



Profile: 2150755R	Page No.: 16
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/23 - 18:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2480MHz by 2DH5	

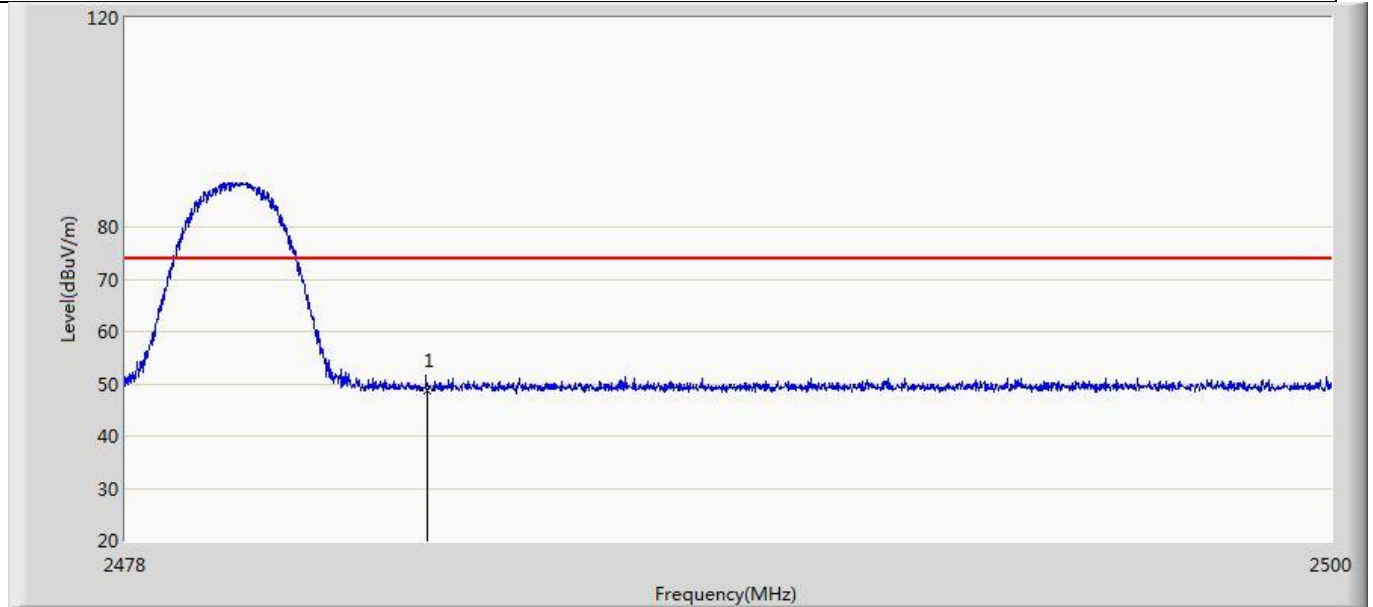


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	48.647	12.972	-25.353	74.000	35.675	PK

Profile: 2150755R	Page No.: 17
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/23 - 18:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2402MHz by 3DH5	

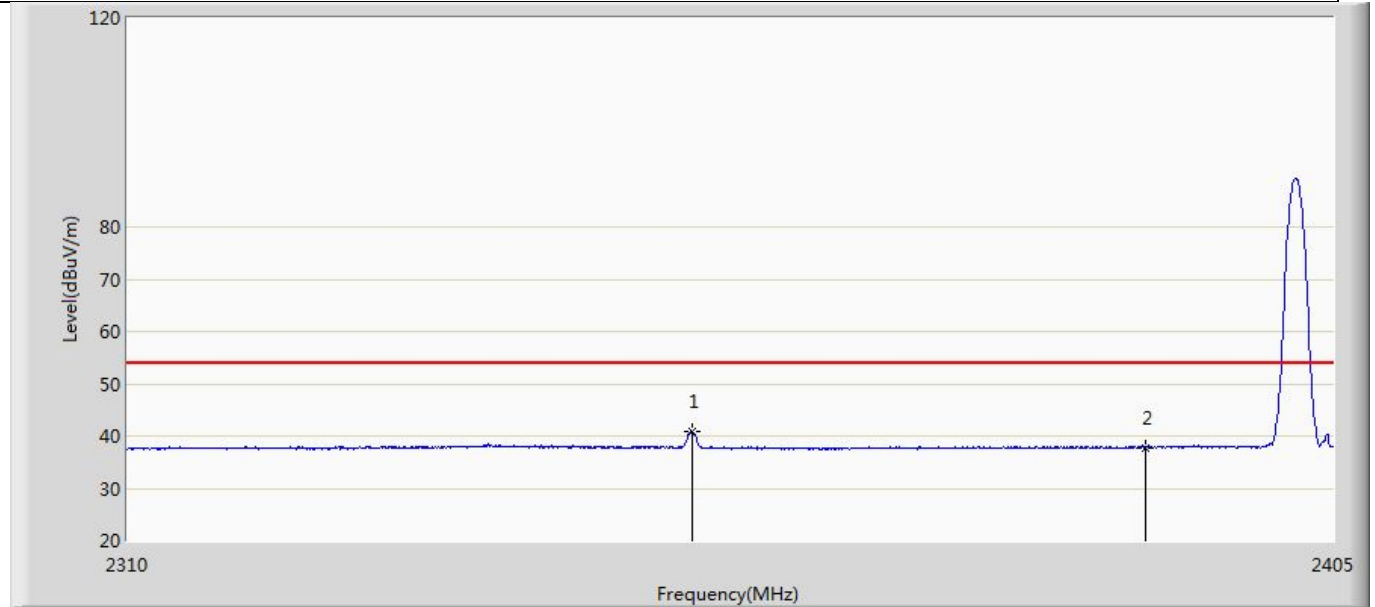


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2354.032	41.006	5.551	-12.994	54.000	35.455	AV
2		2390.000	37.824	2.365	-16.176	54.000	35.459	AV

Profile: 2150755R	Page No.: 18
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/23 - 18:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2402MHz by 3DH5	

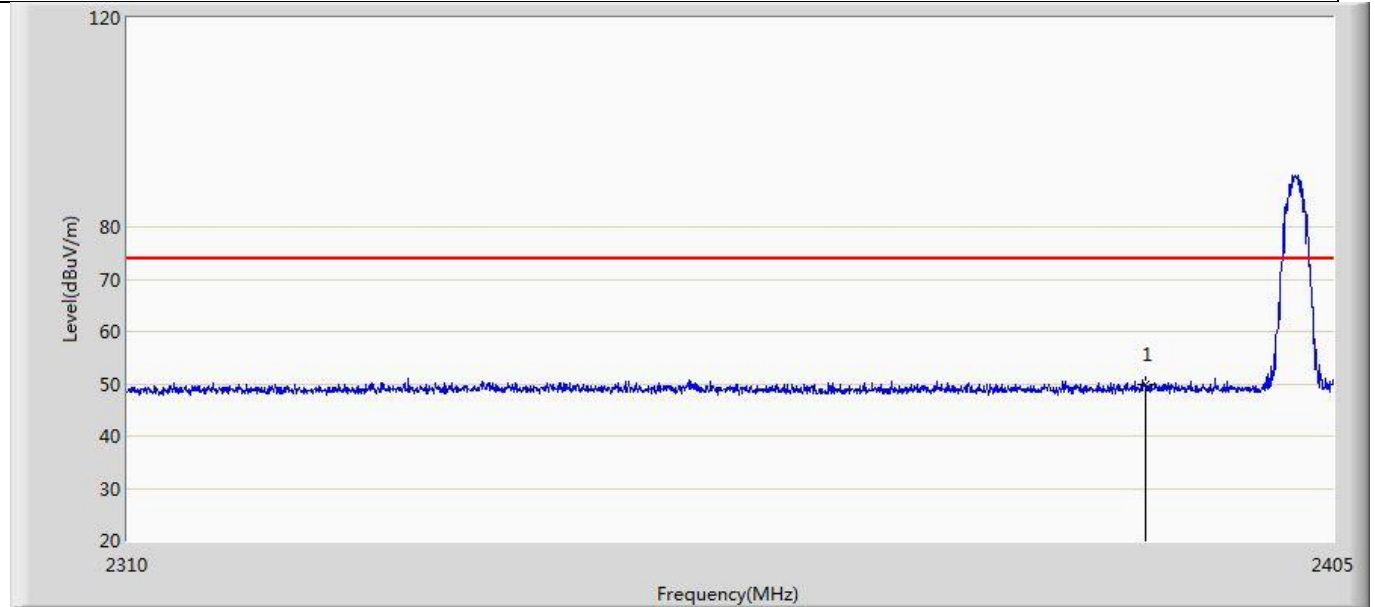


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	49.958	14.499	-24.042	74.000	35.459	PK

Profile: 2150755R	Page No.: 19
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/23 - 18:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2402MHz by 3DH5	

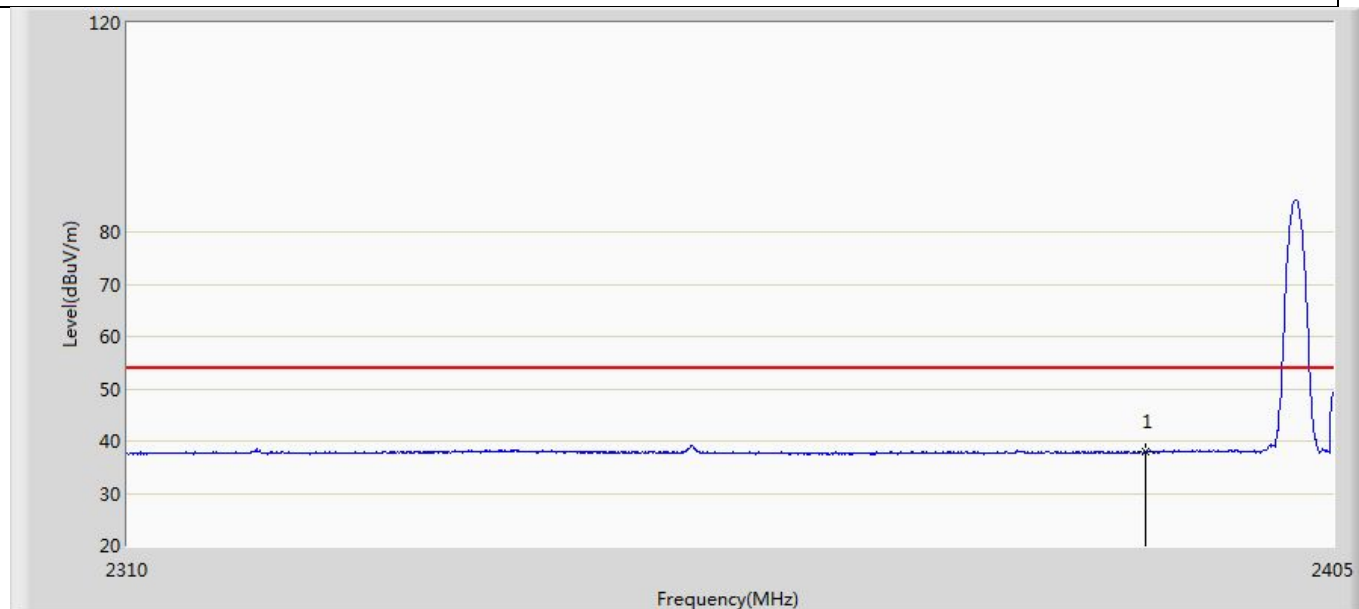


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	37.836	2.377	-16.164	54.000	35.459	AV

Profile: 2150755R	Page No.: 20
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/23 - 18:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2402MHz by 3DH5	

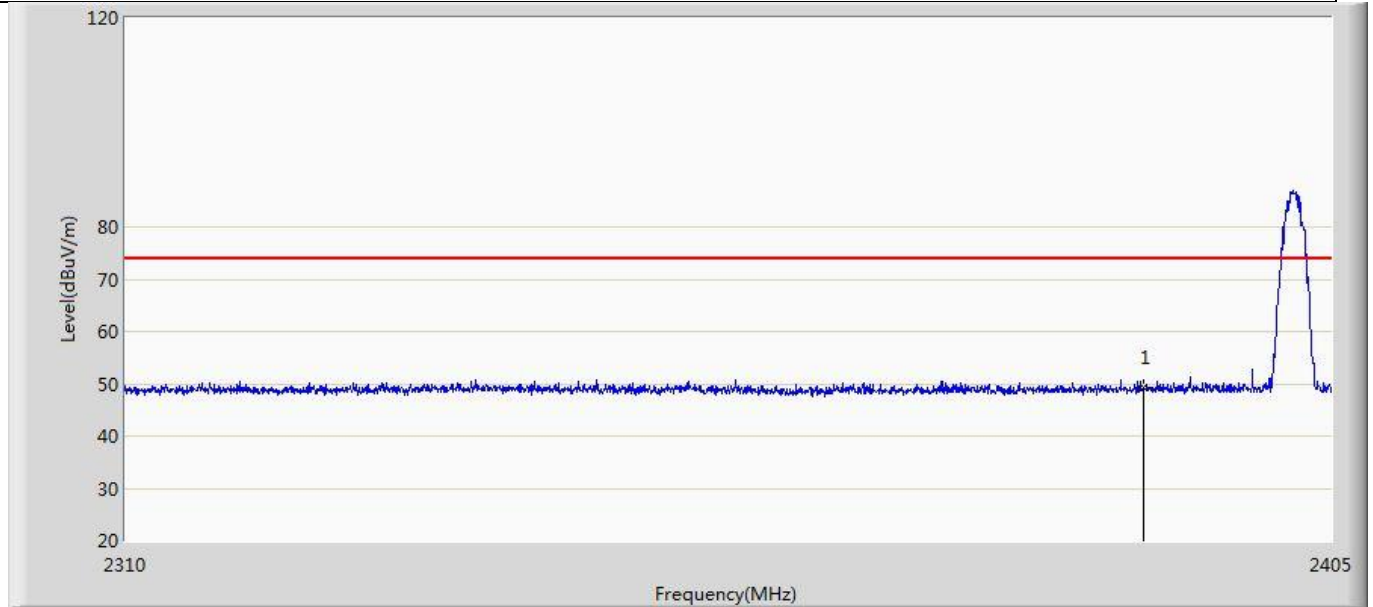


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	49.338	13.879	-24.662	74.000	35.459	PK

Profile: 2150755R	Page No.: 21
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/23 - 18:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2480MHz by 3DH5	

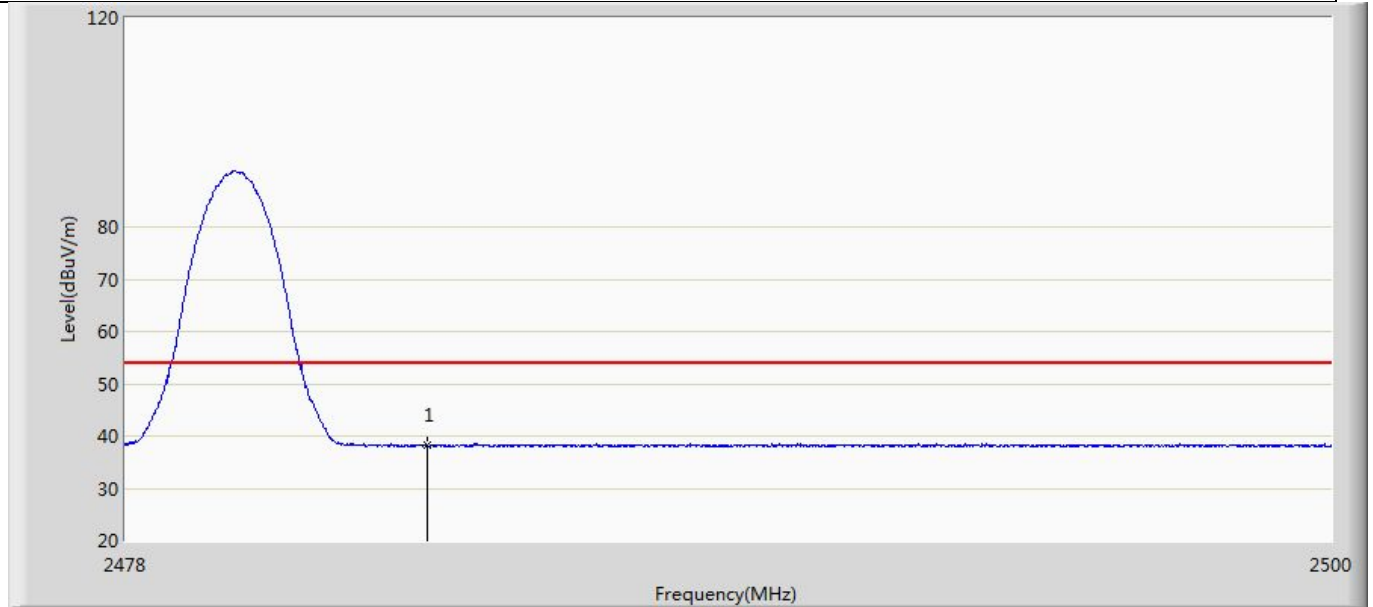


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	38.149	2.474	-15.851	54.000	35.675	AV

Profile: 2150755R	Page No.: 22
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/23 - 18:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2480MHz by 3DH5	

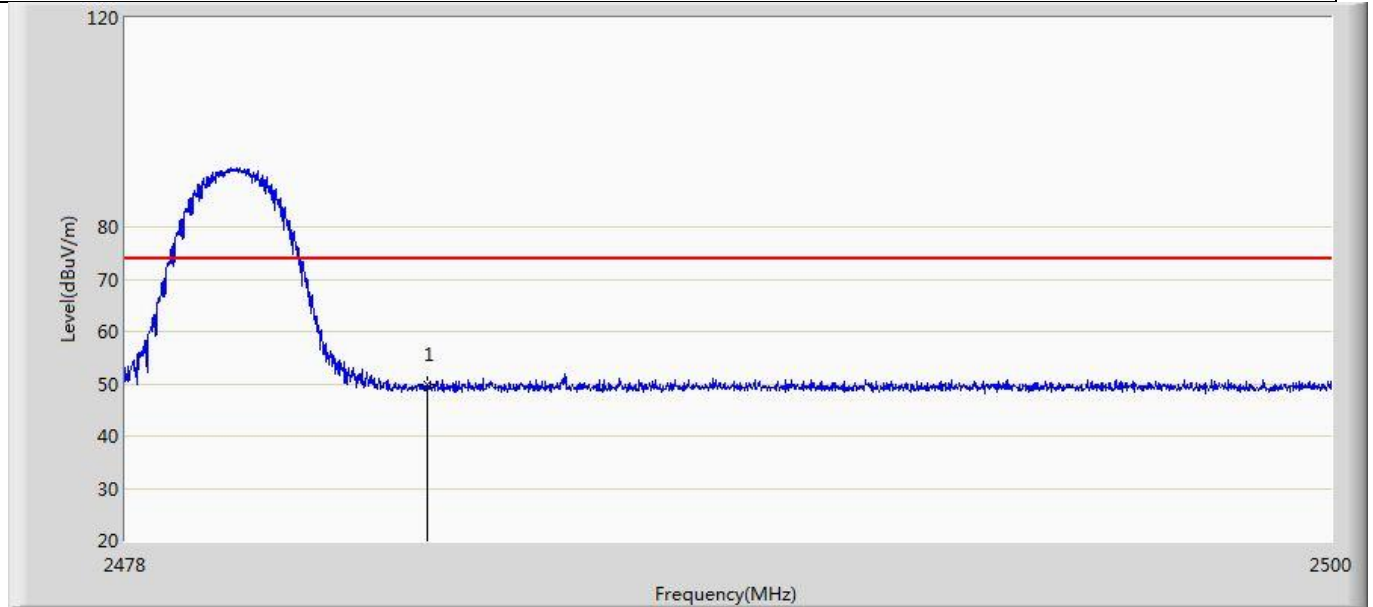


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	49.989	14.314	-24.011	74.000	35.675	PK

Profile: 2150755R	Page No.: 23
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/23 - 18:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2480MHz by 3DH5	

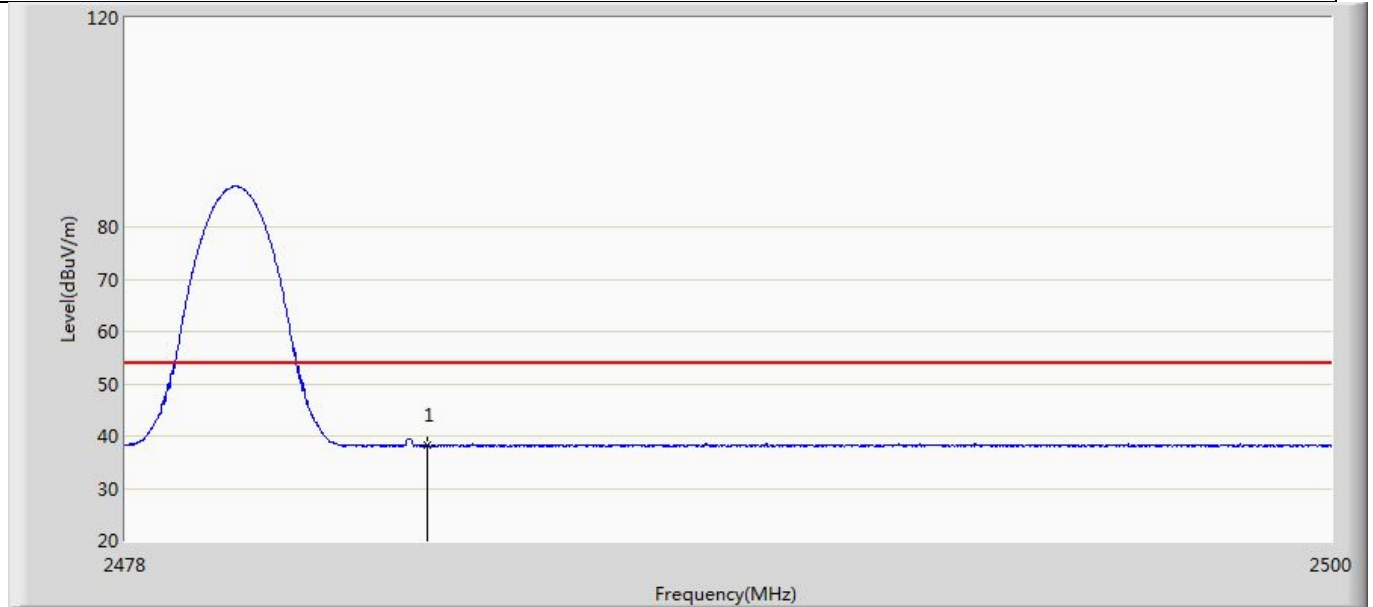

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	38.198	2.523	-15.802	54.000	35.675	AV

Profile: 2150755R	Page No.: 24
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/23 - 18:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2480MHz by 3DH5	

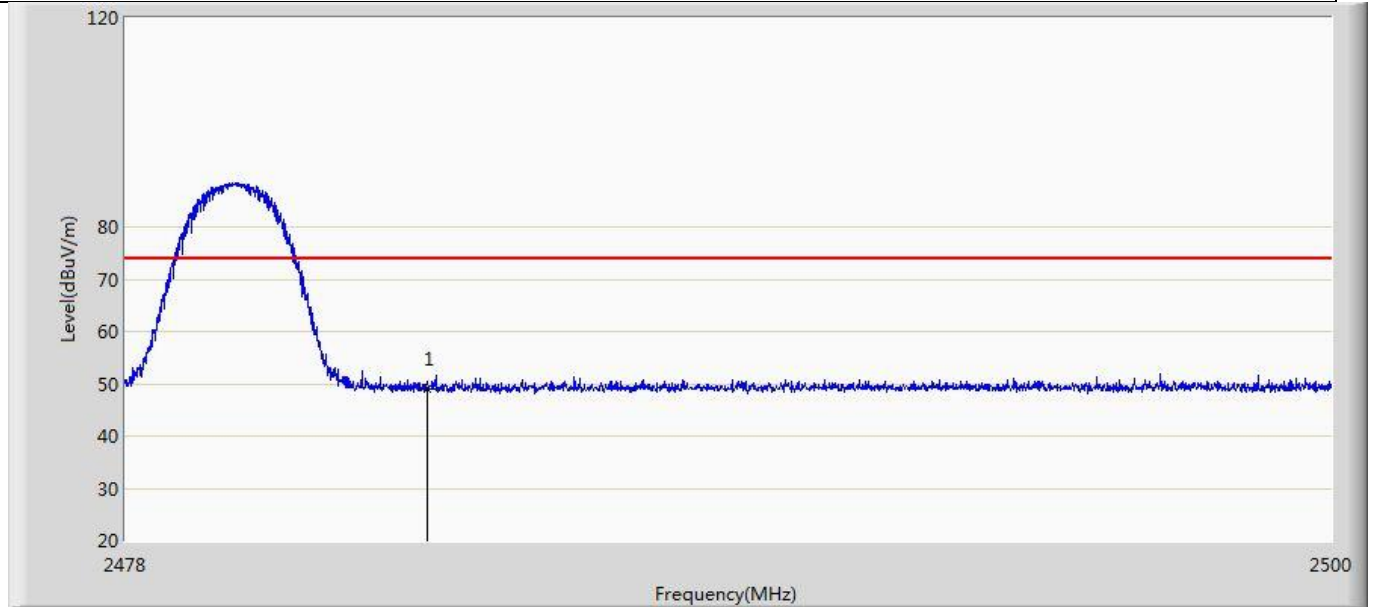

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	48.968	13.293	-25.032	74.000	35.675	PK

4.11 Antenna Requirement**VERDICT: PASS****4.11.1 Limit:****Standard**

FCC Part 15 Subpart C Paragraph 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.11.2 Antenna Connector Construction:

- | | |
|-------------------------------------|--|
| ☒ | The use of a permanently attached antenna |
| ☐ | The antenna use of a unique coupling to the intentional radiator |
| ☐ | The use of a nonstandard antenna jack or electrical connector |

Please refer to the attached document "Internal Photograph" to show the antenna connector.

5 TEST SETUP PHOTO AND EUT PHOTO

Remark: The test setup photo and EUT Photo please see appendix.

_____ The End _____