


LASER SWEEPER ROBOT

Operation Instructions

(Please read the instruction carefully before use and keep it well)

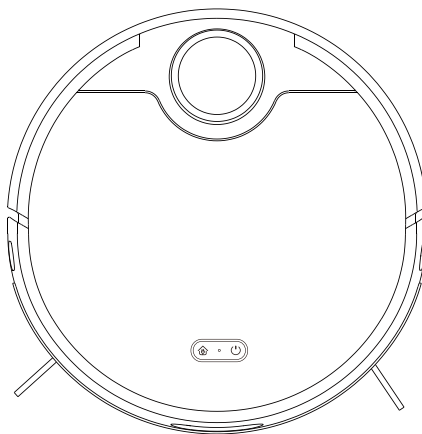

Model: ZK902A


● Machine and accessories	01
● Product introduction	02
● Precautions before using	08
● Quick instruction	09
● Product maintenance	11
● Product parameters	13
● Voice prompts and trouble-shooting	14
● FAQ	16
● Safety information	17

🔌 Machine and accessories


The following product and accessories will be found after opening the package, please check carefully.

(The following pictures are for your reference, and they are subject to the actual product received.)

Machine	X1
Charging stand	X1
High efficiency filter	X1
Side brush	X2
Power adapter	X1
Instruction	X1
* Cleaning brush	X1
* Dust box	X1
• Water tank Mop	X1
• Component	X1
• Single suction port component	X1




Machine




Charging stand



High efficiency filter




Side brush




Power adapter




Instruction



Water tank



Mop component




Single suction port component

*The accessories are already installed on the machine.

•The accessories are optional for the customer.


Product introduction

Keys on the machine

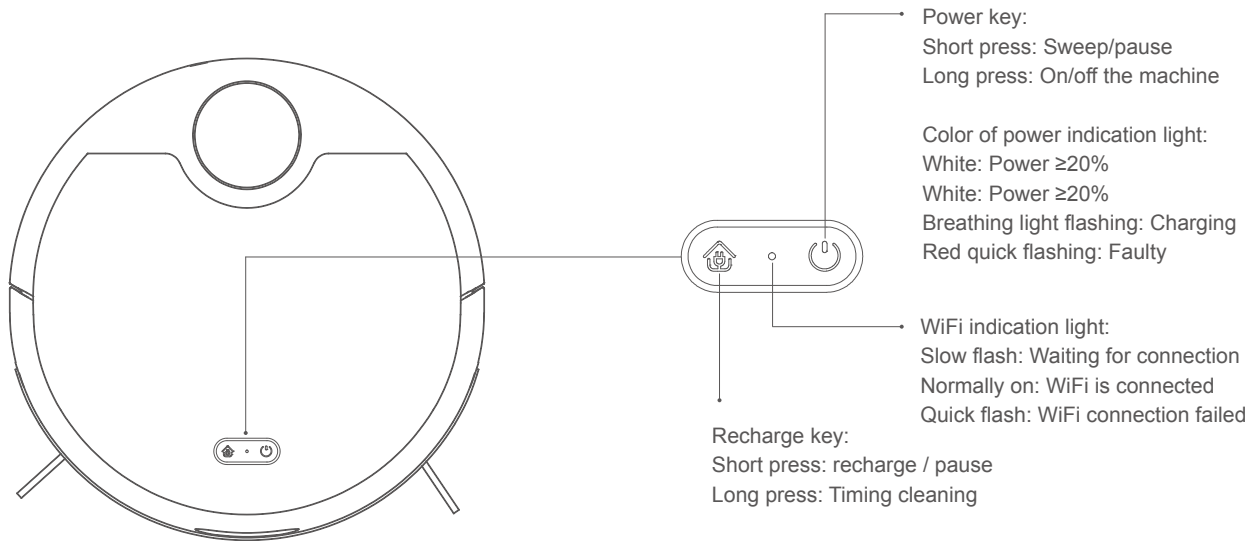


🔌 Product introduction

Front of machine

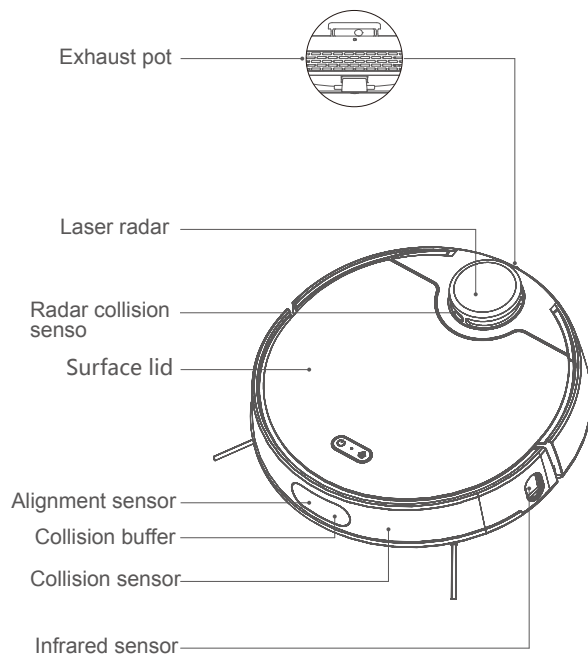


Rear of machine

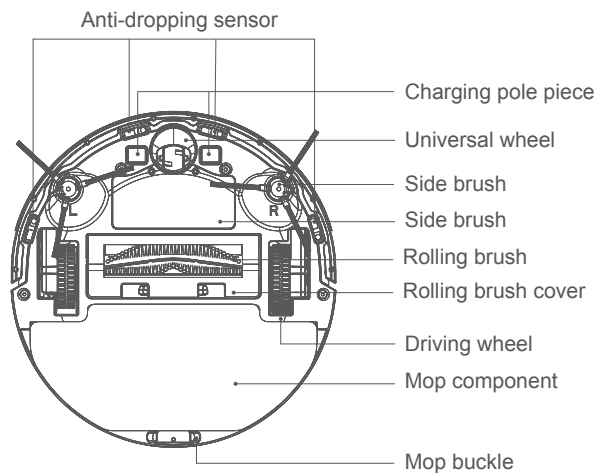


- Please clean the sensors by mop to keep them clear always.

Product introduction

Machine

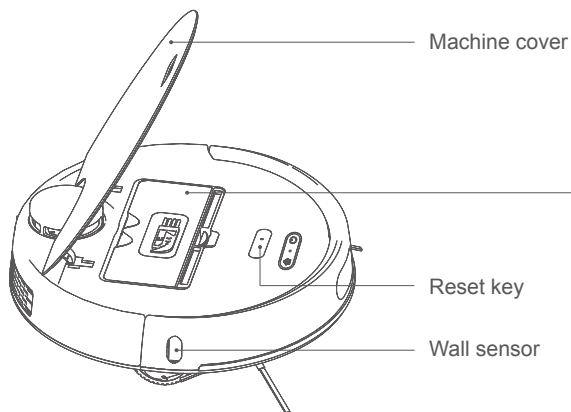

Dust box

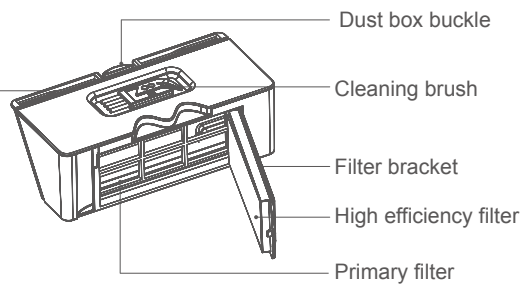


🔌 Product introduction and usage

How to use the dust box and HEPA filter


1. Fetch out the dust box

Attentions: Do not break off the snap lock of dust box in cast of gracture.

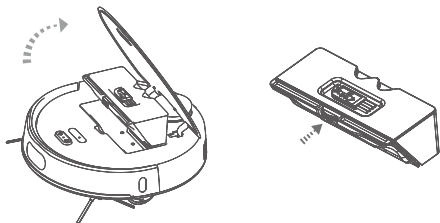

2. Open the lid and empty the dust.


3. Open the filter holder on the dust box and fetch out the HEPA filter.

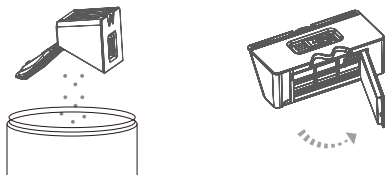

4. Always clean the dust box and filter with a cleaning brush, and wash the dust box and primary filter with water.




5. Assemble the dust box and filter into the robot after completed dried.

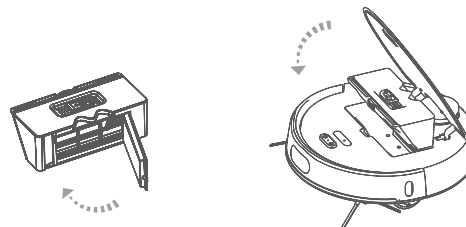


- Please clean thr filter regularly and replace it every 6 -12 months to ensure the clean effect well.

Product introduction

Water tank

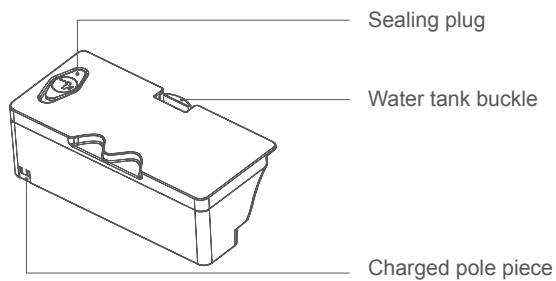

Mop component

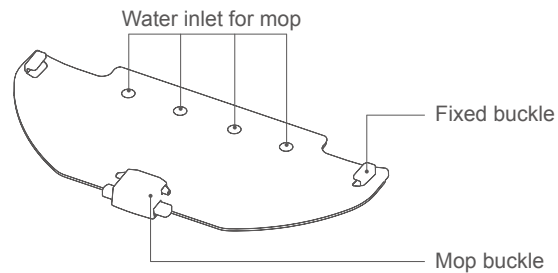

Suction port component

