



TEST REPORT

Report No..... : CHTEW19070054 Report verification : 

Project No..... : SHT1906073903EW

FCC ID..... : 2ATV2-WMBR-1

Applicant's name..... : Walmart, Inc. on behalf of its affiliate Project Franklin, LLC

Address..... : 74 Kent St #2, Brooklyn, NY 11222

Manufacturer..... : Shenzhen ChampOn Technology Co. Ltd

Address..... : 628 Yi Ben BLDG, No.1063 Cha Guang rd, Xili, Nanshan, Shenzhen

Test item description : Walmart WiFi Bridge

Trade Mark : Walmart

Model/Type reference..... : WMBR-1

Listed Model(s) : -

Standard : FCC CFR Title 47 Part 15 Subpart E Section 15.407

Date of receipt of test sample..... : Jul.05, 2019

Date of testing..... : Jul.05, 2019- Jul.15, 2019

Date of issue..... : Jul.16, 2019

Result..... : PASS

Compiled by
(position+printedname+signature).... : File administrators Echo Wei

Echo Wei

Supervised by
(position+printedname+signature).... : Project Engineer Edward Pan

Edward Pan

Approved by
(position+printedname+signature).... : RF Manager Hans Hu

Hans Hu

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report Version	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
<u>4.</u>	<u>TEST ENVIRONMENT</u>	<u>7</u>
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Environmental conditions	8
4.4.	Statement of the measurement uncertainty	8
4.5.	Equipments Used during the Test	9
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>11</u>
5.1.	Antenna requirement	11
5.2.	Conducted Emissions (AC Main)	12
5.3.	Maximum Conducted Output Power	15
5.4.	Maximum Power Spectral Density	17
5.5.	26dB bandwidth and 99% Occupy bandwidth	39
5.6.	6dB Bandwidth	51
5.7.	Band edge	63
5.8.	Radiated Spurious Emissions	70
5.9.	Frequency stability	79
<u>6.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>81</u>
<u>7.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>82</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.407](#): General technical requirements.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB789033 D02 v02r01](#): GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPART E

[KDB662911 D01 Multiple Transmitter Output v02r01](#): Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

[KDB662911 D02 MIMO with Cross-Polarized Antennas v01](#): MIMO with Cross-Polarized Antenna

1.2. Report Version

Revision No.	Date of issue	Description
N/A	2019-07-16	Original

2. TEST DESCRIPTION

Test Item	FCC Rule	Result	Test Engineer
Antenna Requirement	15.203	PASS	JiongSheng.Feng
Line Conducted Emissions (AC Main)	15.207	PASS	Zhiwei Liu
Maximum Conducted Output Power	15.407(a)	PASS	JiongSheng.Feng
Maximum Power Spectral Density	15.407(a)	PASS	JiongSheng.Feng
26dB Bandwidth and 99% Occupancy bandwidth	15.407(a)	PASS	JiongSheng.Feng
6dB Bandwidth	15.407(a)	PASS	JiongSheng.Feng
Band edge	15.407(b)	PASS	Xu Yang
Radiated Spurious Emissions	15.209	PASS	Xu Yang
Frequency Stability	15.407(g)	PASS	JiongSheng.Feng

Remark: The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	Walmart, Inc. on behalf of its affiliate Project Franklin, LLC
Address:	74 Kent St #2, Brooklyn, NY 11222
Manufacturer:	Shenzhen ChampOn Technology Co. Ltd
Address:	628 Yi Ben BLDG, No.1063 Cha Guang rd, Xili, Nanshan, Shenzhen

3.2. Product Description

Name of EUT	Walmart WiFi Bridge		
Trade Mark:	Walmart		
Model No.:	WMBR-1		
Listed Model(s):	-		
Power supply:	DC 5V		
5G WIFI			
Supported type:	☒ 802.11a	☒ 802.11n(HT20)	☒ 802.11n(HT40)
	☒ 802.11ac(HT20)	☒ 802.11ac(HT40)	☒ 802.11ac(HT80)
Function:	☐ Outdoor AP	☐ Indoor AP	☐ Fixed P2P
	☒ Client		
Modulation:	BPSK, QPSK, 16QAM, 64QAM		
Operation frequency:	☒ Band I:	5150MHz~5250MHz	
	☒ Band IV:	5725MHz~5850MHz	
Supported Bandwidth	20MHz:	802.11ac, 802.11n, 802.11a	
	40MHz:	802.11ac, 802.11n	
	80MHz:	802.11ac	
Antenna type:	2 Transmit, 2 Receive		
Antenna gain:	2 dBi		

3.3. Operation state

➤ Frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

Band	Test Channel	20MHz		40MHz		80MHz	
		Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
I	CH _L	36	5180	38	5190	-	-
	CH _M	44	5220	-	-	42	5210
	CH _H	48	5240	46	5230	-	-
IV	CH _L	149	5745	151	5755	-	-
	CH _M	157	5785	-	-	155	5775
	CH _H	165	5825	159	5795	-	-

➤ Data Rated

Preliminary tests were performed in different data rate, and found which the below bit rate is worst case mode, so only show data which it is a worst case mode.

Mode	Data rate (worst mode)
802.11a	6Mbps
802.11n(HT20)/ 802.11ac(HT20)	MCS0
802.11n(HT40)/ 802.11ac(HT40)	MCS0
802.11ac(HT80)	MCS0

➤ Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit (duty cycle>98%).
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated suprious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit(duty cycle>98%). The EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data Recorded in the report.

3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

○	N/A	Manufacturer :	N/A
		Model No. :	N/A
○	Notebook	Manufacturer:	TOSHIBA
		Model No.:	Satellite M800

3.5. Modifications

No modifications were implemented to meet testing criteria.

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Phone: 86-755-26748019 Fax: 86-755-26748089

4.2. Test Facility

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

IC-Registration No.: 5377A

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377A.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd. quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Here after the best measurement capability for Shenzhen Huatongwei International Inspection Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.51 dB	(1)
Conducted spurious emissions 9kHz~40GHz	0.51 dB	(1)
Conducted Disturbance 150kHz~30MHz	3.02 dB	(1)
Radiated Emissions below 1GHz	4.90 dB	(1)
Radiated Emissions above 1GHz	4.96 dB	(1)
Occupied Bandwidth	70 Hz	(1)
Frequency error	70 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

4.5. Equipments Used during the Test

● Conducted Emission						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Shielded Room	Albatross projects	N/A	N/A	2018/09/28	2023/09/27
●	EMI Test Receiver	R&S	ESCI	101247	2018/10/27	2019/10/26
●	Artificial Mains	SCHWARZBECK	NNLK 8121	573	2018/10/27	2019/10/26
●	Pulse Limiter	R&S	ESH3-Z2	100499	2018/10/27	2019/10/26
●	RF Connection Cable	HUBER+SUHNER	EF400	N/A	2018/11/15	2019/11/14
●	Test Software	R&S	ES-K1	N/A	N/A	N/A
○	Single Balanced Telecom Pair ISN	FCC	FCC-TLISN-T2-02	20371	2018/10/28	2019/10/27
○	Two Balanced Telecom Pairs ISN	FCC	FCC-TLISN-T4-02	20373	2018/10/28	2019/10/27
○	Four Balanced Telecom Pairs ISN	FCC	FCC-TLISN-T8-02	20375	2018/10/28	2019/10/27
○	V-Network	R&S	ESH3-Z6	100211	2018/10/27	2019/10/26
○	V-Network	R&S	ESH3-Z6	100210	2018/10/27	2019/10/26
○	2-Line V-Network	R&S	ESH3-Z5	100049	2018/10/27	2019/10/26
● Radiated Emission-6th test site						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	SAC-3m-02	N/A	2018/09/30	2021/09/29
●	EMI Test Receiver	R&S	ESCI	100900	2018/10/28	2019/10/27
●	Loop Antenna	R&S	HFH2-Z2	100020	2017/11/20	2020/11/19
●	Ultra-Broadband Antenna	SCHWARZBECK	VULB9163	546	2017/04/05	2020/04/04
●	Pre-Amplifier	SCHWARZBECK	BBV 9742	N/A	2018/11/15	2019/11/14
●	RF Connection Cable	HUBER+SUHNER	N/A	N/A	2018/09/28	2019/09/27
●	RF Connection Cable	HUBER+SUHNER	SUCOFLEX104	501184/4	2018/09/28	2019/09/27
●	Test Software	R&S	ES-K1	N/A	N/A	N/A
●	Turntable	Maturo Germany	TT2.0-1T	N/A	N/A	N/A
●	Antenna Mast	Maturo Germany	CAM-4.0-P-12	N/A	N/A	N/A
● Radiated emission-7th test site						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	SAC-3m-01	N/A	2018/09/30	2021/09/29
●	Spectrum Analyzer	R&S	FSP40	100597	2018/10/27	2019/10/26
●	Horn Antenna	SCHWARZBECK	9120D	1011	2017/03/27	2020/03/26
●	Pre-amplifier	BONN	BLWA0160-2M	1811887	2018/11/14	2019/11/13
●	Pre-amplifier	CD	PAP-0102	12004	2018/11/14	2019/11/13
●	Broadband Pre-amplifier	SCHWARZBECK	BBV 9718	9718-248	2019/04/26	2020/04/25
●	RF Connection Cable	HUBER+SUHNER	RE-7-FH	N/A	2018/11/15	2019/11/14
●	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	2018/11/15	2019/11/14
●	Test Software	Audix	E3	N/A	N/A	N/A
●	Turntable	Maturo Germany	TT2.0-1T	N/A	N/A	N/A
●	Antenna Mast	Maturo Germany	CAM-4.0-P-12	N/A	N/A	N/A

● RF Conducted Method						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	FSV40	100048	2018/10/28	2019/10/27
●	Spectrum Analyzer	Agilent	N9020A	MY50510187	2018/09/29	2019/09/28
●	OSP	R&S	OSP120	101317	N/A	N/A
○	Radio communication tester	R&S	CMW500	137688-Lv	2018/09/29	2019/09/28
○	Test software	Tonscend	JS1120-1(LTE)	N/A	N/A	N/A
○	Test software	Tonscend	JS1120-2(WIFI)	N/A	N/A	N/A
○	Test software	Tonscend	JS1120-3(WCDMA)	N/A	N/A	N/A
○	Test software	Tonscend	JS1120-4(GSM)	N/A	N/A	N/A

5. TEST CONDITIONS AND RESULTS

5.1. Antenna requirement


Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Test Result:

The directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.

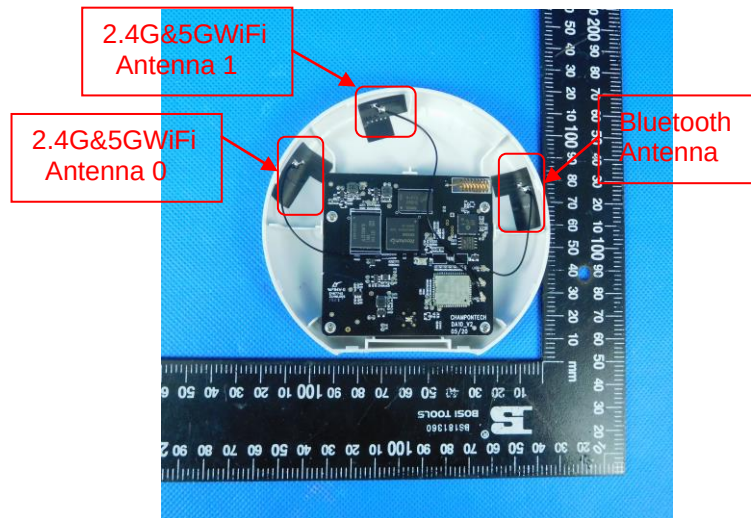

5.2. Conducted Emissions (AC Main)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

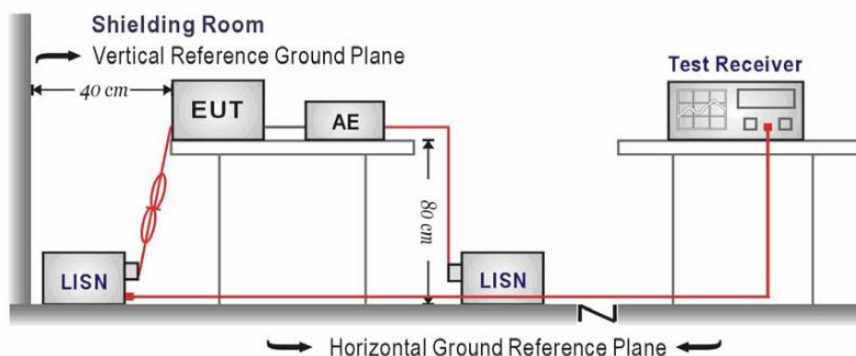

TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS


☒ Passed ☐ Not Applicable

Note:

- 1) Transd=Cable lose+ Pulse Limiter Factor + Artificial Mains Factor
- 2) Margin= Limit -Level

Test Line:


L

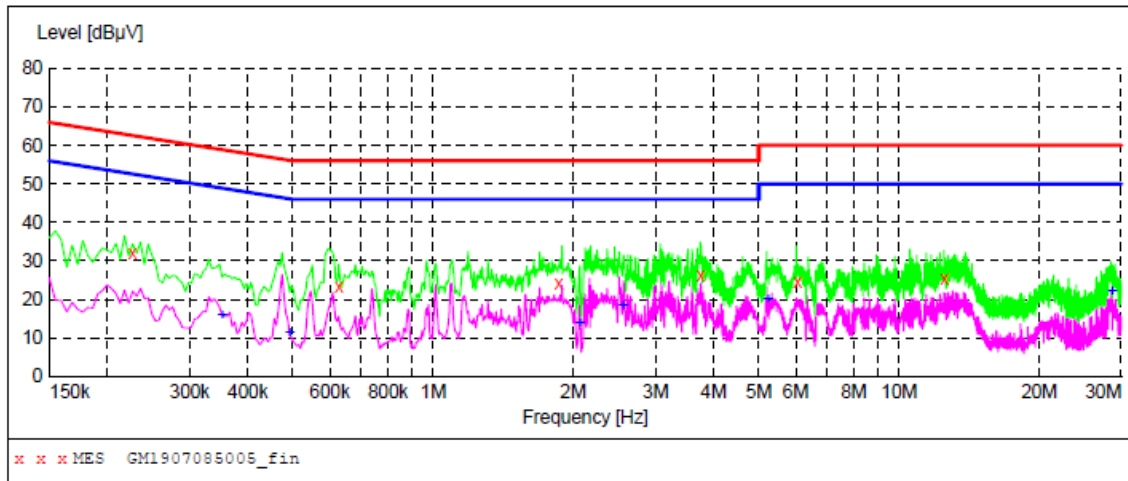

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.226500	32.10	9.9	63	30.5	QP	L1	GND
0.627000	23.20	9.9	56	32.8	QP	L1	GND
1.860000	24.10	9.9	56	31.9	QP	L1	GND
3.750000	26.40	9.9	56	29.6	QP	L1	GND
6.058500	24.70	10.0	60	35.3	QP	L1	GND
12.520500	25.40	10.1	60	34.6	QP	L1	GND
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.352500	15.70	9.9	49	33.2	AV	L1	GND
0.492000	11.50	9.9	46	34.6	AV	L1	GND
2.062500	13.80	9.9	46	32.2	AV	L1	GND
2.553000	18.30	9.9	46	27.7	AV	L1	GND
5.239500	20.10	10.0	50	29.9	AV	L1	GND
28.684500	22.00	10.4	50	28.0	AV	L1	GND

Test Line:

N

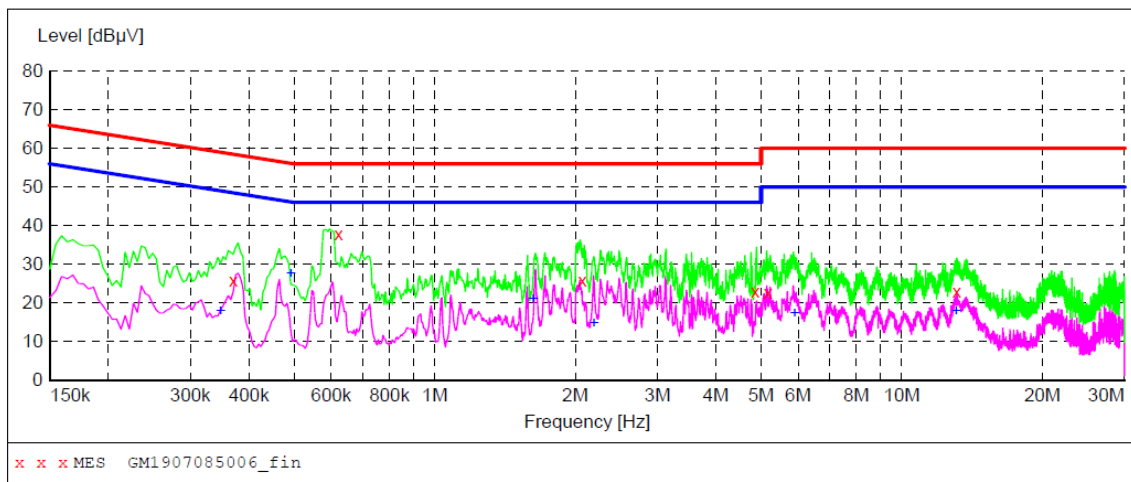

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.370500	25.80	9.9	59	32.7	QP	N	GND
0.622500	37.70	9.9	56	18.3	QP	N	GND
2.071500	25.70	9.9	56	30.3	QP	N	GND
4.852500	23.00	10.0	56	33.0	QP	N	GND
5.176500	22.70	10.0	60	37.3	QP	N	GND
13.105500	23.00	10.1	60	37.0	QP	N	GND
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.348000	17.80	9.9	49	31.2	AV	N	GND
0.492000	27.50	9.9	46	18.6	AV	N	GND
1.626000	21.00	9.9	46	25.0	AV	N	GND
2.193000	14.60	9.9	46	31.4	AV	N	GND
5.901000	17.40	10.0	50	32.6	AV	N	GND
13.083000	17.80	10.1	50	32.2	AV	N	GND

5.3. Maximum Conducted Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart E Section 15.407(a):


For the 5.15~5.25GHz band:

- Outdoor AP
The maximum conducted output power (P_{out}) shall not exceed the lesser of 1W (30dBm).
if $G_{TX} > 6\text{dBi}$, then $P_{out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees $\leq 125\text{mW}$ (21dBm)
- Indoor AP
The maximum conducted output power (P_{out}) shall not exceed the lesser of 1W (30dBm).
if $G_{TX} > 6\text{dBi}$, then $P_{out} = 30 - (G_{TX} - 6)$.
- Point-to-point AP
The maximum conducted output power (P_{out}) shall not exceed the lesser of 1W (30dBm).
if $G_{TX} > 23\text{dBi}$, then $P_{out} = 30 - (G_{TX} - 23)$.
- Client devices
The maximum conducted output power (P_{out}) shall not exceed the lesser of 250W (24dBm).
if $G_{TX} > 6\text{dBi}$, then $P_{out} = 24 - (G_{TX} - 6)$.

For the 5.725~5.85GHz band:

- Point-to-multipoint systems (P2M)
The maximum conducted output power (P_{out}) shall not exceed the lesser of 1W (30dBm).
if $G_{TX} > 6\text{dBi}$, then $P_{out} = 30 - (G_{TX} - 6)$.
- Point-to-point systems (P2P)
The maximum conducted output power (P_{out}) shall not exceed the lesser of 1W (30dBm).

TEST CONFIGURATION

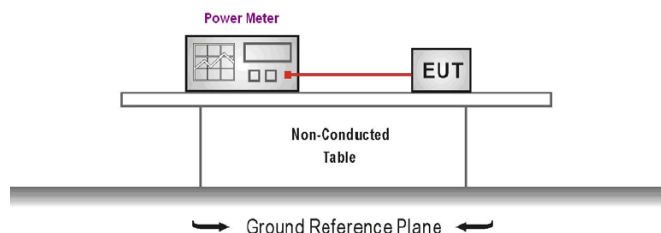

TEST PROCEDURE

1. The EUT was tested according to KDB789033 Section E-3-b)
2. The maximum conducted output power may be measured using a broadband AVG RF power meter.
3. Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor.
4. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.
5. Record the measurement data.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Band	Bandwidth (MHz)	Type	Channel	Output power (dBm)		Total Power (dBm)	Limit (dBm)	Result
				Antenna 0	Antenna 1			
I	20	802.11ac	CH _L	15.57	15.29	18.46	24.00	Pass
			CH _M	15.25	15.45	18.41		
			CH _H	15.57	15.63	18.61		
		802.11n	CH _L	14.57	15.03	17.81	24.00	Pass
			CH _M	14.94	14.90	17.91		
			CH _H	15.48	15.42	18.46		
		802.11a	CH _L	14.52	14.72	-	24.00	Pass
			CH _M	15.25	14.27	-		
			CH _H	15.52	14.57	-		
	40	802.11ac	CH _L	15.40	14.23	17.85	24.00	Pass
			CH _H	16.05	14.57	18.42		
		802.11n	CH _L	14.68	14.35	17.56	24.00	Pass
			CH _H	15.71	14.19	18.02		
	80	802.11ac	CH _M	15.36	14.39	17.94	24.00	Pass
IV	20	802.11ac	CH _L	15.48	15.53	18.51	30.00	Pass
			CH _M	15.07	14.05	17.64		
			CH _H	14.86	14.23	17.57		
		802.11n	CH _L	14.91	15.26	18.11	30.00	Pass
			CH _M	15.09	14.08	17.64		
			CH _H	14.68	14.28	17.51		
		802.11a	CH _L	15.35	15.30	-	30.00	Pass
			CH _M	15.20	14.43	-		
			CH _H	15.08	13.59	-		
	40	802.11ac	CH _L	14.81	14.44	17.61	30.00	Pass
			CH _H	14.76	14.29	17.57		
		802.11n	CH _L	14.73	14.10	17.42	30.00	Pass
			CH _H	14.72	14.04	17.37		
	80	802.11ac	CH _M	14.52	14.20	17.11	30.00	Pass

5.4. Maximum Power Spectral Density

LIMIT

FCC CFR Title 47 Part 15 Subpart E Section 15.407(a):


For the 5.15~5.25GHz band:

- Outdoor AP
The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz.
if $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 17 - (G_{TX} - 6)$.
- Indoor AP
The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz.
if $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 17 - (G_{TX} - 6)$.
- Point-to-point AP
The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz.
if $G_{TX} > 23\text{dBi}$, then $\text{PSD} = 17 - (G_{TX} - 23)$.
- Client devices
The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz.
if $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 11 - (G_{TX} - 6)$.

For the 5.725~5.85GHz band:

- Point-to-multipoint systems (P2M)
The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz.
if $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 30 - (G_{TX} - 6)$.
- Point-to-point systems (P2P)
The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz.

TEST CONFIGURATION

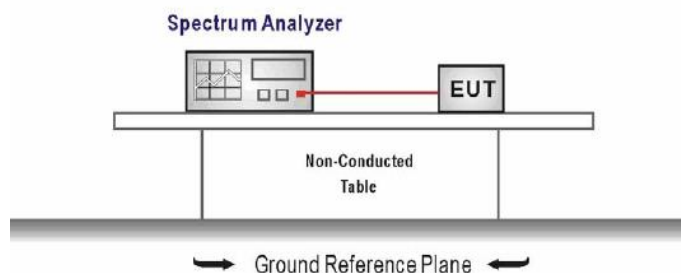

TEST PROCEDURE

1. According KDB 789033 D02 – Section F
2. Analyzer was setting as follow:
Center frequency: test channel
Span was set to encompass the entire emission bandwidth of the signal
RBW=1MHz for devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz
RBW=500kHz for devices operating in the band 5.725-5.85 GHz
VBW ≥ 3 RBW
Number of sweep points > 2 x (span/RBW)
Sweep time = auto
Detector = Peak
Trigger was set to free run for all modes, trace was averaged over 100 sweeps
3. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

TEST MODE:


Please refer to the clause 3.3


TEST RESULTS


☒ Passed ☐ Not Applicable

Band	Bandwidth (MHz)	Type	Channel	Power Spectral Density (dBm/MHz)		Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
				Antenna 0	Antenna 1			
I	20	802.11ac	CH _L	5.29	4.80	8.06	11.00	Pass
			CH _M	5.41	4.63	8.05		
			CH _H	5.75	5.10	8.45		
		802.11n	CH _L	5.42	4.01	7.78	11.00	Pass
			CH _M	5.78	4.64	8.26		
			CH _H	5.41	4.93	8.19		
		802.11a	CH _L	4.51	4.68	-	11.00	Pass
			CH _M	5.24	4.06	-		
			CH _H	5.35	4.06	-		
	40	802.11ac	CH _L	2.45	0.60	4.63	11.00	Pass
			CH _H	2.90	1.00	5.06		
		802.11n	CH _L	2.16	1.70	4.98	11.00	Pass
			CH _H	2.72	1.28	5.07		
	80	802.11ac	CH _M	-1.08	-2.19	1.41	11.00	Pass
Band	Bandwidth (MHz)	Type	Channel	Power Spectral Density (dBm/500kHz)		Total PSD (dBm/500kHz)	Limit (dBm/500KHz)	Result
				Antenna 0	Antenna 1			
IV	20	802.11ac	CH _L	3.52	3.73	6.64	30.00	Pass
			CH _M	3.50	2.08	5.86		
			CH _H	3.23	2.98	6.12		
		802.11n	CH _L	3.61	3.64	6.64	30.00	Pass
			CH _M	2.76	1.32	5.11		
			CH _H	3.19	2.05	5.67		
		802.11a	CH _L	4.01	3.63	-	30.00	Pass
			CH _M	3.40	2.47	-		
			CH _H	3.91	2.14	-		
	40	802.11ac	CH _L	-0.12	-0.83	2.55	30.00	Pass
			CH _H	-0.18	-1.18	2.36		
		802.11n	CH _L	-0.11	-0.67	2.68	30.00	Pass
			CH _H	0.14	-1.27	2.50		
	80	802.11ac	CH _M	-3.92	-4.21	-0.96	30.00	Pass


Test plot as follows:

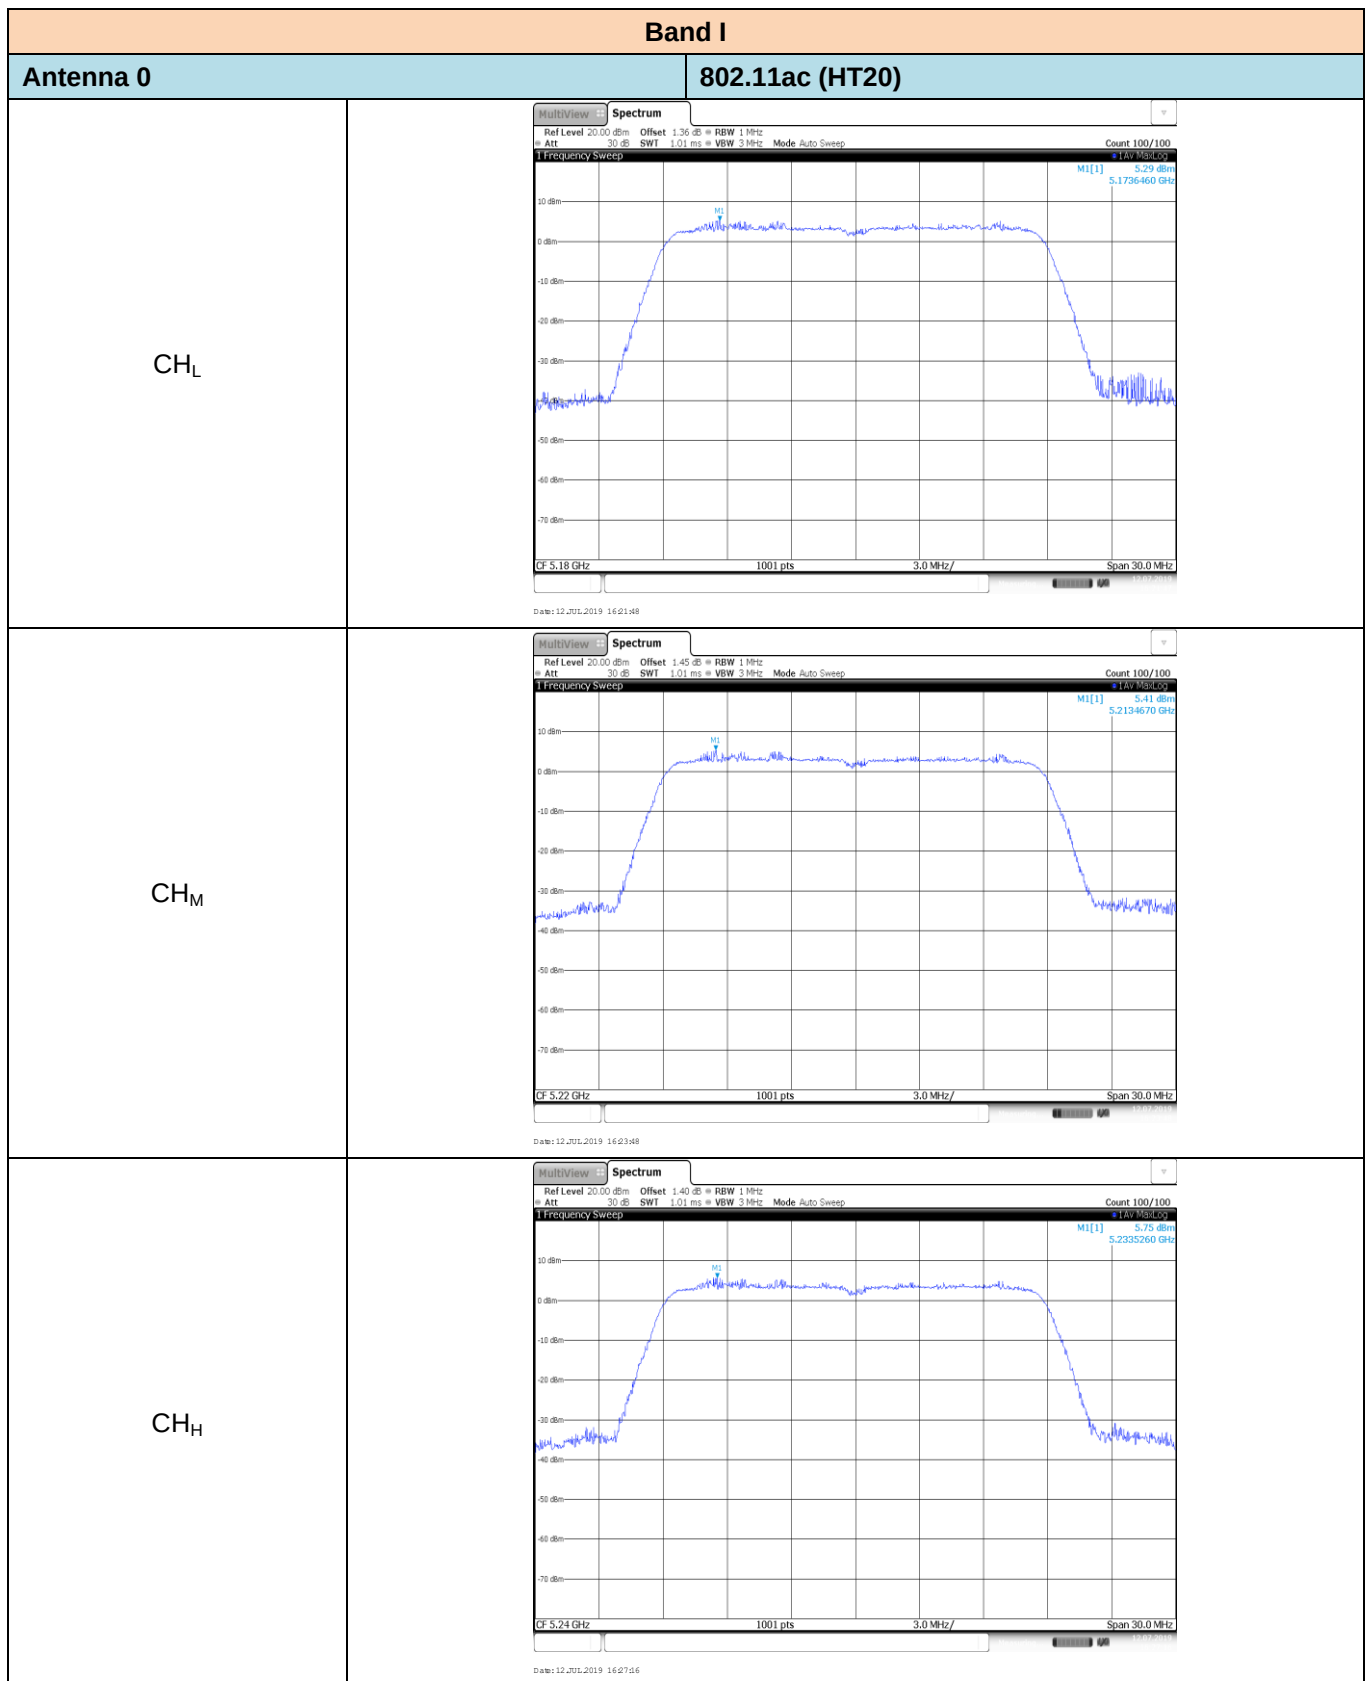


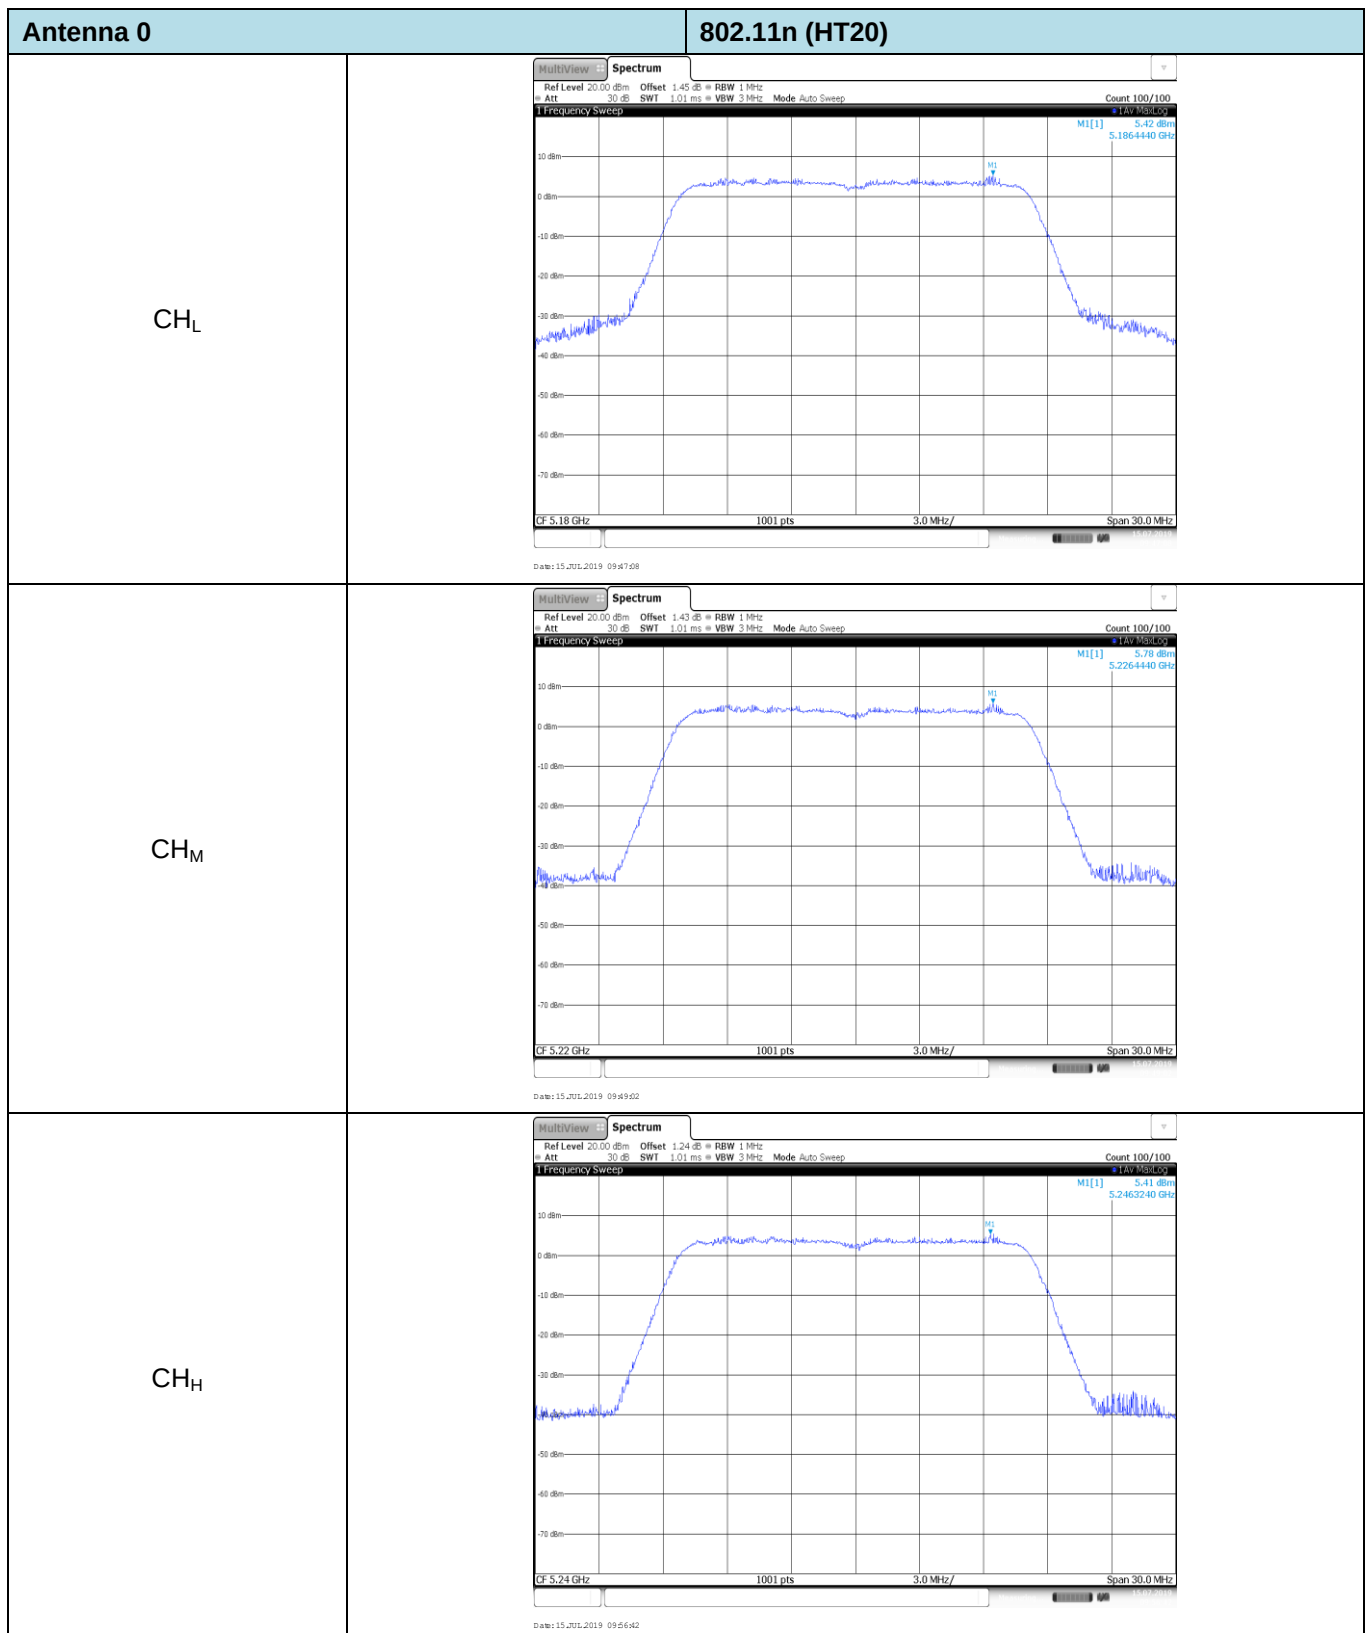


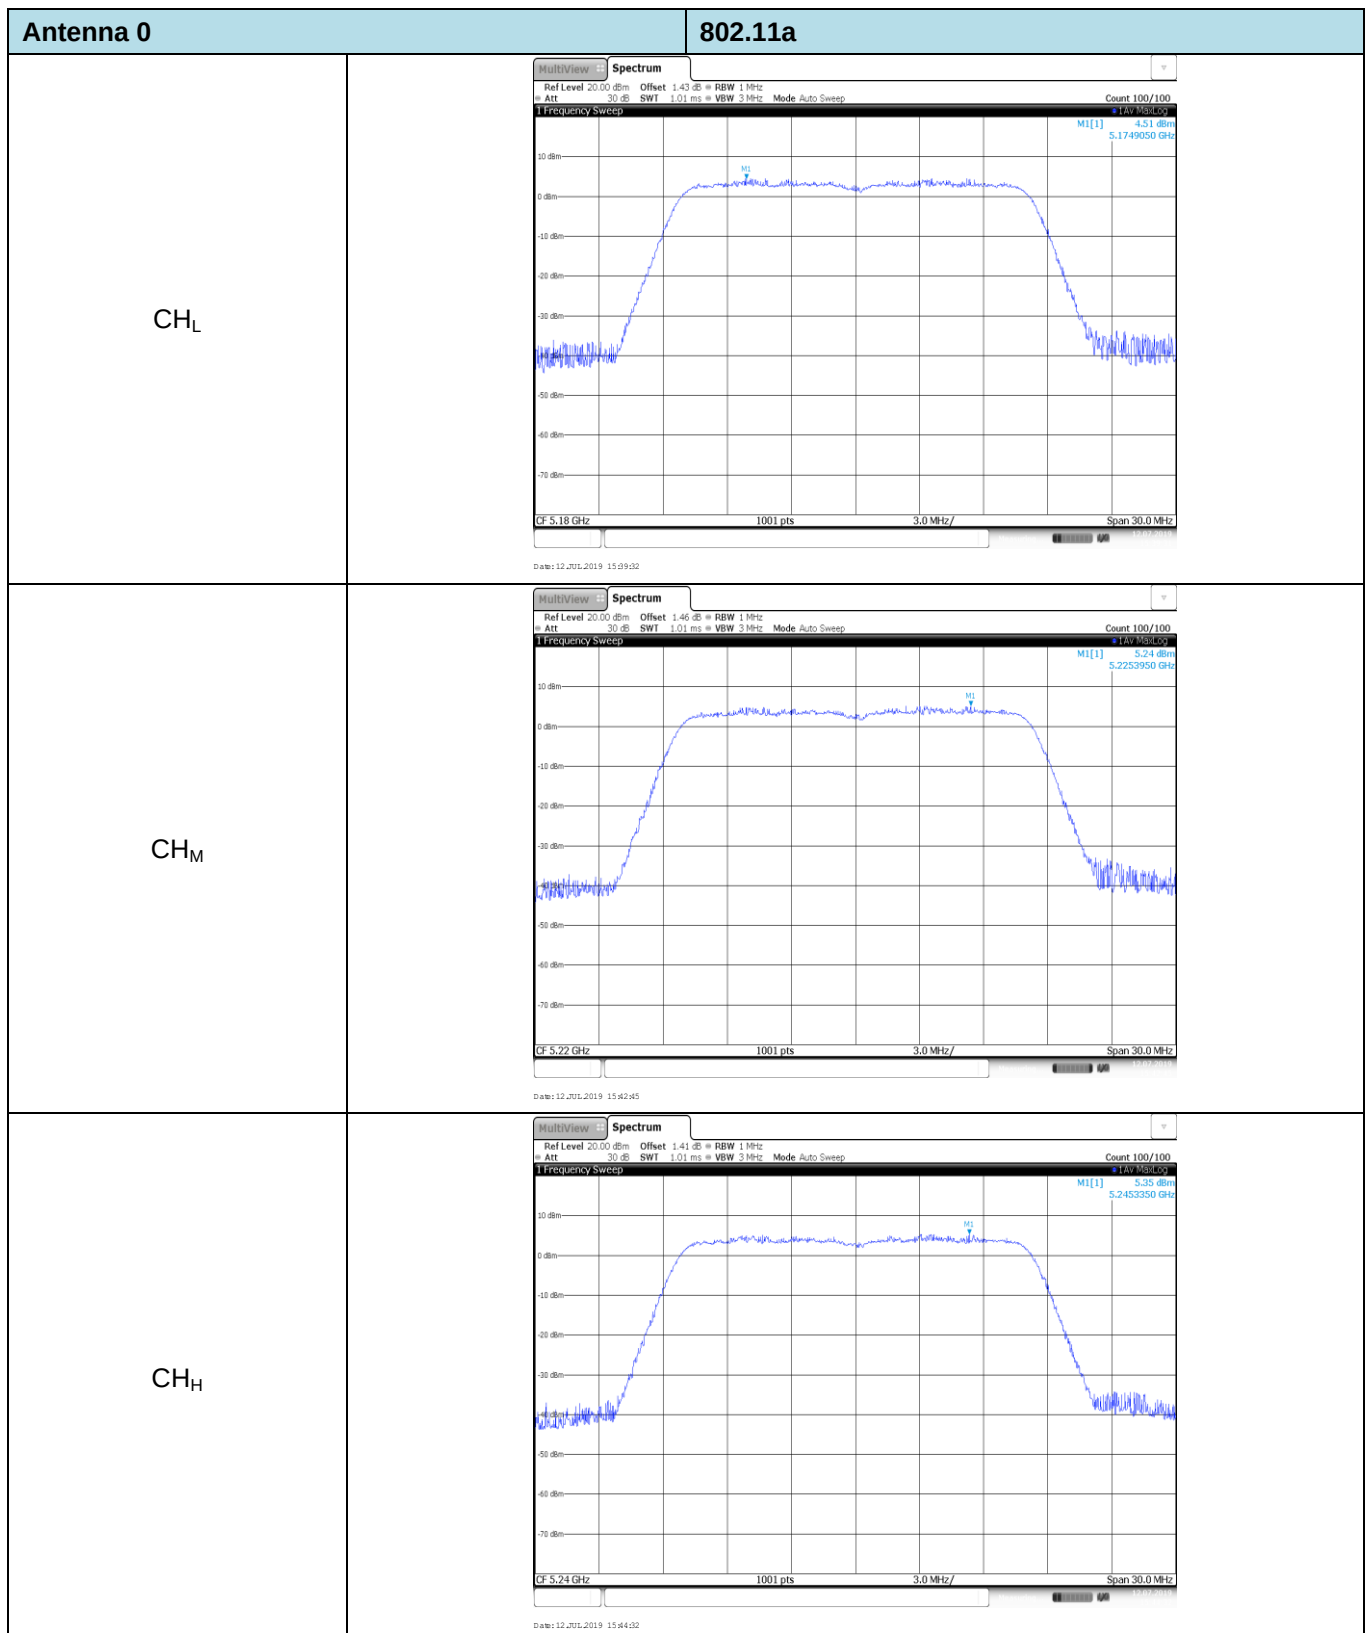




Antenna 0		802.11ac (HT40)
CH _L	MultiView Spectrum Ref Level 20.00 dBm Att 30 dB Offset 1.52 dB RBW 1 MHz Mode Auto Sweep Count 100/100 1 Frequency Sweep MI[1] 2.45 dBm 5.1954550 GHz 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm CF 5.19 GHz 1001 pts 6.0 MHz/ Span 60.0 MHz Date: 12_JUL_2019 16:29:38	
CH _H	MultiView Spectrum Ref Level 20.00 dBm Att 30 dB Offset 2.03 dB RBW 1 MHz Mode Auto Sweep Count 100/100 1 Frequency Sweep MI[1] 2.90 dBm 5.2355140 GHz 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm CF 5.23 GHz 1001 pts 6.0 MHz/ Span 60.0 MHz Date: 12_JUL_2019 16:31:58	

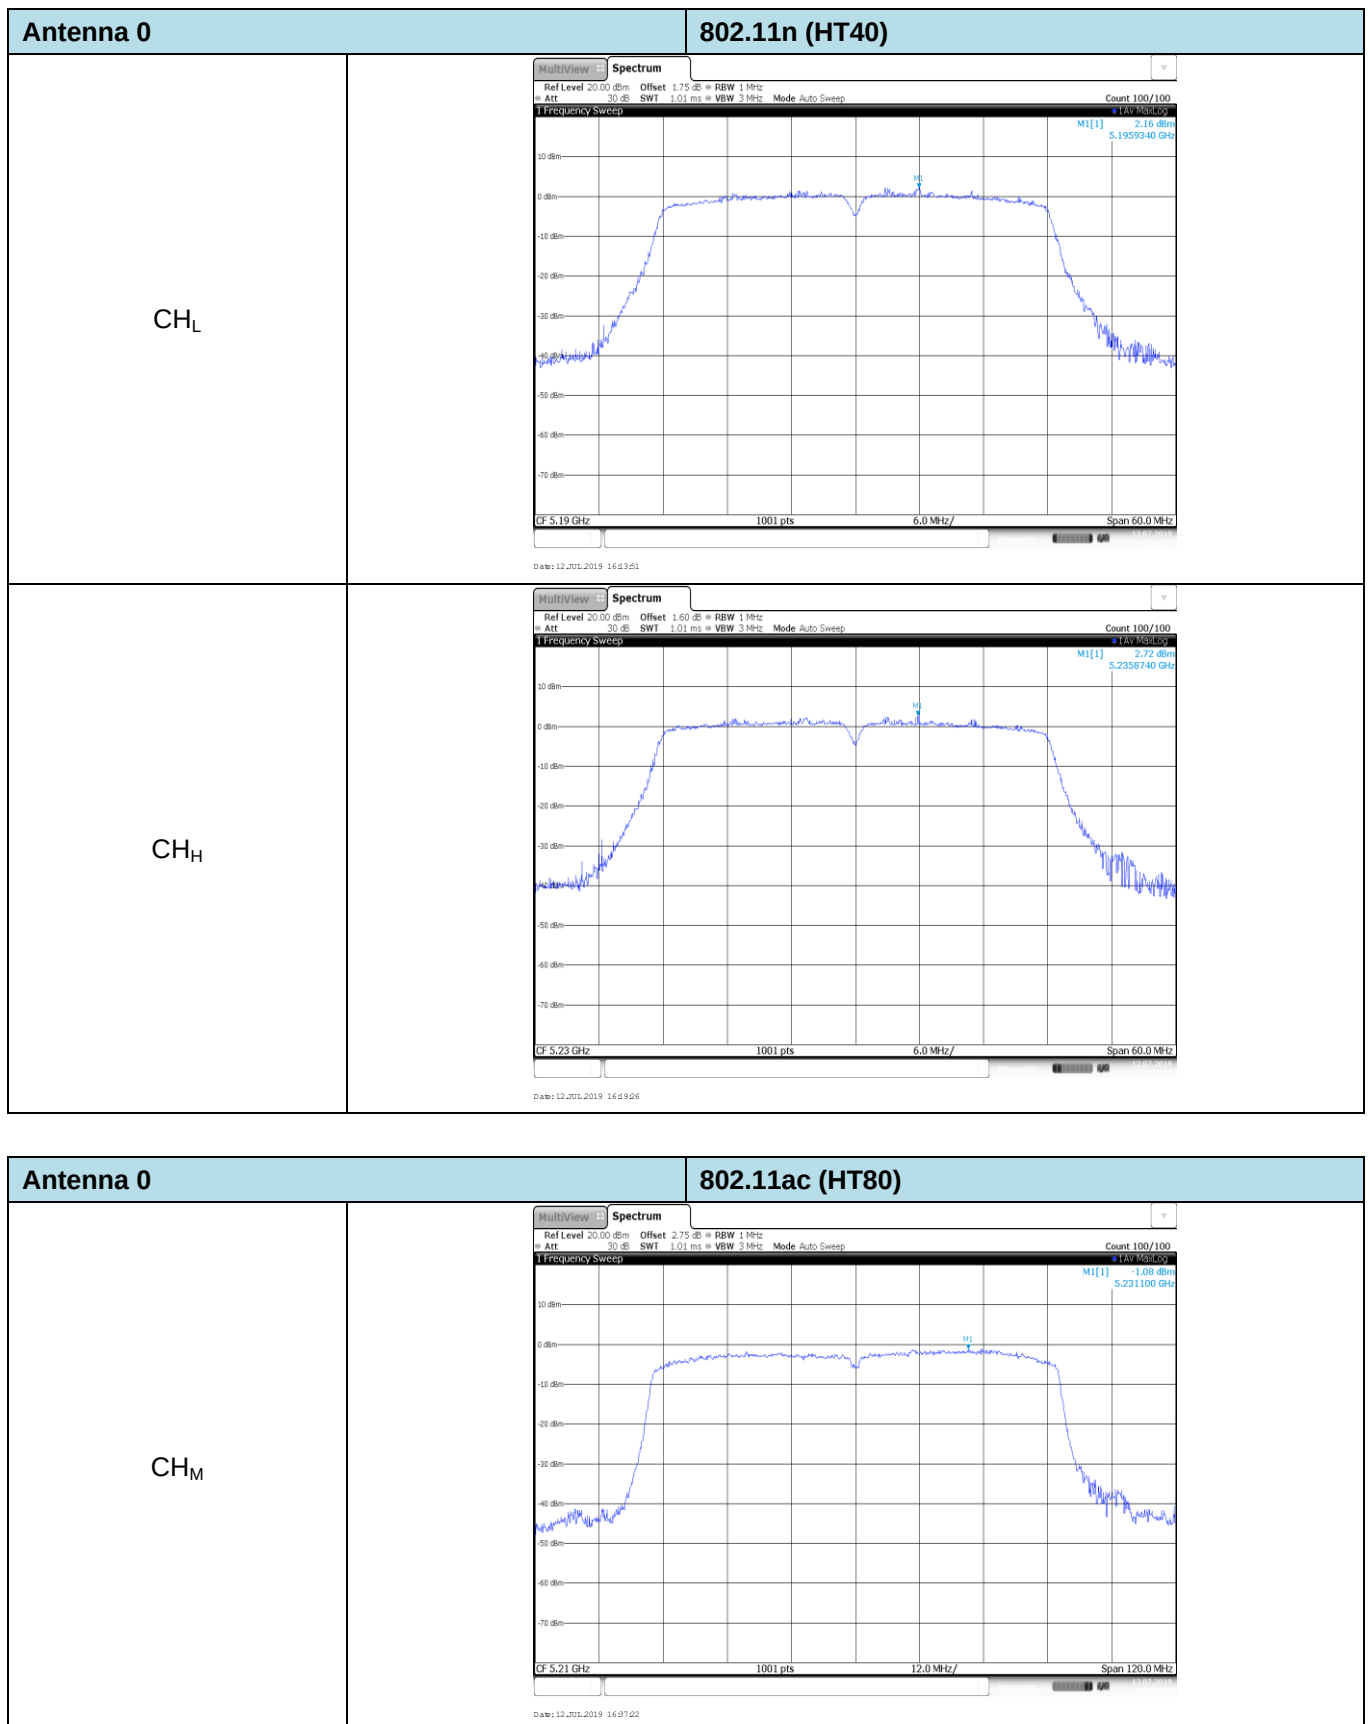


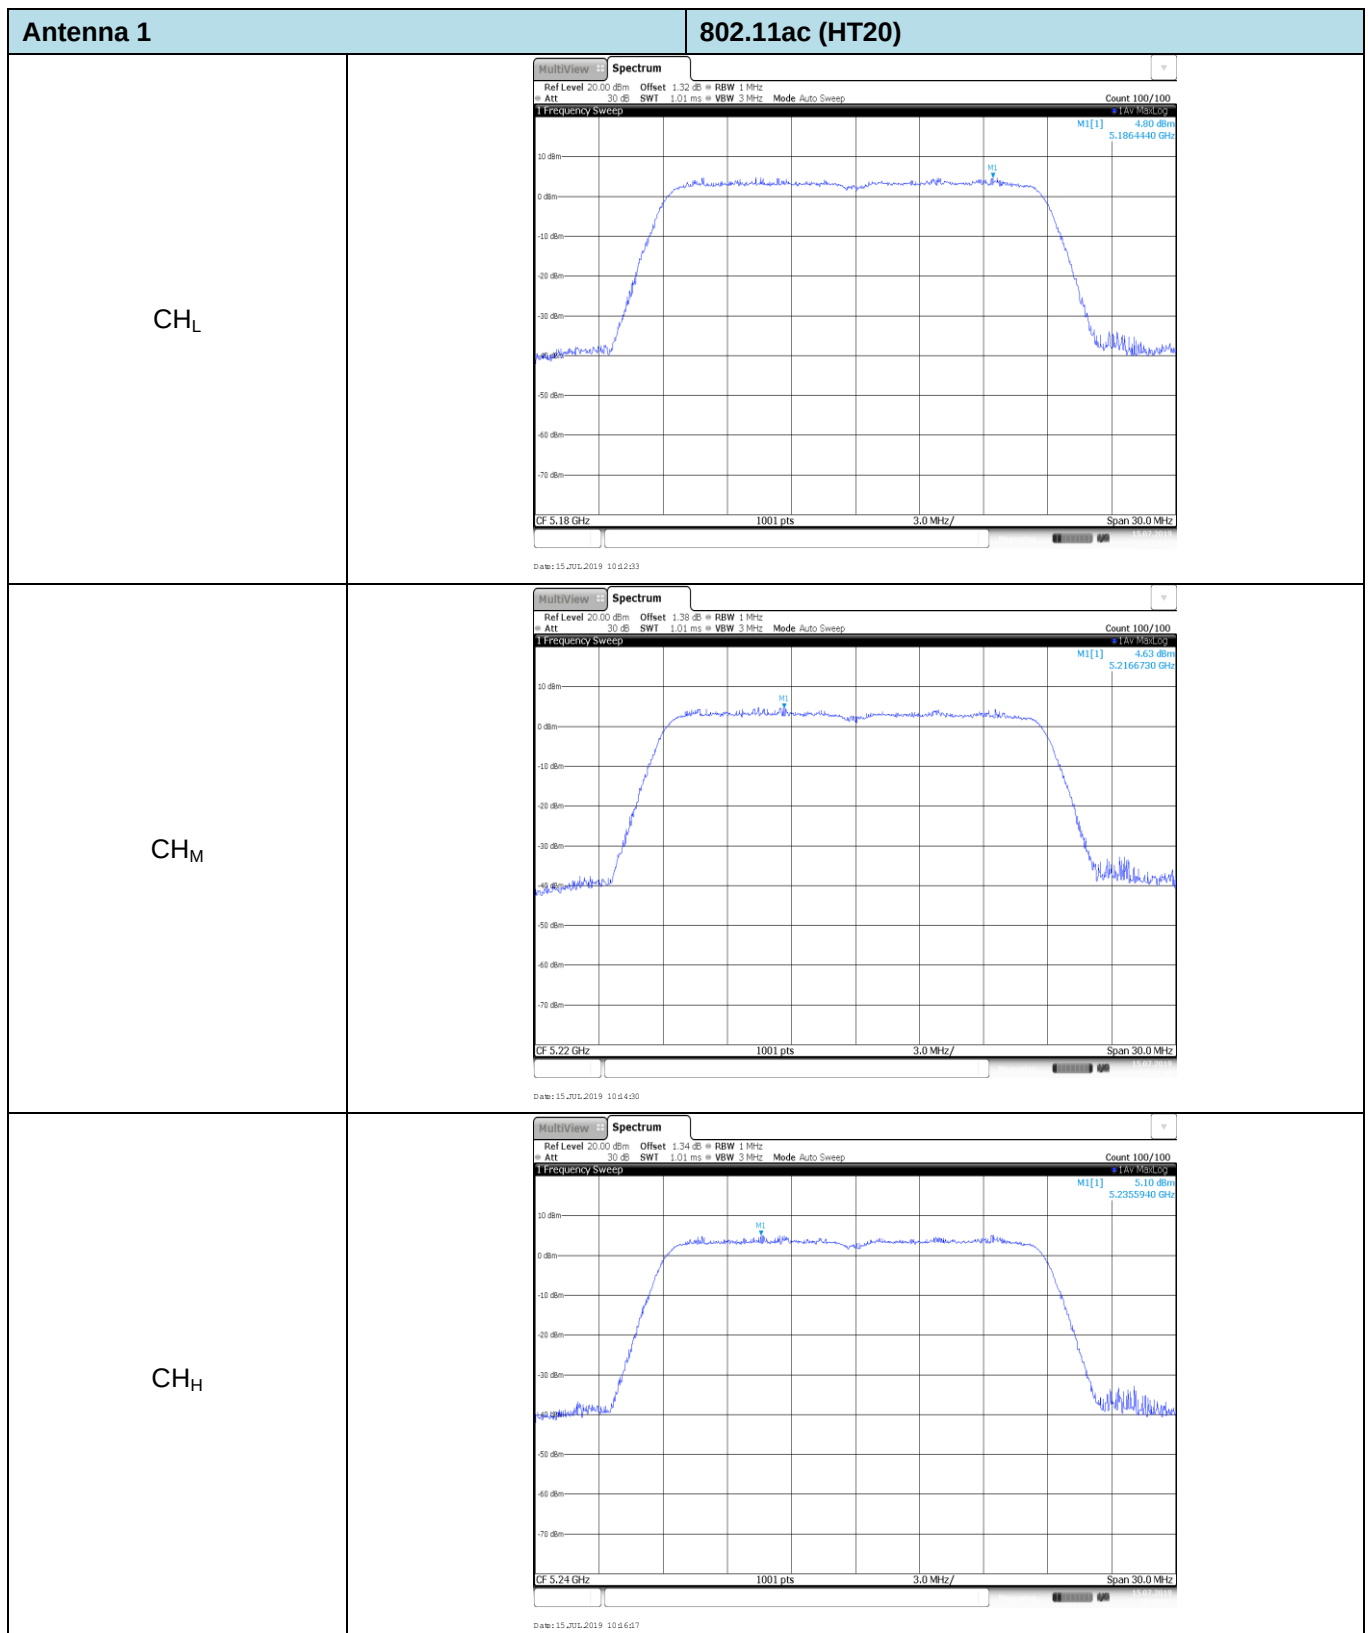


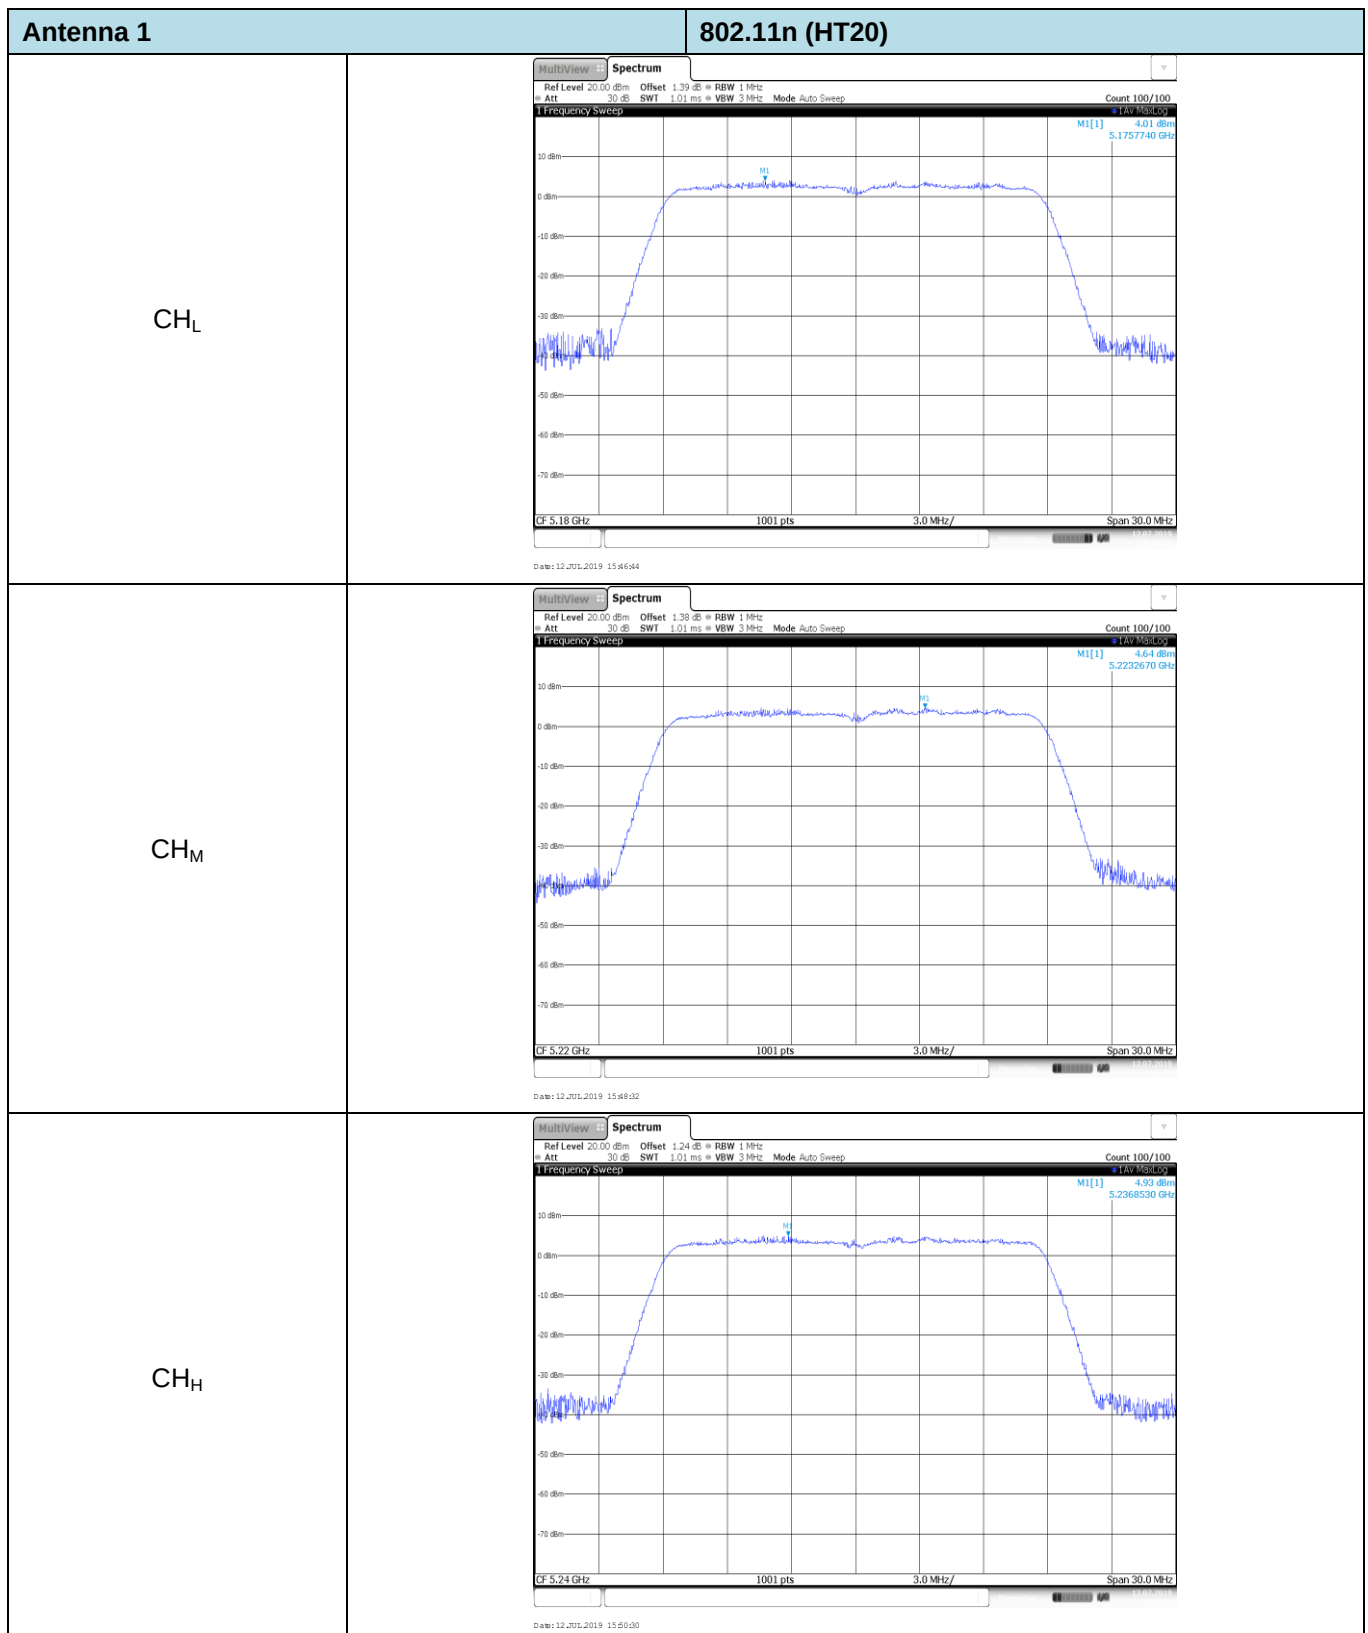


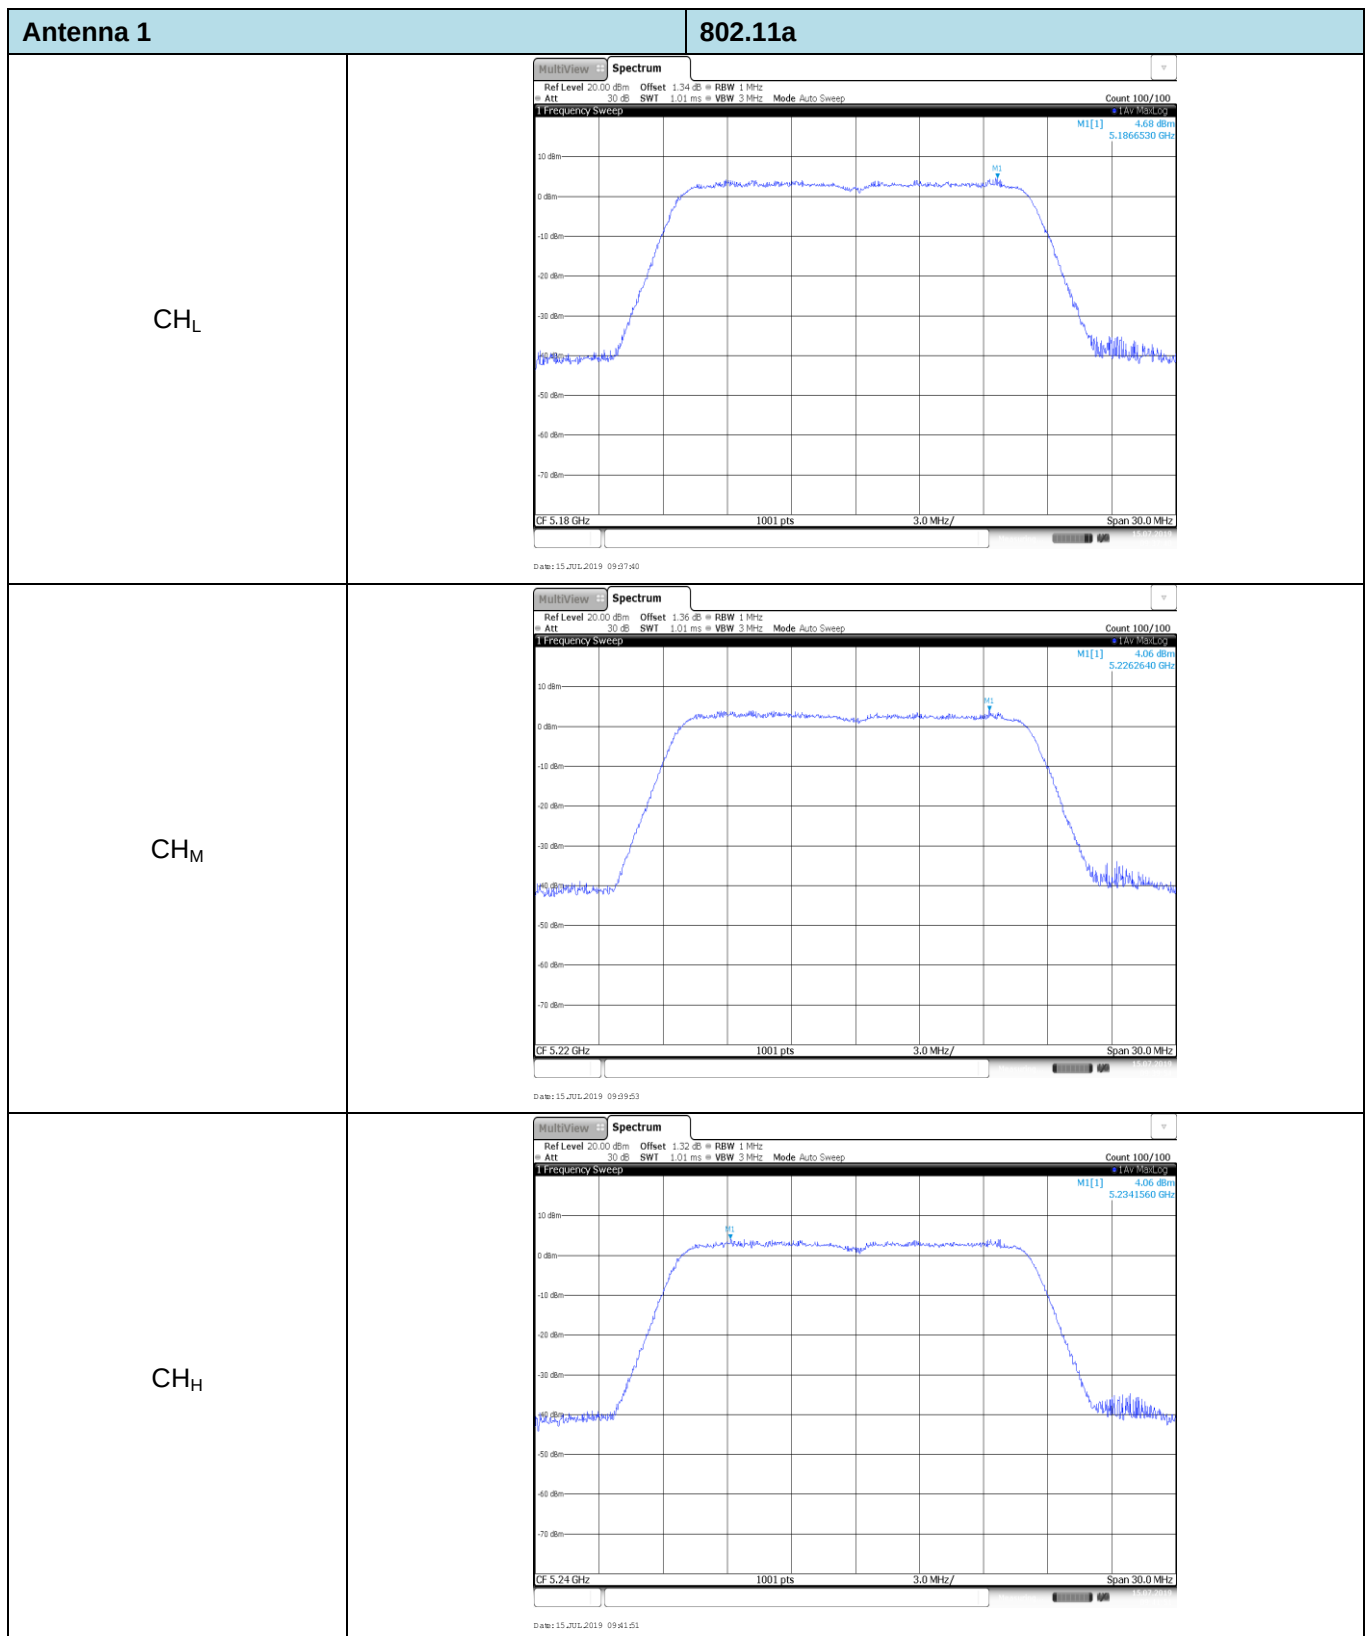


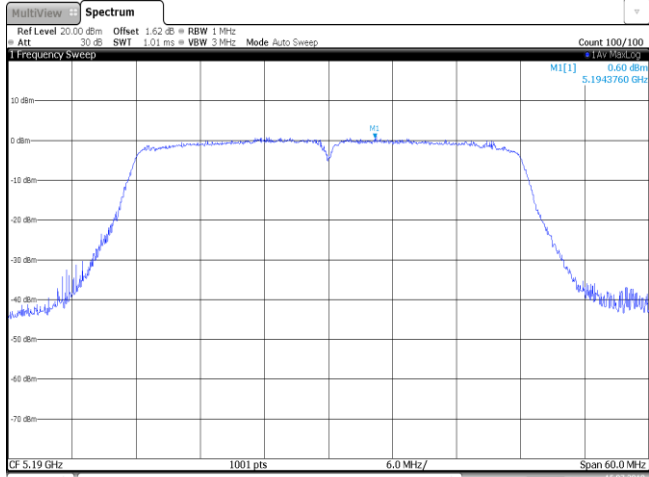
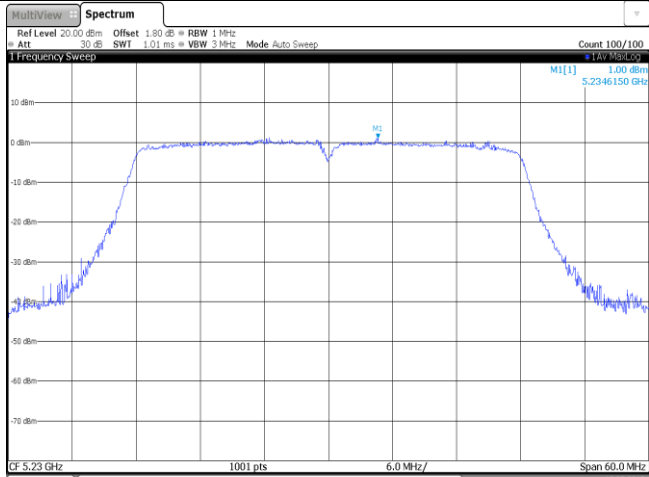
Antenna 1		802.11ac (HT40)
CH _L	 Ref Level 20.00 dBm Offset 1.62 dB RBW 1 MHz Att 30 dB SWF 1.01 ms VSW 3.14 Mode Auto Sweep Count 100/100 MI[1] 0.60 dBm 5.1943760 GHz CF 5.19 GHz 1001 pts 6.0 MHz/ Span 60.0 MHz Date: 15 JUL 2019 10:20:54	
CH _H	 Ref Level 20.00 dBm Offset 1.80 dB RBW 1 MHz Att 30 dB SWF 1.01 ms VSW 3.14 Mode Auto Sweep Count 100/100 MI[1] 1.00 dBm 5.2346150 GHz CF 5.23 GHz 1001 pts 6.0 MHz/ Span 60.0 MHz Date: 15 JUL 2019 10:22:43	

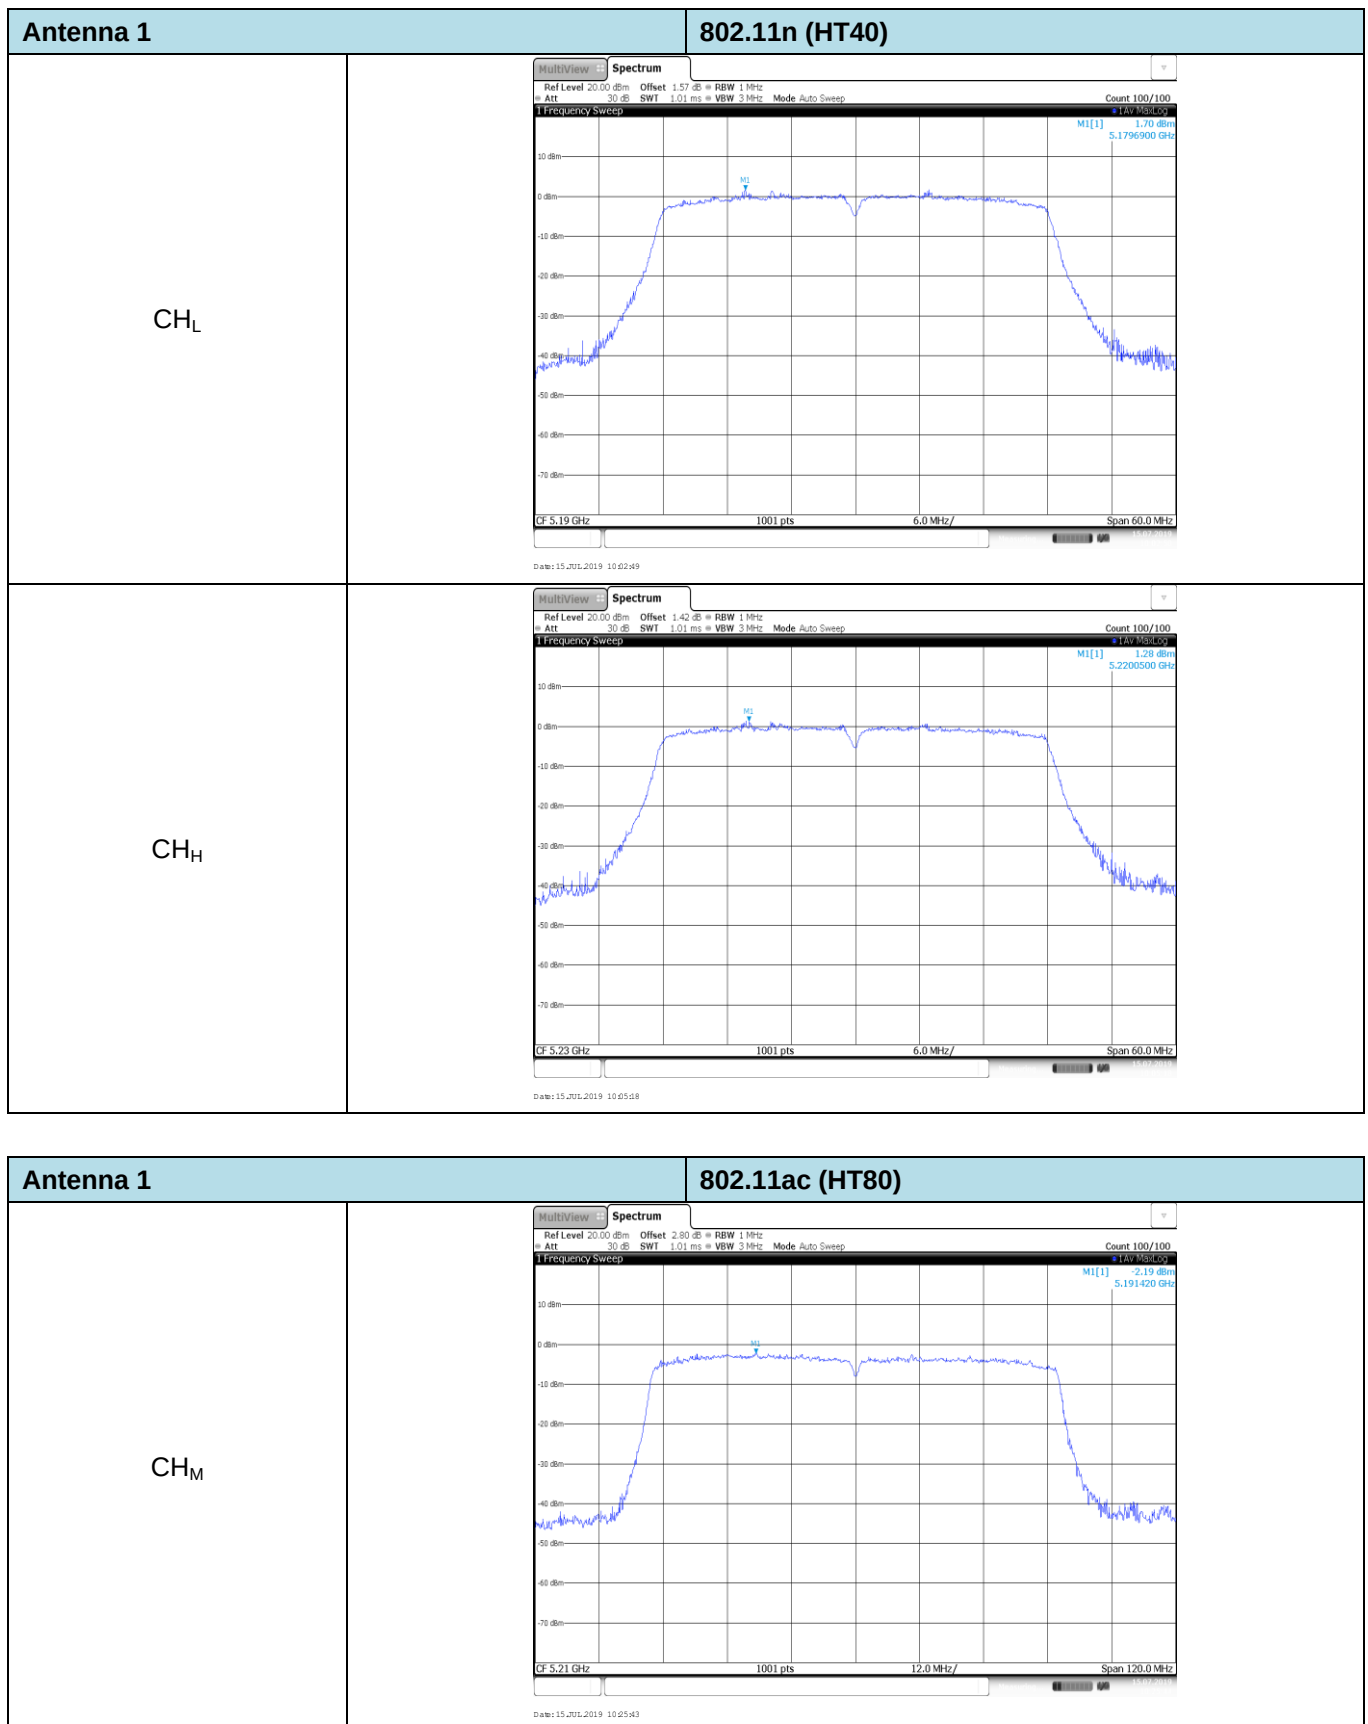


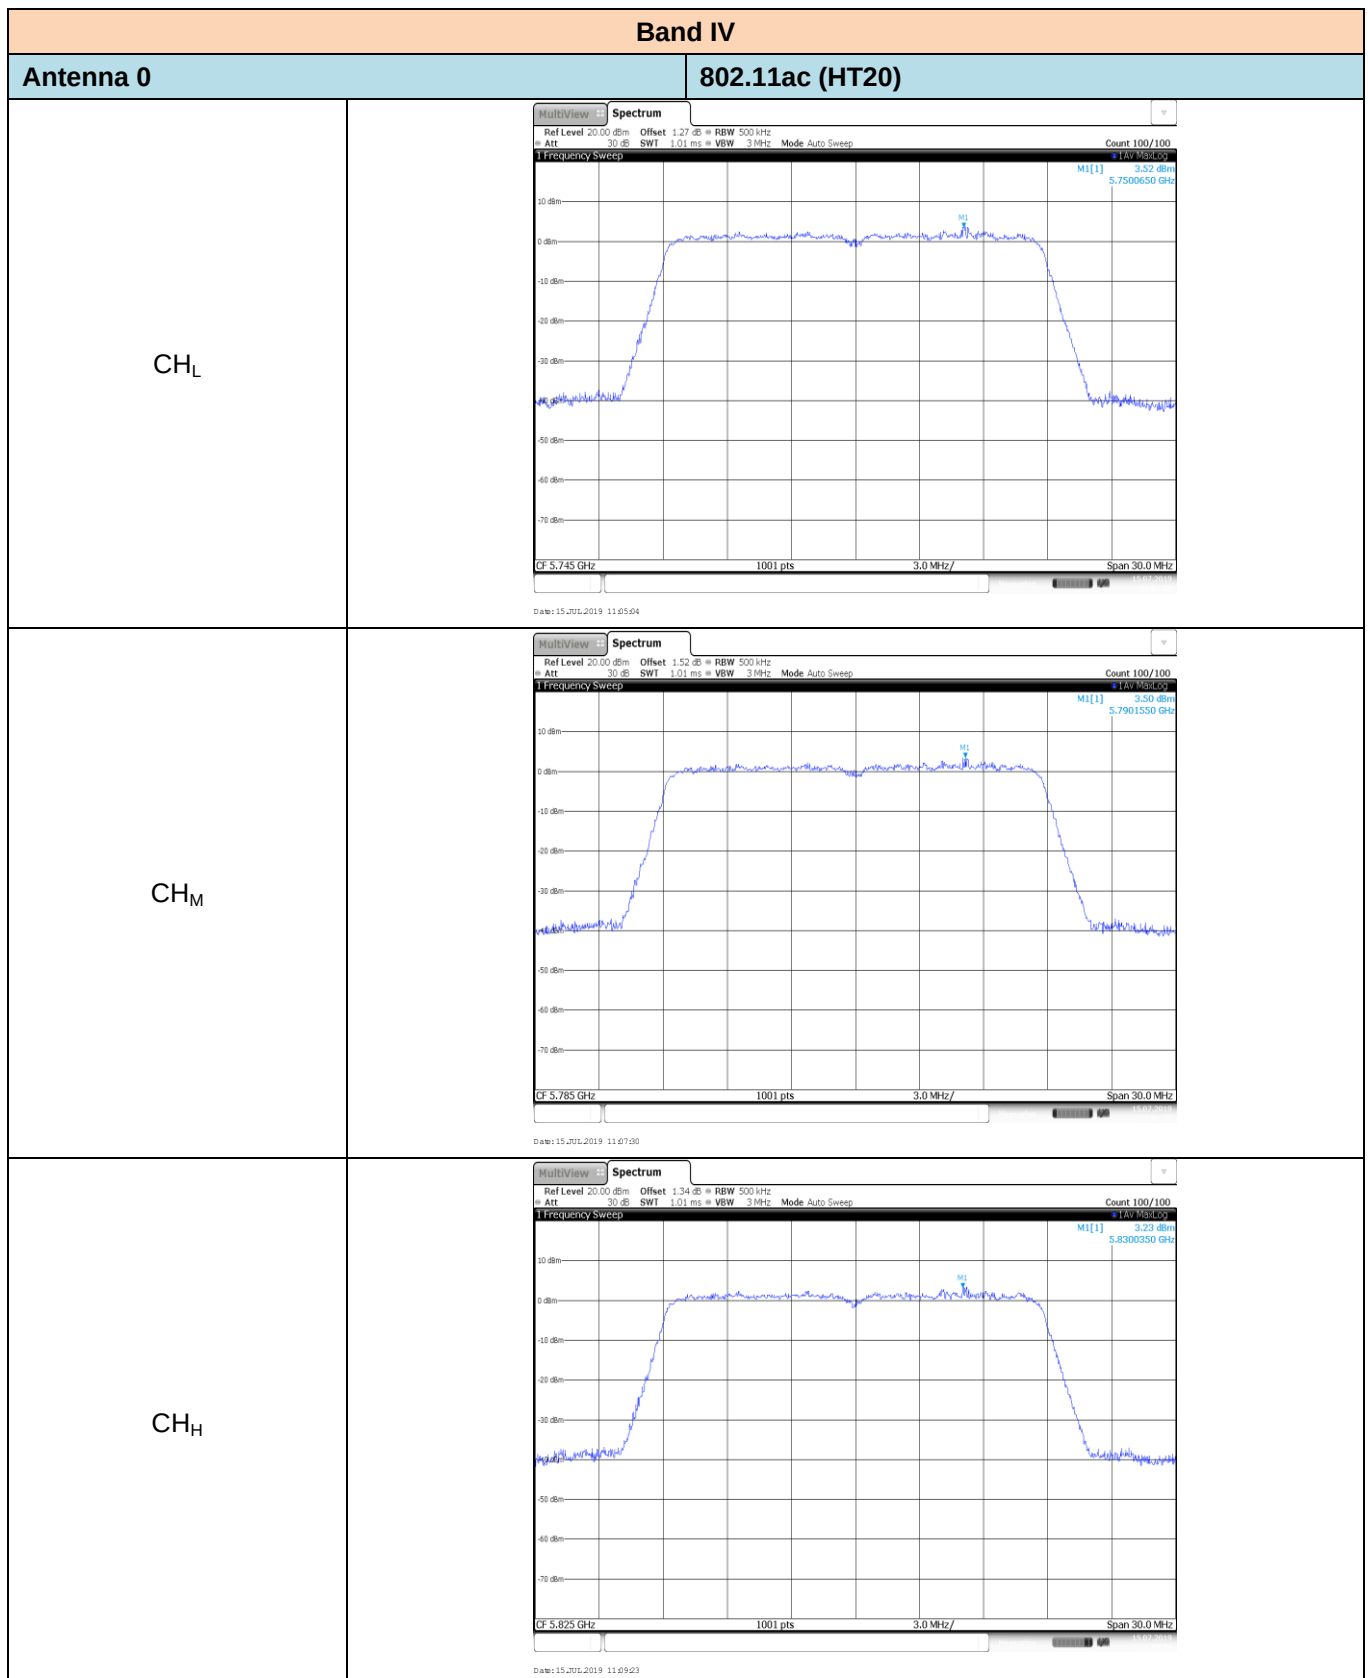


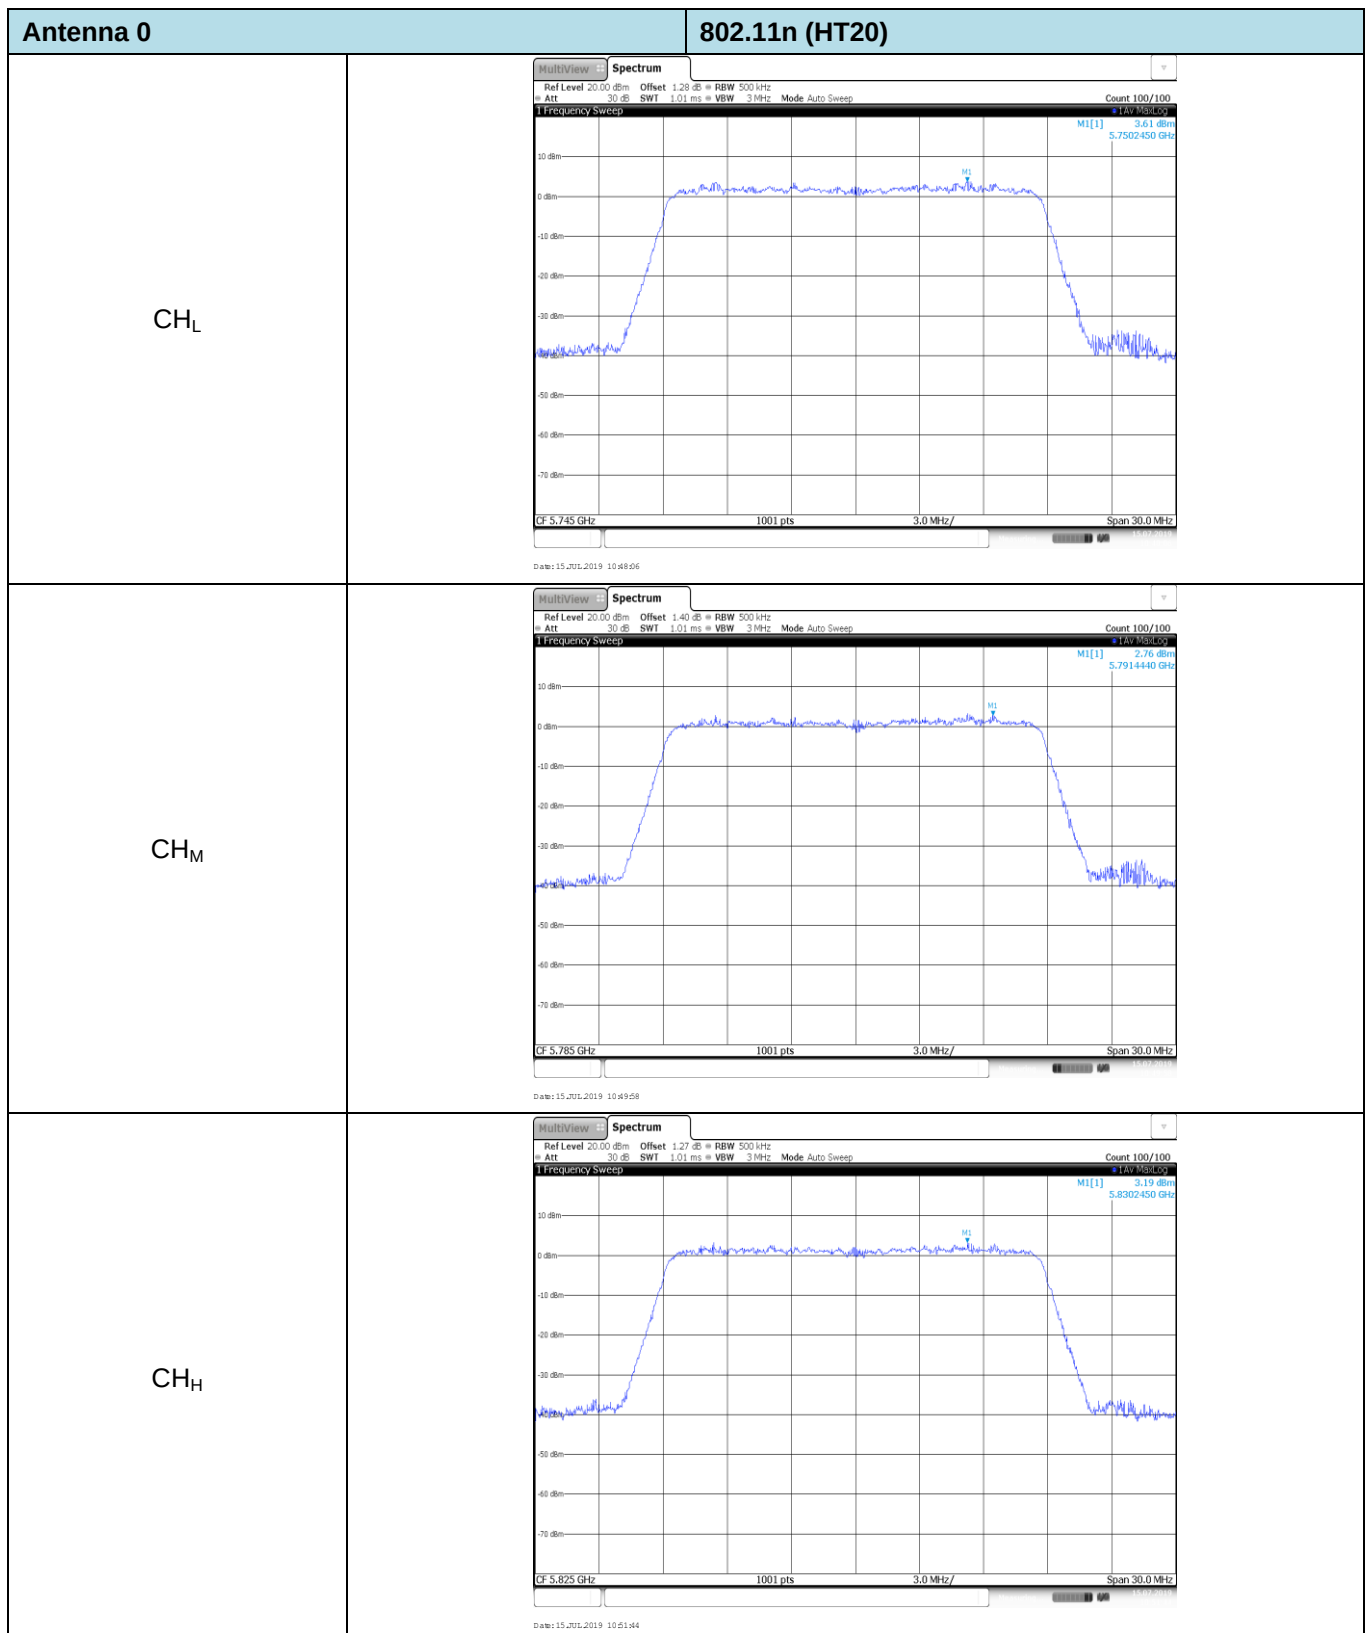


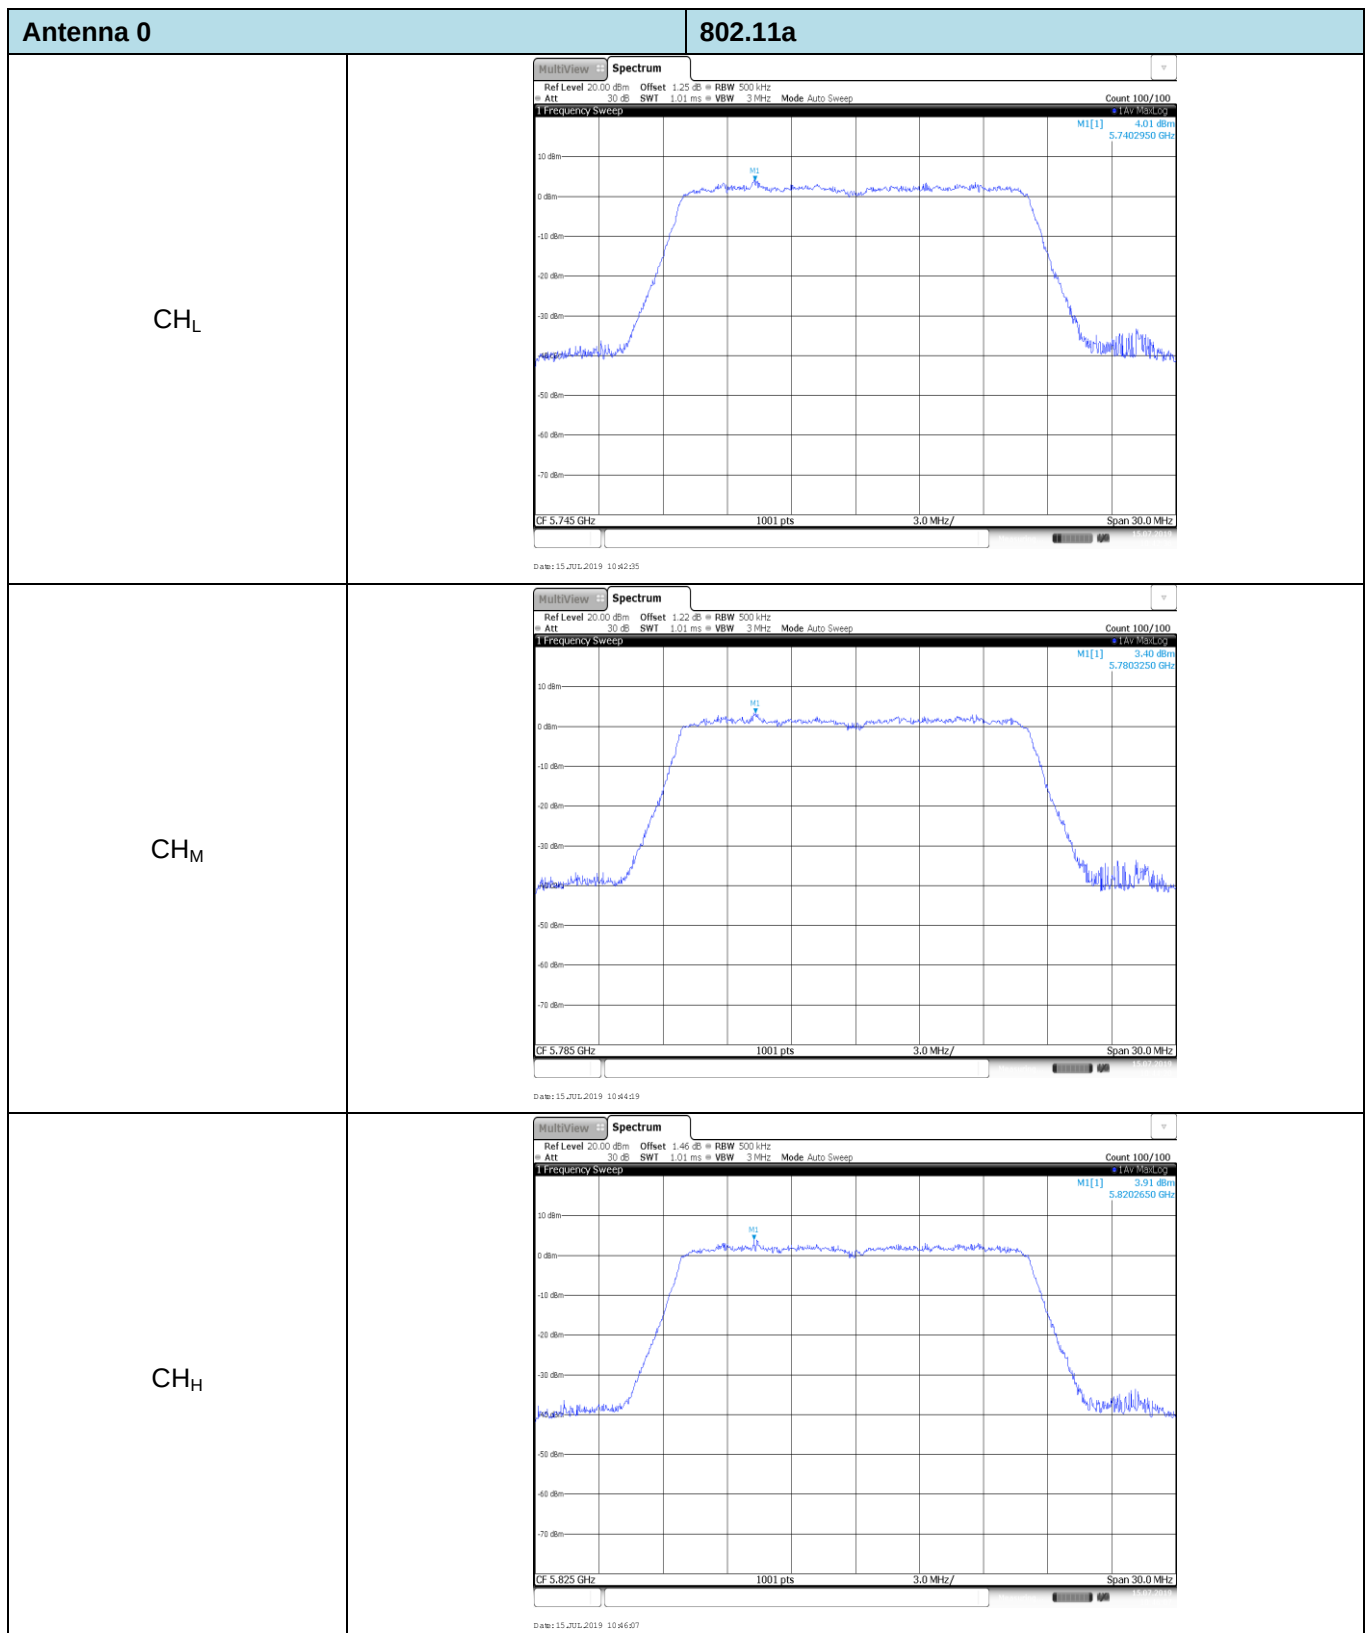


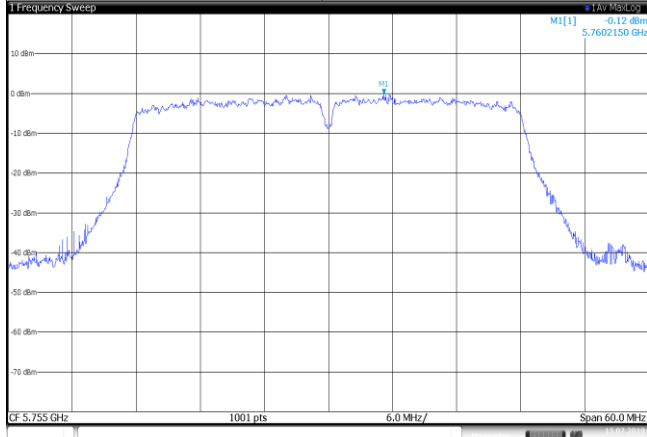
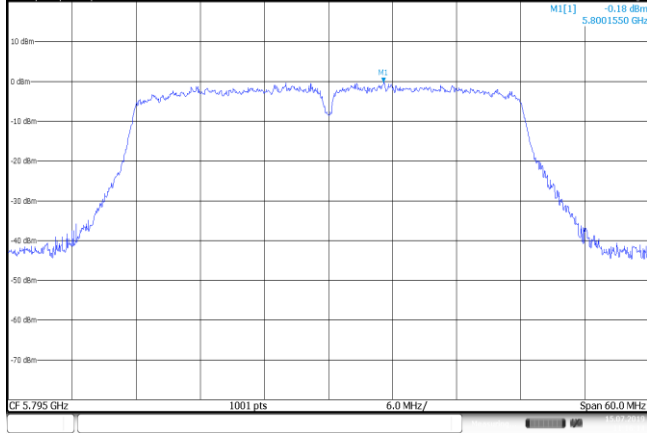
Antenna 0		802.11ac (HT40)
CH _L	MultView Spectrum Ref Level 20.00 dBm Offset 1.80 dB RBW 500 kHz Att 30 dB SWI 1.01 ms VBW 3 MHz Mode Auto Sweep Count 100/100 MI[1] -0.12 dBm 5.7602150 GHz  CF 5.755 GHz 1001 pts 6.0 MHz/ Span 60.0 MHz Date: 15 JUL 2019 11:44:23	
CH _H	MultView Spectrum Ref Level 20.00 dBm Offset 2.00 dB RBW 500 kHz Att 30 dB SWI 1.01 ms VBW 3 MHz Mode Auto Sweep Count 100/100 MI[1] -0.18 dBm 5.8001550 GHz  CF 5.795 GHz 1001 pts 6.0 MHz/ Span 60.0 MHz Date: 15 JUL 2019 11:46:44	

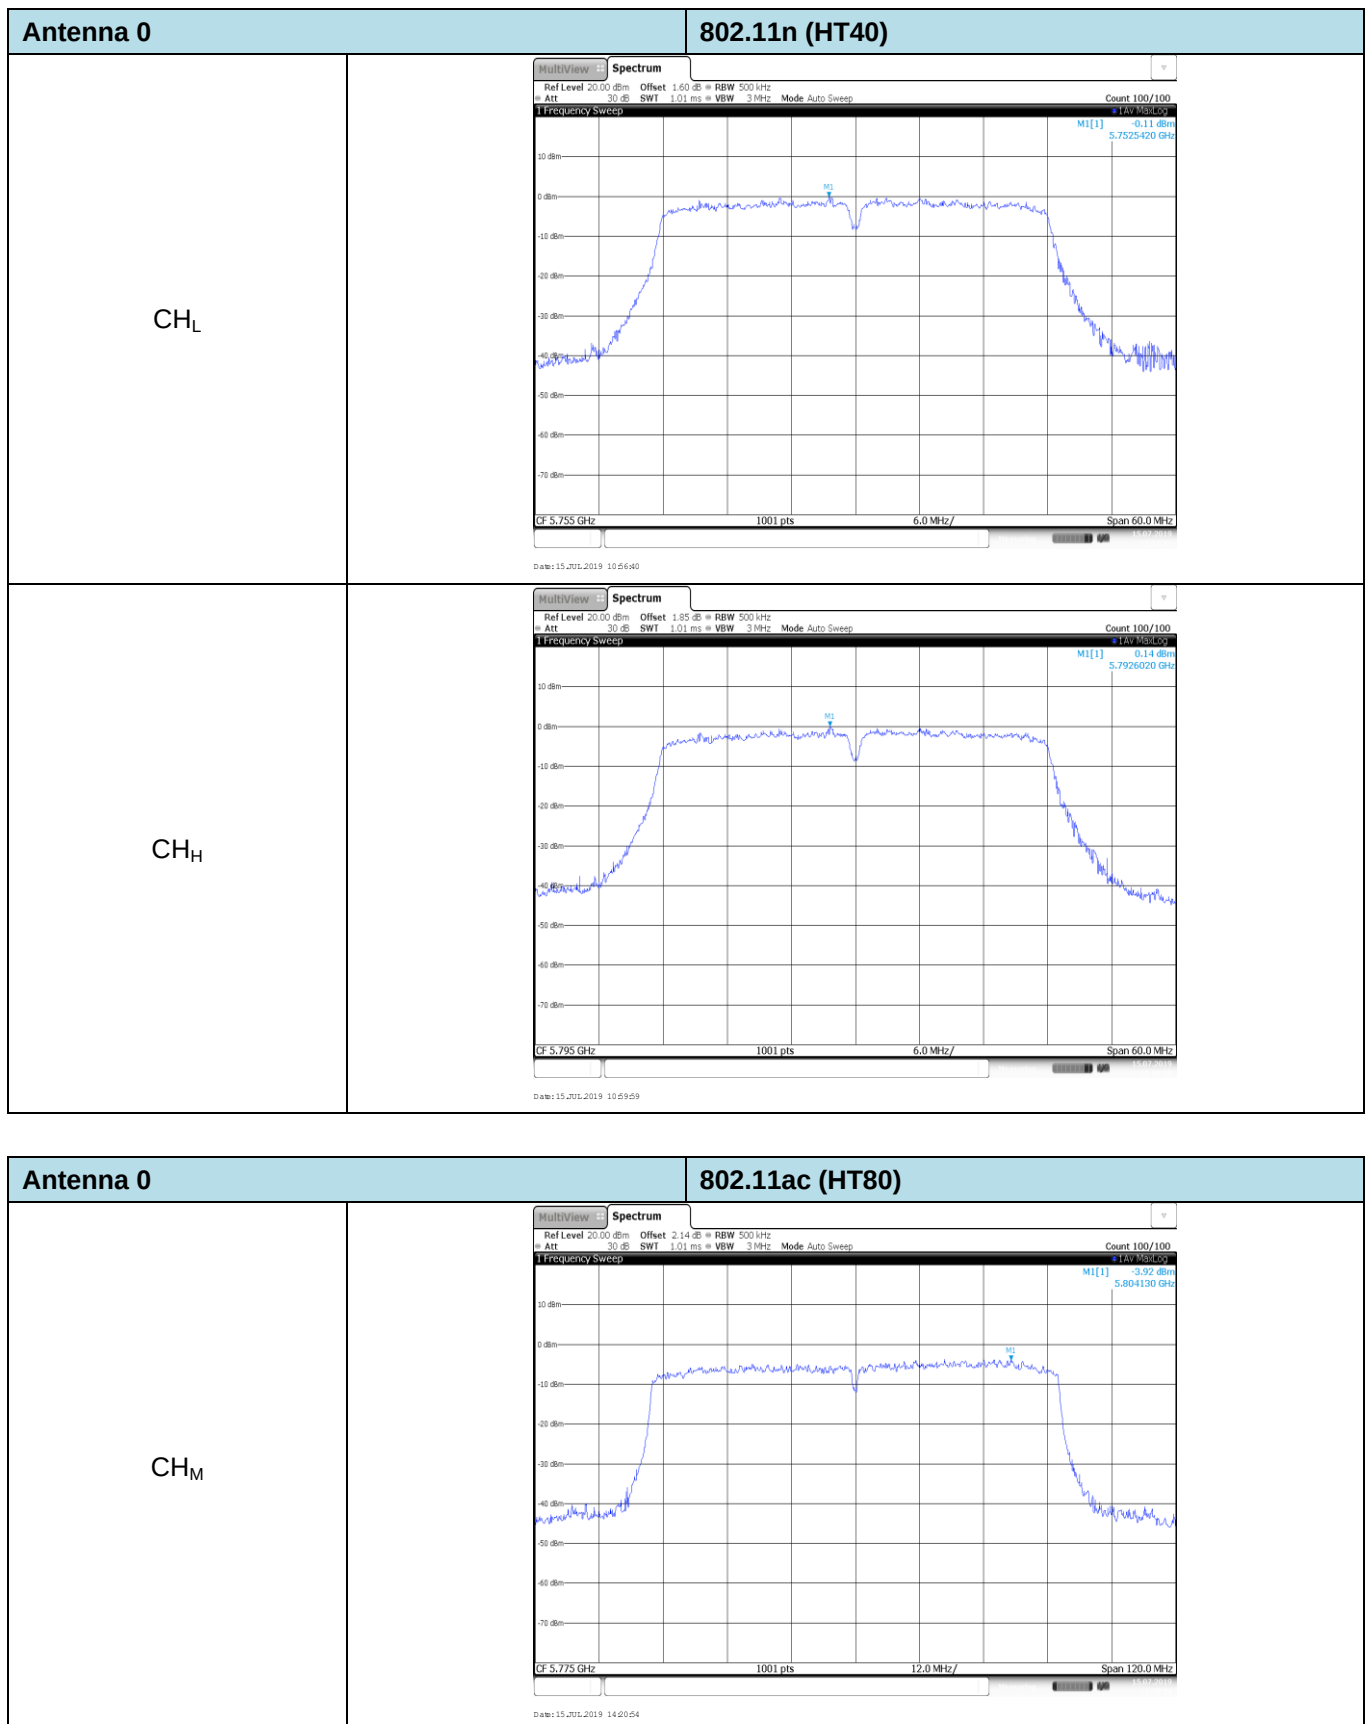

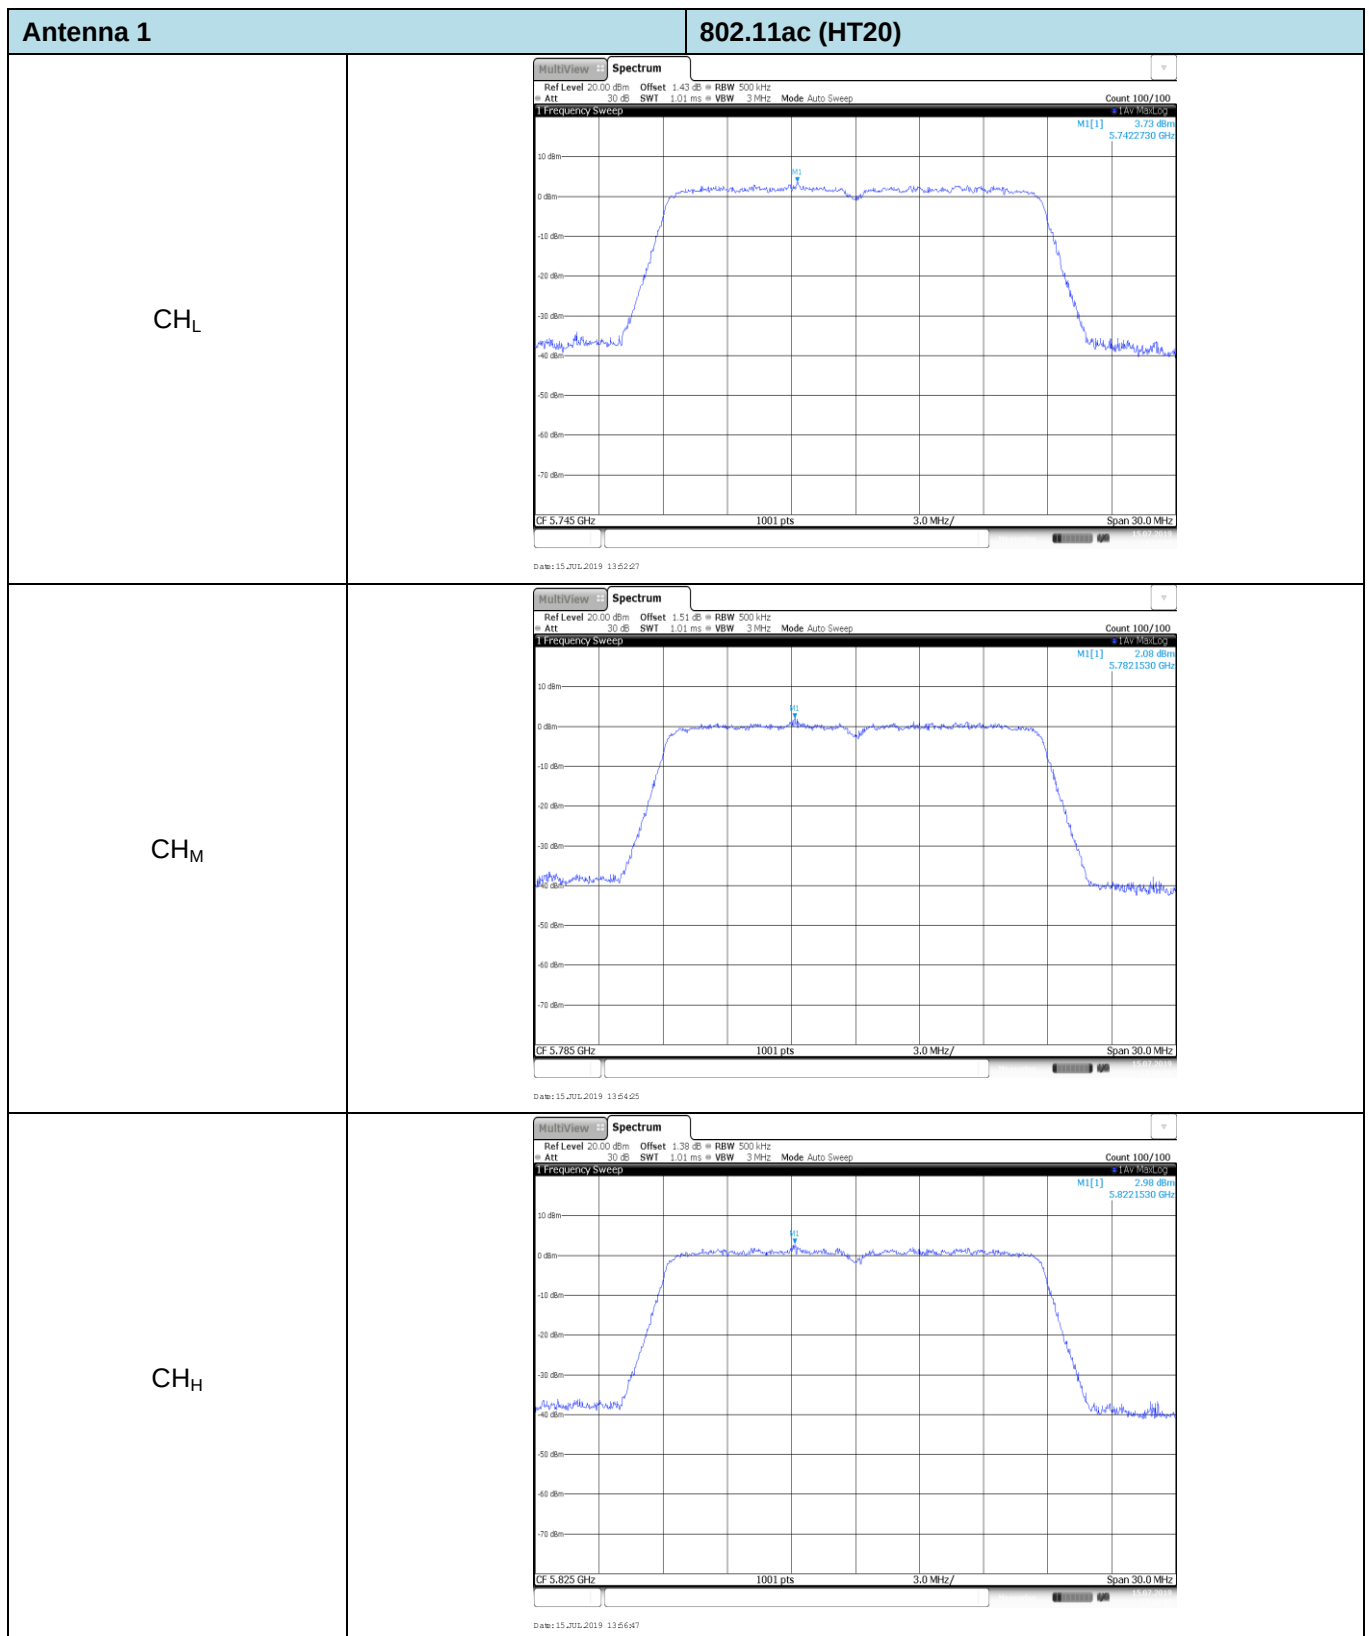

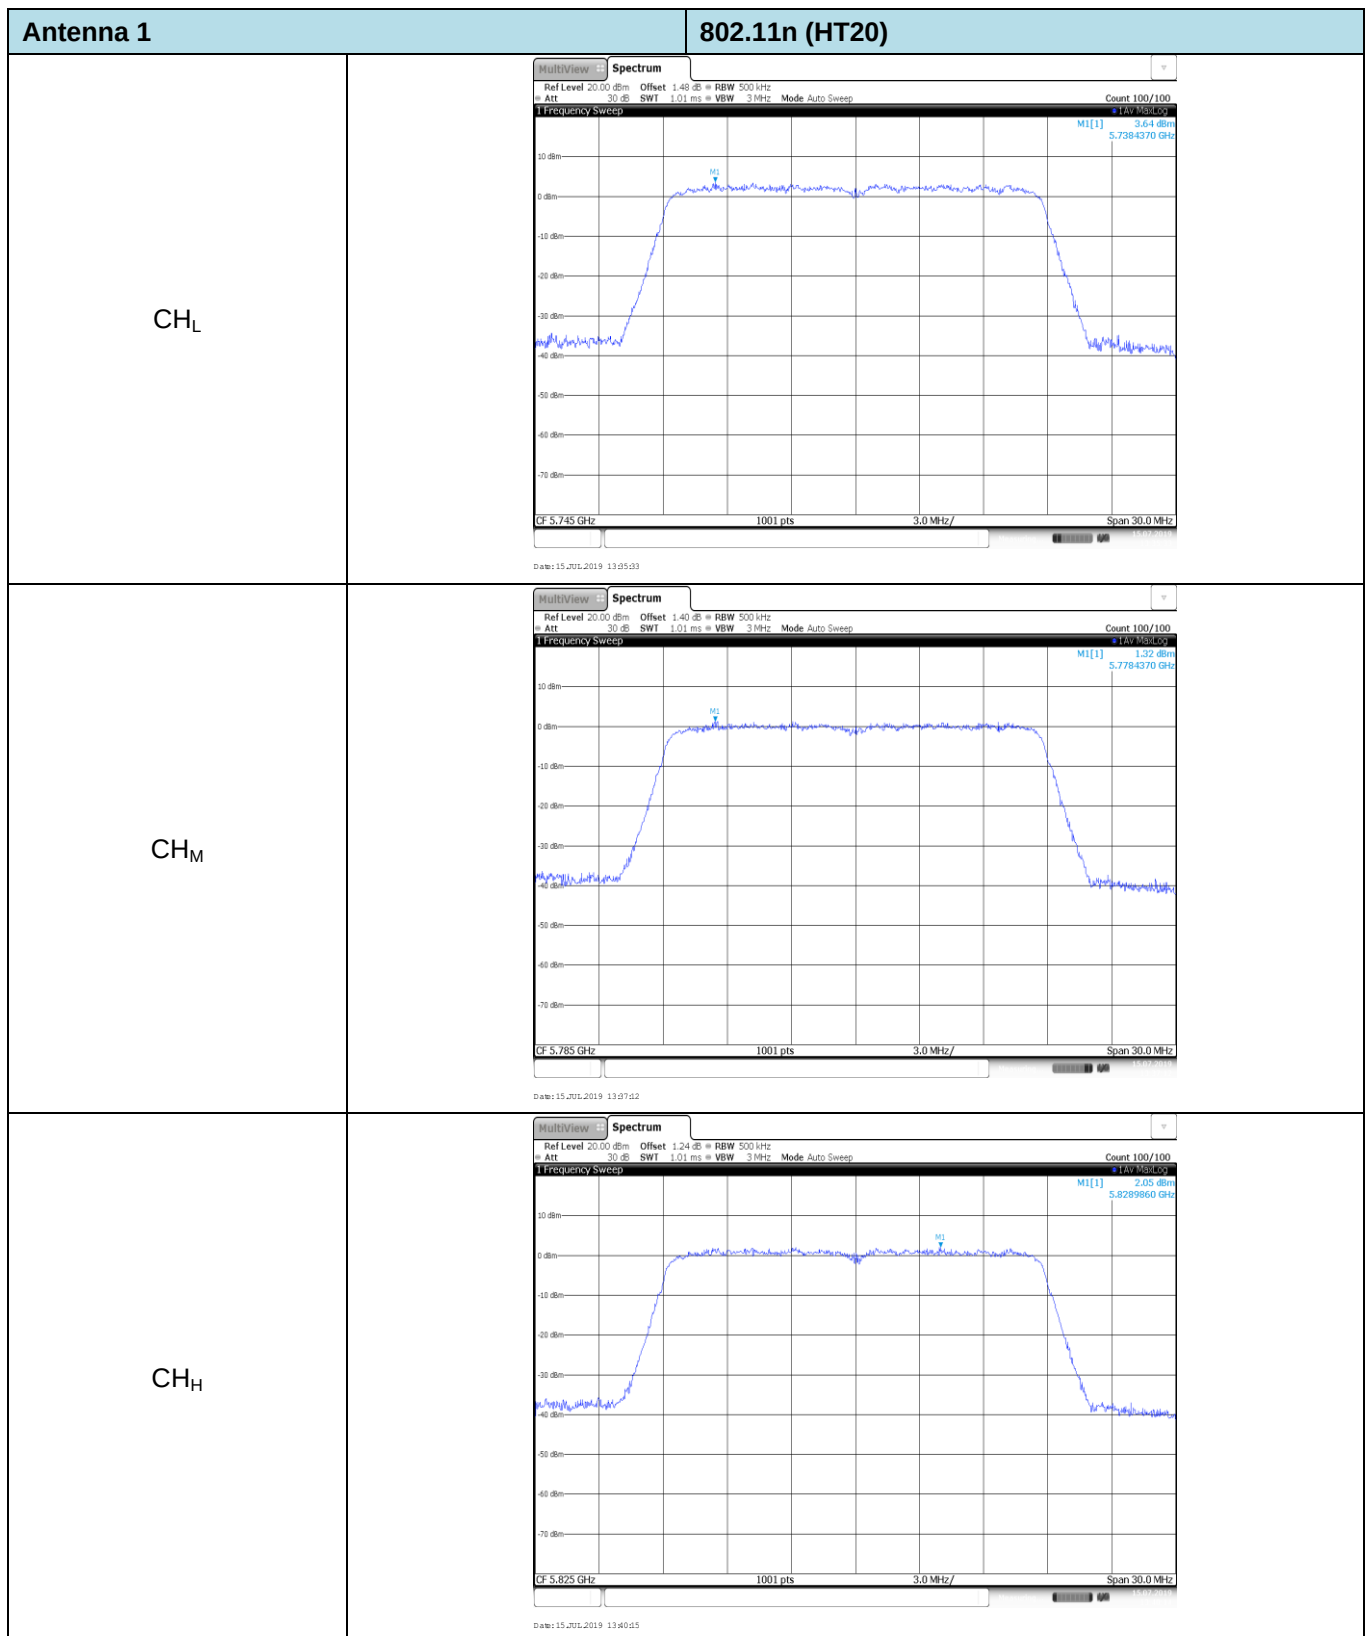

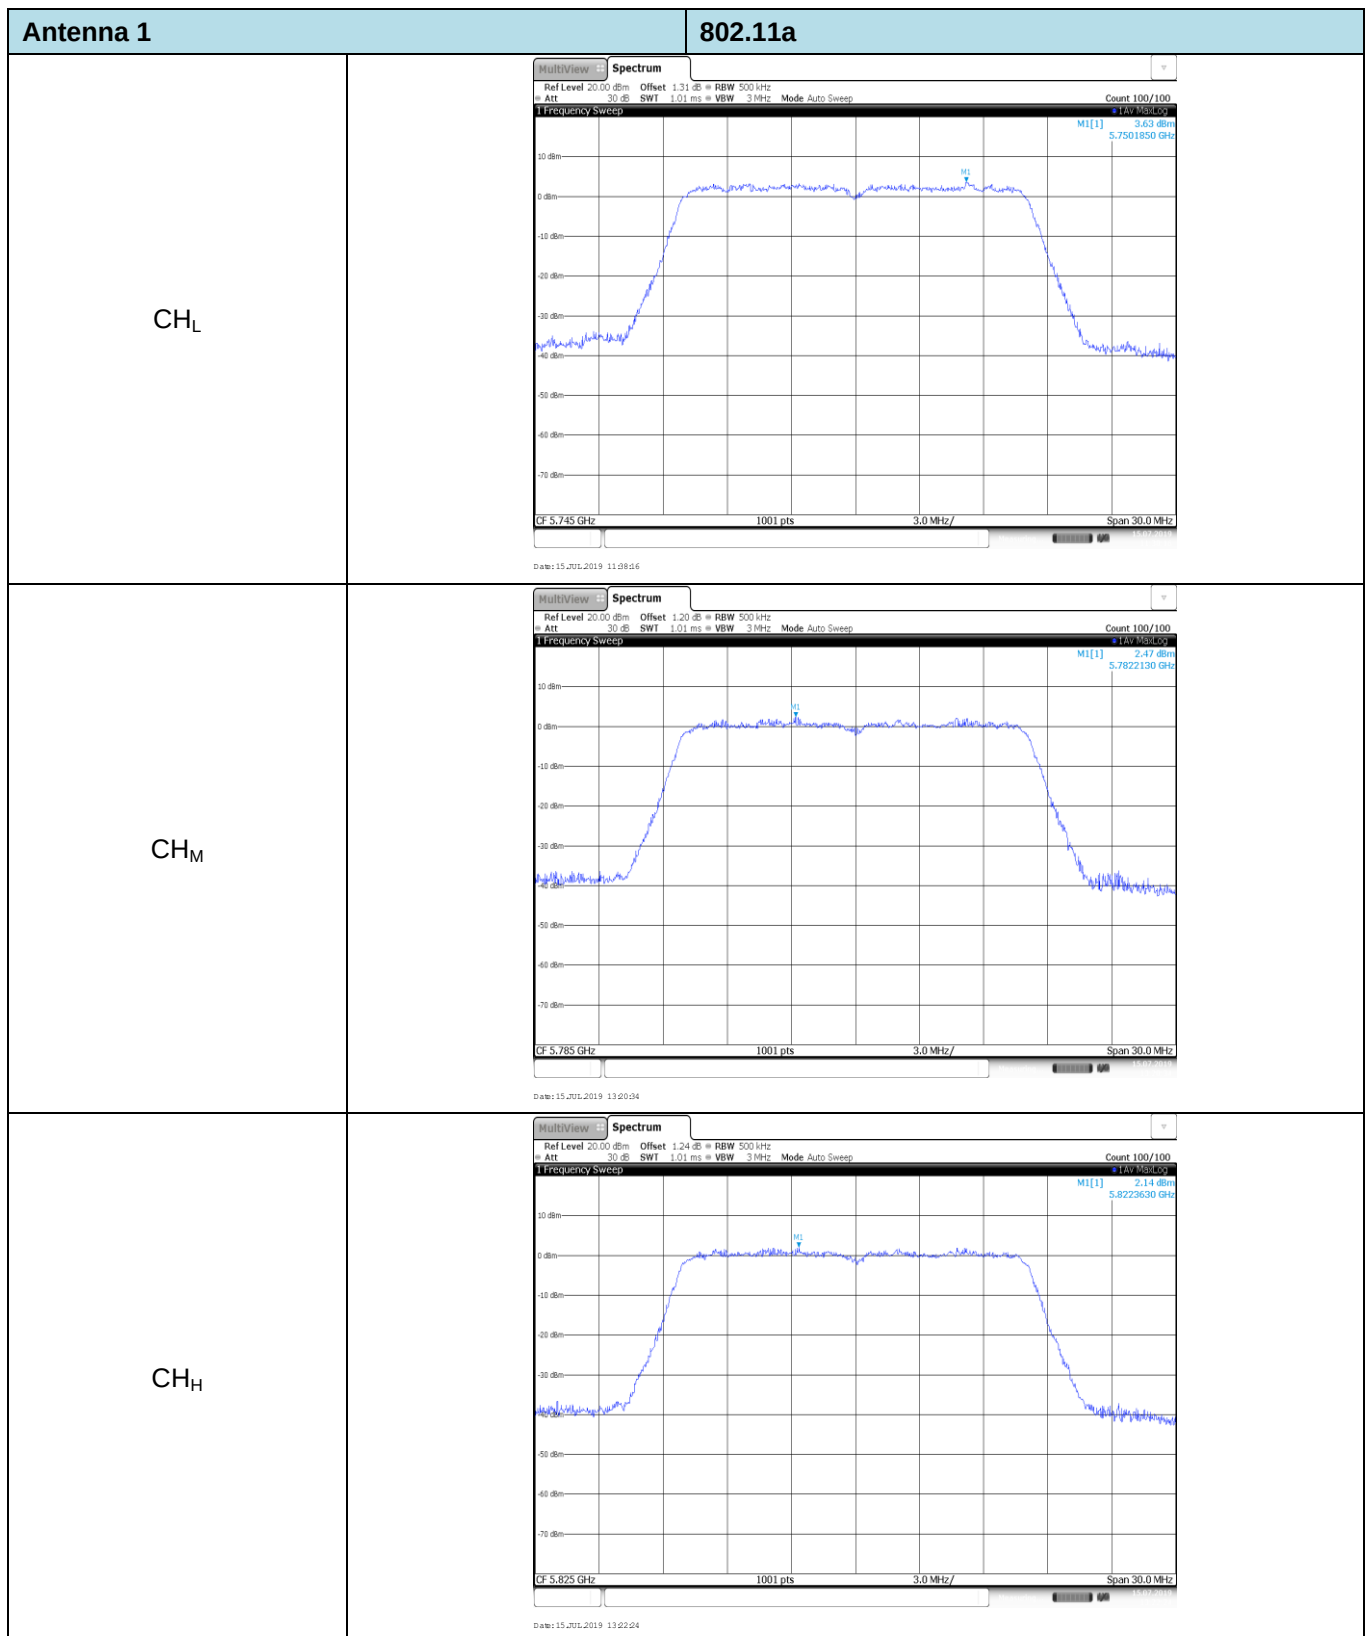

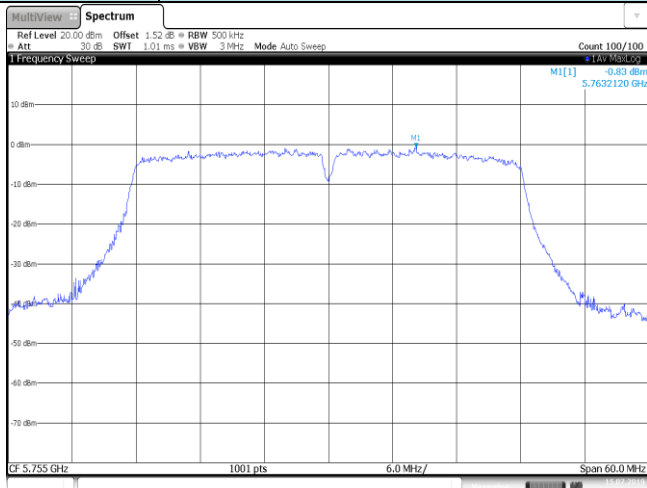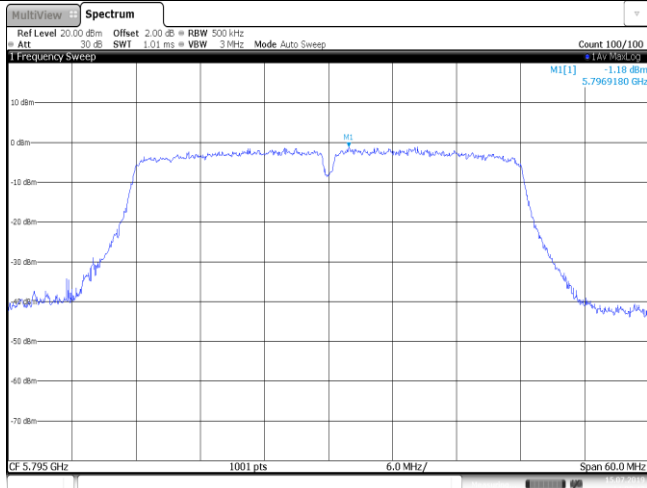
Antenna 1		802.11ac (HT40)
CH _L	 MultiView Spectrum Ref Level 20.00 dBm Offset 1.52 dB RBW 500 kHz Att 30 dB SWI 1.01 ms VSW 3 MHz Mode Auto Sweep Count 100/100 1 Frequency Sweep M1[1] -0.83 dBm 5.7632120 GHz CF 5.755 GHz 1001 pts 6.0 MHz/ Span 60.0 MHz Date: 15 JUL 2019 13:58:57	
CH _H	 MultiView Spectrum Ref Level 20.00 dBm Offset 2.00 dB RBW 500 kHz Att 30 dB SWI 1.01 ms VSW 3 MHz Mode Auto Sweep Count 100/100 1 Frequency Sweep M1[1] -1.18 dBm 5.7969180 GHz CF 5.795 GHz 1001 pts 6.0 MHz/ Span 60.0 MHz Date: 15 JUL 2019 14:00:41	

5.5. 26dB bandwidth and 99% Occupancy bandwidth

LIMIT

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 , and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

TEST CONFIGURATION

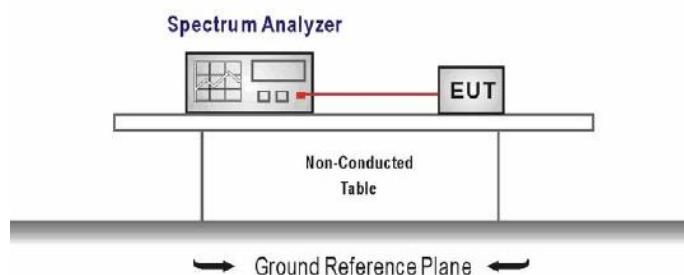

TEST PROCEDURE

1. According KDB 789033 D02 – Section C
2. Connect the antenna port(s) to the spectrum analyzer input.
3. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency = Channel center frequency
Span = 2 x emission bandwidth
RBW = 1% to 5% of the emission bandwidth
VBW > 3 x RBW
Sweep time = auto couple
Detector = Peak
Trace mode = max hold
4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission, and use the 99 % power bandwidth function of the instrument

TEST MODE:


Please refer to the clause 3.3


TEST RESULTS

☒ Passed ☐ Not Applicable

Band	Bandwidth (MHz)	Type	Channel	99% Occupy bandwidth (MHz)	26dB bandwidth (MHz)	Result
				Antenna 0	Antenna 0	
I	20	802.11ac	CH _L	17.53	19.56	Pass
			CH _M	17.50	19.56	
			CH _H	17.53	19.59	
		802.11n	CH _L	17.53	19.47	Pass
			CH _M	17.50	19.47	
			CH _H	17.53	19.44	
		802.11a	CH _L	16.33	18.60	Pass
			CH _M	16.36	18.66	
			CH _H	16.36	18.66	
	40	802.11ac	CH _L	36.20	41.28	Pass
			CH _H	36.14	41.46	
		802.11n	CH _L	36.20	41.46	Pass
			CH _H	36.32	41.76	
	80	802.11ac	CH _M	74.81	81.72	Pass


Band	Bandwidth (MHz)	Type	Channel	99% Occupy bandwidth (MHz)	26dB bandwidth (MHz)	Result
				Antenna 1	Antenna 1	
I	20	802.11ac	CH _L	17.53	19.47	Pass
			CH _M	17.50	19.50	
			CH _H	17.53	19.41	
		802.11n	CH _L	16.33	18.54	Pass
			CH _M	16.33	18.54	
			CH _H	16.33	18.60	
		802.11a	CH _L	16.33	18.60	Pass
			CH _M	16.33	18.54	
			CH _H	16.33	18.57	
	40	802.11ac	CH _L	36.20	41.82	Pass
			CH _H	36.26	42.12	
		802.11n	CH _L	36.14	41.40	Pass
			CH _H	36.20	41.58	
	80	802.11ac	CH _M	75.29	82.92	Pass

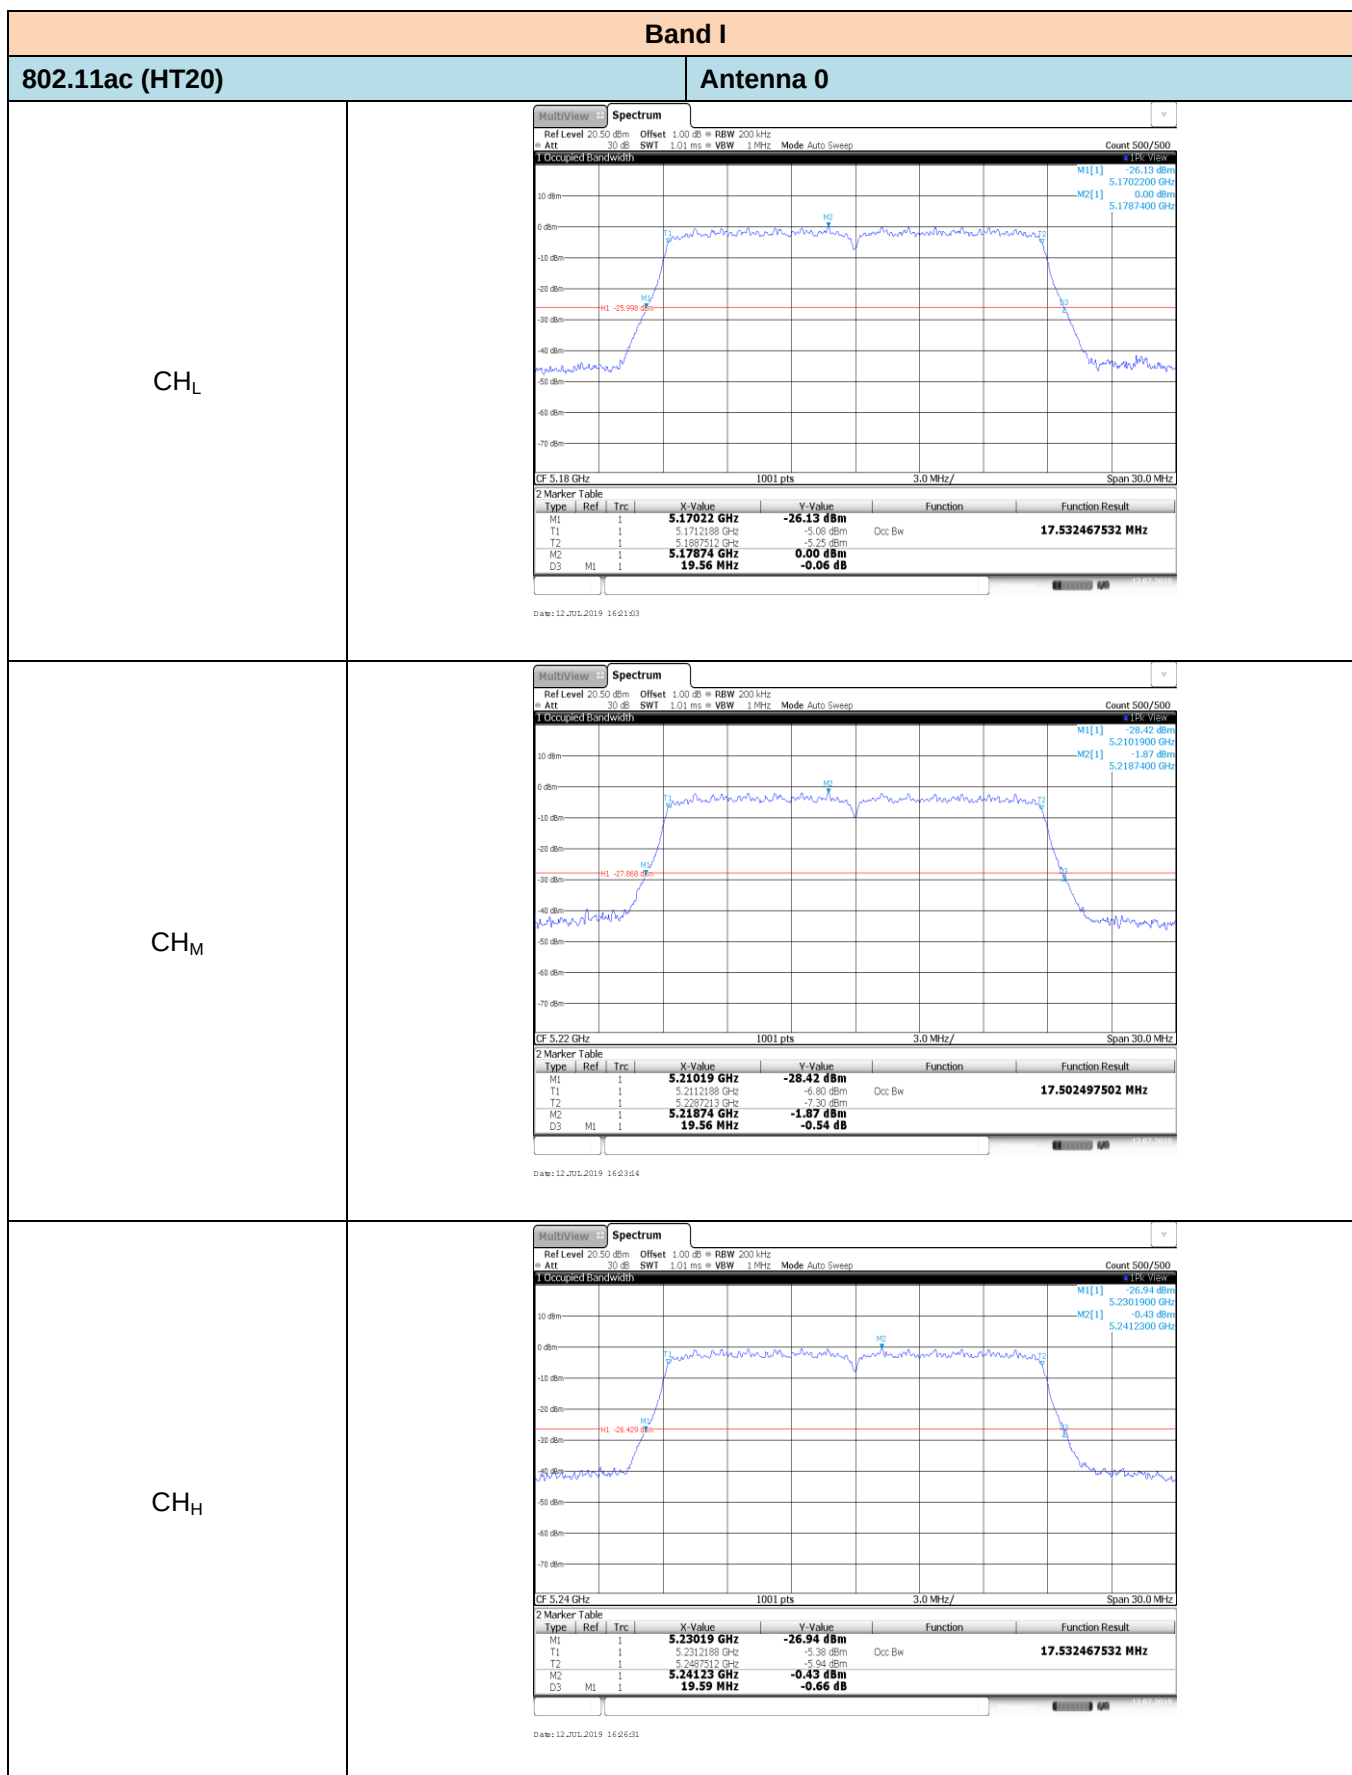

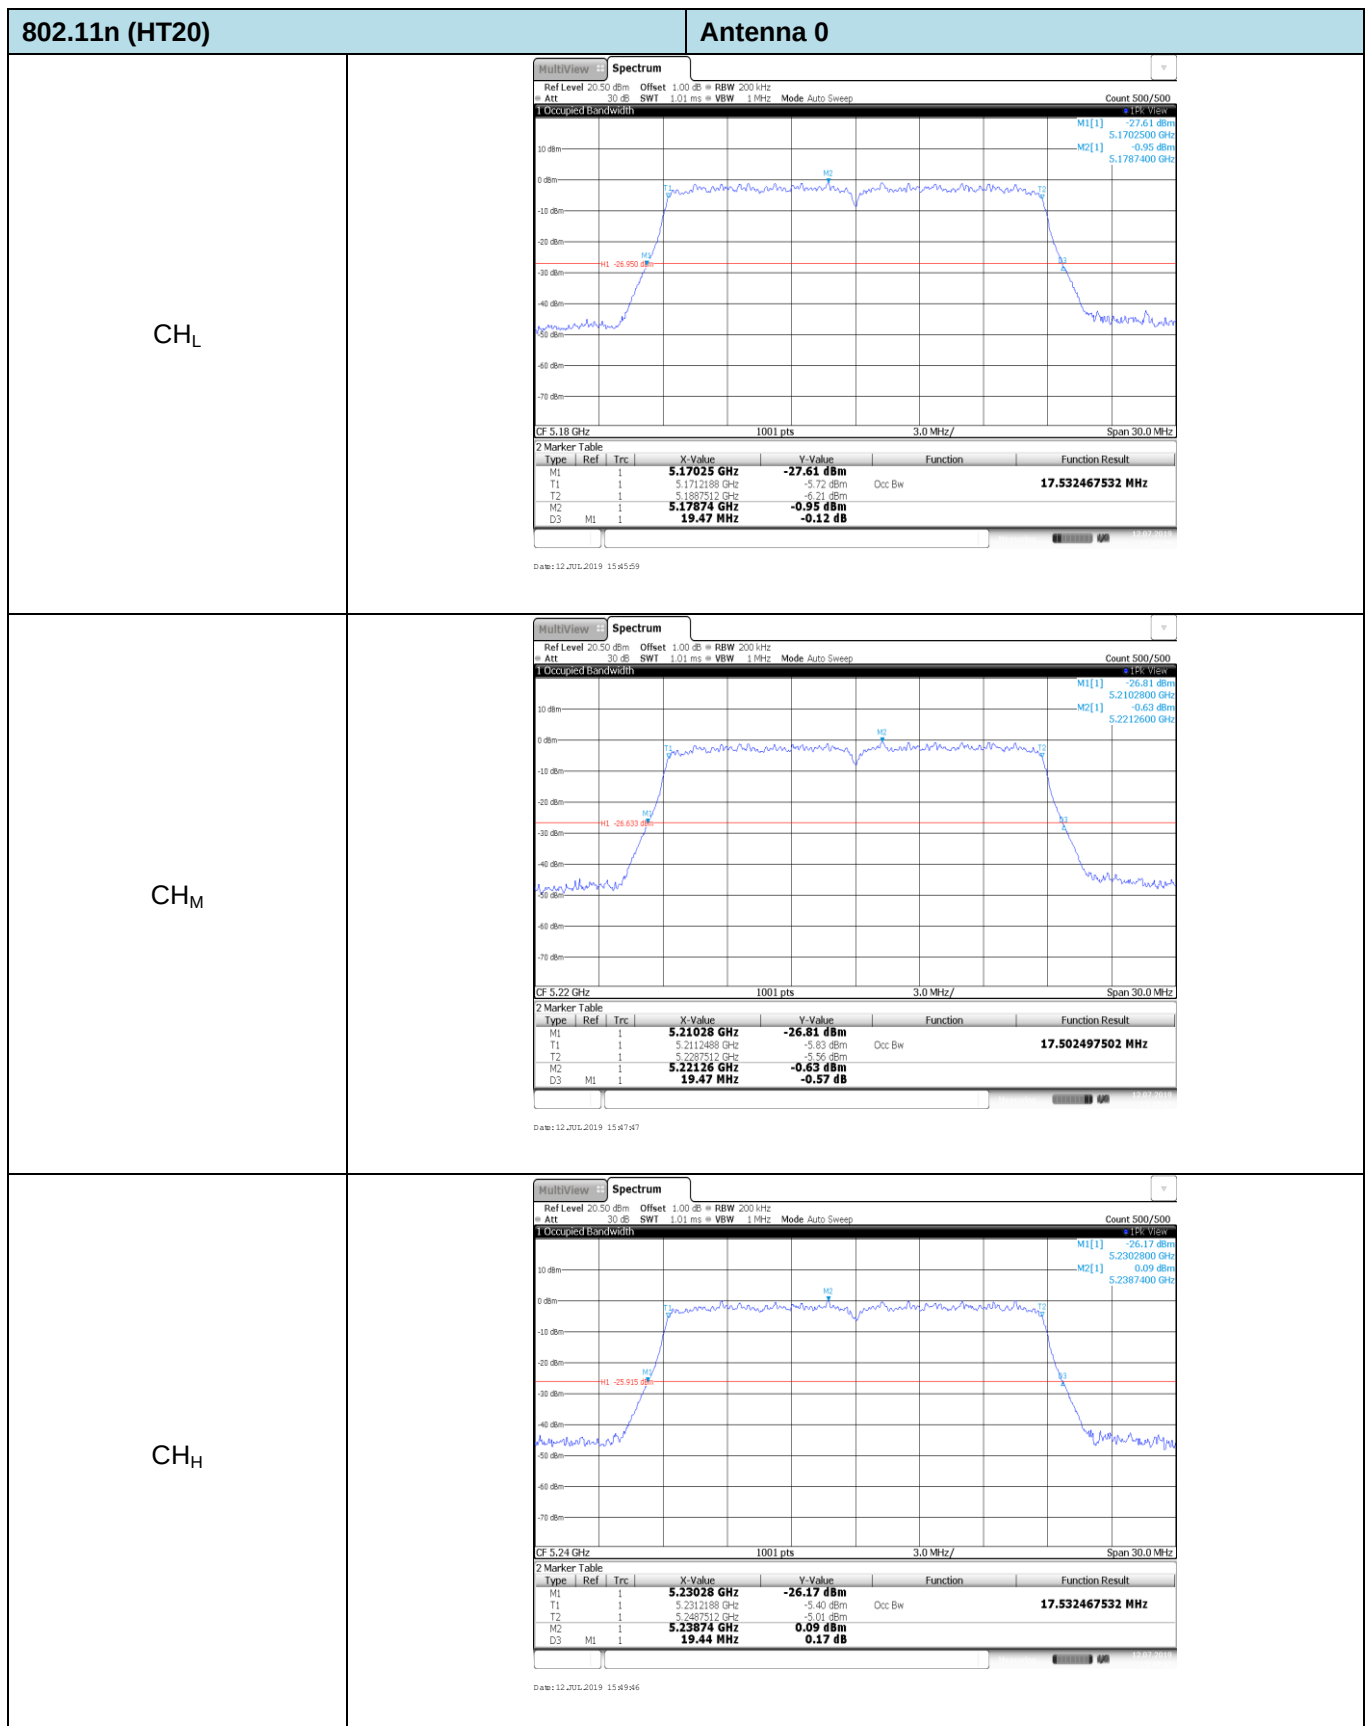


802.11a

Antenna 0

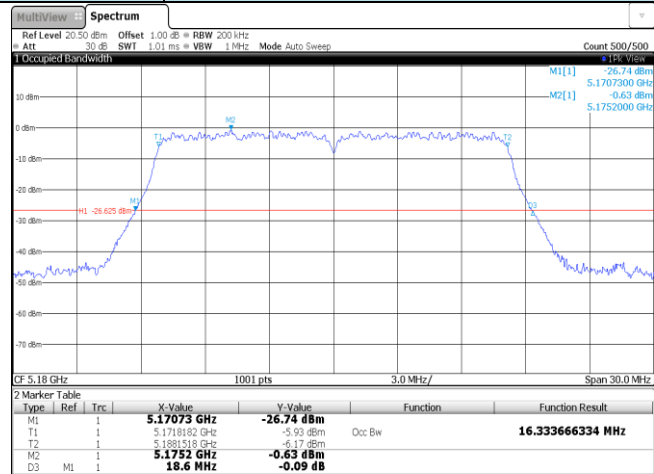CH_L


Date: 12-Jul-2019 15:08:47

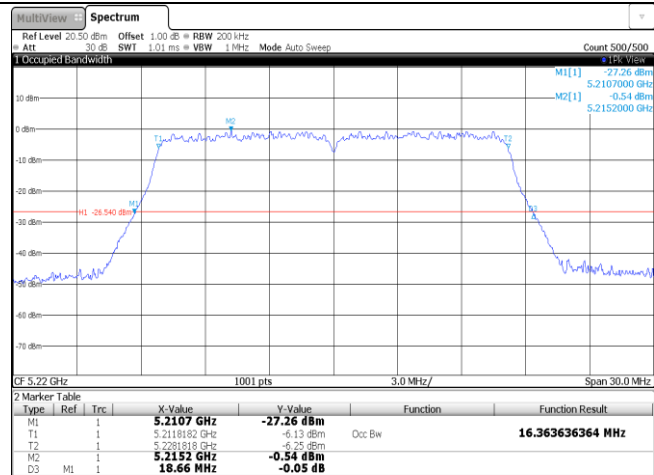CH_M

Date: 12-Jul-2019 15:42:01

CH_H

Date: 12-Jul-2019 15:43:47

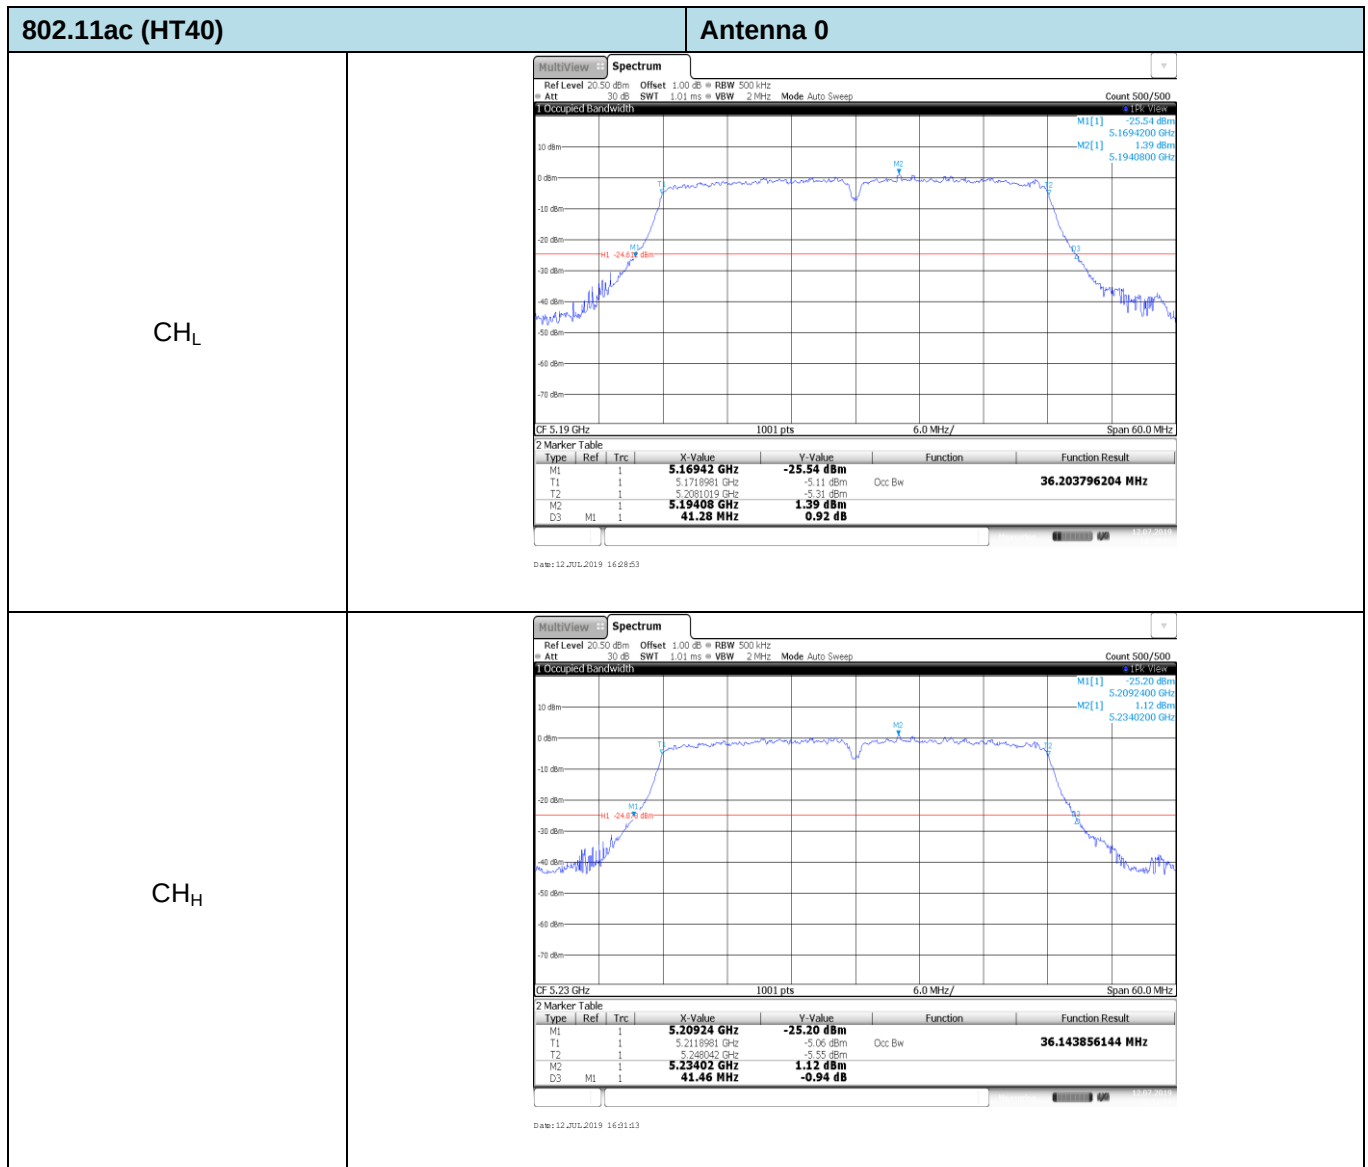

802.11n (HT40)

Antenna 0

CH_L

Date: 12 JUL 2019 16:03:06

CH_H


Date: 12 JUL 2019 16:08:41


802.11ac (HT80)

Antenna 0

CH_M




Date: 12 JUL 2019 16:06:38

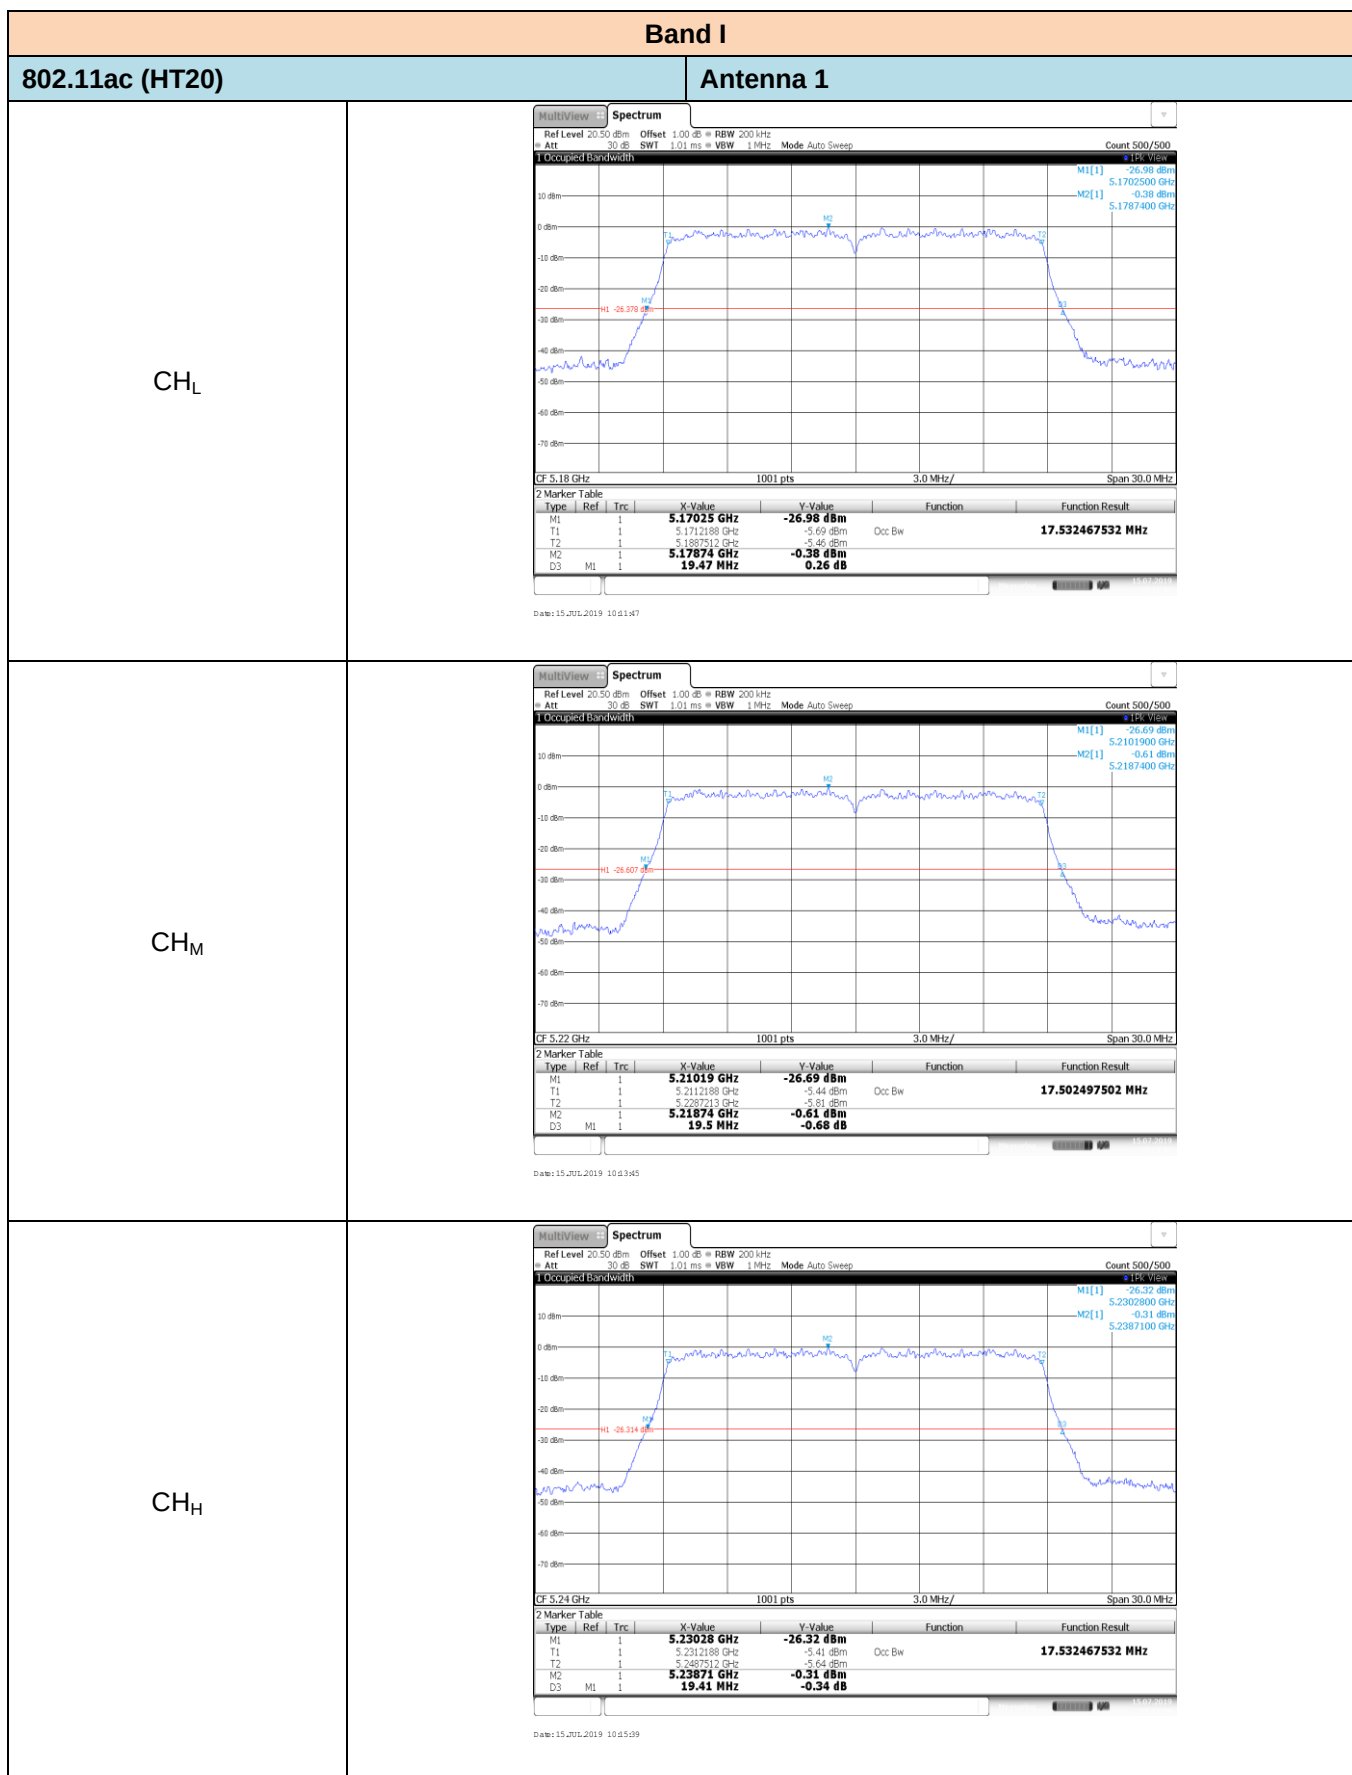


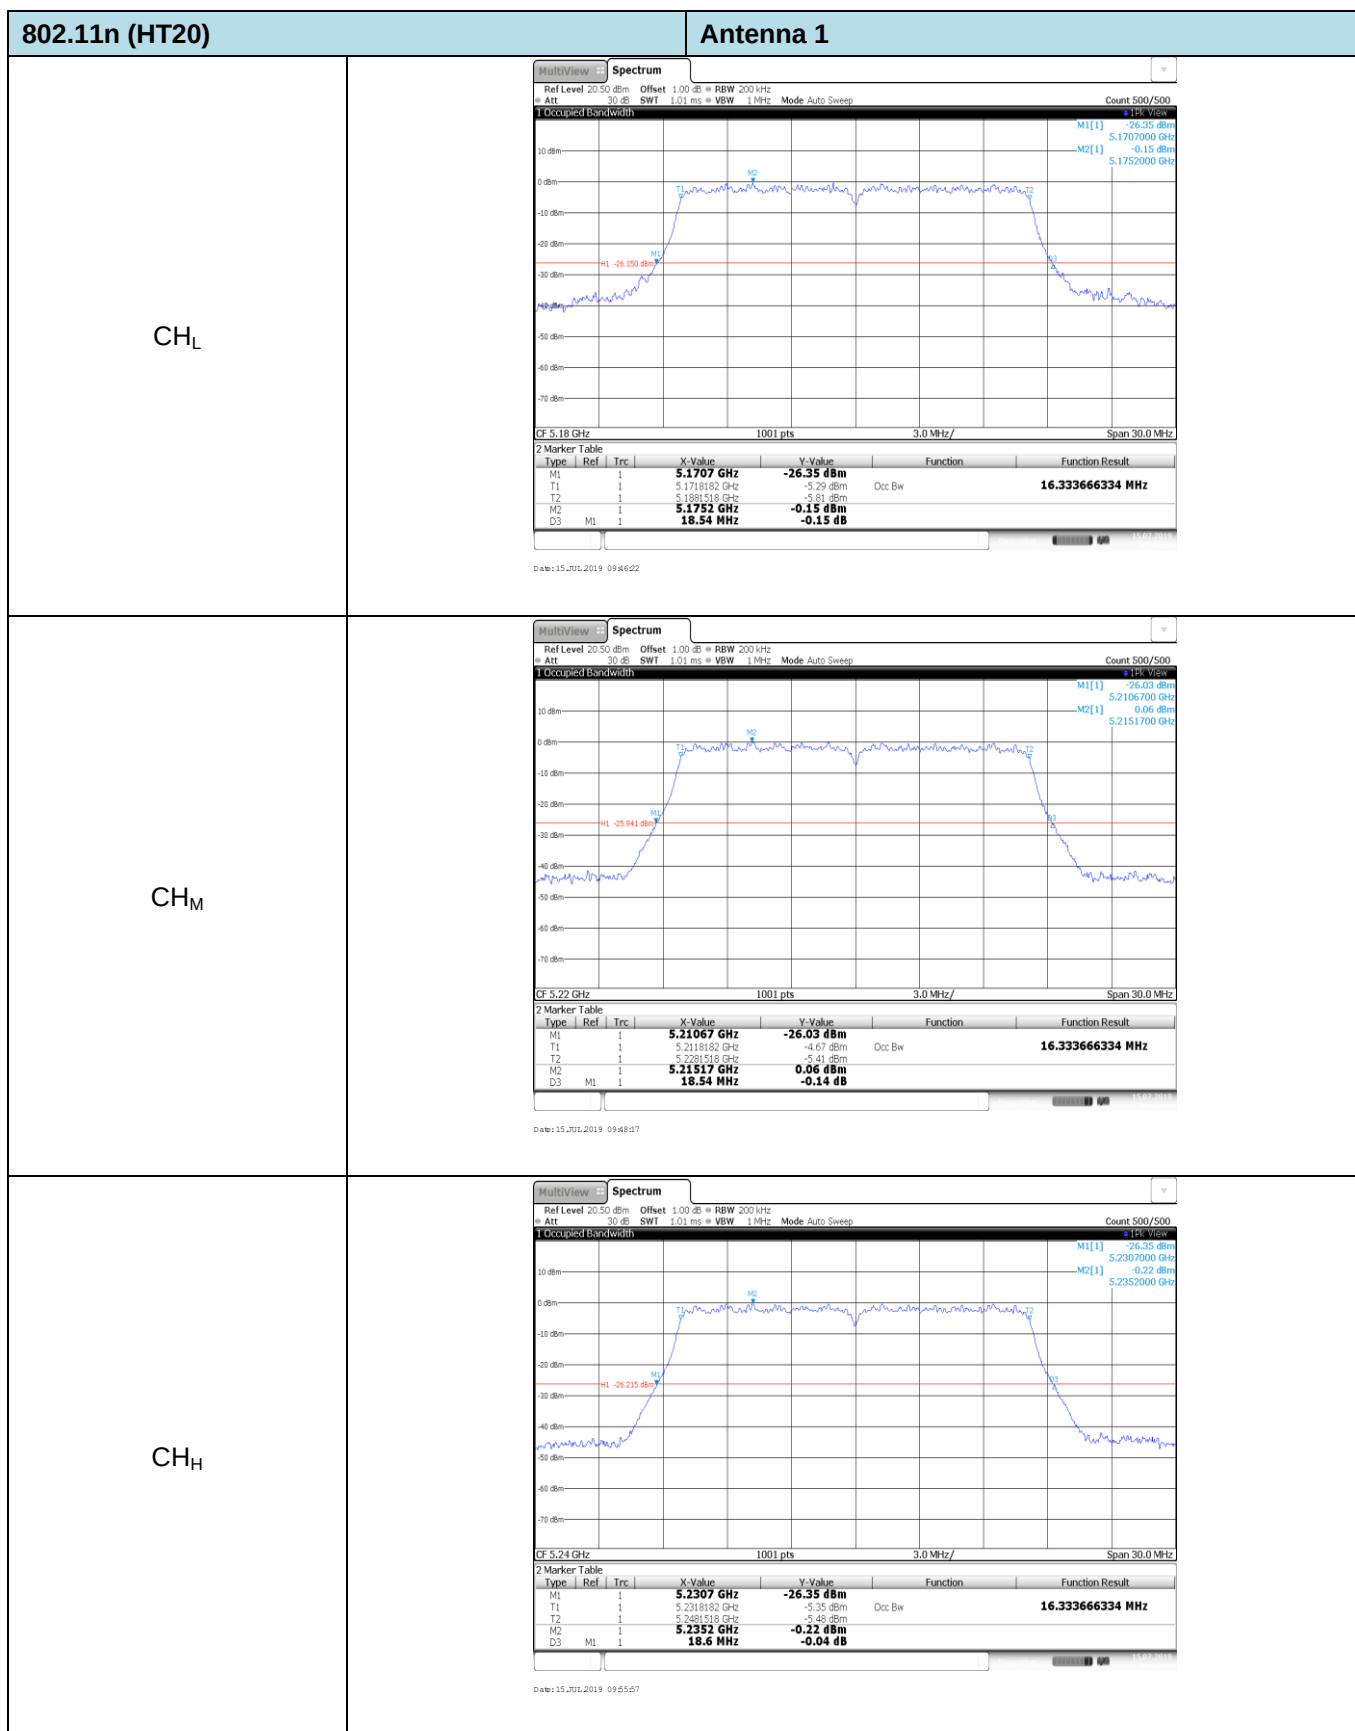


802.11a

Antenna 1

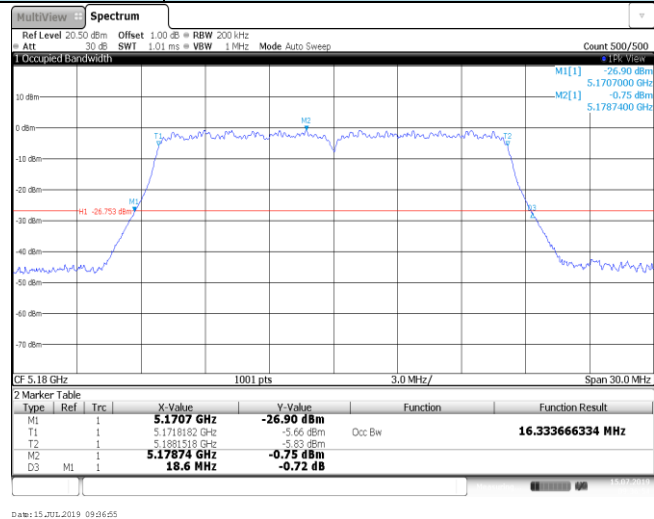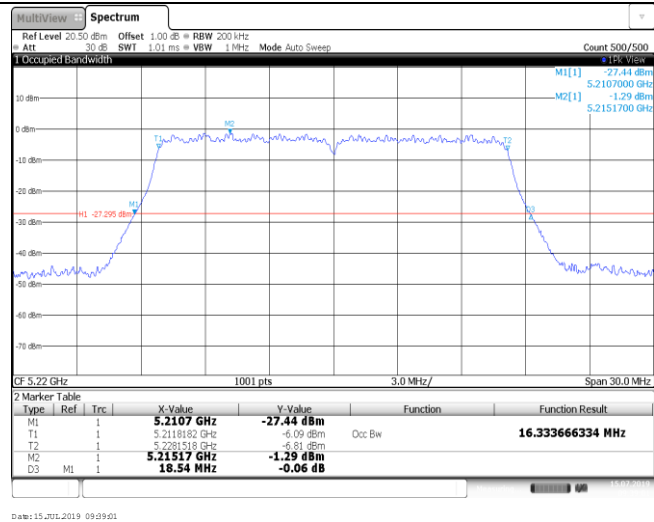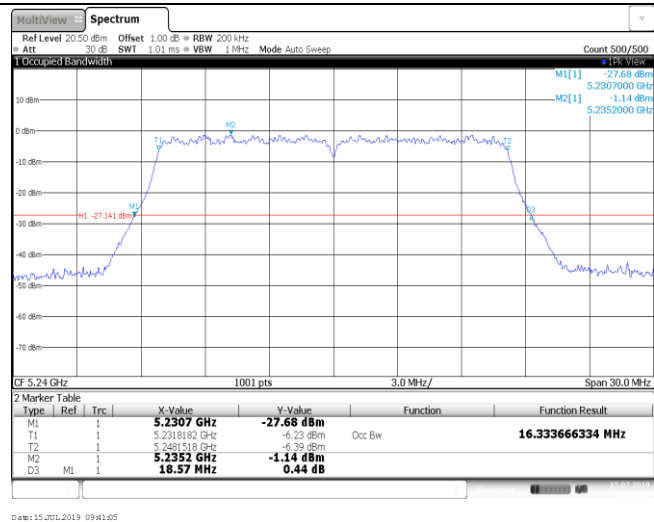CH_LCH_MCH_H

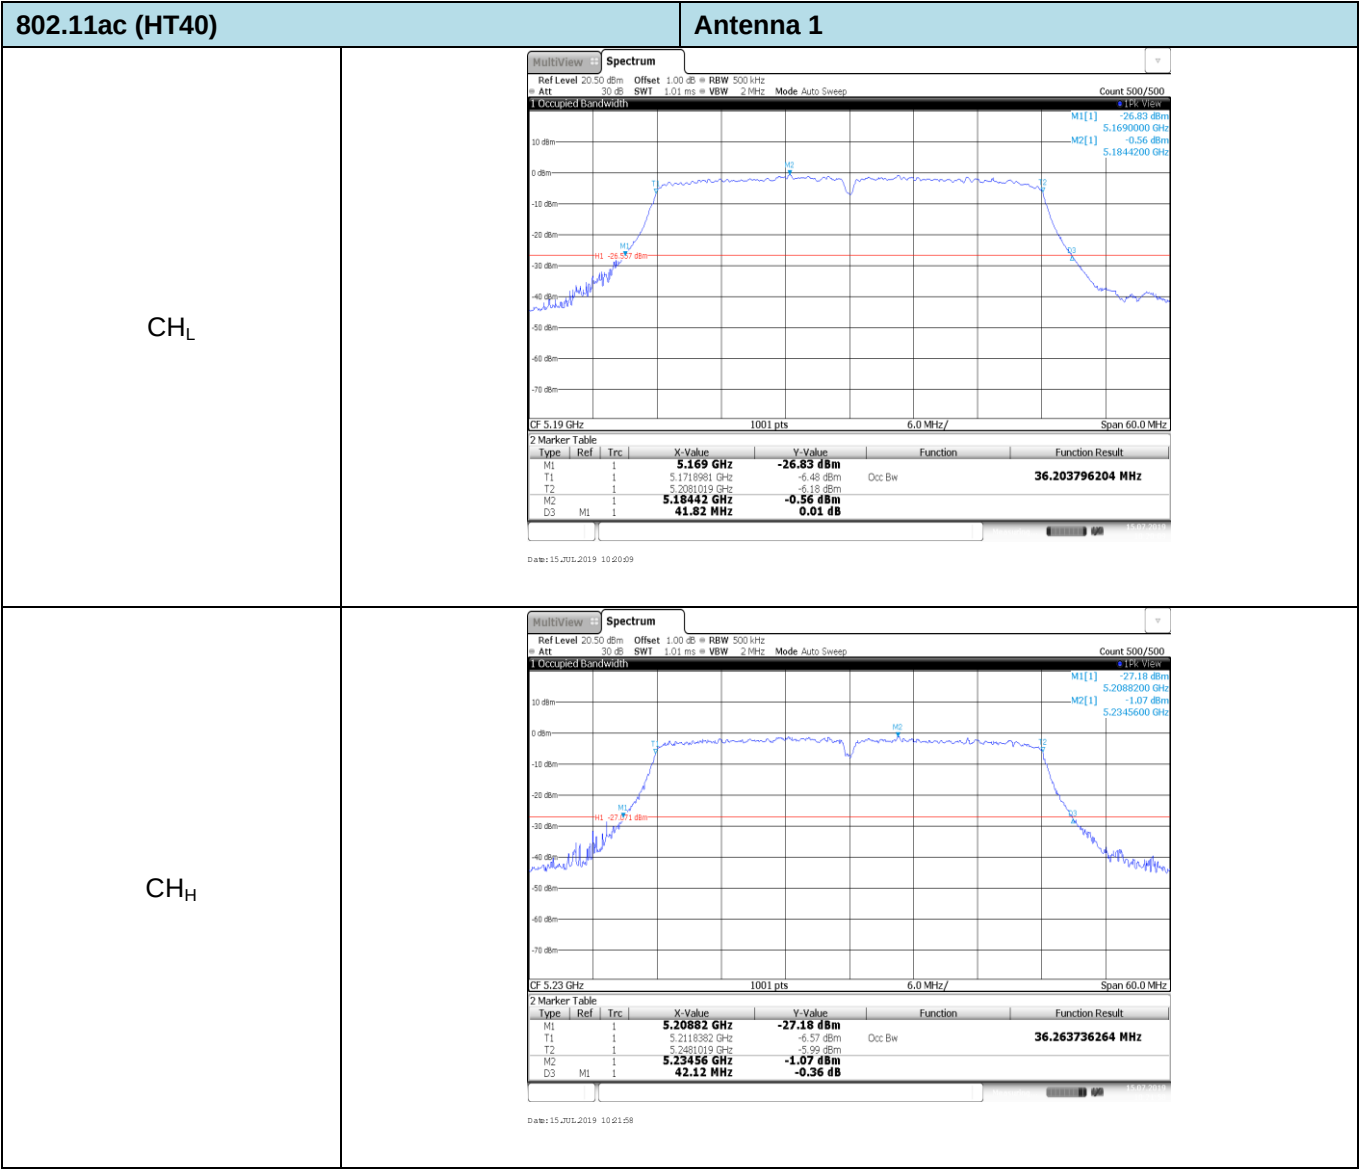

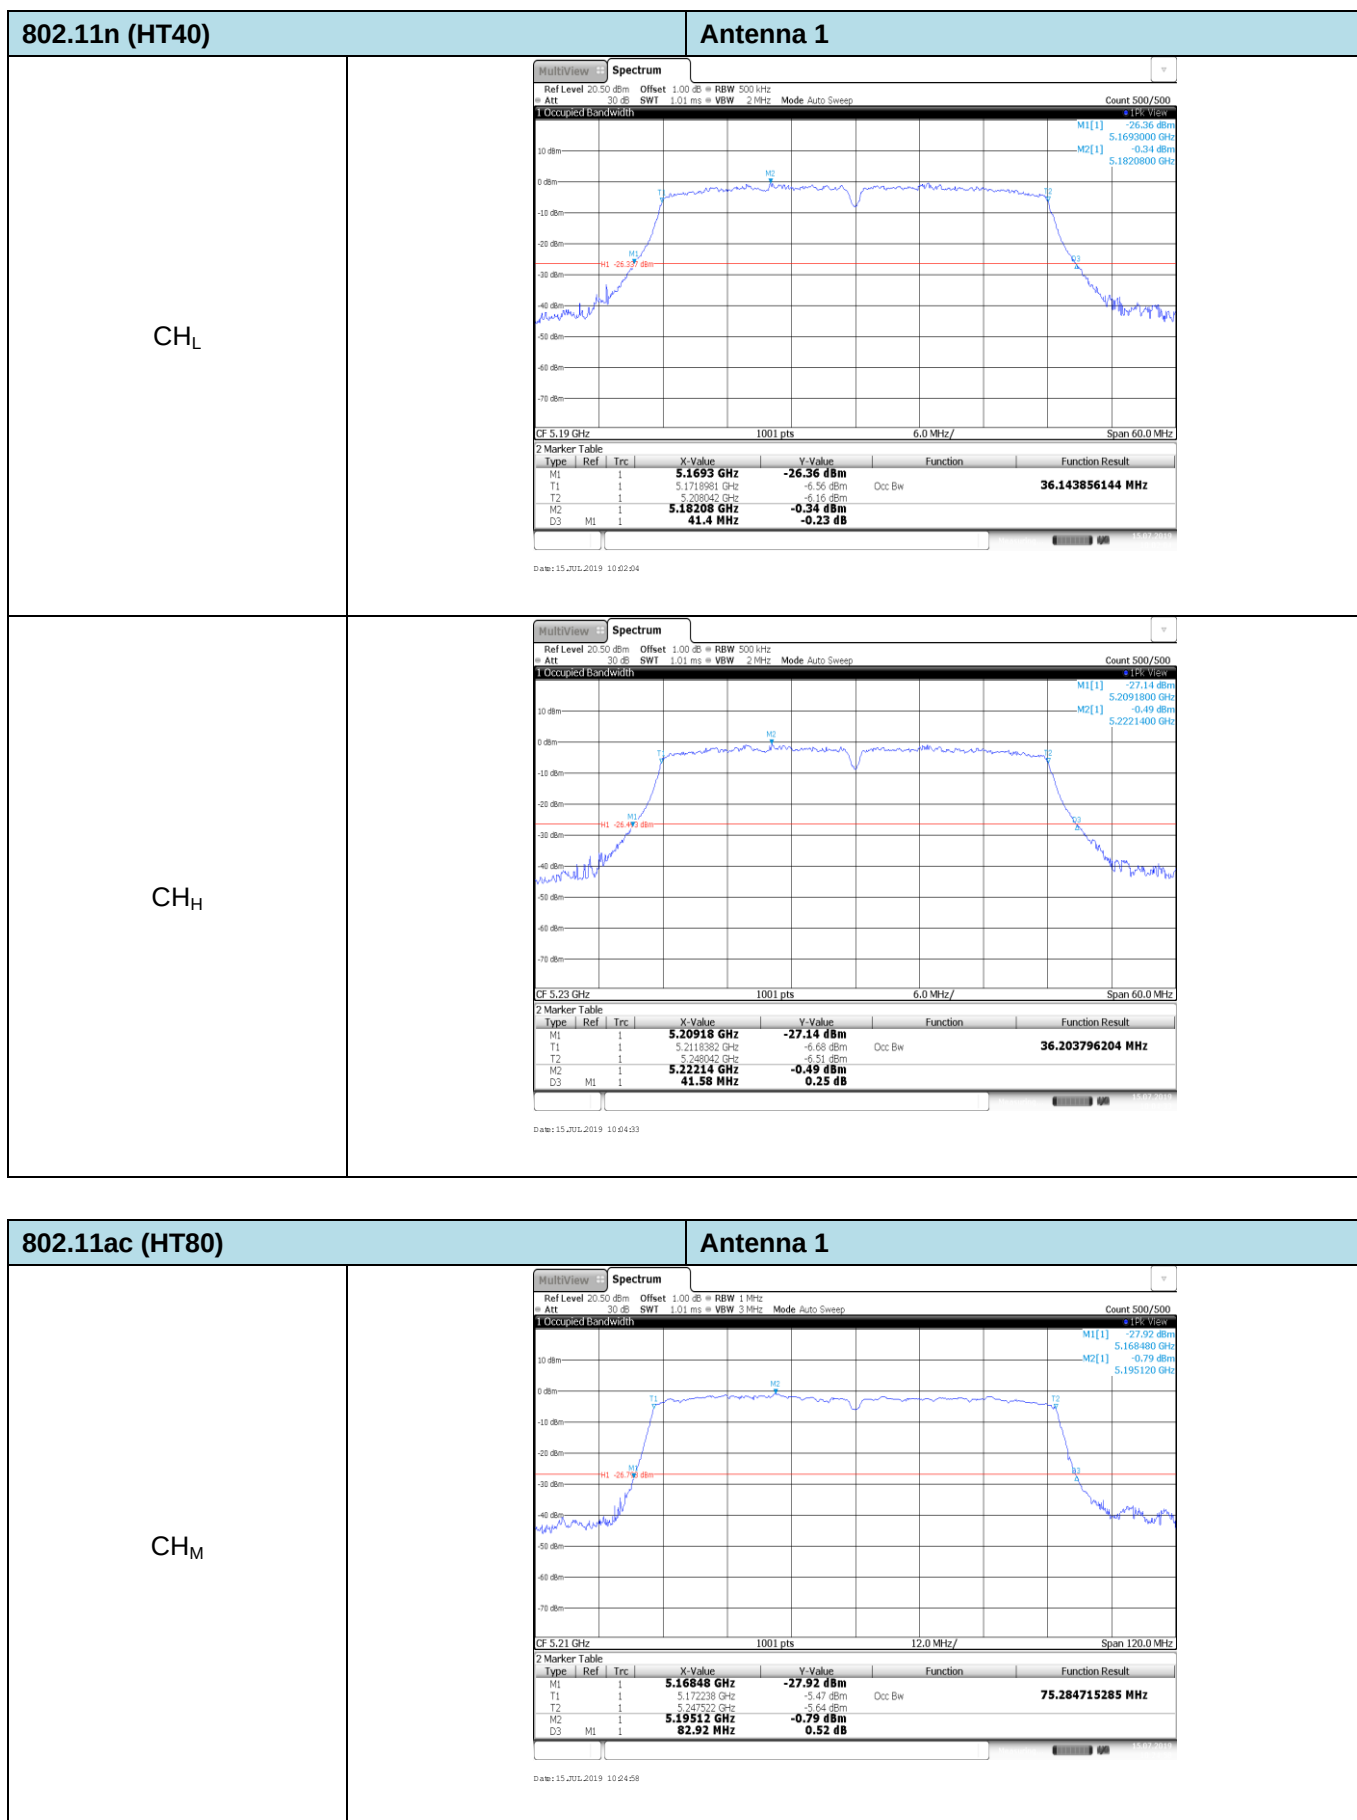


5.6. 6dB Bandwidth

LIMIT

FCC CFR Title 47 Part 15 Subpart E Section 15.407(e)

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz

TEST CONFIGURATION

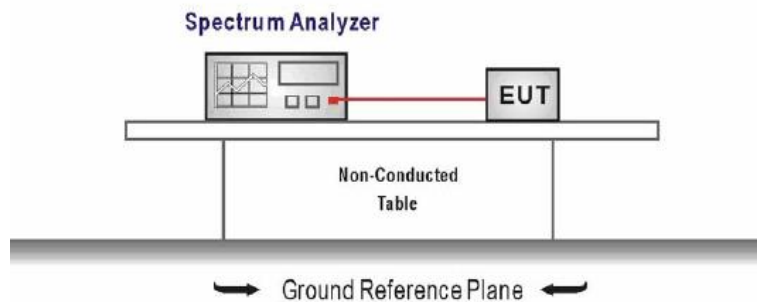

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency = test channel center frequency
Span = 2 x emission bandwidth
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Sweep time = auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

TEST MODE:


Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable


Band	Bandwidth (MHz)	Type	Channel	6dB bandwidth (MHz)	99% Occupy bandwidth (MHz)	Result
				Antenna 0	Antenna 0	
IV	20	802.11ac	CH _L	17.64	17.53	Pass
			CH _M	17.61	17.53	
			CH _H	17.64	17.53	
		802.11n	CH _L	17.61	17.53	Pass
			CH _M	17.61	17.53	
			CH _H	17.61	17.53	
		802.11a	CH _L	16.41	16.33	Pass
			CH _M	16.41	16.33	
			CH _H	16.41	16.33	
	40	802.11ac	CH _L	35.28	35.96	Pass
			CH _H	35.28	35.90	
		802.11n	CH _L	35.57	35.95	Pass
			CH _H	35.57	35.95	
	80	802.11ac	CH _M	75.48	75.29	Pass

Band	Bandwidth (MHz)	Type	Channel	6dB bandwidth (MHz)	99% Occupy bandwidth (MHz)	Result
				Antenna 1	Antenna 1	
IV	20	802.11ac	CH _L	17.64	17.50	Pass
			CH _M	17.61	17.53	
			CH _H	17.64	17.53	
		802.11n	CH _L	17.61	17.53	Pass
			CH _M	17.61	17.53	
			CH _H	17.61	17.50	
		802.11a	CH _L	16.38	16.33	Pass
			CH _M	16.41	16.33	
			CH _H	16.41	16.33	
	40	802.11ac	CH _L	35.34	35.90	Pass
			CH _H	35.28	35.90	
		802.11n	CH _L	35.39	35.95	Pass
			CH _H	35.39	35.95	
	80	802.11ac	CH _M	75.48	75.17	Pass

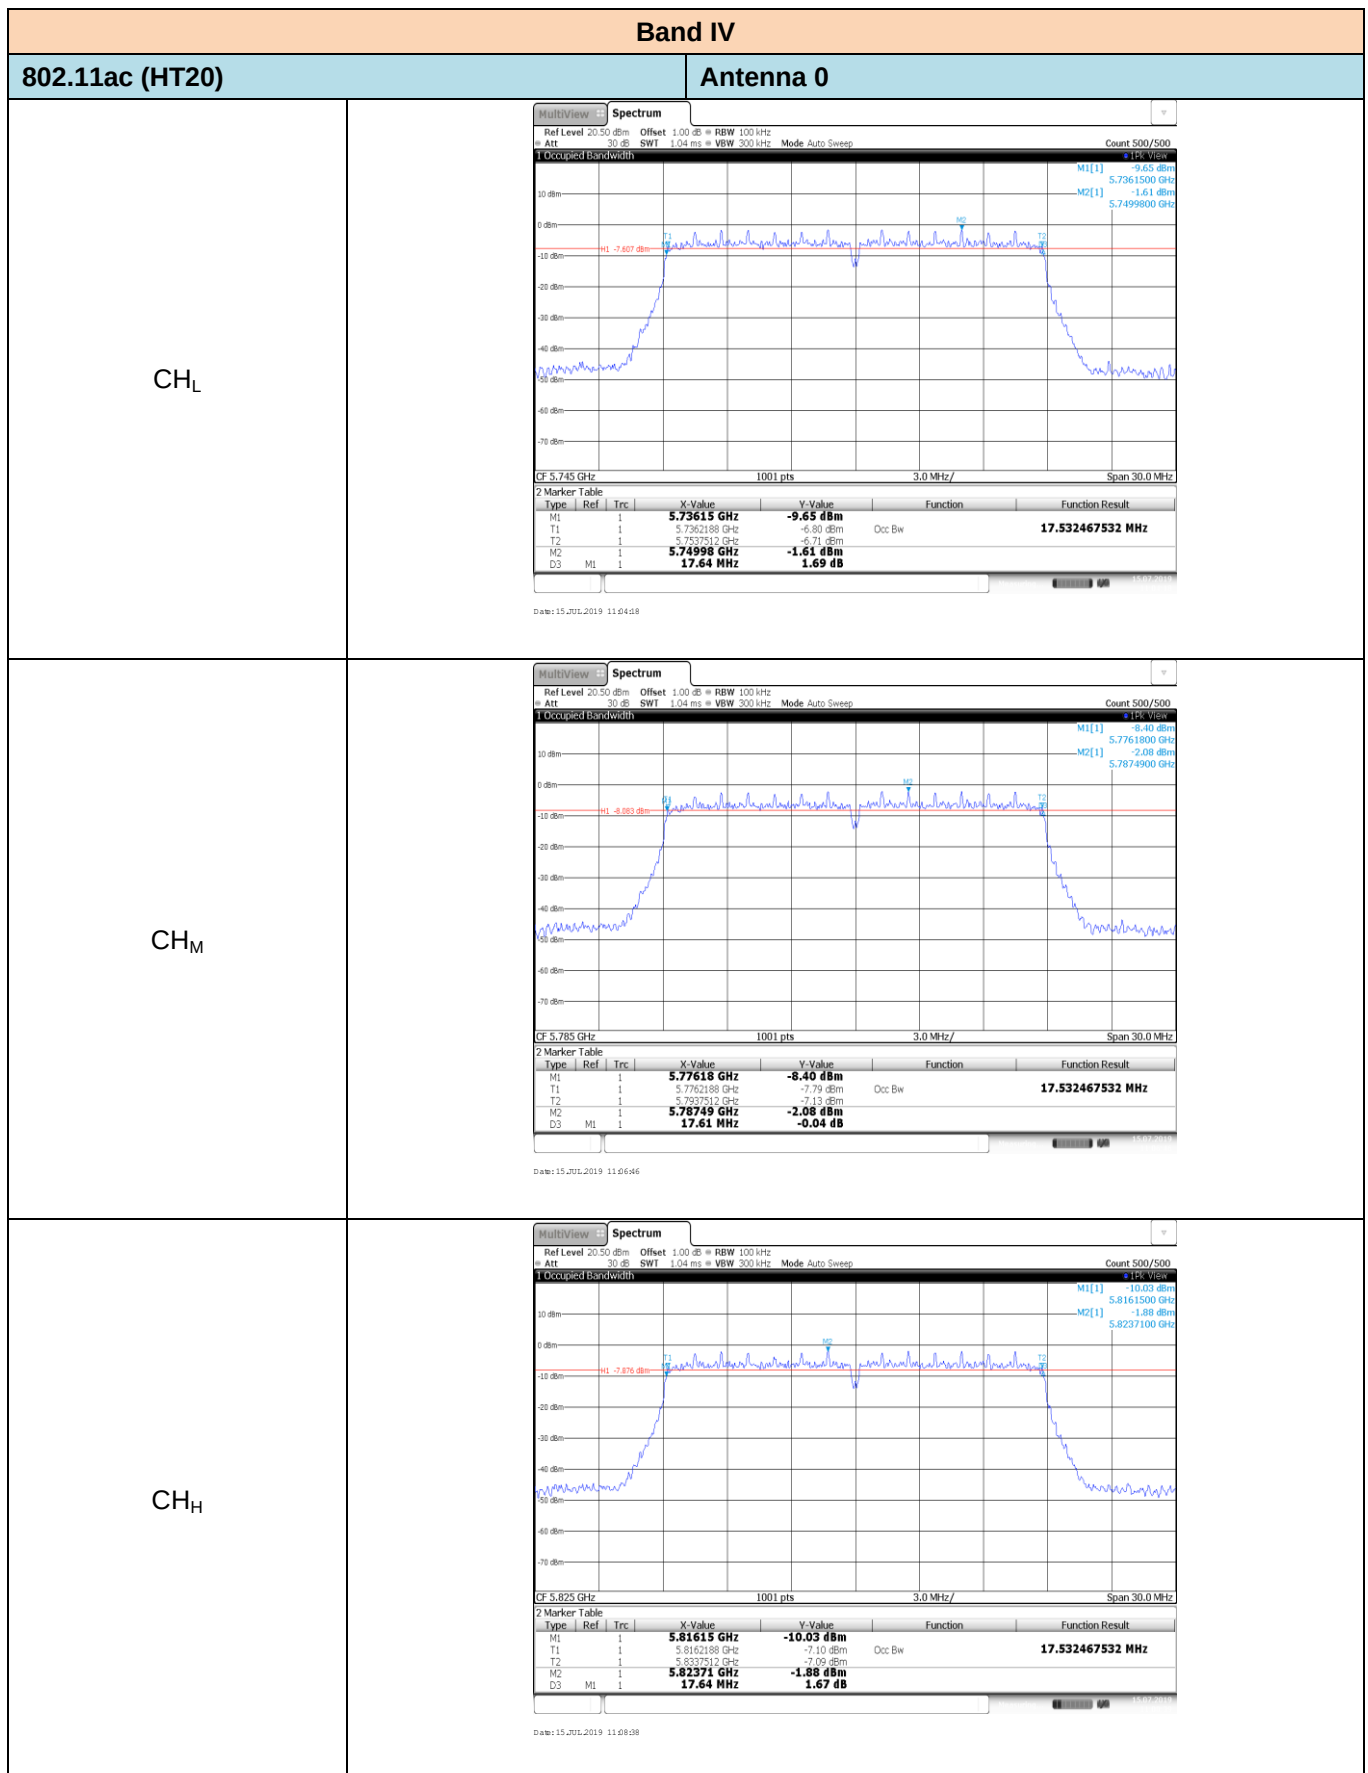

802.11n (HT20)


Antenna 0

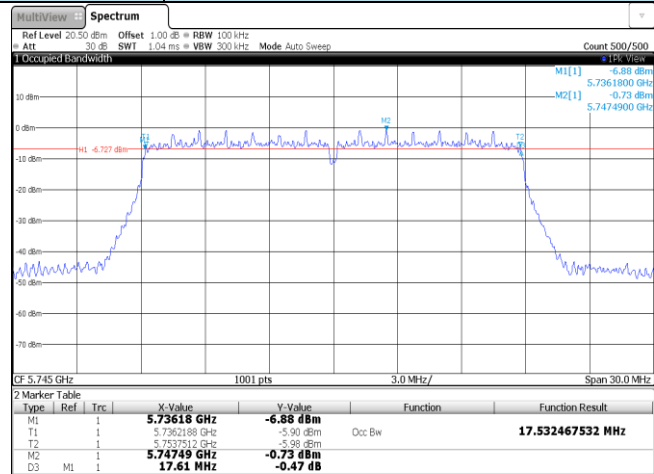CH_L

Date: 15_JUL_2019 10:47:21

CH_M




Date: 15_JUL_2019 10:49:14

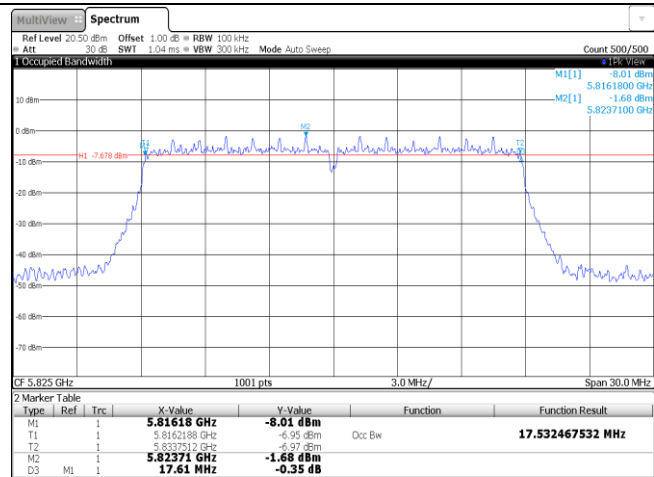
CH_H

Date: 15_JUL_2019 10:51:00

802.11a


Antenna 0

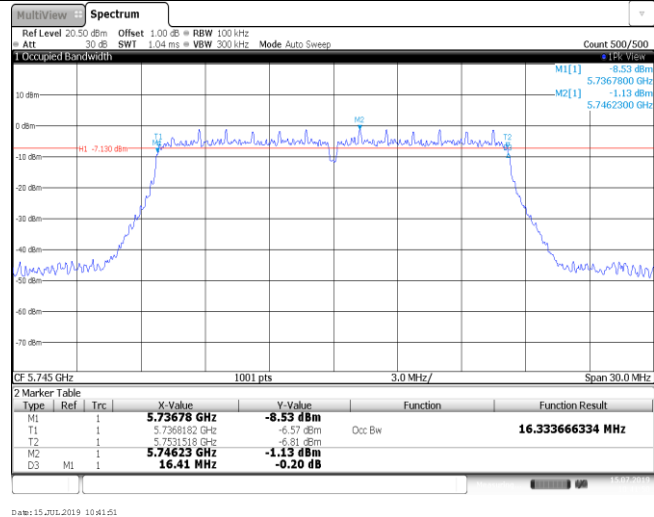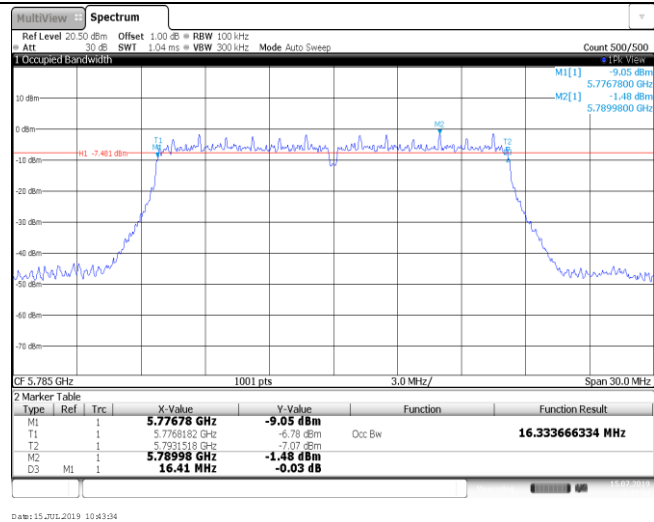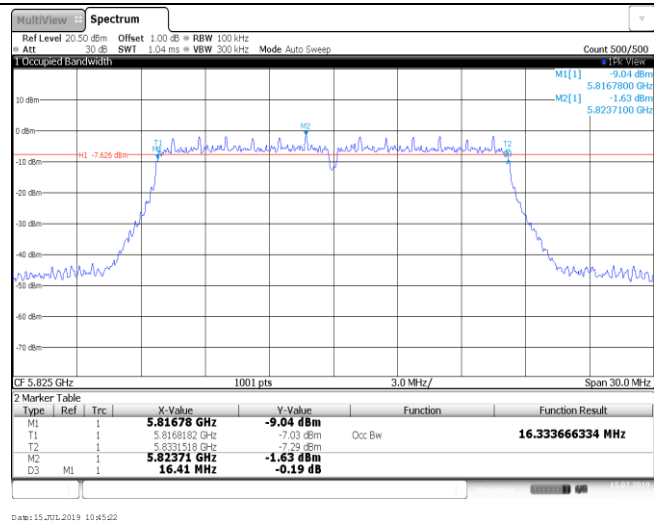CH_LCH_MCH_H

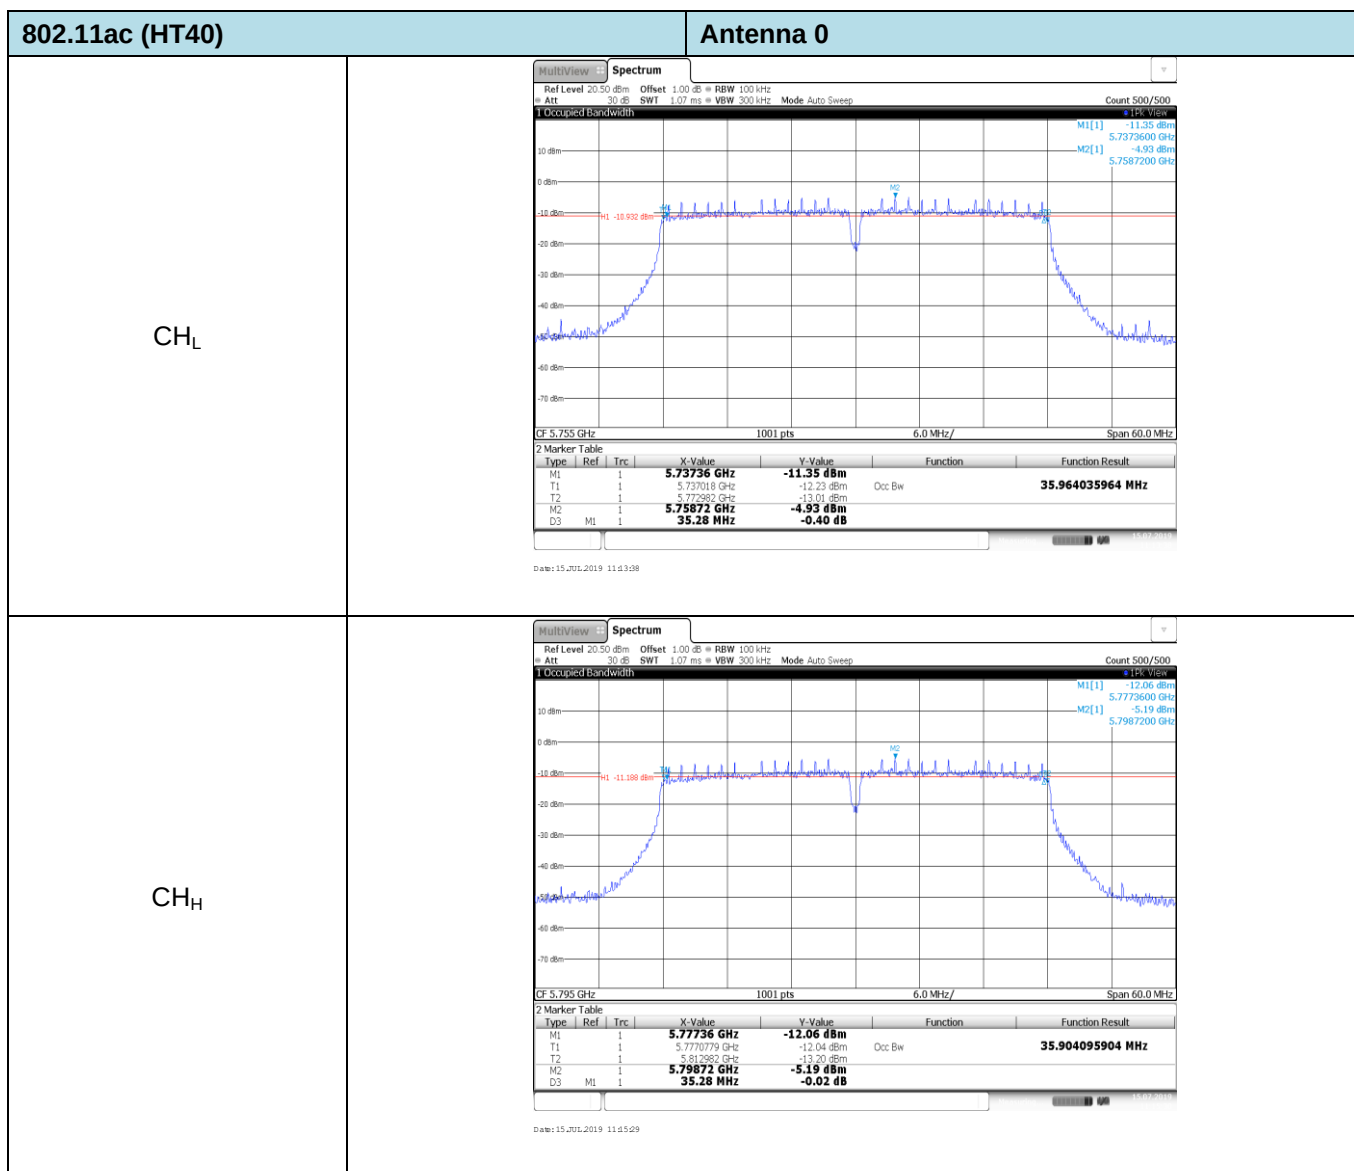


802.11n (HT40)

Antenna 0

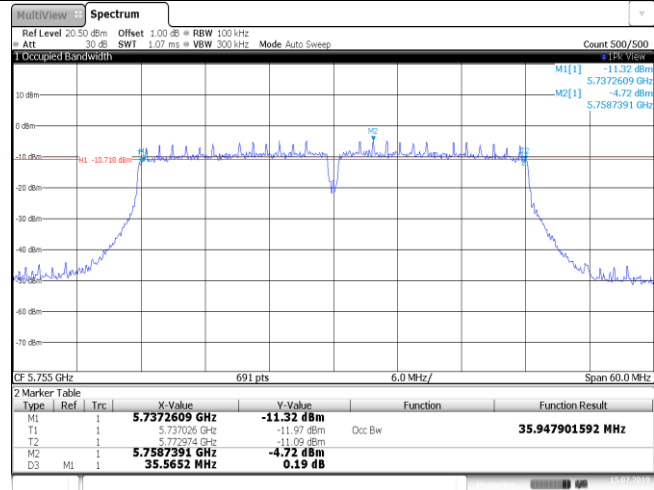CH_L


Date: 15 JUL 2019 10:55:56

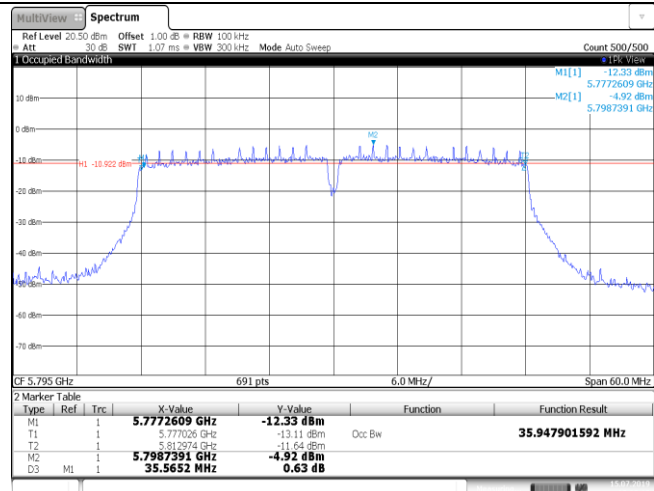CH_H


Date: 15 JUL 2019 10:59:14

802.11ac (HT80)

Antenna 0

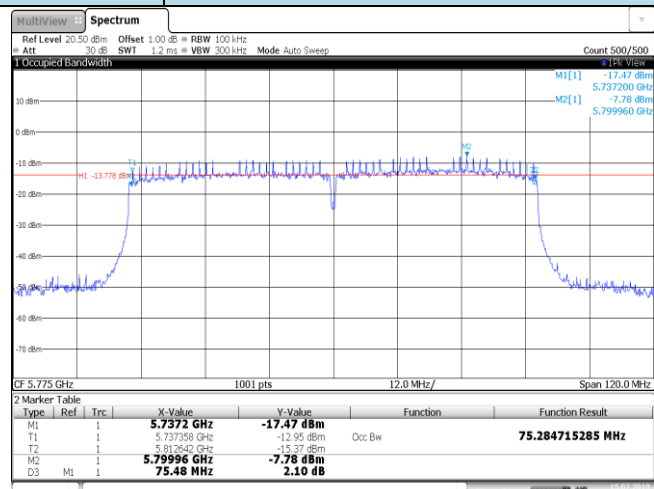
CH_M

Date: 15 JUL 2019 14:20:09

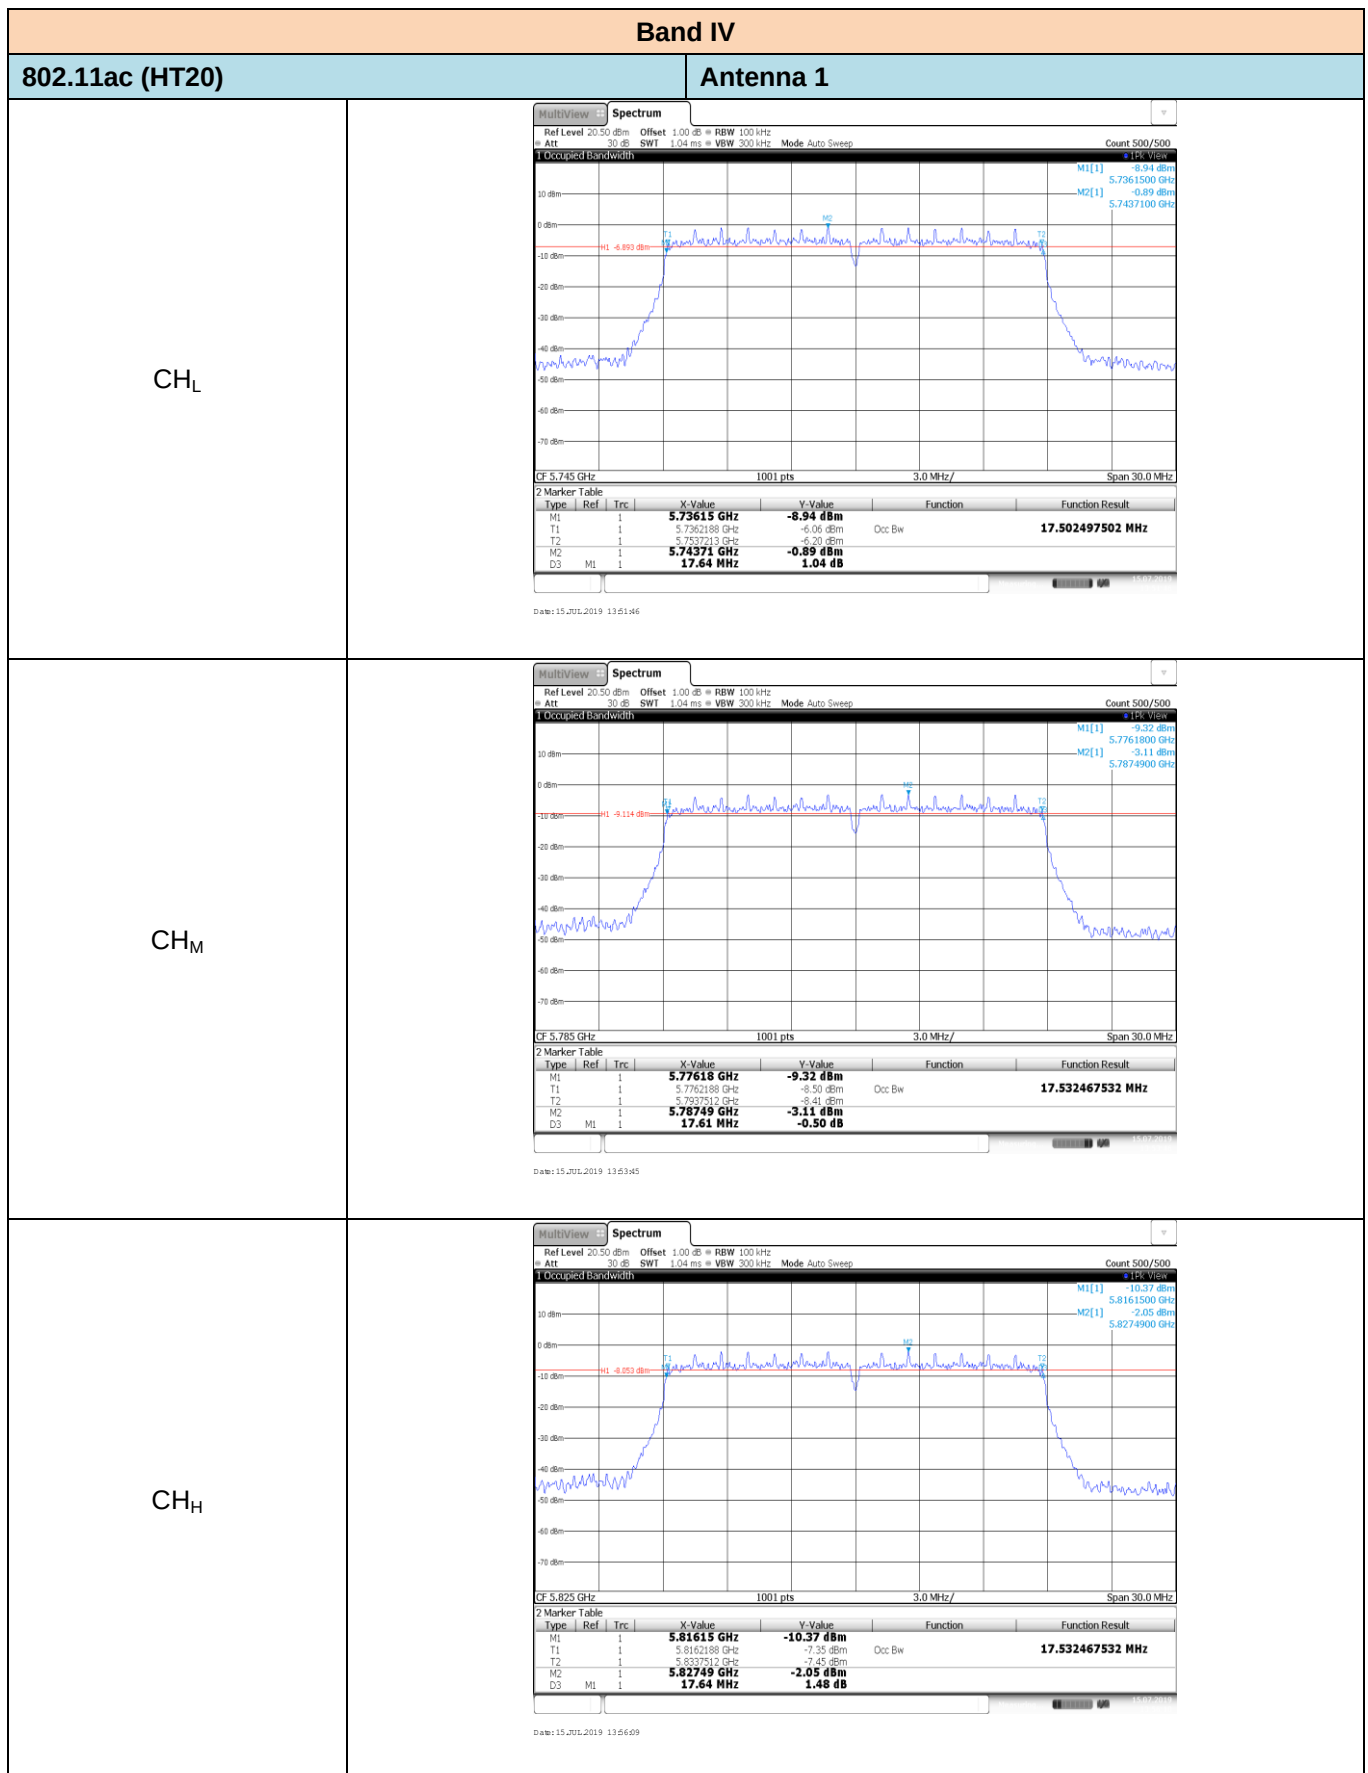


802.11n (HT20)


Antenna 1

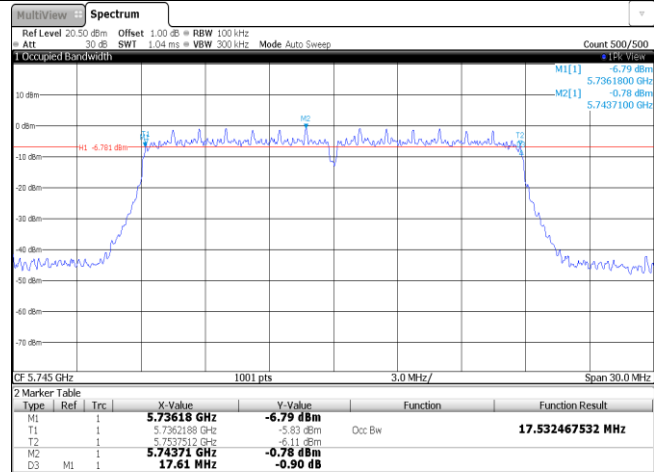CH_L

Date: 15_JUL_2019 13:24:48

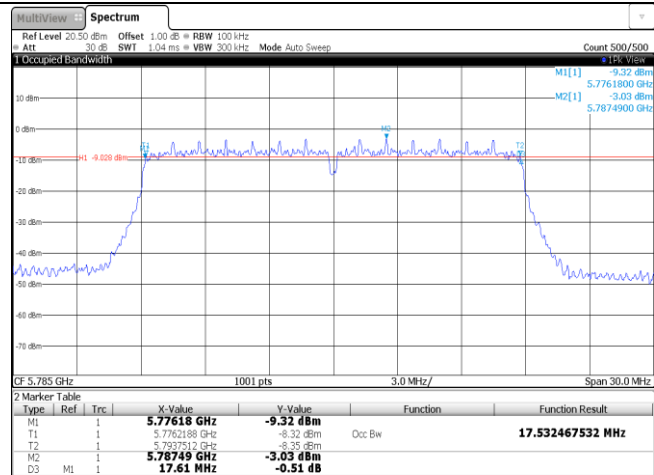CH_M



Date: 15_JUL_2019 13:26:26

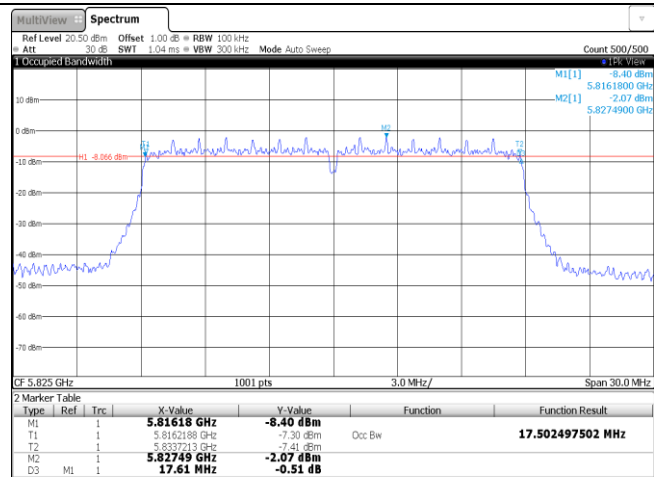CH_H

Date: 15_JUL_2019 13:29:29

802.11a

Antenna 1

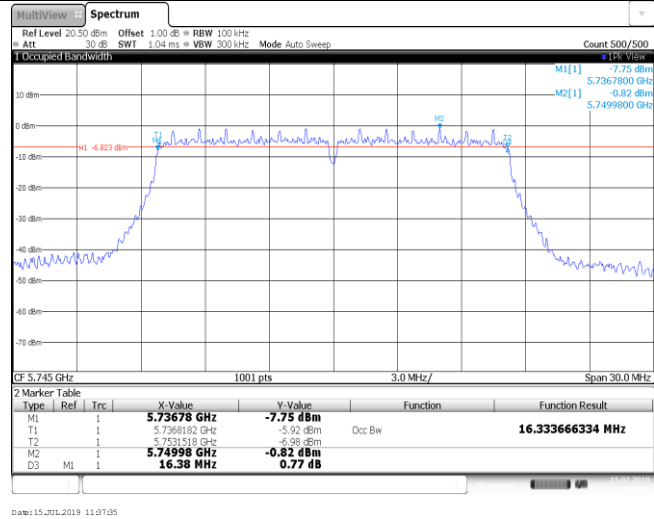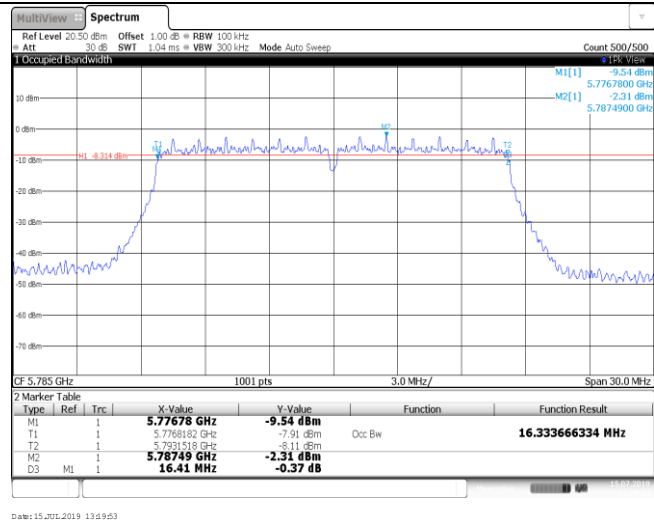CH_LCH_MCH_H