

# **Antenna Specification**

**Version: V2.2**

**Update Date: October 07,2021**

**Shenzhen Yilian Internet of Things Co., Ltd. All rights reserved**

The specifications of this product are subject to change without notice.

Shenzhen Yilian Internet of Things Co., Ltd. reserves the right to make changes to the specifications and materials contained in it without prior notice, and at the same time damage (including consequential damage) caused by trust in the materials cited, including But not limited to errors in printing and other errors related to this publication, Yilian Internet of Things will not be held responsible.

Contents

Contents..... - 1 -

1 Antenna size (Unit: mm) ..... - 1 -

2 Antenna specification parameters..... - 2 -


3 Deoning frequency of antenna network..... - 2 -

4 Antenna test efficiency..... - 3 -

5 2D fig..... - 4 -

6 3D fig..... - 5 -


## 1 Antenna size (Unit: mm)

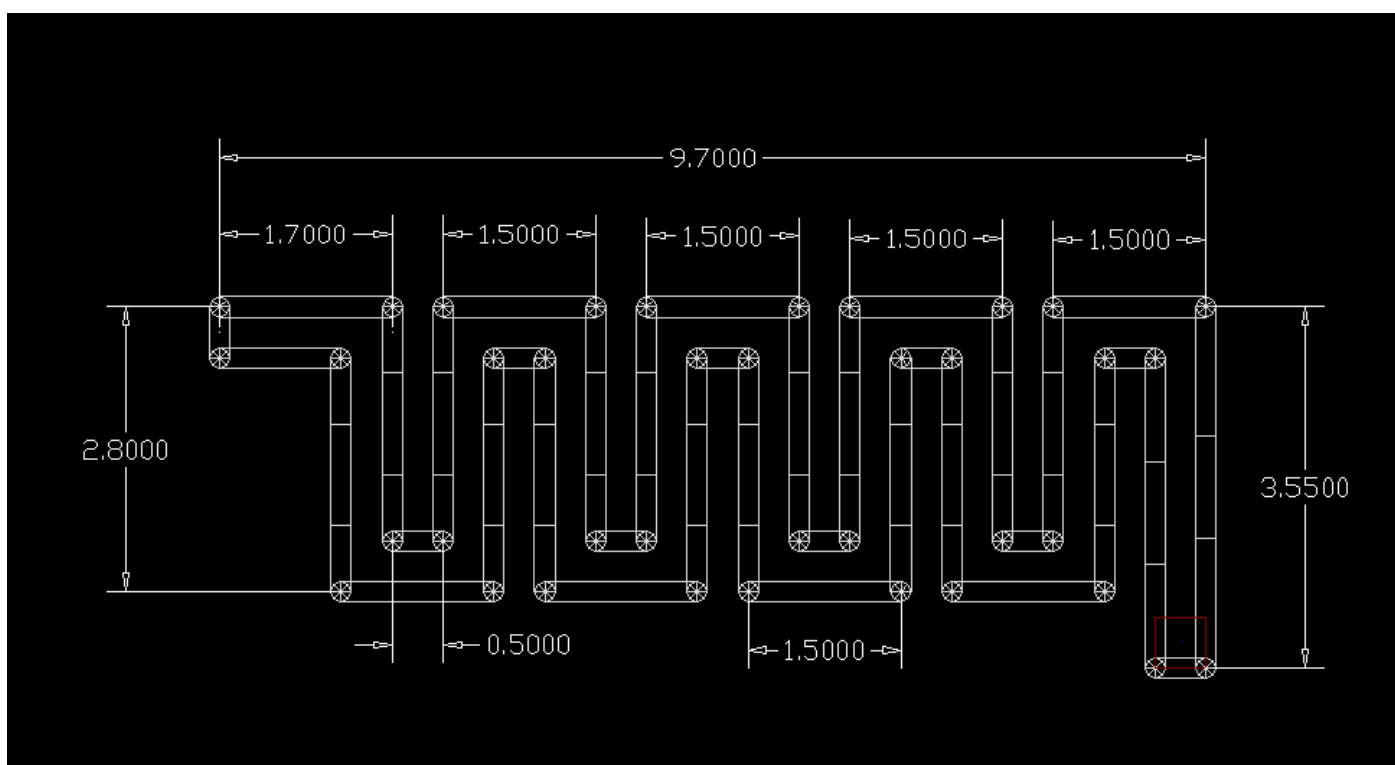

## 2 Antenna specification parameters

| number | Parameter item             | Description                    |
|--------|----------------------------|--------------------------------|
| 1      | Center operating frequency | 2441MHz                        |
| 2      | Work bandwidth             | 2400---2480Mhz                 |
| 3      | Rate of data signalling    | 1Mbps                          |
| 4      | Antenna type               | On-board PCB antenna (default) |
| 5      | Antenna gain               | -1.08dBi                       |
| 6      | Impedance                  | 50ohm                          |
| 7      | Modem type                 | GFSK                           |

## 3 Deoning frequency of antenna network

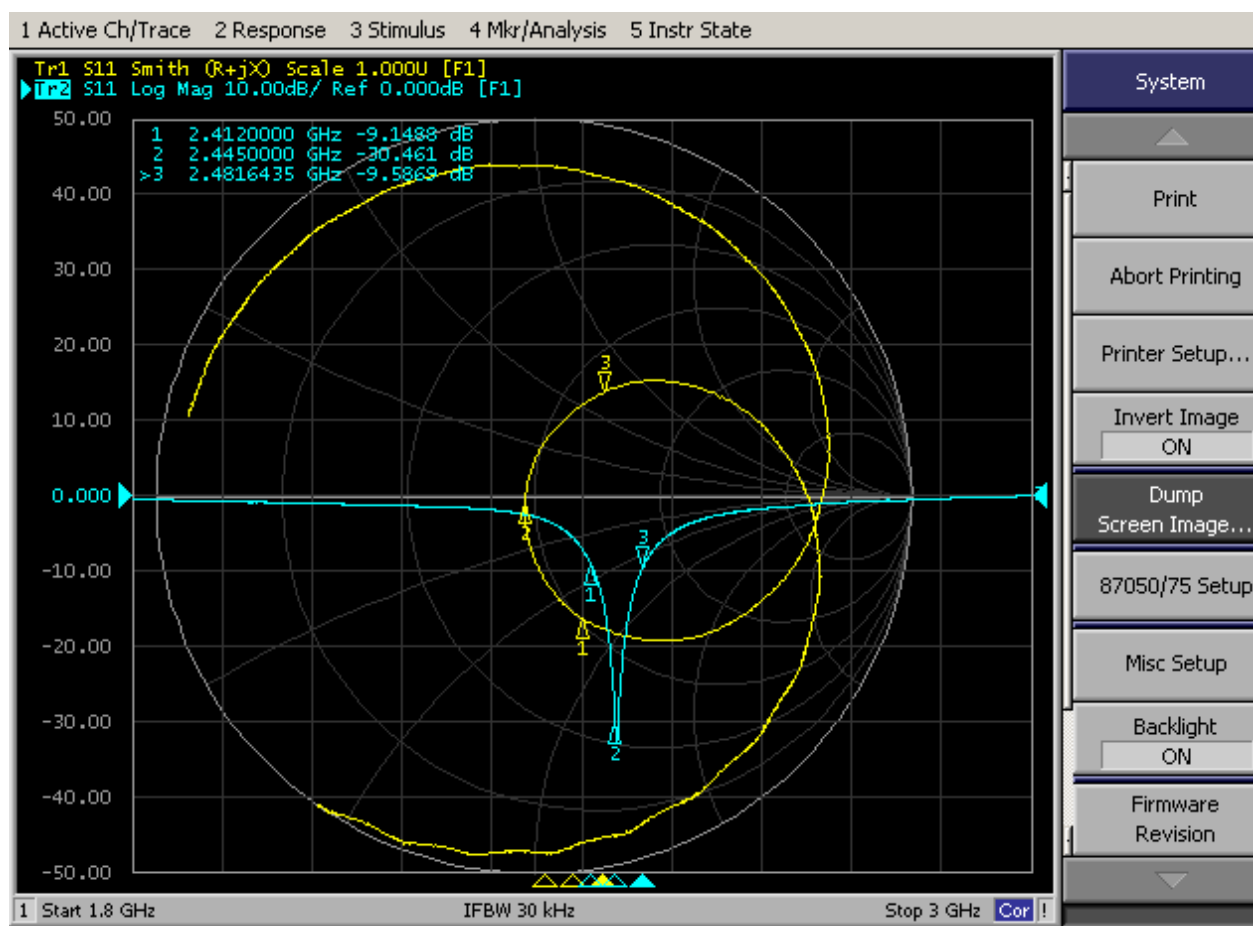


The return loss of the antenna at 2.445ghz is - 30dB and the impedance is about 50. Bandwidth 80m  
Experimental environment: Elink laboratory

## 4 Antenna test efficiency

| The return loss of the antenna at 2.445ghz is - 30dB and the impedance is about 50. Bandwidth 80mpassive test for 2.4g |              |                |               |
|------------------------------------------------------------------------------------------------------------------------|--------------|----------------|---------------|
| Freq (MHz)                                                                                                             | Gain(dB)     | Efficiency(dB) | Efficiency(%) |
| 2400                                                                                                                   | -2.125670268 | -6.512982178   | 22.32039018   |
| 2410                                                                                                                   | -1.839793728 | -6.350555158   | 23.17098436   |
| 2420                                                                                                                   | -1.64029678  | -6.246810655   | 23.7311582    |
| 2430                                                                                                                   | -1.328848956 | -5.925152964   | 25.5555189    |
| 2440                                                                                                                   | -1.132319256 | -5.799553085   | 26.30538676   |
| 2450                                                                                                                   | -1.087960046 | -5.849299265   | 26.00579133   |
| 2460                                                                                                                   | -1.316358881 | -6.006721723   | 25.08001707   |
| 2470                                                                                                                   | -1.579335991 | -6.245067499   | 23.74068524   |
| 2480                                                                                                                   | -1.962892418 | -6.454212193   | 22.62448909   |
| 2490                                                                                                                   | -2.50538583  | -6.753449407   | 21.11811056   |
| 2500                                                                                                                   | -3.031894388 | -7.252236224   | 18.8267943    |

## 5 2D fig

- (1) XY-Plane
- (2) ZY-Plane
- (3) ZX-Plane

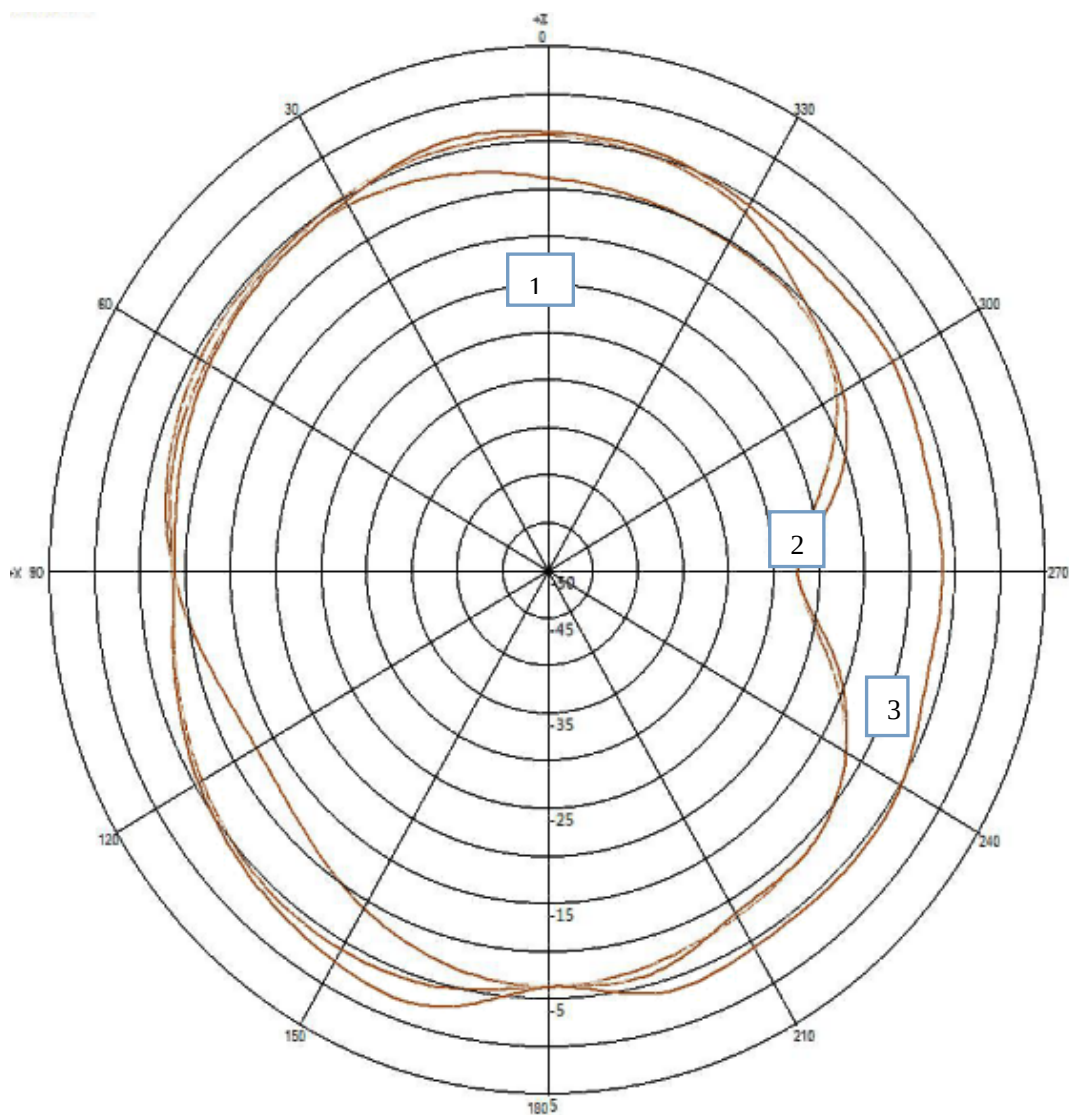

## 6 3D fig

