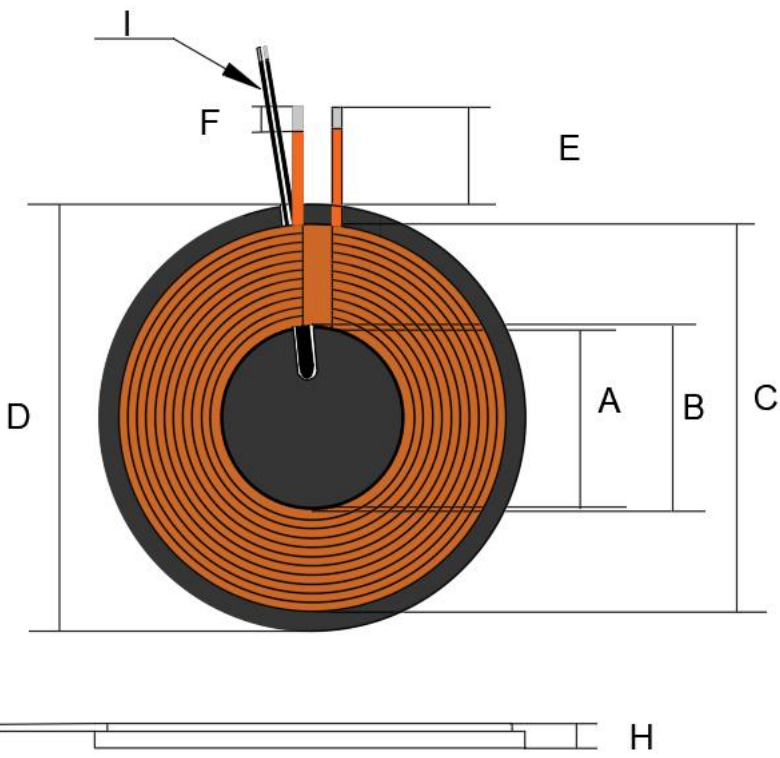


Specification		CISTOME P/N:	Q12-25W(JC)coil			
		PARTNUMBER:				
1.DIMENSIONS: mm		A	18±0.1			
		B	19±1			
		C	39±1			
		D	42.5±1			
		E	14±1			
		F	2-4			
		G	Magnetic thickness0.8±0.1			
		H	total thickness2.6MAX			
		I	NTC 38MM			
		J				
		k				
		L				
		M				
		N				
		O				
		R				
		Q				
		P				
		I			38mm long, black, ntc3950, 10k, 1%	
		APPROVED BY	CHECKED BY	PREPARED BY	DATE	PAGE
				Wangxingwang	2026-5-6	1 of 3

We statement that All measurements were performed radiated and therefore additional antenna gain documentation is not required.

Specifcation					CUSTOMERP/N:	QI2-25W(JC)coil		
					PARTNUMBER:			
5.WINDING DETAILS:								
Wdy.NO.	Start	Finish	Turns	Wire Dia	Wdg.TyepeSprad/lose	Wdg.Direction	Turns/Layer	
1	S	F	11TS	0.08*80P	Close	Anticlockwise	1 layer/11 circles	
6.ELECTRICAL CHARACTERISTICS(电气特性)：								
PARAMETERS					UNIN	LIMTI		
Inductance Is@100KHz/1v					UH	7.4UH±10%		
Q @100KHz/1v						65MIN		
DCR @100KHz/1v					m Ω	75MAX		
APPROVED BY		CHECKED BY		PREPARED BY		DATE		PAGE
				Wangxingwang		2026-5-6		2 of 3

MATERIAL LIST 材 料 清 单			CUSTOMER P/N: 客 户 品 名	QI2-25W(JC)coil	
			PARTNUMBER: 制造商料号		
NO.	Material name 材料名称	Description 品名描述	Manufacturer 制造商	Material 材质	
1	enameled wire	0.08*80P		99.95%copper	
2	Solder Bar	high temperature			
3	High-temperature adhesive	Gold Finger			
4	Glue	Resin adhesive			
5	Magnetic disc	42.5*0.8/18*0.8MM		Ferrites - Manganese zinc PC40	
6	Double-sided tape	Hand tear position adhesive			
7	Pearl cotton	270*380*55			
8	Cton	280*390*190			
9	Thermistor with thin wire	38mm long, black, ntc3950, 10k, 1%			
APPROVED BY		CHECKED BY	PREPARED BY	DATE	PAGE
			Wangxingwang	2026-5-6	3 of 3