
SPECIFICATION FOR APPROVAL

CUSTOMER: Shenzhen Maen Technology Co., Ltd.

CUST P/N: 56653

Model: J-MNW25C-L25

DESC: _____

DATE: 20230504

VERSION: A.0

PREPARED BY	CHECKED BY	APPROVED BY	CUSTOMER APPROVE
Yang Maoxin	Liu Xi Jiang	Jose Roger	

DONGGUAN JIOU ELECTRONIC TECHNOLOGY CO,LTD

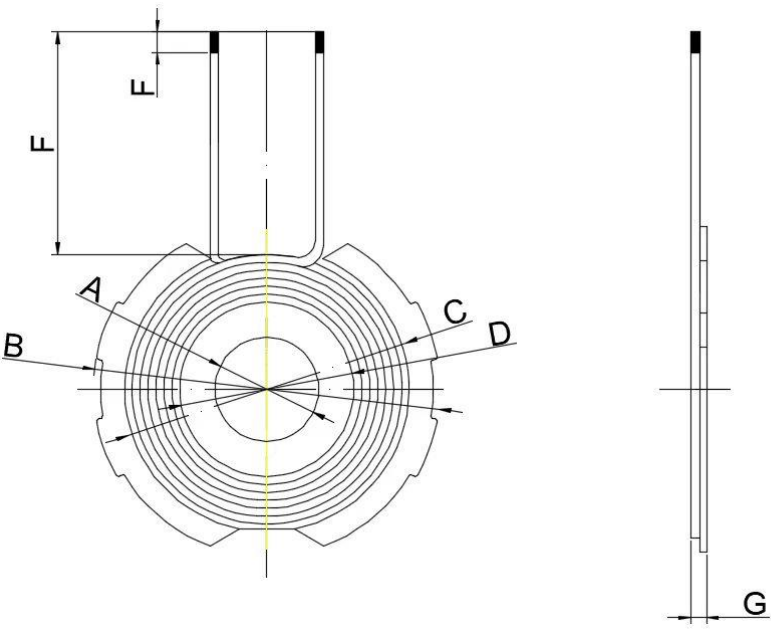
Company Address: Newfa Industrial Zone, Shijie Town, Dongguan City

[TEL:0769-83067050](tel:0769-83067050)

E-mail: lybofmana@163.com

Version Change History

Rev	Before Change	After Change	Change Date	Approved BY
A.0	new issue		20230504	Jose Roger
			</	

 Note: 1. Double-sided adhesive is applied on the back of the coil. 2. The magnetic separation sheet is 25*2.4*8.0. 3. The G value does not include the thickness of the release paper for the double-sided adhesive.	A	8 ± 0.5
	B	25 ± 0.5
	C	20 ± 1
	D	14 ± 0.5
	E	3 ± 1
	F	25 ± 2
	G	2.4 ± 0.1

二、Winding Specification:

Wire	Turns	Winding Direction
Silk braided cable 0.08 * 24P	12TS	back-roll

四、ELECTRICAL CHARACTERISTICS:

TEMPERATURE: $25 \pm 10^{\circ}\text{C}$, RELATIVE HUMIDITY : $65 \pm 20\%$

TIEM	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
IND	$7.2\text{UH} \pm 10\%$	100 KHZ/1.0V	LCZ METER 1062B
DCR	120m Ω Max		LCZ METER 1062B

PREPARED BY	CHECKED BY	DATE
Yang Maoxin	Liu Xi Jiang	20230424