

承认书

SPECIFICATION FOR APPROVAL

客户:

CUSTOMER: Shenzhen Maxnon Technology Limited

客户料号: 56508

CUST P/N:

产品型号: J-MN56508-L52

DESC:

日期: 20230424

DATE:

版本:

VERSION: A.0

拟制 PREPARED BY	审核 CHECKED BY	批准 APPROVED BY	客户承认 CUSTOMER APPROVE
Yang Maoxin	Liu Xijiang	Roger	

东莞市吉欧电子科技有限公司

DONGGUAN JIOU ELECTRONIC TECHNOLOGY CO,LTD

Company Address: Xinfu Industrial Zone, Shijie Town, Dongguan

TEL:0769-83067050

E-mail: lybofmana@163.com


DONGGUAN JIOU ELECTRONIC TECHNOLOGY CO, LTD

东莞市吉欧电子科技有限公司

SPECIFICATION

产品型号 DESC	J-MN56508-L52	版本 REV:A.O	客户 CUST	Maxnon
			客户料号 CUST P/N	56508

一、 尺寸 DIMENSION(MM)

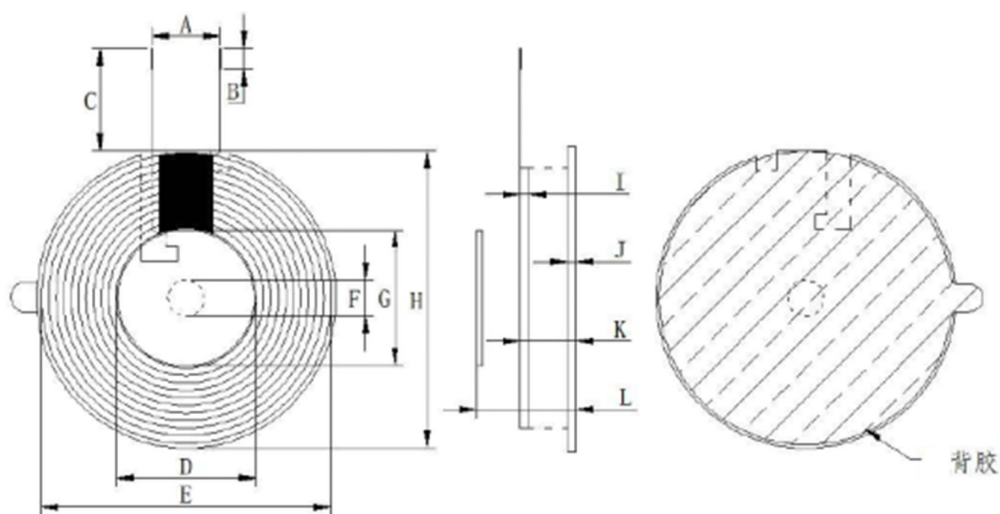

A	B	C	D	E	F	G
10 ± 2 REF	3 ± 1.5	52 ± 2	20.5 ± 0.5	37 ± 1.0	5.3 ± 0.5	19.5 ± 0.5
H	I	J	K,L			
$43.5 \pm 0.5 / -1$	0.7 ± 0.1	0.8 ± 0.1	1.8MAX			

Note:

1. The I size does not include the power cord and 8mm heat-resistant tape; K and L do not include release paper.
2. The large magnetic plate is 43.5*5*0.8 with two slots. The small magnetic plate is 19.5*0.8 with no holes or slots.
3. At the coil lead connection point, apply 8MM heat-resistant tape and wind 1.5 to 2 turns.

二、原理图 SCHEMATIC DIAGRAM:



三、绕线参数 Winding Specification:

线 材 Wire	圈 数 Turns	绕线方向 Winding Direction
Hot air twisted wire 0.08 * 48	10TS	back roll

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE: $25 \pm 10^{\circ}\text{C}$, 湿度 RELATIVE HUMIDITY : $65 \pm 20\%$

项目 TIEM	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
IND	$6.9\mu\text{H} \pm 10\%$	100 KHZ/1.0V	LCRMETRTH2830N
DCR	90 Max		PH2511S
Q	$Q \geq 30$	100 KHZ/1.0V	LCRMETRTH2830N

拟制 PREPARED BY	审核 CHECKED BY	日期 DATE
Yang Maoxin	Liu Xi Jiang	20230424