MEASUREMENT REPORT

FCC PART 15.247 / RSS-247 Bluetooth BLE

FCC ID:	2AU2Y-JH0002
IC	25633-JH0002
Applicant:	Nine Tech Co., Ltd.
Application Type:	Certification
Product:	Segway Bluetooth Fingerprint U-Lock
Model No.:	PJ02ZWS
FCC Classification:	Digital Transmission System (DTS)
FCC Rule Part(s):	Part 15 Subpart C (Section 15.247)
ISED Rule Part(s):	RSS-247 Issue 2, RSS-GEN Issue 5
Test Procedure(s):	ANSI C63.10-2013, KDB 558074 D01v05
Test Date:	October 12 ~ 22, 2020

Reviewed By: Vincent Yu
(Vincent Yu)

Approved By: Robin Wu
(Robin Wu)

ACCREDITED
TESTING LABORATORY
CERTIFICATE #3628.01

The test results relate only to the samples tested.
This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.
The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2010RSU009-U1	Rev. 01	Initial Report	12-24-2020	Valid

CONTENTS

Description Page

1. GENERAL INFORMATION 5

1.1. Applicant 5
1.2. Manufacturer 5
1.3. Testing Facility 5

2. PRODUCT INFORMATION 6

2.1. Feature of Equipment under Test 6
2.2. Product Specification Subjective to this Report 6
2.3. Working Frequencies for this report 7
2.4. Test Mode 7
2.5. Test Environment Condition 7
2.6. Test Software 7
2.7. Description of Test Configuration 8
2.8. Test System Details 8
2.9. Duty Cycle 9

3. ANTENNA REQUIREMENTS 10

4. TEST EQUIPMENT CALIBRATION DATE 11

5. MEASUREMENT UNCERTAINTY 15

6. TEST RESULT 16

6.1. Summary 16
6.2. Occupied Bandwidth Measurement 17
6.2.1. Test Limit 17
6.2.2. Test Procedure used 17
6.2.3. Test Setting 17
6.2.4. Test Setup 18
6.2.5. Test Result 19
6.3. Output Power Measurement 21
6.3.1. Test Limit 21
6.3.2. Test Procedure Used 21
6.3.3. Test Setting 21
6.3.4. Test Setup 21
6.3.5. Test Result of Output Power 22
6.4. Power Spectral Density Measurement 23
6.4.1. Test Limit 23
6.4.2. Test Procedure Used 23

6.4.3. Test Setting 23
6.4.4. Test Setup 23
6.4.5. Test Result 24
6.5. Conducted Band Edge and Out-of-Band Emissions 25
6.5.1. Test Limit 25
6.5.2. Test Procedure Used 25
6.5.3. Test Settitng 25
6.5.4. Test Setup 26
6.5.5. Test Result 27
6.6. Radiated Spurious Emission Measurement 29
6.6.1. Test Limit 29
6.6.2. Test Procedure Used 30
6.6.3. Test Setting 30
6.6.4. Test Setup 31
6.6.5. Test Result 33
6.7. Radiated Restricted Band Edge Measurement 38
6.7.1. Test Limit 38
6.7.2. Test Procedure Used 41
6.7.3. Test Setting 41
6.7.4. Test Setup 42
6.7.5. Test Result 43
6.8. AC Conducted Emissions Measurement 51
6.8.1. Test Limit 51
6.8.2. Test Setup 51
6.8.3. Test Result 52

7. CONCLUSION 54

Appendix A - Test Setup Photograph 55

Appendix B - EUT Photograph 56

1. GENERAL INFORMATION

1.1. Applicant

Nine Tech Co., Ltd.

1 Xingben Rd. Xinbei Dist. Changzhou, Jiangsu, China

1.2. Manufacturer

Nine Tech Co., Ltd.

1 Xingben Rd. Xinbei Dist. Changzhou, Jiangsu, China

1.3. Testing Facility

☒	**Test Site – MRT Suzhou Laboratory**	
	Laboratory Location (Suzhou – Wuzhong)	
	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China	
	Laboratory Location (Suzhou – SIP)	
	4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China	
	Laboratory Accreditations	
	A2LA: 3628.01	CNAS: L10551
	FCC: CN1166	ISED: CN0001
	VCCI: R-20025, G-20034, C-20020, T-20020	
☐	**Test Site – MRT Shenzhen Laboratory**	
	Laboratory Location (Shenzhen)	
	1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China	
	Laboratory Accreditations	
	A2LA: 3628.02	CNAS: L10551
	FCC: CN1284	ISED: CN0105
☐	**Test Site – MRT Taiwan Laboratory**	
	Laboratory Location (Taiwan)	
	No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)	
	Laboratory Accreditations	
	TAF: L3261-190725	
	FCC: 291082, TW3261	ISED: TW3261

2. PRODUCT INFORMATION

2.1. Feature of Equipment under Test

Product Name:	Segway Bluetooth Fingerprint U-Lock
Model No.:	PJ02ZWS
Bluetooth Specification:	Bluetooth 4.1 (BLE Only)
Serial No.:	NAL1A2044J2020
Operating Temperature:	-10 ~ 60 °C
Battery Information:	Rated Voltage: 3.7V Rated Capacity: 400mAh Rated Energy: 1.48Wh

2.2. Product Specification Subjective to this Report

Frequency Range:	2400MHz ~ 2483.5MHz
Number of Channels:	40
Data Rate:	1Mbps
Type of Modulation:	GFSK
Antenna Type:	PCB Antenna
Antenna Gain:	-1.26dBi

Note: Above information is declared by the manufacturer.

2.3. Working Frequencies for this report

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz
03	2408 MHz	04	2410 MHz	05	2412 MHz
06	2414 MHz	07	2416 MHz	08	2418 MHz
09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz
15	2432 MHz	16	2434 MHz	17	2436 MHz
18	2438 MHz	19	2440 MHz	20	2442 MHz
21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz
27	2456 MHz	28	2458 MHz	29	2460 MHz
30	2462 MHz	31	2464 MHz	32	2466 MHz
33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz
39	2480 MHz	--	--	--	--

2.4. Test Mode

Test Mode	Transmit by BLE

2.5. Test Environment Condition

Ambient Temperature	15°C ~ 35°C
Relative Humidity	20%RH ~ 75%RH

2.6. Test Software

The test utility software used during testing was “nRFgo Studio”, and the version was “4.7.2”.

2.7. Description of Test Configuration

The ANSI C63.10: 2013 was used to reference the appropriate EUT setup for testing.

Connection Diagram for Radiated Emissions Measurement

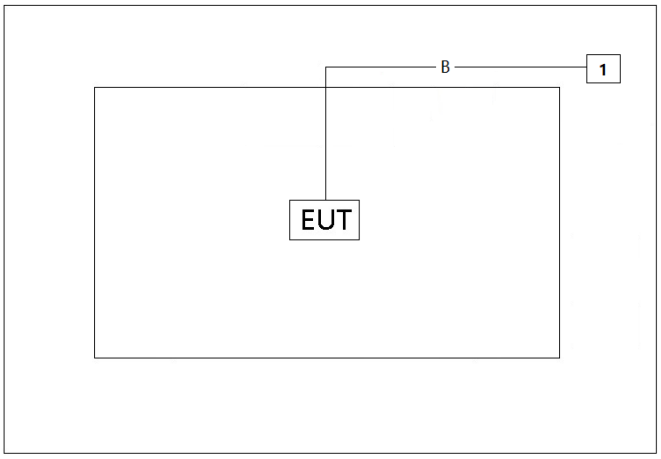

Connection Diagram for AC Conducted Emission Measurement

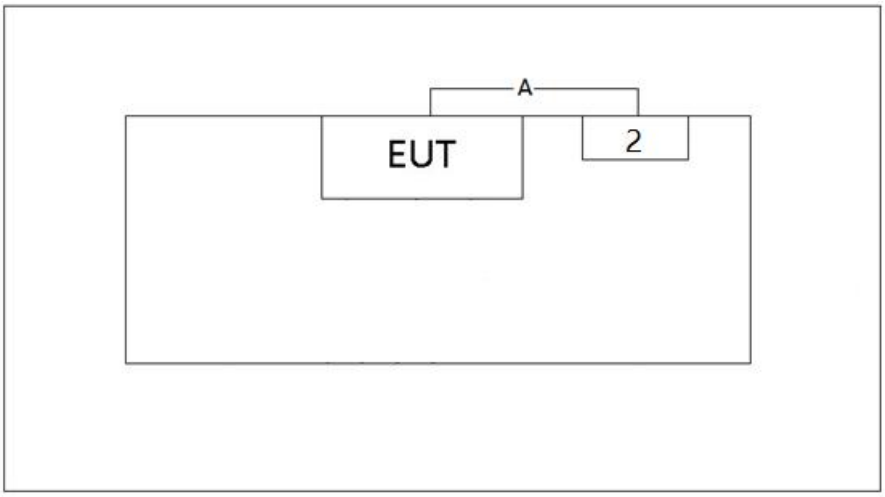

Cable Type		Signal Cable Description
A	USB Cable	Shielding, < 0.5 m
B	Control Cable	Non-Shielded, > 5 m

2.8. Test System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.
1	Notebook	Lenovo	E495
2	USB Adapter	HONOTO	ADS-12B-06

2.9. Duty Cycle

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
BLE	21.63%

Duty Cycle (T = Transmission Duration)	
BLE (T = 135.0us)	
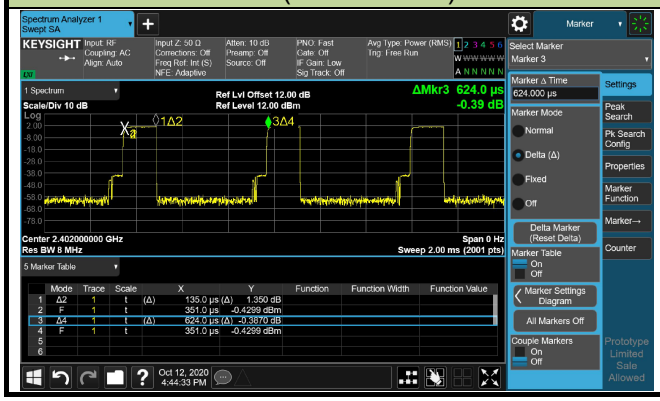	

3. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antenna of the device is **permanently attached.**
- There are no provisions for connection to an external antenna.

Conclusion:

The device unit complies with the requirement of §15.203.

4. TEST EQUIPMENT CALIBRATION DATE

Conducted Emission (WZ-SR2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2021/01/18
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2021/09/09
Thermal Hygrometer	testo	608-H1	MRTSUE06404	1 year	2021/07/26
Shielding Room	MIX-BEP	Chamber-SR2	MRTSUE06215	N/A	N/A

Conducted Emission (SIP-SR2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2021/07/02
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2021/09/09
Thermal Hygrometer	testo	608-H1	MRTSUE06621	1 year	2020/12/29

Radiated Emission (WZ-AC1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2021/01/18
PXA Signal Analyzer	Keysight	N9030B	MRTSUE06395	1 year	2021/08/30
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2021/08/08
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2021/09/27
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06597	1 year	2020/12/17
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2021/11/14
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2021/06/11
Thermal Hygrometer	testo	608-H1	MRTSUE06403	1 year	2021/07/26
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2021/04/30

Radiated Emission (WZ-AC2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
MXE EMI Receiver	Keysight	N9038A	MRTSUE06125	1 year	2021/07/02
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2021/05/26
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2021/10/25
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06597	1 year	2020/12/17
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2021/11/14
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2021/06/11
Thermal Hygrometer	Minggao	ETH529	MRTSUE06170	1 year	2020/12/15
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2021/04/30

Radiated Emission (SIP-AC1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2021/07/02
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2021/07/23
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06645	1 year	2021/08/30
Double Ridged Horn Antenna	R&S	HF907	MRTSUE06610	1 year	2021/08/30
Preamplifier	EMCI	EMC051845SE	MRTSUE06600	1 year	2021/11/09
Thermal Hygrometer	testo	608-H1	MRTSUE06620	1 year	2020/12/29
Anechoic Chamber	RIKEN	SIP-AC1	MRTSUE06554	1 year	2020/12/25

Radiated Emission (SIP-AC2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2021/07/02
MXA Signal Analyzer	Keysight	N9020B	MRTSUE06604	1 year	2021/09/26
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06646	1 year	2021/08/30
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06648	1 year	2020/12/17
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06599	1 year	2020/12/17
Preamplifier	EMCI	EMC051845SE	MRTSUE06644	1 year	2021/11/09
Preamplifier	EMCI	EMC184045SE	MRTSUE06602	1 year	2021/10/21
Thermal Hygrometer	testo	608-H1	MRTSUE06624	1 year	2020/12/29
Anechoic Chamber	RIKEN	SIP-AC2	MRTSUE06781	1 year	2020/12/25

Radiated Emission (SIP-AC3)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2021/07/02
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2021/07/23
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06647	1 year	2021/08/08
Double Ridged Horn Antenna	R&S	HF907	MRTSUE06611	1 year	2021/09/13
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06598	1 year	2020/12/17
Preamplifier	EMCI	EMC012645SE	MRTSUE06642	1 year	2021/01/16
Preamplifier	EMCI	EMC184045SE	MRTSUE06641	1 year	2021/01/16
Thermal Hygrometer	testo	608-H1	MRTSUE06622	1 year	2020/12/29
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2020/12/25

Conducted Test Equipment (WZ-TR3)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2021/04/14
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2021/01/08
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2021/04/14
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2021/10/22
USB wideband power sensor	Keysight	U2021XA	MRTSUE06446	1 year	2021/08/30
USB wideband power sensor	Keysight	U2021XA	MRTSUE06447	1 year	2021/08/08
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2021/06/11
Audio Analyzer	Agilent	U8903B	MRTSUE06143	1 year	2021/06/11
Modulation Analyzer	HP	HP8901A	MRTSUE06098	1 year	2021/09/26
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2021/10/20
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2021/10/21
Attenuator	SHX	TS2-6dB	MRTSUE06538	N/A	N/A
Attenuator	MVE	10dB	MRTSUE06540	N/A	N/A
Thermal Hygrometer	testo	608-H1	MRTSUE06401	1 year	2021/07/26

Conducted Test Equipment (SIP-SR5)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2021/04/14
PXA Signal Analyzer	Keysight	N9030B	MRTSUE06395	1 year	2021/08/30
USB wideband power sensor	Agilent	U2021XA	MRTSUE06595	1 year	2021/09/26
USB wideband power sensor	Agilent	U2021XA	MRTSUE06596	1 year	2021/09/26
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2021/06/11
Temperature Chamber	BAOYT	BYG-408CS	MRTSUE06847	1 year	2021/03/31
Thermal Hygrometer	testo	622	MRTSUE06629	1 year	2020/12/30

Software	Version	Function
EMI Software	V3	EMI Test Software

5. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.

AC Conducted Emission Measurement
Measurement Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): 9kHz~150kHz: 3.74dB 150kHz~30MHz: 3.44dB
Radiated Disturbance
Measurement Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): Horizontal: 30MHz~300MHz: 5.04dB 300MHz~1GHz: 4.95dB 1GHz~40GHz: 6.40dB Vertical: 30MHz~300MHz: 5.24dB 300MHz~1GHz: 6.03dB 1GHz~40GHz: 6.40dB
Spurious Emissions, Conducted
Measurement Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): 0.78dB
Output Power
Measurement Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): 1.13dB
Power Spectrum Density
Measurement Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): 1.15dB
Occupied Bandwidth
Measurement Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): 0.28%

6. TEST RESULT

6.1. Summary

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	≥ 500kHz	Conducted	Pass	Section 6.2
N/A	RSS-Gen [6.7]	99% Bandwidth	N/A		Pass	
15.247(b)(3)	RSS-247 [5.4(d)]	Output Power	≤ 1Watt & EIRP ≤ 4Watt		Pass	Section 6.3
15.247(e)	RSS-247 [5.2]	Power Spectral Density	≤ 8dBm / 3kHz		Pass	Section 6.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	≤ 20dBc (Peak)		Pass	Section 6.5
15.205 15.209	RSS-247 [5.5]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 6.6 & 6.7
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 6.8

Notes:

1) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.
2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.

6.2. Occupied Bandwidth Measurement

6.2.1.Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.

6.2.2.Test Procedure used

ANSI C63.10-2013 - Section 11.8 (6dB bandwidth)

ANSI C63.10-2013 - Section 6.9.3 (99% bandwidth)

6.2.3.Test Setting

For 6dB bandwidth

1. Set RBW = 100 kHz
2. VBW ≥ 3 × RBW
3. Detector = Peak
4. Trace mode = Max hold
5. Sweep = Auto couple
6. Allow the trace was allowed to stabilize
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

For 99% bandwidth

1. Span = 1.5 times to 5 times the OBW
2. Set RBW = 1% to 5% the OBW
3. VBW ≥ 3 × RBW
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize

6.2.4.Test Setup

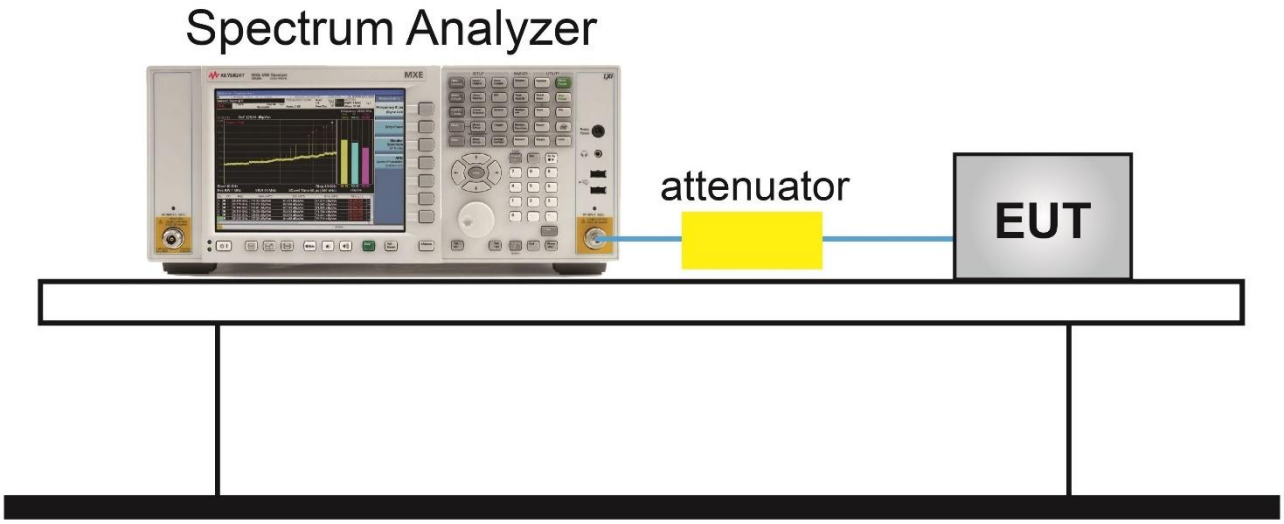

6.2.5.Test Result

Product	Segway Bluetooth Fingerprint U-Lock	Test Engineer	Amy Zhang
Test Site	WZ-TR3	Test Date	2020/10/12 ~ 2020/10/27

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	99% Bandwidth (MHz)	Result
BLE	1	00	2402	0.691	≥ 0.5	1.203	Pass
BLE	1	19	2440	0.691	≥ 0.5	1.244	Pass
BLE	1	39	2480	0.686	≥ 0.5	1.117	Pass

BLE 6dB Bandwidth

Channel 00 (2402MHz)

Channel 19 (2440MHz)

Channel 39 (2480MHz)

BLE 99% Bandwidth

Channel 00 (2402MHz)

Channel 19 (2440MHz)

Channel 39 (2480MHz)

6.3. Output Power Measurement

6.3.1.Test Limit

The maximum out power shall be less 1 Watt (30dBm) and the E.I.R.P shall not exceed 4 Watt (36dBm).

6.3.2.Test Procedure Used

ANSI C63.10-2013 Section 11.9.1.3

ANSI C63.10-2013 Section 11.9.2.3.2

6.3.3.Test Setting

PKPM1 Peak-reading power meter method

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Method AVGPM-G (Measurement using a gated RF average-reading power meter)

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

6.3.4.Test Setup

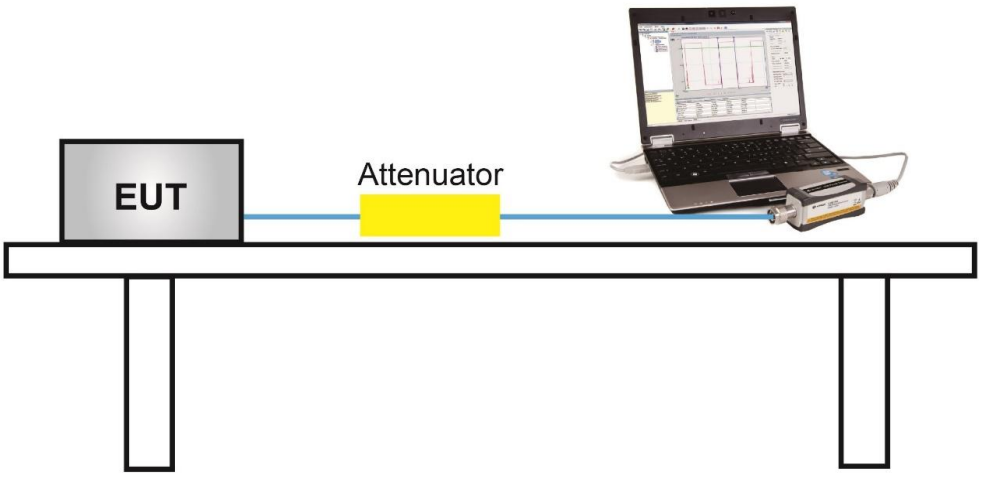

6.3.5.Test Result of Output Power

Product	Segway Bluetooth Fingerprint U-Lock	Test Engineer	Amy Zhang
Test Site	WZ-TR3	Test Date	2020/10/12

Test Result of Peak Output Power

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Max EIRP (dBm)	EIRP Limit (dBm)	Result
BLE	1	00	2402	1.21	≤ 30.00	-0.05	≤ 36.00	Pass
BLE	1	19	2440	-0.12	≤ 30.00	-1.38	≤ 36.00	Pass
BLE	1	39	2480	-1.36	≤ 30.00	-2.62	≤ 36.00	Pass

Note: Max EIRP (dBm) = Peak Power (dBm) + Antenna Gain (dBi), Antenna Gain = -1.26dBi.

Test Result of Average Output Power (Reporting Only)

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Average Power (dBm)	Limit (dBm)	Max EIRP (dBm)	EIRP Limit (dBm)	Result
BLE	1	00	2402	0.79	≤ 30.00	-0.47	≤ 36.00	Pass
BLE	1	19	2440	-0.57	≤ 30.00	-1.83	≤ 36.00	Pass
BLE	1	39	2480	-1.89	≤ 30.00	-3.15	≤ 36.00	Pass

Note: Max EIRP (dBm) = Average Power (dBm) + Antenna Gain (dBi), Antenna Gain = -1.26dBi.

6.4. Power Spectral Density Measurement

6.4.1.Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.

6.4.2.Test Procedure Used

ANSI C63.10 Section 11.10.2

6.4.3.Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow the trace to stabilize

6.4.4.Test Setup

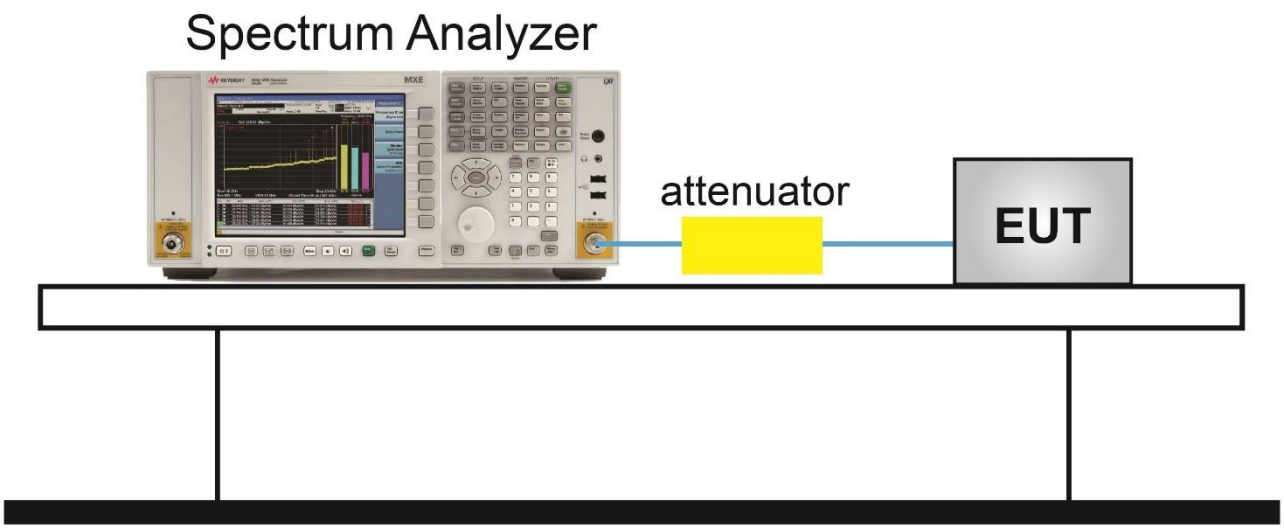

6.4.5.Test Result

Product	Segway Bluetooth Fingerprint U-Lock	Test Engineer	Amy Zhang
Test Site	WZ-TR3	Test Date	2020/10/12

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	PSD Result (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
BLE	1	00	2402	-13.88	≤ 8.00	Pass
BLE	1	19	2440	-14.57	≤ 8.00	Pass
BLE	1	39	2480	-15.07	≤ 8.00	Pass

BLE PSD

Channel 00 (2402MHz)

Channel 19 (2440MHz)

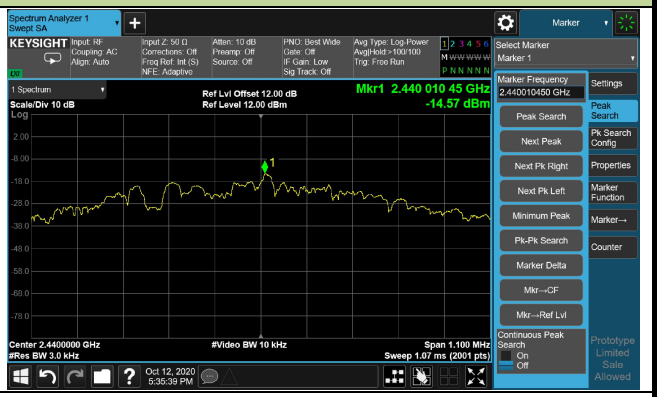

Channel 39 (2480MHz)

6.5. Conducted Band Edge and Out-of-Band Emissions

6.5.1.Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

6.5.2.Test Procedure Used

ANSI C63.10 Section 11.11

6.5.3.Test Settitng

Reference level measurement

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW ≥ 3 x RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. Allow the trace to stabilize

6.5.4.Test Setup

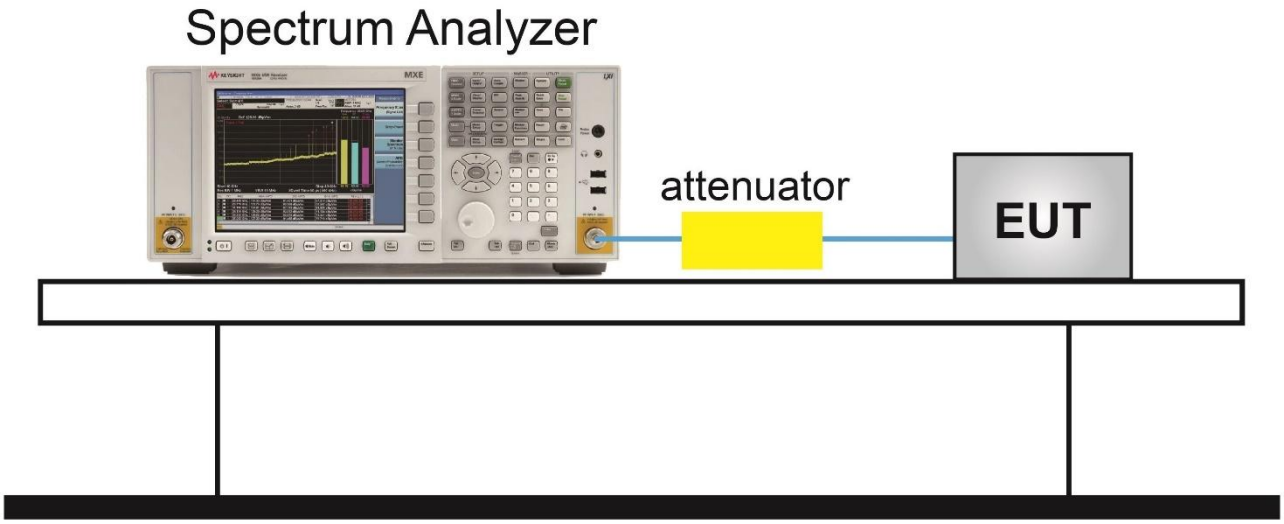

6.5.5.Test Result

Product	Segway Bluetooth Fingerprint U-Lock	Test Engineer	Amy Zhang
Test Site	WZ-TR3	Test Date	2020/10/12

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Limit (dBm)	Result
BLE	1	00	2402	-19.41	Pass
BLE	1	19	2440	-20.71	Pass
BLE	1	39	2480	-21.95	Pass

Note: The limit is 20dB below the fundamental emission level.

BLE Out-of-Band Emissions	
Channel 00 (2402MHz)	
100kHz PSD reference Level	Low Band Edge
Spurious Emission	
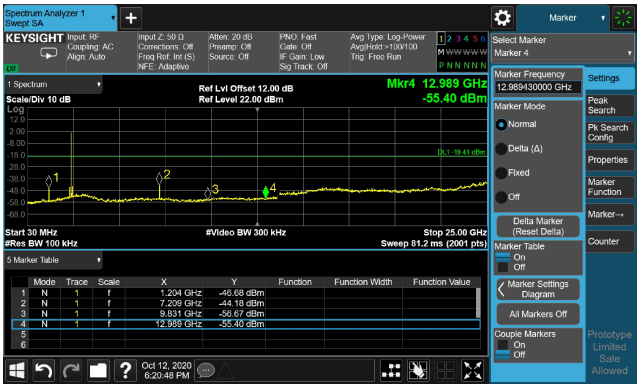	

Channel 19 (2440MHz)

100kHz PSD reference Level

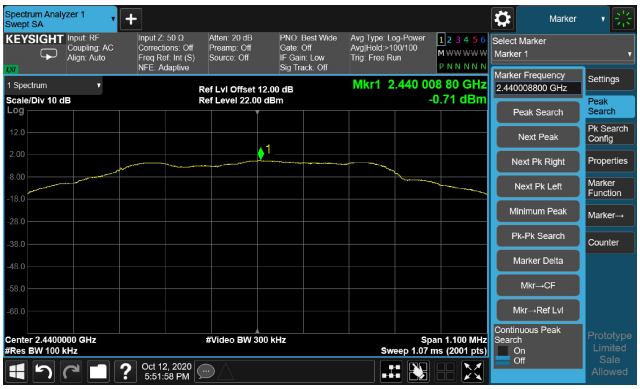

Spurious Emission

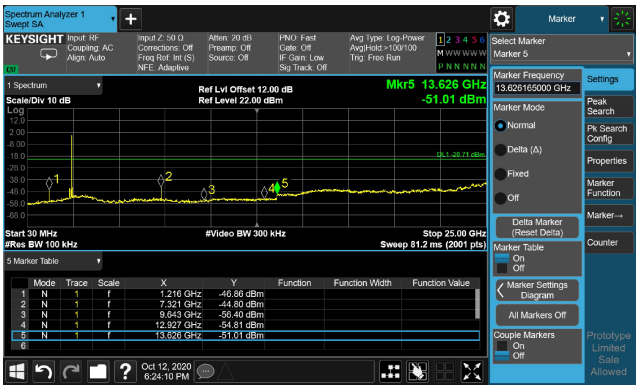

Channel 39 (2480MHz)

100kHz PSD reference Level

High Band Edge

Spurious Emission

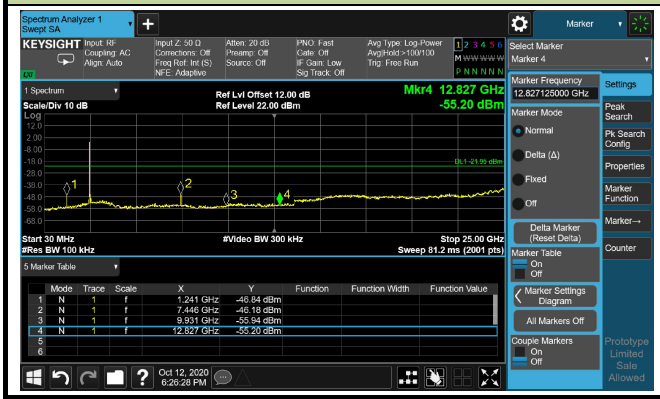

6.6. Radiated Spurious Emission Measurement

6.6.1.Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

All out of band emissions appearing in a restricted band as specified in Section 8.10 of the RSS-Gen must not exceed the limits shown in Table per Section 8.9.

RSS-Gen Section 8.9			
Frequency (MHz)	Field Strength (μV/m)	Magnetic Field Strength (H-Field) (μA/m)	Measured Distance (m)
0.009 - 0.490	--	6.37/F (F in kHz)	300
0.490 - 1.705	--	6.37/F (F in kHz)	30
1.705 - 30	--	0.08	30
30 - 88	100	--	3
88 - 216	150	--	3
216 - 960	200	--	3
Above 960	500	--	3

6.6.2.Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

6.6.3.Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest

2. Span was set greater than 1MHz

3. RBW = as specified in Table 1

4. Detector = CISPR quasi-peak

5. Sweep time = auto couple

6. Trace was allowed to stabilize

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest

2. RBW = 1MHz

3. VBW = 3MHz

4. Detector = peak

5. Sweep time = auto couple

6. Trace mode = max hold

7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest

2. RBW = 1MHz

3. VBW; If the EUT is configured to transmit with duty cycle ≥ 98%, set VBW = 10 Hz.

If the EUT duty cycle is < 98%, set VBW ≥ 1/T. T is the minimum transmission duration.

4. Detector = Peak

5. Sweep time = auto

6. Trace mode = max hold

7. Trace was allowed to stabilize

6.6.4.Test Setup

Below 1GHz Test Setup:

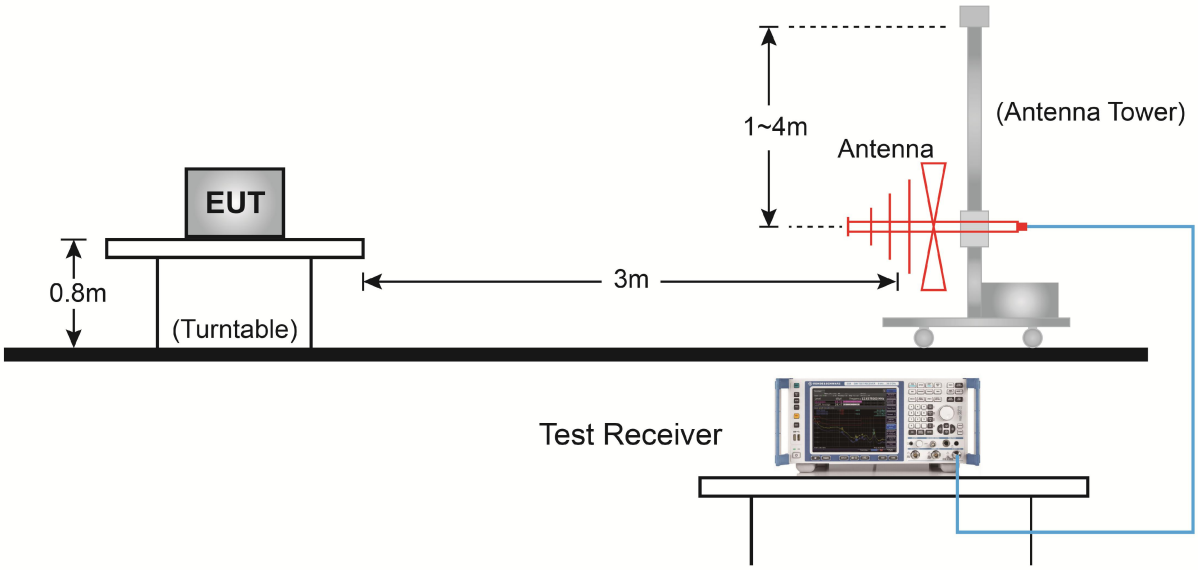

Above 1GHz Test Setup:

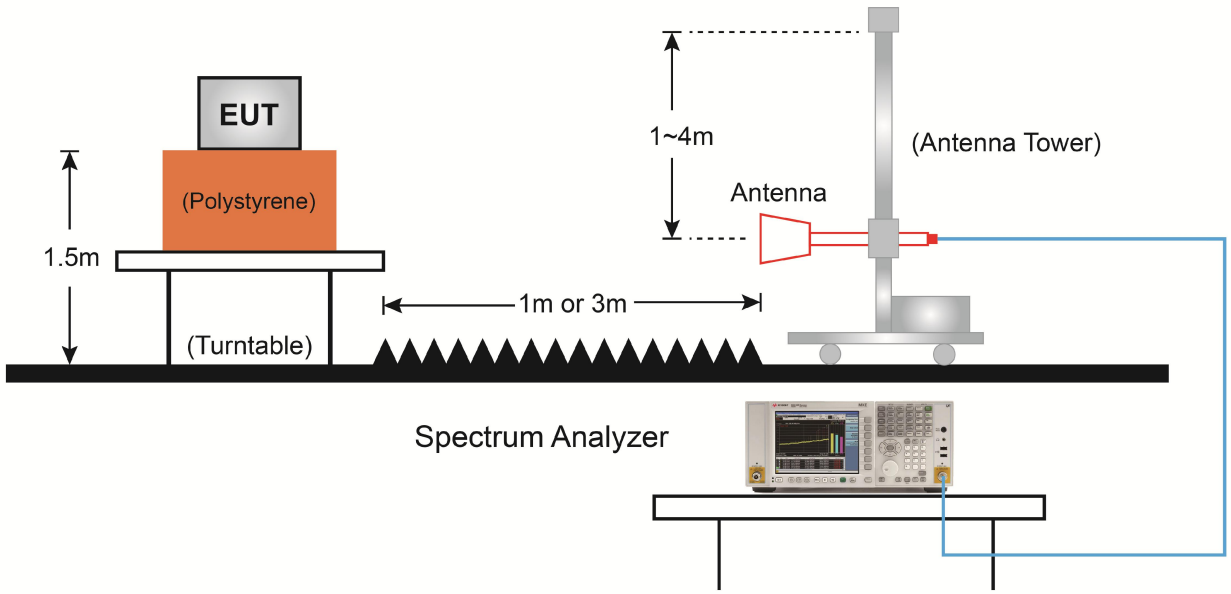

6.6.5.Test Result

Product	Segway Bluetooth Fingerprint U-Lock	Test Engineer	Hyde Yu
Test Site	WZ-AC1	Test Date	2020/10/12
Test Mode	BLE	Test Channel	00
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4213.0	37.9	3.9	41.8	74.0	-32.2	Peak	Horizontal
	4808.0	43.6	5.9	49.5	74.0	-24.5	Peak	Horizontal
*	5998.0	37.7	7.1	44.8	74.0	-29.2	Peak	Horizontal
*	7205.0	42.7	10.5	53.2	74.0	-20.8	Peak	Horizontal
	3992.0	37.7	3.5	41.2	74.0	-32.8	Peak	Vertical
	4808.0	38.6	5.9	44.5	74.0	-29.5	Peak	Vertical
*	6559.0	38.0	8.5	46.5	74.0	-27.5	Peak	Vertical
*	7205.0	40.1	10.5	50.6	74.0	-23.4	Peak	Vertical

Note 1: “*” means test frequency did not fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Segway Bluetooth Fingerprint U-Lock	Test Engineer	Hyde Yu
Test Site	WZ-AC1	Test Date	2020/10/12
Test Mode:	BLE	Test Channel:	19
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4884.5	43.0	5.6	48.6	74.0	-25.4	Peak	Horizontal
	7315.5	42.7	10.6	53.3	74.0	-20.7	Peak	Horizontal
	7315.5	38.9	10.6	49.5	54.0	-4.5	Average	Horizontal
*	7876.5	36.7	11.2	47.9	74.0	-26.1	Peak	Horizontal
*	8709.5	37.1	12.9	50.0	74.0	-24.0	Peak	Vertical
	4884.5	37.4	5.6	43.0	74.0	-31.0	Peak	Vertical
	7315.5	40.7	10.6	51.3	74.0	-22.7	Peak	Vertical
*	7885.0	37.5	11.1	48.6	74.0	-25.4	Peak	Vertical
*	8811.5	36.6	13.3	49.9	74.0	-24.1	Peak	Vertical

Note 1: "*" means test frequency did not fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Segway Bluetooth Fingerprint U-Lock	Test Engineer	Hyde Yu
Test Site	WZ-AC1	Test Date	2020/10/12
Test Mode:	BLE	Test Channel:	39
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4961.0	42.4	5.9	48.3	74.0	-25.7	Peak	Horizontal
	7443.0	43.6	11.0	54.6	74.0	-19.4	Peak	Horizontal
	7443.0	38.3	11.0	49.3	54.0	-4.7	Average	Horizontal
*	7876.5	35.9	11.2	47.1	74.0	-26.9	Peak	Horizontal
*	8811.5	36.9	13.3	50.2	74.0	-23.8	Peak	Horizontal
	4961.0	39.0	5.9	44.9	74.0	-29.1	Peak	Vertical
	7443.0	42.3	11.0	53.3	74.0	-20.7	Peak	Vertical
	7443.0	39.1	11.0	50.1	54.0	-3.9	Average	Vertical
*	7910.5	36.3	11.2	47.5	74.0	-26.5	Peak	Vertical
*	8692.5	36.5	13.1	49.6	74.0	-24.4	Peak	Vertical

Note 1: "*" means test frequency did not fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The worst case of Radiated Emission below 1GHz:

Site: WZ-AC2	Time: 2020/10/22 - 10:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: AC2_VULB9162_0.03-7GHz	Polarity: Horizontal
EUT: Segway Bluetooth Fingerprint U-Lock	Power: By Battery
Test Mode: Transmit by BLE at Channel 2402MHz	

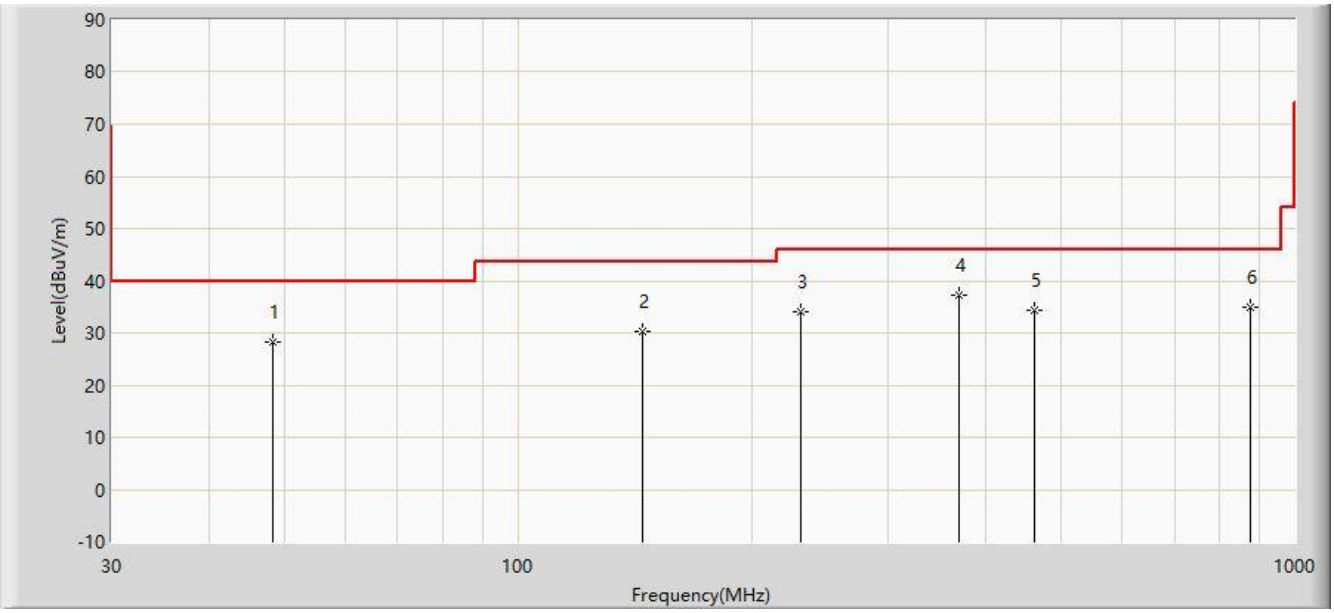

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			48.430	28.294	7.662	-11.706	40.000	20.632	PK
2			144.460	30.223	15.052	-13.277	43.500	15.171	PK
3			231.275	34.066	14.510	-11.934	46.000	19.556	PK
4		*	369.985	37.112	14.524	-8.888	46.000	22.588	PK
5			463.105	34.430	10.006	-11.570	46.000	24.424	PK
6			875.355	35.062	3.787	-10.938	46.000	31.275	PK

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: QP measurement was not performed when peak measure level was lower than the QP limit by more than 6dB.

Note 3: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site: WZ-AC2	Time: 2020/10/22 - 10:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: AC2_VULB9162_0.03-7GHz	Polarity: Vertical
EUT: Segway Bluetooth Fingerprint U-Lock	Power: By Battery
Test Mode: Transmit by BLE at Channel 2402MHz	

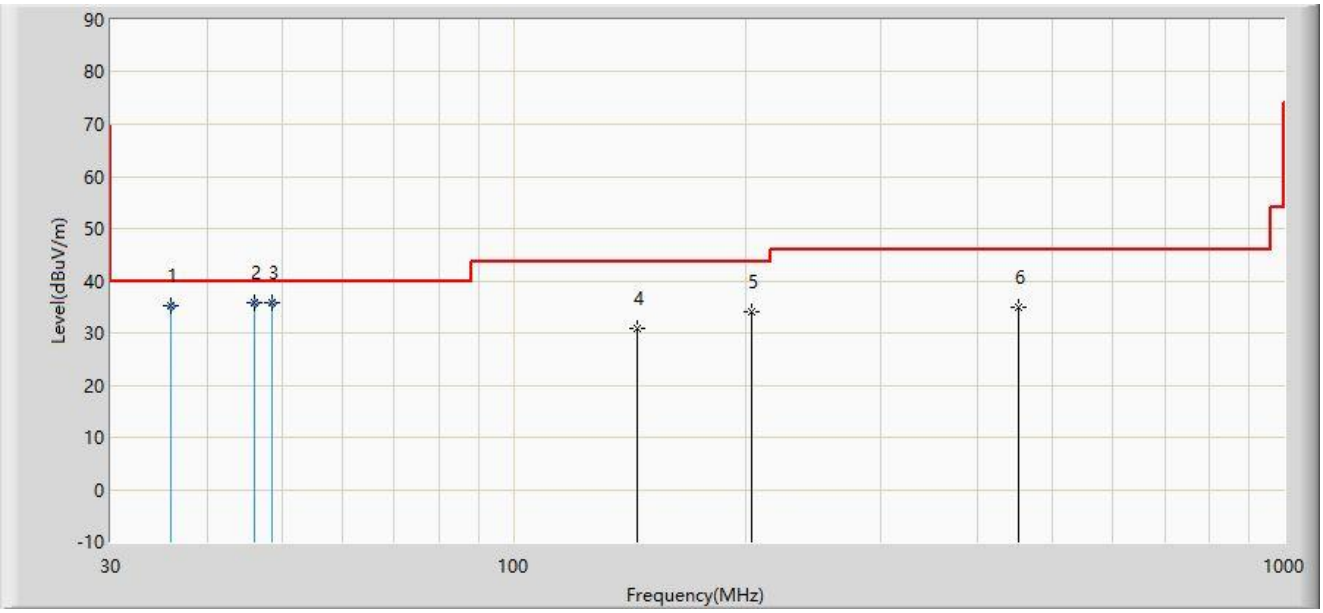

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			35.960	35.182	16.850	-4.818	40.000	18.333	QP
2			46.151	35.759	15.220	-4.241	40.000	20.539	QP
3		*	48.580	35.888	15.250	-4.112	40.000	20.638	QP
4			144.460	30.967	15.796	-12.533	43.500	15.171	PK
5			203.630	34.166	15.606	-9.334	43.500	18.561	PK
6			452.435	34.943	10.708	-11.057	46.000	24.235	PK

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: QP measurement was not performed when peak measure level was lower than the QP limit by more than 6dB.

Note 3: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

6.7. Radiated Restricted Band Edge Measurement

6.7.1.Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
[1] 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	([2])
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For RSS-Gen Section 8.10 Requirement

Radiated emissions which fall in the restricted bands, as defined in Section 8.10 of RSS-Gen, must also comply with the radiated emission limits specified in Section 8.9.

Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	--
8.37625 - 8.38675	1718.8 -1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 -2390	
12.51975 - 12.52025	2483.5 -2500	
12.57675 - 12.57725	2655 - 2900	
13.36 -13.41	3260 - 3267	
16.42 - 16.423	3332 -3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR and in Section 8.10 of the RSS-Gen must not exceed the limits shown in Table.

RSS-Gen Section 8.9			
Frequency (MHz)	Field Strength (μV/m)	Magnetic Field Strength (H-Field) (μA/m)	Measured Distance (m)
0.009 - 0.490	--	6.37/F (F in kHz)	300
0.490 - 1.705	--	6.37/F (F in kHz)	30
1.705 - 30	--	0.08	30
30 - 88	100	--	3
88 - 216	150	--	3
216 - 960	200	--	3
Above 960	500	--	3

6.7.2.Test Procedure Used

ANSI C63.10-2013 Section 6.3 (General Requirements)

ANSI C63.10-2013 Section 6.6 (Standard test method above 1GHz)

ANSI C63.10-2013 Section 6.10.5 (Restricted-band band-edge measurements)

6.7.3.Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW ≥ 1/T
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to “Voltage” regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

6.7.4.Test Setup

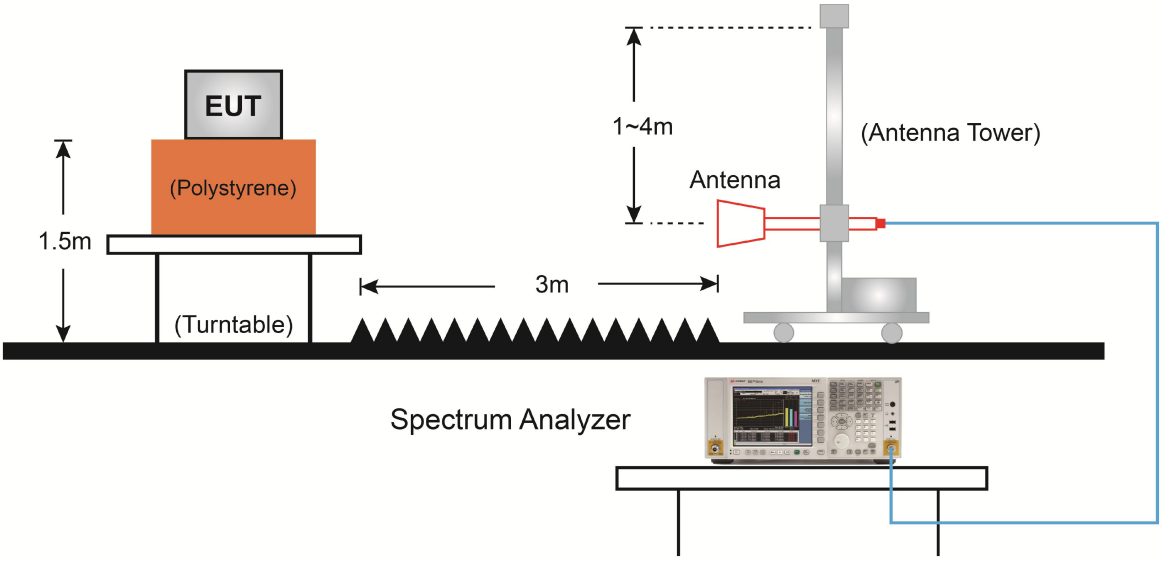

6.7.5.Test Result

Site: WZ-AC1	Time: 2020/10/12 - 11:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Segway Bluetooth Fingerprint U-Lock	Power: By Battery
Test Mode: Transmit by BLE at Channel 2402MHz	

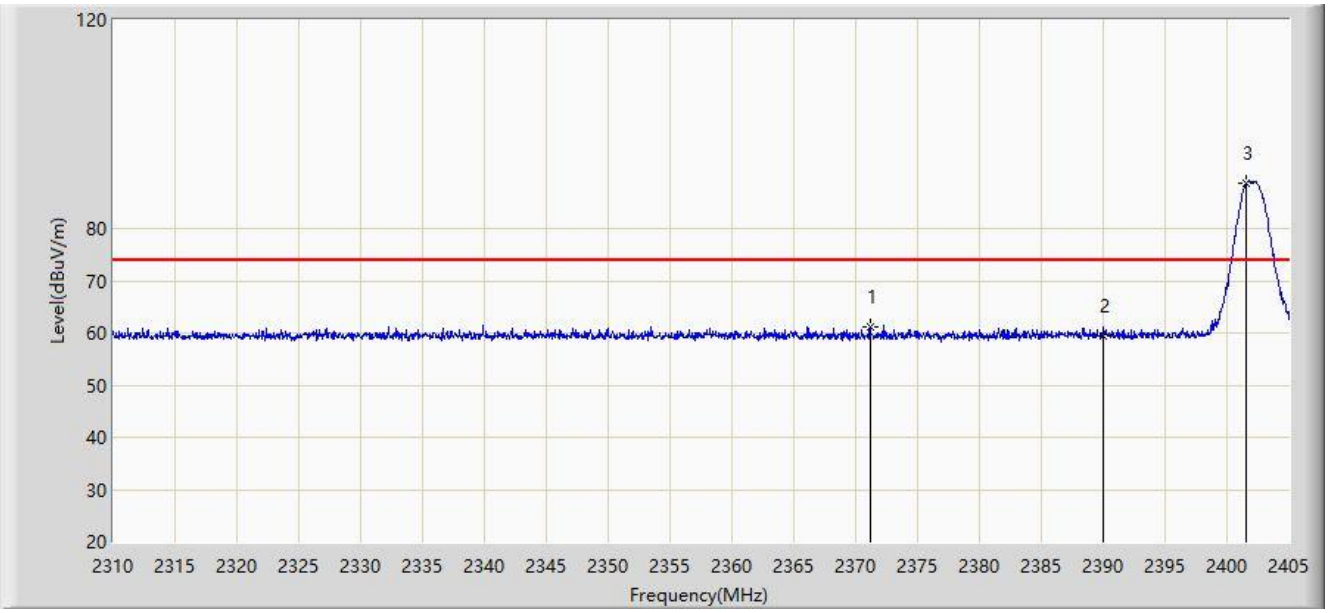

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2371.180	61.221	28.512	-12.779	74.000	32.708	PK
2			2390.000	59.549	26.837	-14.451	74.000	32.712	PK
3		*	2401.580	88.813	56.069	N/A	N/A	32.745	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2020/10/12 - 11:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Segway Bluetooth Fingerprint U-Lock	Power: By Battery
Test Mode: Transmit by BLE at Channel 2402MHz	

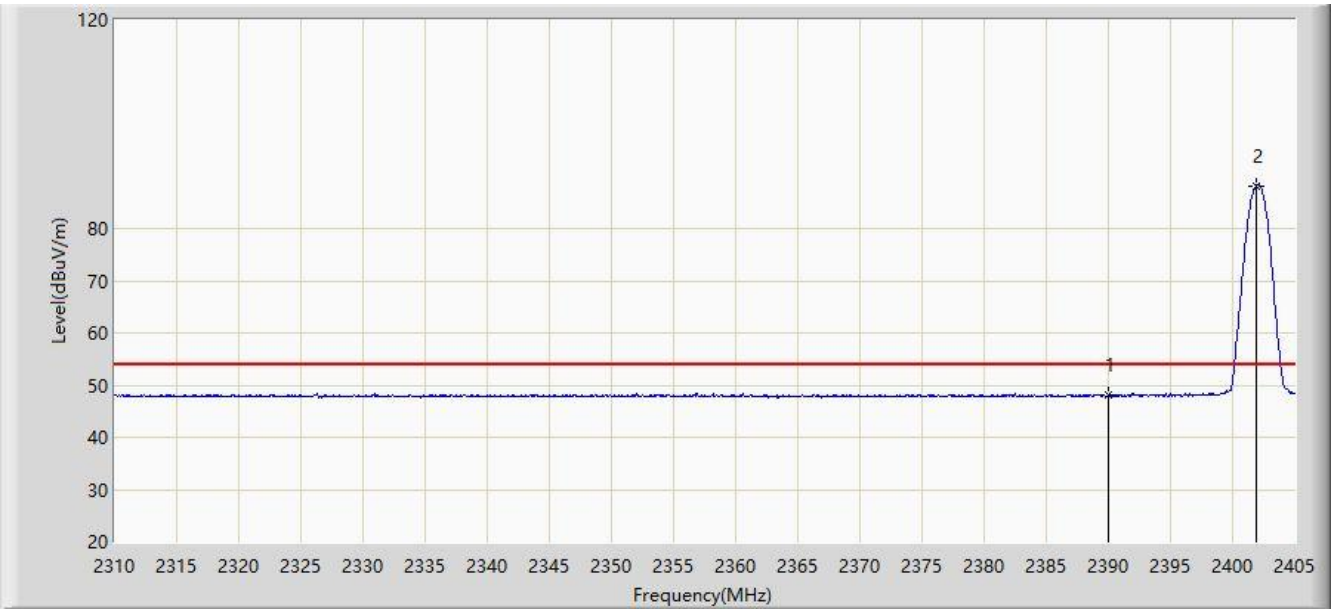

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	48.081	15.369	-5.919	54.000	32.712	AV
2		*	2401.913	88.247	55.503	N/A	N/A	32.744	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2020/10/12 - 11:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Segway Bluetooth Fingerprint U-Lock	Power: By Battery
Test Mode: Transmit by BLE at Channel 2402MHz	

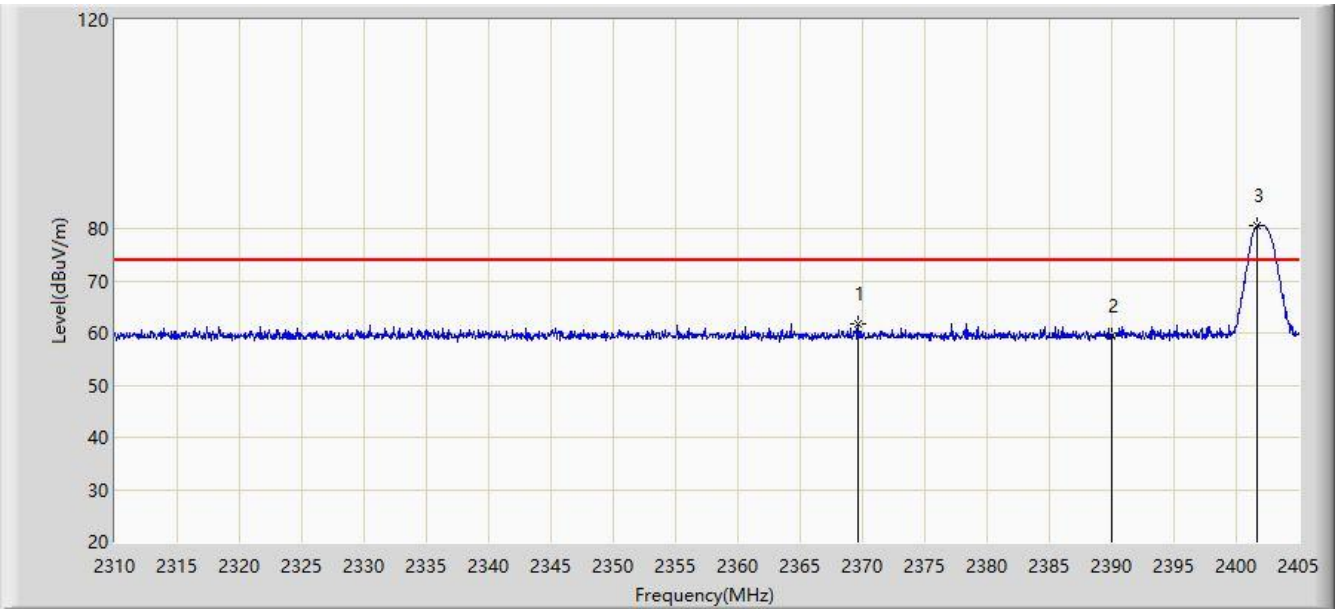

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2369.613	61.784	29.067	-12.216	74.000	32.717	PK
2			2390.000	59.559	26.847	-14.441	74.000	32.712	PK
3		*	2401.627	80.436	47.692	N/A	N/A	32.744	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2020/10/12 - 11:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Segway Bluetooth Fingerprint U-Lock	Power: By Battery
Test Mode: Transmit by BLE at Channel 2402MHz	

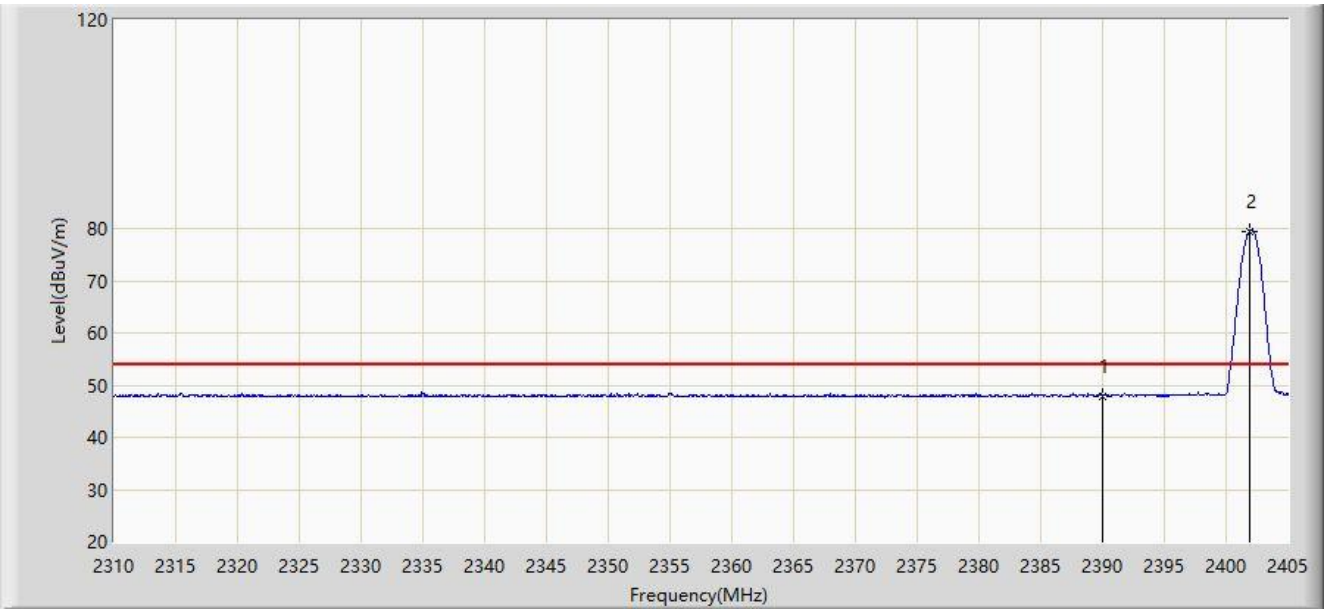

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.933	15.221	-6.067	54.000	32.712	AV
2		*	2401.913	79.553	46.809	N/A	N/A	32.744	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2020/10/12 - 11:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Segway Bluetooth Fingerprint U-Lock	Power: By Battery
Test Mode: Transmit by BLE at Channel 2480MHz	

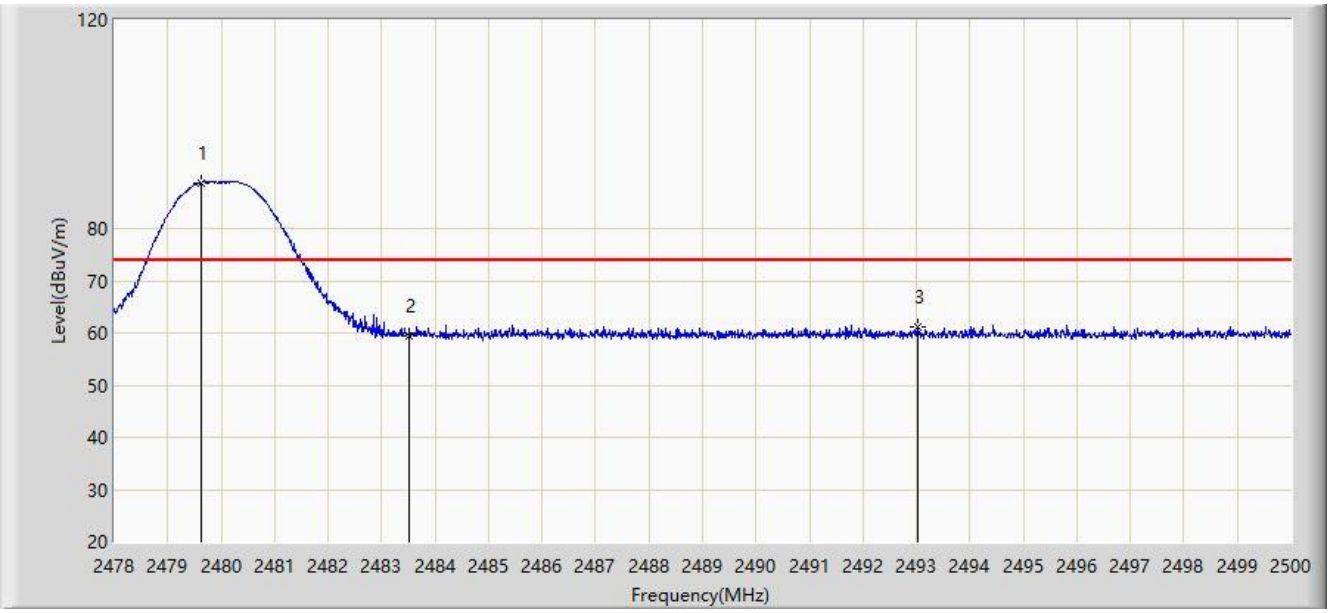

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.628	88.826	56.142	N/A	N/A	32.684	PK
2			2483.500	59.516	26.866	-14.484	74.000	32.651	PK
3			2493.015	61.167	28.550	-12.833	74.000	32.617	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2020/10/12 - 11:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Segway Bluetooth Fingerprint U-Lock	Power: By Battery
Test Mode: Transmit by BLE at Channel 2480MHz	

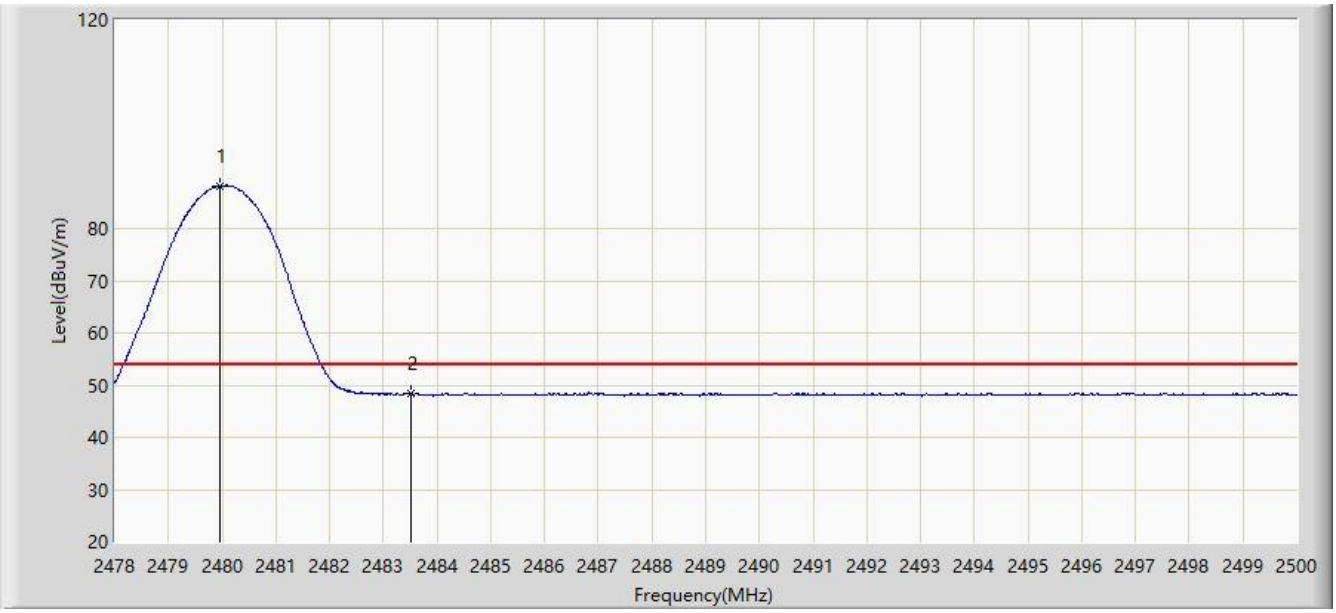

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.969	88.191	55.510	N/A	N/A	32.681	AV
2			2483.500	48.263	15.613	-5.737	54.000	32.651	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2020/10/12 - 11:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Segway Bluetooth Fingerprint U-Lock	Power: By Battery
Test Mode: Transmit by BLE at Channel 2480MHz	

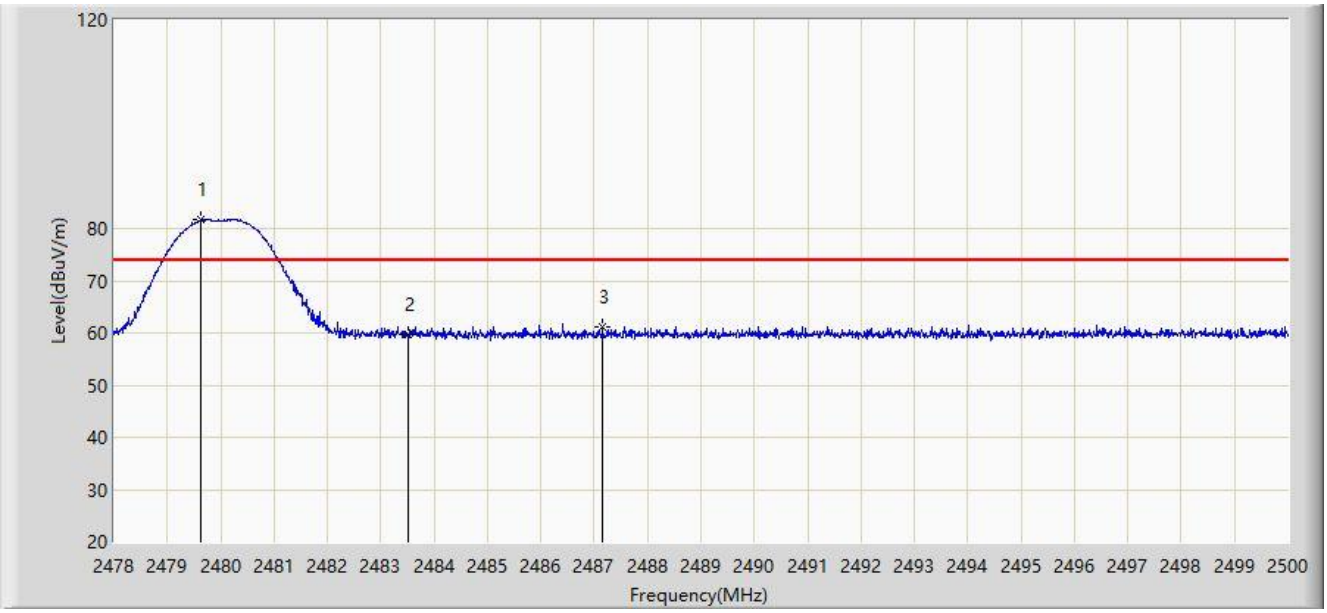

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.639	81.652	48.968	N/A	N/A	32.684	PK
2			2483.500	59.616	26.966	-14.384	74.000	32.651	PK
3			2487.152	61.168	28.549	-12.832	74.000	32.618	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2020/10/12 - 11:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Segway Bluetooth Fingerprint U-Lock	Power: By Battery
Test Mode: Transmit by BLE at Channel 2480MHz	

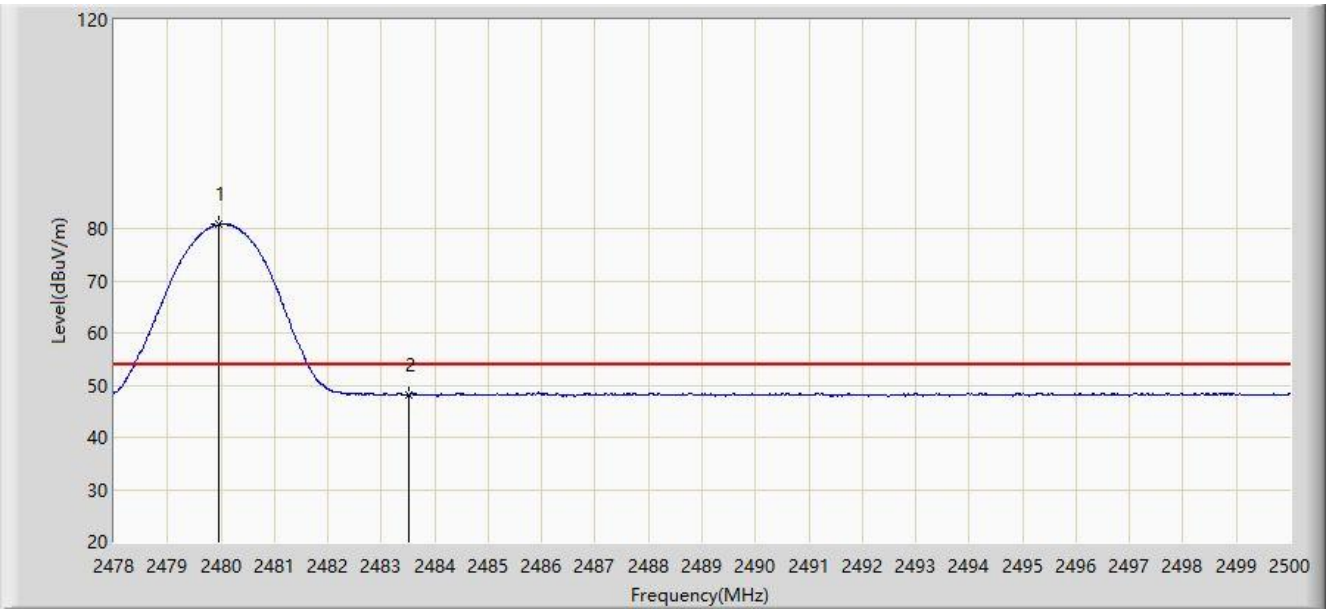

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.947	80.727	48.046	N/A	N/A	32.682	AV
2			2483.500	48.039	15.389	-5.961	54.000	32.651	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

6.8. AC Conducted Emissions Measurement

6.8.1.Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits & RSS-Gen Issue 5 Section 8.8 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50
Note 1: The lower limit shall apply at the transition frequencies. Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.		

6.8.2.Test Setup

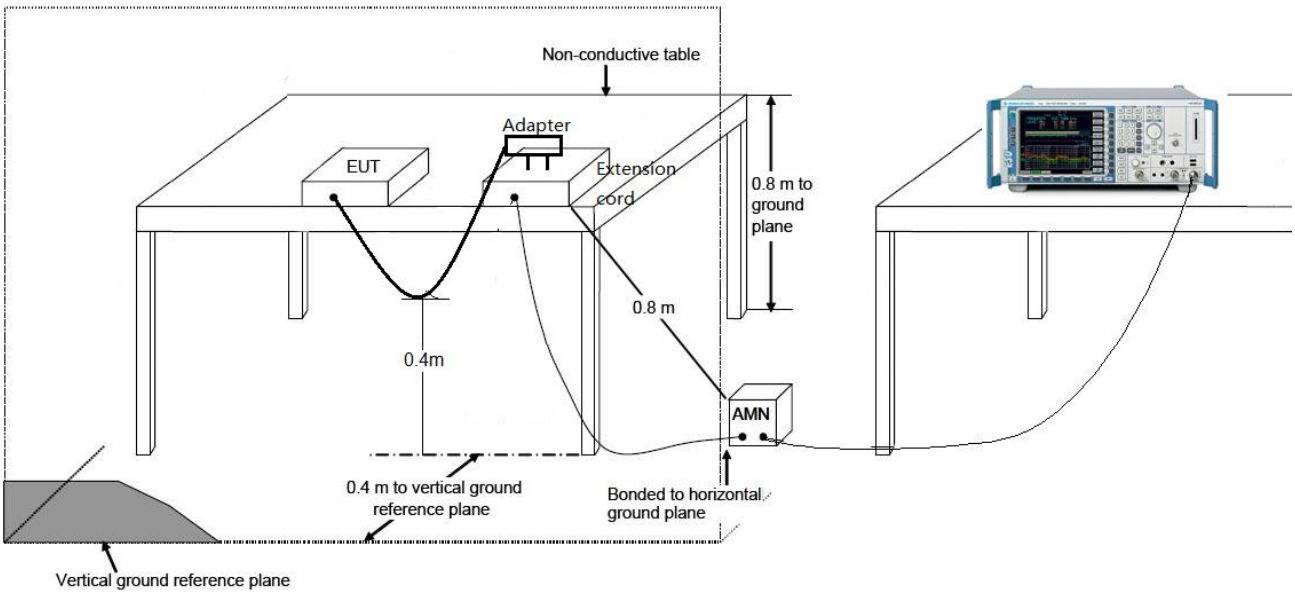

6.8.3.Test Result

Site: WZ-SR2	Time: 2020/11/23
Limit: FCC_Part15.207_CE_AC Power	Engineer: Buter Shi
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Segway Bluetooth Fingerprint U-Lock	Power: AC 120V/60Hz
Test Mode 2	

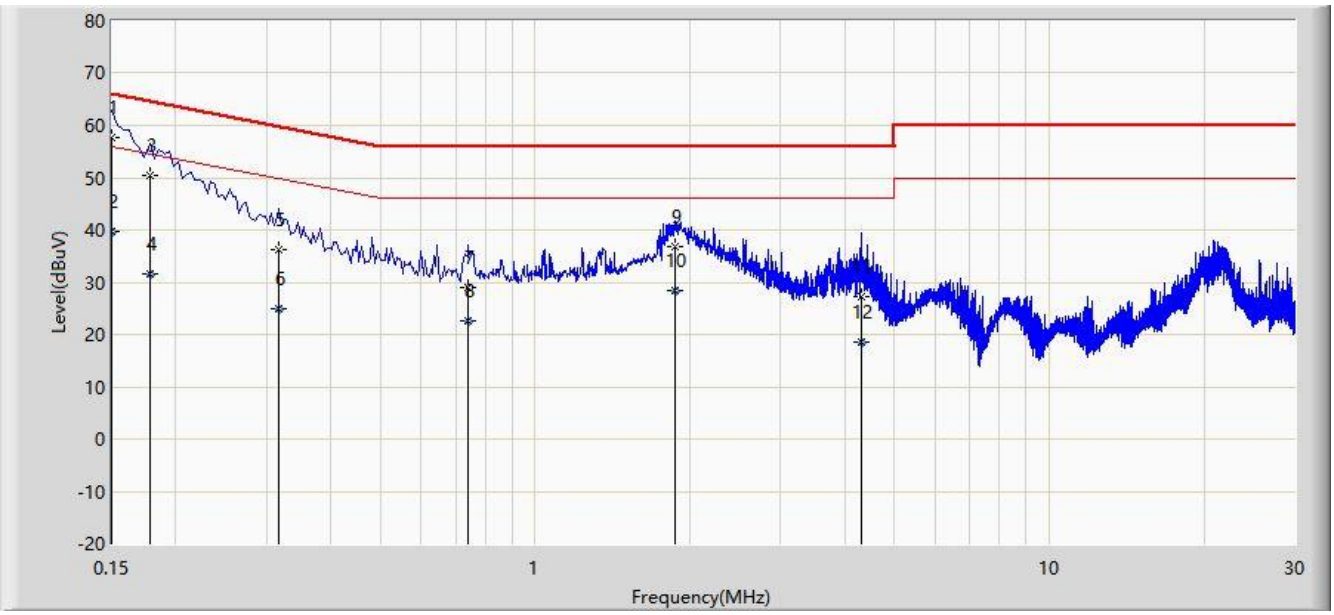

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.150	57.627	48.017	-8.373	66.000	9.610	QP
2			0.150	39.767	30.157	-16.233	56.000	9.610	AV
3			0.178	50.449	40.823	-14.130	64.578	9.625	QP
4			0.178	31.634	22.009	-22.944	54.578	9.625	AV
5			0.318	36.352	26.692	-23.406	59.759	9.660	QP
6			0.318	25.004	15.344	-24.755	49.759	9.660	AV
7			0.742	28.847	19.117	-27.153	56.000	9.730	QP
8			0.742	22.527	12.797	-23.473	46.000	9.730	AV
9			1.866	36.922	27.162	-19.078	56.000	9.760	QP
10			1.866	28.542	18.782	-17.458	46.000	9.760	AV
11			4.302	27.286	17.446	-28.714	56.000	9.840	QP
12			4.302	18.499	8.659	-27.501	46.000	9.840	AV

Note 1: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: WZ-SR2	Time: 2020/11/23
Limit: FCC_Part15.207_CE_AC Power	Engineer: Buter Shi
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Segway Bluetooth Fingerprint U-Lock	Power: AC 120V/60Hz
Test Mode 2	

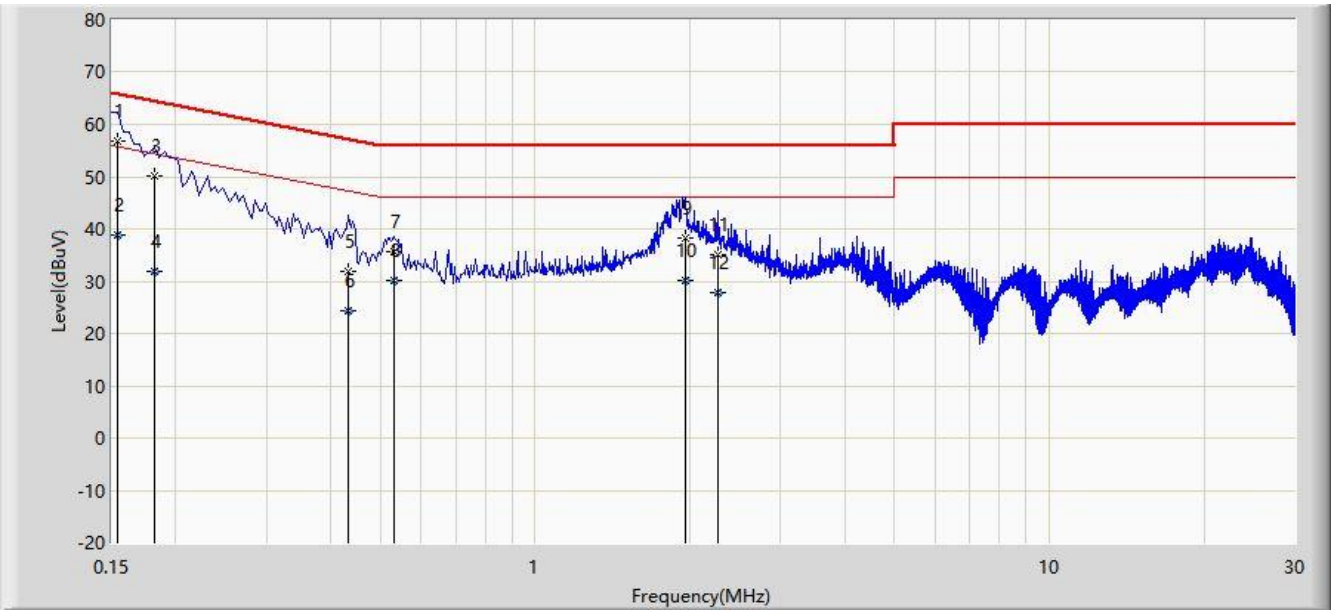

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.154	56.767	47.165	-9.015	65.781	9.601	QP
2			0.154	38.768	29.167	-17.013	55.781	9.601	AV
3			0.182	50.020	40.401	-14.374	64.394	9.619	QP
4			0.182	31.813	22.194	-22.581	54.394	9.619	AV
5			0.434	31.763	22.088	-25.413	57.176	9.675	QP
6			0.434	24.234	14.559	-22.942	47.176	9.675	AV
7			0.530	35.564	25.874	-20.436	56.000	9.690	QP
8			0.530	30.282	20.592	-15.718	46.000	9.690	AV
9			1.962	38.366	28.606	-17.634	56.000	9.760	QP
10			1.962	30.072	20.312	-15.928	46.000	9.760	AV
11			2.274	34.939	25.163	-21.061	56.000	9.775	QP
12			2.274	27.741	17.965	-18.259	46.000	9.775	AV

Note 1: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

7. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15.247 of the FCC Rules and RSS-247 Section 5 of the ISED Rules.

The End

Appendix A - Test Setup Photograph

Refer to “2010RSU009-UT” file.

Appendix B - EUT Photograph

Refer to “2010RSU009-UE” file.