

FCC Part 15.407 TEST REPORT

For

Renesas Design Korea Inc.

7th SiliconPark, 35 Pangyo-ro 255 beon-gil Bundang-gu, Seongnam-si, Gyeonggi-do,
13486

FCC ID: 2AU49-RRQ61001008

Report Type: Original Report	Product Type: RRQ61001 Module
Report Producer : <u>Cedric Xu</u>	
Report Number : <u>RLK250801002RF05</u>	
Report Date : <u>2026-01-26</u>	
Reviewed By: <u>Rory Cheng</u> 	
Prepared By: Bay Area Compliance Laboratories Corp. (Linkou Laboratory) No. 6, Wende 2Rd., Guishan Dist., Taoyuan City 33382, Taiwan (R.O.C.). Tel: +886 (3) 3961072 Fax: +886 (3) 3961027 www.baclcorp.com.tw	

Revision History

Revision	No.	Report Number	Issue Date	Description	Author/ Revised by
0.0	RLK250801002	RLK250801002RF05	2026-01-26	Original Report	Cedric Xu

TABLE OF CONTENTS

1	General Information	5
1.1	Product Description for Equipment under Test (EUT).....	5
1.2	Objective.....	6
1.3	Test Methodology	6
1.4	Statement of Compliance.....	6
1.5	Measurement Uncertainty.....	7
1.6	Environmental Conditions	7
1.7	Test Facility	7
2	System Test Configuration.....	8
2.1	Description of Test Configuration	8
2.2	EUT Exercise Software	9
2.3	Equipment Modifications	10
2.4	Test Mode	10
2.5	Support Equipment List and Details.....	10
2.6	External Cable List and Details	10
2.7	Block Diagram of Test Setup	11
2.8	Duty Cycle	13
3	Summary of Test Results.....	16
4	Test Equipment List and Details	17
5	FCC §15.203 – Antenna Requirements.....	18
5.1	Applicable Standard.....	18
5.2	Antenna Information.....	18
6	FCC§15.207 – AC Line Conducted Emissions	19
6.1	Applicable Standard.....	19
6.2	EUT Setup	19
6.3	EMI Test Receiver Setup.....	20
6.4	Test Procedure	20
6.5	Factor & Over Limit Calculation.....	20
6.6	Test Results.....	21
7	FCC §15.209, §15.205, §15.407(b) – Spurious Emissions	23
7.1	Applicable Standard.....	23
7.2	EUT Setup	24
7.3	EMI Test Receiver & Spectrum Analyzer Setup.....	26
7.4	Test Procedure	26
7.5	Factor & Over Limit Calculation.....	26
7.6	Test Results.....	27
8	FCC §15.407(a)(e) – Emission Bandwidth And Occupied Bandwidth	75
8.1	Applicable Standard.....	75
8.2	Test Procedure	75
8.3	Test Results.....	77
9	FCC §15.407(a) – Maximum Output Power.....	131
9.1	Applicable Standard.....	131
9.2	Test Procedure	132

9.3 Test Results..... 133

10 FCC §15.407(a) – Power Spectral Density 135

10.1 Applicable Standard..... 135

10.2 Test Procedure 136

10.3 Test Results..... 137

1 General Information

1.1 Product Description for Equipment under Test (EUT)

Applicant	Renesas Design Korea Inc.
	7th SiliconPark, 35 Pangyo-ro 255 beon-gil Bundang-gu, Seongnam-si, Gyeonggi-do, 13486
Brand(Trade) Name	Renesas
Product (Equipment)	RRQ61001 Module
Main Model Name	RRQ61001-008
Frequency Range	IEEE 802.11a/n HT20/ac VHT20/ax HE20 Mode:5150 ~ 5250 MHz IEEE 802.11a/n HT20/ac VHT20/ax HE20 Mode:5250 ~ 5350 MHz IEEE 802.11a/n HT20/ac VHT20/ax HE20 Mode:5470 ~ 5725 MHz IEEE 802.11a/n HT20/ac VHT20/ax HE20 Mode:5725 ~ 5850 MHz
Maximum Conducted Average Output Power	5150-5250 MHz: 12.95 dBm 5250-5350 MHz: 17.89 dBm 5470-5725 MHz: 14.42 dBm 5725-5850 MHz: 12.52 dBm
Modulation Technique	IEEE 802.11a Mode: OFDM IEEE 802.11n HT20 Mode: OFDM IEEE 802.11ac VHT20 Mode: OFDM IEEE 802.11ax HE20 Mode: OFDMA
Power Operation (Voltage Range)	☐ AC 120V/60Hz ☐ Adapter ☐ By AC Power Cord ☐ PoE
	☐ DC Type ☐ Battery ☐ DC Power Supply ☐ External from USB Cable ☐ External DC Adapter
	☒ 3.3Vdc
Received Date	Aug 01, 2025
Date of Test	Sep. 22, 2025 ~ Jan. 26, 2026

Note:

*All measurement and test data in this report was gathered from production sample serial number:

RLK250801002-01(Assigned by BACL, Linkou Laboratory).

**802.11ax mode only support full RU.

***This device cannot run both WIFI 2.4G and WIFI 5G simultaneously.

1.2 Objective

This report is prepared on behalf of Renesas Design Korea Inc. in accordance with Part 2, Subpart J, Part 15, Subparts A, and E of the Federal Communication Commission's rules.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020+Cor.1-2023, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. KDB 789033 D02 General UNII Test Procedures New Rules v02r01

1.4 Statement of Compliance

1. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Linkou Laboratory).
2. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.
3. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
4. The determination of the test results does not require consideration of the uncertainty of the measurement, unless the assessment is required by customer agreement, regulation or standard document specification.
5. Bay Area Compliance Laboratories Corp. (Linkou Laboratory) is not responsible for the authenticity of the information provided by the applicant that affects the test results.

1.5 Measurement Uncertainty

Parameter		Uncertainty
AC Mains		±2.98 (dB)
RF output power, conducted		±3.73 (dB)
Power Spectral Density, conducted		±0.65 (dBm)
Occupied Bandwidth		±0.09 (%)
Unwanted Emissions, conducted		±1.03 (dB)
Emissions, radiated	9kHz~30MHz	±3.20 (dB)
	30 MHz~1GHz	±3.30 (dB)
	1 GHz~18 GHz	±4.99 (dB)
	18 GHz~40 GHz	±4.52 (dB)
Temperature		±0.78 (°C)
Humidity		±0.04 (%)

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

1.6 Environmental Conditions

Test Site	Test Date	Temperature (°C)	Relative Humidity (%)	Test Engineer
AC Line Conducted Emissions	2025/10/21	23.6	52	Cedric Xu
Radiation Spurious Emissions	2025/10/07~2026/01/26	19.4~25.0	38~63	Derek
Duty Cycle	2025/09/22	25.3	43	Alan
Emission Bandwidth And Occupied Bandwidth	2025/09/22~2026/01/24	21.5~25.3	43~59	Alan
Maximum Output Power	2025/09/22~2026/01/24	21.5~25.3	43~59	Alan
Power Spectral Density	2025/09/22~2026/01/24	21.5~25.3	43~59	Alan

1.7 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Linkou Laboratory) to collect test data is located on

☒ No.6, Wende 2Rd., Guishan Dist., Taoyuan City 33382, Taiwan (R.O.C.).

Bay Area Compliance Laboratories Corp. (Linkou Laboratory) is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 3546) and the FCC designation No.TW3546 under the Mutual Recognition Agreement (MRA) in FCC Test.

2 System Test Configuration

2.1 Description of Test Configuration

For 5150 ~ 5250MHz

4 channels are provided for 802.11a, 802.11n (HT20) , 802.11ac (VHT20) , 802.11ax (HE20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
40	5200	48	5240

802.11a/n20/ac20/ax20 mode Channel 36, 40, 48 were tested.

For 5250 ~ 5350MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20) , 802.11ax (HE20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	60	5300
56	5280	64	5320

802.11a/n20/ac20/ax20 mode Channel 52, 60, 64 were tested.

For 5470 ~ 5725MHz

11 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20) , 802.11ax (HE20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	124	5620
104	5520	128	5640
108	5540	132	5660
112	5560	136	5680
116	5580	140	5700
120	5600	/	/

802.11a/n20/ac20/ax20 mode Channel 100, 116, 140 were tested.

For 5725 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20) , 802.11ax (HE20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	161	5805
153	5765	165	5825
157	5785	/	/

802.11a/n20/ac20/ax20 mode Channel 149, 157, 165 were tested.

The system was configured for testing in engineering mode, which was provided by manufacturer.

2.2 EUT Exercise Software

The software was used “TeraTerm5”.

UNII Band	Mode	Channel	Frequency (MHz)	Power setting	
UNII-1	802.11a	36	5180	12	
		40	5200	12	
		48	5240	10	
UNII-2A		52	5260	15	
		60	5300	15	
		64	5320	11	
UNII-2C		100	5500	10	
		116	5580	13	
		136	5680	10	
		140	5700	7	
UNII-3		149	5745	10	
		157	5785	12	
		165	5825	12	
UNII-1		802.11n HT20	36	5180	12
			40	5200	12
	48		5240	10	
UNII-2A	52		5260	16	
	60		5300	16	
	64		5320	12	
UNII-2C	100		5500	10	
	116		5580	13	
	136		5680	10	
	140		5700	7	
UNII-3	149		5745	10	
	157		5785	12	
	165		5825	12	
UNII-1	802.11ac VHT20		36	5180	12
			40	5200	12
		48	5240	10	
UNII-2A		52	5260	14	
		60	5300	14	
		64	5320	11	
UNII-2C		100	5500	10	
		116	5580	13	
		136	5680	10	
		140	5700	7	
UNII-3		149	5745	10	
		157	5785	12	
		165	5825	12	
UNII-1		802.11 ax HE20	36	5180	12

		40	5200	12
		48	5240	10
UNII-2A		52	5260	14
		60	5300	14
		64	5320	11
UNII-2C		100	5500	10
		116	5580	13
		136	5680	10
		140	5700	7
UNII-3		149	5745	10
		157	5785	12
		165	5825	12

The worst case data rates are as follows:

802.11a: 6Mbps

802.11n HT20: MCS0

802.11ac VHT20: MCS0

802.11ax HE20: MCS0

2.3 Equipment Modifications

No modification was made to the EUT.

2.4 Test Mode

Mode 1: Full System (model: RRQ61001-008) for all test item.

2.5 Support Equipment List and Details

No.	Description	Manufacturer	Model
1	Notebook (Lab provided)	DELL	E6410
2	Notebook (Lab provided)	Acer	N16Q1
3	Test Development Board (Customer provided)	RENESAS	EK-RQ61 565-11-C-0001 Ver 3.1
4	DaughterBoard (Customer provided)	RENESAS	RRQ610x1 565-16-B

2.6 External Cable List and Details


No.	Description	Manufacturer	Model
1	USB-A to C cable (Customer provided)	VENTION	COZ

2.7 Block Diagram of Test Setup


See test photographs attached in setup photos for the actual connections between EUT and support equipment.

Radiation:


Below 1GHz

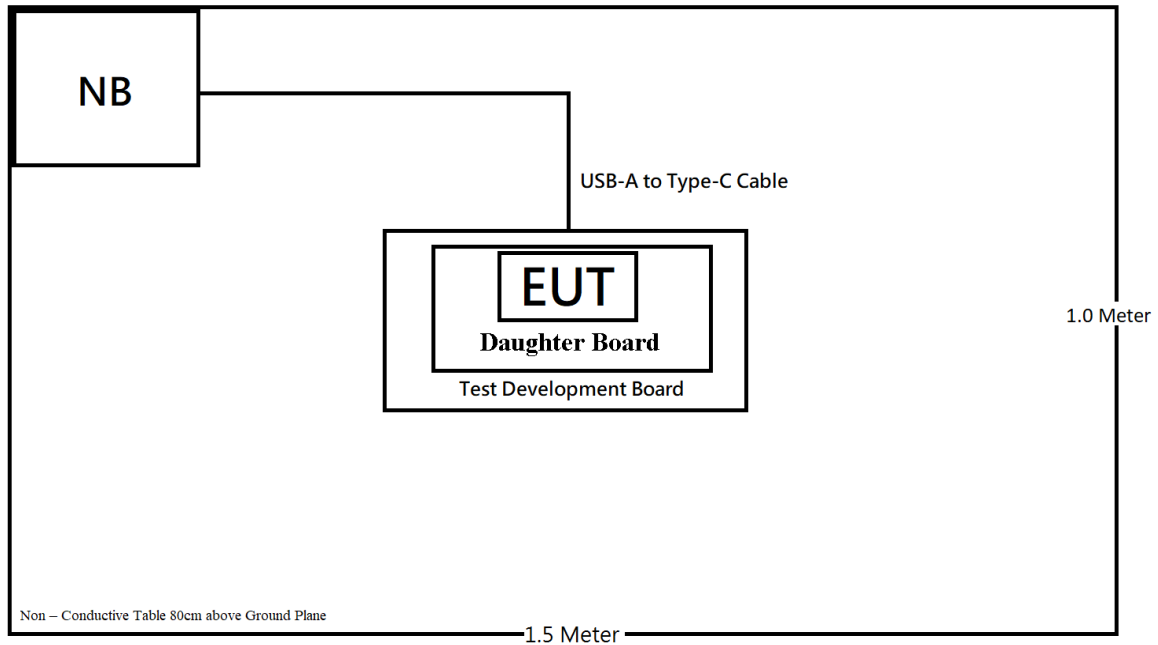


Above 1GHz:

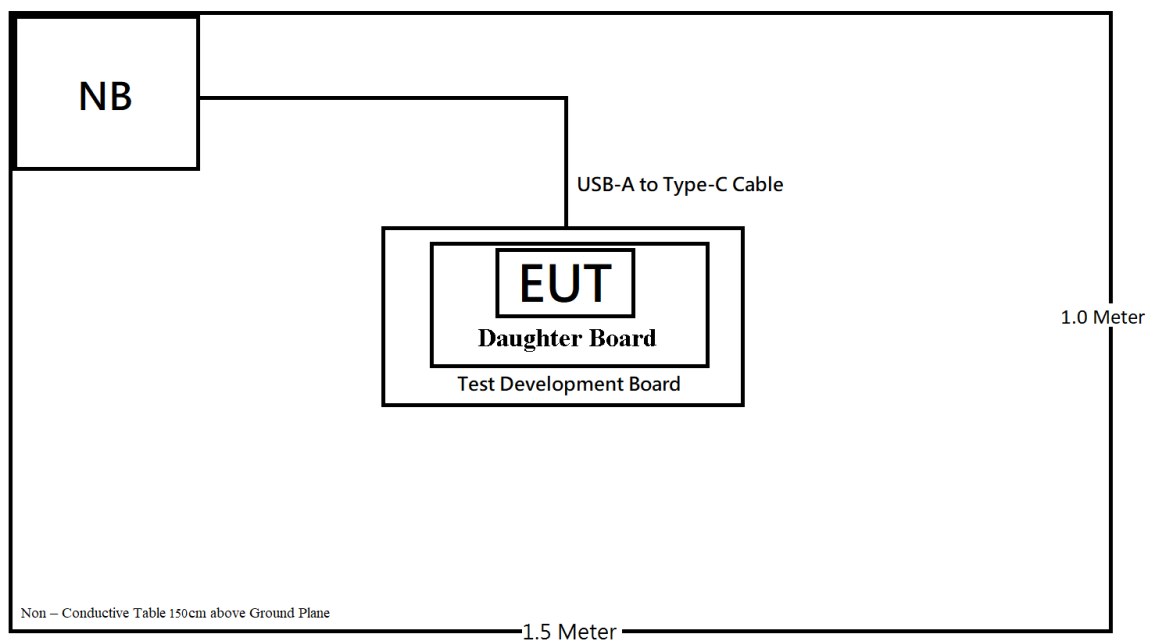

Conduction:

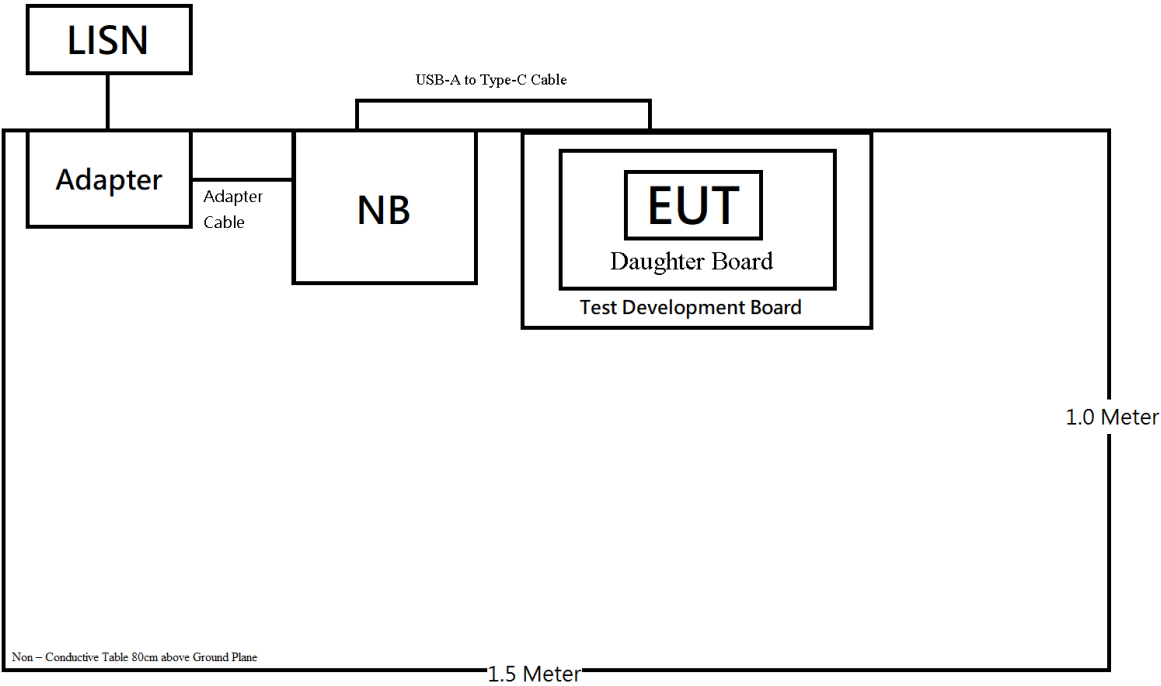

Conducted:

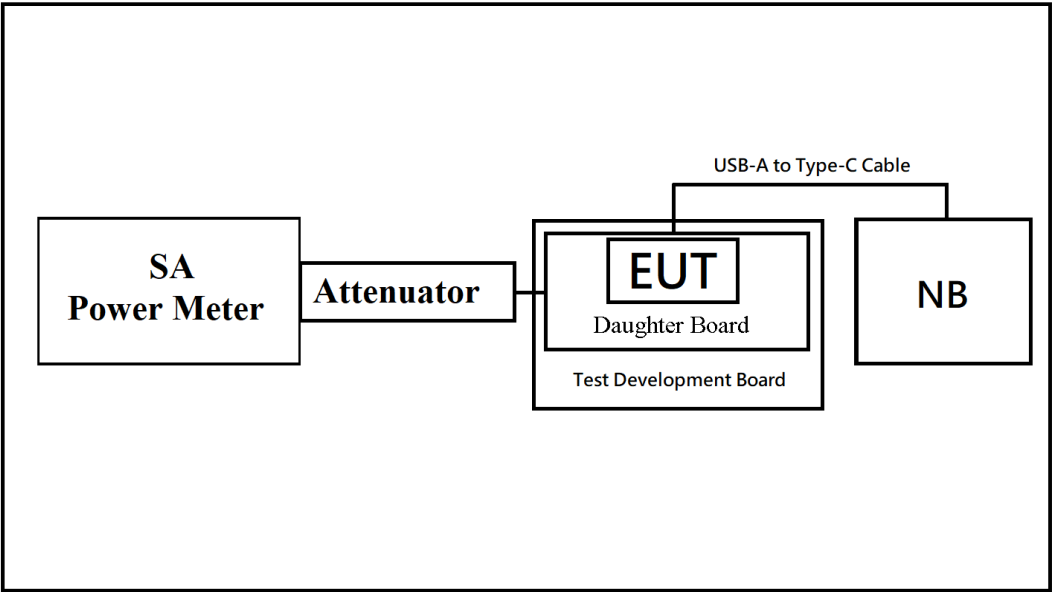

Radio Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T VBW Seting (kHz)	1/T (kHz)
802.11a	0.695	0.722	96	0.18	3	1.44
802.11 n20	0.292	0.319	92	0.36	5	3.42
802.11 ac20	3.752	3.779	99	0	3	0.27
802.11 ax20	2.842	2.869	99	0	3	0.35

Please refer to the following plots.

Spectrum

Ref Level 30.00 dBm Offset 2.64 dB RBW 10 MHz
 Att 40 dB SWT 3 ms VBW 10 MHz

SGL

1Pk Clrw


19.50 dBm
 979.00 μ s
 -0.58 dB
 695.00 μ s

CF 5.18 GHz 1001 pts 300.0 μ s/


Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	979.0 μ s	19.50 dBm		
D1	M1	1	695.0 μ s	-0.58 dB		
D2	M1	1	722.0 μ s	-0.00 dB		


802.11 n20 Mode

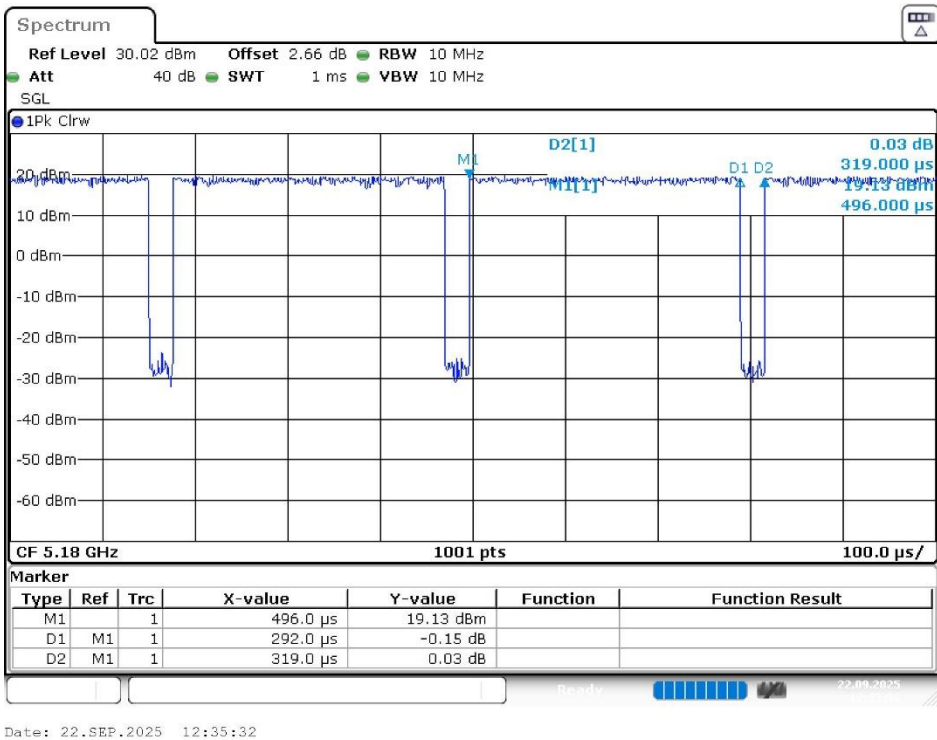

802.11 ac20 Mode

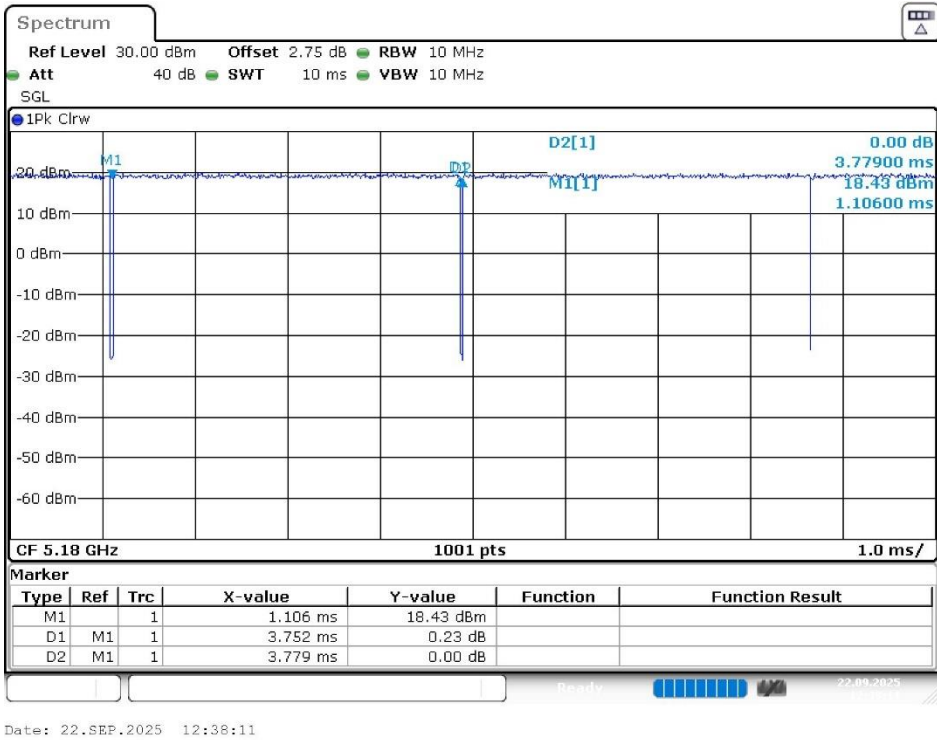

802.11 ax20 Mode

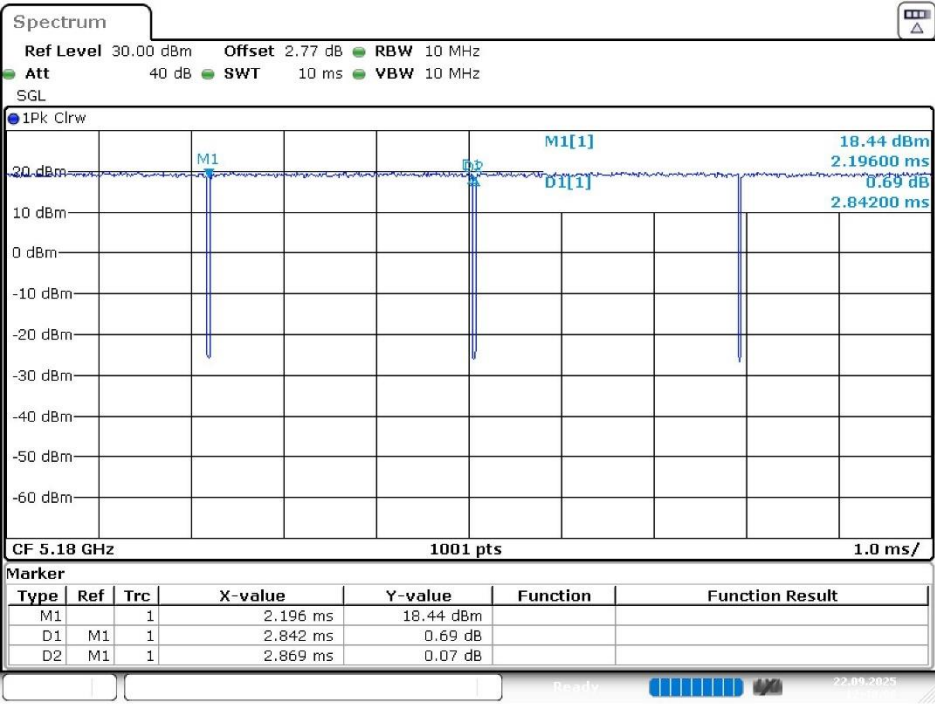

Date: 22.SEP.2025 12:40:01

3 Summary of Test Results

Standard(s) Section	Description of Test	Results
§15.203	Antenna Requirement	Compliance
§15.407(b)(9) & §15.207(a)	AC Line Conducted Emissions	Compliance
§15.205 & §15.209 & §15.407(b)	Unwanted Emission	Compliance
§15.407(a)(e)	Emission Bandwidth	Compliance
§15.407(a)	Conducted Transmitter Output Power	Compliance
§15.407(a)	Power Spectral Density	Compliance

4 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conduction Room (CON-A)					
Pulse Limiter	SCHWARZBECK	VTSD 9561-F	00432	2025/08/14	2026/8/14
ESR EMI Test Receiver	Rohde & Schwarz	ESCI7	100769	2025/04/02	2026/4/2
RF Cable	EMCI	EMCCFD300-BM-BM-3000	221013	2025/10/16	2026/10/16
Two-Line V-Network	Rohde & Schwarz	ENV216	100037	2025/09/15	2026/9/15
Software	Audix	e3 v9	E3LK-03	N.C.R	N.C.R
Radiation 3M Room (966-B)					
Bilog Antenna & 6 dB Attenuator	SUNOL SCIENCES & EMCI	JB3 & N-6-06	A071318 & AT-N0670	2025/08/14	2026/08/14
Active Loop Antenna	ETS-Lindgren	6502	0001-3322	2025/03/27	2026/03/27
Horn Antenna	ETS-Lindgren	3115	85775	2025/10/03	2026/10/03
Horn Antenna	ETS-Lindgren	3160-09	123853	2025/08/28	2026/08/28
Horn Antenna	ETS-Lindgren	3160-10	123856	2025/08/28	2026/08/28
18-40GHz Preamplifier	GLOBAL	1313-A1840	5031371	2025/04/28	2026/04/28
30M-18GHz Preamplifier	A.H. Systems	PAM-0118P	479	2025/09/05	2026/09/05
ESR EMI Test Receiver	Rohde & Schwarz	ESR3	102430	2025/04/25	2026/04/25
Spectrum Analyzer	Rohde & Schwarz	FSV40	101456	2025/06/05	2026/06/05
Microflex Cable (1m)	EMCI	EMCI02-KM-KM-1000	180524	2025/08/01	2026/08/01
Microflex Cable (2m)	EMCI	EMCI06-SM-SM-2000	180516	2025/08/01	2026/08/01
Microflex Cable (8m)	UTIFLEX	UFA210A-1-3149-300300	MFR 64639 232490-002	2025/08/01	2026/08/01
Software	AUDIX	E3 V9	E3LK-02	N.C.R	N.C.R
-10dB Attenuator	MTJ	MTJ604-10	004	2025/04/07	2026/04/07
Band Reject Filter	MICRO-TRONICS	BRM50716	G444	2025/04/30	2026/04/30
Conducted Room					
Cable	MTJ	MT40S	620620-MT40S-100	2024/12/26	2026/01/05
Cable	MTJ	MT40S	620620-MT40S-100	2026/01/05	2027/01/05
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV40	101457	2024/12/04	2025/12/04
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV40	101457	2025/12/03	2026/12/03
USB Wideband Power Sensor	AGILENT	U2021XA	MY54080011	2025/08/26	2026/08/26
10dB Attenuator	MCL	BW-S10W5+	605	2025/04/14	2026/04/14

***Statement of Traceability:** BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to the SI System of Units via the R.O.C. Center for Measurement Standards of the Electronics Testing Center, Taiwan (ETC) or to another internationally recognized National Metrology Institute (NMI), and were compliant with the current Taiwan Accreditation Foundation (TAF) requirements.

5 FCC §15.203 – Antenna Requirements

5.1 Applicable Standard

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

5.2 Antenna Information

Manufacturer	Model	Antenna Type	Antenna Gain (dBi)
Renesas	RRQ610x1-008	PCB Antenna	5150~5250 MHz: 3.4 dBi 5250~5350 MHz: 3.4 dBi 5470~5725 MHz: 3.4 dBi 5725~5850 MHz: 3.4 dBi

Unit use of a permanently attached antenna

Result: Compliance

6 FCC§15.207 – AC Line Conducted Emissions

6.1 Applicable Standard

As per FCC §15.207


Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency.

6.2 EUT Setup

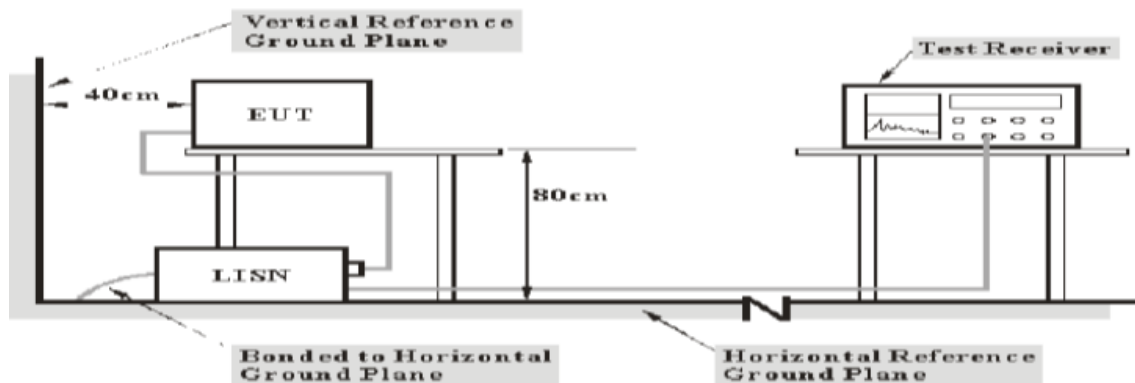

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2020+Cor.1-2023 measurement procedure. The specification used was with the FCC Part 15.207 limits.

6.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150kHz to 30MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations

Frequency Range	IF B/W
150kHz – 30MHz	9kHz

6.4 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

6.5 Factor & Over Limit Calculation

The factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “Over Limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for Over Limit calculation is as follows:


$$\text{Over Limit} = \text{Level} - \text{Limit Line}$$

6.6 Test Results

Test Mode: Transmitting


UNII-1 Band I 5150~5250 MHz



(Worst case is 802.11a mode 5180 MHz)

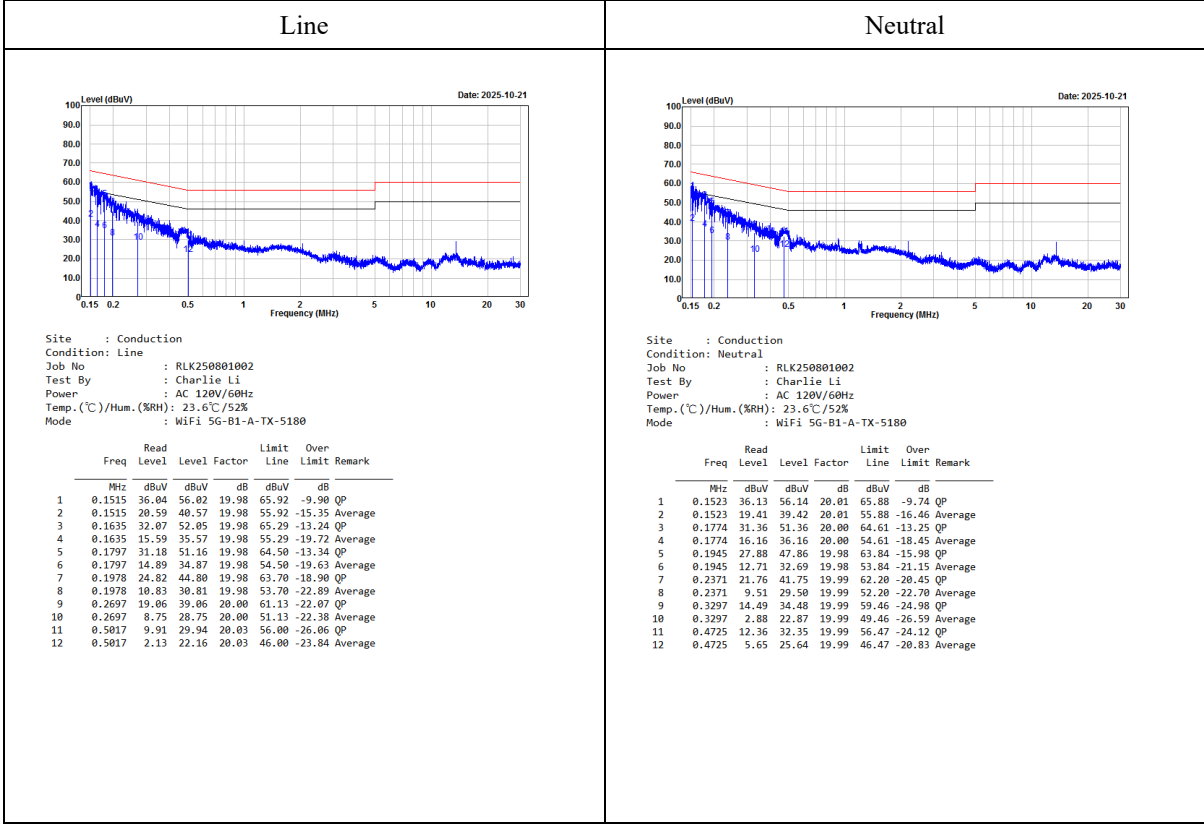

UNII-2A Band II 5250~5350 MHz

(Worst case is 802.11 n20 mode 5300 MHz)

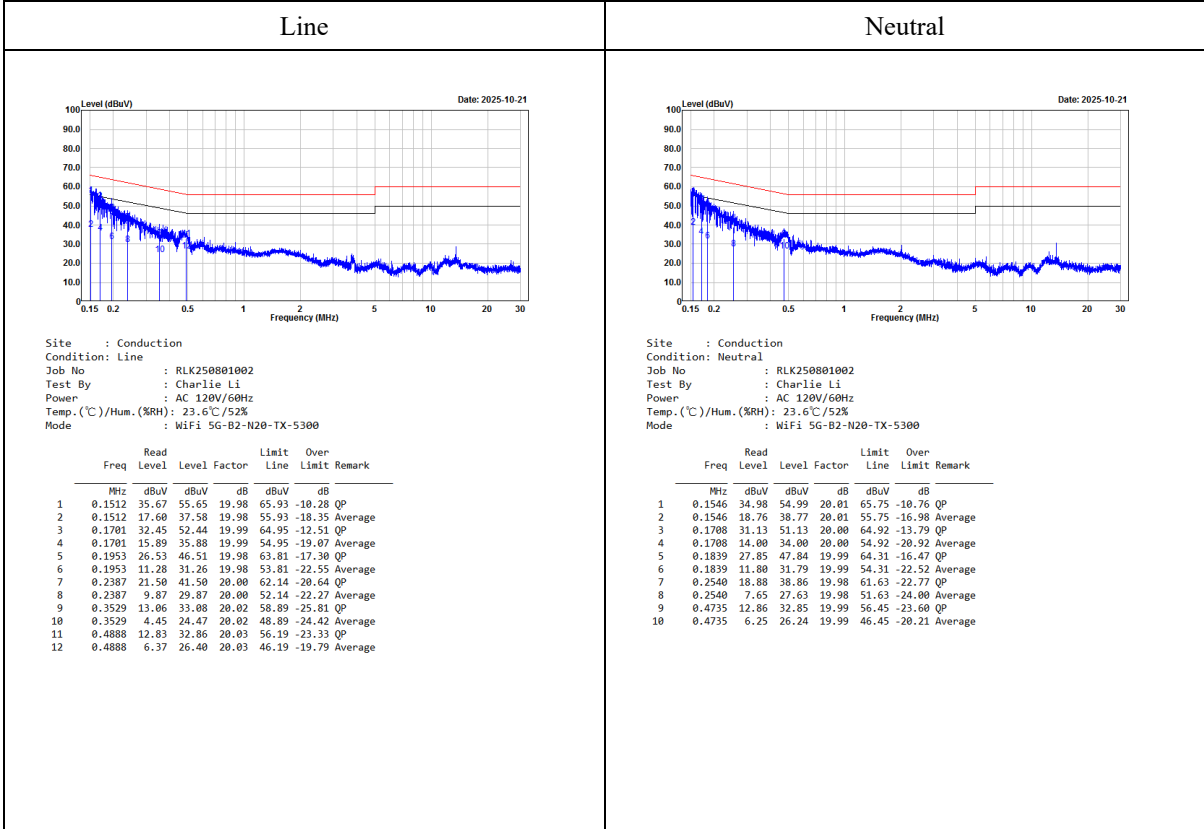

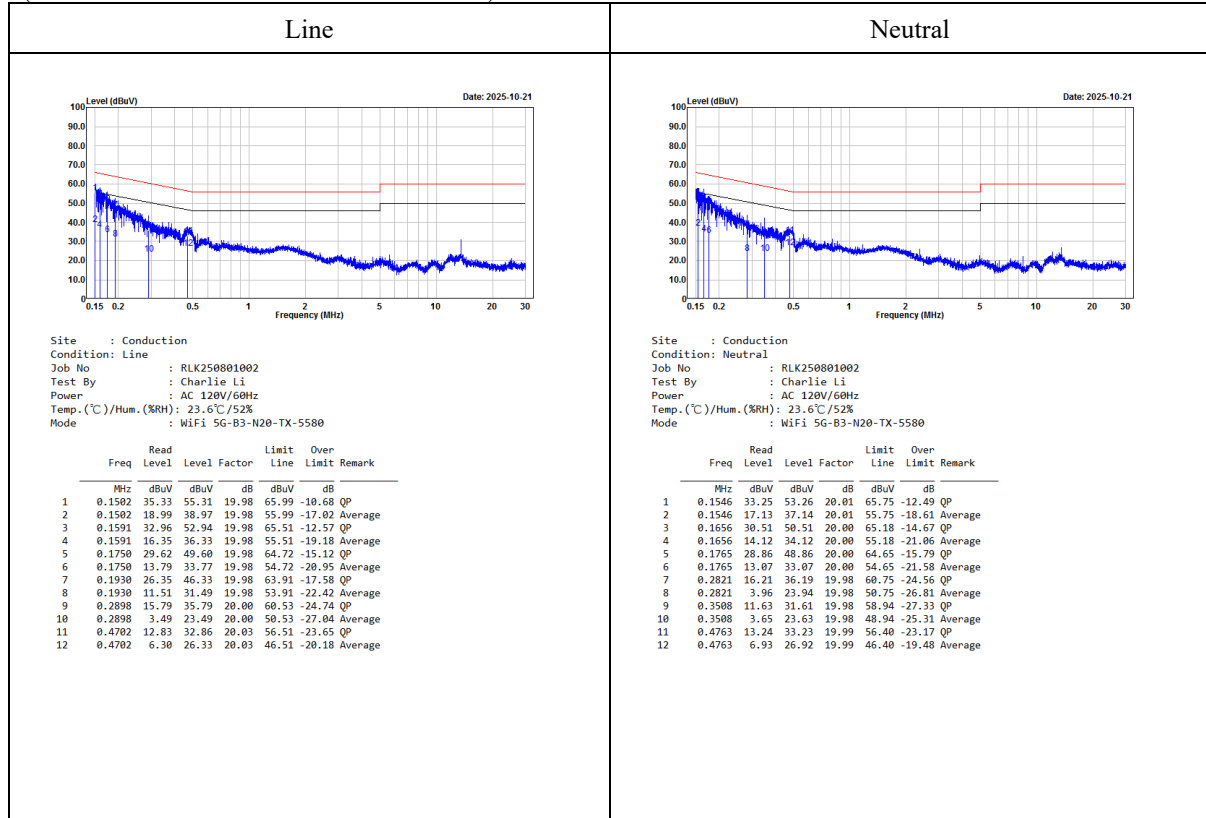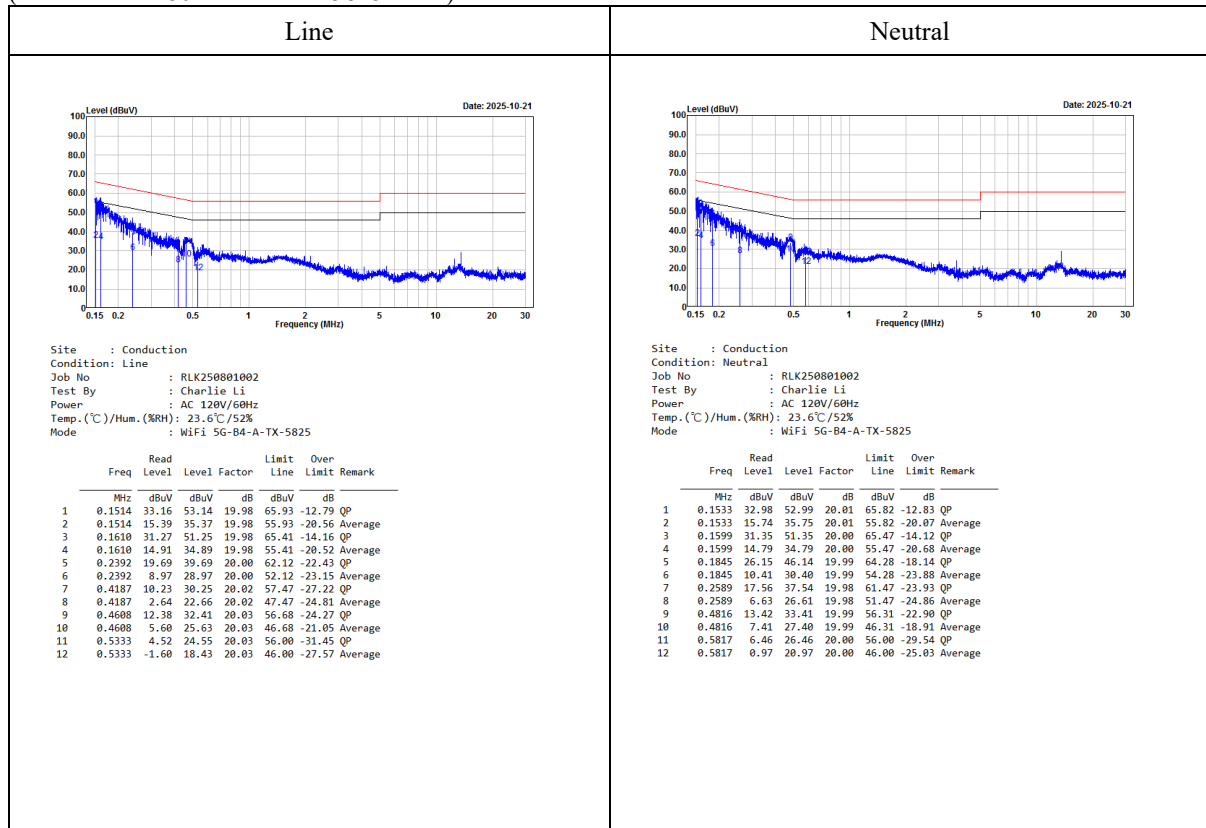UNII-2C Band III 5470~5725 MHz
(Worst case is 802.11 n20 mode 5580 MHz)**UNII-3 Band IV 5725~5850 MHz**
(Worst case is 802.11 a mode 5825 MHz)

Note:

Result = Reading + Factor

Over Limit = Result - Limit Line

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator

Note: It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.
(Linkou Laboratory)

7 FCC §15.209, §15.205, §15.407(b) – Spurious Emissions

7.1 Applicable Standard

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	608 – 614	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	960 – 1240	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	1300 – 1427	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1435 – 1626.5	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1645.5 – 1646.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1660 – 1710	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1718.8 – 1722.2	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	2200 – 2300	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2310 – 2390	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2483.5 – 2500	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2690 – 2900	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	3260 – 3267	22.01 – 23.12
8.41425 – 8.41475	162.0125 – 167.17	3.332 – 3.339	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3.3458 – 3.358	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3.600 – 4.400	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4		Above 38.6
13.36 – 13.41	399.9 – 410		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

Note 1: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

According to ANSI C63.10-2020+Cor.1-2023, section 5.3.3

Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field, and the emissions to be measured can be detected by the measurement equipment (see 4.3.4).

Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. Measurements from 18 GHz to 40 GHz are typically made at distances significantly less than 3 m from the EUT. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance

Note: It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

(Linkou Laboratory)

using an extrapolation factor of 20 dB/decade of distance (inverse of linear distance for field-strength measurements or inverse of linear distance-squared for power-density measurements).

As per FCC Part 15.407 (b)

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.


Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

7.2 EUT Setup


9kHz-30MHz:

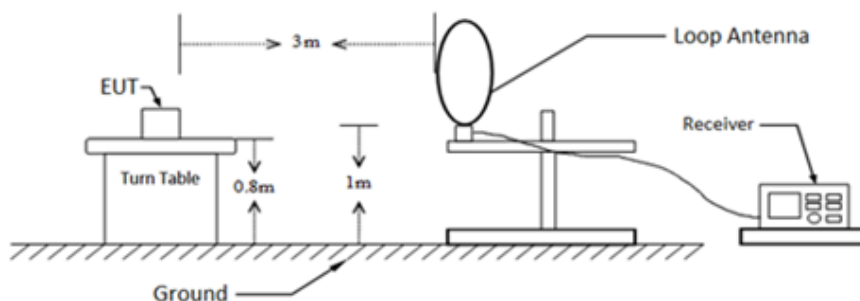


30MHz-1GHz:

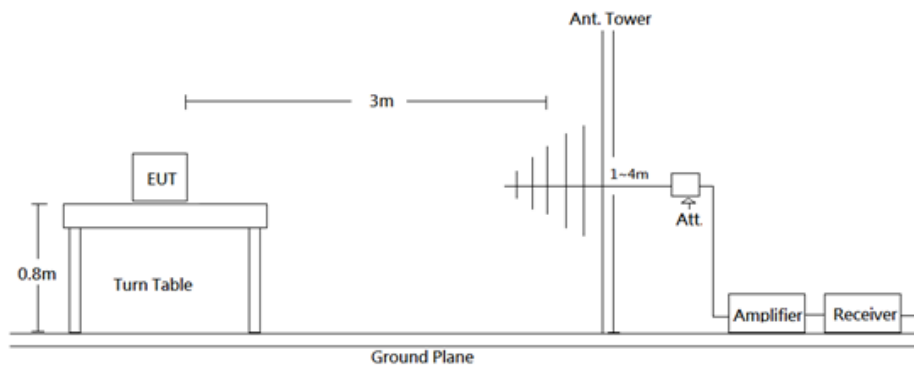

1-18 GHz:

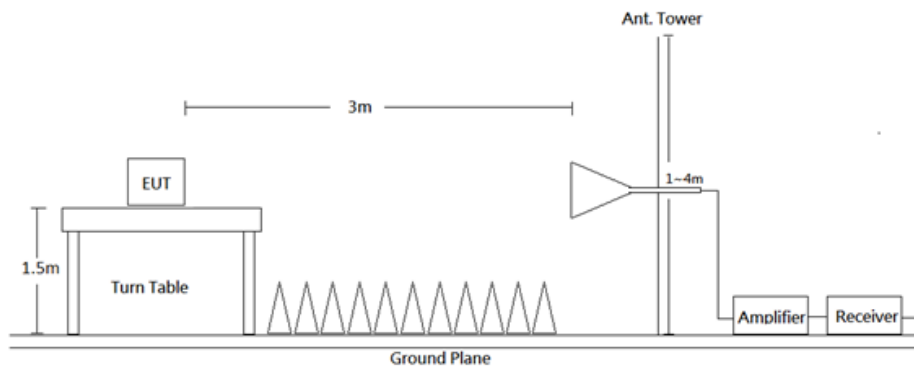

18-40 GHz:

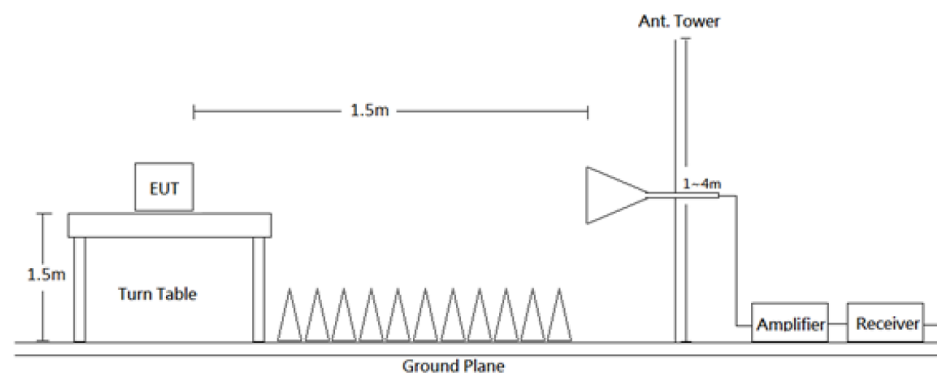

Radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2020+Cor.1-2023. The specification used was the FCC Part 15.209, FCC 15.407 Limits.

7.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 40 GHz. During the radiated emission test, the EMI test receiver was set with the following configurations measurement method 6.3 in ANSI C63.10-2020+Cor.1-2023.

Frequency Range	RBW	VBW	Duty cycle	Measurement method	Detector
9 kHz - 150 kHz	200 Hz/300 Hz	1 kHz	/	QP/AV	QP/AV
150 kHz - 30 MHz	9 kHz/10 kHz	30 kHz	/	QP/AV	QP/AV
30-1000 MHz	120 kHz	500 kHz	/	QP	QP
Above 1 GHz	Pre-scan :				
	1 MHz	3 MHz	/	PK	PK
	1 MHz	1 kHz	>98%	Ave	PK
	1 MHz	$\geq 1/\text{Ton}$, not less than 1 Hz	<98%	Ave	PK
	Final measurement for emission identified during pre-scan :				
	1 MHz	3 MHz	/	PK	PK
	1 MHz	10 Hz	>98%	Ave	PK
	1 MHz	$\geq 1/\text{Ton}$	<98%	Ave	PK

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

7.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in Quasi-peak and average detector mode from 9 kHz to 30 MHz, Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

According to C63.10-2020+Cor.1-2023, emission shall be computed as: $E [\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2$, for $d = 3$ meters.

All emissions under the average limit and under the noise floor have not recorded in the report

7.5 Factor & Over Limit Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Over Limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit}$$


7.6 Test Results

Test Mode: Transmitting


(Pre-scan with three orthogonal axis, and worse case as X axis.)

9kHz-30MHz: (Pre-scan using three directional polarities, worst case as ground parallel.)


UNII-1 Band I 5150~5250 MHz (Worst case is 802.11a Mode, 5180 MHz)

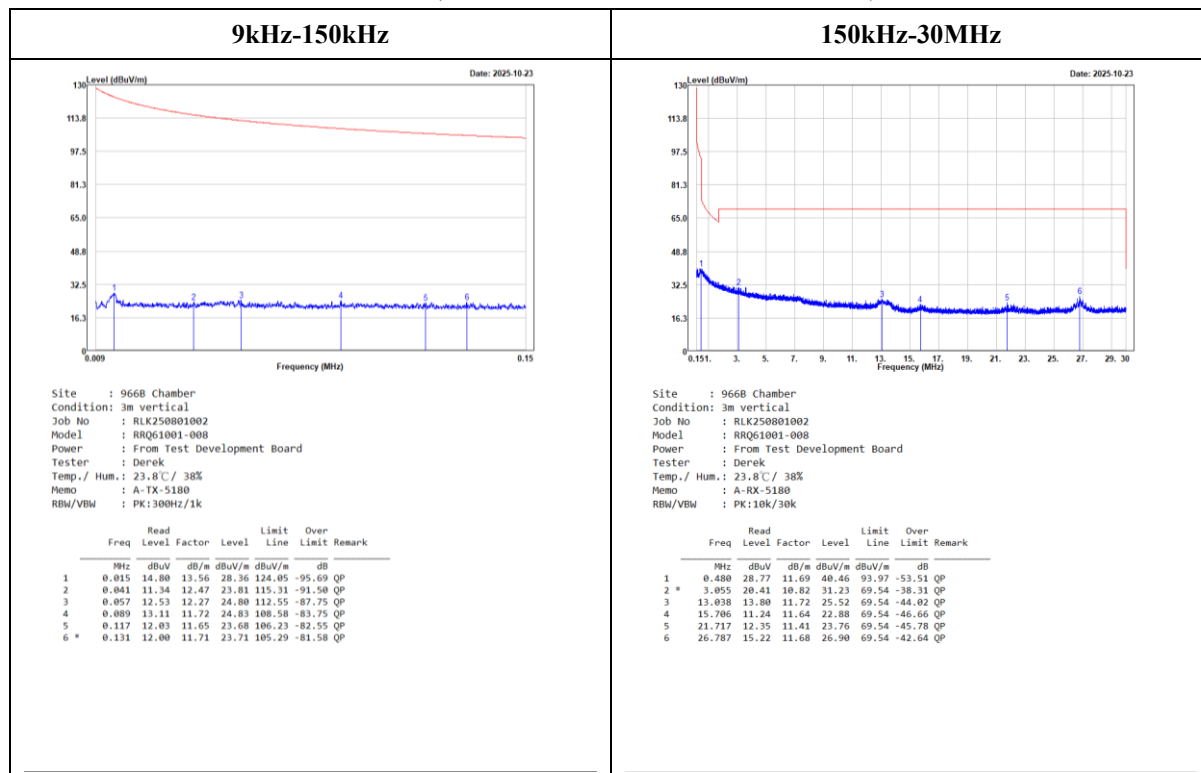


UNII-2A Band II 5250~5350 MHz (Worst case is 802.11n20 Mode, 5300 MHz)

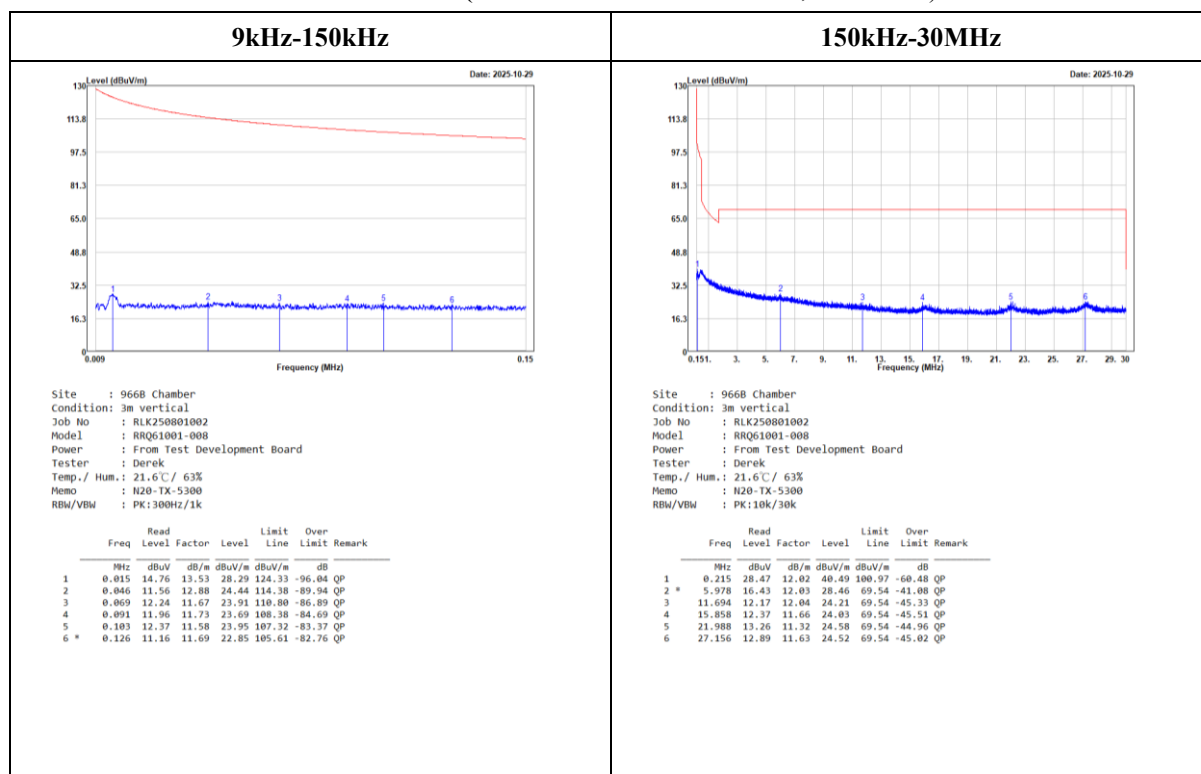

UNII-2C Band III 5470~5725 MHz (Worst case is 802.11n20 Mode, 5580 MHz)

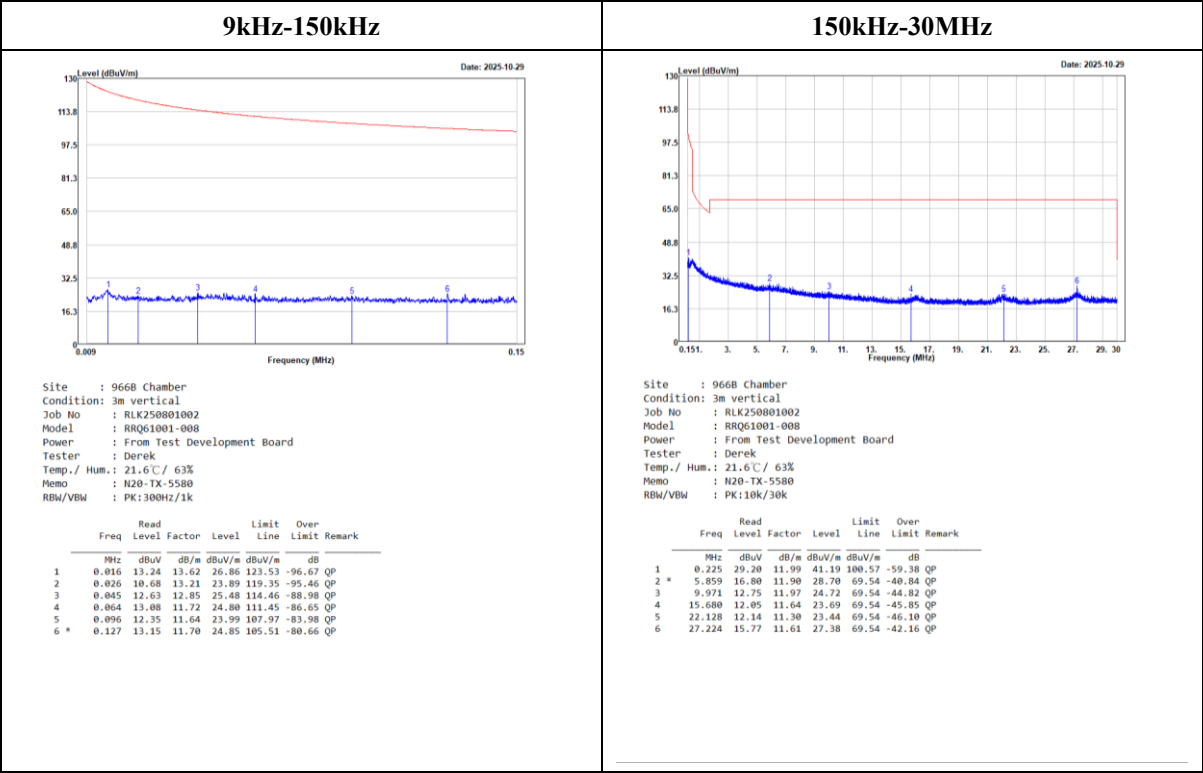


UNII-3 Band IV 5725~5850 MHz (Worst case is 802.11a Mode, 5825 MHz)

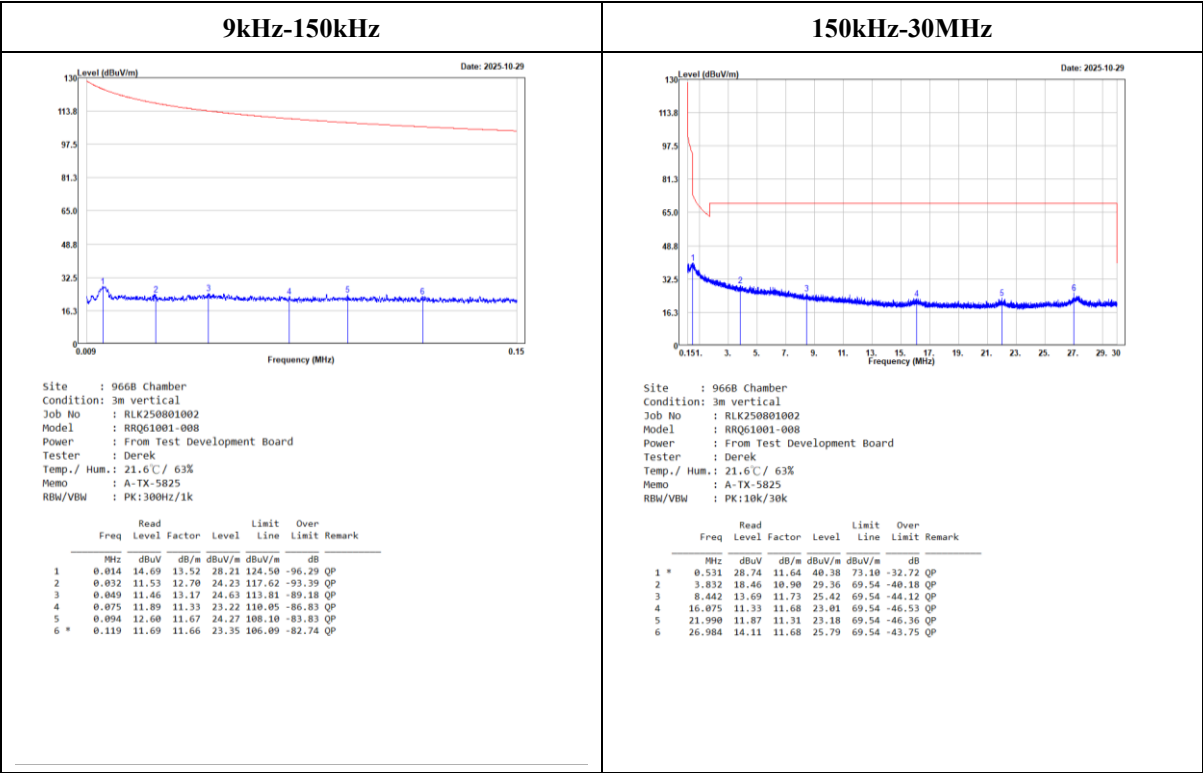


30MHz-1GHz:


UNII-1 Band I 5150~5250 MHz (Worst case is 802.11a Mode)

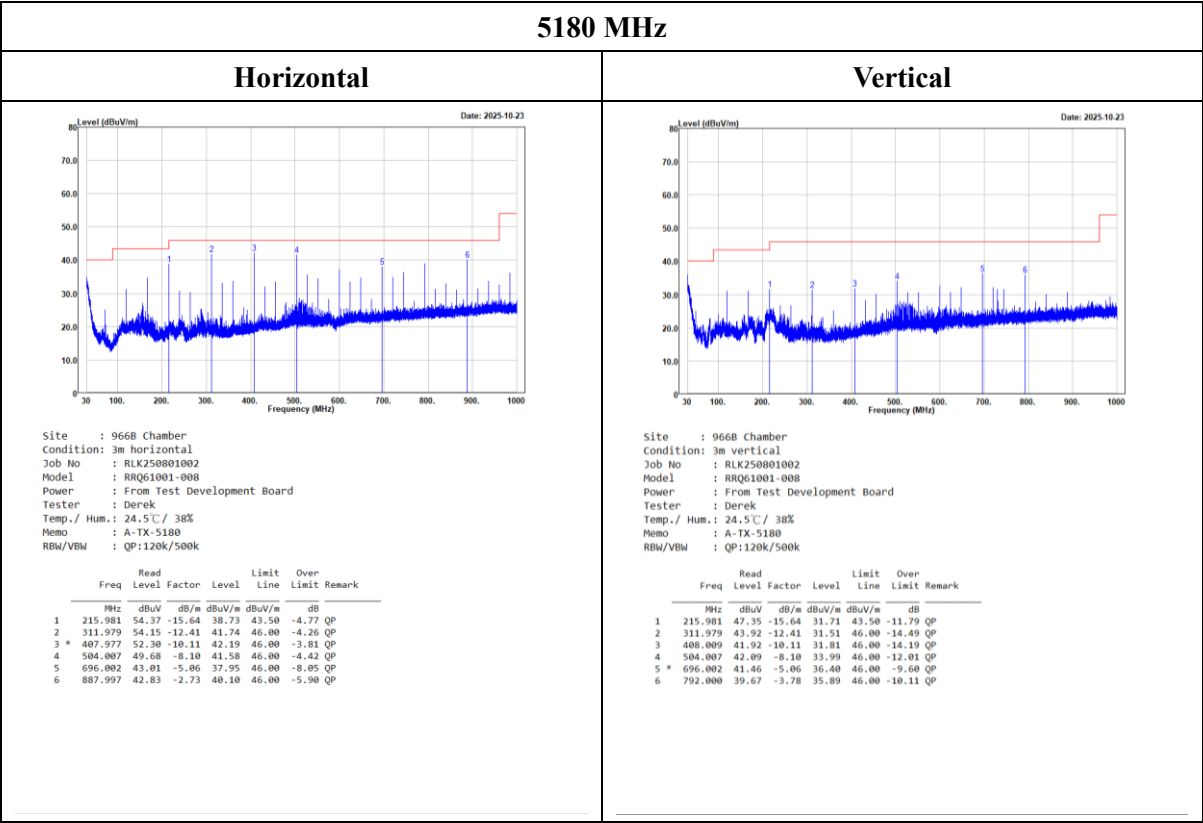


UNII-2A Band II 5250~5350 MHz (Worst case is 802.11n20 Mode)

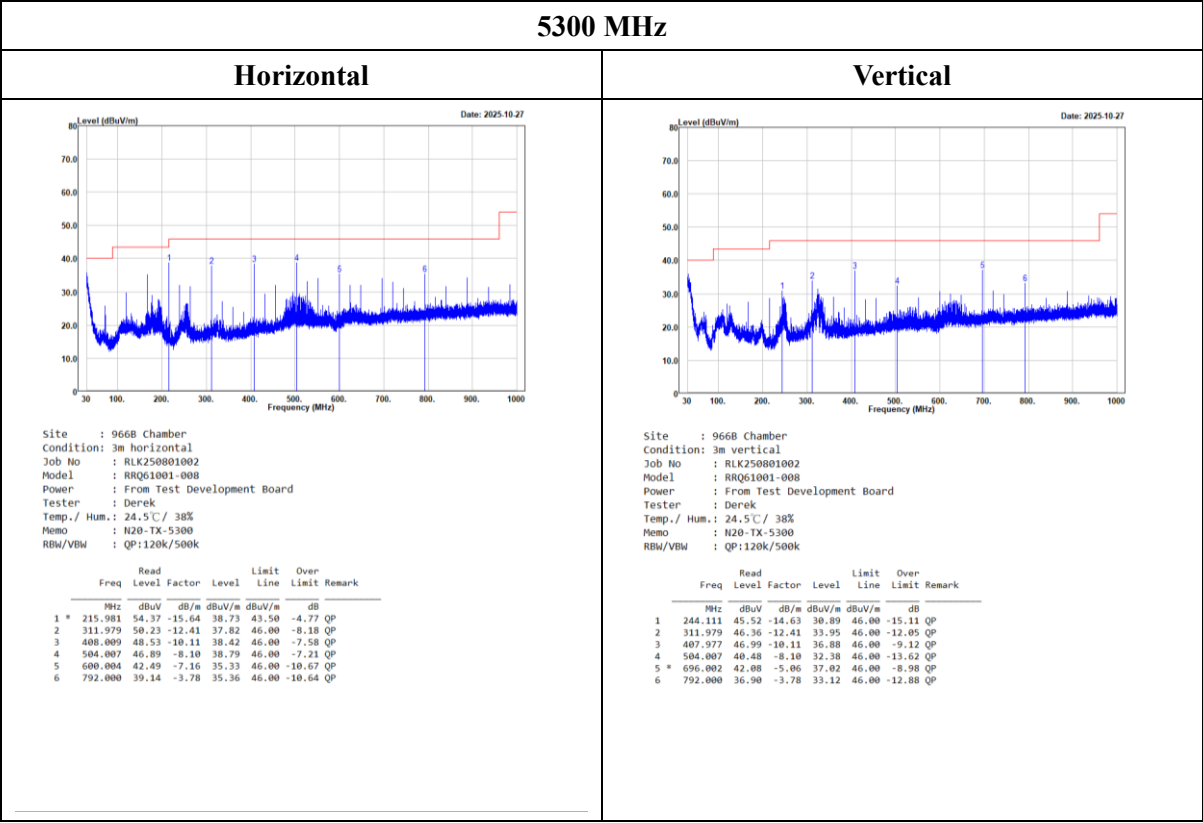

UNII-2C Band III 5470~5725 MHz (Worst case is 802.11n20 Mode)

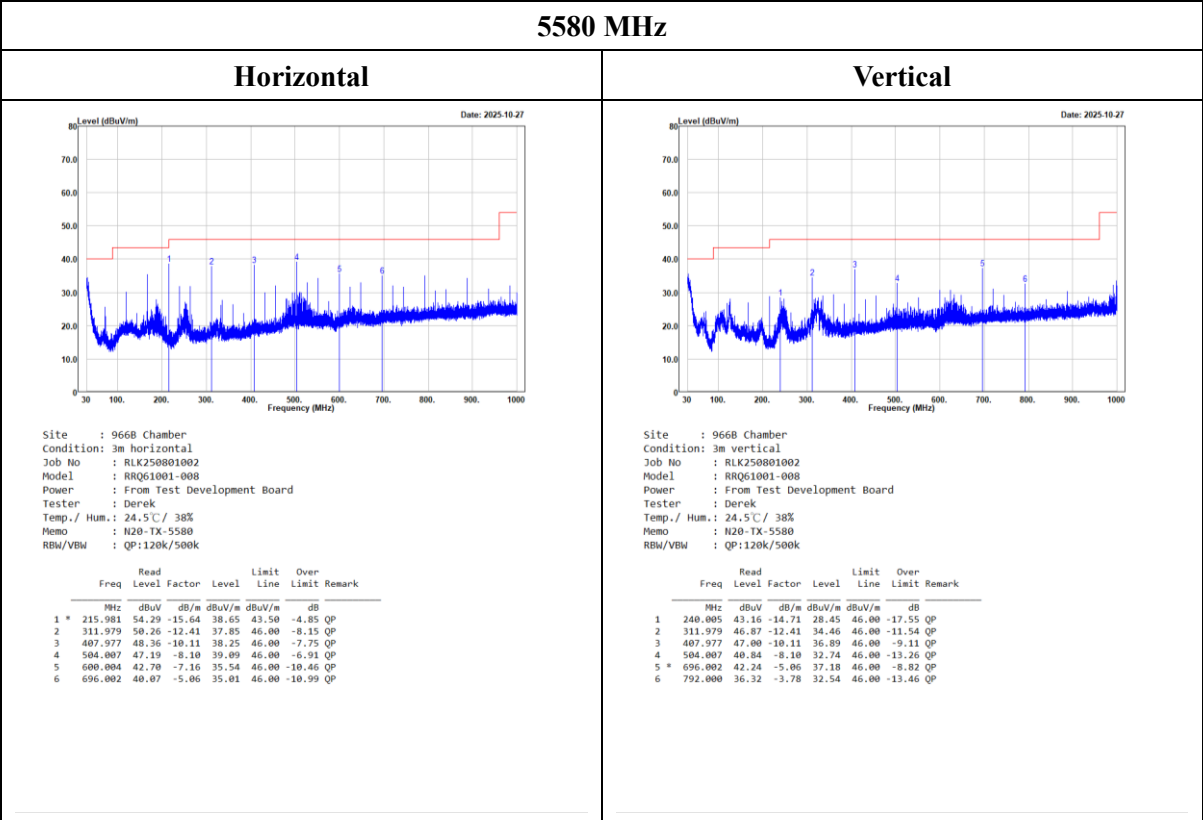

UNII-3 Band IV 5725~5850 MHz (Worst case is 802.11a Mode)

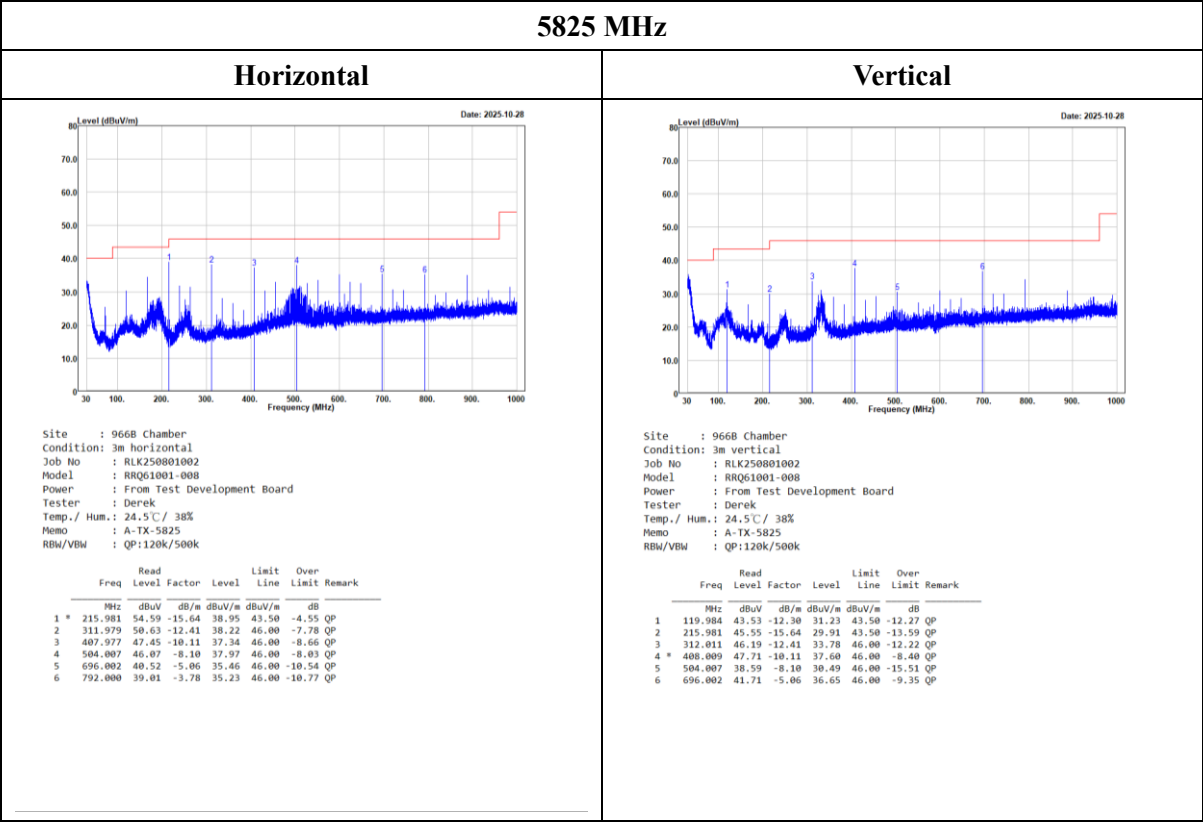

Level = Reading + Factor.



Over Limit = Level – Limit.

Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Note: It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Linkou Laboratory)


Band-Edge

5150-5250 MHz

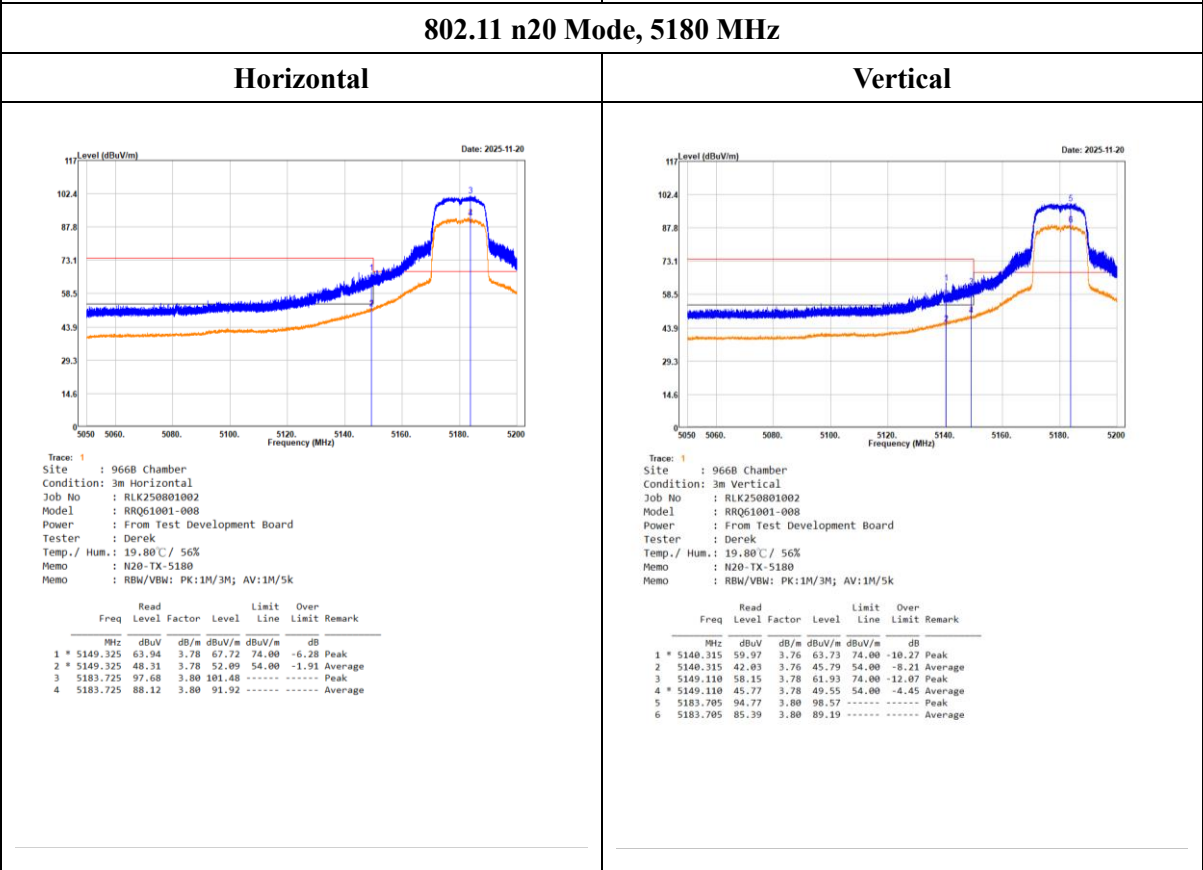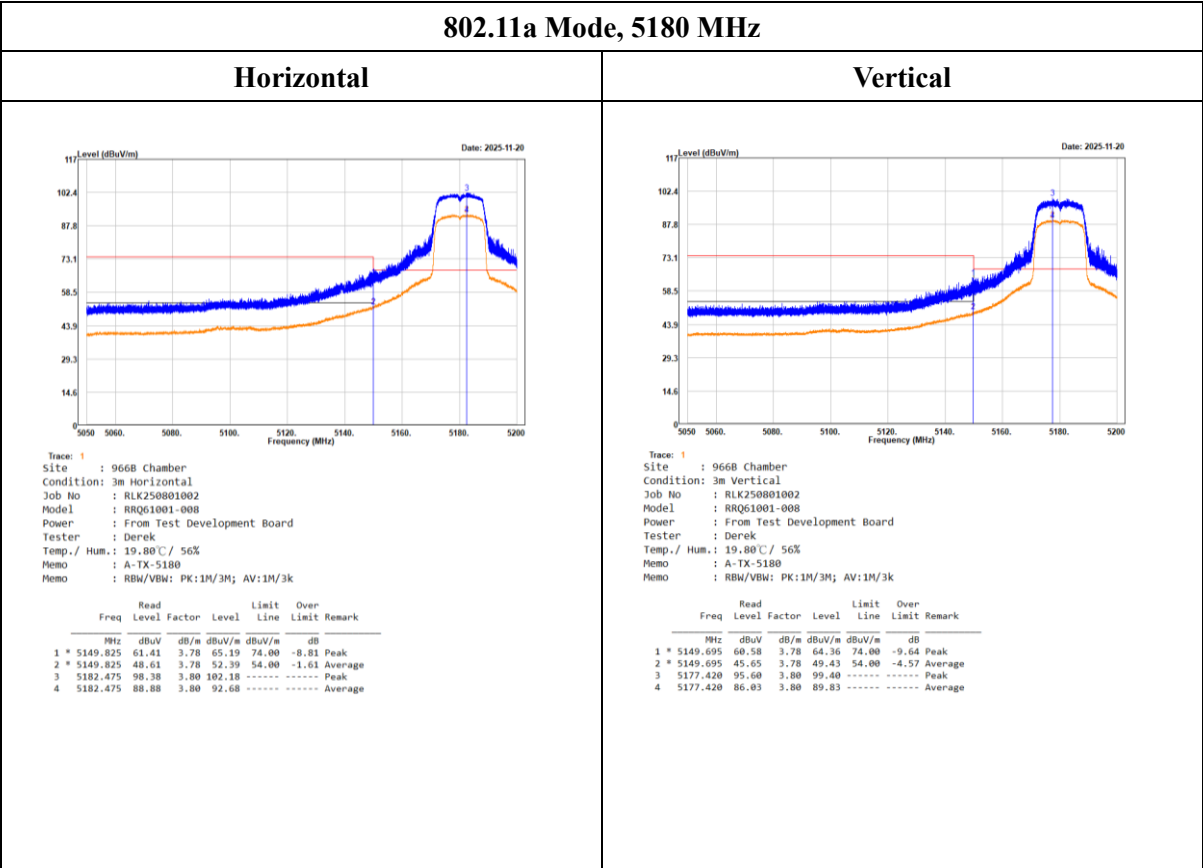

802.11 ac20 Mode, 5180 MHz


Horizontal

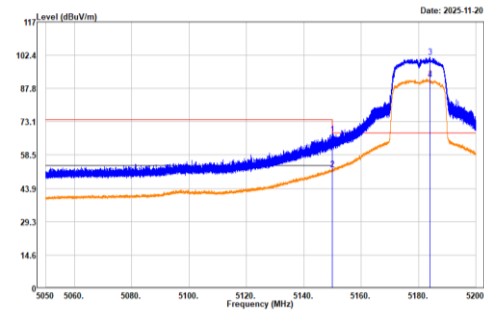

Trace: 1
Site : 966B Chamber
Condition: 3m Horizontal
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 19.80°C/ 56%
Memo : AC20-TX-5180
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read		Level	Limit		Over	Remark
	Freq	Level Factor		Line	Line		
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 *	5149.845	63.97	3.78	67.75	74.00	-6.25	Peak
2 *	5149.845	48.52	3.78	52.30	54.00	-1.70	Average
3	5183.925	97.74	3.80	101.54	-----	-----	Peak
4	5183.925	88.09	3.80	91.89	-----	-----	Average

Vertical

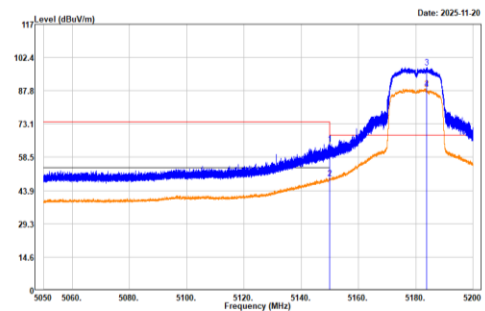


Trace: 1
Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 19.80°C/ 56%
Memo : AC20-TX-5180
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read		Level	Limit		Over	Remark
	Freq	Level Factor		Line	Line		
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 *	5149.845	60.74	3.78	64.52	74.00	-9.48	Peak
2 *	5149.845	45.62	3.78	49.40	54.00	-4.60	Average
3	5183.925	94.32	3.80	98.12	-----	-----	Peak
4	5183.925	84.72	3.80	88.52	-----	-----	Average

802.11 ax20 Mode, 5180 MHz


Horizontal

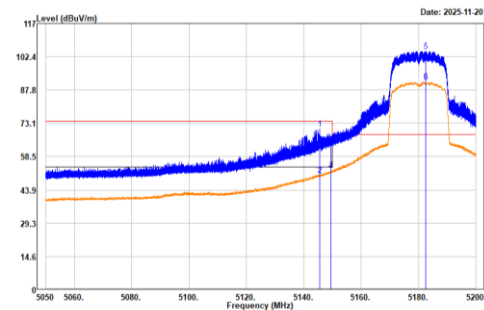

Trace: 1
Site : 966B Chamber
Condition: 3m Horizontal
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 19.80°C/ 56%
Memo : AX20-TX-5180
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read		Level	Limit		Over	Remark
	Freq	Level Factor		Line	Line		
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 *	5145.445	67.01	3.77	70.78	74.00	-3.22	Peak
2	5145.445	46.50	3.77	50.27	54.00	-3.73	Average
3	5149.405	60.00	3.78	63.86	74.00	-10.14	Peak
4 *	5149.405	48.68	3.78	52.46	54.00	-1.54	Average
5	5182.505	100.98	3.80	104.78	-----	-----	Peak
6	5182.505	87.60	3.80	91.40	-----	-----	Average



Vertical

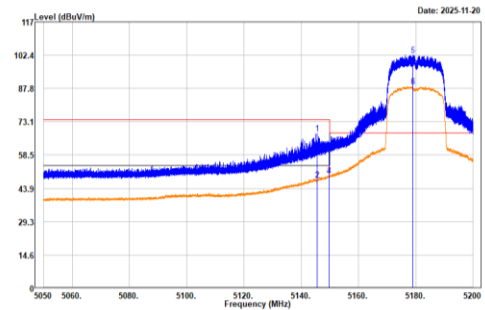

Trace: 1
Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 19.80°C/ 56%
Memo : AX20-TX-5180
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k


	Read		Level	Limit		Over	Remark
	Freq	Level Factor		Line	Line		
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 *	5145.400	64.25	3.77	68.02	74.00	-5.98	Peak
2	5145.400	43.88	3.77	47.65	54.00	-6.35	Average
3	5149.730	56.68	3.78	60.46	74.00	-13.54	Peak
4 *	5149.730	45.64	3.78	49.42	54.00	-4.58	Average
5	5178.895	98.60	3.80	102.40	-----	-----	Peak
6	5178.895	84.87	3.80	88.67	-----	-----	Average

5250~5350 MHz

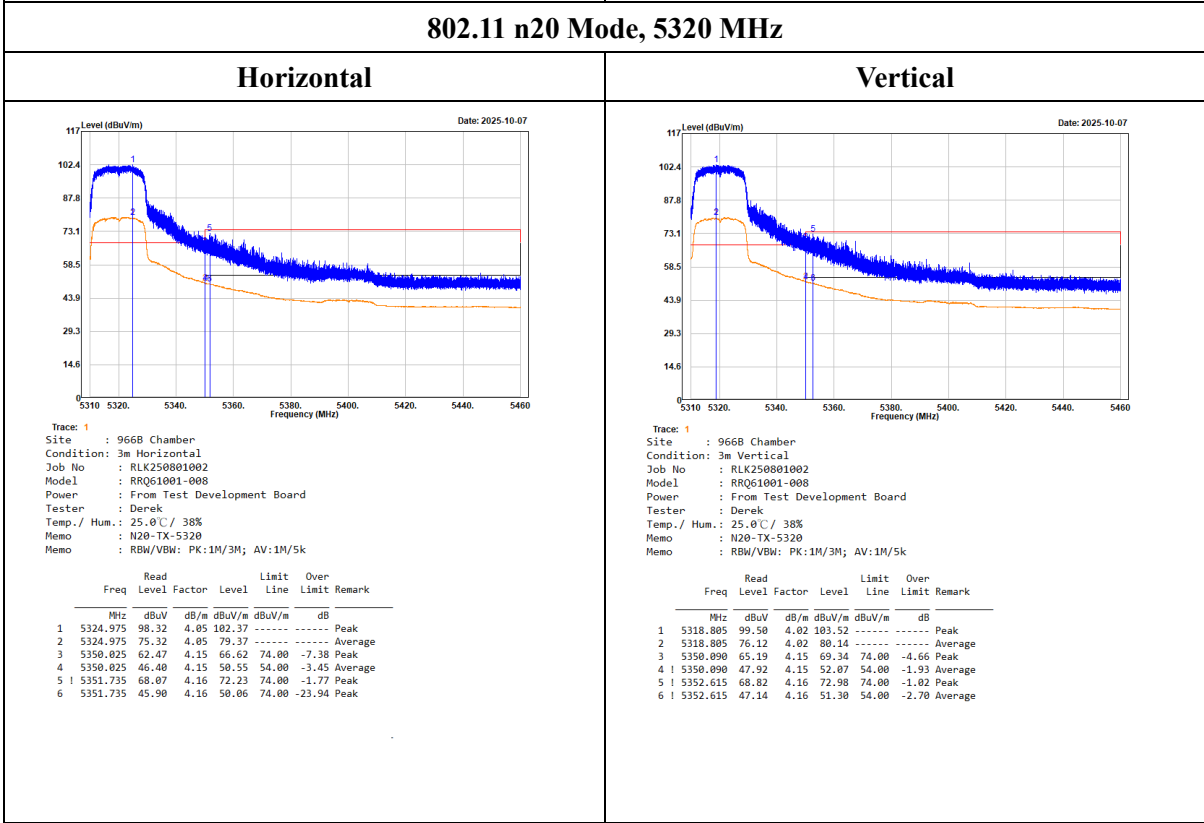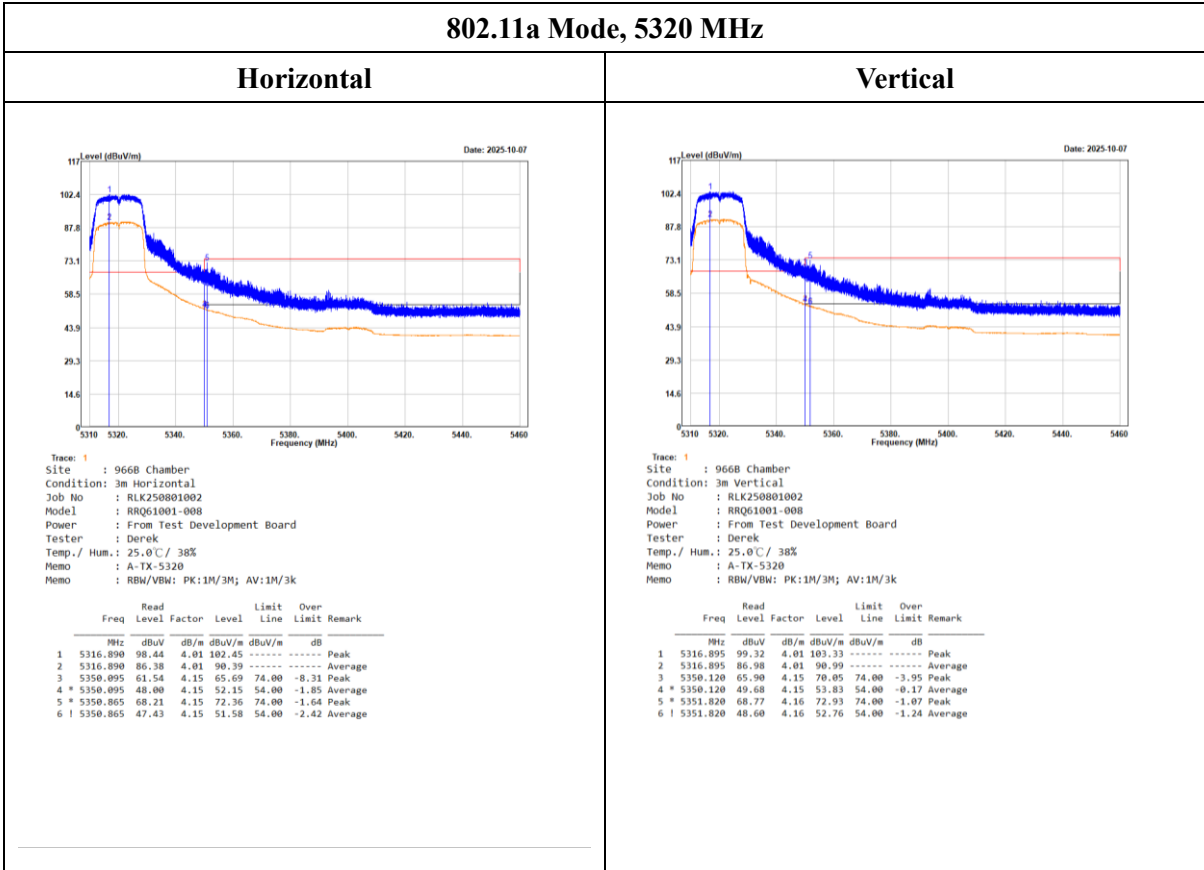

802.11 ac20 Mode, 5320 MHz


Horizontal

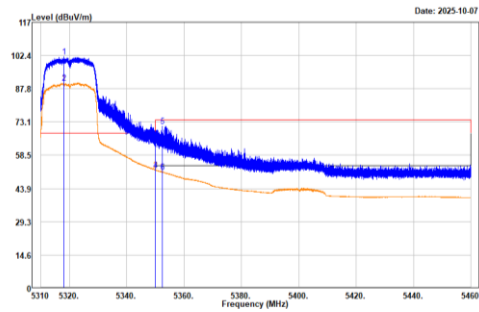

Trace: 1
Site : 966B Chamber
Condition: 3m Horizontal
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 25.0°C / 38%
Memo : AC20-TX-5320
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read			Limit	Over	
	Level	Factor	Level	Line	Limit	Remark
	Freq					
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	5317.875	97.82	4.02	101.84	-----	Peak
2	5318.180	86.24	4.02	90.26	-----	Average
3	5350.040	60.35	4.15	64.50	74.00	-9.50 Peak
4	* 5350.040	47.93	4.15	52.08	54.00	-1.92 Average
5	* 5352.455	67.24	4.16	71.40	74.00	-2.60 Peak
6	! 5352.455	46.98	4.16	51.14	54.00	-2.86 Average

Vertical

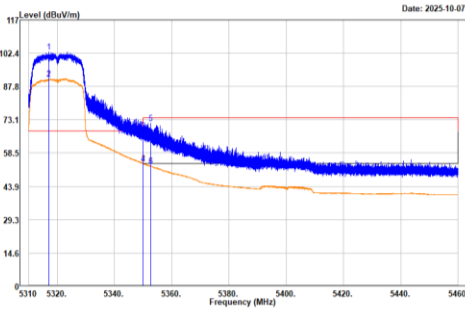


Trace: 1
Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 25.0°C / 38%
Memo : AC20-TX-5320
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read			Limit	Over	
	Level	Factor	Level	Line	Limit	Remark
	Freq					
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	5317.875	98.92	4.01	102.93	-----	Peak
2	5317.875	87.07	4.01	91.08	-----	Average
3	5350.040	64.16	4.15	68.31	74.00	-5.69 Peak
4	* 5350.040	49.78	4.15	53.93	54.00	-0.07 Average
5	* 5352.570	67.38	4.16	71.54	74.00	-2.46 Peak
6	! 5352.570	48.71	4.16	52.87	54.00	-1.13 Average

802.11 ax20 Mode, 5320 MHz


Horizontal

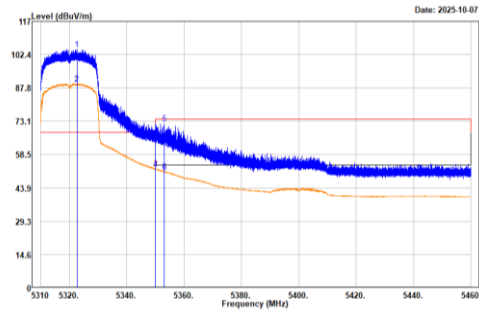

Trace: 1
Site : 966B Chamber
Condition: 3m Horizontal
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 25.0°C / 38%
Memo : AX20-TX-5320
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read			Limit	Over	
	Level	Factor	Level	Line	Limit	Remark
	Freq					
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	5322.625	100.64	4.03	104.67	-----	Peak
2	5322.625	85.52	4.03	89.55	-----	Average
3	5350.045	60.39	4.15	64.54	74.00	-9.46 Peak
4	* 5350.045	48.07	4.15	52.22	54.00	-1.78 Average
5	* 5353.105	67.87	4.16	72.03	74.00	-1.97 Peak
6	! 5353.105	46.85	4.16	51.01	54.00	-2.99 Average

Vertical

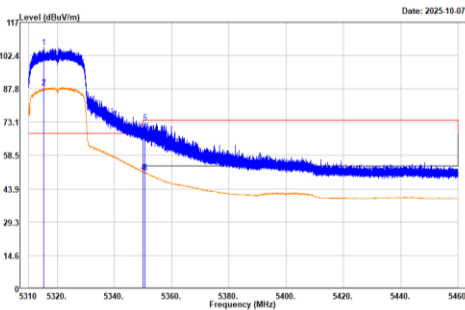


Trace: 1
Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 25.0°C / 38%
Memo : AX20-TX-5320
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read			Limit	Over	
	Level	Factor	Level	Line	Limit	Remark
	Freq					
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	5322.625	102.00	4.00	106.00	-----	Peak
2	5322.625	84.32	4.00	88.32	-----	Average
3	! 5350.000	61.96	4.15	66.11	68.20	-2.09 Peak
4	* 5350.000	47.13	4.15	51.28	54.00	-2.72 Average
5	* 5350.615	68.90	4.15	73.05	74.00	-0.95 Peak
6	5350.615	46.77	4.15	50.92	54.00	-3.08 Average

5470-5725 MHz

(802.11a Mode, 5500 MHz)


Horizontal

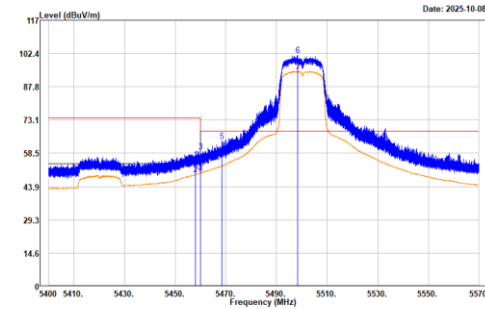

Trace: 1
Site : 966B Chamber
Condition: 3m Horizontal
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 24.0°C / 39%
Memo : A-TX-5500
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read	Read	Read	Read	Limit	Over
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 5457.953	51.40	4.59	55.99	74.00	-18.01	Peak
2 5457.953	44.57	4.59	49.16	54.00	-4.84	Average
3 5459.908	54.69	4.60	59.29	74.00	-14.71	Peak
4 * 5459.908	45.18	4.60	49.78	54.00	-4.22	Average
5 * 5468.521	59.31	4.63	63.94	68.20	-4.26	Peak
6 5498.453	96.92	4.75	101.67	-----	-----	Peak
7 5498.453	89.75	4.75	94.50	-----	-----	Average

Vertical

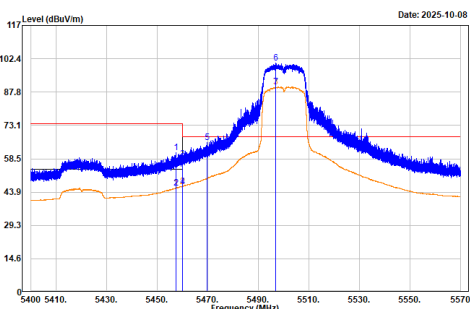


Trace: 1
Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 24.0°C / 39%
Memo : A-TX-5500
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read	Read	Read	Read	Limit	Over
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 5457.438	56.66	4.59	61.25	74.00	-12.75	Peak
2 5457.438	41.03	4.59	45.62	54.00	-8.38	Average
3 5459.931	53.72	4.60	58.32	74.00	-15.68	Peak
4 5459.931	41.80	4.60	46.40	54.00	-7.60	Average
5 5469.785	61.04	4.63	65.67	68.20	-2.53	Peak
6 5496.866	95.61	4.75	100.36	-----	-----	Peak
7 5496.866	85.25	4.75	90.00	-----	-----	Average

(802.11a Mode, 5680 MHz)


Horizontal

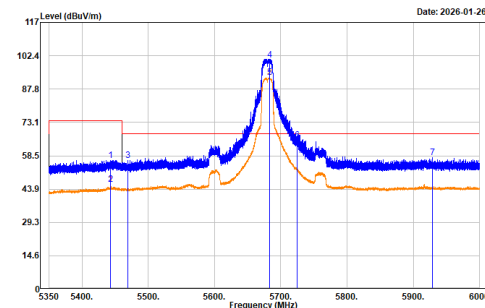

Trace: 1
Site : 966B Chamber
Condition: 3m Horizontal
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 19.4°C / 58%
Memo : A-TX-5680
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read	Read	Read	Read	Limit	Over
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 5443.124	52.00	4.52	56.52	74.00	-17.48	Peak
2 5443.124	41.32	4.52	45.84	54.00	-8.16	Average
3 5469.513	51.65	4.70	56.35	68.20	-11.85	Peak
4 5683.190	95.34	5.15	100.49	-----	-----	Peak
5 5683.190	87.69	5.15	92.84	-----	-----	Average
6 5725.000	59.97	5.31	65.28	68.20	-2.92	Peak
7 5928.435	51.23	6.36	57.59	68.20	-10.61	Peak

Vertical

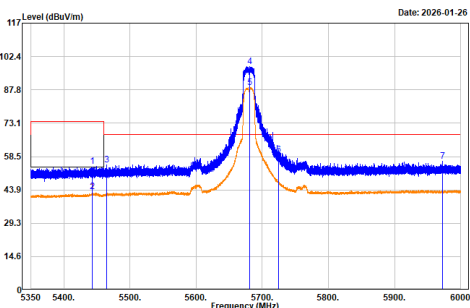


Trace: 1
Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 19.4°C / 58%
Memo : A-TX-5680
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read	Read	Read	Read	Limit	Over
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 5442.777	49.85	4.52	54.37	74.00	-19.63	Peak
2 5442.777	38.64	4.52	43.16	54.00	-10.84	Average
3 5464.790	50.14	4.66	54.80	68.20	-13.40	Peak
4 5681.132	92.89	5.14	98.03	-----	-----	Peak
5 5681.132	83.66	5.14	88.80	-----	-----	Average
6 5725.000	54.10	5.31	59.41	68.20	-8.79	Peak
7 5972.570	49.80	6.53	56.33	68.20	-11.87	Peak

(802.11a Mode, 5700 MHz)


Horizontal

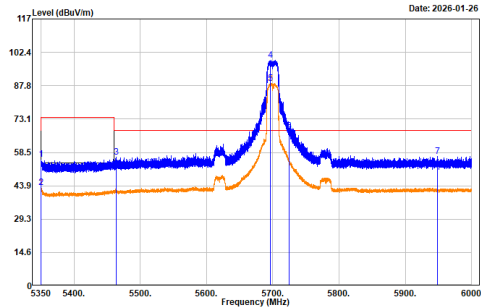

Trace: 1
Site : 966B Chamber
Condition: 3m Horizontal
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 19.4°C / 58%
Memo : A-TX-5700
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Freq	Read Level	Factor	Level	Limit	Over	Remark
	MHz	dBuV		dB/m	dBuV/m	dB	
1	5350.477	51.44	4.19	55.63	74.00	-18.37	Peak
2	5350.477	38.83	4.19	43.02	54.00	-10.98	Average
3	5463.512	51.64	4.65	56.29	68.20	-11.91	Peak
4	5696.645	93.67	5.18	98.85	-----	-----	Peak
5	5696.645	83.65	5.18	88.83	-----	-----	Average
6	5725.000	62.48	5.31	67.79	68.20	-0.41	Peak
7	5948.802	50.21	6.46	56.67	68.20	-11.53	Peak

Vertical

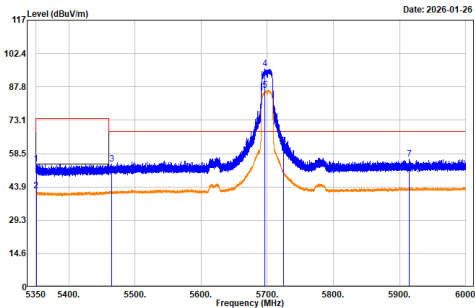


Trace: 1
Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 19.4°C / 58%
Memo : A-TX-5700
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Freq	Read Level	Factor	Level	Limit	Over	Remark
	MHz	dBuV		dB/m	dBuV/m	dB	
1	5350.672	49.72	4.19	53.91	74.00	-20.09	Peak
2	5350.672	37.88	4.19	42.07	54.00	-11.93	Average
3	5464.292	49.11	4.65	53.76	68.20	-14.44	Peak
4	5696.407	90.55	5.18	95.73	-----	-----	Peak
5	5696.407	81.00	5.18	86.18	-----	-----	Average
6	5725.000	56.53	5.31	61.84	68.20	-6.36	Peak
7	5915.197	49.74	6.30	56.04	68.20	-12.16	Peak

(802.11 n20 Mode, 5500 MHz)


Horizontal

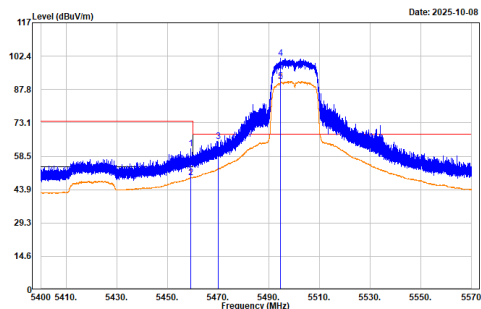

Trace: 1
Site : 966B Chamber
Condition: 3m Horizontal
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 24.0°C / 39%
Memo : N20-TX-5500
Memo : RBW/VBW: PK:1M/3M; AV:1M/5k

	Freq	Read Level	Factor	Level	Limit	Over	Remark
	MHz	dBuV		dB/m	dBuV/m	dB	
1	5459.075	57.23	4.59	61.82	74.00	-12.18	Peak
2	5459.075	44.68	4.59	49.27	54.00	-4.73	Average
3	5470.000	60.31	4.63	64.94	68.20	-3.26	Peak
4	5494.548	96.74	4.74	101.48	-----	-----	Peak
5	5494.548	86.66	4.74	91.40	-----	-----	Average

Vertical

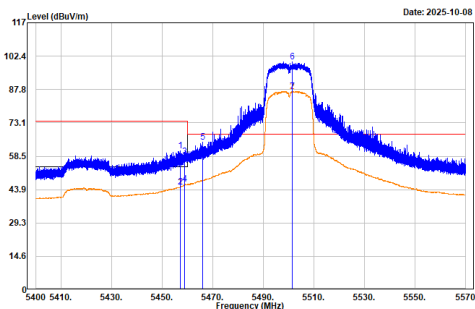


Trace: 1
Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 24.0°C / 39%
Memo : N20-TX-5500
Memo : RBW/VBW: PK:1M/3M; AV:1M/5k

	Freq	Read Level	Factor	Level	Limit	Over	Remark
	MHz	dBuV		dB/m	dBuV/m	dB	
1	5457.279	56.27	4.59	60.86	74.00	-13.14	Peak
2	5457.279	40.57	4.59	45.16	54.00	-8.84	Average
3	5458.871	53.60	4.59	58.19	74.00	-15.81	Peak
4	5458.871	41.62	4.59	46.21	54.00	-7.79	Average
5	5465.994	60.20	4.62	64.82	68.20	-3.38	Peak
6	5501.541	95.88	4.76	99.84	-----	-----	Peak
7	5501.541	82.27	4.76	87.03	-----	-----	Average

(802.11 n20 Mode, 5680 MHz)


Horizontal

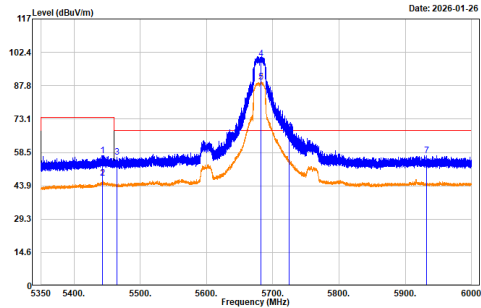

Trace: 1
Site : 966B Chamber
Condition: 3m Horizontal
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 19.4°C / 58%
Memo : N20-TX-5680
Memo : RBW/VBW: PK:1M/3M; AV:1M/5k

	Freq	Read Level	Factor	Level	Limit	Over	Remark
	MHz	dBuV		dB/m	dBuV/m	dB	
1	5443.058	52.67	4.52	57.19	74.00	-16.81	Peak
2	5443.058	42.73	4.52	47.25	54.00	-6.75	Average
3	5464.783	51.91	4.66	56.57	68.20	-11.63	Peak
4	5682.193	94.29	5.14	99.43	-----	-----	Peak
5	5682.193	84.17	5.14	89.31	-----	-----	Average
6	5725.000	61.75	5.31	67.06	68.20	-1.14	Peak
7	5931.729	50.83	6.38	57.21	68.20	-10.99	Peak

Vertical

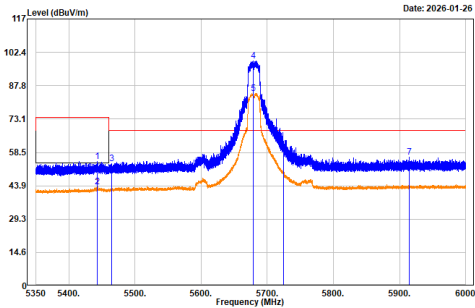


Trace: 1
Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 19.4°C / 58%
Memo : N20-TX-5680
Memo : RBW/VBW: PK:1M/3M; AV:1M/5k

	Freq	Read Level	Factor	Level	Limit	Over	Remark
	MHz	dBuV		dB/m	dBuV/m	dB	
1	5442.993	50.15	4.52	54.67	74.00	-19.33	Peak
2	5442.993	39.06	4.52	43.58	54.00	-10.42	Average
3	5464.538	48.89	4.66	53.55	68.20	-14.65	Peak
4	5678.380	93.47	5.14	98.61	-----	-----	Peak
5	5678.380	79.20	5.14	84.34	-----	-----	Average
6	5725.000	52.61	5.31	57.92	68.20	-10.28	Peak
7	5915.218	50.14	6.30	56.44	68.20	-11.76	Peak

(802.11 n20 Mode, 5700 MHz)


Horizontal

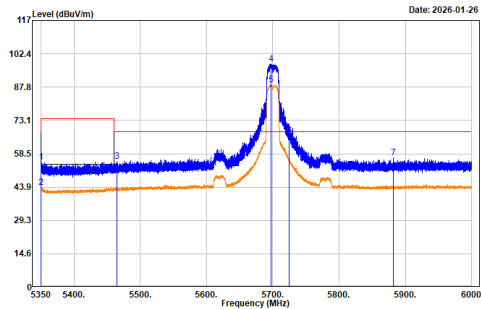

Trace: 1
Site : 966B Chamber
Condition: 3m Horizontal
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 19.4°C / 58%
Memo : N20-TX-5700
Memo : RBW/VBW: PK:1M/3M; AV:1M/5k


	Freq	Read Level	Factor	Level	Limit	Over	Remark
	MHz	dBuV		dB/m	dBuV/m	dB	
1	5350.260	50.66	4.19	54.85	74.00	-19.15	Peak
2	5350.260	39.42	4.19	43.61	54.00	-10.39	Average
3	5464.876	50.66	4.66	55.32	68.20	-12.88	Peak
4	5697.403	92.68	5.18	97.86	-----	-----	Peak
5	5697.403	83.63	5.18	88.81	-----	-----	Average
6	5725.000	61.40	5.31	66.71	68.20	-1.49	Peak
7	5881.895	50.65	6.10	56.75	68.20	-11.45	Peak

Vertical

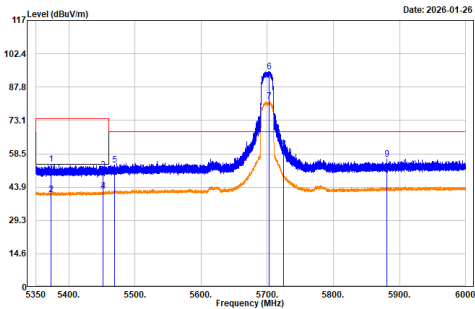


Trace: 1
Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 19.4°C / 58%
Memo : N20-TX-5700
Memo : RBW/VBW: PK:1M/3M; AV:1M/5k

	Freq	Read Level	Factor	Level	Limit	Over	Remark
	MHz	dBuV		dB/m	dBuV/m	dB	
1	5373.356	49.61	4.29	53.90	74.00	-20.10	Peak
2	5373.356	36.32	4.29	40.61	54.00	-13.39	Average
3	5451.790	46.72	4.54	51.26	74.00	-22.74	Peak
4	5451.790	37.66	4.54	42.20	54.00	-11.80	Average
5	5469.383	48.96	4.70	53.66	68.20	-14.54	Peak
6	5702.993	89.25	5.21	94.46	-----	-----	Peak
7	5702.993	76.32	5.21	81.53	-----	-----	Average
8	5725.000	55.22	5.31	60.53	68.20	-7.67	Peak
9	5880.422	49.99	6.09	56.08	68.20	-12.12	Peak

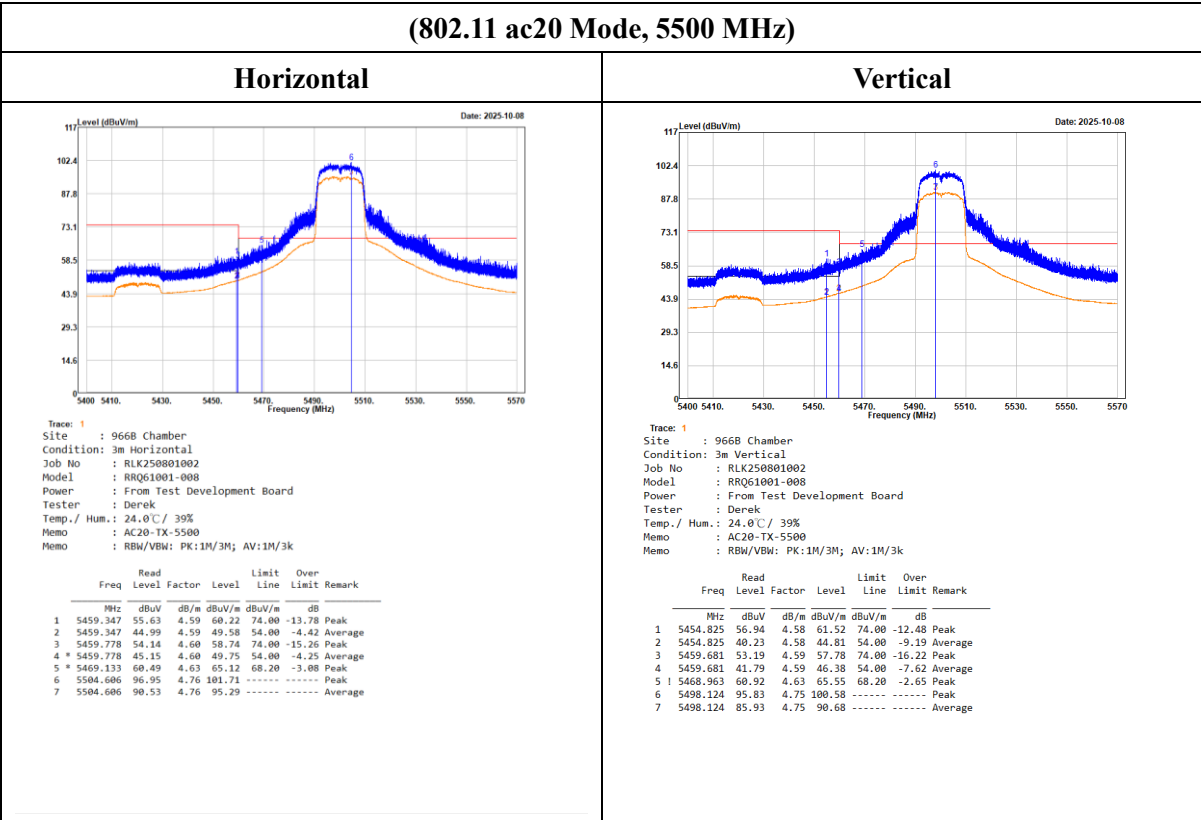

(802.11 ac20 Mode, 5700 MHz)


Horizontal

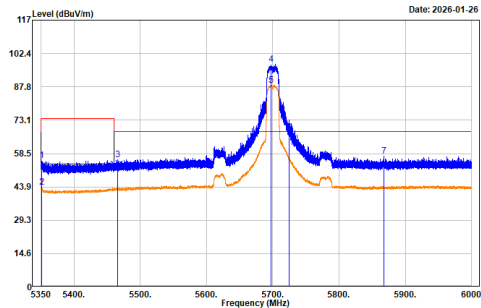

Trace: 1
Site : 966B Chamber
Condition: 3m Horizontal
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 19.4°C/ 58%
Memo : AC20-TX-5700
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV		dB/m	dBuV/m	dB	
1	5350.888	51.23	4.19	55.42	74.00	-18.58 Peak
2	5350.888	39.61	4.19	43.80	54.00	-10.20 Average
3	5465.830	51.09	4.67	55.76	68.20	-12.44 Peak
4	5697.165	92.39	5.22	97.61	-----	Peak
5	5697.165	83.37	5.18	88.55	-----	Average
6	5725.000	62.57	5.31	67.88	68.20	-0.32 Peak
7	5867.876	51.24	6.02	57.26	68.20	-10.94 Peak

Vertical

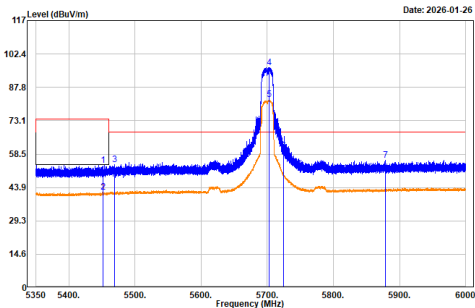


Trace: 1
Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 19.4°C/ 58%
Memo : AC20-TX-5700
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV		dB/m	dBuV/m	dB	
1	5451.249	49.14	4.54	53.68	74.00	-20.32 Peak
2	5451.249	37.34	4.54	41.88	54.00	-12.12 Average
3	5469.383	49.22	4.70	53.92	68.20	-14.28 Peak
4	5702.495	91.23	5.20	96.43	-----	Peak
5	5702.495	77.09	5.21	82.30	-----	Average
6	5725.000	54.54	5.31	59.85	68.20	-8.35 Peak
7	5878.688	49.82	6.08	55.90	68.20	-12.30 Peak

(802.11 ax20 Mode, 5500 MHz)


Horizontal

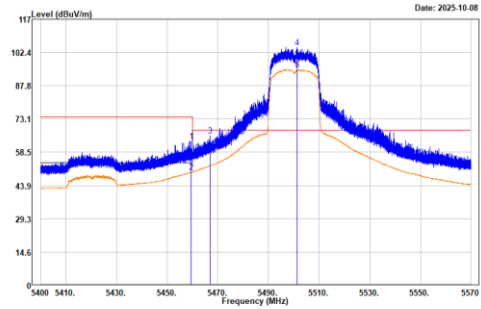

Trace: 1
Site : 966B Chamber
Condition: 3m Horizontal
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 24.0°C/ 39%
Memo : AX20-TX-5500
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV		dB/m	dBuV/m	dB	
1	5459.608	58.00	4.59	63.39	74.00	-10.61 Peak
2	5459.608	45.28	4.59	49.87	54.00	-4.13 Average
3	5467.031	61.27	4.62	65.89	68.20	-2.31 Peak
4	5501.360	99.74	4.76	104.50	-----	Peak
5	5501.360	90.08	4.76	94.84	-----	Average

Vertical

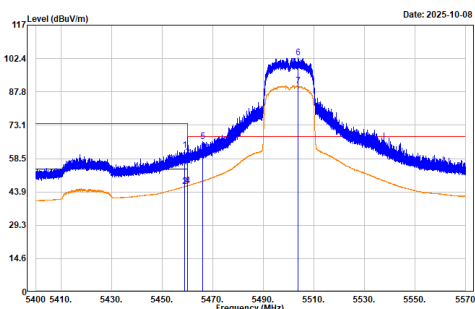


Trace: 1
Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 24.0°C/ 39%
Memo : AX20-TX-5500
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV		dB/m	dBuV/m	dB	
1	5458.820	57.63	4.59	62.22	74.00	-11.78 Peak
2	5458.820	41.67	4.59	46.26	54.00	-7.74 Average
3	5459.981	54.48	4.60	59.08	74.00	-14.92 Peak
4	5459.981	41.97	4.60	46.57	54.00	-7.43 Average
5	5465.943	61.45	4.62	66.07	68.20	-2.13 Peak
6	5503.808	97.97	4.76	102.73	-----	Peak
7	5503.808	85.59	4.76	90.35	-----	Average

(802.11 ax20 Mode, 5680 MHz)


Horizontal

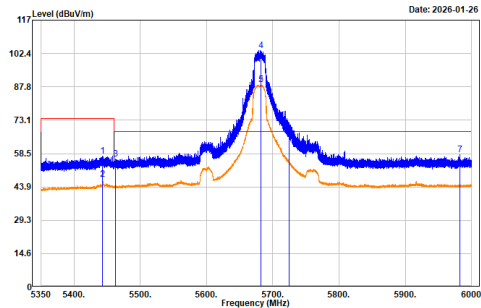

Trace: 1
Site : 966B Chamber
Condition: 3m Horizontal
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum. : 19.4°C/ 58%
Memo : AX20-TX-5680
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read		Limit	Over	
Freq	Level	Factor	Level	Line	Limit Remark
MHz	dBuV		dB/m	dBuV/m	dB
1 5443.167	52.90	4.52	57.42	74.00	-16.58 Peak
2 5443.167	42.60	4.52	47.12	54.00	-6.88 Average
3 5462.667	51.60	4.64	56.24	68.20	-11.96 Peak
4 5681.717	98.63	5.14	103.77	-----	Peak
5 5681.717	83.57	5.14	88.71	-----	Average
6 5725.000	60.93	5.31	66.24	68.20	-1.96 Peak
7 5982.862	51.34	6.56	57.90	68.20	-10.30 Peak

Vertical

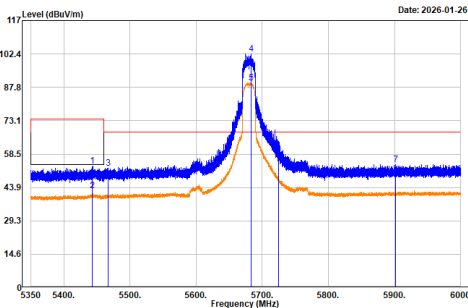


Trace: 1
Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum. : 19.4°C/ 58%
Memo : AX20-TX-5680
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read		Limit	Over	
Freq	Level	Factor	Level	Line	Limit Remark
MHz	dBuV		dB/m	dBuV/m	dB
1 5443.340	48.84	4.52	53.36	74.00	-20.64 Peak
2 5443.340	37.90	4.52	42.42	54.00	-11.58 Average
3 5467.412	47.66	4.68	52.34	68.20	-15.86 Peak
4 5682.908	97.25	5.15	102.40	-----	Peak
5 5682.908	84.65	5.15	89.80	-----	Average
6 5725.000	53.43	5.31	58.74	68.20	-9.46 Peak
7 5901.460	47.70	6.24	53.94	68.20	-14.26 Peak

(802.11 ax20 Mode, 5700 MHz)


Horizontal

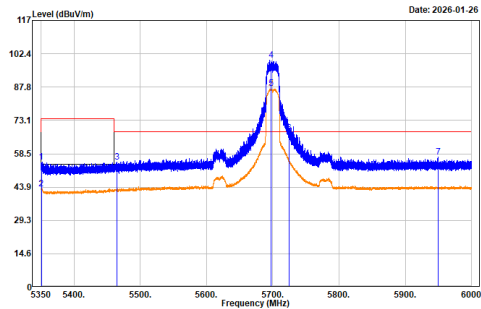

Trace: 1
Site : 966B Chamber
Condition: 3m Horizontal
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum. : 19.4°C/ 58%
Memo : AX20-TX-5700
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read		Limit	Over	
Freq	Level	Factor	Level	Line	Limit Remark
MHz	dBuV		dB/m	dBuV/m	dB
1 5350.693	50.68	4.19	54.87	74.00	-19.13 Peak
2 5350.693	38.96	4.19	43.15	54.00	-10.85 Average
3 5464.292	50.34	4.65	54.99	68.20	-13.21 Peak
4 5697.533	94.40	5.18	99.66	-----	Peak
5 5697.533	81.88	5.19	87.07	-----	Average
6 5725.000	62.10	5.31	67.41	68.20	-0.79 Peak
7 5949.343	50.51	6.46	56.97	68.20	-11.23 Peak

Vertical

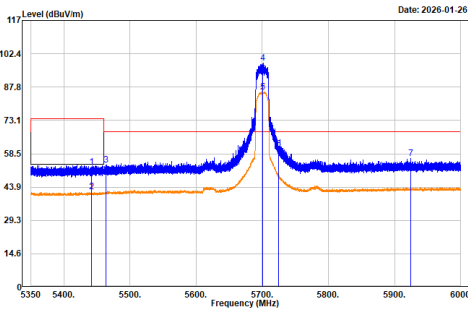

Trace: 1
Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801002
Model : RRQ61001-008
Power : From Test Development Board
Tester : Derek
Temp./ Hum. : 19.4°C/ 58%
Memo : AX20-TX-5700
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read		Limit	Over	
Freq	Level	Factor	Level	Line	Limit Remark
MHz	dBuV		dB/m	dBuV/m	dB
1 5441.845	48.10	4.51	52.61	74.00	-21.39 Peak
2 5441.845	37.34	4.51	41.85	54.00	-12.15 Average
3 5463.251	49.04	4.65	53.69	68.20	-14.51 Peak
4 5701.086	92.95	5.19	98.14	-----	Peak
5 5701.086	80.45	5.19	85.64	-----	Average
6 5725.000	55.30	5.31	60.61	68.20	-7.59 Peak
7 5924.275	50.19	6.35	56.54	68.20	-11.66 Peak

5725-5850 MHz

