

FCC Part 15.247

TEST REPORT

For

Renesas Design Korea Inc.

7th SiliconPark, 35 Pangyo-ro 255 beon-gil Bundang-gu, Seongnam-si, Gyeonggi-do,
13486

FCC ID: 2AU49-RRQ61001009

Report Type:
Original Report

Product Type:
RRQ61001 Module

Report Producer : Sandy Luo

Report Number : RLK250801003RF04

Report Date : 2025-12-11

Reviewed By: Rory Cheng



Prepared By: Bay Area Compliance Laboratories Corp.

(Linkou Laboratory)

No. 6, Wende 2Rd., Guishan Dist.,

Taoyuan City 33382, Taiwan (R.O.C.).

Tel: +886 (3) 3961072

Fax: +886 (3) 3961027

www.baclcorp.com.tw

Revision History

Revision	No.	Report Number	Issue Date	Description	Author/ Revised by
0.0	RLK250801003	RLK250801003RF04	2025-12-11	Original Report	Sandy Luo

TABLE OF CONTENTS

1	General Information	5
1.1	Product Description for Equipment under Test (EUT)	5
1.2	Objective	6
1.3	Test Methodology.....	6
1.4	Statement of Compliance	6
1.5	Measurement Uncertainty	7
1.6	Environmental Conditions.....	7
1.7	Test Facility.....	7
2	System Test Configuration.....	8
2.1	Description of Test Configuration.....	8
2.2	EUT Exercise Software	8
2.3	Test Mode.....	8
2.4	Support Equipment List and Details.....	9
2.5	External Cable List and Details.....	9
2.6	Block Diagram of Test Setup	10
2.7	Duty Cycle.....	12
3	Summary of Test Results.....	15
4	Test Equipment List and Details	16
5	FCC §15.203 – Antenna Requirements.....	18
5.1	Applicable Standard	18
5.2	Antenna List and Details	18
6	FCC §15.207(a) – AC Line Conducted Emissions	19
6.1	Applicable Standard	19
6.2	EUT Setup	19
6.3	EMI Test Receiver Setup	20
6.4	Test Procedure.....	20
6.5	Corrected Factor & Margin Calculation.....	20
6.6	Test Results	21
7	FCC §15.209, §15.205 , §15.247(d) – Spurious Emissions	22
7.1	Applicable Standard	22
7.2	EUT Setup	23
7.3	EMI Test Receiver & Spectrum Analyzer Setup.....	24
7.4	Test Procedure.....	25
7.5	Factor & Over Limit Calculation	25
7.6	Test Results	26
8	FCC §15.247(a)(2) – 6 dB Emission Bandwidth And Occupied Bandwidth	51
8.1	Applicable Standard	51
8.2	Test Procedure.....	51
8.3	Test Results	52
9	FCC §15.247(b)(3) – Maximum Output Power.....	65
9.1	Applicable Standard	65
9.2	Test Procedure.....	65
9.3	Test Results	66
10	FCC§15.247(d) – 100 kHz Bandwidth of Frequency Band Edge	67

10.1	Applicable Standard	67
10.2	Test Procedure.....	67
10.3	Test Results	68
11	FCC §15.247(e) – Power Spectral Density	73
11.1	Applicable Standard	73
11.2	Test Procedure.....	73
11.3	Test Results	74

1 General Information

1.1 Product Description for Equipment under Test (EUT)

Applicant	Renesas Design Korea Inc.
	7th SiliconPark, 35 Pangyo-ro 255 beon-gil Bundang-gu, Seongnam-si, Gyeonggi-do, 13486
Manufacturer	Renesas Design Korea Inc.
	7th SiliconPark, 35 Pangyo-ro 255 beon-gil Bundang-gu, Seongnam-si, Gyeonggi-do, 13486
Brand(Trade) Name	Renesas
Product (Equipment)	RRQ61001 Module
Main Model Name	RRQ61001-009
Series Model Name	RRQ61001-010
Model Discrepancy	Different antenna interfaces
Frequency Range	IEEE 802.11b/g/n HT20/ax HE20 Mode: 2412 ~ 2462 MHz
Transmit Power	IEEE 802.11b Mode: 20.16dBm (0.104W) IEEE 802.11g Mode: 20.63 dBm (0.116W) IEEE 802.11n HT20 Mode: 20.62 dBm (0.115W) IEEE 802.11ax HE20 Mode: 20.62 dBm (0.115W)
Modulation Technique	IEEE 802.11b Mode: DSSS IEEE 802.11g Mode: OFDM IEEE 802.11n HT20 Mode: OFDM IEEE 802.11ax HE20 Mode: OFDMA
Power Operation (Voltage Range)	☐ AC 120V/60Hz ☐ Adapter ☐ By AC Power Cord ☐ PoE
	☐ DC Type ☐ Battery ☐ DC Power Supply ☐ External from USB Cable ☐ External DC Adapter
	☒ 3.3Vdc
Received Date	Aug 01, 2025
Date of Test	Sep 22, 2025 ~ Oct 13, 2025

*All measurement and test data in this report was gathered from production sample serial number:

RLK250801003-01 (Assigned by BAACL, Linkou Laboratory).

****This device cannot run both WIFI 2.4G and WIFI 5G simultaneously.**

*****802.11ax mode only support full RU**

1.2 Objective

This report is prepared on behalf of Renesas Design Korea Inc. in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communication Commission's rules.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020+Cor.1-2023, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices KDB 558074 D01 DTS Meas Guidance v05r02

1.4 Statement of Compliance

Decision Rule: No, (The test results do not include MU judgment)

1. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Linkou Laboratory).
2. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.
3. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
4. The determination of the test results does not require consideration of the uncertainty of the measurement, unless the assessment is required by customer agreement, regulation or standard document specification.
5. Bay Area Compliance Laboratories Corp. (Linkou Laboratory) is not responsible for the authenticity of the information provided by the applicant that affects the test results.

1.5 Measurement Uncertainty

Parameter		Uncertainty
AC Mains		±2.98 (dB)
RF output power, conducted		±3.73 (dB)
Power Spectral Density, conducted		±0.65 (dBm)
Occupied Bandwidth		±0.09 (%)
Unwanted Emissions, conducted		±1.03 (dB)
Emissions, radiated	9kHz~30MHz	±3.20 (dB)
	30 MHz~1GHz	±3.30 (dB)
	1 GHz~18 GHz	±4.99 (dB)
	18 GHz~40 GHz	±4.52 (dB)
Temperature		±0.78 (°C)
Humidity		±0.04 (%)

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

1.6 Environmental Conditions

Test Site	Test Data	Temperature (°C)	Relative Humidity (%)	Test Engineer
AC Line Conducted Emissions	2025/10/13	23.4	48	Charlie
Radiation Spurious Emissions	2025/09/22 ~ 2025/10/08	20.0~24.1	33~42	Derek
Conducted Spurious Emissions	2025/09/25	24.1	46	Alan
6 dB Emission Bandwidth	2025/09/25	24.1	46	Alan
Maximum Output Power	2025/09/25	24.1	46	Alan
100 kHz Bandwidth of Frequency Band Edge	2025/09/25	24.1	46	Alan
Power Spectral Density	2025/09/25	24.1	46	Alan
Duty Cycle	2025/09/25~10/07	24.1~24.8	46	Alan

1.7 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Linkou Laboratory) to collect test data is located on

☒ No.6, Wende 2Rd., Guishan Dist., Taoyuan City 33382, Taiwan (R.O.C.).

Bay Area Compliance Laboratories Corp. (Linkou Laboratory) is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 3546) and the FCC designation No.TW3546 under the Mutual Recognition Agreement (MRA) in FCC Test.

2 System Test Configuration

2.1 Description of Test Configuration

For WIFI mode, there are totally 11 channels.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

For 802.11 b/g/n20/ax20 Modes were tested with channel 1, 6 and 11.

The system was configured for testing in engineering mode, which was provided by manufacturer.

2.2 EUT Exercise Software

Used “TeraTerm5” software.

Test Frequency		Low	Mid	High
Power Level Setting	b Mode	11	13	11
	g Mode	11	11	9
	n20 Mode	10	11	9
	ax20 Mode	9	11	10

The worst case data rates are as follows:

802.11b: 1Mbps

802.11g: 6Mbps

802.11n HT20: MCS0

802.11ax HE20: MCS0

2.3 Test Mode

Mode 1: Full System (model: RRQ61001-009) for all test item.

2.4 Support Equipment List and Details

No.	Description	Manufacturer	Model Number
1	Notebook (Lab provided)	DELL	E6410
2	Notebook (Lab provided)	Acer	N16Q1
3	Test Development Board (Customer provided)	RENESAS	EK-RQ61 565-11-C-0001 Ver 3.1
4	Daughter Board (Customer provided)	RENESAS	RRQ610x1 565-16-B

2.5 External Cable List and Details


No.	Description	Manufacturer	Model Number
1	USB-A to Type-C cable (Customer provided)	VENTION	COZ
2	I-PEX to SMA Cable (Customer provided)	TAOGLAS	0.2m
3	Antenna (Customer provided)	ARISTOTLE	RFA-27-H60-U-GB70

2.6 Block Diagram of Test Setup


See test photographs attached in setup photos for the actual connections between EUT and support equipment.

Radiation:


Below 1GHz:

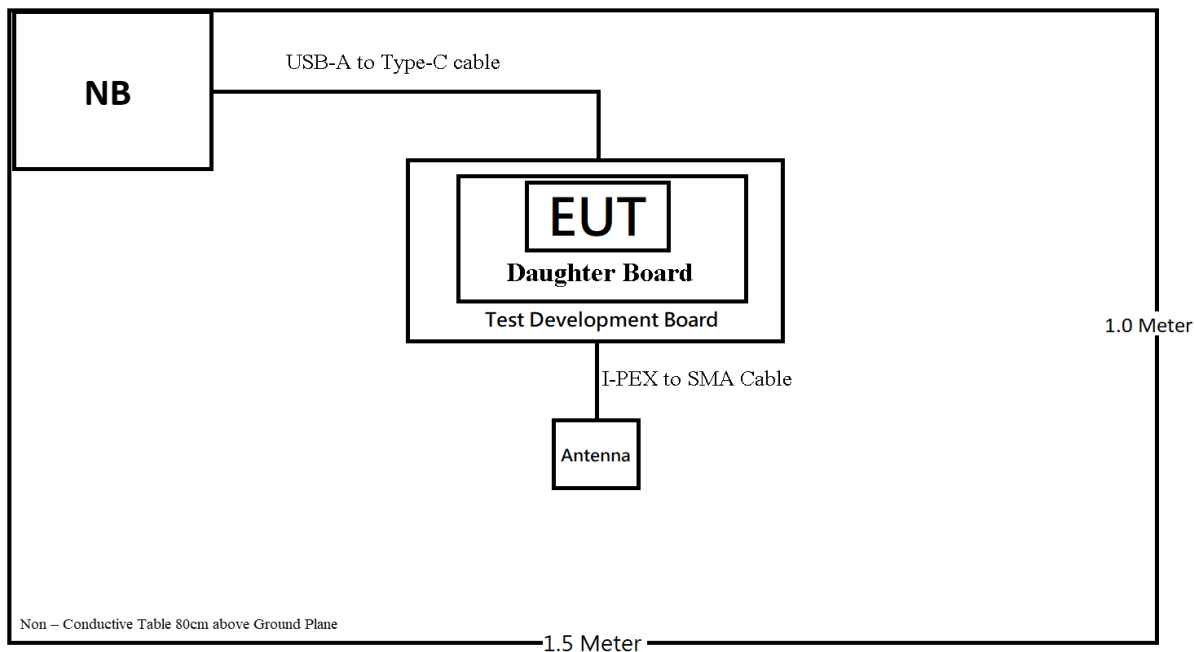


Above 1GHz:

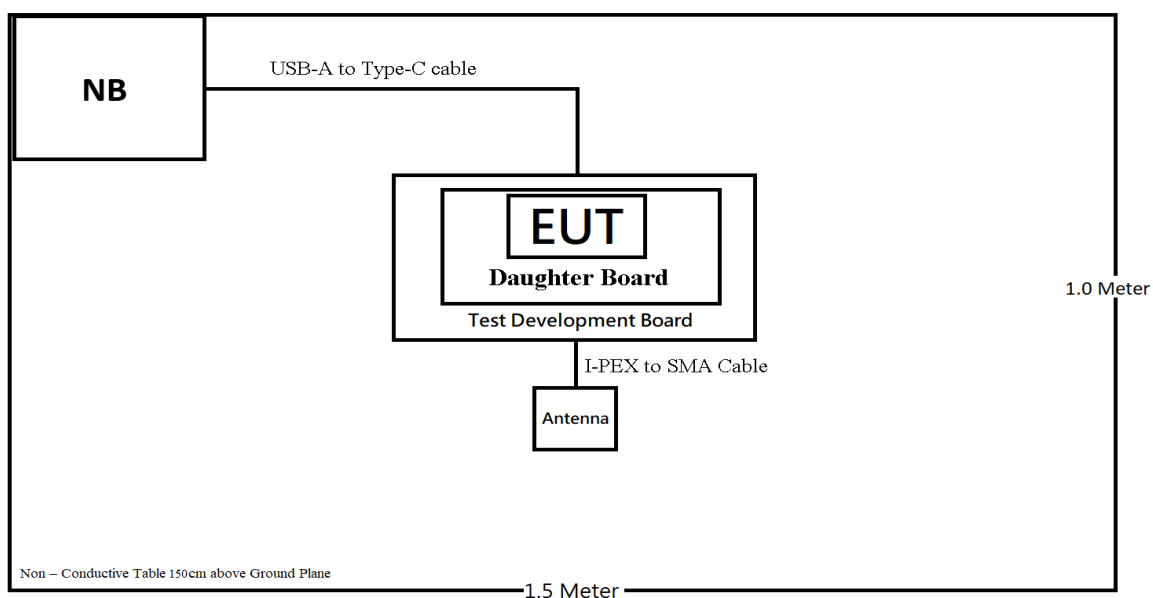

Conduction:

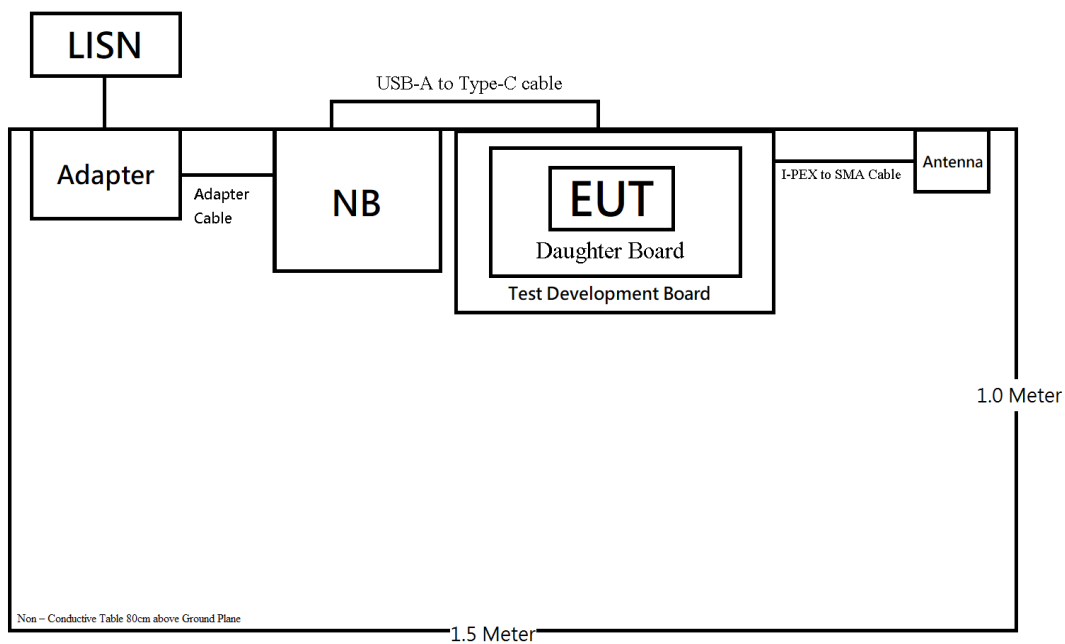

Conducted:

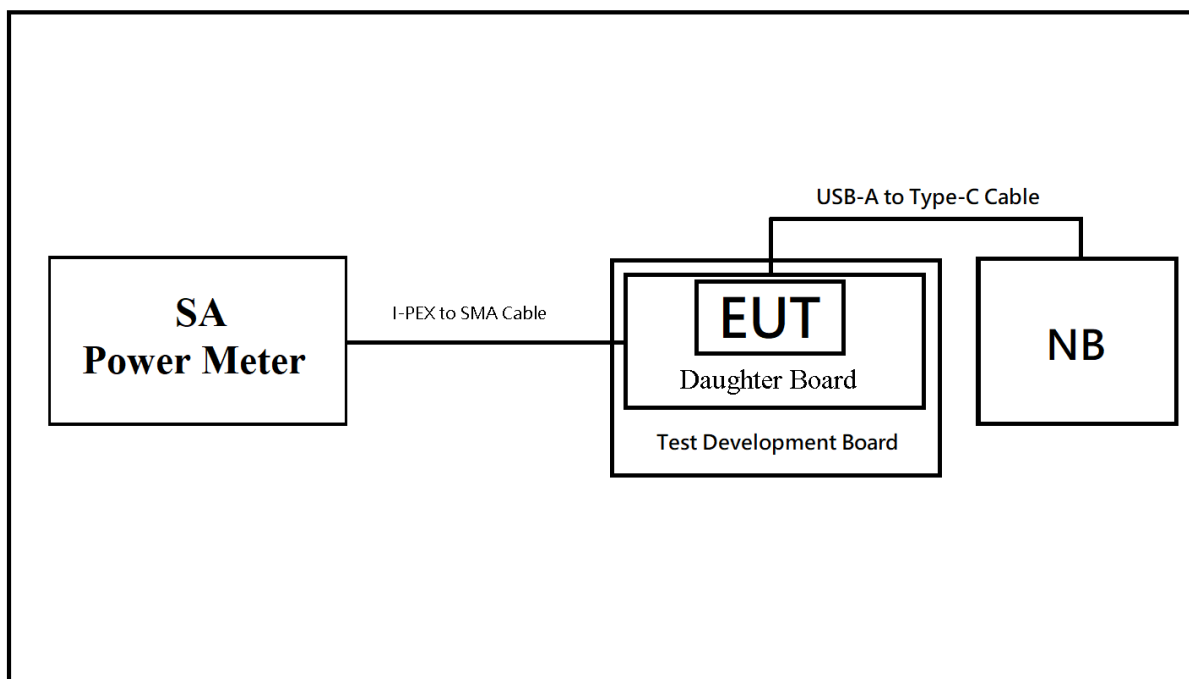

2.7 Duty Cycle

According to KDB 558074 D01 15.247 Meas Guidance v05r02 section 6.0:


All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x, and maximum power transmission duration, T, are required for each tested mode of operation.

Radio Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T VBW Setting (kHz)	1/T (kHz)
802.11b	0.622	0.643	97	0.13	3	1.61
802.11g	0.698	0.72	97	0.13	3	1.43
802.11 n20	0.29	0.32	91	0.41	5	3.45
802.11 ax20	2.852	2.888	99	0	/	0.35


Note: Duty Cycle Correction Factor = $10 \cdot \log(1/\text{duty cycle})$

Please refer to the following plots.

b Mode

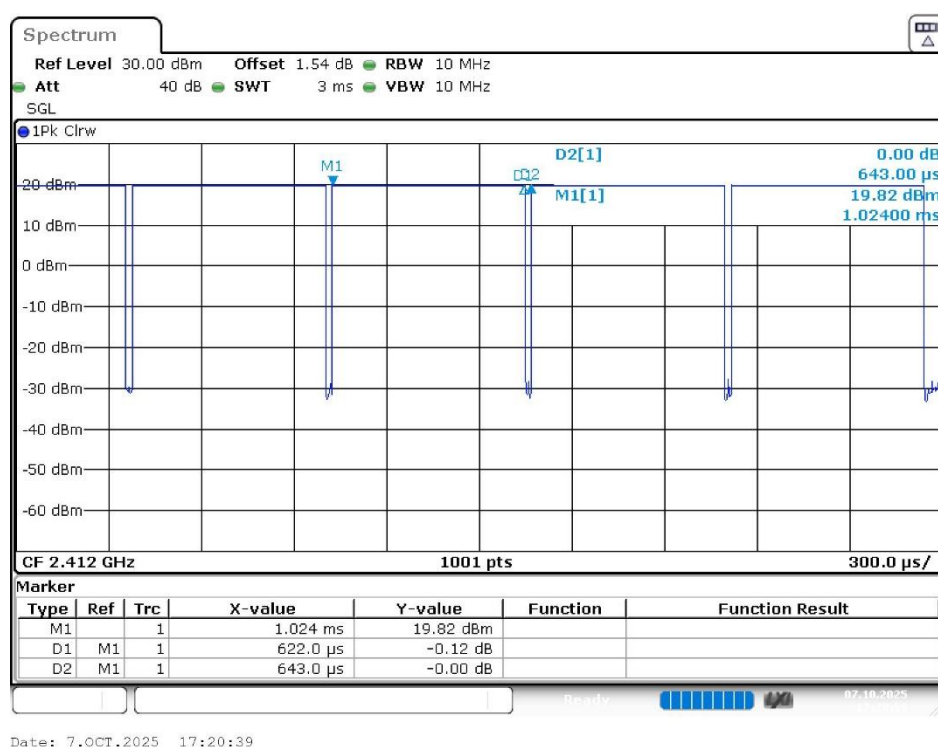


g Mode

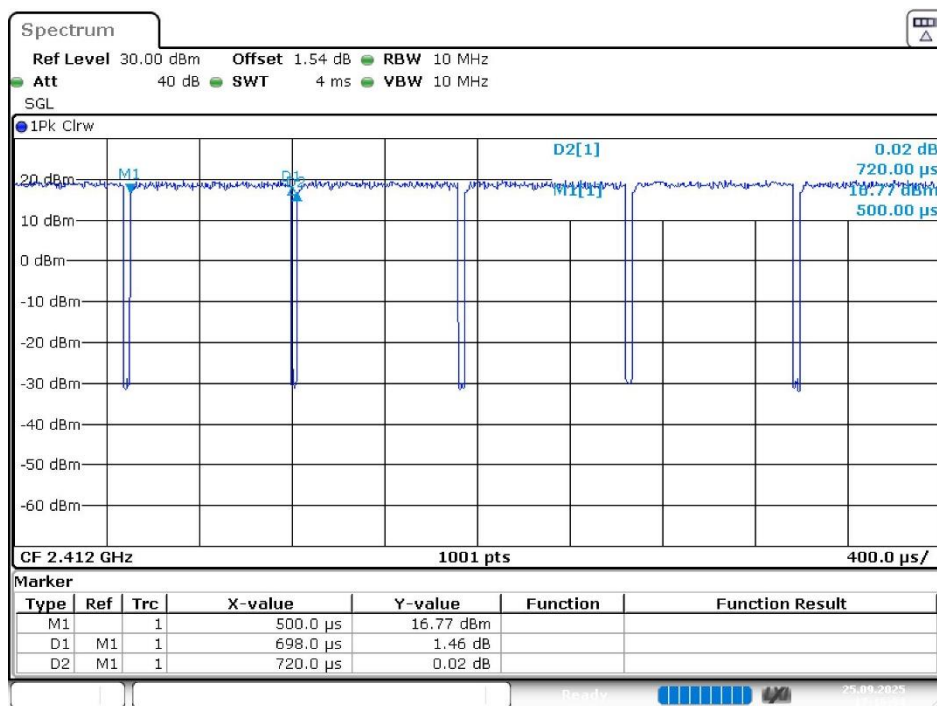


Date: 25.SEP.2025 17:16:34

n20 Mode

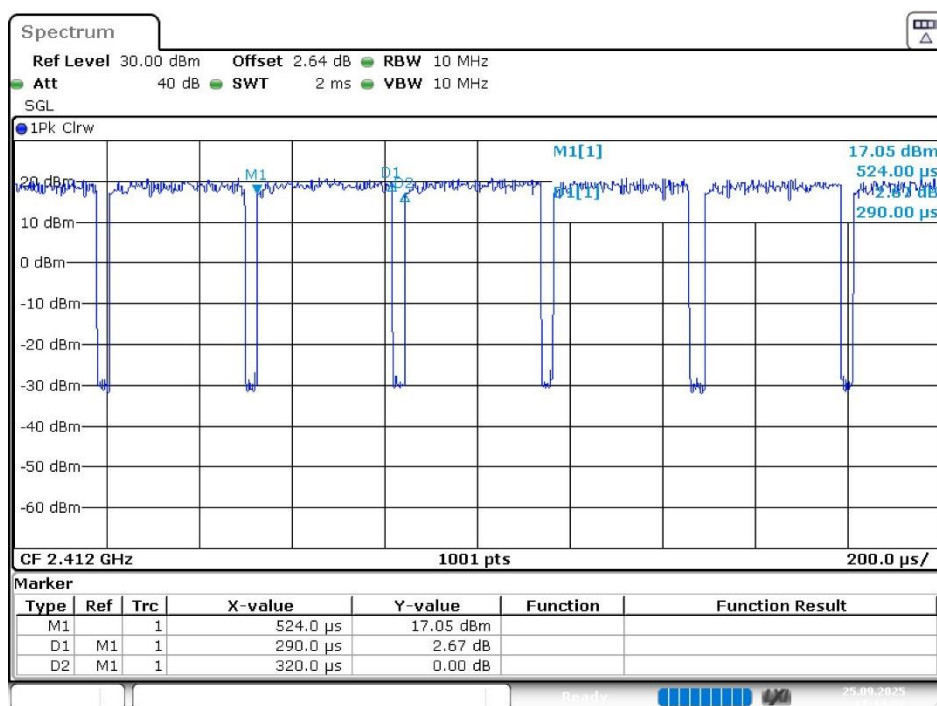

Date: 25.SEP.2025 17:14:02

ax20 Mode

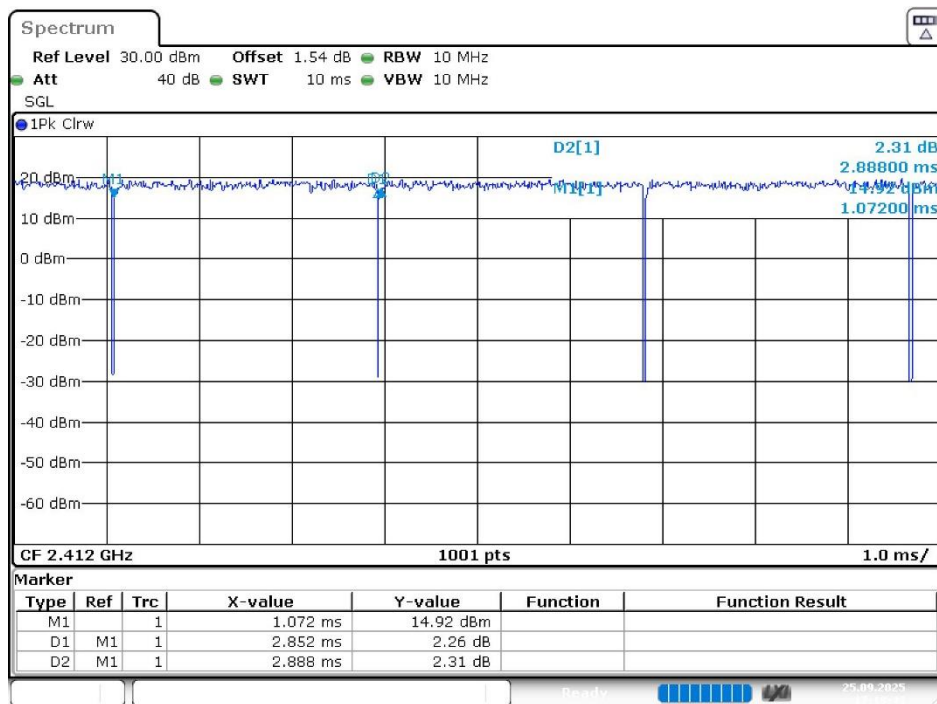

Date: 25.SEP.2025 17:18:43

3 Summary of Test Results

FCC Rules	Description of Test	Results
§15.247(i), §1.1310, §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247(a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

4 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conduction Room (CON-A)					
Pulse Limiter	SCHWARZBECK	VTSD 9561-F	00432	2025/08/14	2026/08/14
ESR EMI Test Receiver	Rohde & Schwarz	ESCI7	100769	2025/04/02	2026/04/02
RF Cable	EMCI	EMCCFD300-BM-BM-3000	221013	2025/10/16	2026/10/16
Two-Line V-Network	Rohde & Schwarz	ENV216	100037	2025/09/15	2026/09/15
Software	Audix	e3 v9	E3LK-03	N.C.R	N.C.R
Radiated Room (966-B)					
Bilog Antenna & 6 dB Attenuator	SUNOL SCIENCES & EMCI	JB3 & N-6-06	A071318 & AT-N0670	2025/08/14	2026/08/14
Active Loop Antenna	ETS-Lindgren	6502	0001-3322	2025/03/27	2026/03/27
Horn Antenna	ETS-Lindgren	3115	85775	2025/10/03	2026/10/03
Horn Antenna	ETS-Lindgren	3160-09	123853	2025/08/28	2026/08/28
18-40GHz Preamplifier	GLOBAL	1313-A1840	5031371	2025/04/28	2026/04/28
30M-18GHz Preamplifier	A.H. Systems	PAM-0118P	479	2025/09/05	2026/09/05
ESR EMI Test Receiver	Rohde & Schwarz	ESR3	102430	2025/04/25	2026/04/25
Spectrum Analyzer	Rohde & Schwarz	FSV40	101456	2025/06/05	2026/06/05
Microflex Cable (1m)	EMCI	EMCI02-KM-KM-1000	180524	2025/08/01	2026/08/01
Microflex Cable (2m)	EMCI	EMCI06-SM-SM-2000	180516	2025/08/01	2026/08/01
Microflex Cable (8m)	UTIFLEX	UFA210A-1-3149-300300	MFR 64639 232490-002	2025/08/01	2026/08/01
Software	AUDIX	E3 V9	E3LK-02	N.C.R	N.C.R
-10dB Attenuator	MTJ	MTJ604-10	004	2025/04/07	2026/04/07
Band Reject Filter	MICRO-TRONICS	BRM50702	G613	2025/04/30	2026/04/30
Conducted Room					

Cable	MTJ	MT40S	620620-MT40S-100	2024/12/26	2026/01/05
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV40	101457	2024/12/04	2025/12/04
USB Wideband Power Sensor	AGILENT	U2021XA	MY54080011	2025/08/26	2026/08/26
10dB Attenuator	MCL	BW-S10W5+	605	2025/04/14	2026/04/14

***Statement of Traceability:** BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to the SI System of Units via the R.O.C. Center for Measurement Standards of the Electronics Testing Center, Taiwan (ETC) or to another internationally recognized National Metrology Institute (NMI), and were compliant with the current Taiwan Accreditation Foundation (TAF) requirements

5 FCC §15.203 – Antenna Requirements

5.1 Applicable Standard

According to § 15.203,

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna does not exceed 6dBi.

5.2 Antenna List and Details

Manufacturer	Model	Antenna Type	Antenna Gain
Aristotle	RFA-27-H60-U-GB70	Dipole Antenna	3.3 dBi

Unit uses a unique coupling to the intentional radiator.

2.4 Cable Loss of the I-Pex Cable used for antenna connection : 1.54 dB

Result: Compliance

6 FCC §15.207(a) – AC Line Conducted Emissions

6.1 Applicable Standard

According to §15.207


For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 Note 1	56 to 46 Note 2
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency.

Note 2: A linear average detector is required

6.2 EUT Setup

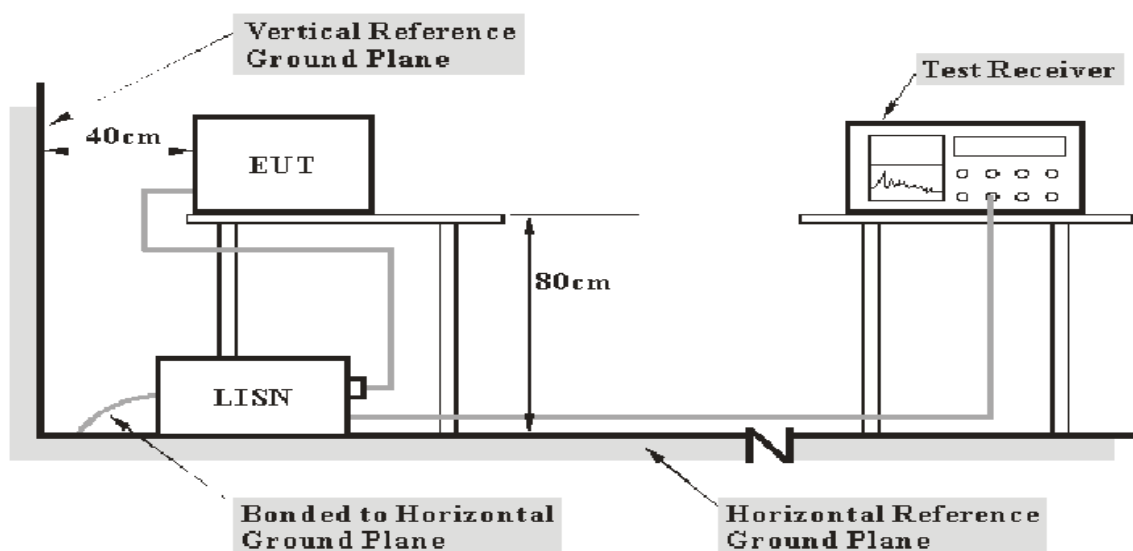

**Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.**

The setup of EUT is according with per ANSI C63.10-2020+Cor.1-2023 measurement procedure. The specification used was with the FCC Part 15.207 limits.

6.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150kHz to 30MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations

Frequency Range	IF B/W
150kHz – 30MHz	9kHz

6.4 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

6.5 Corrected Factor & Margin Calculation

The factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$


The “Over Limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit Line}$$

6.6 Test Results

Test Mode: Transmitting

(Worst case is 802.11g High Channel)

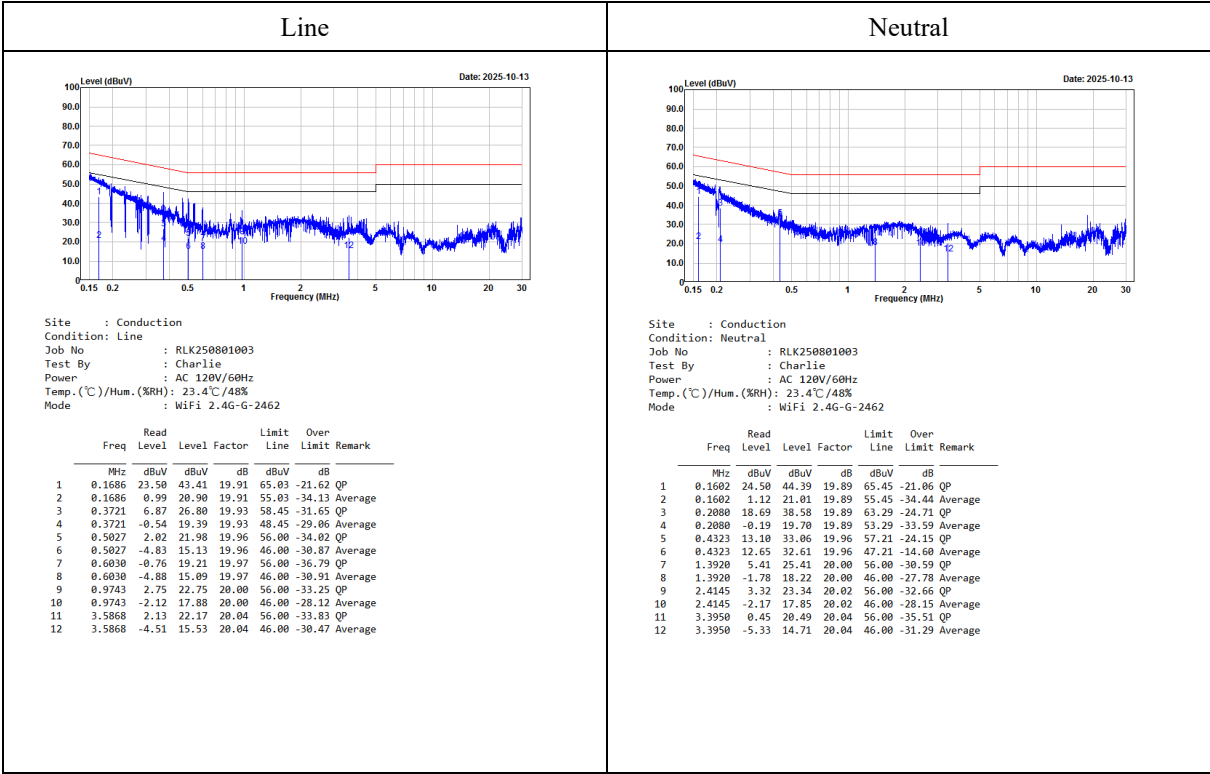

Note:

Level = Read Level + Factor

Over Limit = Level – Limit Line

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator

7 FCC §15.209, §15.205 , §15.247(d) – Spurious Emissions

7.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	608 – 614	4. 5 – 5. 15
0.495 – 0.505	16.69475 – 16.69525	960 – 1240	5. 35 – 5. 46
2.1735 – 2.1905	16.80425 – 16.80475	1300 – 1427	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1435 – 1626.5	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1645.5 – 1646.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1660 – 1710	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1718.8 – 1722.2	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	2200 – 2300	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2310 – 2390	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2483.5 – 2500	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2690 – 2900	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	3260 – 3267	22.01 – 23.12
8.41425 – 8.41475	162.0125 – 167.17	3.332 – 3.339	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3 3458 – 3 358	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3.600 – 4.400	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4		Above 38.6
13.36 – 13.41	399.9 – 410		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

According to ANSI C63.10-2020+Cor.1-2023, section 5.3.3


Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field, and the emissions to be measured can be detected by the measurement equipment (see 4.3.4).

Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. Measurements from 18 GHz to 40 GHz are typically made at distances significantly less than 3 m from the EUT. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade of distance (inverse of linear distance for field-strength measurements or inverse of linear distance-squared for power-density measurements).


As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.2 EUT Setup


9kHz-30MHz:

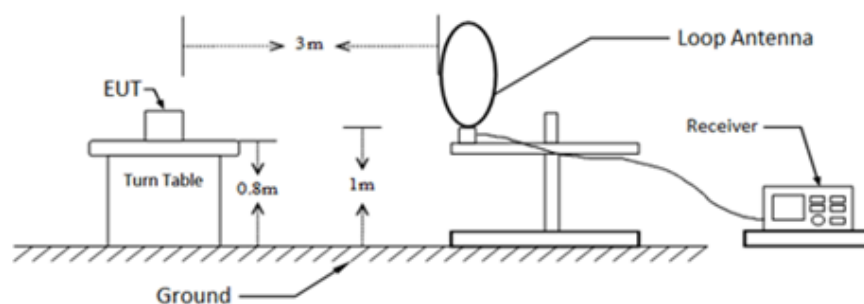


30MHz- 1GHz:

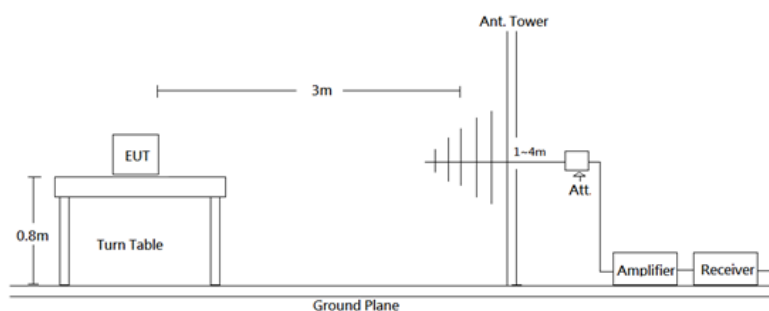

1-18 GHz:

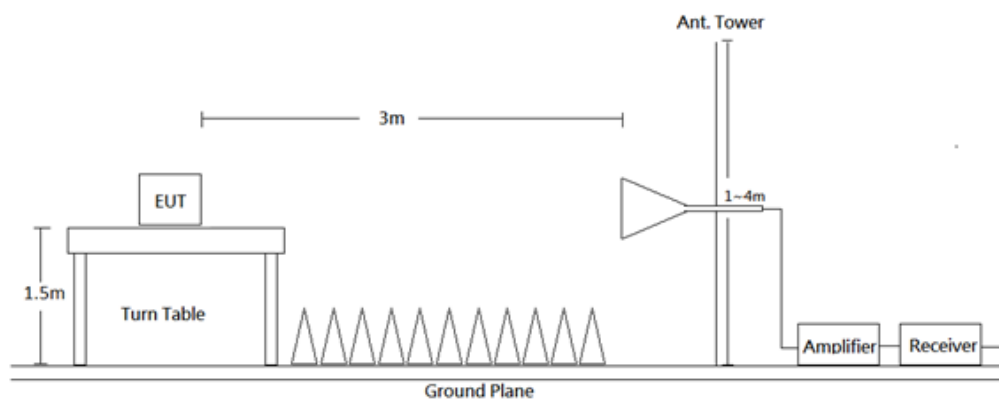

18-26.5 GHz:

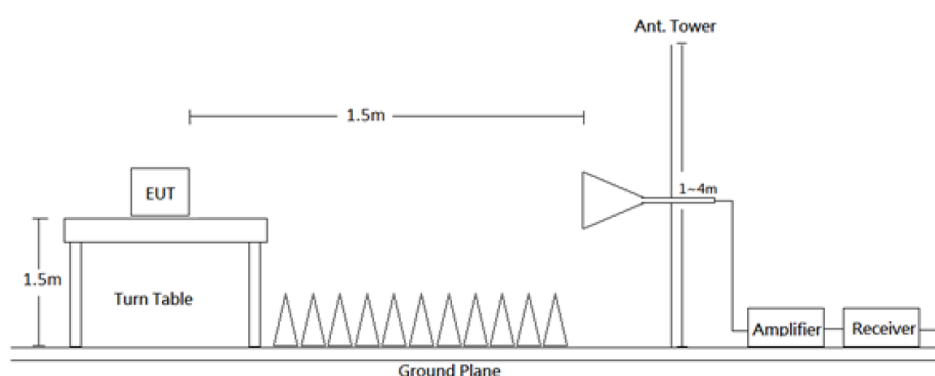

Radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the C63.10-2020+Cor.1-2023. The specification used was the FCC Part 15.209 and FCC 15.247 Limits.

7.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 26.5 GHz. During the radiated emission test, the EMI test receiver was set with the following configurations measurement method 6.3 in ANSI C63.10-2020+Cor.1-2023.

Frequency Range	RBW	VBW	Duty cycle	Measurement method	Detector
9 kHz - 150 kHz	200 Hz/300 Hz	1 kHz	/	QP/AV	QP/AV
150 kHz - 30 MHz	9 kHz/10 kHz	30 kHz	/	QP/AV	QP/AV
30-1000 MHz	120 kHz	500 kHz	/	QP	QP
Above 1 GHz	Pre-scan :				
	1 MHz	3 MHz	/	PK	PK
	1 MHz	1 kHz	>98%	Ave	PK
	1 MHz	$\geq 1/T_{on}$, not less than 1 Hz	<98%	Ave	PK
	Final measurement for emission identified during pre-scan :				
	1 MHz	3 MHz	/	PK	PK
	1 MHz	10 Hz	>98%	Ave	PK
	1 MHz	$\geq 1/T_{on}$	<98%	Ave	PK

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

7.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in Quasi-peak and average detector mode from 9 kHz to 30 MHz, Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

7.5 Factor & Over Limit Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Over Limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit Line}$$


7.6 Test Results

Test Mode: Transmitting

(Pre-scan with three orthogonal axis, and worse case as Y axis.)

9KHz-30MHz: (Worst case is 802.11g Mode High Channel)

(Pre-scan using three directional polarities, worst case as parallel.)

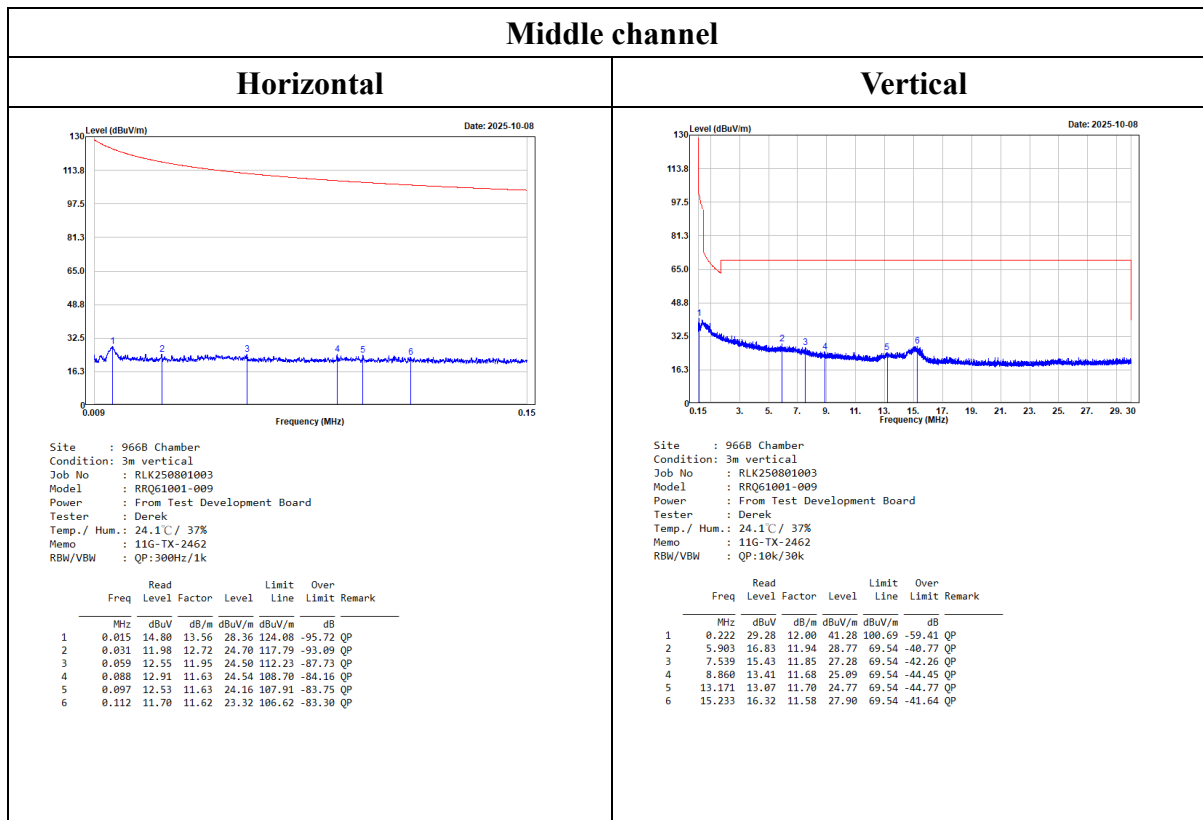

Note:


Level = Read Level + Factor

Over Limit = Level – Limit Line

Factor = Antenna Factor + Cable Loss – Amplifier Gain

30MHz-1GHz:

(Worst case is 802.11g Mode High Channel)

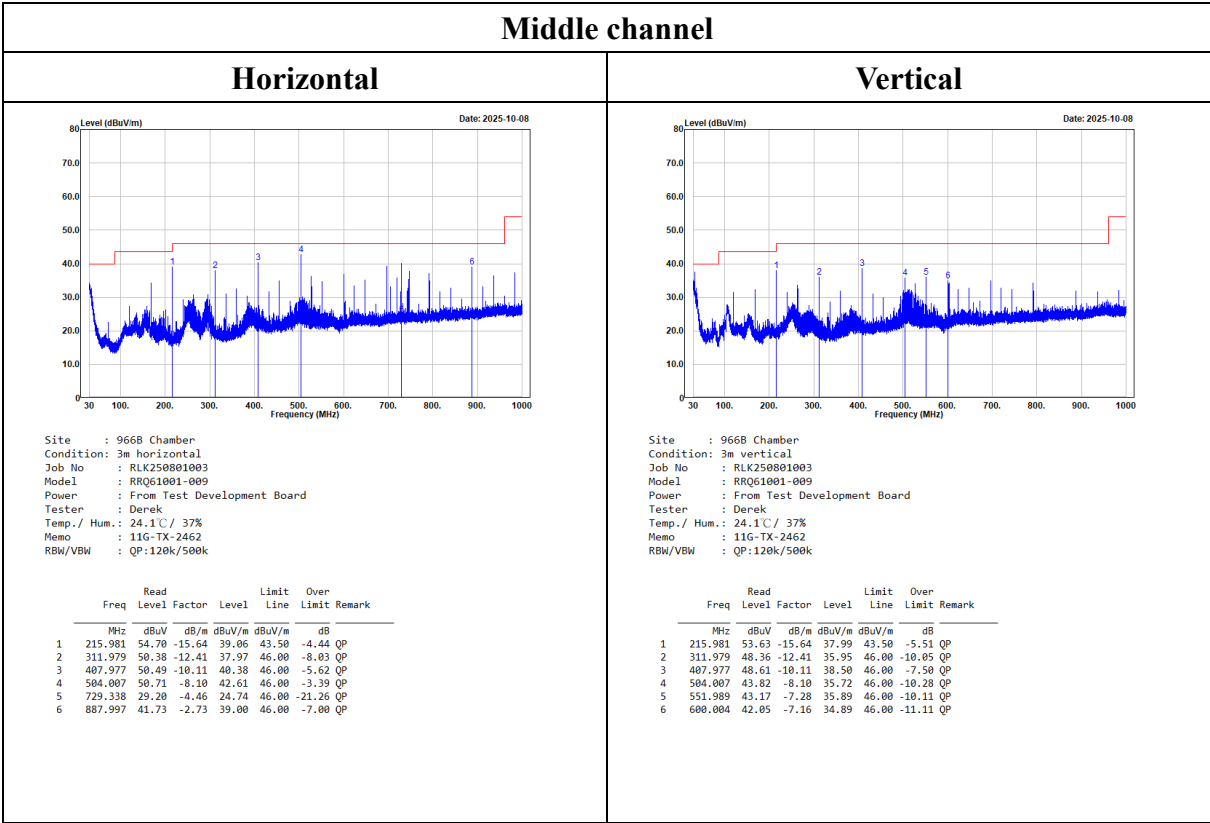

Note:

Level = Read Level + Factor

Over Limit = Level – Limit Line


Factor = Antenna Factor + Cable Loss – Amplifier Gain

802.11b Mode

1GHz-18GHz:

Low channel


Horizontal

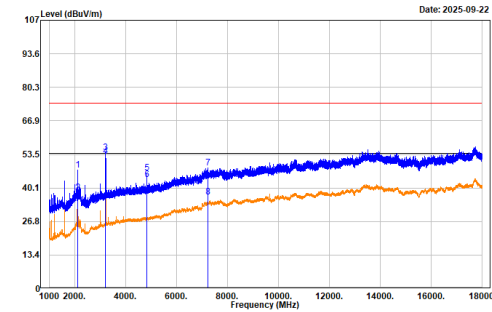

Trace: 1
Site : 966B Chamber
Condition: 3m horizontal
Job No : RLK250801003
Model : RRQ61001-009
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 23.3°C / 33%
Memo : 11B-TX-2412
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read		Limit	Over	
Freq	Level	Factor	Level	Line	Limit Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1 2110.667	48.91	-1.59	47.32	74.00	-26.68 Peak
2 2110.667	39.99	-1.59	38.40	54.00	-15.60 Average
3 3215.667	53.95	0.25	54.20	74.00	-19.80 Peak
4 3215.667	52.56	0.25	52.81	54.00	-1.19 Average
5 4824.000	42.97	3.11	46.08	74.00	-27.92 Peak
6 4824.000	40.27	3.11	43.38	54.00	-10.62 Average
7 7236.000	39.67	9.15	48.22	74.00	-25.78 Peak
8 7236.000	27.34	9.15	36.49	54.00	-17.51 Average

Vertical

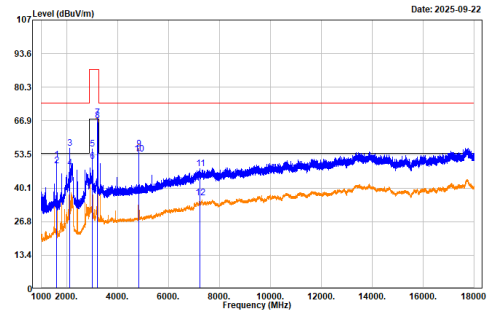


Trace: 1
Site : 966B Chamber
Condition: 3m vertical
Job No : RLK250801003
Model : RRQ61001-009
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 23.3°C / 33%
Memo : 11B-TX-2412
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read		Limit	Over	
Freq	Level	Factor	Level	Line	Limit Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1 1608.033	56.74	-5.40	51.34	74.00	-22.66 Peak
2 1608.033	54.44	-5.40	49.04	54.00	-4.96 Average
3 2110.100	57.64	-1.58	56.06	74.00	-17.94 Peak
4 2110.100	49.58	-1.58	48.00	54.00	-6.00 Average
5 3015.067	56.01	-0.26	55.75	87.42	-31.67 Peak
6 3015.067	50.92	-0.26	50.66	67.42	-16.76 Average
7 3216.233	67.98	0.25	68.23	87.42	-19.19 Peak
8 3216.233	66.63	0.25	66.88	67.42	-0.54 Average
9 4824.000	52.66	3.11	55.77	74.00	-18.23 Peak
10 4824.000	50.62	3.11	53.73	54.00	-0.27 Average
11 7236.000	38.56	9.15	47.71	74.00	-26.29 Peak
12 7236.000	27.07	9.15	36.22	54.00	-17.78 Average

Middle channel


Horizontal

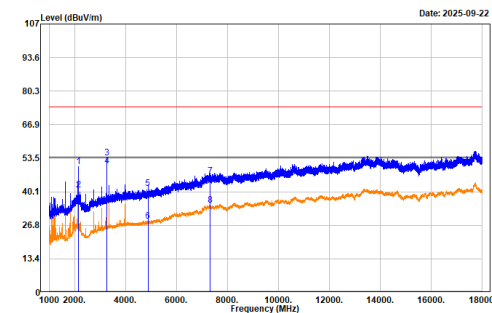

Trace: 1
Site : 966B Chamber
Condition: 3m horizontal
Job No : RLK250801003
Model : RRQ61001-009
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 23.3°C / 33%
Memo : 11B-TX-2437
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k


	Read		Limit	Over	
Freq	Level	Factor	Level	Line	Limit Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1 2132.200	51.98	-1.83	50.15	74.00	-23.85 Peak
2 2132.200	42.80	-1.83	40.97	54.00	-13.03 Average
3 3249.100	53.45	0.25	53.70	74.00	-20.30 Peak
4 3249.100	50.19	0.25	50.44	54.00	-3.56 Average
5 4874.000	38.02	3.33	41.35	74.00	-32.65 Peak
6 4874.000	25.23	3.33	28.56	54.00	-25.44 Average
7 7311.000	36.79	9.48	46.27	74.00	-27.73 Peak
8 7311.000	25.28	9.48	34.76	54.00	-19.24 Average

Vertical

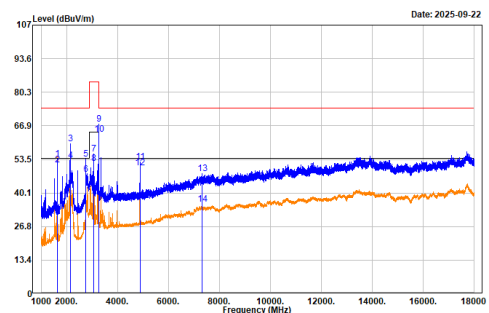

Trace: 1
Site : 966B Chamber
Condition: 3m vertical
Job No : RLK250801003
Model : RRQ61001-009
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 23.3°C / 33%
Memo : 11B-TX-2437
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read		Limit	Over	
Freq	Level	Factor	Level	Line	Limit Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1 1624.467	59.20	-5.50	53.70	74.00	-20.30 Peak
2 1624.467	56.87	-5.50	51.37	54.00	-2.63 Average
3 2132.767	61.43	-1.83	59.60	74.00	-14.40 Peak
4 2132.767	54.82	-1.83	52.99	54.00	-1.01 Average
5 2741.367	54.43	-0.91	53.52	74.00	-20.48 Peak
6 2741.367	48.37	-0.91	47.46	54.00	-6.54 Average
7 3046.233	55.63	0.00	55.63	84.33	-28.70 Peak
8 3046.233	51.86	0.00	51.86	64.33	-12.47 Average
9 3249.100	67.18	0.25	67.43	84.33	-16.90 Peak
10 3249.100	63.27	0.25	63.52	64.33	-0.81 Average
11 4874.000	49.15	3.33	52.48	74.00	-21.52 Peak
12 4874.000	46.84	3.33	50.17	54.00	-3.83 Average
13 7311.000	38.41	9.48	47.89	74.00	-26.11 Peak
14 7311.000	26.05	9.48	35.53	54.00	-18.47 Average

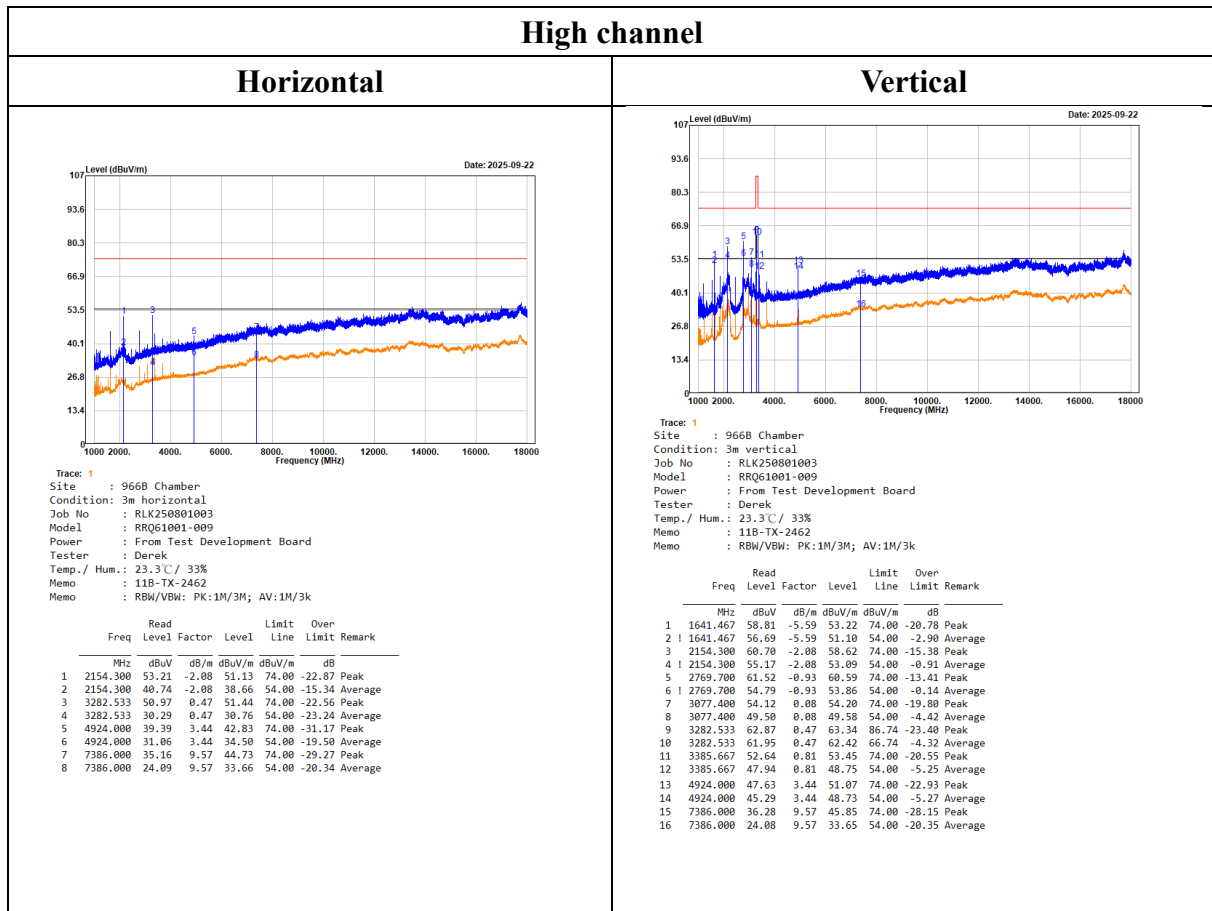

Note:

Level = Read Level + Factor

Over Limit = Level – Limit Line

Factor = Antenna Factor + Cable Loss – Amplifier Gain

For Not Restricted bands of operation Limit.

Convert the Main Frequency Peak Power -20dB=Peak Limit

Convert the Main Frequency Peak Power -40dB=Average Limit

802.11b Low channel Vertical For Not Restricted bands of operation Limit :

Peak Limit =107.42dB -20dB=87.42 dBuV/m

Average Limit =107.42dB -40dB=67.42 dBuV/m

802.11b Middle channel Vertical For Not Restricted bands of operation Limit :

Peak Limit =104.33dB -20dB=84.33 dBuV/m

Average Limit =104.33dB -40dB=64.33 dBuV/m

802.11b High channel Vertical For Not Restricted bands of operation Limit :

Peak Limit =106.74dB -20dB=86.74 dBuV/m


Average Limit =106.74dB -40dB=66.74 dBuV/m

802.11g Mode

1GHz-18GHz:

Low channel


Horizontal

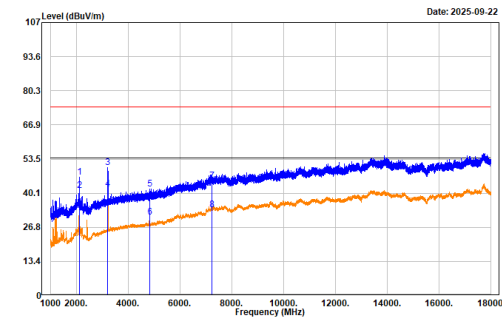

Trace: 1
Site: 966B Chamber
Condition: 3m horizontal
Job No: RLK250801003
Model: RRQ61001-009
Power: From Test Development Board
Tester: Derek
Temp./ Hum.: 23.3°C / 33%
Memo: 11G-TX-2412
Memo: RBW/VBW: PK:1M/3M; AV:1M/3k

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV		dB/m	dBuV/m	dB	
1	2110.667	47.94	-1.59	46.35	74.00	-27.65 Peak
2	2110.667	42.86	-1.59	41.27	54.00	-12.73 Average
3	3216.233	49.96	0.25	50.21	74.00	-23.79 Peak
4	3216.233	41.50	0.25	41.75	54.00	-12.25 Average
5	4824.000	38.61	3.11	41.72	74.00	-32.28 Peak
6	4824.000	27.62	3.11	30.73	54.00	-23.27 Average
7	7236.000	35.79	9.15	44.94	74.00	-29.06 Peak
8	7236.000	24.56	9.15	33.71	54.00	-20.29 Average

Vertical

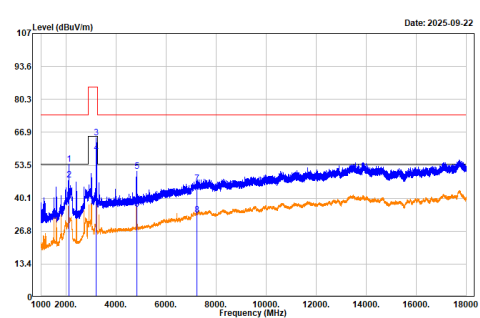


Trace: 1
Site: 966B Chamber
Condition: 3m vertical
Job No: RLK250801003
Model: RRQ61001-009
Power: From Test Development Board
Tester: Derek
Temp./ Hum.: 23.3°C / 33%
Memo: 11G-TX-2412
Memo: RBW/VBW: PK:1M/3M; AV:1M/3k

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV		dB/m	dBuV/m	dB	
1	2110.100	55.66	-1.58	54.08	74.00	-19.92 Peak
2	2110.100	49.22	-1.58	47.64	54.00	-6.36 Average
3	3215.667	64.38	0.25	64.63	85.21	-20.58 Peak
4	3215.667	58.40	0.25	58.65	65.21	-6.56 Average
5	4824.000	47.98	3.11	51.09	74.00	-22.91 Peak
6	4824.000	32.44	3.11	35.55	54.00	-18.45 Average
7	7236.000	36.87	9.15	46.02	74.00	-27.98 Peak
8	7236.000	24.33	9.15	33.48	54.00	-20.52 Average

Middle channel


Horizontal

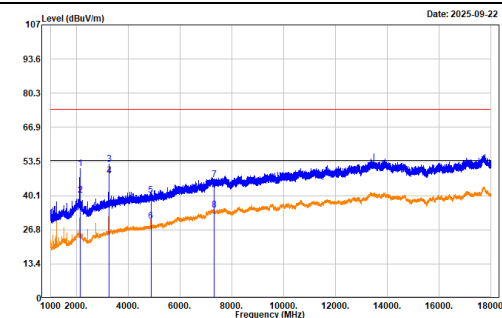

Trace: 1
Site: 966B Chamber
Condition: 3m horizontal
Job No: RLK250801003
Model: RRQ61001-009
Power: From Test Development Board
Tester: Derek
Temp./ Hum.: 23.3°C / 33%
Memo: 11G-TX-2437
Memo: RBW/VBW: PK:1M/3M; AV:1M/3k


	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV		dB/m	dBuV/m	dB	
1	2132.200	52.48	-1.83	50.65	74.00	-23.35 Peak
2	2132.200	42.26	-1.83	40.43	54.00	-13.57 Average
3	3249.667	52.32	0.25	52.57	74.00	-21.43 Peak
4	3249.667	47.71	0.25	47.96	54.00	-6.04 Average
5	4874.000	37.05	3.33	40.38	74.00	-33.62 Peak
6	4874.000	26.70	3.33	30.03	54.00	-23.97 Average
7	7311.000	36.78	9.48	46.26	74.00	-27.74 Peak
8	7311.000	25.09	9.48	34.57	54.00	-19.43 Average

Vertical

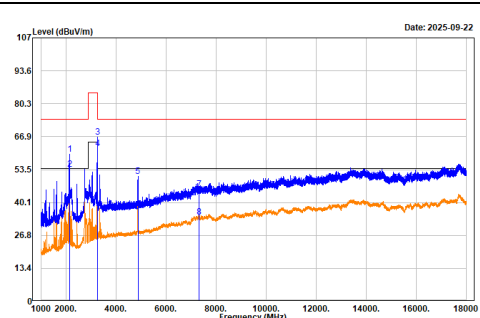

Trace: 1
Site: 966B Chamber
Condition: 3m vertical
Job No: RLK250801003
Model: RRQ61001-009
Power: From Test Development Board
Tester: Derek
Temp./ Hum.: 23.3°C / 33%
Memo: 11G-TX-2437
Memo: RBW/VBW: PK:1M/3M; AV:1M/3k

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV		dB/m	dBuV/m	dB	
1	2132.767	61.42	-1.83	59.59	74.00	-14.41 Peak
2	2132.767	55.59	-1.83	53.76	54.00	-0.24 Average
3	3249.667	66.57	0.25	66.82	84.62	-17.80 Peak
4	3249.667	61.77	0.25	62.02	64.62	-2.60 Average
5	4874.000	47.50	3.33	50.83	74.00	-23.17 Peak
6	4874.000	33.14	3.33	36.47	54.00	-17.53 Average
7	7311.000	36.08	9.48	45.56	74.00	-28.44 Peak
8	7311.000	24.67	9.48	34.15	54.00	-19.85 Average

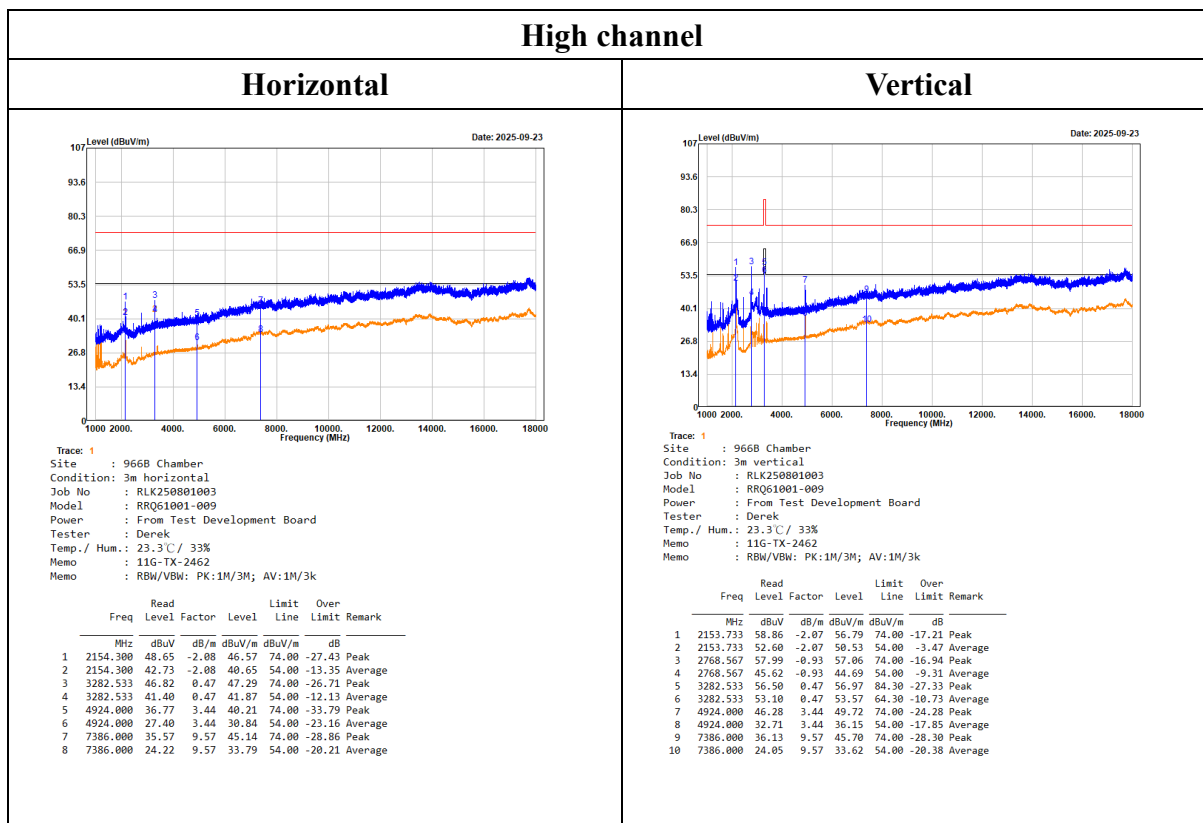

Note:

Level = Read Level + Factor

Over Limit = Level – Limit Line

Factor = Antenna Factor + Cable Loss – Amplifier Gain

For Not Restricted bands of operation Limit.

Convert the Main Frequency Peak Power -20dB=Peak Limit

Convert the Main Frequency Peak Power -40dB=Average Limit

802.11g Low channel Vertical For Not Restricted bands of operation Limit :

Peak Limit =105.21dB -20dB=85.21 dBuV/m

Average Limit =105.21dB -40dB=65.21dBuV/m

802.11 g Middle channel Vertical For Not Restricted bands of operation Limit :

Peak Limit =104.62dB -20dB=84.62 dBuV/m

Average Limit =104.62dB -40dB=64.62 dBuV/m

802.11 g High channel Vertical For Not Restricted bands of operation Limit :

Peak Limit =104.30dB -20dB=84.30 dBuV/m


Average Limit =104.30dB -40dB=64.30 dBuV/m

802.11n HT20 Mode

1GHz-18GHz:

Low channel


Horizontal

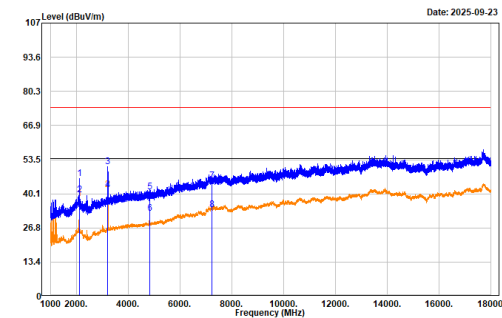

Trace: 1
Site: 966B Chamber
Condition: 3m horizontal
Job No: RLK250801003
Model: RRQ61001-009
Power: From Test Development Board
Tester: Derek
Temp./ Hum.: 23.3°C / 33%
Memo: N20-TX-2412
Memo: RBW/VBW: PK:1M/3M; AV:1M/5k

	Read				Limit	Over	
	Level	Factor	Level		Line	Limit	Remark
Freq							
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 2110.667	47.59	-1.59	46.00	74.00	-28.00	Peak	
2 2110.667	41.46	-1.59	39.87	54.00	-14.13	Average	
3 3215.667	50.54	0.25	50.79	74.00	-23.21	Peak	
4 3215.667	41.39	0.25	41.64	54.00	-12.36	Average	
5 4824.000	37.75	3.11	40.86	74.00	-33.14	Peak	
6 4824.000	29.51	3.11	32.62	54.00	-21.38	Average	
7 7236.000	36.02	9.15	45.17	74.00	-28.83	Peak	
8 7236.000	24.80	9.15	33.95	54.00	-20.05	Average	

Vertical

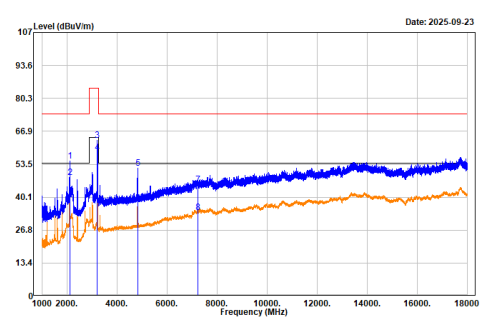


Trace: 1
Site: 966B Chamber
Condition: 3m vertical
Job No: RLK250801003
Model: RRQ61001-009
Power: From Test Development Board
Tester: Derek
Temp./ Hum.: 23.3°C / 33%
Memo: N20-TX-2412
Memo: RBW/VBW: PK:1M/3M; AV:1M/5k

	Read				Limit	Over	
	Level	Factor	Level		Line	Limit	Remark
Freq							
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 2110.667	56.41	-1.59	54.82	74.00	-19.18	Peak	
2 2110.667	49.61	-1.59	48.02	54.00	-5.98	Average	
3 3215.667	63.02	0.25	63.27	84.25	-20.98	Peak	
4 3215.667	57.90	0.25	58.15	64.25	-6.10	Average	
5 4824.000	48.77	3.11	51.88	74.00	-22.12	Peak	
6 4824.000	34.28	3.11	37.39	54.00	-16.61	Average	
7 7236.000	35.98	9.15	45.13	74.00	-28.87	Peak	
8 7236.000	24.66	9.15	33.81	54.00	-20.19	Average	

Middle channel


Horizontal

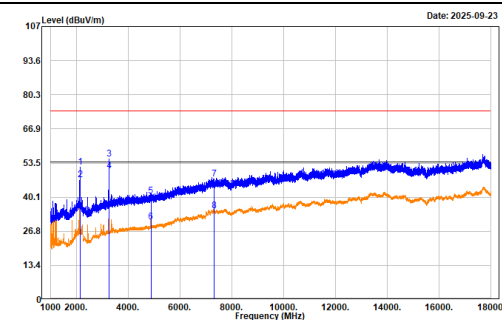

Trace: 1
Site: 966B Chamber
Condition: 3m horizontal
Job No: RLK250801003
Model: RRQ61001-009
Power: From Test Development Board
Tester: Derek
Temp./ Hum.: 23.3°C / 33%
Memo: N20-TX-2437
Memo: RBW/VBW: PK:1M/3M; AV:1M/5k


	Read				Limit	Over	
	Level	Factor	Level		Line	Limit	Remark
Freq							
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 2132.200	53.60	-1.83	51.77	74.00	-22.23	Peak	
2 2132.200	48.67	-1.83	46.84	54.00	-7.16	Average	
3 3249.100	54.83	0.25	55.08	74.00	-18.92	Peak	
4 3249.100	50.10	0.25	50.35	54.00	-3.65	Average	
5 4874.000	37.14	3.33	40.47	74.00	-33.53	Peak	
6 4874.000	27.07	3.33	30.40	54.00	-23.60	Average	
7 7311.000	37.78	9.48	47.26	74.00	-26.74	Peak	
8 7311.000	25.22	9.48	34.70	54.00	-19.30	Average	

Vertical

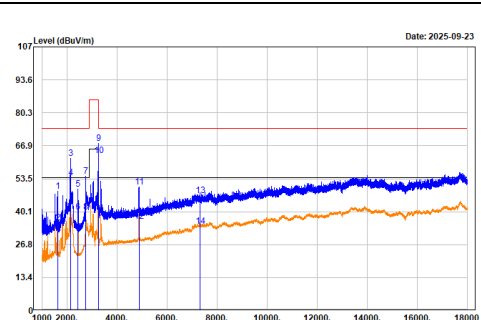

Trace: 1
Site: 966B Chamber
Condition: 3m vertical
Job No: RLK250801003
Model: RRQ61001-009
Power: From Test Development Board
Tester: Derek
Temp./ Hum.: 23.3°C / 33%
Memo: N20-TX-2437
Memo: RBW/VBW: PK:1M/3M; AV:1M/5k

	Read				Limit	Over	
	Level	Factor	Level		Line	Limit	Remark
Freq							
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 1623.900	53.96	-5.49	48.47	74.00	-25.53	Peak	
2 1623.900	41.24	-5.49	35.75	54.00	-18.25	Average	
3 2132.200	63.59	-1.83	61.76	74.00	-12.24	Peak	
4 2132.200	55.66	-1.83	53.83	54.00	-0.17	Average	
5 2439.333	51.30	-2.13	49.17	74.00	-24.83	Peak	
6 2439.333	42.21	-2.13	40.08	54.00	-13.92	Average	
7 2749.300	55.50	-0.91	54.59	74.00	-19.41	Peak	
8 2749.300	40.97	-0.91	40.06	54.00	-13.94	Average	
9 3249.667	67.49	0.25	67.74	85.41	-17.67	Peak	
10 3249.667	62.66	0.25	62.91	65.41	-2.50	Average	
11 4874.000	46.84	3.33	50.17	74.00	-23.83	Peak	
12 4874.000	33.05	3.33	36.38	54.00	-17.62	Average	
13 7311.000	37.30	9.48	46.78	74.00	-27.22	Peak	
14 7311.000	24.81	9.48	34.29	54.00	-19.71	Average	

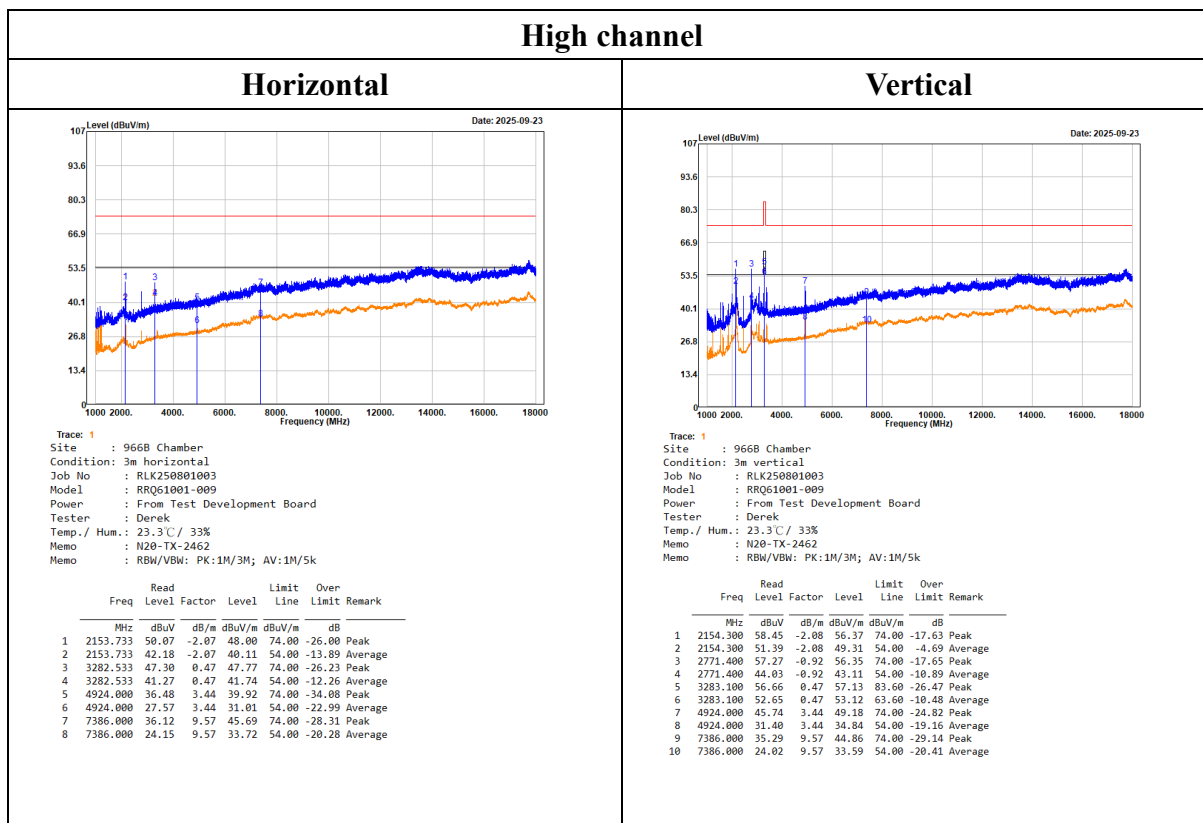

Note:

Level = Read Level + Factor

Over Limit = Level – Limit Line

Factor = Antenna Factor + Cable Loss – Amplifier Gain

For Not Restricted bands of operation Limit.

Convert the Main Frequency Peak Power -20dB=Peak Limit

Convert the Main Frequency Peak Power -40dB=Average Limit

802.11n20 Low channel Vertical For Not Restricted bands of operation Limit :

Peak Limit =104.25dB -20dB=84.25 dBuV/m

Average Limit =104.25dB -40dB=64.25 dBuV/m

802.11 n20 Middle channel Vertical For Not Restricted bands of operation Limit :

Peak Limit =105.41dB -20dB=85.41 dBuV/m

Average Limit =105.41dB -40dB=65.41 dBuV/m

802.11 n20 High channel Vertical For Not Restricted bands of operation Limit :

Peak Limit =103.60dB -20dB=83.60 dBuV/m


Average Limit =103.60dB -40dB=63.60 dBuV/m

802.11 ax20 Mode

1GHz-18GHz:

Low channel


Horizontal

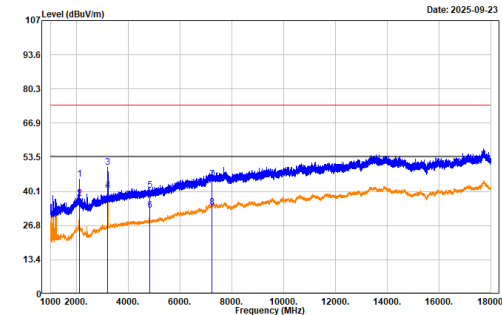

Trace: 1
Site : 966B Chamber
Condition: 3m horizontal
Job No : RLK250801003
Model : RRQ61001-009
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 23.3°C / 33%
Memo : AX20-TX-2412
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read			Limit	Over
Freq	Level	Factor	Level	Line	Limit Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1 2110.667	46.47	-1.59	44.88	74.00	-29.12 Peak
2 2110.667	39.07	-1.59	37.48	54.00	-16.52 Average
3 3215.667	49.22	0.25	49.47	74.00	-24.53 Peak
4 3215.667	40.34	0.25	40.59	54.00	-13.41 Average
5 4824.000	37.37	3.11	40.48	74.00	-33.52 Peak
6 4824.000	29.78	3.11	32.89	54.00	-21.11 Average
7 7236.000	35.79	9.15	44.94	74.00	-29.06 Peak
8 7236.000	24.90	9.15	34.05	54.00	-19.95 Average

Vertical

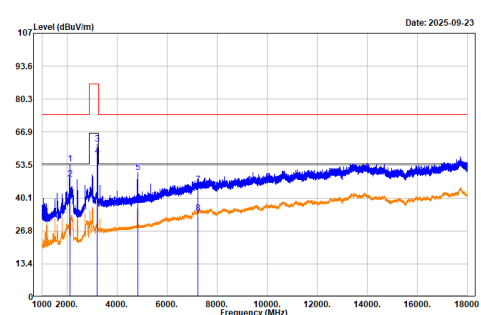


Trace: 1
Site : 966B Chamber
Condition: 3m vertical
Job No : RLK250801003
Model : RRQ61001-009
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 23.3°C / 33%
Memo : AX20-TX-2412
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read			Limit	Over
Freq	Level	Factor	Level	Line	Limit Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1 2110.667	55.59	-1.59	54.00	74.00	-20.00 Peak
2 2110.667	49.44	-1.59	47.85	54.00	-6.15 Average
3 3215.667	61.80	0.25	62.05	86.41	-24.36 Peak
4 3215.667	56.76	0.25	57.01	66.41	-9.40 Average
5 4824.000	47.48	3.11	50.59	74.00	-23.41 Peak
6 4824.000	34.78	3.11	37.89	54.00	-16.11 Average
7 7236.000	36.31	9.15	45.46	74.00	-28.54 Peak
8 7236.000	24.85	9.15	34.00	54.00	-20.00 Average

Middle channel


Horizontal

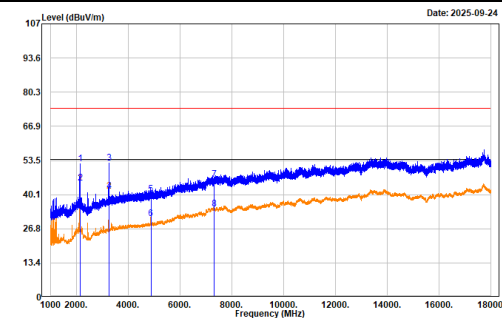

Trace: 1
Site : 966B Chamber
Condition: 3m horizontal
Job No : RLK250801003
Model : RRQ61001-009
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 23.3°C / 33%
Memo : AX20-TX-2437
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k


	Read			Limit	Over
Freq	Level	Factor	Level	Line	Limit Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1 2132.200	54.15	-1.83	52.32	74.00	-21.68 Peak
2 2132.200	46.46	-1.83	44.63	54.00	-9.37 Average
3 3249.100	52.30	0.25	52.55	74.00	-21.45 Peak
4 3249.100	41.09	0.25	41.34	54.00	-12.66 Average
5 4874.000	37.07	3.33	40.40	74.00	-33.60 Peak
6 4874.000	27.33	3.33	30.66	54.00	-23.34 Average
7 7311.000	36.69	9.48	46.17	74.00	-27.83 Peak
8 7311.000	25.03	9.48	34.51	54.00	-19.49 Average

Vertical

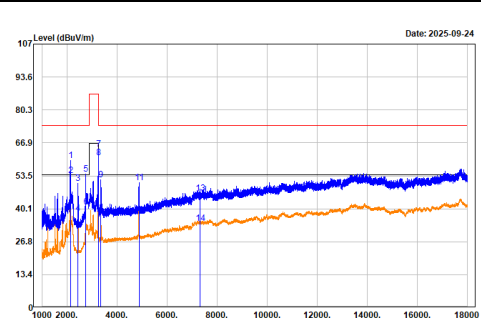

Trace: 1
Site : 966B Chamber
Condition: 3m vertical
Job No : RLK250801003
Model : RRQ61001-009
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 23.3°C / 33%
Memo : AX20-TX-2437
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read			Limit	Over
Freq	Level	Factor	Level	Line	Limit Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1 2132.200	61.61	-1.83	59.78	74.00	-14.22 Peak
2 2132.200	55.45	-1.83	53.62	54.00	-0.38 Average
3 3249.100	52.65	-2.17	50.48	74.00	-23.52 Peak
4 3249.100	40.56	-2.17	38.39	54.00	-15.61 Average
5 2744.200	55.10	-0.91	54.19	74.00	-19.81 Peak
6 2744.200	41.93	-0.91	41.02	54.00	-12.98 Average
7 3249.667	64.02	0.25	64.27	86.76	-22.49 Peak
8 3249.667	60.51	0.25	60.76	66.76	-6.00 Average
9 3351.667	51.24	0.68	51.92	74.00	-22.08 Peak
10 3351.667	35.49	0.68	36.17	54.00	-17.83 Average
11 4874.000	47.39	3.33	50.72	74.00	-23.28 Peak
12 4874.000	33.73	3.33	37.06	54.00	-16.94 Average
13 7311.000	37.06	9.48	46.54	74.00	-27.46 Peak
14 7311.000	24.88	9.48	34.36	54.00	-19.64 Average

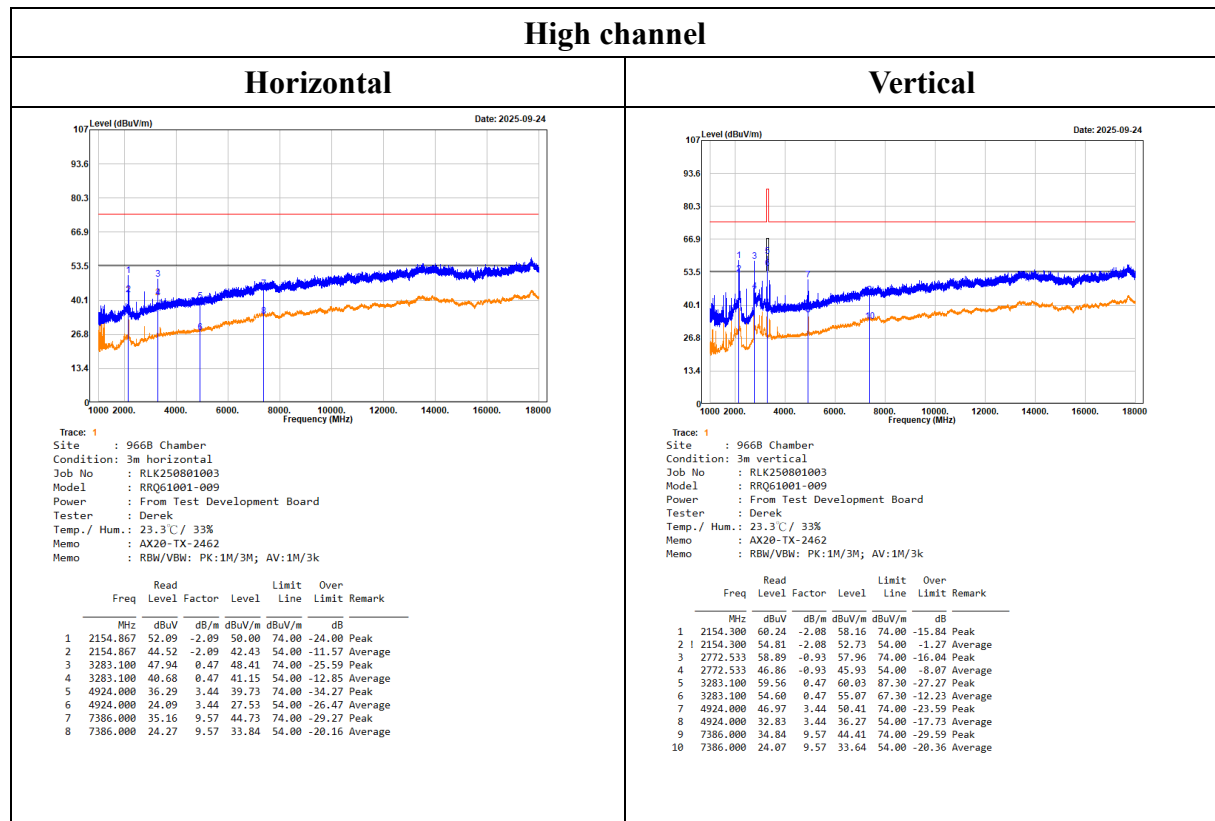

Note:

Level = Read Level + Factor

Over Limit = Level – Limit Line

Factor = Antenna Factor + Cable Loss – Amplifier Gain

For Not Restricted bands of operation Limit.

Convert the Main Frequency Peak Power -20dB=Peak Limit

Convert the Main Frequency Peak Power -40dB=Average Limit

802.11ax20 Low channel Vertical For Not Restricted bands of operation Limit :

Peak Limit =106.41dB -20dB=86.41 dBuV/m

Average Limit =106.41dB -40dB=66.41 dBuV/m

802.11 ax20 Middle channel Vertical For Not Restricted bands of operation Limit :

Peak Limit =106.76dB -20dB=86.76 dBuV/m

Average Limit =106.76dB -40dB=66.76 dBuV/m


802.11 ax20 High channel Vertical For Not Restricted bands of operation Limit :

Peak Limit =107.30dB -20dB=87.30 dBuV/m

Average Limit =107.30dB -40dB=67.30 dBuV/m

Main Frequency Power


802.11b Low channel Vertical

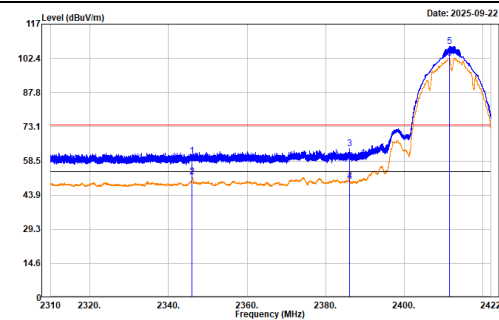

Trace: 1
Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801003
Model : RRQ61001-009
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 23.7°C / 36%
Memo : 11B-TX-2412
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read	Read	Read	Read	Limit	Over
	Freq	Level	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	2346.823	27.83	32.65	60.48	74.00	-13.52 Peak
2	2346.823	19.01	32.65	51.66	54.00	-2.34 Average
3	2385.992	31.27	32.49	63.76	74.00	-10.24 Peak
4	2385.992	17.21	32.49	49.70	54.00	-4.30 Average
5	2411.397	74.91	32.51	107.42	-----	----- Peak
6	2411.397	69.98	32.50	102.48	-----	----- Average


802.11b Middle channel Vertical

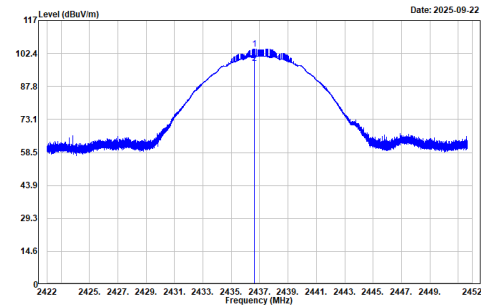

Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801003
Model : RRQ61001-009
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 23.3°C / 33%
Memo : 11B-TX-2437

	Read	Read	Read	Read	Limit	Over
	Freq	Level	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	2436.607	71.66	32.67	104.33	-----	----- Peak
2	2436.607	65.16	32.67	97.83	-----	----- Average


802.11b High channel Vertical

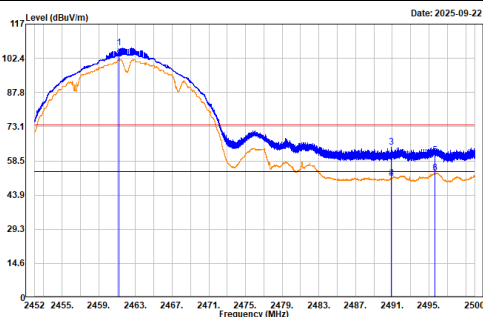

Trace: 1
Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801003
Model : RRQ61001-009
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 23.7°C / 36%
Memo : 11B-TX-2462
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read	Read	Read	Read	Limit	Over
	Freq	Level	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	2461.240	73.94	32.80	106.74	-----	----- Peak
2	2461.240	69.41	32.80	102.21	-----	----- Average
3	2490.899	31.42	32.88	64.30	74.00	-9.70 Peak
4	2490.899	18.12	32.88	51.00	54.00	-3.00 Average
5	2495.630	28.07	32.90	60.97	74.00	-13.03 Peak
6	2495.630	20.49	32.90	53.39	54.00	-0.61 Average


802.11g Low channel Vertical

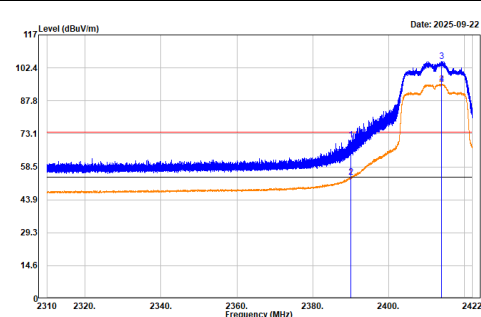

Trace: 1
Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801003
Model : RRQ61001-009
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 23.7°C / 36%
Memo : 11G-TX-2412
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read	Read	Read	Read	Limit	Over
	Freq	Level	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	2389.998	37.91	32.47	70.38	74.00	-3.62 Peak
2	2389.998	21.49	32.47	53.96	54.00	-0.04 Average
3	2413.832	72.69	32.52	105.21	-----	----- Peak
4	2413.832	62.76	32.51	95.27	-----	----- Average


802.11g Middle channel Vertical

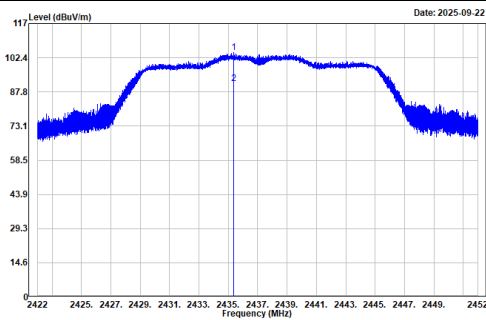

Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801003
Model : RRQ61001-009
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 23.3°C / 33%
Memo : 11G-TX-2437

	Read		Limit	Over	
Freq	Level	Factor	Level	Line	Limit Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1 2435.350	71.96	32.66	104.62	-----	Peak
2 2435.350	58.51	32.66	91.17	-----	Average


802.11g High channel Vertical

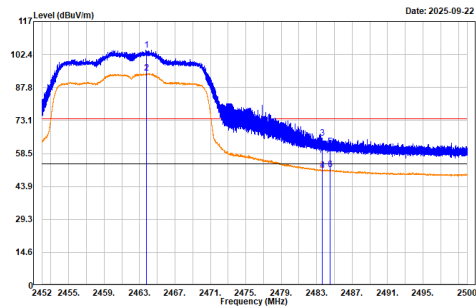

Trace: 1
Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801003
Model : RRQ61001-009
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 23.7°C / 36%
Memo : 11G-TX-2462
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read		Limit	Over	
Freq	Level	Factor	Level	Line	Limit Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1 2463.754	71.49	32.81	104.30	-----	Peak
2 2463.754	61.23	32.81	94.04	-----	Average
3 2483.624	32.58	32.87	65.45	74.00	-8.55 Peak
4 2483.624	18.18	32.87	51.05	54.00	-2.95 Average
5 2484.541	28.59	32.87	61.46	74.00	-12.54 Peak
6 2484.541	18.49	32.87	51.36	54.00	-2.64 Average


802.11n20 Low channel Vertical

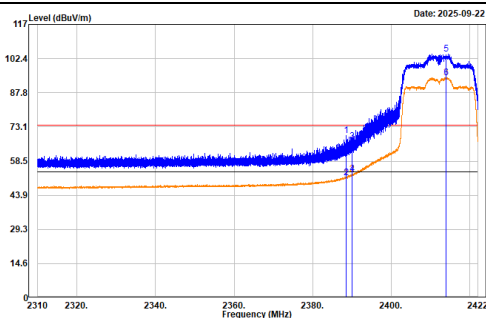

Trace: 1
Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801003
Model : RRQ61001-009
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 23.7°C / 36%
Memo : N20-TX-2412
Memo : RBW/VBW: PK:1M/3M; AV:1M/5k

	Read		Limit	Over	
Freq	Level	Factor	Level	Line	Limit Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1 2388.520	36.89	32.48	69.37	74.00	-4.63 Peak
2 2388.520	18.76	32.48	51.24	54.00	-2.76 Average
3 2389.964	34.45	32.47	66.92	74.00	-7.08 Peak
4 2389.964	20.44	32.47	52.91	54.00	-1.09 Average
5 2413.921	71.76	32.49	104.25	-----	Peak
6 2413.921	61.73	32.51	94.24	-----	Average


802.11n20 Middle channel Vertical

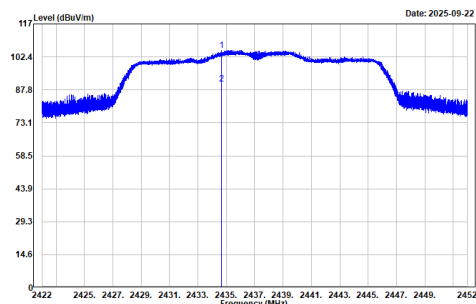

Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801003
Model : RRQ61001-009
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 23.3°C / 33%
Memo : N20-TX-2437

	Read		Limit	Over	
Freq	Level	Factor	Level	Line	Limit Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1 2434.655	72.75	32.66	105.41	-----	Peak
2 2434.655	57.78	32.66	90.44	-----	Average


802.11n20 High channel Vertical

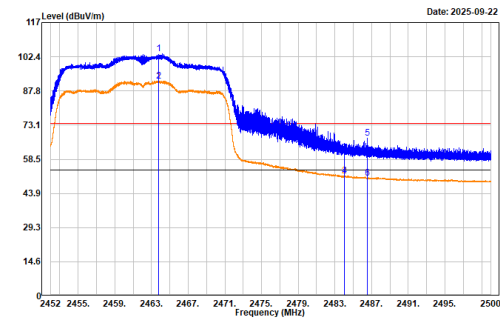

Trace 1
Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801003
Model : RRQ61001-009
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 23.7°C / 36%
Memo : N20-TX-2462
Memo : RBW/VBW: PK:1M/3M; AV:1M/5k

	Read	Read	Read	Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	2463.776	70.79	32.81	103.60	-----	Peak
2	2463.776	59.29	32.81	92.10	-----	Average
3	2484.010	28.31	32.87	61.18	74.00	-12.82 Peak
4	2484.010	18.60	32.87	51.47	54.00	-2.53 Average
5	2486.546	34.58	32.87	67.45	74.00	-6.55 Peak
6	2486.546	17.65	32.87	50.52	54.00	-3.48 Average


802.11ax20 Low channel Vertical

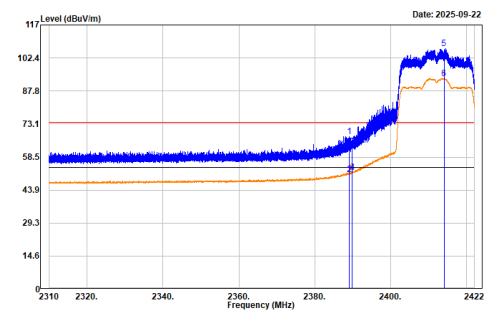

Trace 1
Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801003
Model : RRQ61001-009
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 23.7°C / 36%
Memo : AX20-TX-2412
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read	Read	Read	Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	2388.971	35.04	32.48	67.52	74.00	-6.48 Peak
2	2388.971	18.39	32.48	50.87	54.00	-3.13 Average
3	2389.878	30.71	32.47	63.18	74.00	-10.82 Peak
4	2389.878	19.32	32.47	51.79	54.00	-2.21 Average
5	2413.985	73.89	32.52	106.41	-----	Peak
6	2413.985	60.77	32.51	93.28	-----	Average


802.11ax Middle channel Vertical

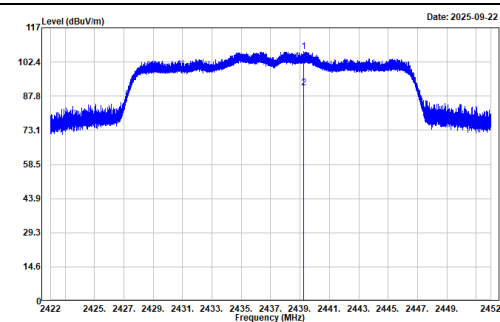

Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801003
Model : RRQ61001-009
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 23.3°C / 33%
Memo : AX20-TX-2437

	Read	Read	Read	Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	2439.237	74.06	32.70	106.76	-----	Peak
2	2439.237	58.68	32.70	91.38	-----	Average


802.11ax High channel Vertical

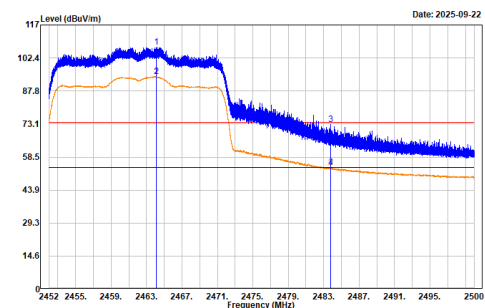

Trace 1
Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801003
Model : RRQ61001-009
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 23.7°C / 36%
Memo : AX20-TX-2462
Memo : RBW/VBW: PK:1M/3M; AV:1M/3k

	Read	Read	Read	Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	2464.114	74.49	32.81	107.30	-----	Peak
2	2464.114	61.32	32.81	94.13	-----	Average
3	2483.776	39.92	32.87	72.79	74.00	-1.21 Peak
4	2483.776	21.03	32.87	53.90	54.00	-0.10 Average

18GHz-26.5GHz:

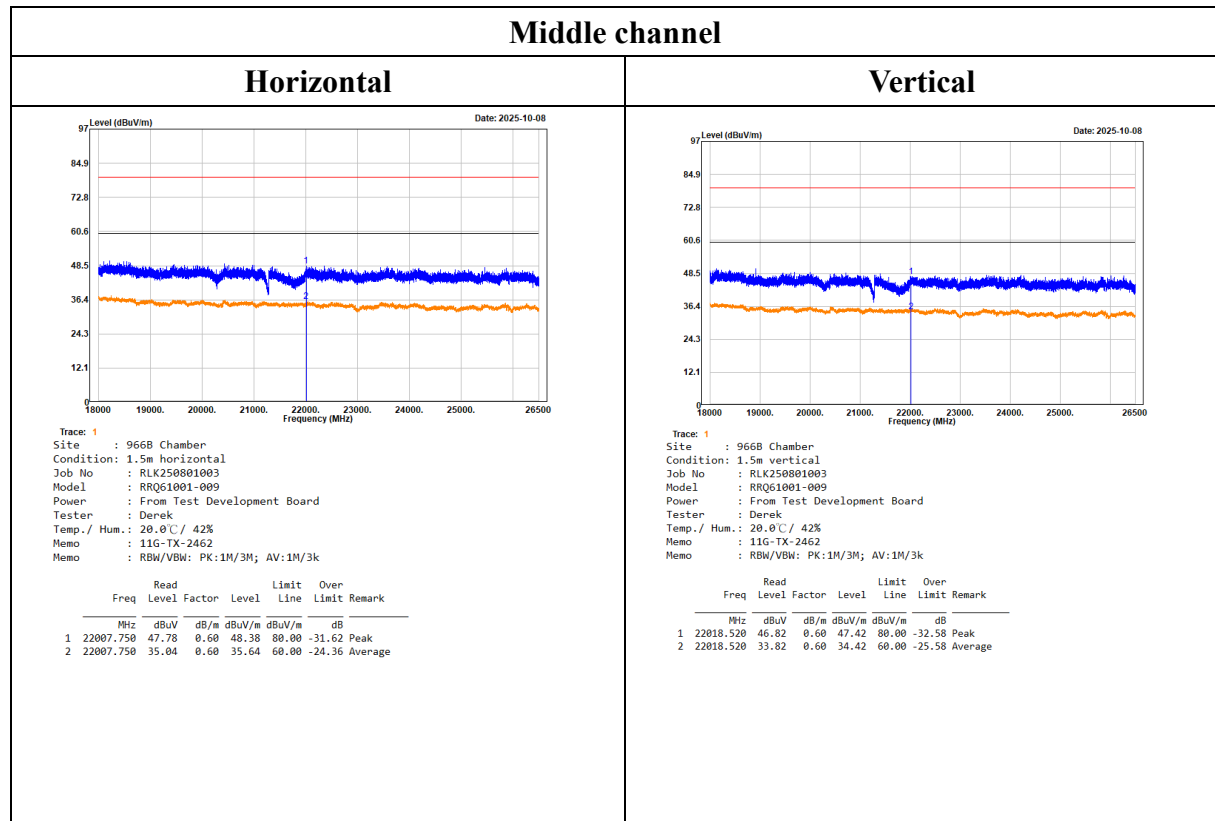

Note:

Level = Read Level + Factor

Over Limit = Level – Limit Line


Factor = Antenna Factor + Cable Loss – Amplifier Gain

For 18-26.5GHz Convert the test distance limit of 3 meters to a limit of 1.5 meter:

Conversion factor = $20 \log (1.5\text{m}/3\text{m}) = 6 \text{ dB}$,

Average Limit = $54+6 = 60 \text{ dBuV/m}@1.5\text{m}$, Peak Limit = $60+20 = 80 \text{ dBuV/m}@1.5\text{m}$

Band-Edge:
802.11b Mode

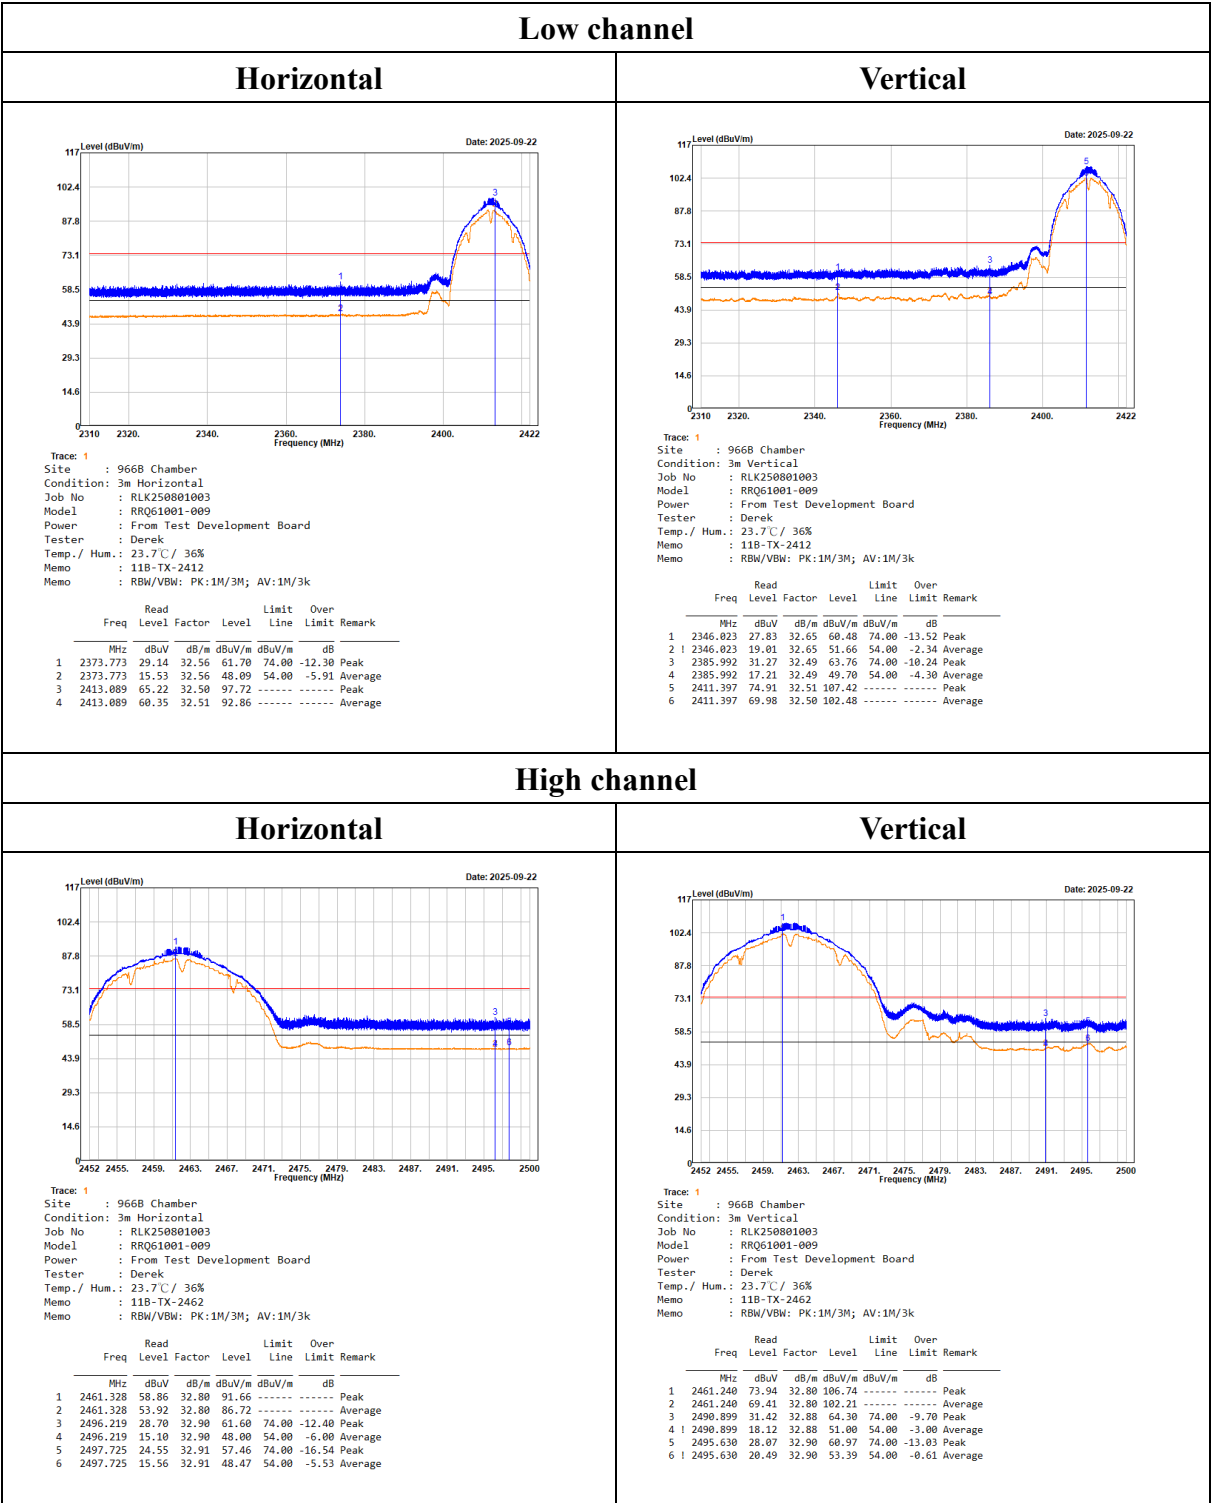


Note:

Level = Read Level + Factor

Over Limit = Level – Limit Line

Factor = Antenna Factor + Cable Loss – Amplifier Gain

802.11g Mode

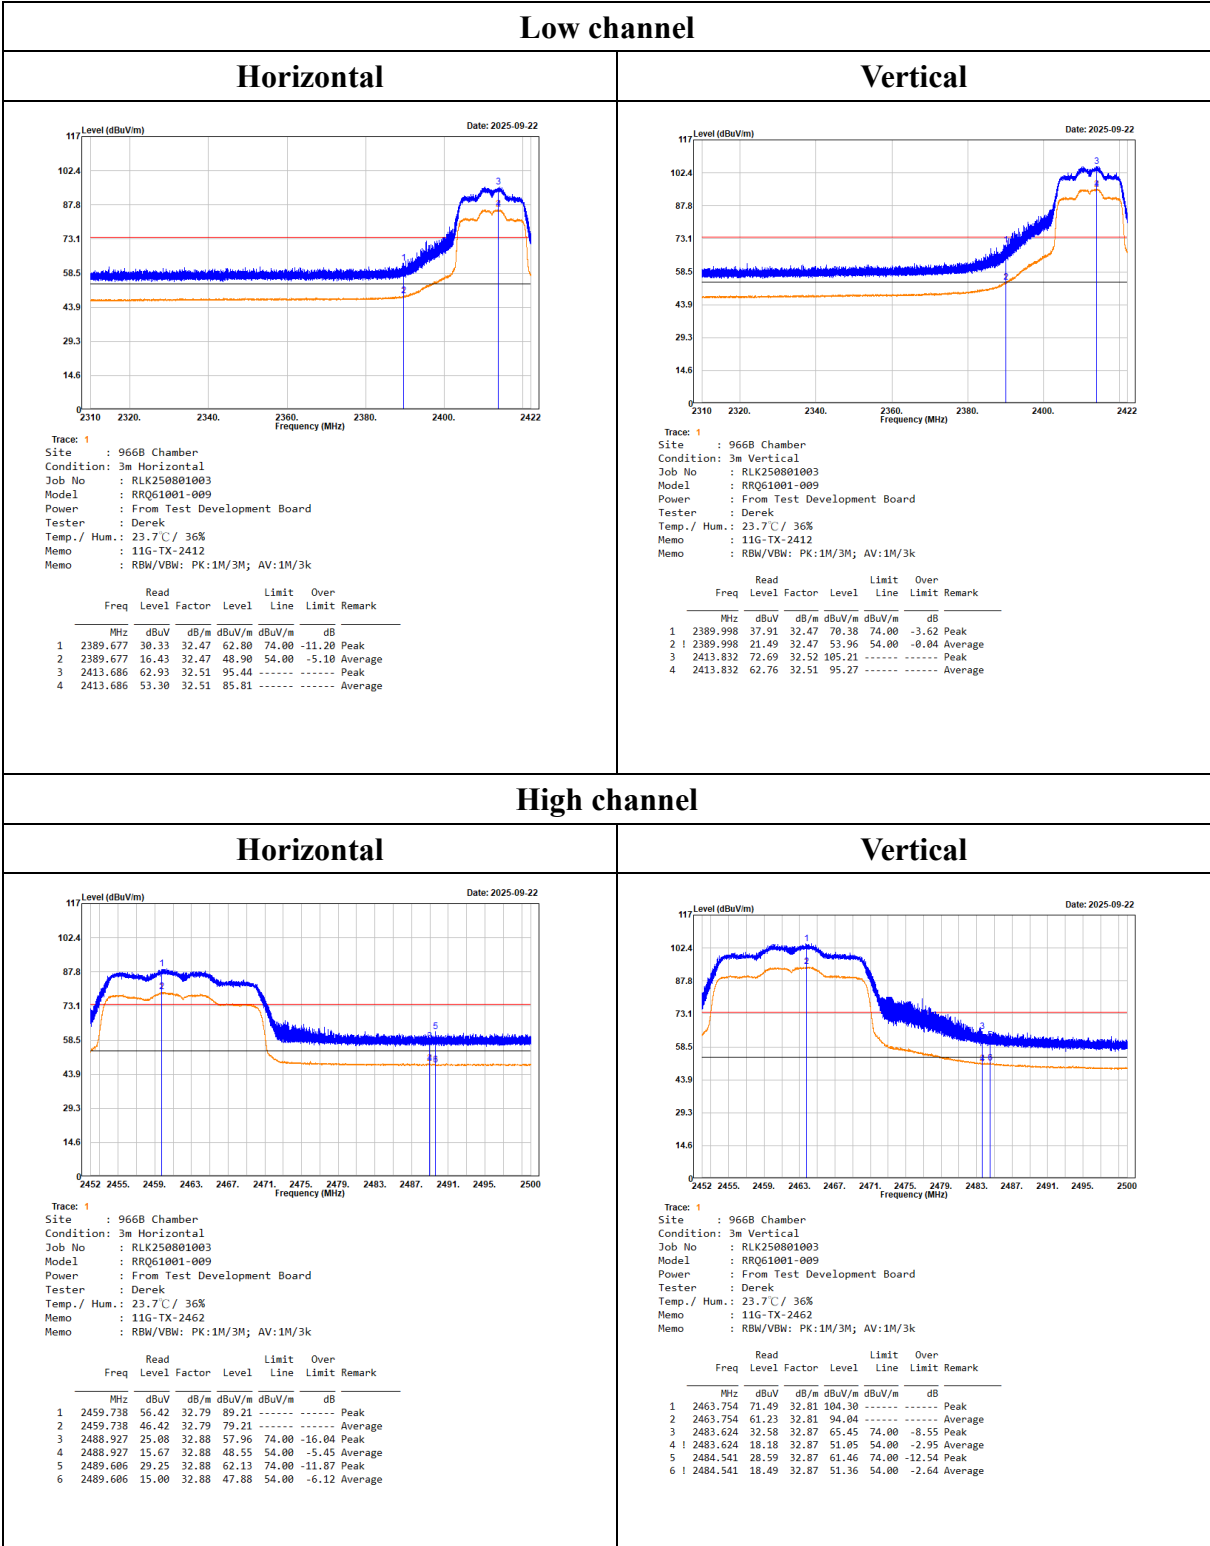

Note:

Level = Read Level + Factor


Over Limit = Level – Limit Line

Factor = Antenna Factor + Cable Loss – Amplifier Gain

802.11n HT20 Mode

Low channel


Horizontal

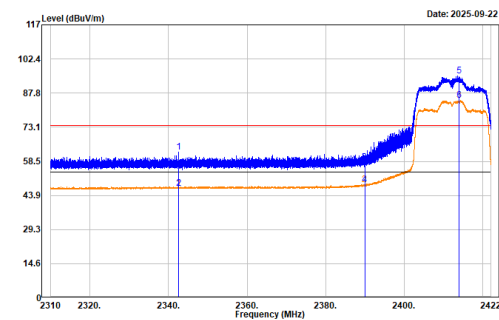

Trace: 1
Site : 966B Chamber
Condition: 3m Horizontal
Job No : RLK250801003
Model : RRQ61001-009
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 23.7°C / 36%
Memo : N20-TX-2412
Memo : RBW/VBW: PK:1M/3M; AV:1M/5k

	Read	Level	Factor	Level	Limit	Over	
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	2342.532	29.73	32.63	62.36	74.00	-11.64	Peak
2	2342.532	14.36	32.63	46.99	54.00	-7.01	Average
3	2389.905	25.68	32.47	58.15	74.00	-15.85	Peak
4	2389.905	16.15	32.47	48.62	54.00	-5.38	Average
5	2413.902	62.55	32.51	95.06	-----	-----	Peak
6	2413.902	52.13	32.51	84.64	-----	-----	Average

Vertical

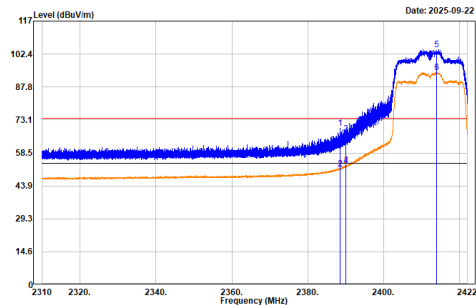


Trace: 1
Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801003
Model : RRQ61001-009
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 23.7°C / 36%
Memo : N20-TX-2412
Memo : RBW/VBW: PK:1M/3M; AV:1M/5k

	Read	Level	Factor	Level	Limit	Over	
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	2388.520	36.89	32.48	69.37	74.00	-4.63	Peak
2	2388.520	18.76	32.48	51.24	54.00	-2.76	Average
3	2389.964	34.45	32.47	66.92	74.00	-7.08	Peak
4	2389.964	20.44	32.47	52.91	54.00	-1.09	Average
5	2413.921	71.76	32.49	104.25	-----	-----	Peak
6	2413.921	61.73	32.51	94.24	-----	-----	Average

High channel


Horizontal

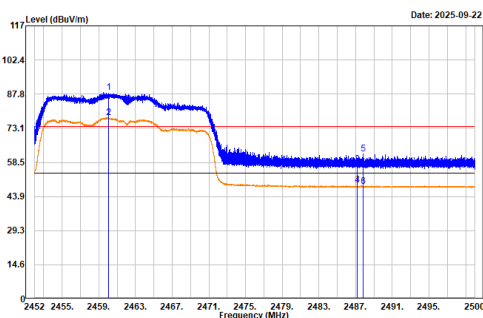

Trace: 1
Site : 966B Chamber
Condition: 3m Horizontal
Job No : RLK250801003
Model : RRQ61001-009
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 23.7°C / 36%
Memo : N20-TX-2462
Memo : RBW/VBW: PK:1M/3M; AV:1M/5k

	Read	Level	Factor	Level	Limit	Over	
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	2460.877	55.71	32.79	88.50	-----	-----	Average
2	2460.877	44.91	32.79	77.70	-----	-----	Average
3	2487.190	24.91	32.87	57.78	74.00	-16.22	Peak
4	2487.190	15.84	32.87	48.71	54.00	-5.29	Average
5	2487.854	29.34	32.88	62.22	74.00	-11.78	Peak
6	2487.854	15.23	32.88	48.11	74.00	-25.89	Peak

Vertical

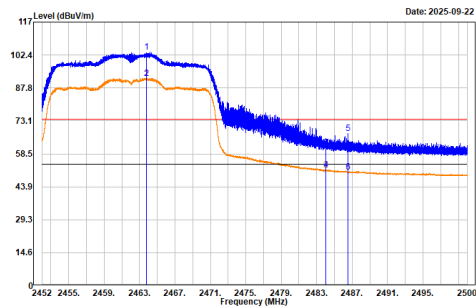

Trace: 1
Site : 966B Chamber
Condition: 3m Vertical
Job No : RLK250801003
Model : RRQ61001-009
Power : From Test Development Board
Tester : Derek
Temp./ Hum.: 23.7°C / 36%
Memo : N20-TX-2462
Memo : RBW/VBW: PK:1M/3M; AV:1M/5k

	Read	Level	Factor	Level	Limit	Over	
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	2463.776	70.79	32.81	103.60	-----	-----	Peak
2	2463.776	59.29	32.81	92.10	-----	-----	Average
3	2484.010	28.31	32.87	61.18	74.00	-12.82	Peak
4	2484.010	18.60	32.87	51.47	54.00	-2.53	Average
5	2486.546	34.58	32.87	67.45	74.00	-6.55	Peak
6	2486.546	17.65	32.87	50.52	54.00	-3.48	Average


Note:

Level = Read Level + Factor

Over Limit = Level – Limit Line

Factor = Antenna Factor + Cable Loss – Amplifier Gain

802.11 ax20 Mode

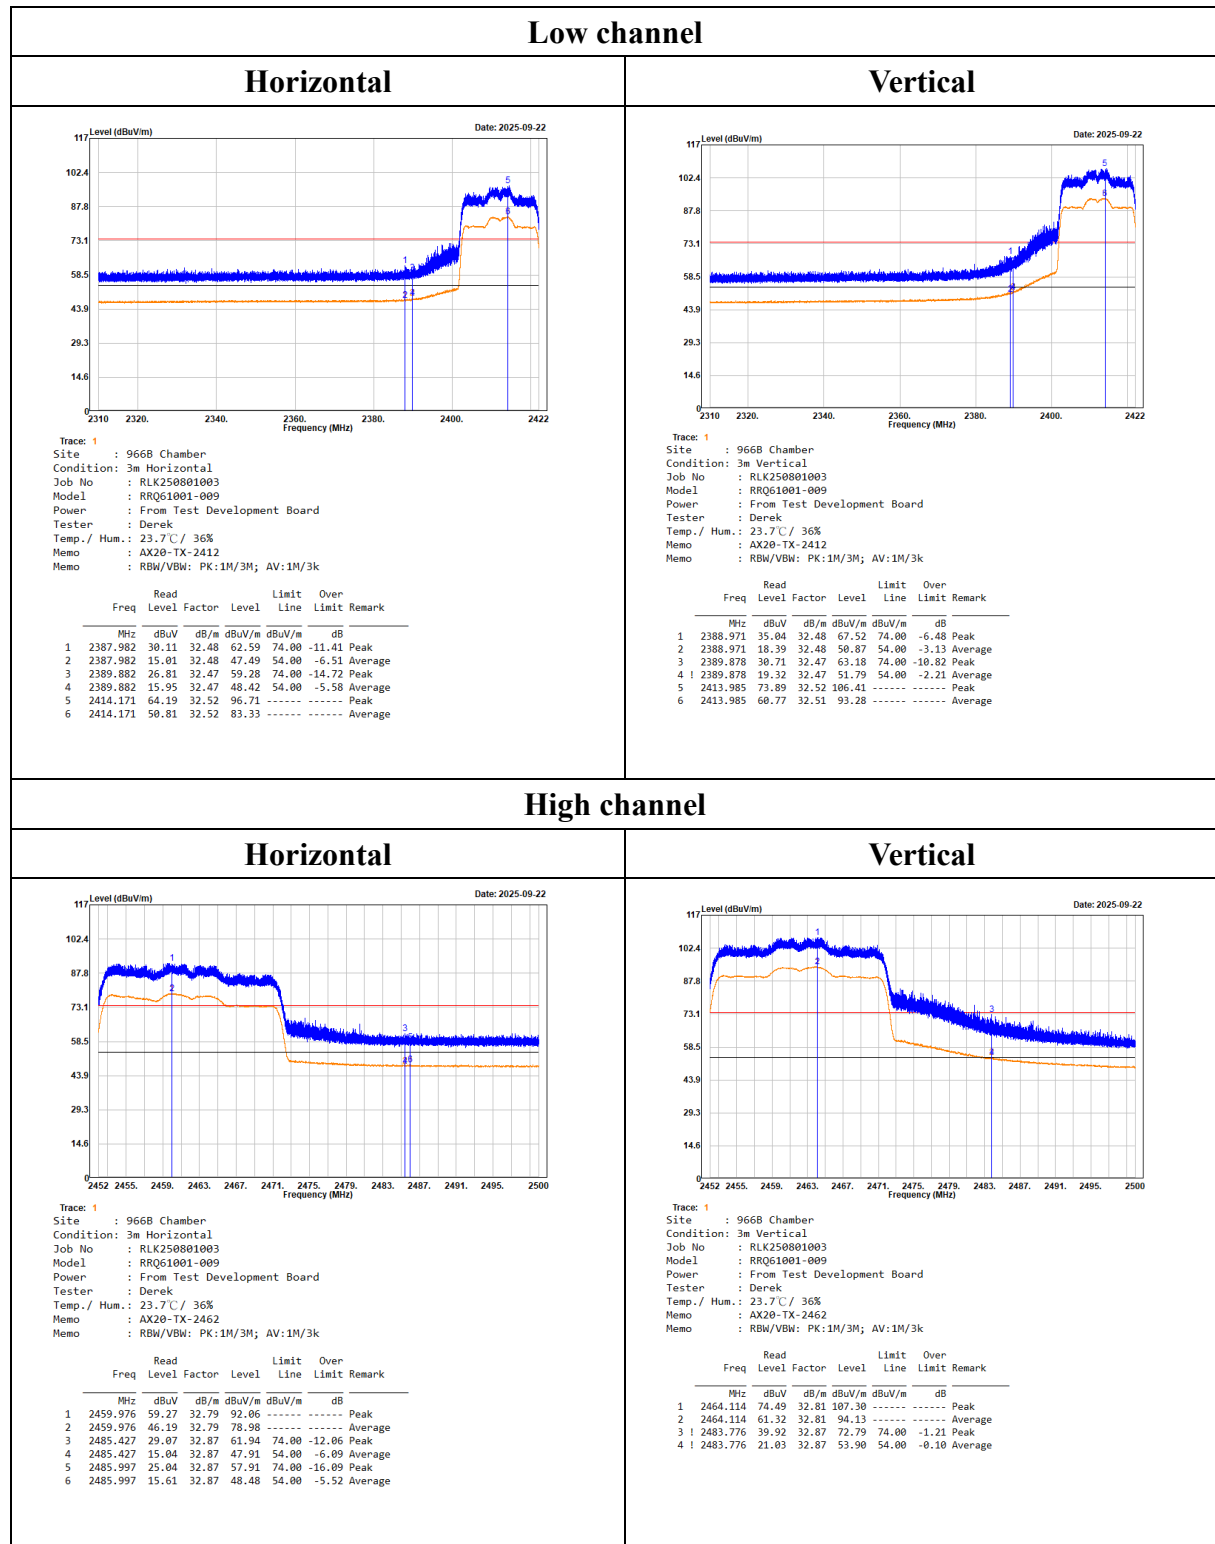

Note:

Level = Read Level + Factor

Over Limit = Level – Limit Line


Factor = Antenna Factor + Cable Loss – Amplifier Gain

Conducted Spurious Emissions:

Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Result
b Mode				
Low	2412	32.13	≥ 20	PASS
Mid	2437	31.33	≥ 20	PASS
High	2462	29.93	≥ 20	PASS
g Mode				
Low	2412	35.12	≥ 20	PASS
Mid	2437	33.34	≥ 20	PASS
High	2462	34.90	≥ 20	PASS
n20 Mode				
Low	2412	35.79	≥ 20	PASS
Mid	2437	32.00	≥ 20	PASS
High	2462	36.29	≥ 20	PASS
ax20 Mode				
Low	2412	36.30	≥ 20	PASS
Mid	2437	34.34	≥ 20	PASS
High	2462	36.40	≥ 20	PASS


Please refer to the following plots

b Mode Low Channel

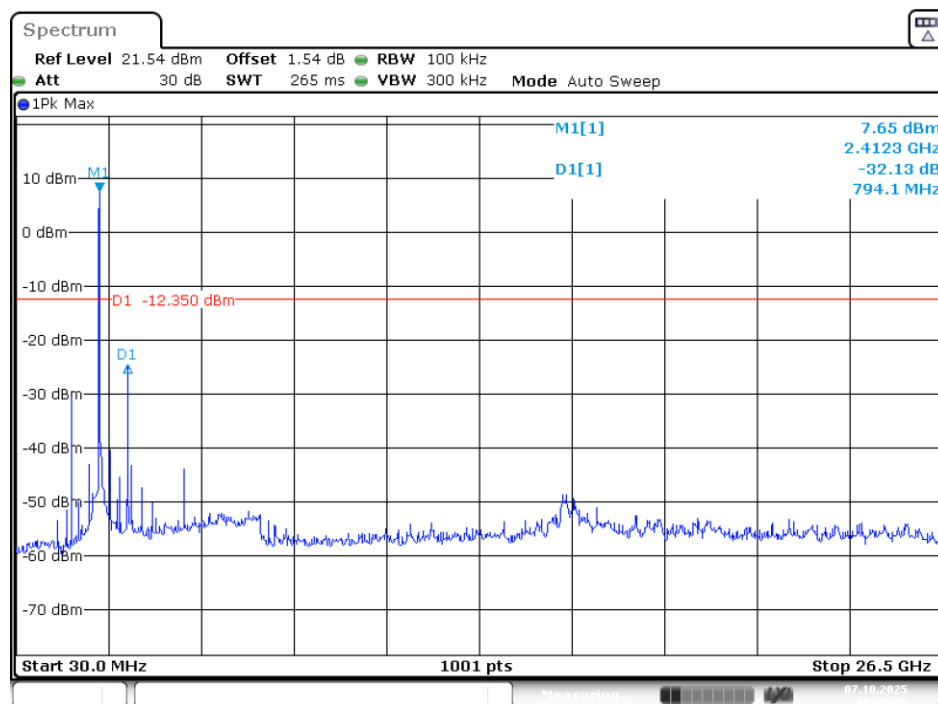


Date: 7.OCT.2025 10:37:05

Middle Channel

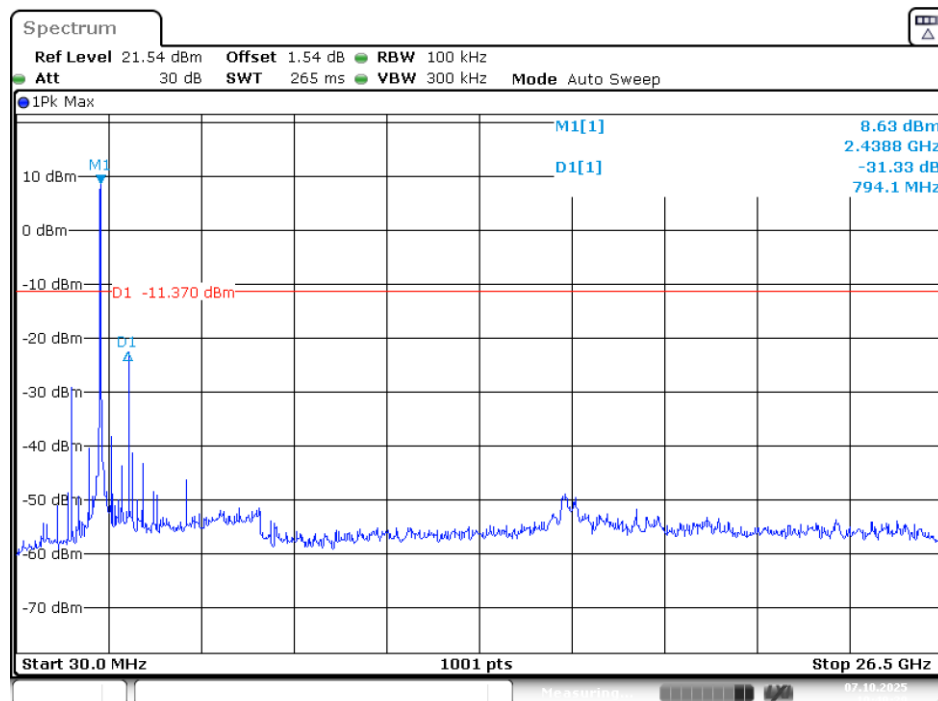


Date: 7.OCT.2025 10:40:29

High Channel

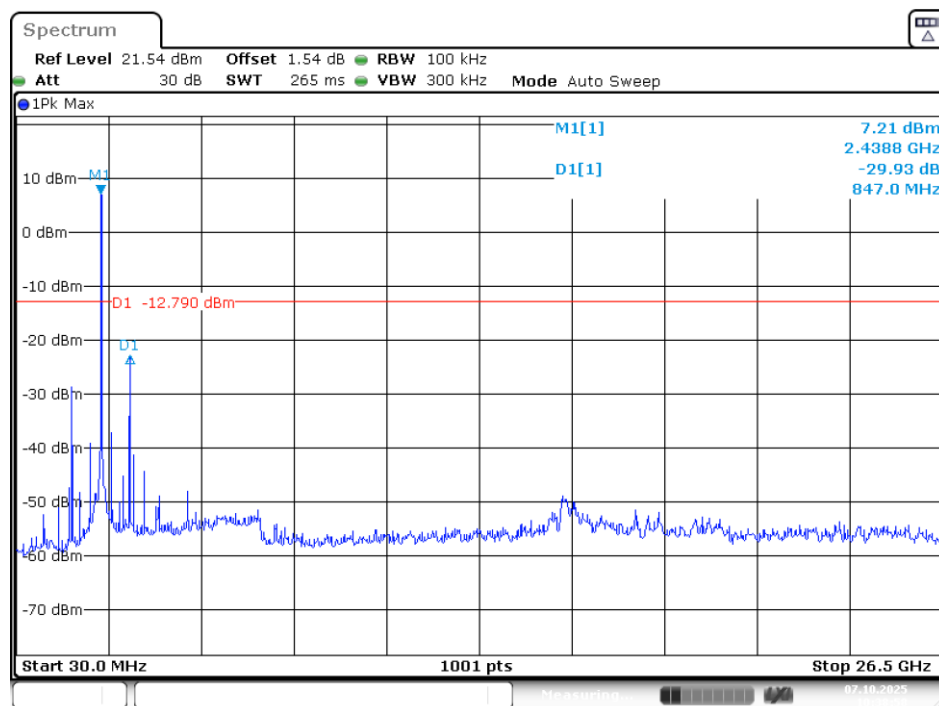


g Mode

Low Channel

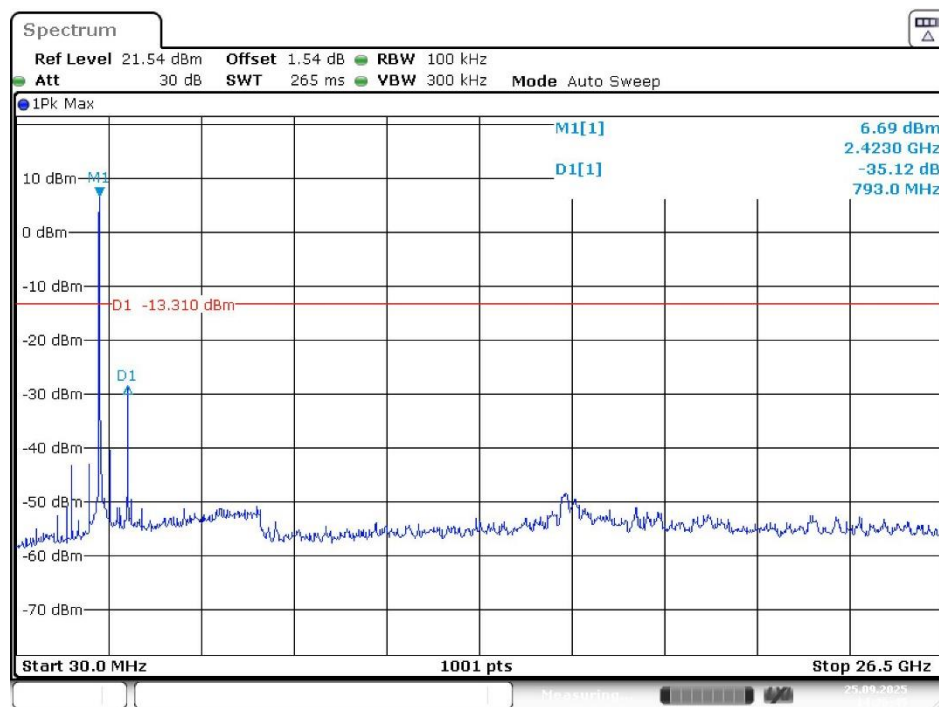


Middle Channel

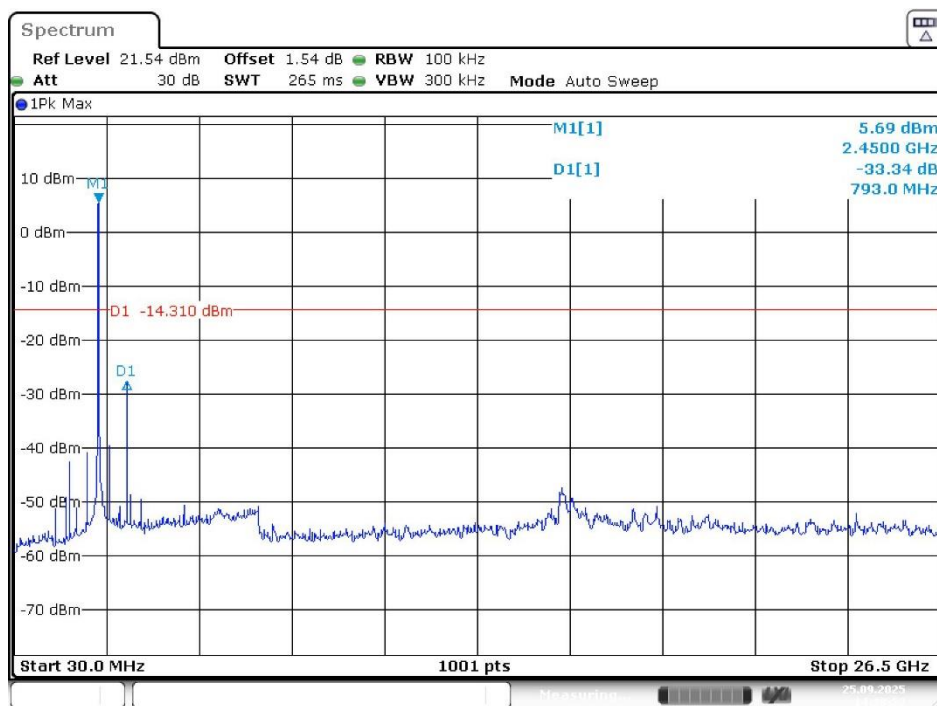


Date: 25.SEP.2025 14:28:23

High Channel

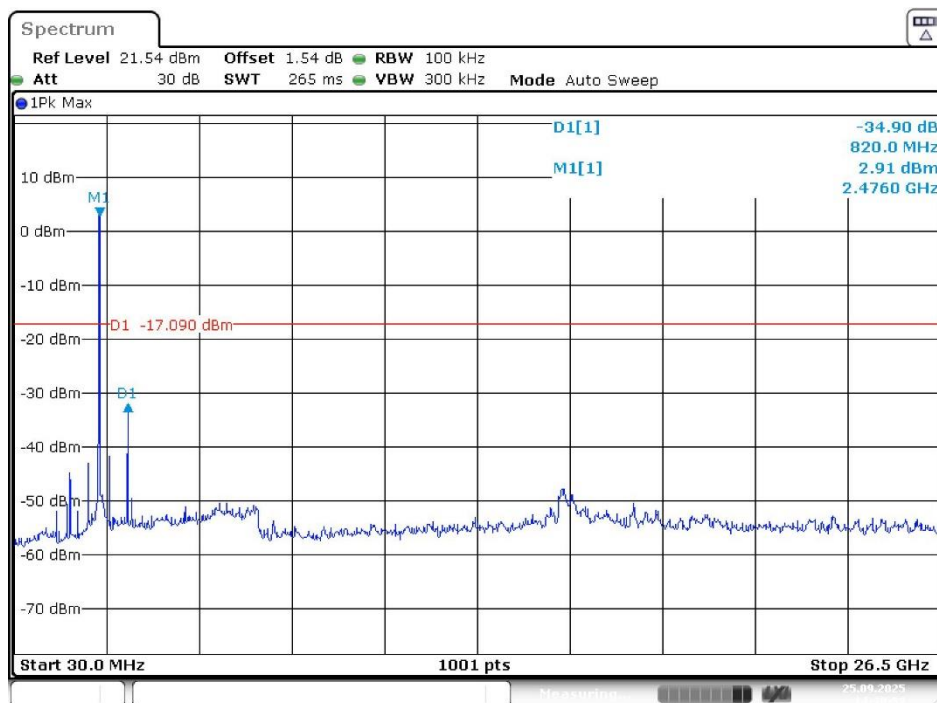


Date: 25.SEP.2025 14:30:52


n20 Mode Low Channel

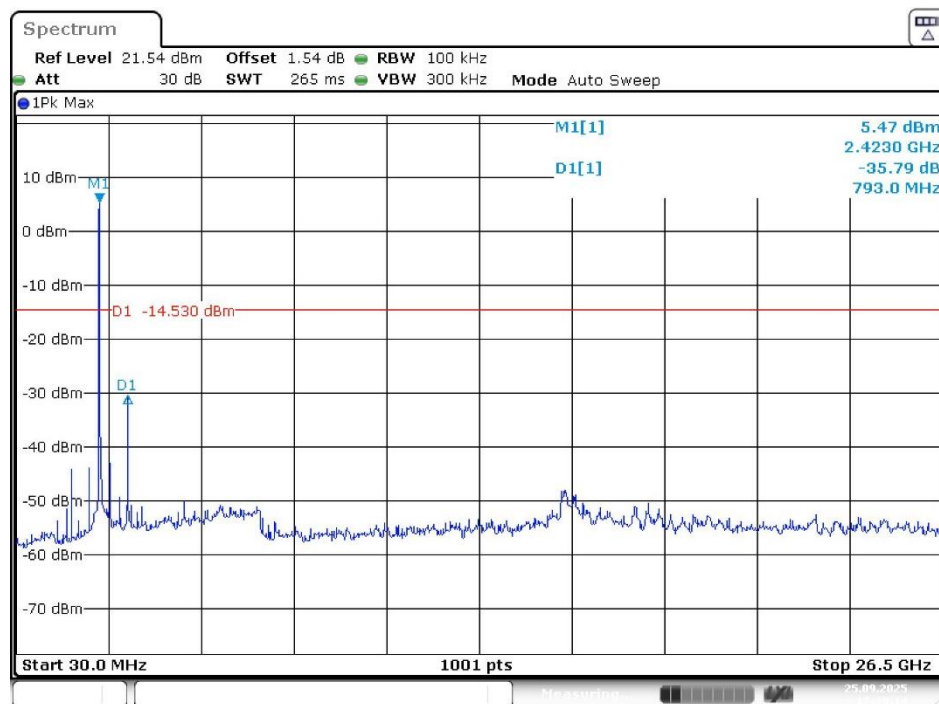

Middle Channel

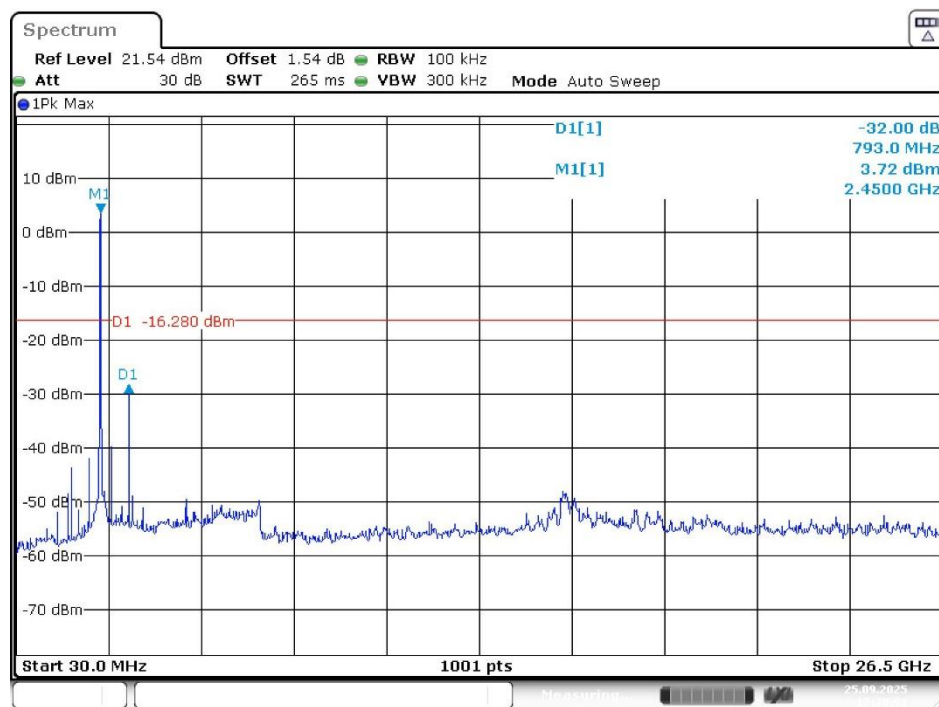


High Channel

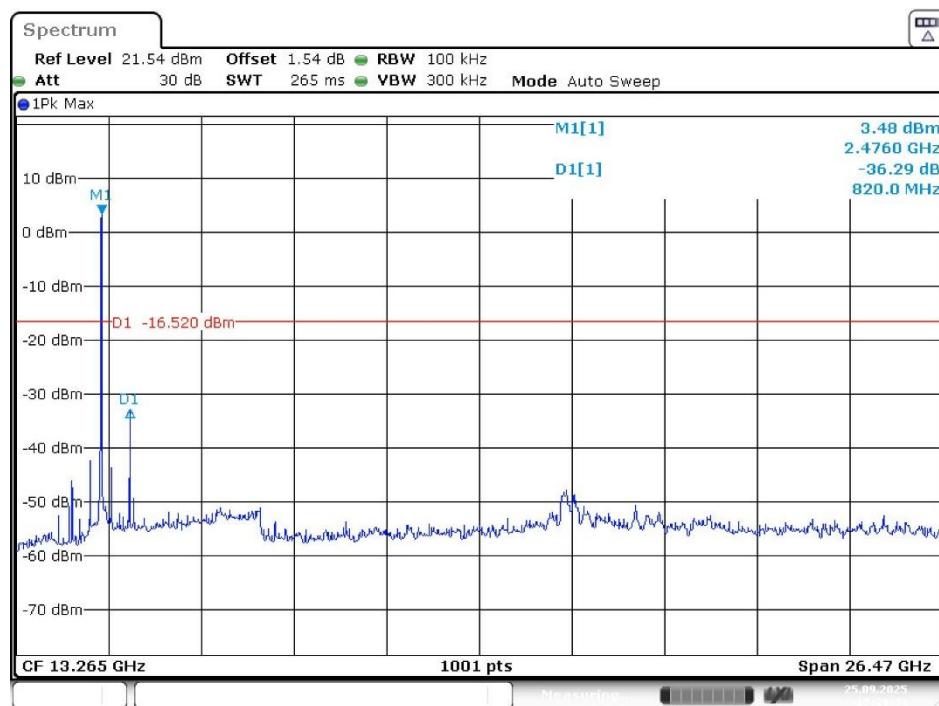


ax20 Mode


Low Channel

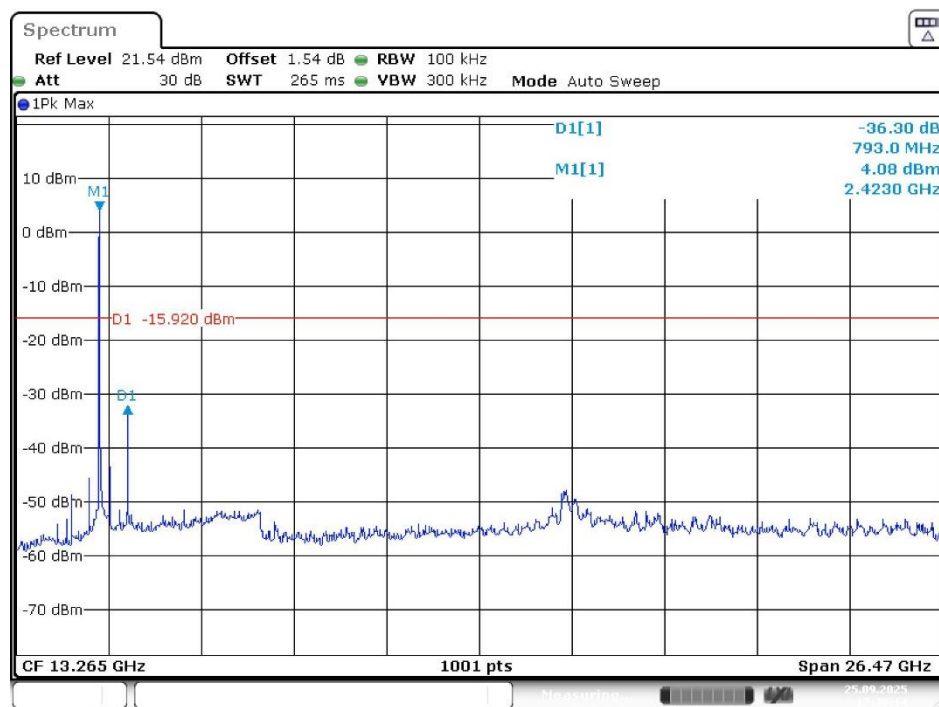

Middle Channel

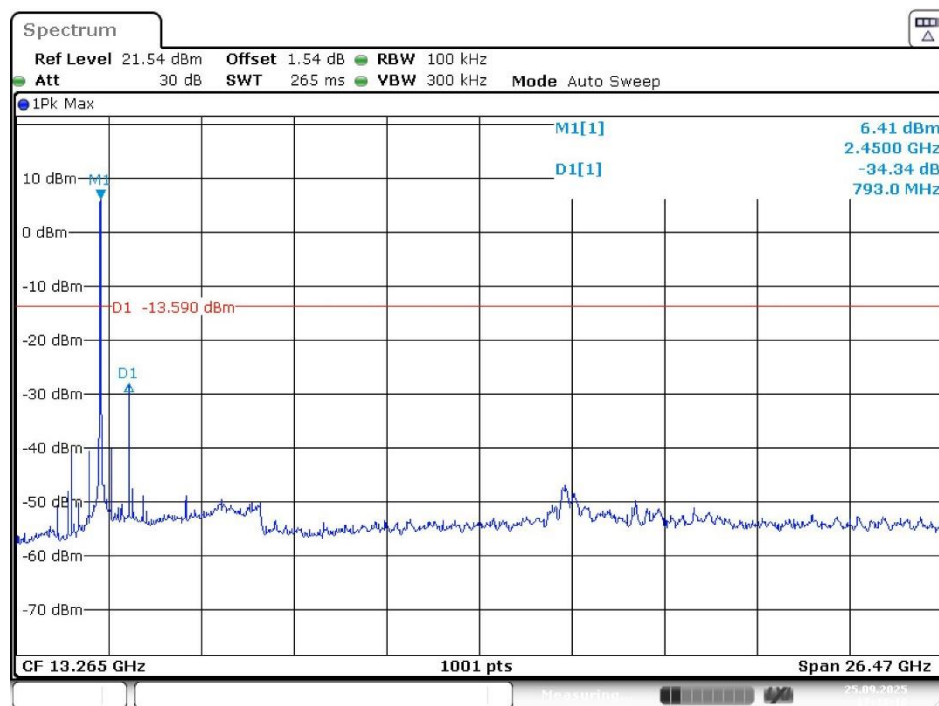

High Channel

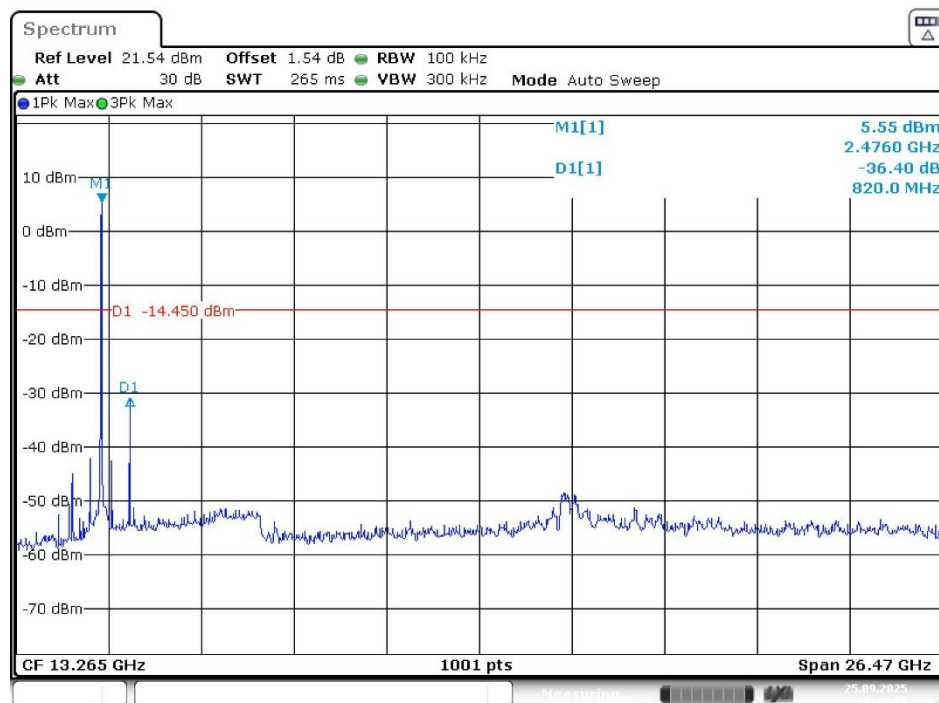

8 FCC §15.247(a)(2) – 6 dB Emission Bandwidth And Occupied Bandwidth

8.1 Applicable Standard

According to FCC §15.247(a)(2).

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

8.2 Test Procedure

For – 6 dB Emission Bandwidth:

According to ANSI C63.10-2020+Cor.1-2023 ,section 11.8

The steps for the first option are as follows:

- a) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- b) Set the VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Trace mode = max-hold.
- e) Sweep = No faster than coupled (auto) time.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “–6 dB down amplitude”. If a marker is below this “–6 dB down amplitude” value, then it shall be as close as possible to this value.

For 99% Occupied Bandwidth

According to ANSI C63.10-2020+Cor.1-2023 ,section 6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.6.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.

e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max-hold mode (until the trace stabilizes) shall be used.

f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.

g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.


h) The occupied bandwidth shall be reported by providing spectral plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

8.3 Test Results


Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)	Result
b Mode					
Low	2412	8.68	15.10	> 500	PASS
Middle	2437	4.76	16.90	> 500	PASS
High	2462	7.16	15.14	> 500	PASS
g Mode					
Low	2412	15.76	16.86	> 500	PASS
Middle	2437	15.68	16.82	> 500	PASS
High	2462	15.16	16.58	> 500	PASS
n20 Mode					
Low	2412	17.4	17.74	> 500	PASS
Middle	2437	17.24	17.82	> 500	PASS
High	2462	17.36	17.74	> 500	PASS
ax20 Mode					
Low	2412	18.52	18.78	> 500	PASS
Middle	2437	18.44	18.86	> 500	PASS
High	2462	18.40	18.86	> 500	PASS

Please refer to the following plots


b Mode Low Channel

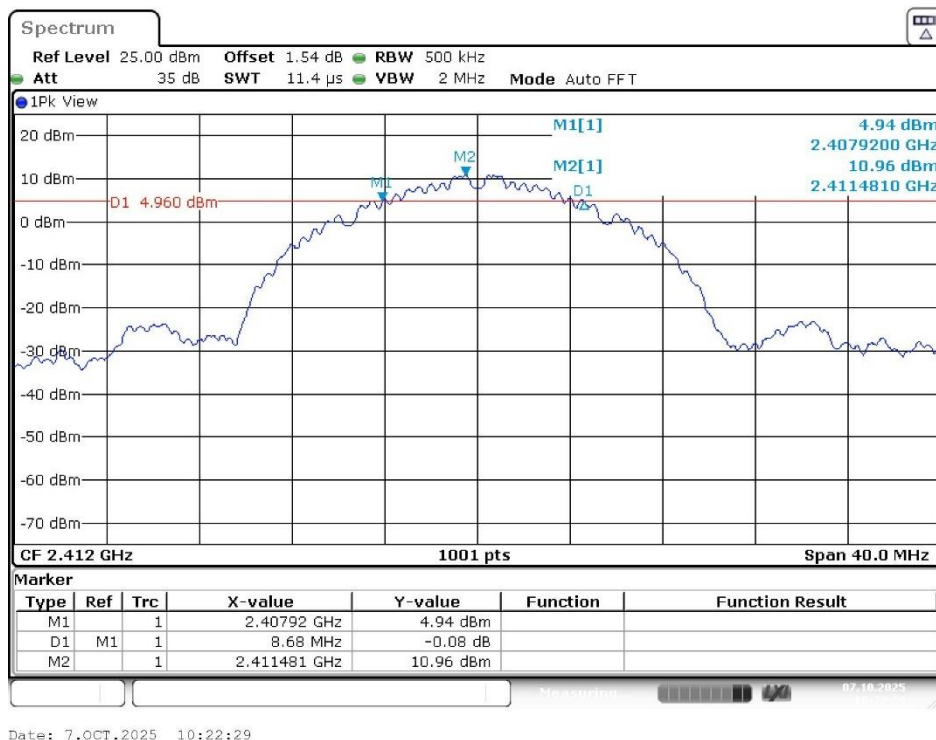


Middle Channel

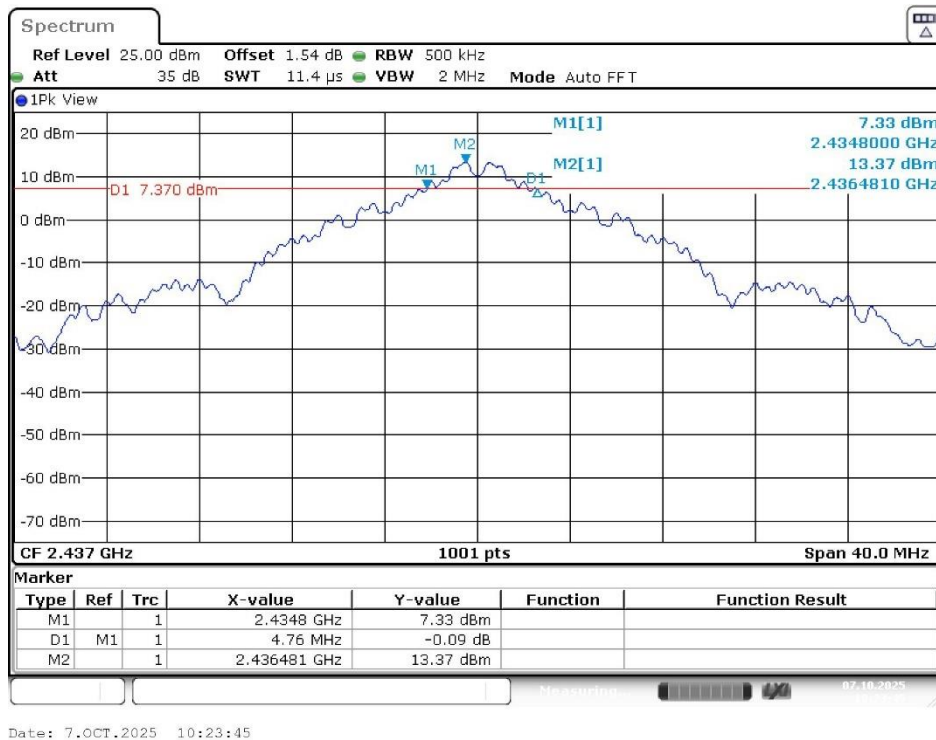


High Channel

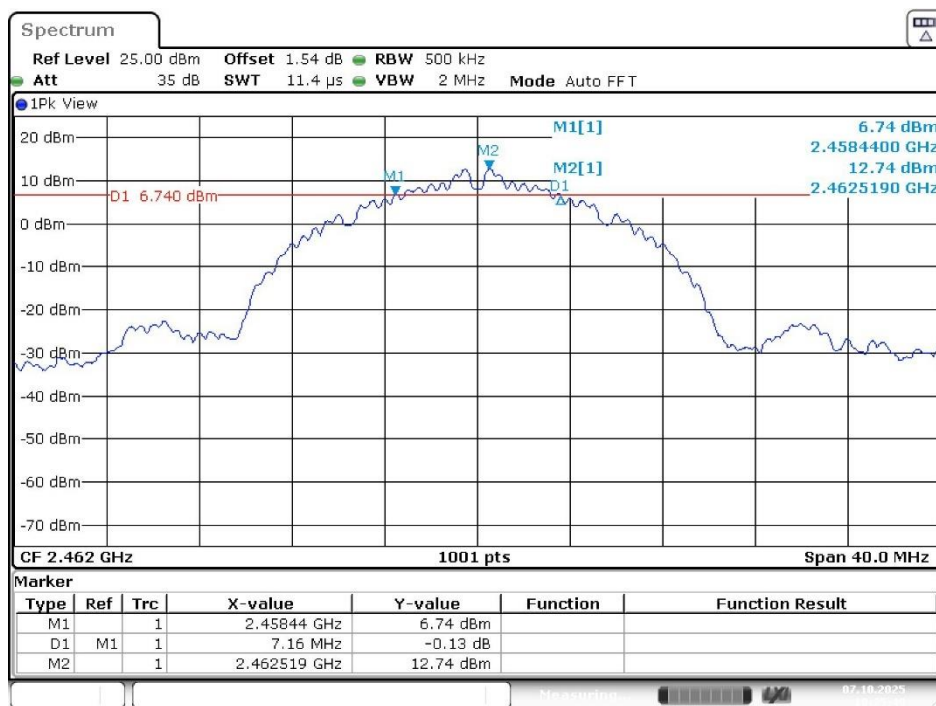

g Mode Low Channel

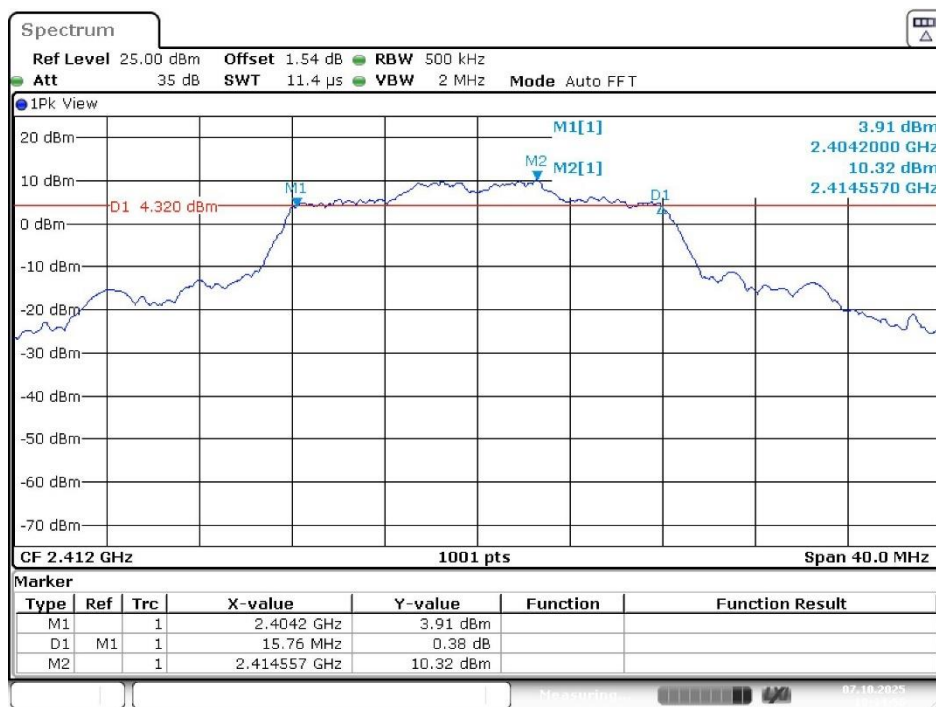


Middle Channel

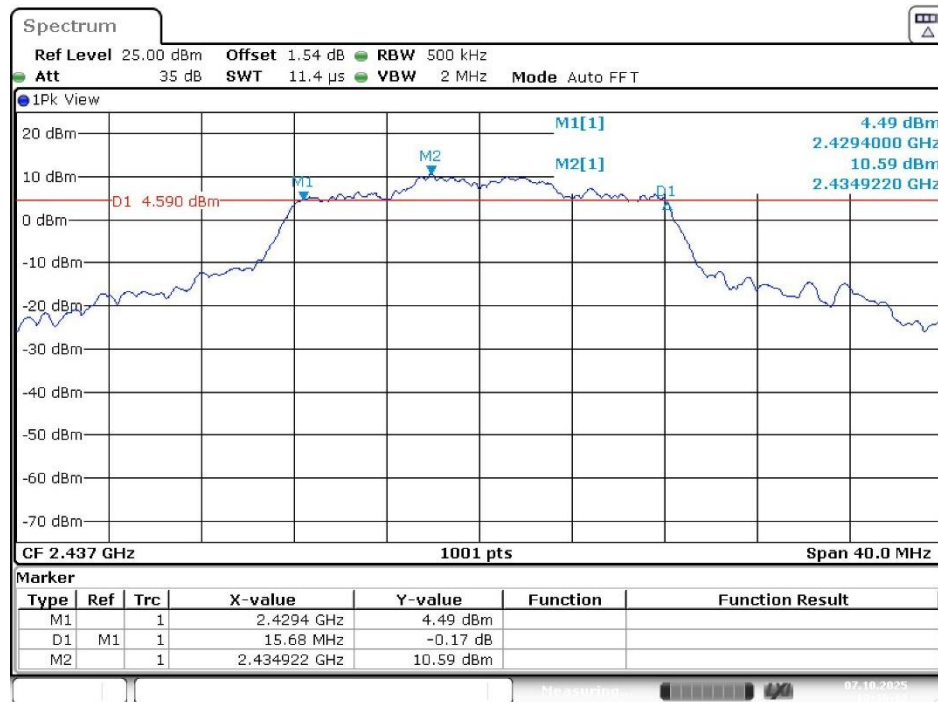


Date: 7.OCT.2025 10:36:12

High Channel

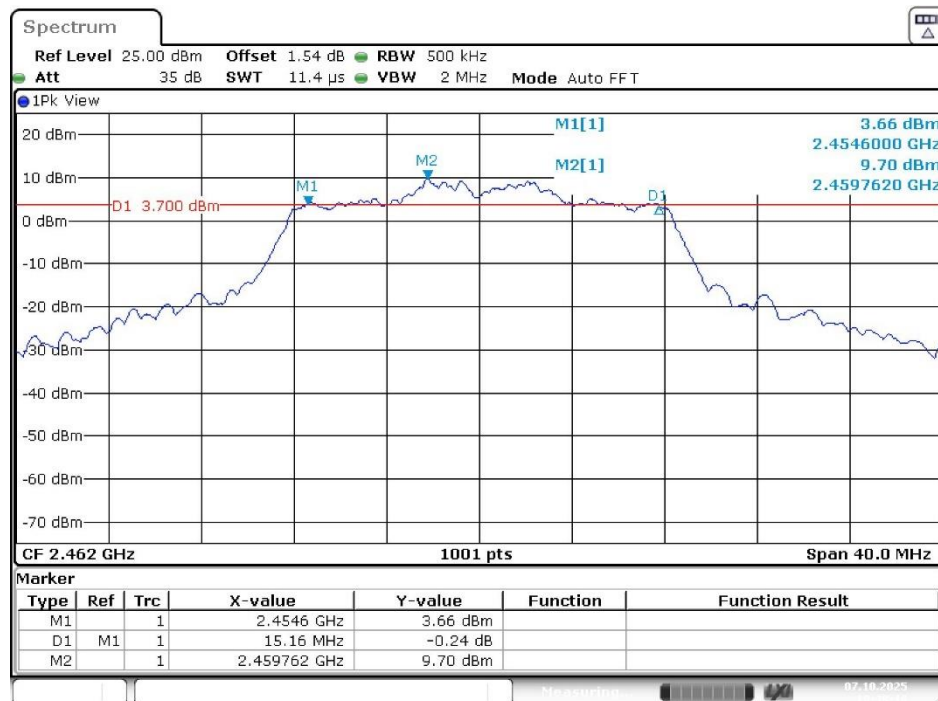


Date: 7.OCT.2025 10:38:10

n20 Mode Low Channel

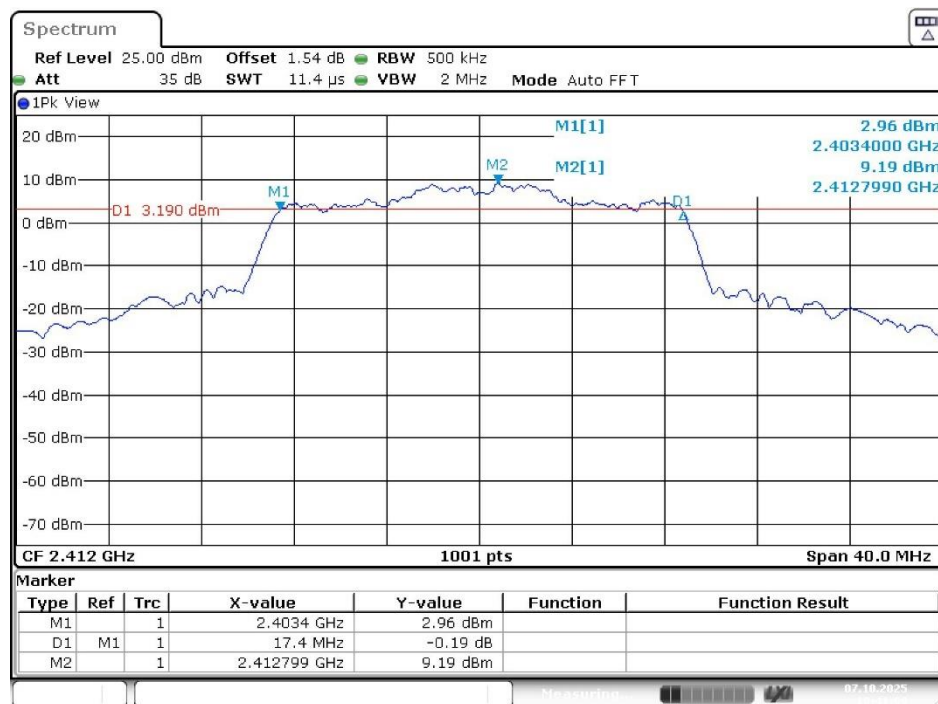


Date: 7.OCT.2025 10:41:09

Middle Channel

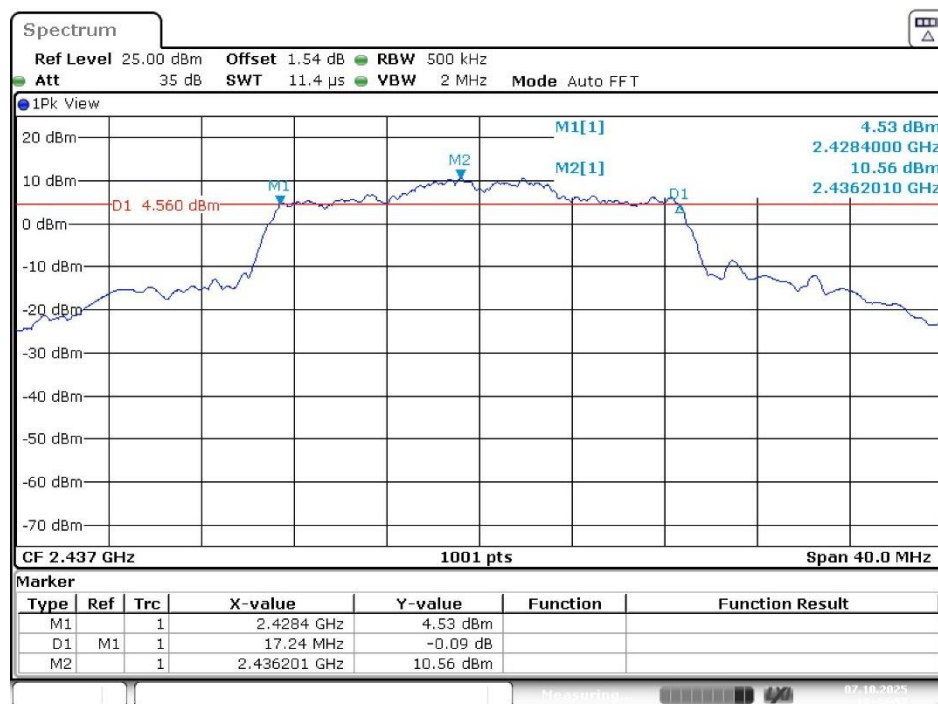

Date: 7.OCT.2025 10:42:57


High Channel

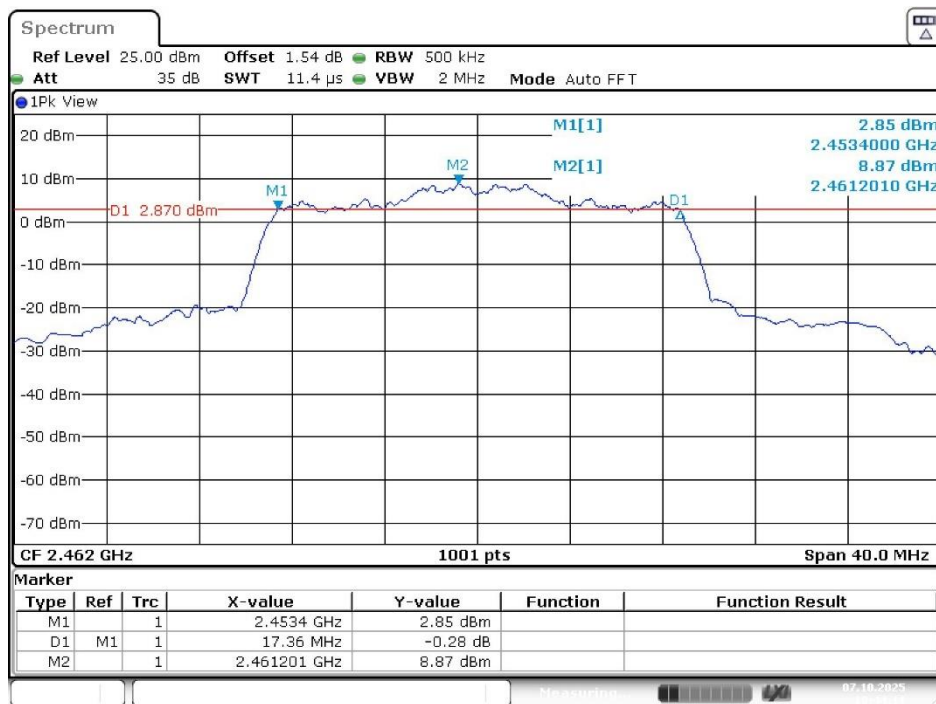

Date: 7.OCT.2025 10:44:12

ax20 Mode

Low Channel

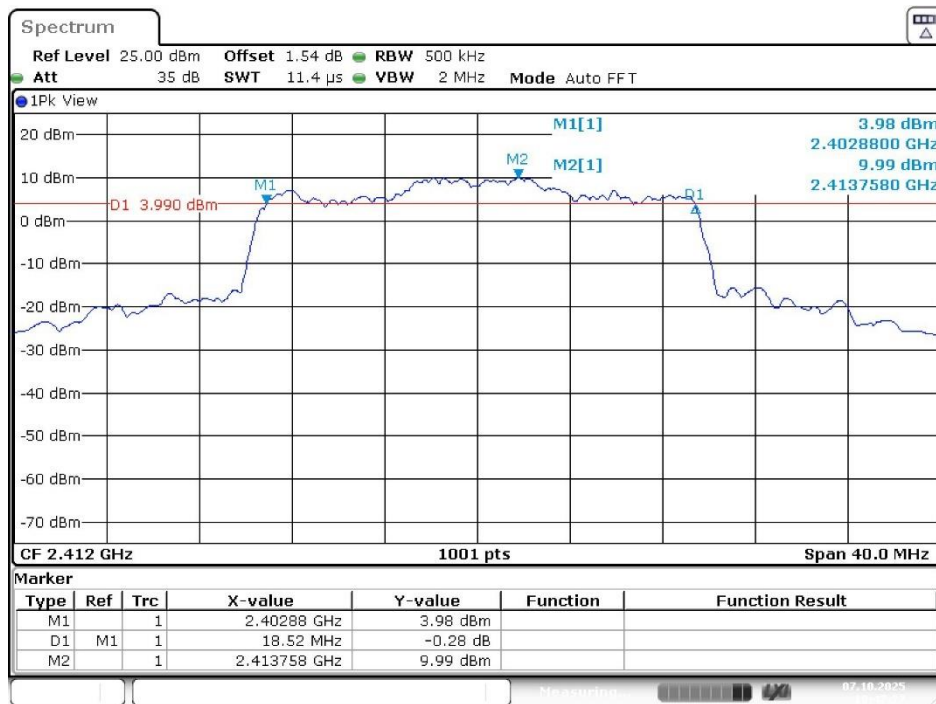

Date: 7.OCT.2025 10:47:27