



5785MHz

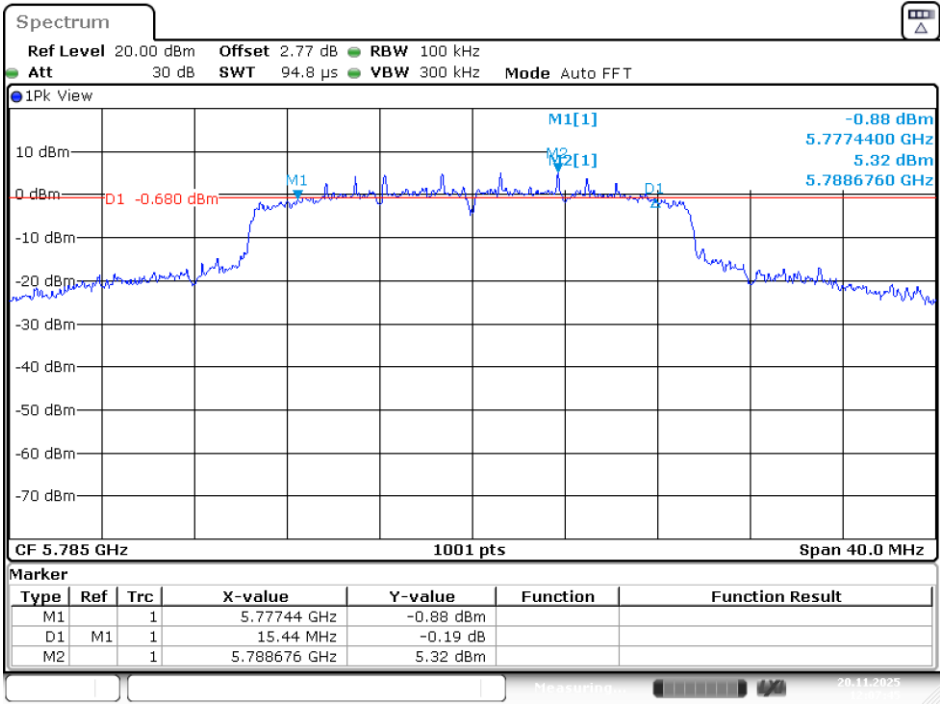

Date: 20.NOV.2025 12:07:46


5825MHz

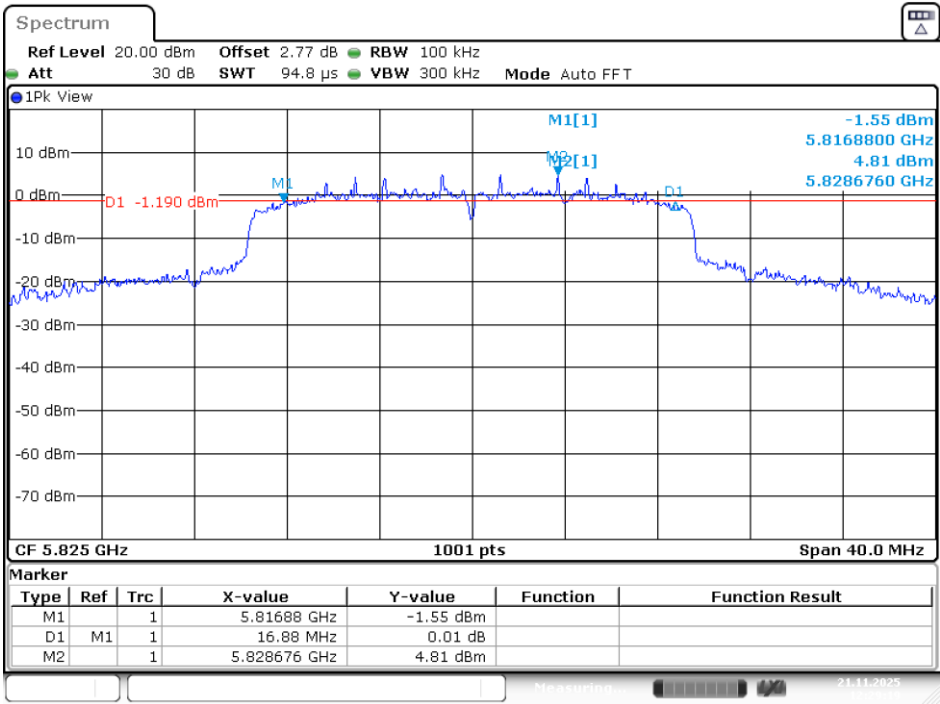

Date: 21.NOV.2025 12:29:20


UNII-1 Band I / OBW 99%
802.11a Mode / 5150 ~ 5250MHz

5180MHz

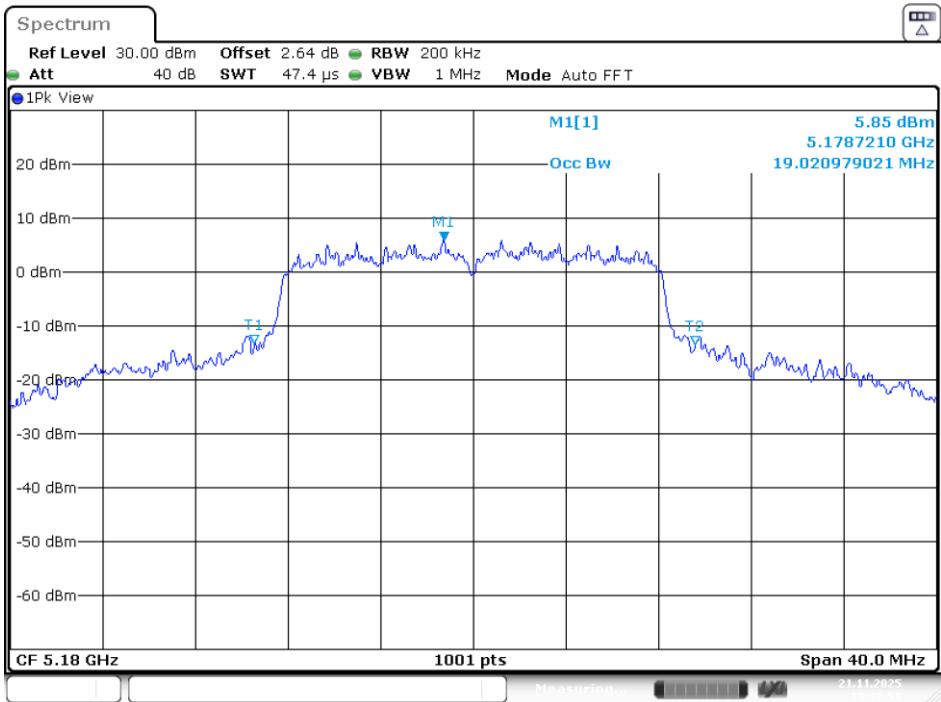


Date: 21.NOV.2025 19:32:59

5200MHz

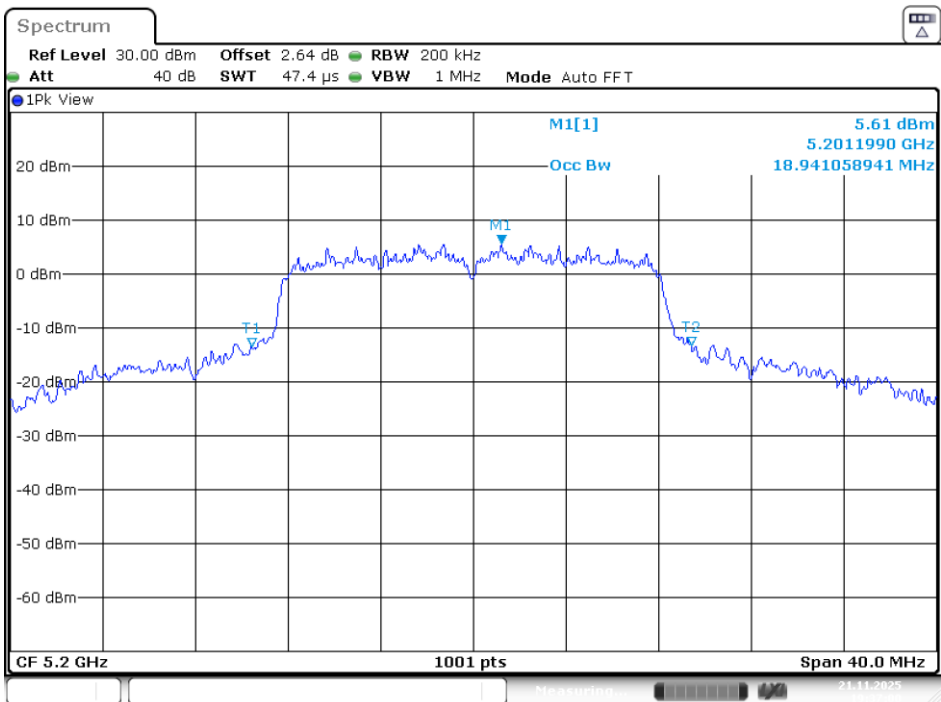

Date: 21.NOV.2025 19:37:00


5240MHz

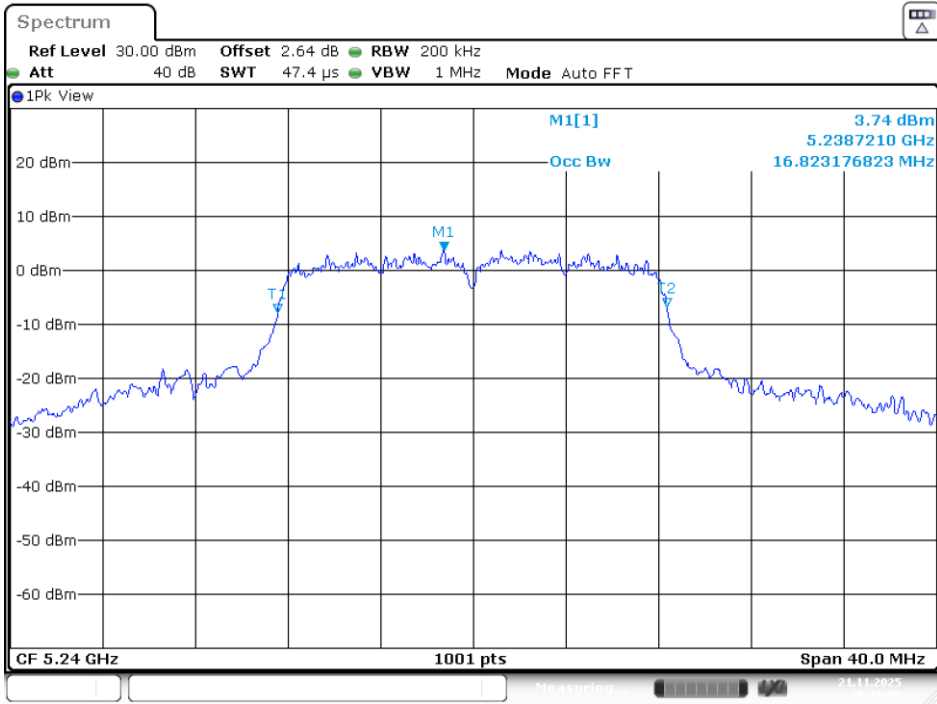

Date: 21.NOV.2025 19:38:51


802.11 n20 Mode / 5150 ~ 5250MHz

5180MHz

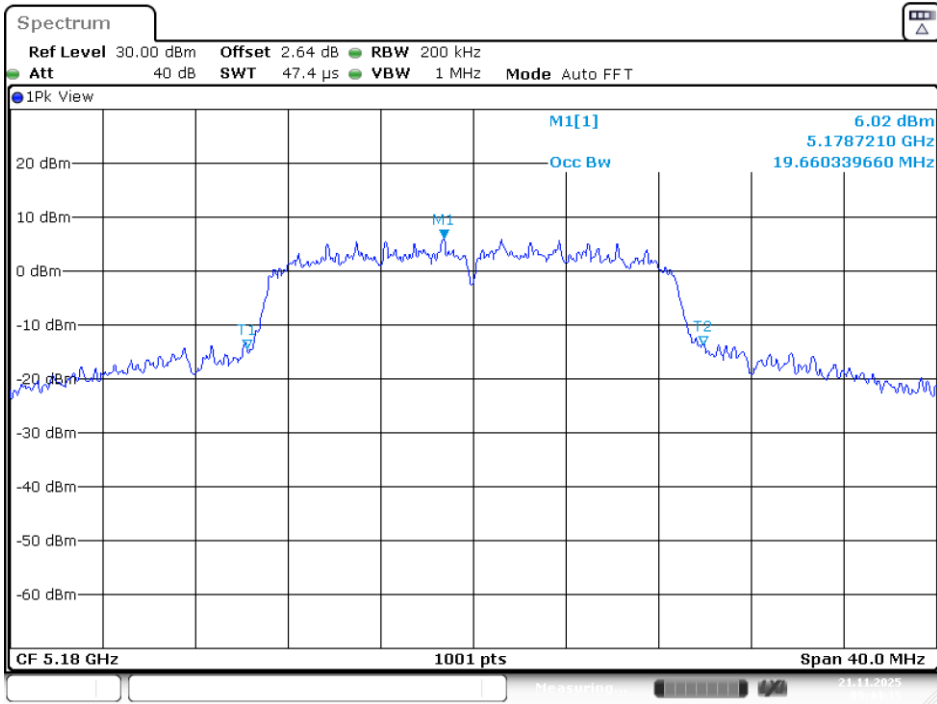


Date: 21.NOV.2025 09:44:16

5200MHz

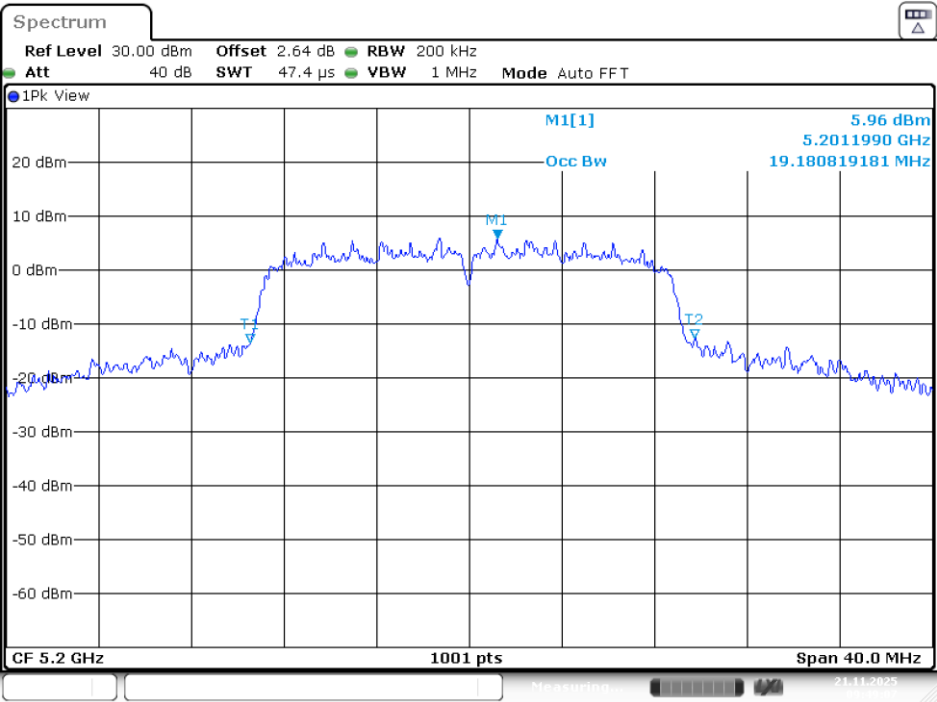

Date: 21.NOV.2025 09:49:07


5240MHz

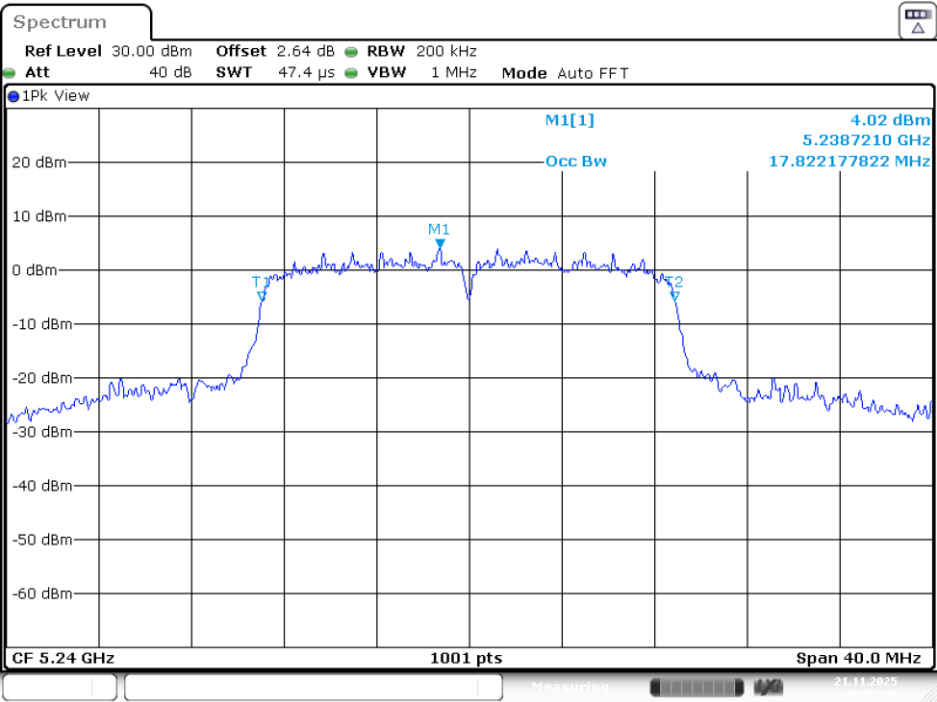


Date: 21.NOV.2025 09:55:05

802.11 ac20 Mode / 5150 ~ 5250MHz


5180MHz

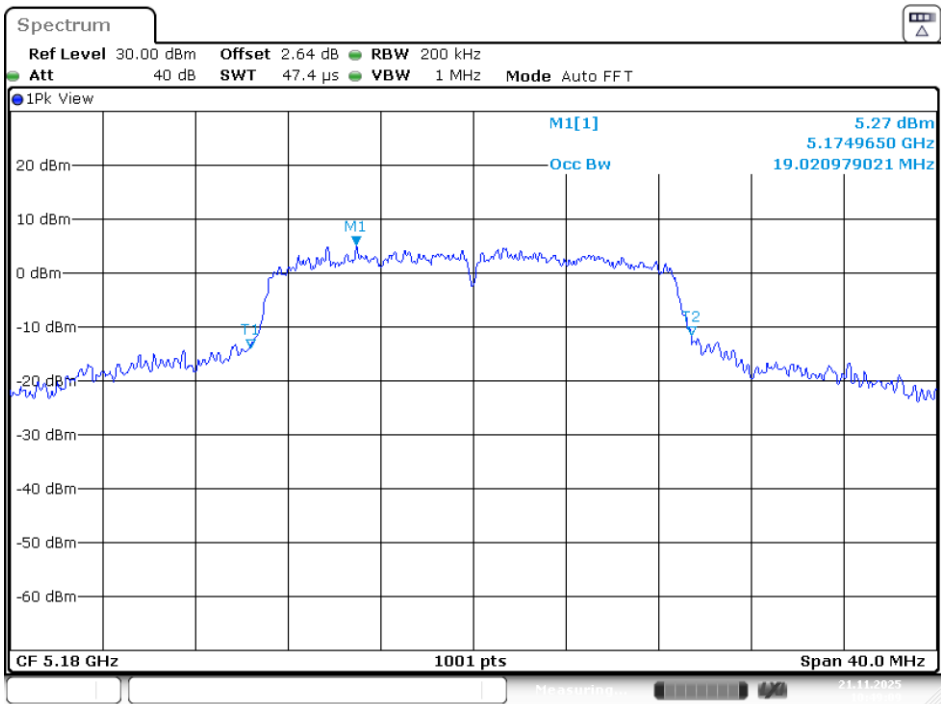

5200MHz

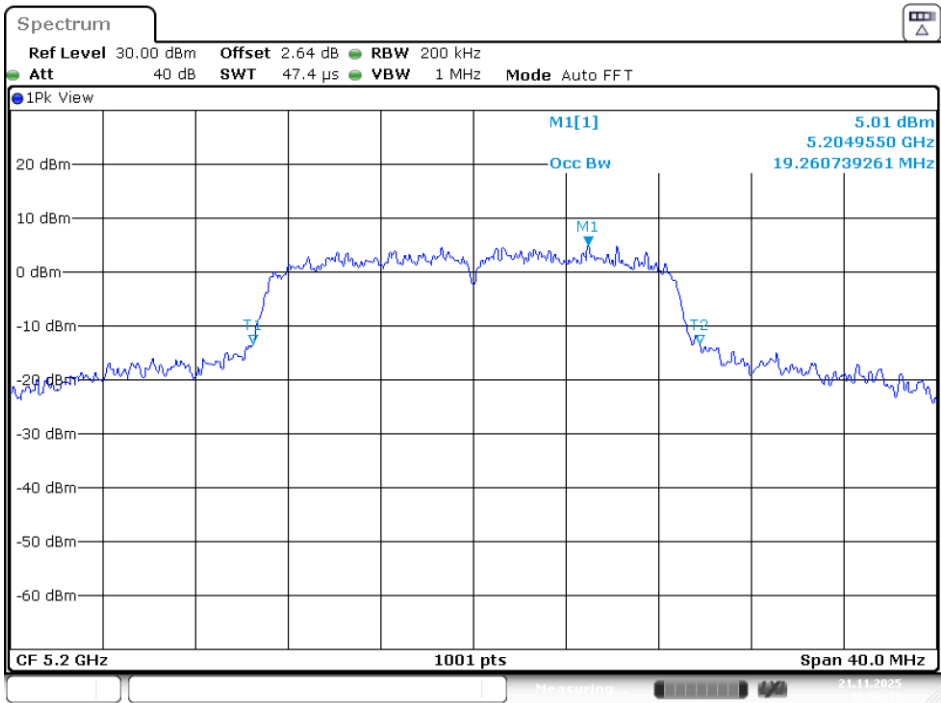


5240MHz

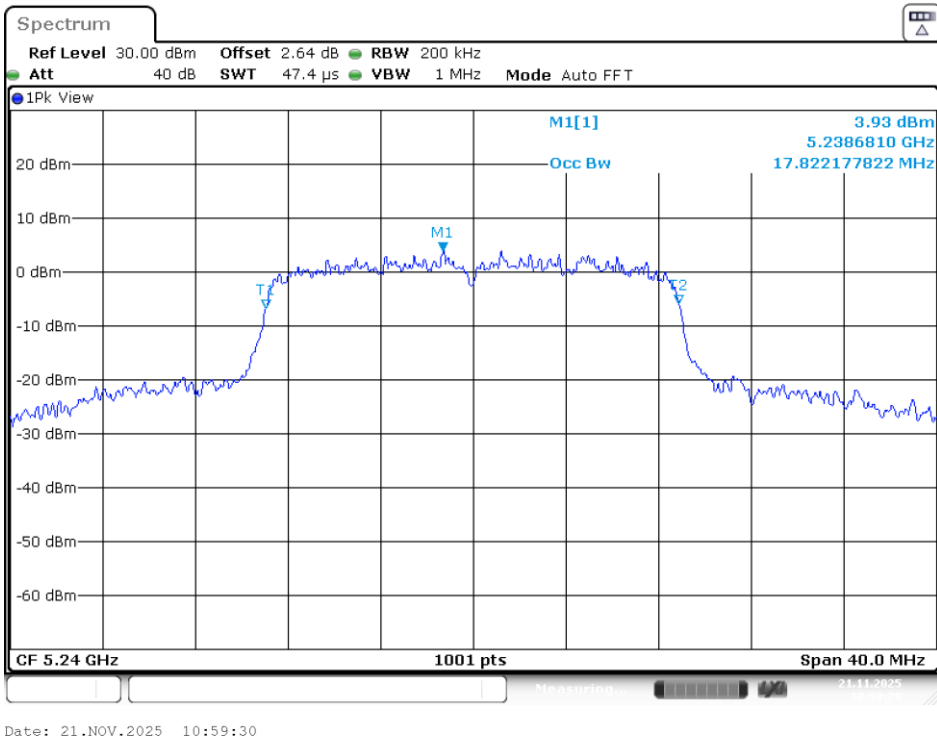


802.11 ax20 Mode / 5150 ~ 5250MHz

5180MHz

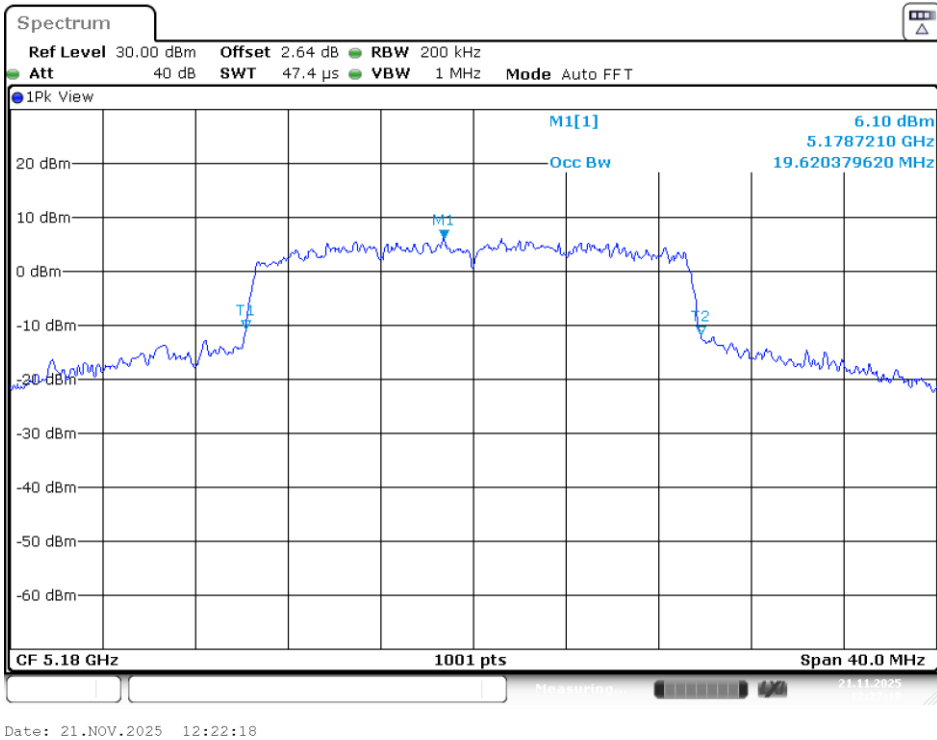


5200MHz

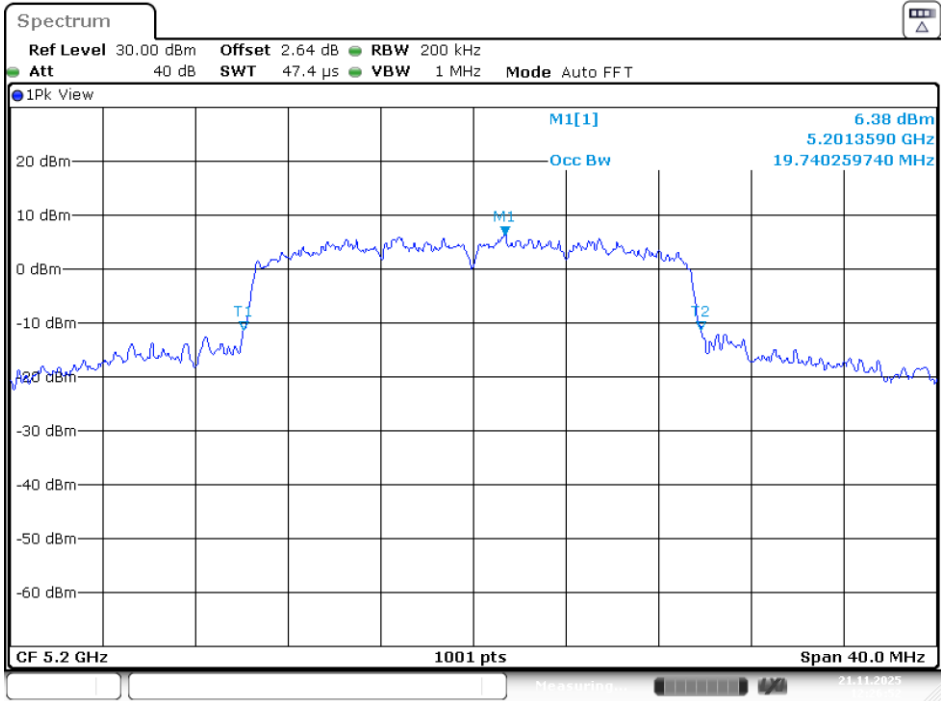

Date: 21.NOV.2025 12:26:52

5240MHz

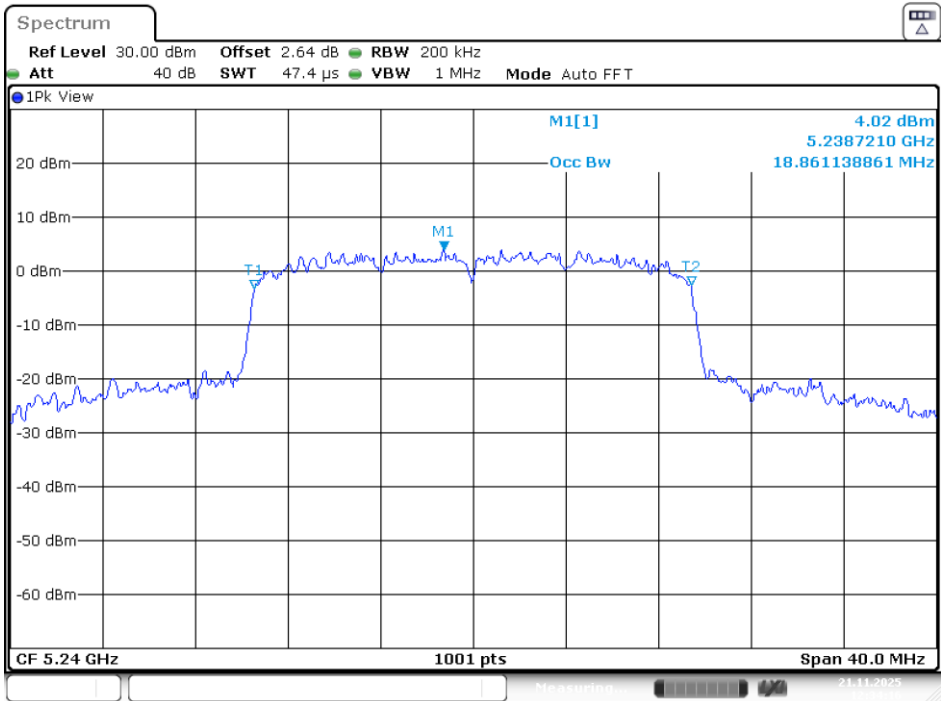


Date: 21.NOV.2025 12:34:17

UNII-2A Band II / OBW 99%


802.11a Mode / 5250 ~ 5350MHz

5260MHz

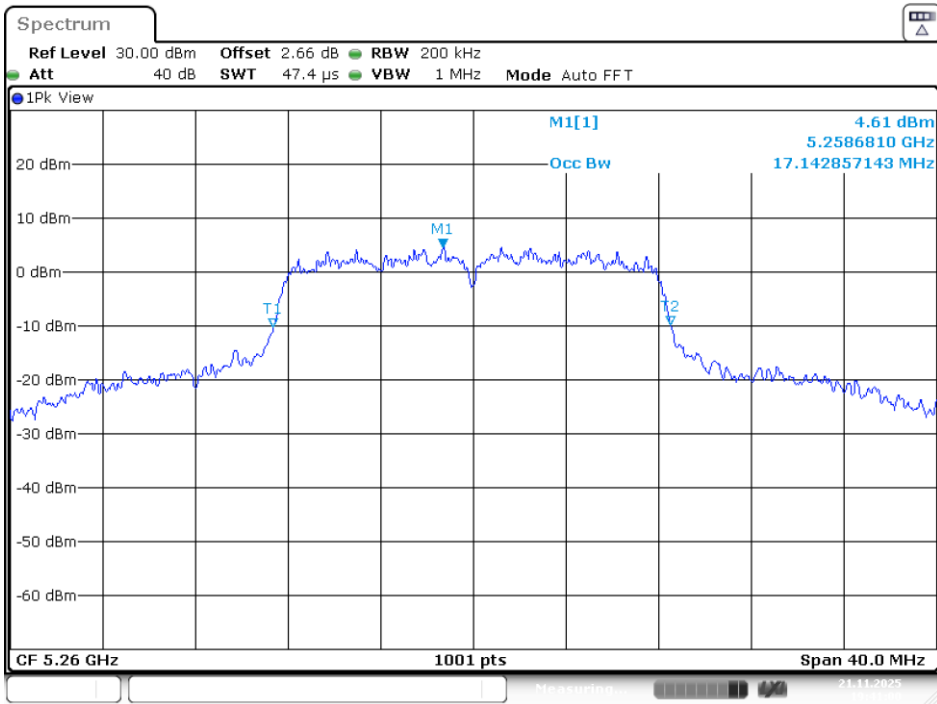


Date: 21.NOV.2025 19:41:00

5300MHz

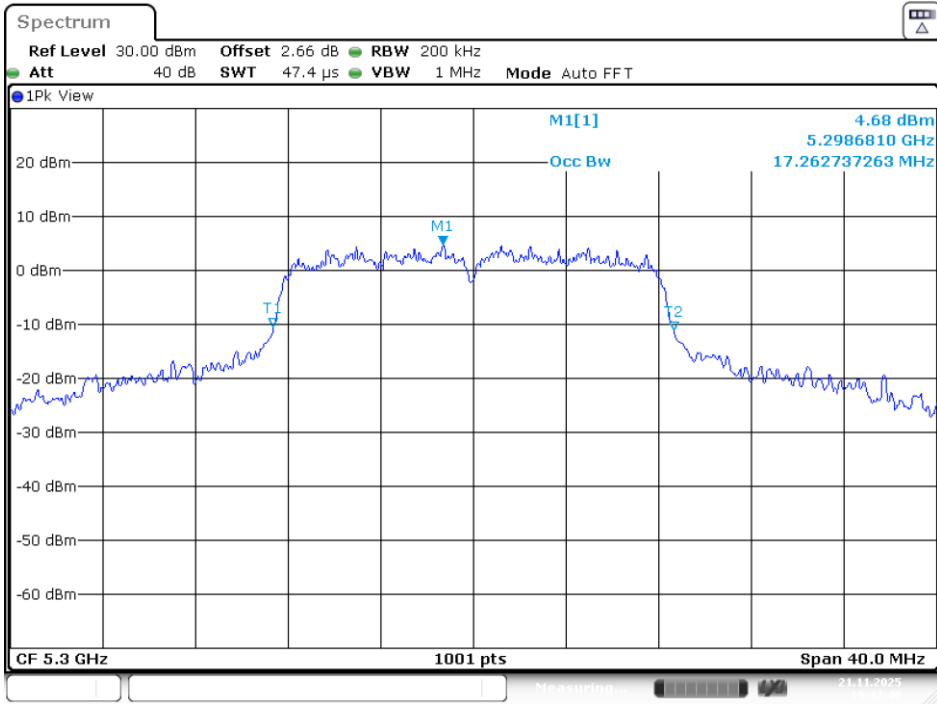

Date: 21.NOV.2025 19:42:41


5320MHz

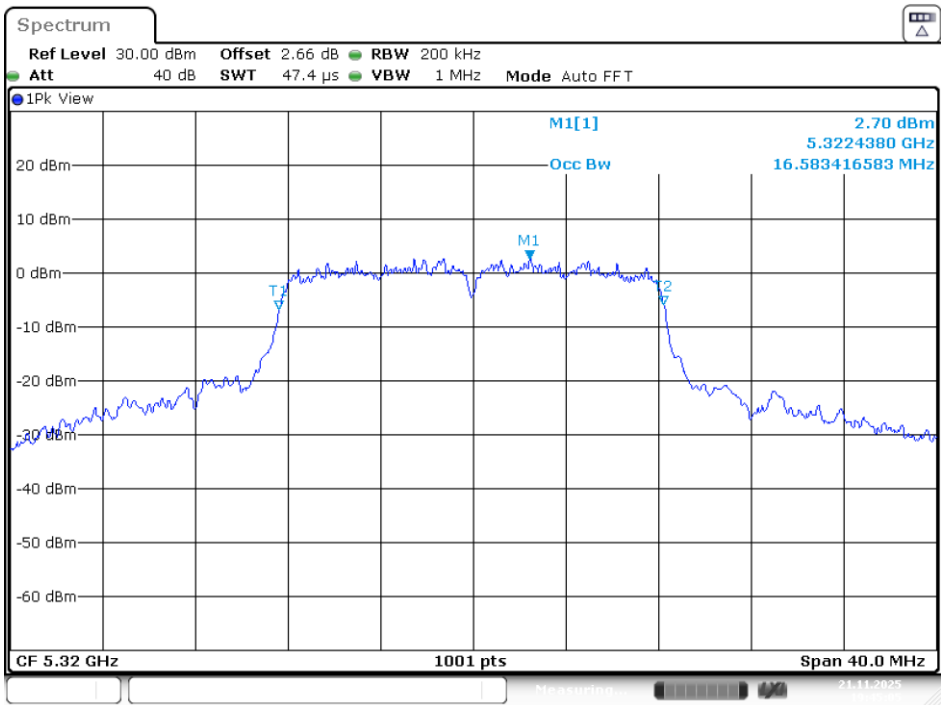

Date: 21.NOV.2025 19:45:05


802.11 n20 Mode / 5250 ~ 5350MHz

5260MHz

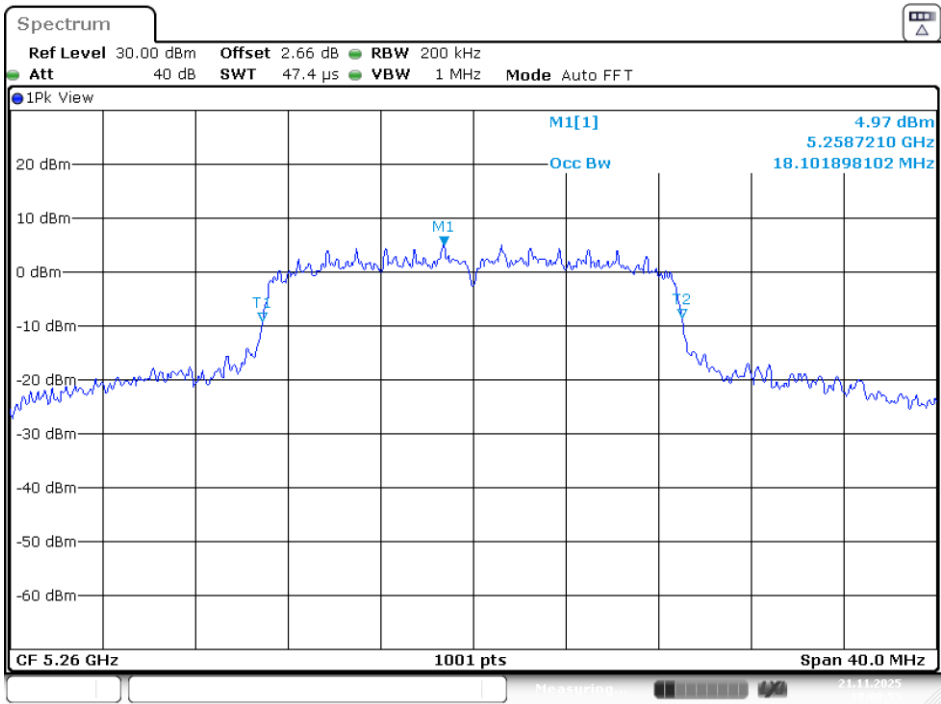


Date: 21.NOV.2025 10:00:55

5300MHz

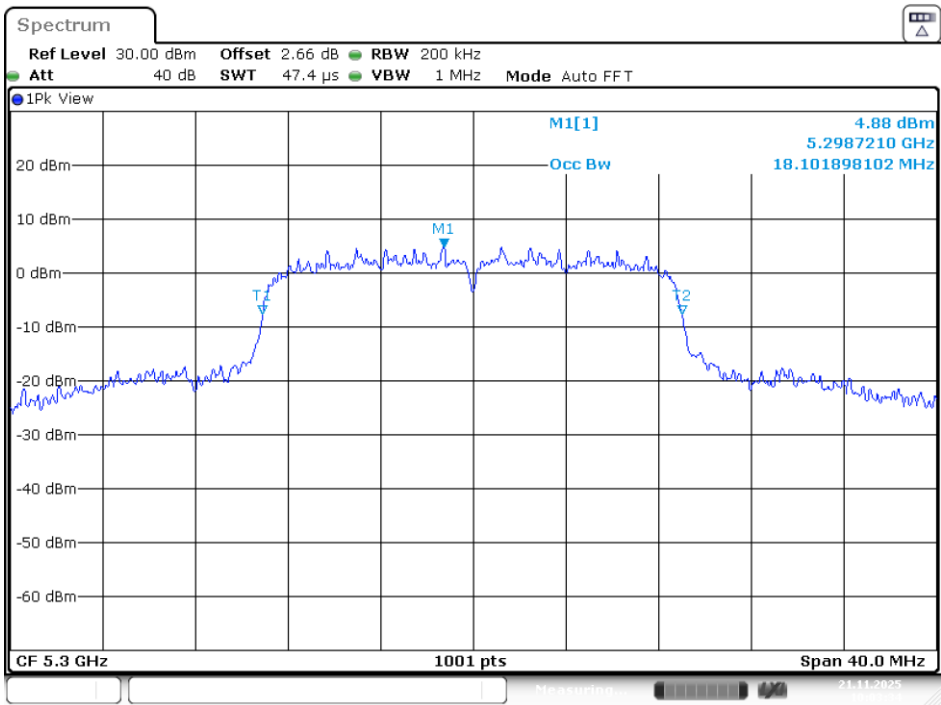

Date: 21.NOV.2025 10:03:34


5320MHz

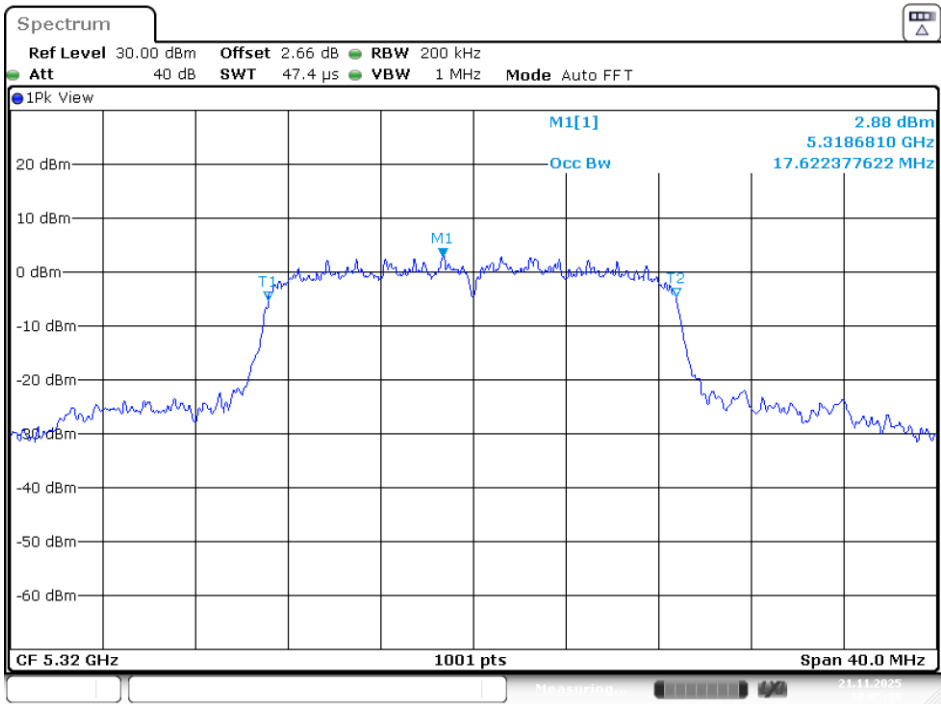

Date: 21.NOV.2025 10:05:39


802.11 ac20 Mode / 5250 ~ 5350MHz

5260MHz

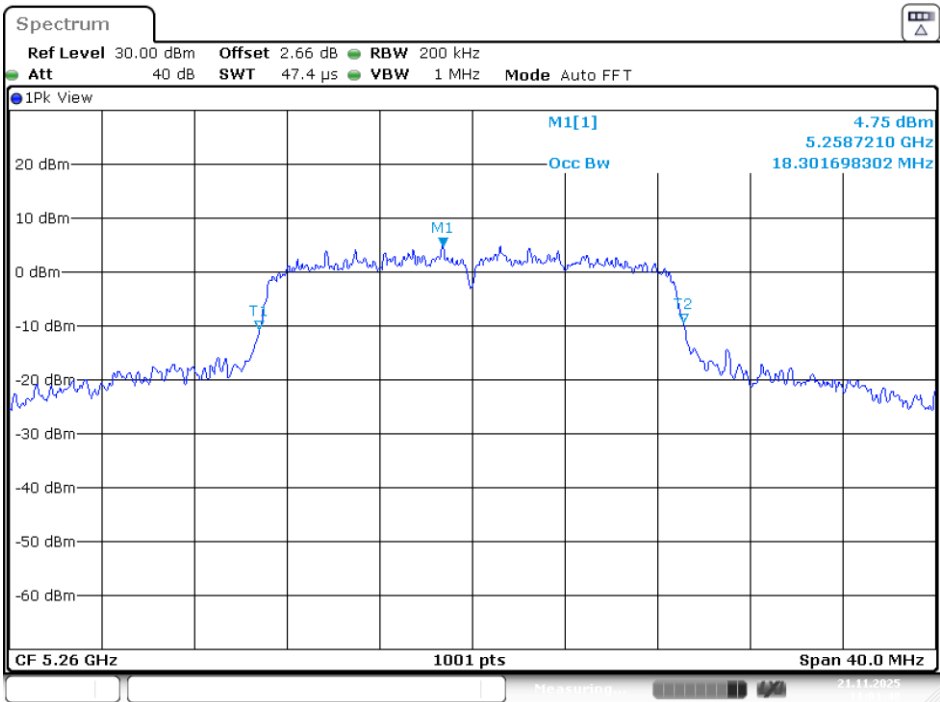


Date: 21.NOV.2025 11:01:48

5300MHz

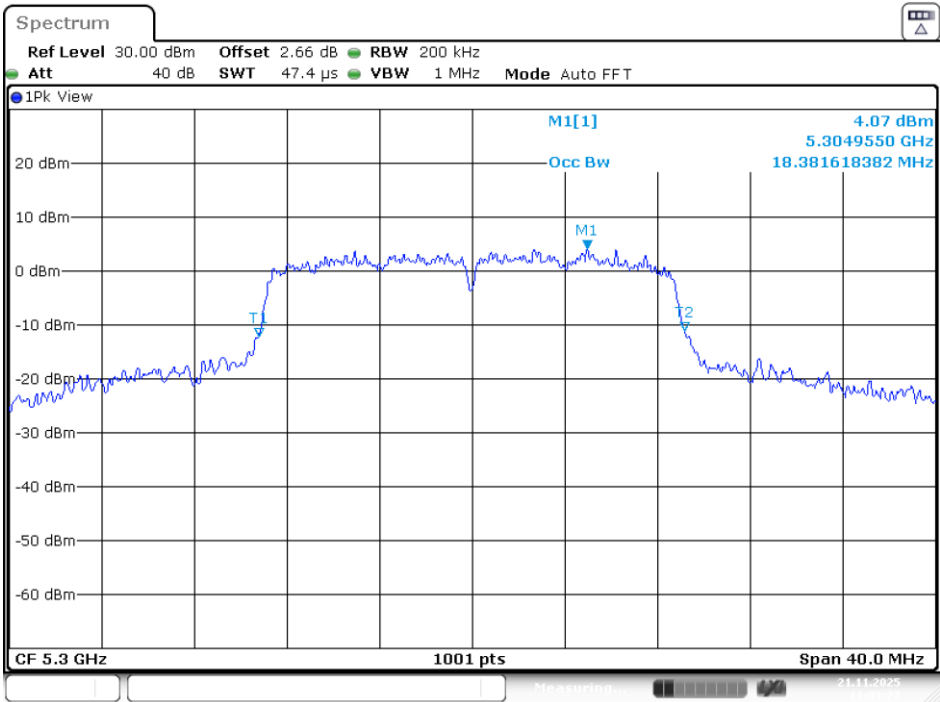

Date: 21.NOV.2025 11:03:27


5320MHz

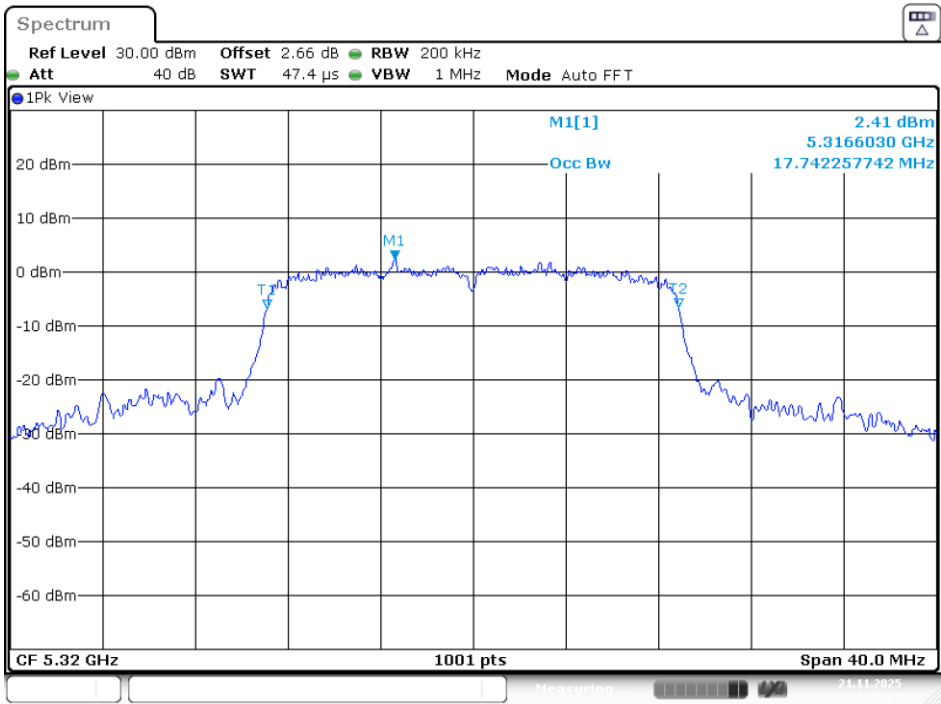

Date: 21.NOV.2025 11:07:30


802.11 ax20 Mode / 5250 ~ 5350MHz

5260MHz

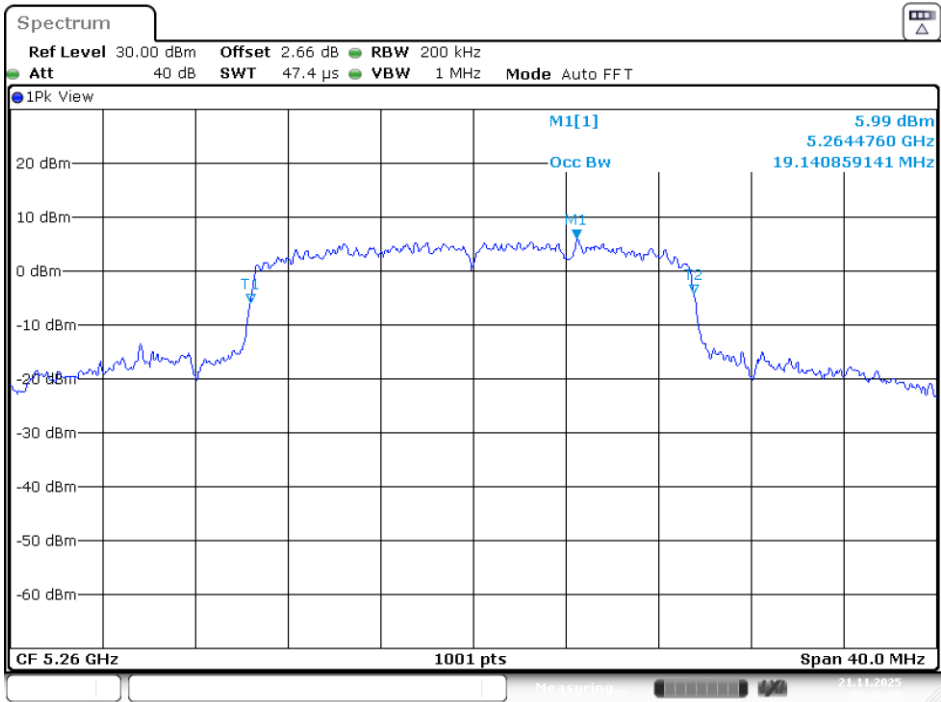


Date: 21.NOV.2025 12:42:25

5300MHz

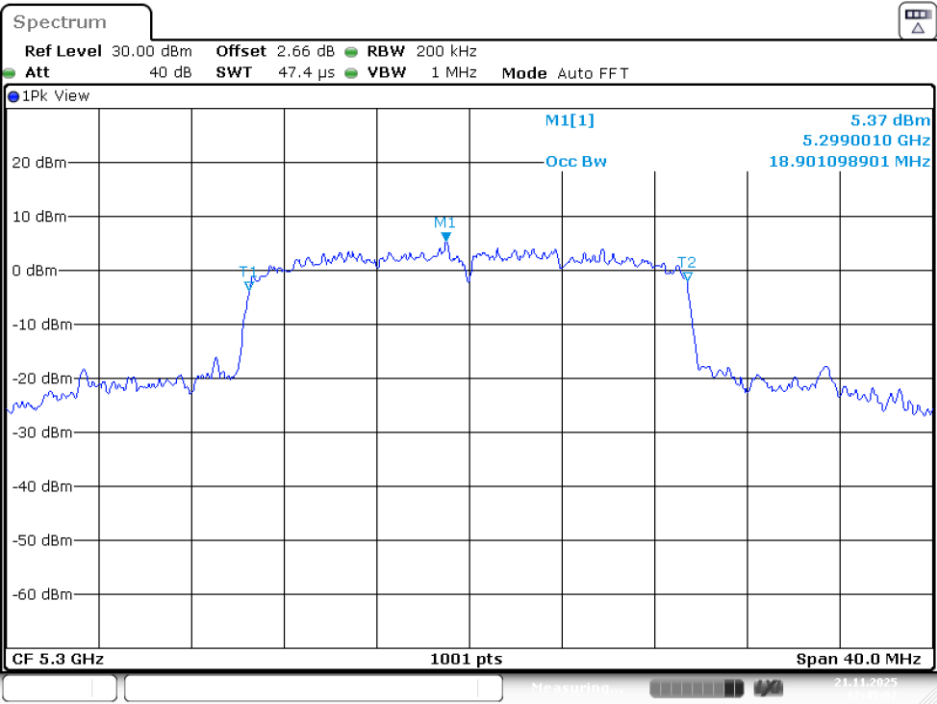

Date: 21.NOV.2025 12:45:03

5320MHz

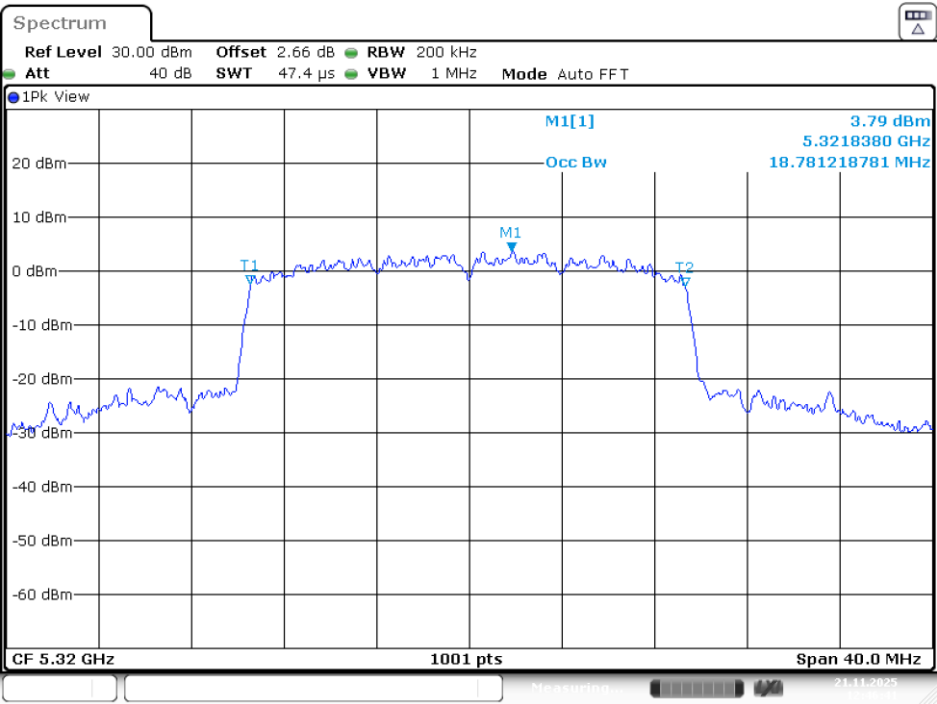


Date: 21.NOV.2025 12:46:42

UNII-2C Band III / OBW 99%


802.11a Mode / 5470 ~ 5725MHz

5500MHz

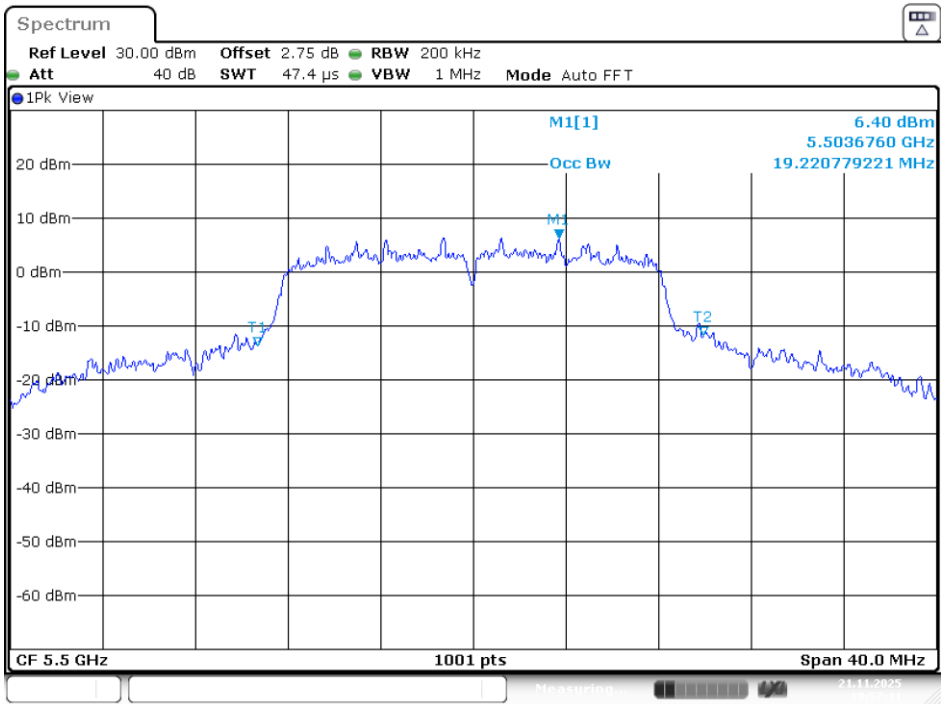


Date: 21.NOV.2025 19:57:11

5580MHz

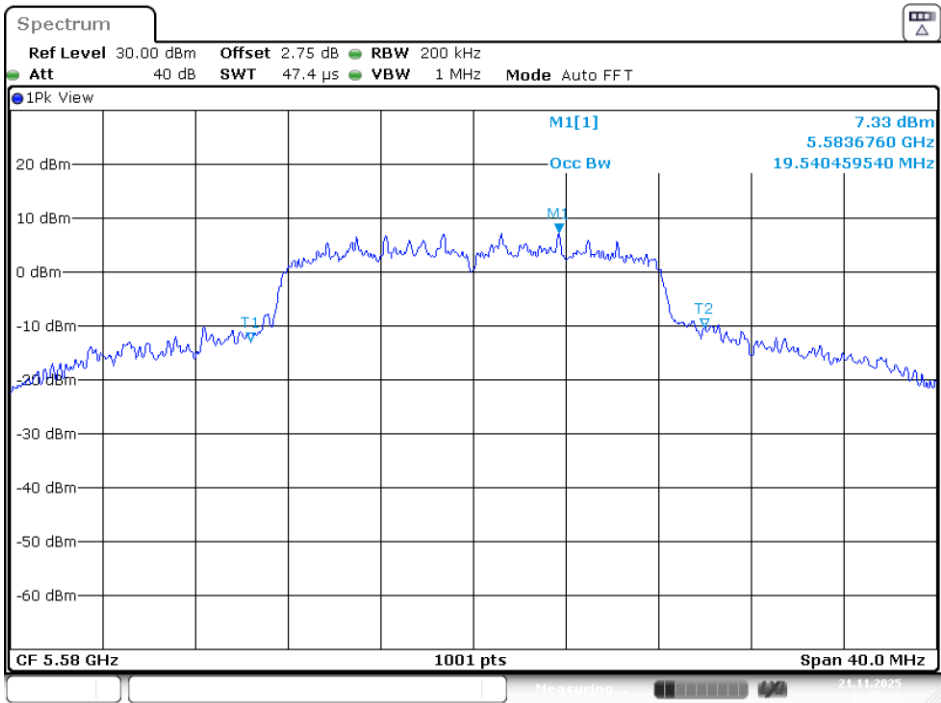


Date: 21.NOV.2025 19:55:20

5680MHz

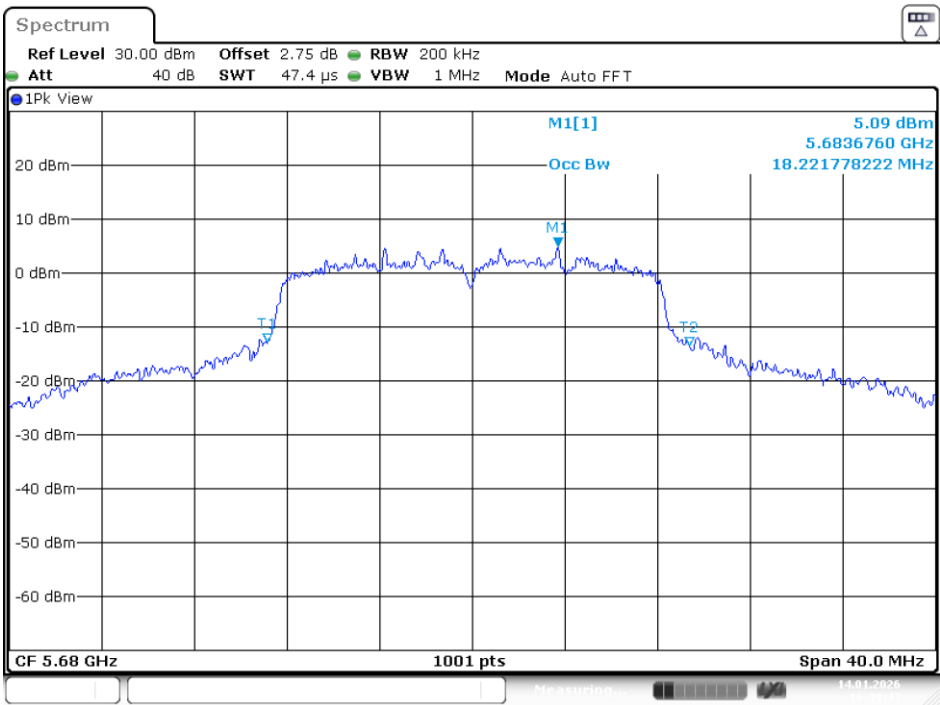

Date: 14.JAN.2026 16:39:43


5700MHz

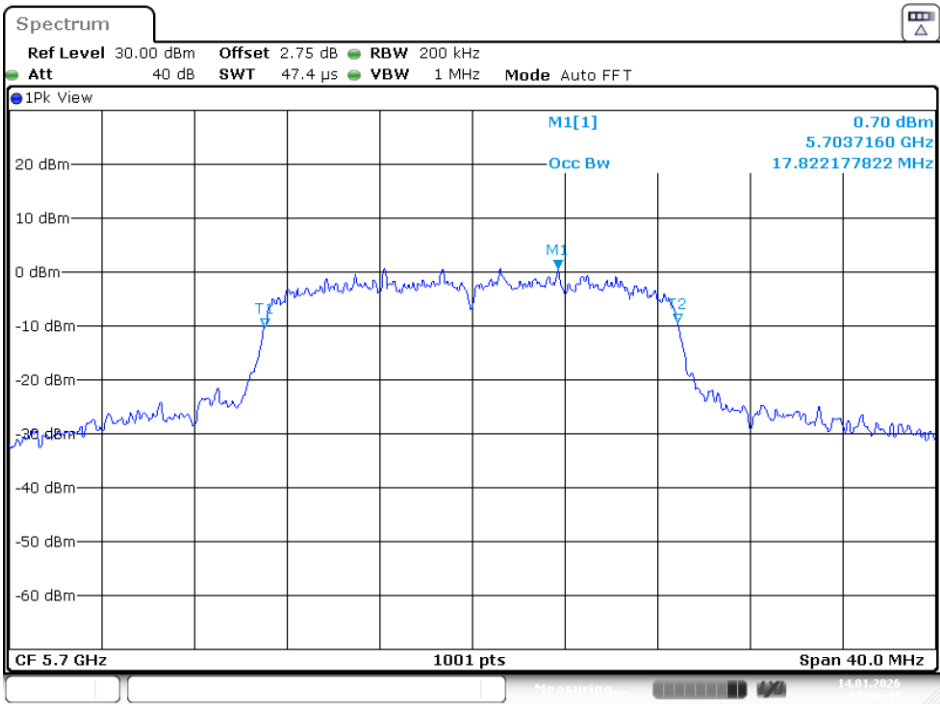

Date: 14.JAN.2026 17:00:42


802.11 n20 Mode / 5470 ~ 5725MHz

5500MHz

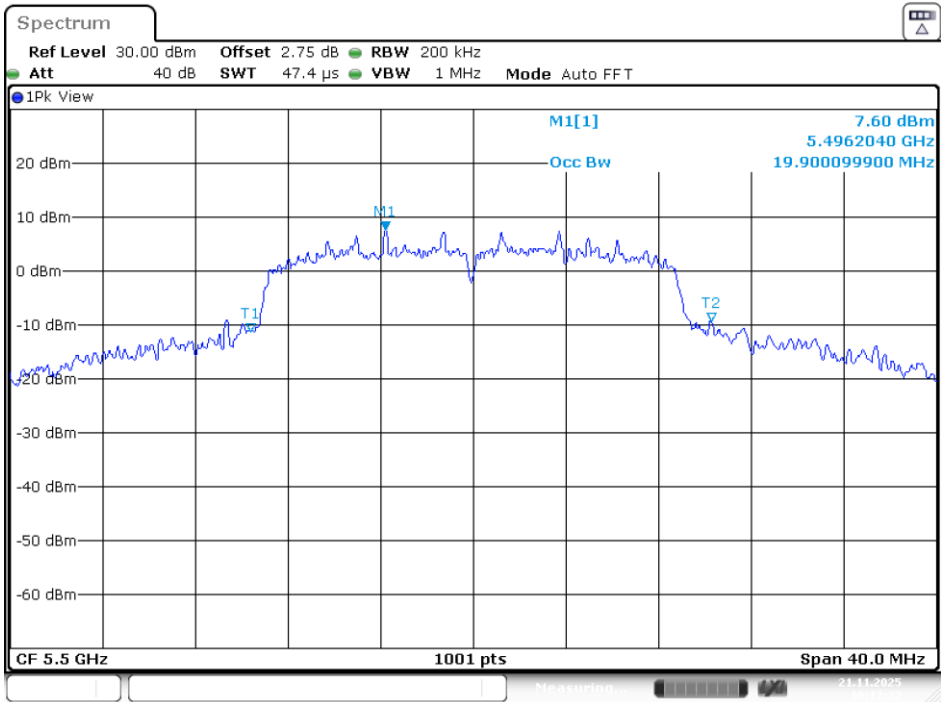


Date: 21.NOV.2025 10:12:32

5580MHz

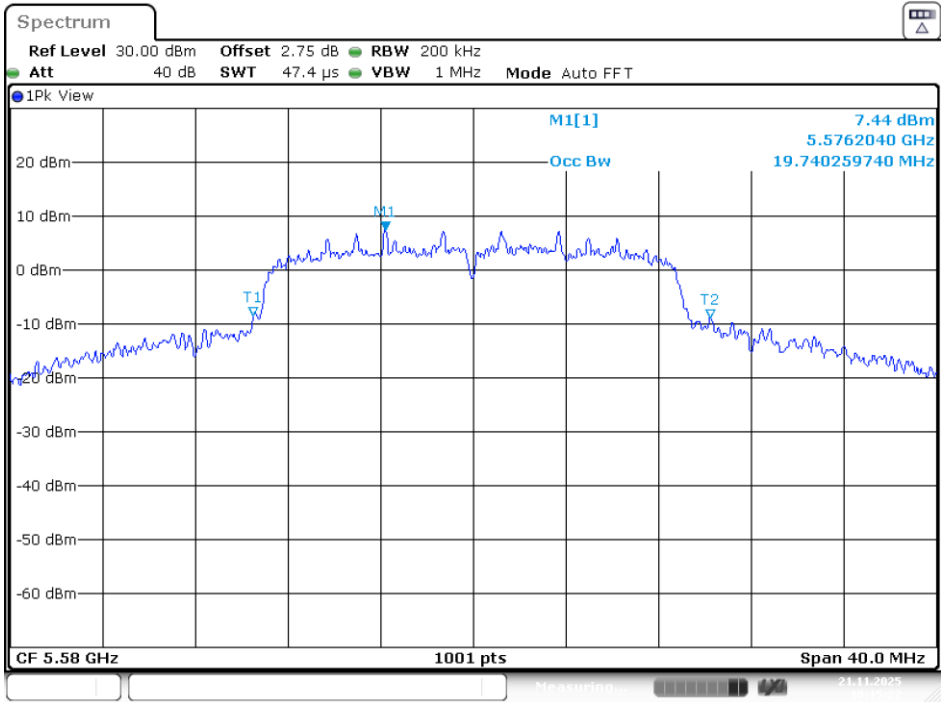


Date: 21.NOV.2025 10:15:22

5680MHz

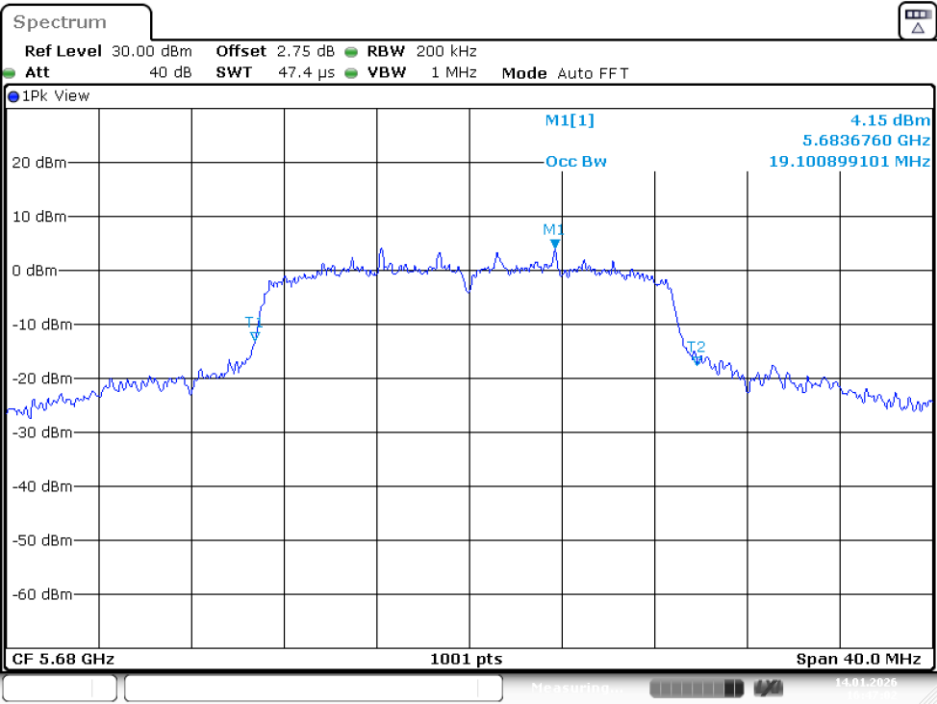

Date: 14.JAN.2026 16:47:02


5700MHz

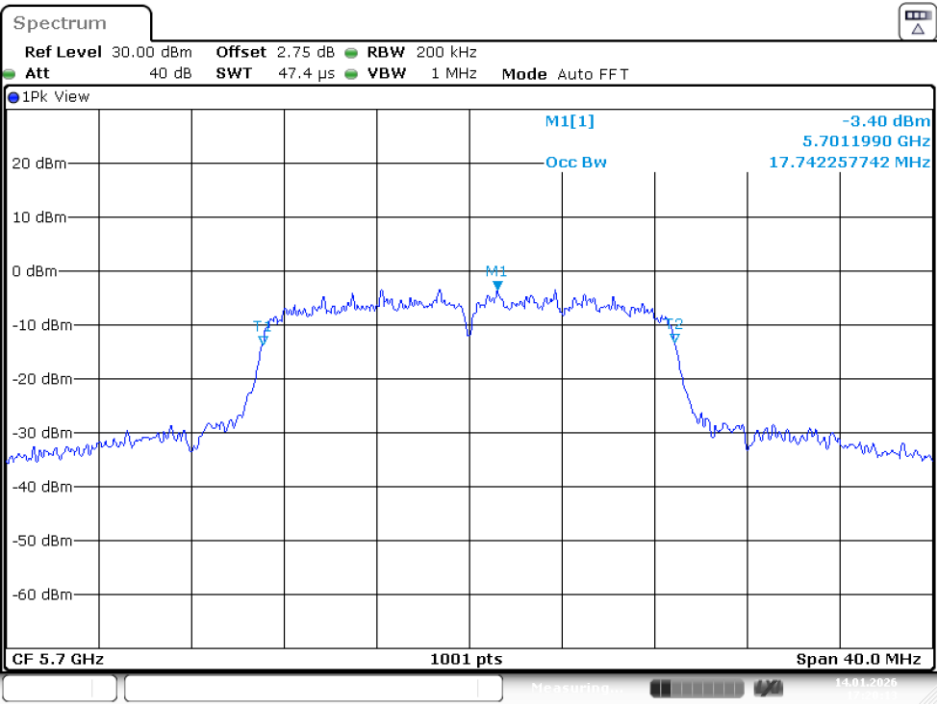

Date: 14.JAN.2026 17:20:14


802.11 ac20 Mode / 5470 ~ 5725MHz

5500MHz

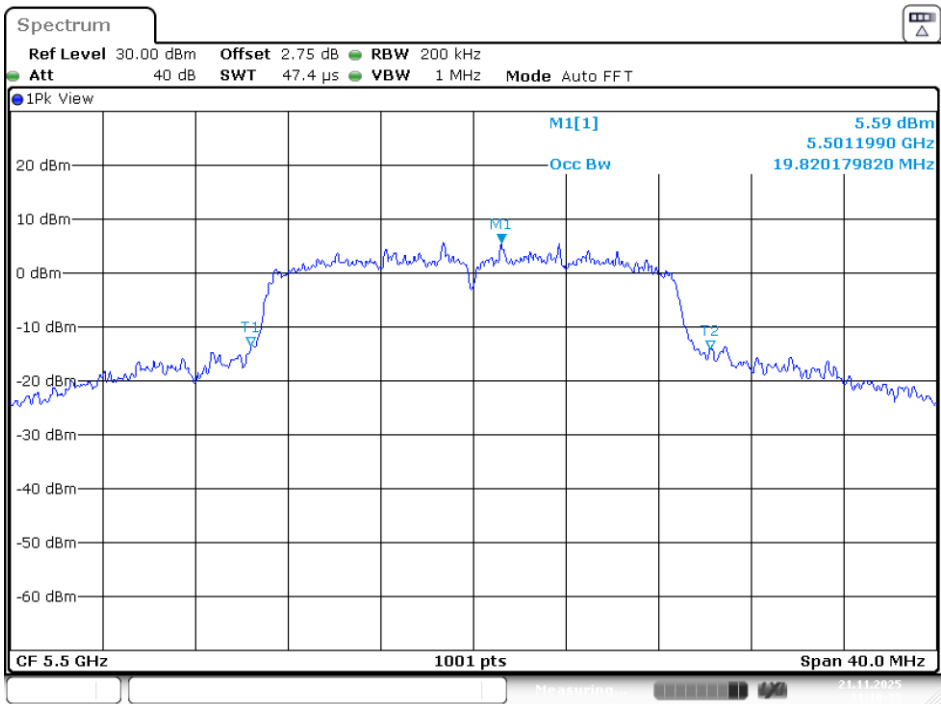


Date: 21.NOV.2025 11:10:35

5580MHz

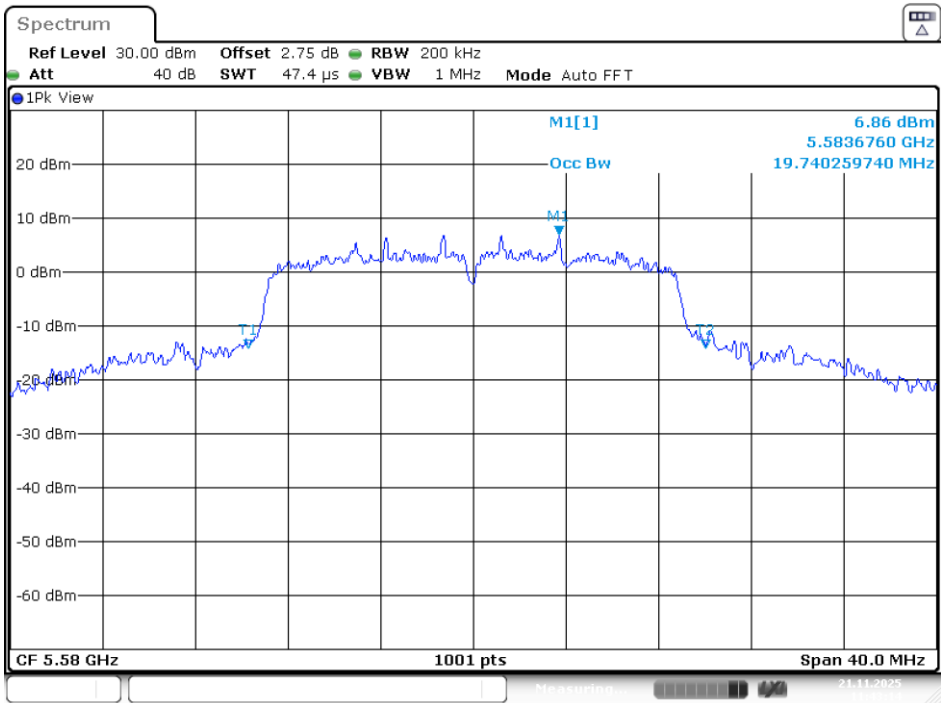


Date: 21.NOV.2025 11:43:15

5680MHz

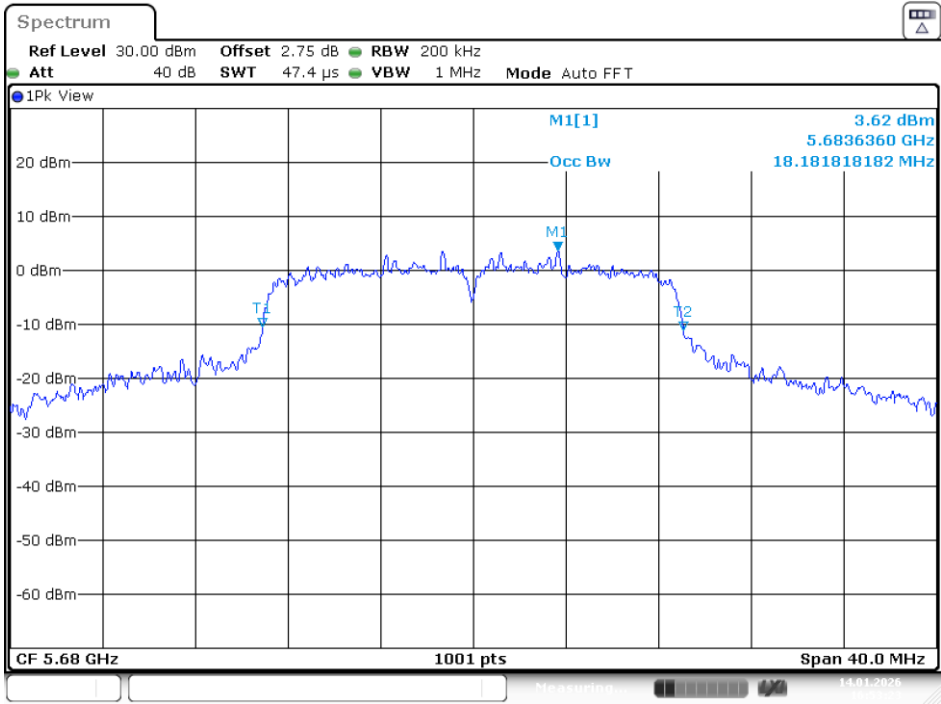



Date: 14.JAN.2026 16:53:23

5700MHz

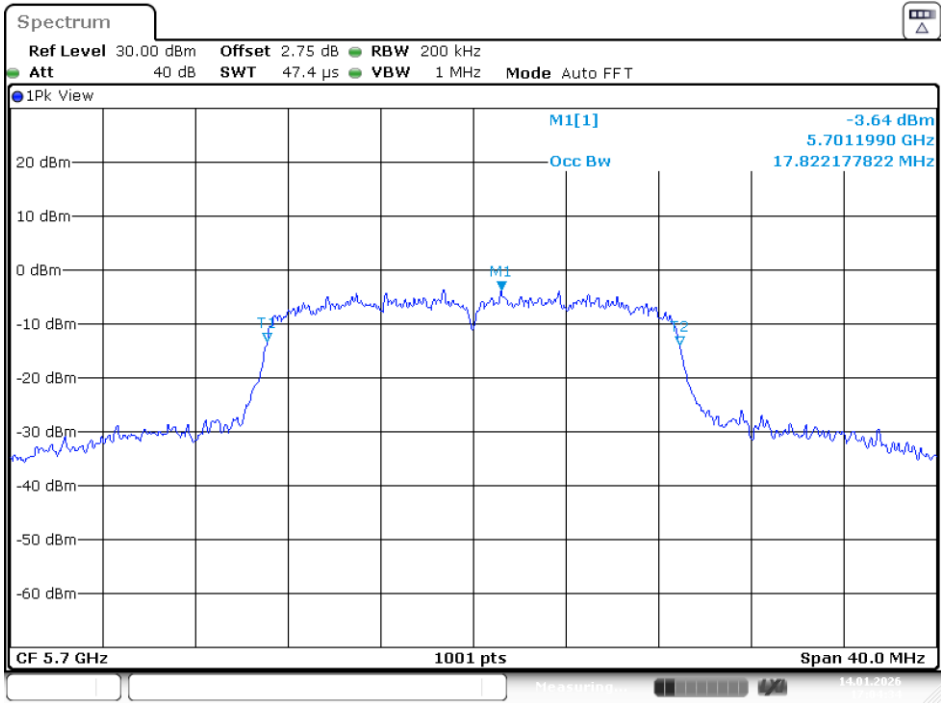


Date: 14.JAN.2026 17:04:34

802.11 ax20 Mode / 5470 ~ 5725MHz

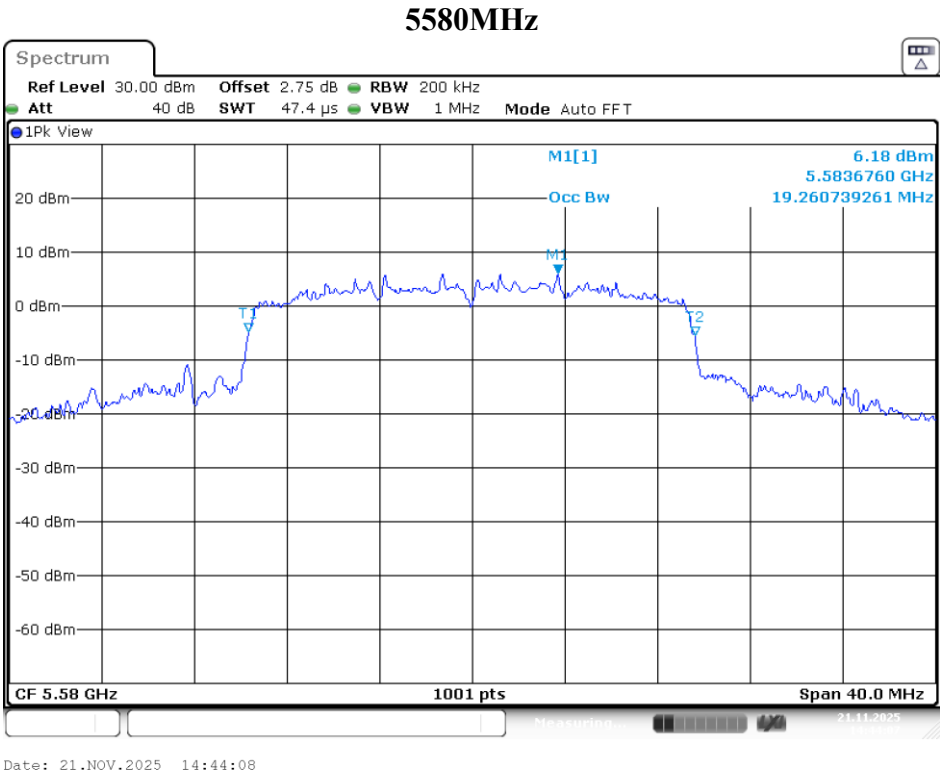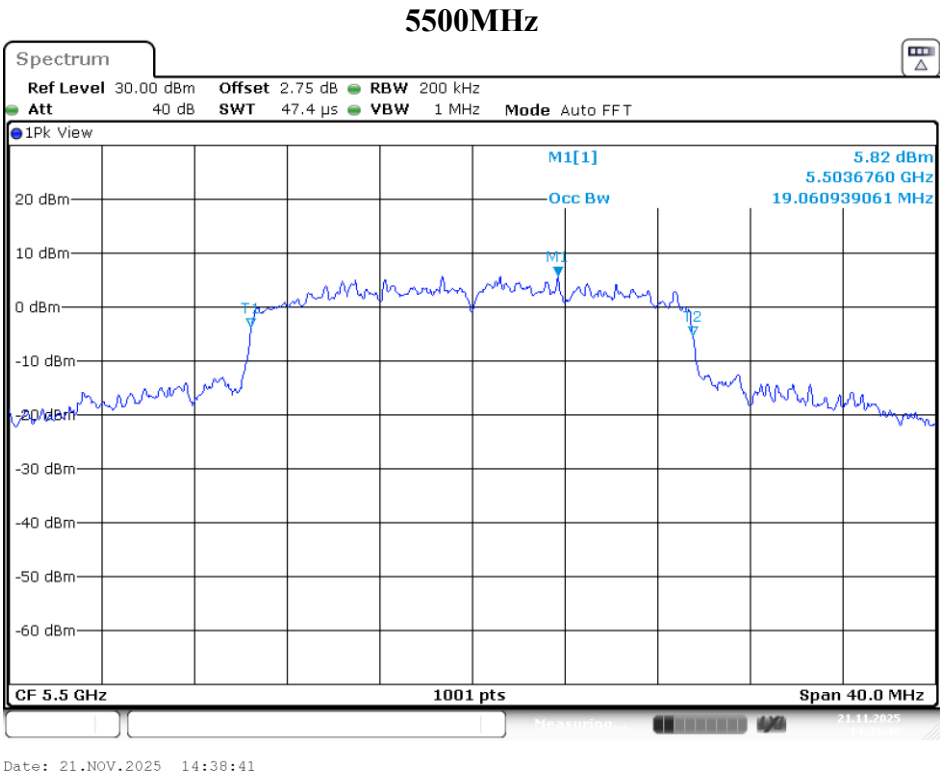


5680MHz

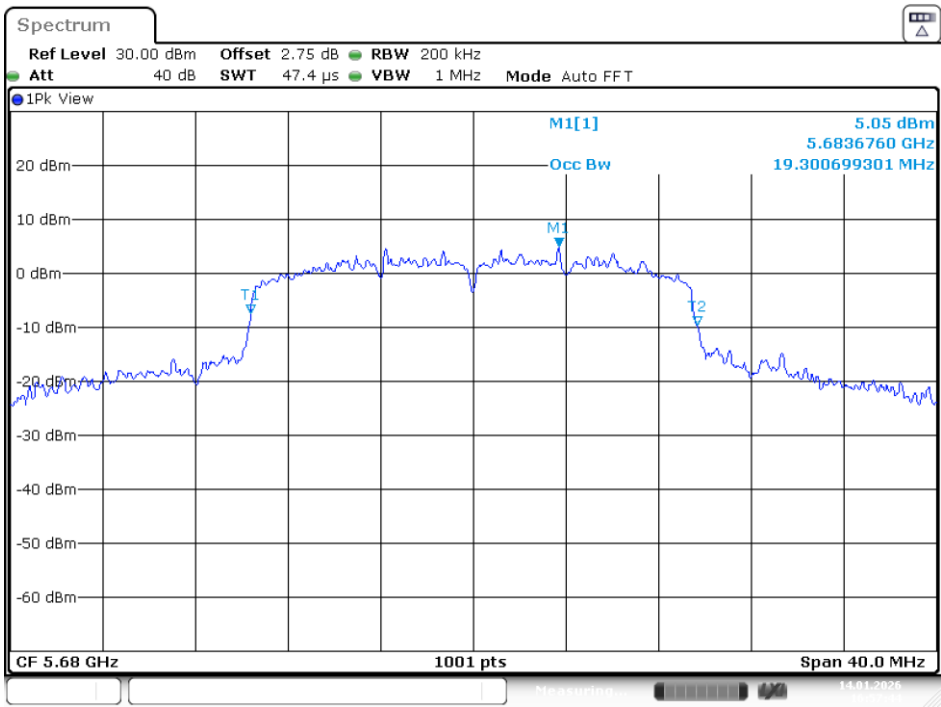

Date: 14.JAN.2026 16:57:45


5700MHz

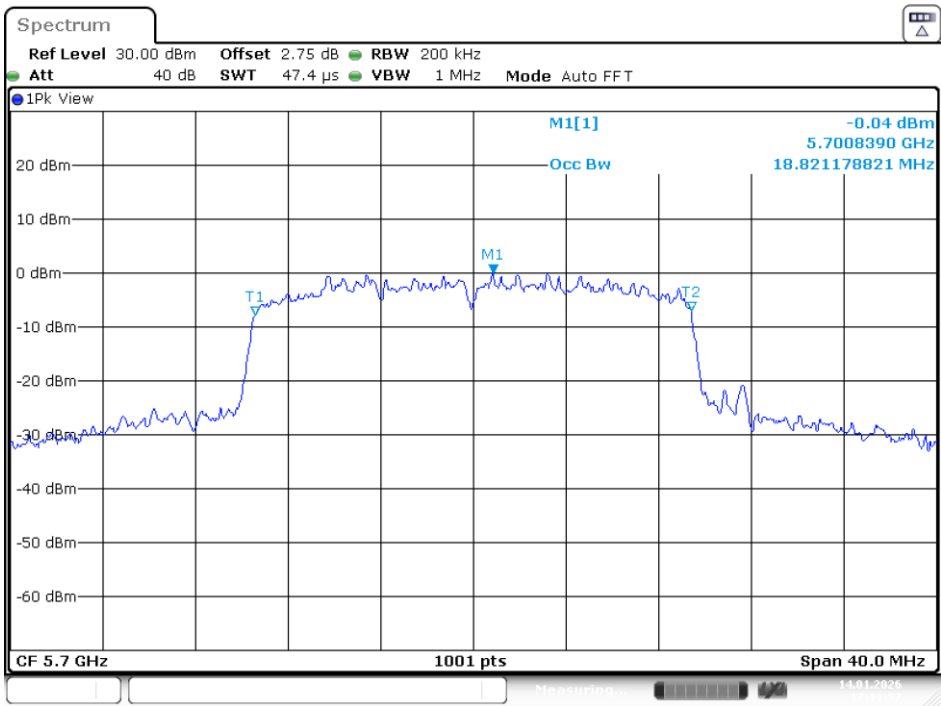

Date: 14.JAN.2026 17:11:58


UNII-3 Band IV / OBW 99%
802.11a Mode / 5725 ~ 5850MHz

5745MHz

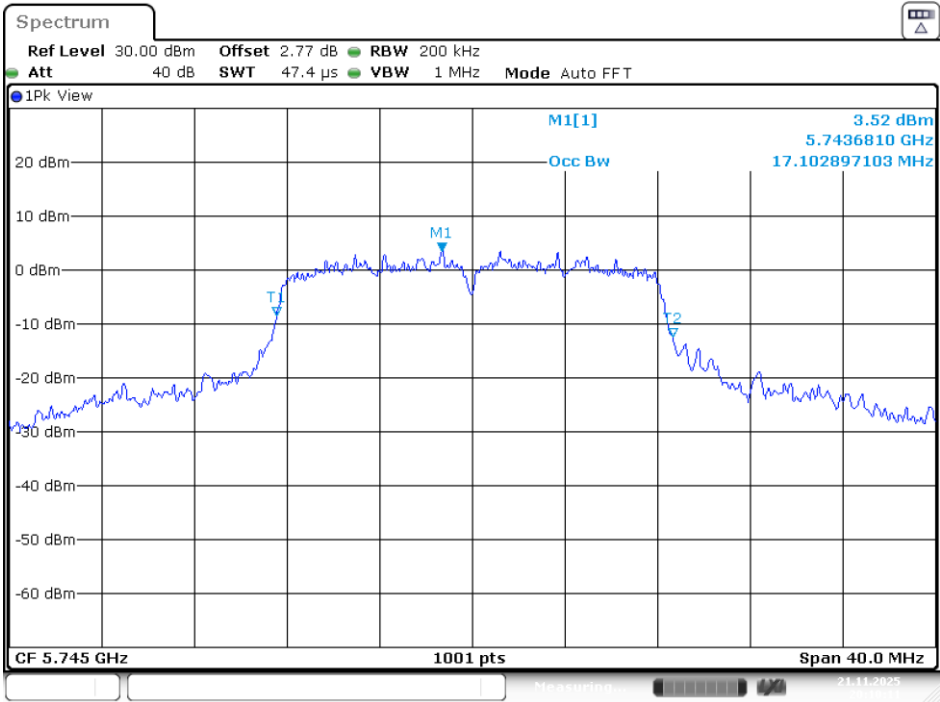


Date: 21.NOV.2025 20:10:11

5785MHz

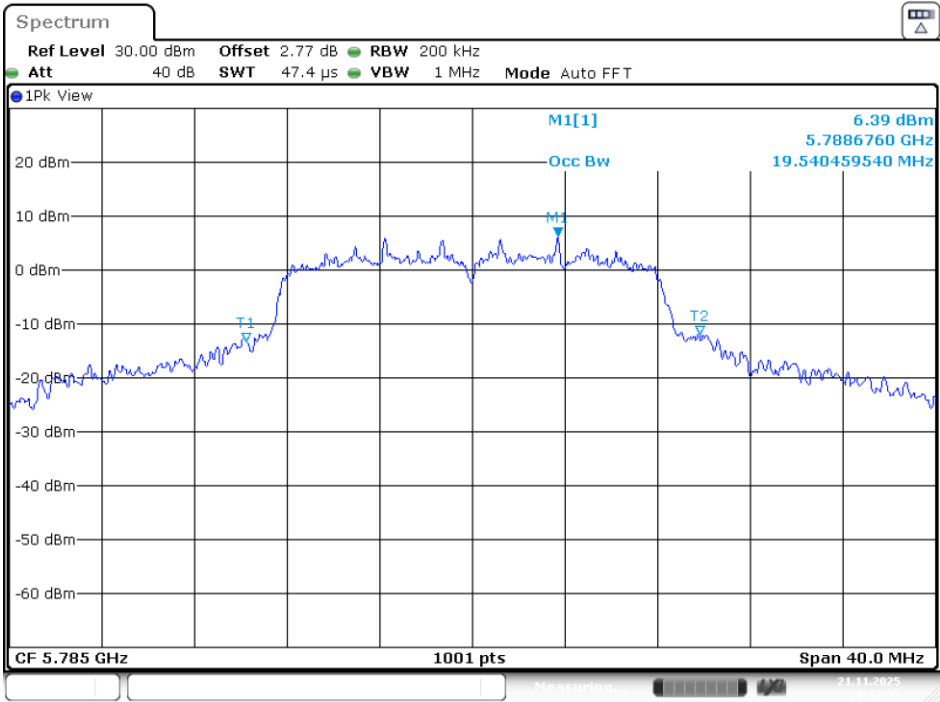

Date: 21.NOV.2025 20:12:35


5825MHz

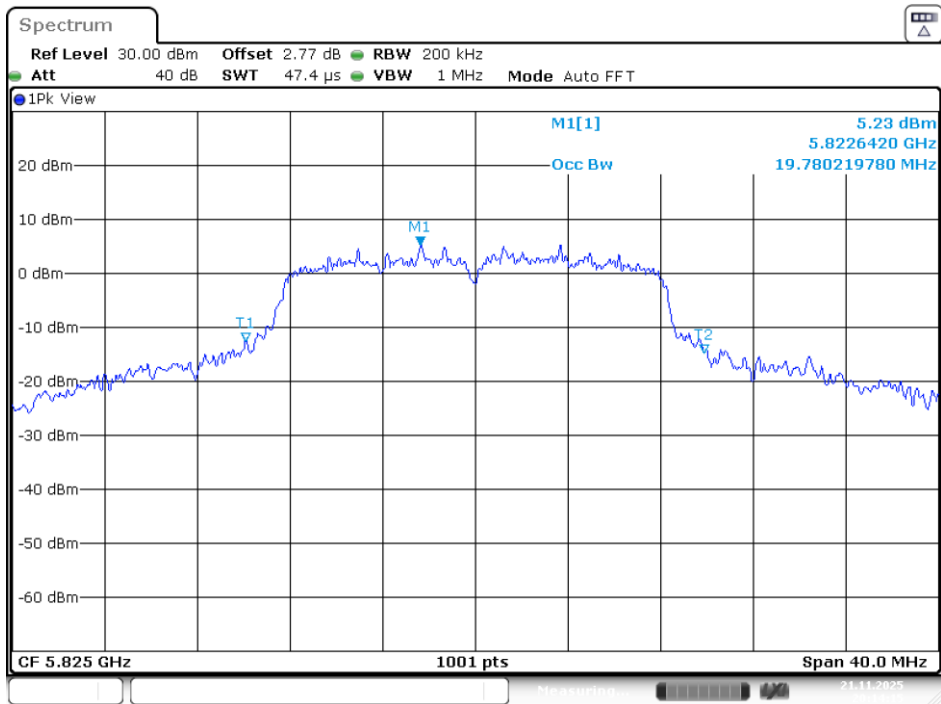

Date: 21.NOV.2025 20:14:15


802.11 n20 Mode / 5725 ~ 5850MHz

5745MHz

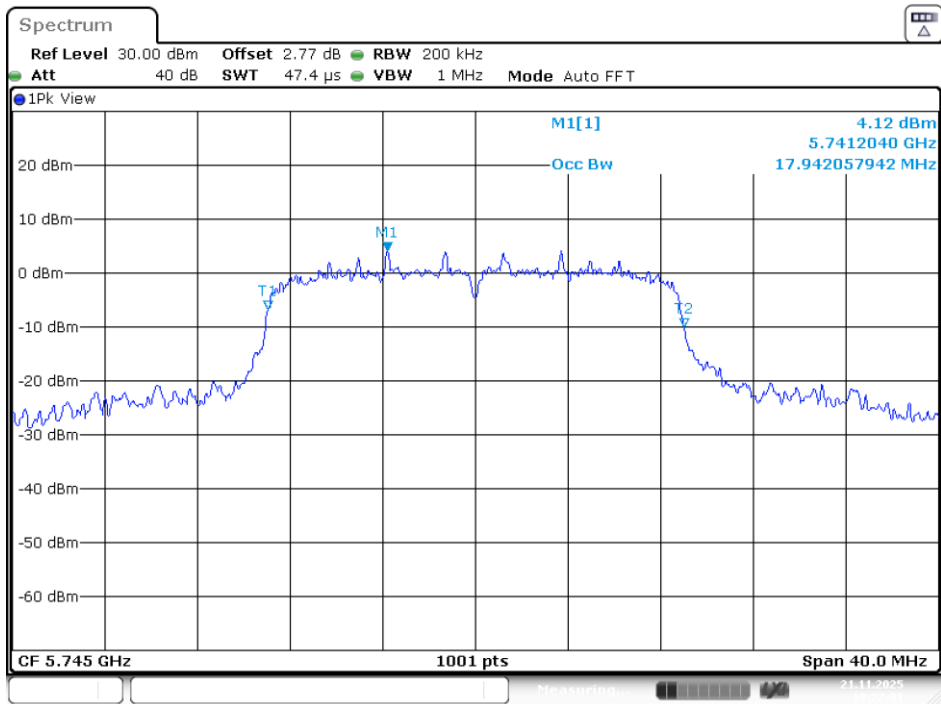


Date: 21.NOV.2025 10:22:02

5785MHz

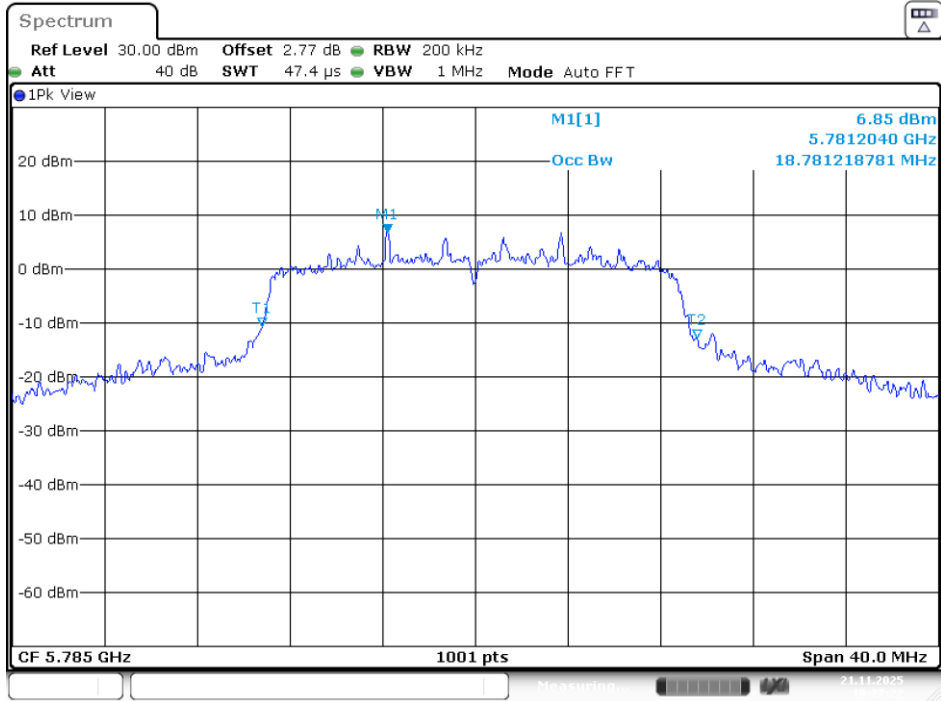

Date: 21.NOV.2025 10:27:22


5825MHz

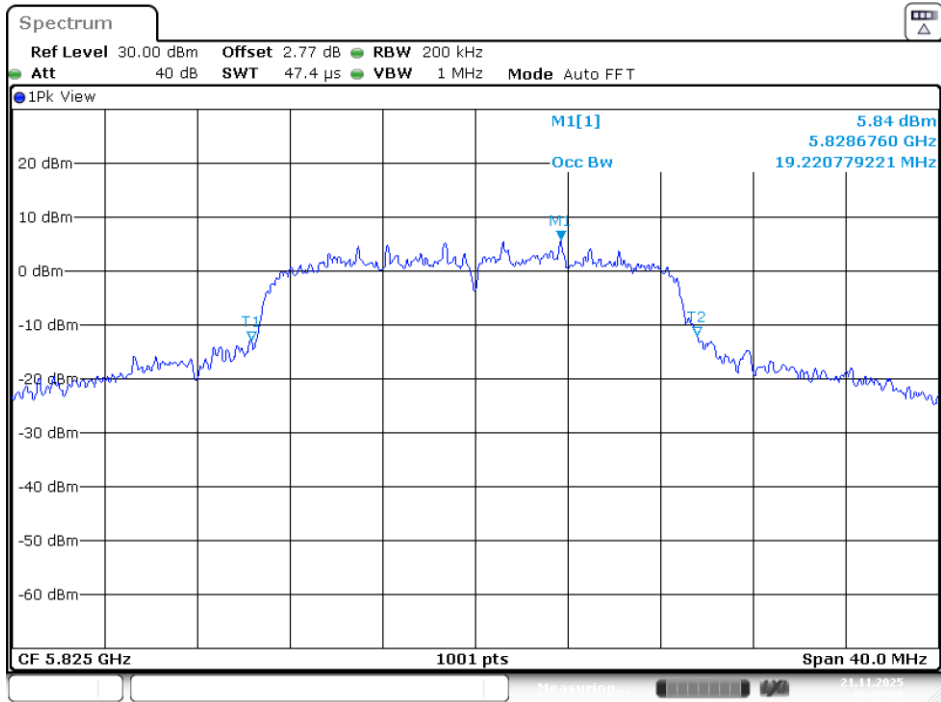


Date: 21.NOV.2025 10:32:08

802.11 ac20 Mode / 5725 ~ 5850MHz


5745MHz

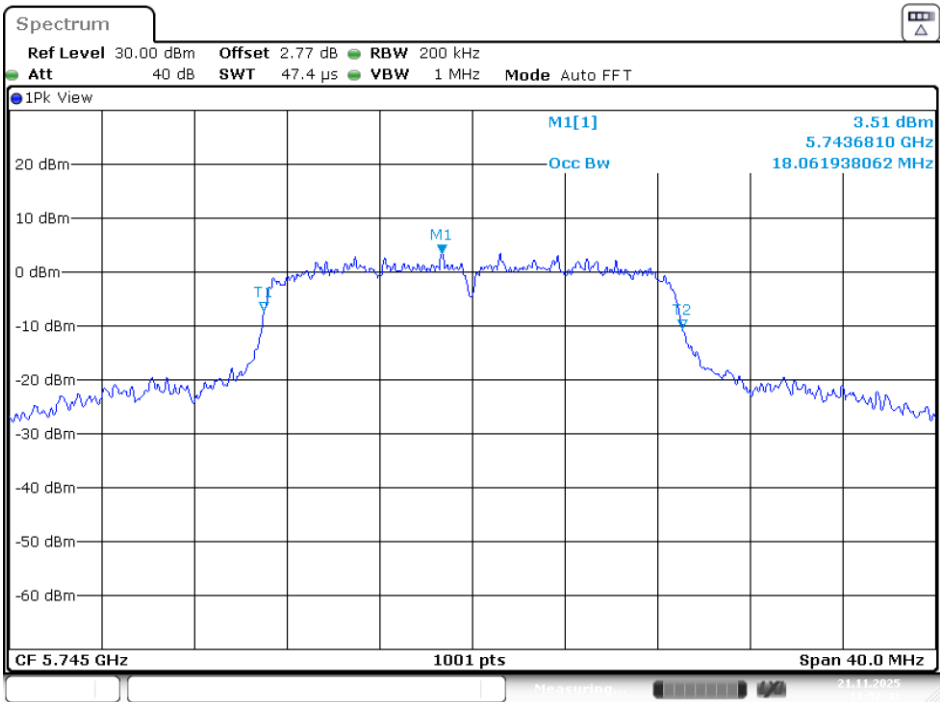

5785MHz

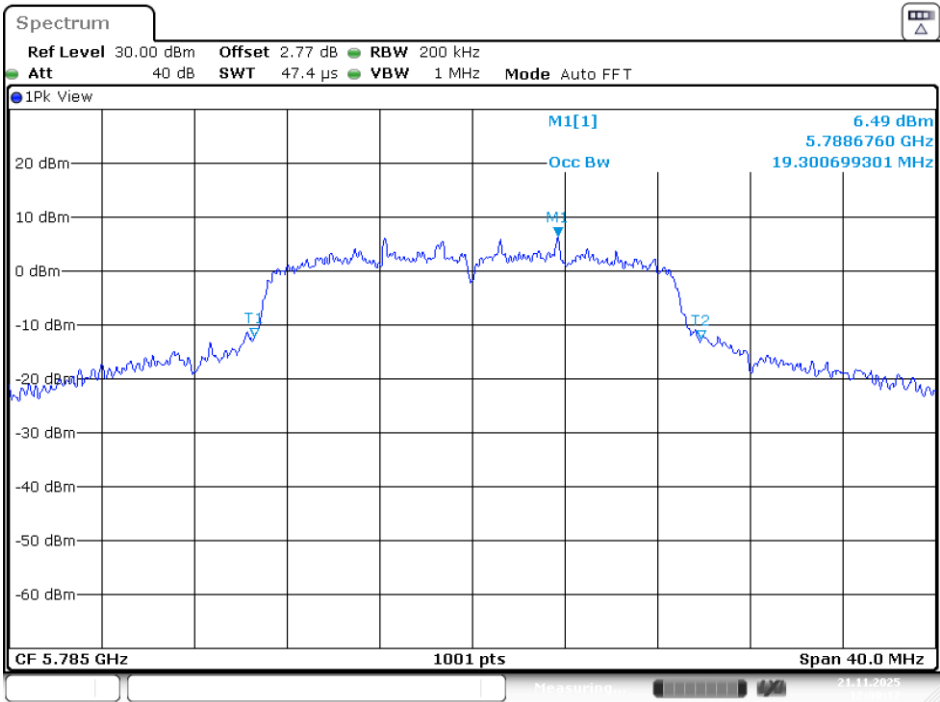


5825MHz

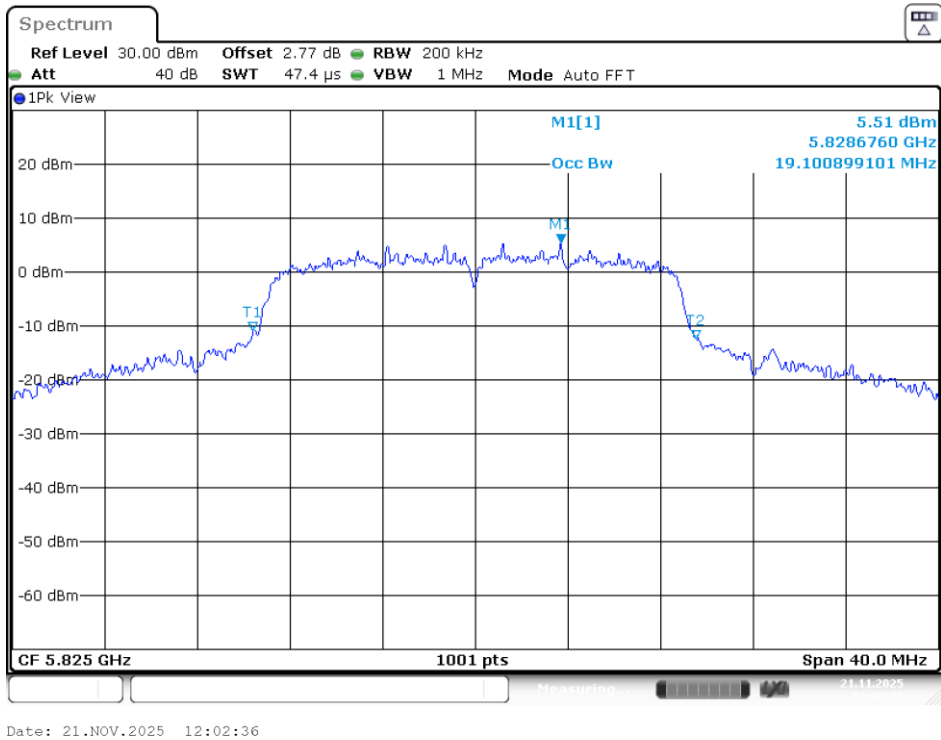


802.11 ax20 Mode / 5725 ~ 5850MHz

5745MHz

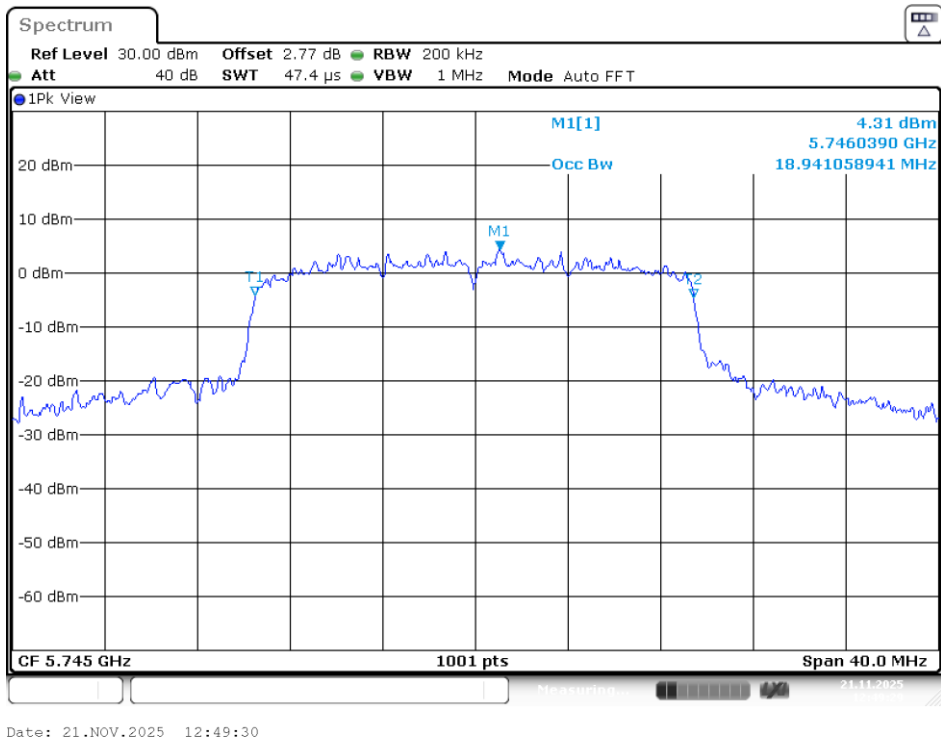


5785MHz

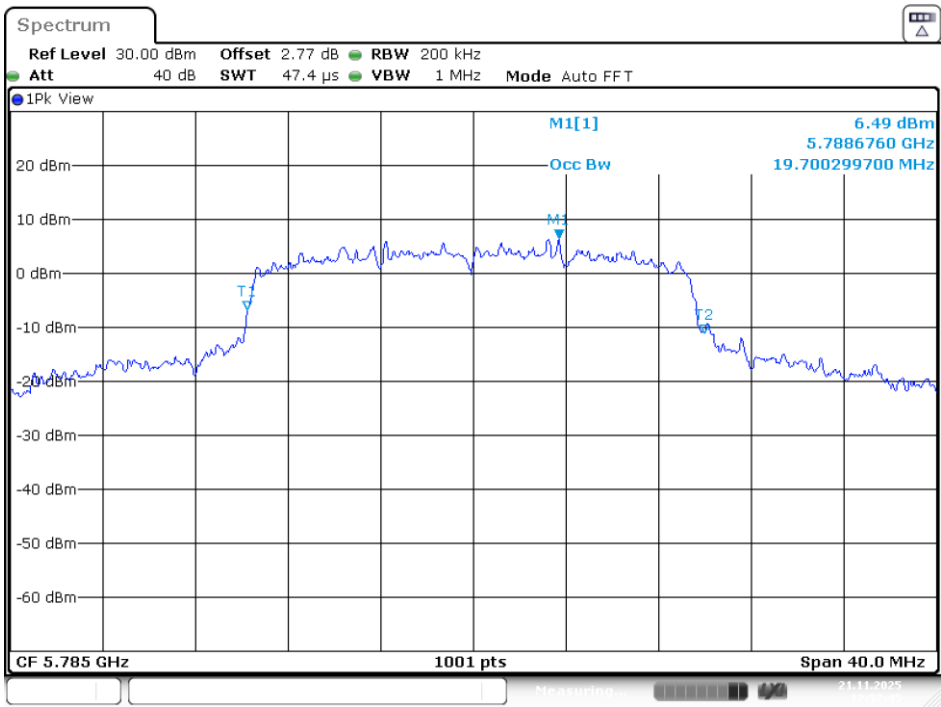

Date: 21.NOV.2025 12:52:45

5825MHz

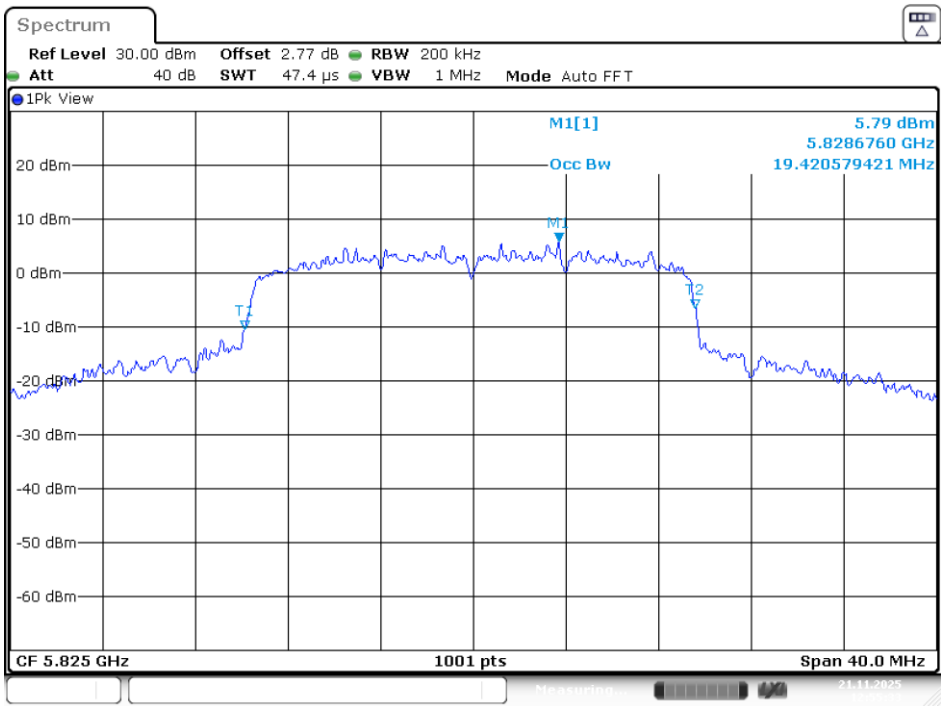

Date: 21.NOV.2025 12:55:33

9 FCC §15.407(a) – Maximum Output Power

9.1 Applicable Standard

According to FCC §15.407(a):

For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

9.2 Test Procedure

According to ANSI C63.10-2020+Cor.1-2023 Section 12.4.3.1

The use Power Meter

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to a Power sensor.

9.3 Test Results

Test Mode: Transmitting

5150-5250MHz

Test Modes	Channel	Frequency (MHz)	Maximum Conducted Average Output Power (dBm)	Duty Factor (dB)	Total Maximum Conducted Average Output Power With Duty Factor (dBm)	For Client devices Limit (dBm)	For Master devices Limit (dBm)
802.11a	36	5180	15.23	0.18	15.41	24	30
	40	5200	15.21	0.18	15.39	24	30
	48	5240	14.1	0.18	14.28	24	30
802.11 n20	36	5180	15.03	0.36	15.39	24	30
	40	5200	15.12	0.36	15.48	24	30
	48	5240	13.54	0.36	13.90	24	30
802.11 ac20	36	5180	15.21	0	15.21	24	30
	40	5200	15.2	0	15.2	24	30
	48	5240	14.14	0	14.14	24	30
802.11 ax20	36	5180	15.21	0	15.21	24	30
	40	5200	15.1	0	15.1	24	30
	48	5240	14.01	0	14.01	24	30

Note: Device can support both roles master and client device.

Max EIRP Power = 18.8 (dBm) < 21 (dBm)

5250-5350MHz

Test Modes	Channel	Frequency (MHz)	Maximum Conducted Average Output Power (dBm)	Duty Factor (dB)	Total Maximum Conducted Average Output Power With Duty Factor (dBm)	Limit (dBm)
802.11a	52	5260	15.11	0.18	15.29	24
	60	5300	15.09	0.18	15.27	24
	64	5320	13.31	0.18	13.49	24
802.11 n20	52	5260	15.11	0.36	15.47	24
	60	5300	15.12	0.36	15.48	24
	64	5320	13.30	0.36	13.66	24
802.11 ac20	52	5260	14.91	0	14.91	24
	60	5300	14.99	0	14.99	24
	64	5320	13.22	0	13.22	24
802.11 ax20	52	5260	15.68	0	15.68	24
	60	5300	15.16	0	15.16	24
	64	5320	13.71	0	13.71	24

Note: The device in DFS channels is a client device.

Note: It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Linkou Laboratory)

5470-5725MHz

Test Modes	Channel	Frequency (MHz)	Maximum Conducted Average Output Power (dBm)	Duty Factor (dB)	Total Maximum Conducted Average Output Power With Duty Factor (dBm)	Limit (dBm)
802.11a	100	5500	14.89	0.18	15.07	24
	116	5580	16.7	0.18	16.88	24
	136	5680	14.81	0.18	14.99	24
	140	5700	11.49	0.18	11.67	24
802.11 n20	100	5500	16.82	0.36	17.18	24
	116	5580	16.69	0.36	17.05	24
	136	5680	14.72	0.36	15.08	24
	140	5700	7.50	0.36	7.86	24
802.11 ac20	100	5500	13.65	0	13.65	24
	116	5580	15.59	0	15.59	24
	136	5680	14.75	0	14.75	24
	140	5700	8.84	0	8.84	24
802.11 ax20	100	5500	14.08	0	14.08	24
	116	5580	16.01	0	16.01	24
	136	5680	14.60	0	14.60	24
	140	5700	10.50	0	10.50	24

The device in DFS channels is a client device.

5725-5850MHz

Test Modes	Channel	Frequency (MHz)	Maximum Conducted Average Output Power (dBm)	Duty Factor (dB)	Total Maximum Conducted Average Output Power With Duty Factor (dBm)	Limit (dBm)
802.11a	149	5745	13.03	0.18	13.21	30
	157	5785	13.93	0.18	14.11	30
	165	5825	13.66	0.18	13.84	30
802.11 n20	149	5745	12.90	0.36	13.26	30
	157	5785	13.81	0.36	14.17	30
	165	5825	13.42	0.36	13.78	30
802.11 ac20	149	5745	13.1	0	13.10	30
	157	5785	13.96	0	13.96	30
	165	5825	13.67	0	13.67	30
802.11 ax20	149	5745	12.92	0	12.92	30
	157	5785	13.79	0	13.79	30
	165	5825	13.46	0	13.46	30

Note: Device can support both roles master and client device.

Note: It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Linkou Laboratory)

10 FCC §15.407(a) – Power Spectral Density

10.1 Applicable Standard

According to FCC §15.407(a):

For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

10.2 Test Procedure

The measurements are based on FCC KDB 789033 D02 General U-NII Test Procedures New Rules v02r01: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices section F: Maximum power spectral density.

Duty cycle <98%, duty cycle variations are less than $\pm 2\%$

Method SA-2 was used.

10.3 Test Results

Test Mode: Transmitting

5150-5250MHz

Mode	Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor (dB)	Power Spectral Density with duty factor (dBm/MHz)	For Client devices Limit (dBm/MHz)	For Master devices Limit (dBm/MHz)
802.11a	36	5180	3.56	0.18	3.74	11	17
	40	5200	3.90	0.18	4.08	11	17
	48	5240	2.22	0.18	2.40	11	17
802.11 n20	36	5180	2.88	0.36	3.24	11	17
	40	5200	3.17	0.36	3.53	11	17
	48	5240	2.12	0.36	2.48	11	17
802.11 ac20	36	5180	3.96	0.00	3.96	11	17
	40	5200	4.02	0.00	4.02	11	17
	48	5240	2.78	0.00	2.78	11	17
802.11 ax20	36	5180	4.11	0.00	4.11	11	17
	40	5200	4.10	0.00	4.10	11	17
	48	5240	2.25	0.00	2.25	11	17

5250-5350MHz

Mode	Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor (dB)	Power Spectral Density with duty factor (dBm/MHz)	Limit (dBm/MHz)
802.11a	52	5260	3.37	0.18	3.55	11
	60	5300	3.17	0.18	3.35	11
	64	5320	1.8	0.18	1.98	11
802.11 n20	52	5260	3.05	0.36	3.41	11
	60	5300	3.06	0.36	3.42	11
	64	5320	1.16	0.36	1.52	11
802.11 ac20	52	5260	3.23	0	3.23	11
	60	5300	3.39	0	3.39	11
	64	5320	1.88	0	1.88	11
802.11 ax20	52	5260	3.18	0	3.18	11
	60	5300	2.67	0	2.67	11
	64	5320	1.58	0	1.58	11

5470-5725MHz

Mode	Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor (dB)	Power Spectral Density with duty factor (dBm/MHz)	Limit (dBm/MHz)
802.11a	100	5500	3.99	0.18	4.17	11
	116	5580	4.13	0.18	4.31	11
	136	5680	1.70	0.18	1.88	11
	140	5700	-1.73	0.18	-1.55	11
802.11 n20	100	5500	4.25	0.36	4.61	11
	116	5580	4.24	0.36	4.6	11
	136	5680	1.09	0.36	1.45	11
	140	5700	-5.67	0.36	-5.31	11
802.11 ac20	100	5500	3.64	0.00	3.64	11
	116	5580	4.44	0.00	4.44	11
	136	5680	1.90	0.00	1.90	11
	140	5700	-4.88	0.00	-4.88	11
802.11 ax20	100	5500	3.36	0.00	3.36	11
	116	5580	3.31	0.00	3.31	11
	136	5680	1.73	0.00	1.73	11
	140	5700	-2.29	0.00	-2.29	11

5725-5850MHz

Mode	Channel	Frequency (MHz)	Power Spectral Density (dBm/500kHz)	Duty Factor (dB)	Power Spectral Density with duty factor (dBm/500kHz)	Limit (dBm/500kHz)
802.11a	149	5745	1.68	0.18	1.86	30
	157	5785	3.00	0.18	3.18	30
	165	5825	2.70	0.18	2.88	30
802.11 n20	149	5745	1.42	0.36	1.78	30
	157	5785	2.98	0.36	3.34	30
	165	5825	2.78	0.36	3.14	30
802.11 ac20	149	5745	1.93	0.00	1.93	30
	157	5785	3.21	0.00	3.21	30
	165	5825	3.19	0.00	3.19	30
802.11 ax20	149	5745	1.58	0.00	1.58	30
	157	5785	2.94	0.00	2.94	30
	165	5825	2.64	0.00	2.64	30


Please refer to the following plots

Note: It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

(Linkou Laboratory)


UNII-1 Band I / PSD
802.11a Mode / 5150 ~ 5250MHz

5180MHz

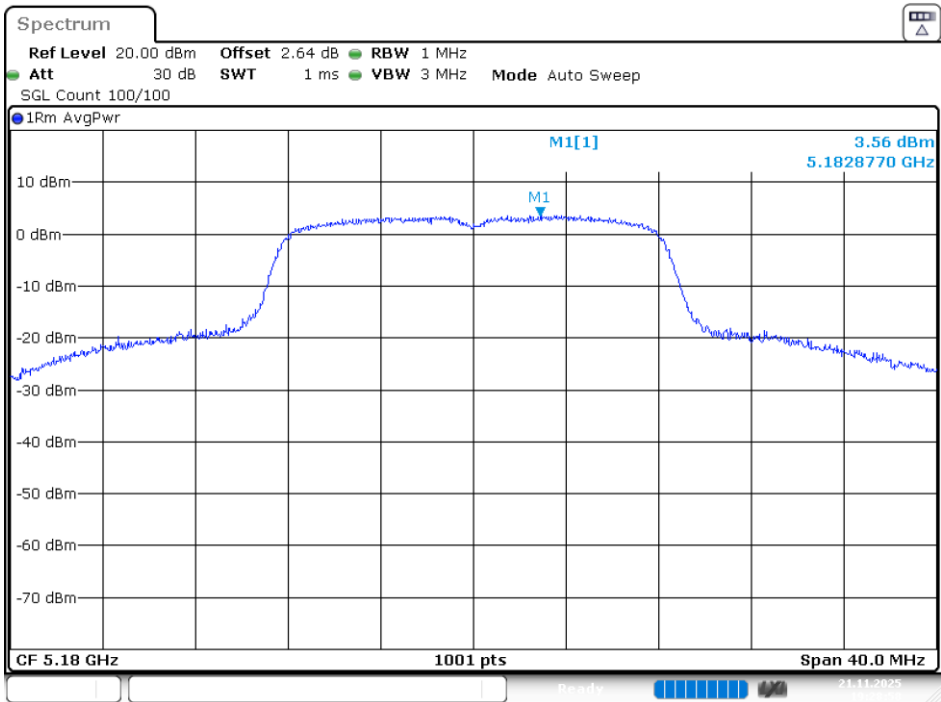


Date: 21.NOV.2025 19:28:59

5200MHz

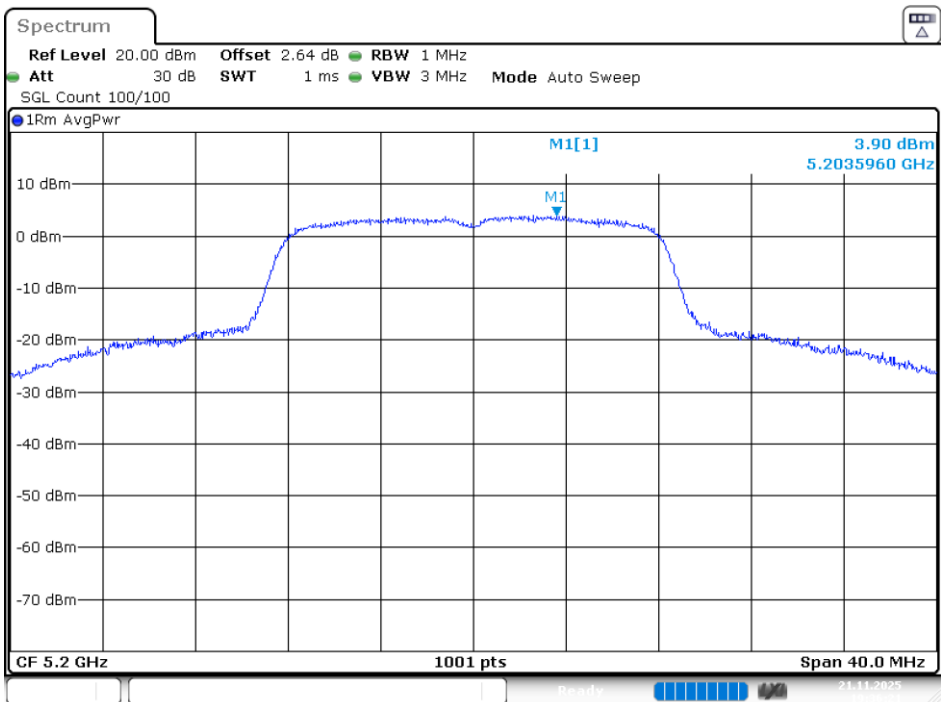

Date: 21.NOV.2025 19:36:21


5240MHz

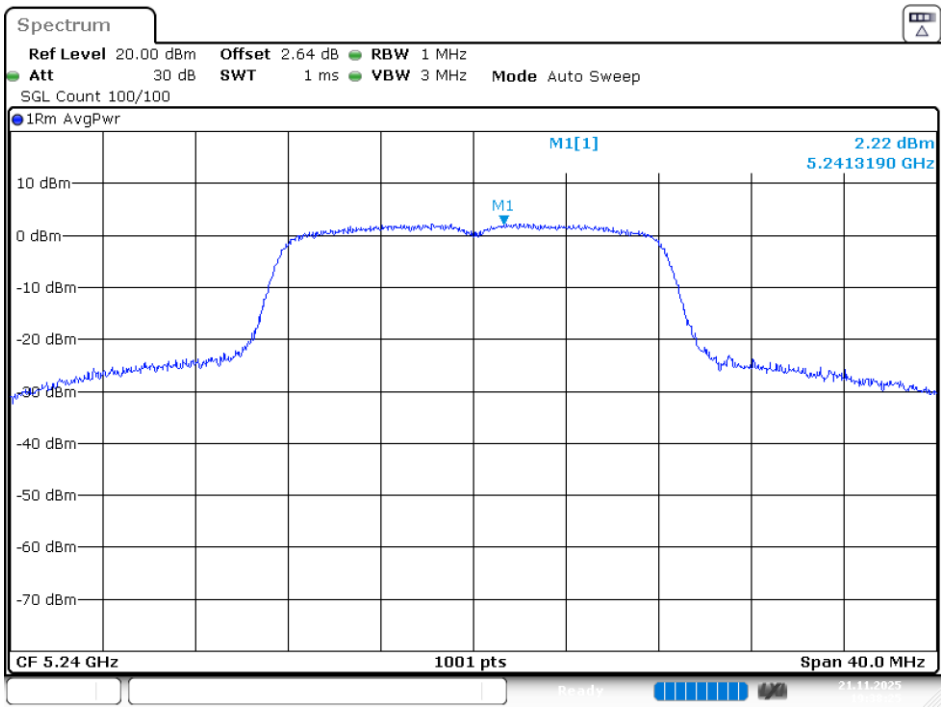

Date: 21.NOV.2025 19:38:25


802.11 n20 Mode / 5150 ~ 5250MHz

5180MHz

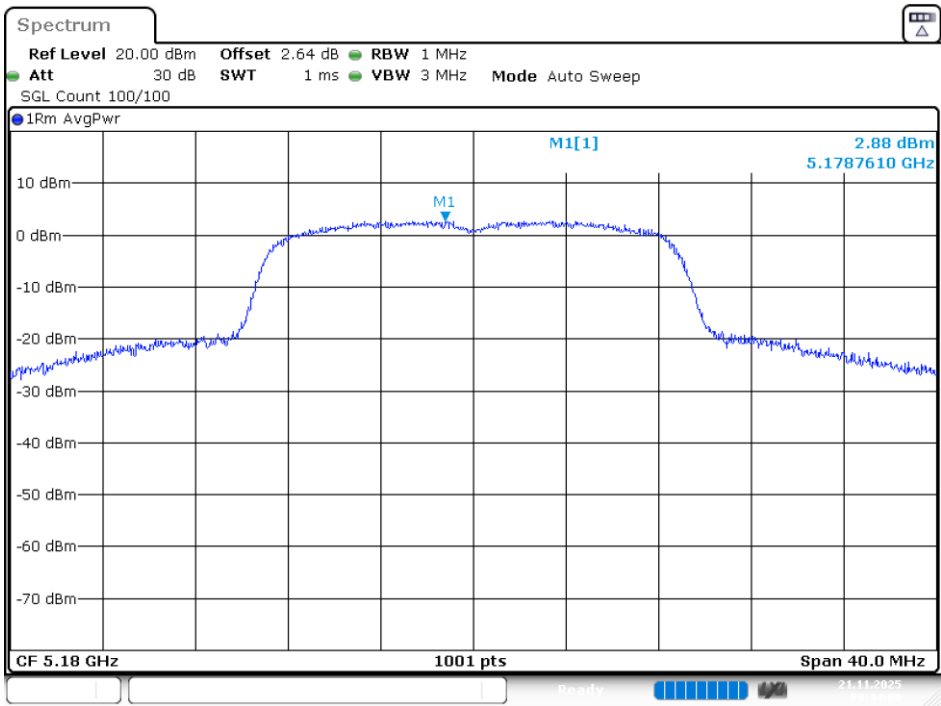


Date: 21.NOV.2025 09:44:00

5200MHz

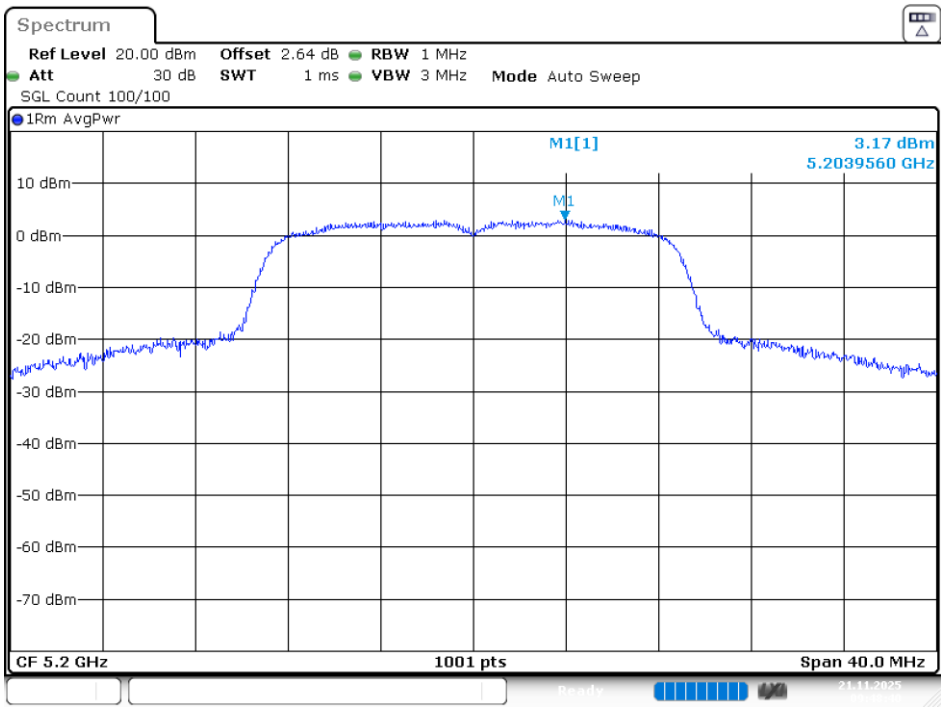

Date: 21.NOV.2025 09:48:40


5240MHz

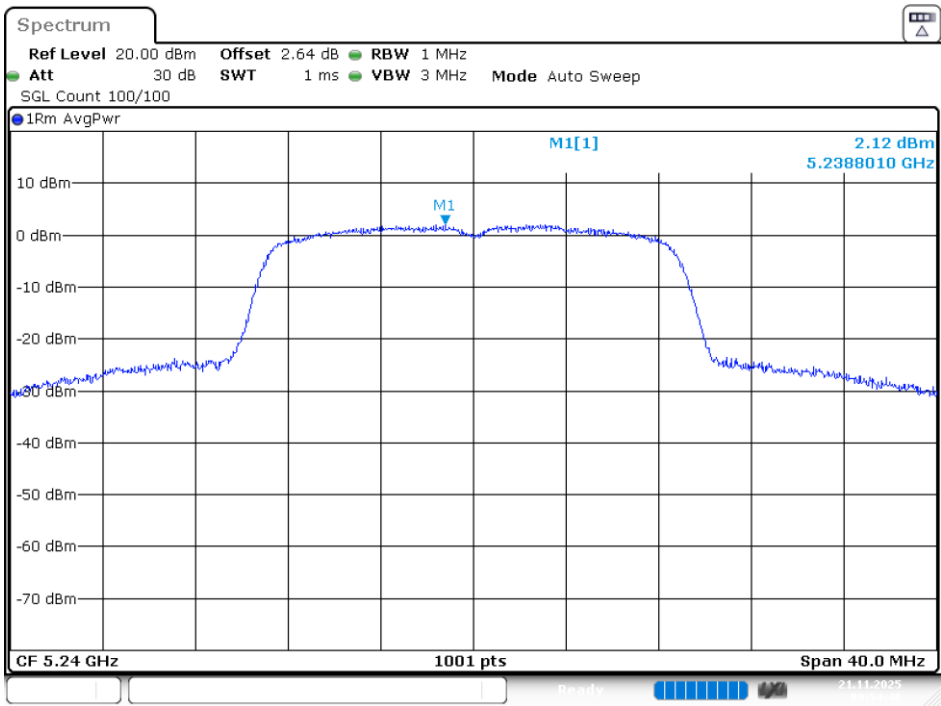

Date: 21.NOV.2025 09:54:48


802.11 ac20 Mode / 5150 ~ 5250MHz

5180MHz

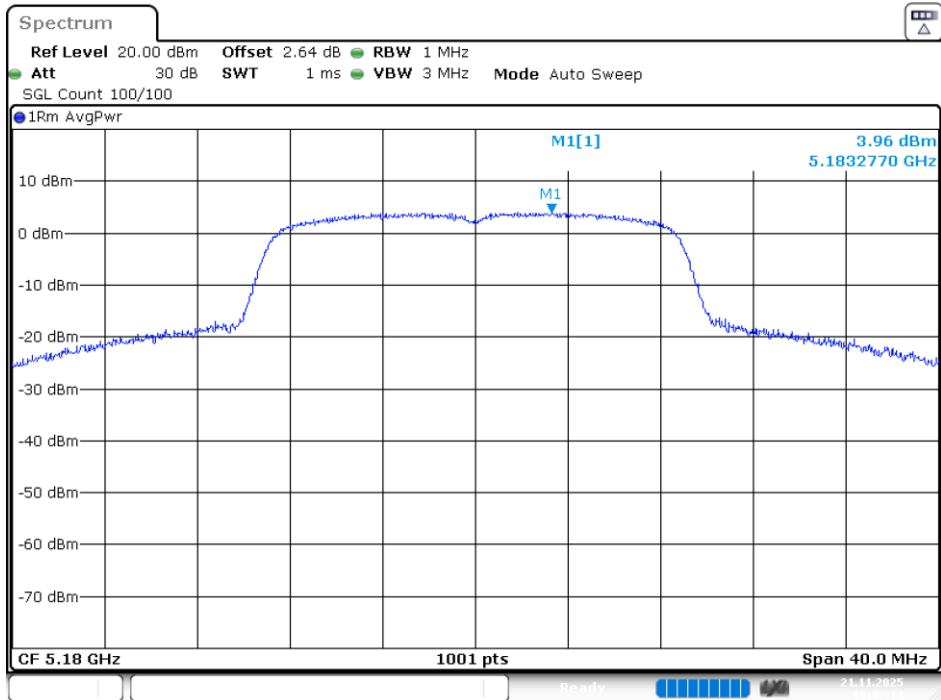


Date: 21.NOV.2025 10:48:14

5200MHz

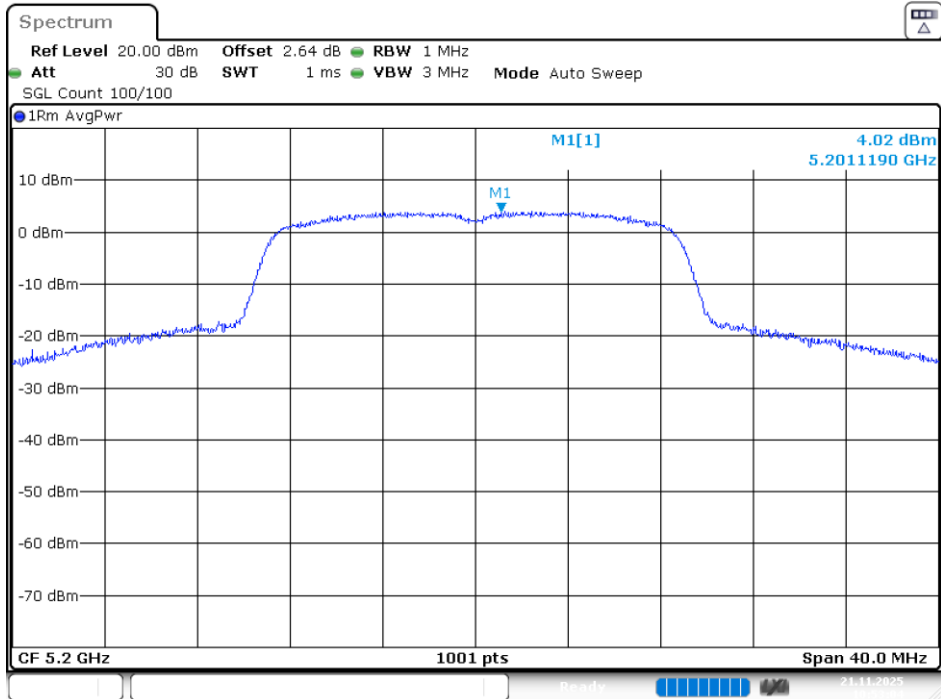


Date: 21.NOV.2025 10:53:05

5240MHz

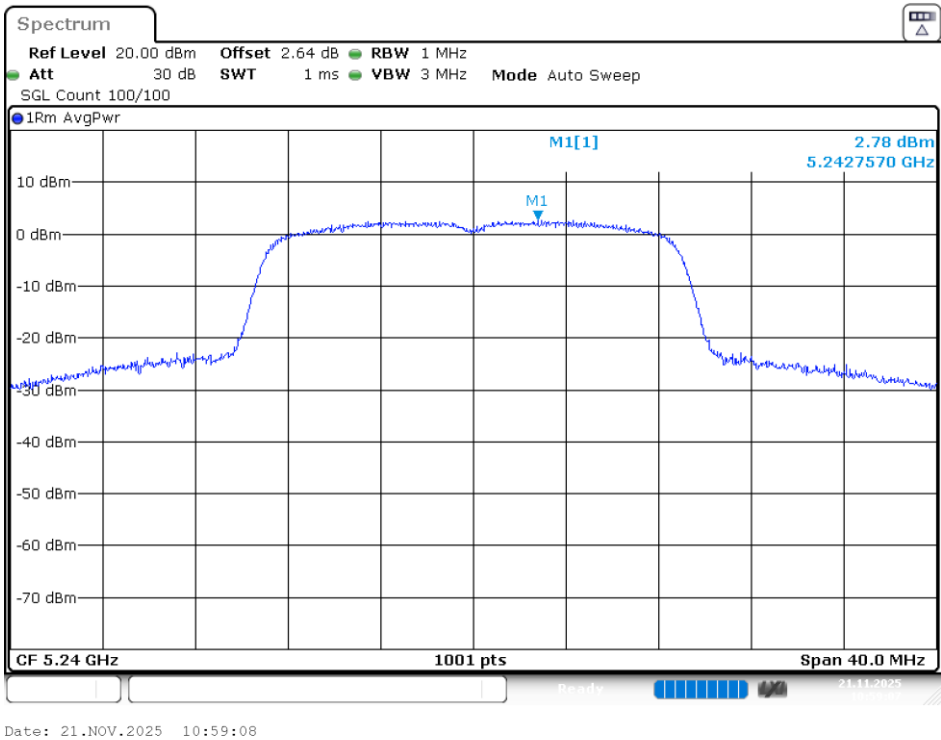


802.11 ax20 Mode / 5150 ~ 5250MHz

5180MHz

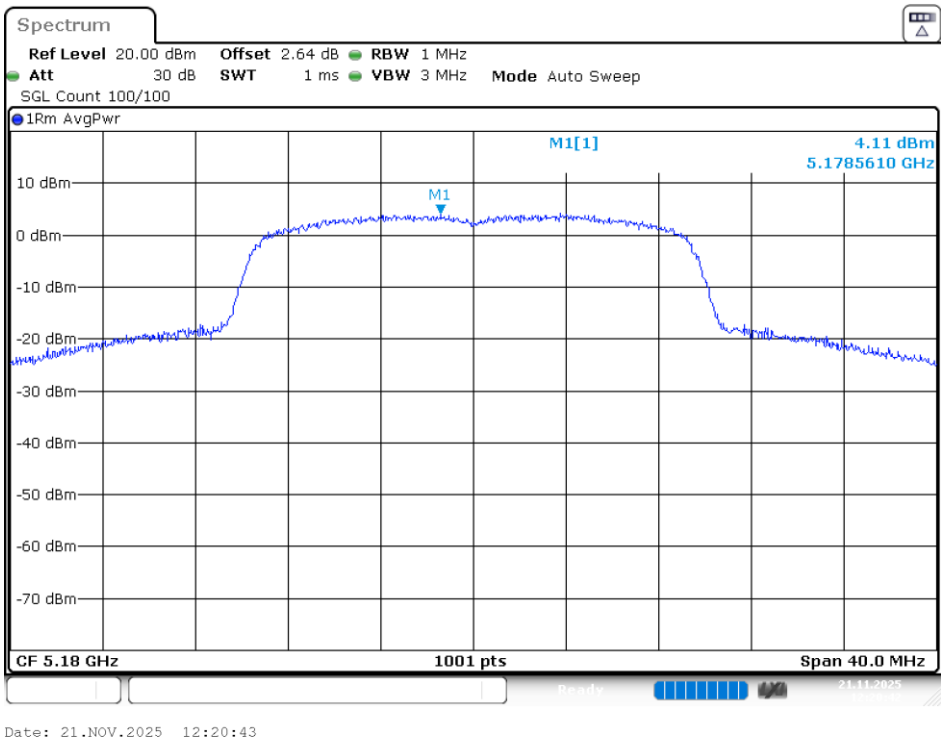


5200MHz

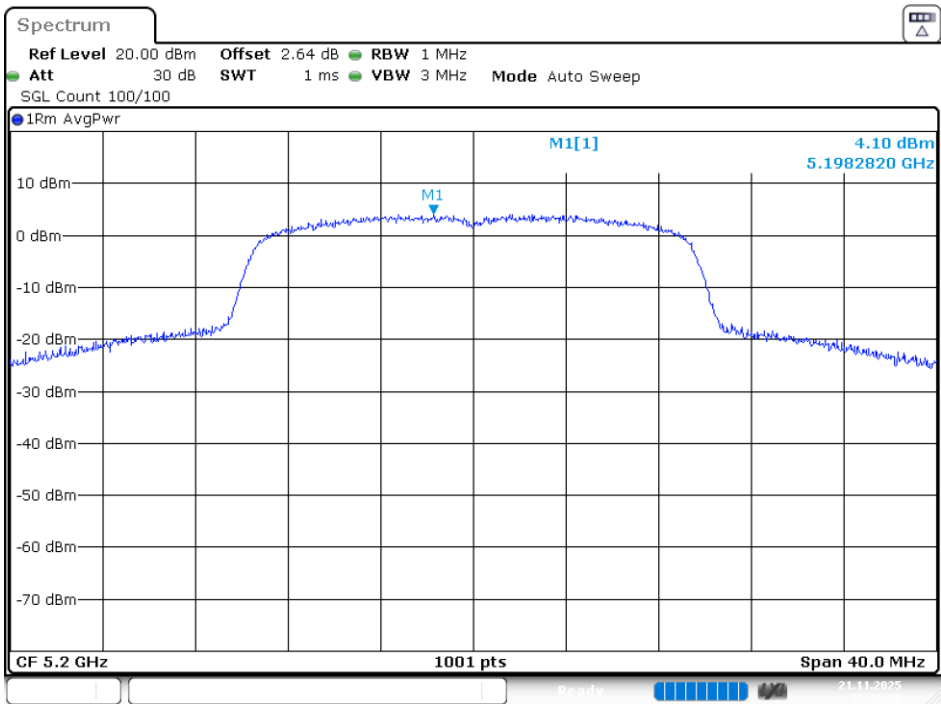

Date: 21.NOV.2025 12:25:50

5240MHz

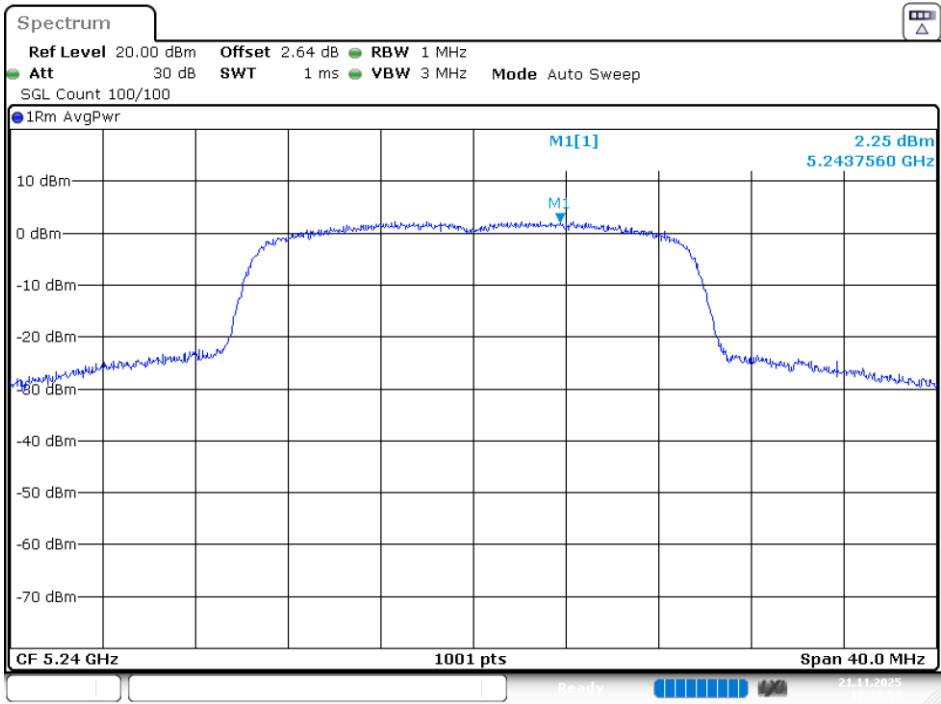


Date: 21.NOV.2025 12:33:54

UNII-2A Band II / PSD


802.11a Mode / 5250 ~ 5350MHz

5260MHz

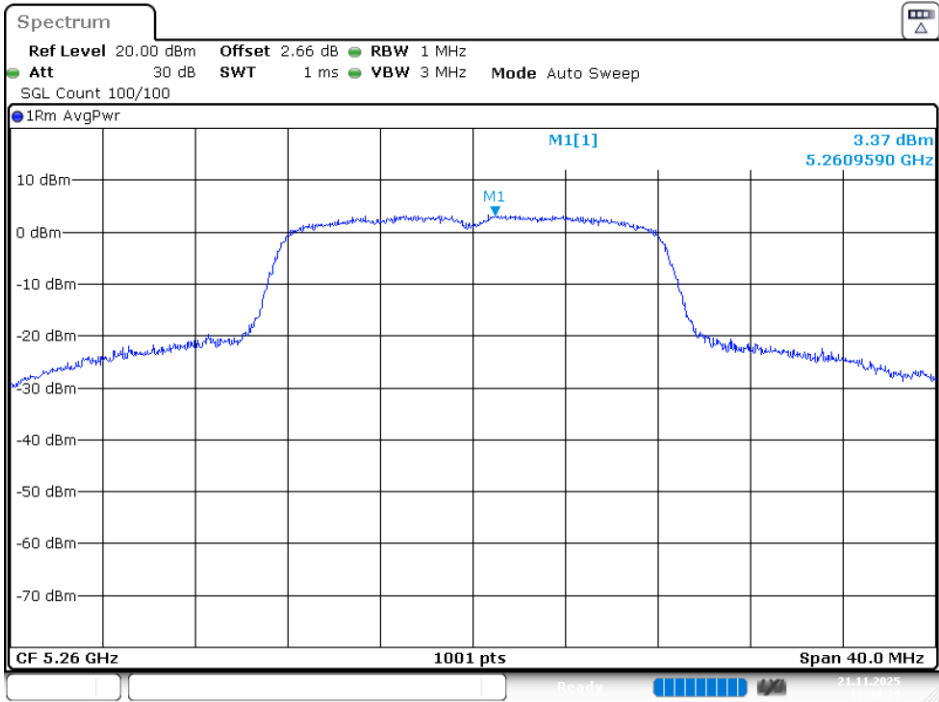


Date: 21.NOV.2025 19:40:29

5300MHz

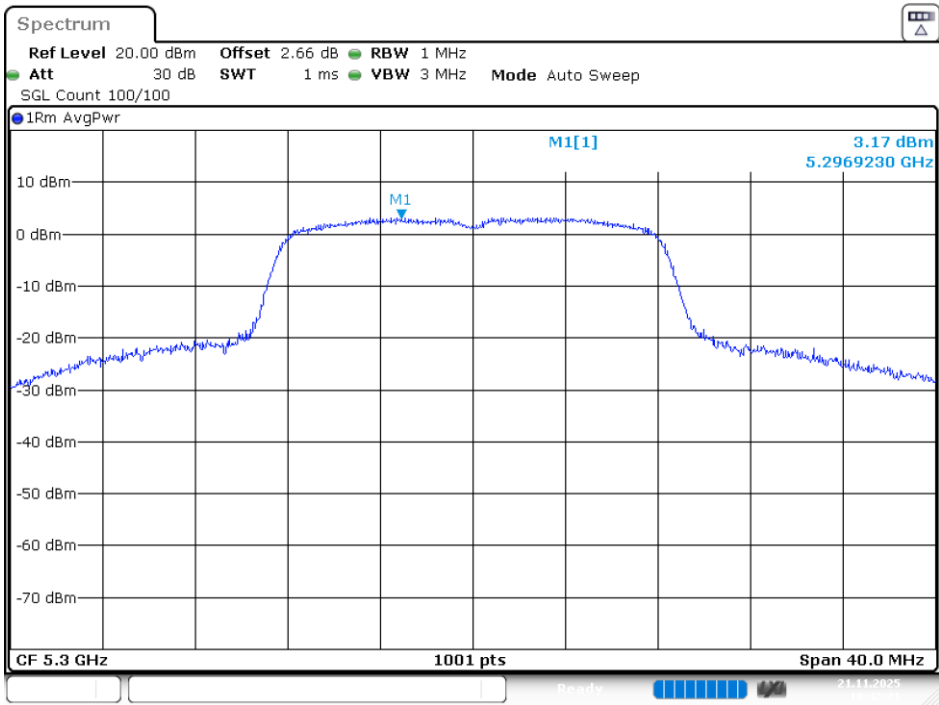

Date: 21.NOV.2025 19:42:21


5320MHz

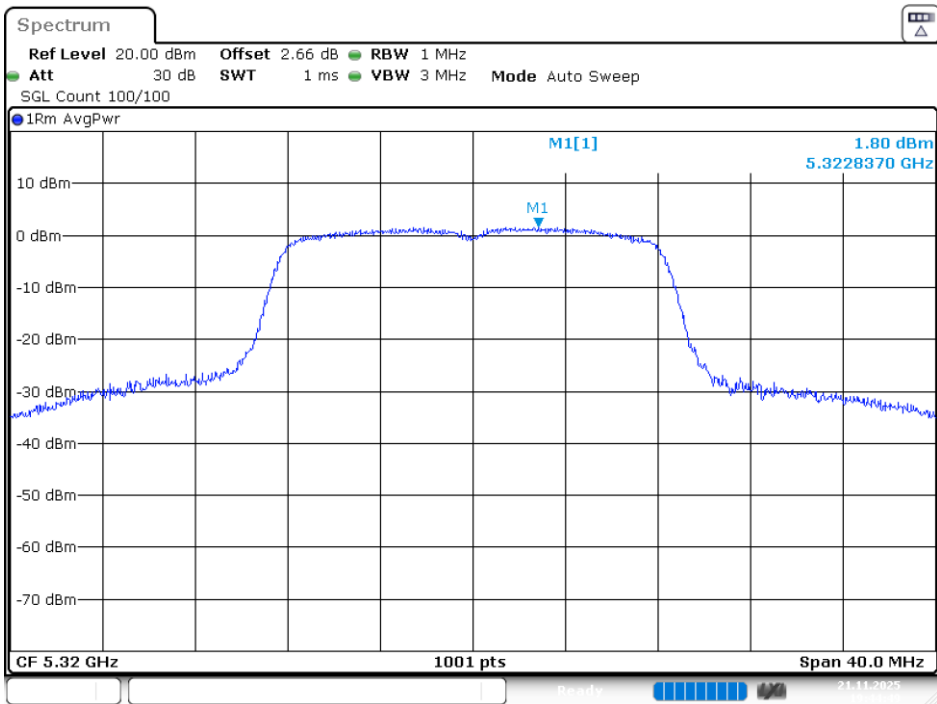

Date: 21.NOV.2025 19:44:49


802.11 n20 Mode / 5250 ~ 5350MHz

5260MHz

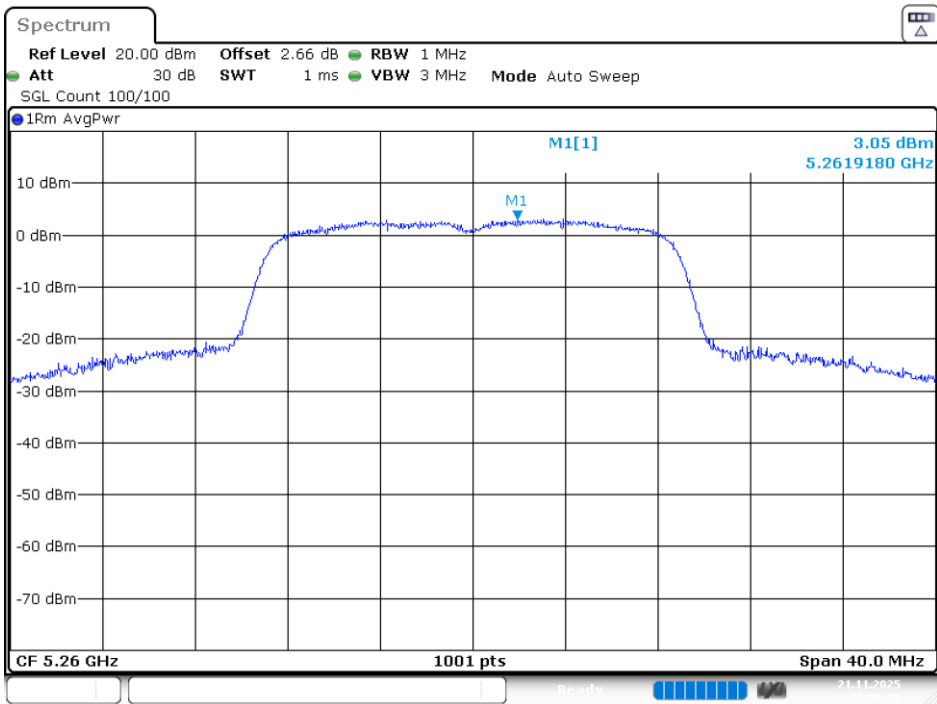


Date: 21.NOV.2025 10:00:19

5300MHz

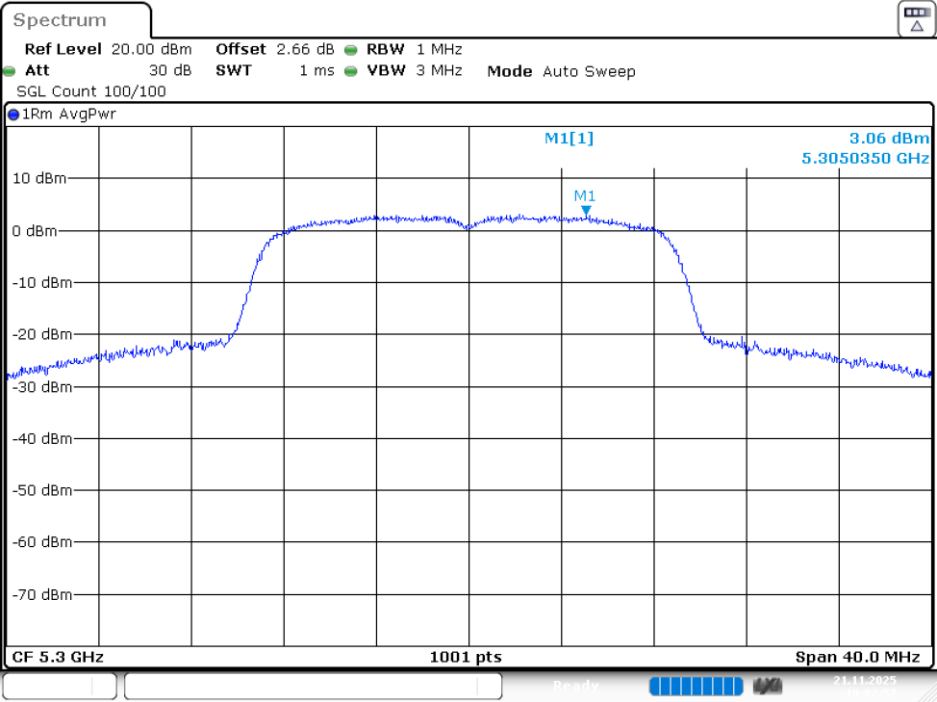

Date: 21.NOV.2025 10:02:57


5320MHz

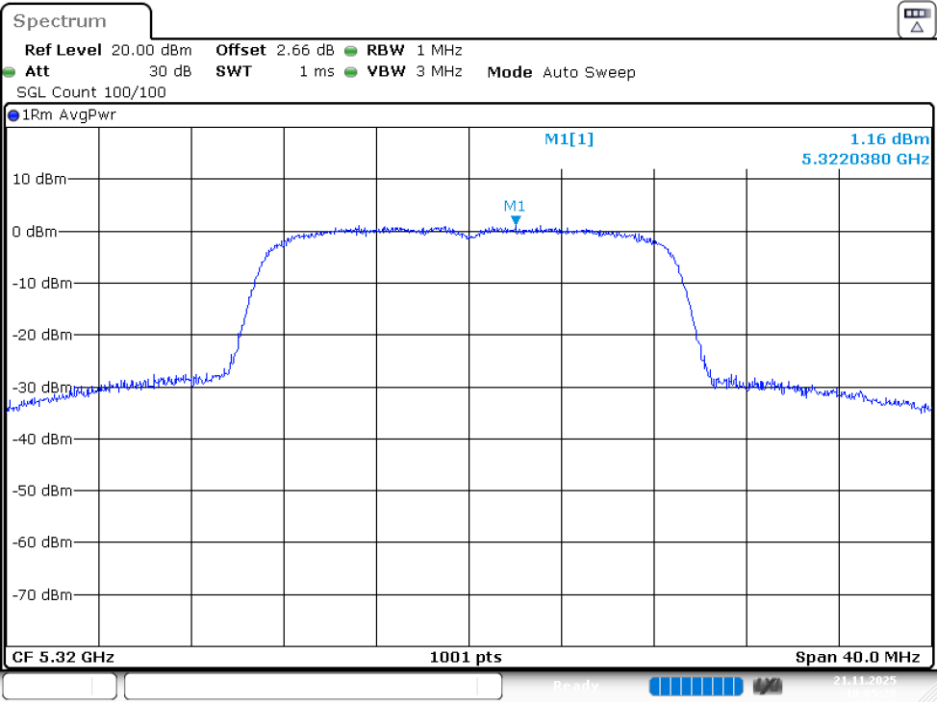

Date: 21.NOV.2025 10:05:28


802.11 ac20 Mode / 5250 ~ 5350MHz

5260MHz

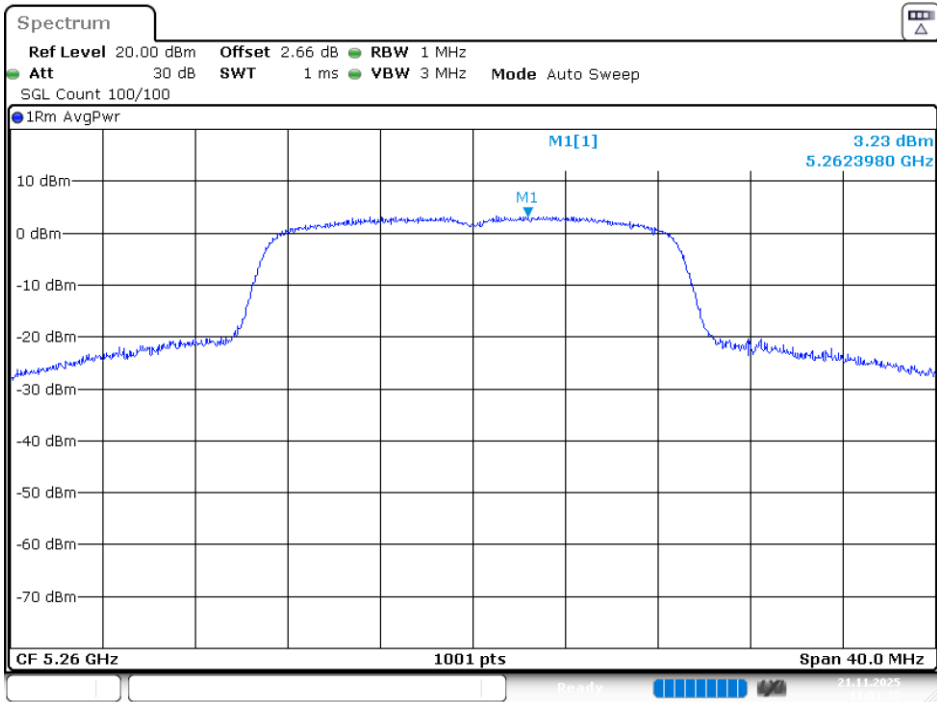


Date: 21.NOV.2025 11:01:36

5300MHz

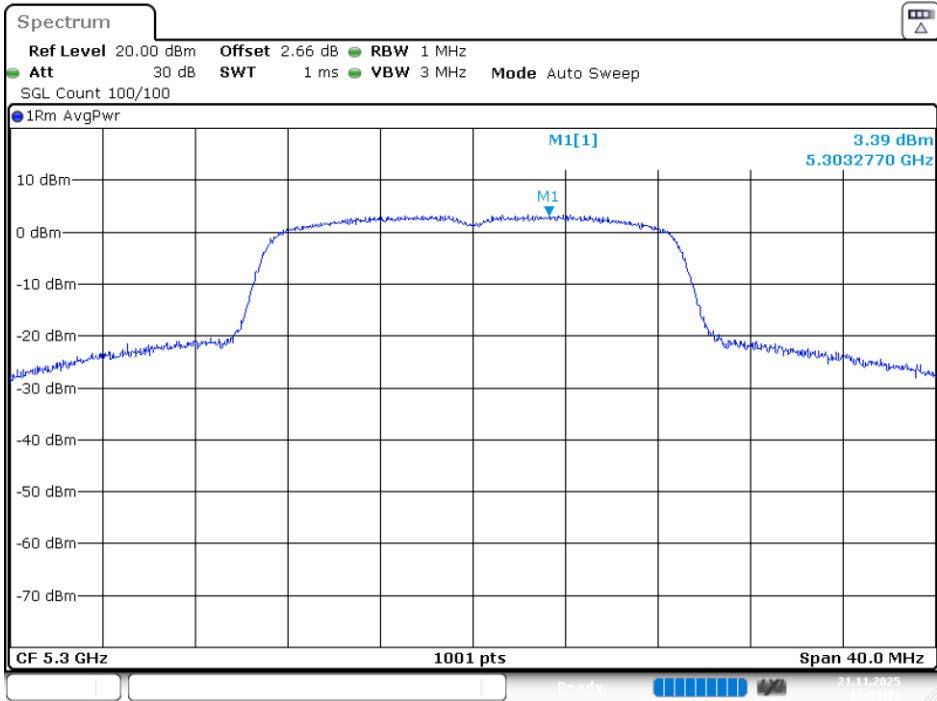


Date: 21.NOV.2025 11:03:11

5320MHz

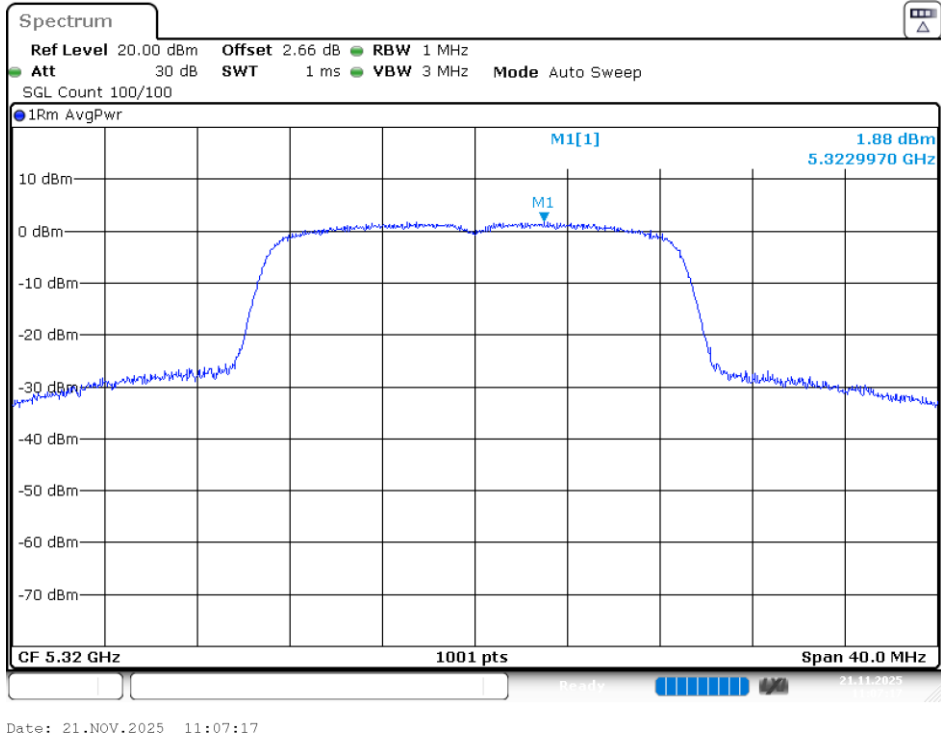


802.11 ax20 Mode / 5250 ~ 5350MHz

5260MHz

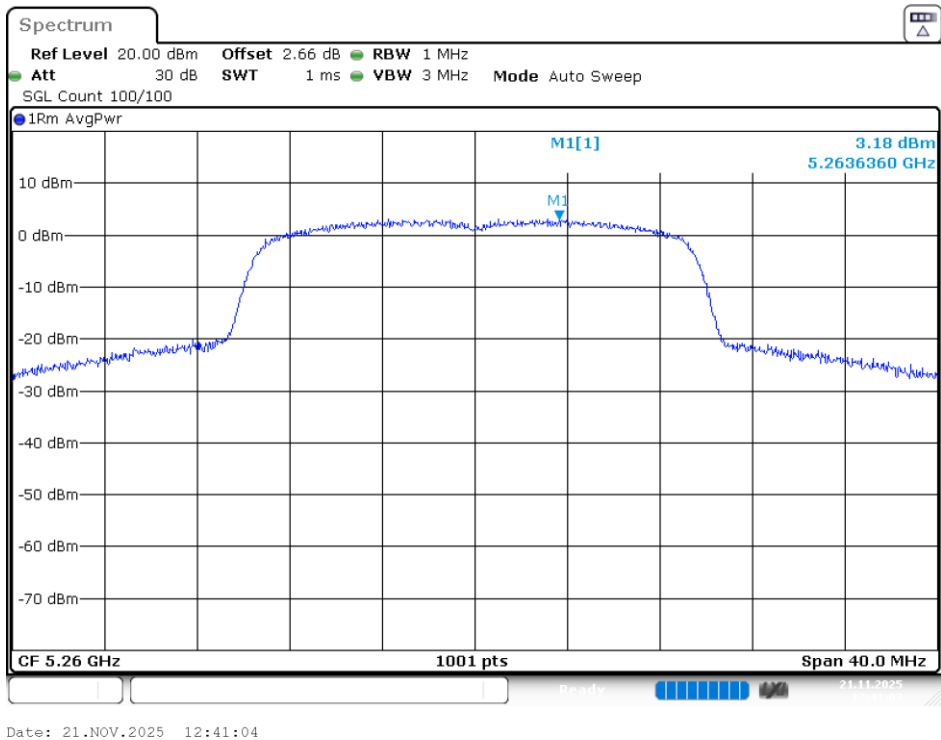


5300MHz

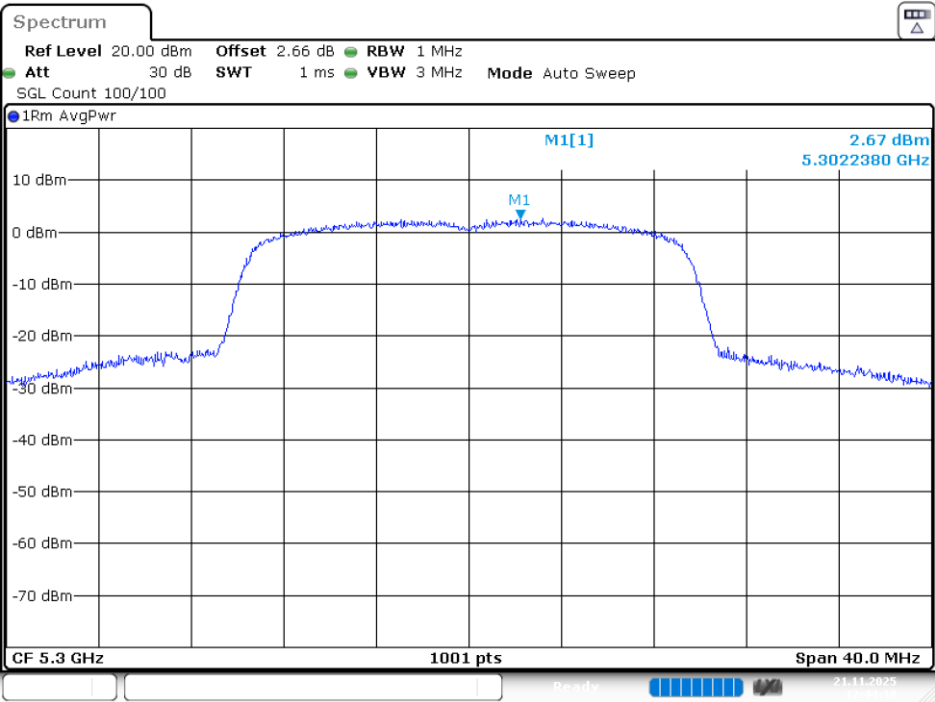

Date: 21.NOV.2025 12:44:18

5320MHz

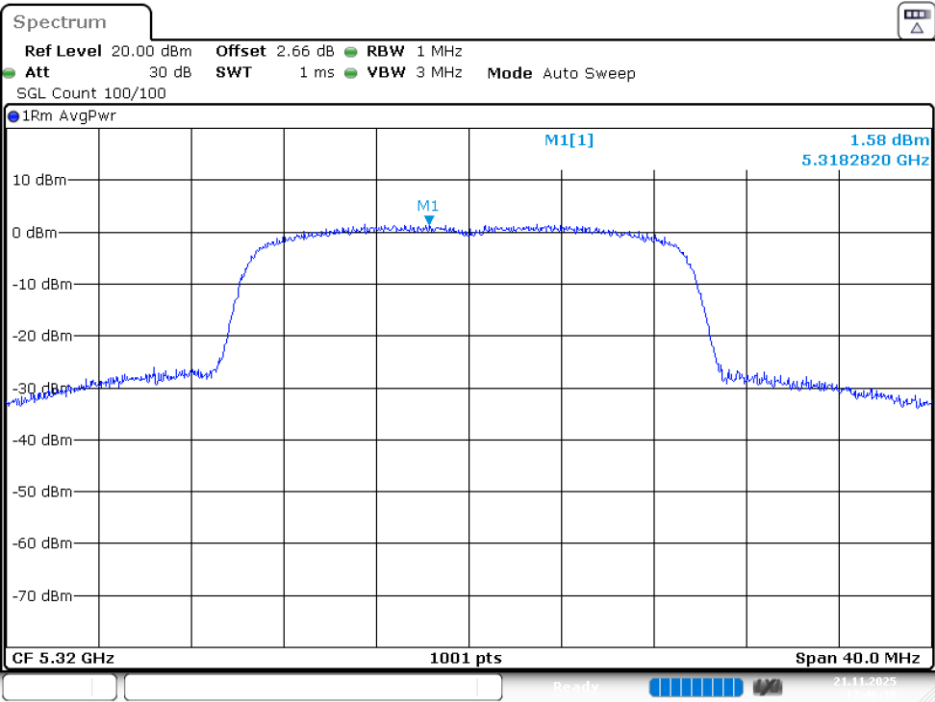


Date: 21.NOV.2025 12:46:10

UNII-2C Band III / PSD


802.11a Mode / 5470 ~ 5725MHz

5500MHz

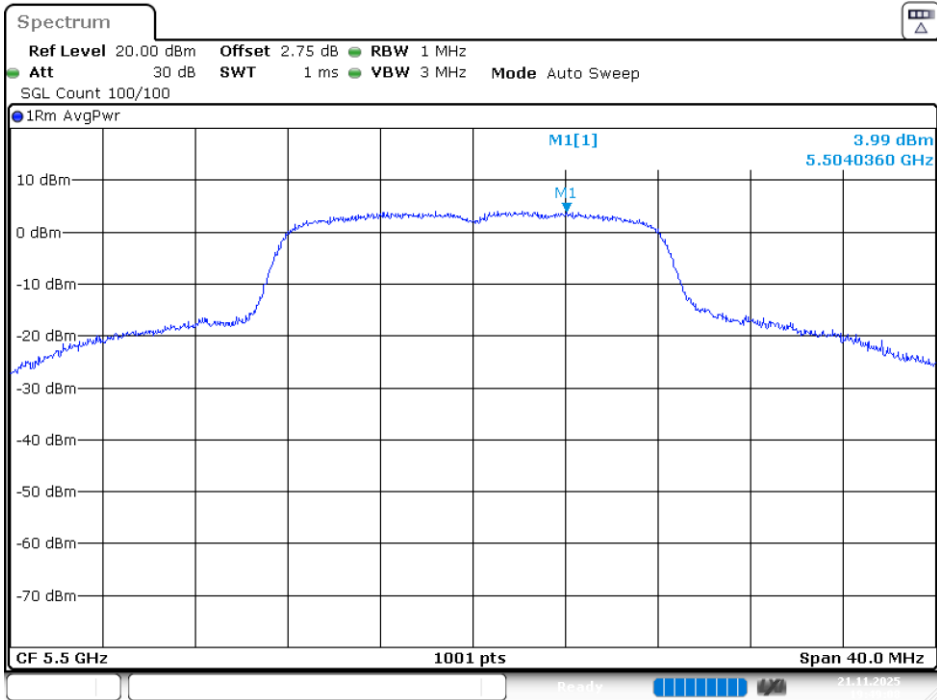


Date: 21.NOV.2025 19:49:08

5580MHz

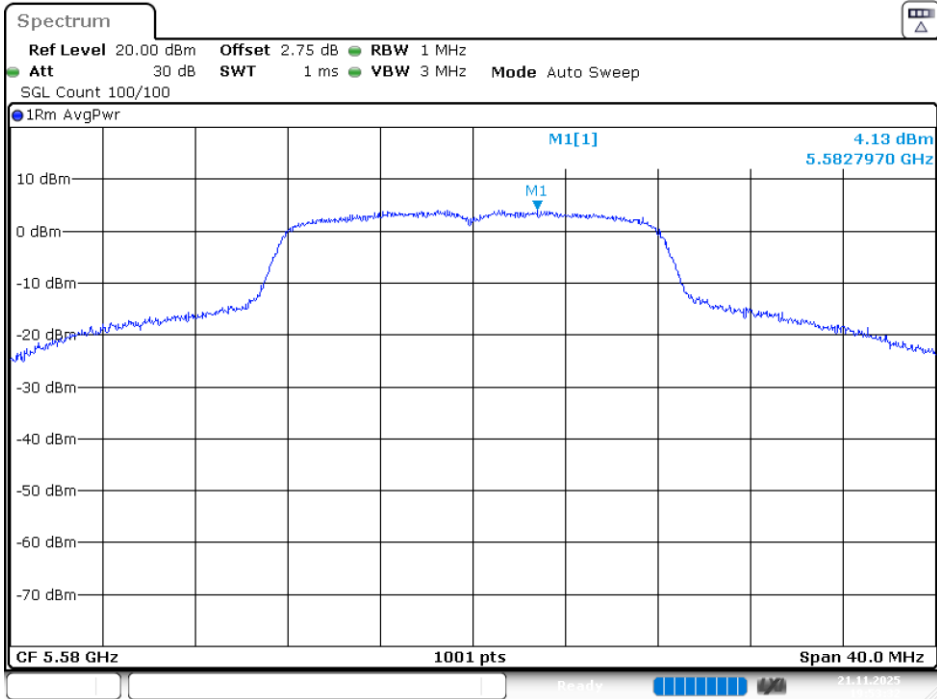


Date: 21.NOV.2025 19:53:32

5680MHz

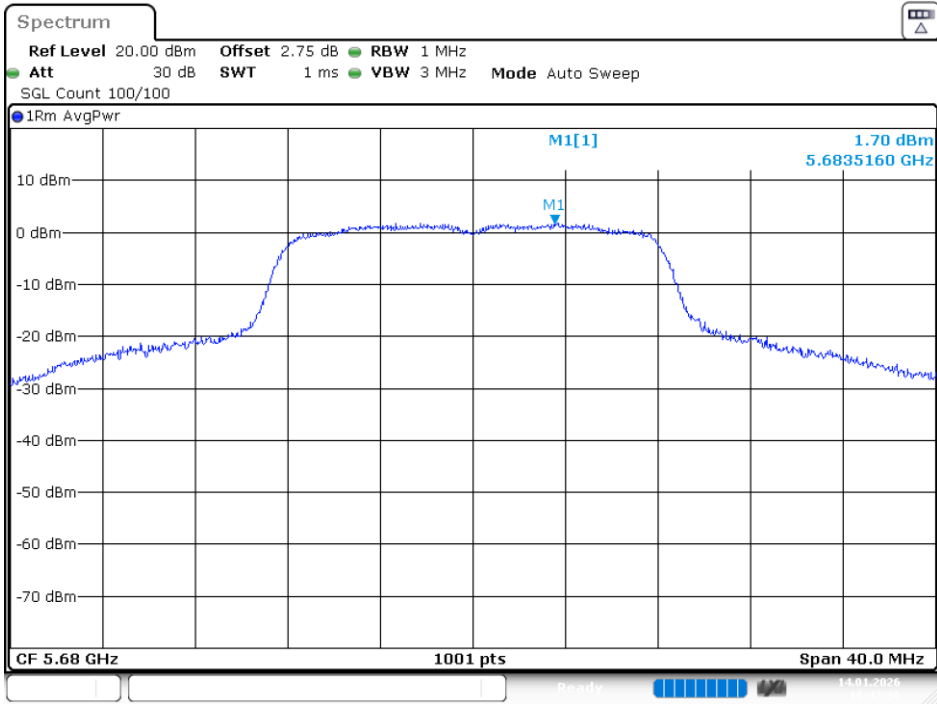

Date: 14.JAN.2026 16:42:37

5700MHz

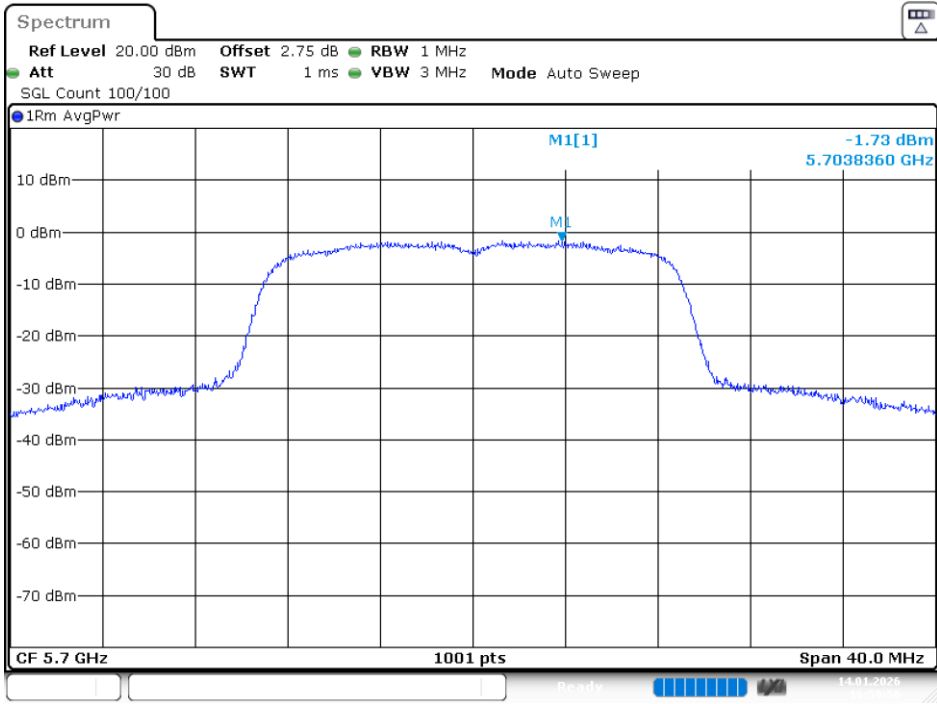

Date: 14.JAN.2026 16:59:57