


BLE (1M) Mode


Low Channel

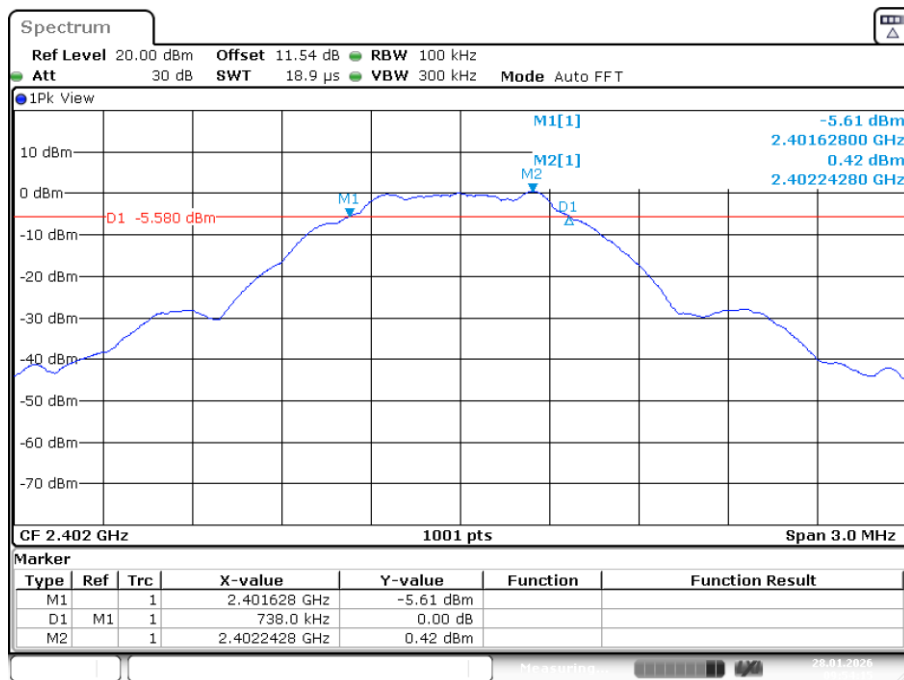

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 28.JAN.2026 09:54:15


Middle Channel

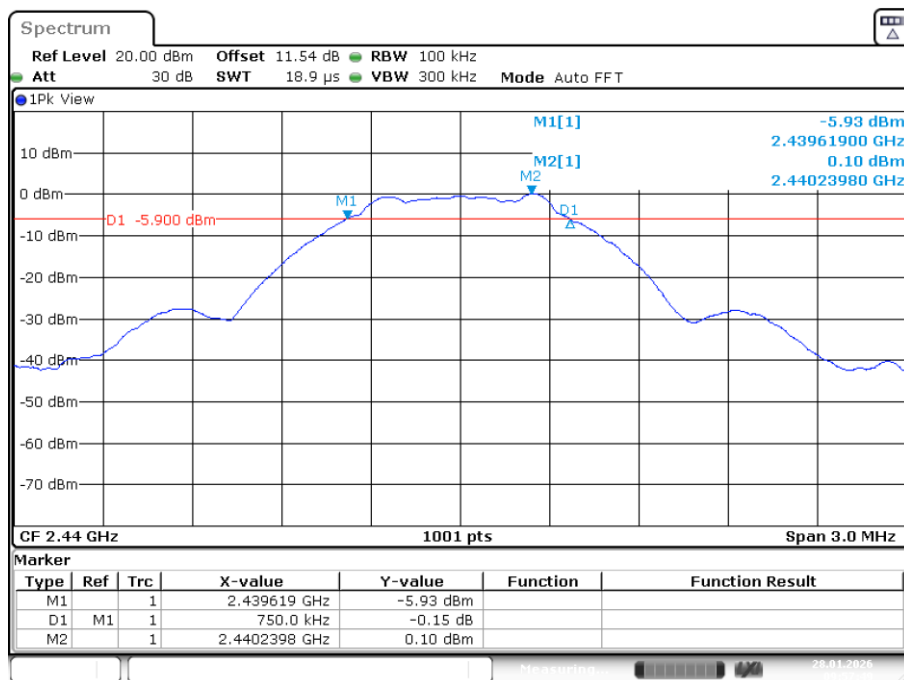

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 28.JAN.2026 09:57:49

High Channel

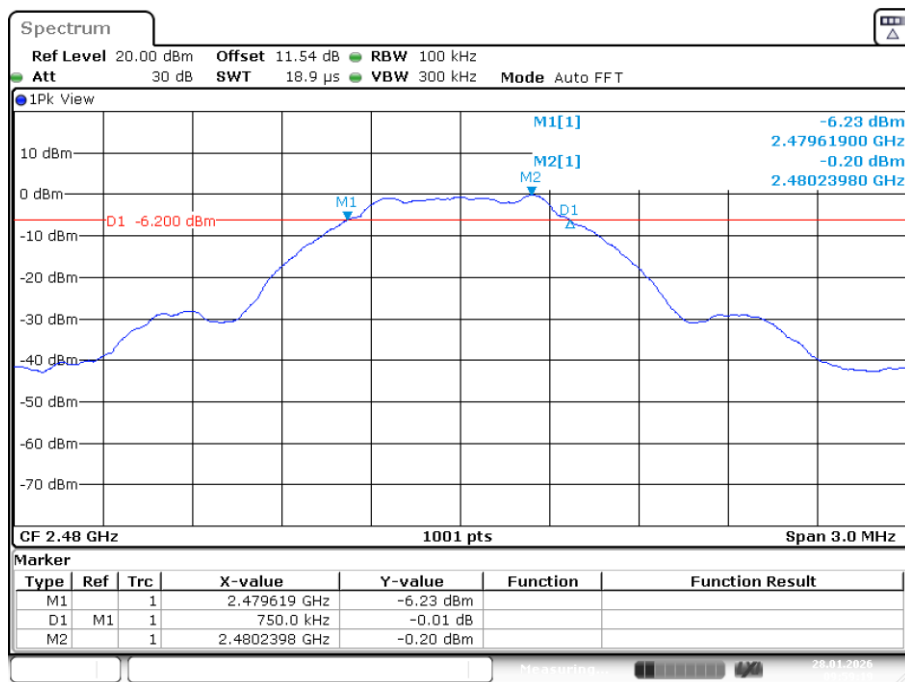


ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 28.JAN.2026 09:59:19

99% Occupied Bandwidth:


b Mode Low Channel

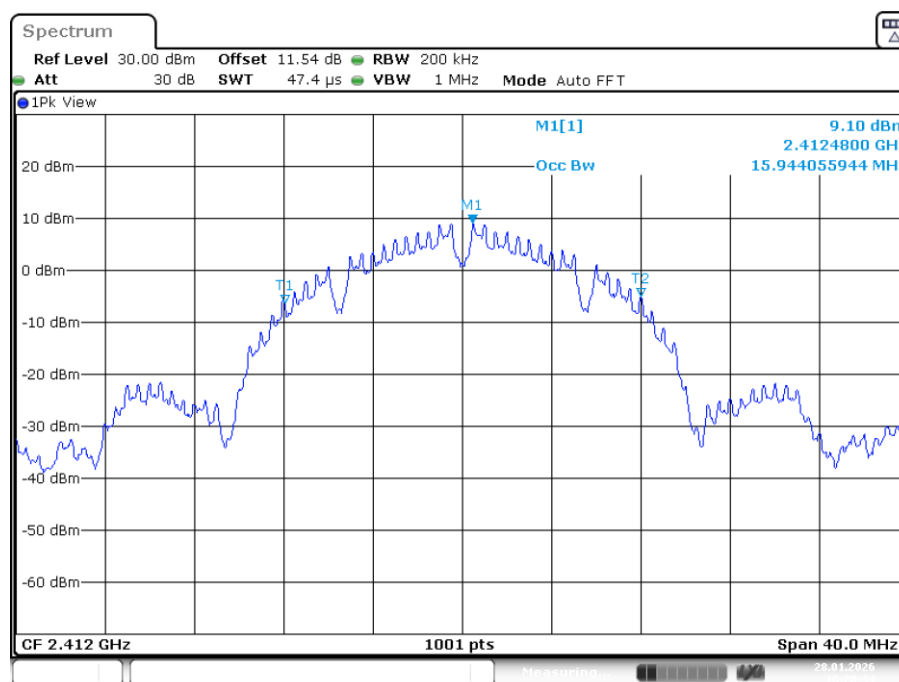

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 28.JAN.2026 10:28:34

Middle Channel

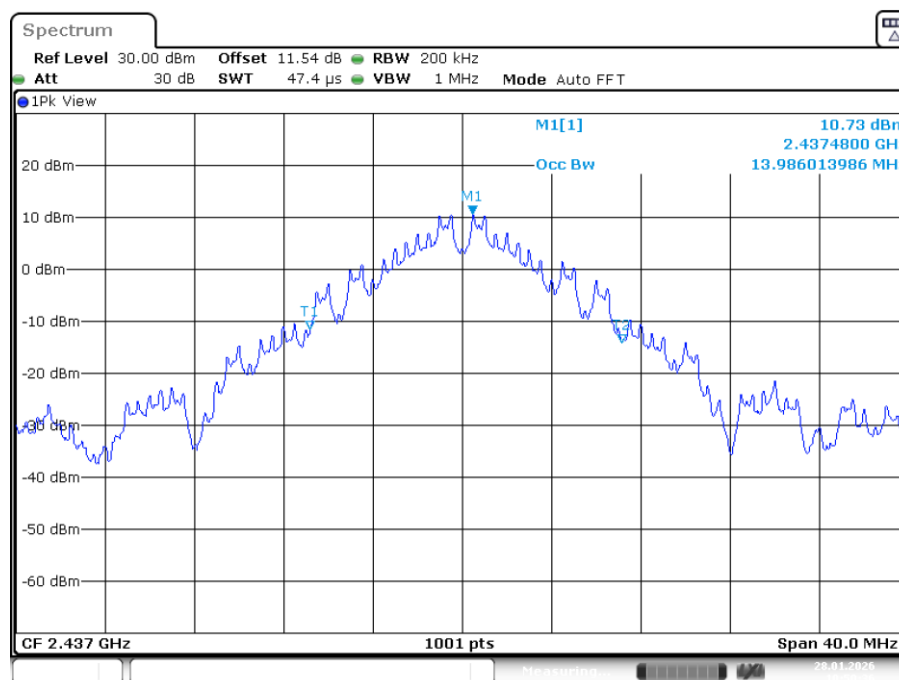

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 28.JAN.2026 10:50:37

Spectrum

Ref Level 30.00 dBm Offset 11.54 dB RBW 200 kHz
 Att 30 dB SWT 47.4 μs VBW 1 MHz Mode Auto FFT

● 1Pk View

M1[1] 9.27 dBm
 2.4624800 GHz
 15.144855145 MHz

Occ Bw

T1 T2

CF 2.462 GHz 1001 pts Span 40.0 MHz

Date: 28.JAN.2026 10:54:30

Spectrum

Ref Level 30.00 dBm Offset 11.54 dB RBW 200 kHz
 Att 30 dB SWT 47.4 μ s VBW 1 MHz Mode Auto FFT

1Pk View

M1[1]
 5.56 dBm
 2.4099220 GHz
 16.863136863 MHz


Occ Bw

CF 2.412 GHz 1001 pts Span 40.0 MHz

28.01.2026

Date: 28.JAN.2026 11:09:54


Middle Channel

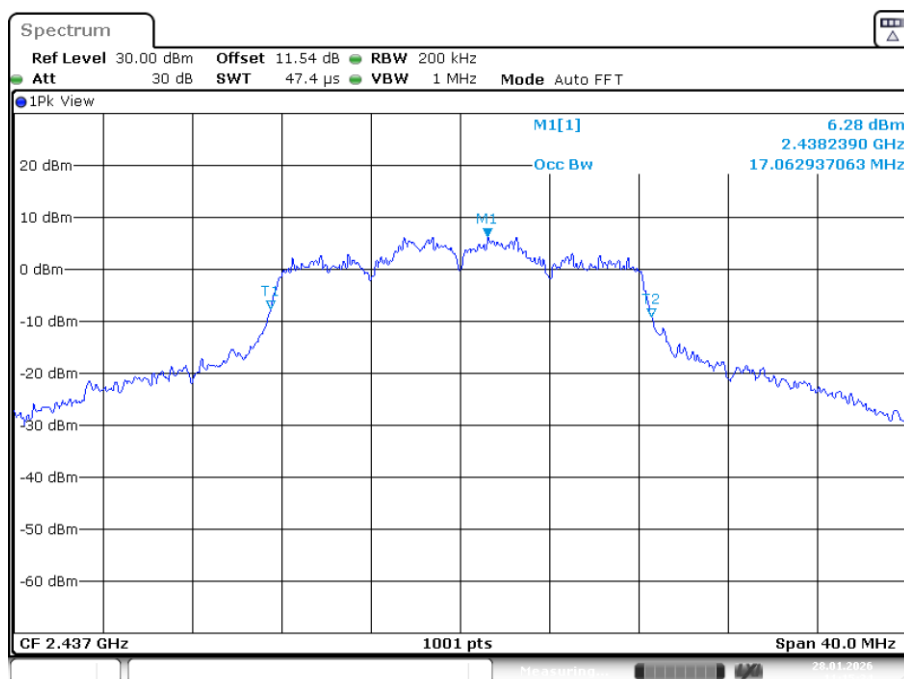

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 28.JAN.2026 11:15:34


High Channel

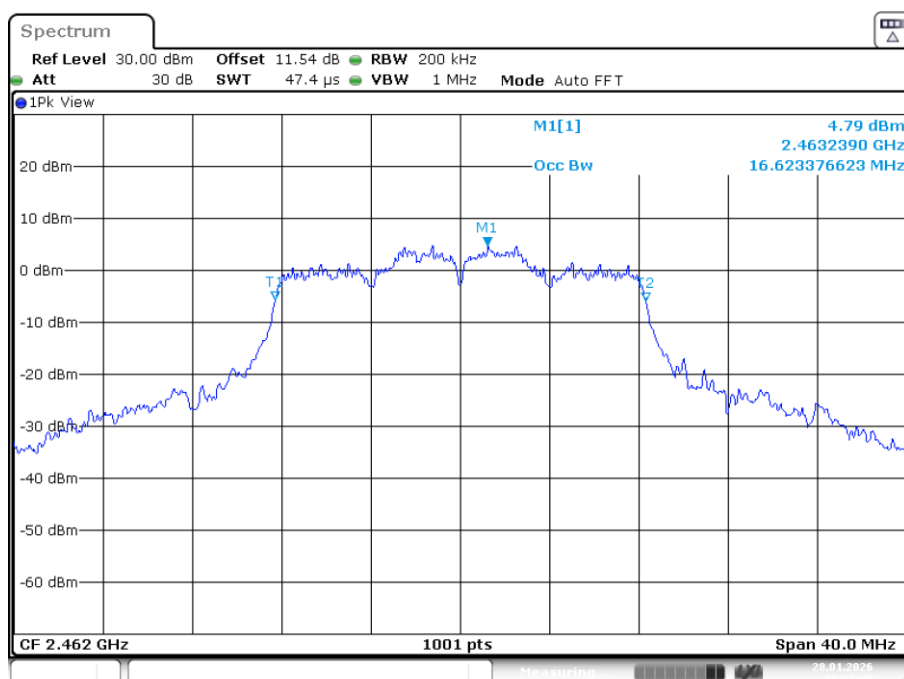

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 28.JAN.2026 11:33:45


n20 Mode Low Channel

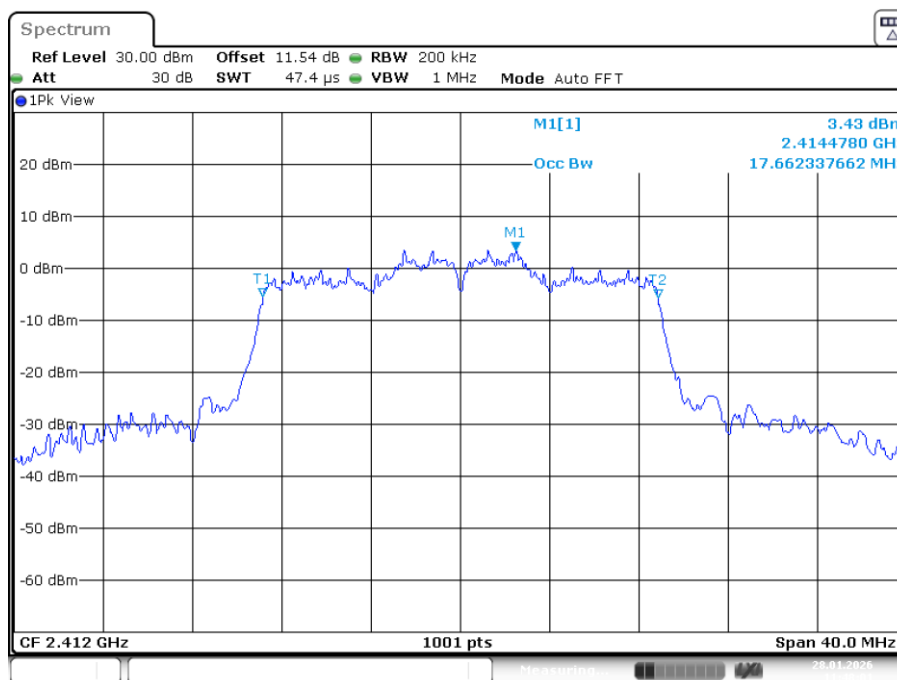

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 28.JAN.2026 11:48:01


Middle Channel

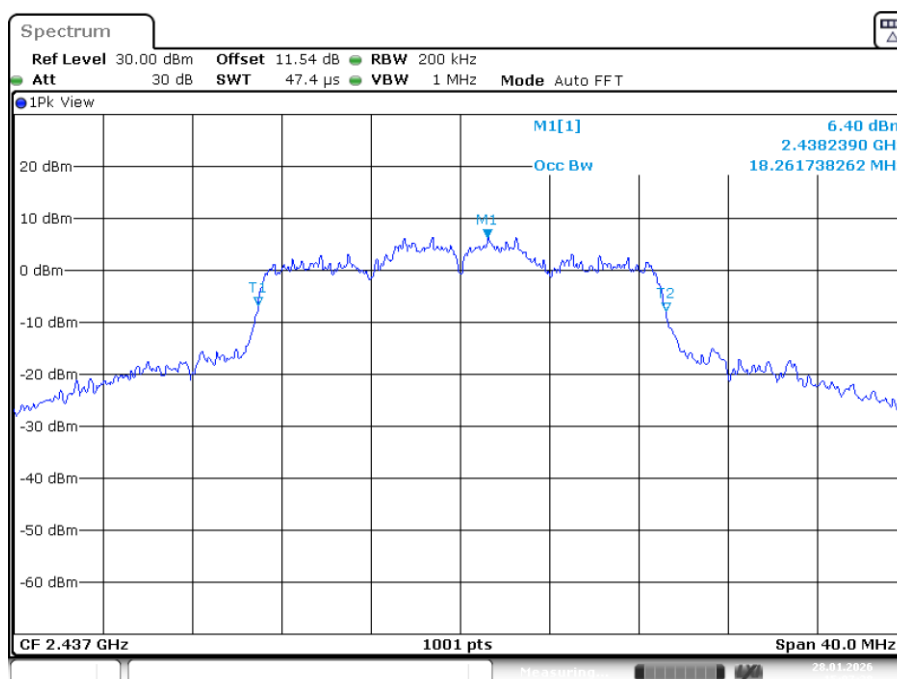

ProjectNo.:RLK260119062 Tester:Alan Huang


Date: 28.JAN.2026 15:07:39

High Channel

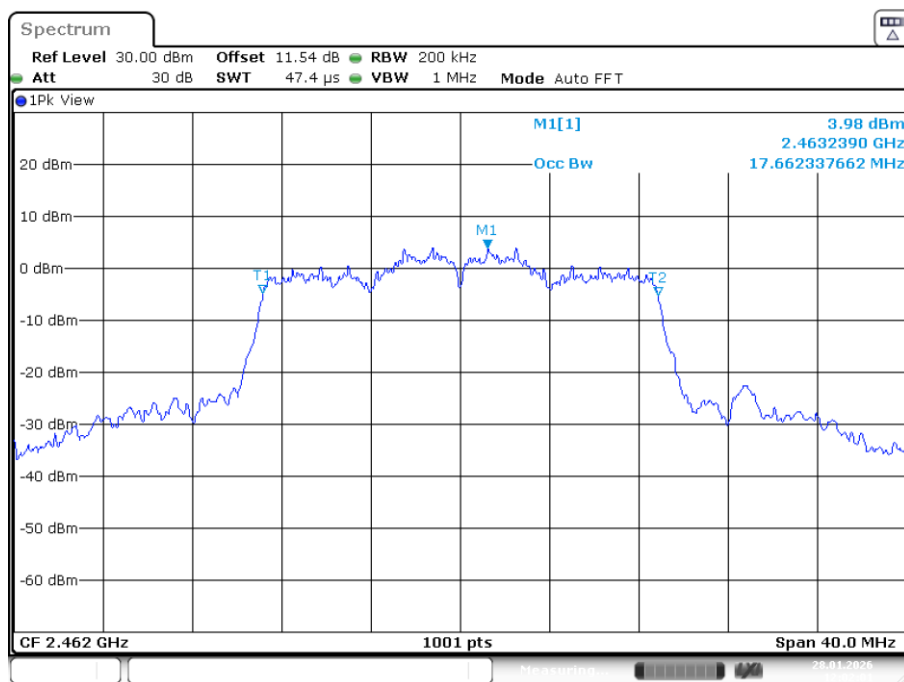


ProjectNo.:RLK260119062 Tester:Alan Huang
Date: 28.JAN.2026 12:02:02

ax20 Mode Low Channel

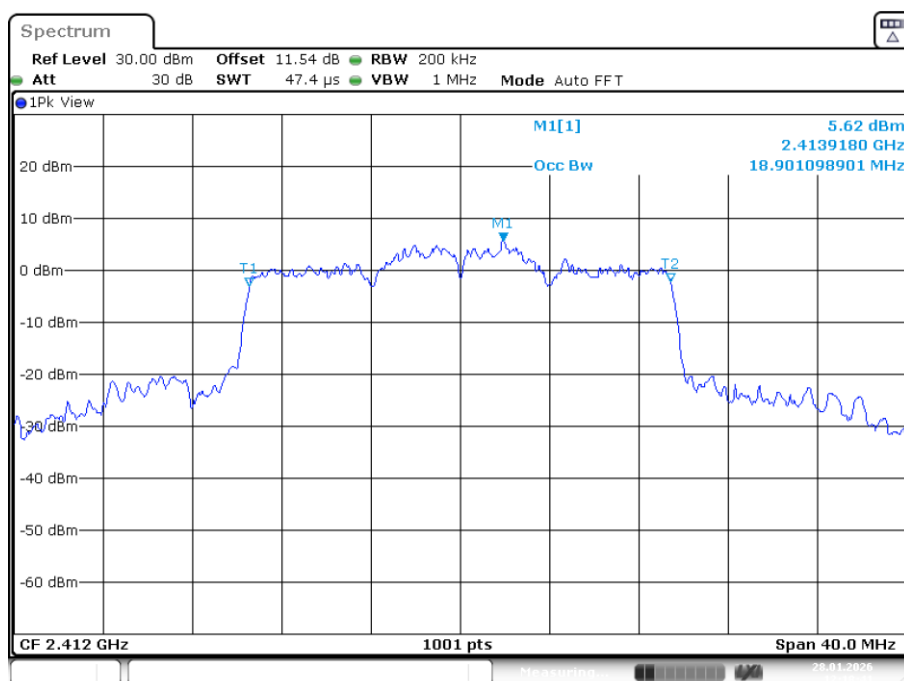

ProjectNo.:RLK260119062 Tester:Alan Huang
Date: 28.JAN.2026 12:18:42


Middle Channel

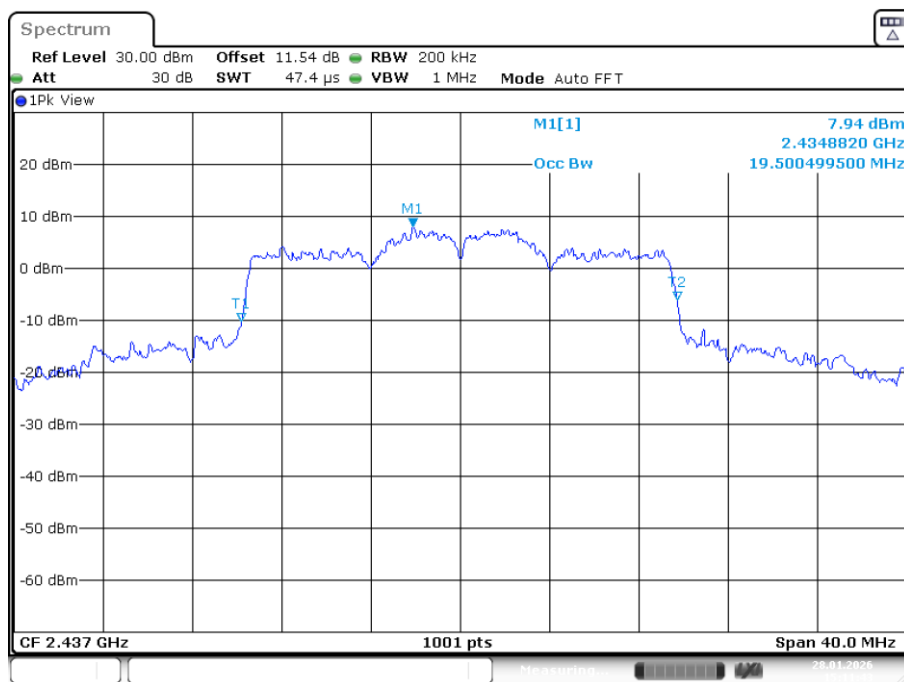

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 28.JAN.2026 15:11:44


High Channel

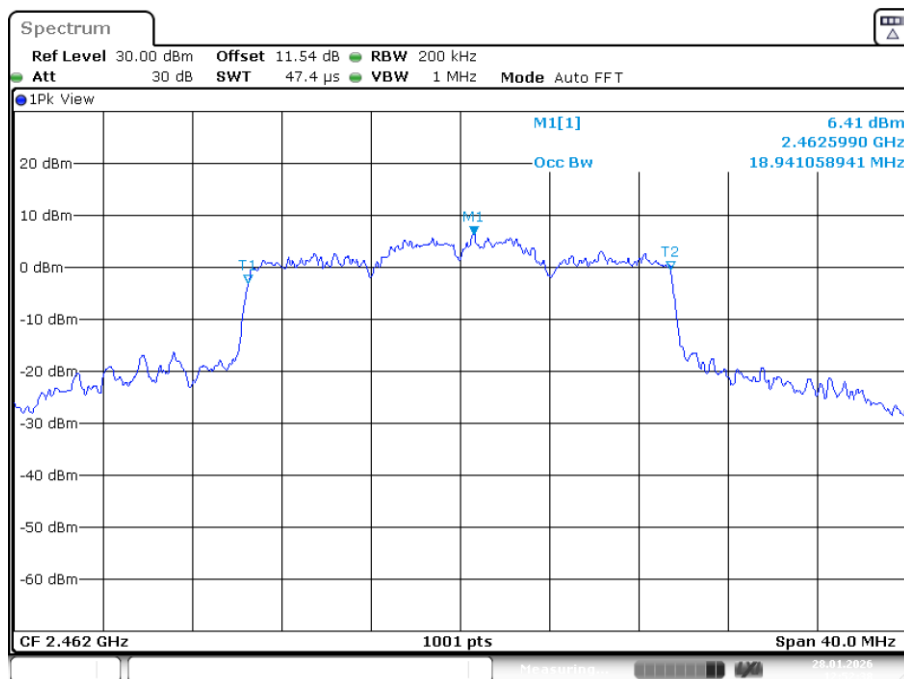

ProjectNo.:RLK260119062 Tester:Alan Huang


Date: 28.JAN.2026 12:52:38

BLE (1M) Mode Low Channel

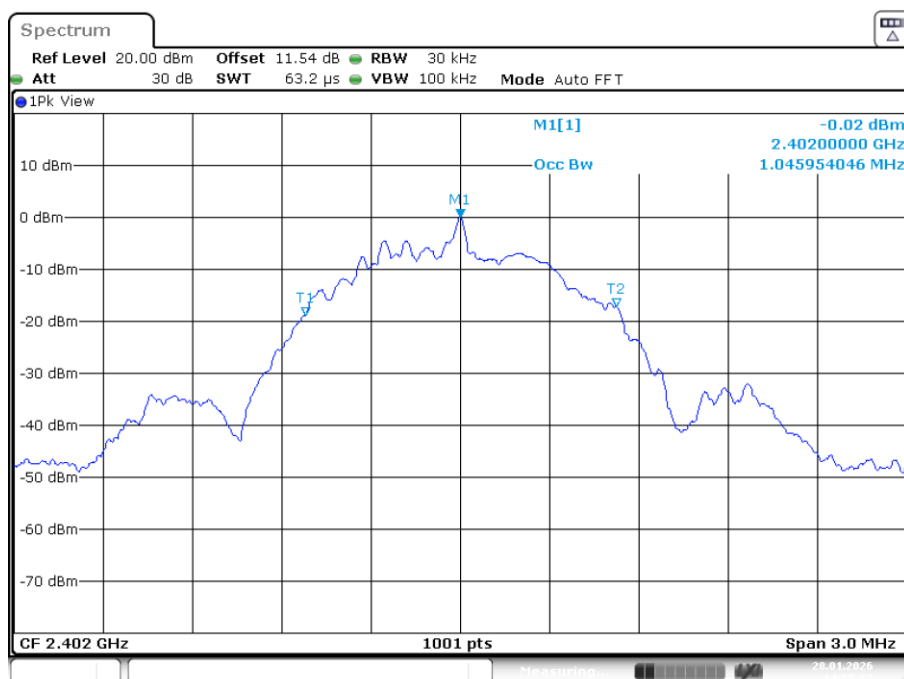


ProjectNo.:RLK260119062 Tester:Alan Huang
Date: 28.JAN.2026 14:55:52

Middle Channel

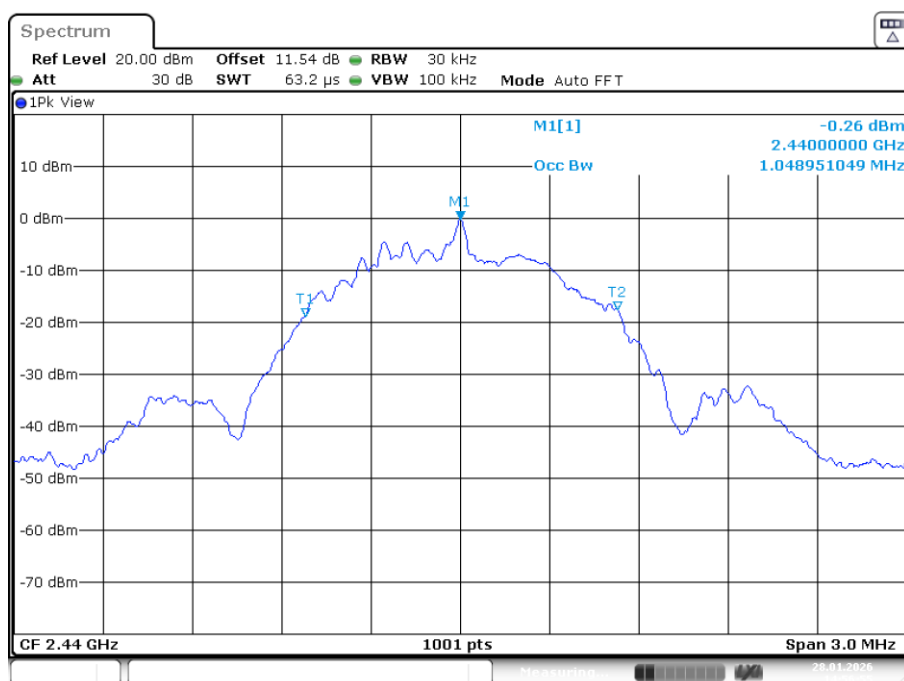

ProjectNo.:RLK260119062 Tester:Alan Huang
Date: 28.JAN.2026 14:56:55

High Channel

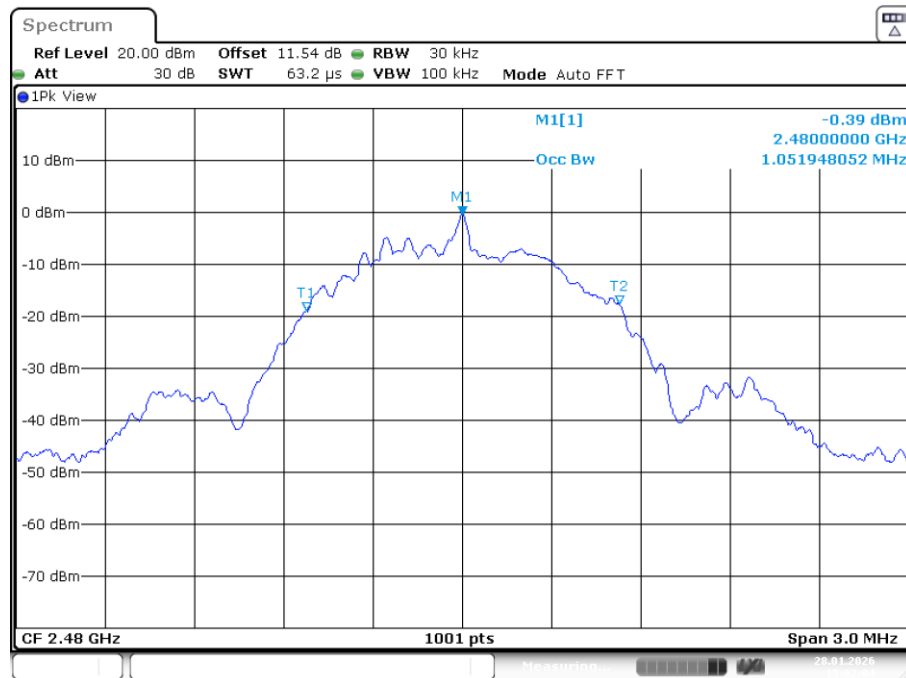

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 28.JAN.2026 15:02:05

9 FCC §15.247(b)(3) – Maximum Output Power

9.1 Applicable Standard

According to FCC §15.247(b).

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

Systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

9.2 Test Procedure

According to ANSI C63.10-2020+Cor.1-2023 ,section 11.9.1.2

According to ANSI C63.10-2020+Cor.1-2023 ,section 11.9.2.3.1

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to measuring equipment.

9.3 Test Results**Conducted Peak Output Power****RRQ61051-408**

Channel	Frequency (MHz)	Average Power (dBm)	Peak Power (dBm)	Power (W)	Limit (W)	Result
b Mode						
Low	2412	17.59	19.61	0.091	1	PASS
Middle	2437	17.84	19.85	0.097	1	PASS
High	2462	17.50	19.45	0.088	1	PASS
g Mode						
Low	2412	14.63	19.39	0.087	1	PASS
Middle	2437	14.91	19.42	0.087	1	PASS
High	2462	15.07	19.52	0.090	1	PASS
n20 Mode						
Low	2412	13.10	19.31	0.085	1	PASS
Middle	2437	14.29	19.73	0.094	1	PASS
High	2462	13.90	19.91	0.098	1	PASS
ax20 Mode						
Low	2412	13.91	19.31	0.085	1	PASS
Middle	2437	15.08	19.37	0.086	1	PASS
High	2462	15.09	19.79	0.095	1	PASS
BLE(1M) Mode						
Low	2402	1.41	1.49	0.00141	1	PASS
Middle	2440	1.34	1.43	0.00139	1	PASS
High	2480	1.27	1.35	0.00136	1	PASS

RRQ61051-208

Channel	Frequency (MHz)	Average Power (dBm)	Peak Power (dBm)	Power (W)	Limit (W)	Result
b Mode						
Low	2412	17.49	19.41	0.087	1	PASS
Middle	2437	17.64	19.49	0.089	1	PASS
High	2462	17.48	19.38	0.087	1	PASS
g Mode						
Low	2412	14.52	19.11	0.081	1	PASS
Middle	2437	14.85	19.24	0.084	1	PASS
High	2462	15.03	19.47	0.089	1	PASS
n20 Mode						
Low	2412	13.10	19.29	0.085	1	PASS
Middle	2437	14.18	19.42	0.087	1	PASS
High	2462	13.82	19.89	0.097	1	PASS
BLE(1M) Mode						
Low	2402	1.33	1.44	0.00139	1	PASS
Middle	2440	1.22	1.34	0.00136	1	PASS
High	2480	1.11	1.19	0.00132	1	PASS

10 FCC§15.247(d) – 100 kHz Bandwidth of Frequency Band Edge

10.1 Applicable Standard

According to FCC §15.247(d).

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

10.2 Test Procedure

According to ANSI C63.10-2020+Cor.1-2023 ,Section 11.11

a) Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution.

NOTE—the number of points can also be increased for large spans to retain frequency resolution

b) Set the RBW = 100 kHz.

c) Set the VBW $\geq [3 \times \text{RBW}]$.

d) Detector = peak.

e) Sweep time = No faster than coupled (auto) time.

f) Trace mode = max-hold.

g) Allow trace to fully stabilize.


h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

10.3 Test Results

Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Result
b Mode				
Low	2412	30.48	≥ 20	PASS
High	2462	47.22	≥ 20	PASS
g Mode				
Low	2412	28.17	≥ 20	PASS
High	2462	40.63	≥ 20	PASS
n20 Mode				
Low	2412	32.43	≥ 20	PASS
High	2462	41.63	≥ 20	PASS
ax20 Mode				
Low	2412	27.95	≥ 20	PASS
High	2462	36.42	≥ 20	PASS
BLE(1M) Mode				
Low	2402	43.60	≥ 20	PASS
High	2480	45.72	≥ 20	PASS


b Mode Band Edge, Left Side

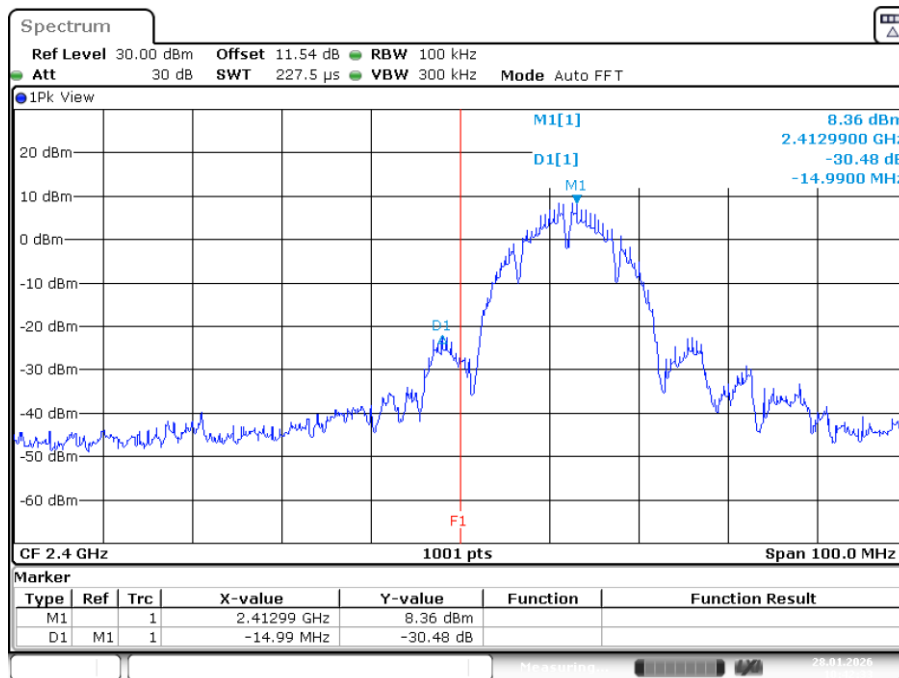

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 28.JAN.2026 10:42:33

Band Edge, Right Side

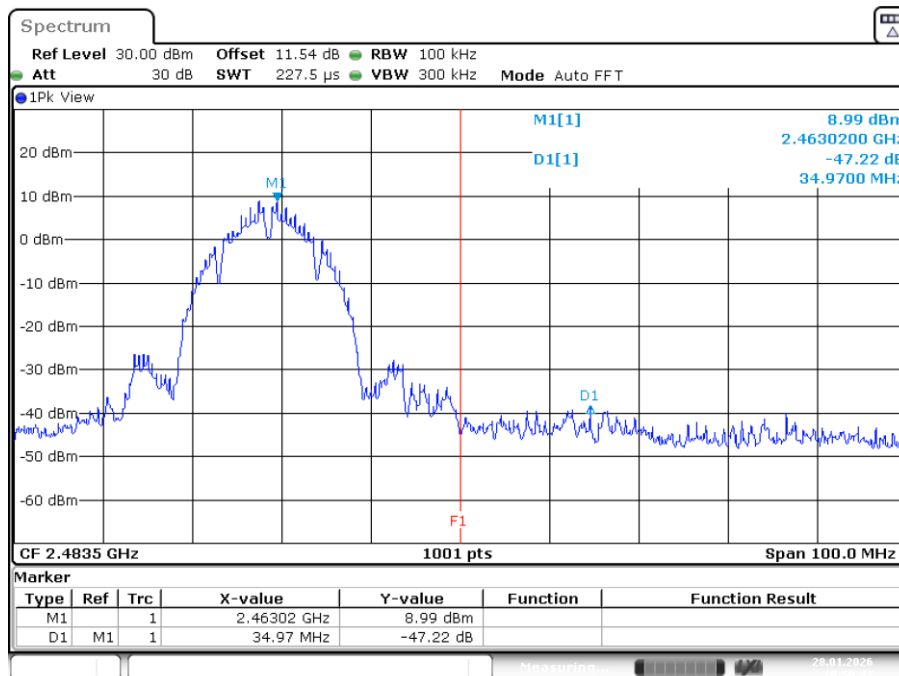


ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 28.JAN.2026 10:56:42

g Mode


Band Edge, Left Side

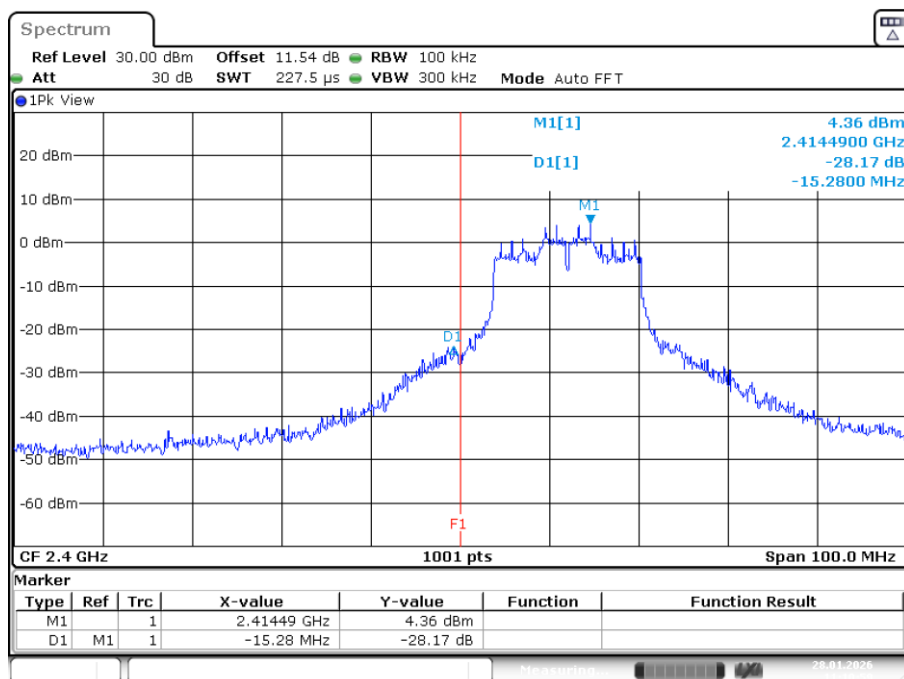

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 28.JAN.2026 11:10:59

Band Edge, Right Side

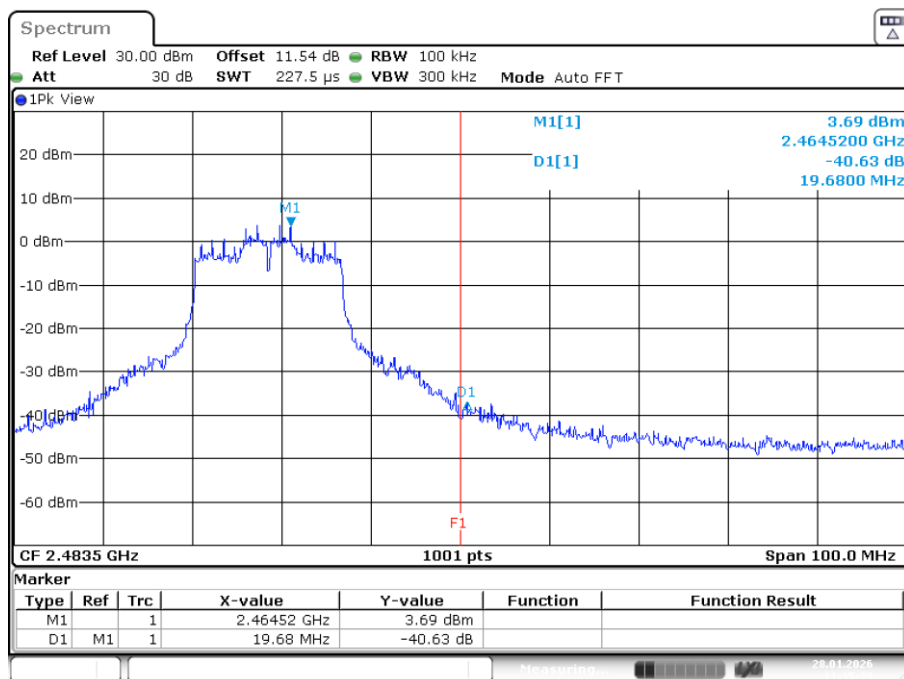


ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 28.JAN.2026 11:35:23

n20 Mode


Band Edge, Left Side

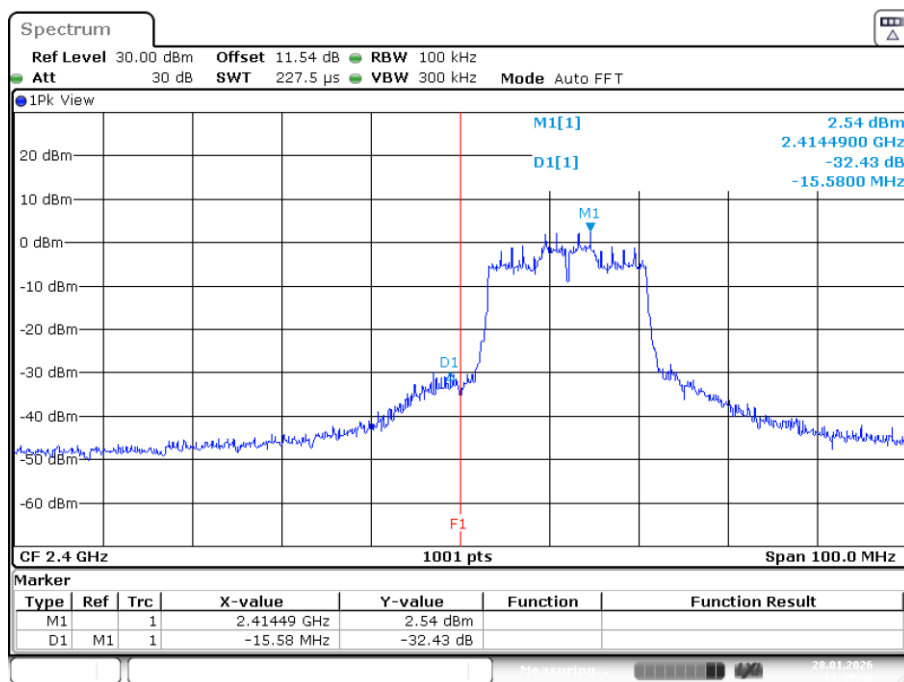

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 28.JAN.2026 11:49:46

Band Edge, Right Side

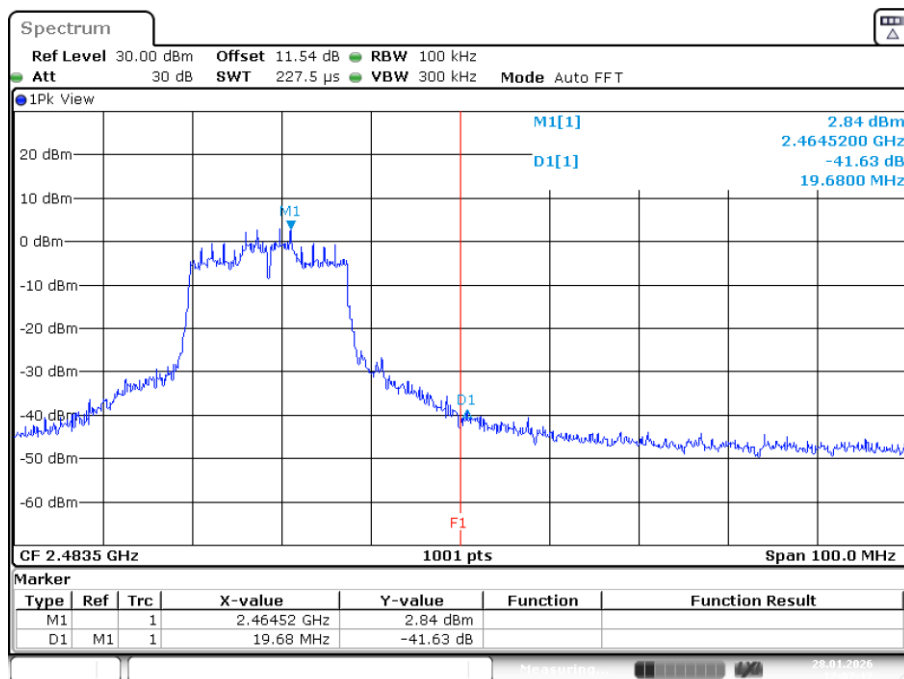


ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 28.JAN.2026 12:07:17

ax20 Mode


Band Edge, Left Side

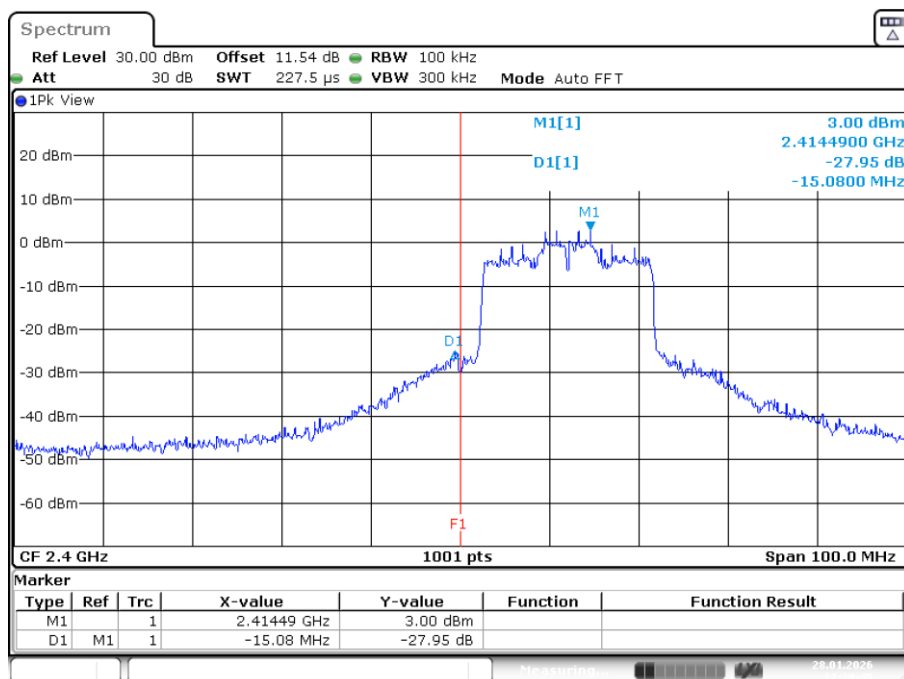

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 28.JAN.2026 12:20:45


Band Edge, Right Side

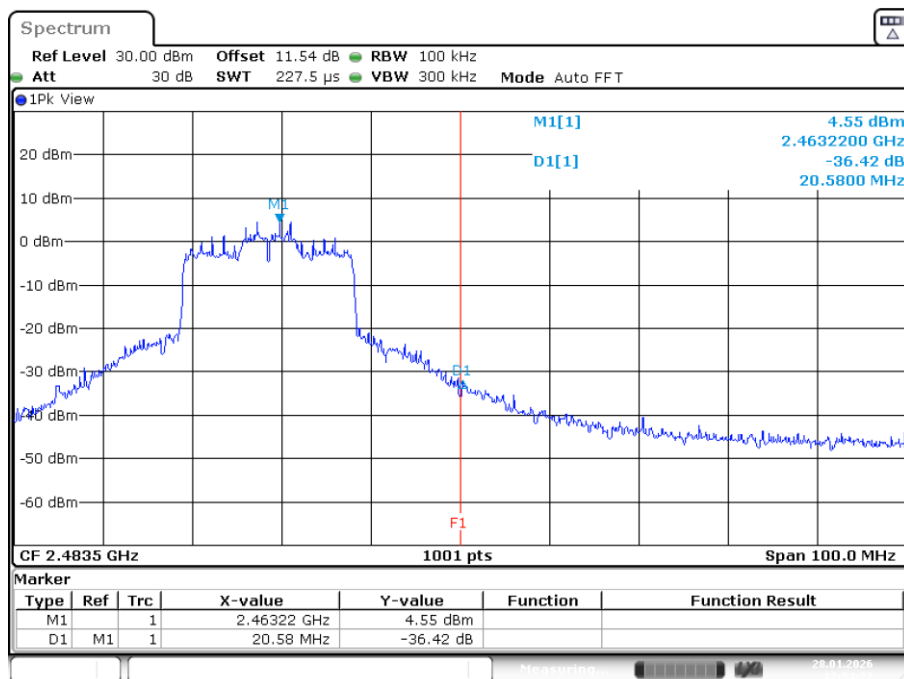

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 28.JAN.2026 12:54:27


BLE (1M) Mode Band Edge, Left Side

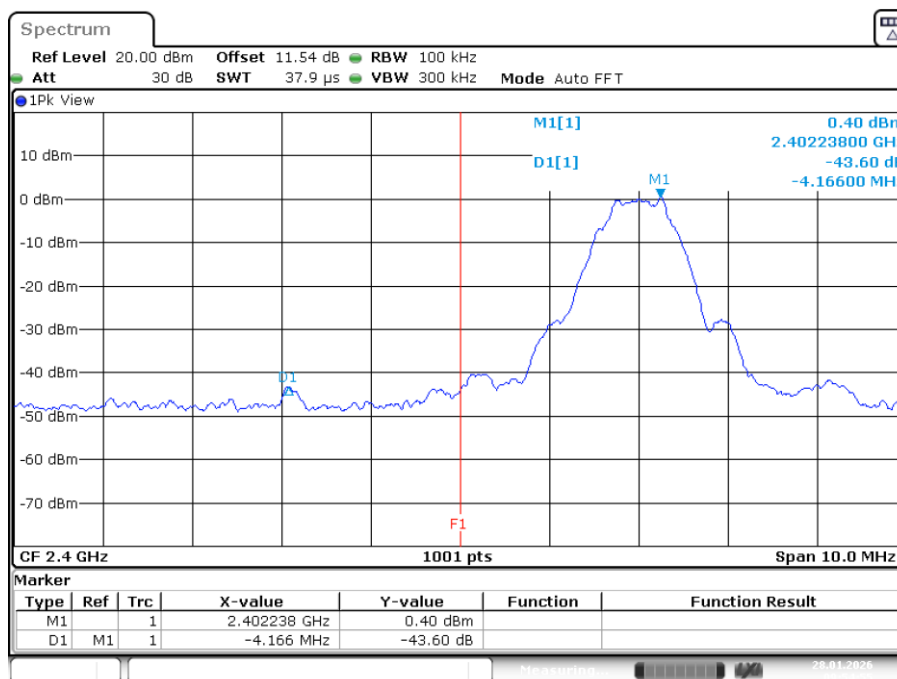

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 28.JAN.2026 09:54:56

Band Edge, Right Side

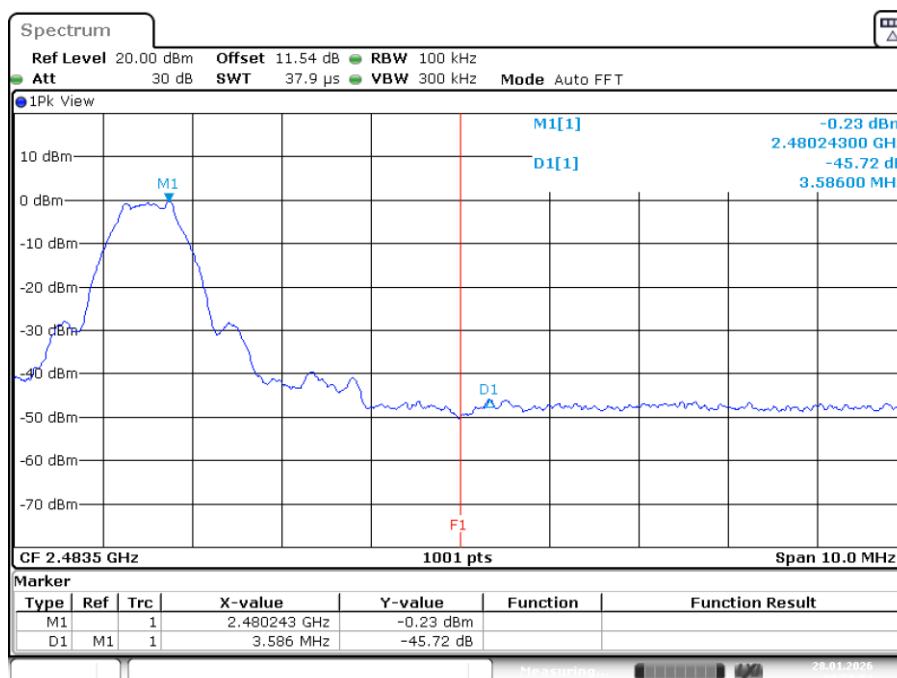

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 28.JAN.2026 09:59:54

11 FCC §15.247(e) – Power Spectral Density

11.1 Applicable Standard

According to FCC §15.247(e).

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

11.2 Test Procedure


According to ANSI C63.10-2020+Cor.1-2023

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span > 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat

11.3 Test Results

Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Limit (dBm/3 kHz)	Result
b Mode				
Low	2412	-0.07	8	PASS
Middle	2437	1.10	8	PASS
High	2462	0.53	8	PASS
g Mode				
Low	2412	-8.21	8	PASS
Middle	2437	-6.92	8	PASS
High	2462	-8.66	8	PASS
n20 Mode				
Low	2412	-9.62	8	PASS
Middle	2437	-7.26	8	PASS
High	2462	-9.09	8	PASS
ax20 Mode				
Low	2412	-9.15	8	PASS
Middle	2437	-7.42	8	PASS
High	2462	-8.57	8	PASS
BLE(1M) Mode				
Low	2402	-15.55	8	PASS
Middle	2440	-15.85	8	PASS
High	2480	-16.02	8	PASS


b Mode Low Channel

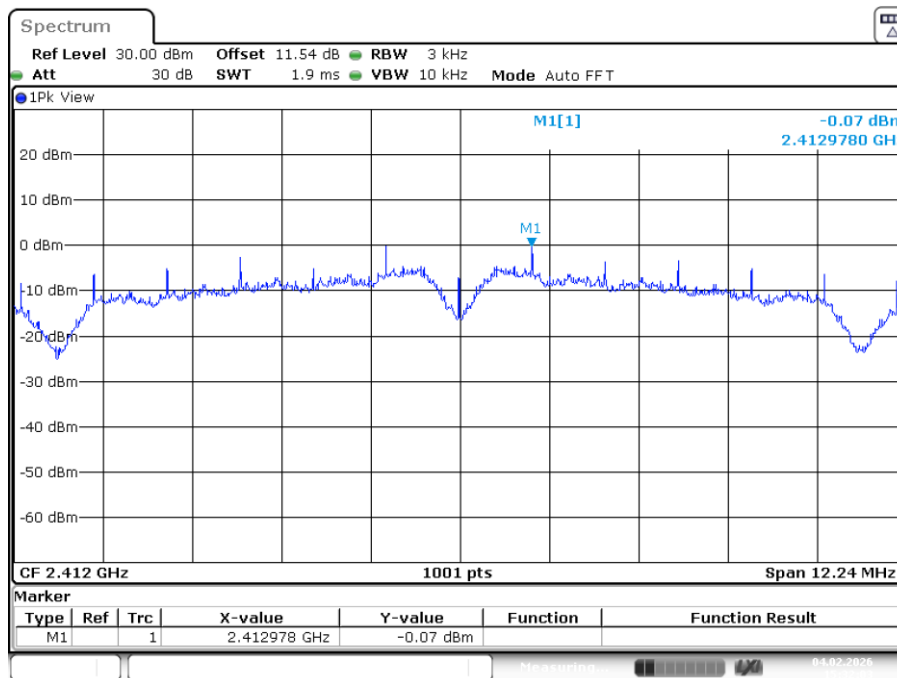

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 28.JAN.2026 15:32:03


Middle Channel

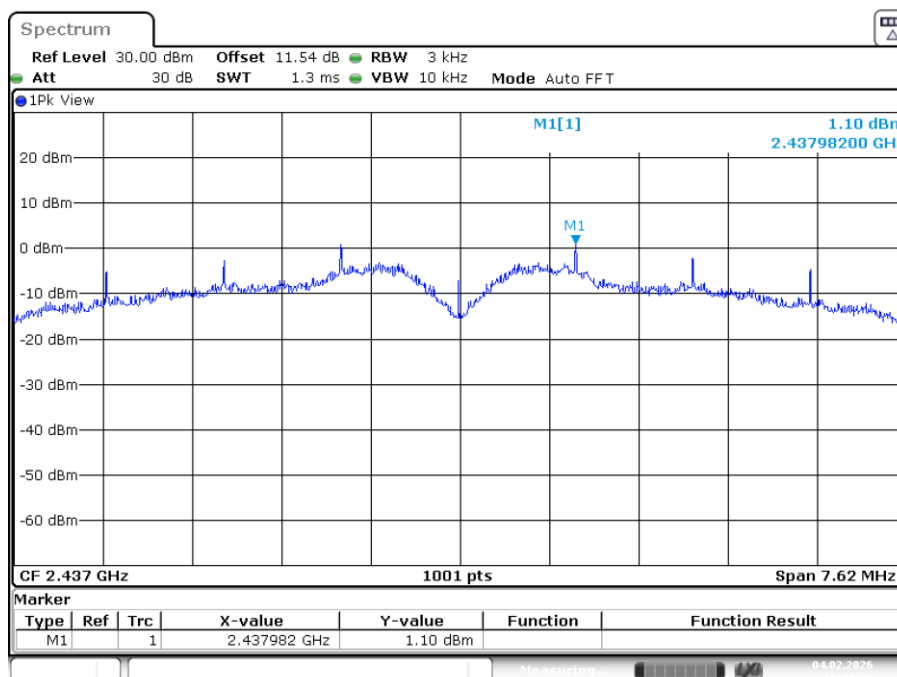

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 28.JAN.2026 15:40:36

High Channel

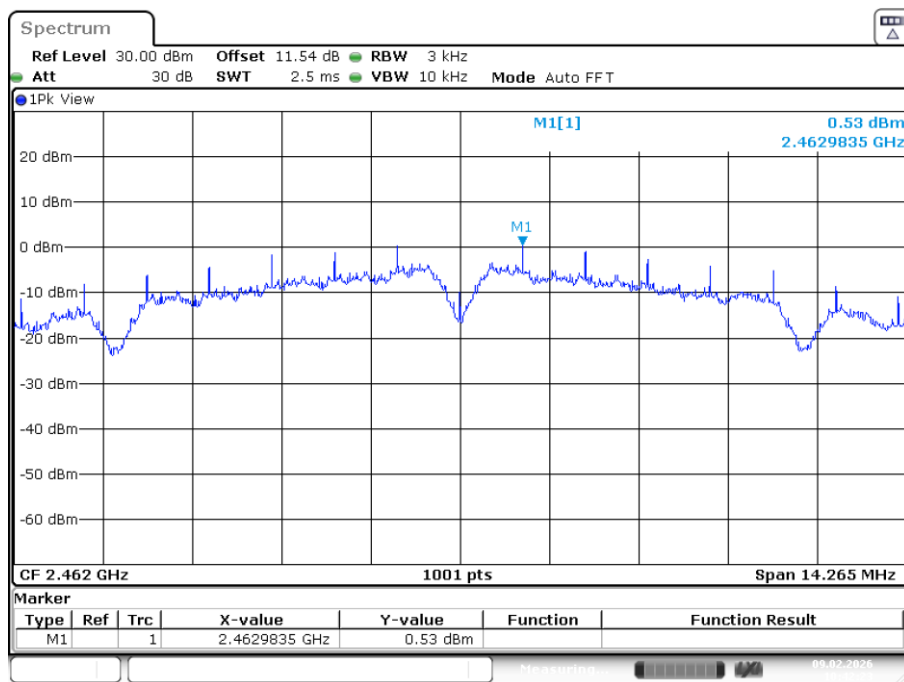


ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 9.FEB.2026 10:42:23

g Mode


Low Channel

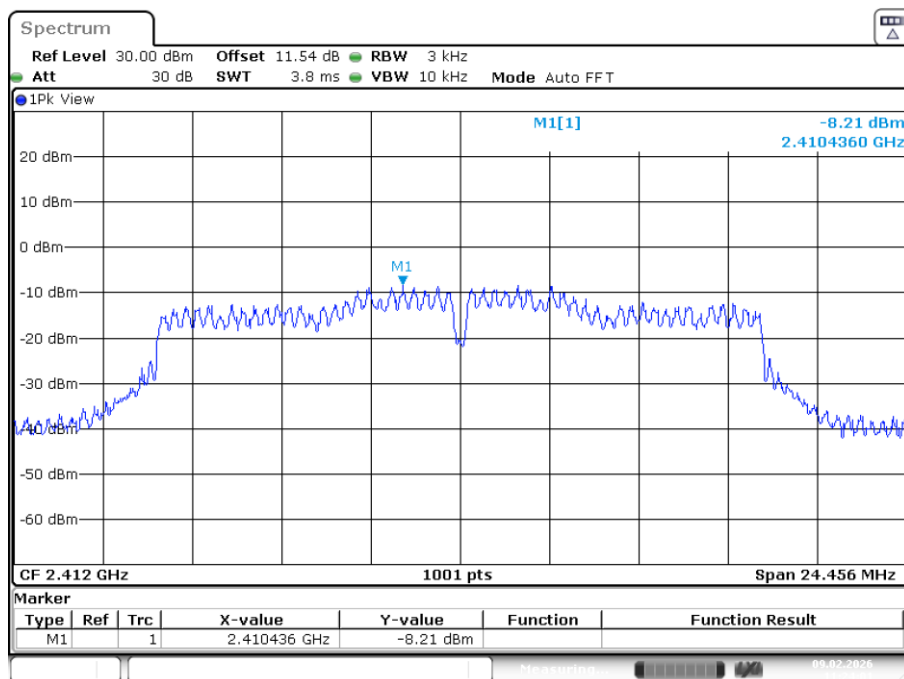

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 9.FEB.2026 11:24:01


Middle Channel

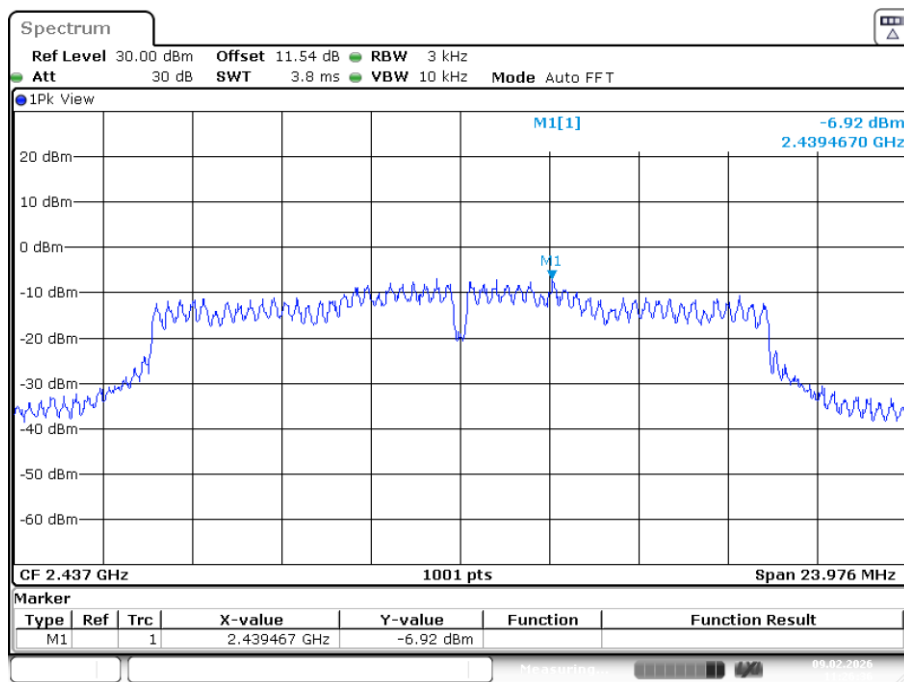

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 9.FEB.2026 11:26:36


High Channel

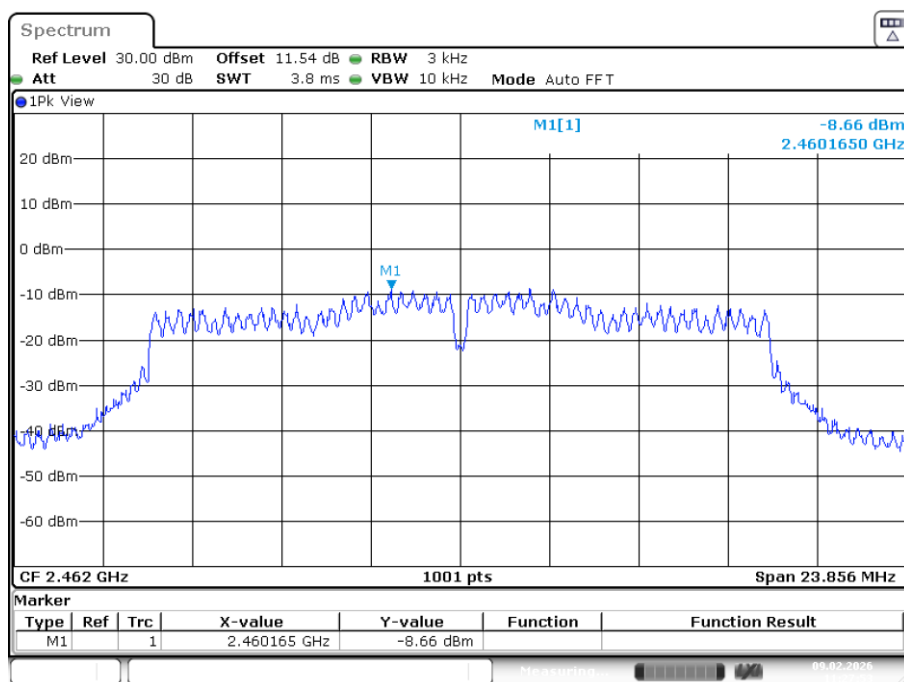

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 9.FEB.2026 11:27:53


n20 Mode Low Channel

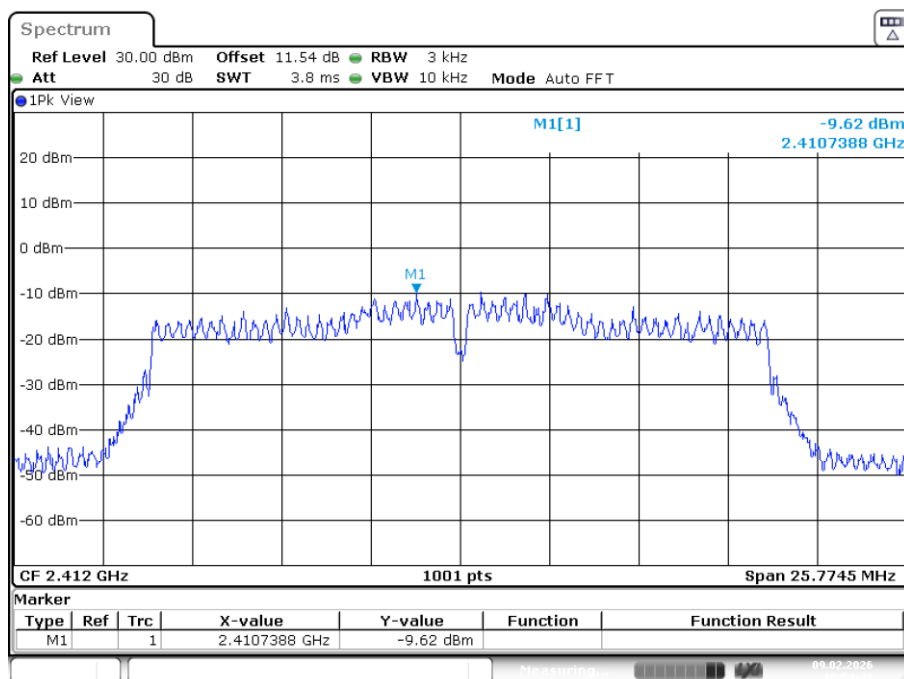

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 9.FEB.2026 10:50:48


Middle Channel

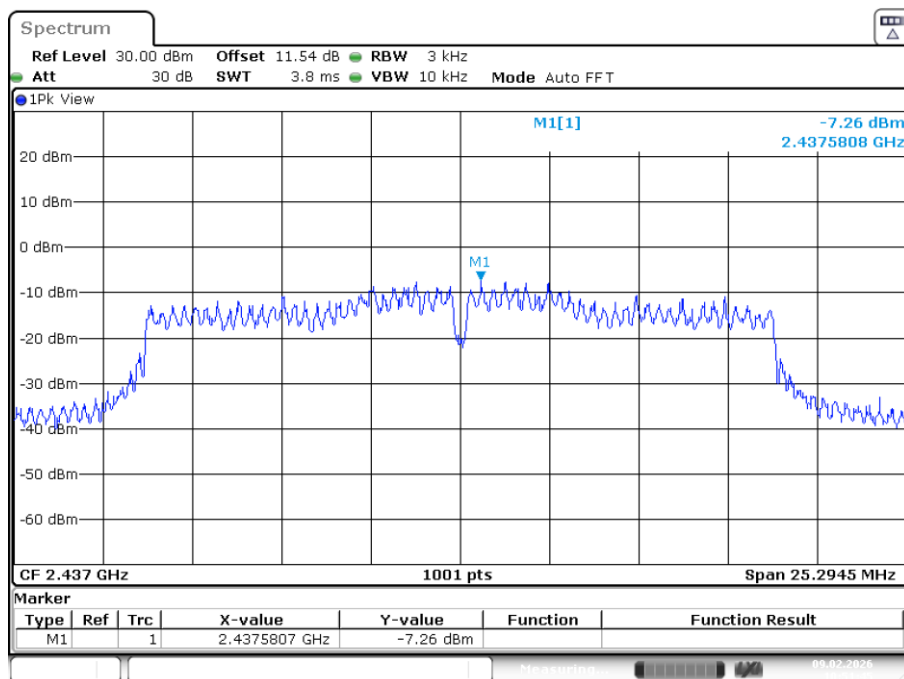

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 9.FEB.2026 10:51:46


High Channel

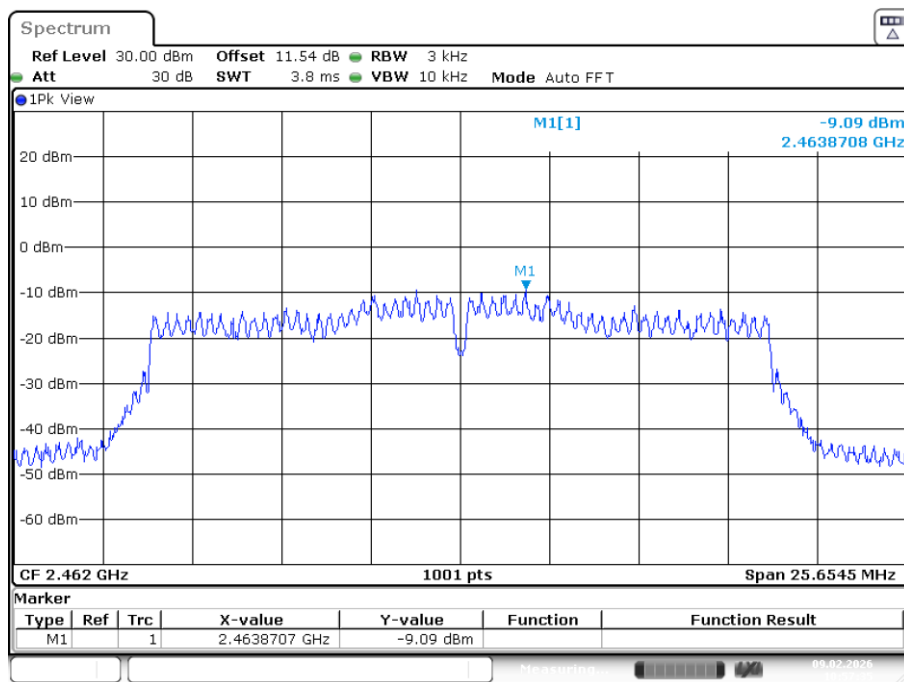

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 9.FEB.2026 10:57:36


ax20 Mode Low Channel

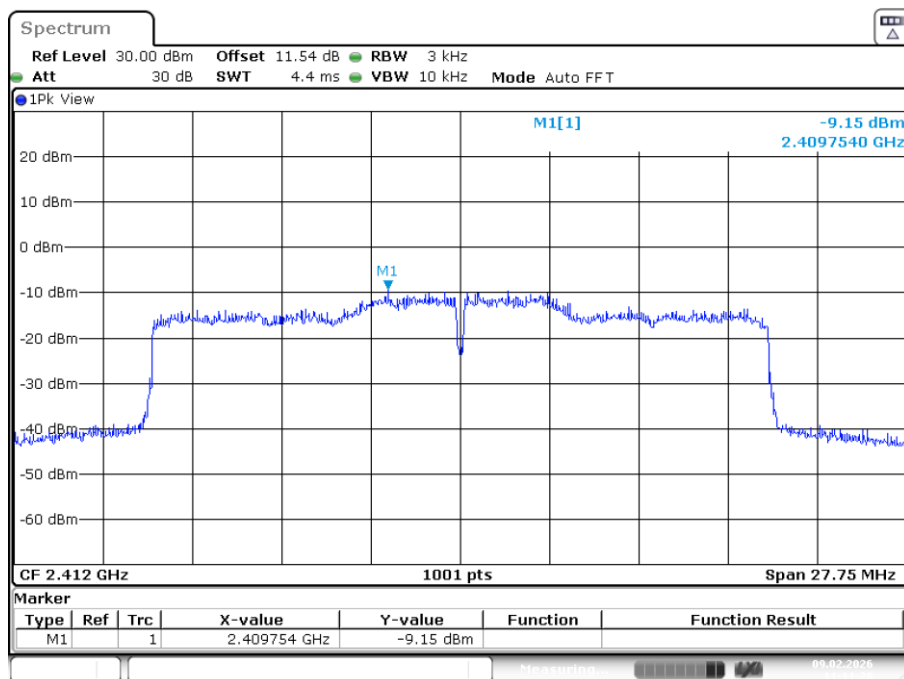

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 9.FEB.2026 11:11:28


Middle Channel

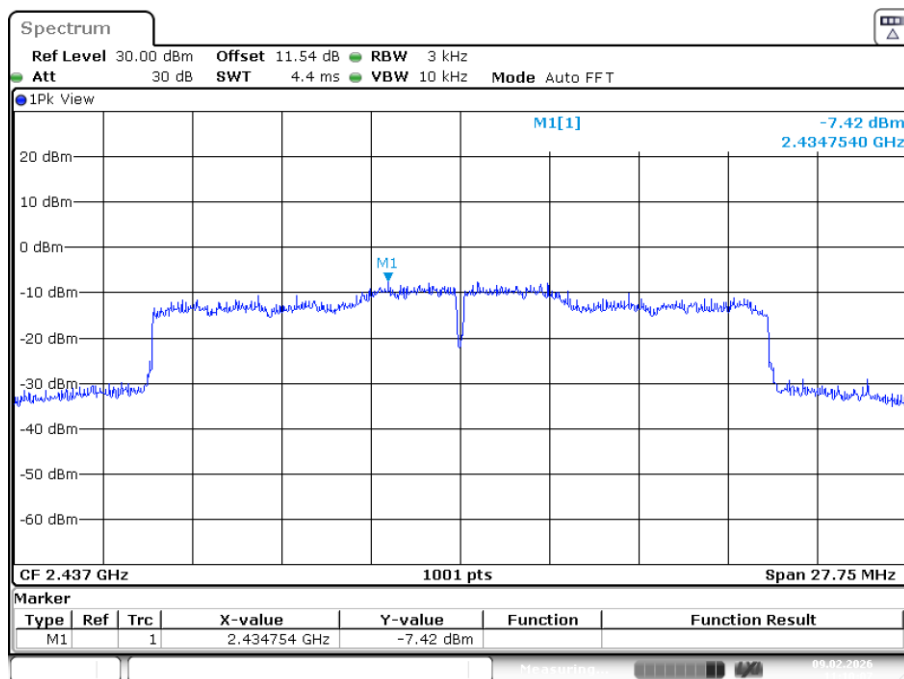

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 9.FEB.2026 11:10:06

High Channel

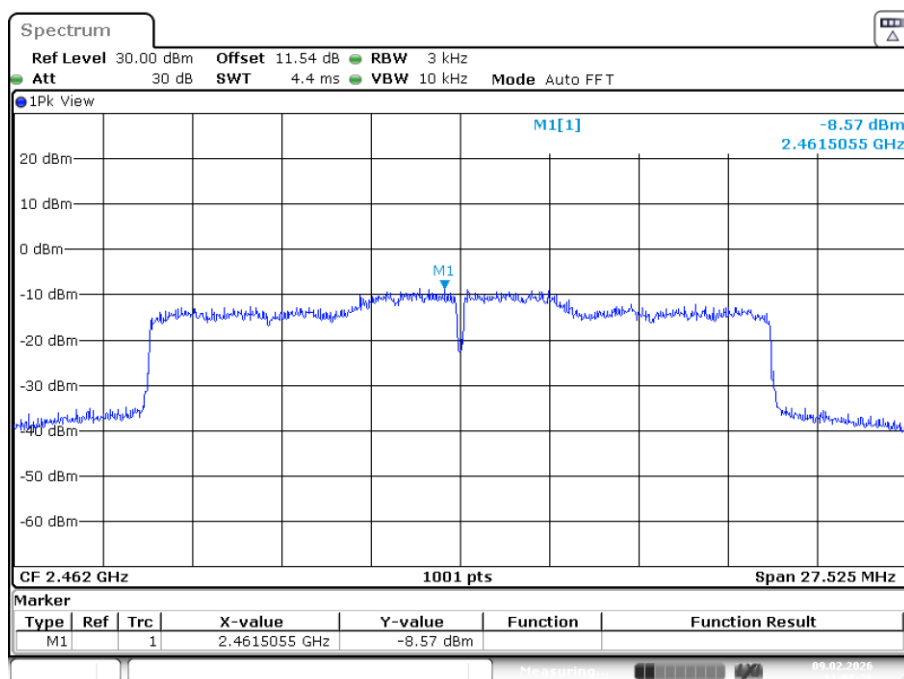


ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 9.FEB.2026 11:08:26

BLE (1M) Mode


Low Channel

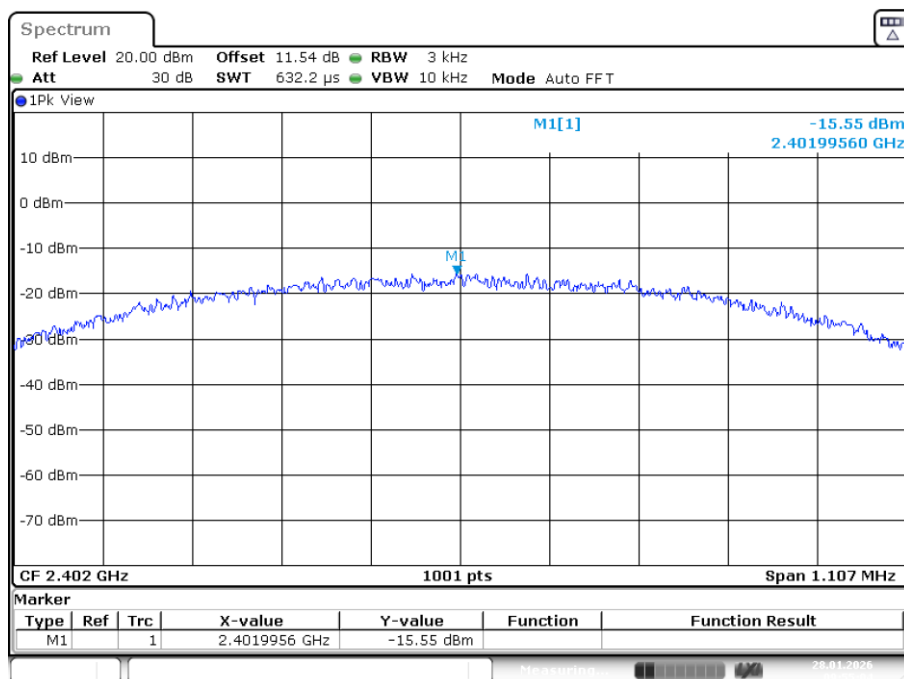

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 28.JAN.2026 09:55:04


Middle Channel

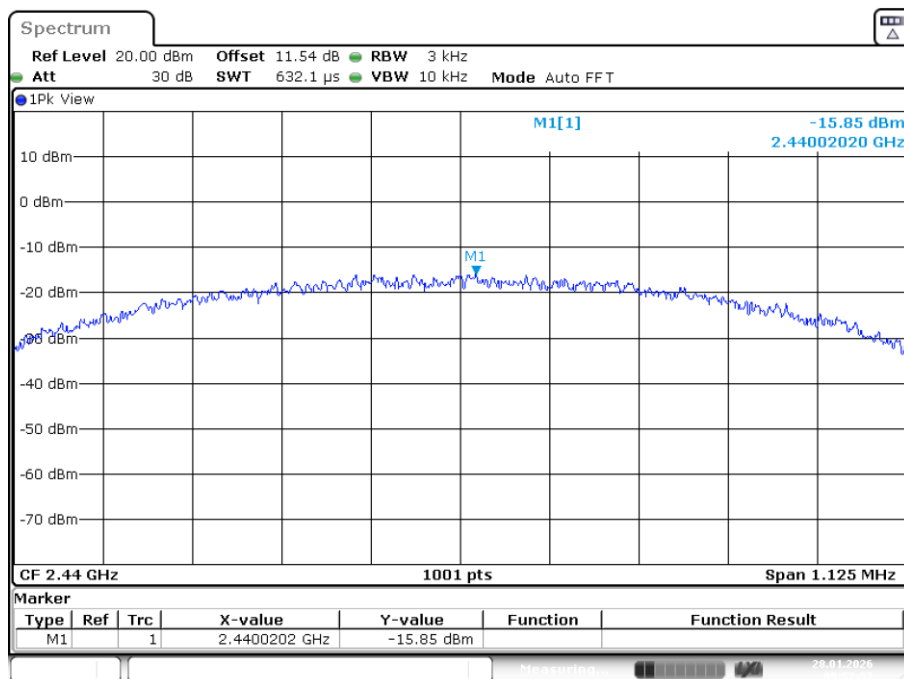

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 28.JAN.2026 09:57:57

High Channel

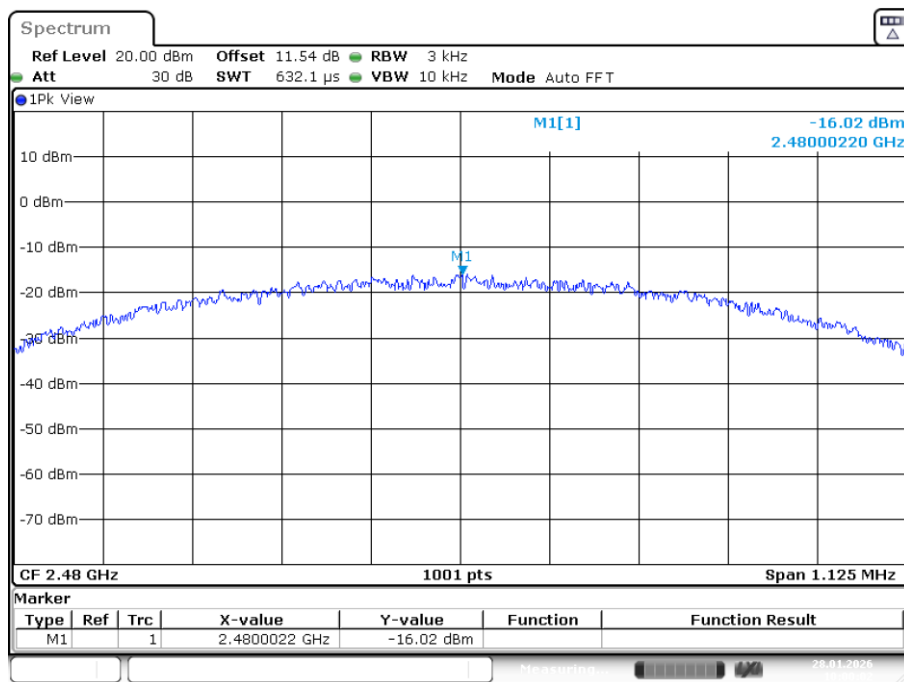

ProjectNo.:RLK260119062 Tester:Alan Huang

Date: 28.JAN.2026 10:00:02

***** END OF REPORT *****