

TEST REPORT

Product Name: Smoke and Carbon Monoxide Alarm
Trade Mark: X-SENSE
Model No.: SC01-MN
Add. Model No.: CB0Z-3S, LP/N-SCA-0A
HVIN: SC01-MN_V1.0
Report Number: 26042724151RFC-1
FCC 47 CFR Part 15 Subpart C
RSS-210 Issue 11
RSS-Gen Issue 5
FCC ID: 2AU4DDCY
IC: 32919-AAW
Test Result: PASS
Date of Issue: June 11, 2026

Prepared for:

X-Sense Innovations Co., Ltd.

**Room 1701, Block 3, Shenzhen International Innovation Valley,
Dashi 1st Road, Xili Community, Xili Subdistrict, Nanshan District,
Shenzhen.**

Prepared by:

**Shenzhen UnionTrust Quality and Technology Co., Ltd.
16/F., Block A, Building 6, Baoneng Science and Technology Park,
Longhua Street, Longhua District, Shenzhen, Guangdong, China**

TEL: +86-755-2823 0888

FAX: +86-755-2823 0886

Tested by:

David Chen

David Chen

Senior Project Engineer

Reviewed by:

Henry Lu

Henry Lu

Team Leader

Approved by:


Kevin Liang
Kevin Liang
Assistant Manager

Date:

June 11, 2026

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

UTTR-RF-RSS210-V1.1

Version

Version No.	Date	Description
V1.0	June 11, 2026	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com
[Http://www.uttlab.com](http://www.uttlab.com)

UTTR-RF-RSS210-V1.1

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	4
1.4 OTHER INFORMATION	4
1.5 DESCRIPTION OF SUPPORT UNITS	5
1.6 TEST LOCATION	5
1.7 TEST FACILITY	5
1.8 DEVIATION FROM STANDARDS	5
1.9 ABNORMALITIES FROM STANDARD CONDITIONS	5
1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	5
1.11 MEASUREMENT UNCERTAINTY	6
2. TEST SUMMARY	7
3. EQUIPMENT LIST	8
4. TEST CONFIGURATION	9
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	9
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	9
4.1.2 RECORD OF NORMAL ENVIRONMENT	9
4.2 TEST CHANNELS	9
4.3 EUT TEST STATUS	9
4.4 TEST SETUP	10
4.4.1 FOR RADIATED EMISSIONS TEST SETUP	10
4.4.2 FOR CONDUCTED EMISSIONS TEST SETUP	11
4.4.3 FOR CONDUCTED RF TEST SETUP	12
4.5 SYSTEM TEST CONFIGURATION	12
4.6 DUTY CYCLE	13
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	15
5.1 REFERENCE DOCUMENTS FOR TESTING	15
5.2 ANTENNA REQUIREMENT	15
5.3 RADIATED EMISSION	15
5.4 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	21
5.5 20dB OCCUPIED BANDWIDTH & OCCUPIED BANDWIDTH	22
APPENDIX 1 PHOTOS OF TEST SETUP	24
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	24

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	X-Sense Innovations Co., Ltd.
Address of Applicant:	Room 1701, Block 3, Shenzhen International Innovation Valley, Dashi 1st Road, Xili Community, Xili Subdistrict, Nanshan District, Shenzhen.
Manufacturer:	X-Sense Electronics Co., Ltd.
Address of Manufacturer:	Room 402, Building 4, No. 9, Jinshagang 1st Road, Shixia Village, Dalang Town, Dongguan City, 523750 Guangdong, P.R. CHINA

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	Smoke and Carbon Monoxide Alarm
Model No.:	SC01-MN
Add. Model No.:	CB0Z-3S, LP/N-SCA-0A
HVIN:	SC01-MN_V1.0
Trade Mark:	X-SENSE
DUT Stage:	Identical Prototype
EUT Supports Function:	915.27MHz
Power Supply:	3VDC
Software Version: (Provided by the customer)	N/A
Hardware Version: (Provided by the customer)	SC01-MN_V1.0
Sample Received Date:	April 21, 2026
Sample Tested Date:	May 8, 2026 to May 14, 2026
Note: The additional models are identical with the test model except the model number for marketing purpose.	

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Frequency Range:	915.27MHz
Type of Modulation:	FSK
Number of Channels:	1
Antenna Type:	Spring antenna
Antenna Gain: (Provided by the customer)	1 dBi
Maximum Field Strength:	92.53 dBμV/m@3m
Normal Test Voltage:	3.0 Vdc

1.4 OTHER INFORMATION

None

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested independently

1.6 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

IC-Registration No.: 21600-1

The 3m Semi-anechoic chamber of Shenzhen UnionTrust Quality and Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 21600-1.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.8 DEVIATION FROM STANDARDS

None.

1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.2 dB
2	Conducted emission 150KHz-30MHz	±2.7 dB
3	Radiated emission 9KHz-30MHz	±4.7 dB
4	Radiated emission 30MHz-1GHz	±4.6 dB
5	Radiated emission 1GHz-18GHz	±4.4 dB
6	Radiated emission 18GHz-26GHz	±4.6 dB
7	Radiated emission 26GHz-40GHz	±5.2 dB
8	Radio Frequency	±7.0x10 ⁻⁸
9	Transmission Time	±0.19%
10	Occupied Bandwidth	±1.86%

2. TEST SUMMARY

Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203 RSS-Gen Issue 5, Section 6.8	ANSI C63.10-2020+COR. 1-2023+C63.10A-2024 + ERRATA TO C63.10A-2024	PASS
Conducted Emission	FCC 47 CFR Part 15 Subpart C Section 15.207 RSS-Gen Issue 5, Section 8.8	ANSI C63.10-2020+COR. 1-2023+C63.10A-2024 + ERRATA TO C63.10A-2024	N/A ^{Note1, 2}
Radiated Emission	FCC 47 CFR Part 15 Subpart C Section 15.249 (a)(c)(d)(e)/15.209 RSS-210 Issue 11, Annex B.10 RSS-Gen Issue 5, Section 8.9	ANSI C63.10-2020+COR. 1-2023+C63.10A-2024 + ERRATA TO C63.10A-2024	PASS
Restricted bands around fundamental frequency (Radiated Emission)	FCC 47 CFR Part 15 Subpart C Section 15.249(a) RSS-210 Issue 11, Annex B.10	ANSI C63.10-2020+COR. 1-2023+C63.10A-2024 + ERRATA TO C63.10A-2024	PASS
20 dB bandwidth	FCC 47 CFR Part 15 Subpart C Section 15.215 (c)	ANSI C63.10-2020+COR. 1-2023+C63.10A-2024 + ERRATA TO C63.10A-2024	PASS
Occupied Bandwidth	RSS-Gen Issue 5, Section 6.7	ANSI C63.10-2020+COR. 1-2023+C63.10A-2024 + ERRATA TO C63.10A-2024	PASS
Note: 1) N/A: In this whole report not application. 2) The EUT is powered by 3V lithium Battery *2.			

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	3m SAC	ETS-LINDGREN	3M	Euroshiedpn-CT001270-1317	11-Nov-2023	10-Nov-2026
☒	Receiver	R&S	ESIB26	100114	24-Oct-2025	23-Oct-2026
☒	Loop Antenna	ETS-LINDGREN	6502	00202525	26-Oct-2025	25-Oct-2026
☒	Broadband Antenna	ETS-LINDGREN	3142E	00201566	26-Oct-2025	25-Oct-2026
☒	6dB Attenuator	Talent	RA6A5-N-18	18103001	24-Oct-2025	23-Oct-2026
☒	Preamplifier	HP	8447F	2805A02960	24-Oct-2025	23-Oct-2026
☒	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	24-Oct-2025	23-Oct-2026
☒	Pre-amplifier	ETS-Lindgren	00118384	00202652	24-Oct-2025	23-Oct-2026
☒	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201541	21-Mar-2026	20-Mar-2027
☒	Pre-amplifier	ETS-Lindgren	00118385	00201874	21-Mar-2026	20-Mar-2027
☒	Band Reject Filter (2400MHz~2500MHz)	Micro-Tronics	BRM50702	G590	24-Oct-2025	23-Oct-2026
☒	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted RF test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	Spectrum analyzer	Keygight	N9020A	MY51286807	24-Oct-2025	23-Oct-2026

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (Vdc)	Relative Humidity (%)
NT/NV	+15 to +35	3	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment

Test Item	Temp. (°C)	Relative Humidity (%)	Pressure (kPa)	Sample No.	Tested by
Radiated Emission	24.3	61.2	99.4	S202604248513-ZJA01/6	Linson Xie
Restricted bands around fundamental frequency (Radiated Emission)					
20dB Bandwidth & Occupied Bandwidth	24.5	52.5	100.1	S202604248513-ZJA03/6	Erina Chen
Duty cycle					

4.2 TEST CHANNELS



Type of Modulation	Tx/Rx Frequency	Test RF Channel Lists
FSK	915.27MHz	Channel 1: 915.27 MHz


4.3 EUT TEST STATUS

Modulation Mode	Tx Function	Description
FSK	1Tx	Keep the EUT in continuously transmitting with modulation test single.


4.4 TEST SETUP

4.4.1 For Radiated Emissions test setup

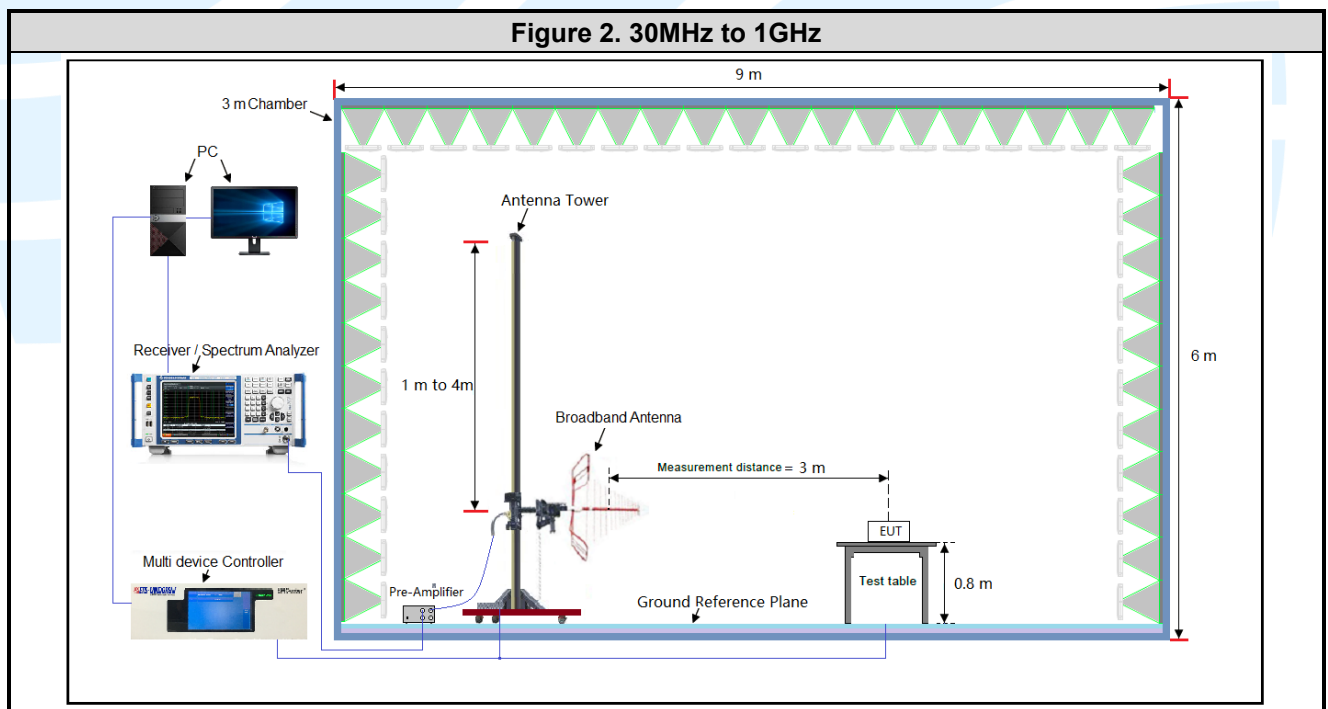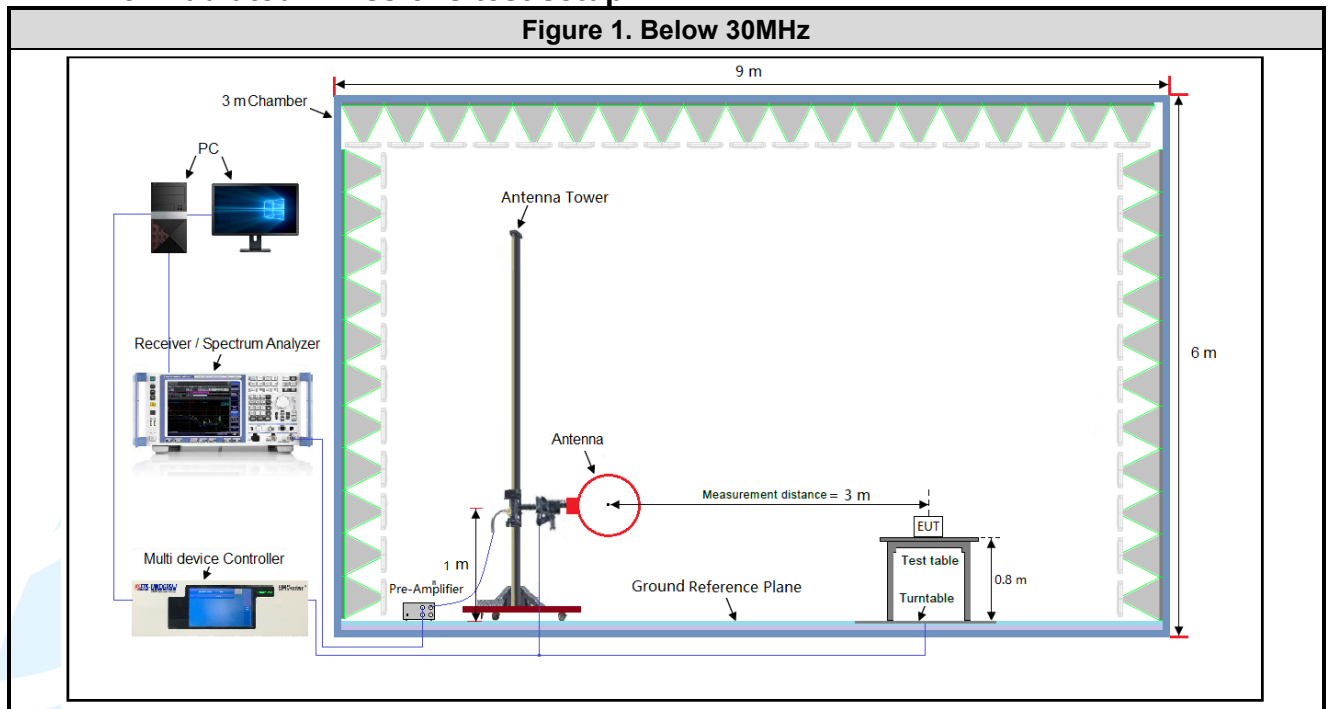


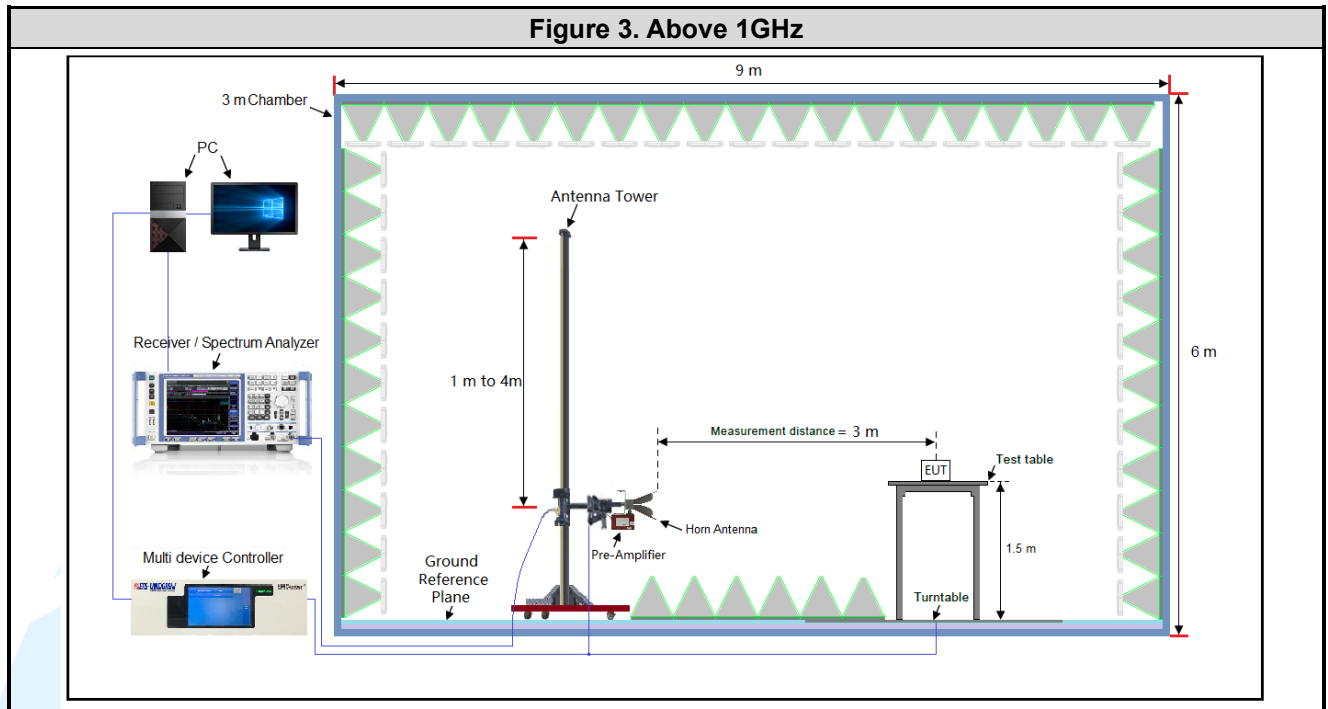

4.4.2 For Conducted Emissions test setup

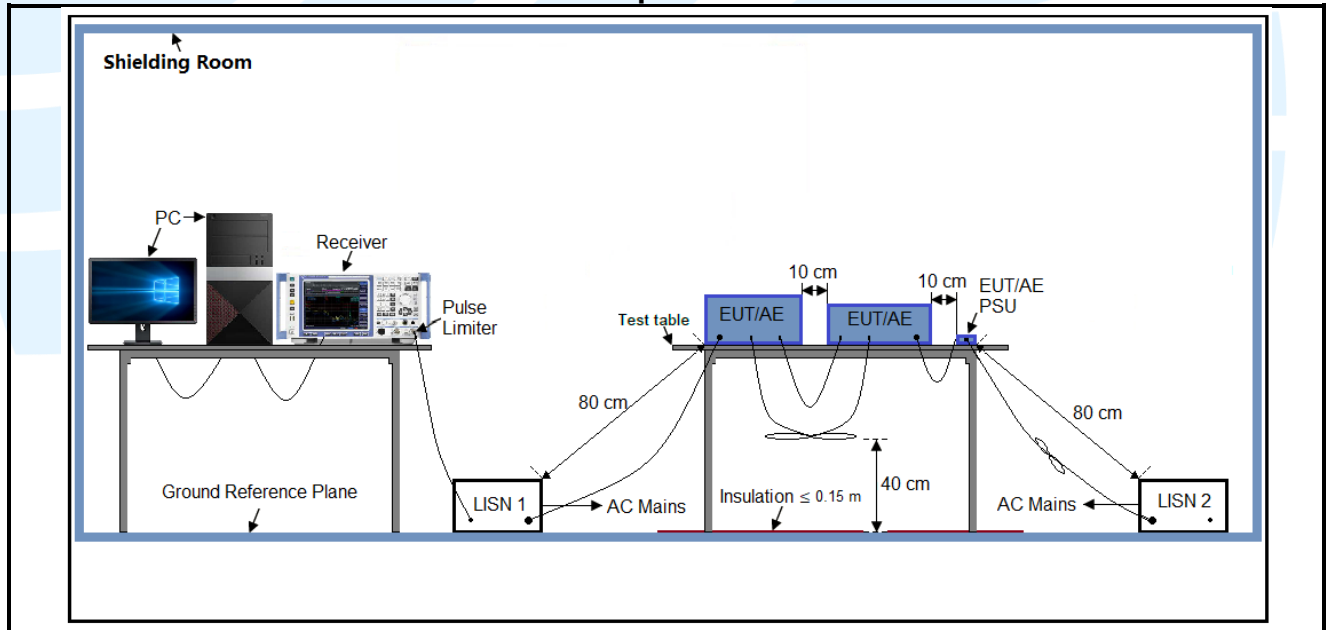

4.4.3 For Conducted RF test setup

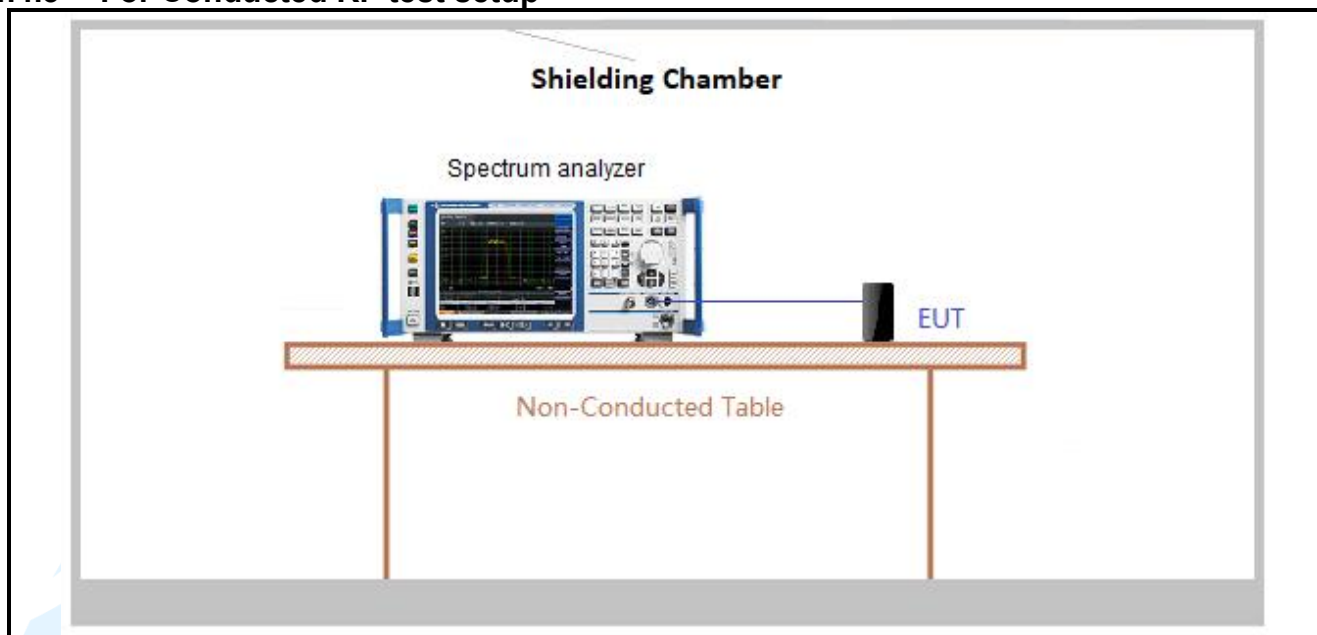

4.5 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3Vdc battery. Only the worst case data were recorded in this test report.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.


4.6 DUTY CYCLE


Period (ms)	On Time (ms)	Duty Cycle (linear)	Duty Cycle (%)	Average Factor (dB)
100	1.395	0.014	1.40%	-18.55

Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;
- 3) Average factor = $10 * \log_{10} \text{Duty Cycle}$.

According to ANSI C63.10-2020section 7.5(g), if the periodic with a period that exceeds 100ms, determine the duty cycle by dividing the total maximum “ON time” by 100ms.

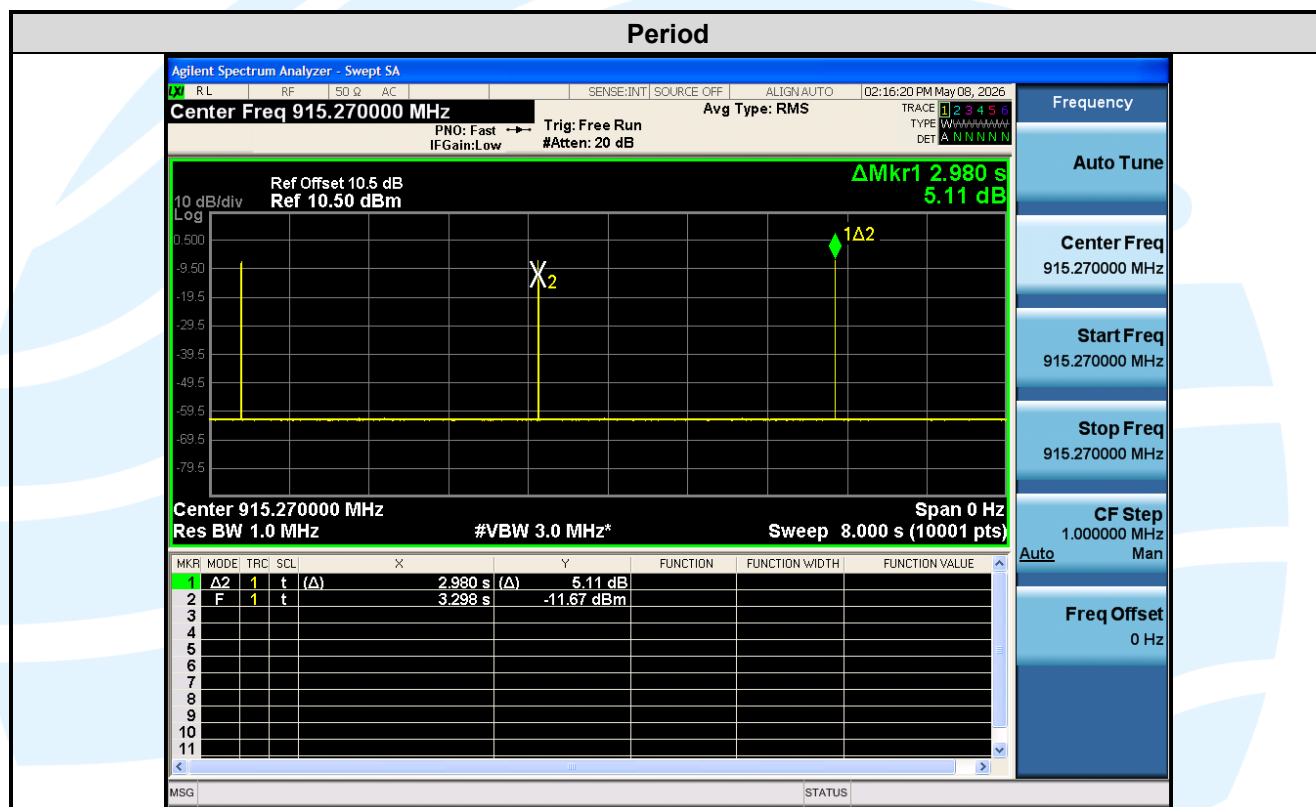

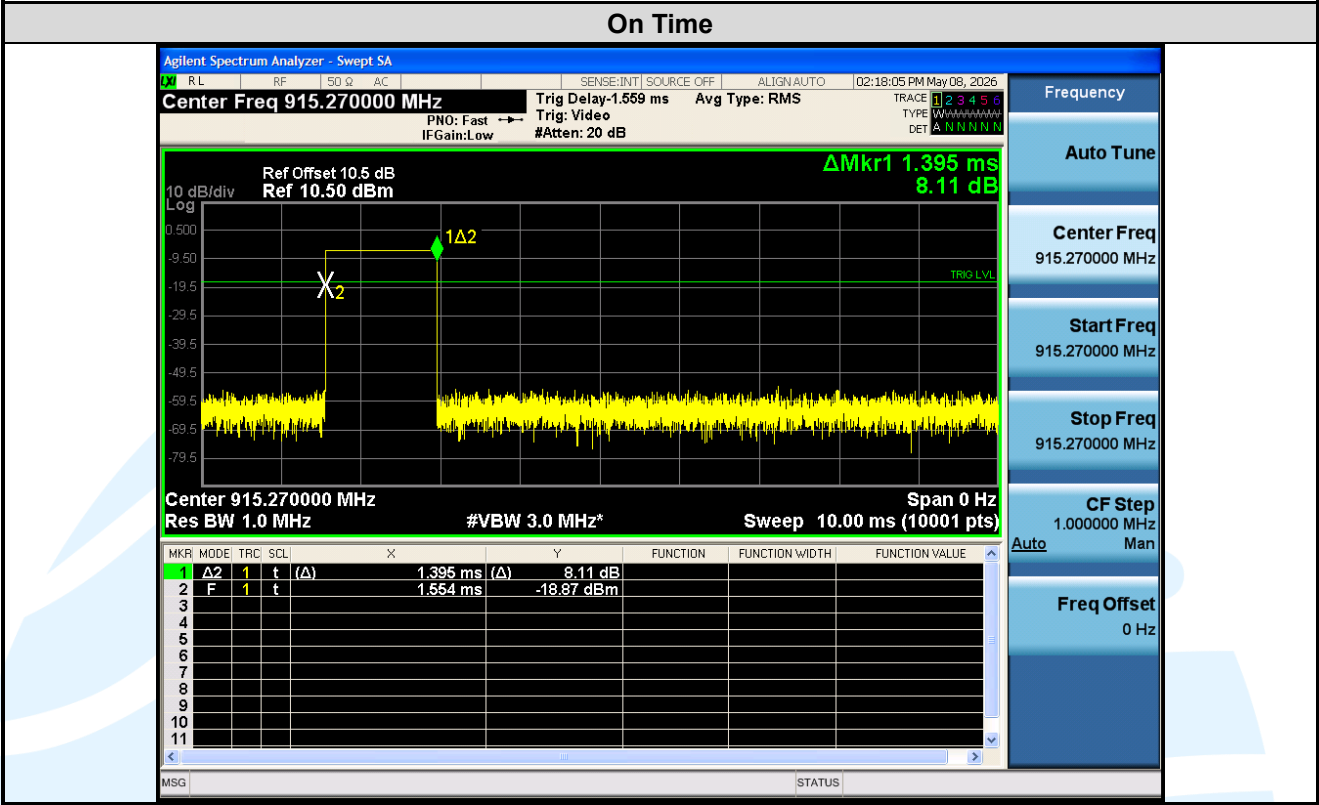

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 15	Radio Frequency Devices
2	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus
3	RSS-210 Issue 11	Licence-Exempt Radio Apparatus: Category I Equipment
4	ANSI C63.10-2020+COR. 1-2023+C63.10A-2024 + ERRATA TO C63.10A-2024	American National Standard for Testing Unlicensed Wireless Devices

5.2 ANTENNA REQUIREMENT

Standard Requirement
15.203 Requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
RSS-Gen Issue 4, Section 6.8 requirement: According to RSS-Gen Issue 5, section 6.8, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns.
EUT Antenna: Antenna in the interior of the equipment and no consideration of replacement. The gain of the antenna is 1 dBi.

5.3 RADIATED EMISSION

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.249 (a)(c)(d)(e)/15.209, RSS-210 Issue 11, Annex B.10, RSS-Gen Issue 5, Section 8.9
Test Method: ANSI C63.10-2020+COR. 1-2023+C63.10A-2024 + ERRATA TO C63.10A-2024 Section 6.6.4.3
Receiver Setup:

Frequency	Detector	RBW	VBW	Remark
0.009 MHz-0.090 MHz	Peak	10 kHz	30 KHz	Peak
0.009 MHz-0.090 MHz	Average	10 kHz	30 KHz	Average
0.090 MHz-0.110 MHz	Quasi-peak	10 kHz	30 KHz	Quasi-peak
0.110 MHz-0.490 MHz	Peak	10 kHz	30 KHz	Peak
0.110 MHz-0.490 MHz	Average	10 kHz	30 KHz	Average
0.490 MHz -30 MHz	Quasi-peak	10 kHz	30 kHz	Quasi-peak
30 MHz-1 GHz	Quasi-peak	100 kHz	300 KHz	Quasi-peak
Above 1 GHz	Peak	1 MHz	3 MHz	Peak
	Peak	1 MHz	10 Hz	Average

Limits:

Spurious Emissions

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009 MHz-0.490 MHz	2400/F(kHz)	--	--	300
0.490 MHz-1.705 MHz	24000/F(kHz)	--	--	30
1.705 MHz-30 MHz	30	--	--	30

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

UTTR-RF-RSS210-V1.1

30 MHz-88 MHz	100	40.0	Quasi-peak	3
88 MHz-216 MHz	150	43.5	Quasi-peak	3
216 MHz-960 MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1 GHz	500	54.0	Average	3

Field strength of the fundamental signal

Limit (dB μ V/m @3m)	Detector
94	Quasi-peak

Remark:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB μ V/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Test Setup: Refer to section 4.4.1 for details.

Test Procedures:

1. From 30 MHz to 1GHz test procedure as below:
 - 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
 - 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
 - 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
2. Above 1GHz test procedure as below:
 - 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
 - 2) Test the EUT in the lowest channel ,middle channel, the Highest channel
 - 3) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.
 - 4) Repeat above procedures until all frequencies measured was complete.


Equipment Used: Refer to section 3 for details.

Test Result: Pass

The measurement data as follows:

Radiated Emission Test Data (9 KHz ~ 30 MHz):

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

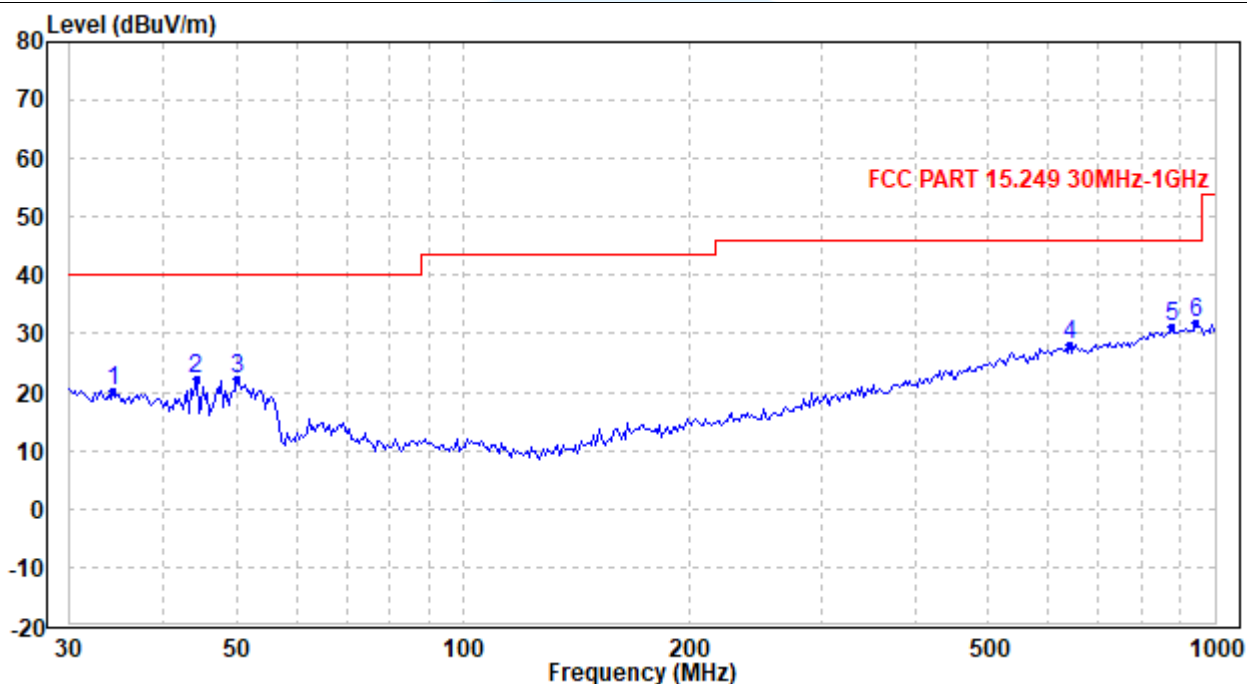Radiated Emission Test Data (30 MHz ~ 1 GHz):
Lowest Channel
Horizontal


No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	34.285	28.14	-7.77	20.37	40.00	-19.63	Peak
2	44.154	35.78	-13.60	22.18	40.00	-17.82	Peak
3	50.108	37.39	-15.22	22.17	40.00	-17.83	Peak
4	642.292	26.67	1.52	28.19	46.00	-17.81	Peak
5	875.013	25.69	5.54	31.23	46.00	-14.77	Peak
6	945.334	25.33	6.60	31.93	46.00	-14.07	Peak

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)


UTTR-RF-RSS210-V1.1

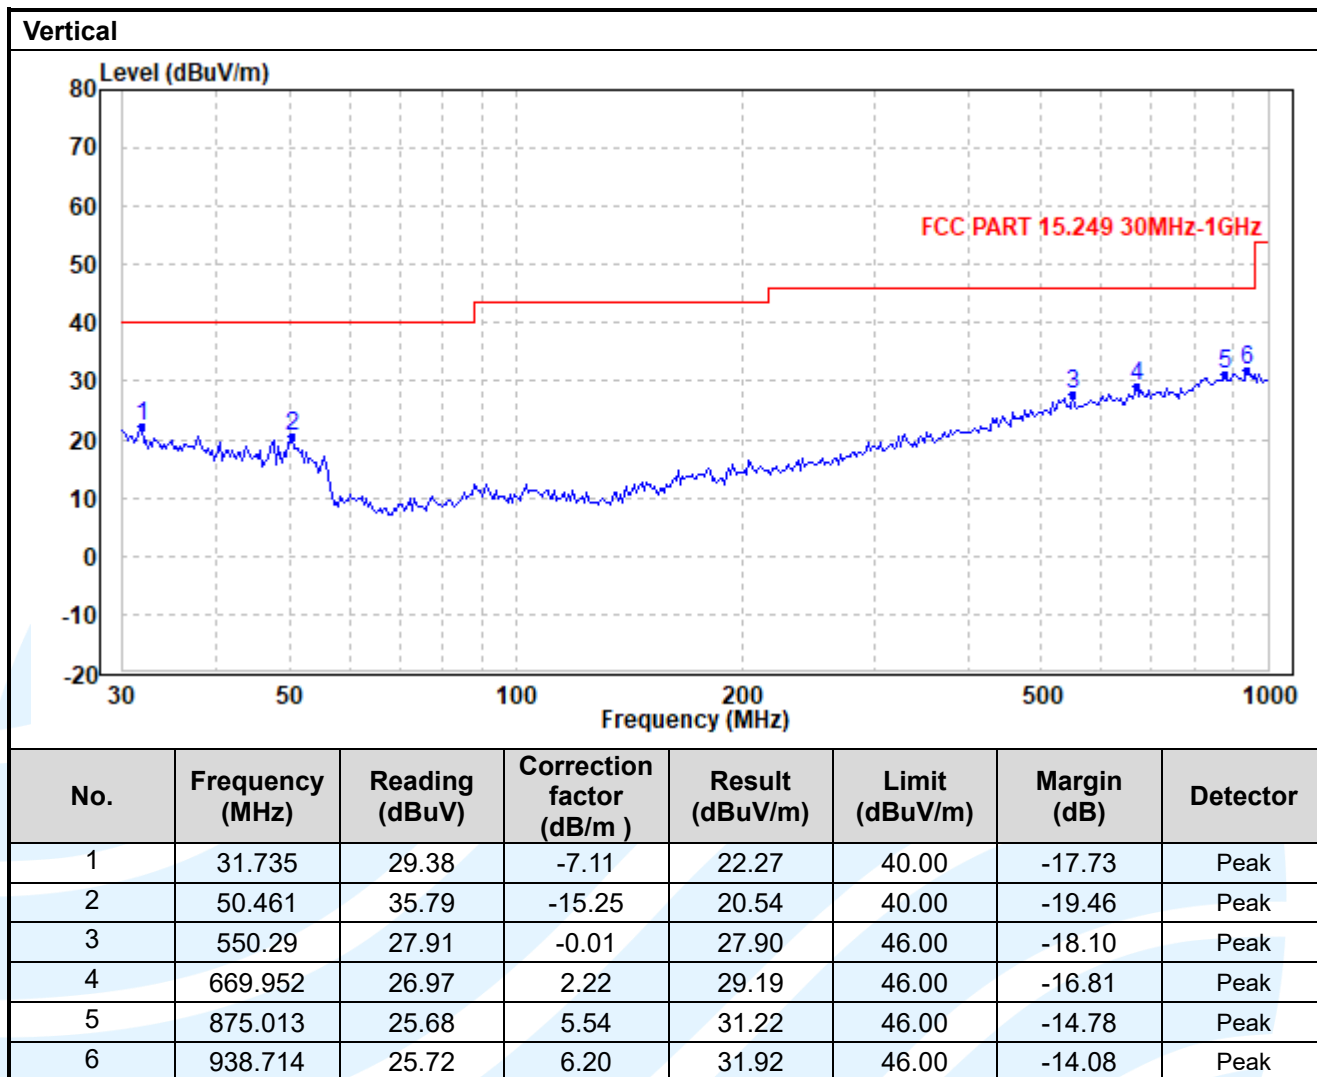

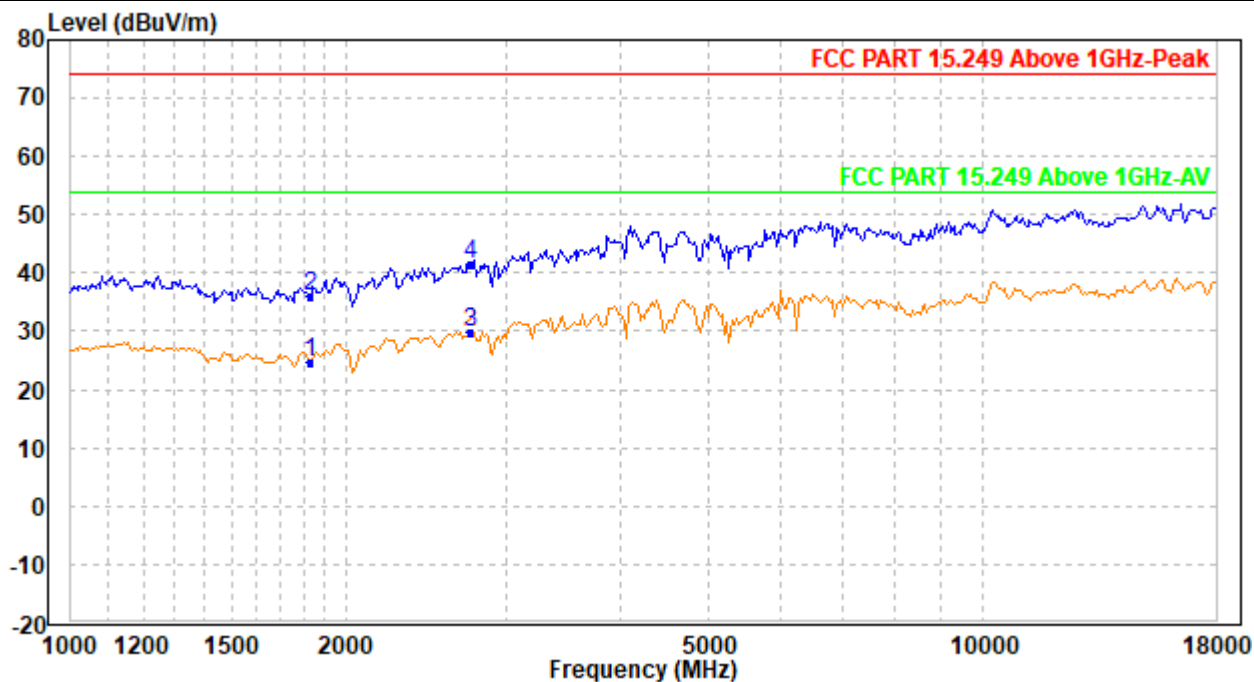Radiated Emission Test Data (Above 1 GHz):
Horizontal


No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1830.54	32.80	-8.19	24.61	54.00	-29.39	Average
2	1830.54	44.19	-8.19	36.00	74.00	-38.00	Peak
3	2745.81	34.11	-4.40	29.71	54.00	-24.29	Average
4	2745.81	45.91	-4.40	41.51	74.00	-32.49	Peak

Vertical

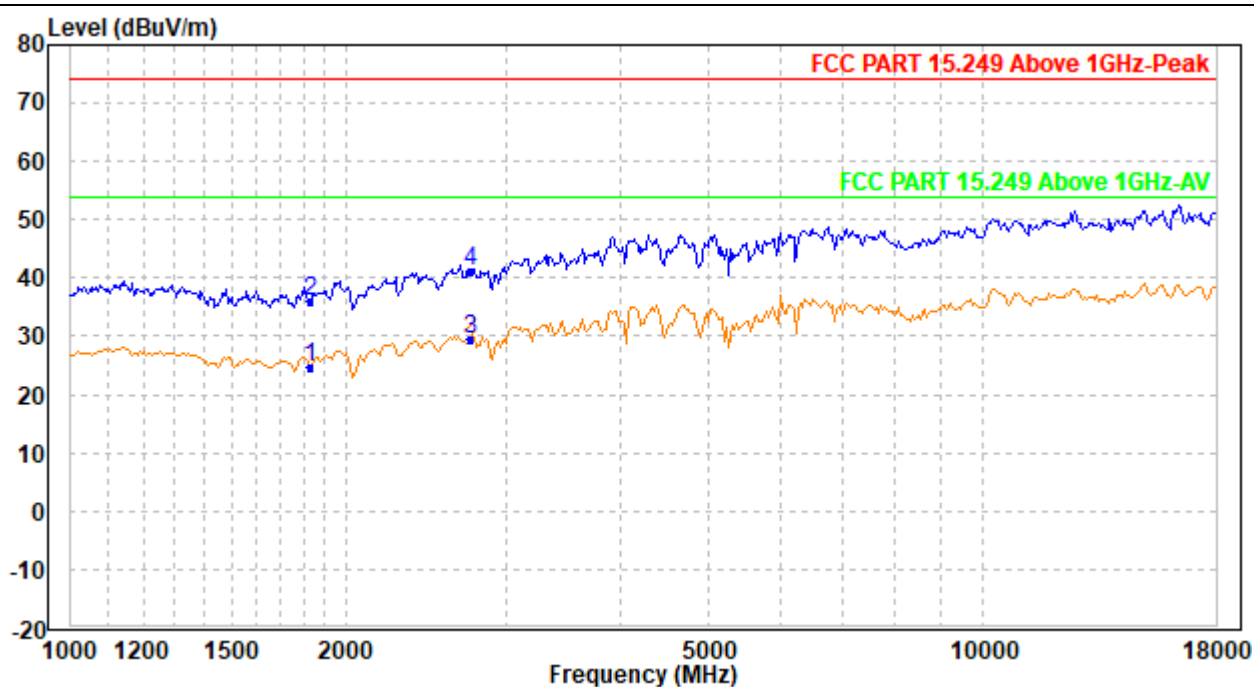

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1830.54	32.83	-8.19	24.64	54.00	-29.36	Average
2	1830.54	44.12	-8.19	35.93	74.00	-38.07	Peak
3	2745.81	34.02	-4.40	29.62	54.00	-24.38	Average
4	2745.81	45.63	-4.40	41.23	74.00	-32.77	Peak

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

UTTR-RF-RSS210-V1.1

5.4 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.249(a)
RSS-210 Issue 11, Annex B.10

Test Method: ANSI C63.10-2020+COR. 1-2023+C63.10A-2024 + ERRATA TO C63.10A-2024

Limits:

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Frequency	Limit (dB μ V/m @3m)	Remark
30 MHz-88 MHz	40.0	Quasi-peak Value
88 MHz-216 MHz	43.5	Quasi-peak Value
216 MHz-960 MHz	46.0	Quasi-peak Value
960 MHz-1 GHz	54.0	Quasi-peak Value
Above 1 GHz	54.0	Average Value
	74.0	Peak Value

Test Setup: Refer to section 4.4.1 for details.

Test Procedures:

Radiated band edge measurements at 902 MHz and 928 MHz were made with the unit transmitting in the low end of the channel range and the high end closest to the restricted bands respectively. The emissions were made on the 966 Semi-Chamber. Use (resolution bandwidth (RBW) = 100 kHz, video bandwidth (VBW) = 300 kHz for peak levels.

1. Use radiated spurious emission test procedure described in clause 5.3. The transmitter output (antenna port) was connected to the test receiver.
2. Set the QP limit line.

Equipment Used: Refer to section 3 for details.

Test Result: Pass

The measurement data as follows:

Freq. (MHz)	Read Value (dB μ V)	Factor (dB)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	EUT Axis	Detector	Antenna polarization
902.00	25.64	4.65	32.18	46	-13.82	X Axis	Quasi-peak	Vertical
915.27	80.80	4.65	87.34	94	-6.64	X Axis	Quasi-peak	Vertical
928.00	27.02	4.65	33.51	46	-12.49	X Axis	Quasi-peak	Vertical
902.00	26.43	4.65	32.97	46	-13.03	X Axis	Quasi-peak	Horizontal
915.27	85.99	4.65	92.53	94	-1.47	X Axis	Quasi-peak	Horizontal
928.00	26.97	4.65	33.46	46	-12.54	X Axis	Quasi-peak	Horizontal

5.5 20DB OCCUPIED BANDWIDTH & OCCUPIED BANDWIDTH

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.215 (c)
RSS-Gen Issue 5, Section 6.7

Test Method: ANSI C63.10-2020+COR. 1-2023+C63.10A-2024 + ERRATA TO C63.10A-2024

Test Setup: Refer to section 4.4.3 for details.

Limits: N/A

Equipment Used: Refer to section 3 for details.

The measurement procedure shall be as follows:

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

20dB Bandwidth

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

- Set RBW = 1% to 5% of the occupied bandwidth
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.


Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Result: Pass

The measurement data as follows:

Test Channel	Occupied Bandwidth(kHz)	20 dB Bandwidth (kHz)
915.27 MHz	10.773	10.76

The test plot as follows:

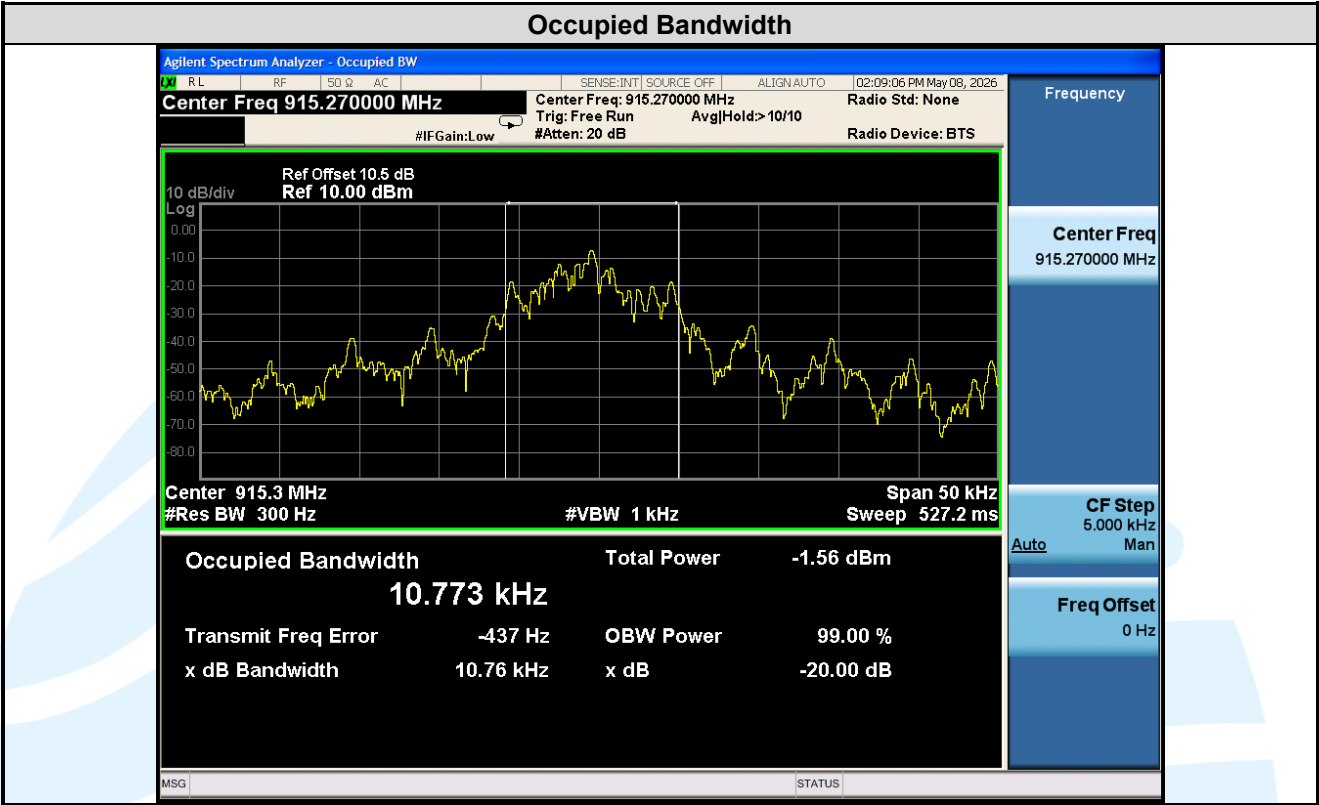

APPENDIX 1 PHOTOS OF TEST SETUP

See test photos attached in Appendix 1 for the actual connections between Product and support equipment.

APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photos.

*** End of Report ***

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.
