

承 認 書

SPECIFICATION FOR APPROVAL

客 戶: CUSTOMER:	
客 戶 料 號: CUST P/N:	
聚 福 料 號: FINE P/N:	G43.5 Dual Groove - 6.5UH Single Coil 0.08*24*2P-10TS
產 品 型 號: DESC:	Φ43.5MMX5.0MMX0.6MM
日 期: DATE:	2024/5/4
版 本: Version:	A.0

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
陈小英	宁元	周文韬	

东莞聚福电子科技有限公司

Dongguan Jufu Electronics Technology Co., Ltd.

Address: Sukeng Village, Changping Town, Dongguan City


TEL: 15015156515

FAX: 0769-84526500


E-mail: 281749556@qq.com

Version Change History

[illegible]

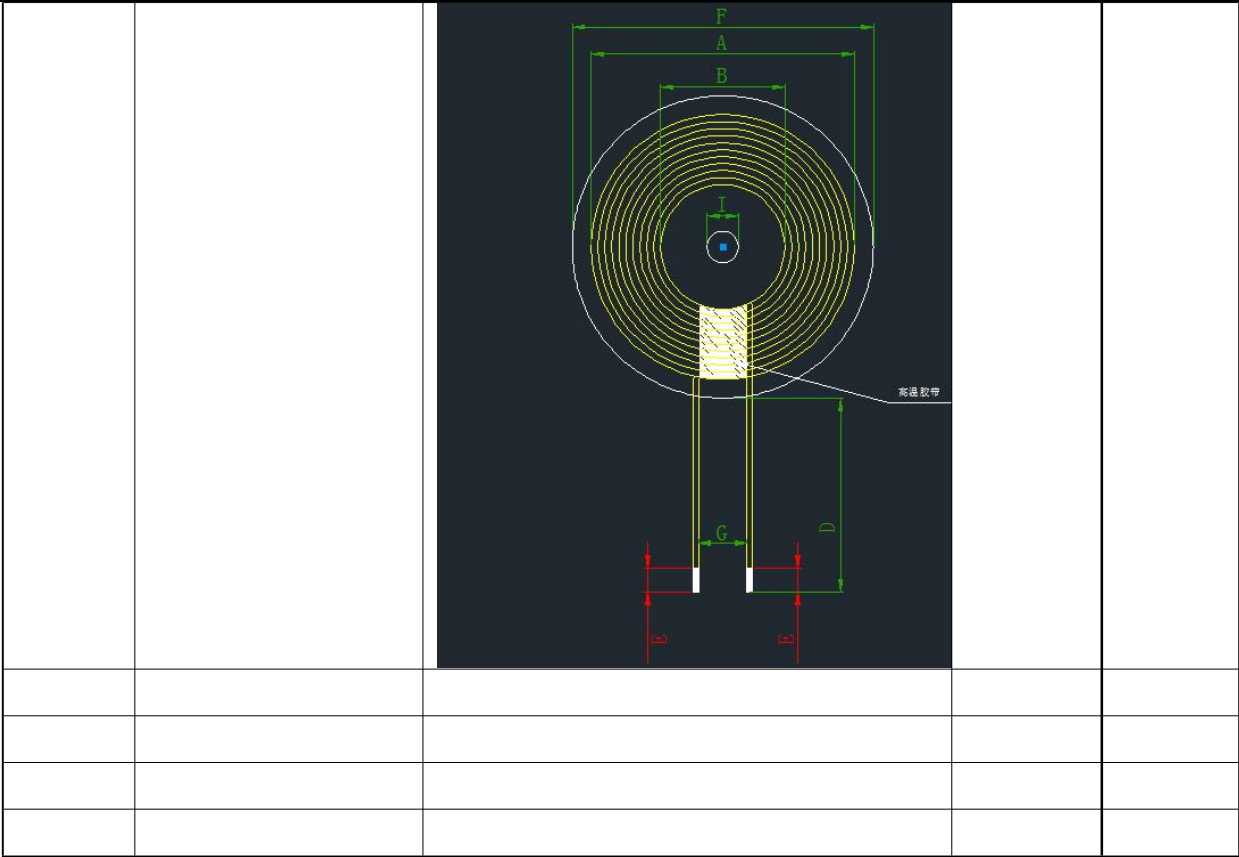

SPECIFICATION

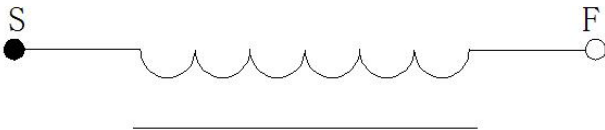產 品 型 號: DESC	Φ43.5MM*5MM*0.6MM	版本	客戶 CUST:	XXX
		Rev: A.0	客戶料号 CUST P/N:	
一、尺寸 DIMENSION:(mm)			A	38.50±1.5
			B	20.5±0.5
			C	1.25 Max
			D	45±2
			E	4±2
			F	43.5±1
			G	10.0 ref
			H	1.8 Max
			I	5.3 ref
二、原理图 SCHEMATIC DIAGRAM: 				
Notes:				
1. Cross-wiring;				
2. Wrap the wire exit points with 1 - 2 Ts of 7 mm (ref) wide high-temperature tape;				
3. Self-adhesive label				

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	Enameled Wire0.08*24*2P	10Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10℃, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.8 uH ±20% single coil	100KHz/0.25V	LCZ METER 1062B
2	IND.	S-F	6.3 uH ±10% magnetizing plate	100KHz/0.25V	LCZ METER 1062B
3	DCR	S-F	≤50m Ω		LCZ METER 502B

拟制/日期 PREPARED BY/DATE	审核/日期 CHECKED BY/DATE
陈小英 2024/03/23	周文韬 2025/3/31