






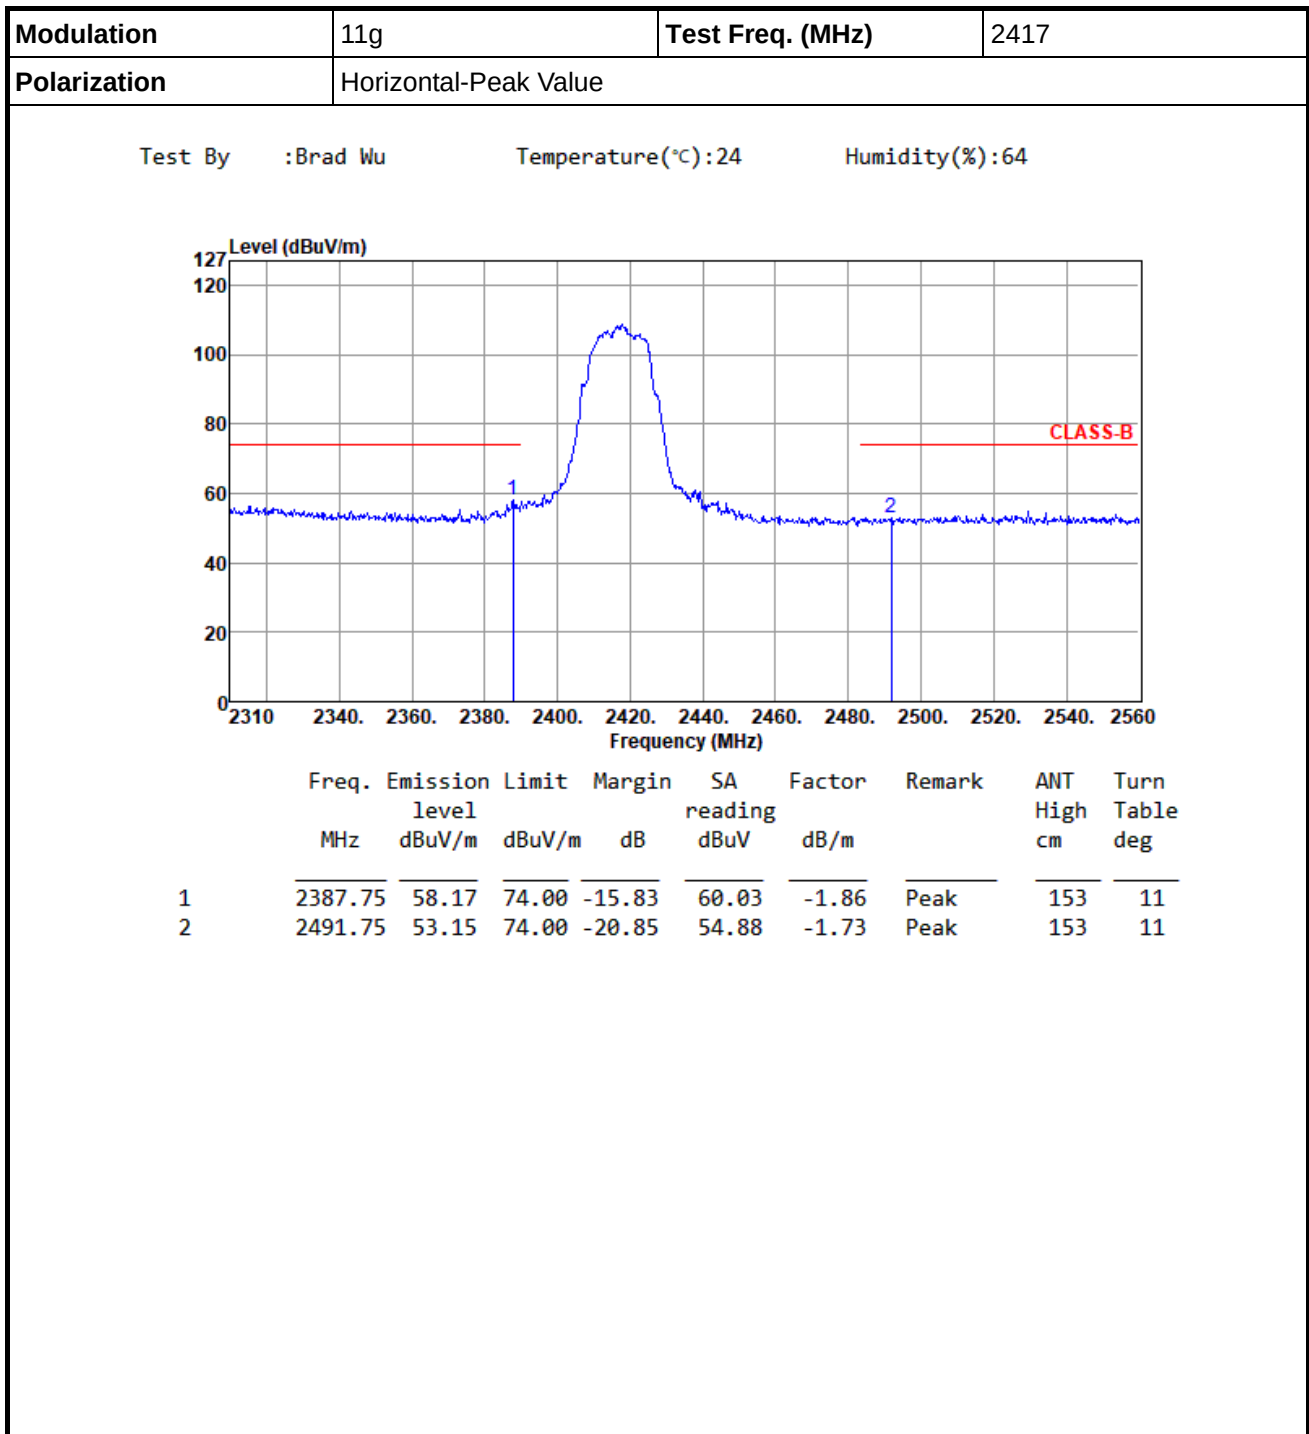


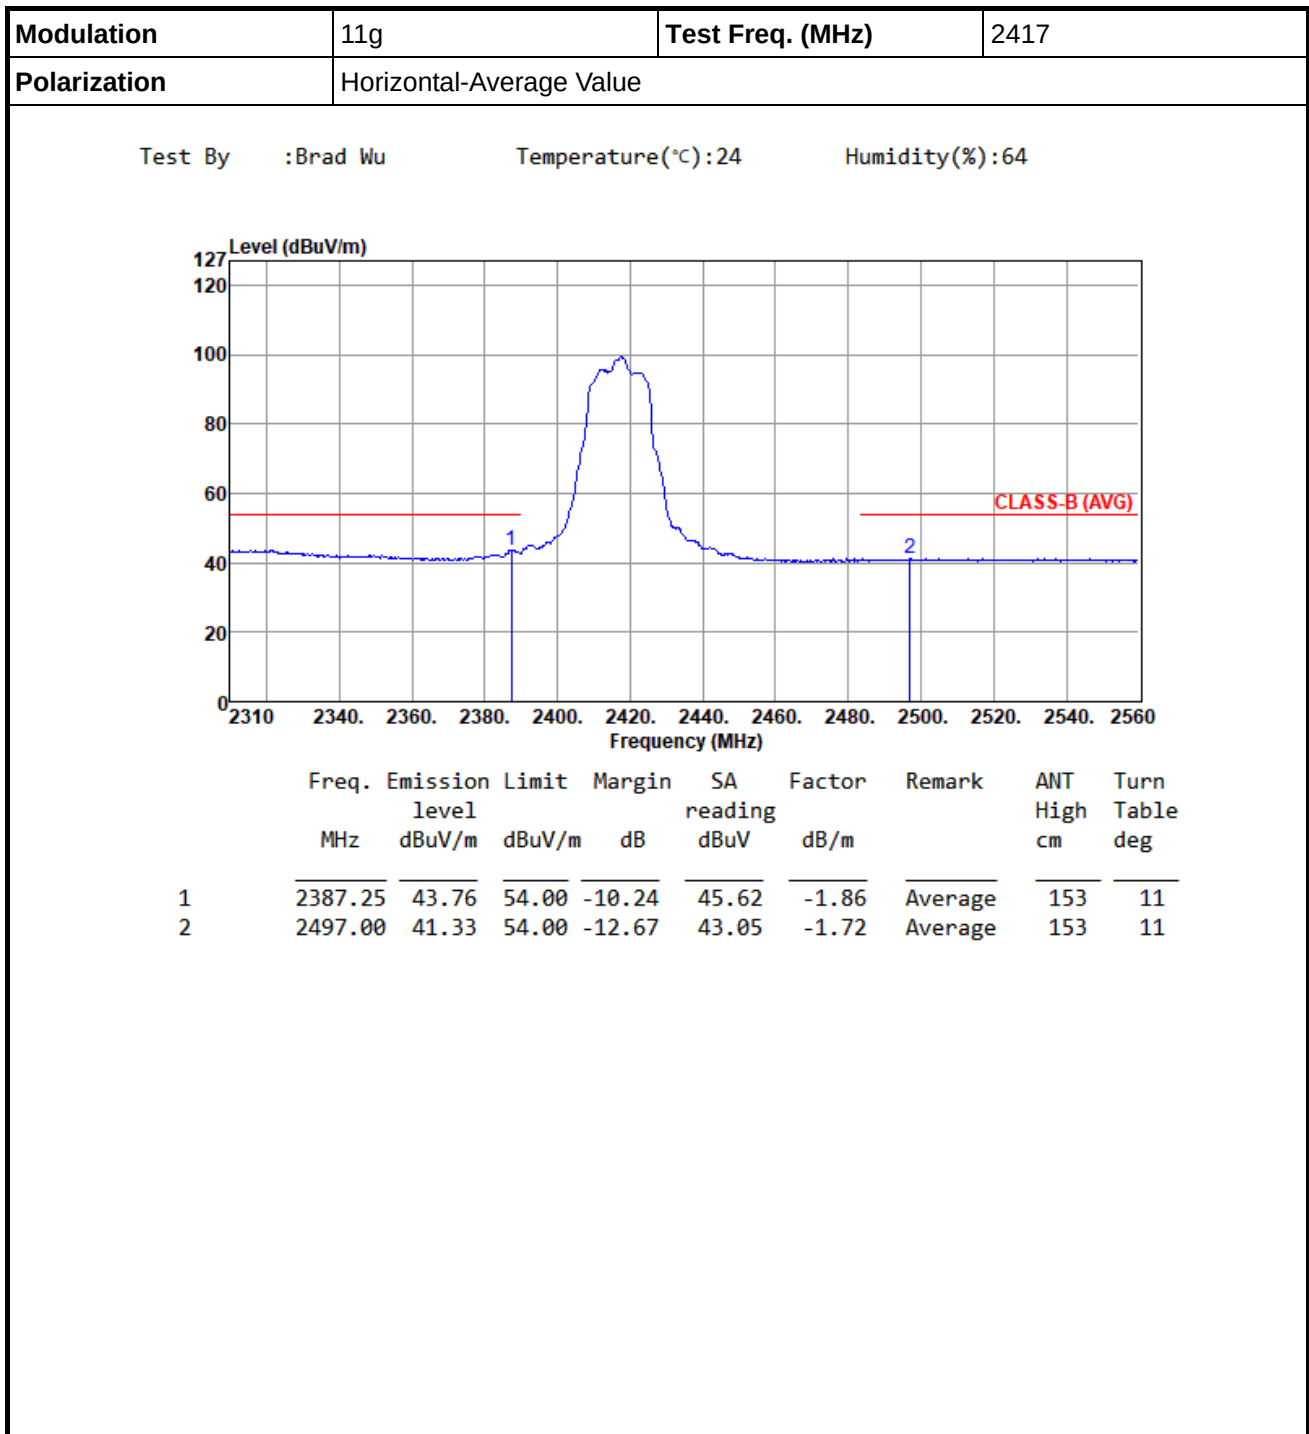


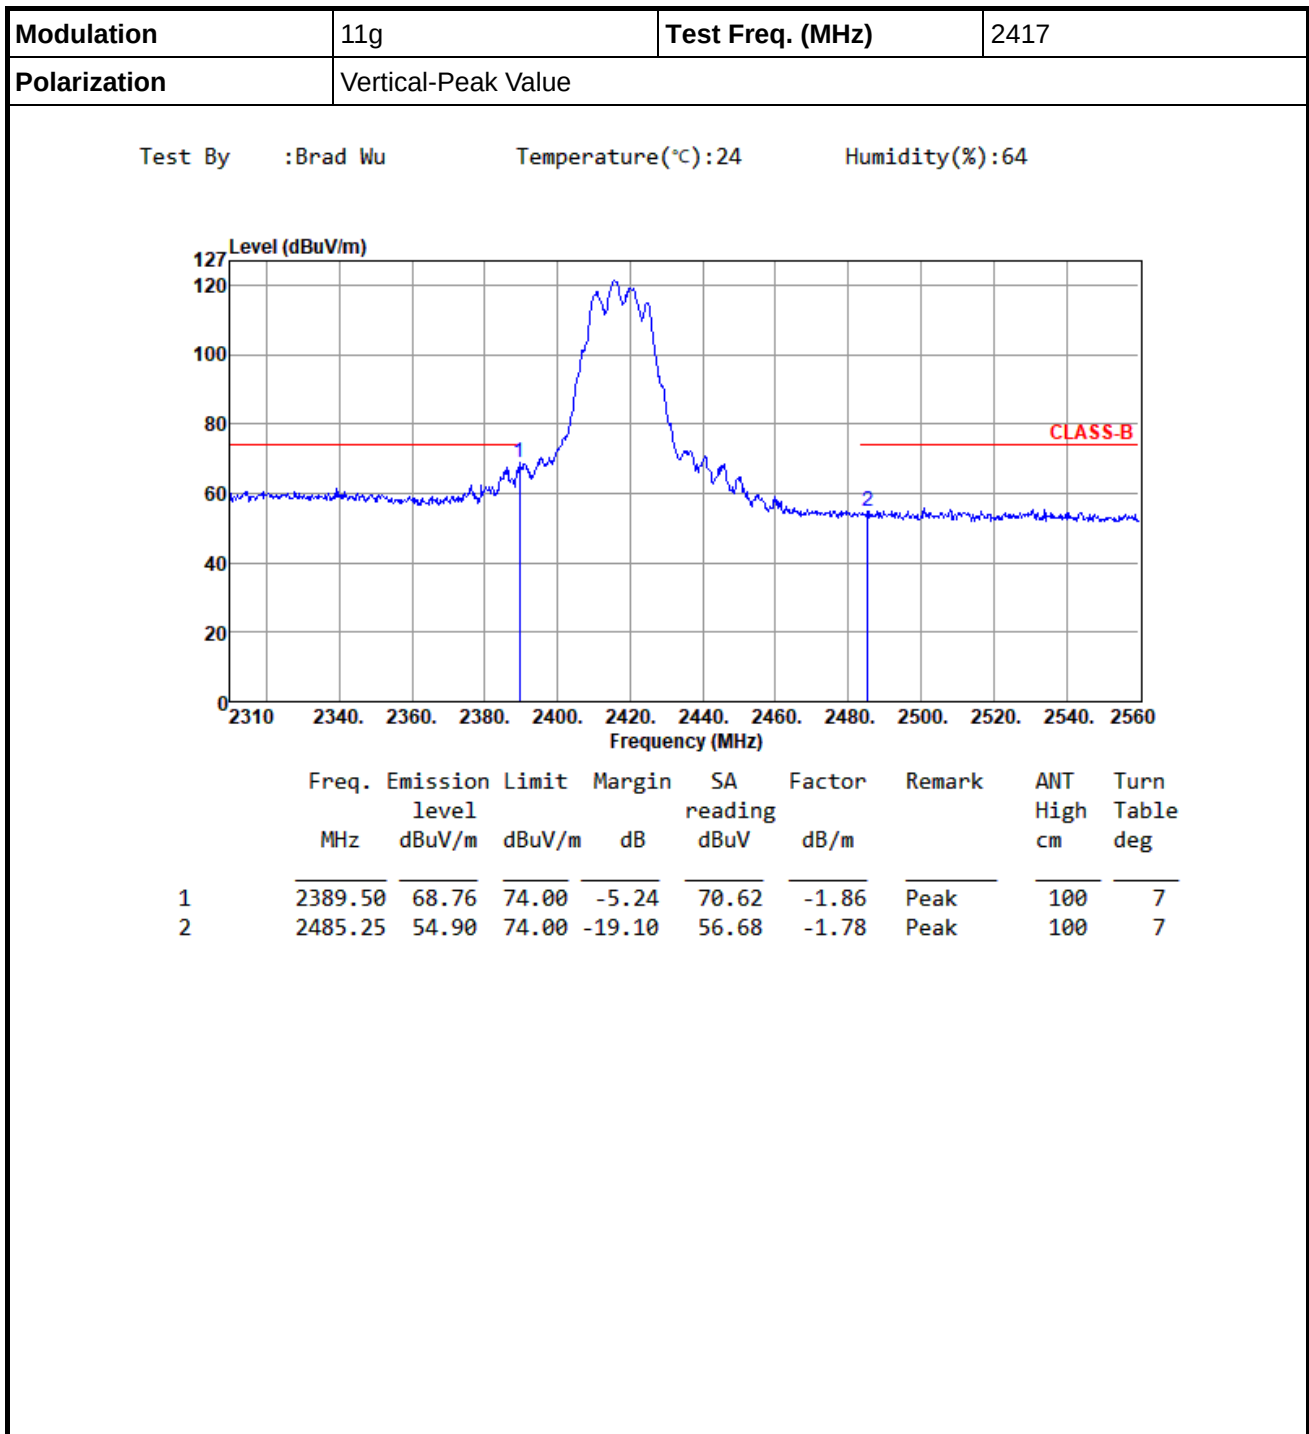


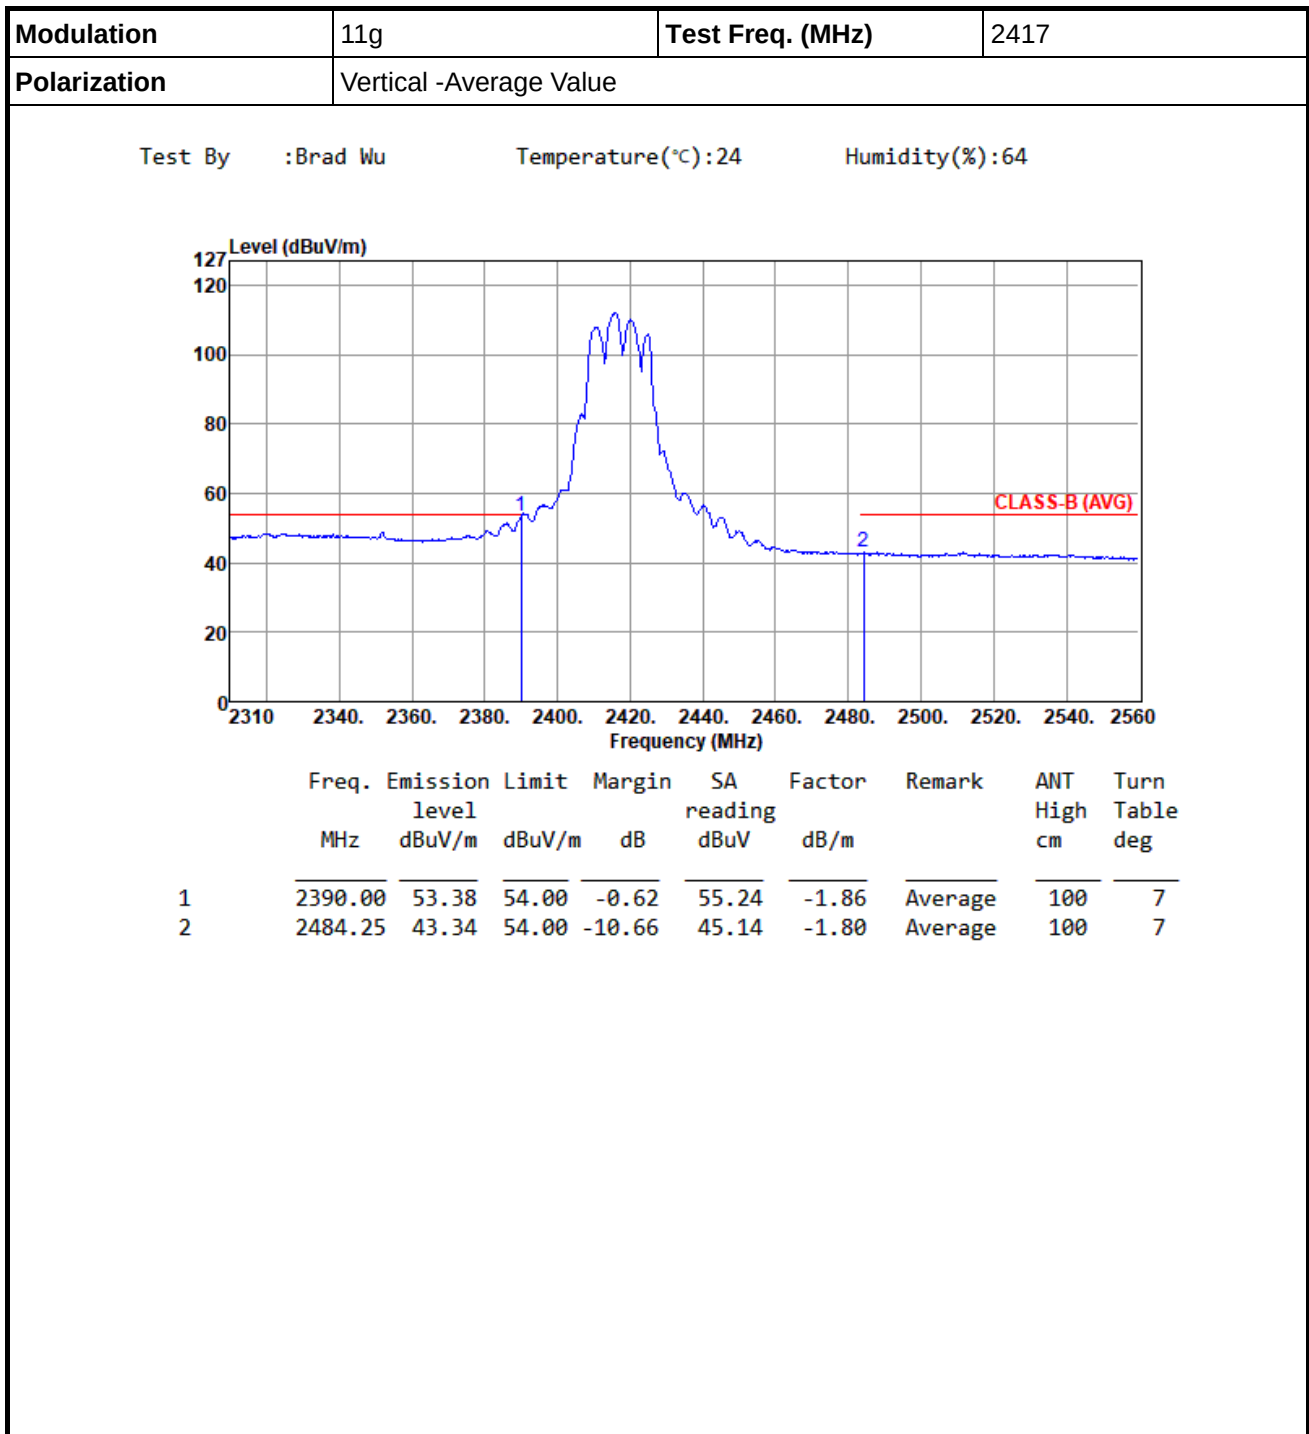


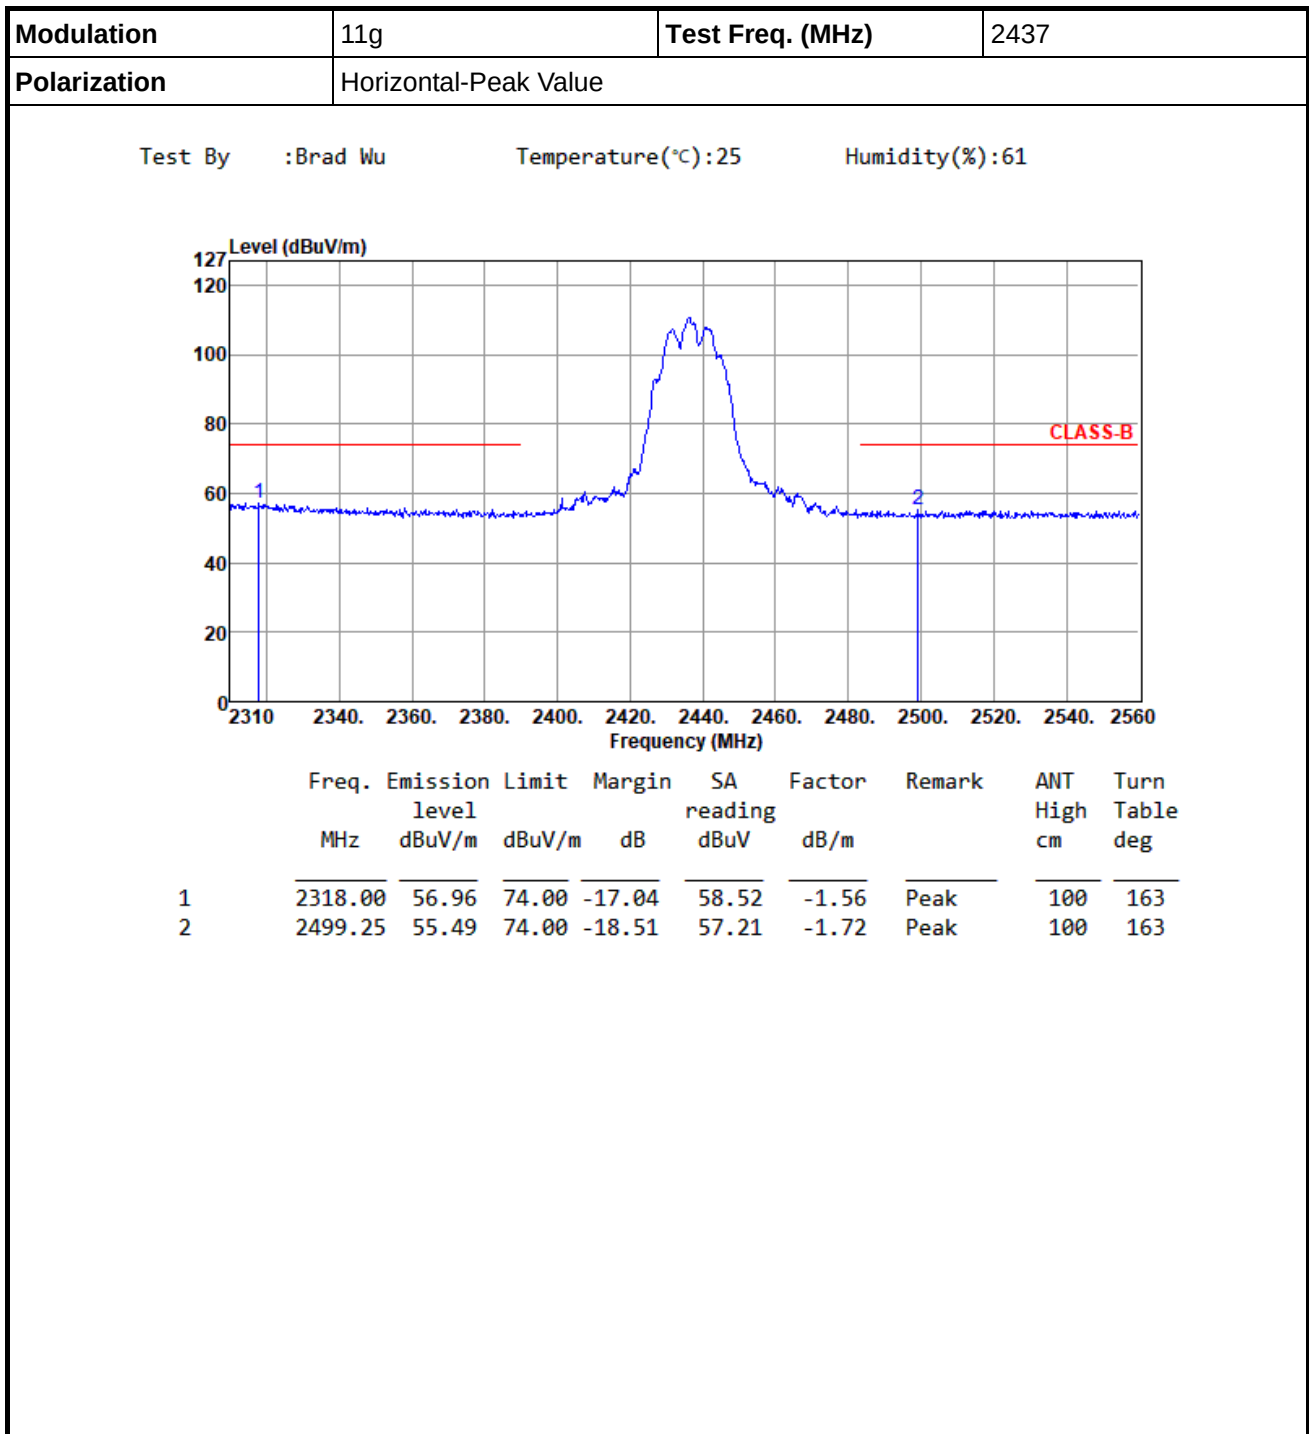


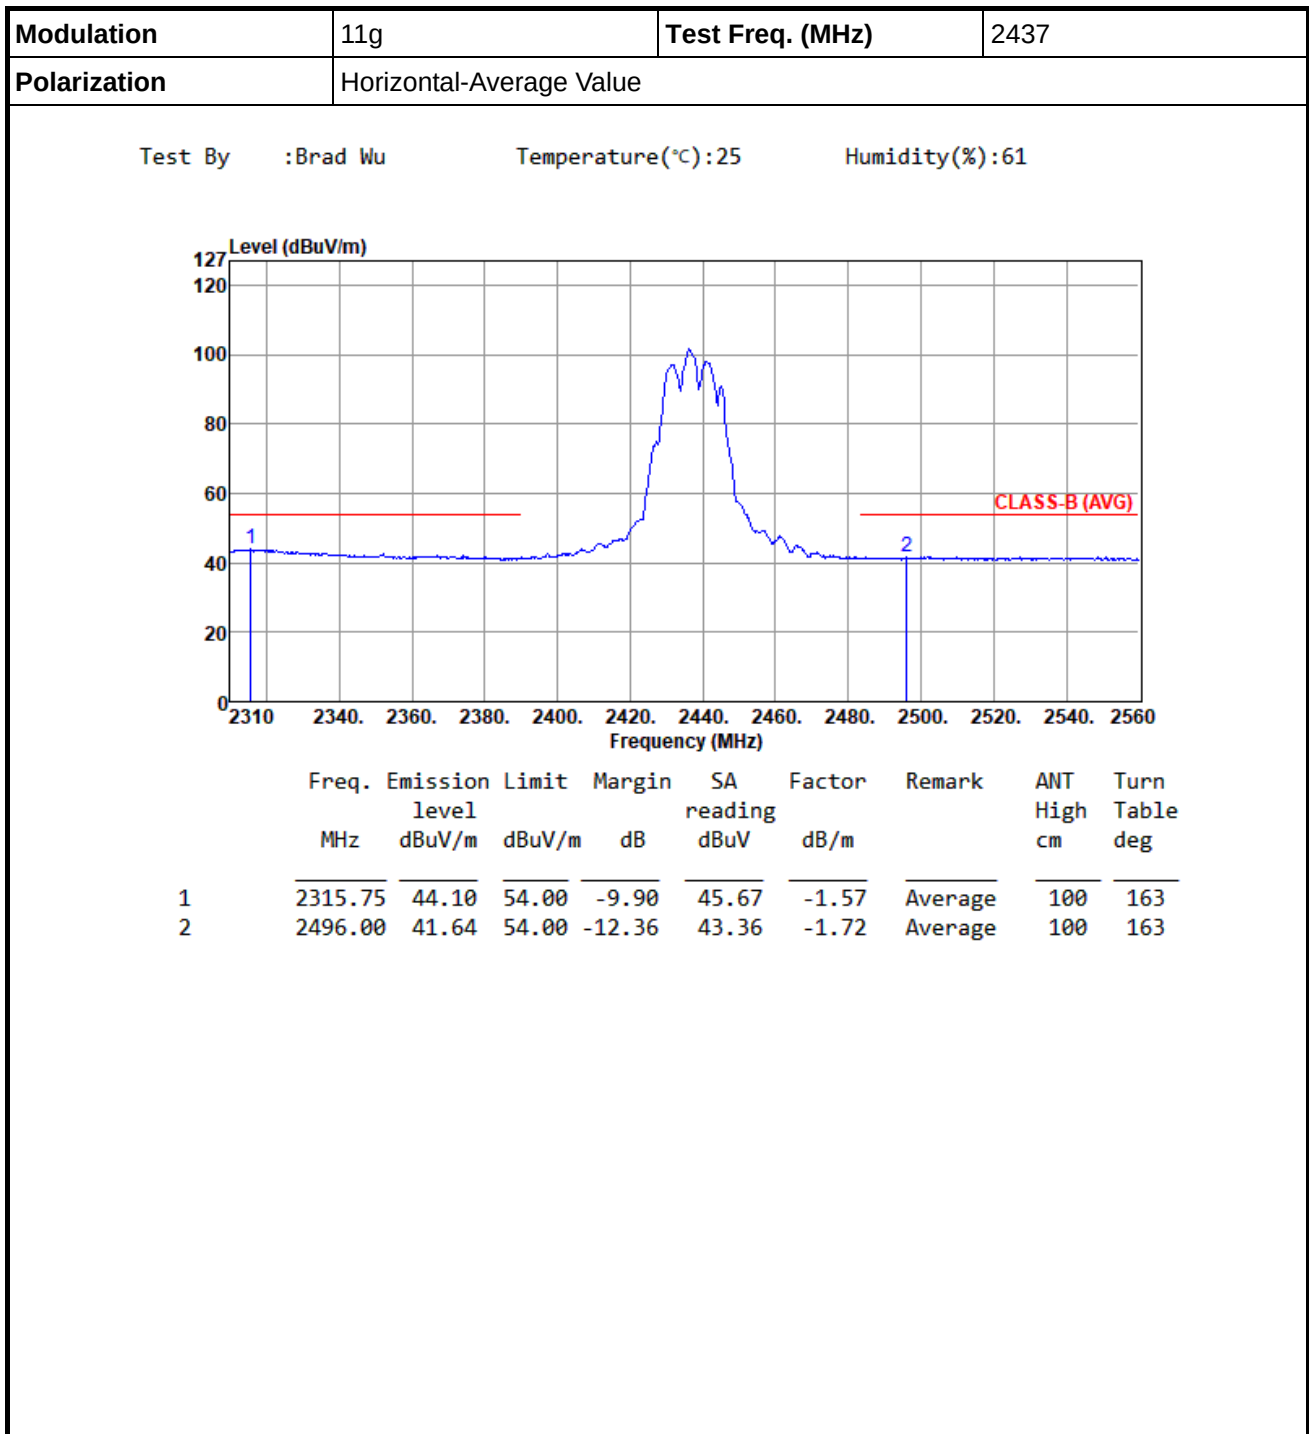


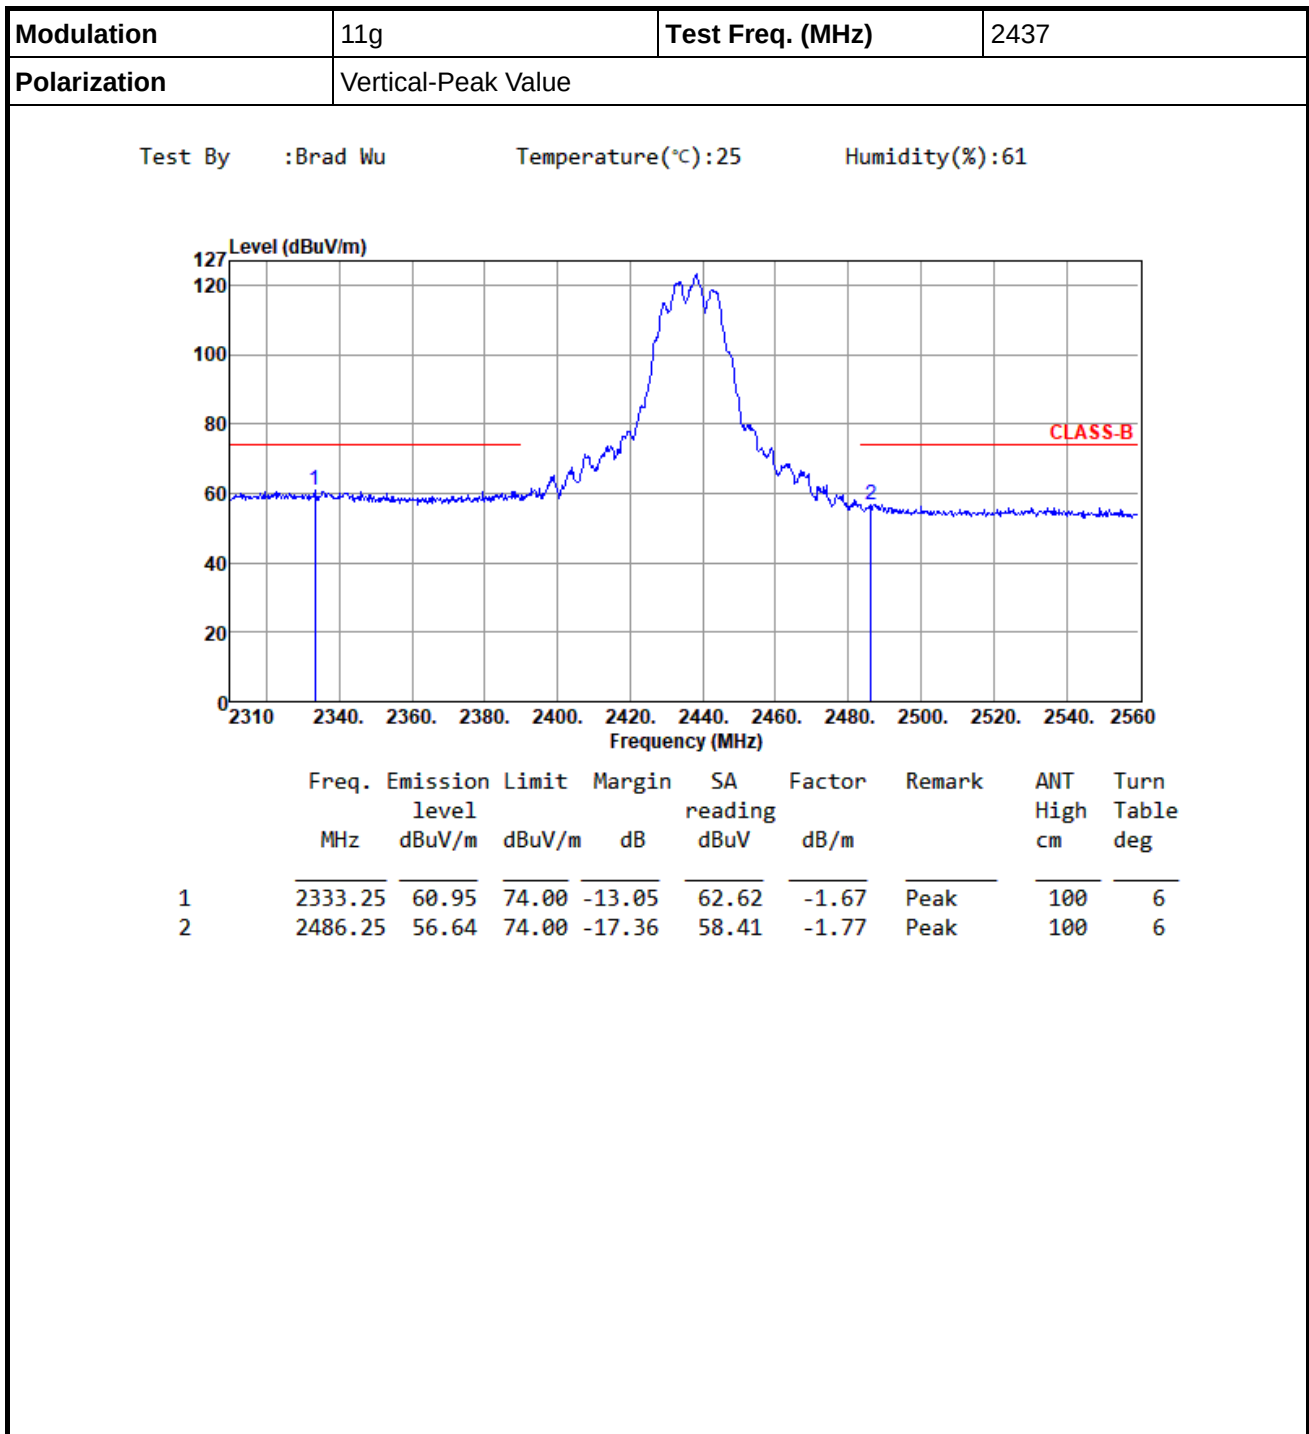


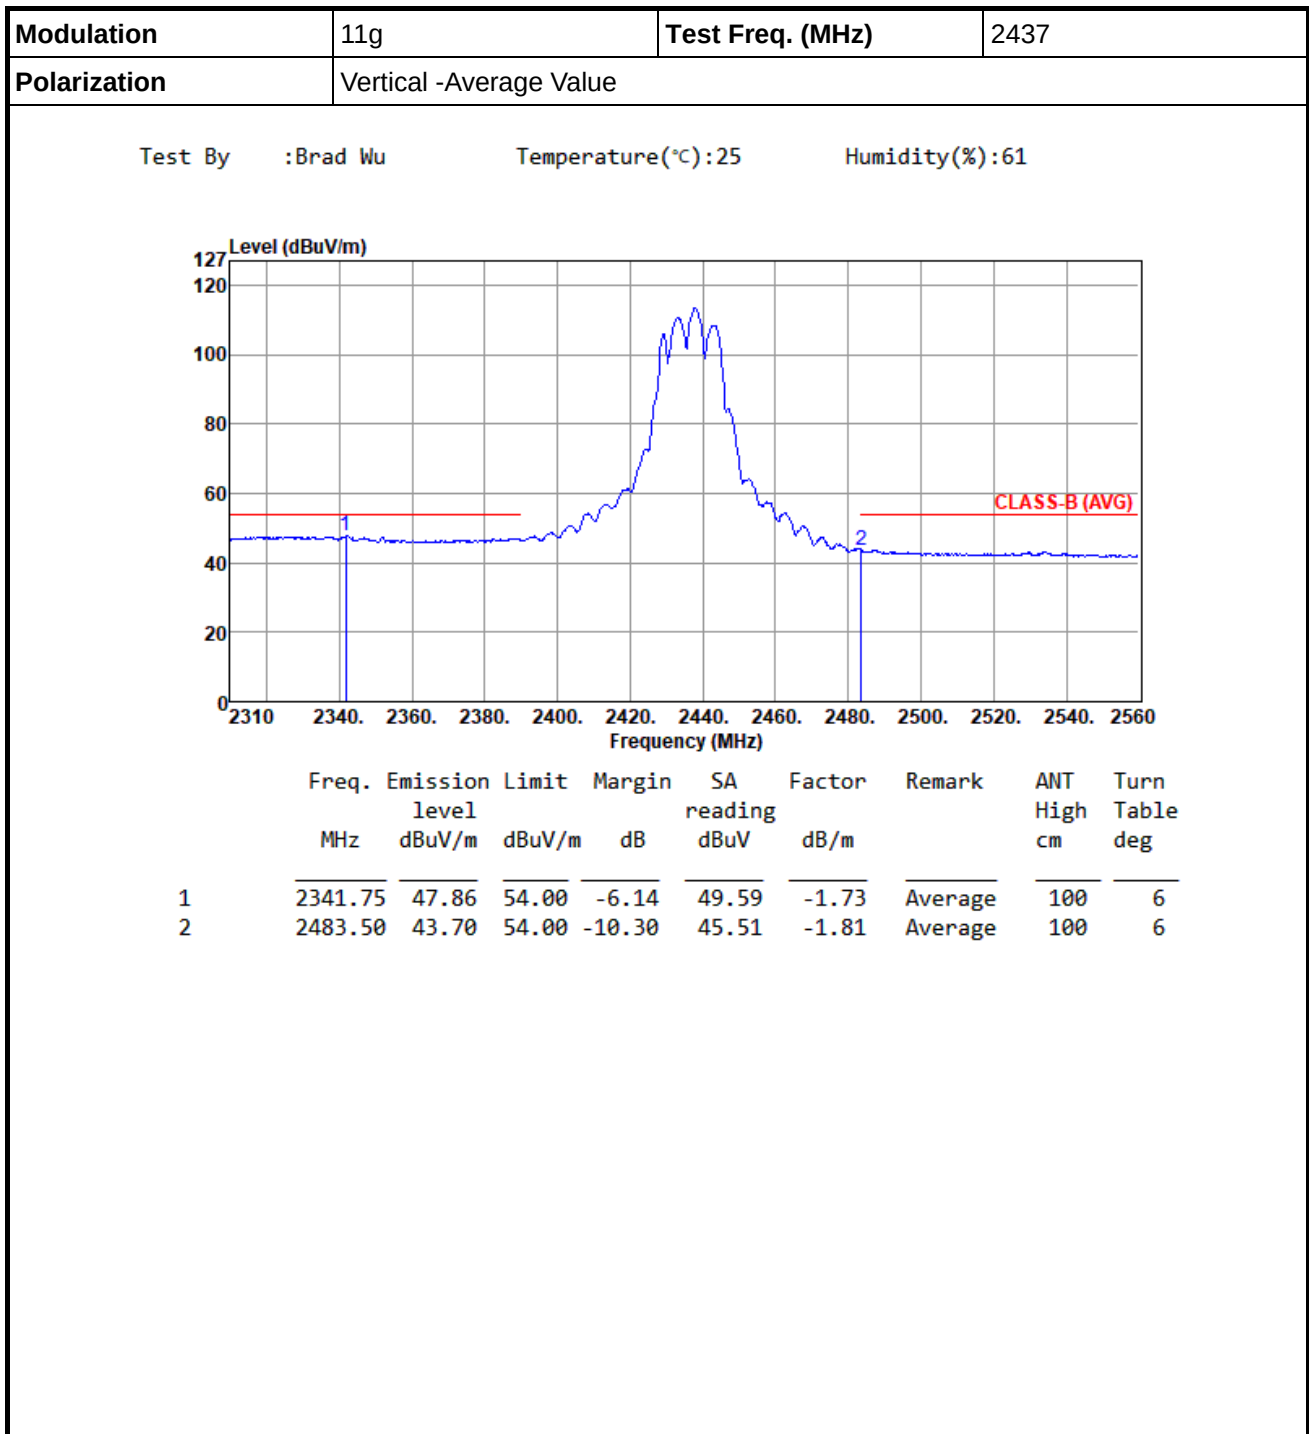


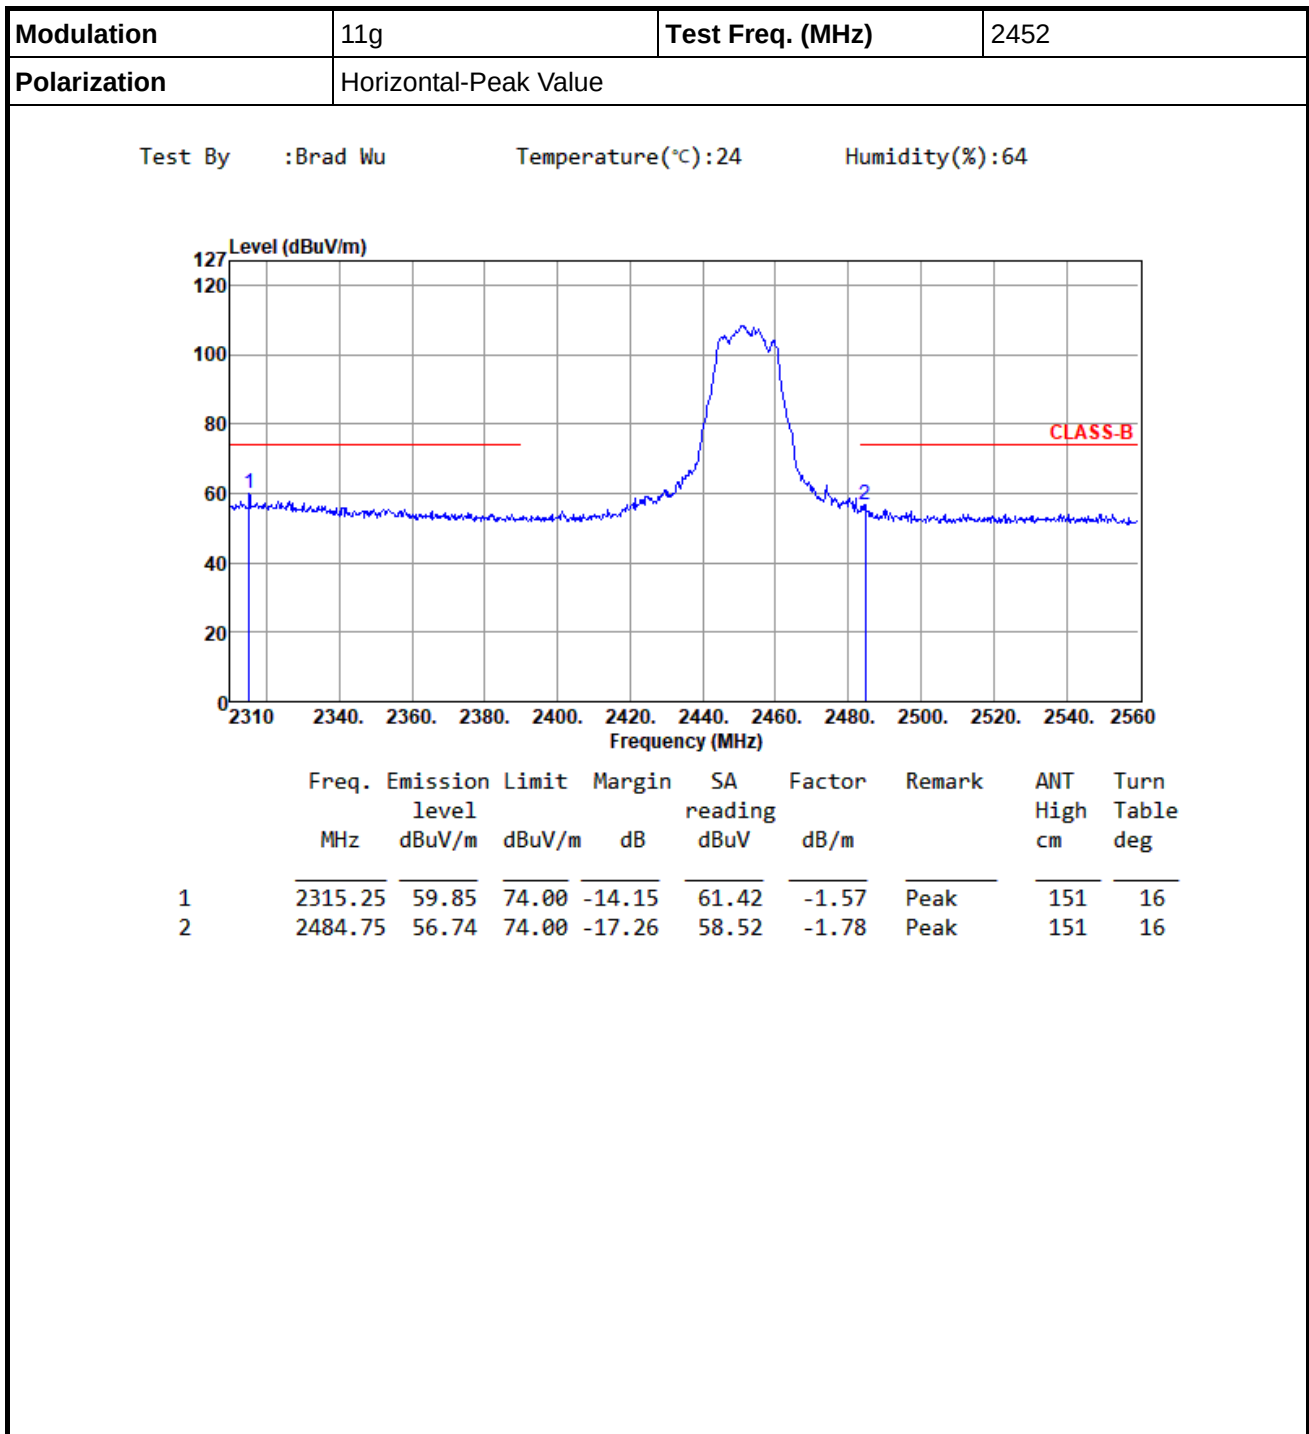


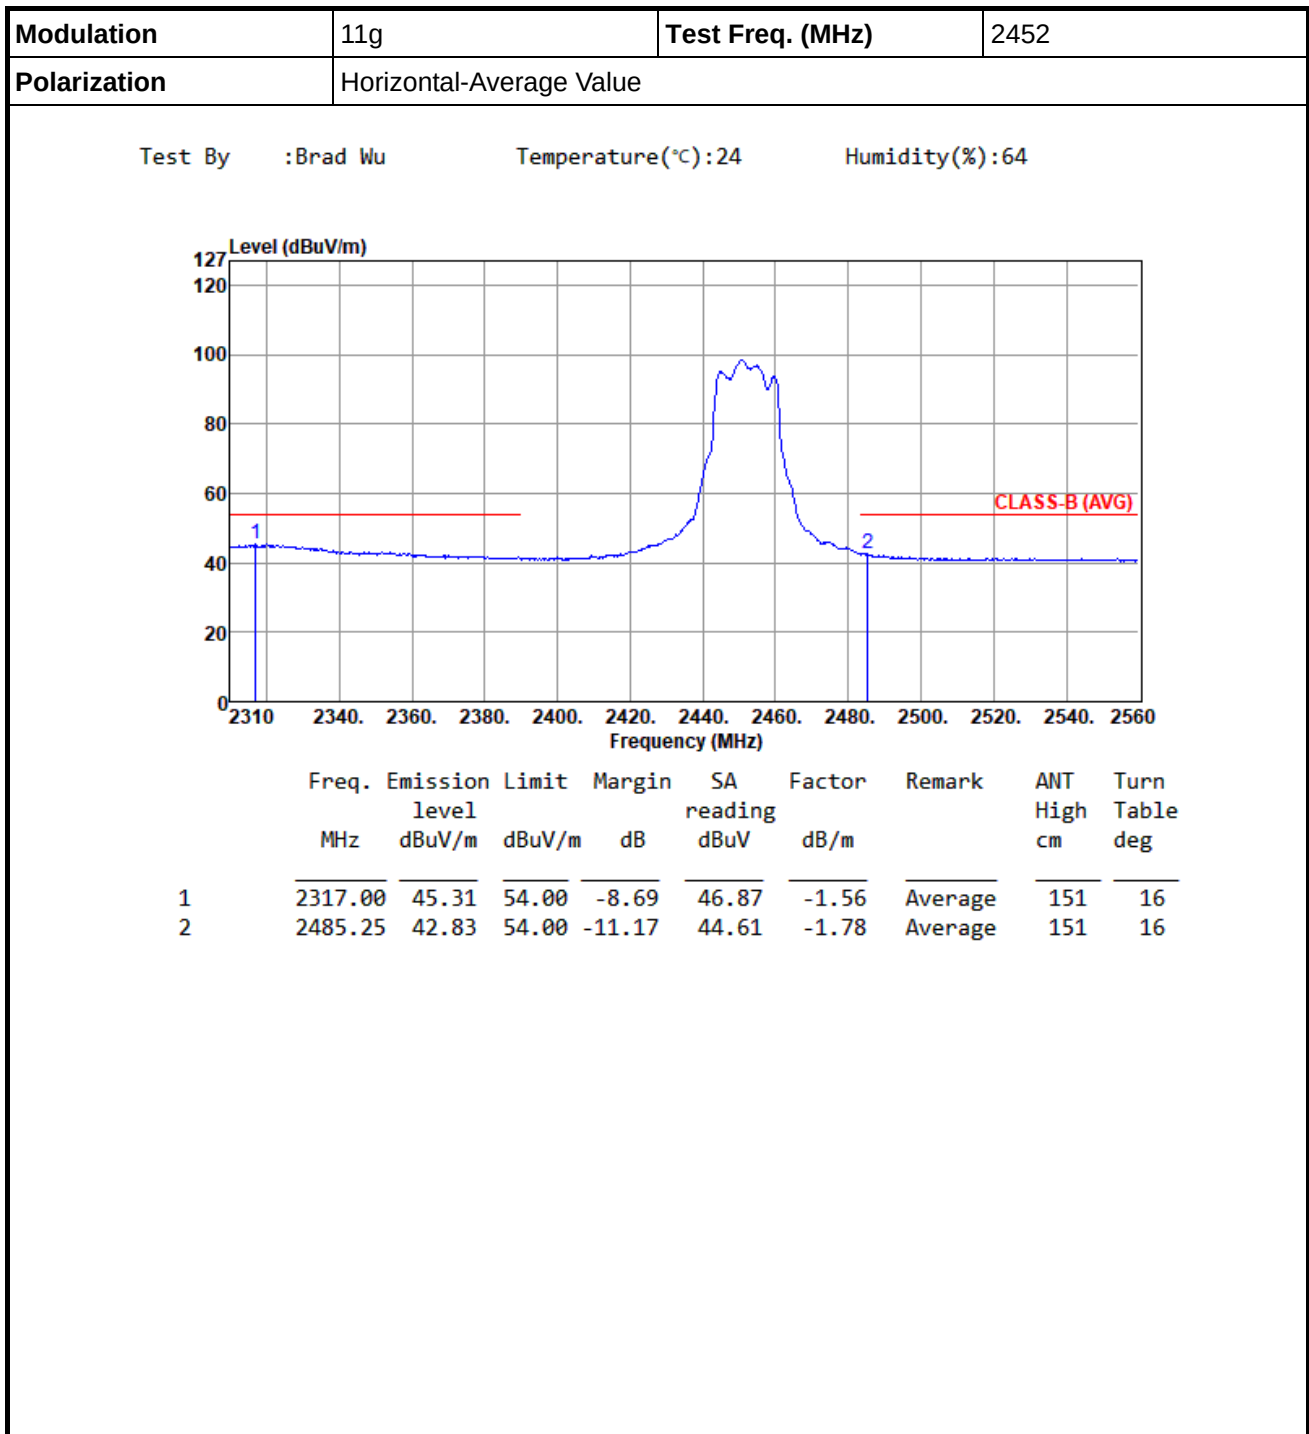


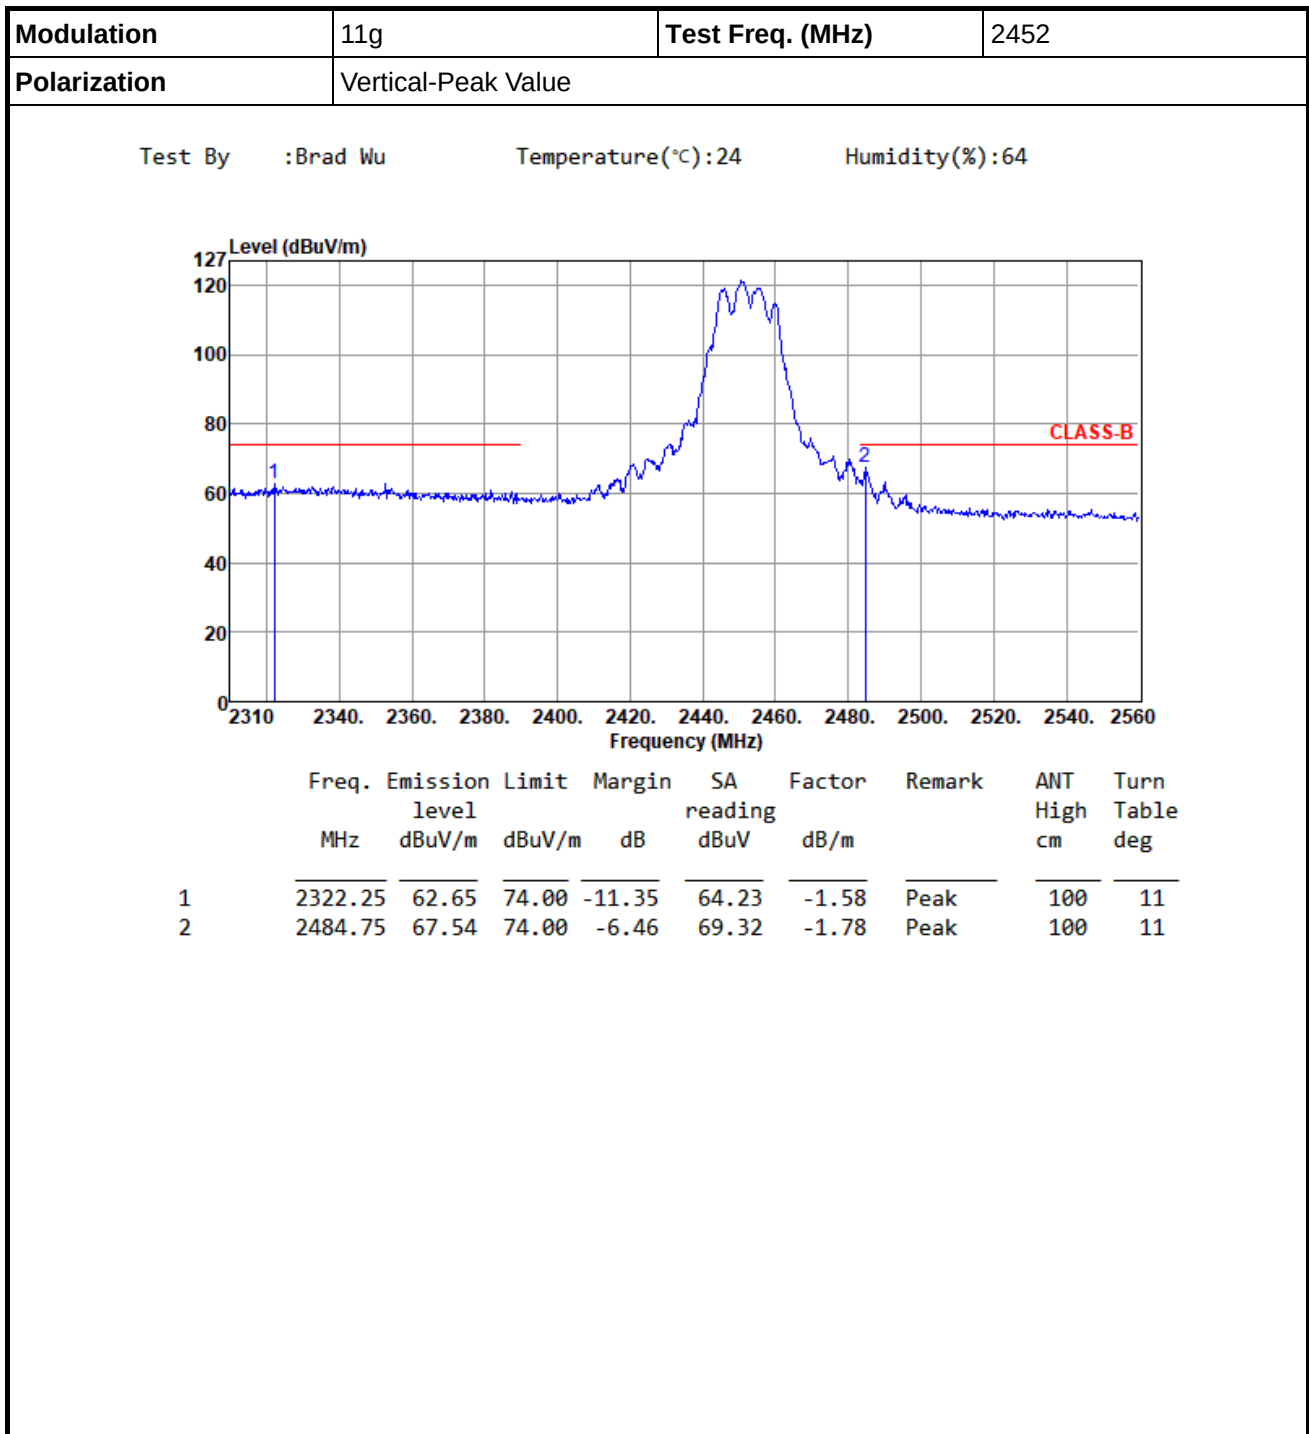


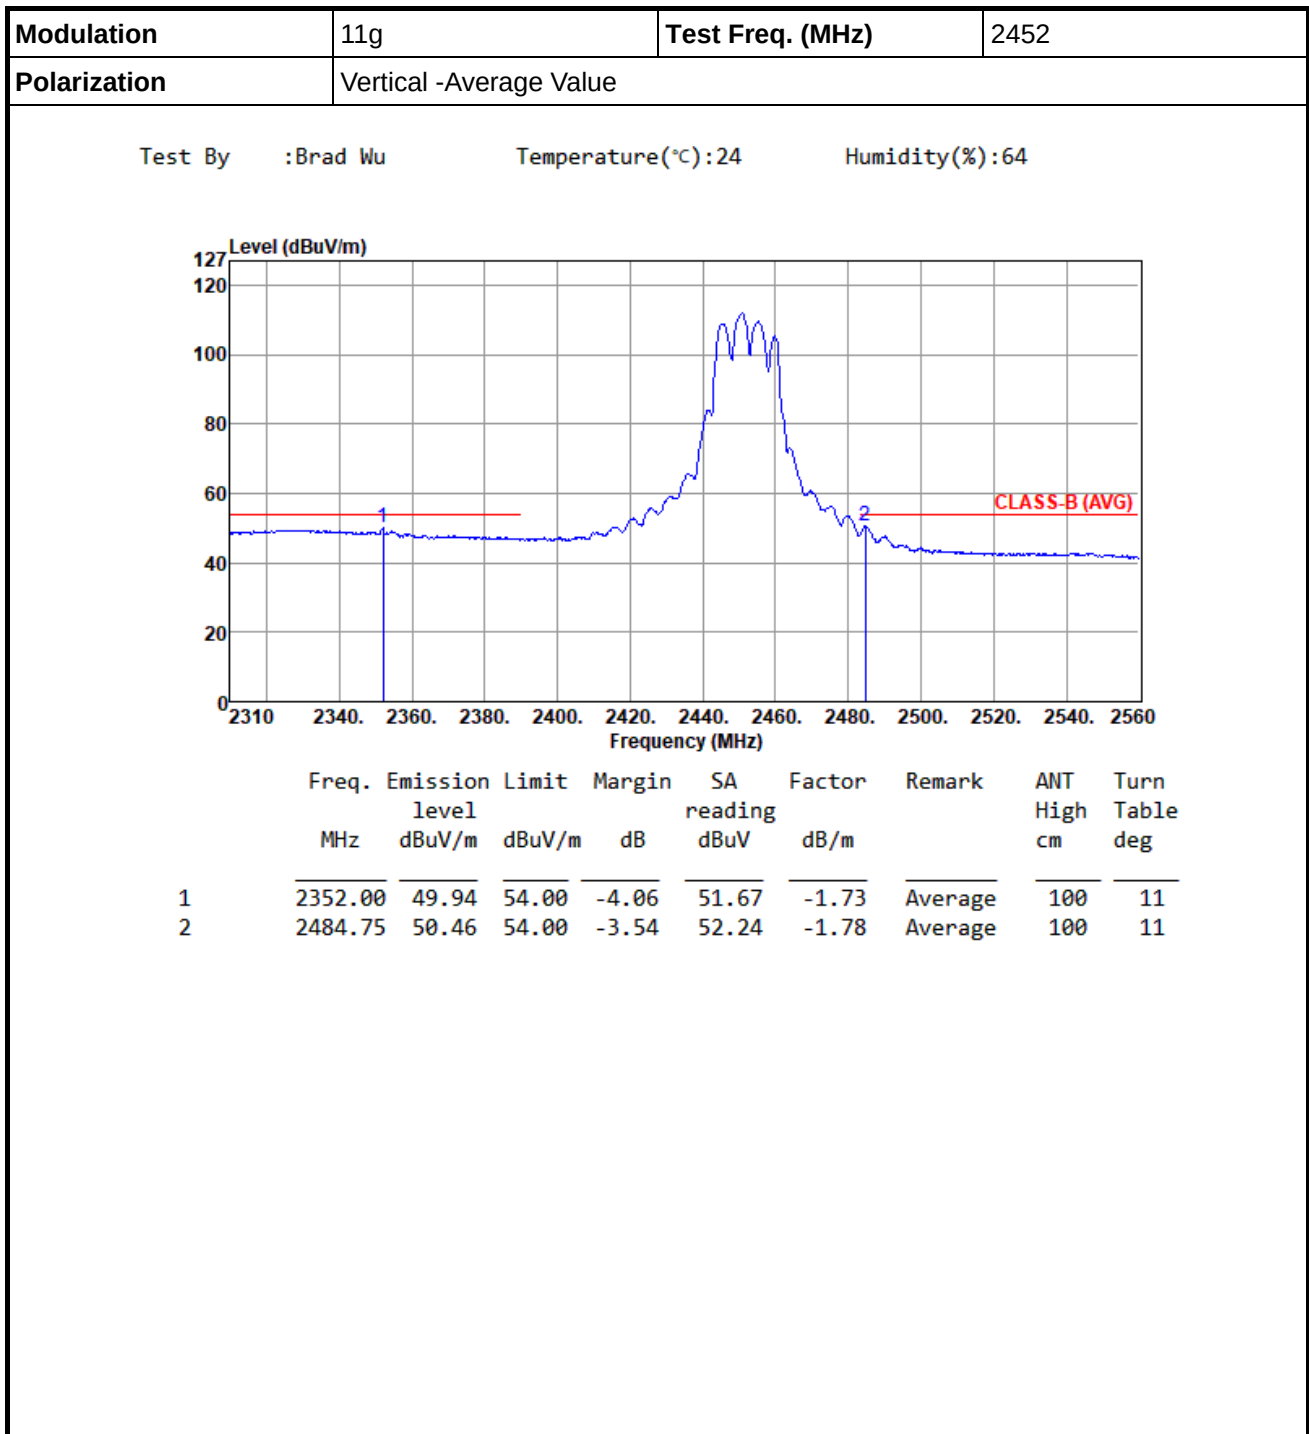


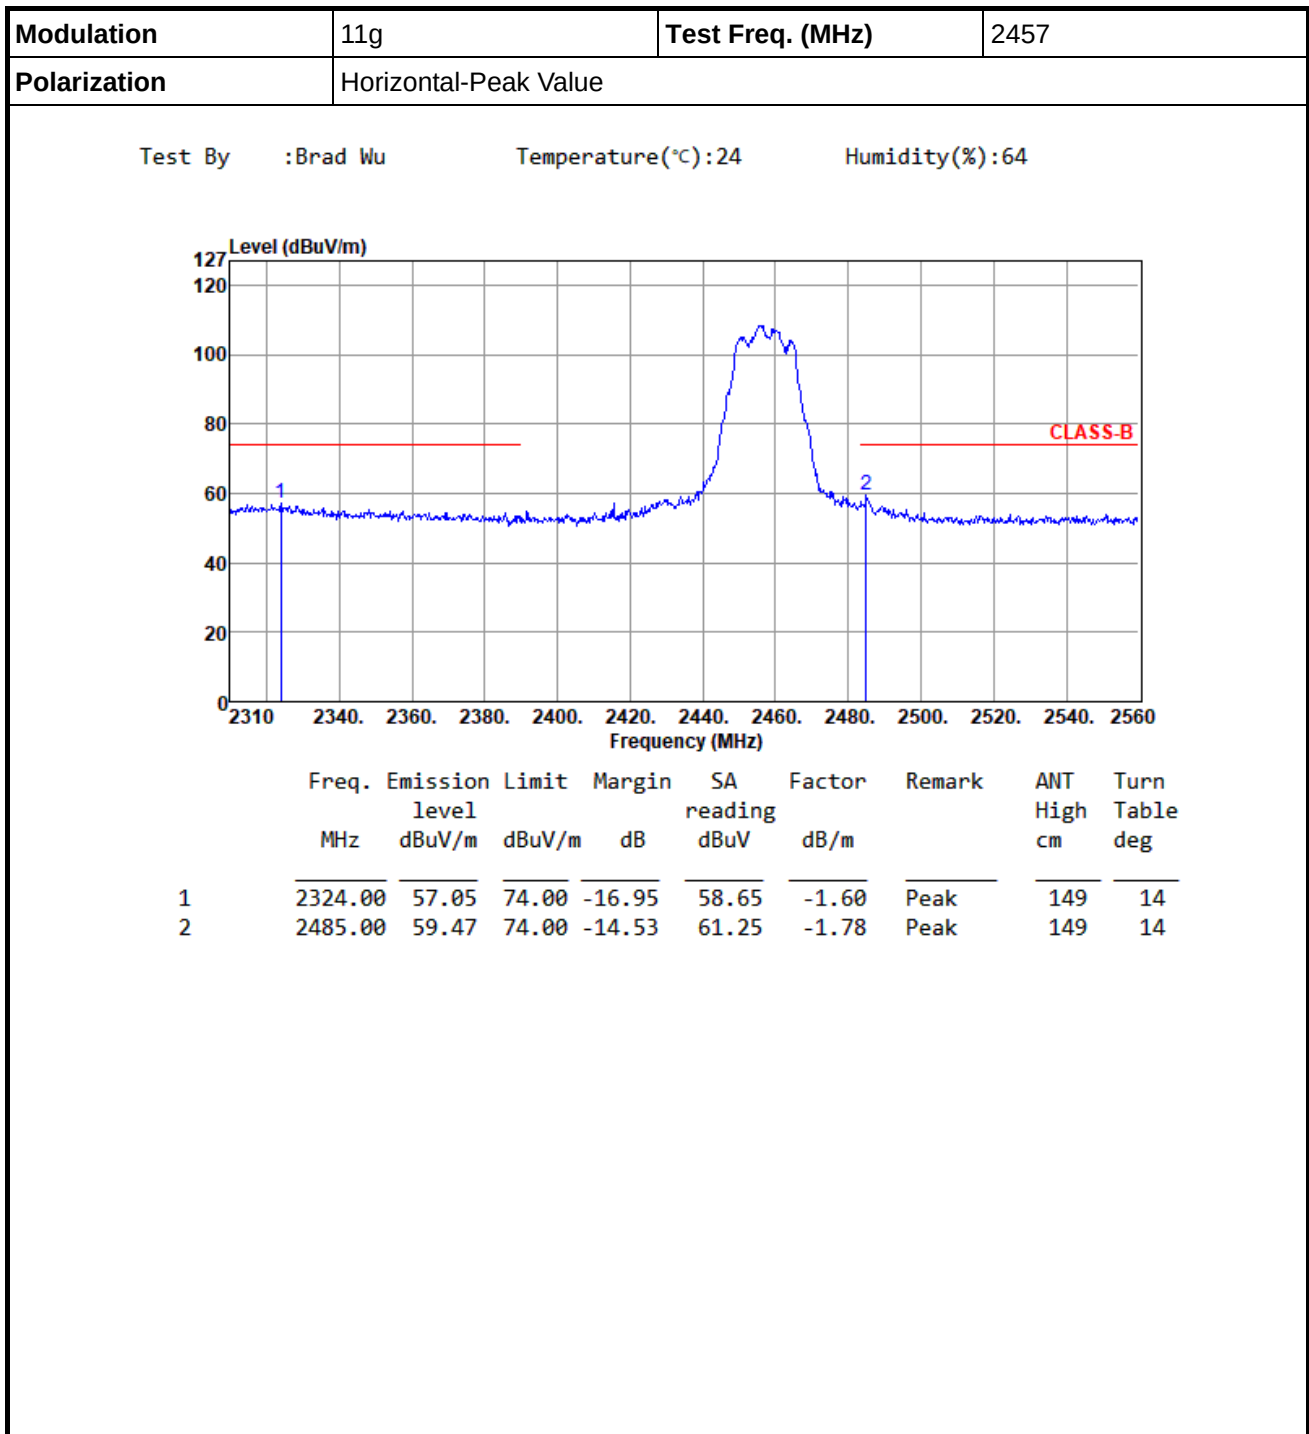


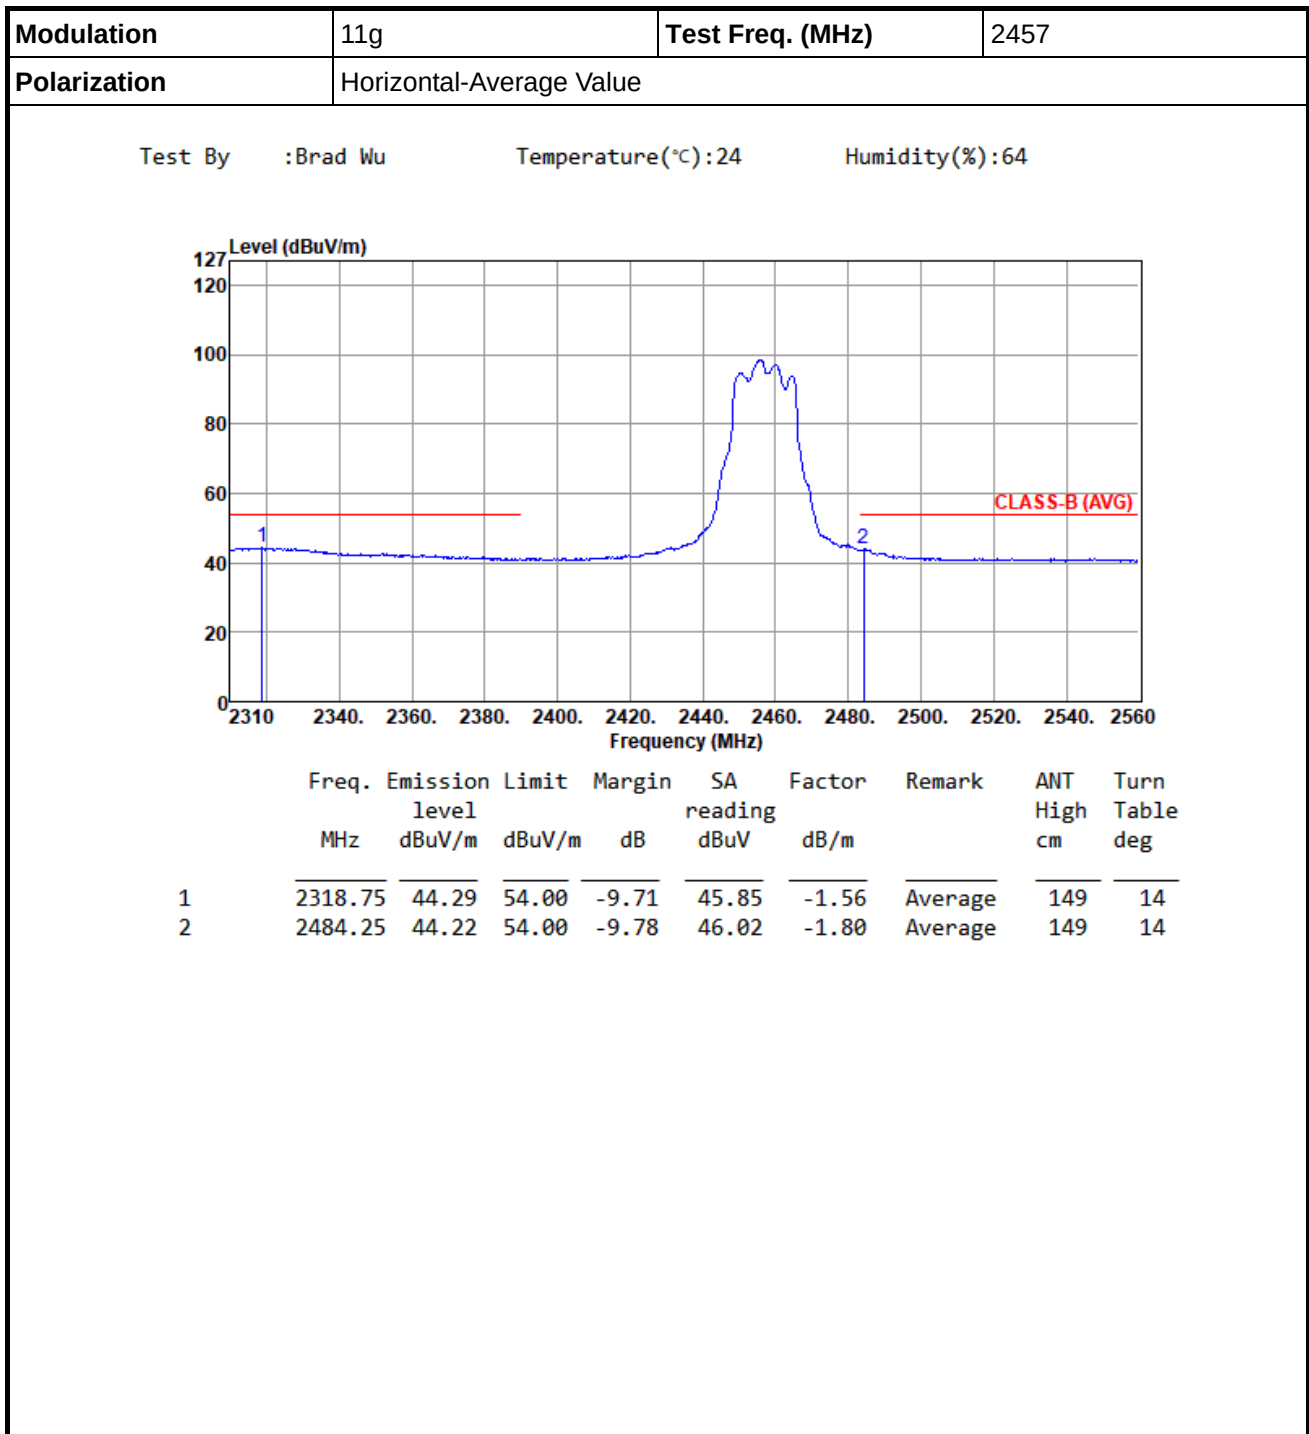


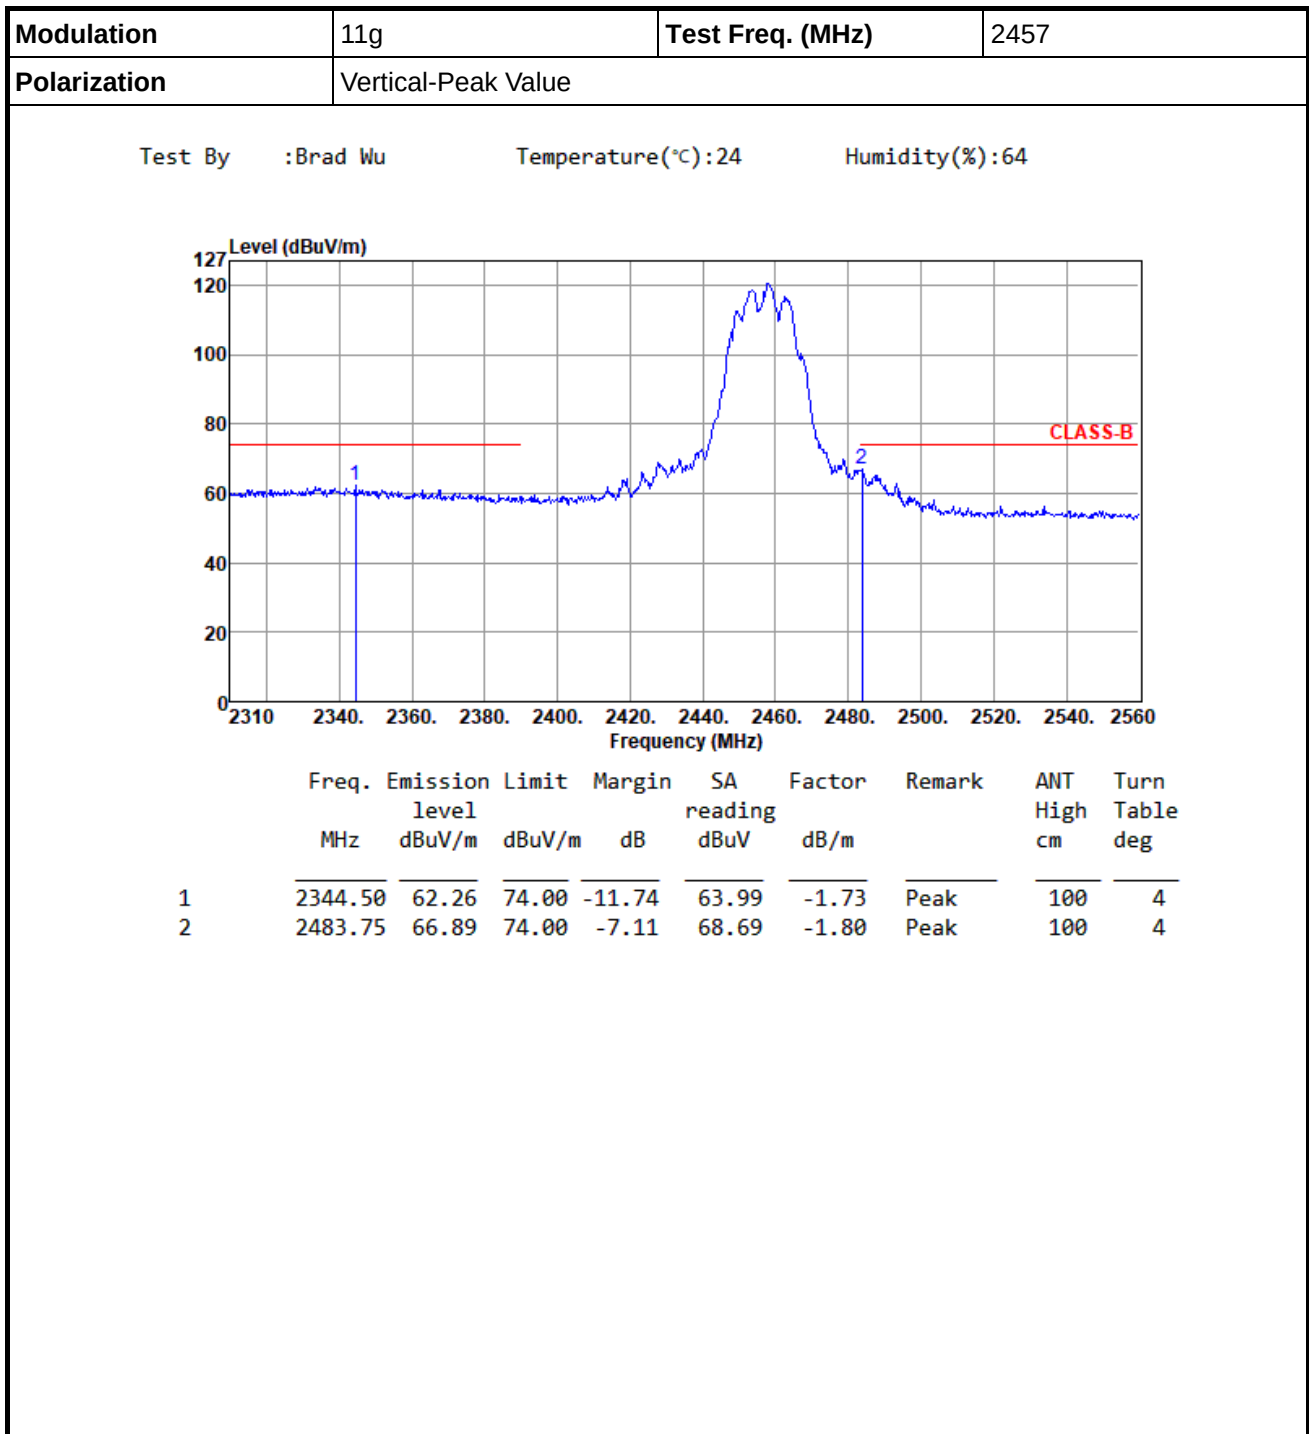


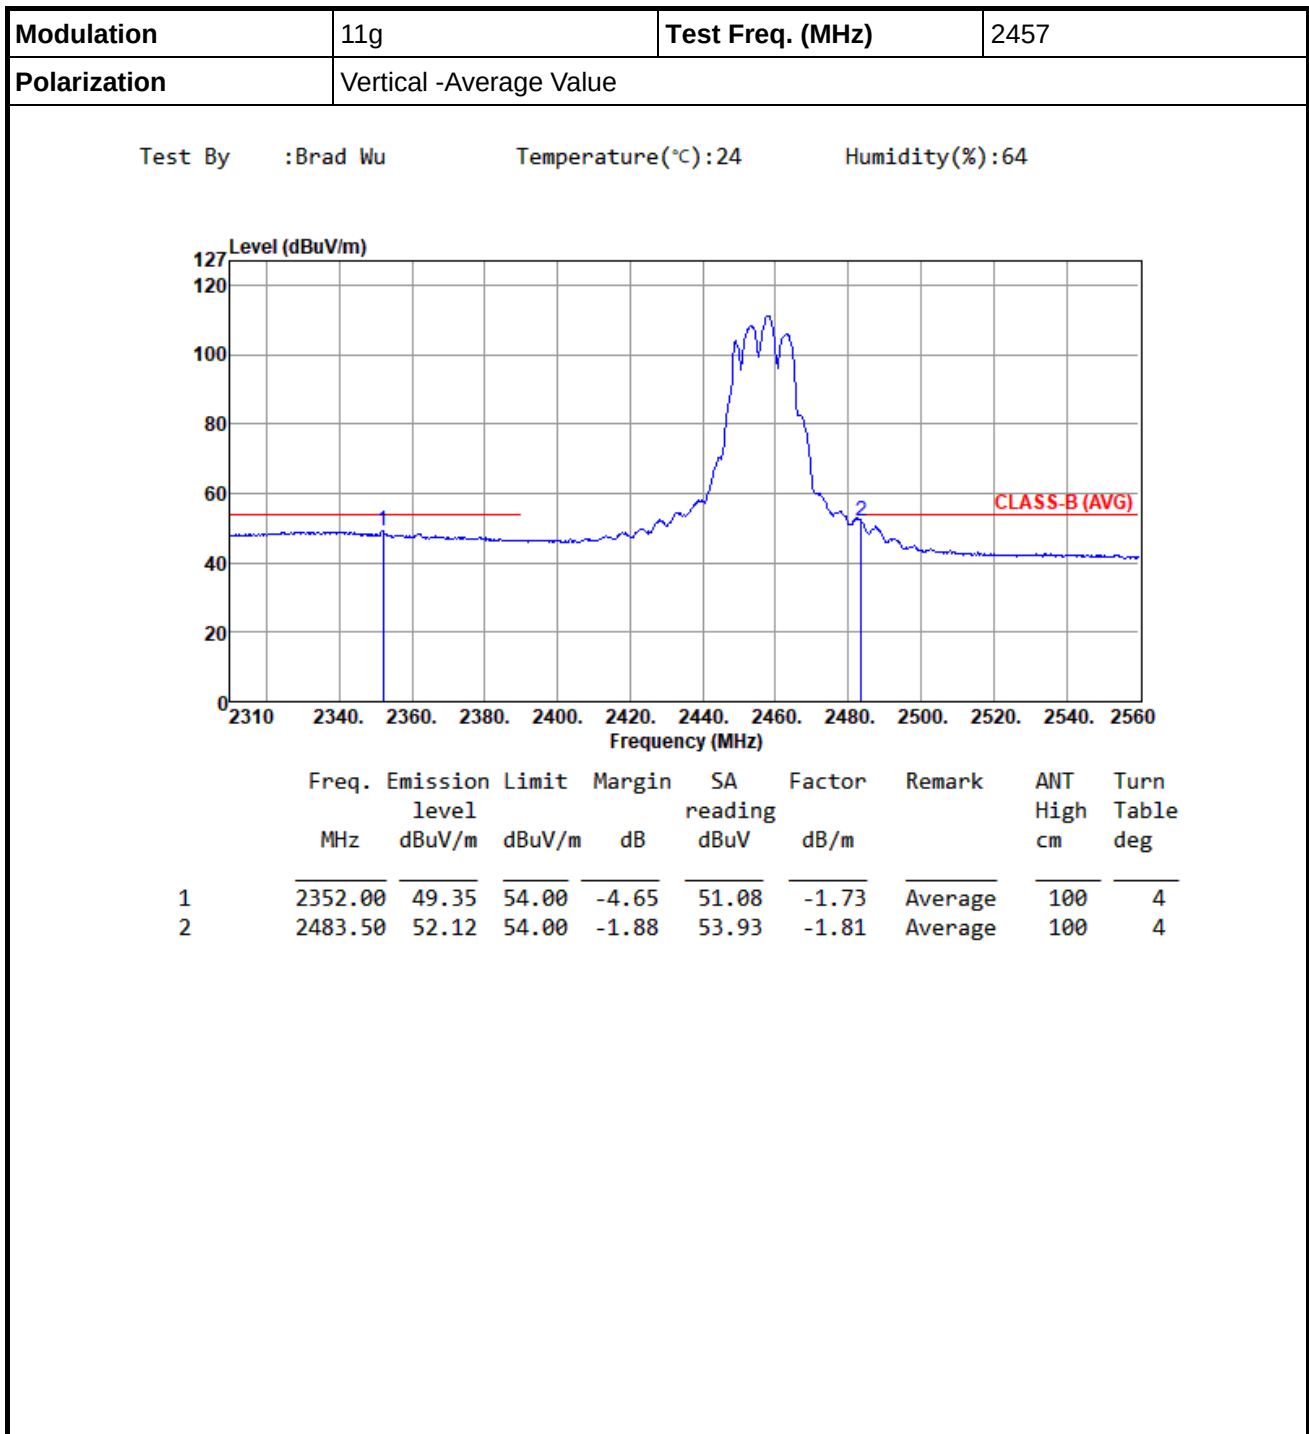


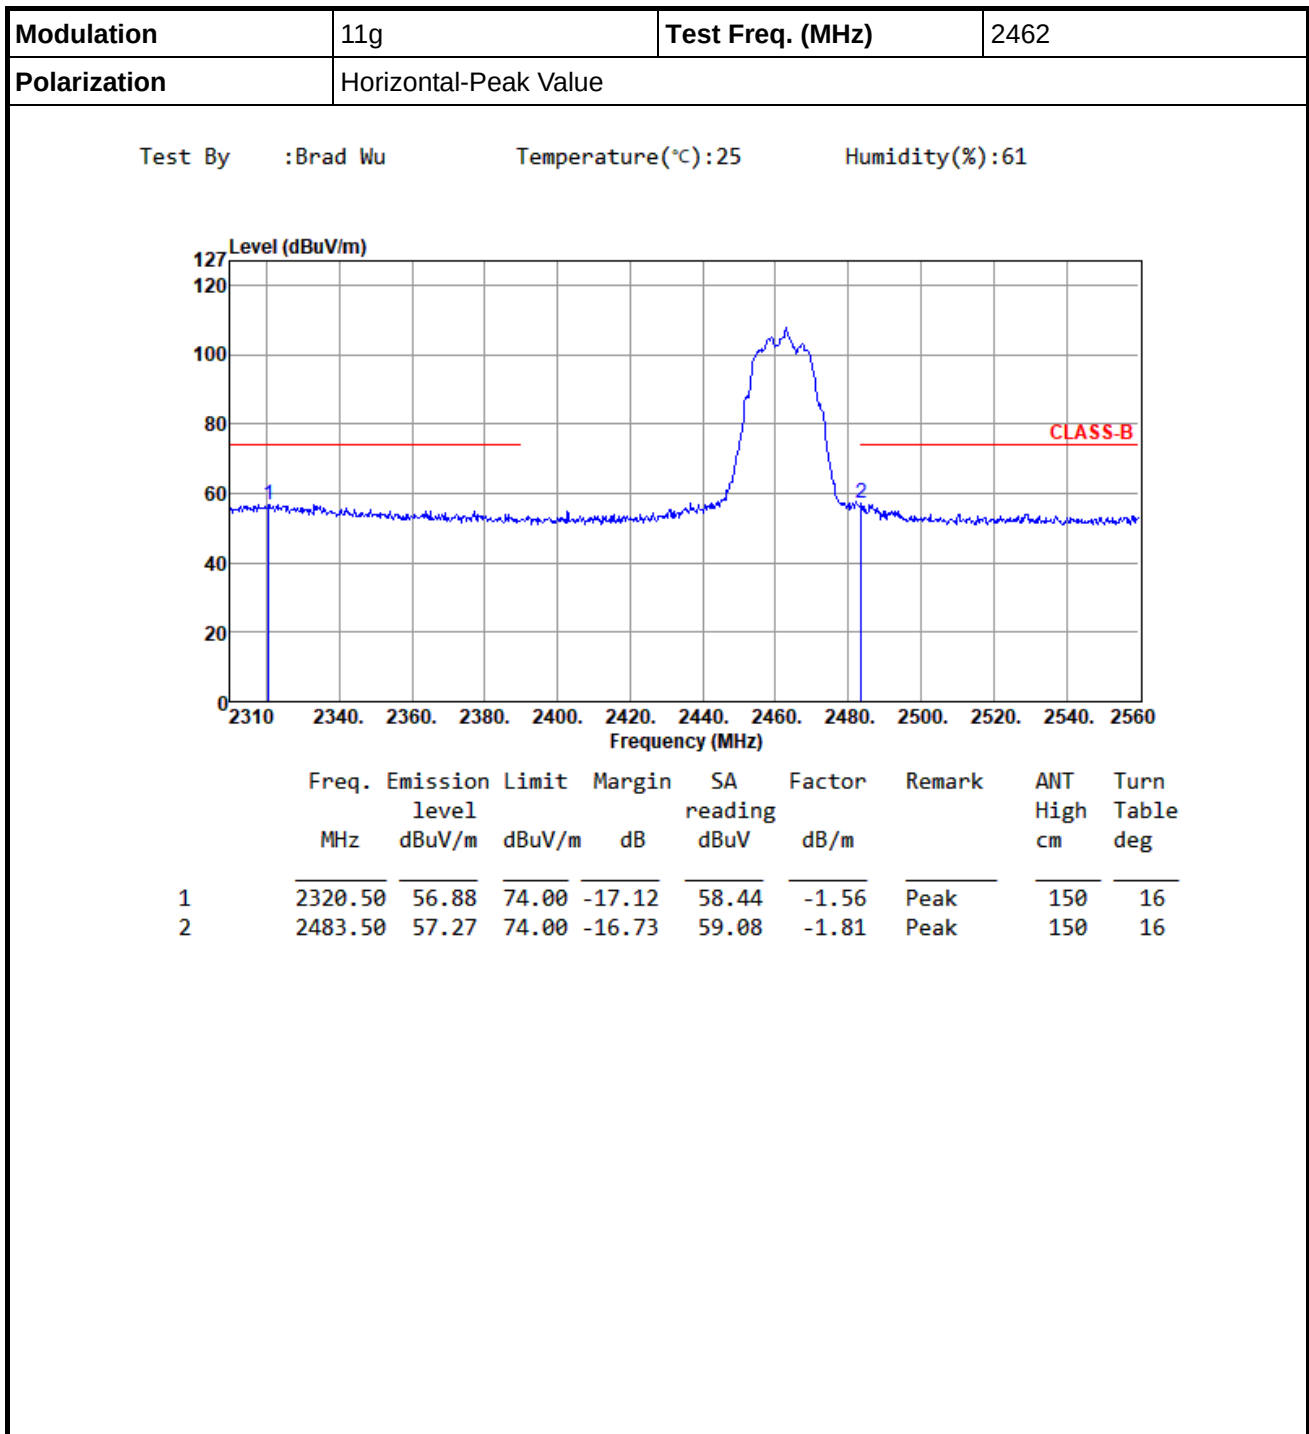


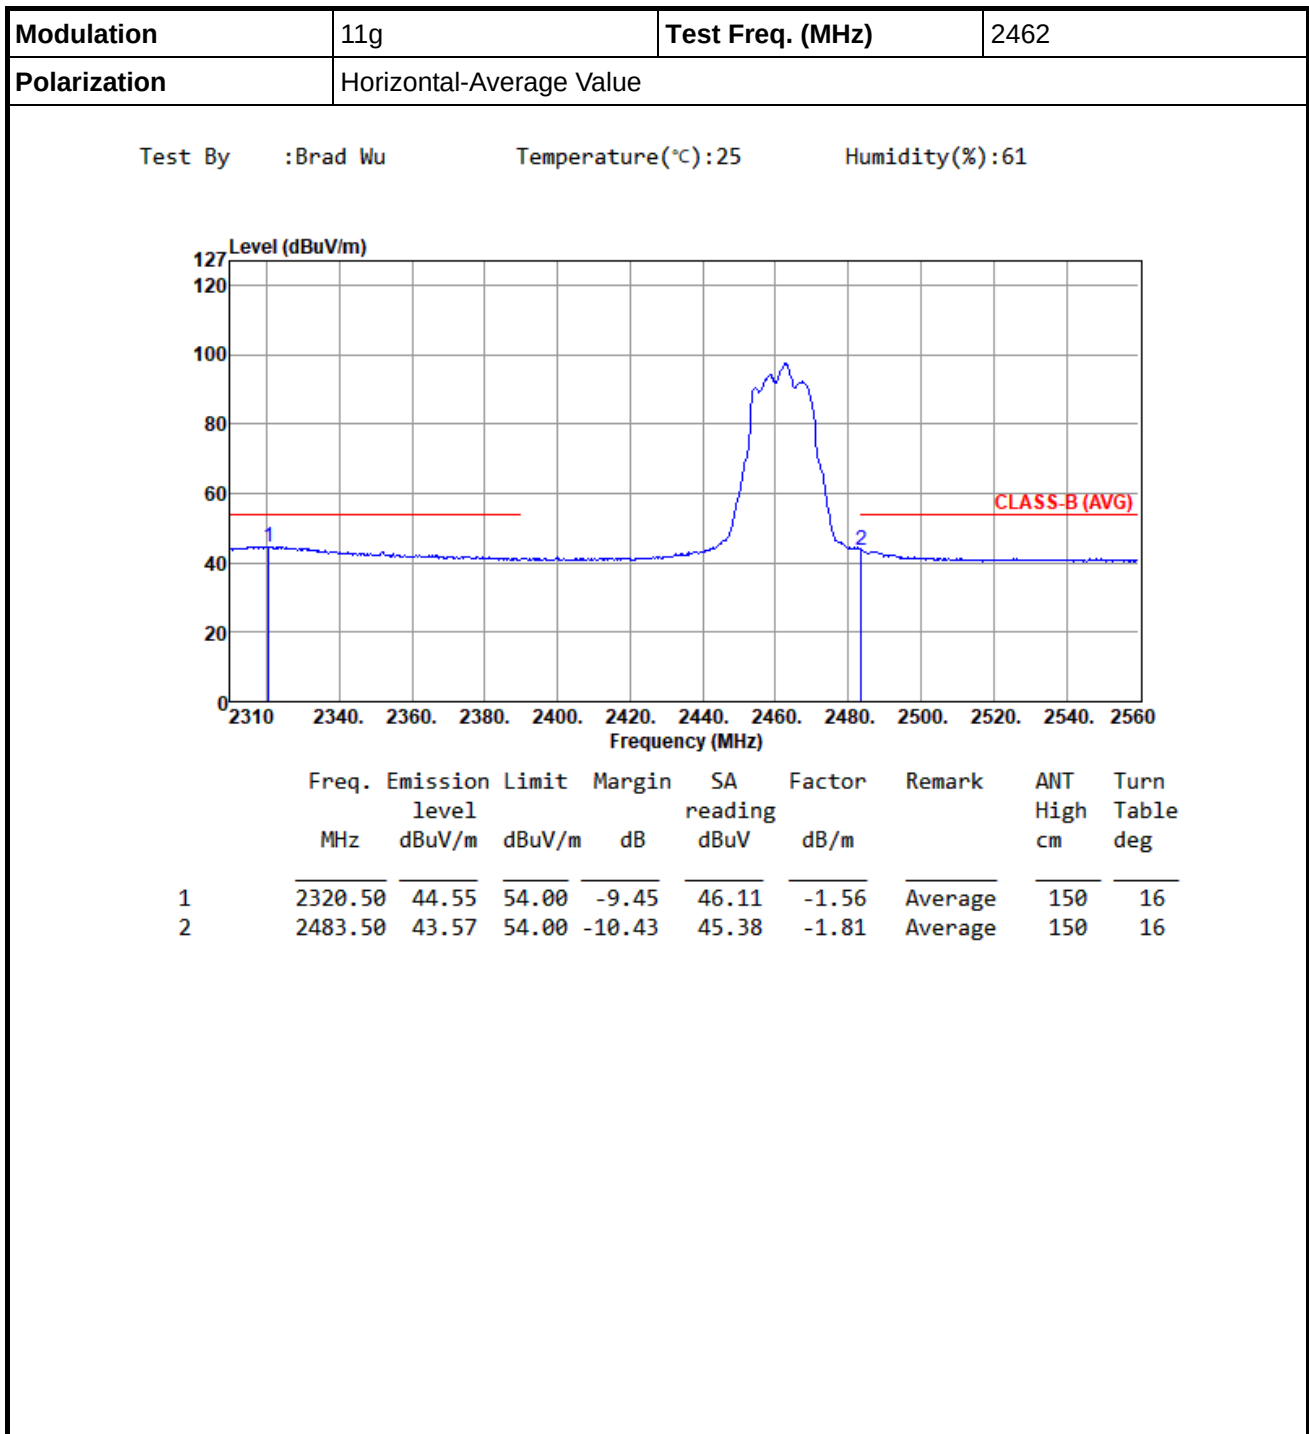


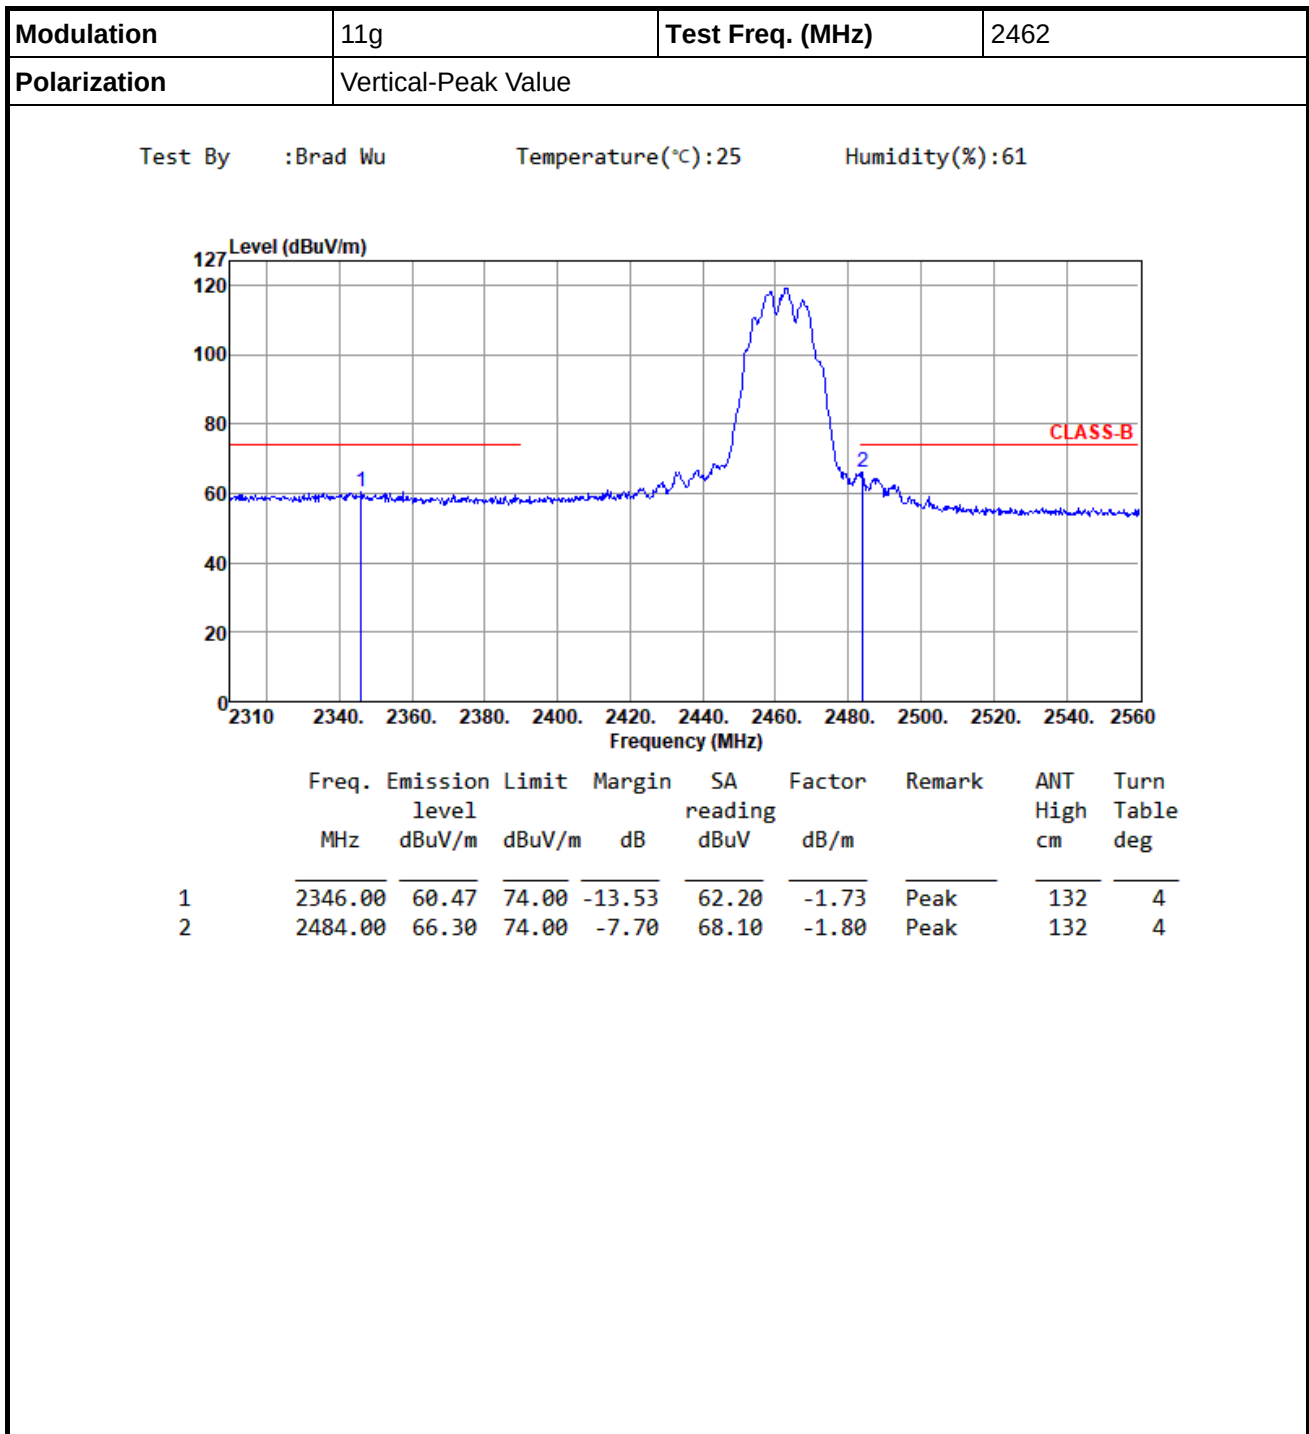


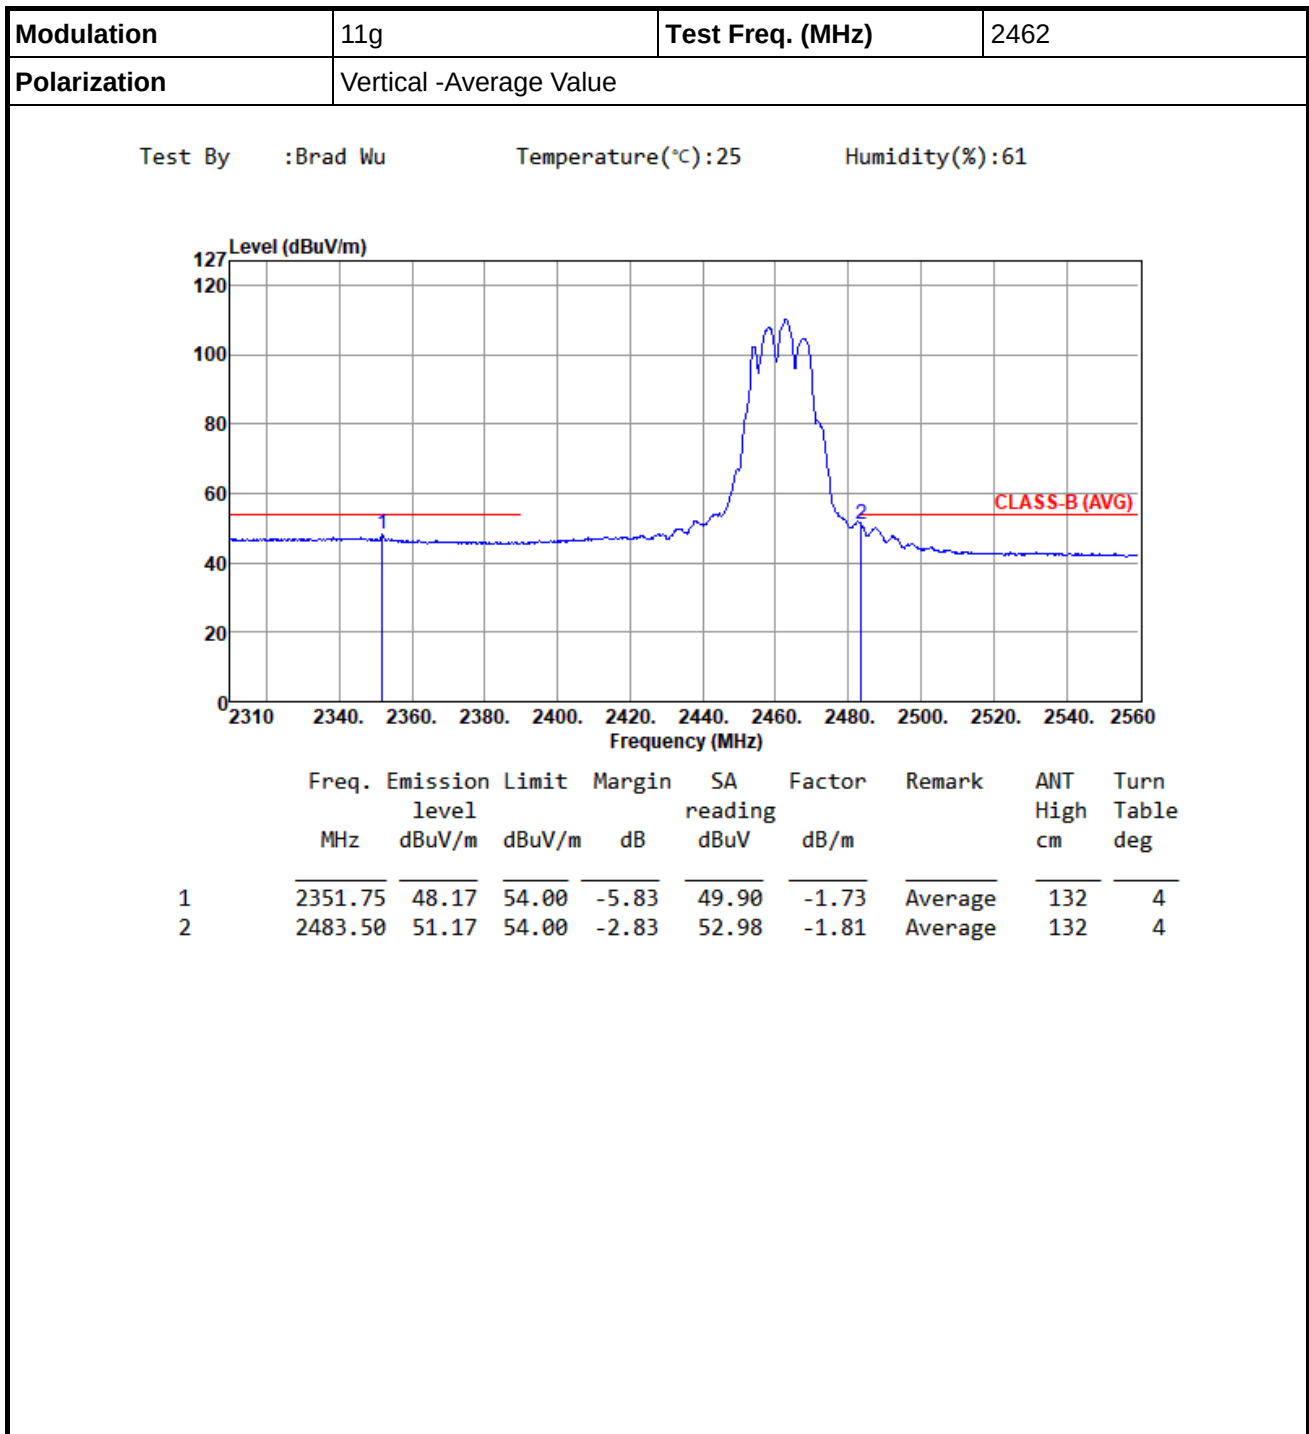


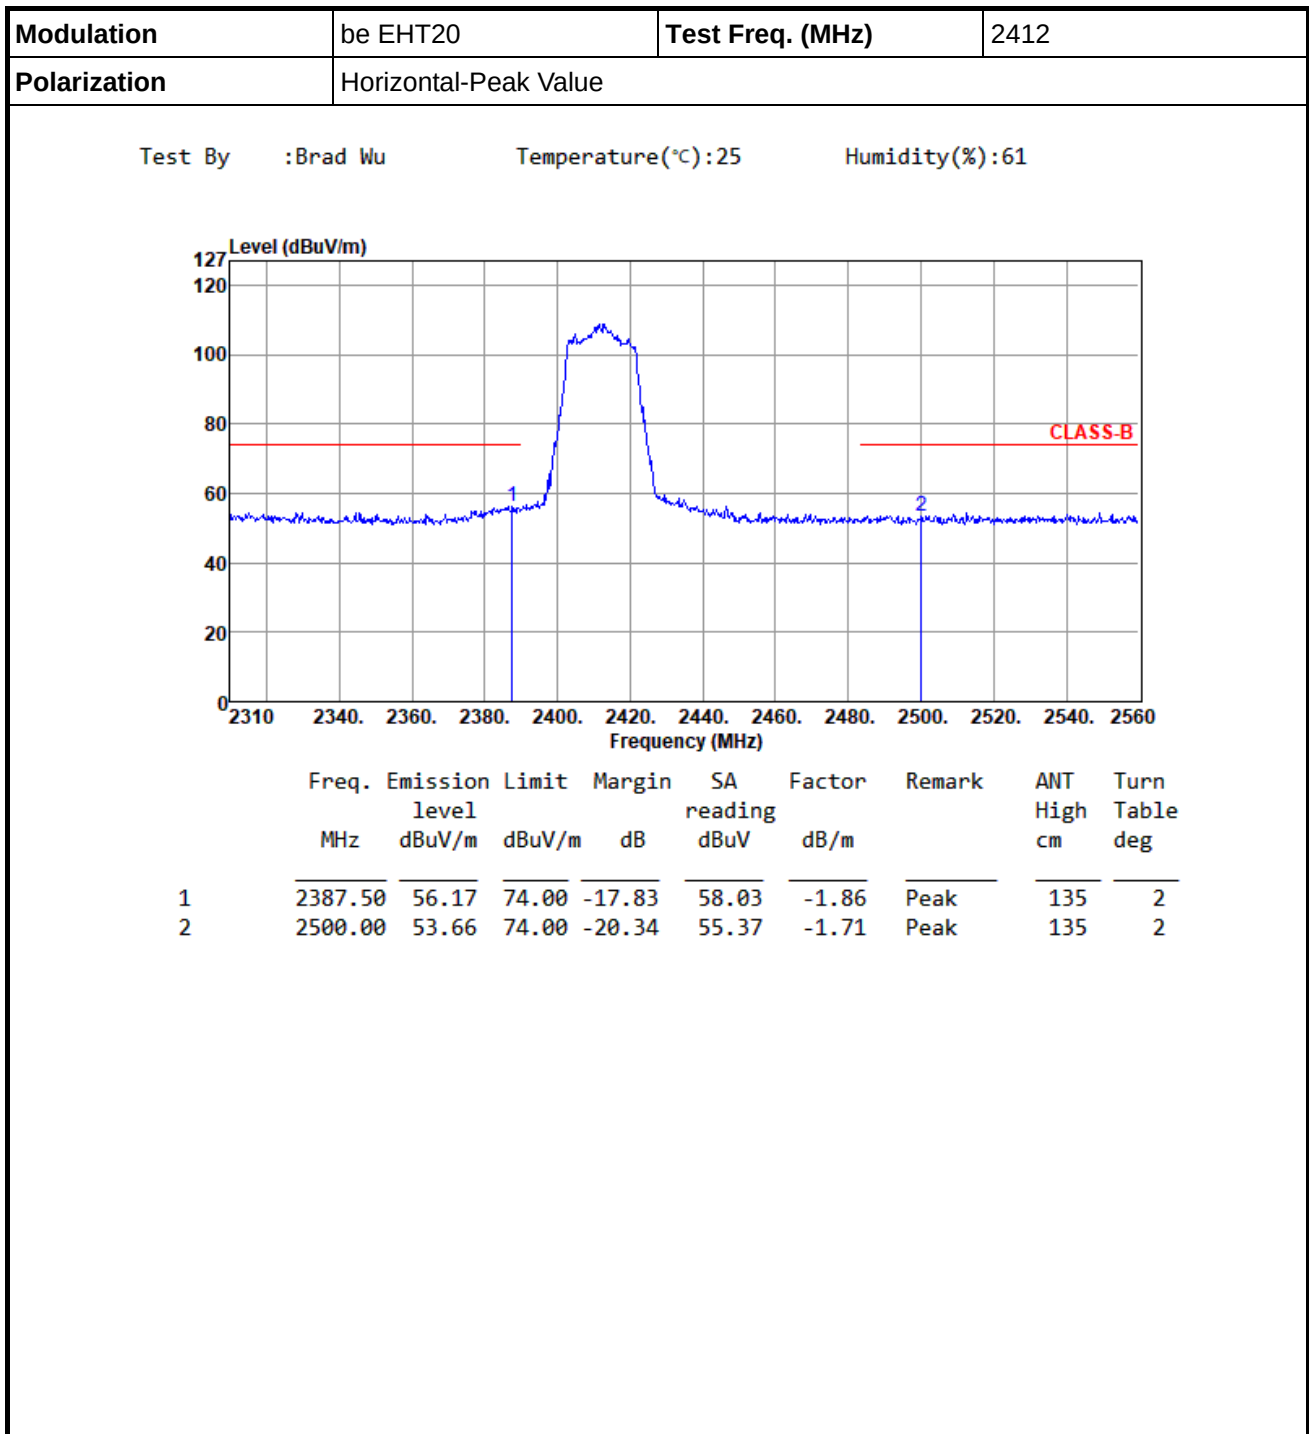


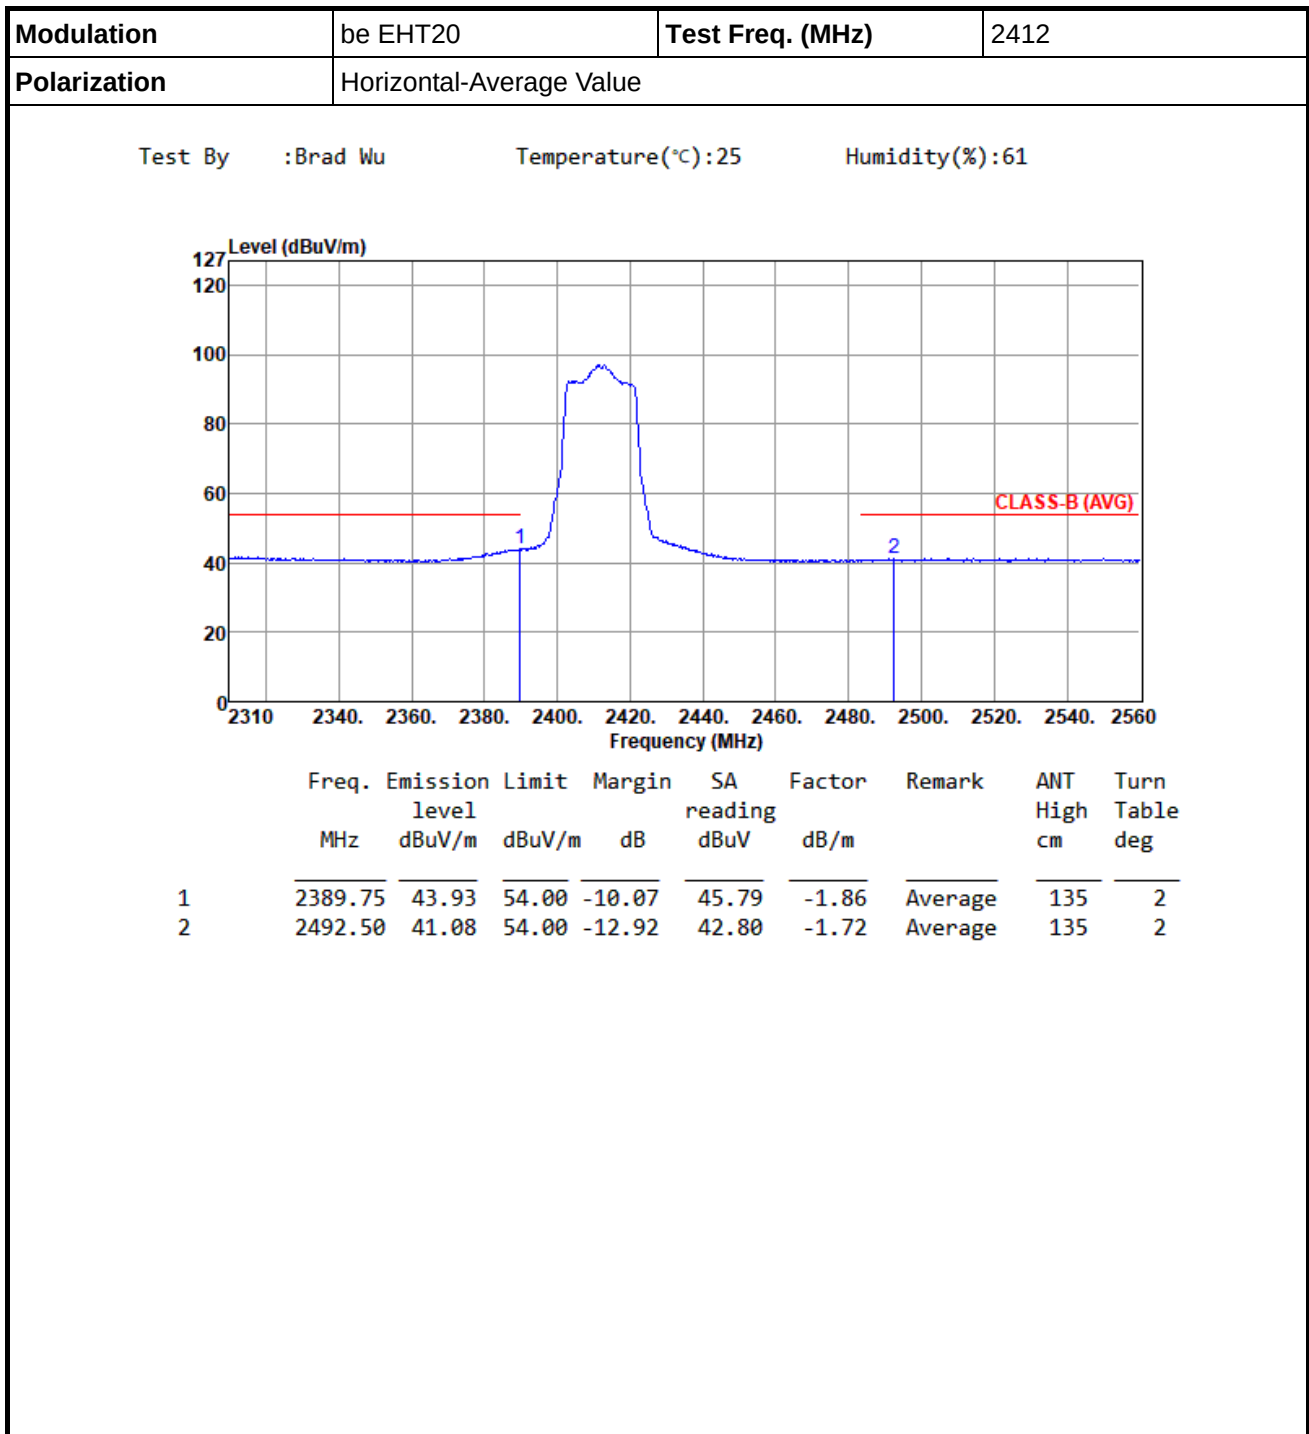


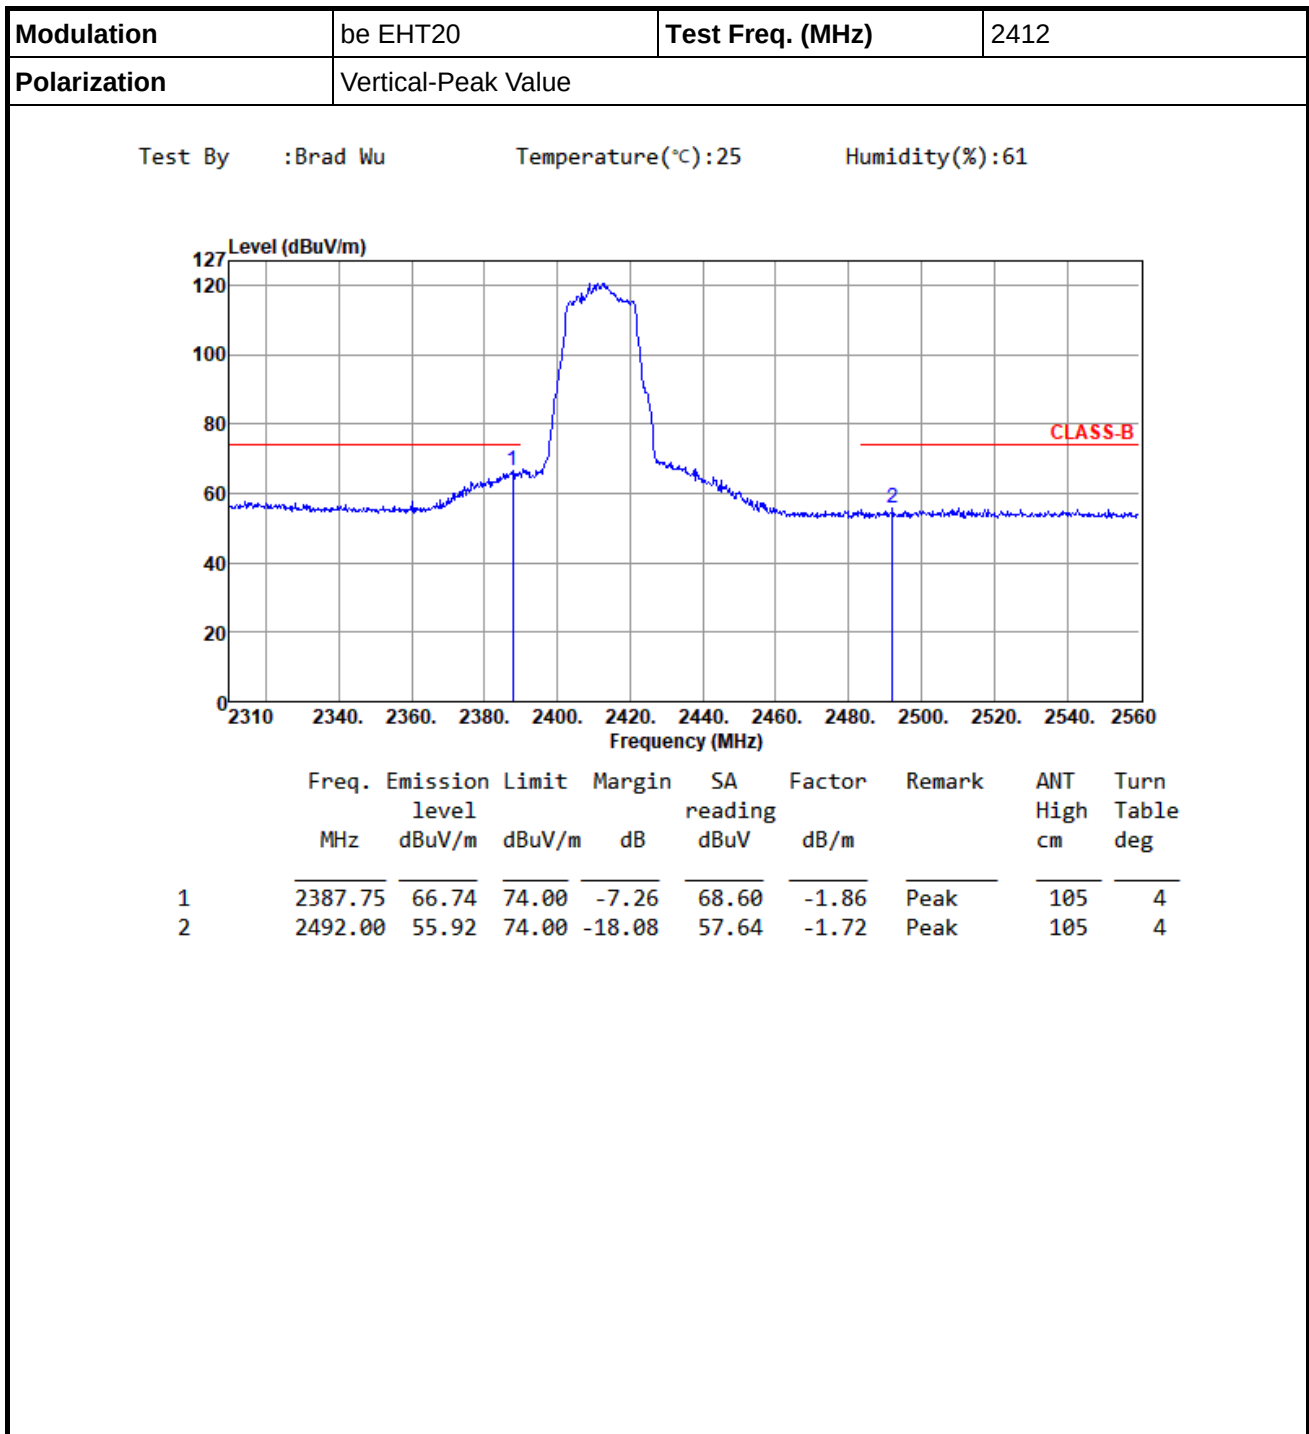


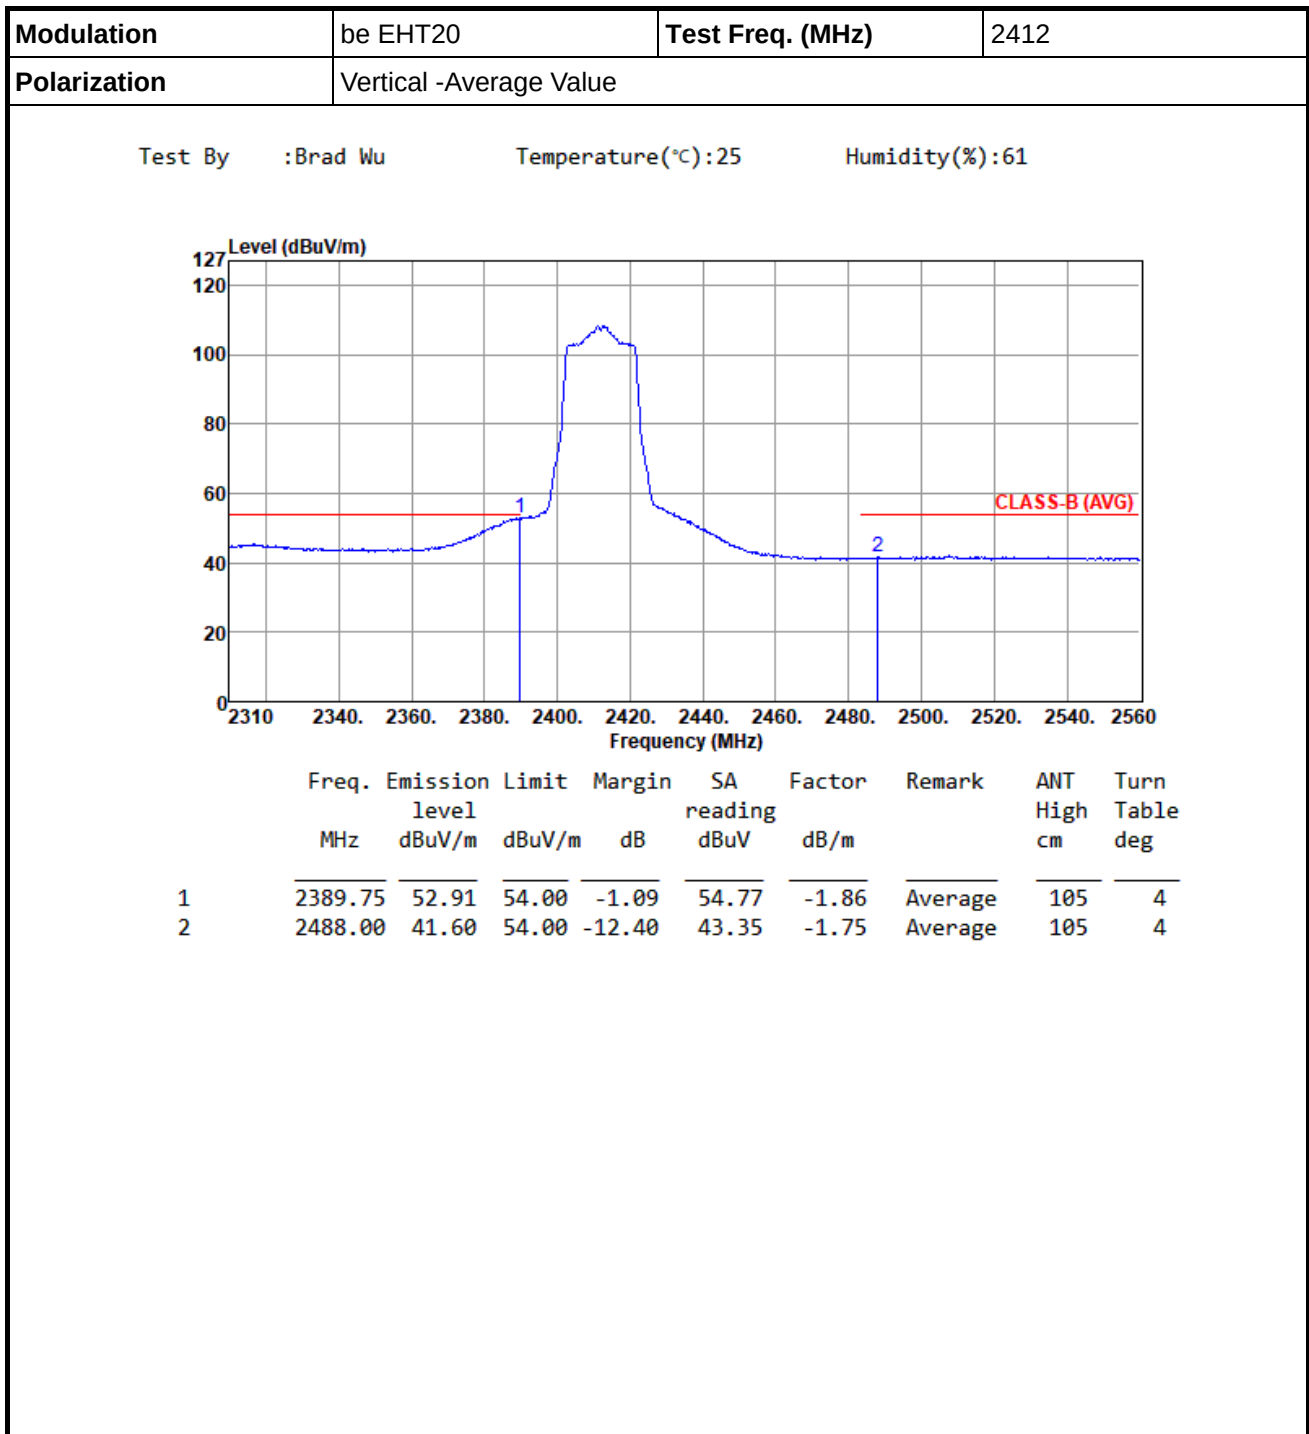


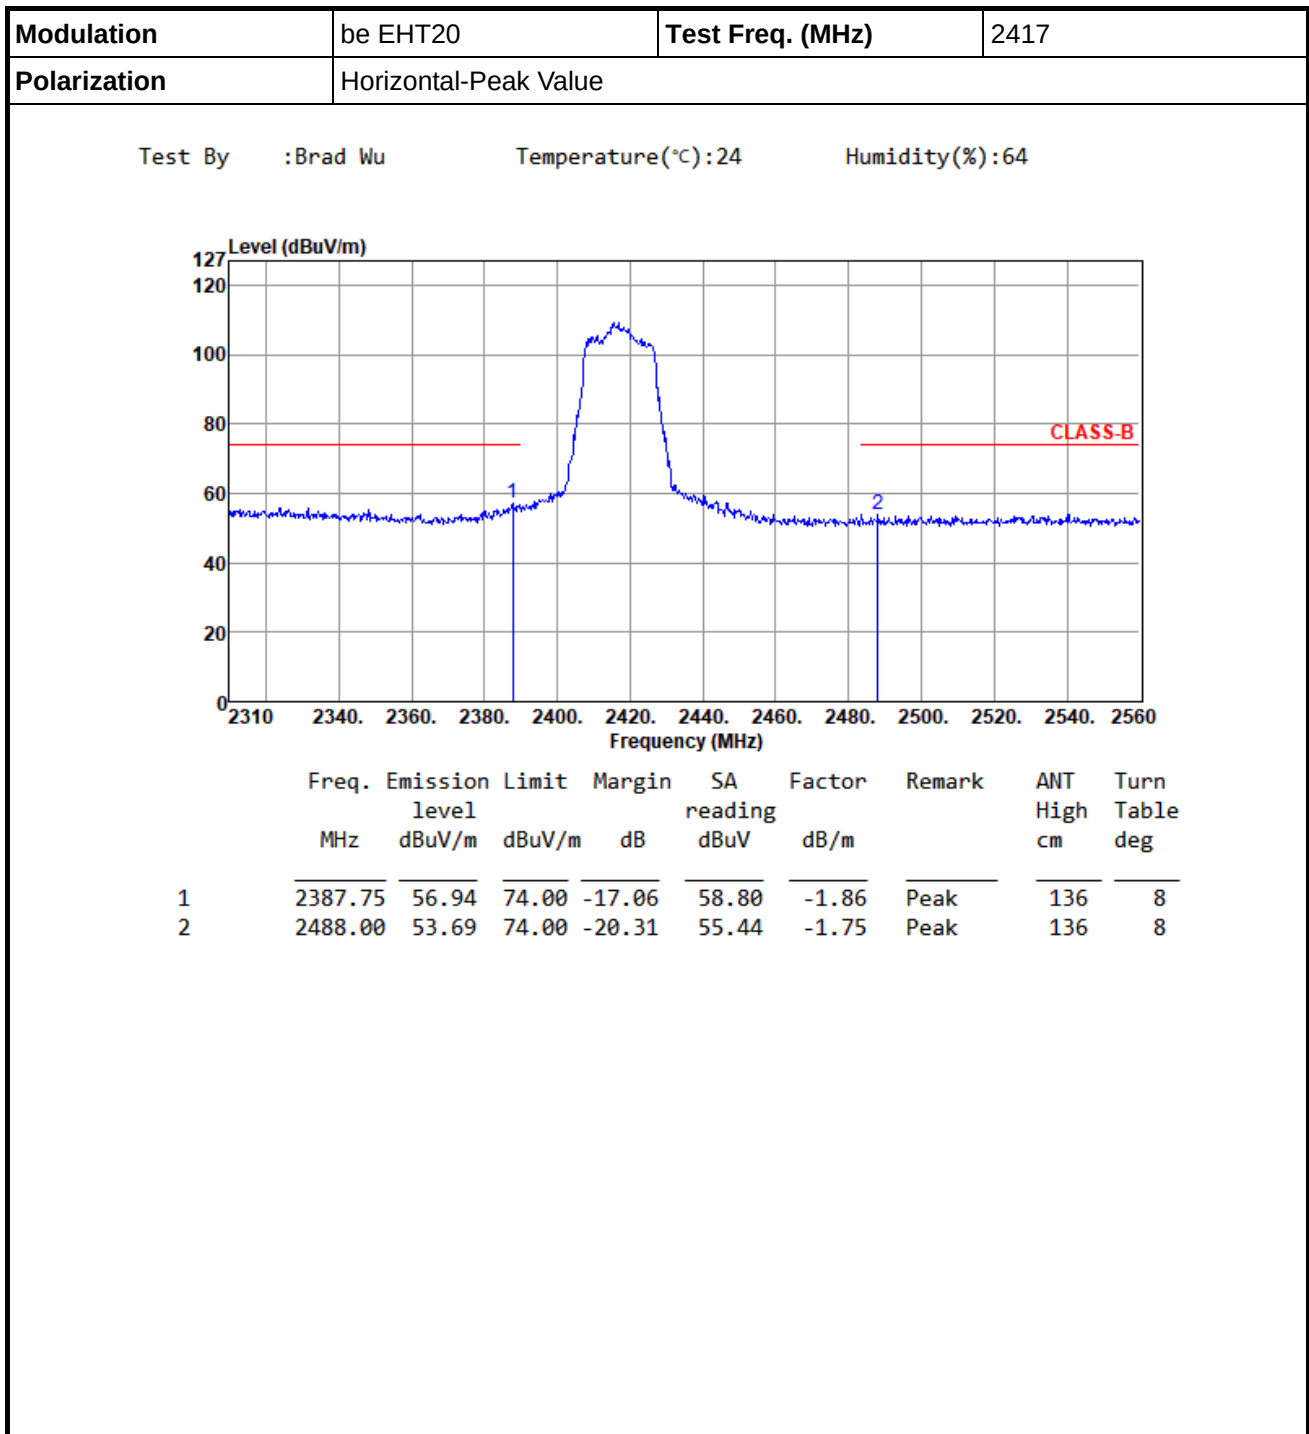


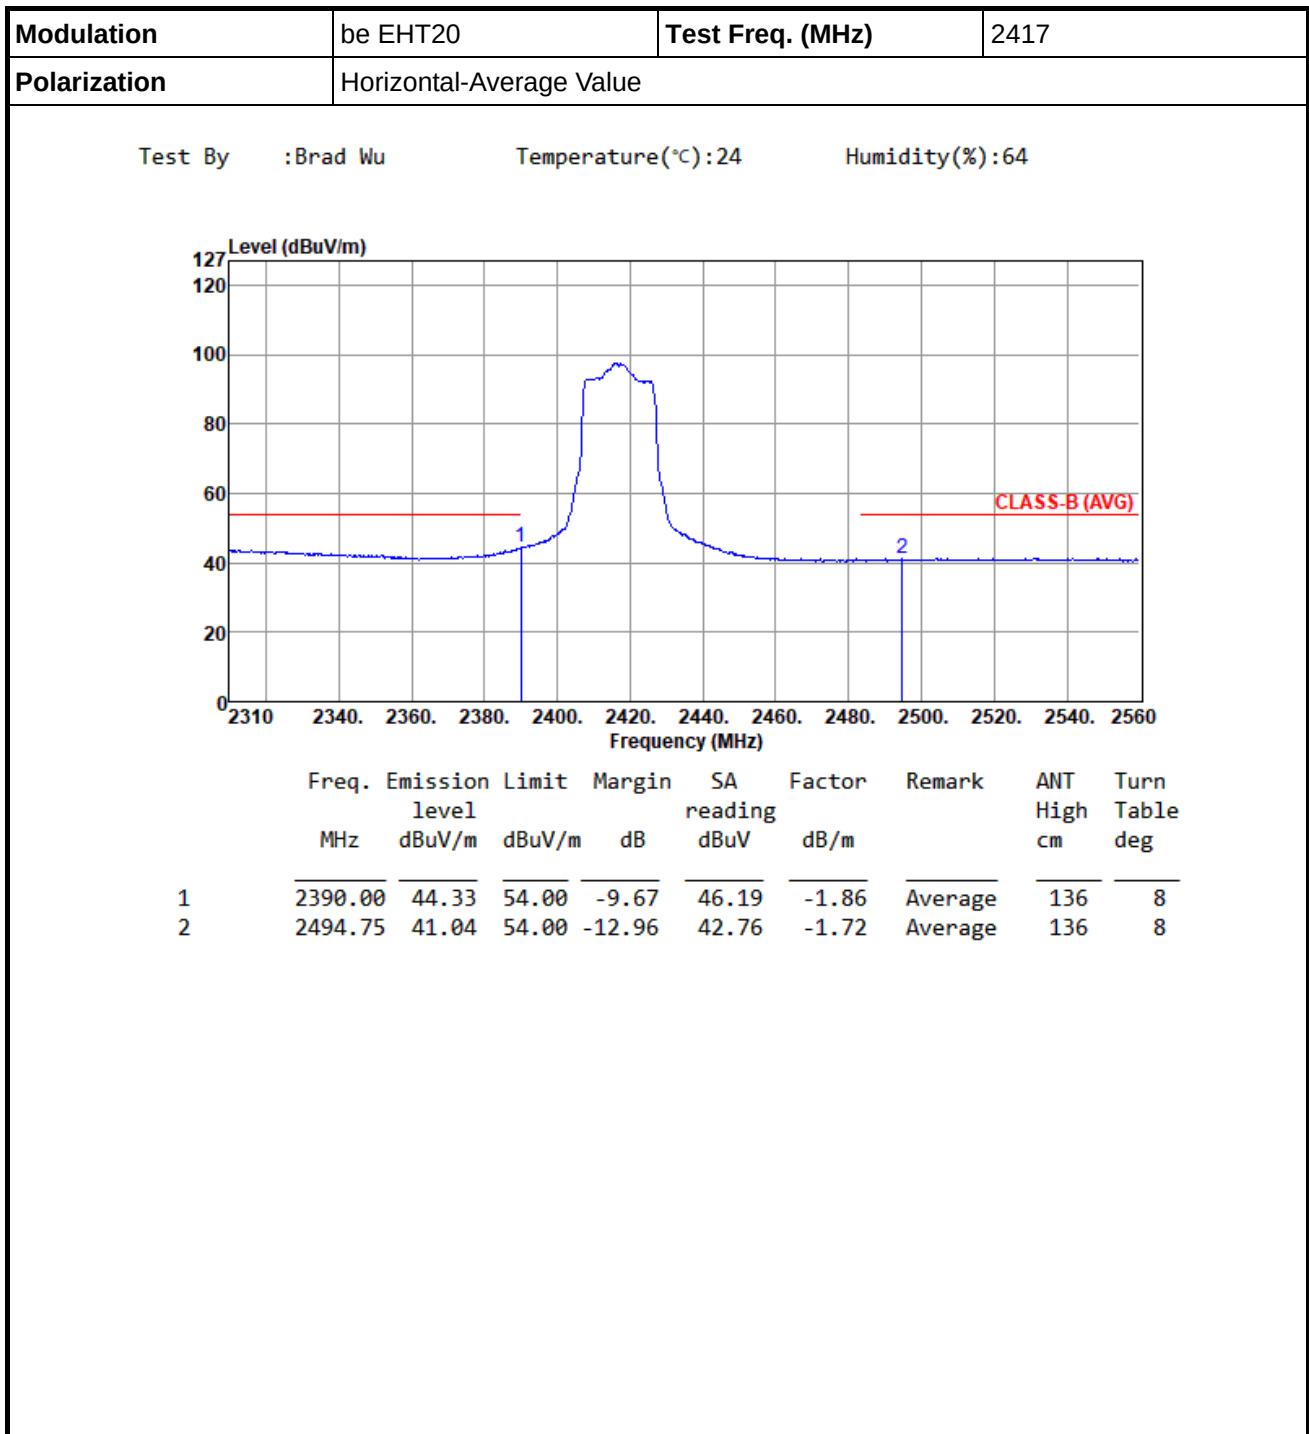


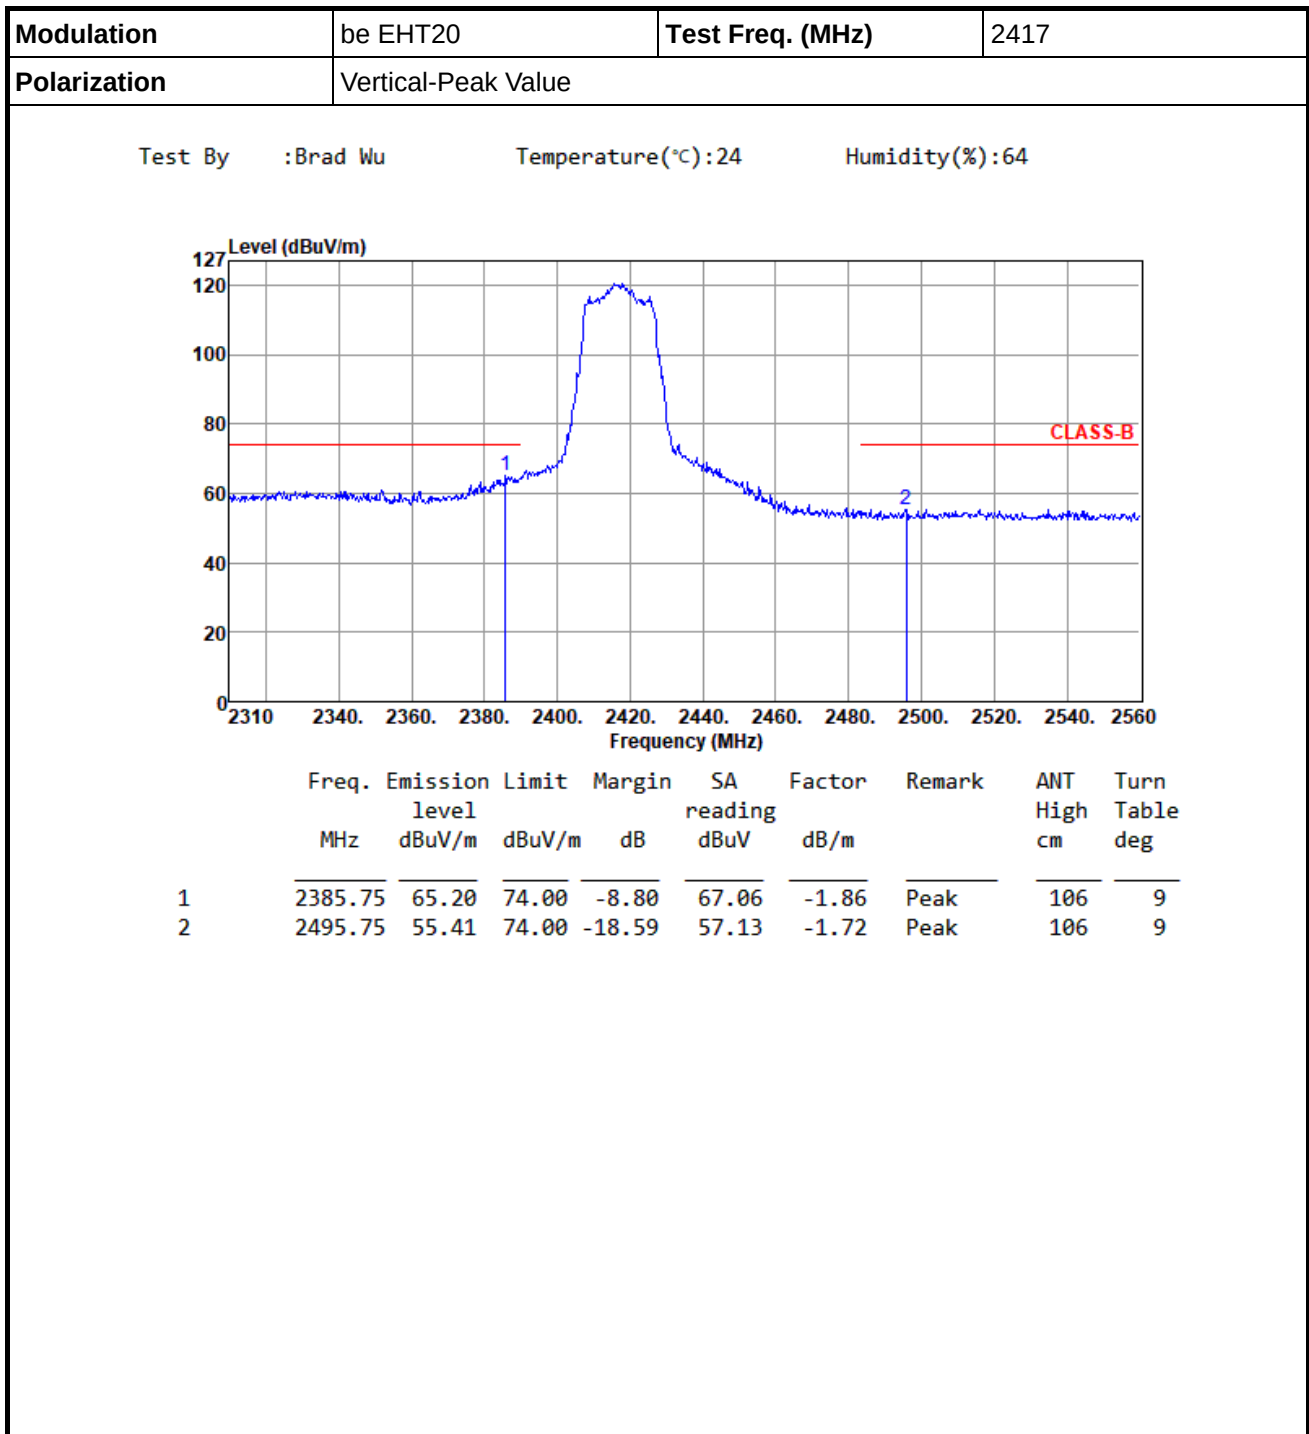


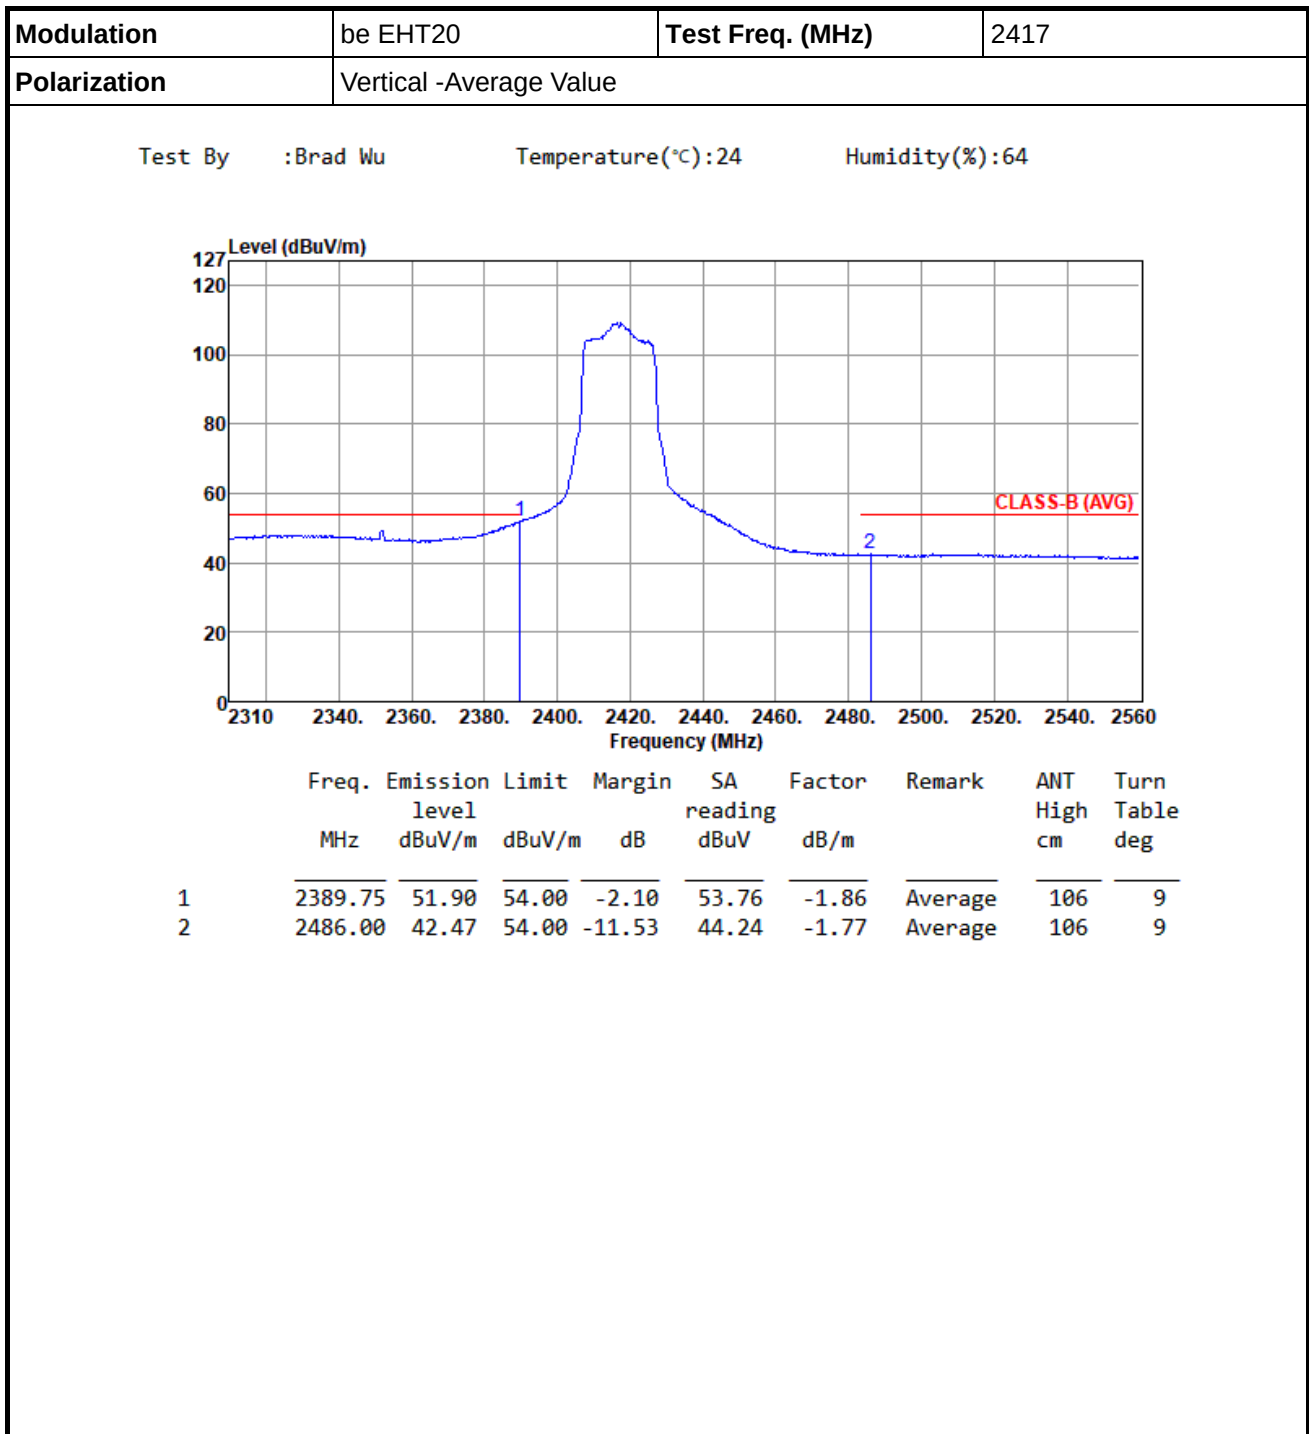


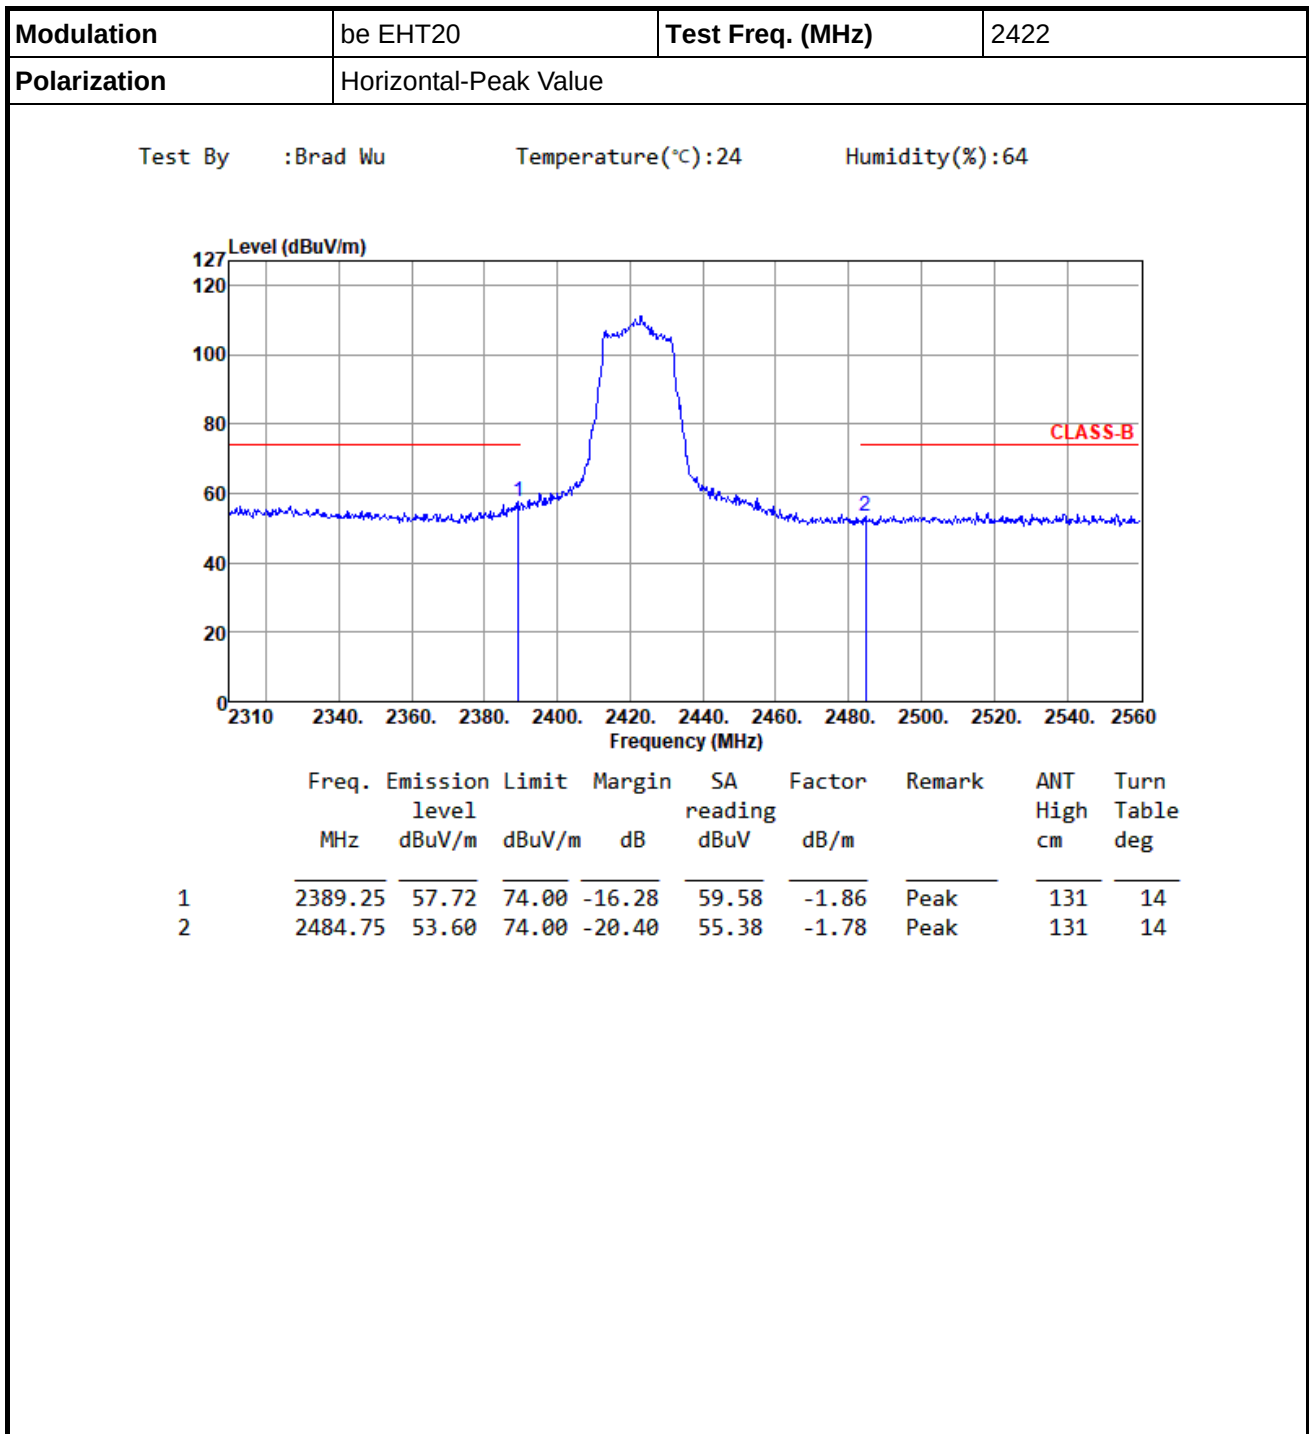


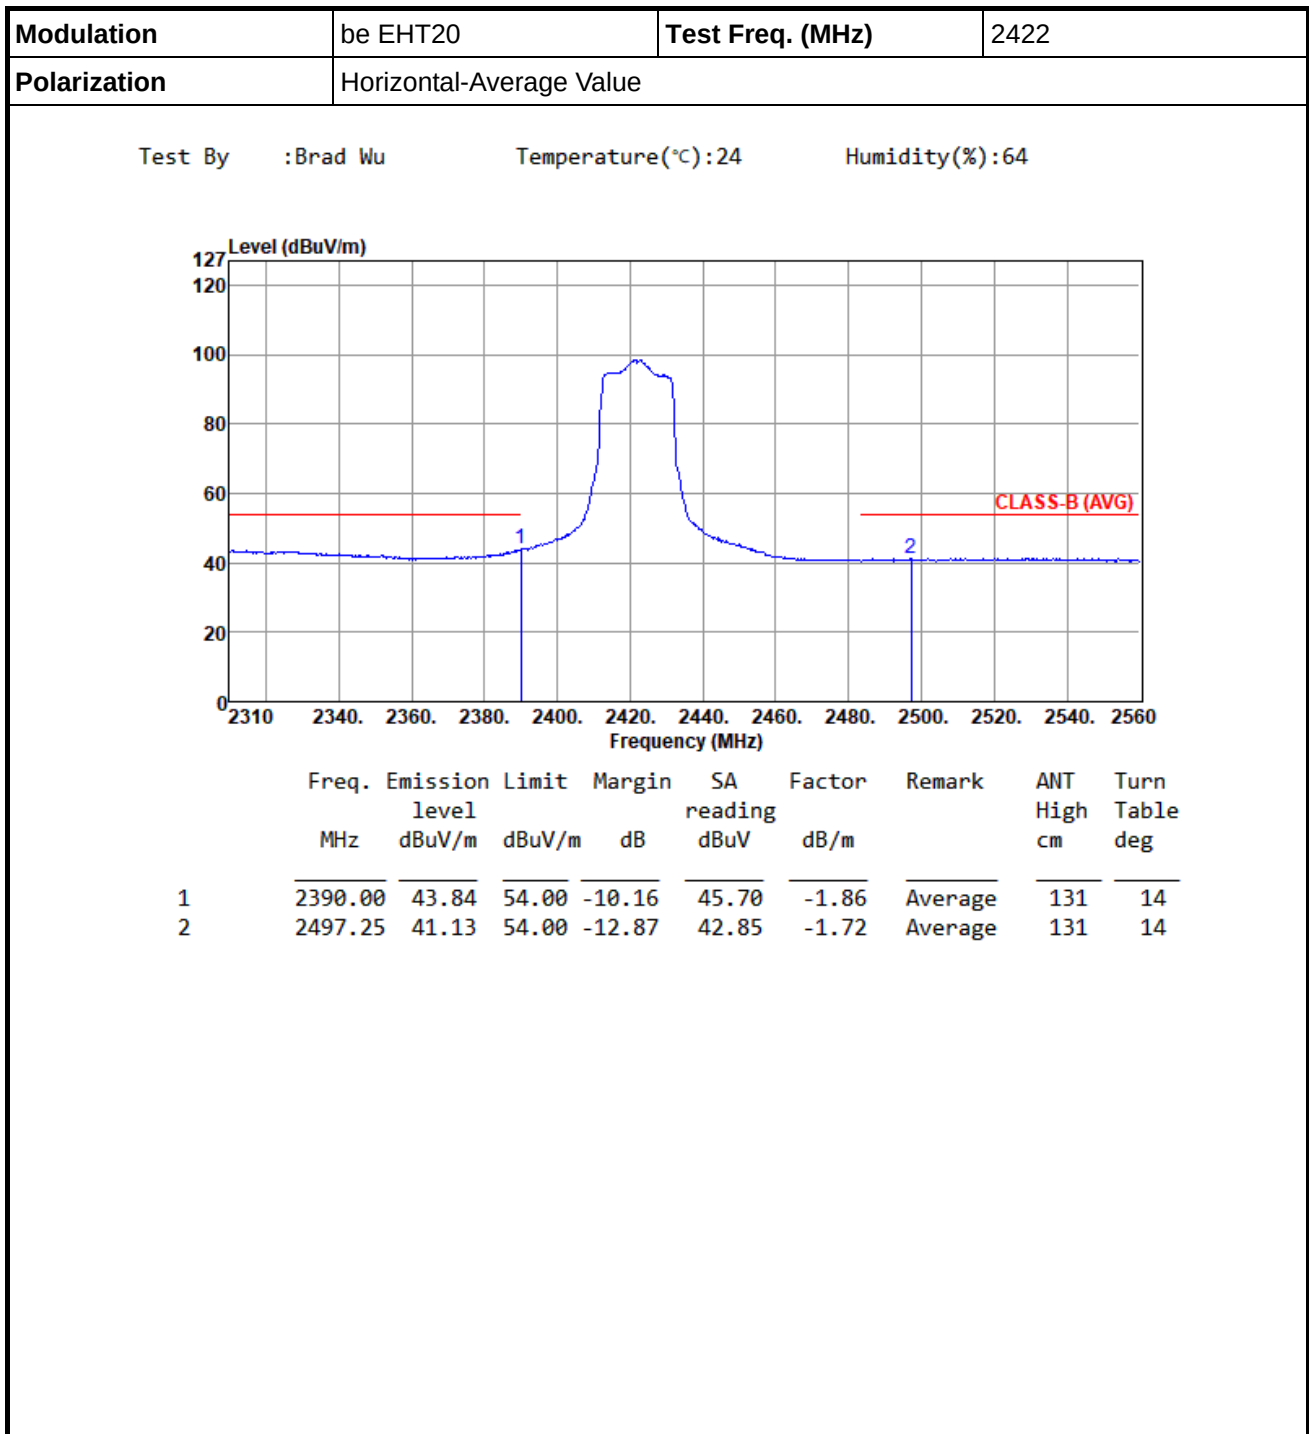


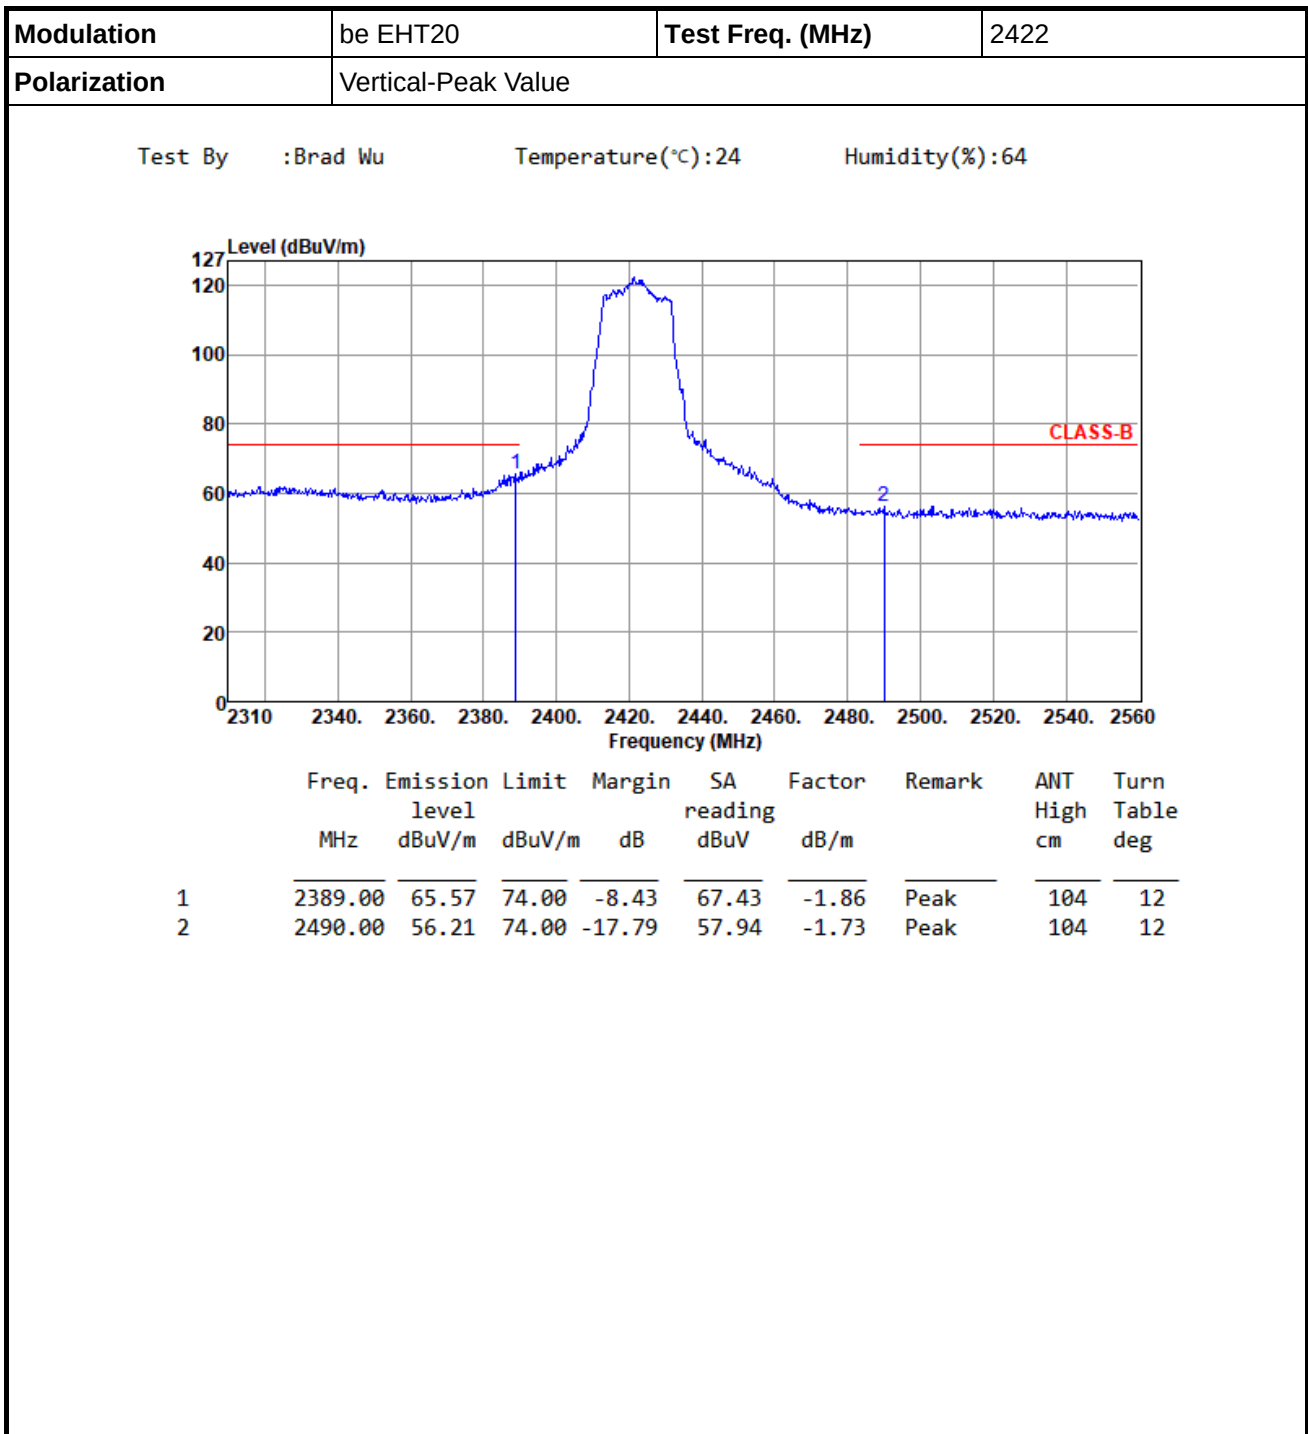


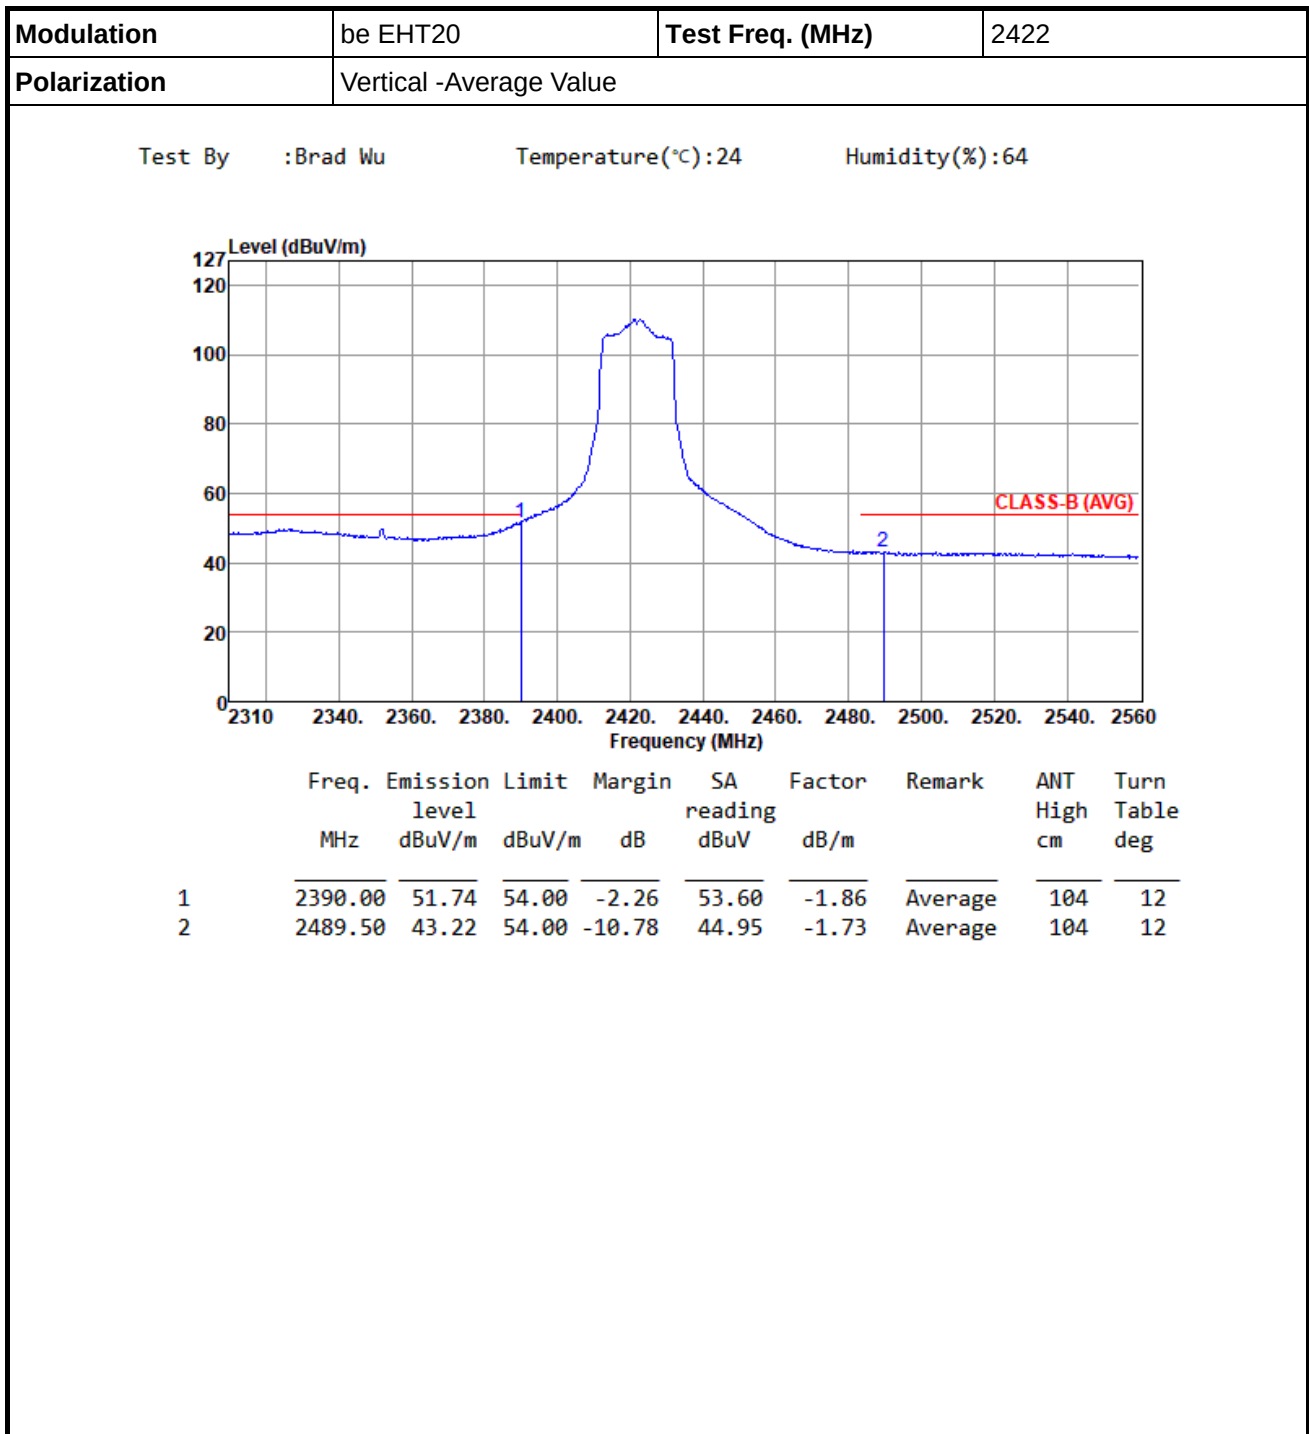


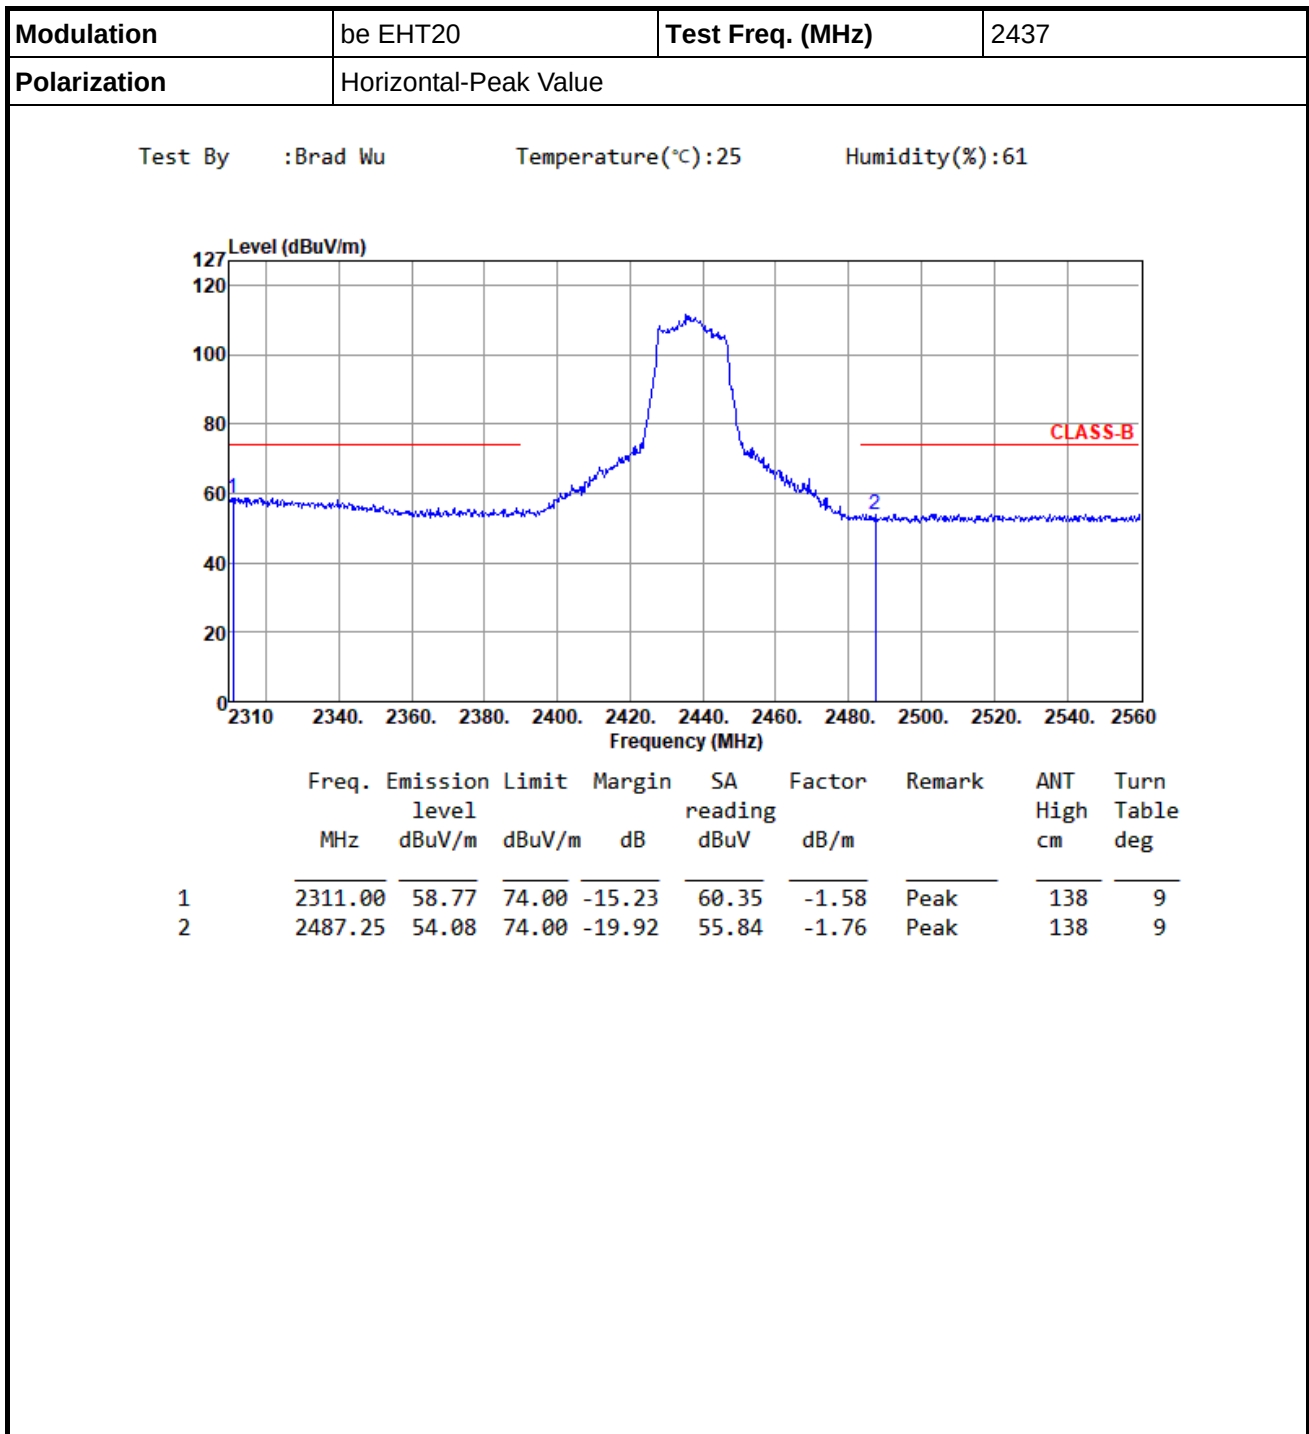


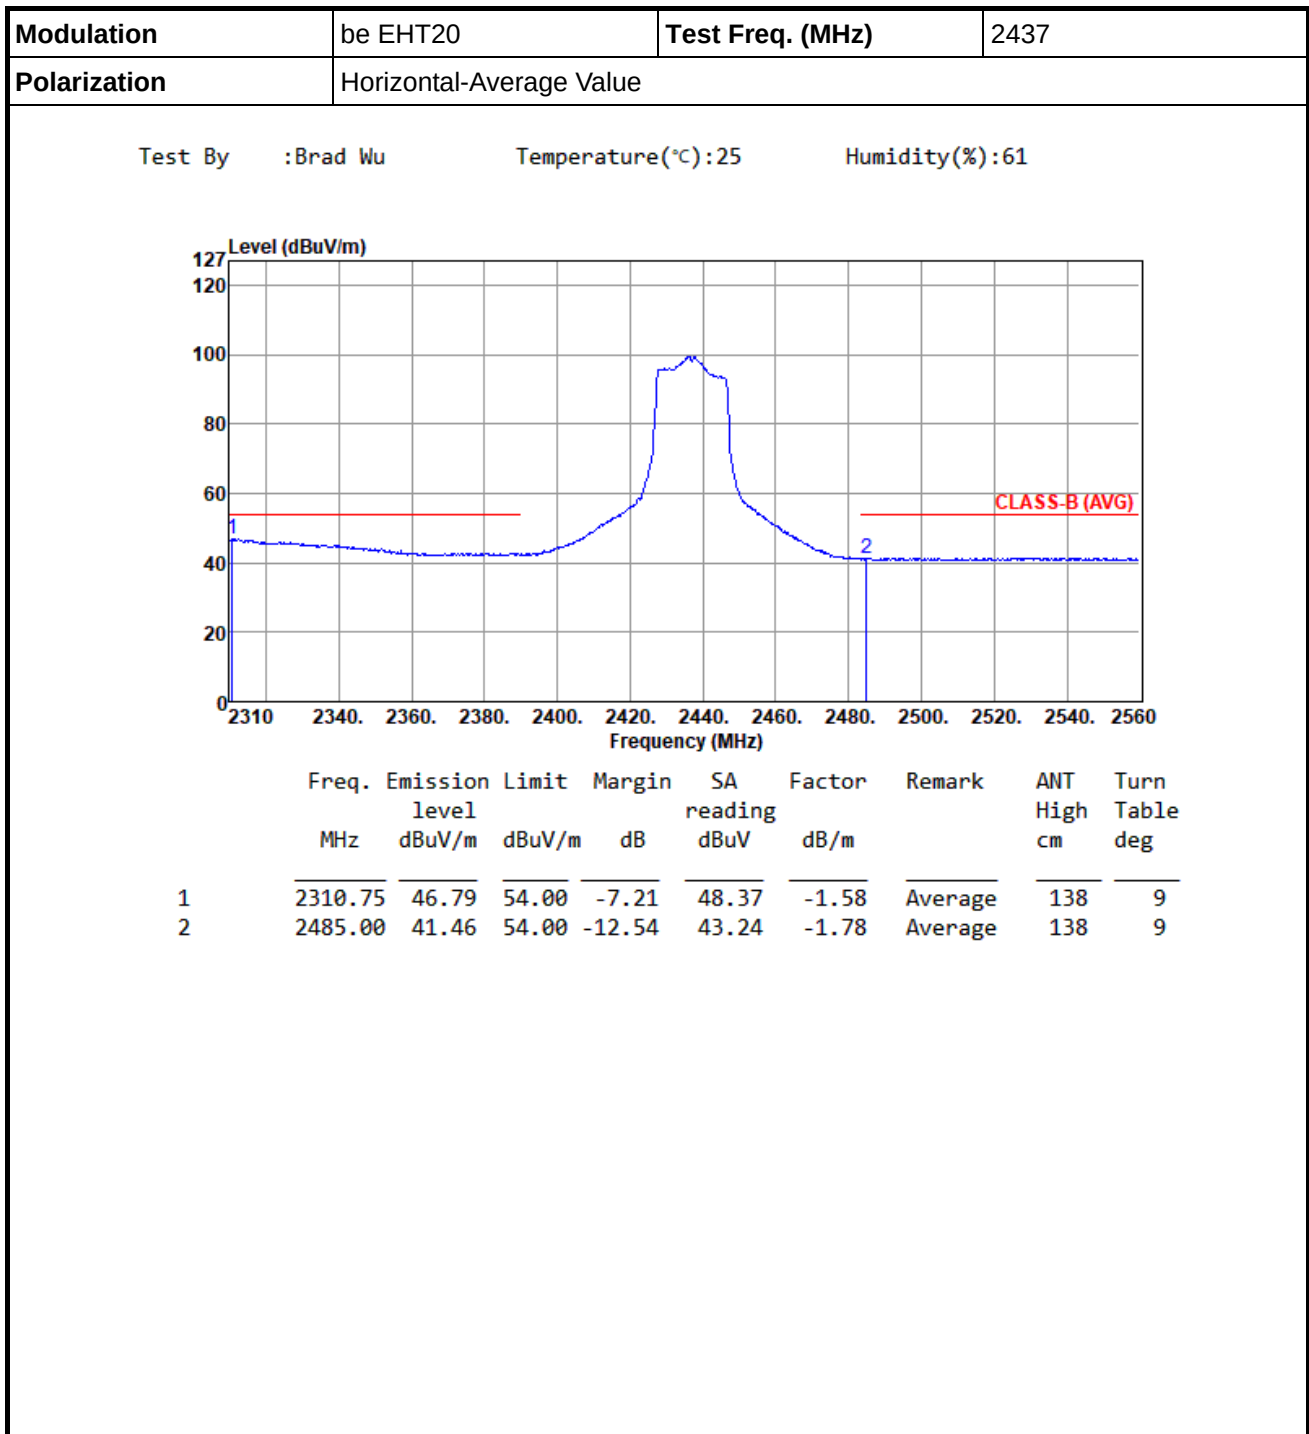


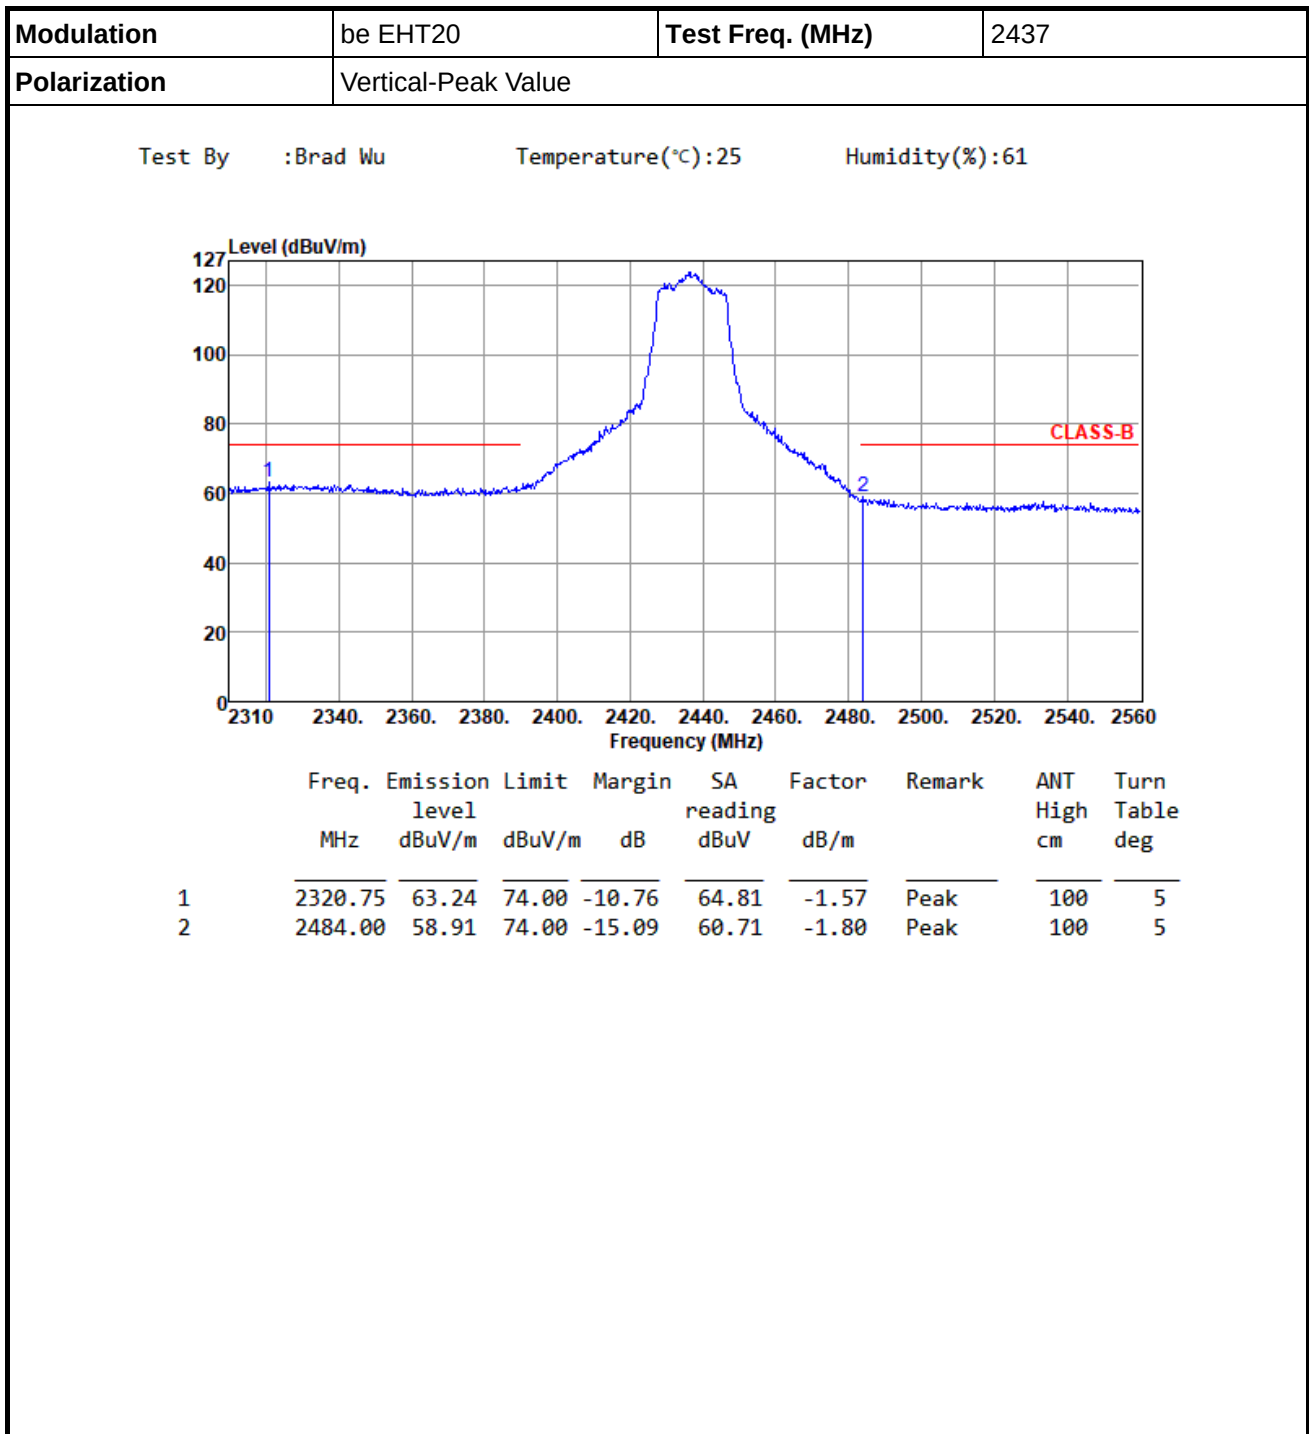


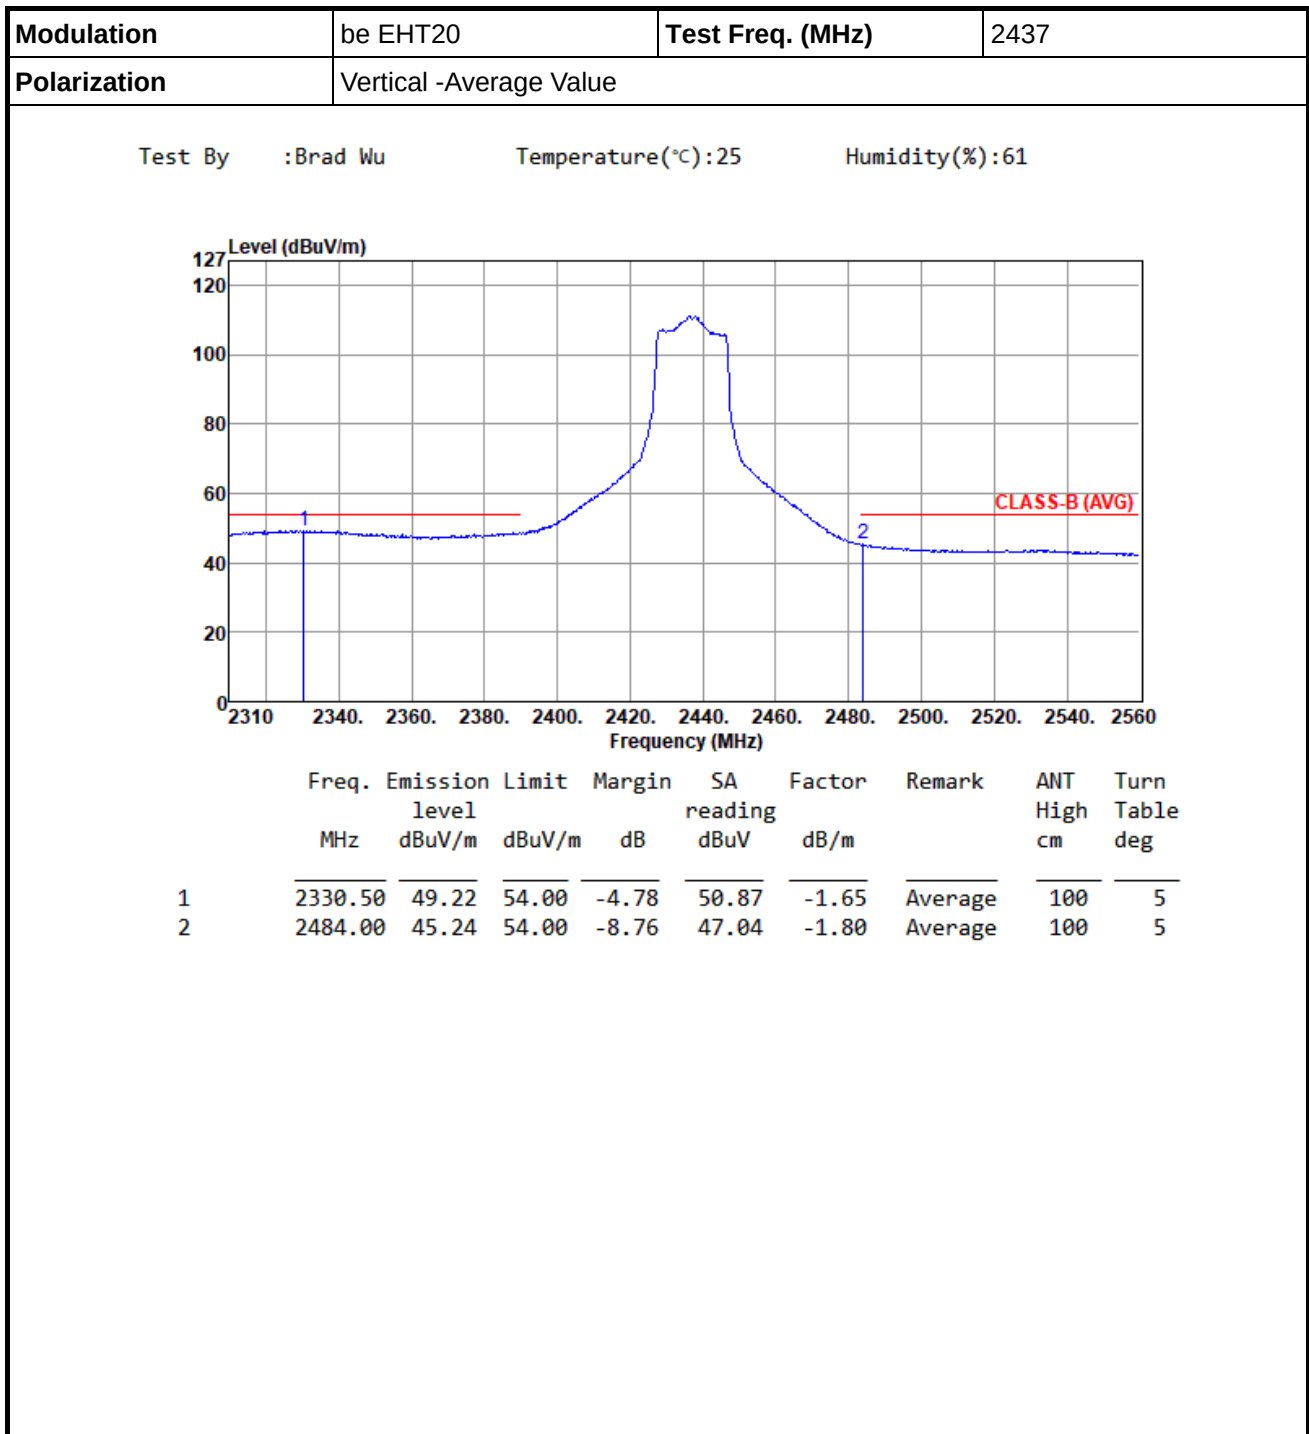


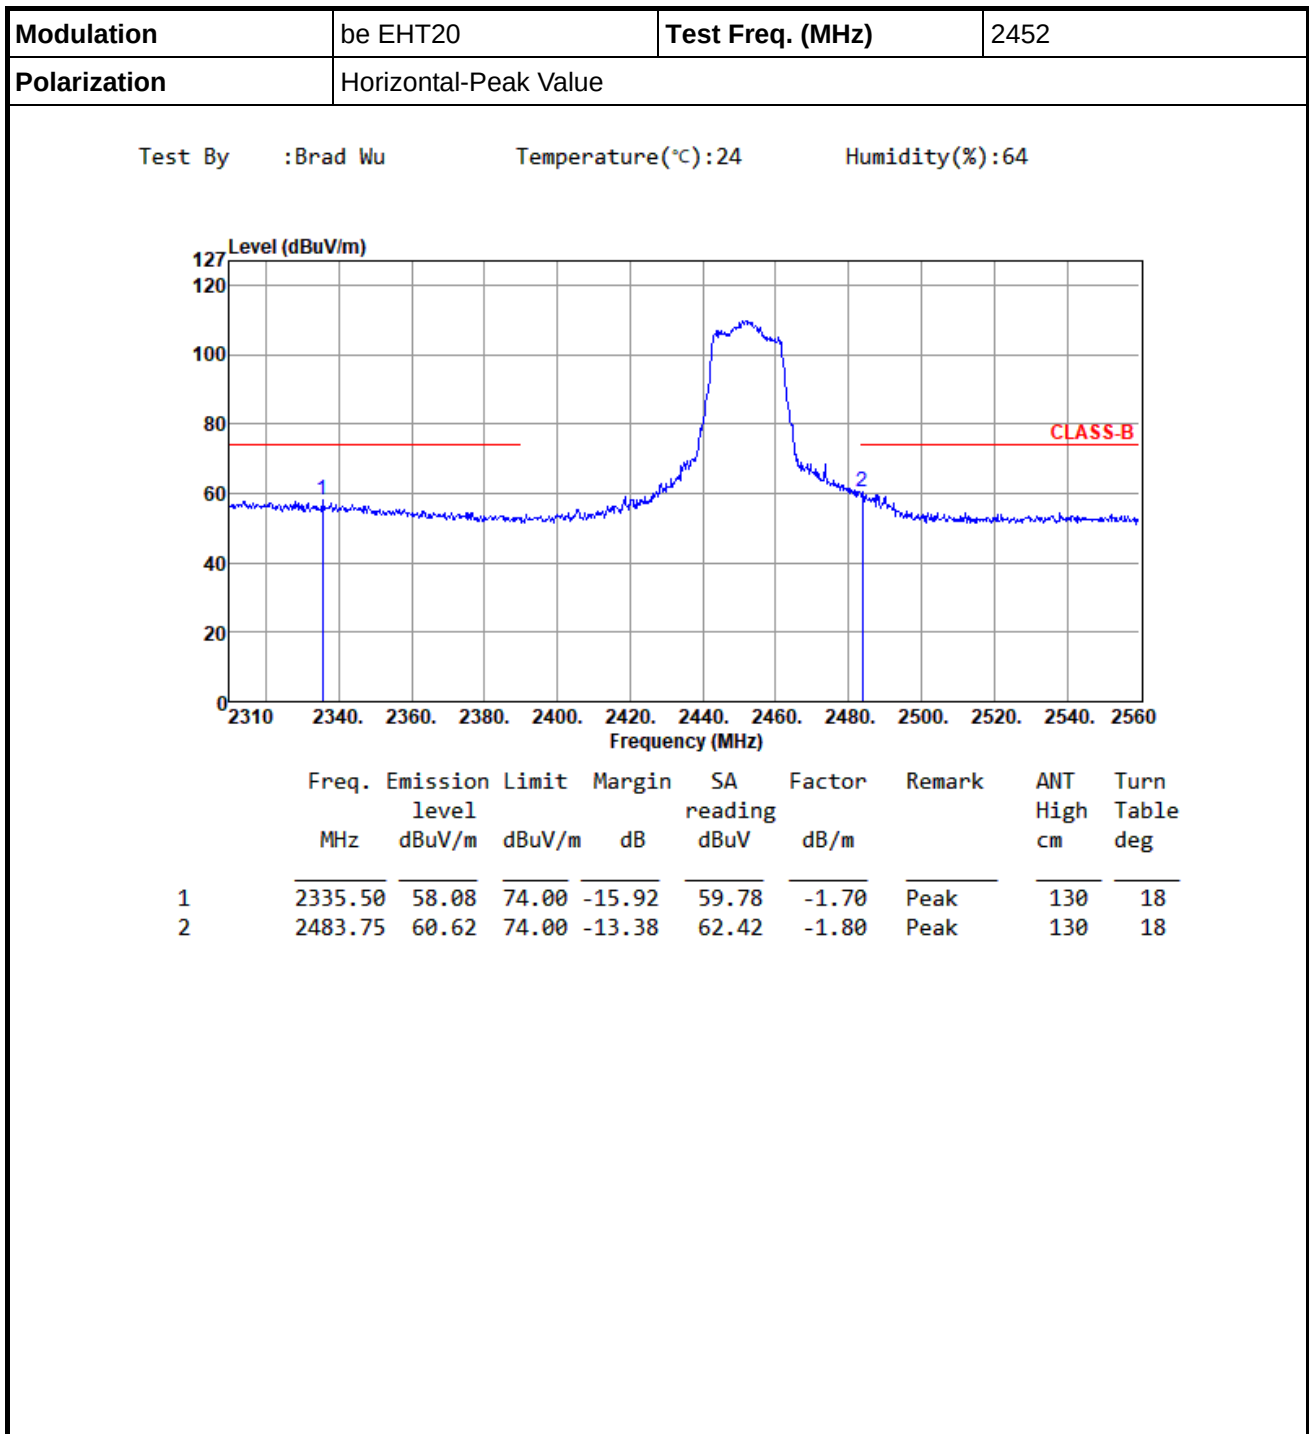


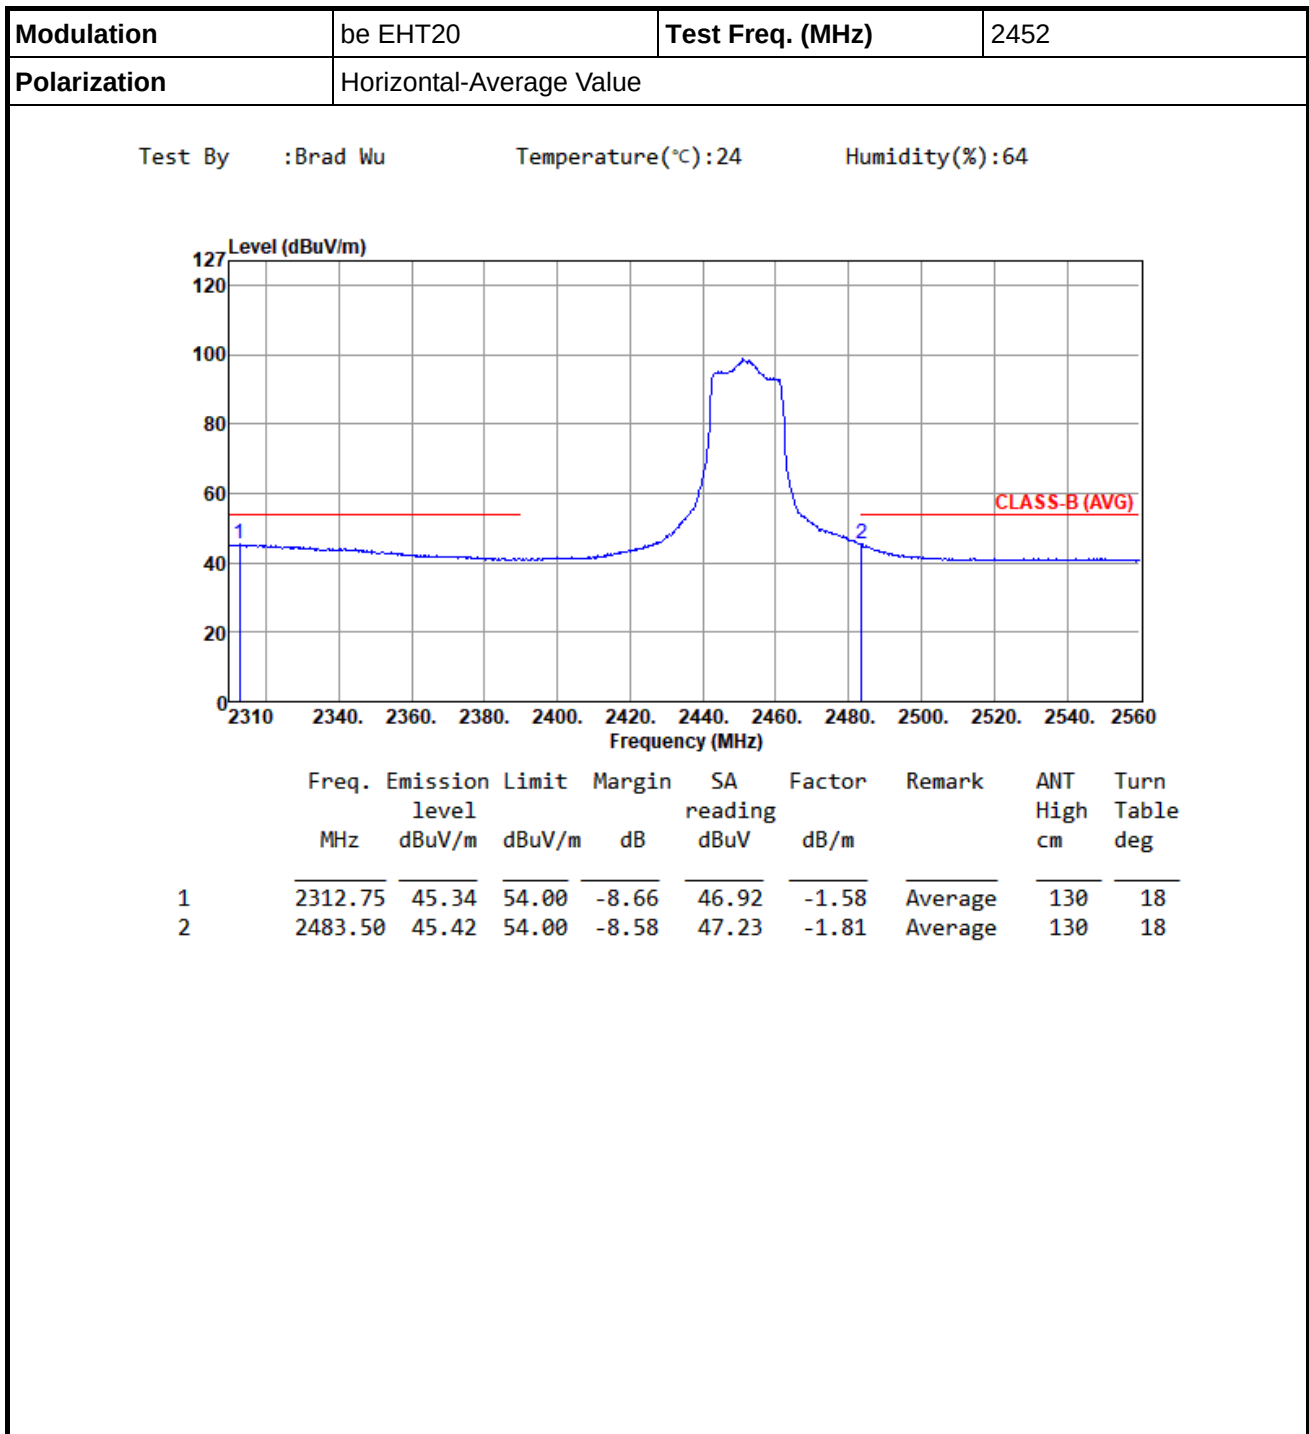


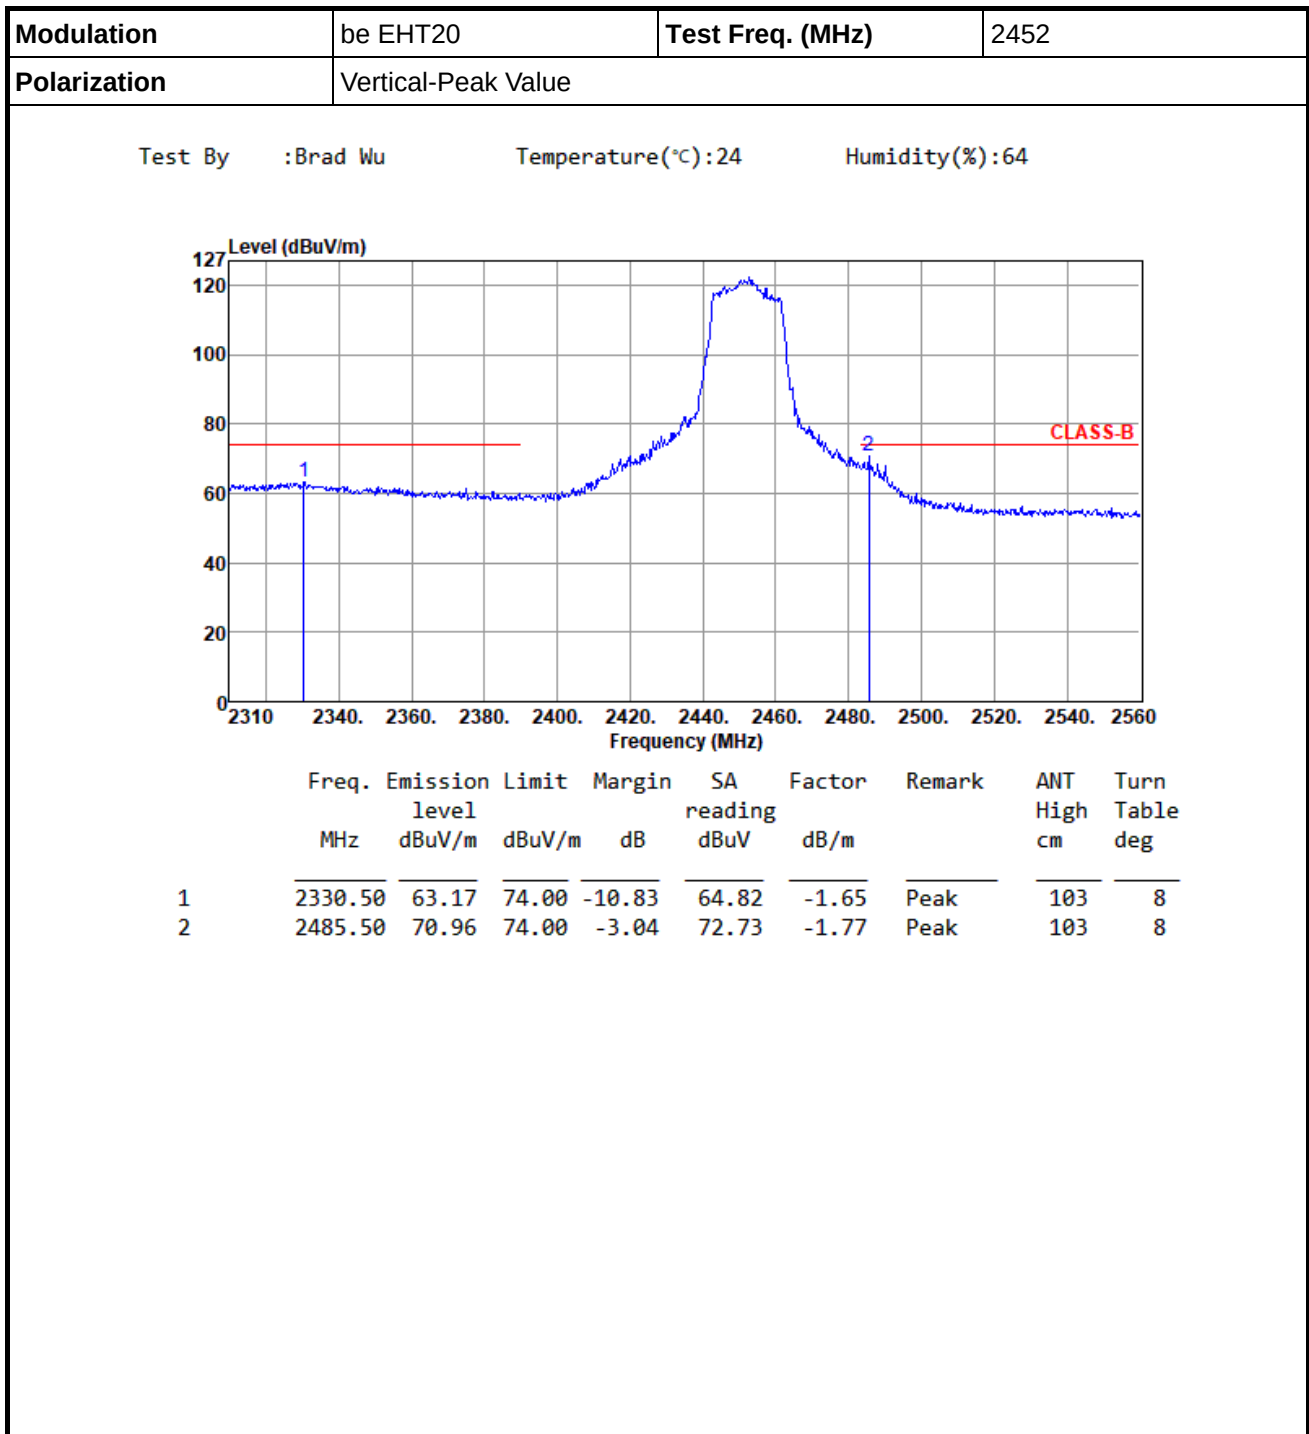


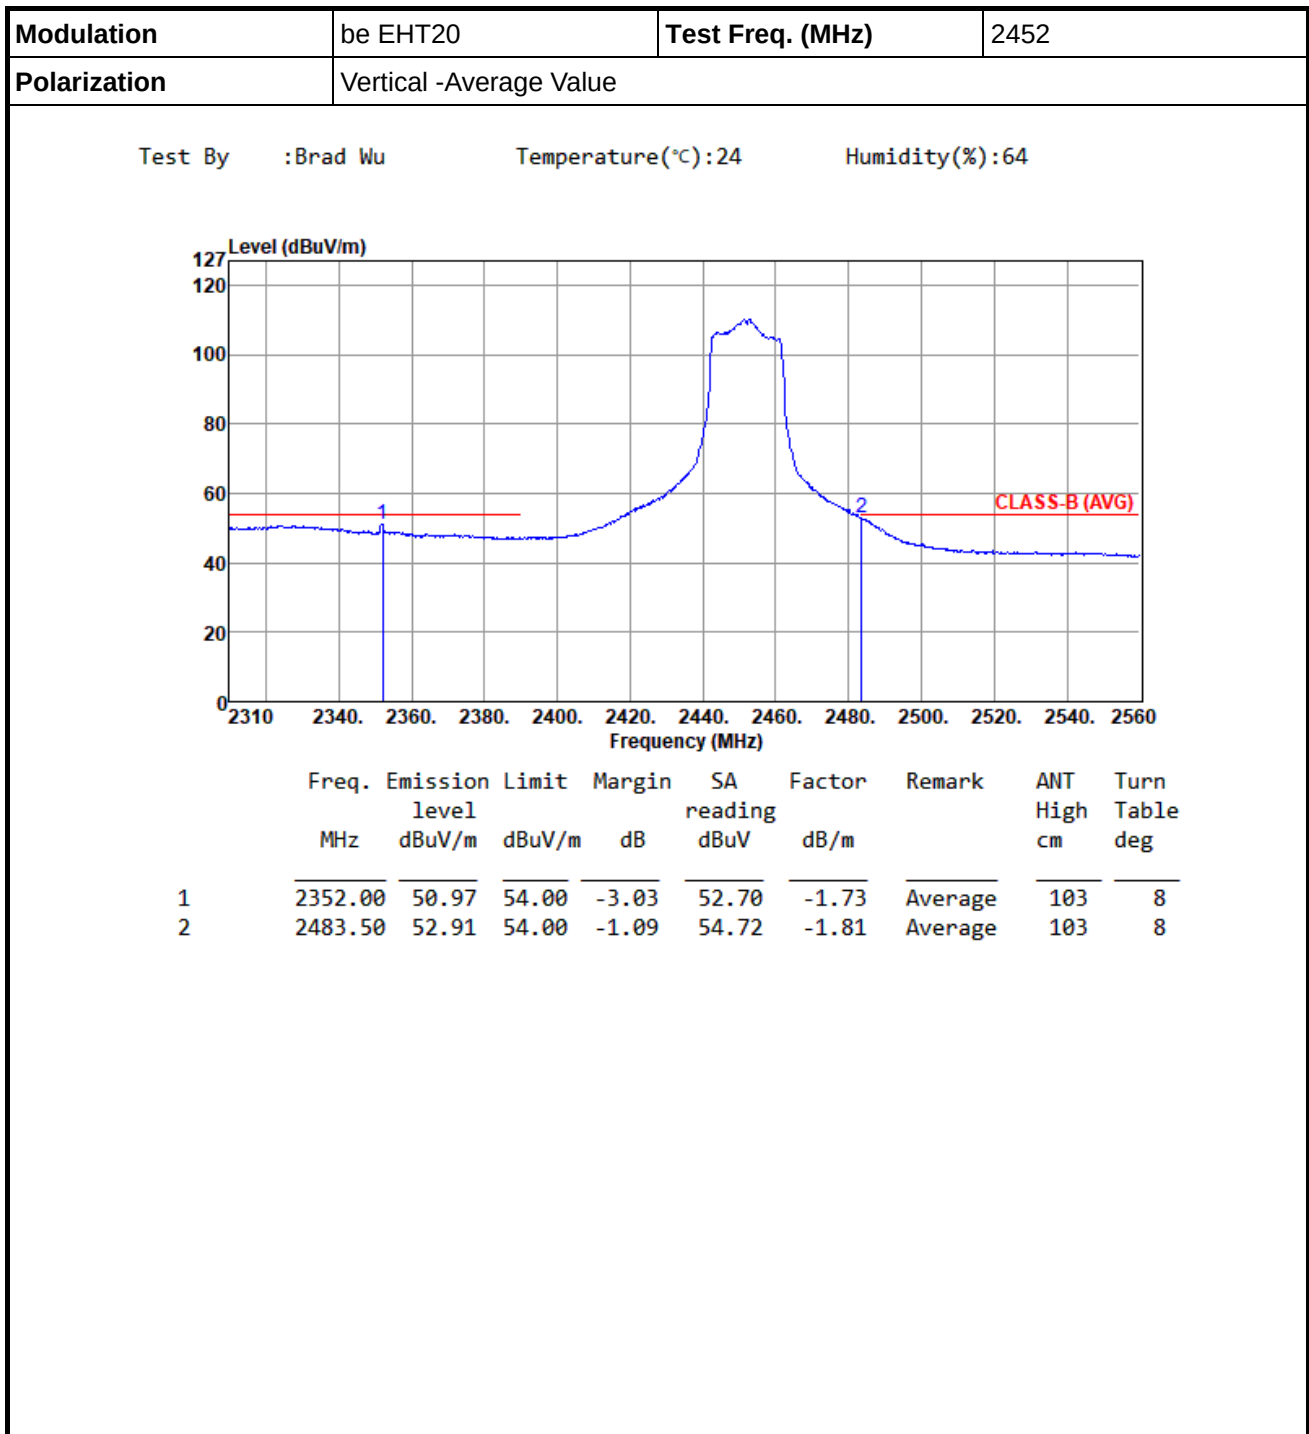


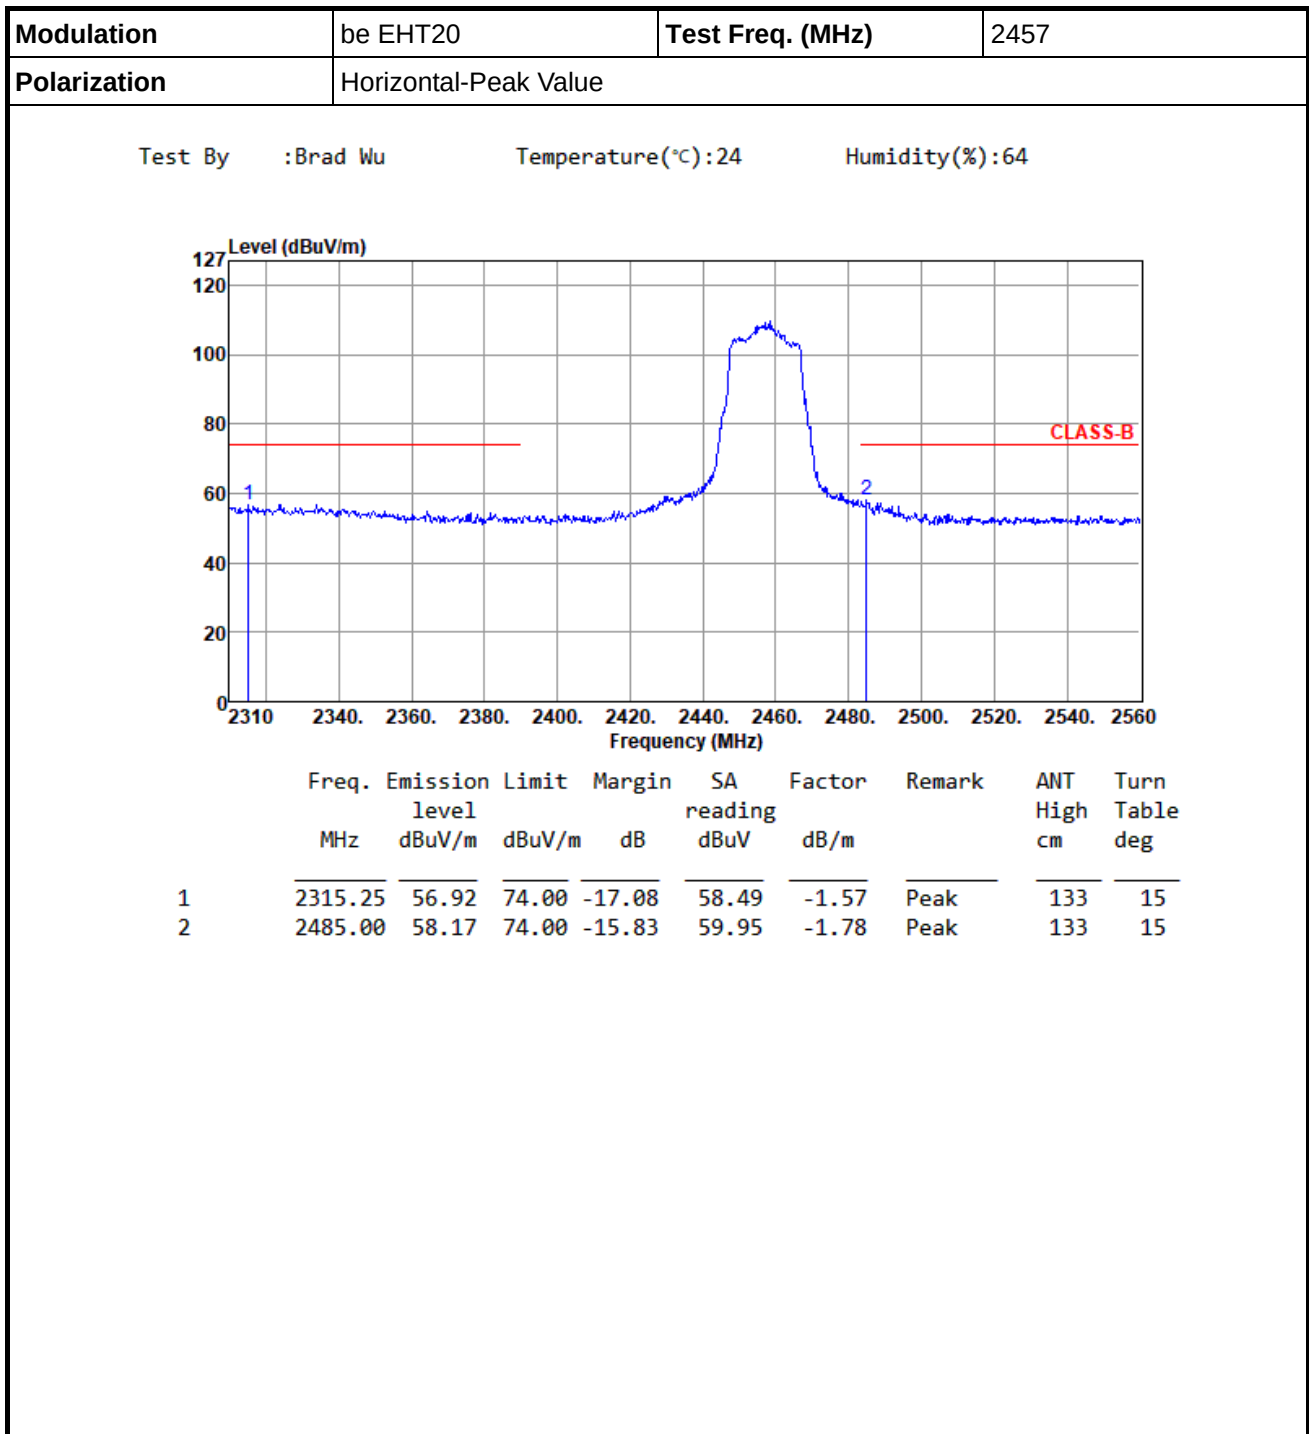


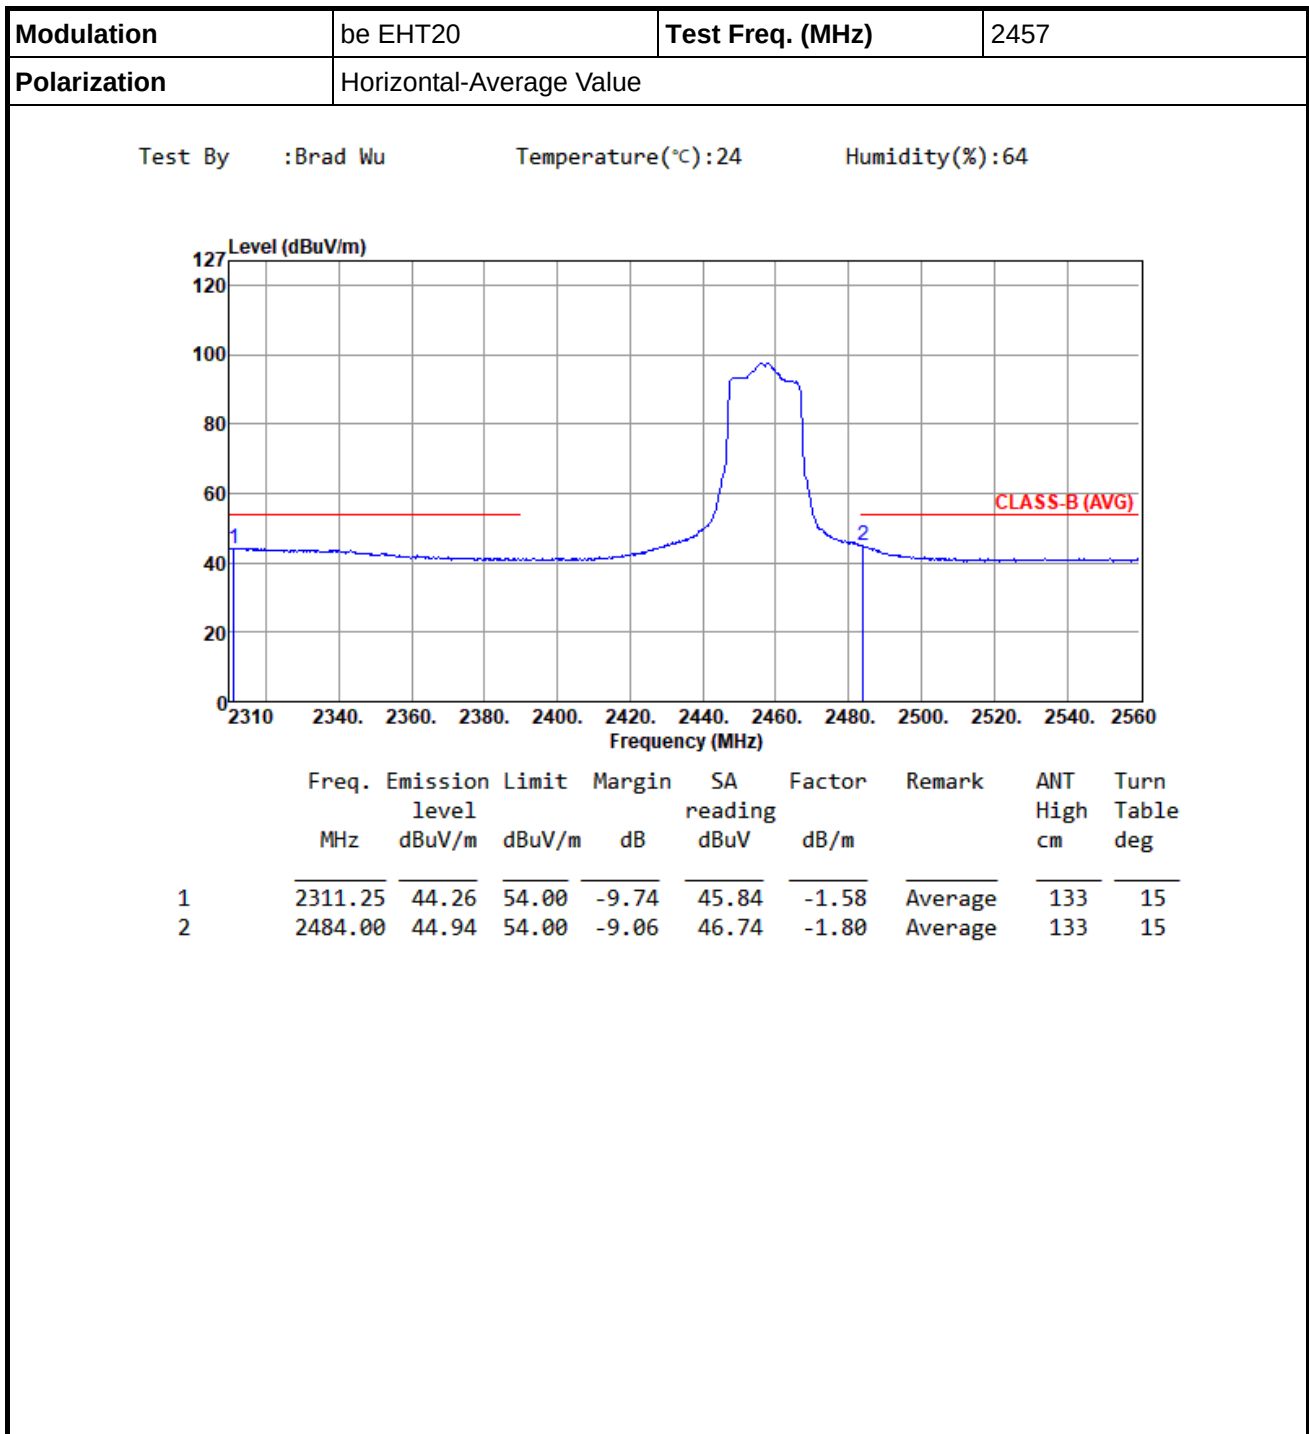


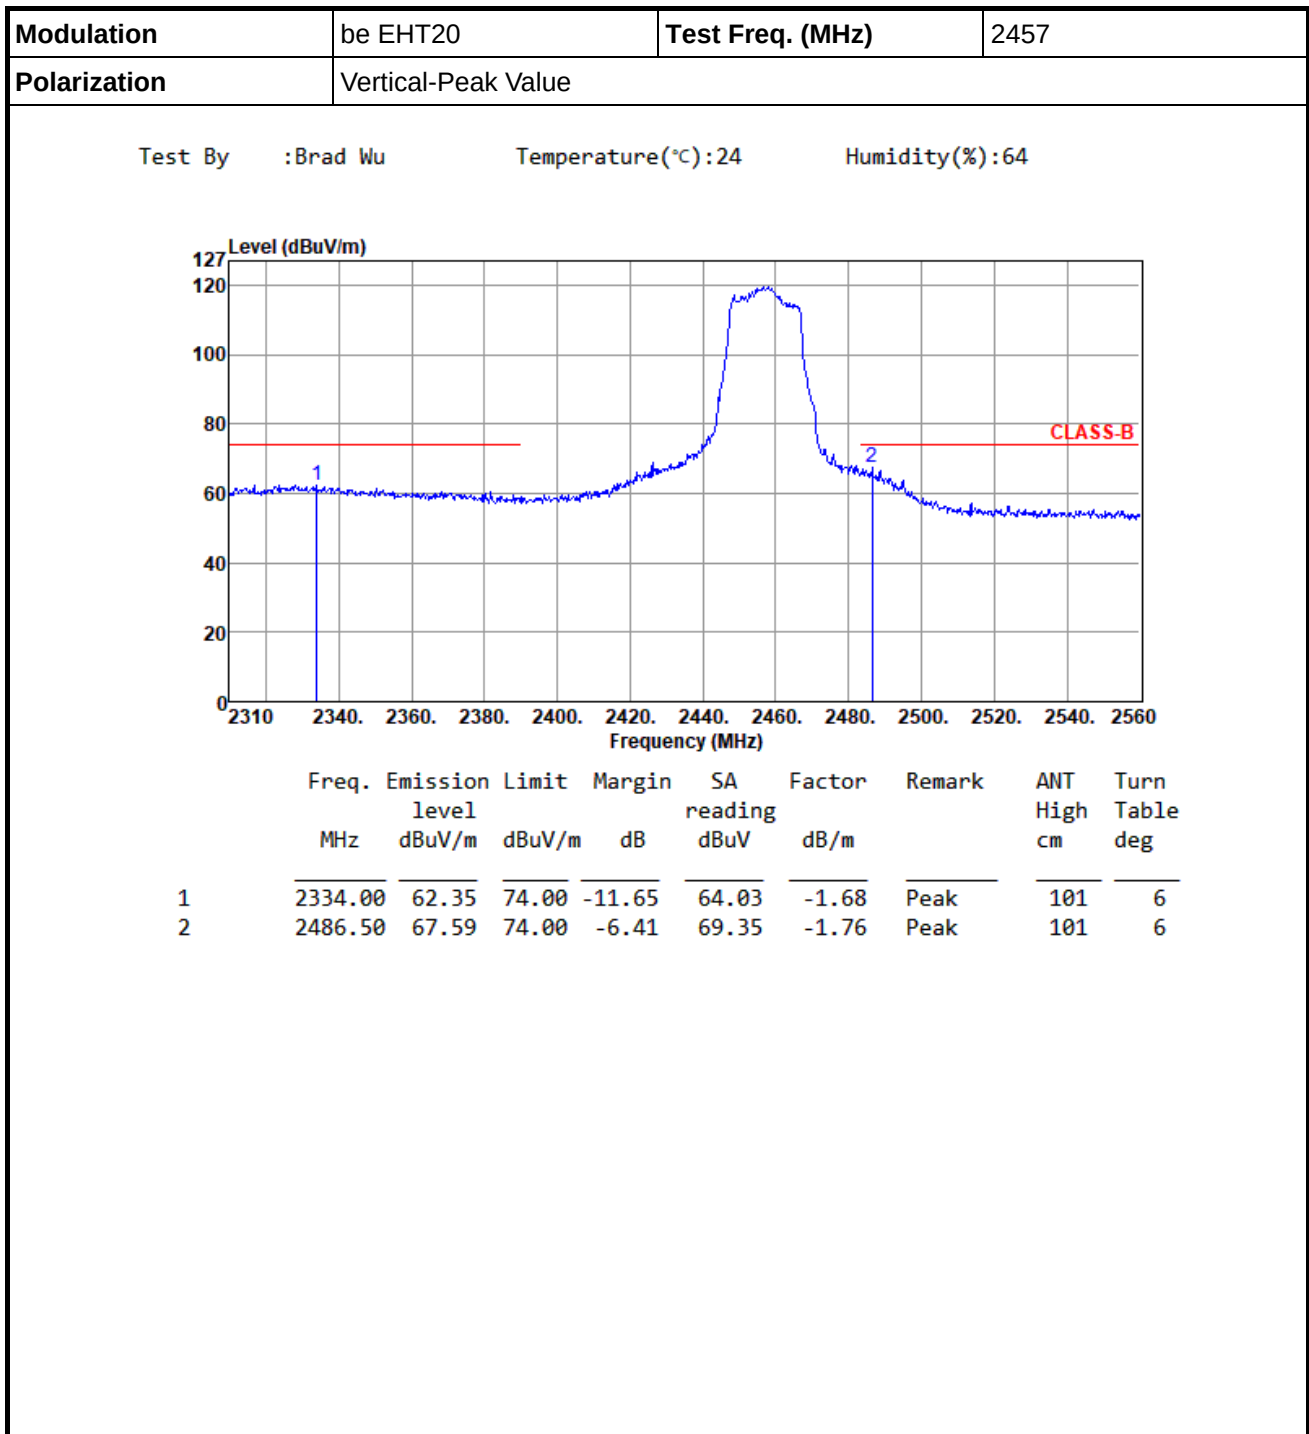


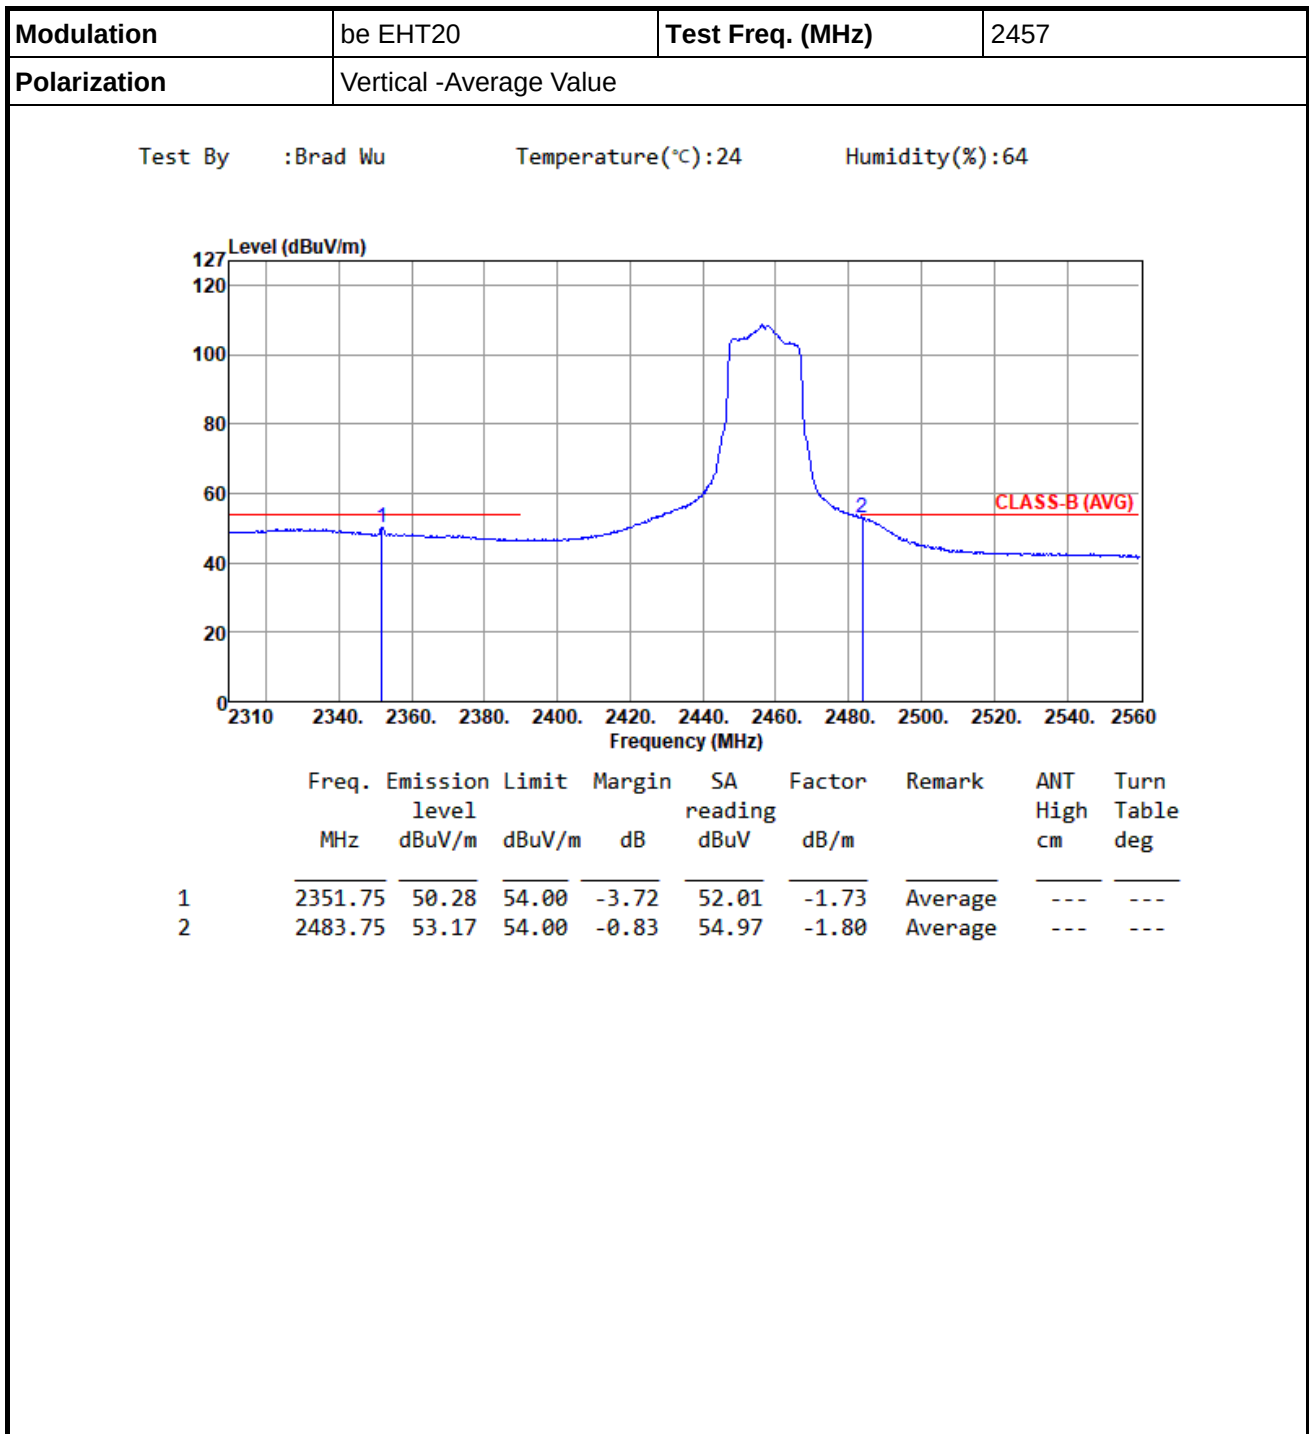


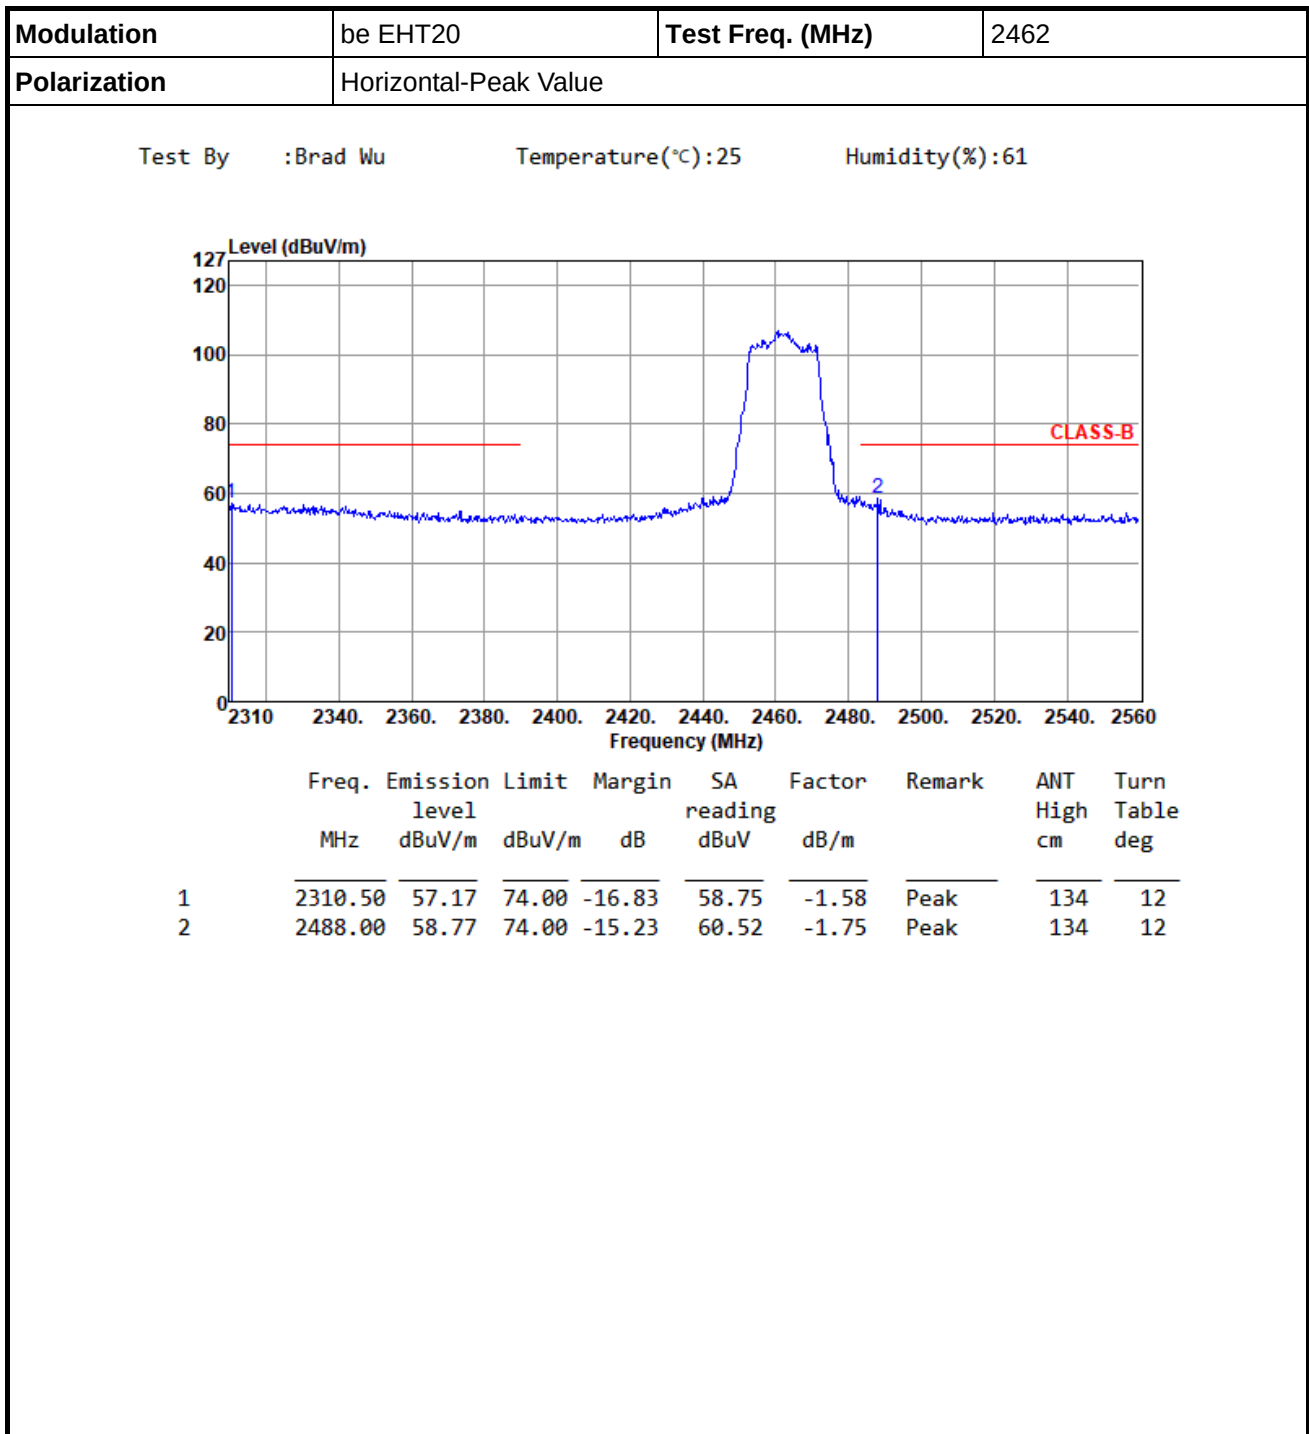


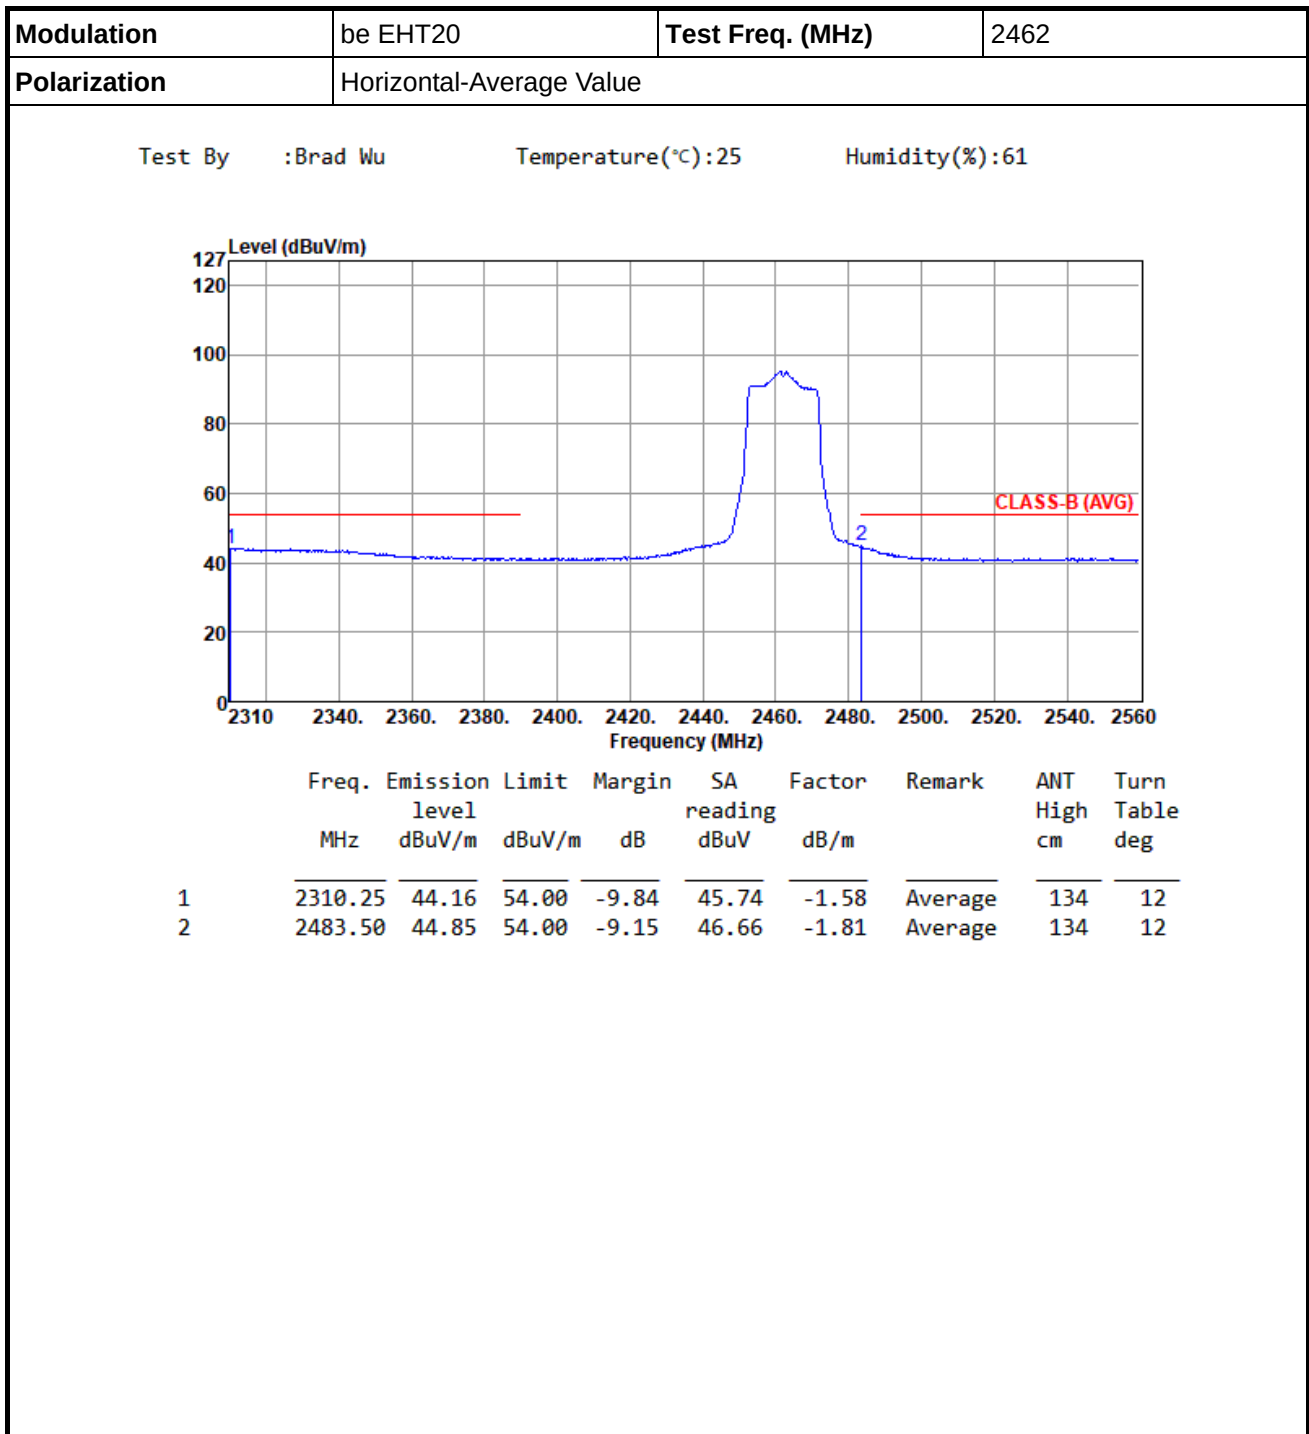


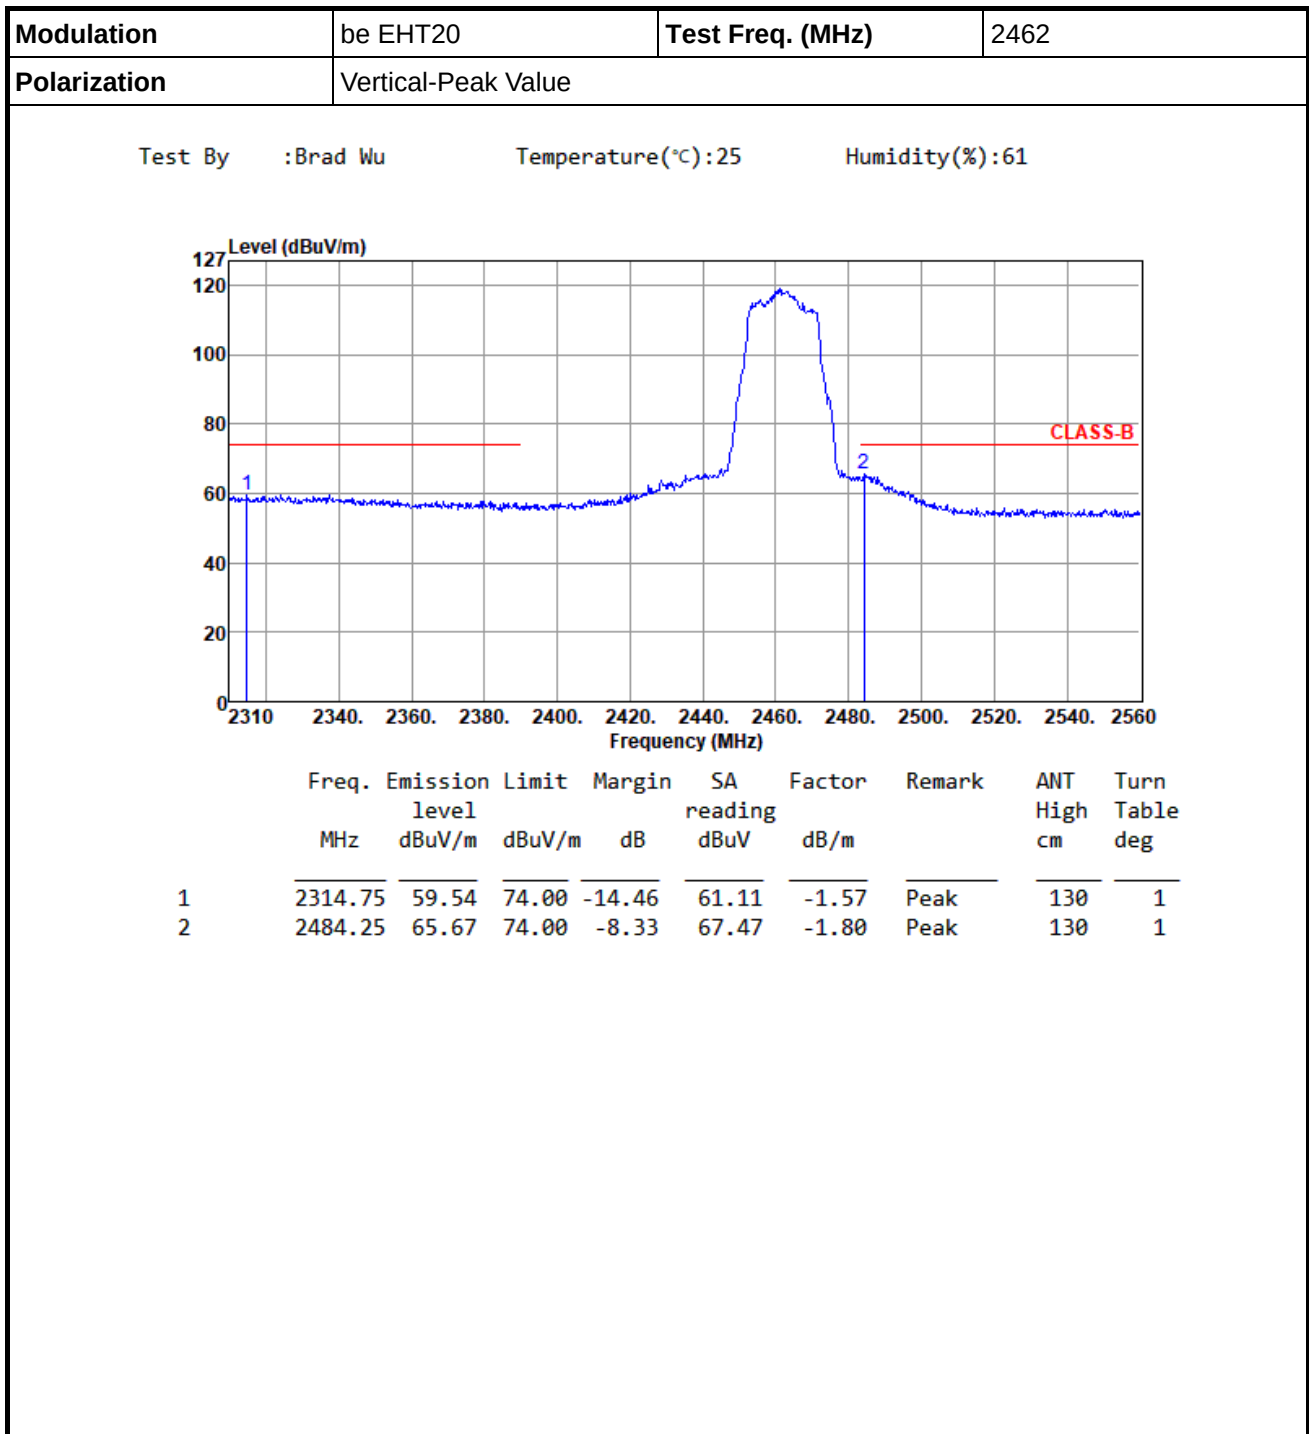


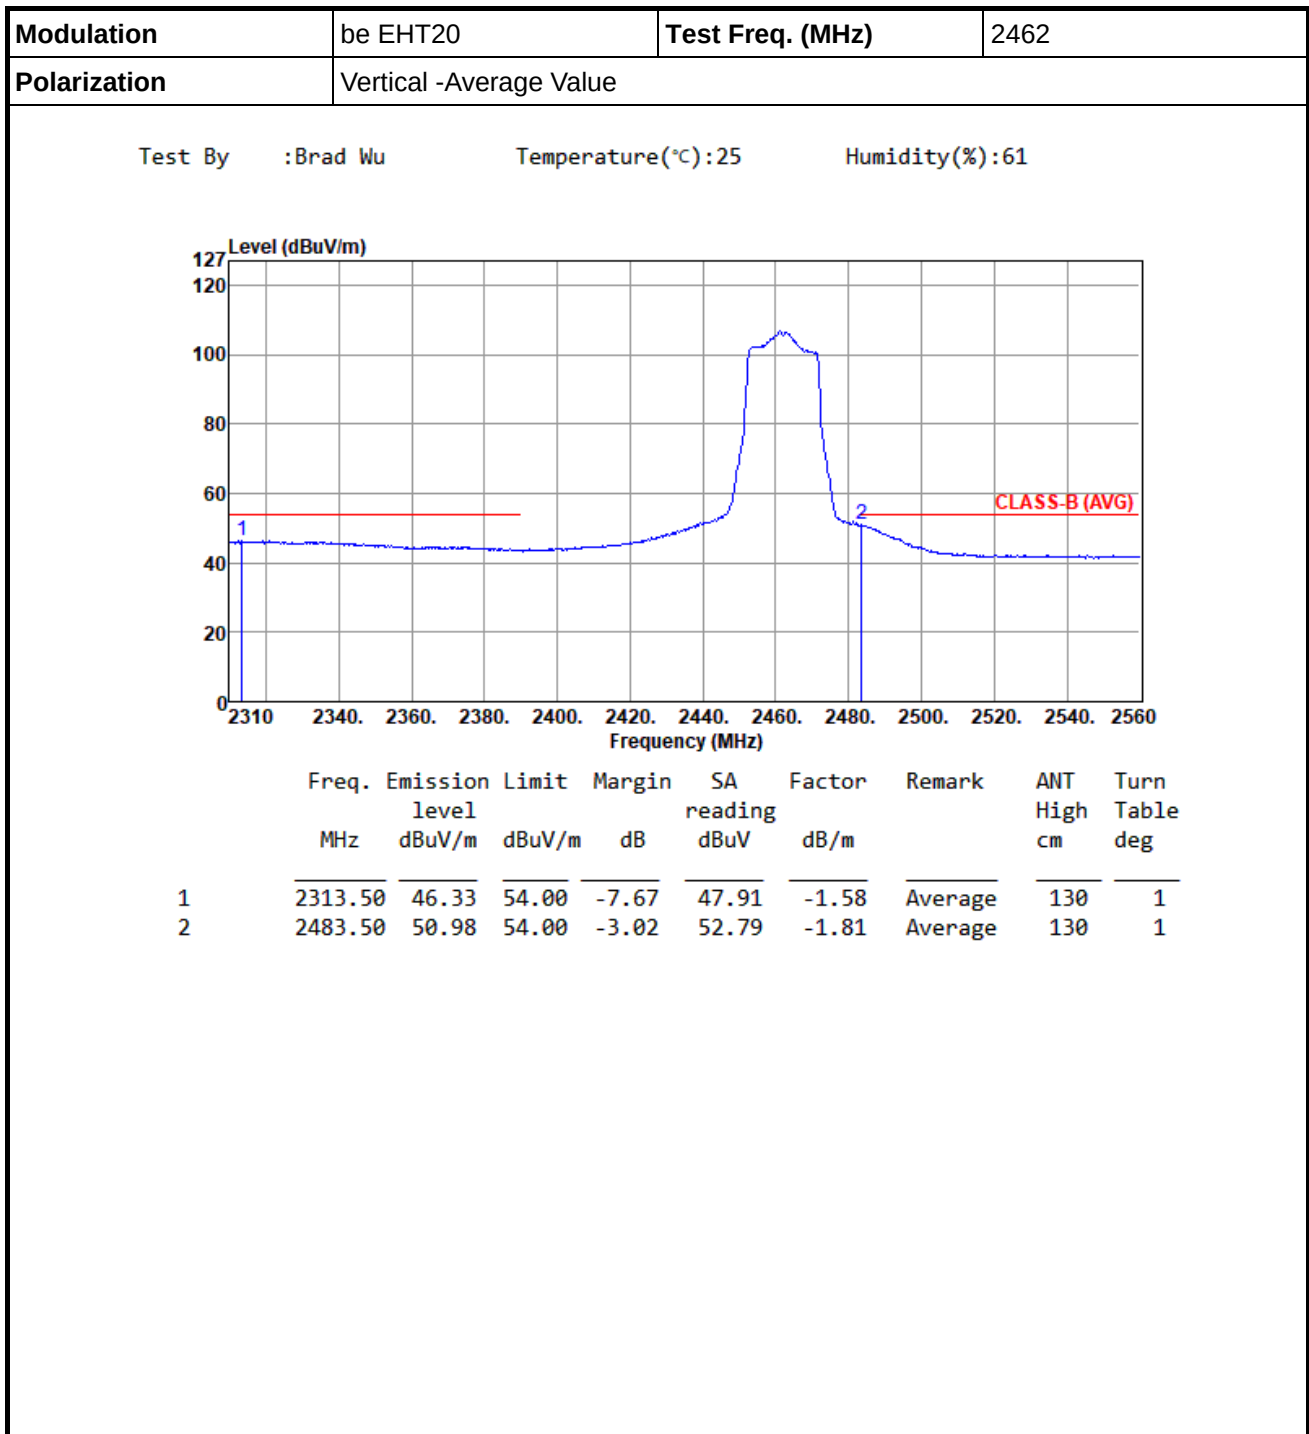


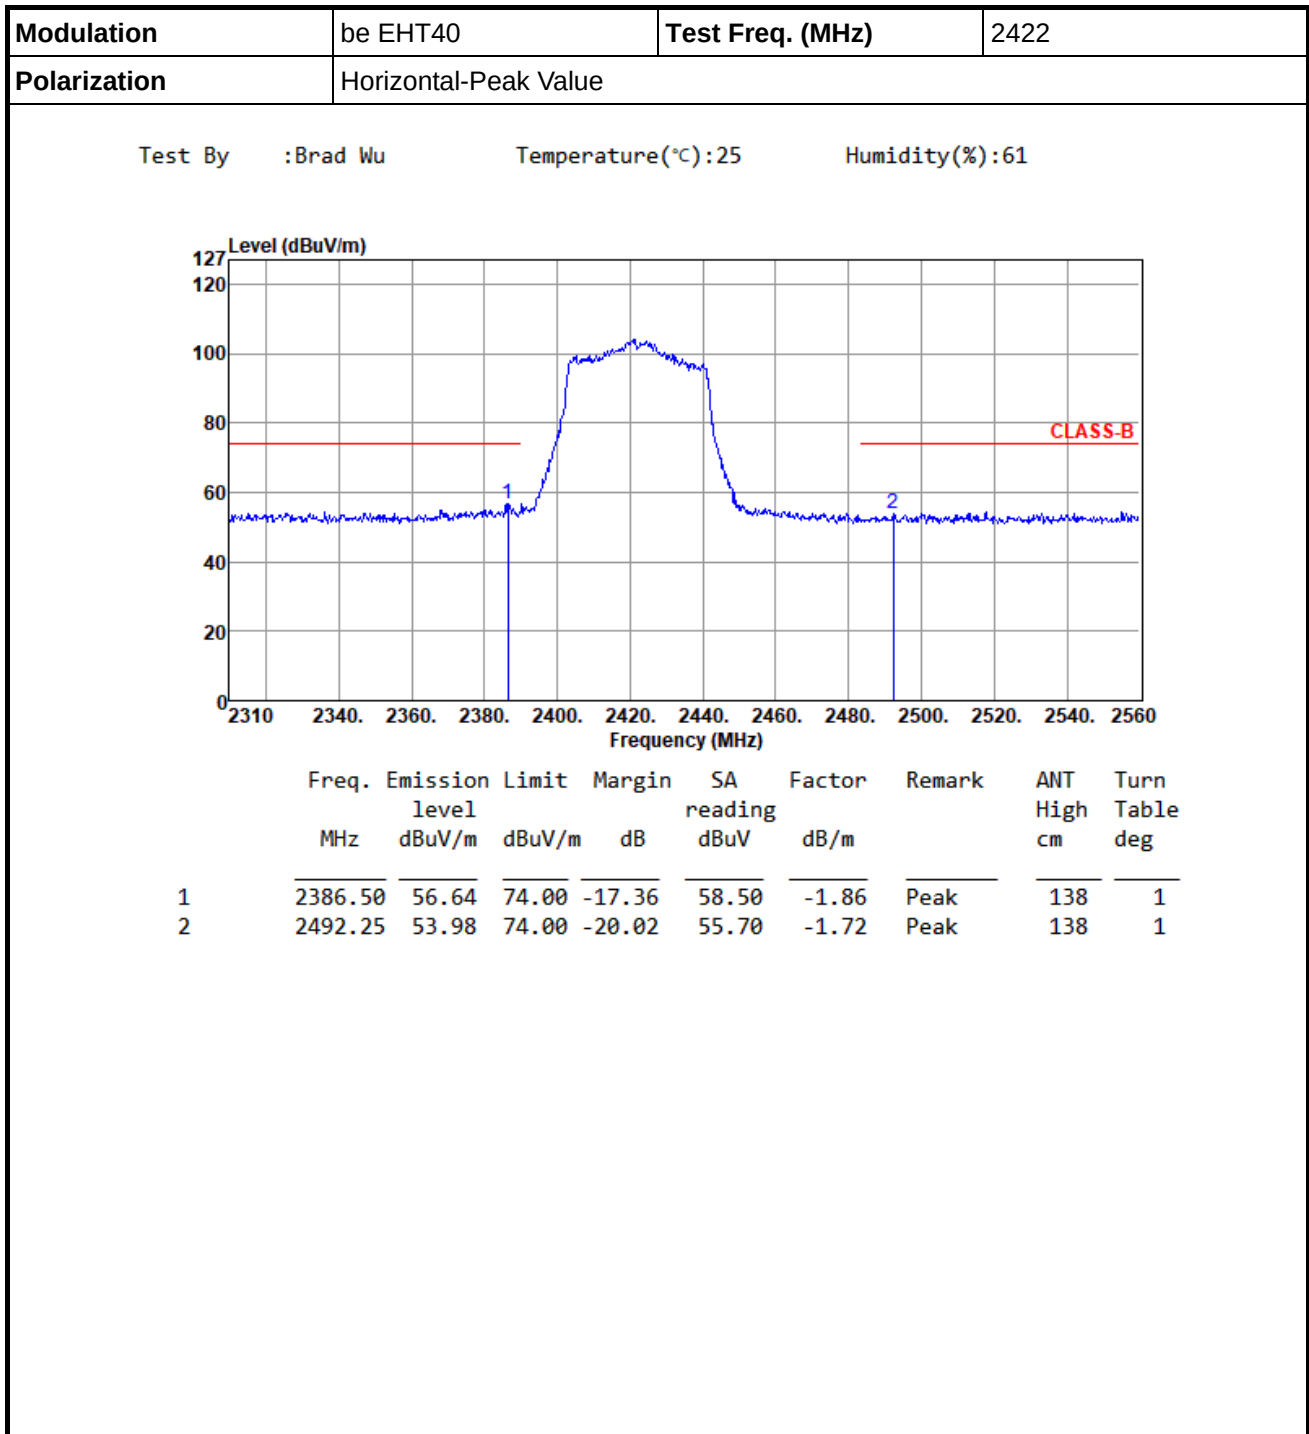


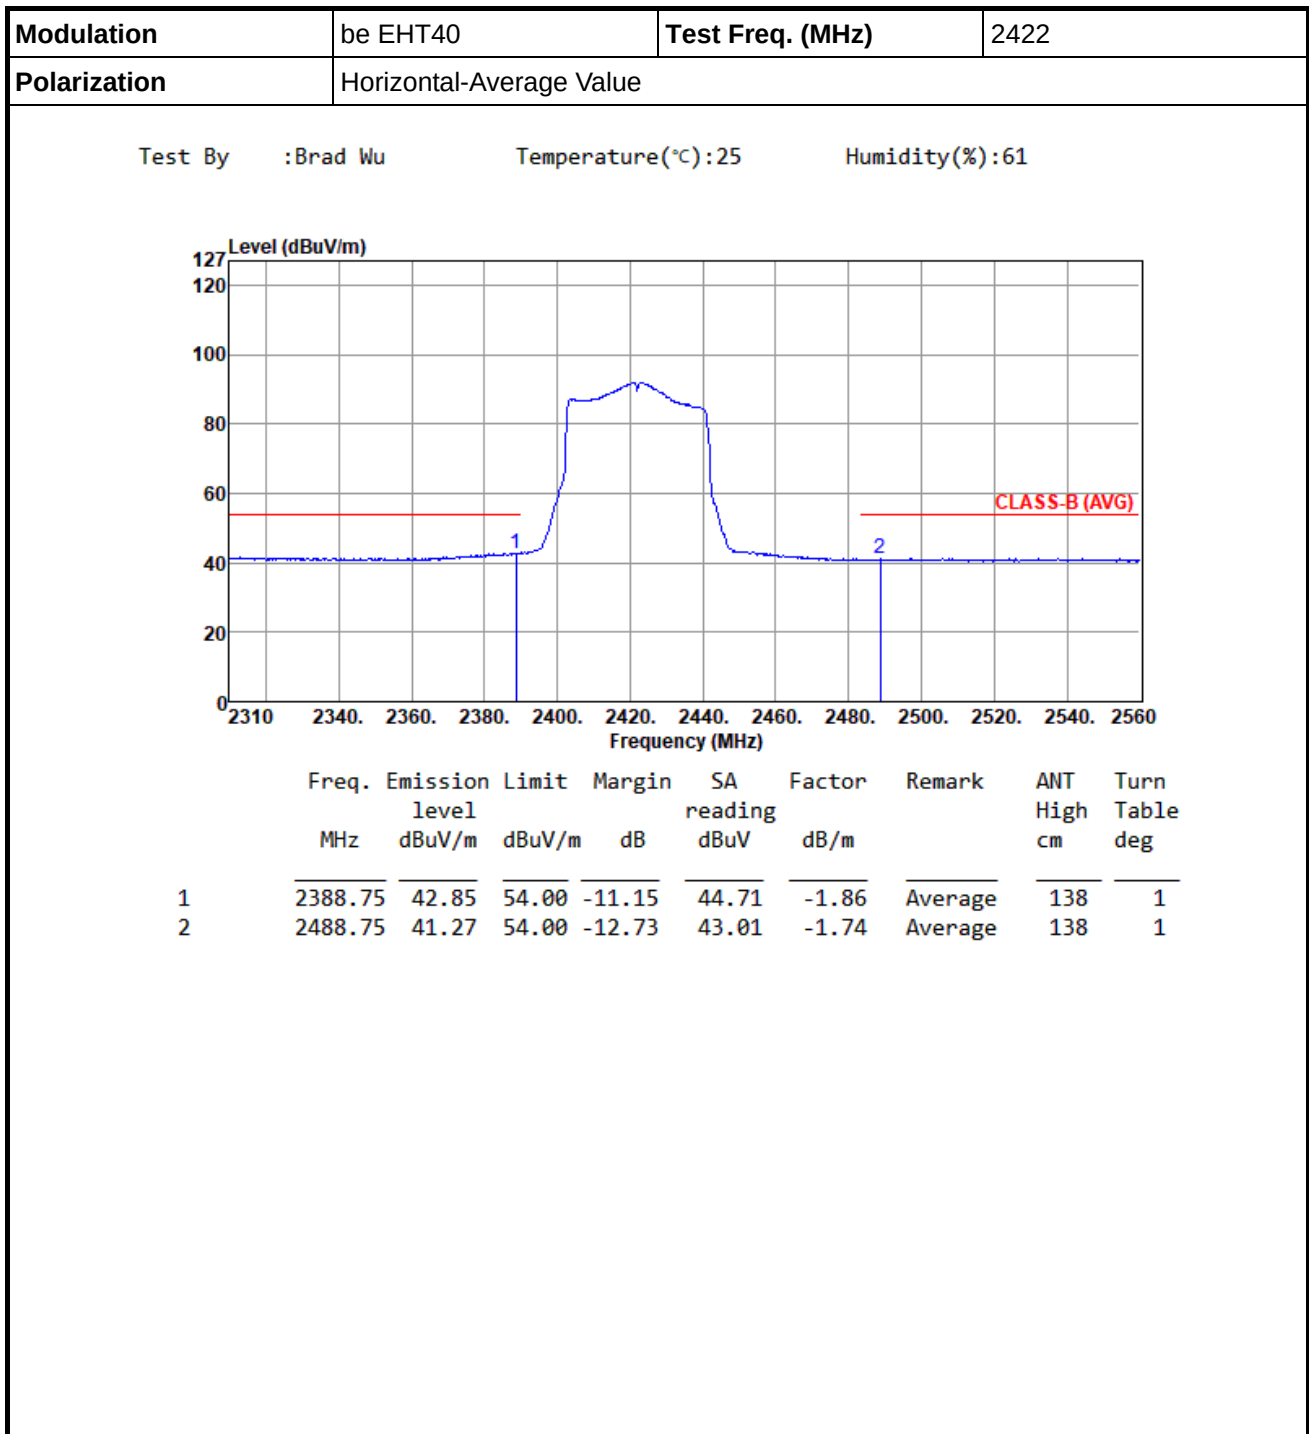


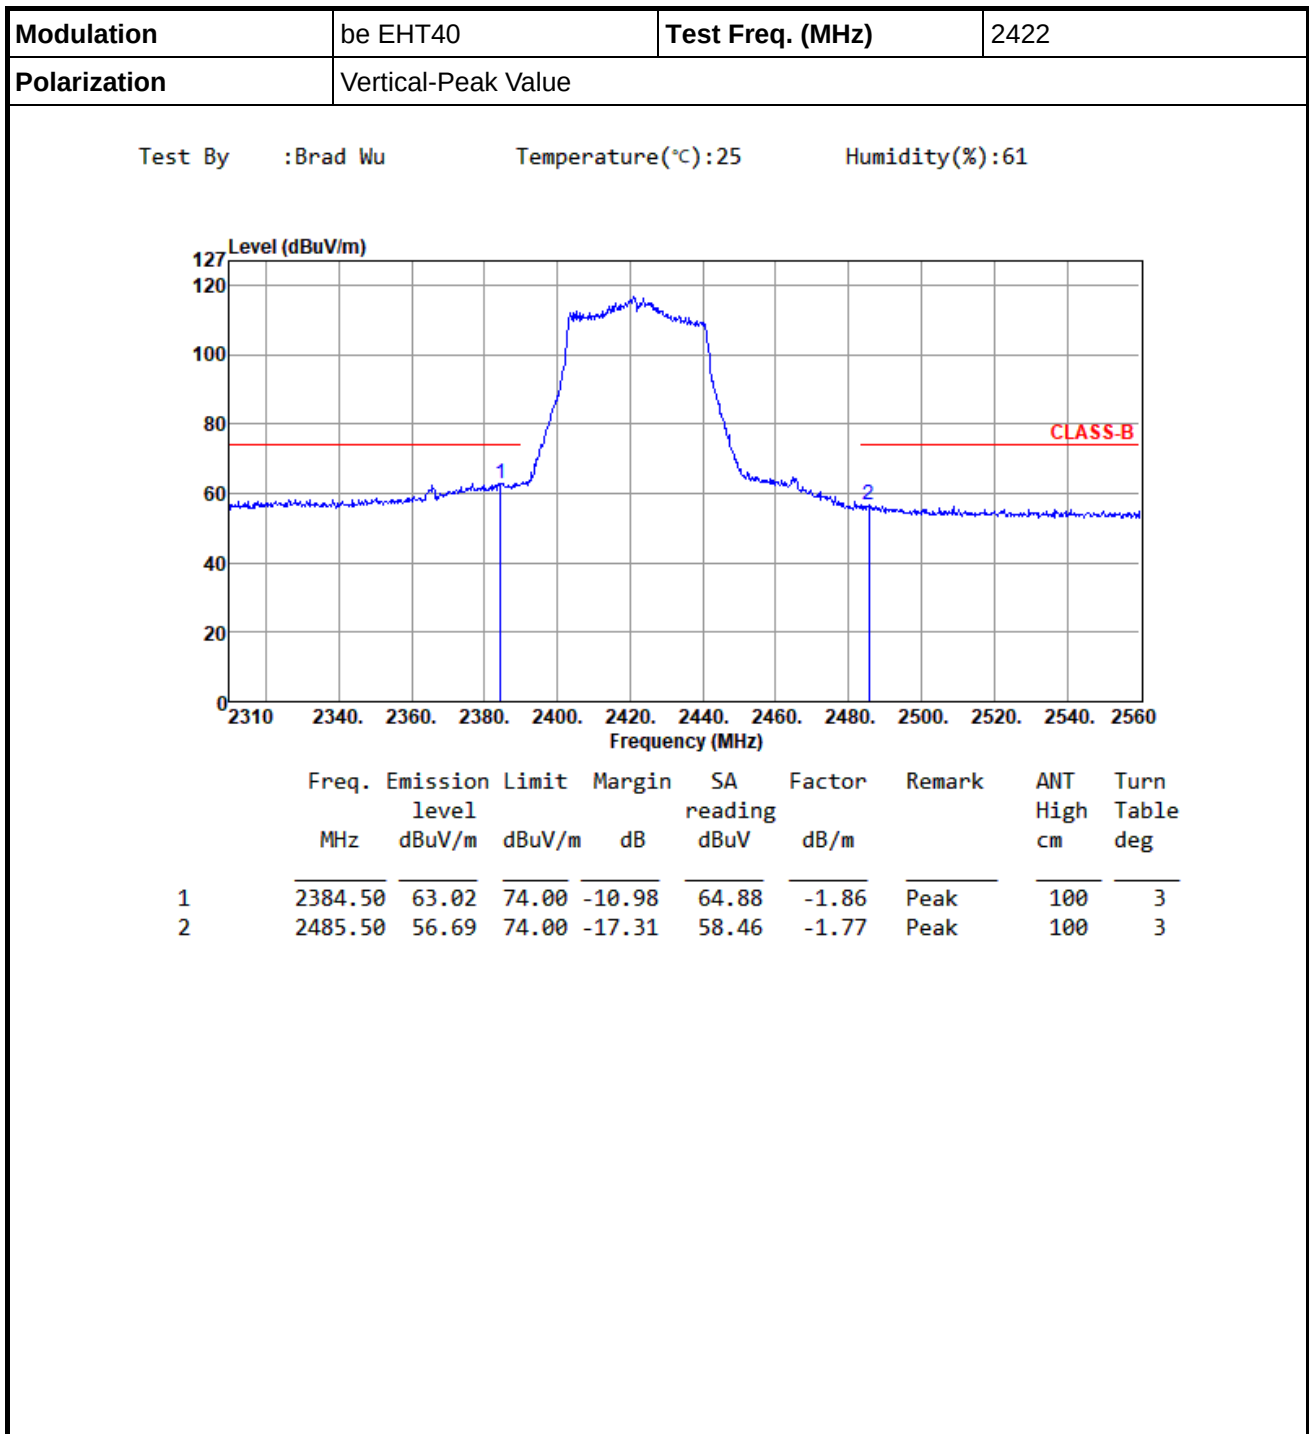


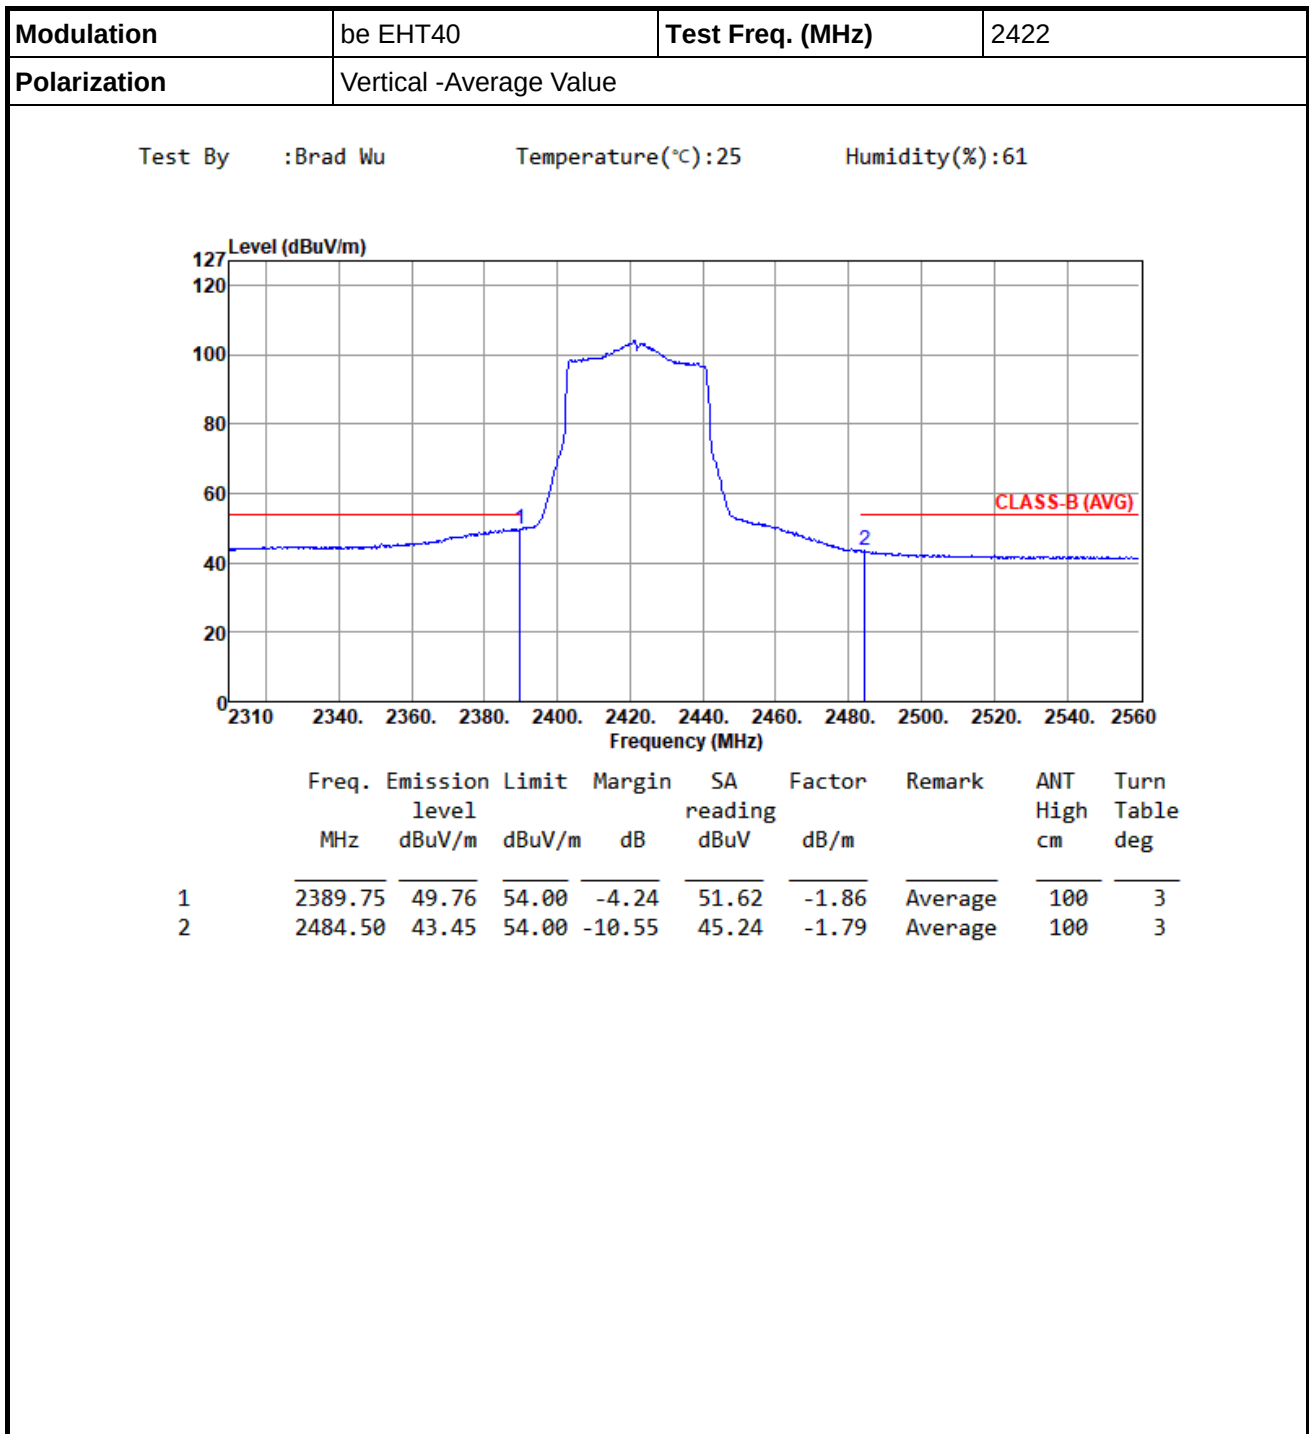


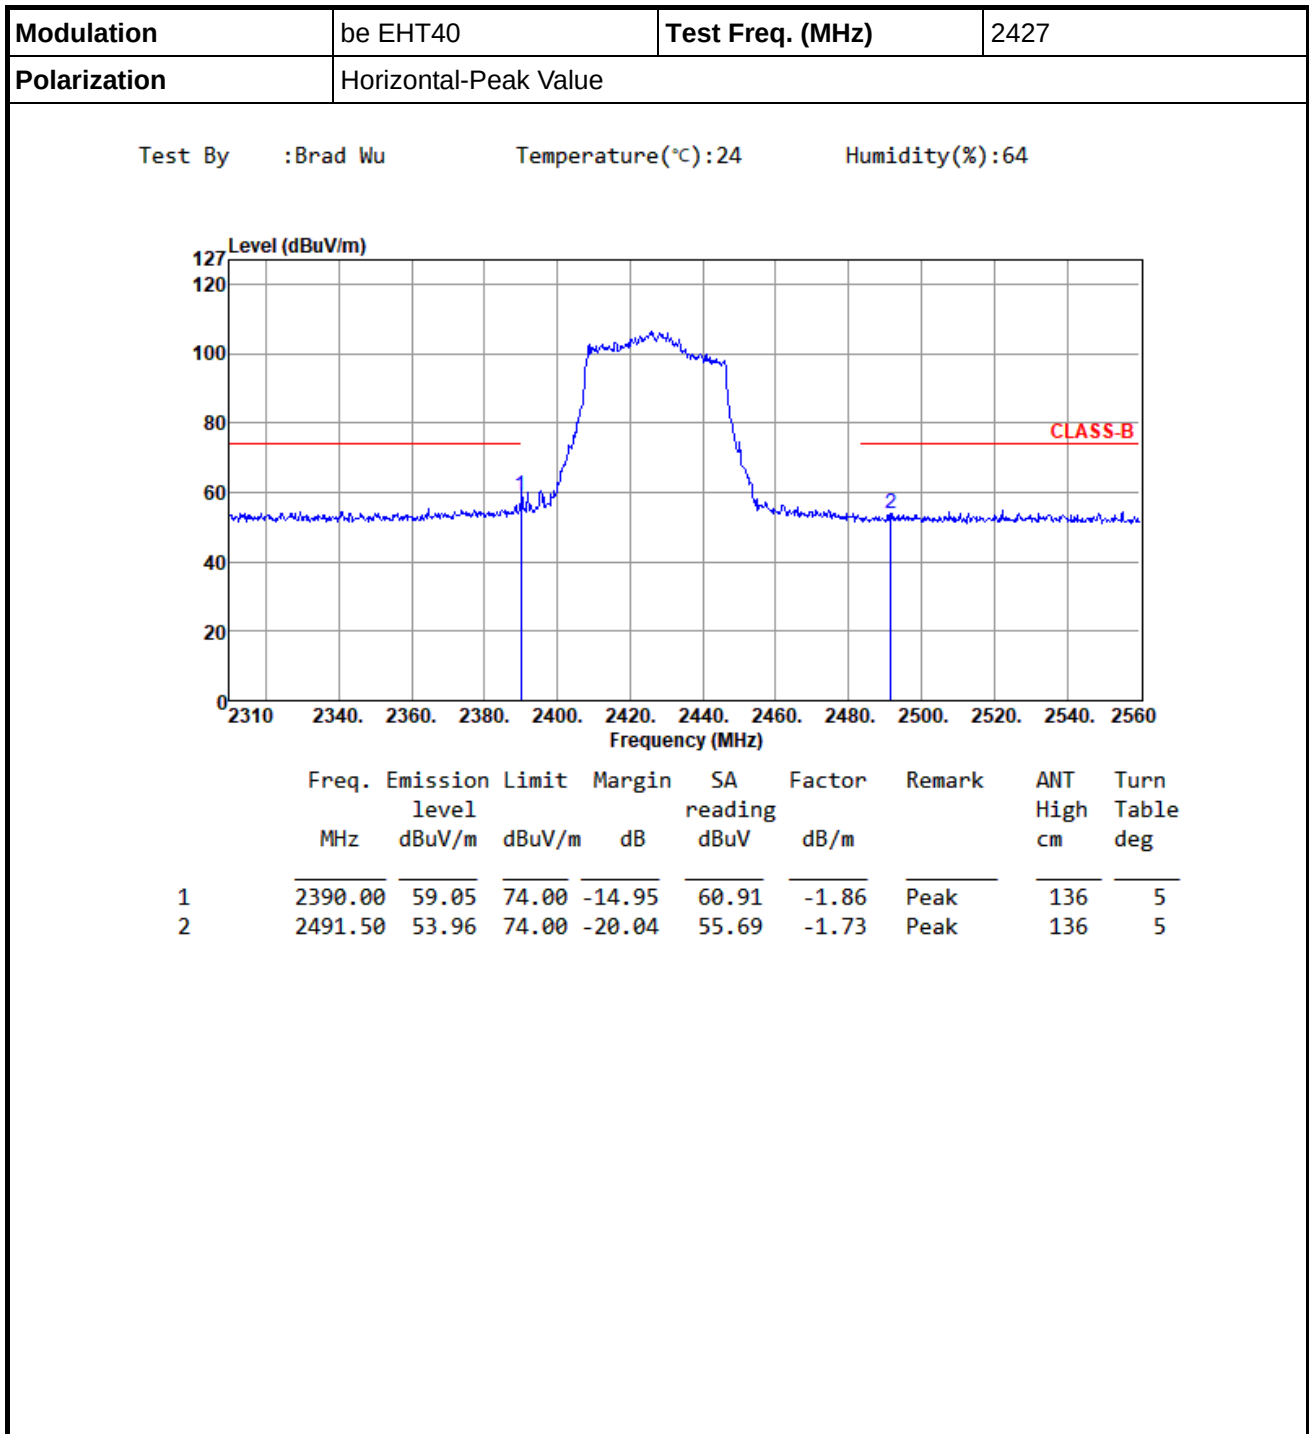


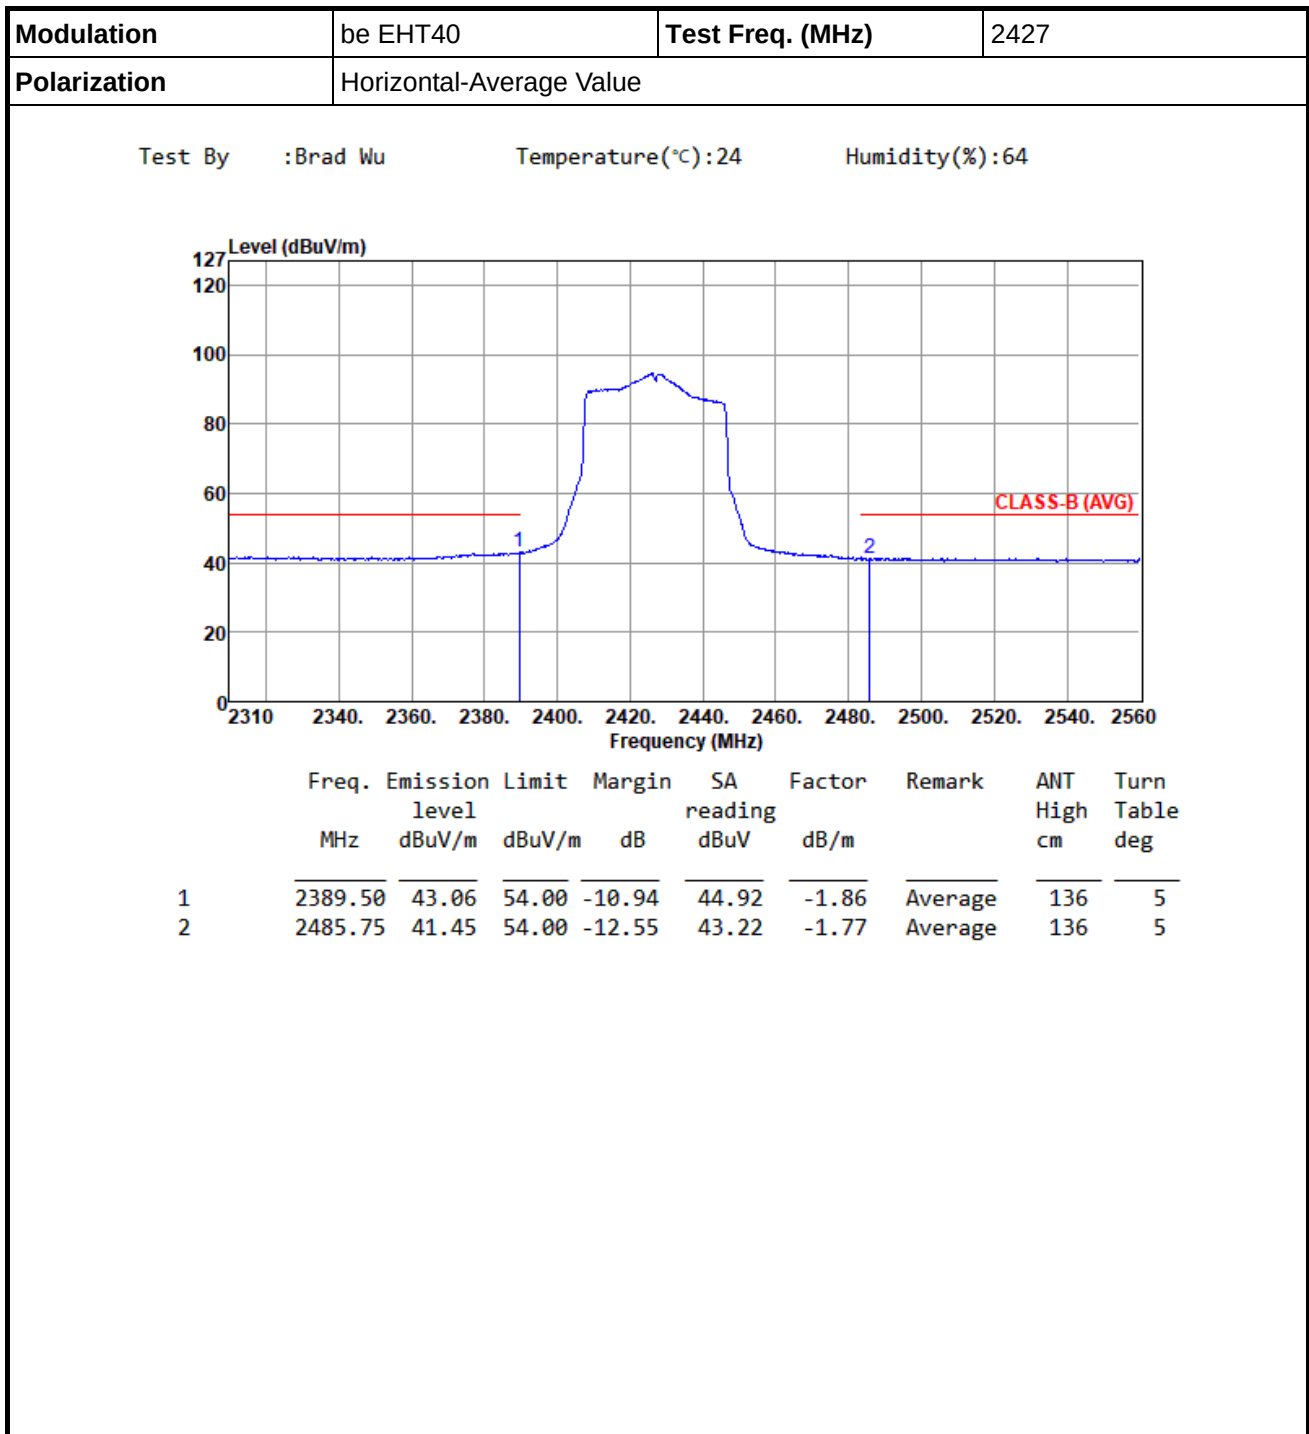


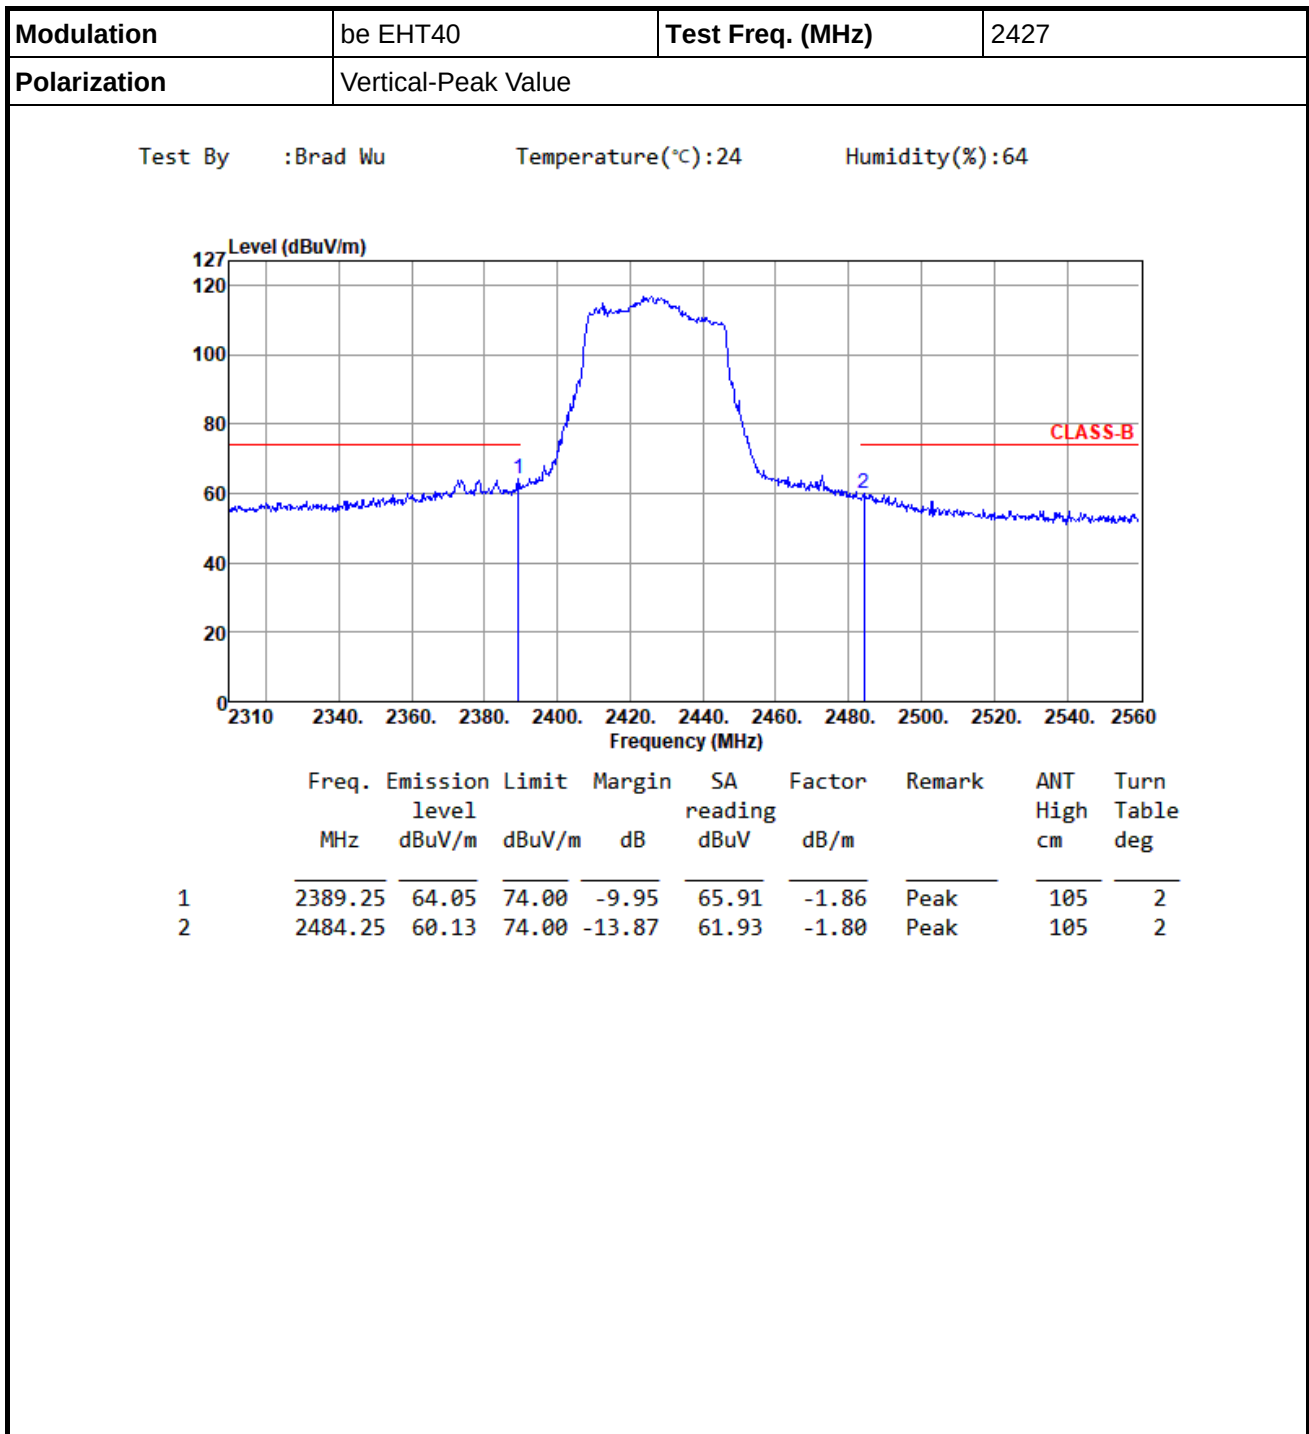


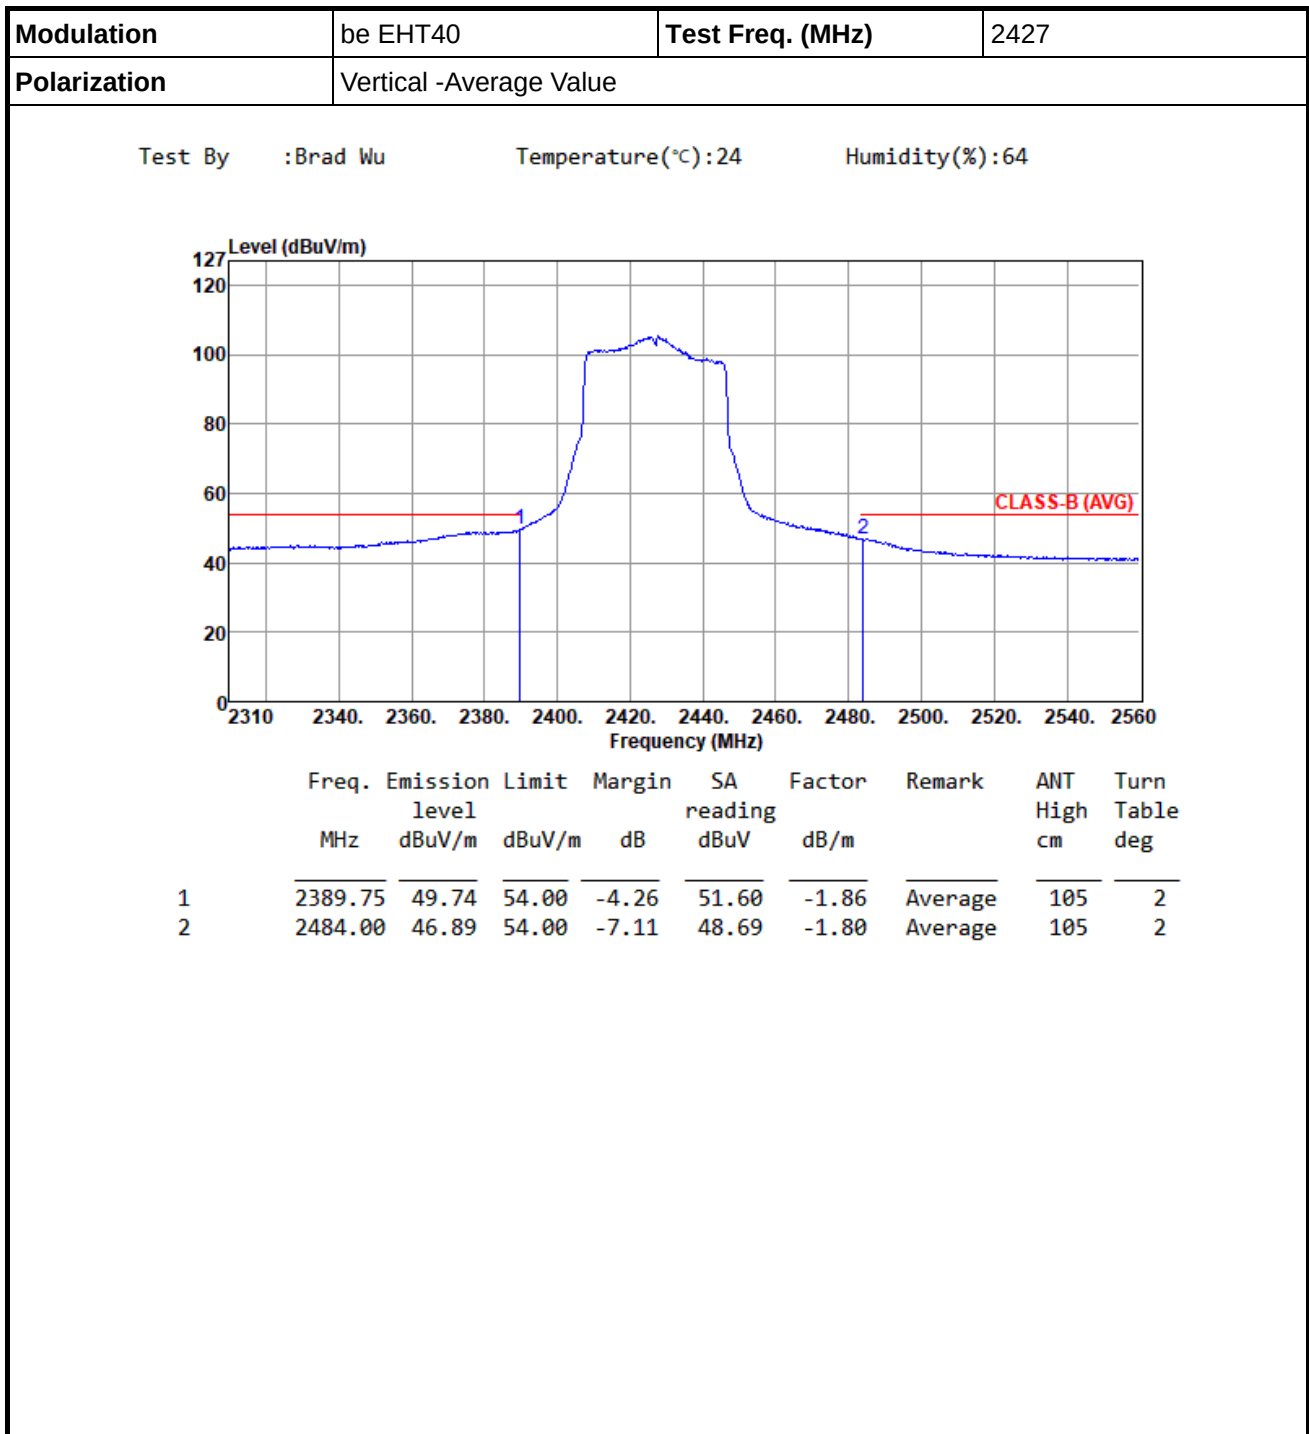


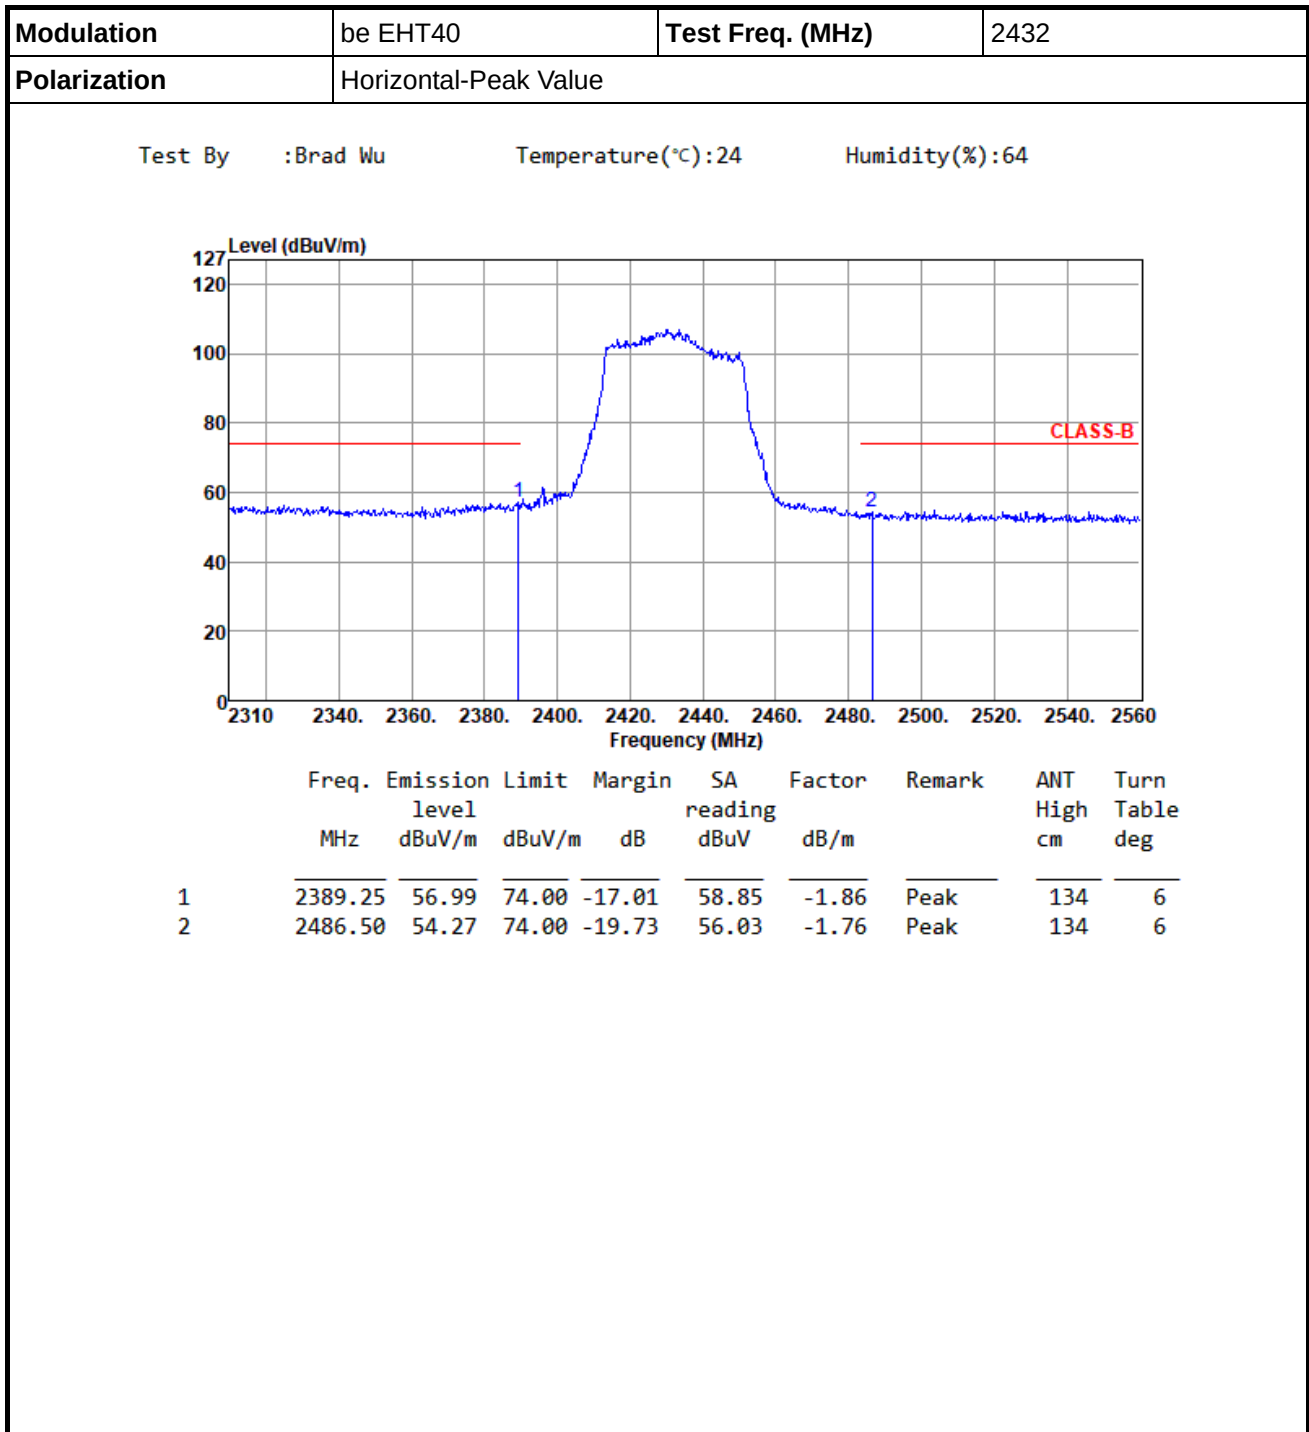


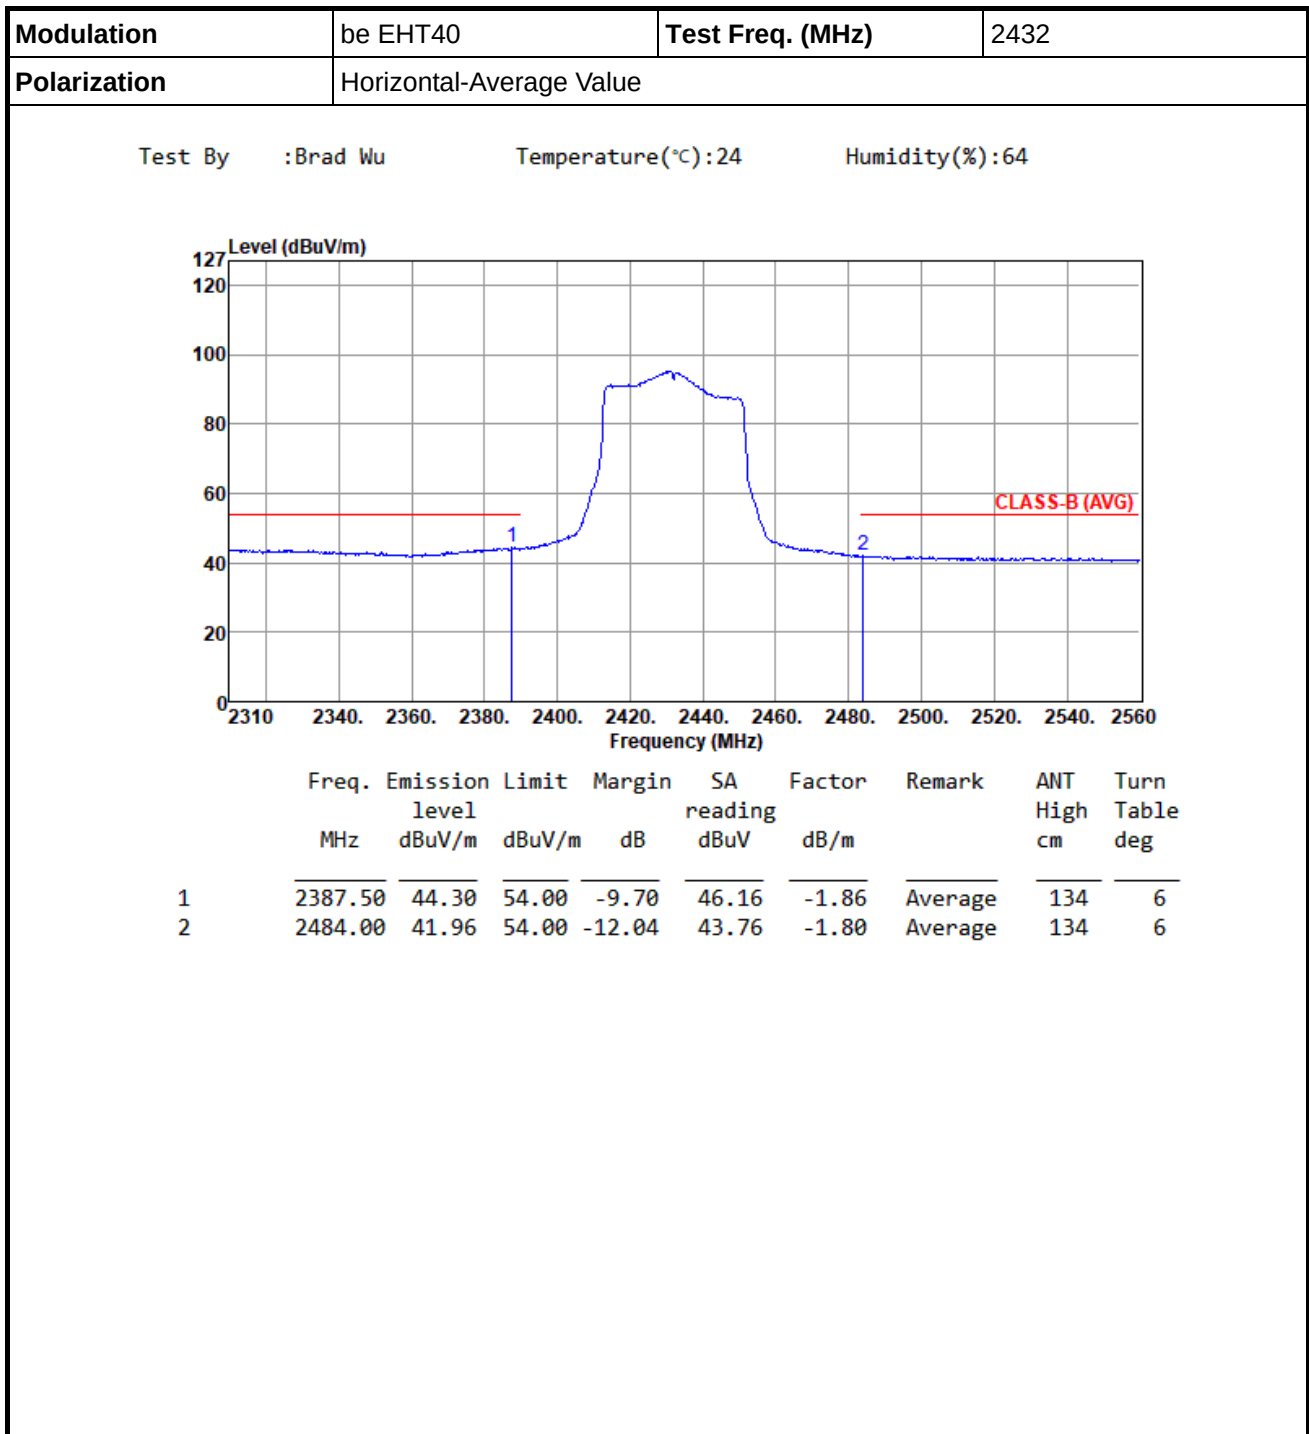


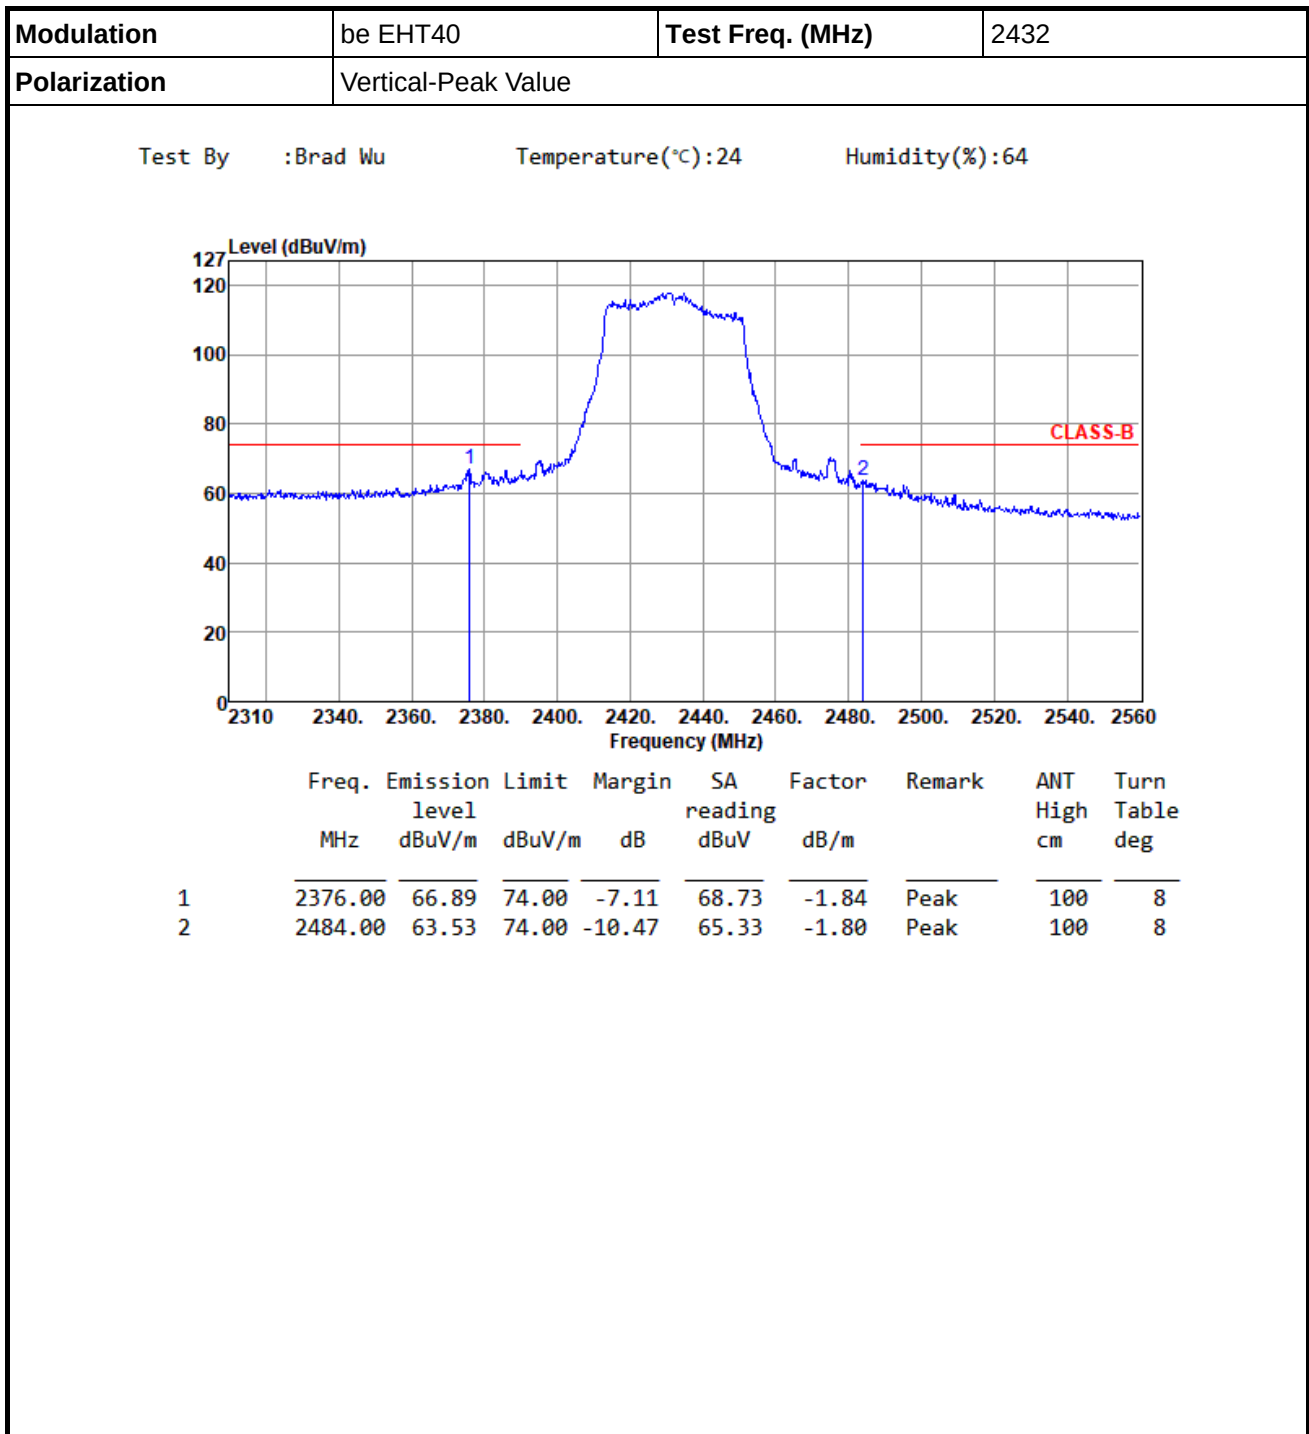


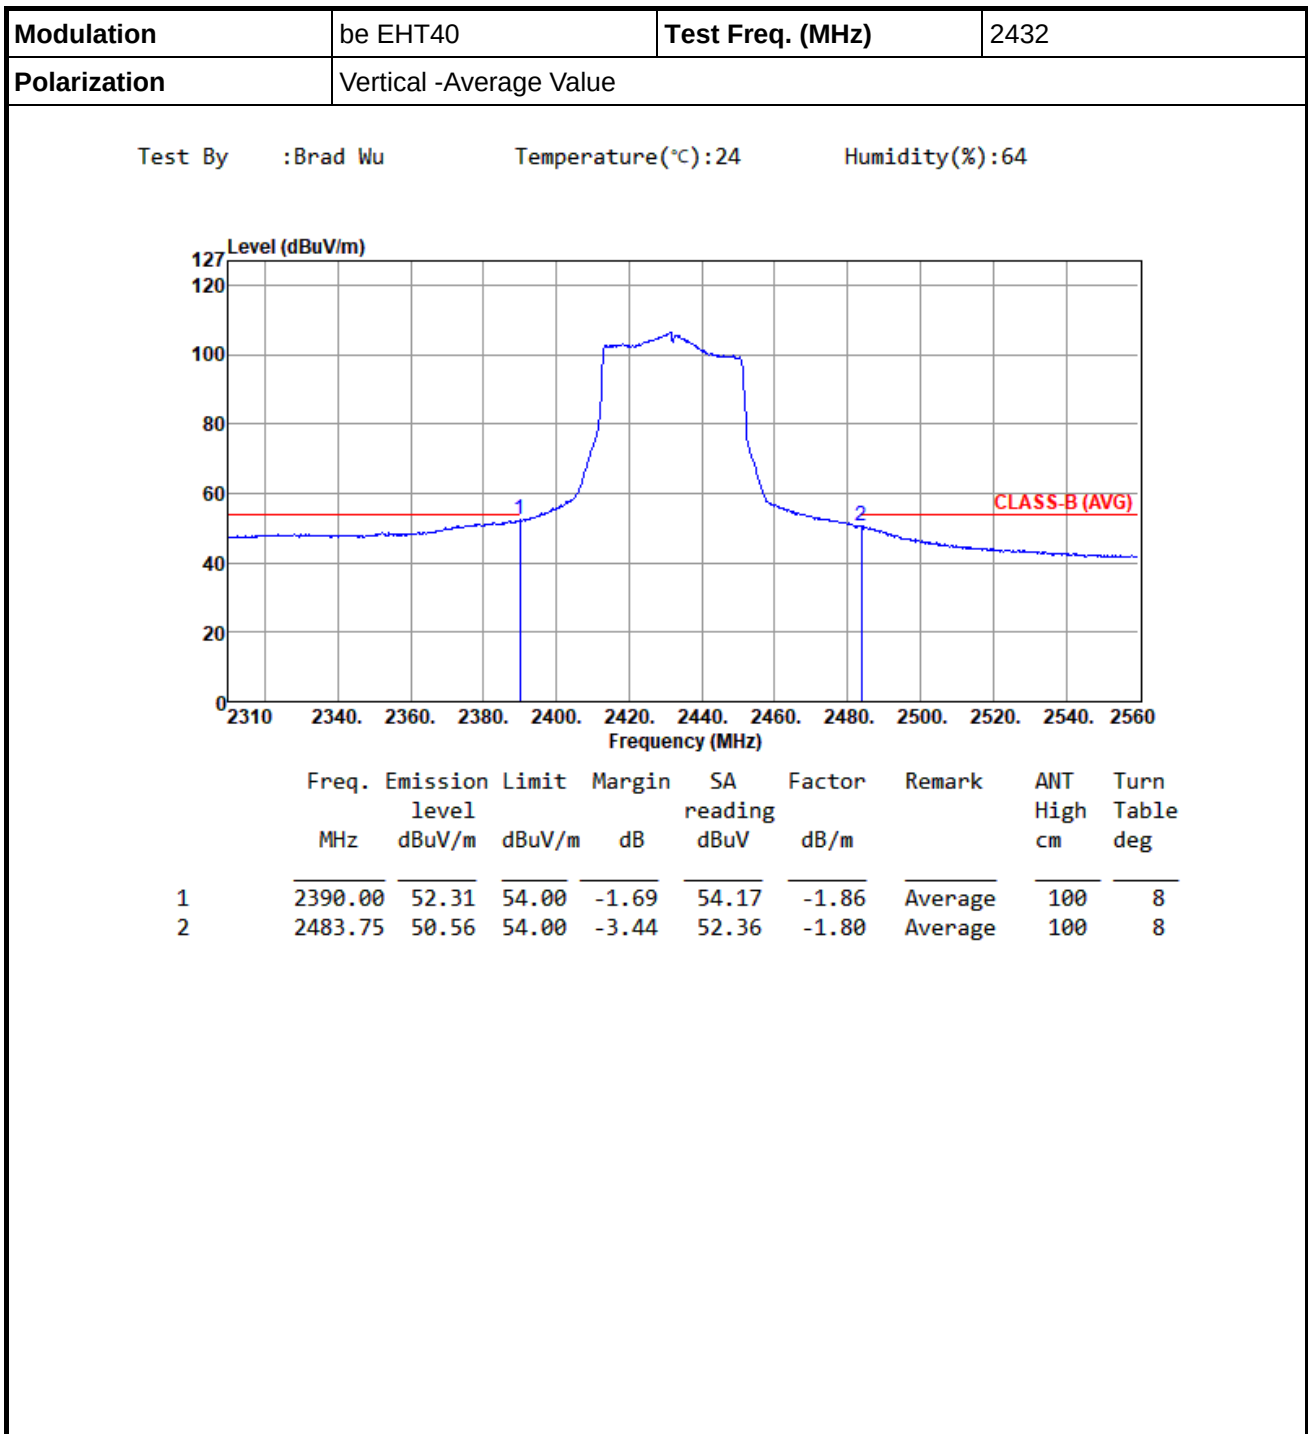


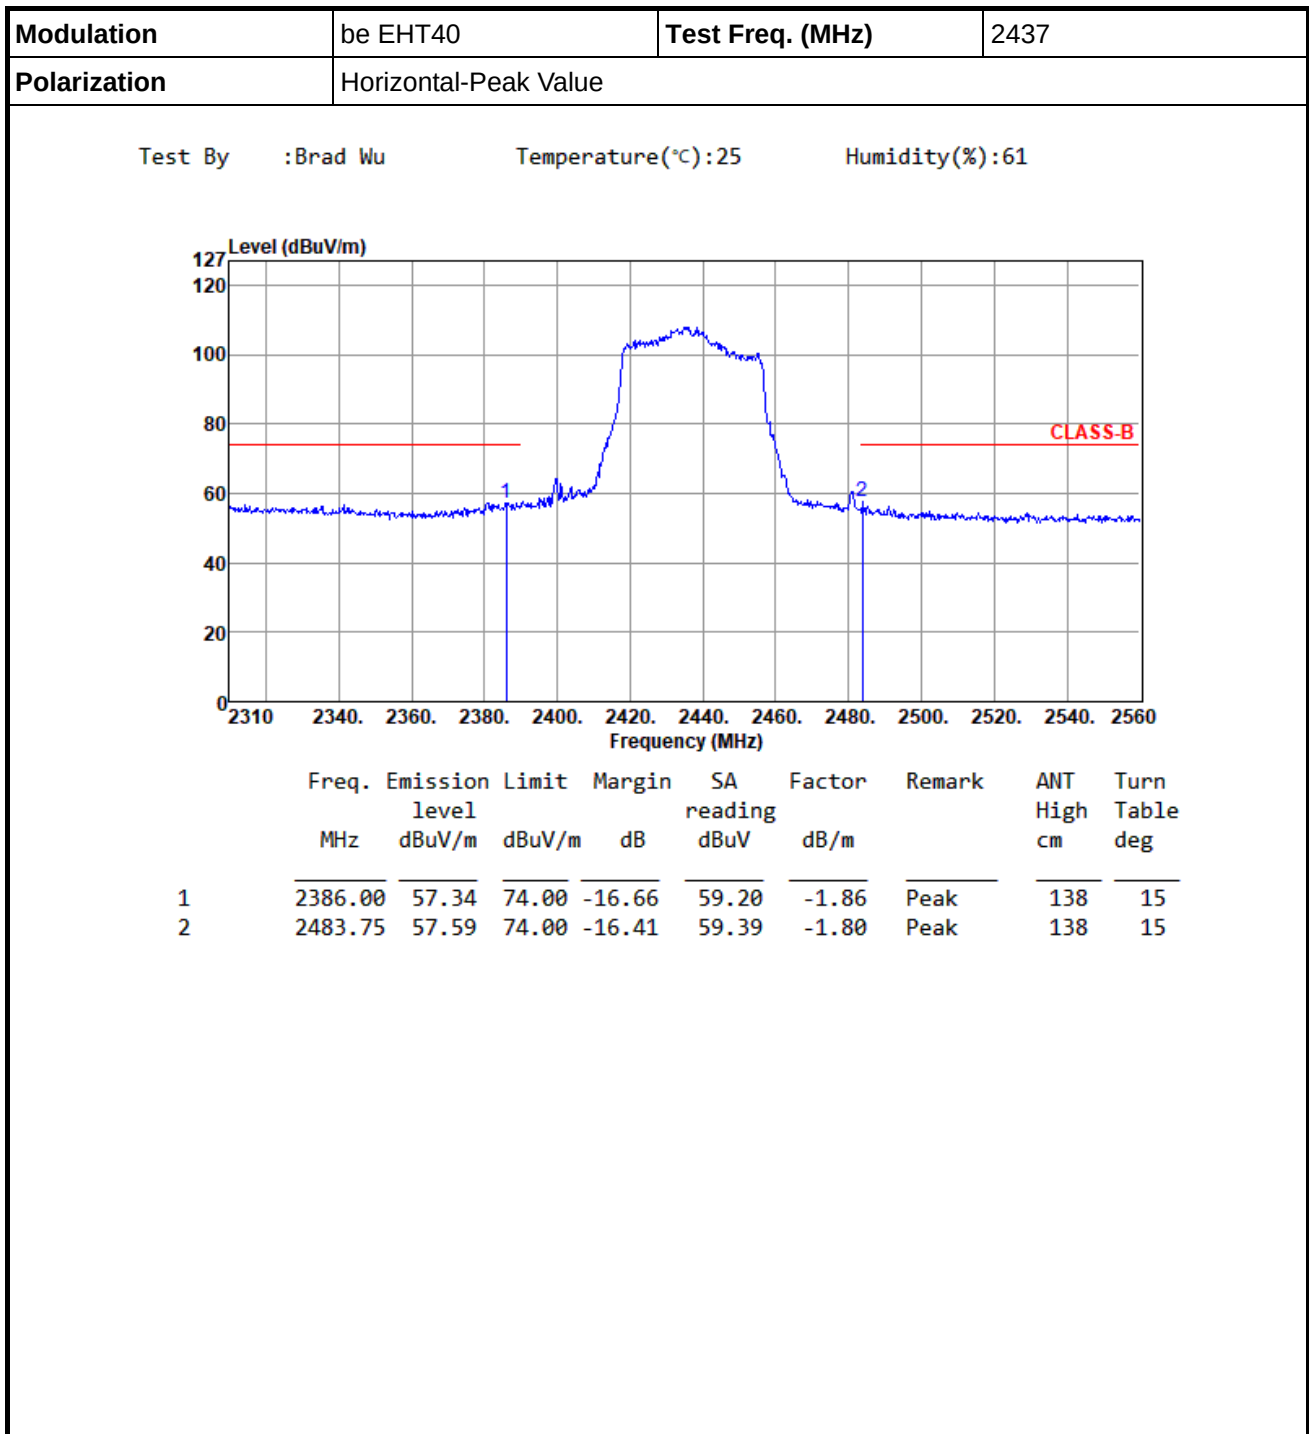


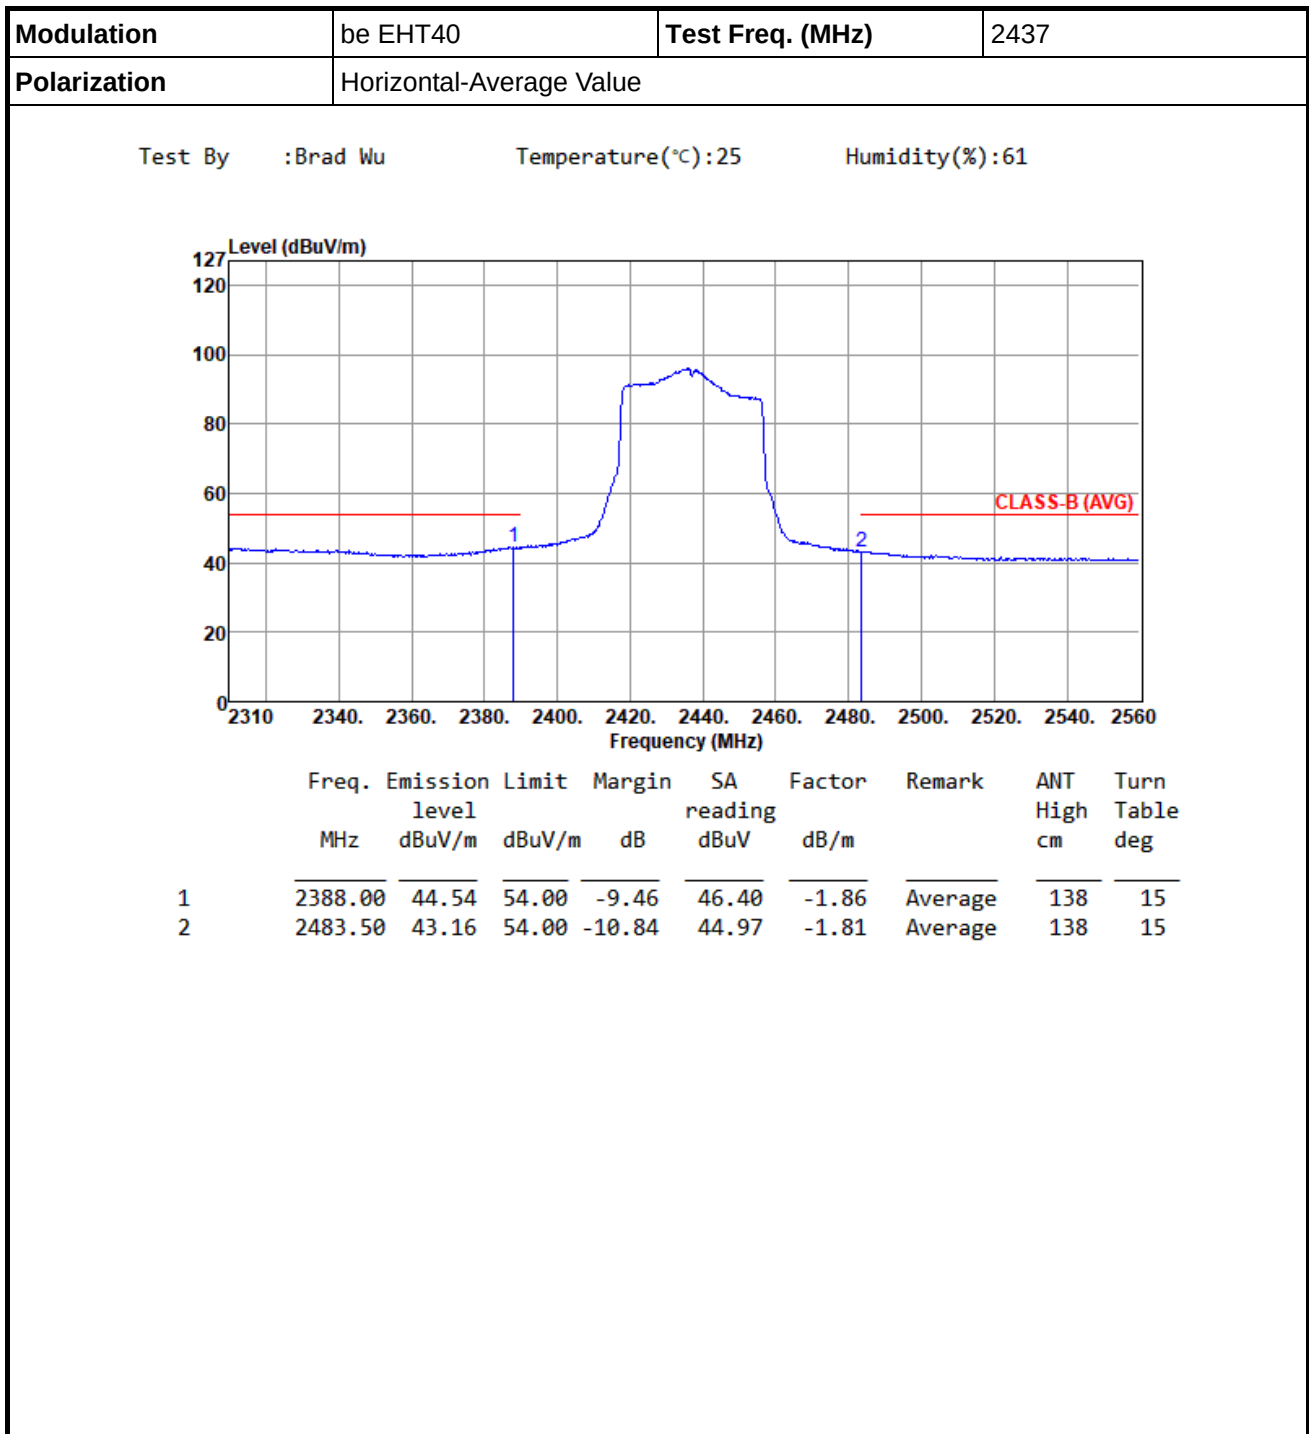


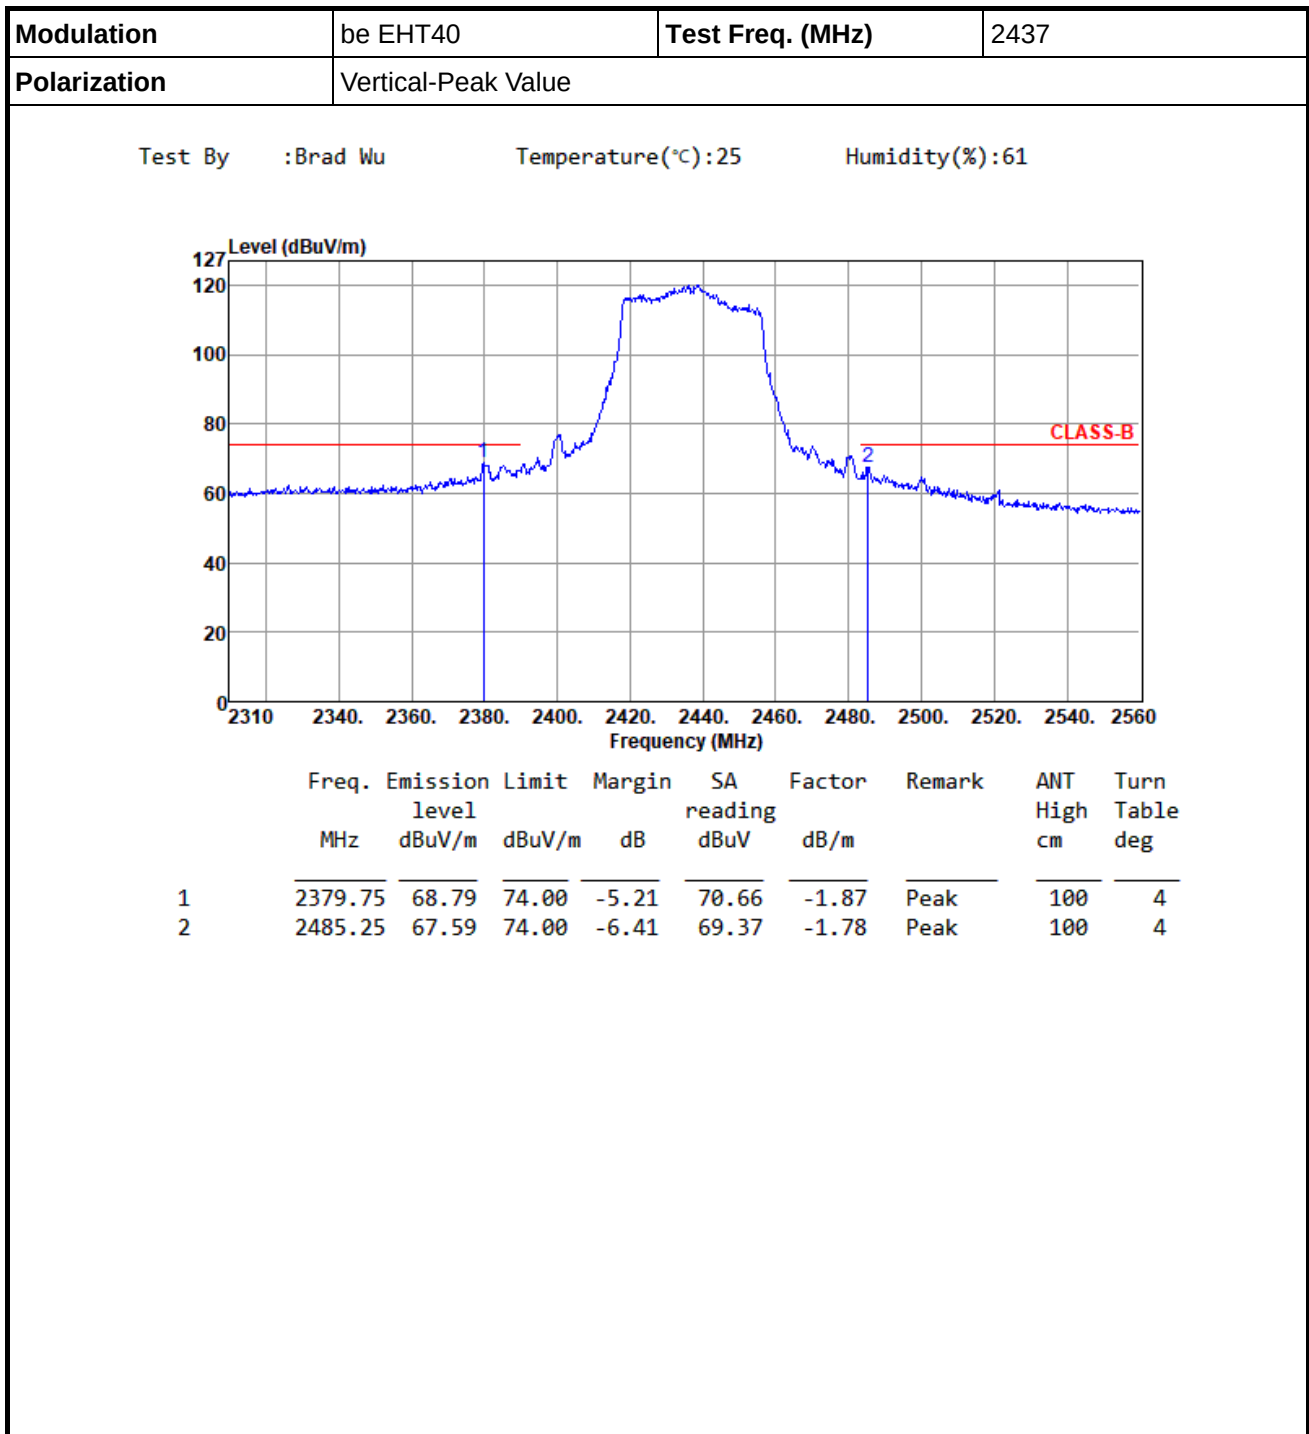


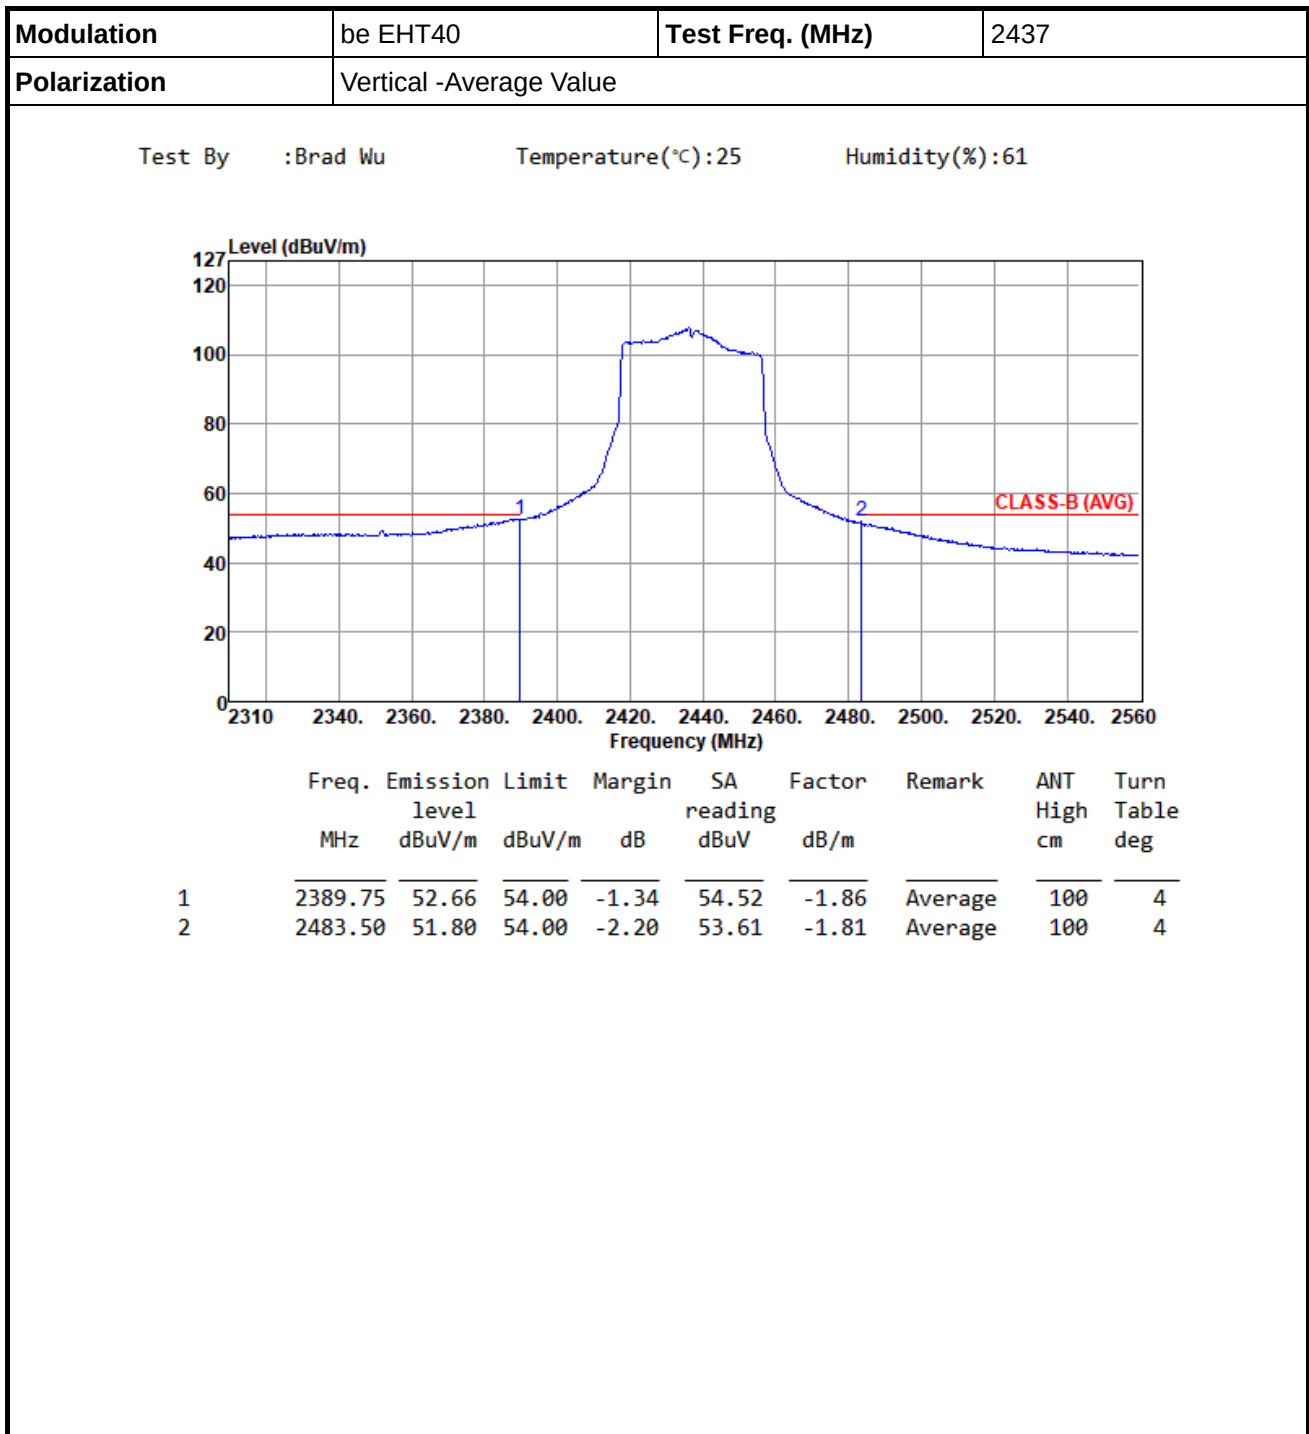


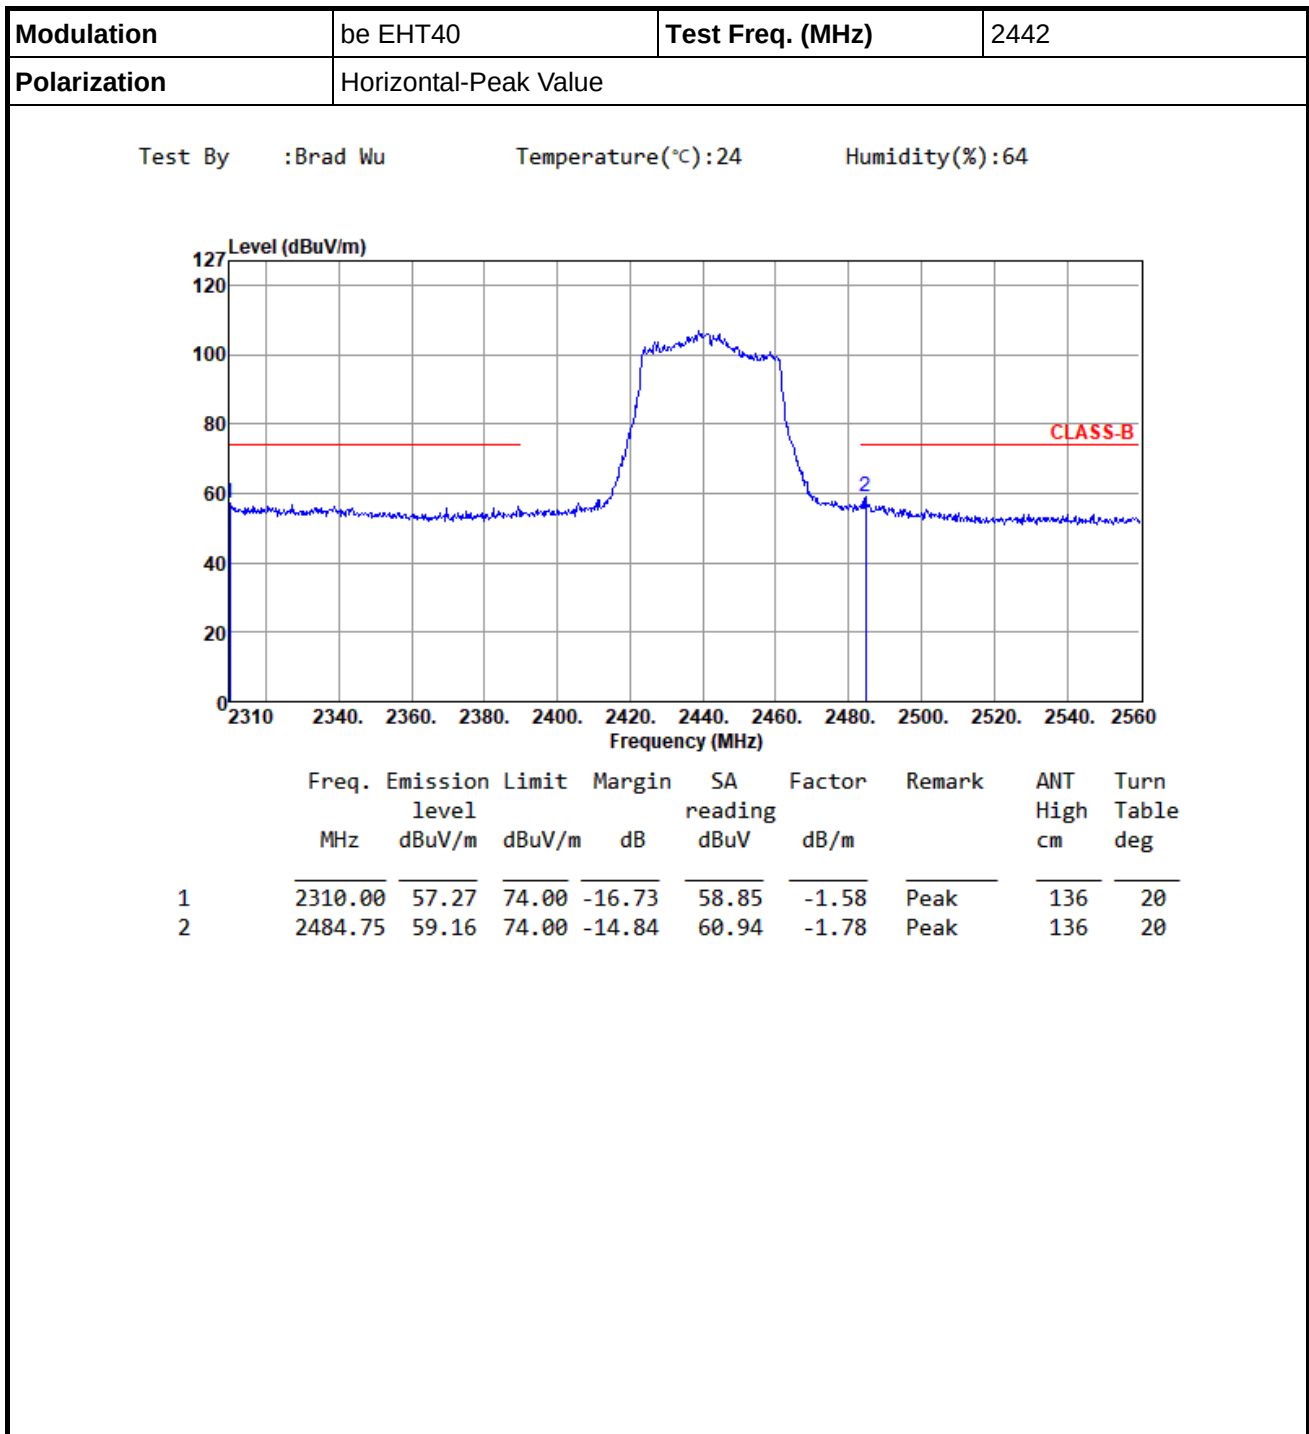


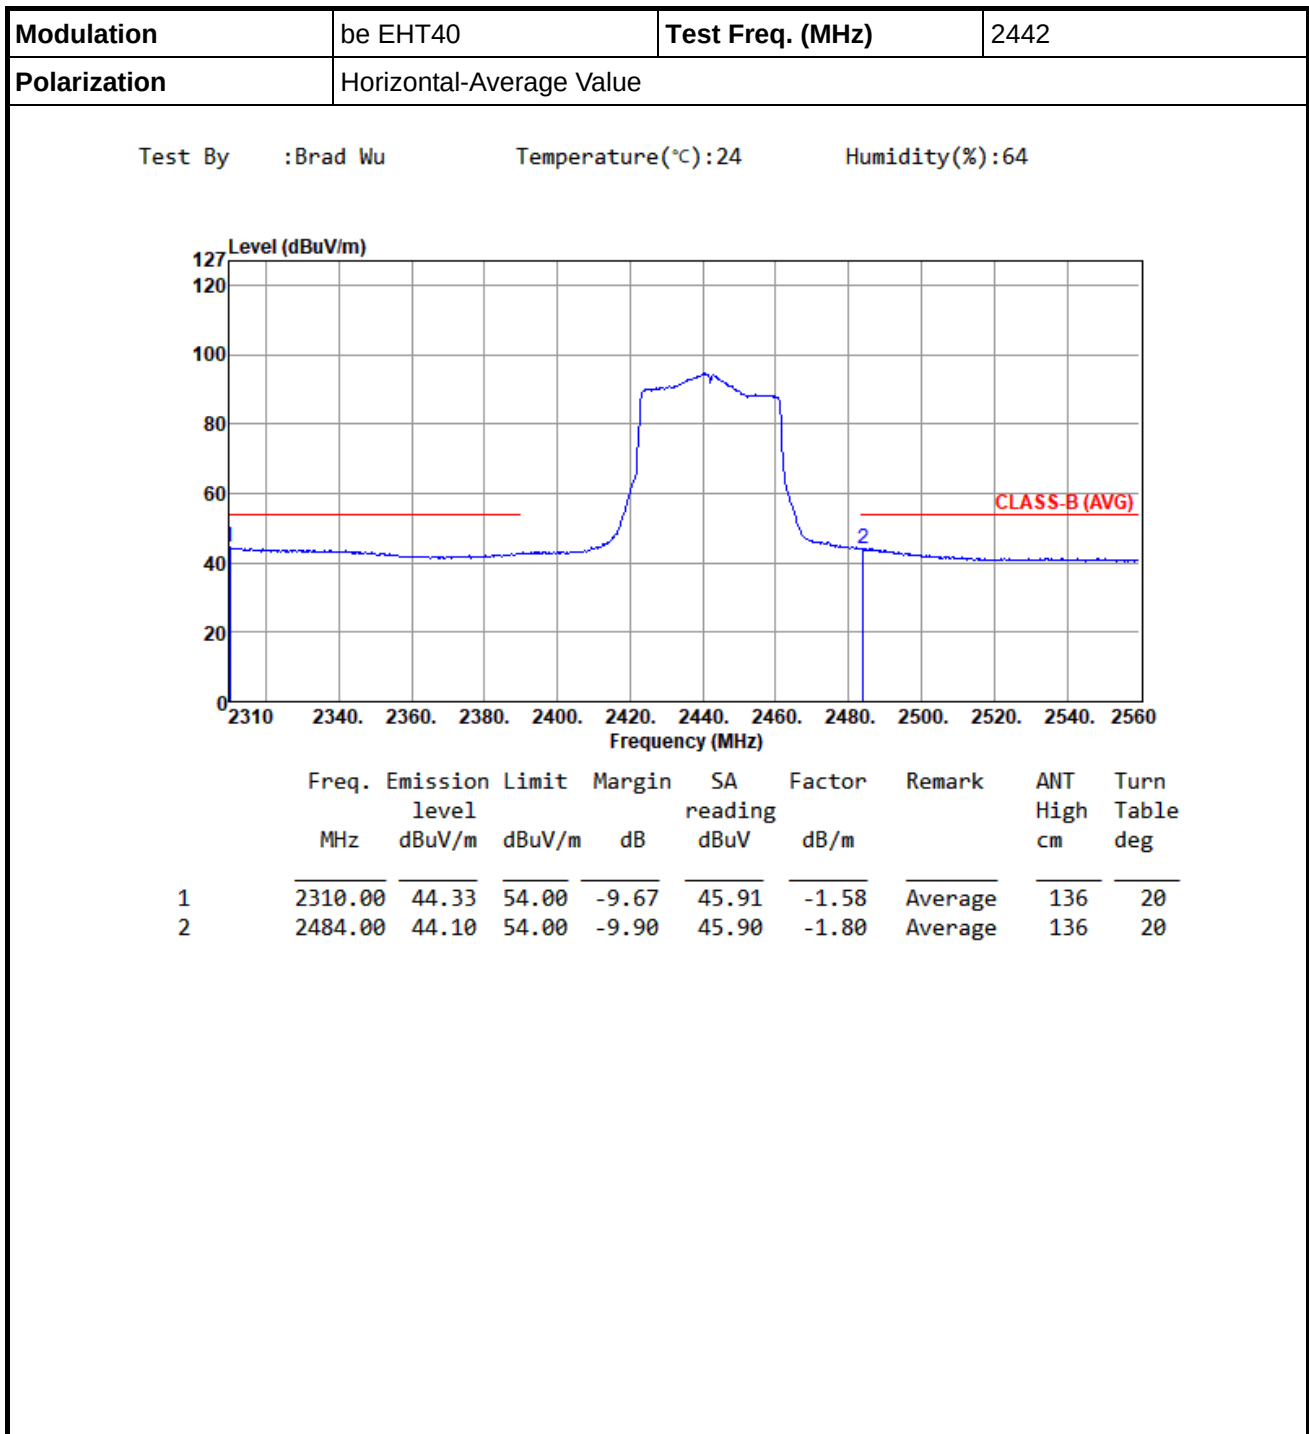


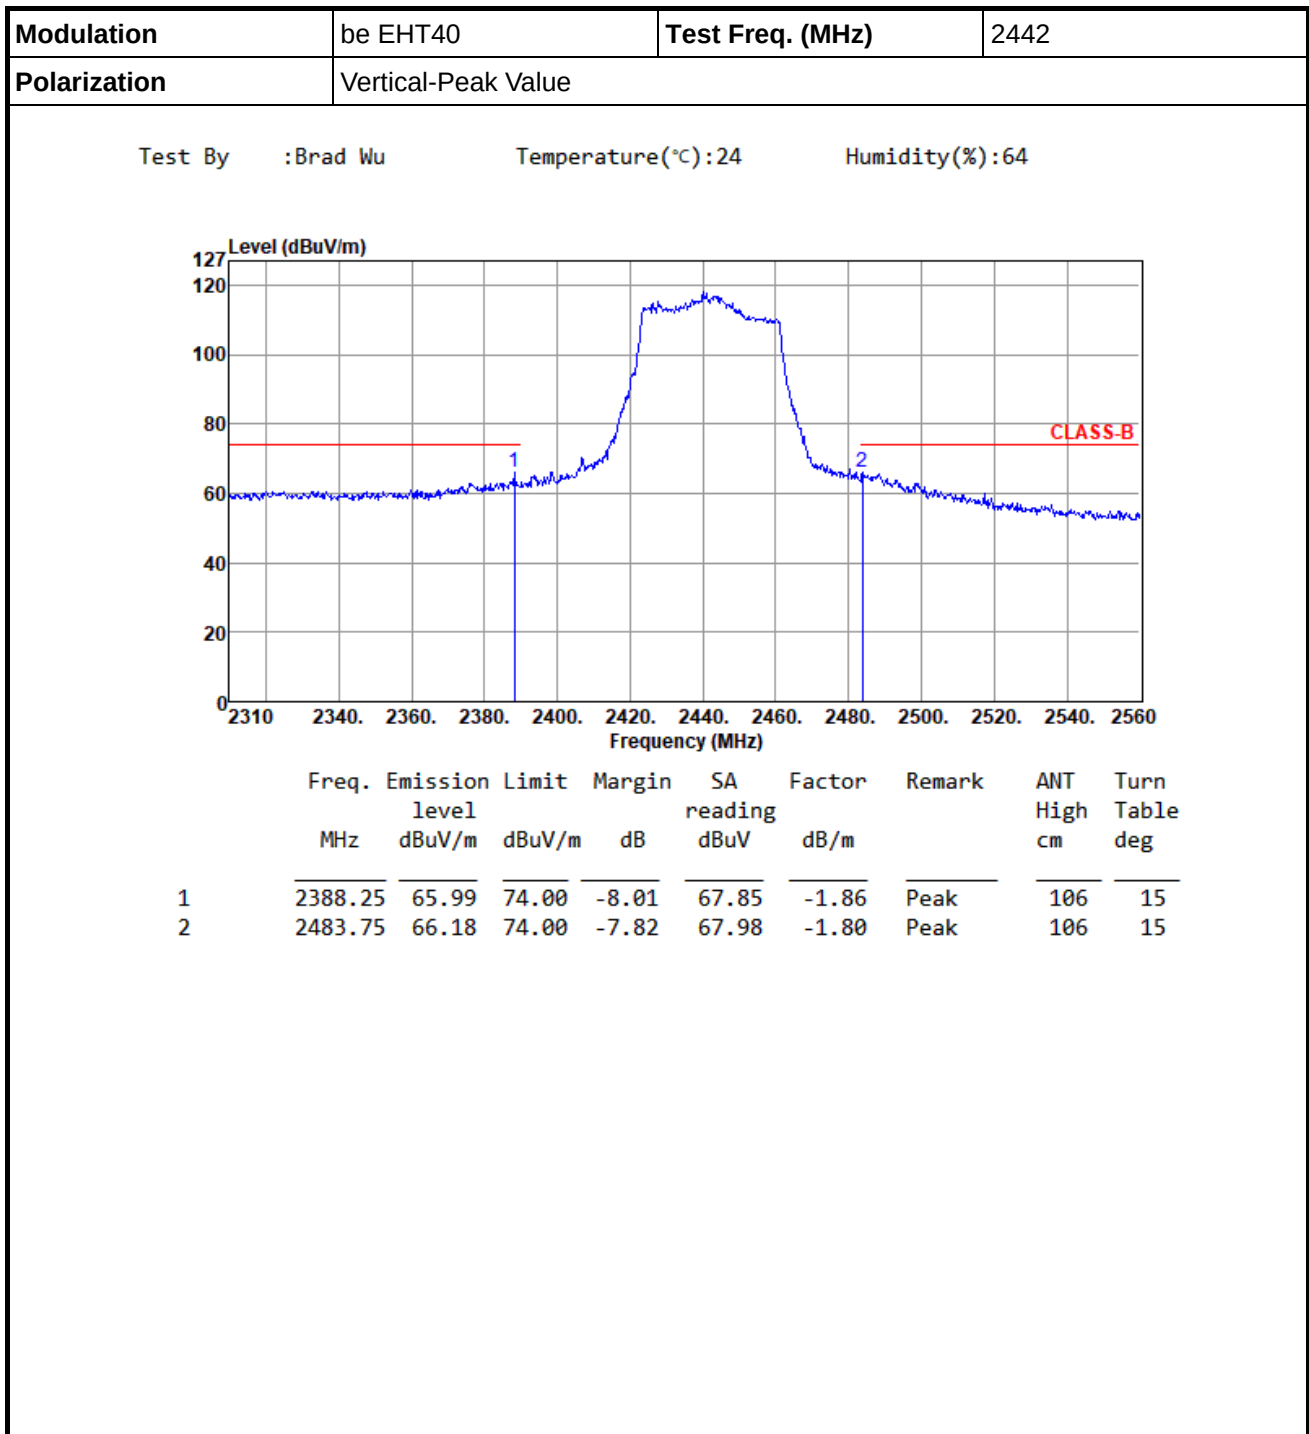


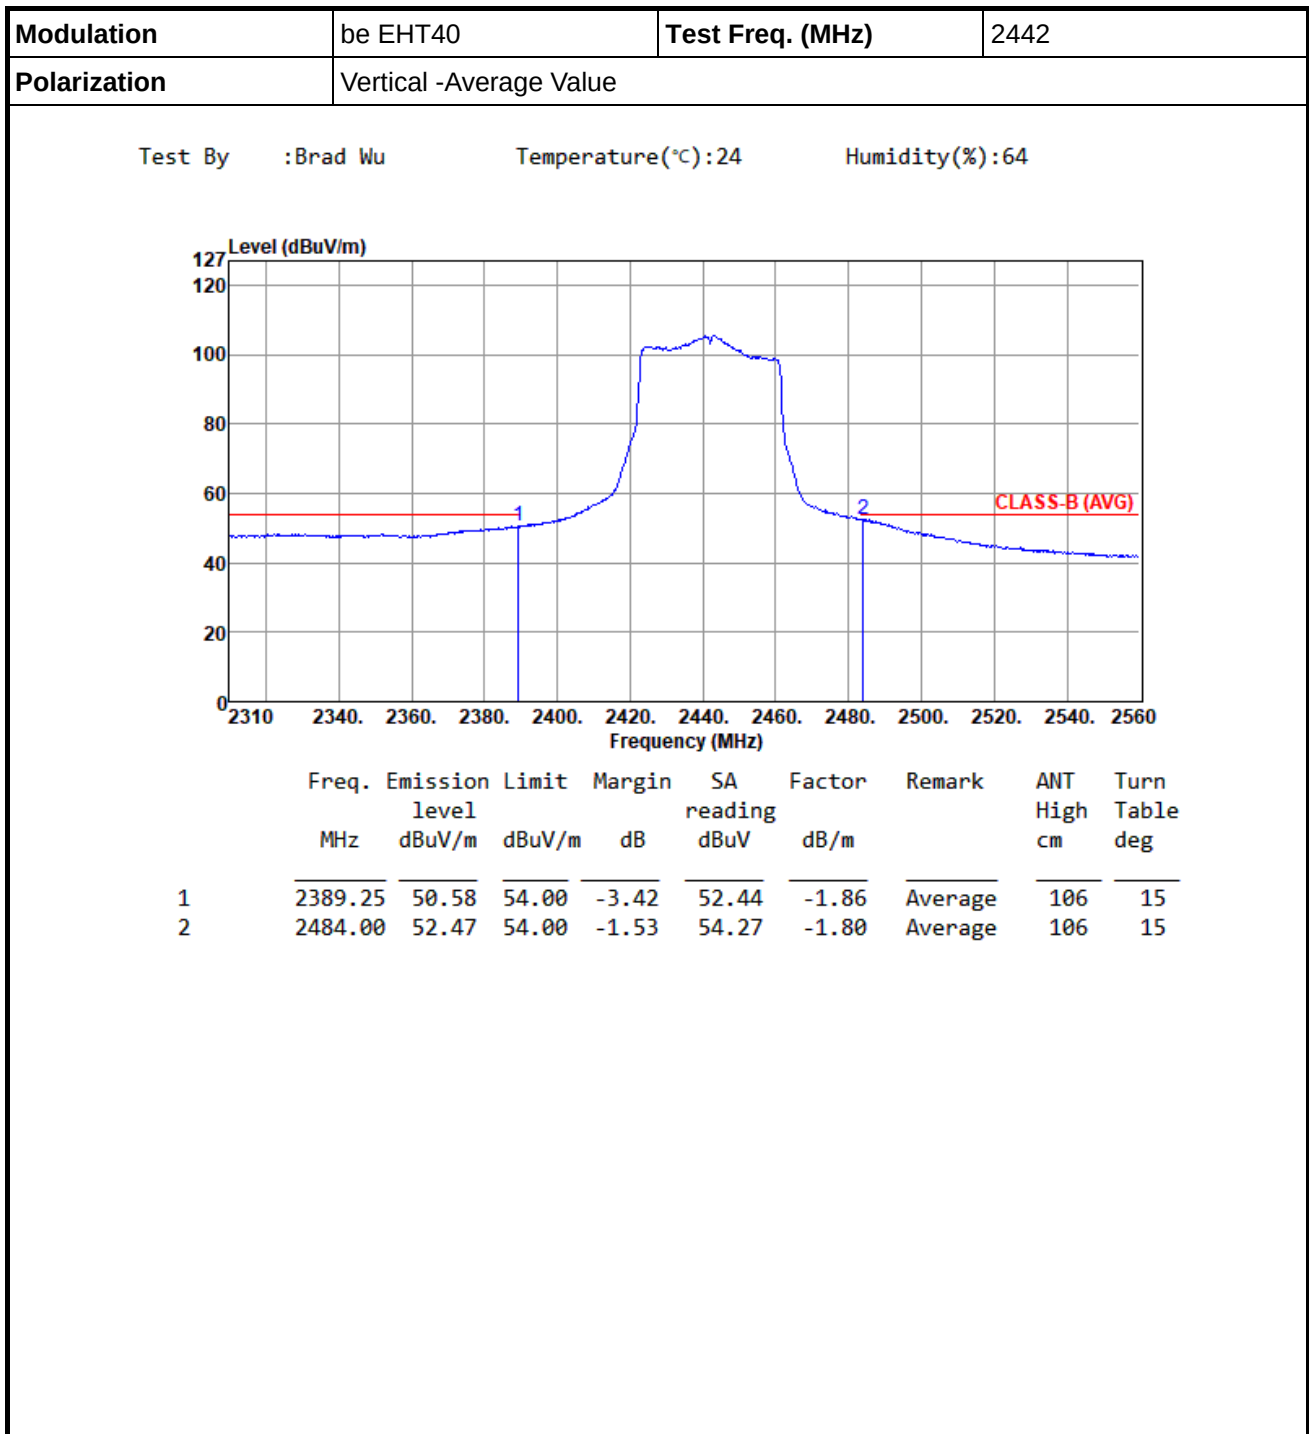


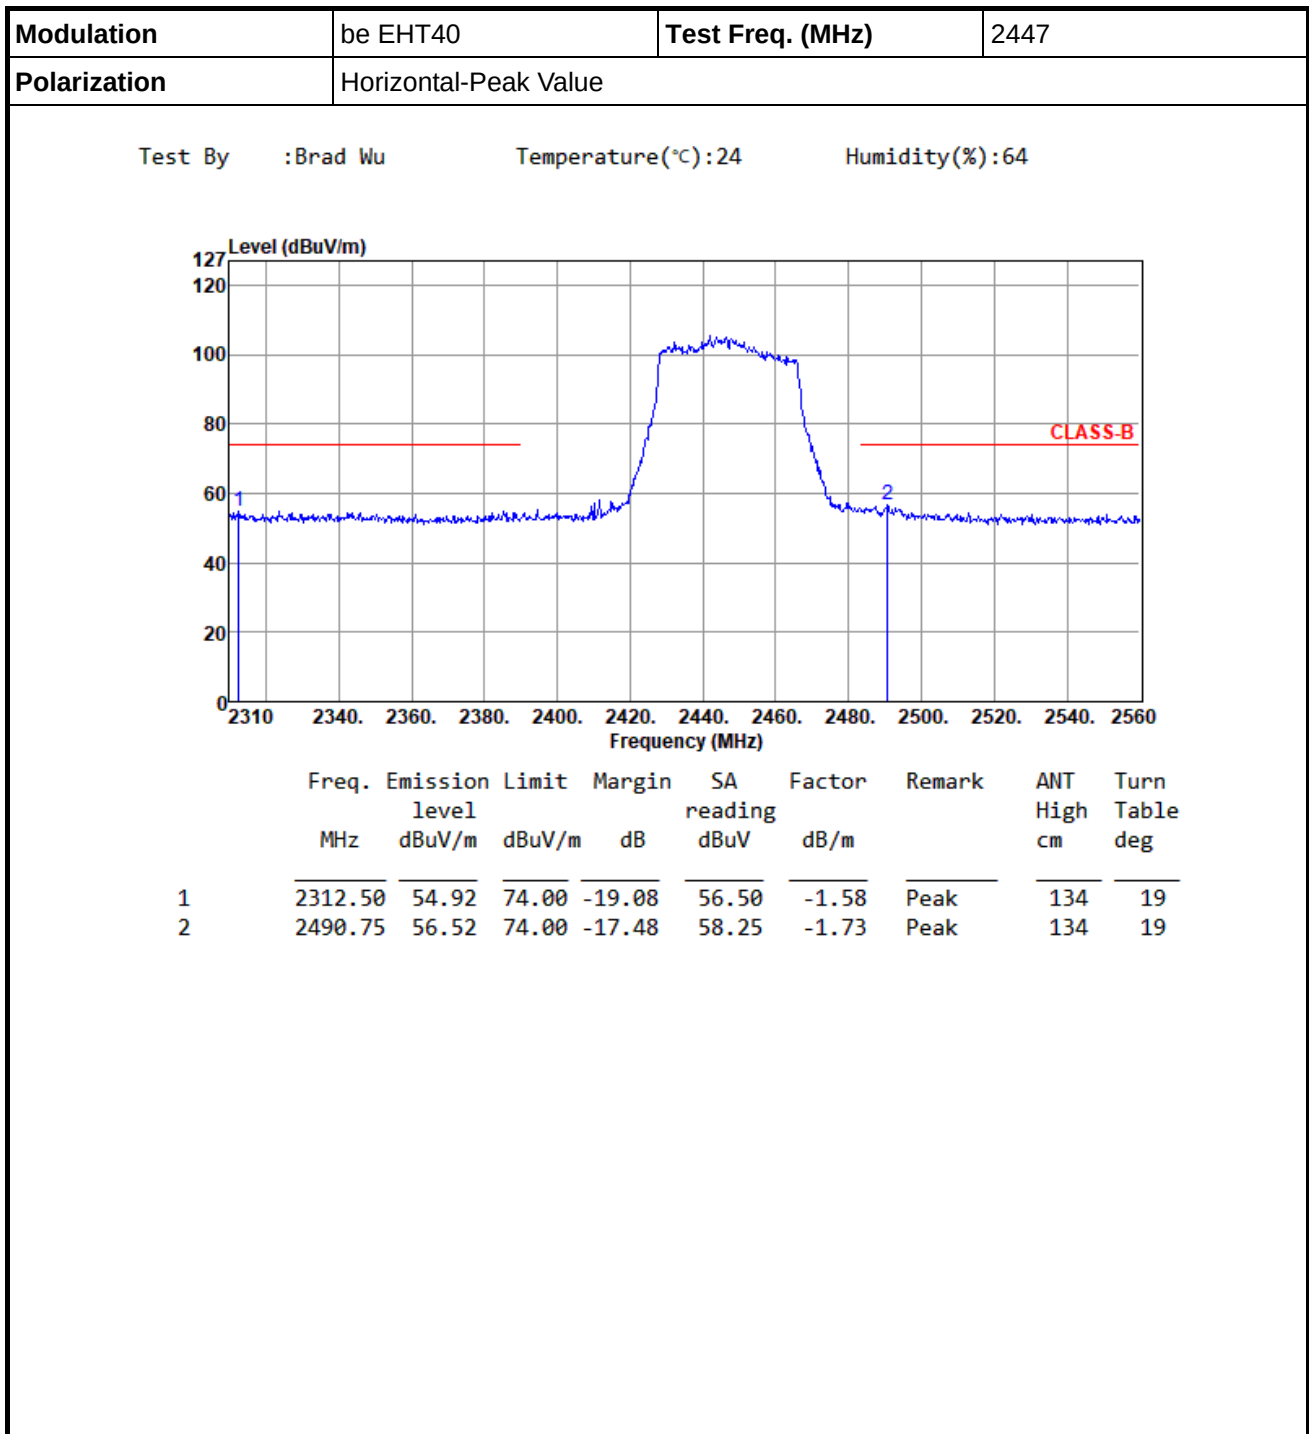


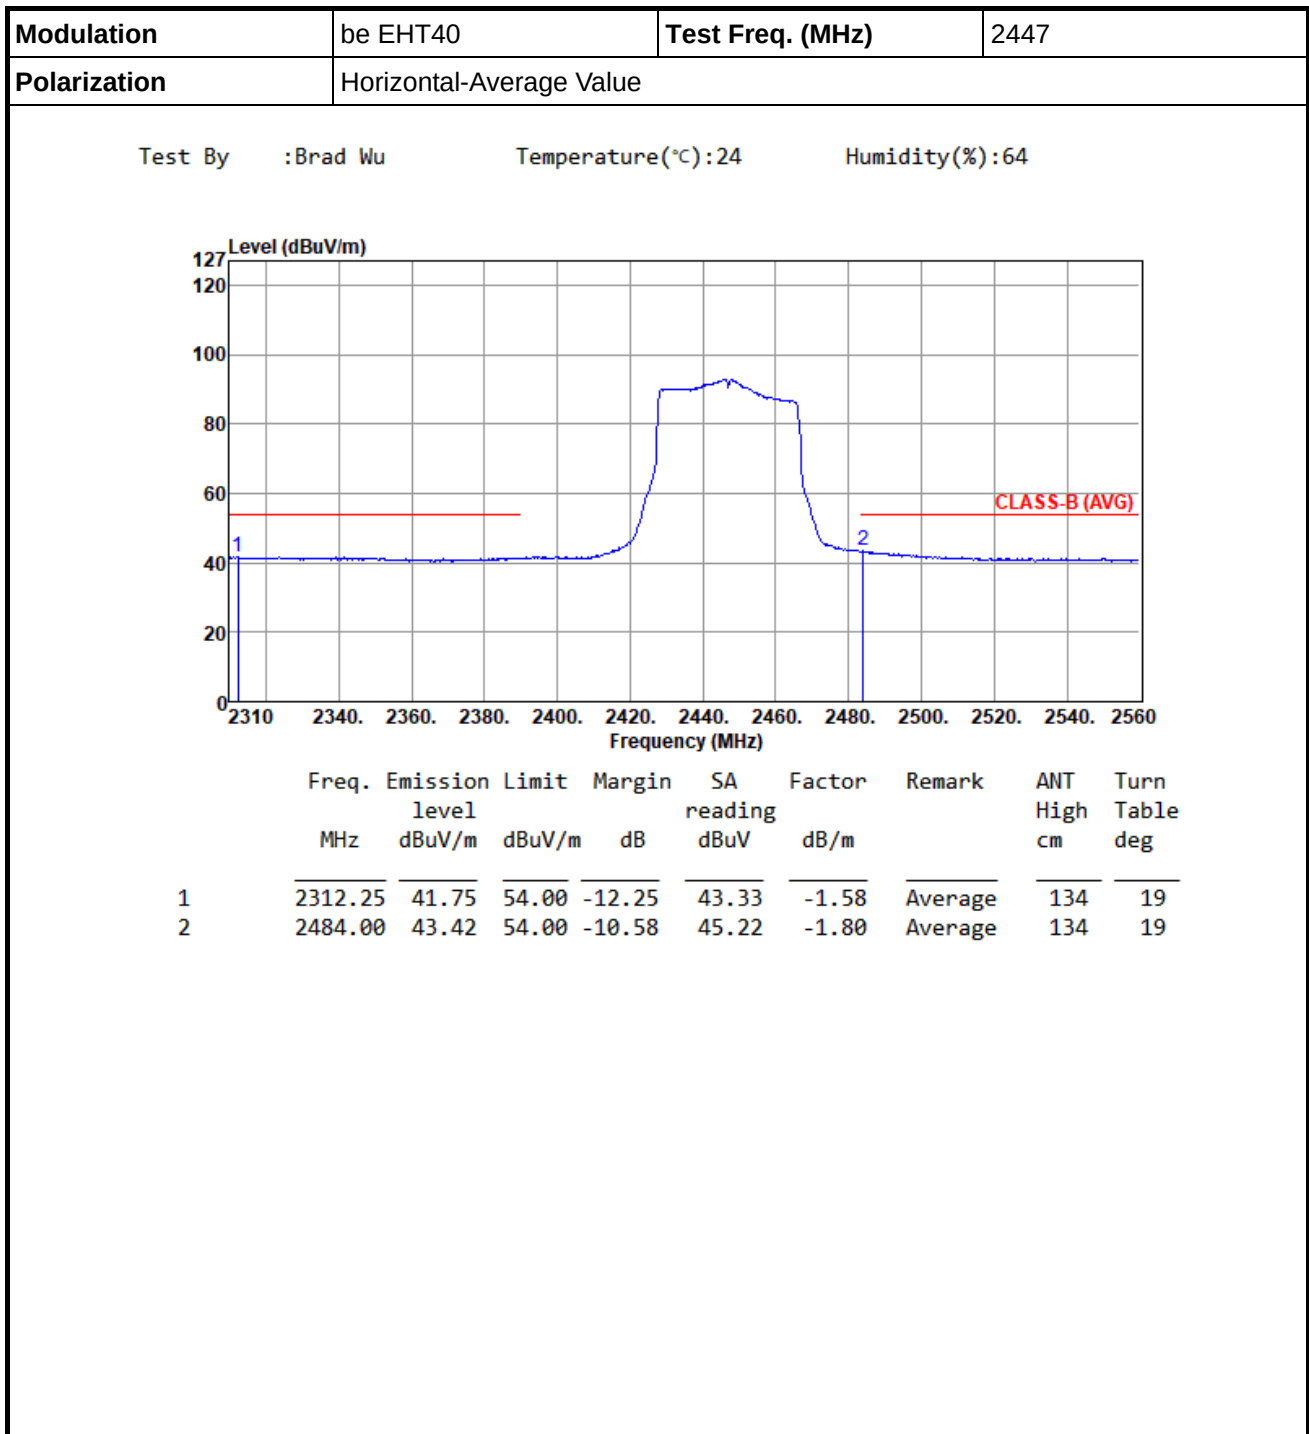


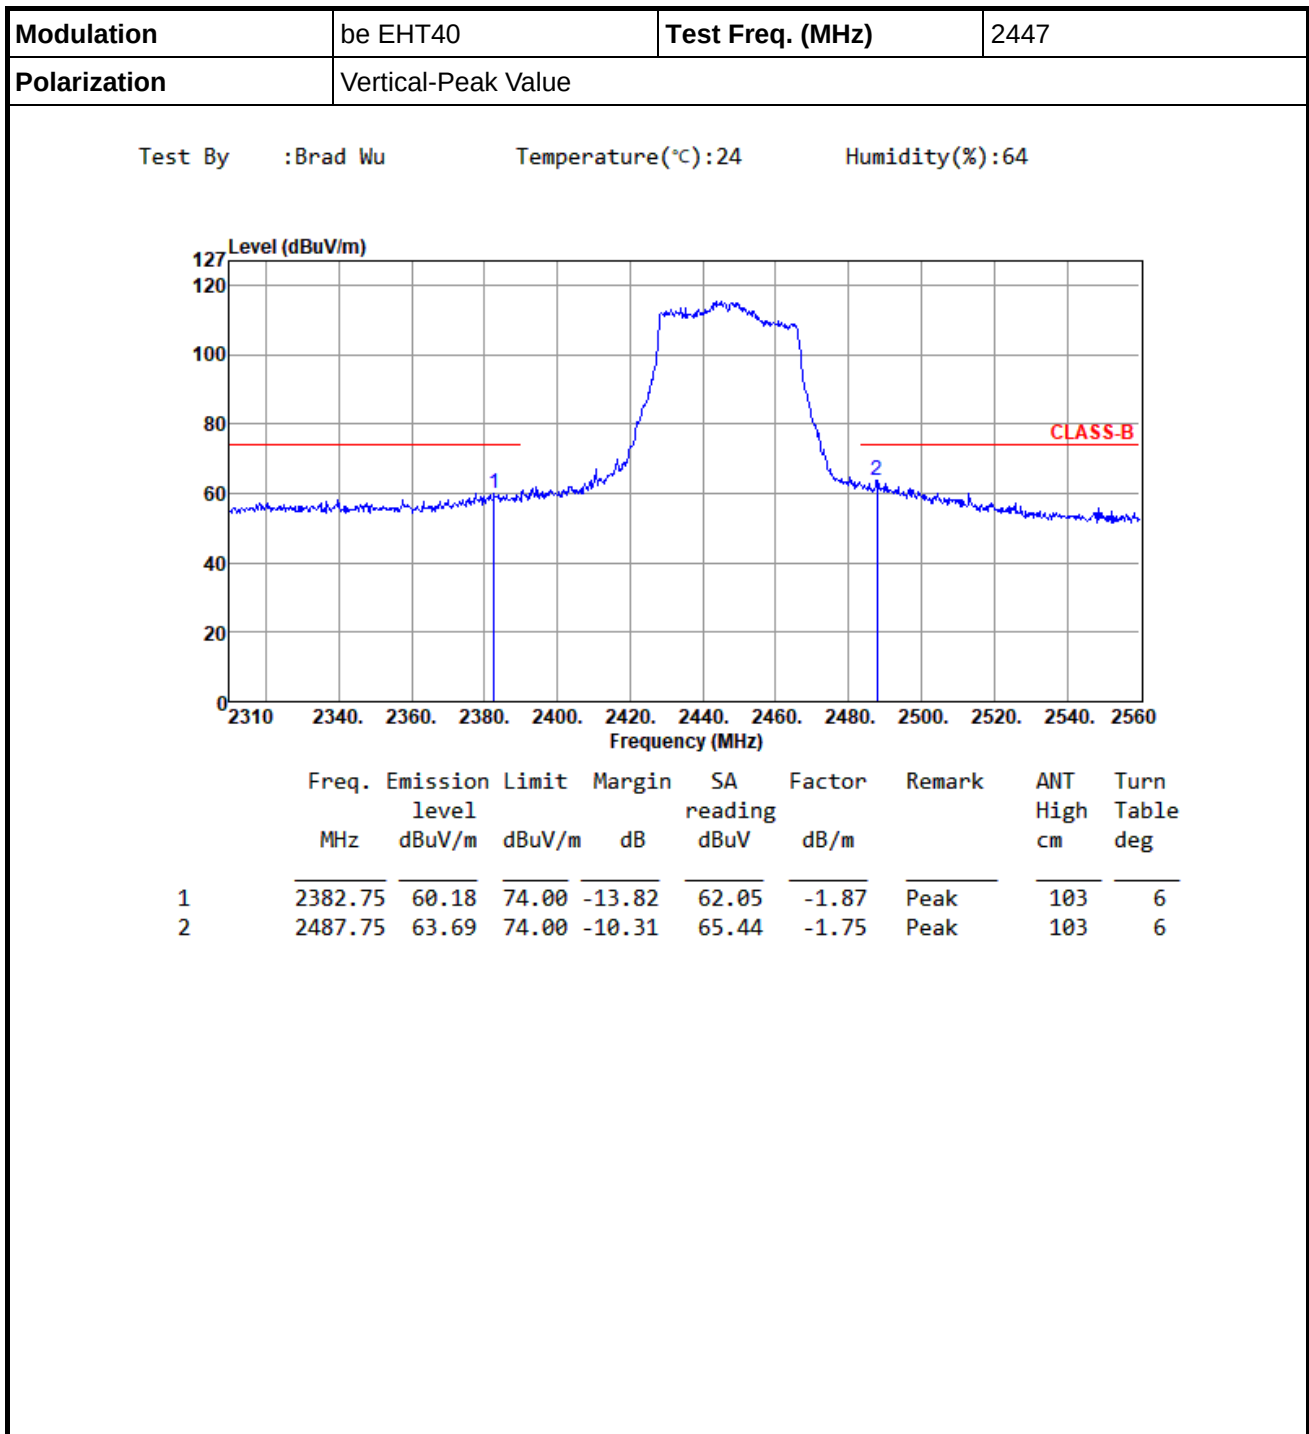


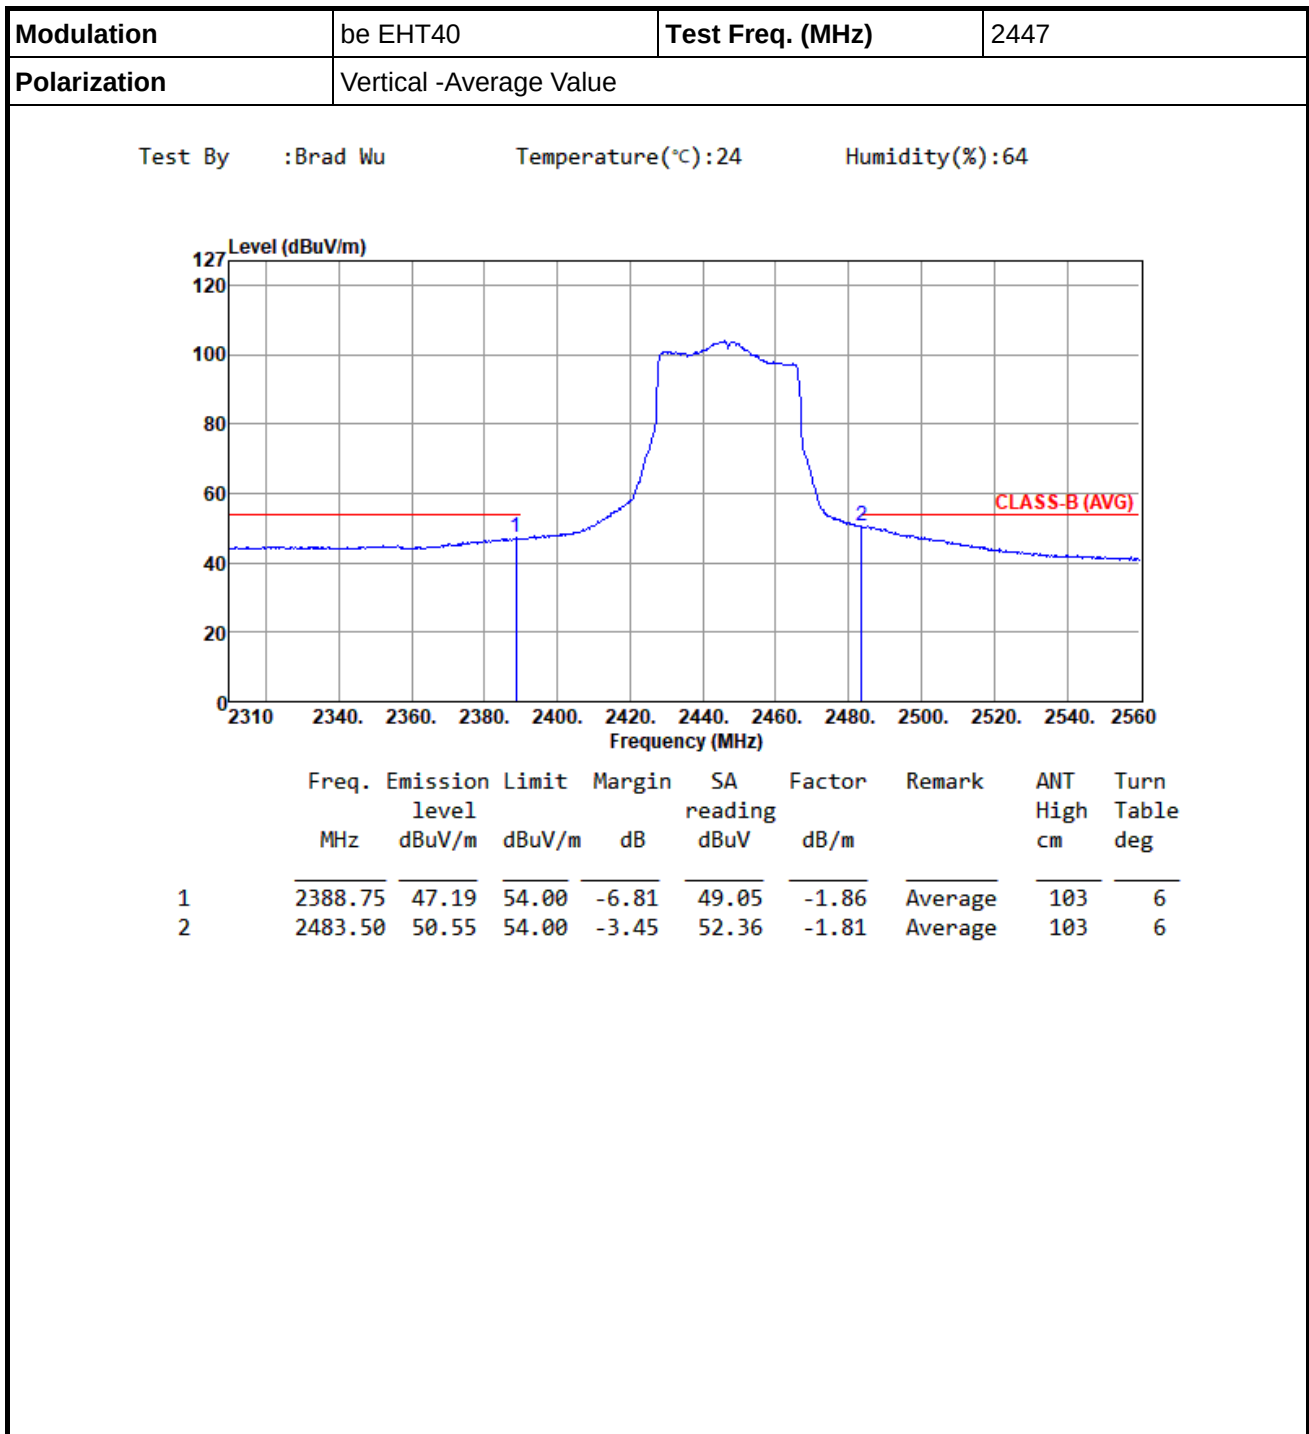

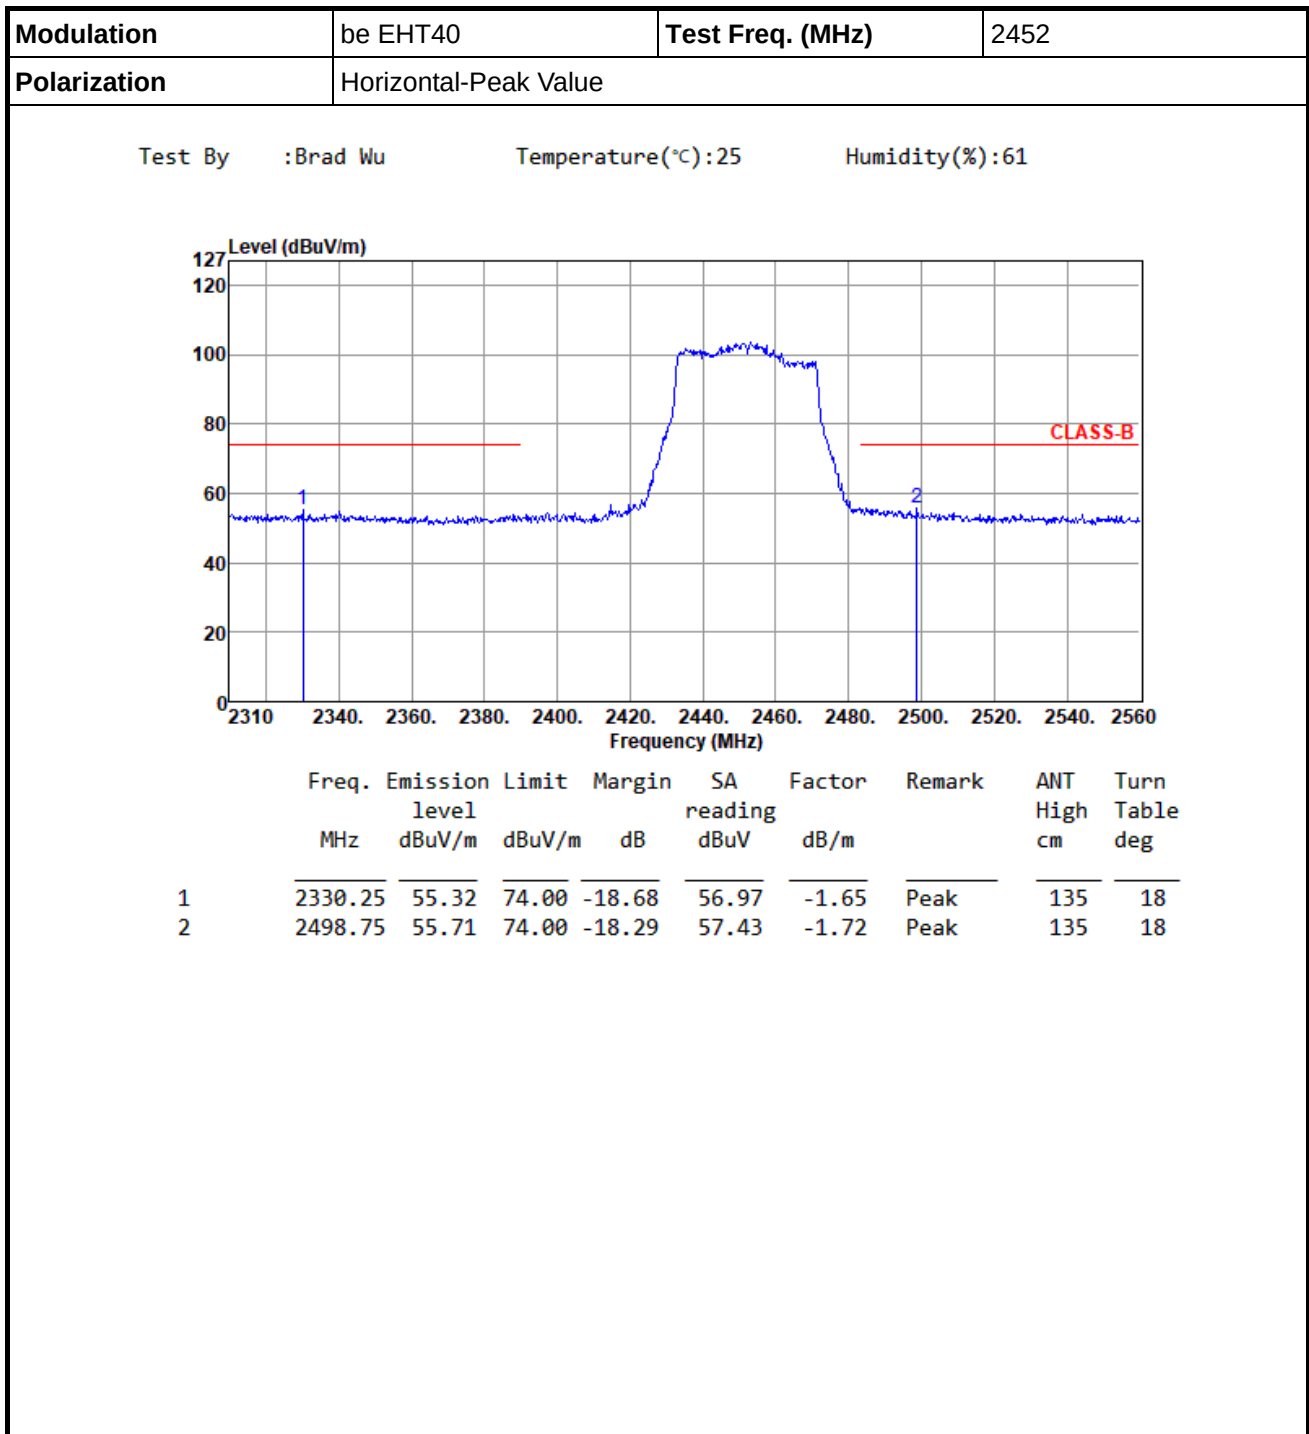

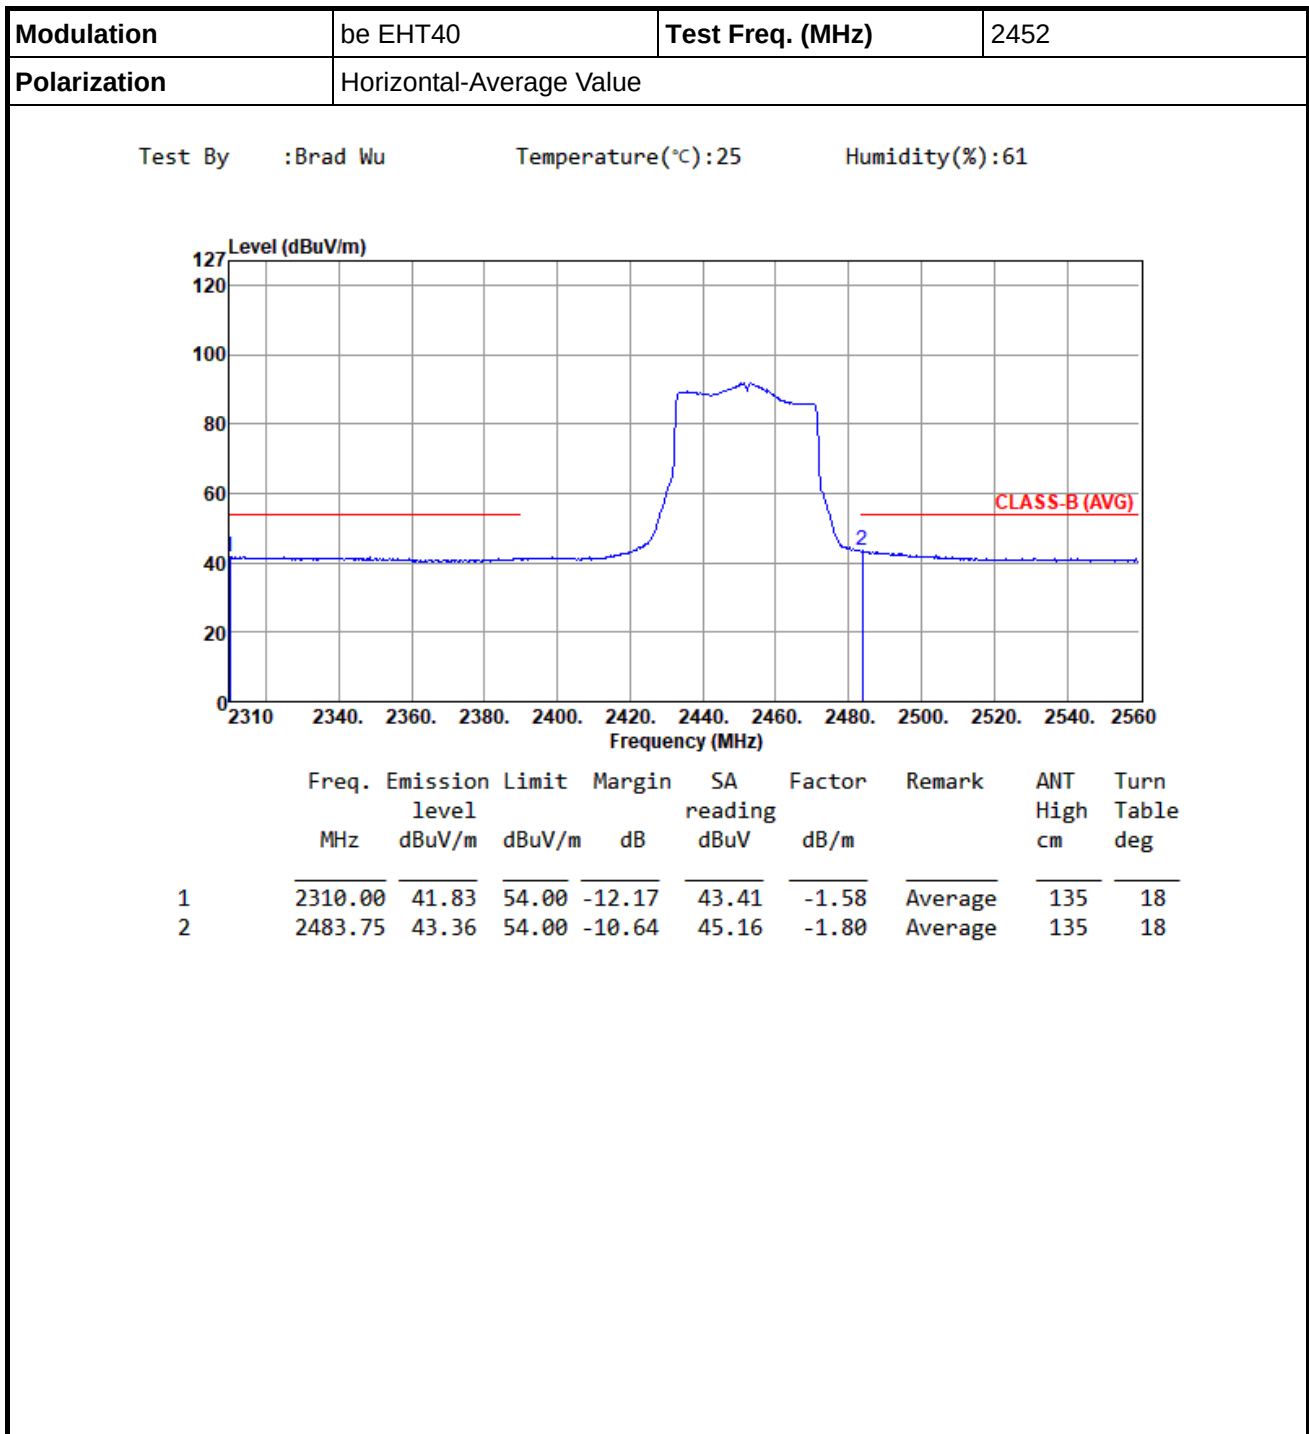

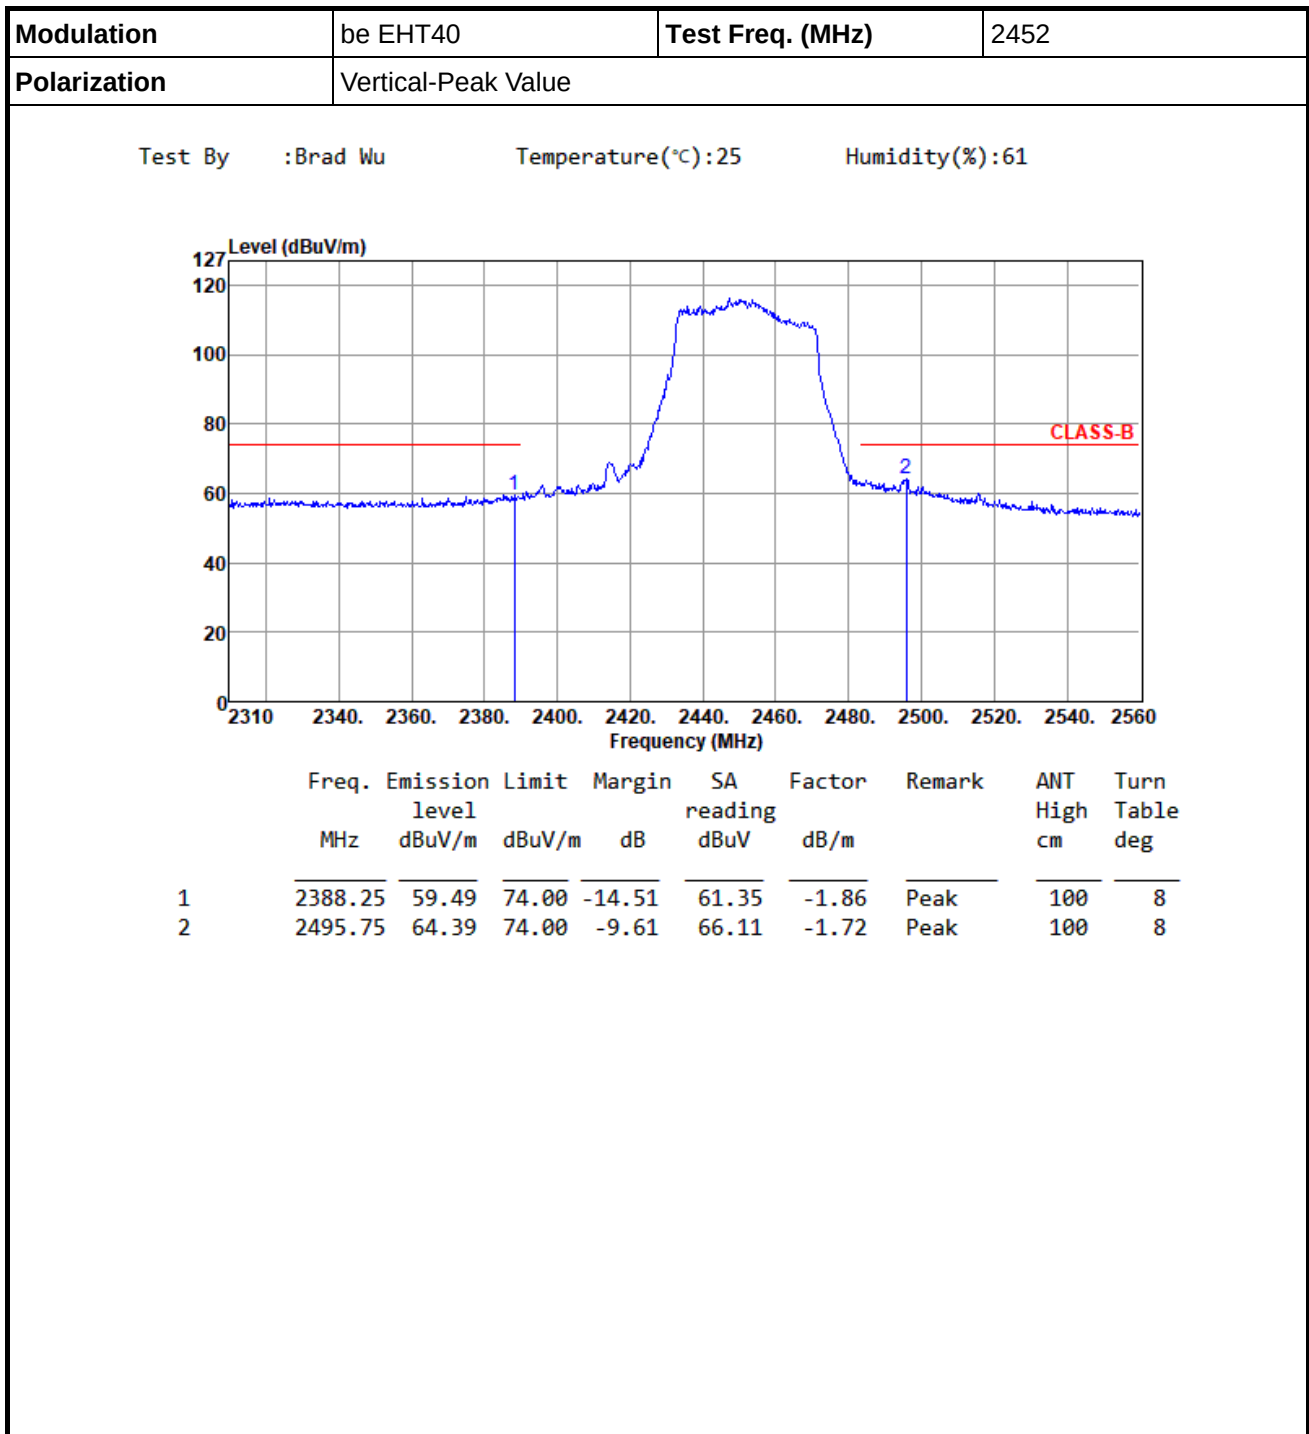

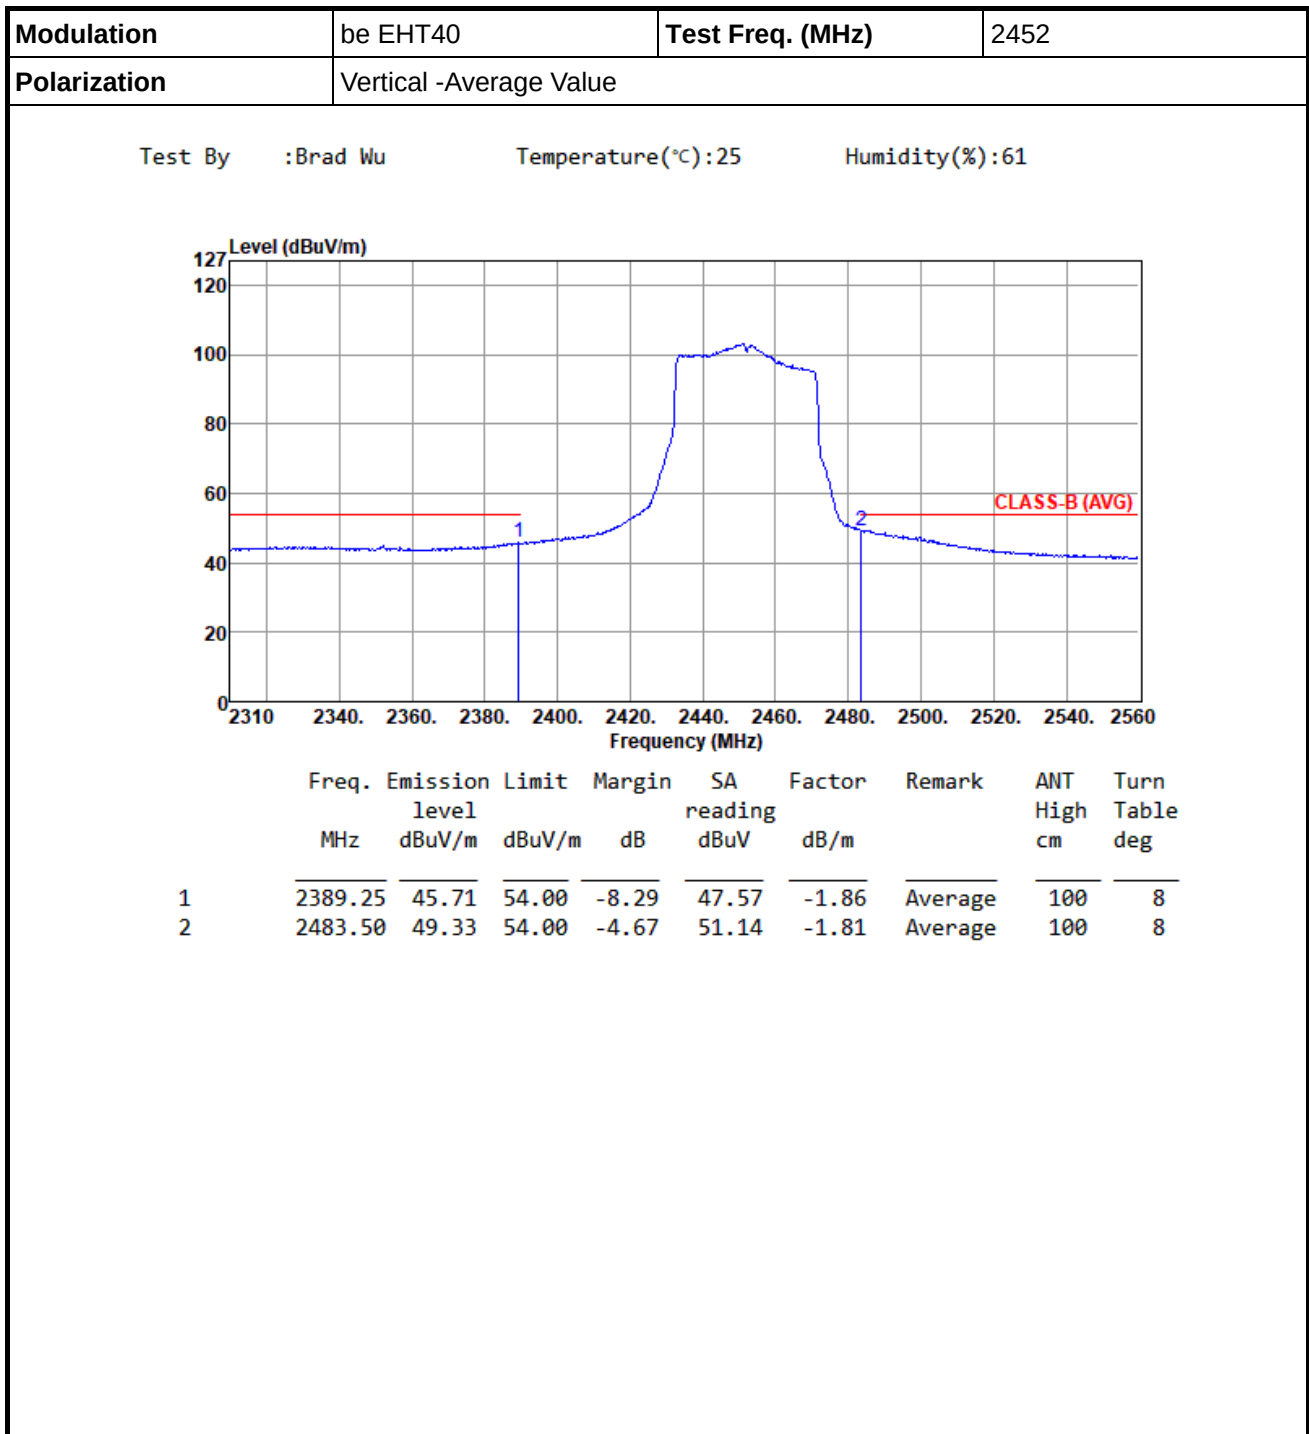




2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

CSEndB


2412MHz

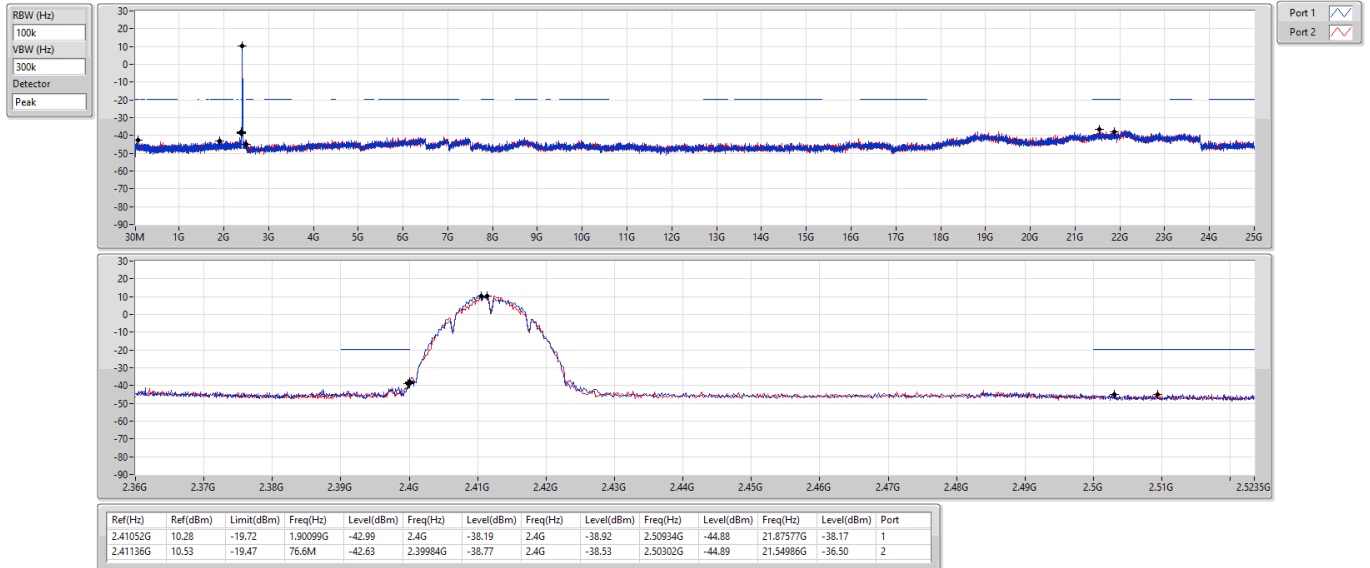

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

CSEndB

2437MHz

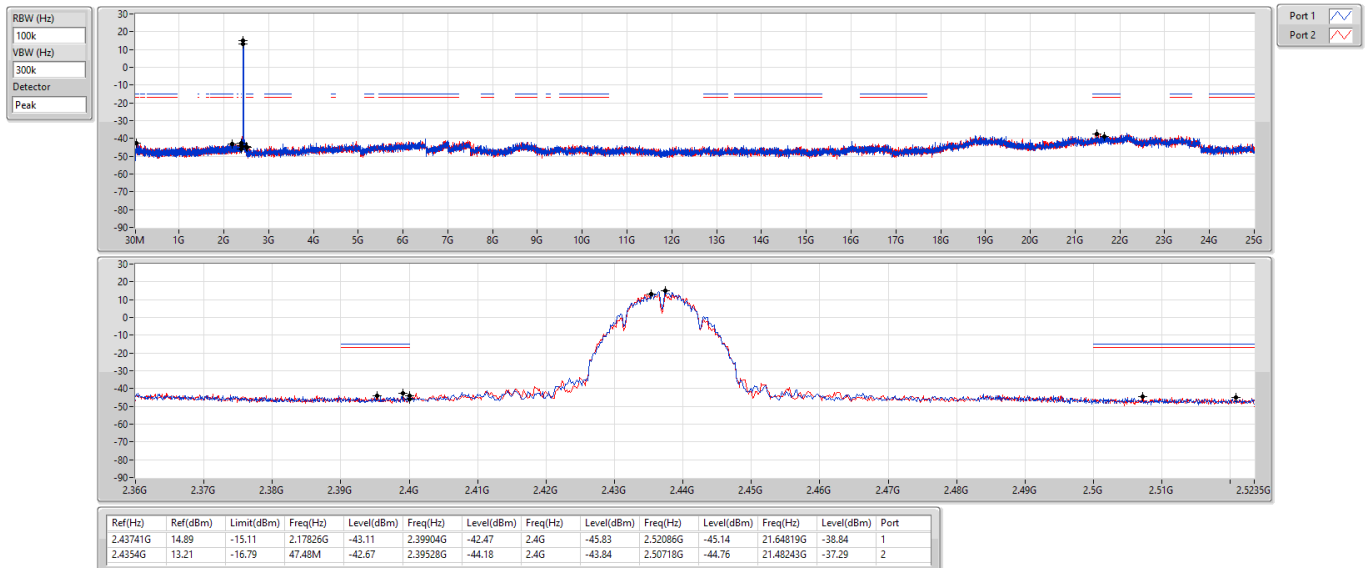


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

CSEndB

2462MHz

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

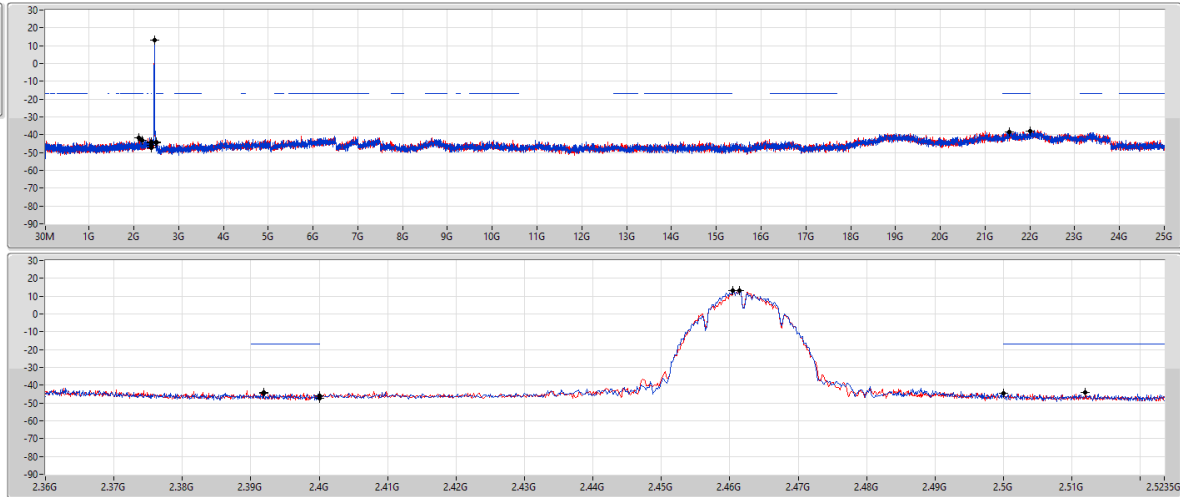


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.46045G	12.92	-17.08	2.19457G	-43.21	2.39184G	-44.68	2.4G	-45.76	2.50006G	-44.62	2.153862G	-38.27	1
2.46146G	13.02	-16.98	2.10953G	-41.91	2.39184G	-43.99	2.4G	-47.24	2.51198G	-43.85	2.200501G	-38.17	2

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

CSEndB

2412MHz

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

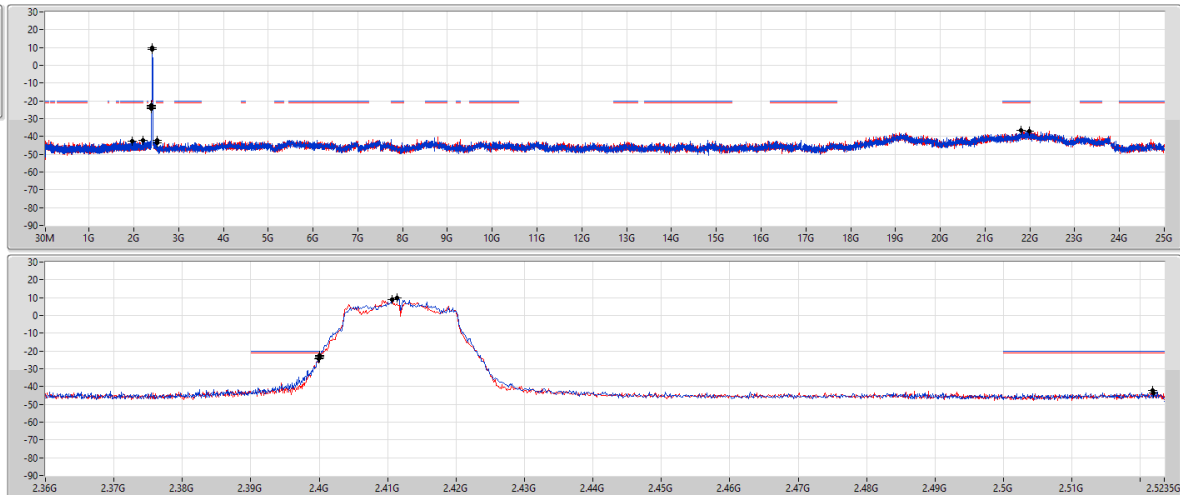


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.41136G	9.70	-20.30	1.95924G	-42.48	2.39992G	-24.36	2.4G	-23.14	2.52182G	-42.25	2.199377G	-37.04	1
2.41069G	9.03	-20.97	2.19923G	-42.15	2.4G	-23.85	2.4G	-22.55	2.5219G	-43.52	2.180272G	-36.44	2

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

CSEndB

2437MHz

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

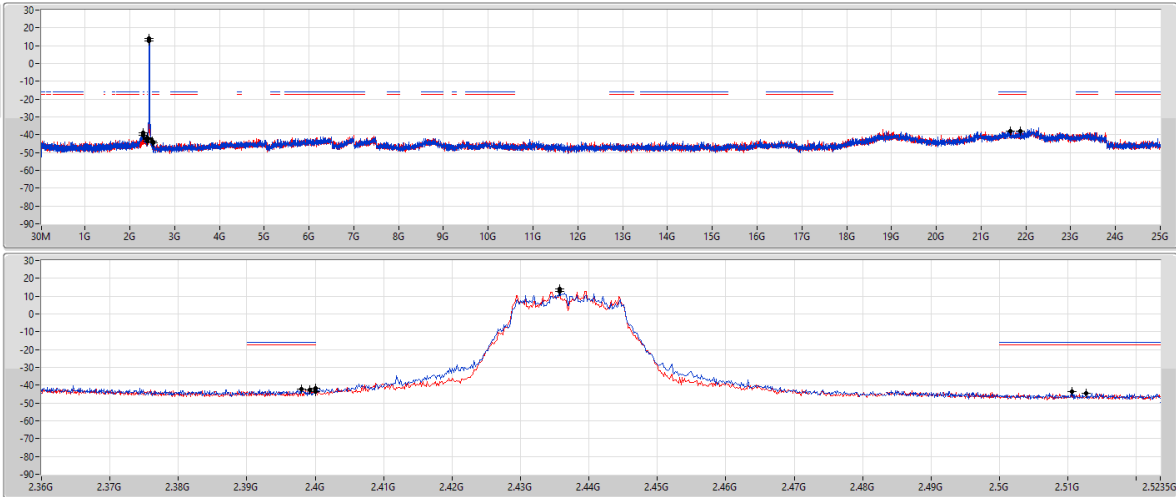


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43574G	13.93	-16.07	2.30525G	-38.95	2.398G	-42.34	2.4G	-41.86	2.51062G	-43.69	21.65381G	-37.75	1
2.43574G	12.78	-17.22	2.30408G	-40.21	2.3992G	-42.47	2.4G	-43.38	2.5127G	-44.48	21.87015G	-37.84	2

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

CSEndB

2462MHz

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

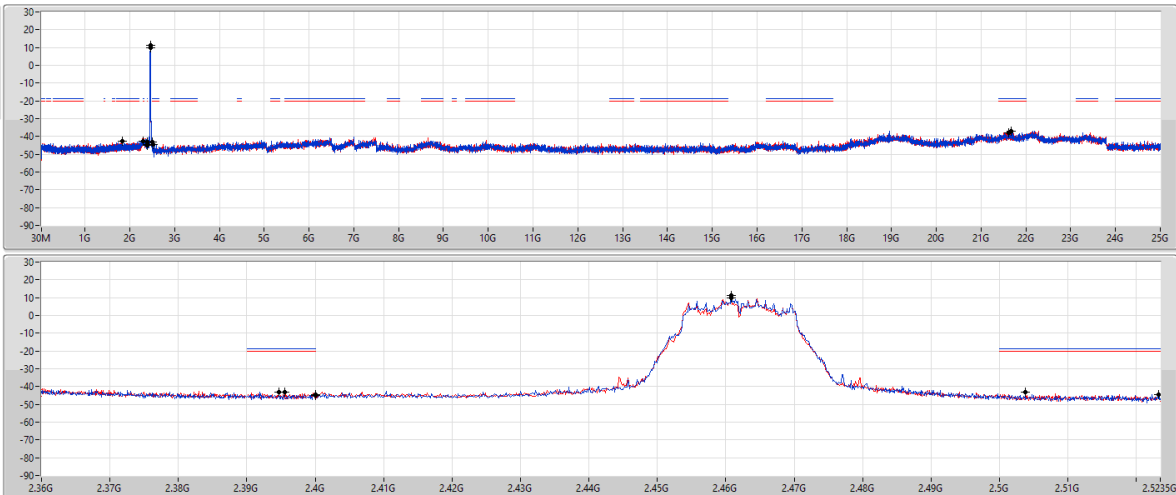

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.46079G	11.31	-18.69	1.83808G	-42.53	2.39472G	-43.16	2.4G	-45.01	2.52326G	-44.37	21.67348G	-37.11	1
2.46079G	10.01	-19.99	2.30059G	-42.64	2.3956G	-42.99	2.4G	-44.65	2.50382G	-43.18	21.61448G	-37.77	2




2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

CSEndB

2412MHz

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

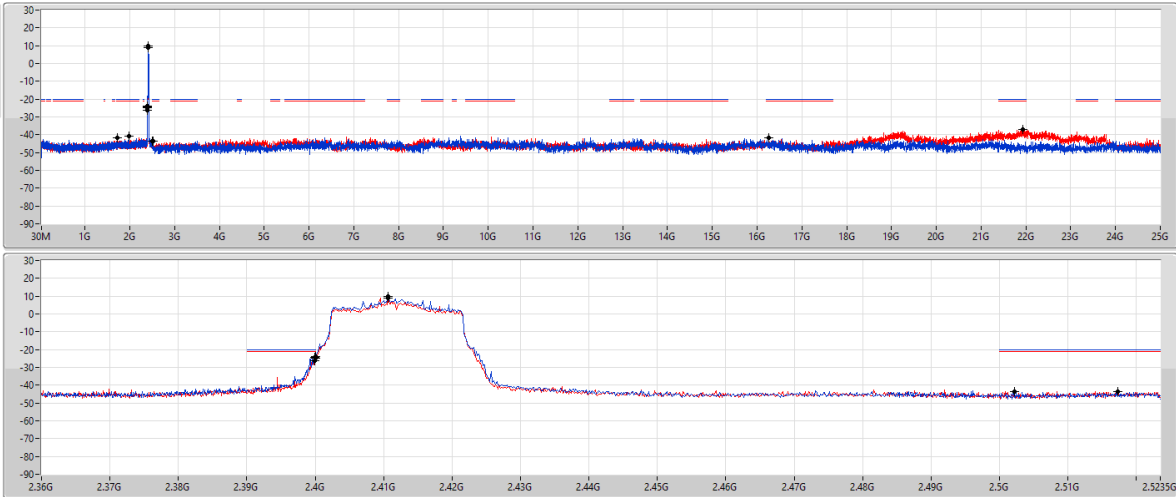


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.41069G	9.76	-20.24	1.98604G	-40.83	2.39992G	-24.36	2.4G	-23.86	2.50214G	-43.61	16.26788G	-41.73	1
2.41069G	9.10	-20.90	1.72624G	-41.73	2.39992G	-26.17	2.4G	-24.94	2.51726G	-43.69	21.93196G	-37.12	2

2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

CSEndB

2437MHz

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

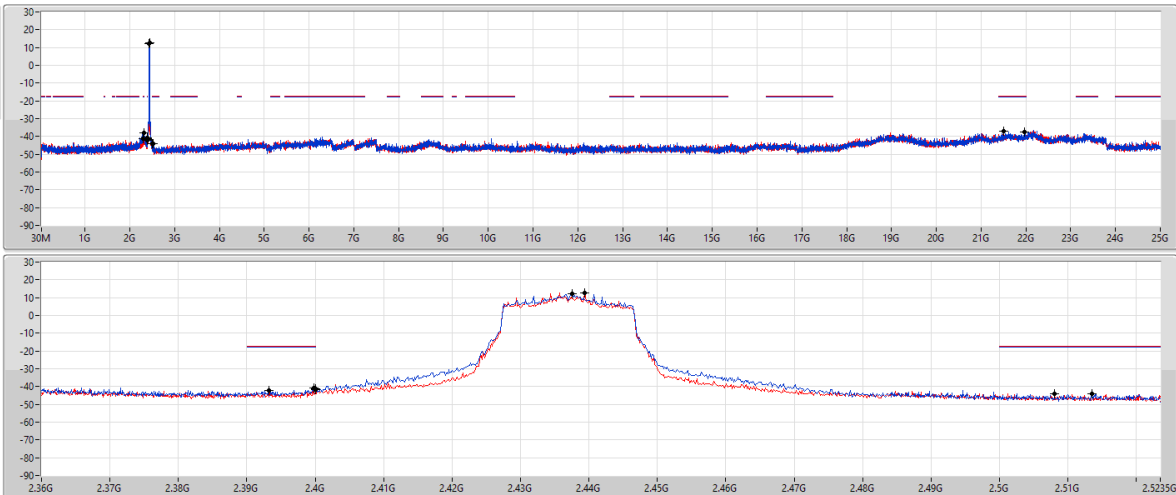


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43738G	11.98	-18.02	2.30874G	-38.11	2.39978G	-40.98	2.4G	-41.70	2.5135G	-43.85	21.50771G	-37.14	1
2.43941G	12.67	-17.33	2.30059G	-41.24	2.39328G	-42.17	2.4G	-41.44	2.50806G	-44.25	21.96567G	-37.62	2

2.4-2.4835GHz_802.11be EHT20_Nss2,(MCS0)_2TX

CSEndB

2462MHz

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

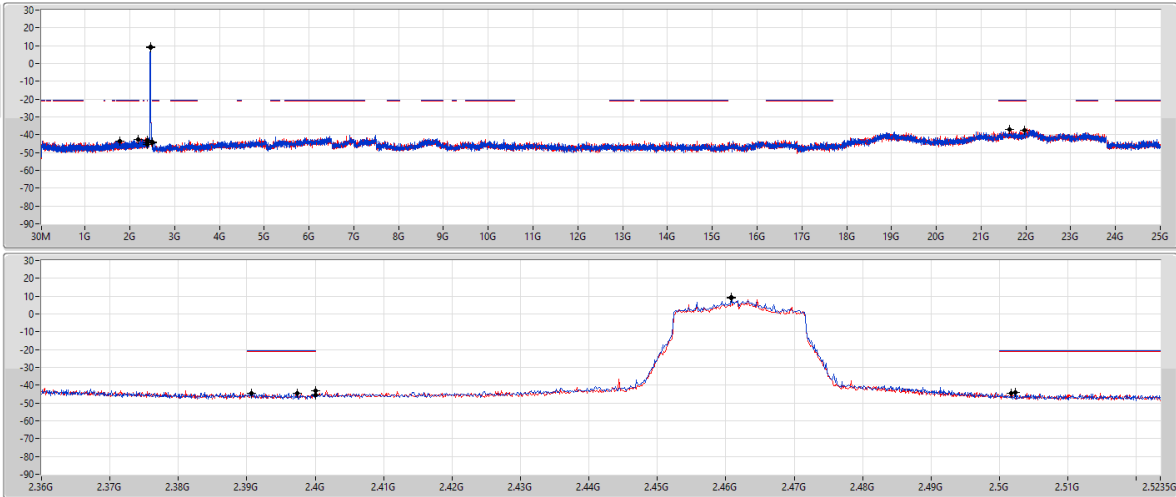


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.46079G	9.37	-20.63	2.17826G	-42.55	2.39736G	-44.36	2.4G	-43.35	2.5023G	-44.27	2.196286G	-37.48	1
2.46079G	9.03	-20.97	1.781G	-43.51	2.39072G	-44.75	2.4G	-45.50	2.50174G	-44.50	2.162572G	-36.98	2

2.4-2.4835GHz_802.11be EHT40_Nss2,(MCS0)_2TX

CSEndB

2422MHz

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

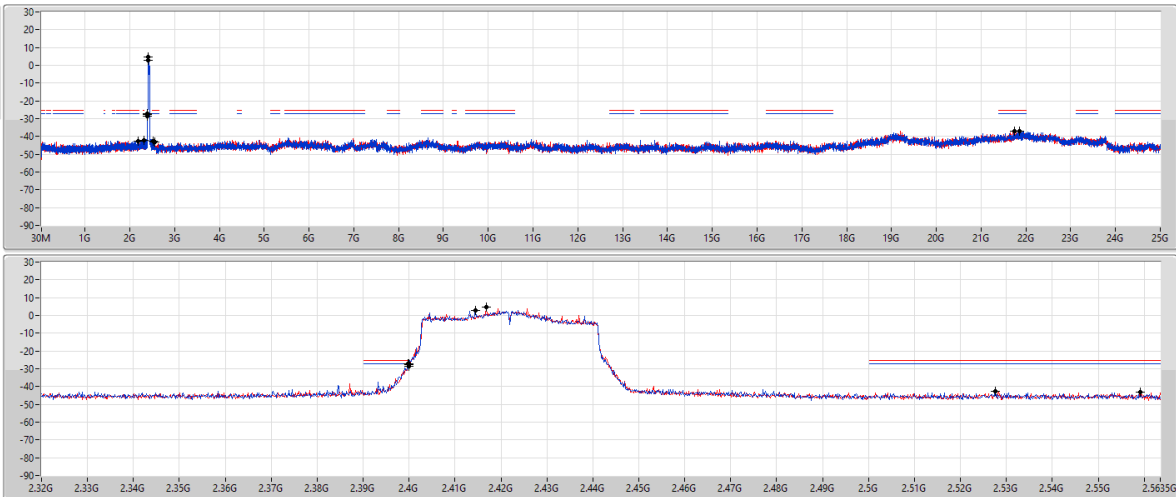

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.41433G	2.76	-27.24	2.17917G	-42.53	2.39984G	-27.30	2.4G	-27.35	2.52766G	-42.83	2.173829G	-37.19	1
2.41687G	4.73	-25.27	2.3097G	-41.98	2.4G	-28.77	2.4G	-27.66	2.55918G	-43.30	2.186169G	-36.90	2




2.4-2.4835GHz_802.11be EHT40_Nss2,(MCS0)_2TX

CSEndB

2437MHz

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

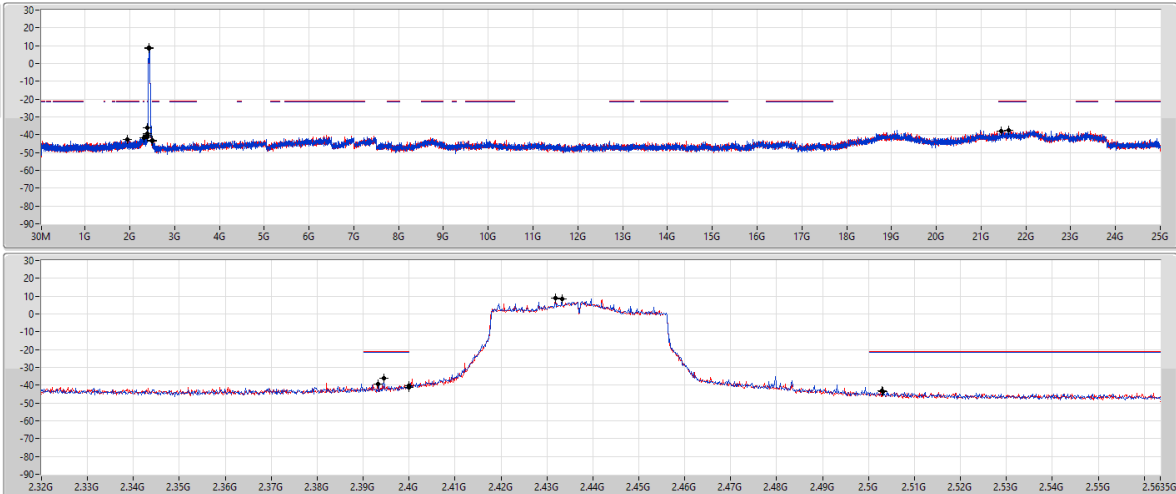


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43323G	8.55	-21.45	1.94444G	-42.77	2.39456G	-35.90	2.4G	-40.15	2.50318G	-43.62	2.145784G	-38.00	1
2.4319G	8.74	-21.26	2.30855G	-41.50	2.39328G	-39.51	2.4G	-41.29	2.50302G	-43.08	2.161209G	-37.63	2

2.4-2.4835GHz_802.11be EHT40_Nss2,(MCS0)_2TX

CSEndB

2452MHz

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

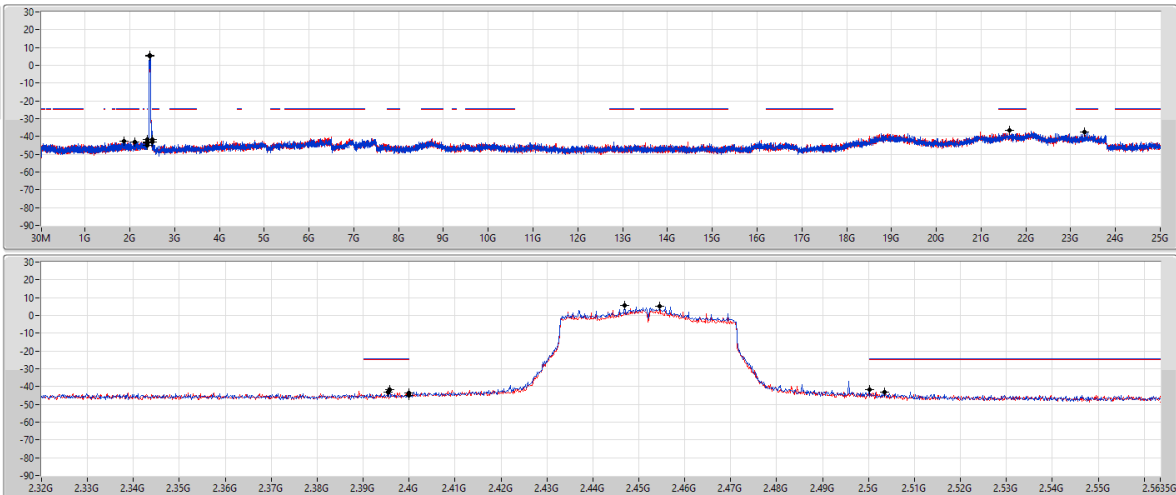

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44693G	5.41	-24.59	2.1139G	-43.07	2.39584G	-41.76	2.4G	-44.88	2.50014G	-41.66	2.163453G	-36.42	1
2.45461G	5.39	-24.61	1.862G	-42.71	2.39536G	-43.35	2.4G	-43.58	2.5035G	-43.23	2.31726G	-37.38	2




Configuration 1: Model: IAP500BE

Modulation Mode	11b	Test Freq. (MHz)	2437
Power Phase	Line		

Test by : Joe Liao

Temperature: 25°C

Humidity: 61%

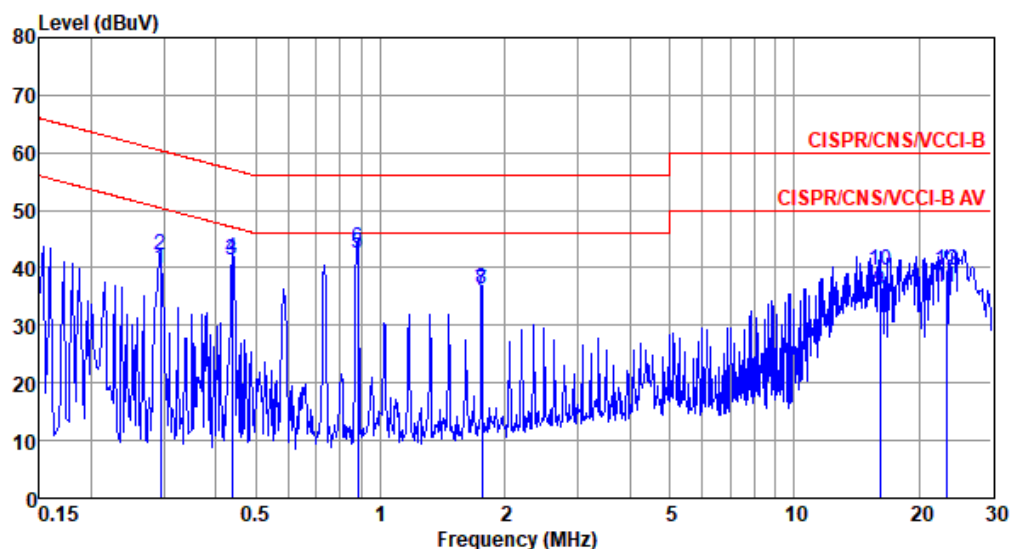

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.294	39.86	50.41	-10.55	30.13	9.64	0.09	0.00	Average
2	0.294	42.17	60.41	-18.24	32.44	9.64	0.09	0.00	QP
3	0.437	41.39	47.11	-5.72	31.66	9.64	0.09	0.00	Average
4	0.437	41.72	57.11	-15.39	31.99	9.64	0.09	0.00	QP
5*	0.880	42.47	46.00	-3.53	32.72	9.65	0.10	0.00	Average
6	0.880	43.43	56.00	-12.57	33.68	9.65	0.10	0.00	QP
7	1.756	36.07	46.00	-9.93	26.26	9.65	0.16	0.00	Average
8	1.756	36.22	56.00	-19.78	26.41	9.65	0.16	0.00	QP
9	16.095	35.89	50.00	-14.11	25.72	9.70	0.47	0.00	Average
10	16.095	39.54	60.00	-20.46	29.37	9.70	0.47	0.00	QP
11	23.263	36.59	50.00	-13.41	26.31	9.67	0.61	0.00	Average
12	23.263	39.68	60.00	-20.32	29.40	9.67	0.61	0.00	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).



Modulation Mode	11b	Test Freq. (MHz)	2437																																																																																																																																												
Power Phase	Neutral																																																																																																																																														
Test by : Joe Liao Temperature: 25°C Humidity: 61%																																																																																																																																															
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Cable</th><th>Aux</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV</th><th>dBuV</th><th>Limit</th><th>Level</th><th>dB</th><th>loss</th><th>dB</th><th></th></tr><tr><td>1</td><td>0.156</td><td>15.91</td><td>55.69</td><td>-39.78</td><td>6.19</td><td>9.64</td><td>0.08</td><td>0.00</td><td>Average</td></tr><tr><td>2</td><td>0.156</td><td>40.33</td><td>65.69</td><td>-25.36</td><td>30.61</td><td>9.64</td><td>0.08</td><td>0.00</td><td>QP</td></tr><tr><td>3</td><td>0.294</td><td>38.85</td><td>50.41</td><td>-11.56</td><td>29.13</td><td>9.63</td><td>0.09</td><td>0.00</td><td>Average</td></tr><tr><td>4</td><td>0.294</td><td>41.29</td><td>60.41</td><td>-19.12</td><td>31.57</td><td>9.63</td><td>0.09</td><td>0.00</td><td>QP</td></tr><tr><td>5*</td><td>0.437</td><td>40.78</td><td>47.11</td><td>-6.33</td><td>31.06</td><td>9.63</td><td>0.09</td><td>0.00</td><td>Average</td></tr><tr><td>6</td><td>0.437</td><td>41.20</td><td>57.11</td><td>-15.91</td><td>31.48</td><td>9.63</td><td>0.09</td><td>0.00</td><td>QP</td></tr><tr><td>7</td><td>0.880</td><td>35.83</td><td>46.00</td><td>-10.17</td><td>26.09</td><td>9.64</td><td>0.10</td><td>0.00</td><td>Average</td></tr><tr><td>8</td><td>0.880</td><td>35.79</td><td>56.00</td><td>-20.21</td><td>26.05</td><td>9.64</td><td>0.10</td><td>0.00</td><td>QP</td></tr><tr><td>9</td><td>4.094</td><td>29.49</td><td>46.00</td><td>-16.51</td><td>19.61</td><td>9.66</td><td>0.22</td><td>0.00</td><td>Average</td></tr><tr><td>10</td><td>4.094</td><td>29.78</td><td>56.00</td><td>-26.22</td><td>19.90</td><td>9.66</td><td>0.22</td><td>0.00</td><td>QP</td></tr><tr><td>11</td><td>23.979</td><td>39.12</td><td>50.00</td><td>-10.88</td><td>28.71</td><td>9.79</td><td>0.62</td><td>0.00</td><td>Average</td></tr><tr><td>12</td><td>23.979</td><td>40.71</td><td>60.00</td><td>-19.29</td><td>30.30</td><td>9.79</td><td>0.62</td><td>0.00</td><td>QP</td></tr></table>					Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark		MHz	dBuV	dBuV	Limit	Level	dB	loss	dB		1	0.156	15.91	55.69	-39.78	6.19	9.64	0.08	0.00	Average	2	0.156	40.33	65.69	-25.36	30.61	9.64	0.08	0.00	QP	3	0.294	38.85	50.41	-11.56	29.13	9.63	0.09	0.00	Average	4	0.294	41.29	60.41	-19.12	31.57	9.63	0.09	0.00	QP	5*	0.437	40.78	47.11	-6.33	31.06	9.63	0.09	0.00	Average	6	0.437	41.20	57.11	-15.91	31.48	9.63	0.09	0.00	QP	7	0.880	35.83	46.00	-10.17	26.09	9.64	0.10	0.00	Average	8	0.880	35.79	56.00	-20.21	26.05	9.64	0.10	0.00	QP	9	4.094	29.49	46.00	-16.51	19.61	9.66	0.22	0.00	Average	10	4.094	29.78	56.00	-26.22	19.90	9.66	0.22	0.00	QP	11	23.979	39.12	50.00	-10.88	28.71	9.79	0.62	0.00	Average	12	23.979	40.71	60.00	-19.29	30.30	9.79	0.62	0.00	QP
	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark																																																																																																																																						
	MHz	dBuV	dBuV	Limit	Level	dB	loss	dB																																																																																																																																							
1	0.156	15.91	55.69	-39.78	6.19	9.64	0.08	0.00	Average																																																																																																																																						
2	0.156	40.33	65.69	-25.36	30.61	9.64	0.08	0.00	QP																																																																																																																																						
3	0.294	38.85	50.41	-11.56	29.13	9.63	0.09	0.00	Average																																																																																																																																						
4	0.294	41.29	60.41	-19.12	31.57	9.63	0.09	0.00	QP																																																																																																																																						
5*	0.437	40.78	47.11	-6.33	31.06	9.63	0.09	0.00	Average																																																																																																																																						
6	0.437	41.20	57.11	-15.91	31.48	9.63	0.09	0.00	QP																																																																																																																																						
7	0.880	35.83	46.00	-10.17	26.09	9.64	0.10	0.00	Average																																																																																																																																						
8	0.880	35.79	56.00	-20.21	26.05	9.64	0.10	0.00	QP																																																																																																																																						
9	4.094	29.49	46.00	-16.51	19.61	9.66	0.22	0.00	Average																																																																																																																																						
10	4.094	29.78	56.00	-26.22	19.90	9.66	0.22	0.00	QP																																																																																																																																						
11	23.979	39.12	50.00	-10.88	28.71	9.79	0.62	0.00	Average																																																																																																																																						
12	23.979	40.71	60.00	-19.29	30.30	9.79	0.62	0.00	QP																																																																																																																																						
Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).																																																																																																																																															




Configuration 2: Model: NWA30BE

Modulation Mode	11b	Test Freq. (MHz)	2437
Power Phase	Line		

Test by : Joe Liao

Temperature: 25°C

Humidity: 61%

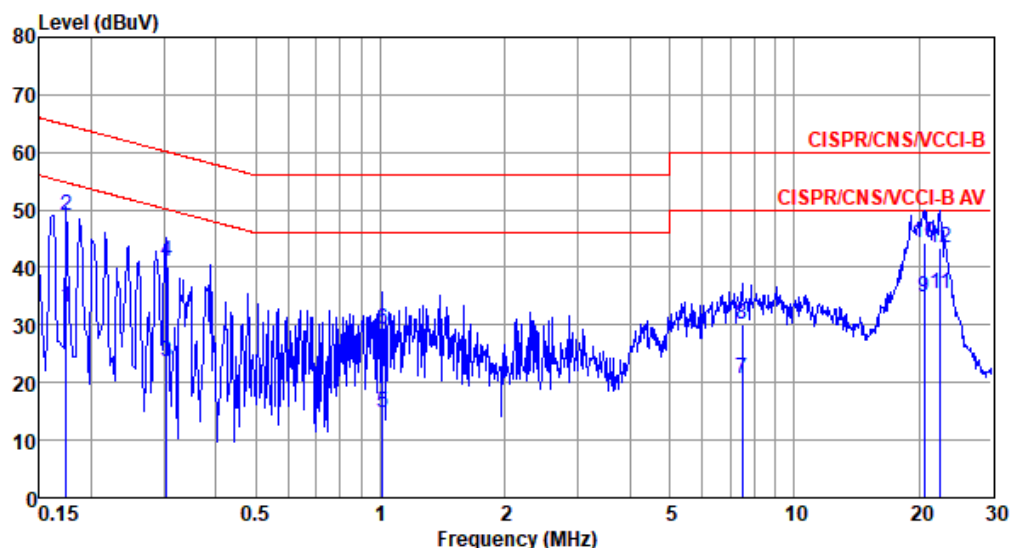

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.174	33.17	54.77	-21.60	23.21	9.64	0.08	0.24	Average
2	0.174	49.05	64.77	-15.72	39.09	9.64	0.08	0.24	QP
3	0.303	23.65	50.15	-26.50	13.62	9.64	0.09	0.30	Average
4	0.303	40.94	60.15	-19.21	30.91	9.64	0.09	0.30	QP
5	1.010	14.89	46.00	-31.11	4.74	9.65	0.10	0.40	Average
6	1.010	29.26	56.00	-26.74	19.11	9.65	0.10	0.40	QP
7	7.486	20.79	50.00	-29.21	10.33	9.70	0.27	0.49	Average
8	7.486	30.24	60.00	-29.76	19.78	9.70	0.27	0.49	QP
9	20.594	34.75	50.00	-15.25	23.82	9.69	0.58	0.66	Average
10	20.594	44.18	60.00	-15.82	33.25	9.69	0.58	0.66	QP
11*	22.535	35.28	50.00	-14.72	24.30	9.68	0.60	0.70	Average
12	22.535	43.43	60.00	-16.57	32.45	9.68	0.60	0.70	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).




Modulation Mode	11b	Test Freq. (MHz)	2437
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 25°C

Humidity: 61%

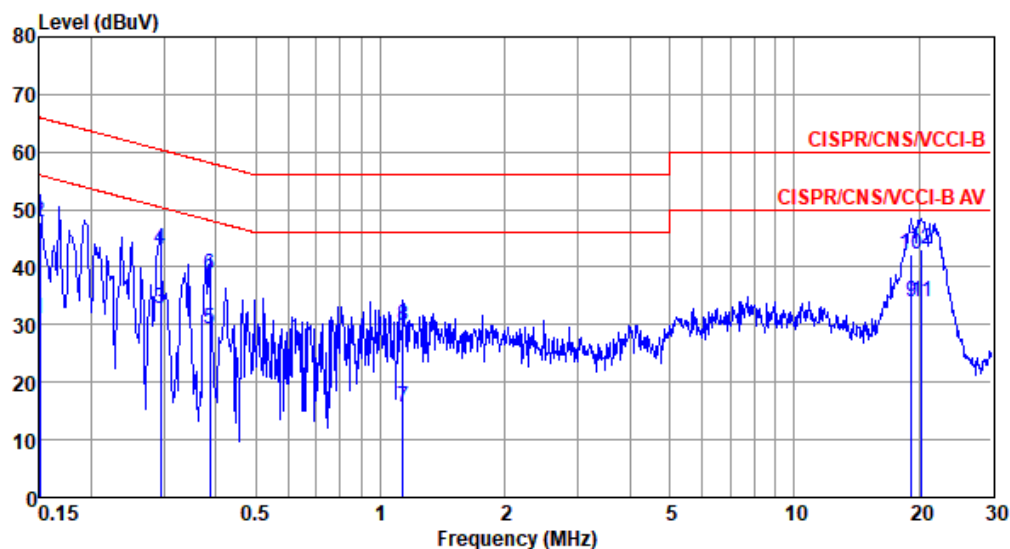

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.150	30.94	56.00	-25.06	21.08	9.64	0.08	0.14	Average
2	0.150	47.84	66.00	-18.16	37.98	9.64	0.08	0.14	QP
3	0.294	32.70	50.41	-17.71	22.75	9.63	0.09	0.23	Average
4	0.294	43.11	60.41	-17.30	33.16	9.63	0.09	0.23	QP
5	0.387	29.10	48.12	-19.02	19.12	9.63	0.09	0.26	Average
6	0.387	38.73	58.12	-19.39	28.75	9.63	0.09	0.26	QP
7	1.135	15.52	46.00	-30.48	5.41	9.64	0.11	0.36	Average
8	1.135	29.81	56.00	-26.19	19.70	9.64	0.11	0.36	QP
9*	19.224	34.08	50.00	-15.92	23.11	9.79	0.55	0.63	Average
10	19.224	42.13	60.00	-17.87	31.16	9.79	0.55	0.63	QP
11	20.270	33.93	50.00	-16.07	22.93	9.79	0.57	0.64	Average
12	20.270	43.23	60.00	-16.77	32.23	9.79	0.57	0.64	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).




Configuration 3: Model: NWA55BE

Modulation Mode	11b	Test Freq. (MHz)	2437
Power Phase	Line		

Test by : Joe Liao

Temperature: 25°C

Humidity: 61%

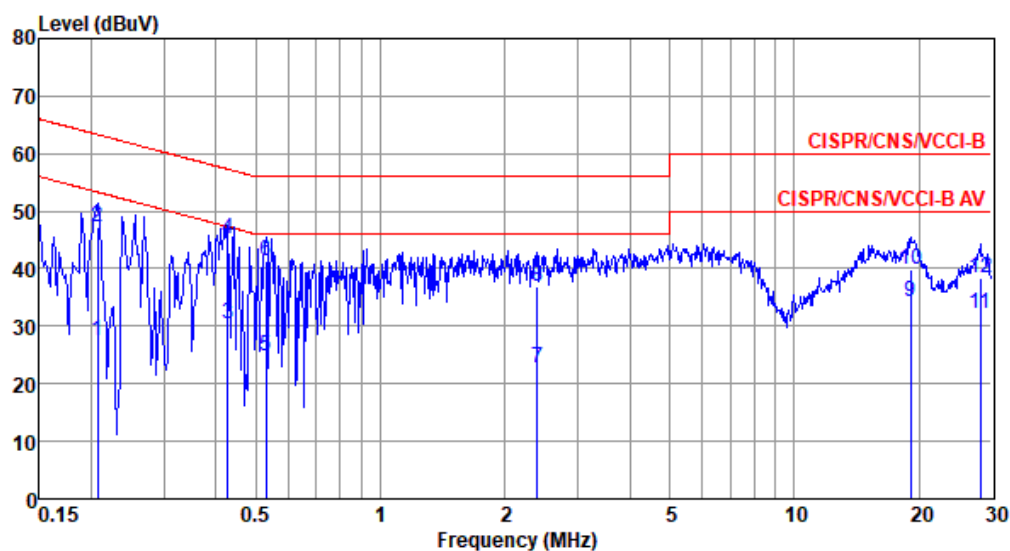

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.207	27.46	53.32	-25.86	17.48	9.64	0.08	0.26	Average
2	0.207	47.12	63.32	-16.20	37.14	9.64	0.08	0.26	QP
3	0.428	30.43	47.29	-16.86	20.37	9.64	0.09	0.33	Average
4*	0.428	45.19	57.29	-12.10	35.13	9.64	0.09	0.33	QP
5	0.529	24.70	46.00	-21.30	14.63	9.64	0.09	0.34	Average
6	0.529	41.33	56.00	-14.67	31.26	9.64	0.09	0.34	QP
7	2.396	22.66	46.00	-23.34	12.38	9.66	0.18	0.44	Average
8	2.396	37.00	56.00	-19.00	26.72	9.66	0.18	0.44	QP
9	19.122	34.37	50.00	-15.63	23.50	9.69	0.55	0.63	Average
10	19.122	39.97	60.00	-20.03	29.10	9.69	0.55	0.63	QP
11	28.152	32.23	50.00	-17.77	21.03	9.65	0.73	0.82	Average
12	28.152	38.24	60.00	-21.76	27.04	9.65	0.73	0.82	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).



Modulation Mode	11b	Test Freq. (MHz)	2437																																																																																																																																		
Power Phase	Neutral																																																																																																																																				
Test by : Joe Liao Temperature: 25°C Humidity: 61%																																																																																																																																					
Level (dBuV) Frequency (MHz) <table><tr><th></th><th>Freq MHz</th><th>Level dBuV</th><th>Limit Line dBuV</th><th>Over Limit dB</th><th>Read Level dBuV</th><th>Factor dB</th><th>Cable loss dB</th><th>Aux dB</th><th>Remark</th></tr><tr><td>1</td><td>0.192</td><td>29.52</td><td>53.93</td><td>-24.41</td><td>19.61</td><td>9.64</td><td>0.08</td><td>0.19</td><td>Average</td></tr><tr><td>2</td><td>0.192</td><td>47.95</td><td>63.93</td><td>-15.98</td><td>38.04</td><td>9.64</td><td>0.08</td><td>0.19</td><td>QP</td></tr><tr><td>3</td><td>0.273</td><td>30.80</td><td>51.03</td><td>-20.23</td><td>20.85</td><td>9.64</td><td>0.08</td><td>0.23</td><td>Average</td></tr><tr><td>4</td><td>0.273</td><td>45.22</td><td>61.03</td><td>-15.81</td><td>35.27</td><td>9.64</td><td>0.08</td><td>0.23</td><td>QP</td></tr><tr><td>5</td><td>0.417</td><td>30.76</td><td>47.51</td><td>-16.75</td><td>20.78</td><td>9.63</td><td>0.09</td><td>0.26</td><td>Average</td></tr><tr><td>6*</td><td>0.417</td><td>45.08</td><td>57.51</td><td>-12.43</td><td>35.10</td><td>9.63</td><td>0.09</td><td>0.26</td><td>QP</td></tr><tr><td>7</td><td>0.561</td><td>27.67</td><td>46.00</td><td>-18.33</td><td>17.66</td><td>9.63</td><td>0.09</td><td>0.29</td><td>Average</td></tr><tr><td>8</td><td>0.561</td><td>43.10</td><td>56.00</td><td>-12.90</td><td>33.09</td><td>9.63</td><td>0.09</td><td>0.29</td><td>QP</td></tr><tr><td>9</td><td>2.500</td><td>22.89</td><td>46.00</td><td>-23.11</td><td>12.61</td><td>9.65</td><td>0.19</td><td>0.44</td><td>Average</td></tr><tr><td>10</td><td>2.500</td><td>38.07</td><td>56.00</td><td>-17.93</td><td>27.79</td><td>9.65</td><td>0.19</td><td>0.44</td><td>QP</td></tr><tr><td>11</td><td>19.428</td><td>35.42</td><td>50.00</td><td>-14.58</td><td>24.44</td><td>9.79</td><td>0.56</td><td>0.63</td><td>Average</td></tr><tr><td>12</td><td>19.428</td><td>41.06</td><td>60.00</td><td>-18.94</td><td>30.08</td><td>9.79</td><td>0.56</td><td>0.63</td><td>QP</td></tr></table>					Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark	1	0.192	29.52	53.93	-24.41	19.61	9.64	0.08	0.19	Average	2	0.192	47.95	63.93	-15.98	38.04	9.64	0.08	0.19	QP	3	0.273	30.80	51.03	-20.23	20.85	9.64	0.08	0.23	Average	4	0.273	45.22	61.03	-15.81	35.27	9.64	0.08	0.23	QP	5	0.417	30.76	47.51	-16.75	20.78	9.63	0.09	0.26	Average	6*	0.417	45.08	57.51	-12.43	35.10	9.63	0.09	0.26	QP	7	0.561	27.67	46.00	-18.33	17.66	9.63	0.09	0.29	Average	8	0.561	43.10	56.00	-12.90	33.09	9.63	0.09	0.29	QP	9	2.500	22.89	46.00	-23.11	12.61	9.65	0.19	0.44	Average	10	2.500	38.07	56.00	-17.93	27.79	9.65	0.19	0.44	QP	11	19.428	35.42	50.00	-14.58	24.44	9.79	0.56	0.63	Average	12	19.428	41.06	60.00	-18.94	30.08	9.79	0.56	0.63	QP
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark																																																																																																																												
1	0.192	29.52	53.93	-24.41	19.61	9.64	0.08	0.19	Average																																																																																																																												
2	0.192	47.95	63.93	-15.98	38.04	9.64	0.08	0.19	QP																																																																																																																												
3	0.273	30.80	51.03	-20.23	20.85	9.64	0.08	0.23	Average																																																																																																																												
4	0.273	45.22	61.03	-15.81	35.27	9.64	0.08	0.23	QP																																																																																																																												
5	0.417	30.76	47.51	-16.75	20.78	9.63	0.09	0.26	Average																																																																																																																												
6*	0.417	45.08	57.51	-12.43	35.10	9.63	0.09	0.26	QP																																																																																																																												
7	0.561	27.67	46.00	-18.33	17.66	9.63	0.09	0.29	Average																																																																																																																												
8	0.561	43.10	56.00	-12.90	33.09	9.63	0.09	0.29	QP																																																																																																																												
9	2.500	22.89	46.00	-23.11	12.61	9.65	0.19	0.44	Average																																																																																																																												
10	2.500	38.07	56.00	-17.93	27.79	9.65	0.19	0.44	QP																																																																																																																												
11	19.428	35.42	50.00	-14.58	24.44	9.79	0.56	0.63	Average																																																																																																																												
12	19.428	41.06	60.00	-18.94	30.08	9.79	0.56	0.63	QP																																																																																																																												
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).																																																																																																																																					