






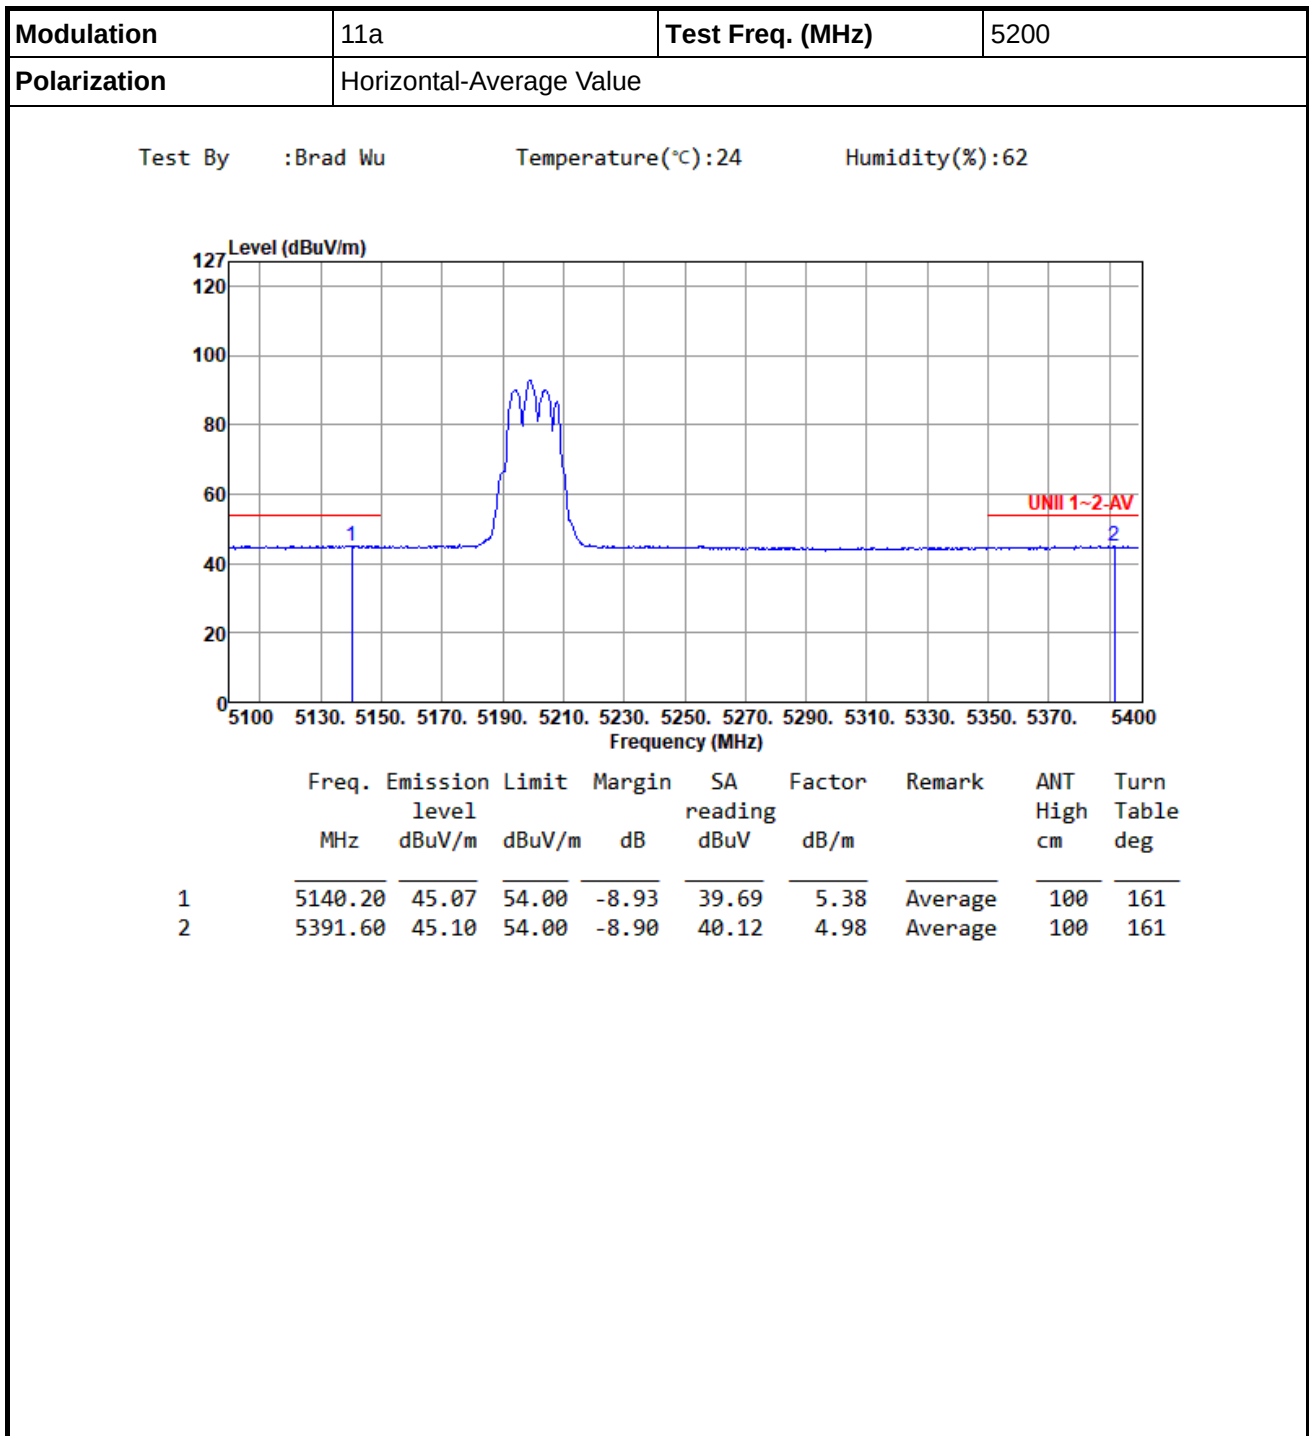


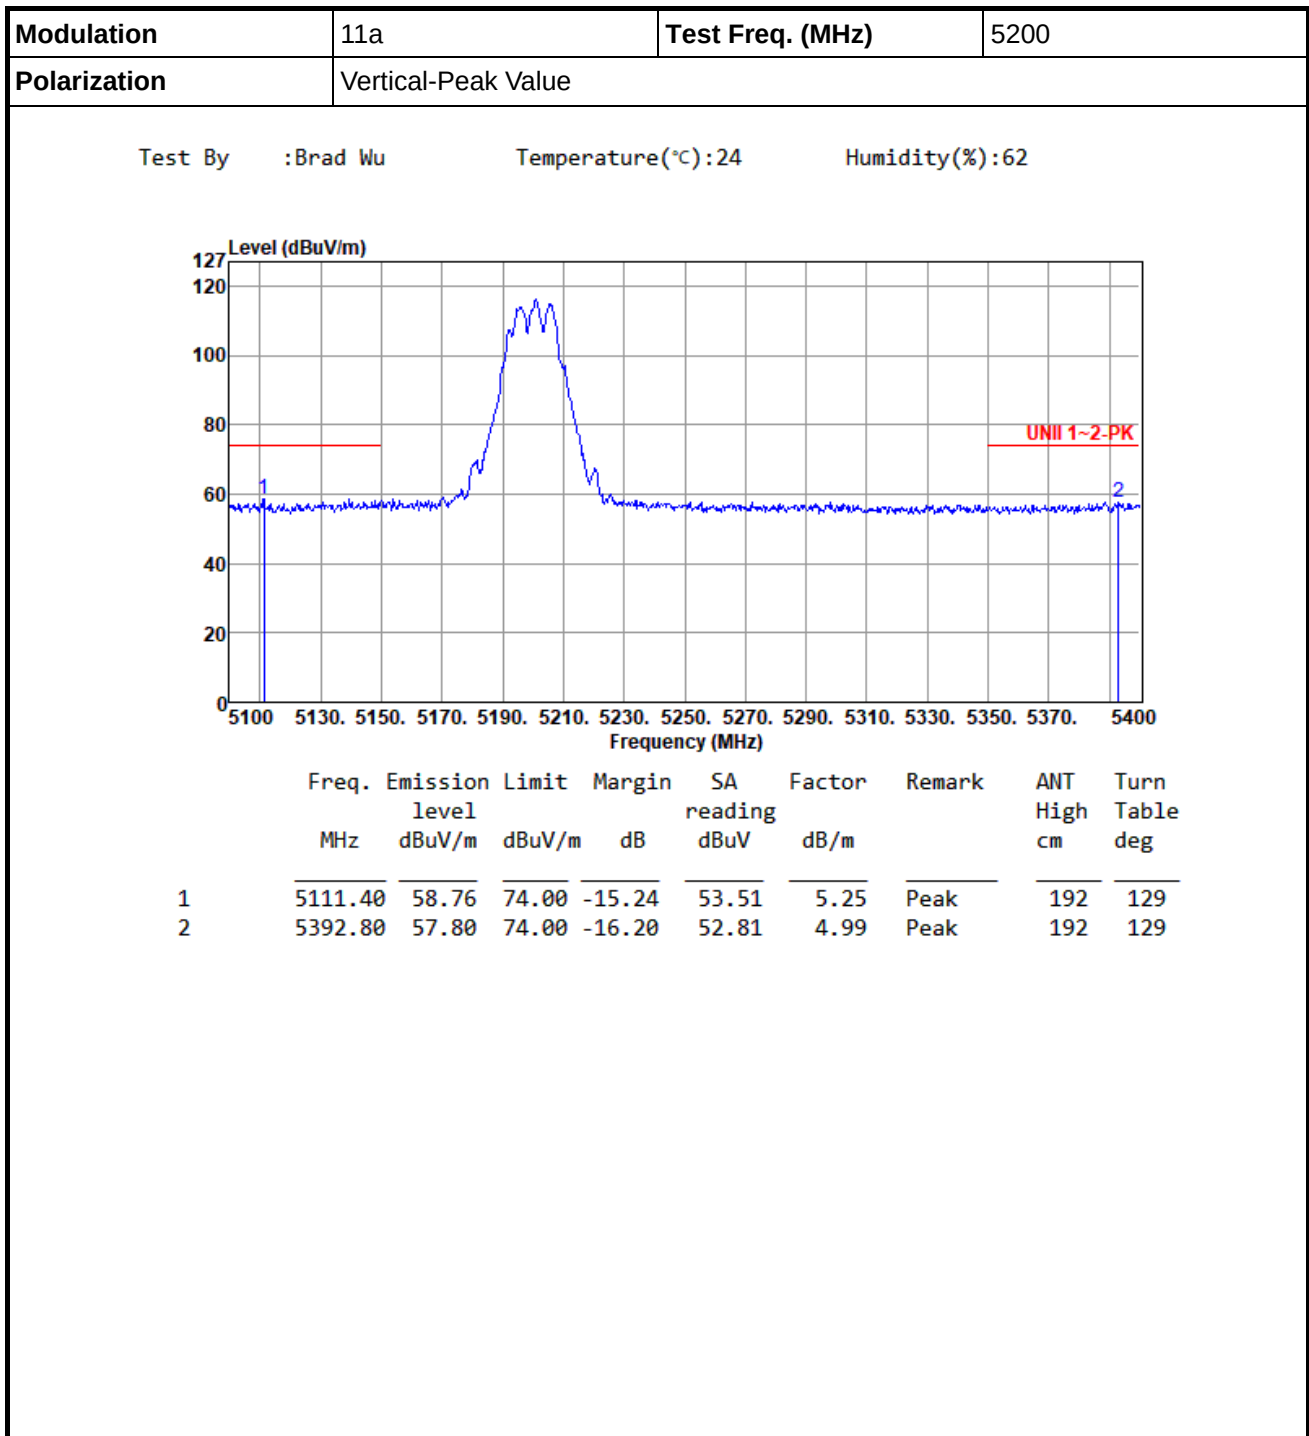


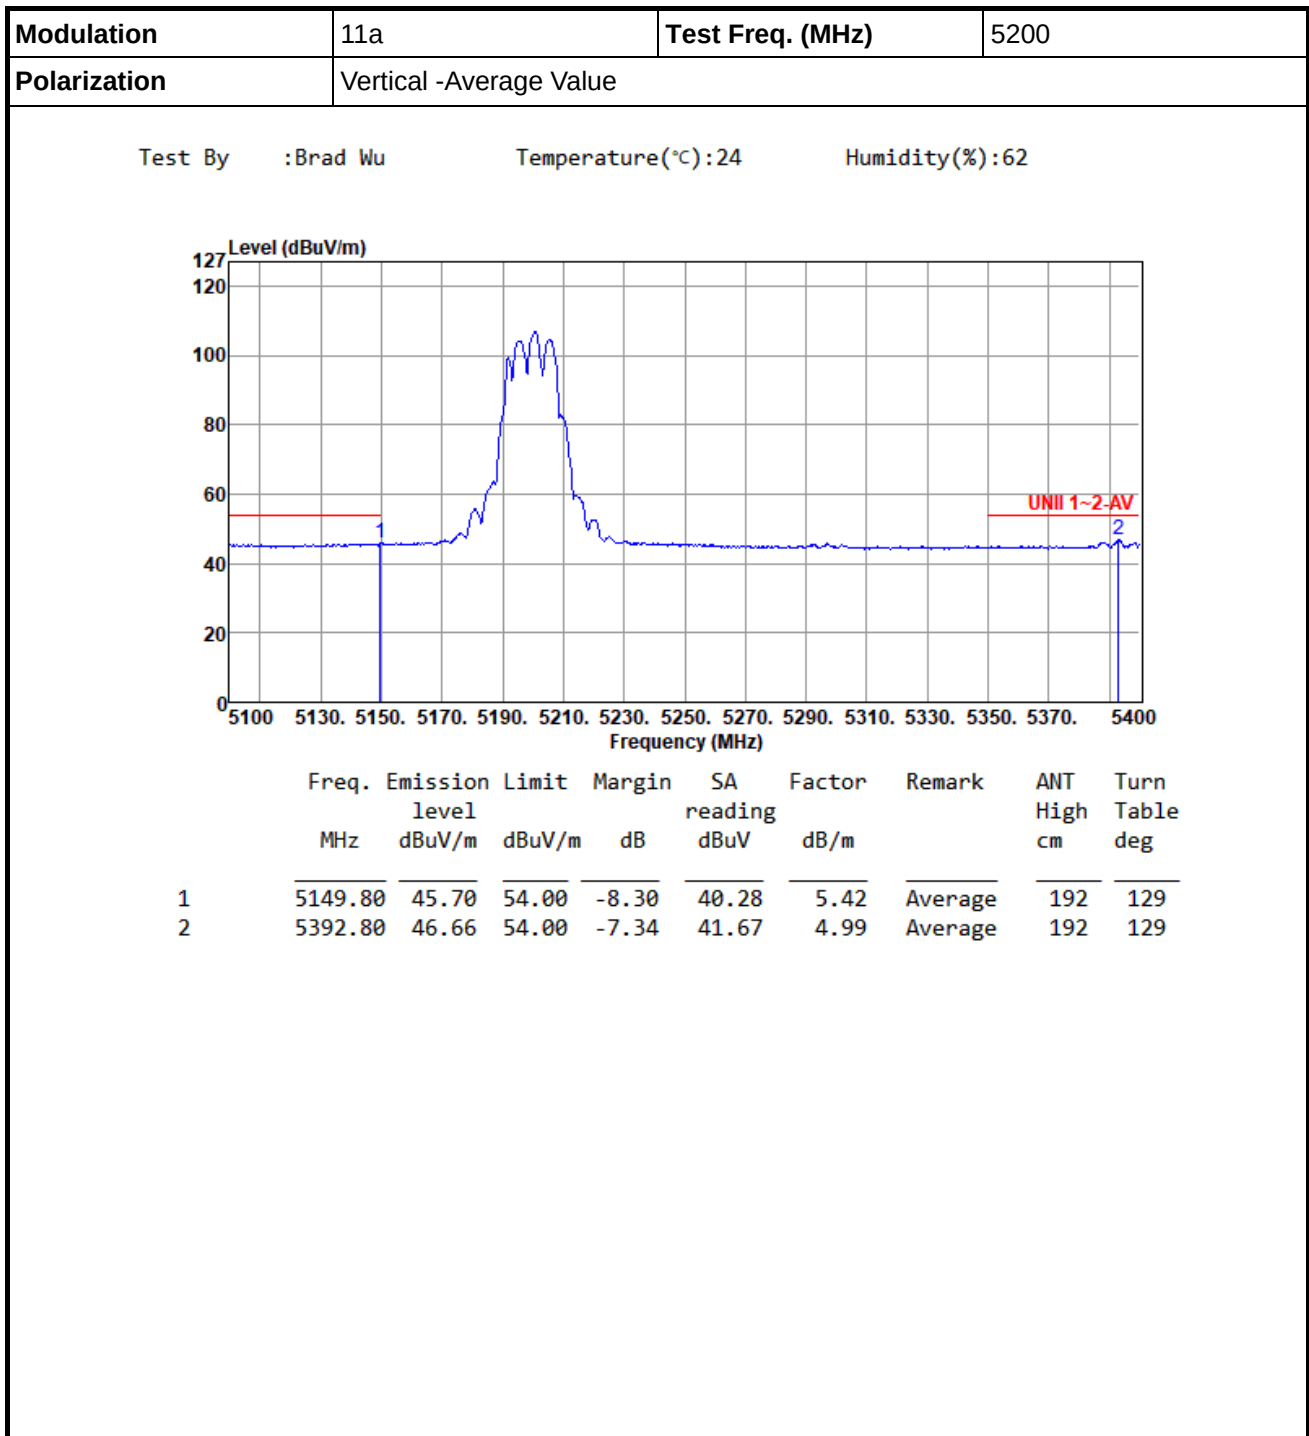


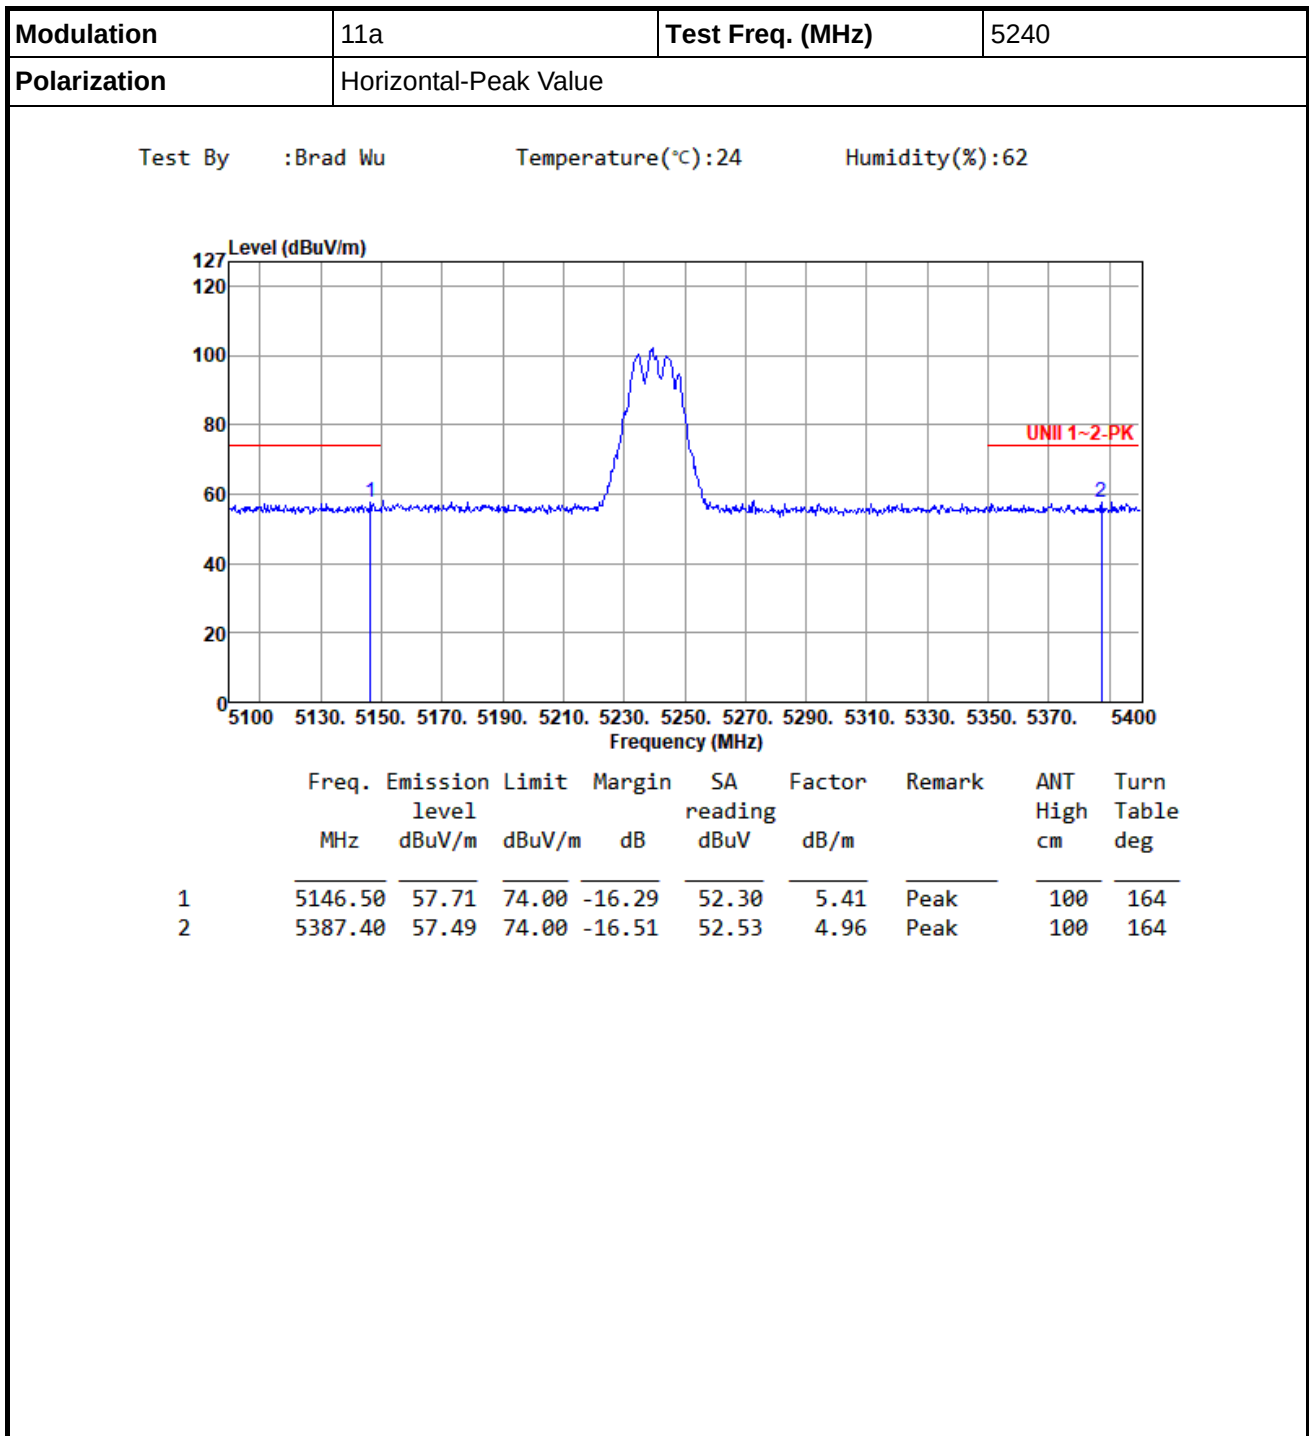


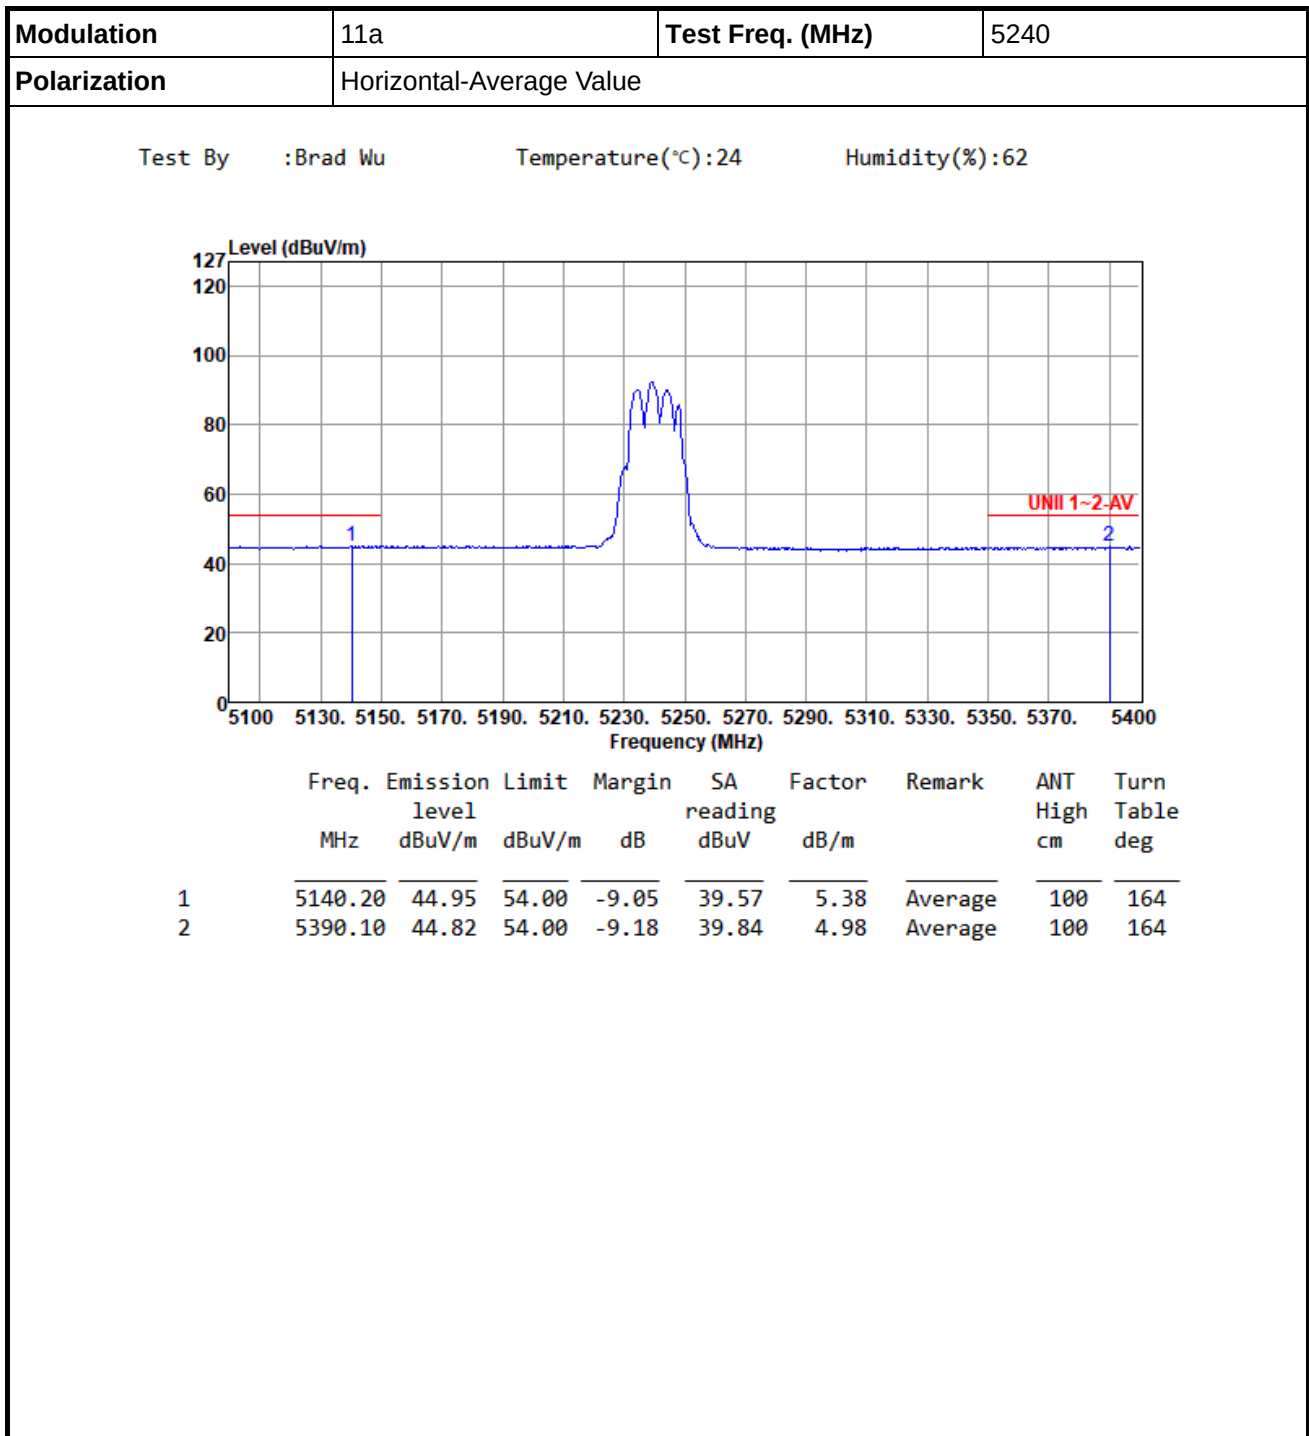


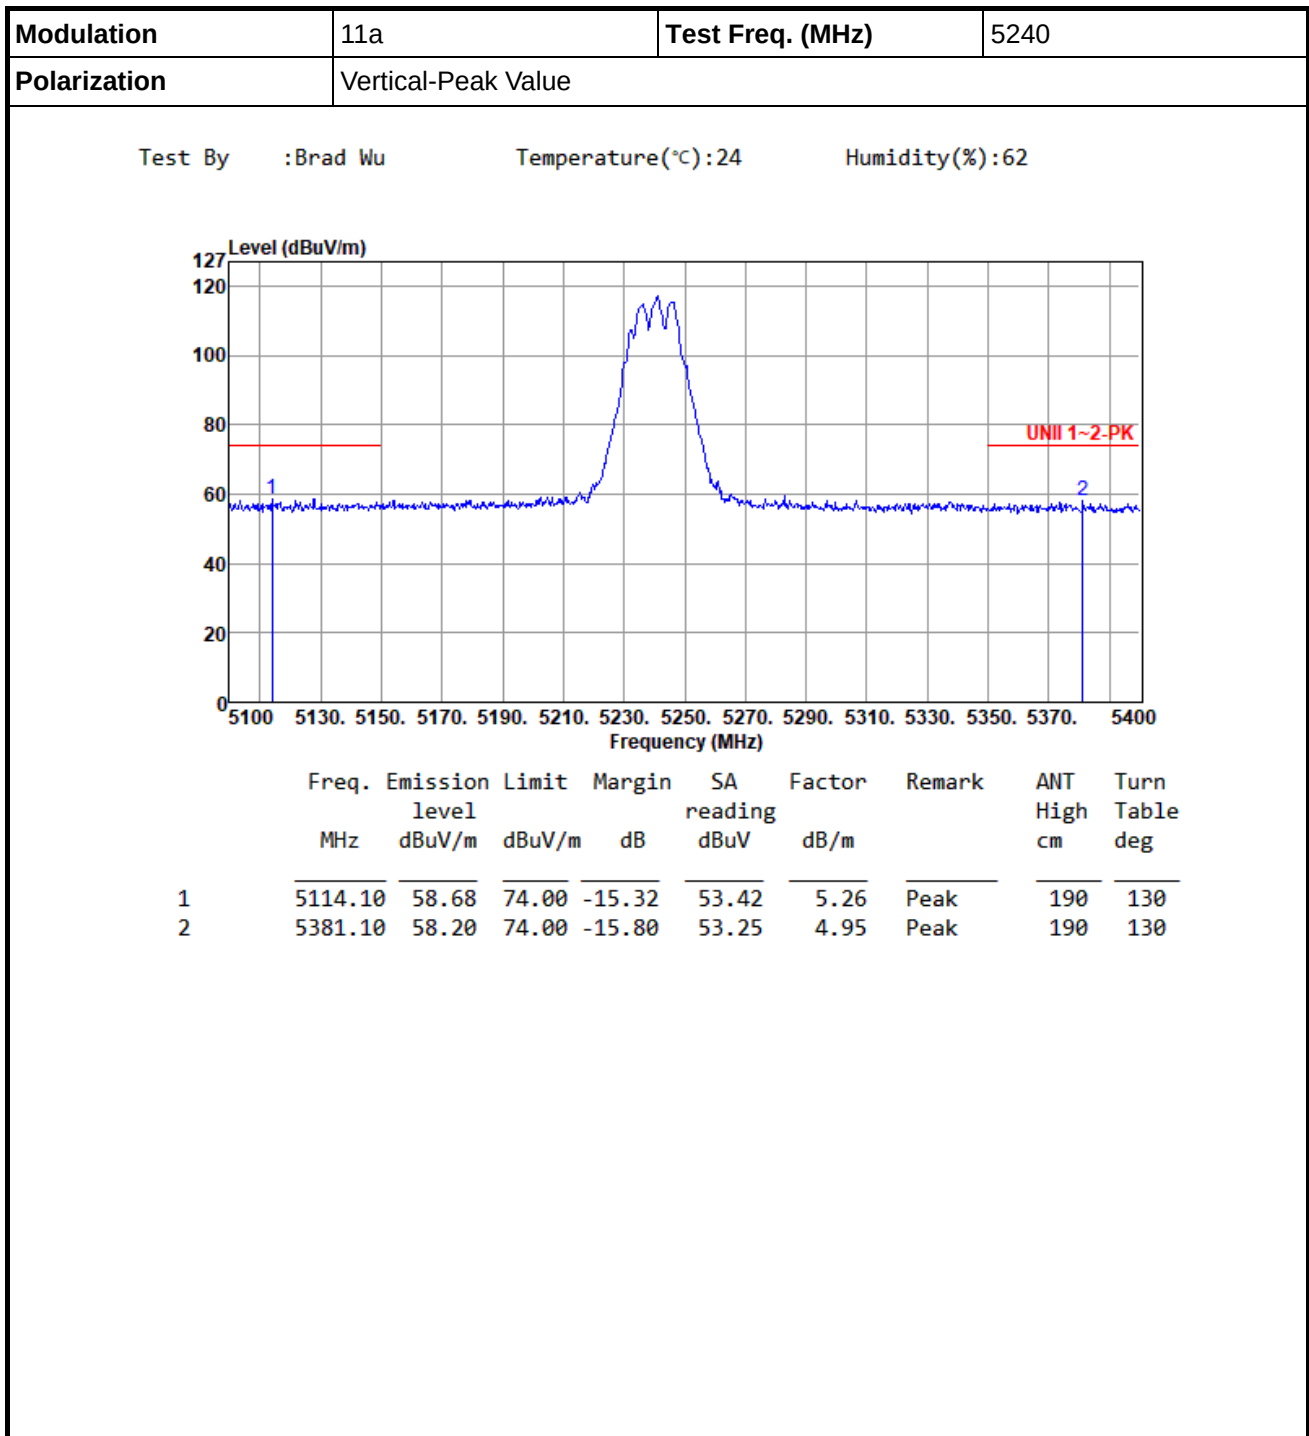


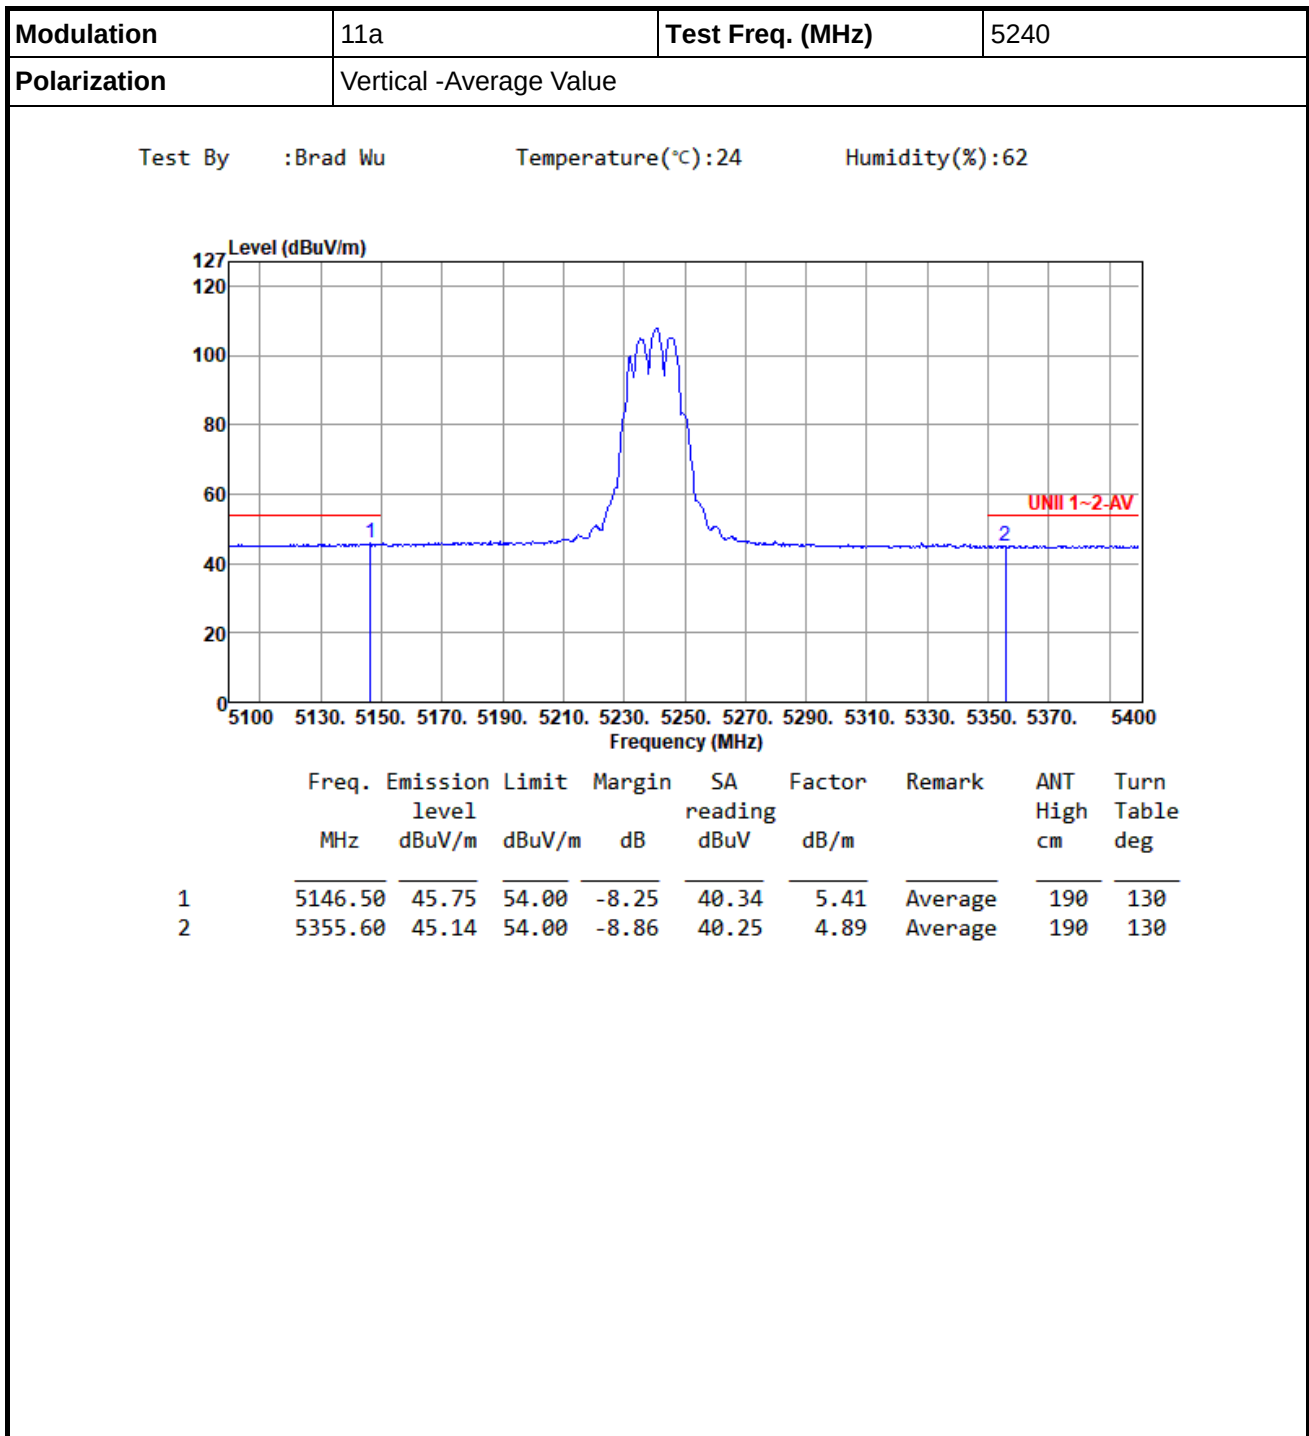


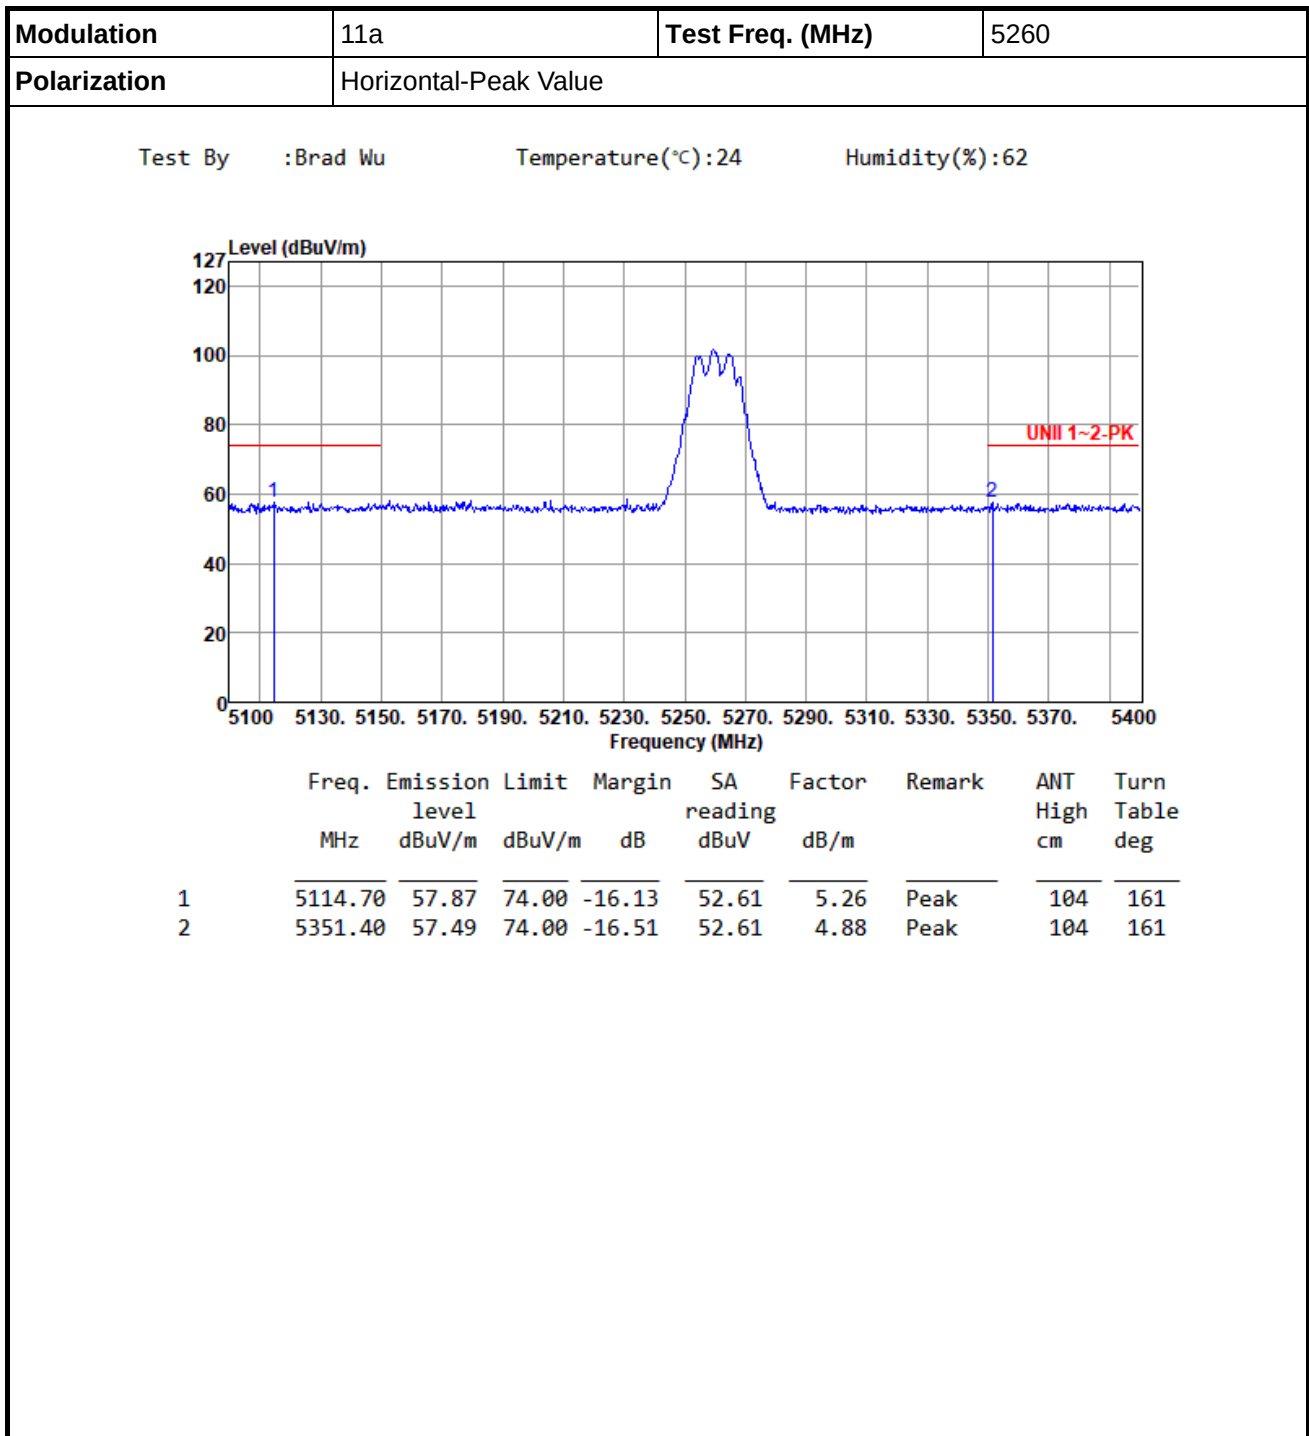


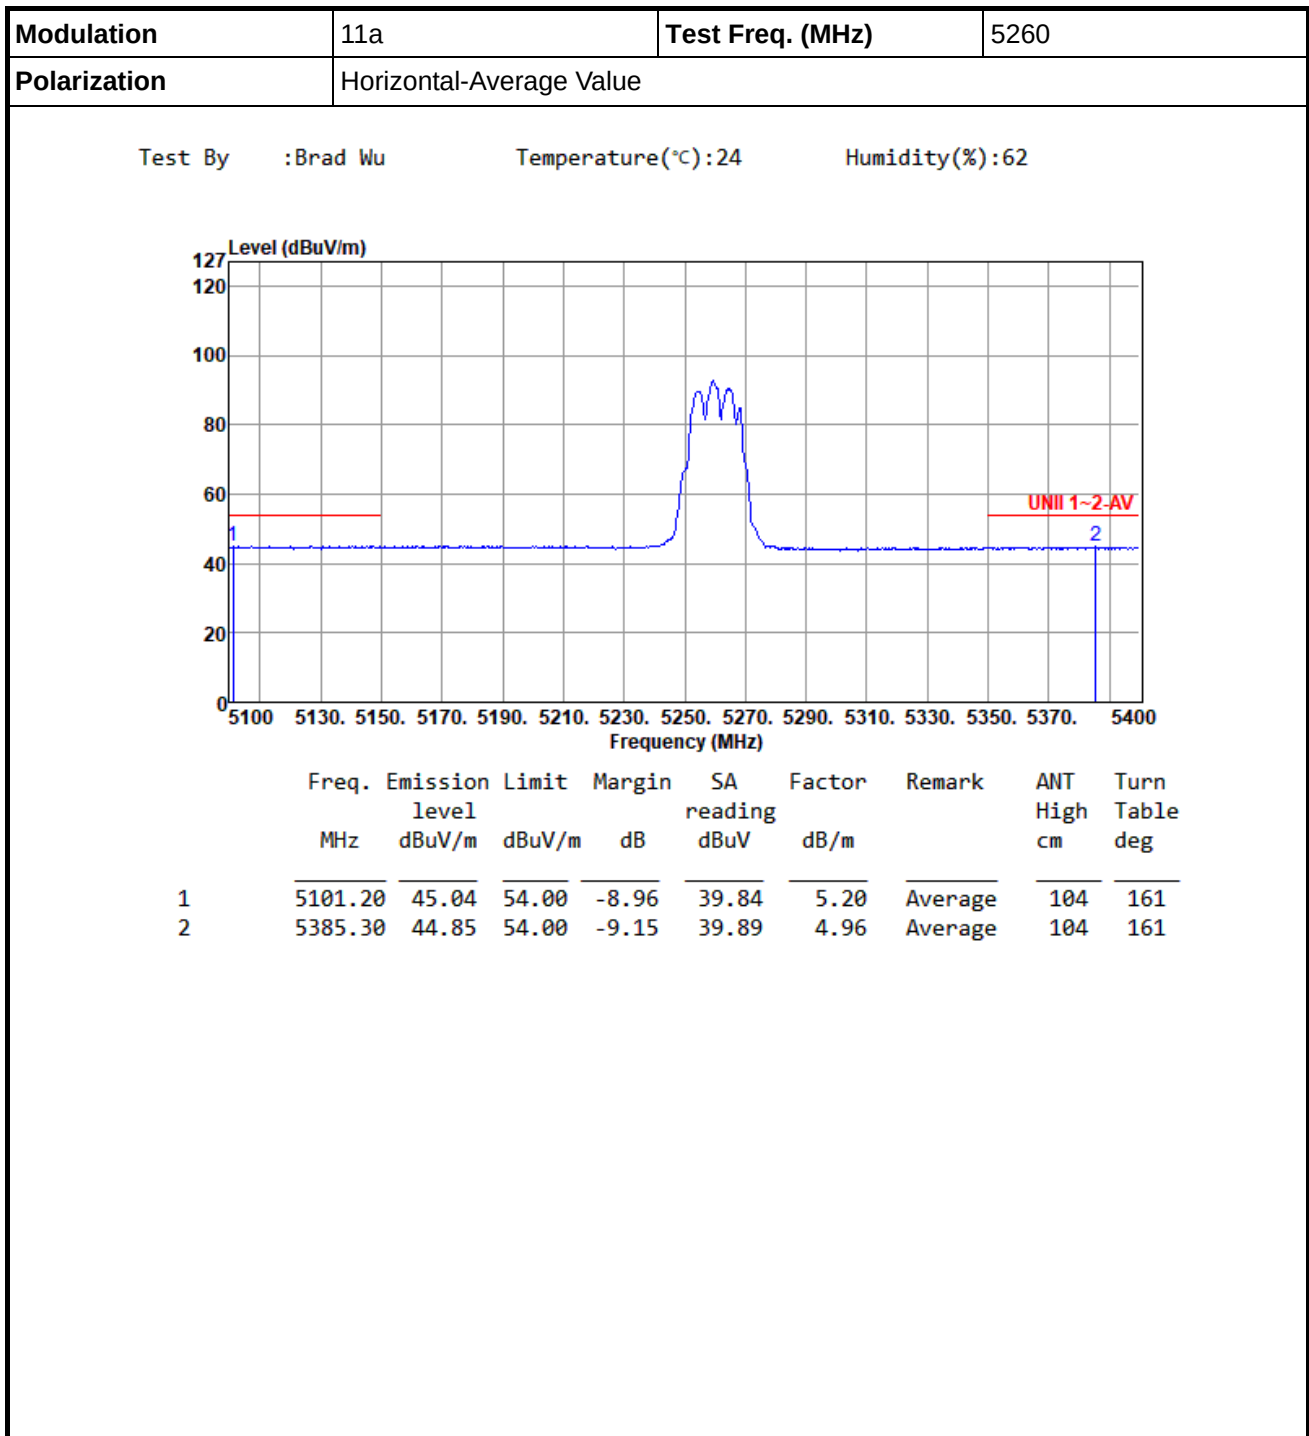


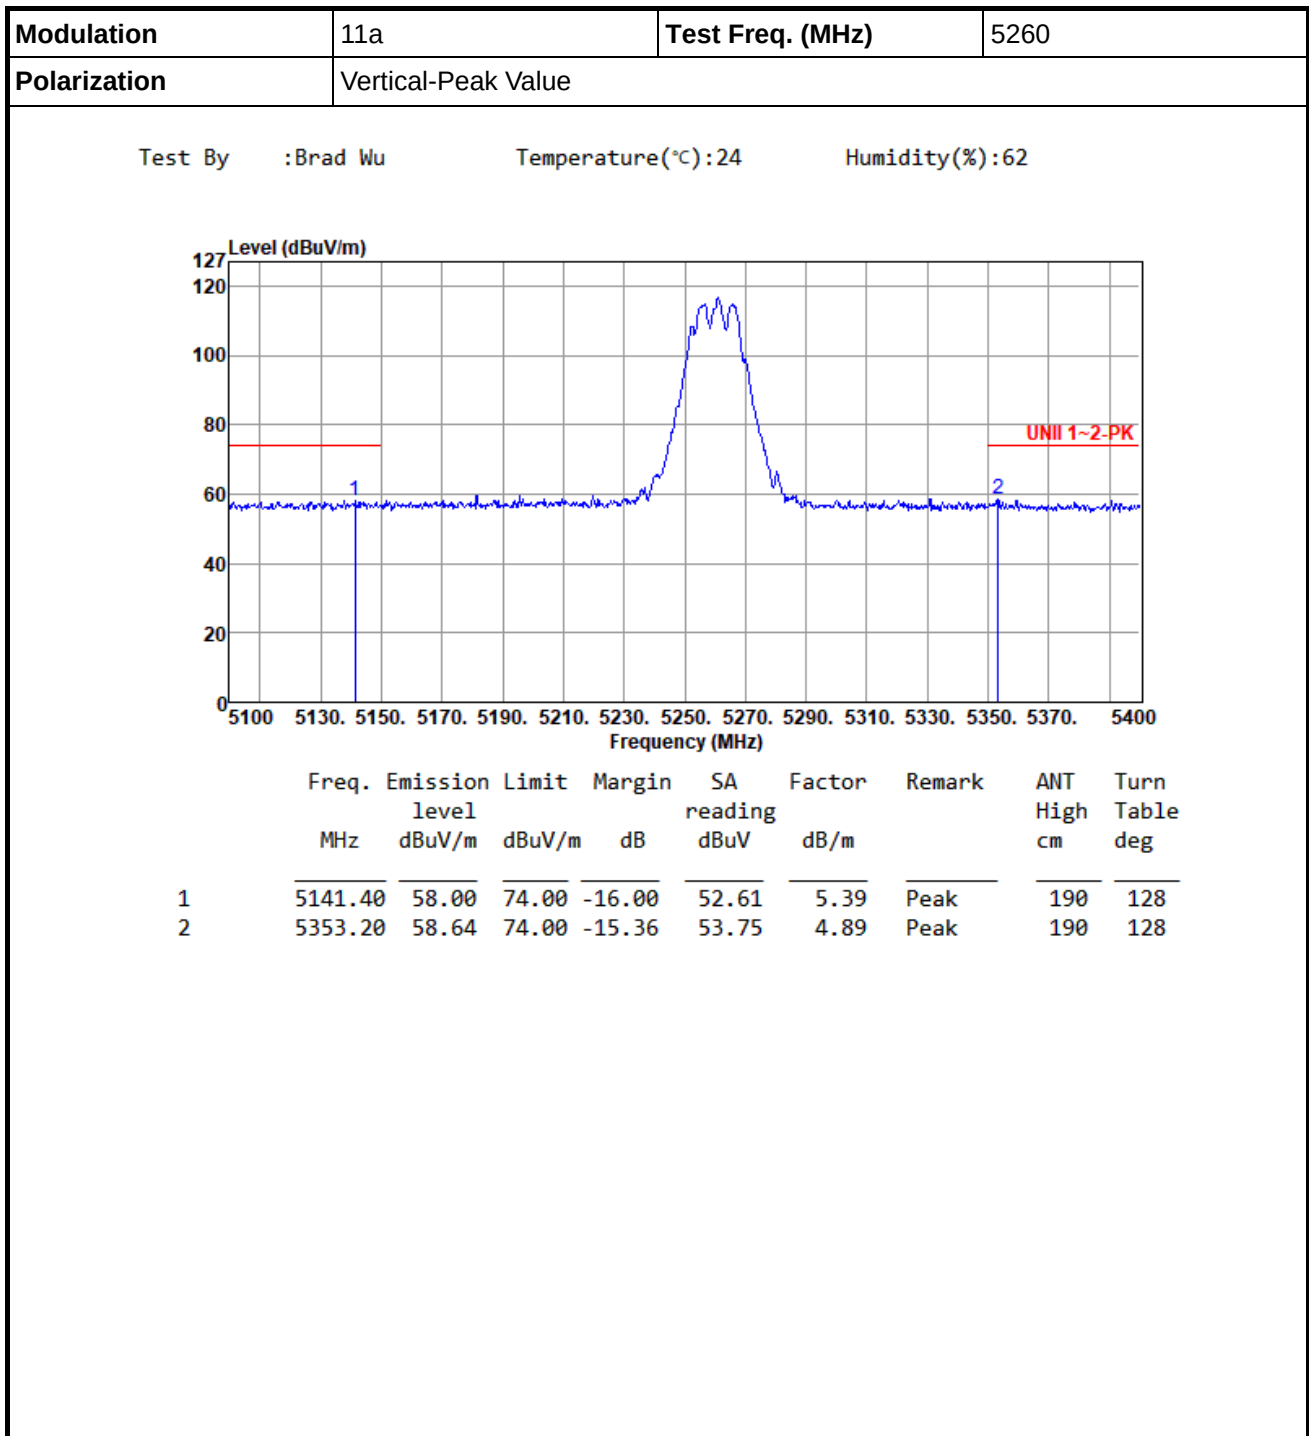


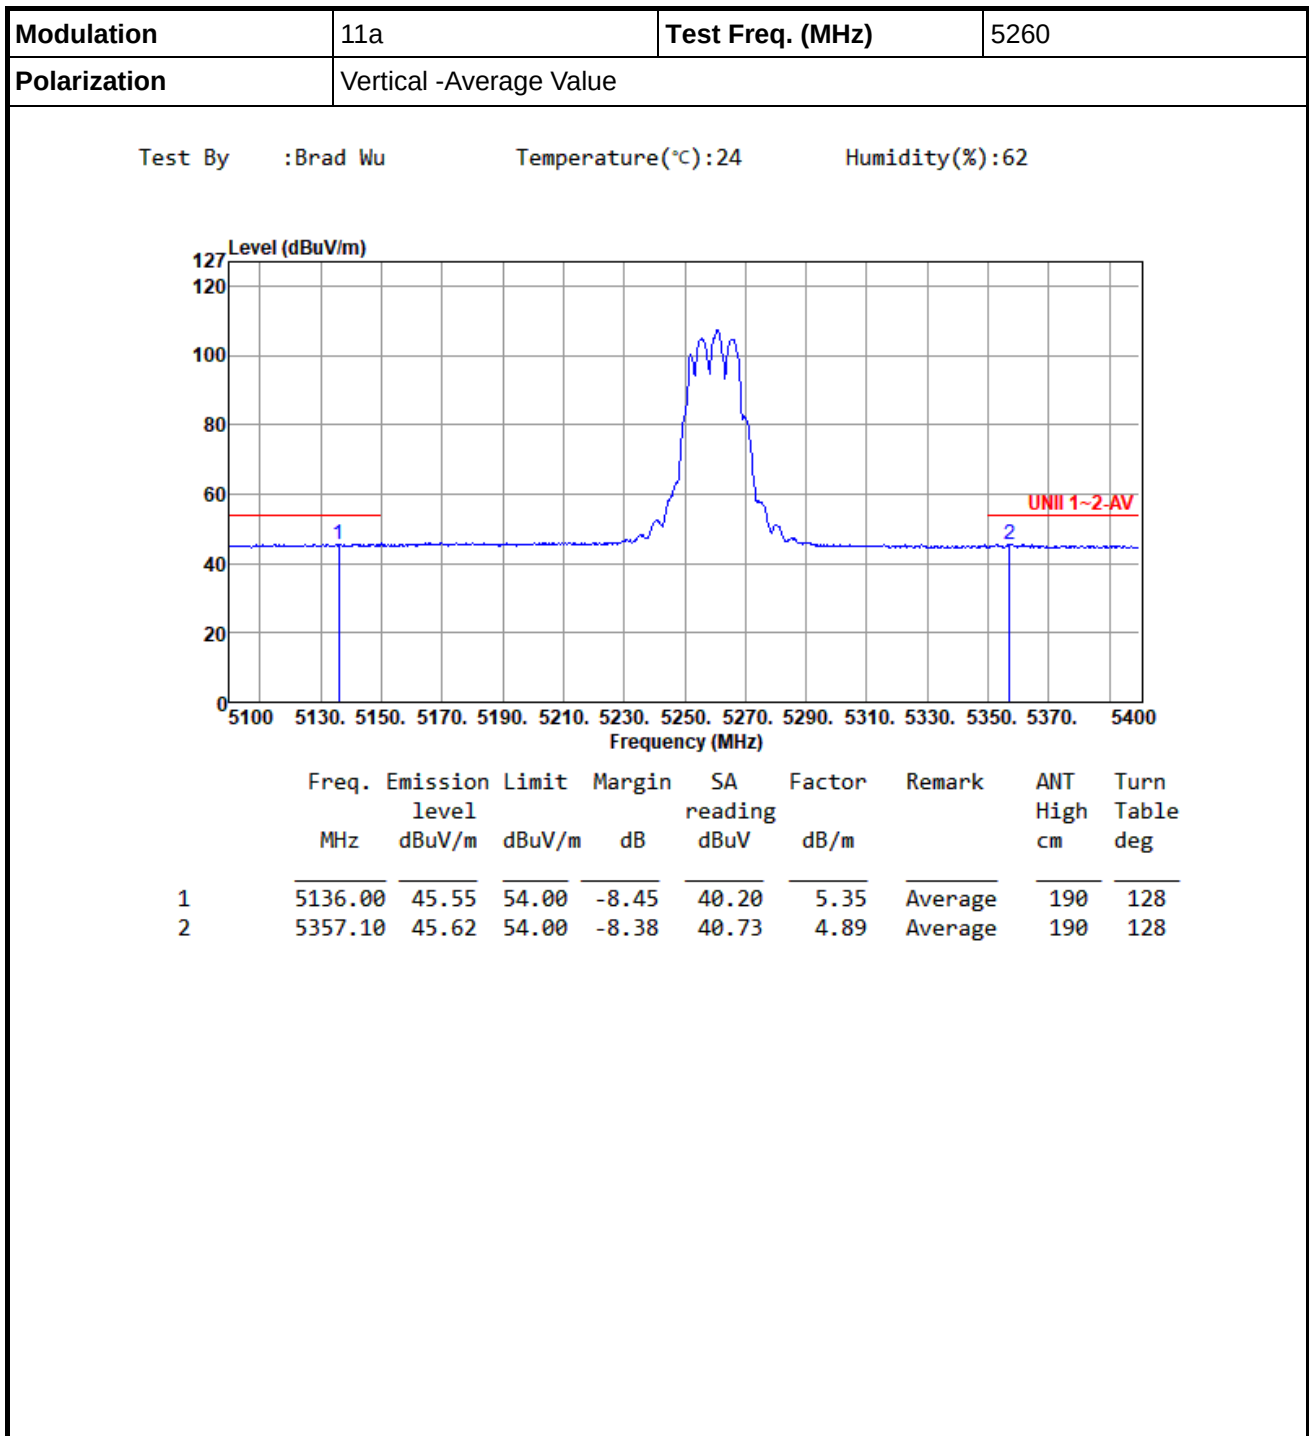


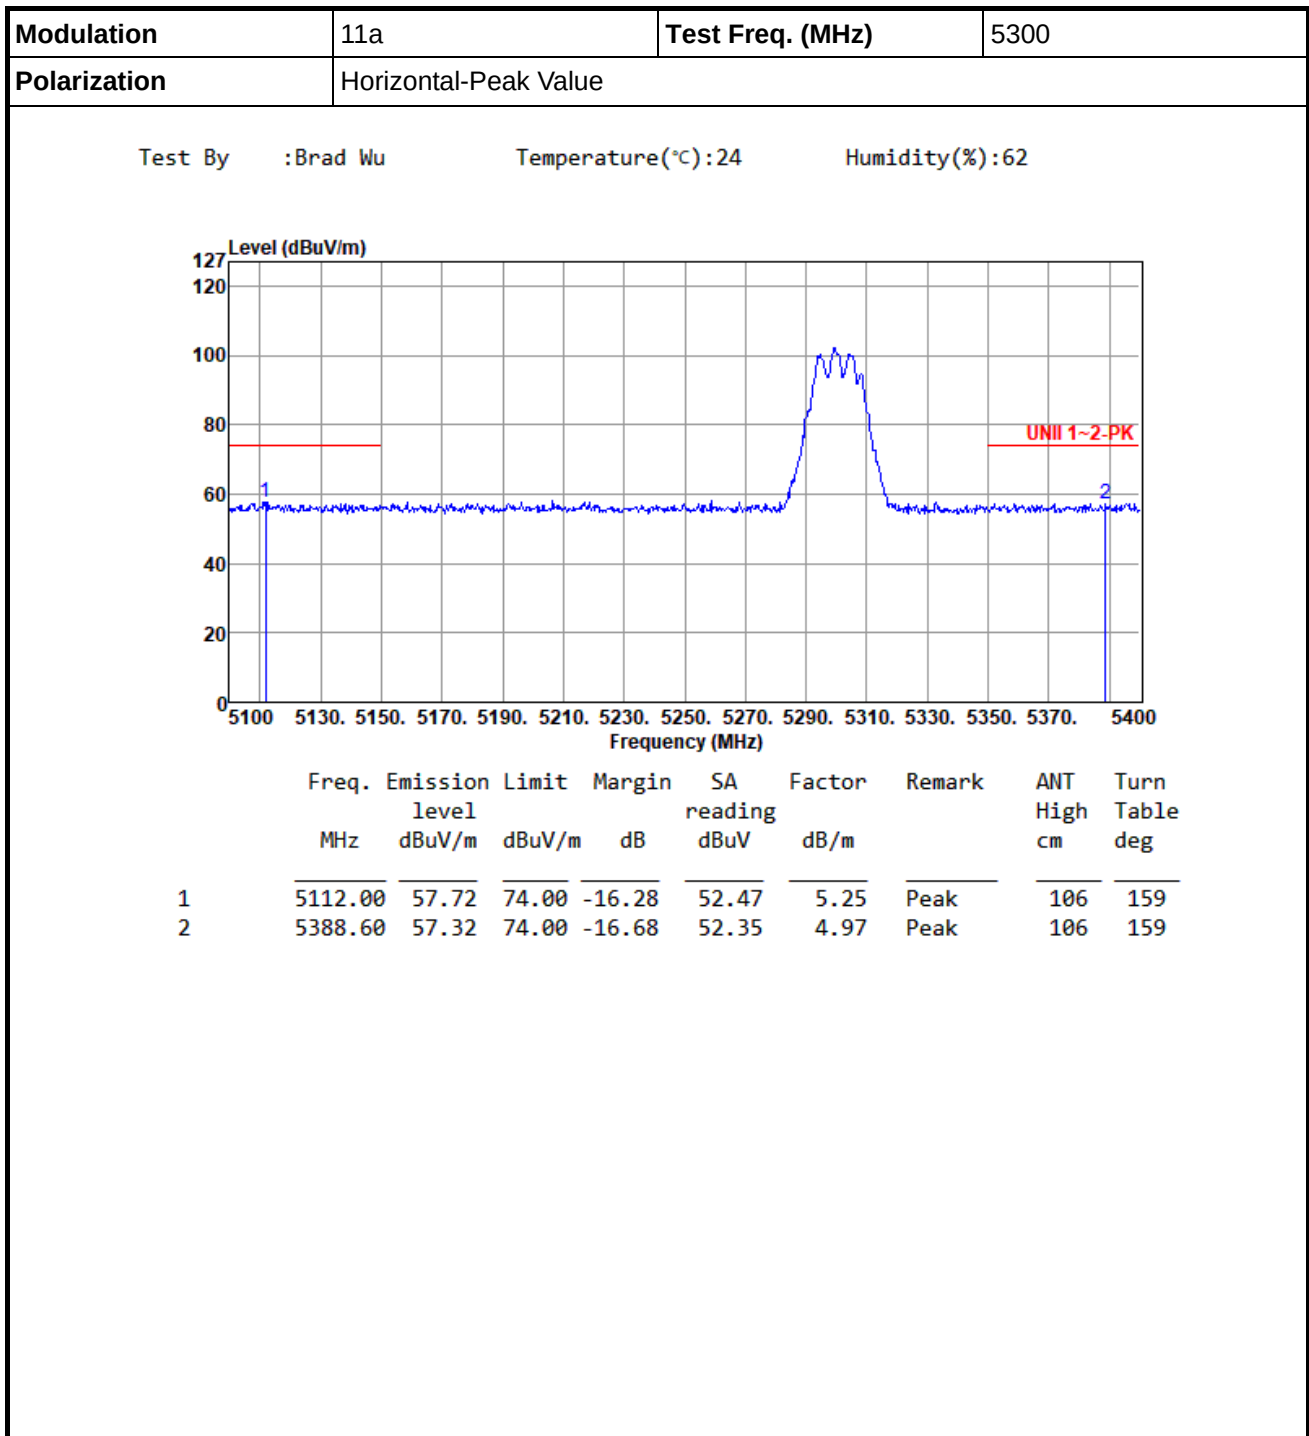


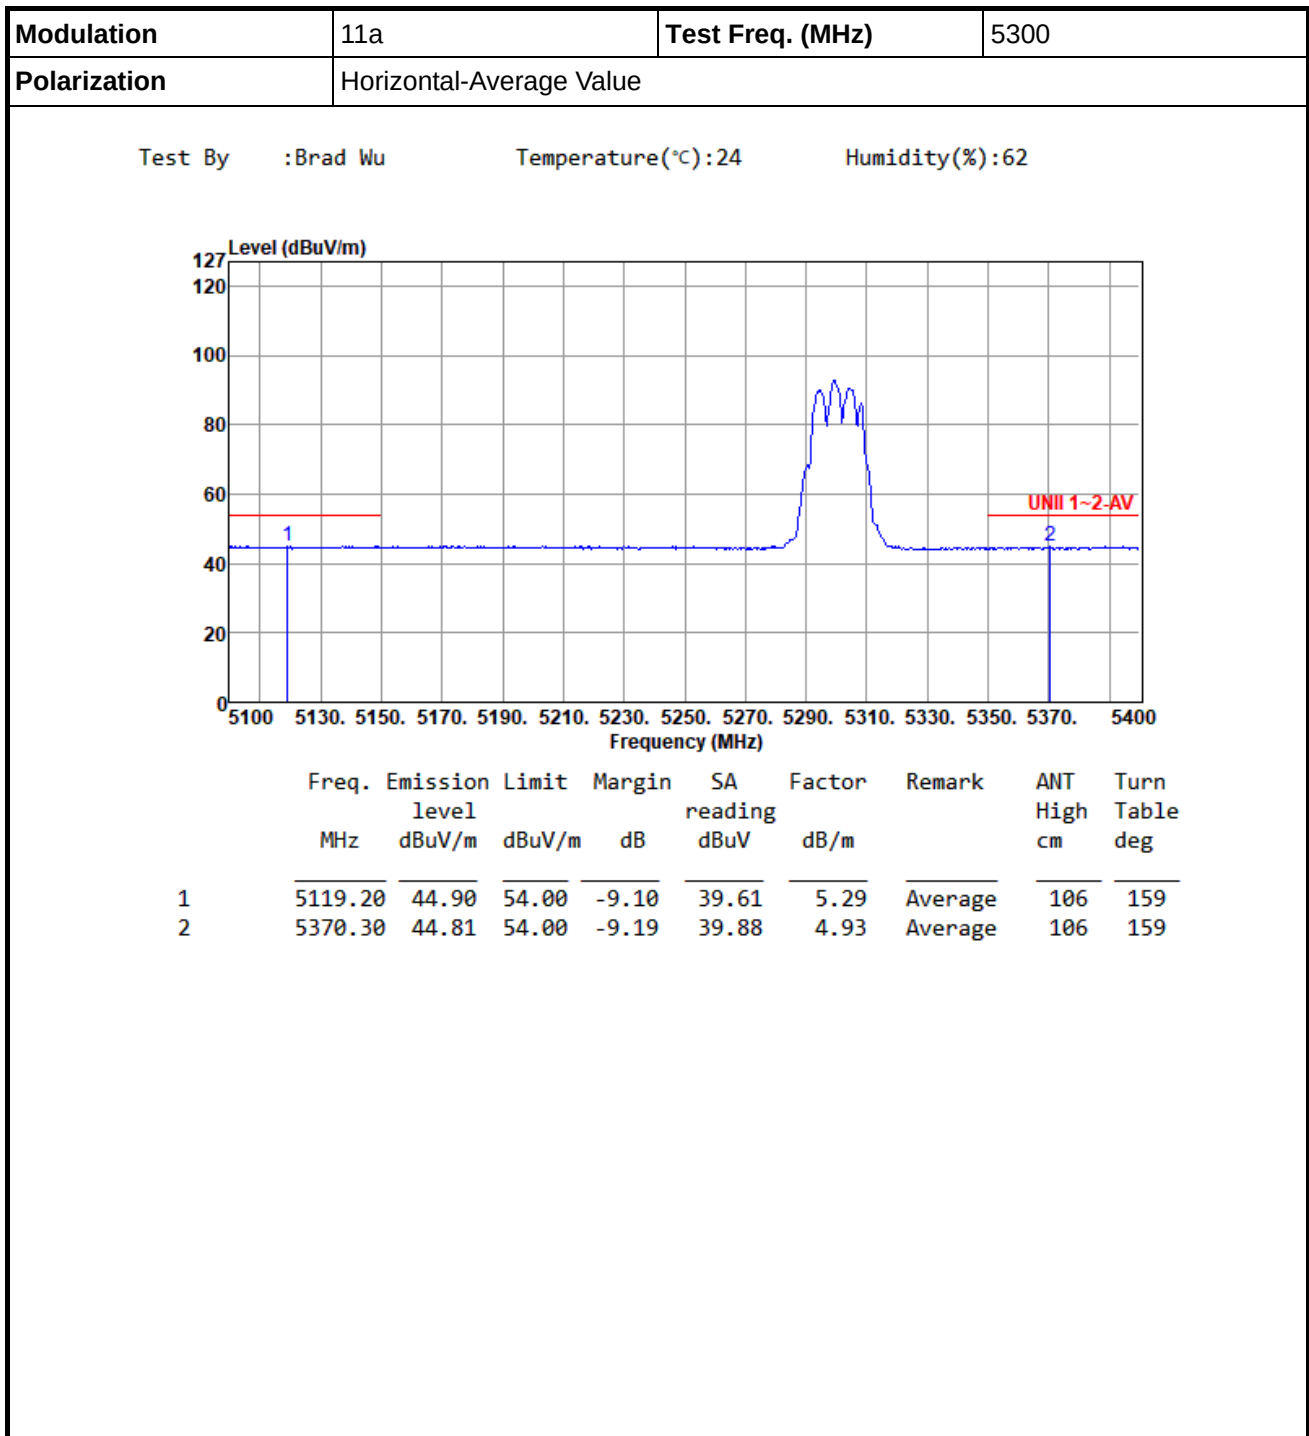


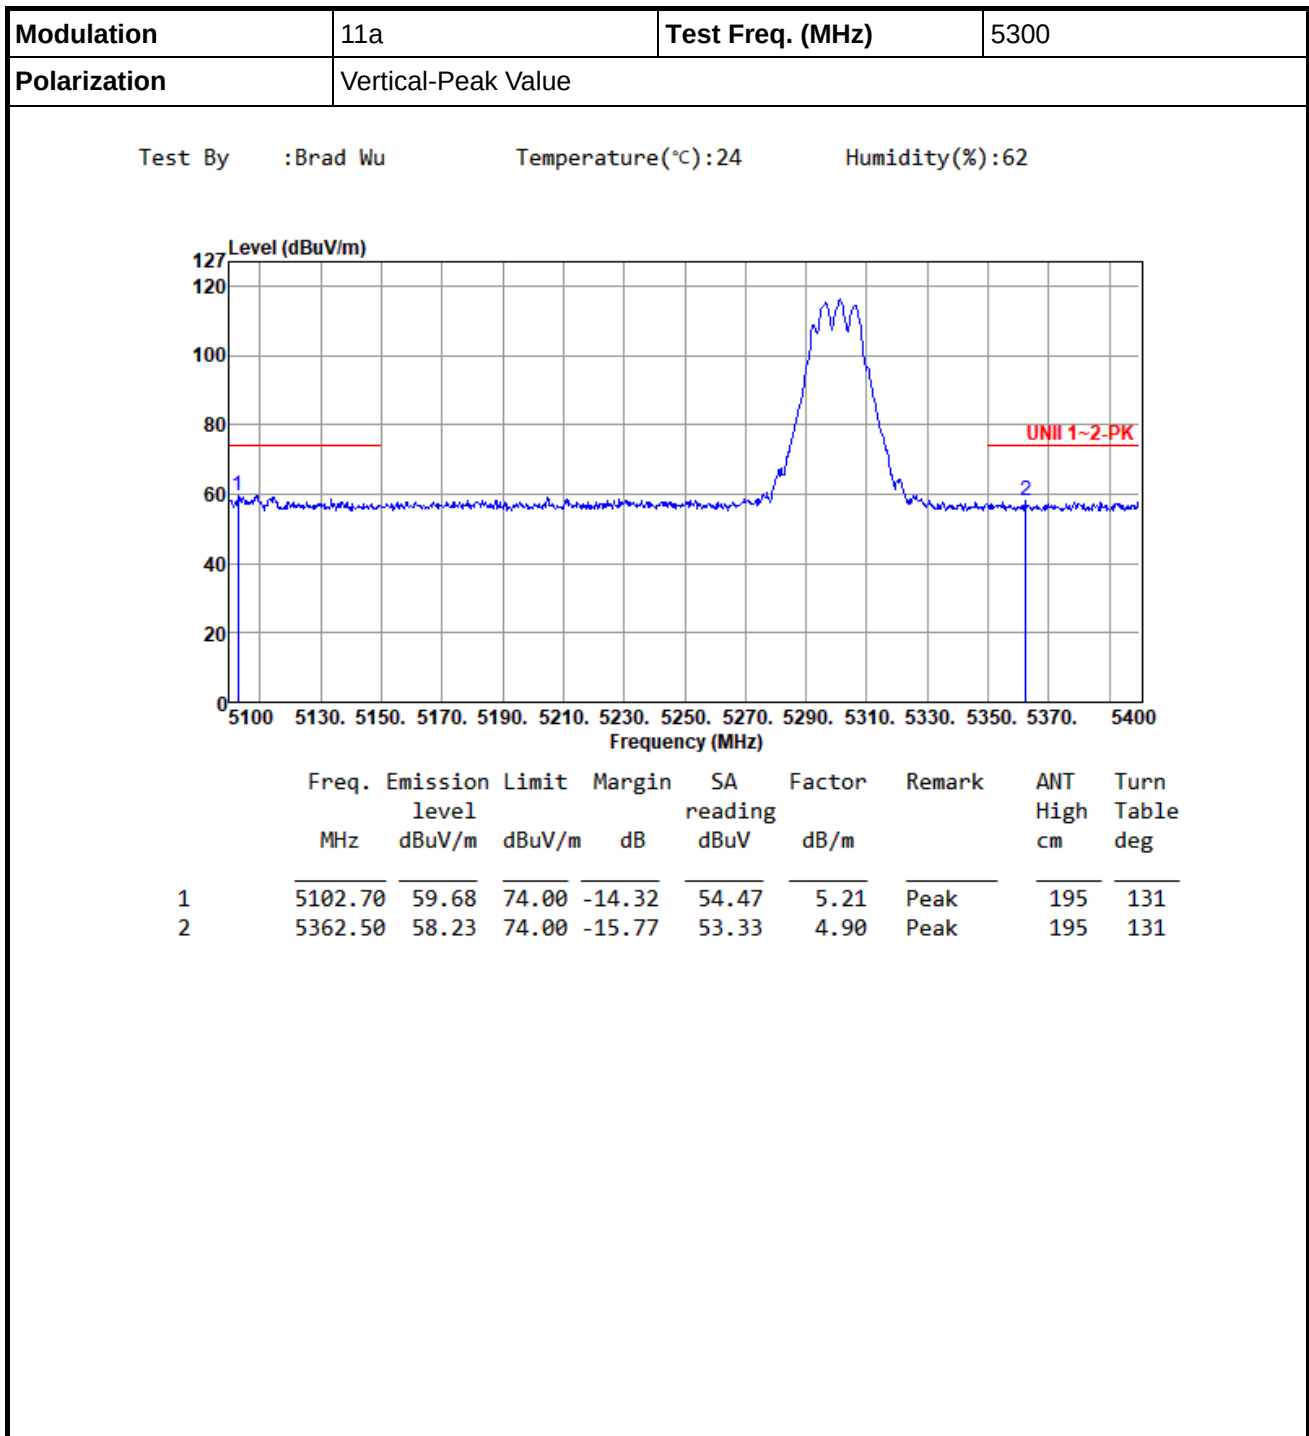


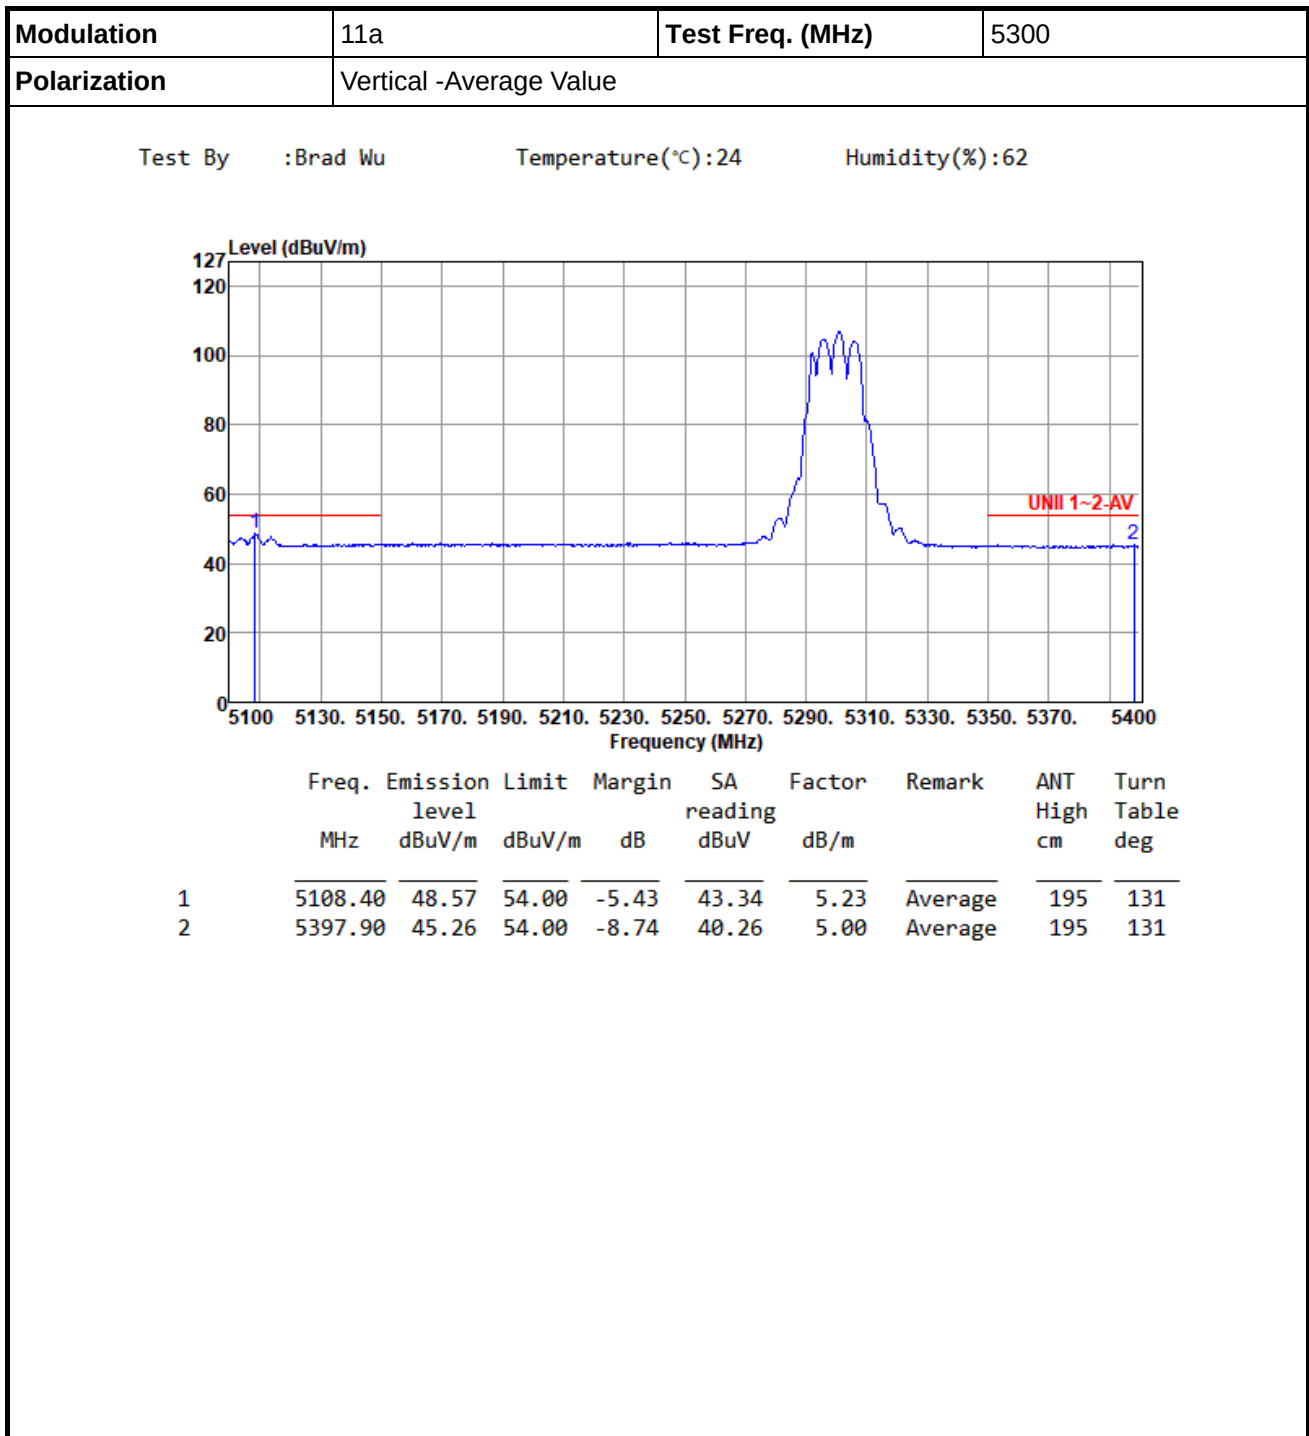


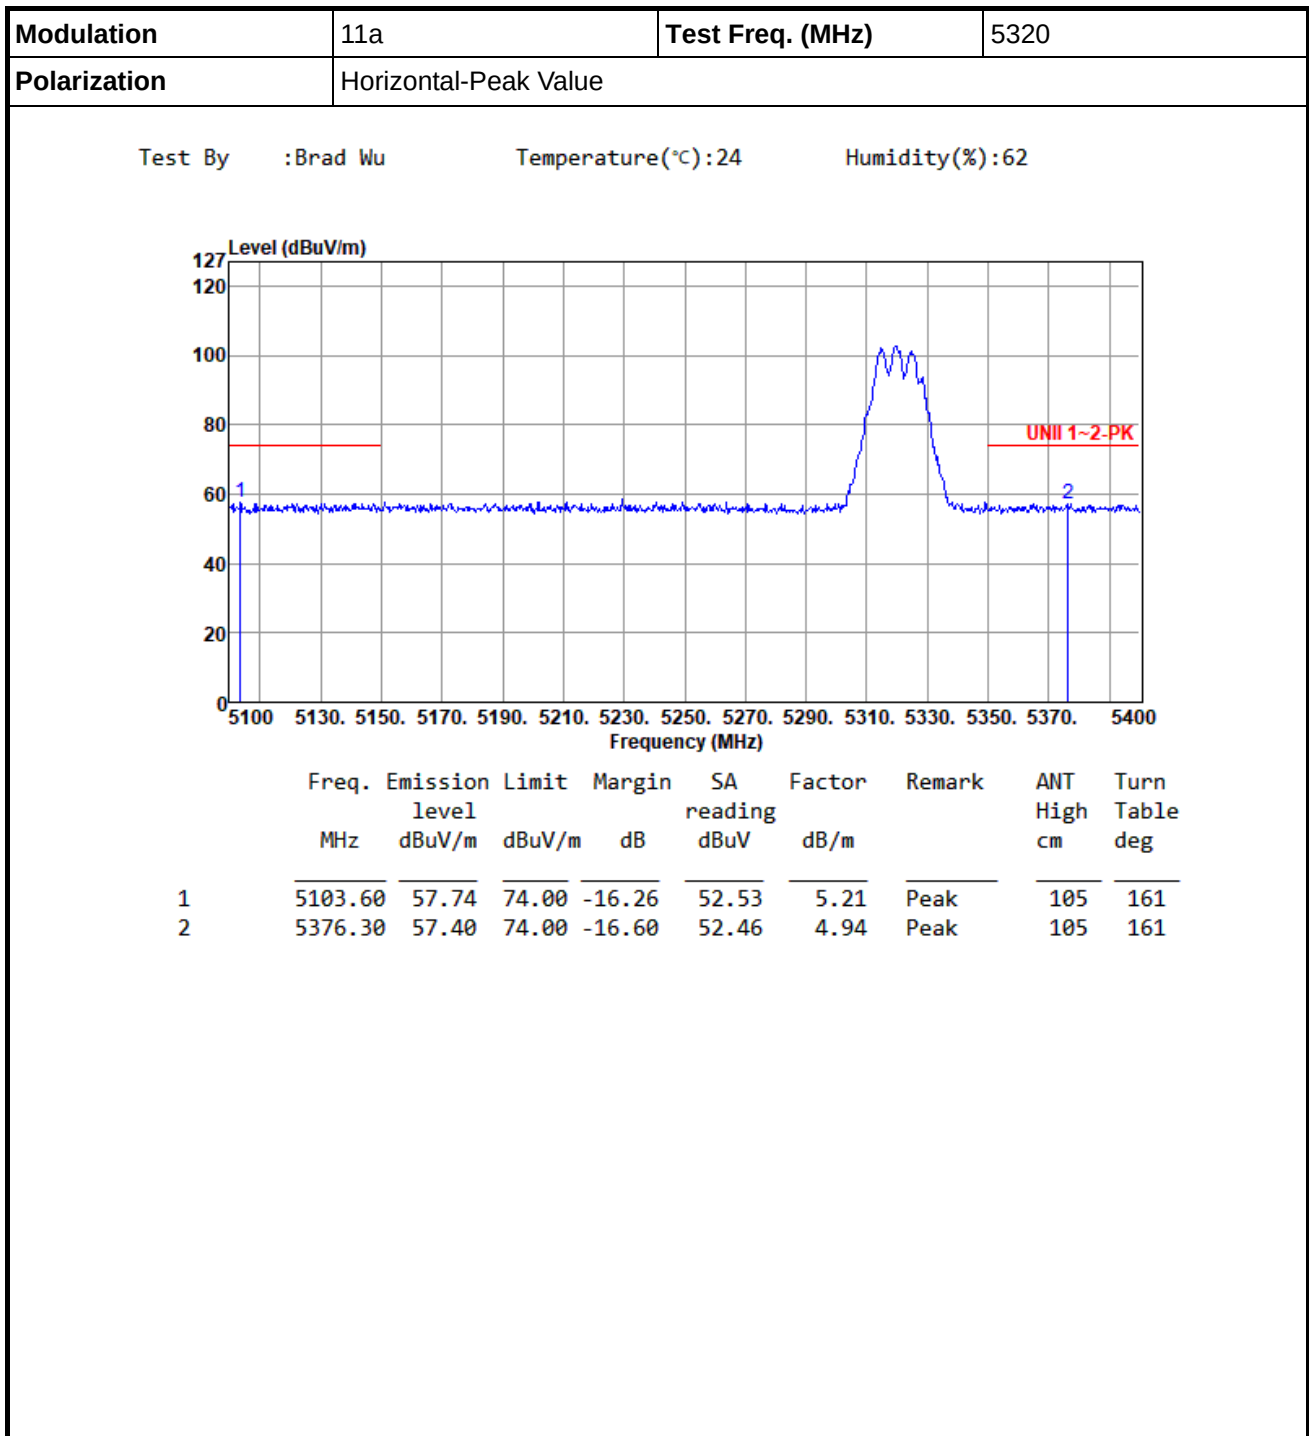


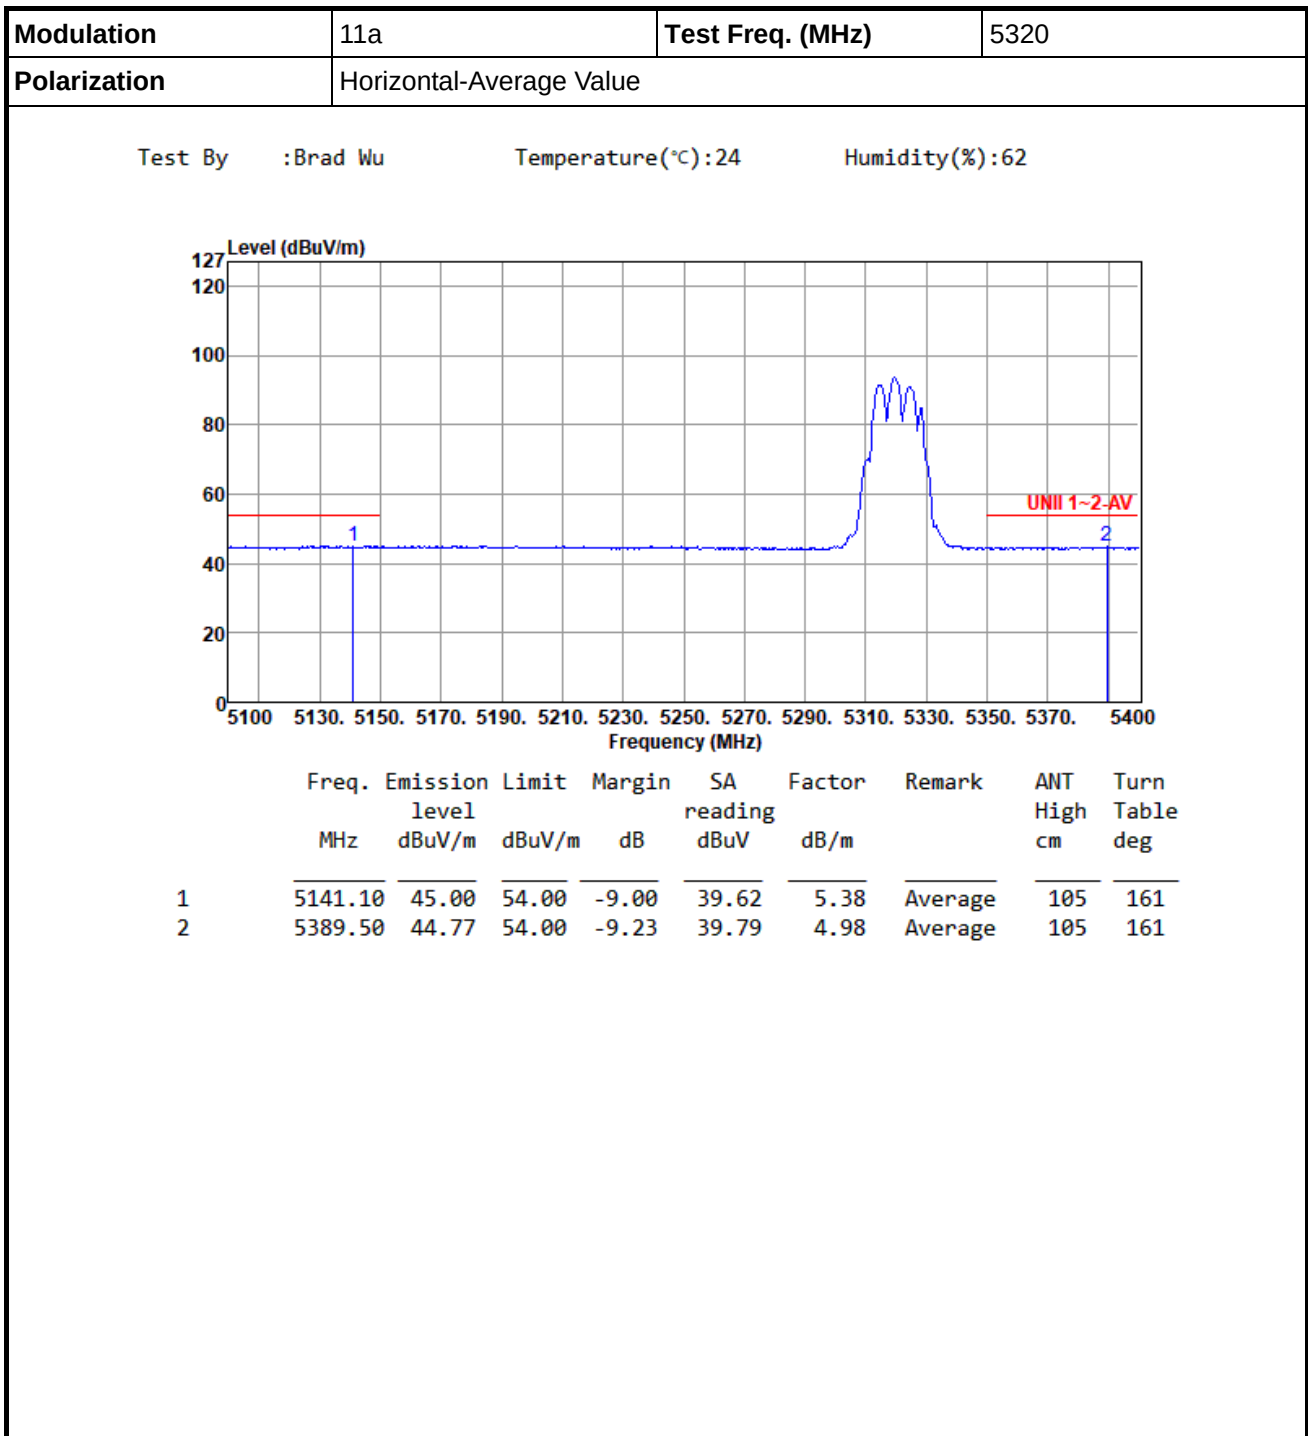


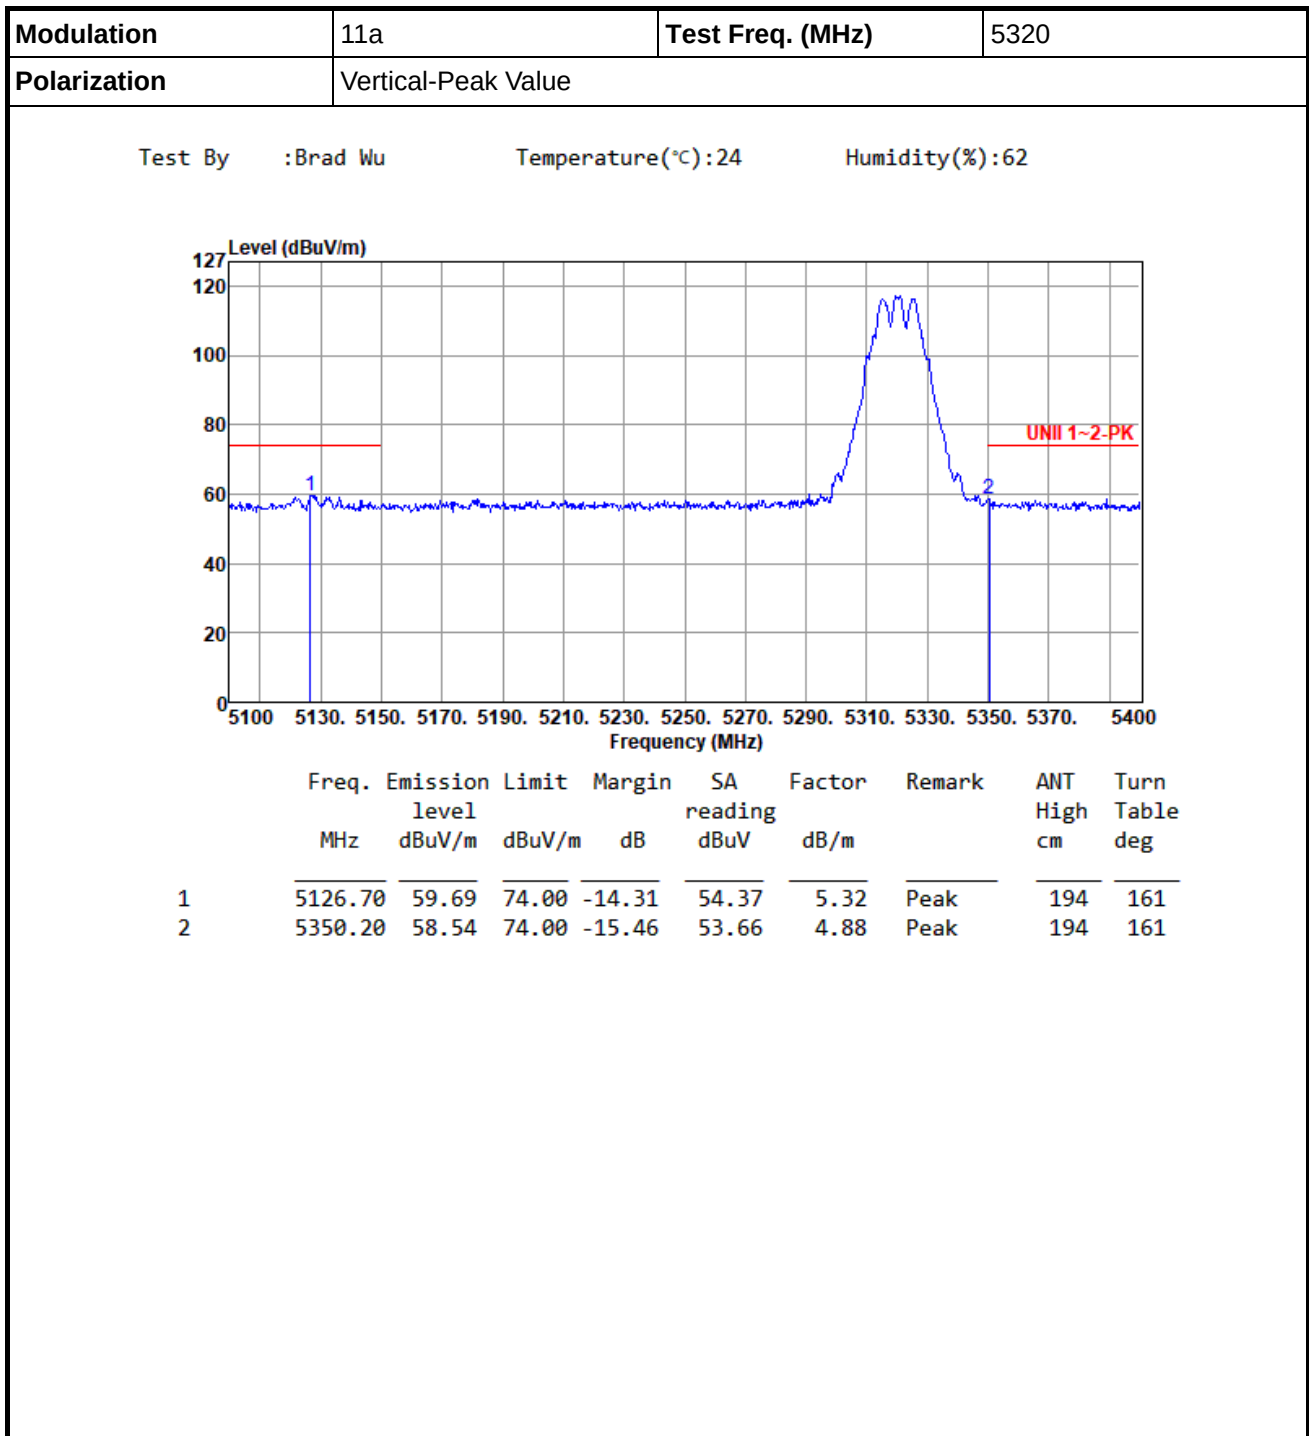


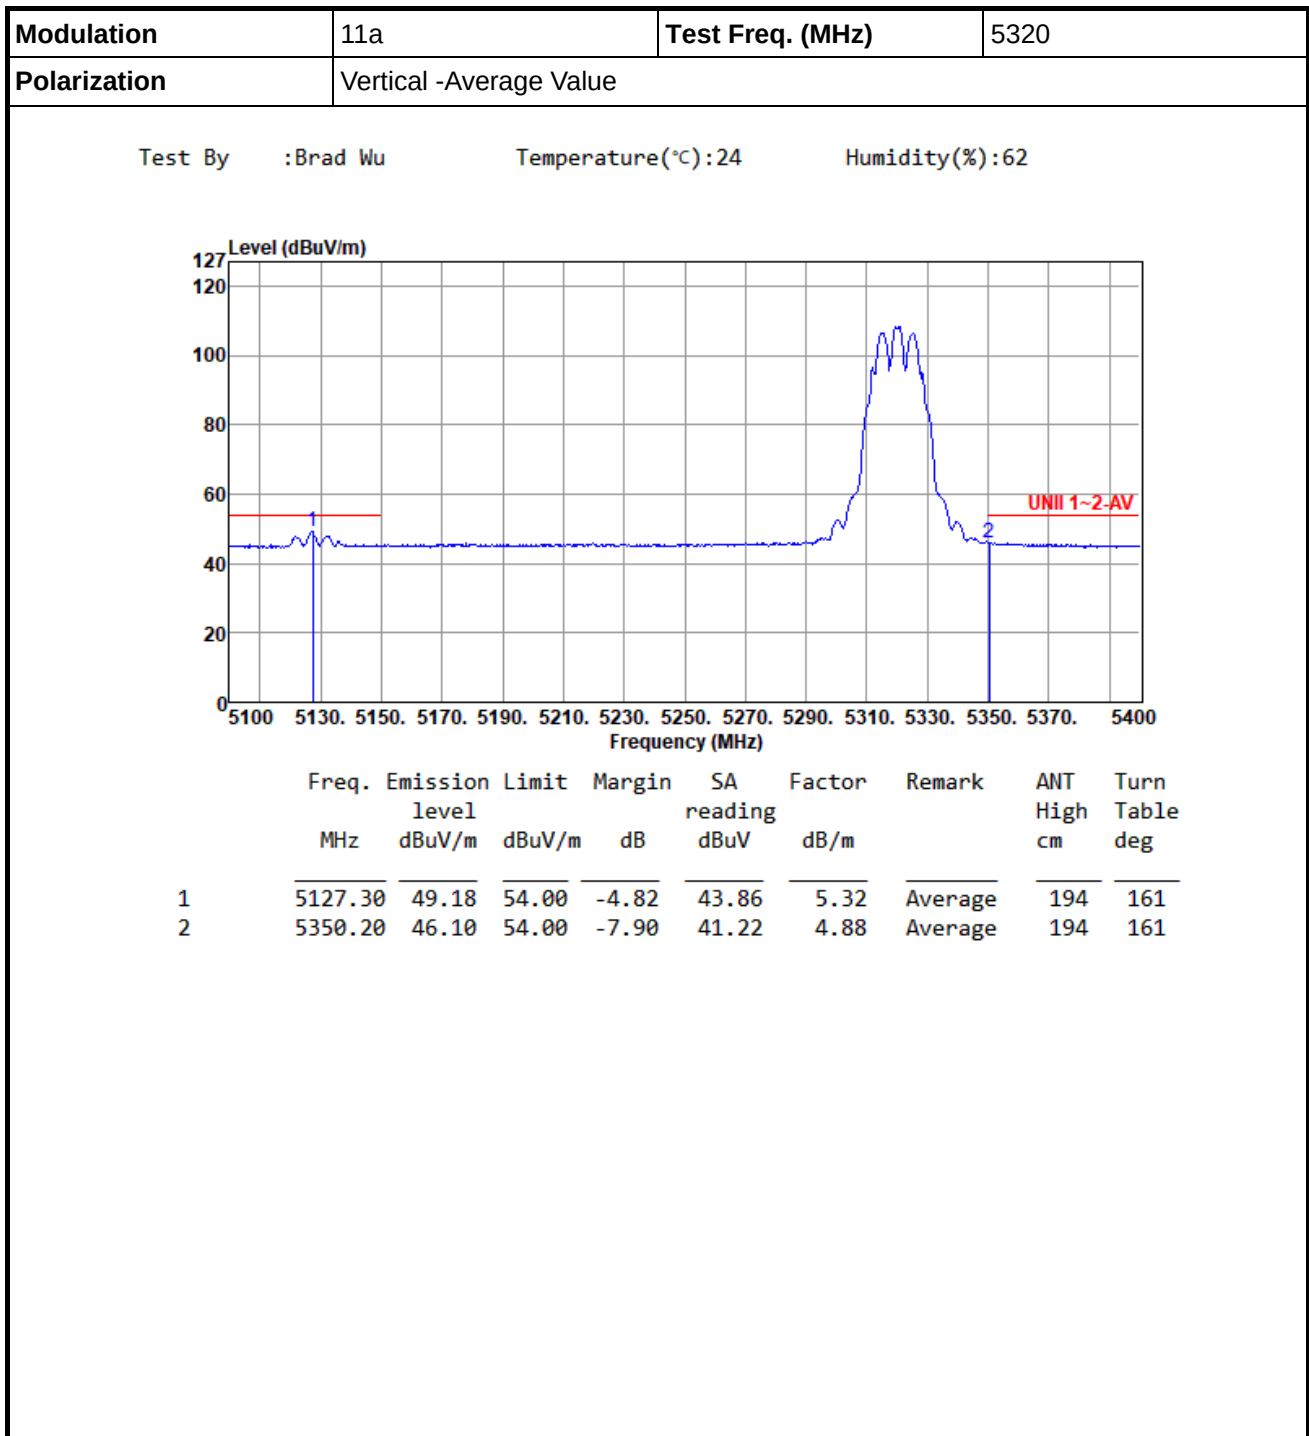


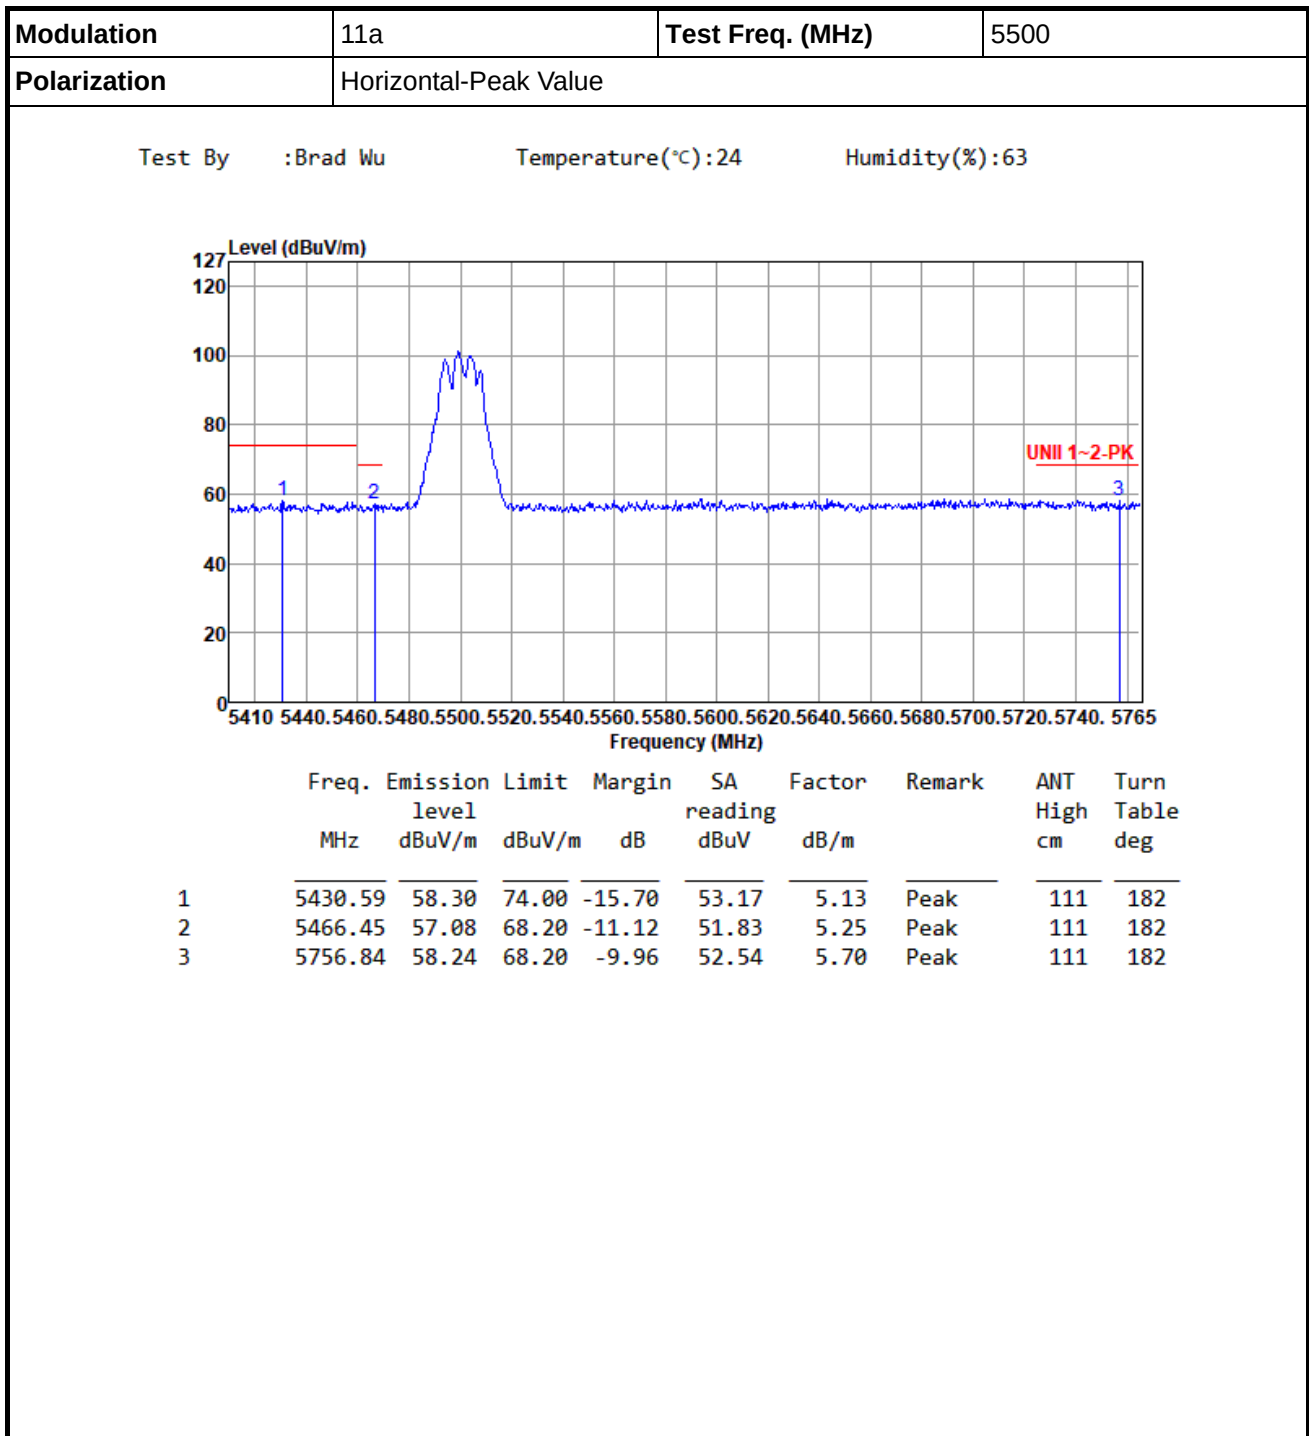


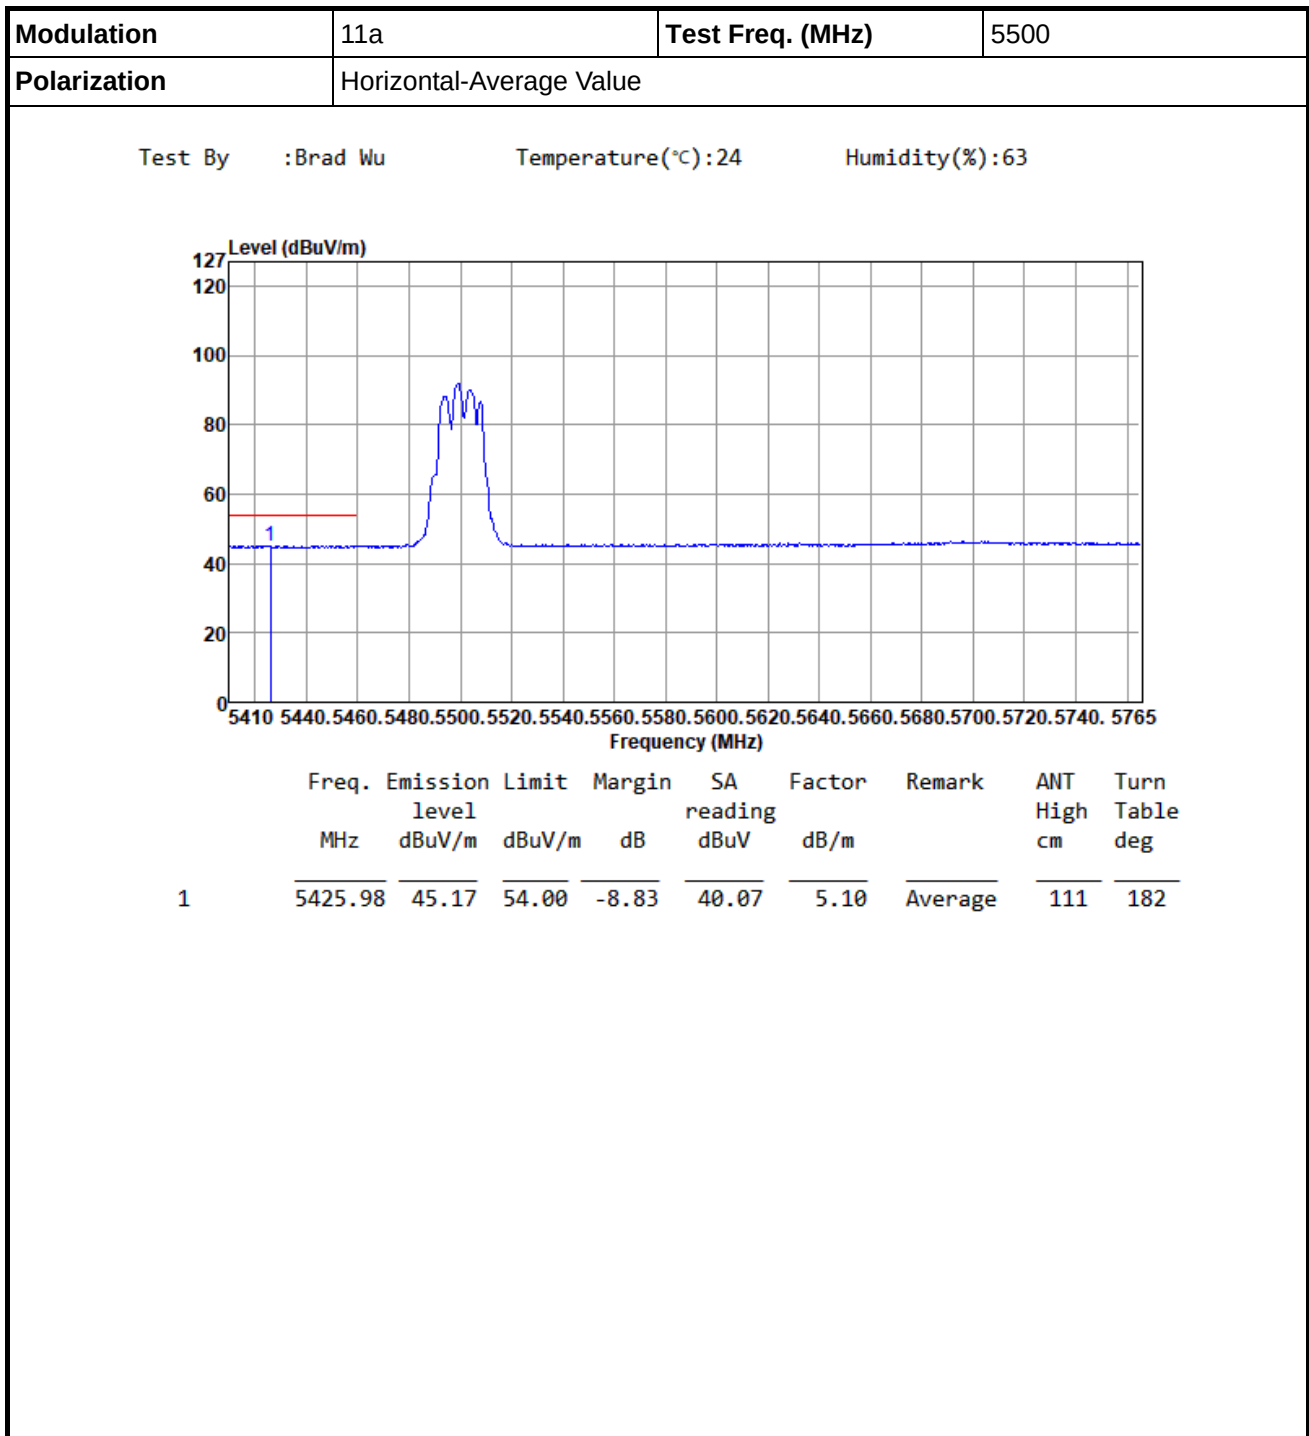


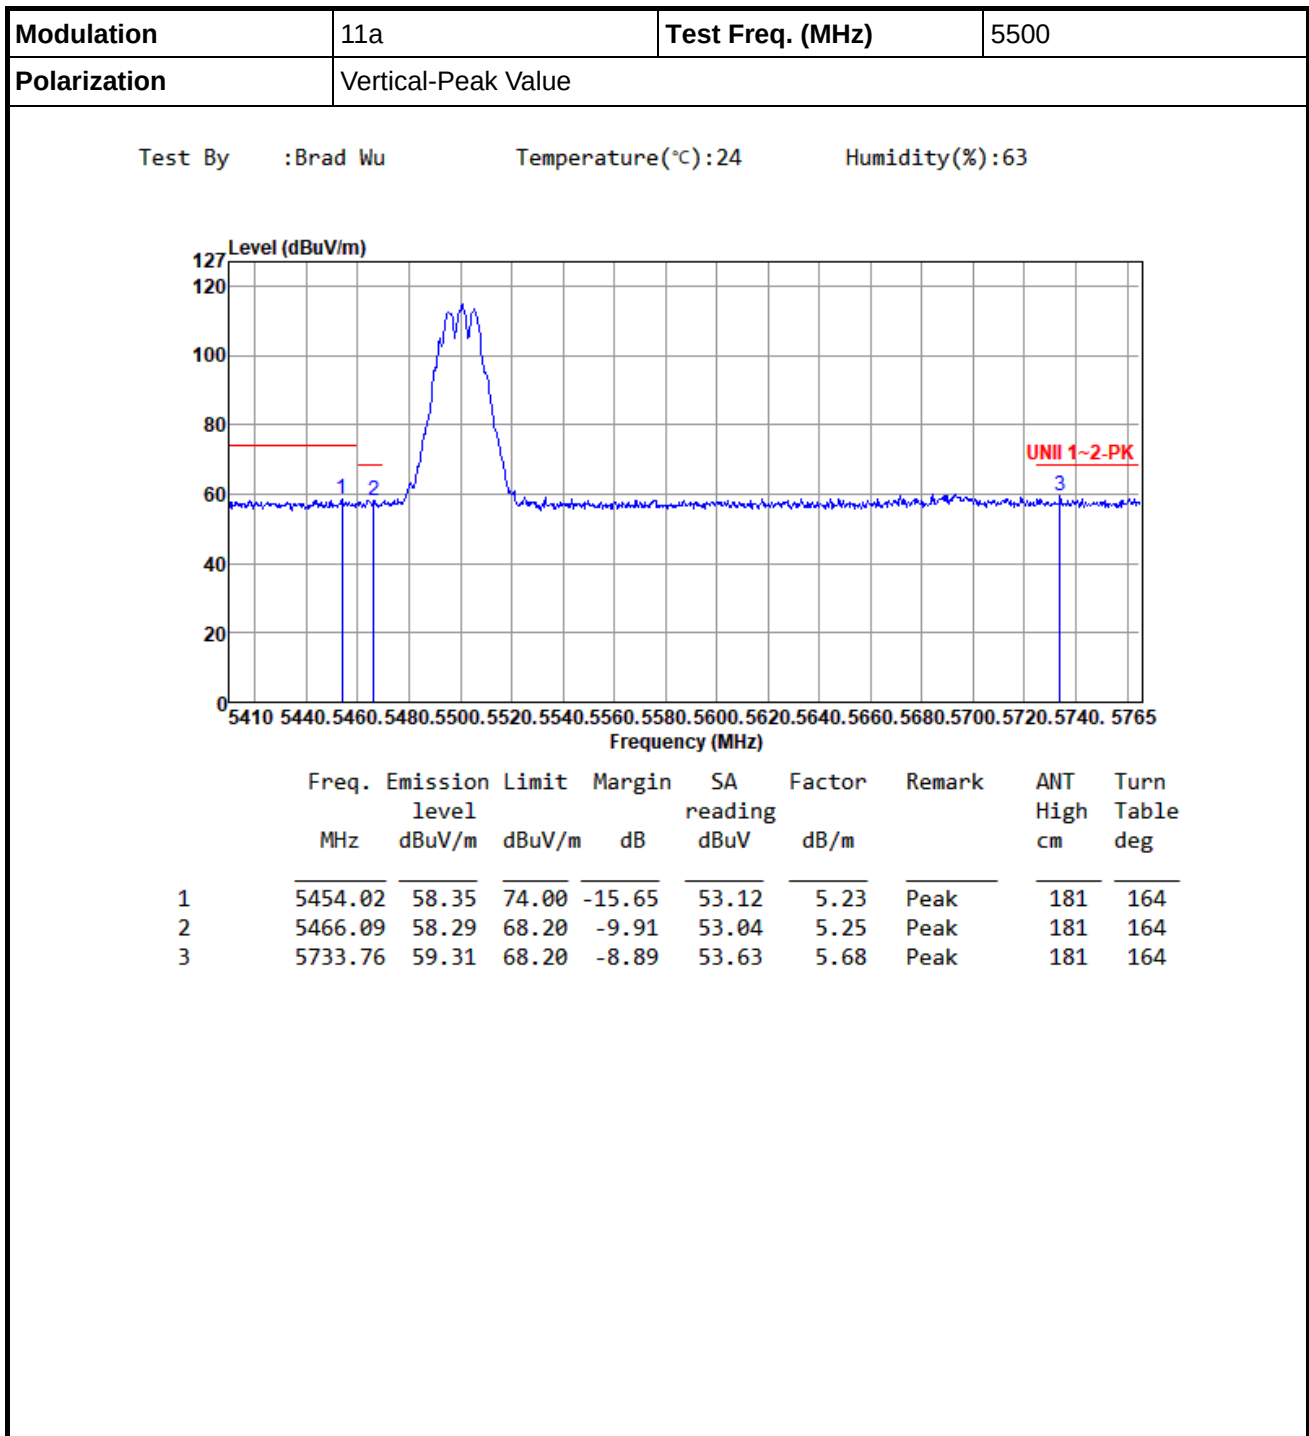


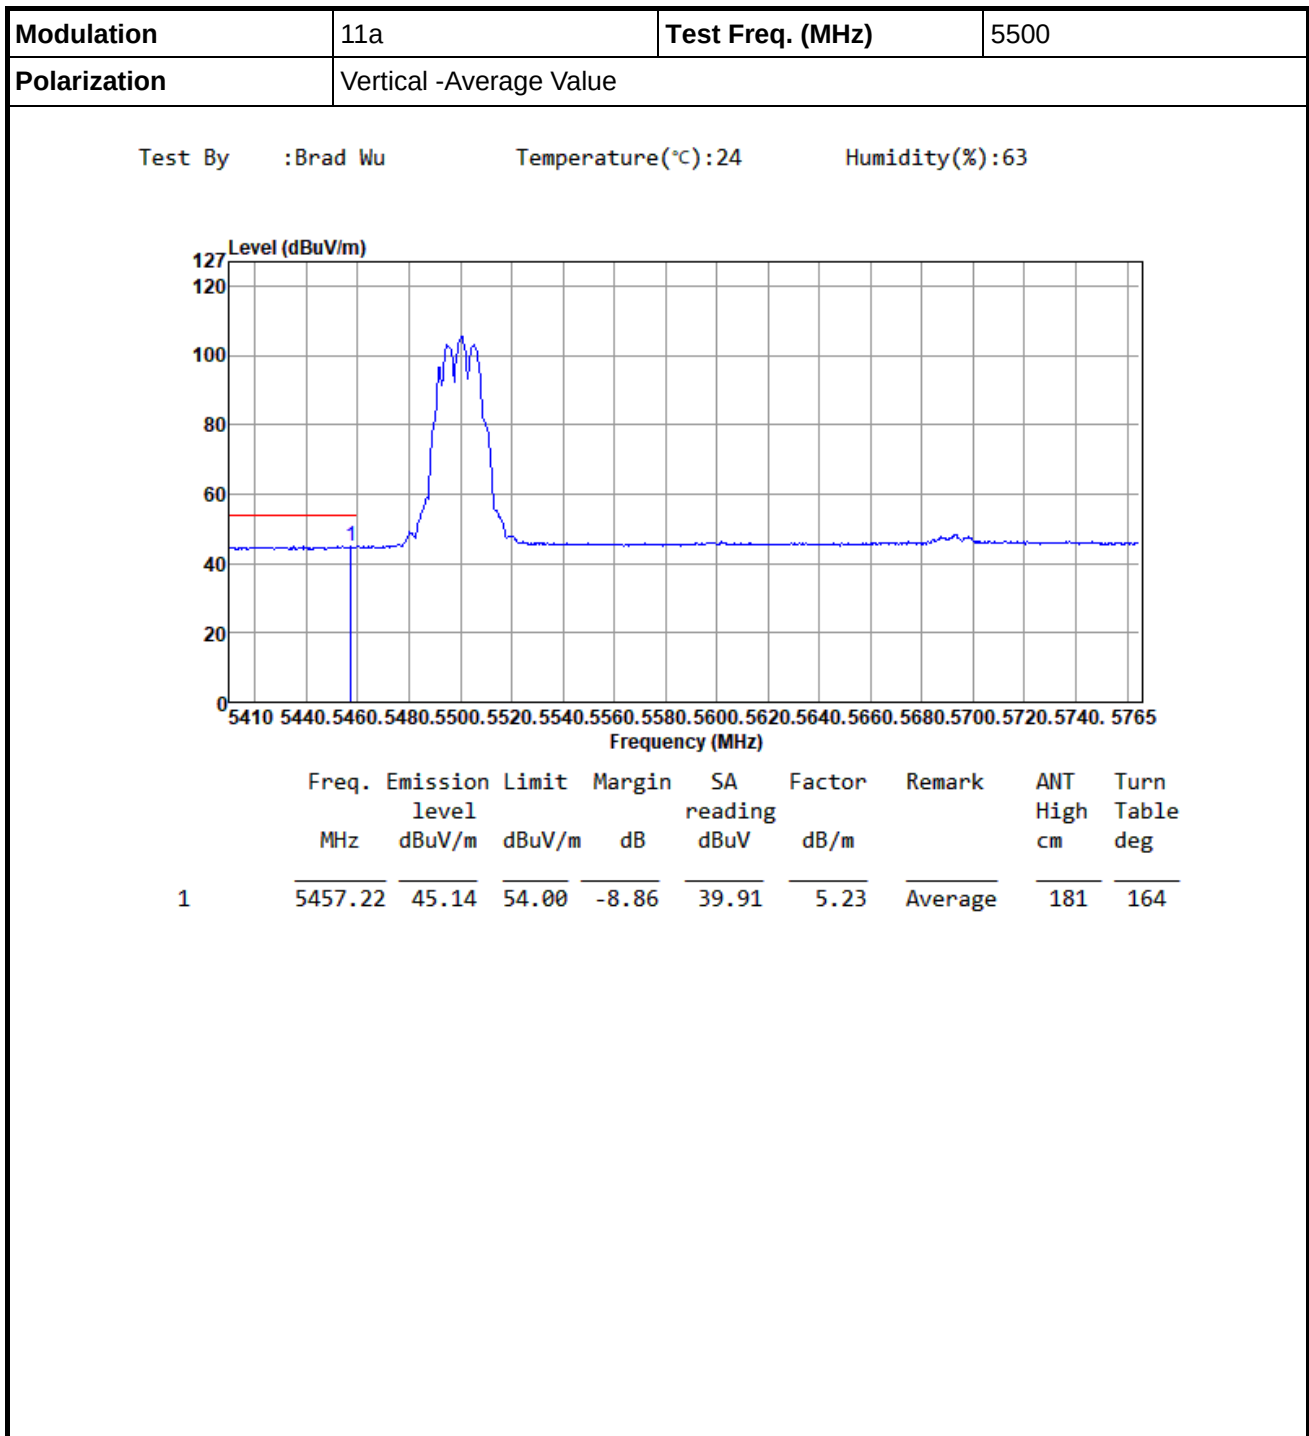


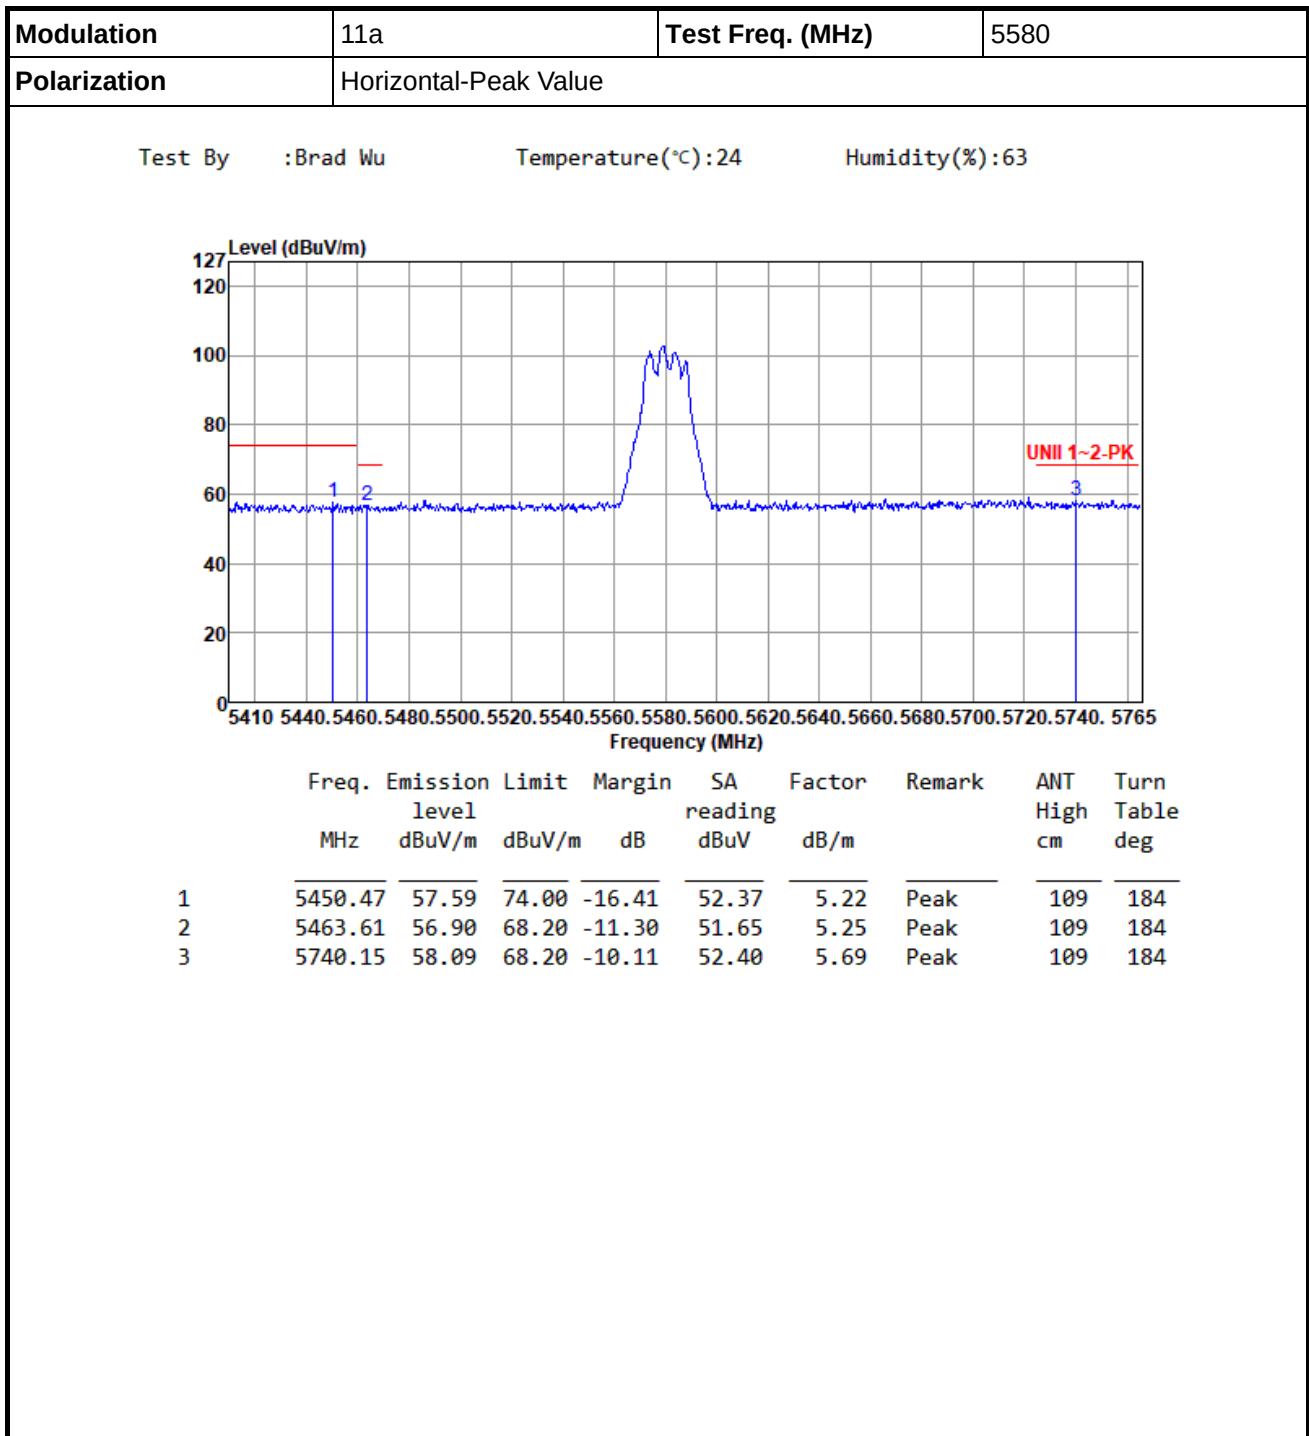


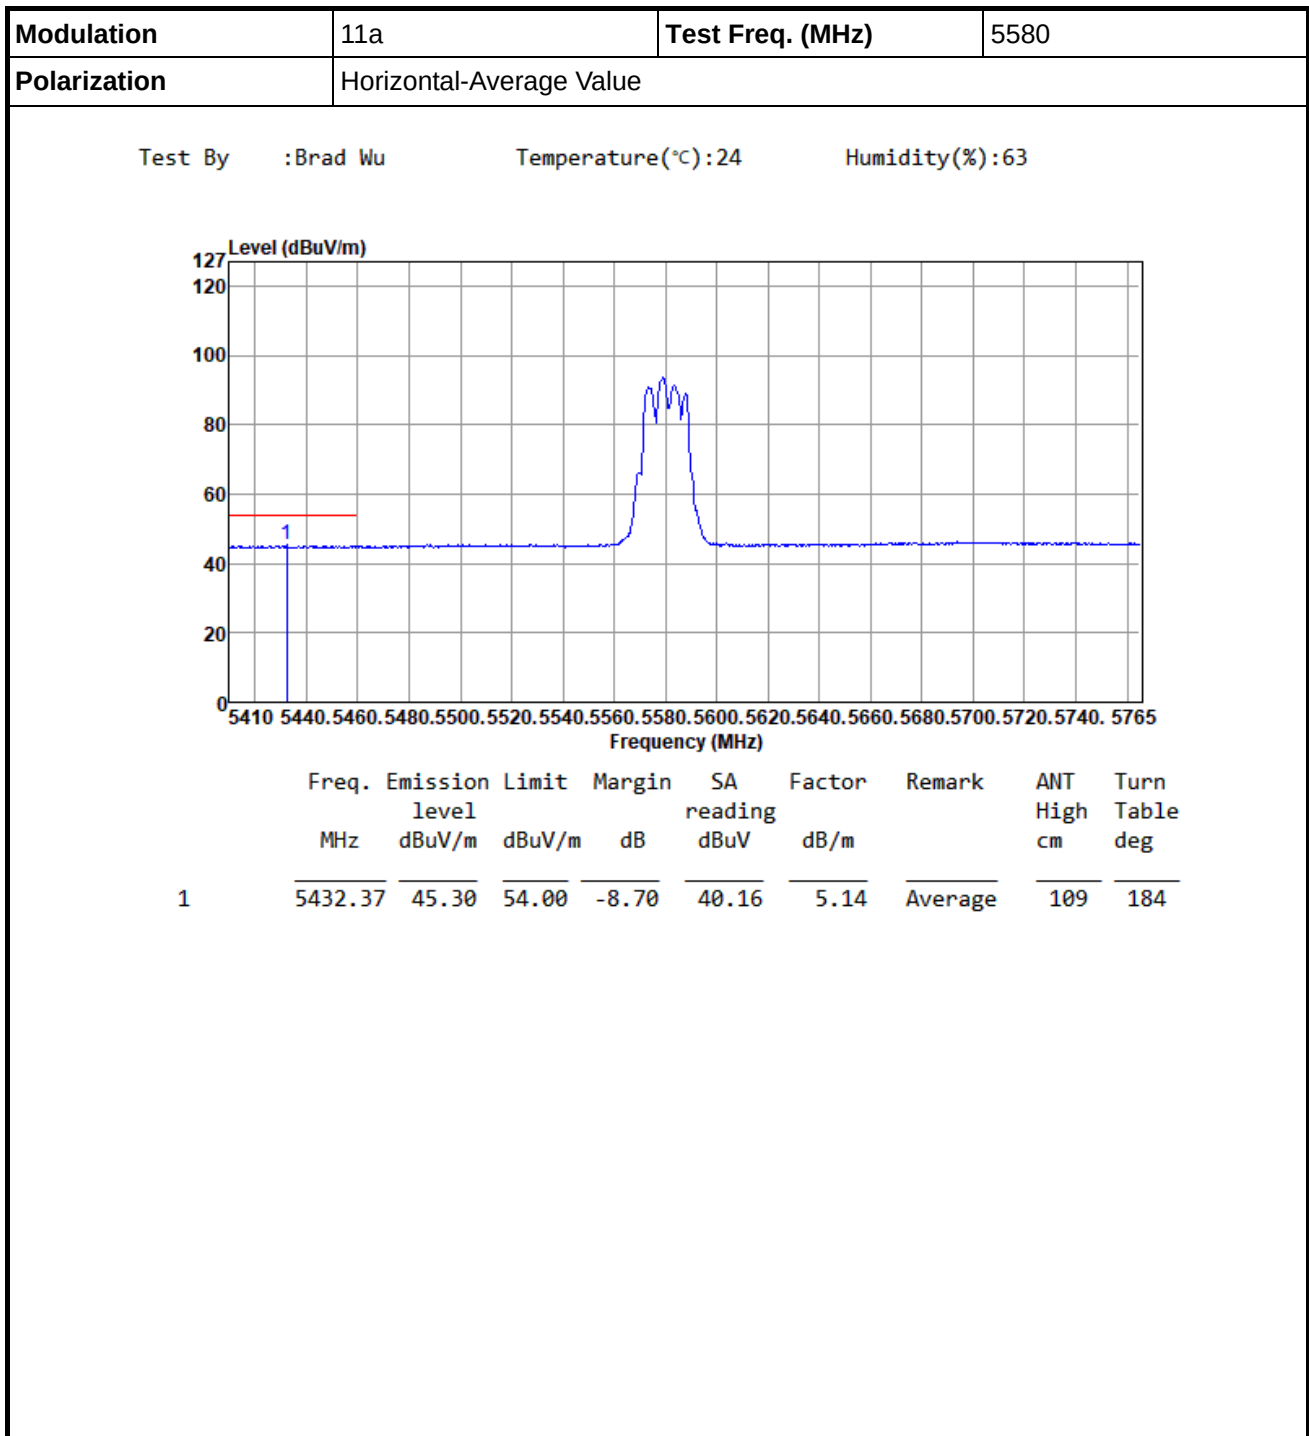


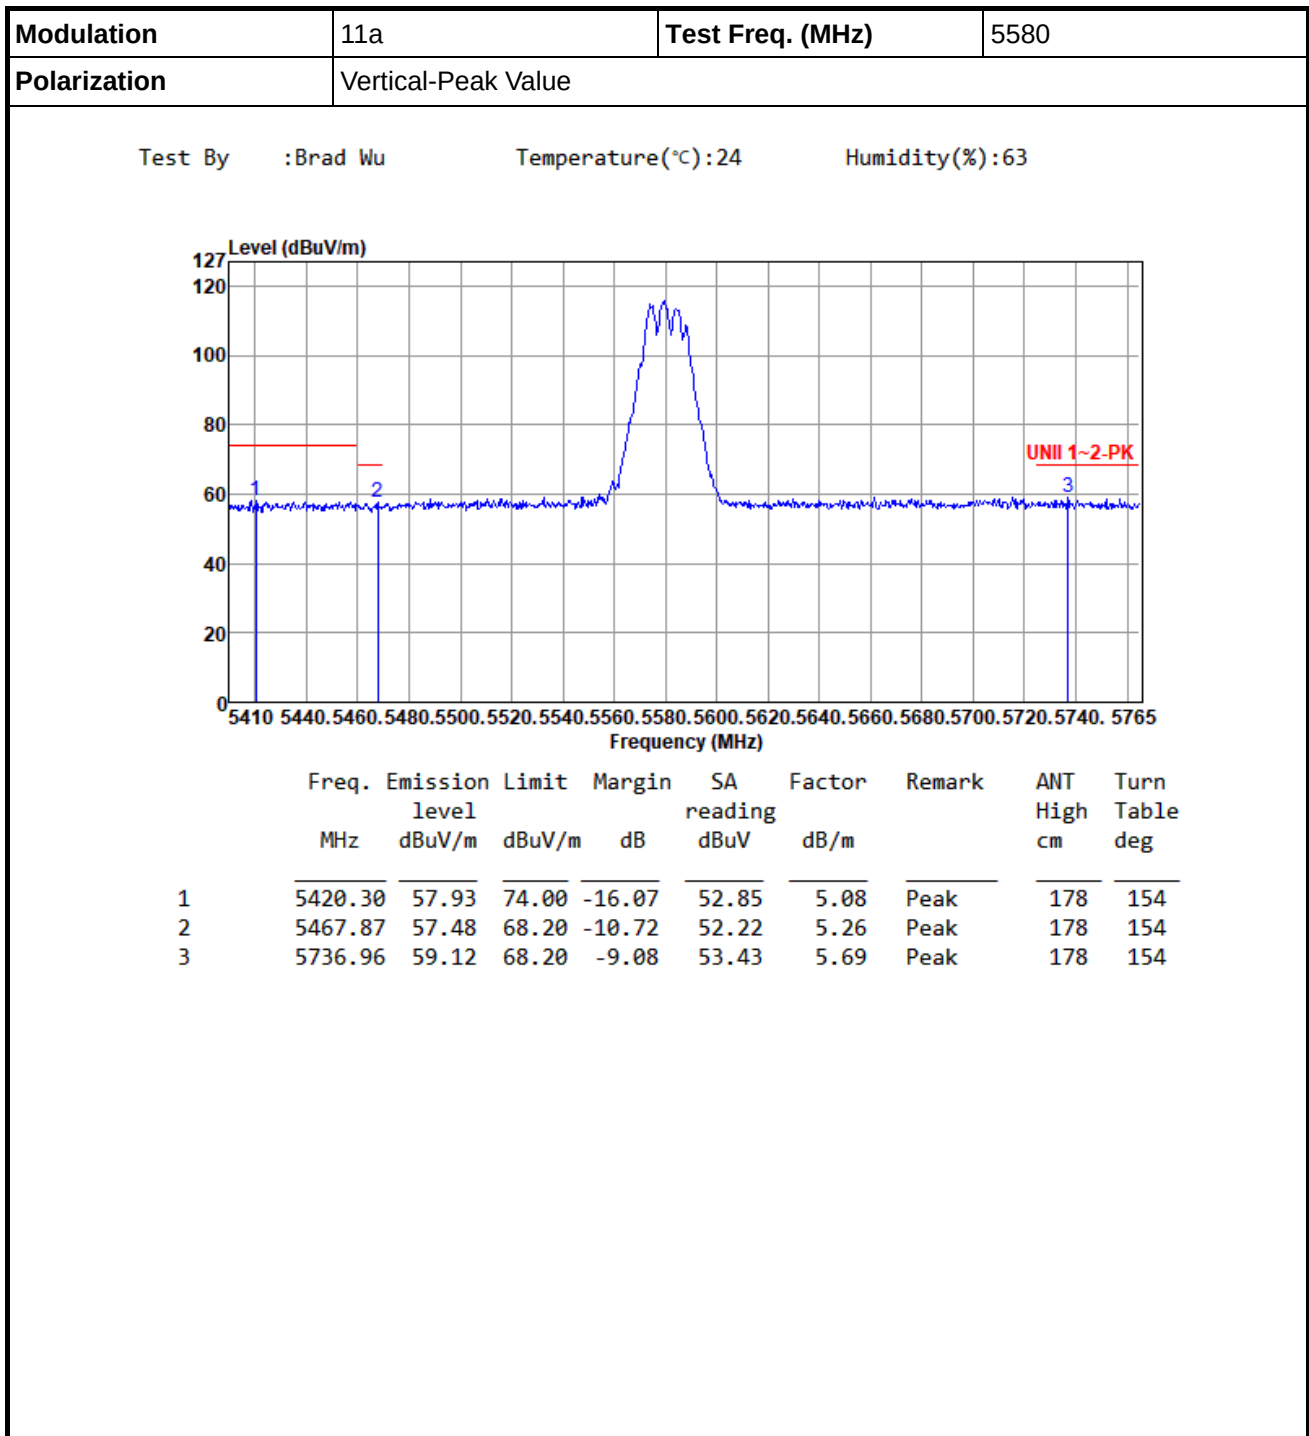


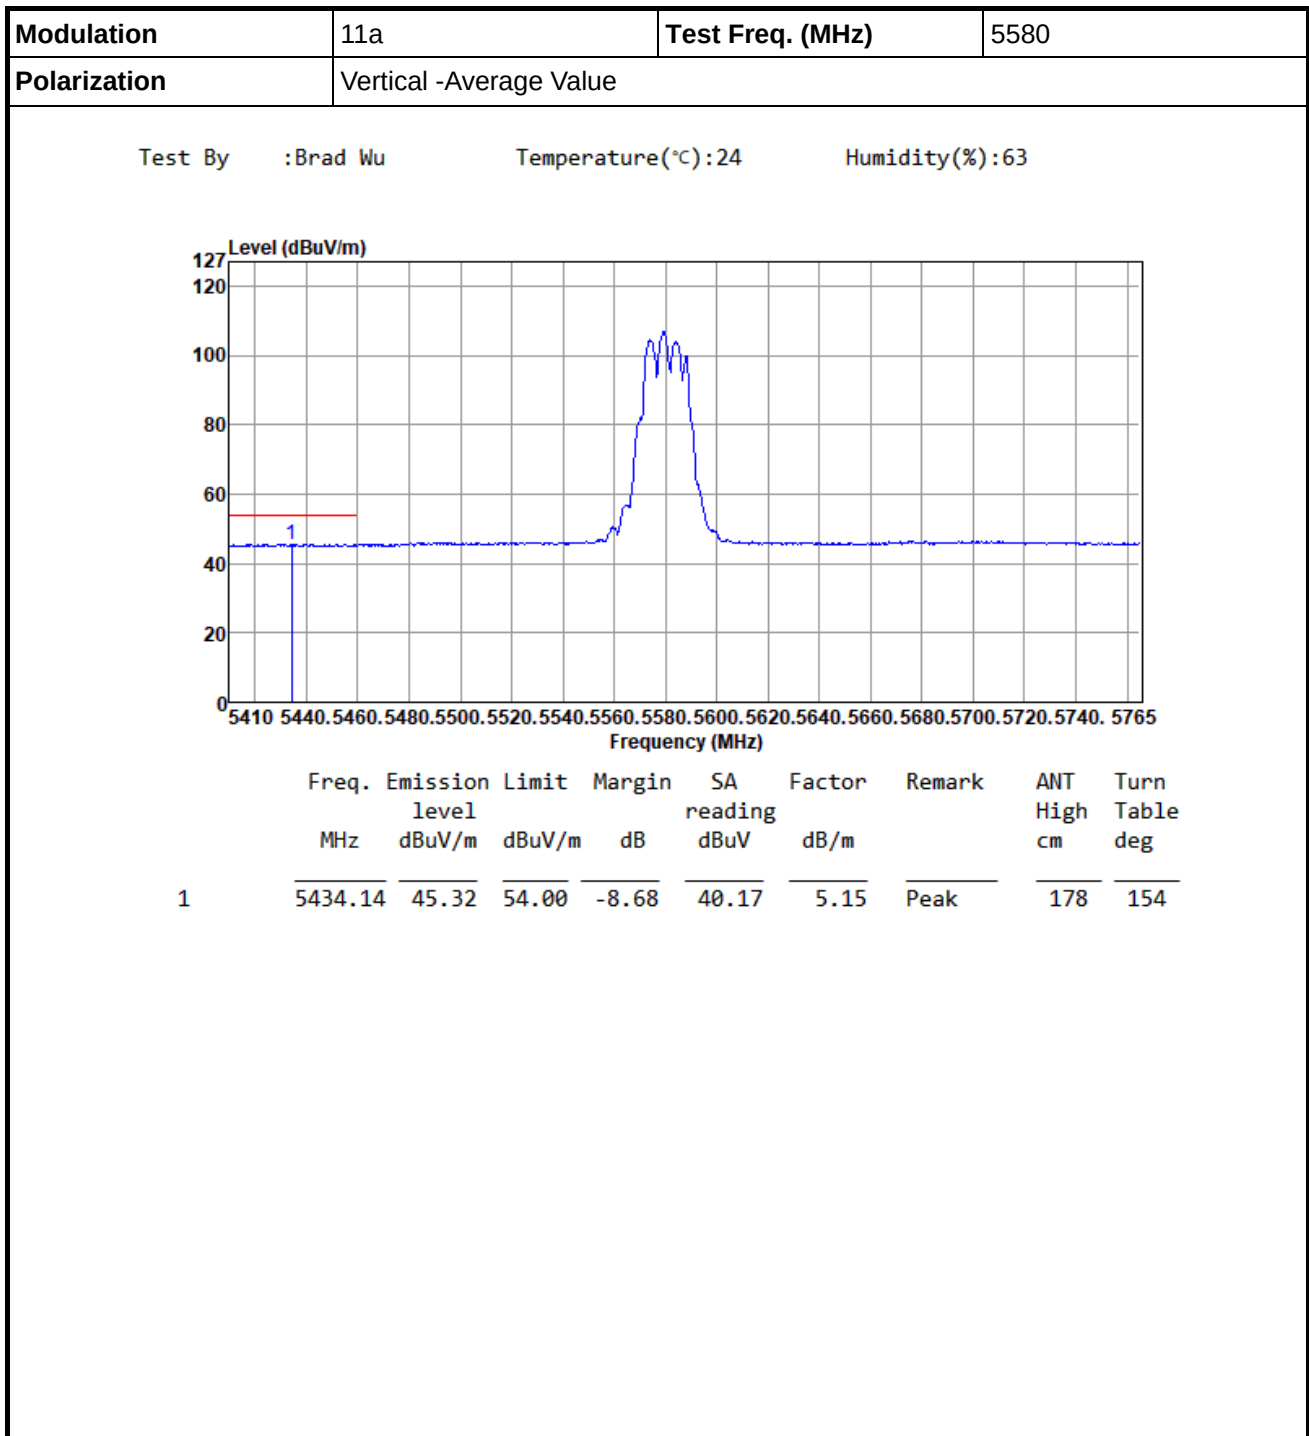

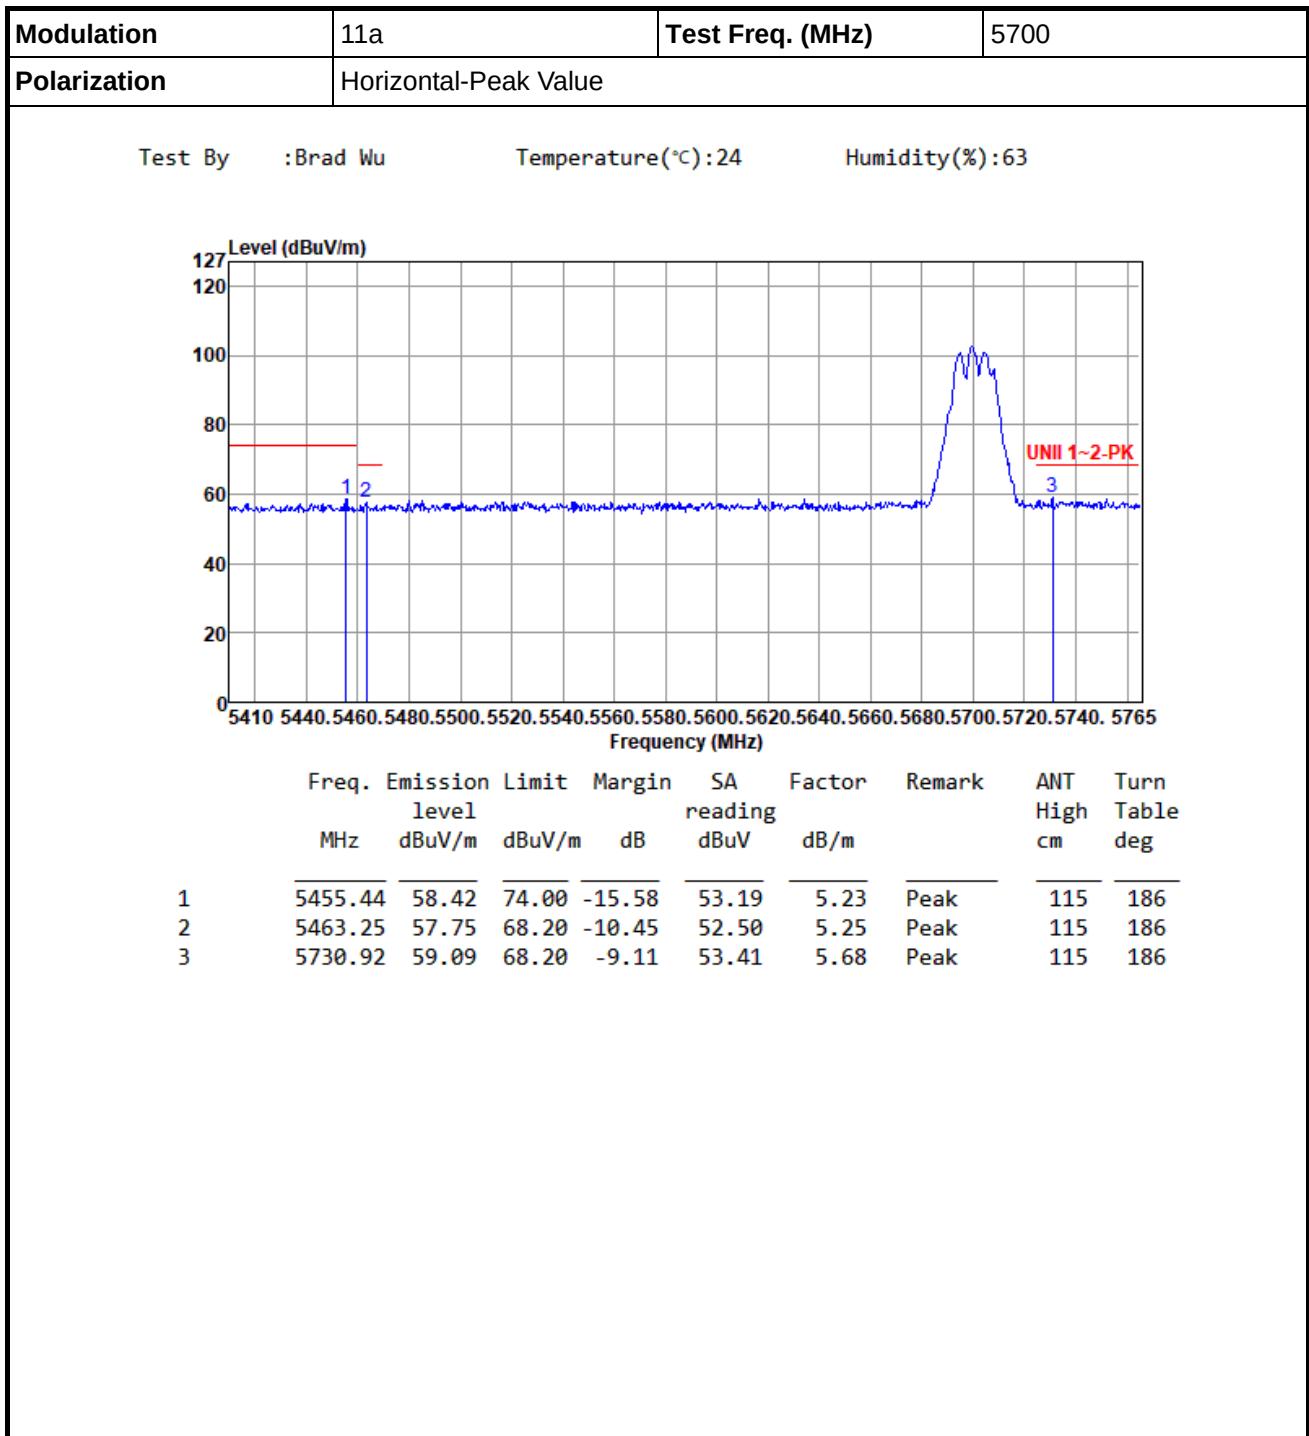

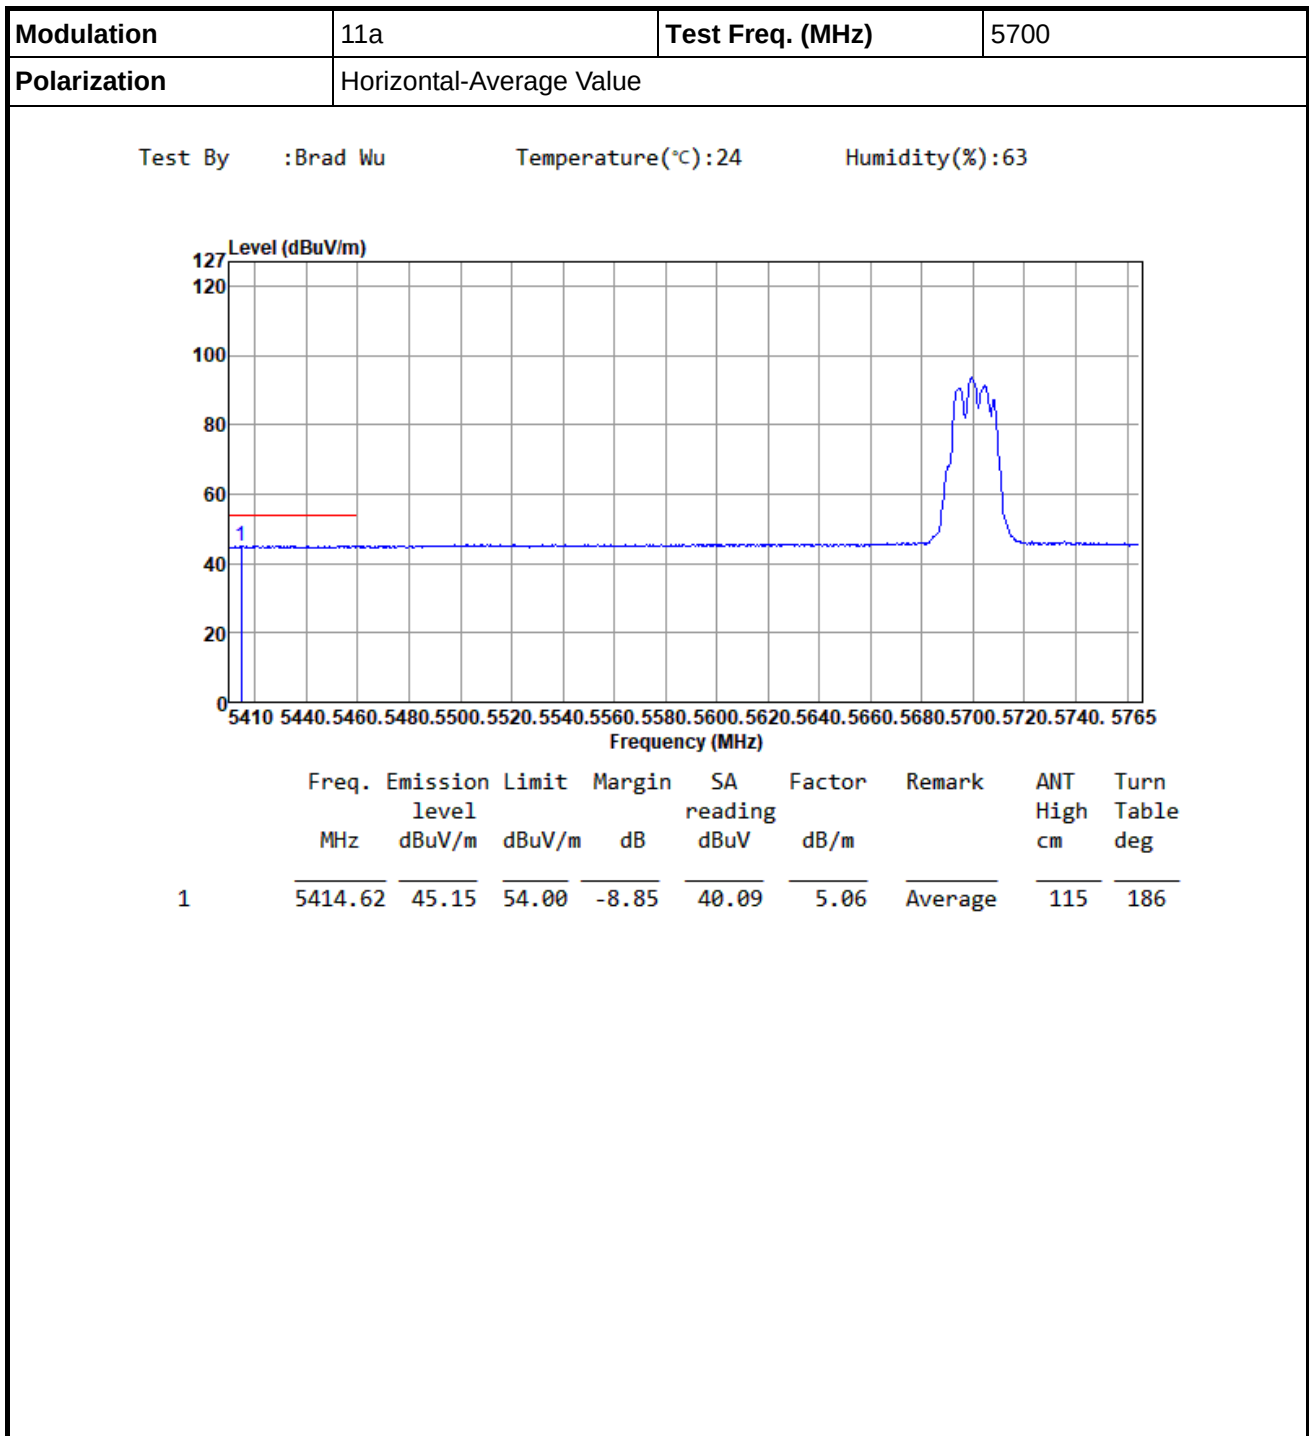

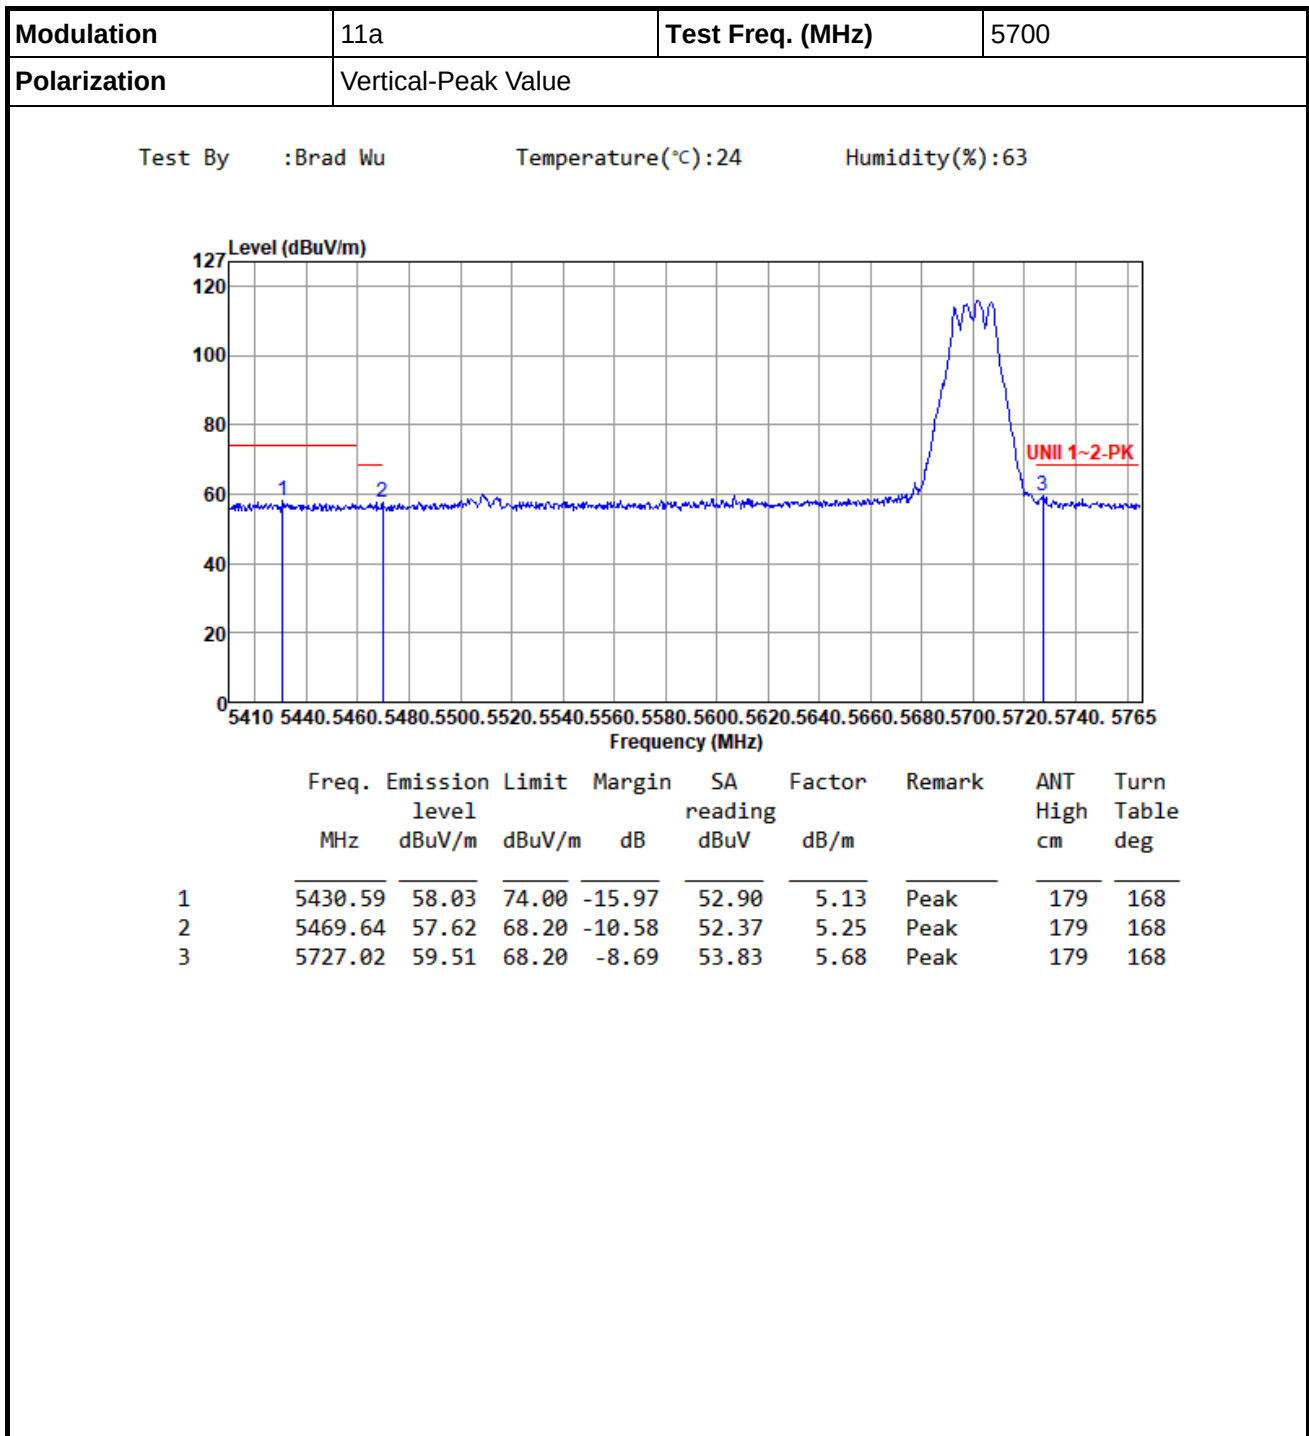


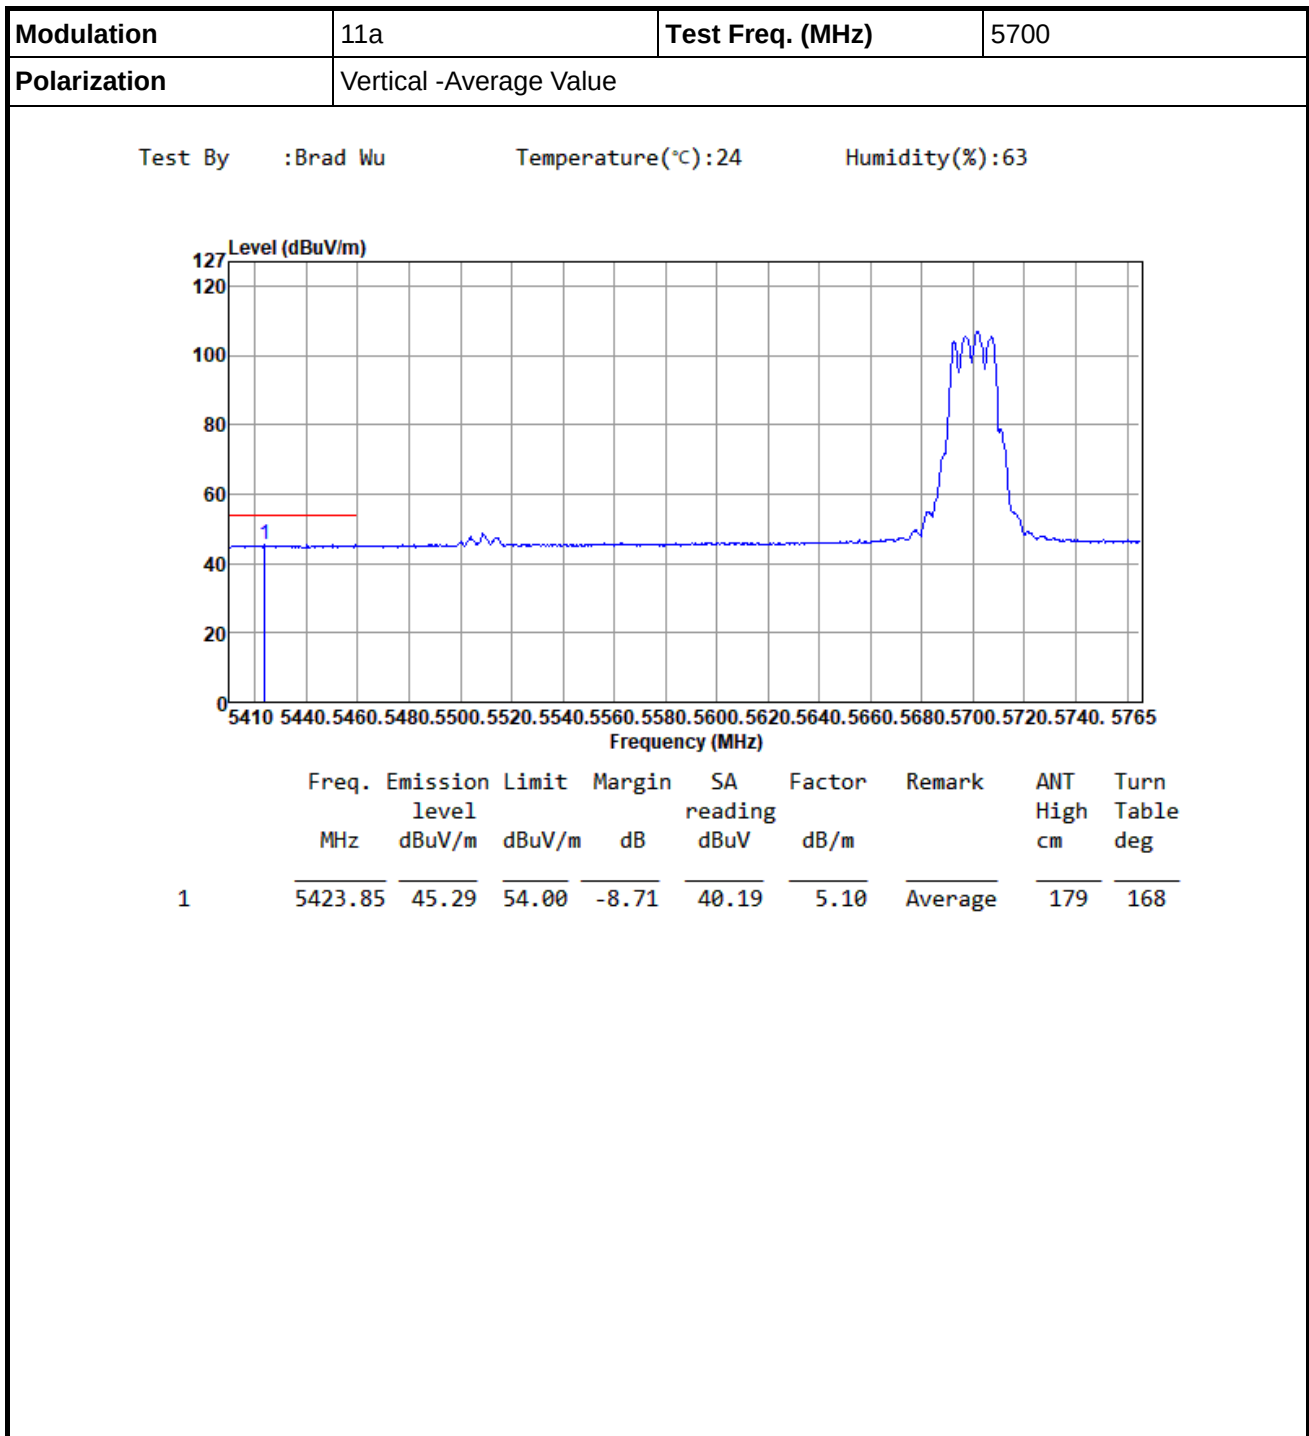




Band Edge measurement


Appendix D.9

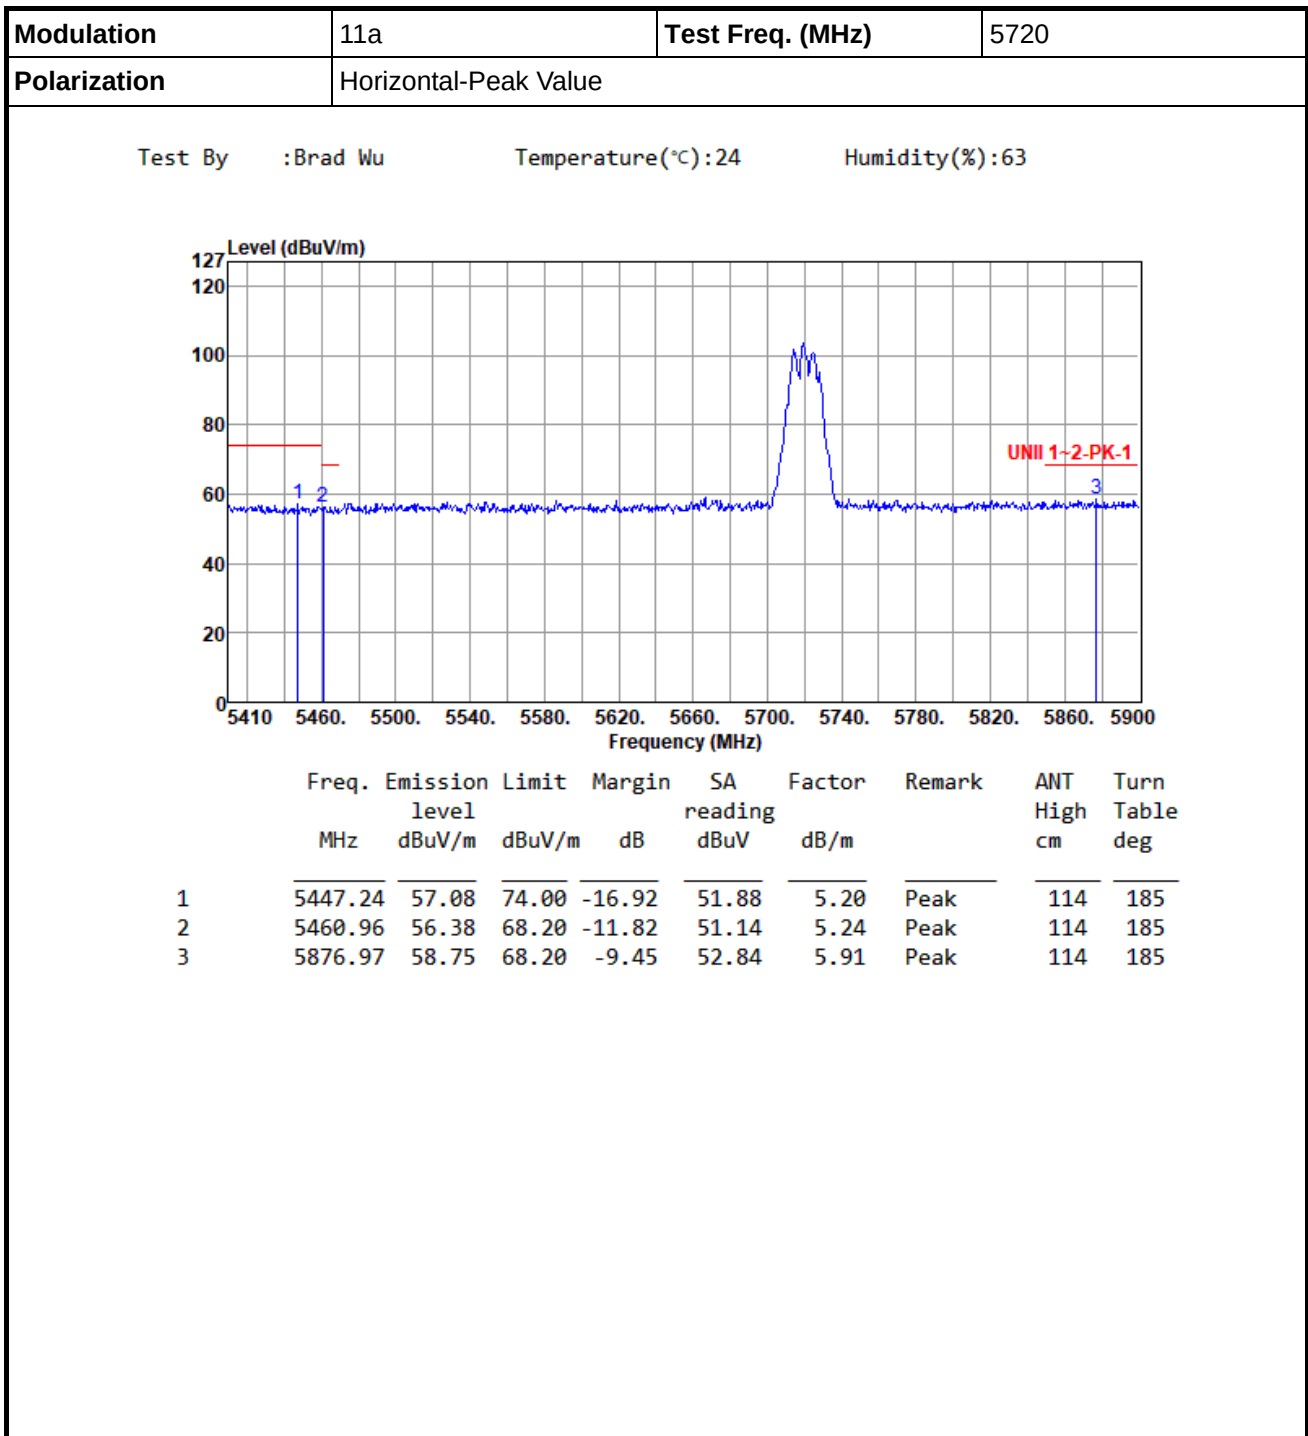






Modulation	11a	Test Freq. (MHz)	5720						
Polarization	Horizontal-Average Value								
Test By :Brad Wu Temperature(°C):24 Humidity(%):63									
Level (dBuV/m) Frequency (MHz)									
	Freq.	Emission Limit	Margin	SA	Factor	Remark	ANT	Turn	
	MHz	level		reading			High	Table	
		dBuV/m	dBuV/m	dB	dBuV	dB/m	cm	deg	
1	5435.48	45.11	54.00	-8.89	39.96	5.15	Average	114	185

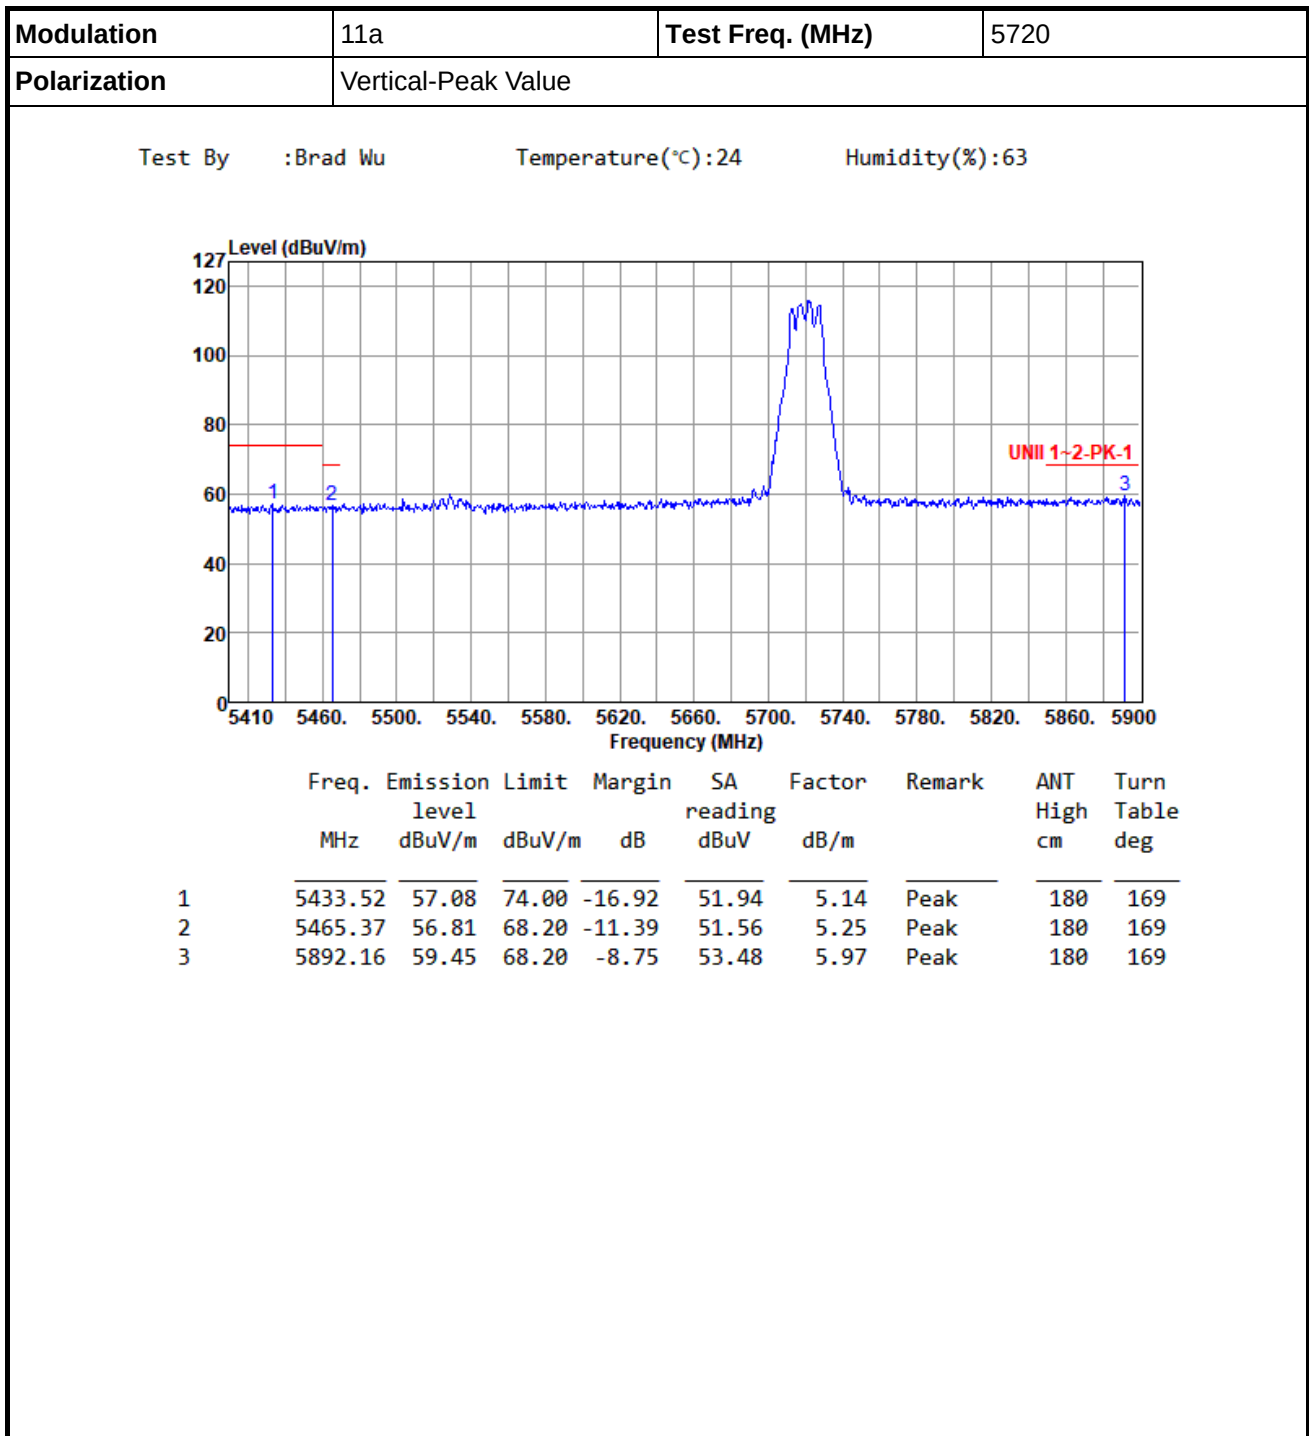


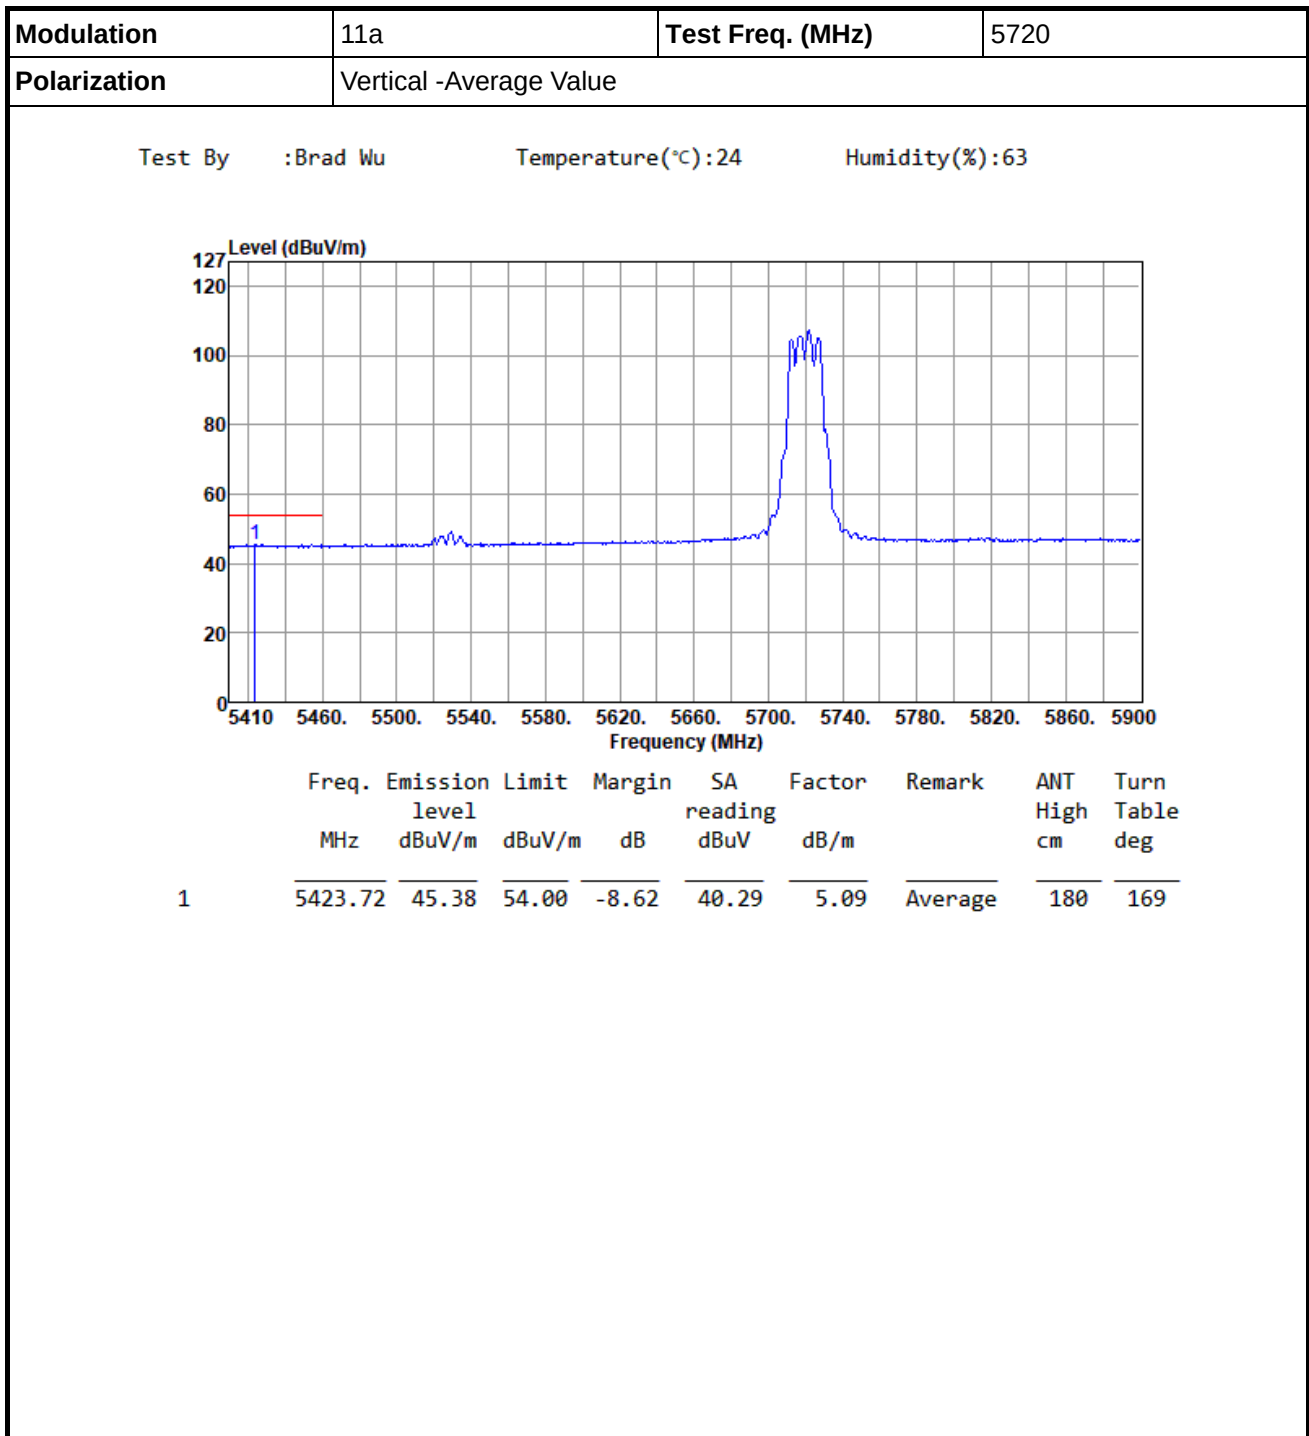


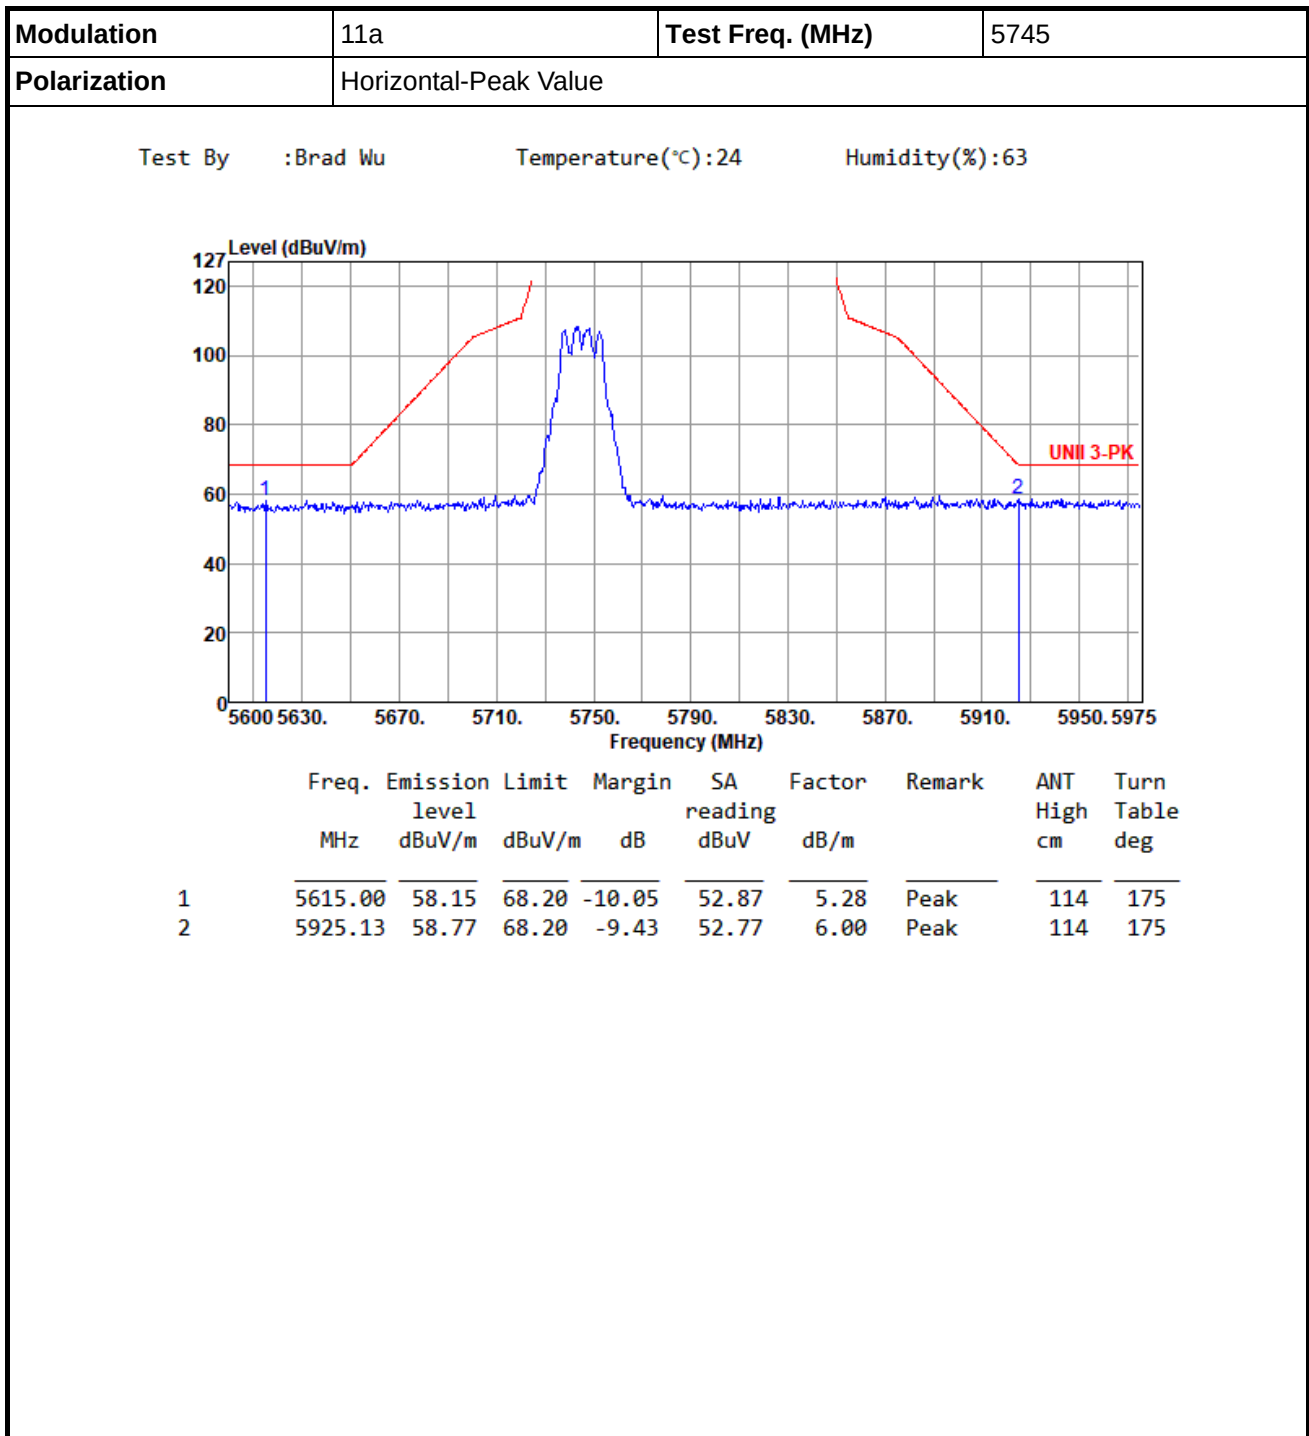


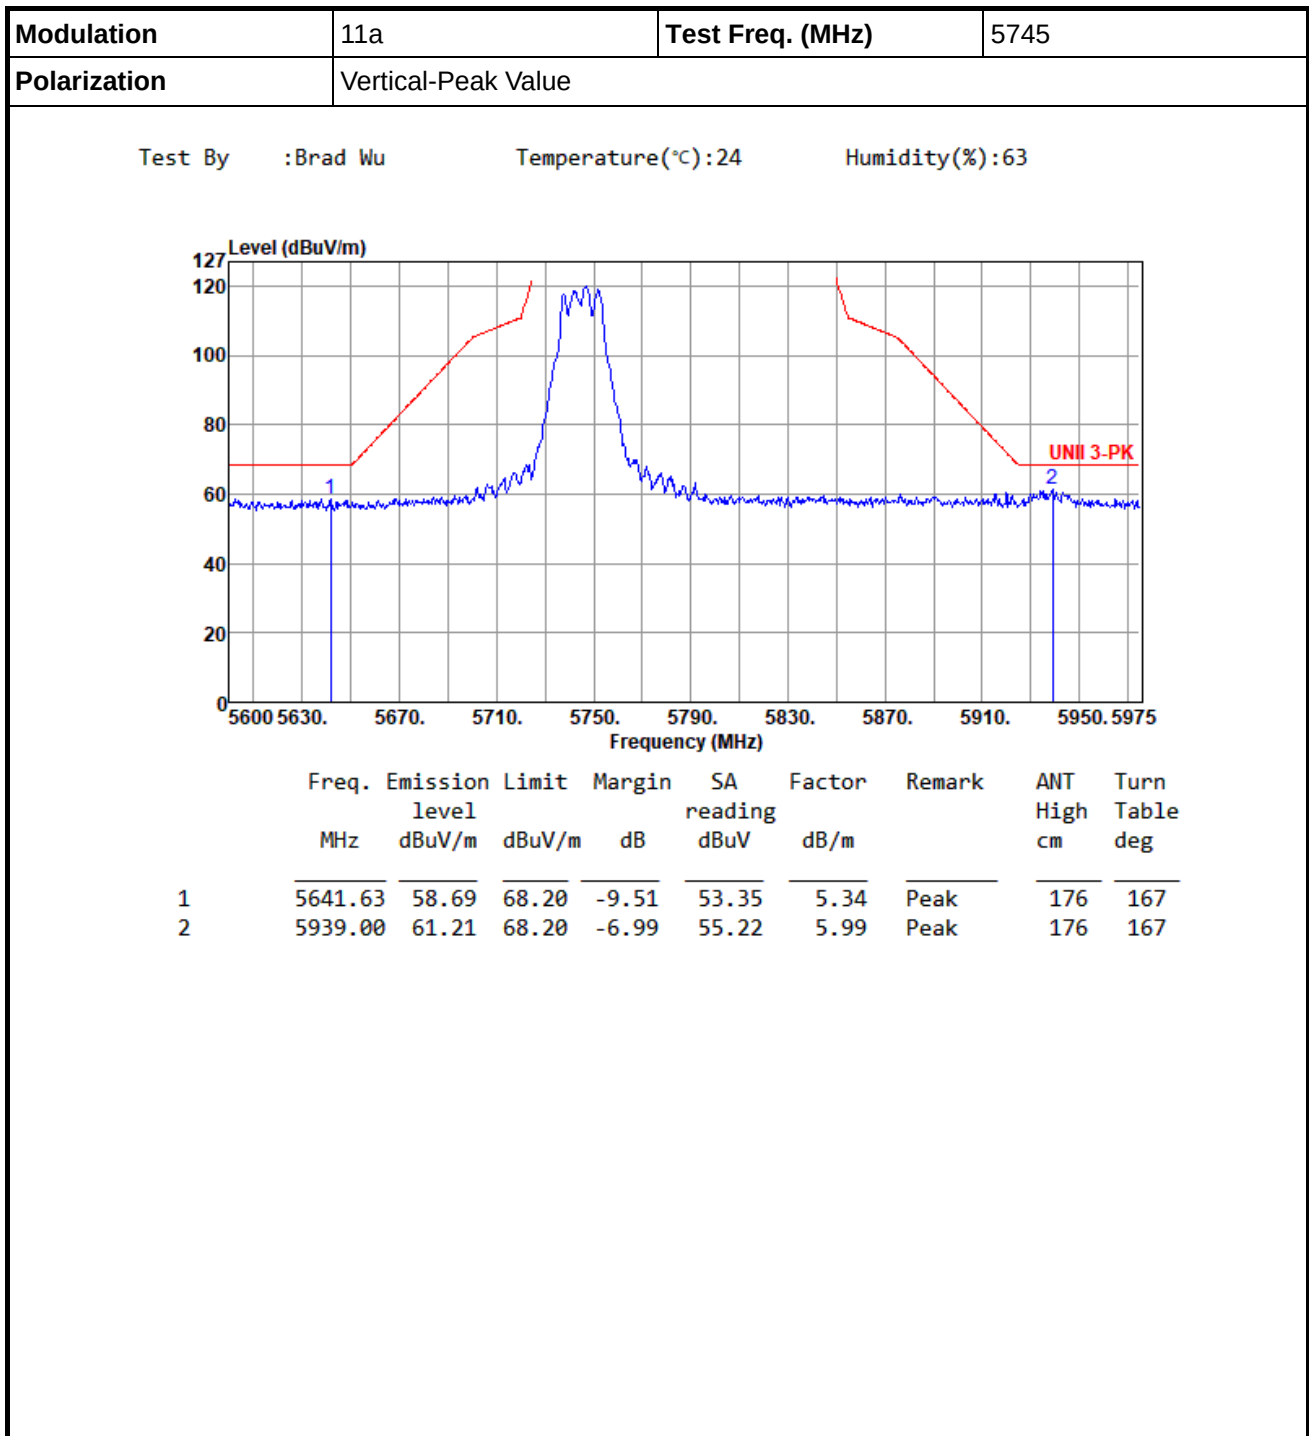


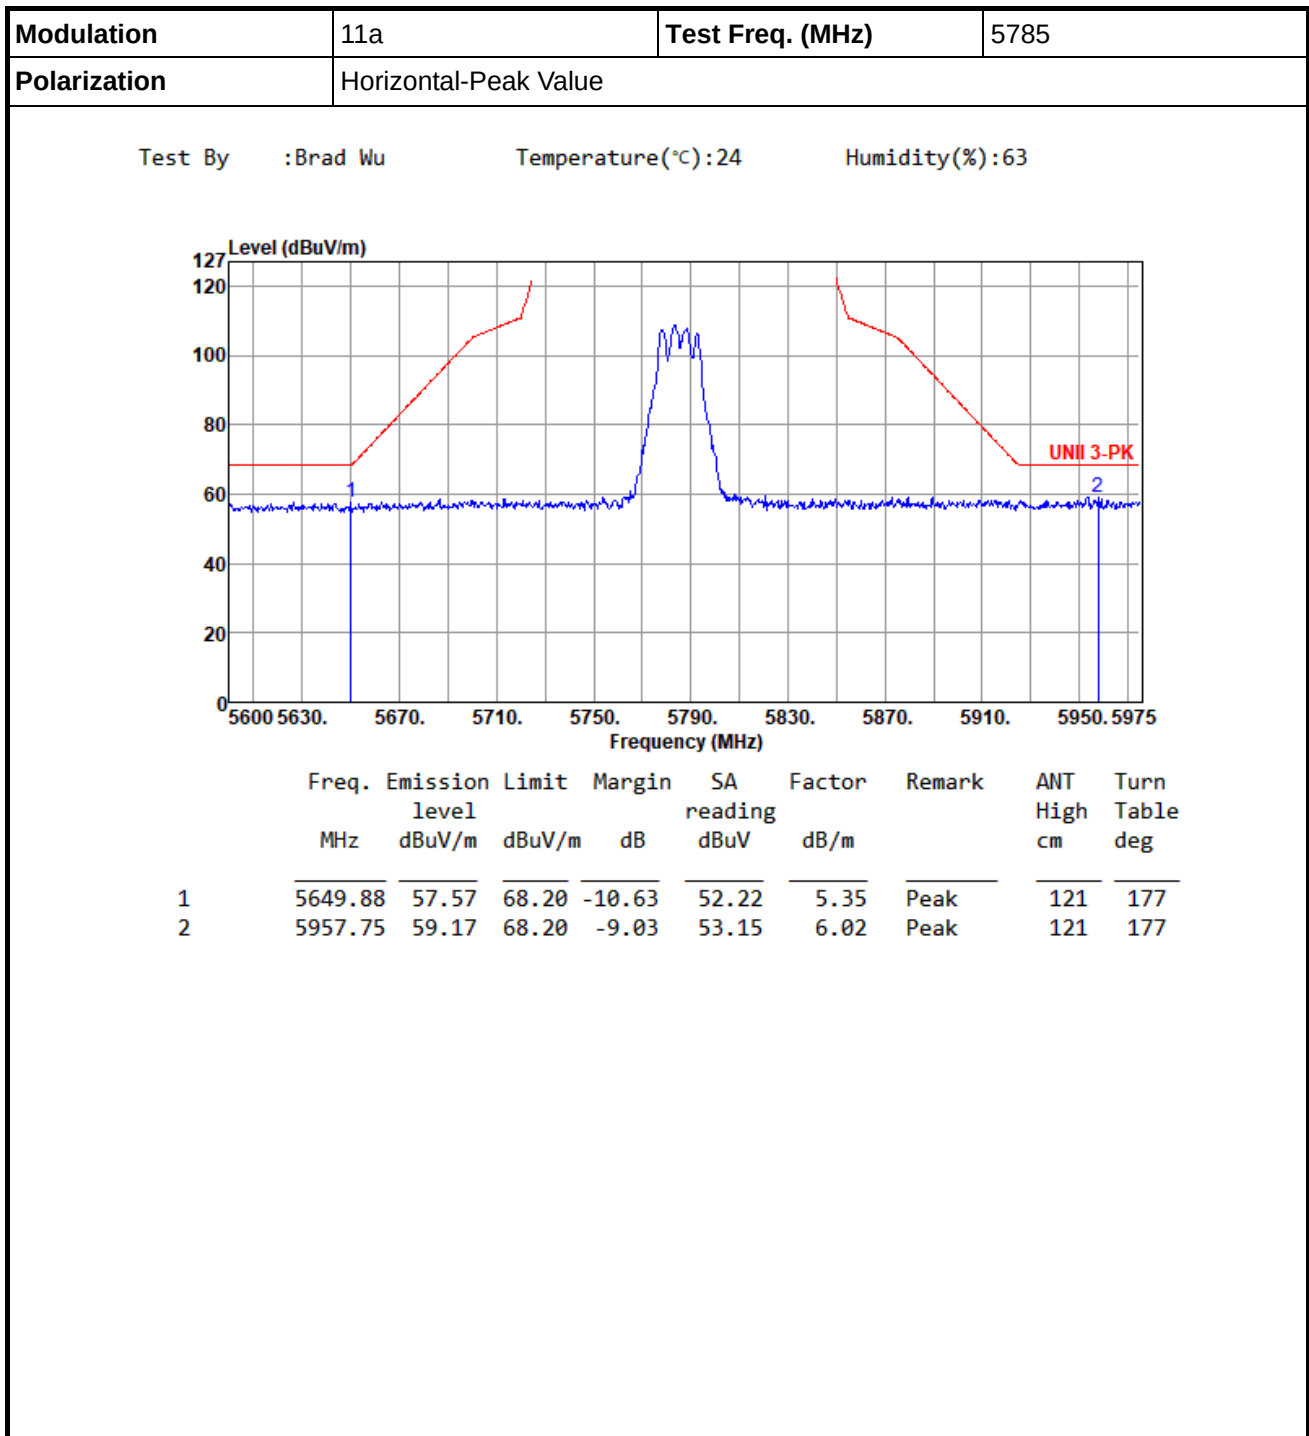


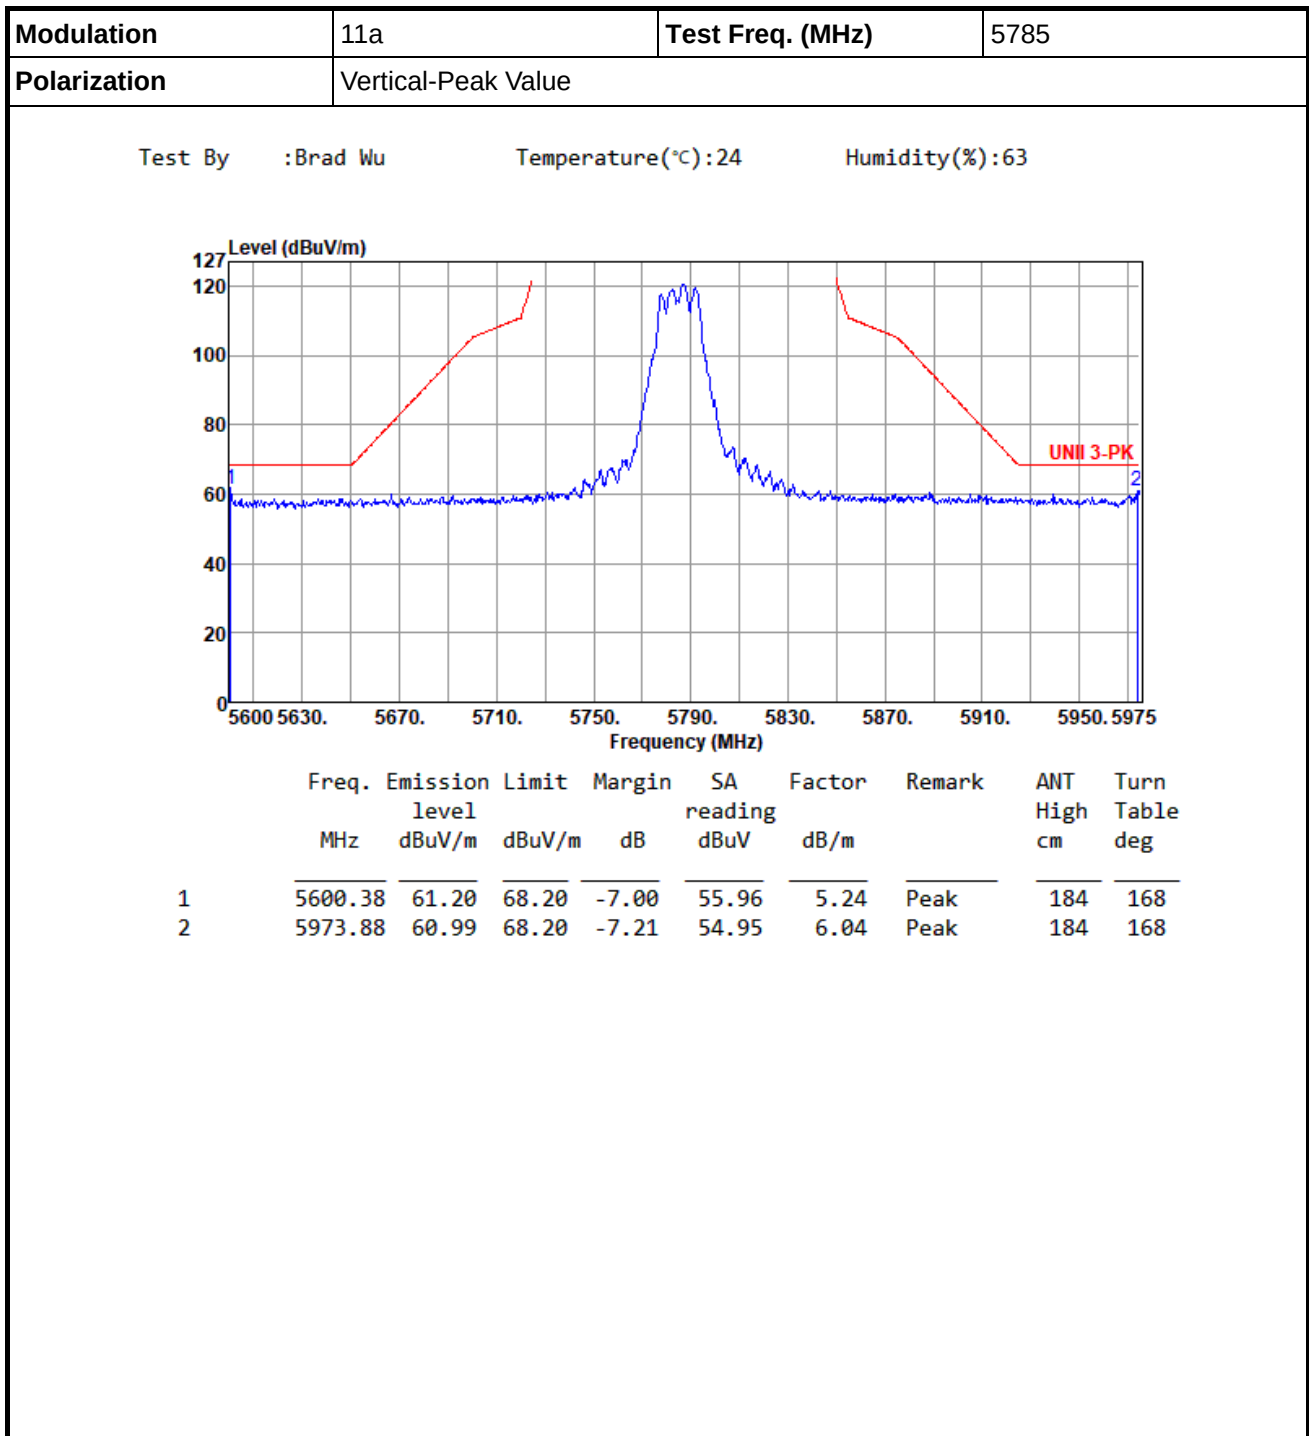


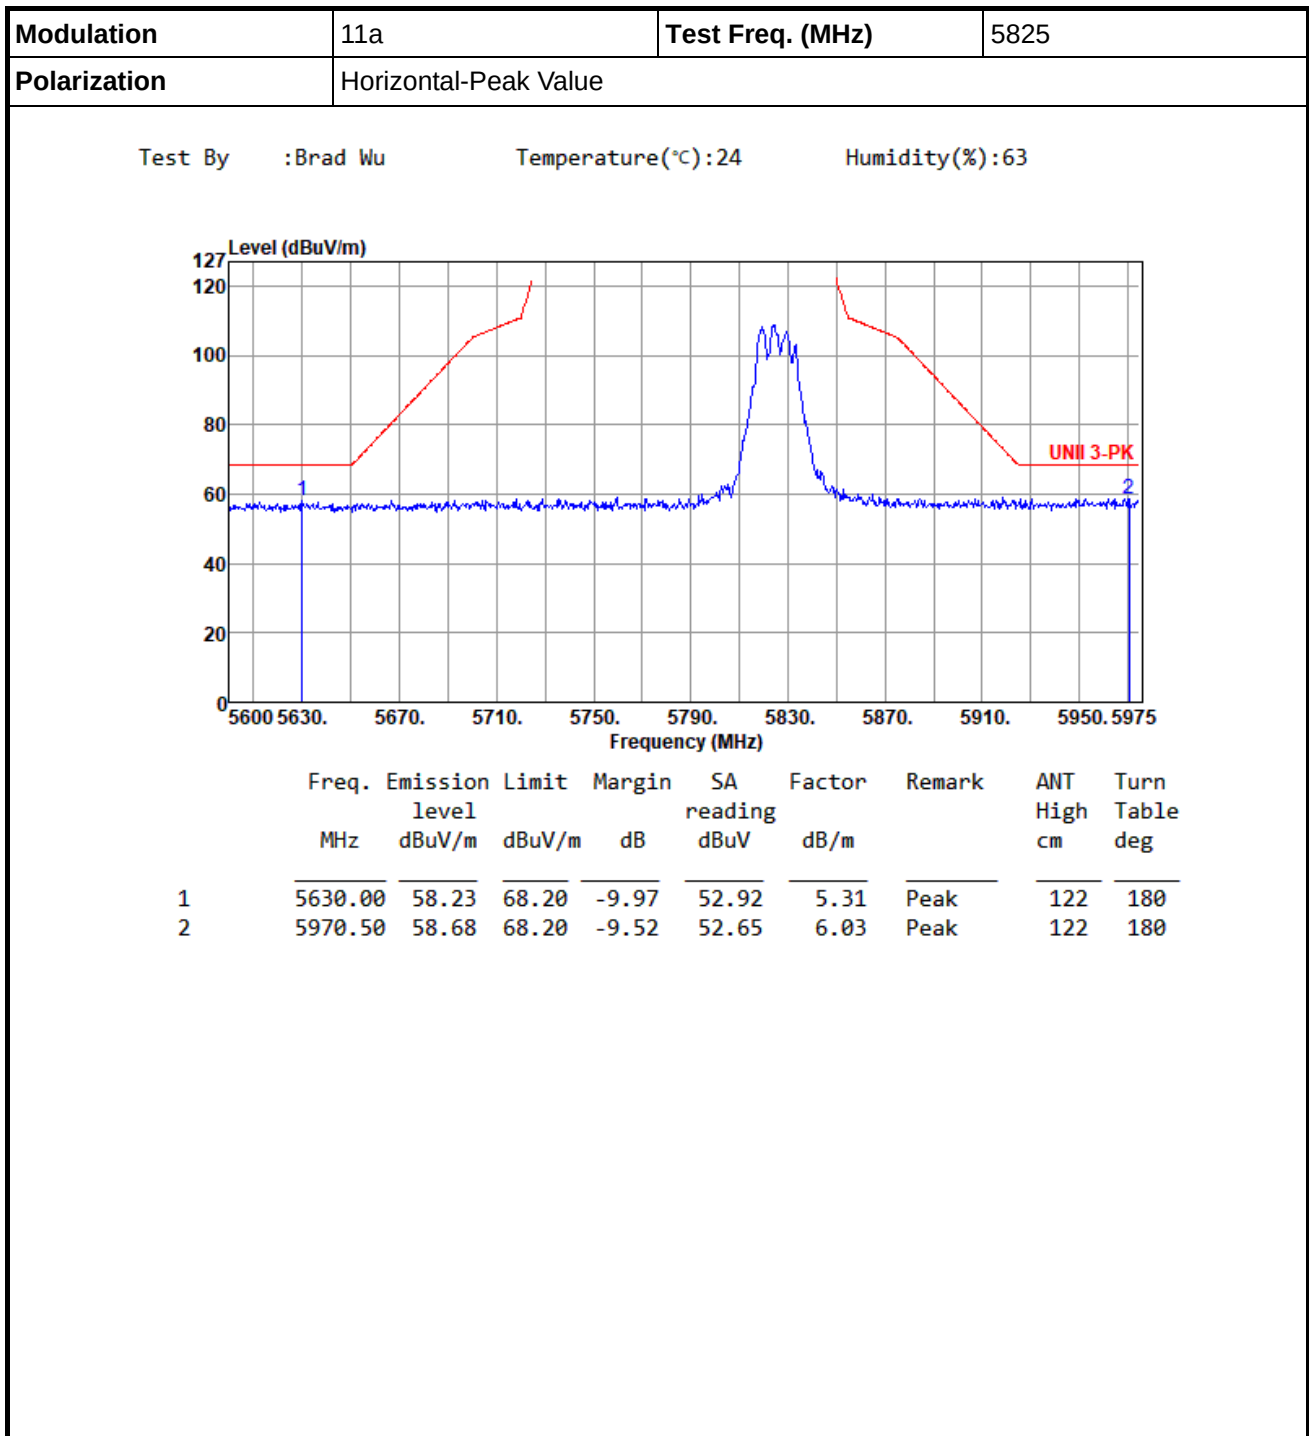


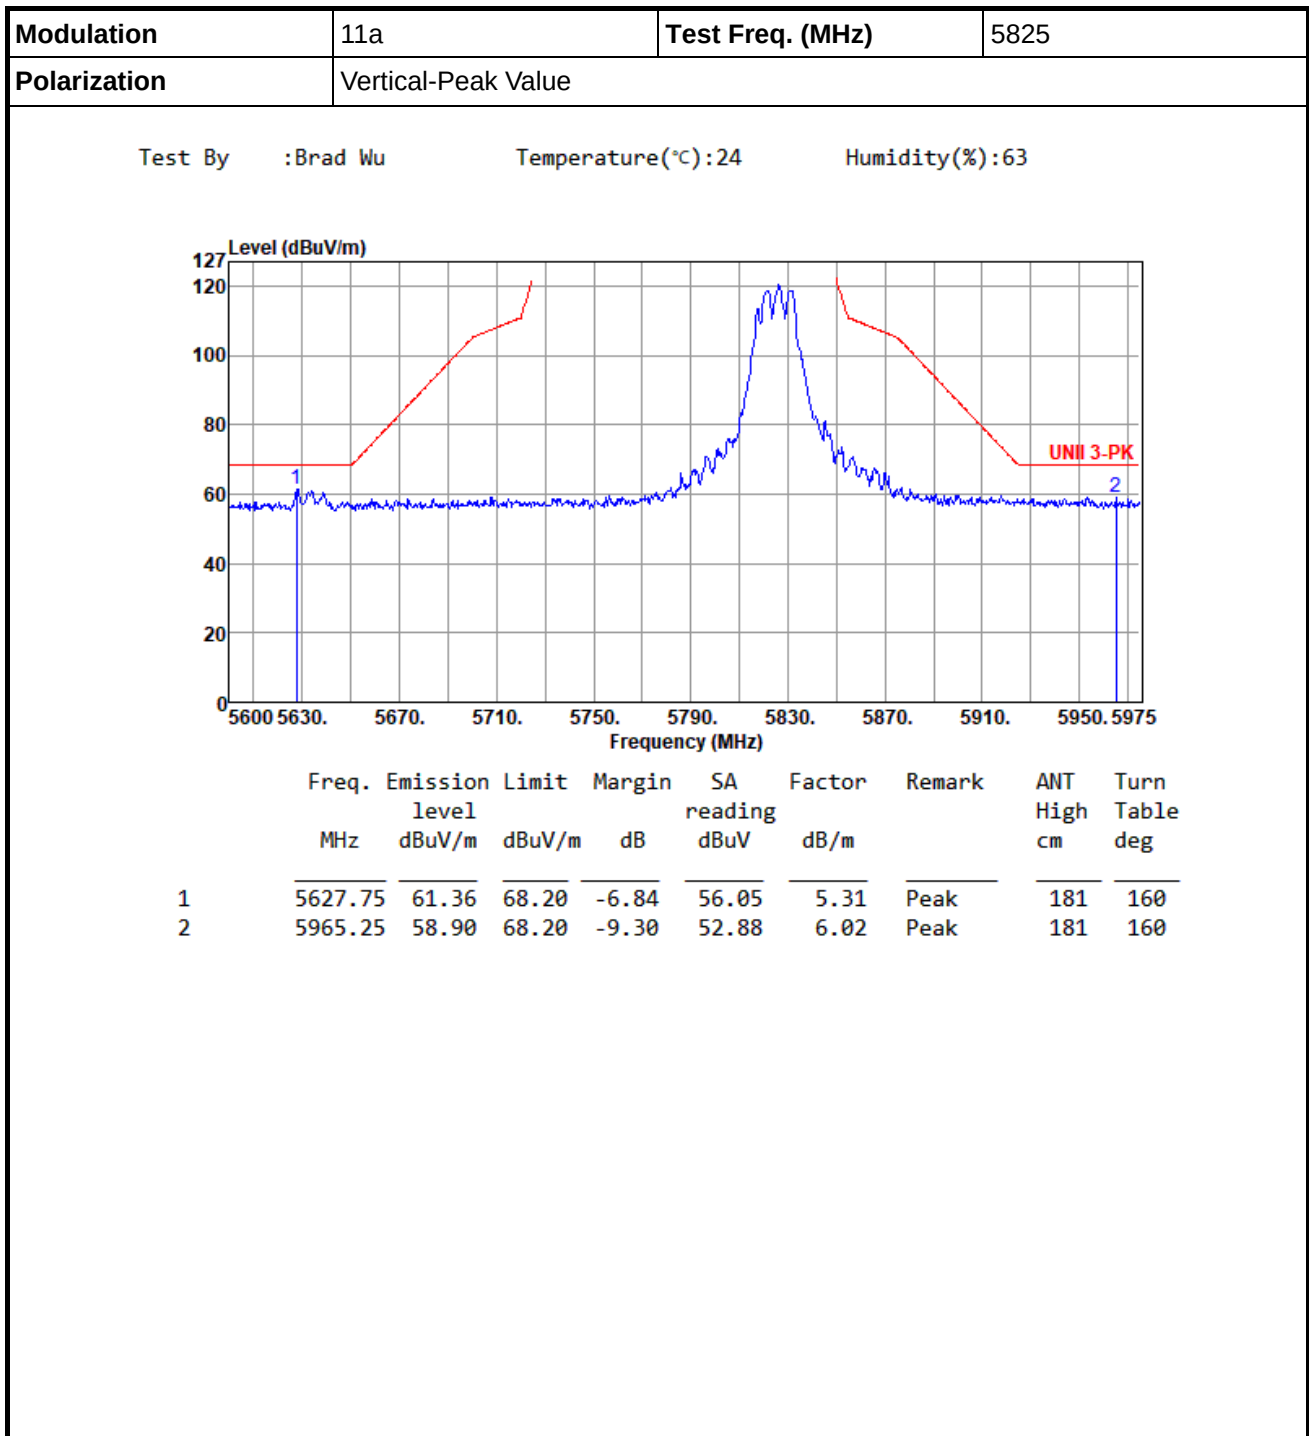


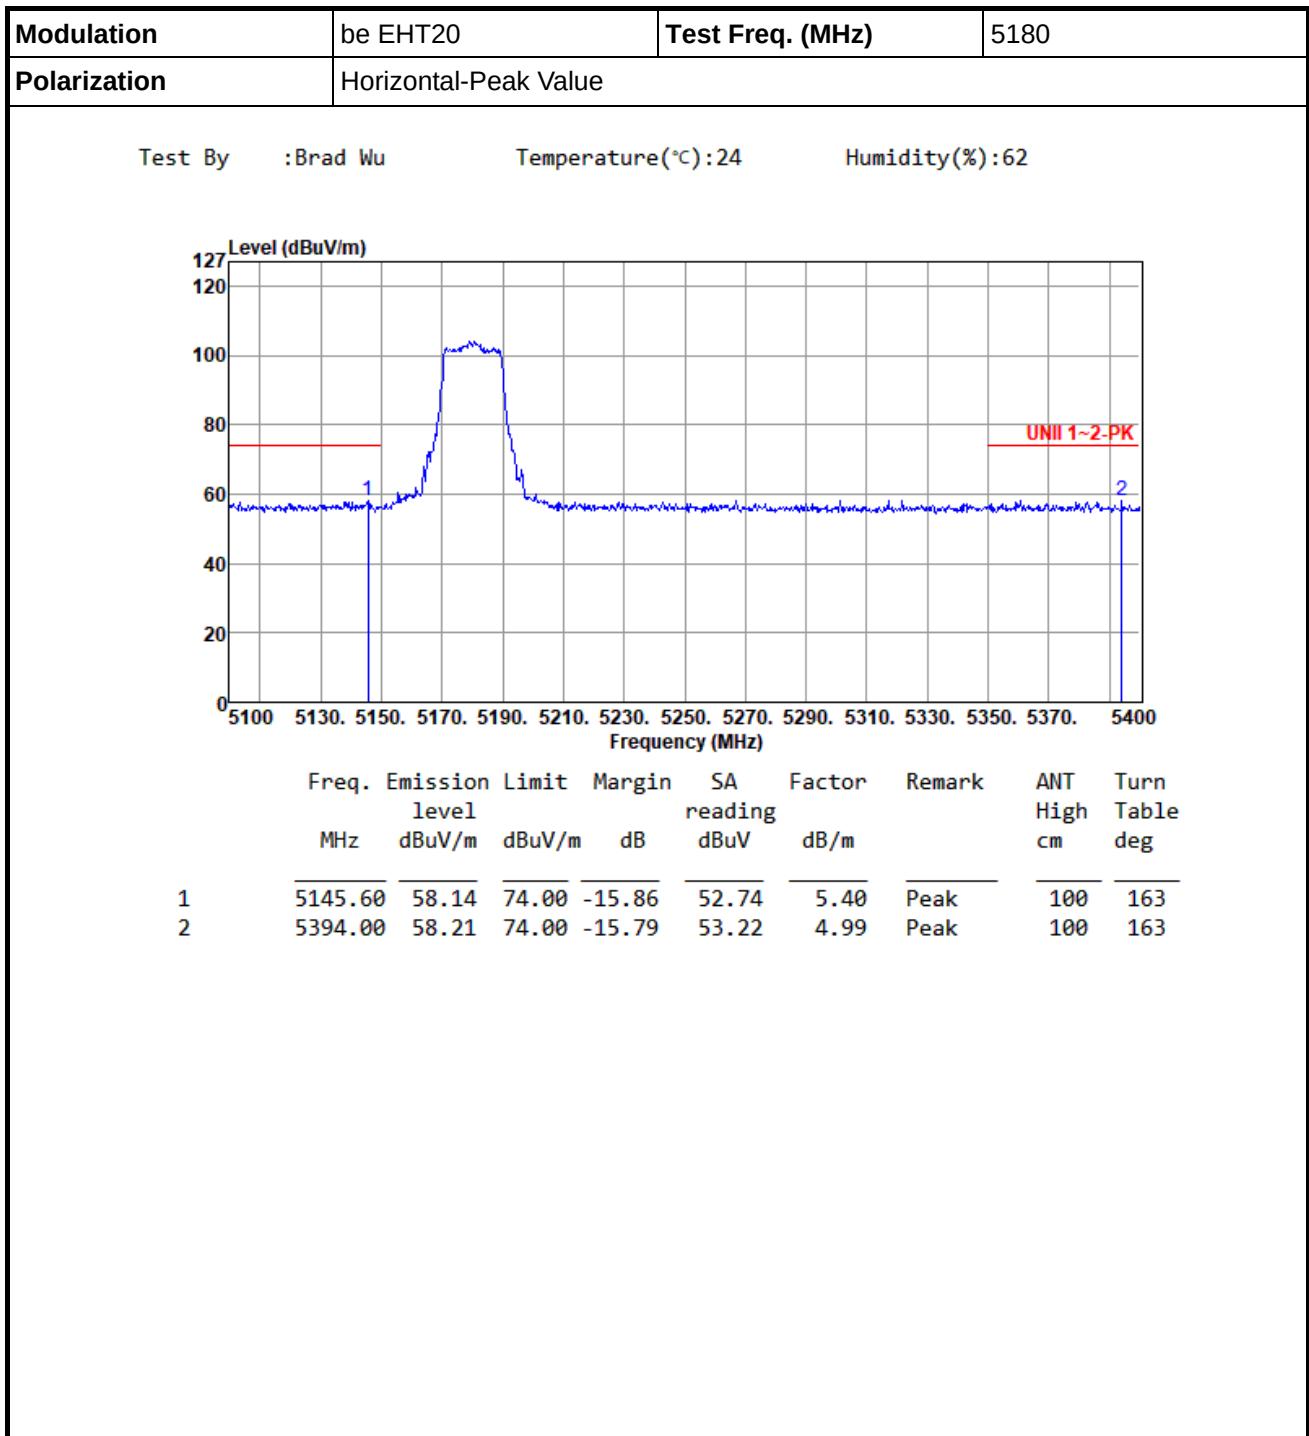


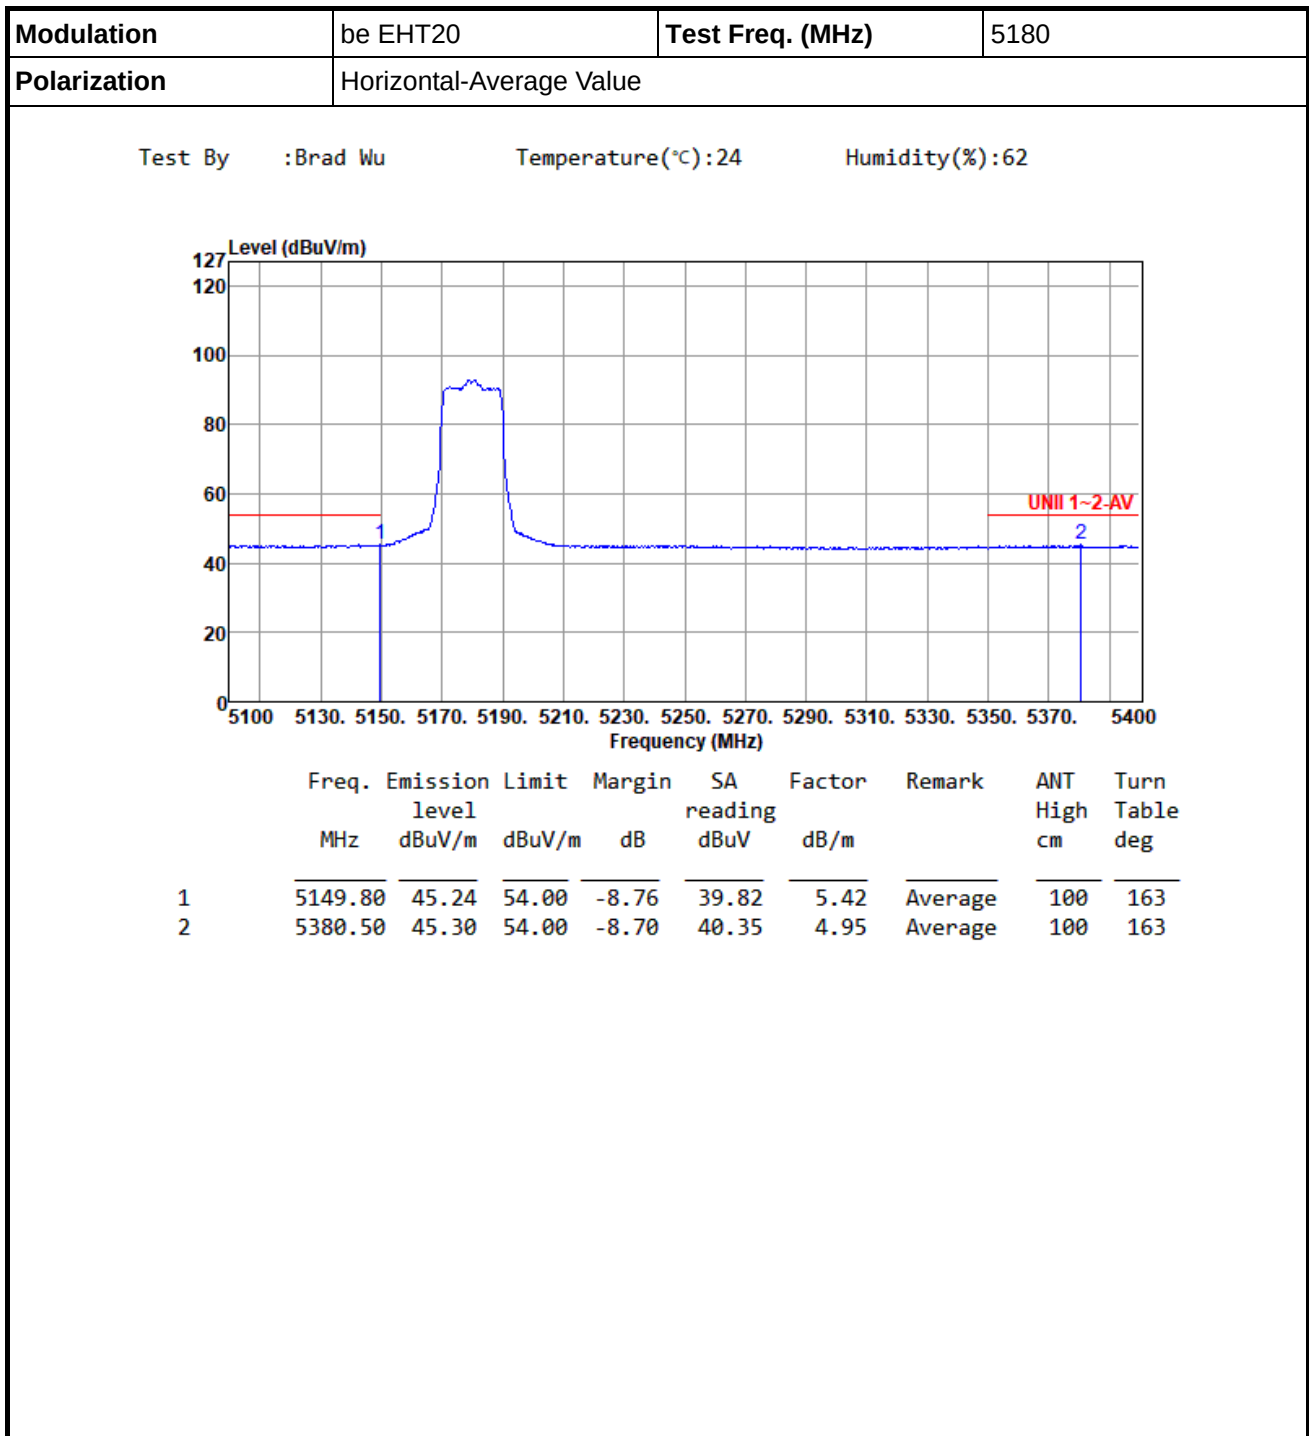


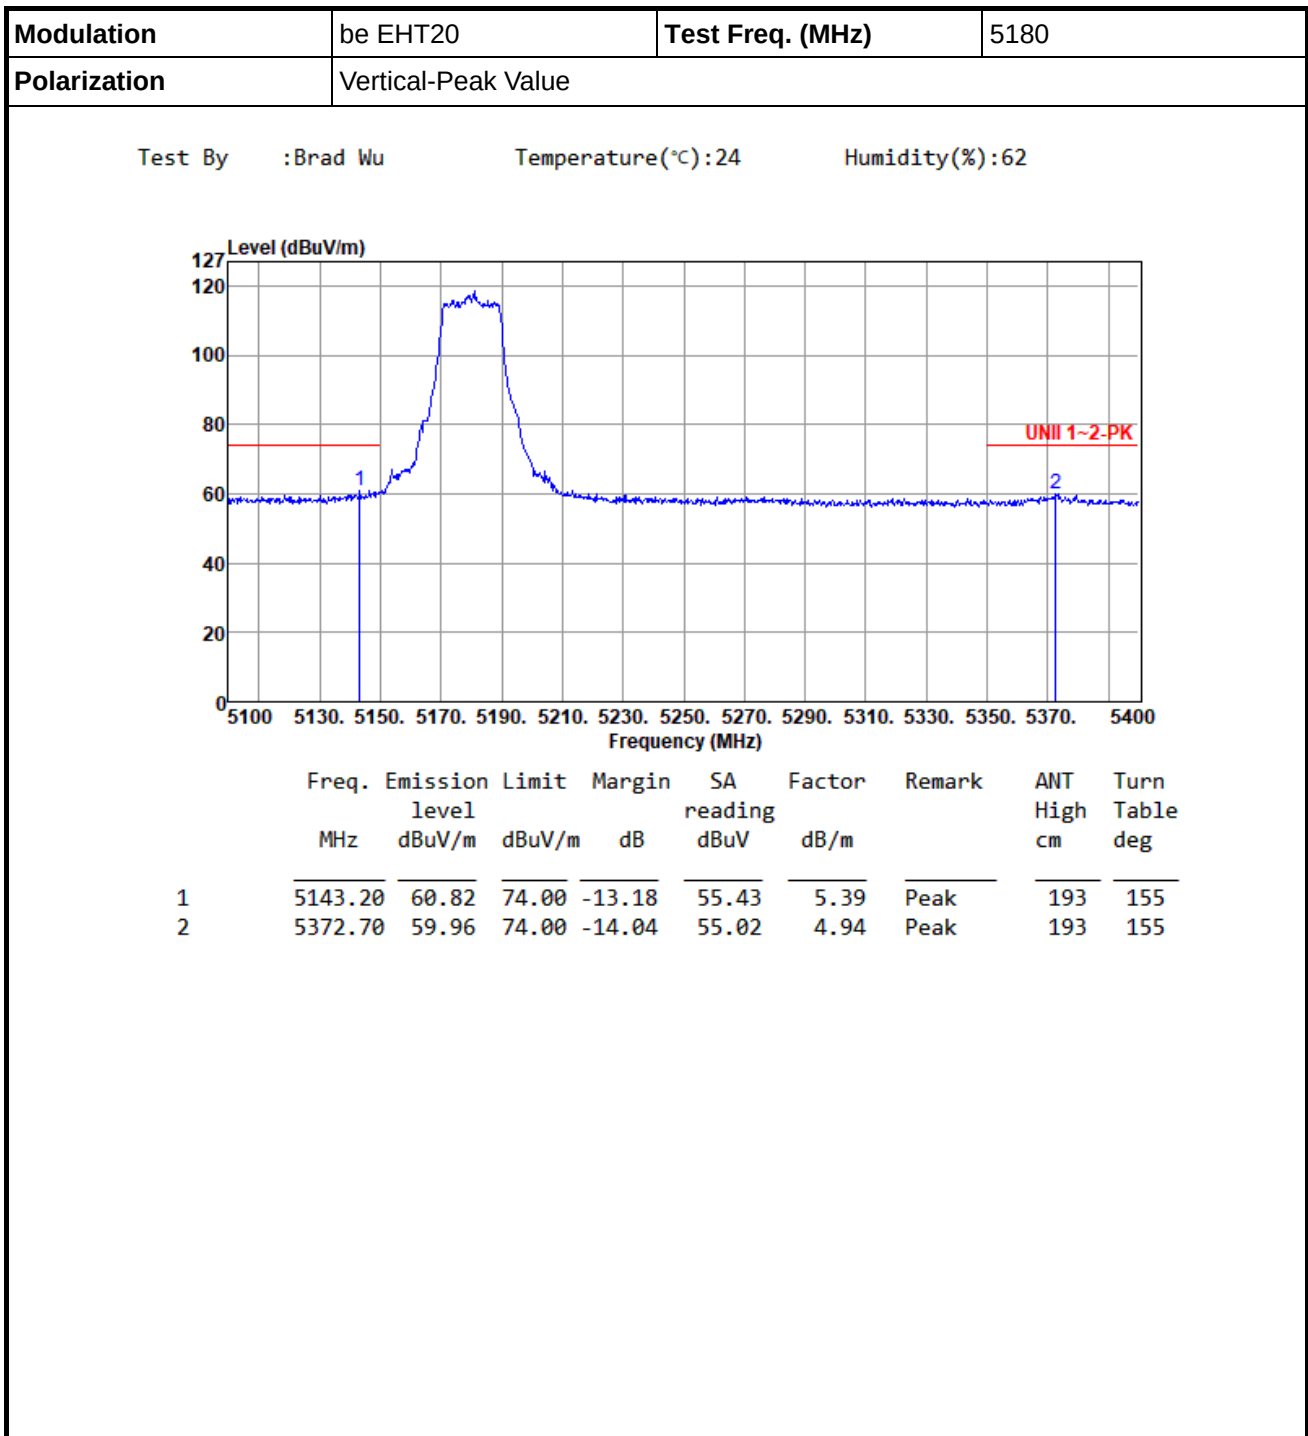


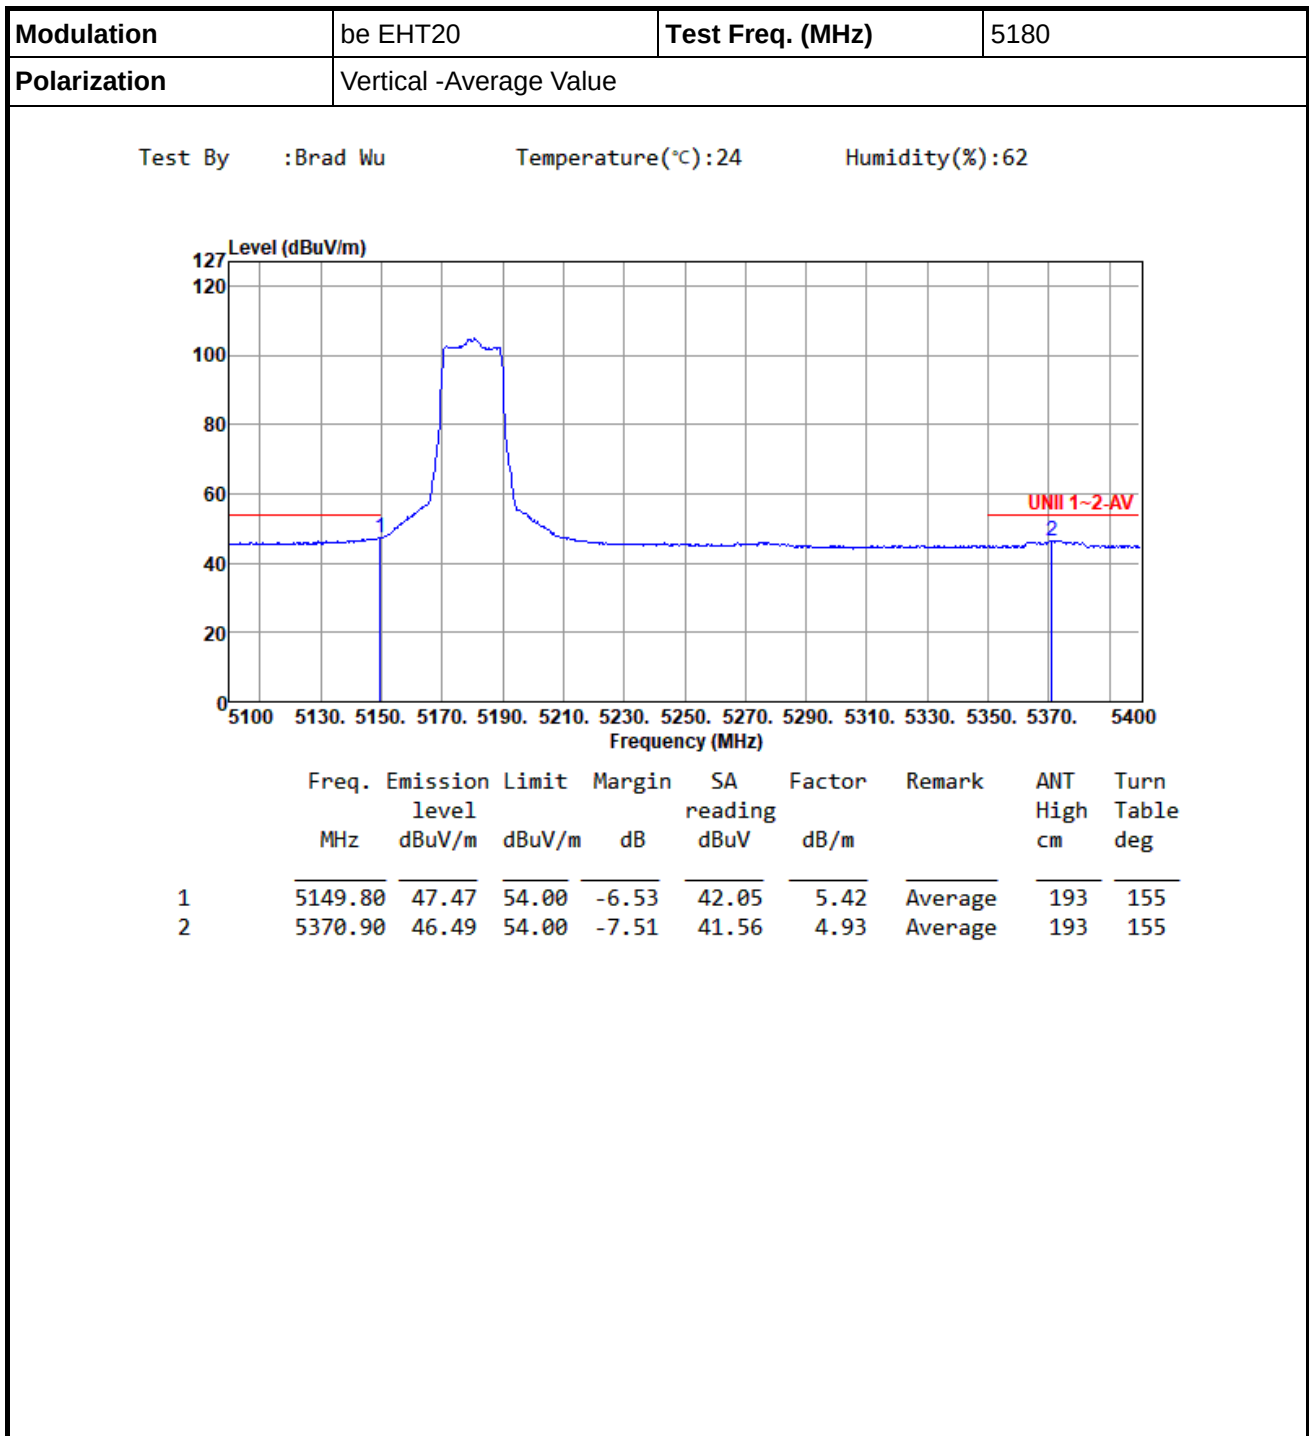


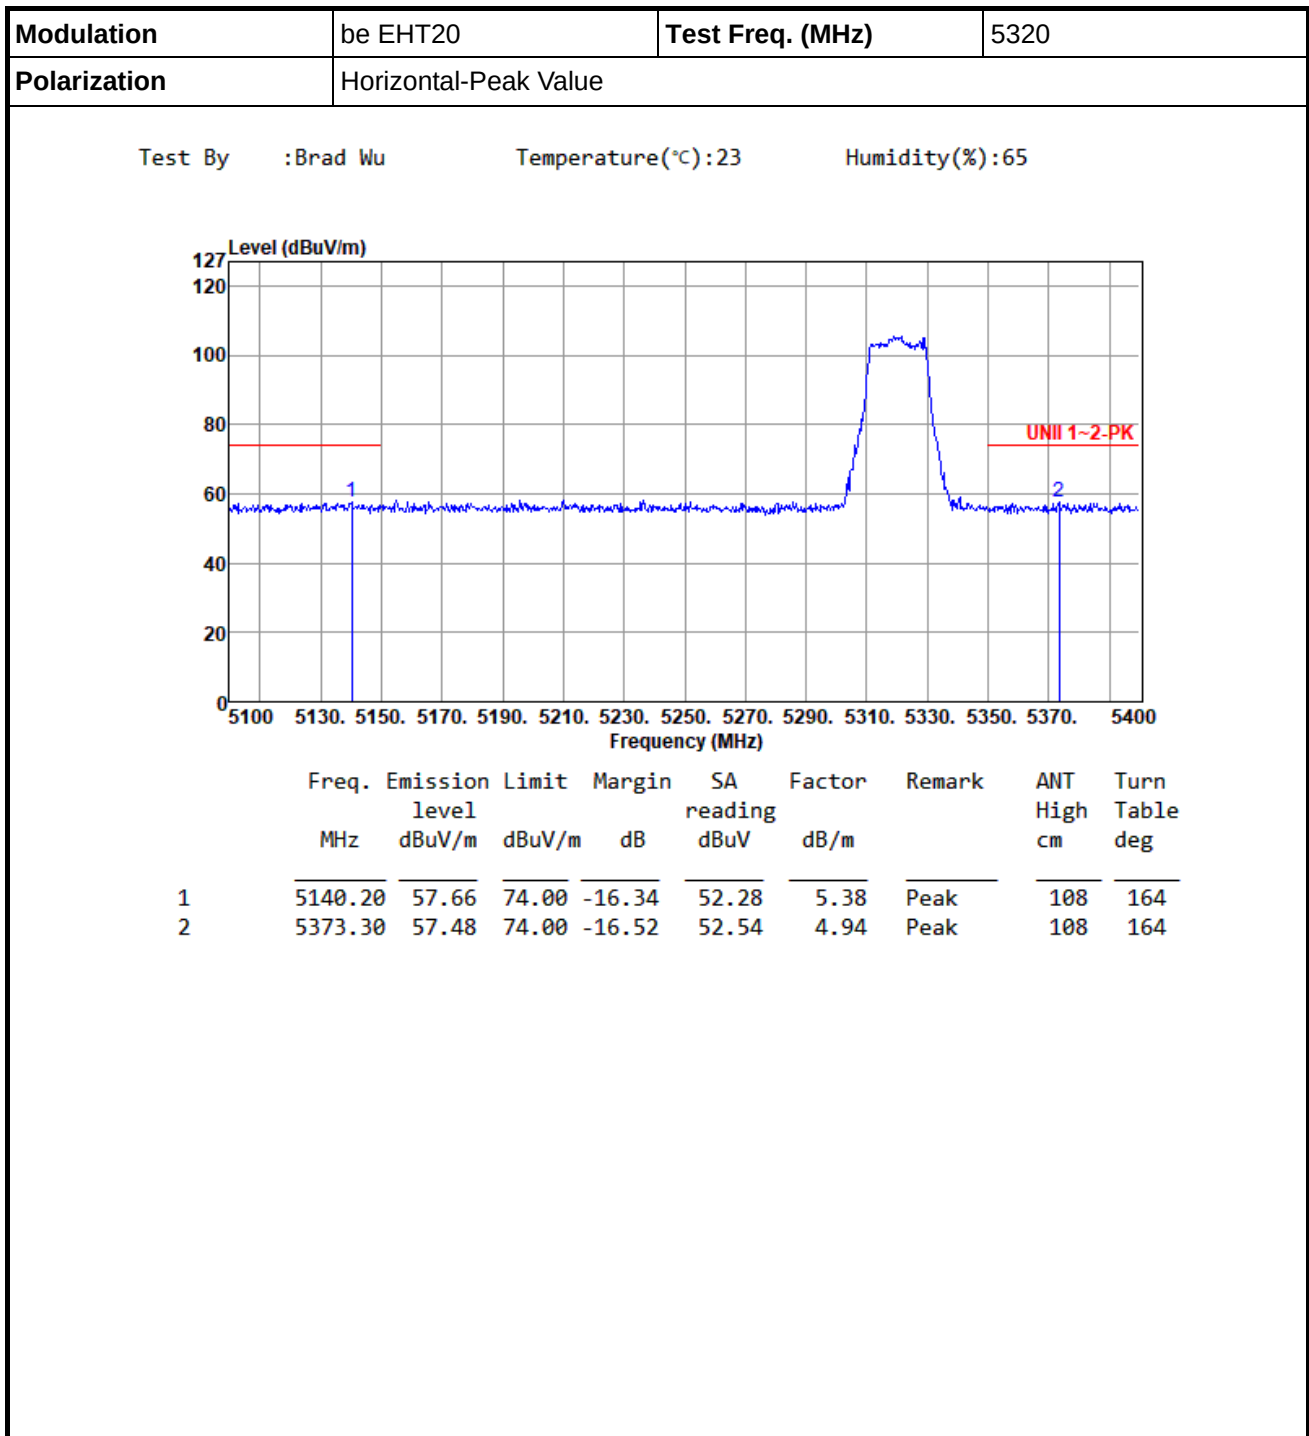


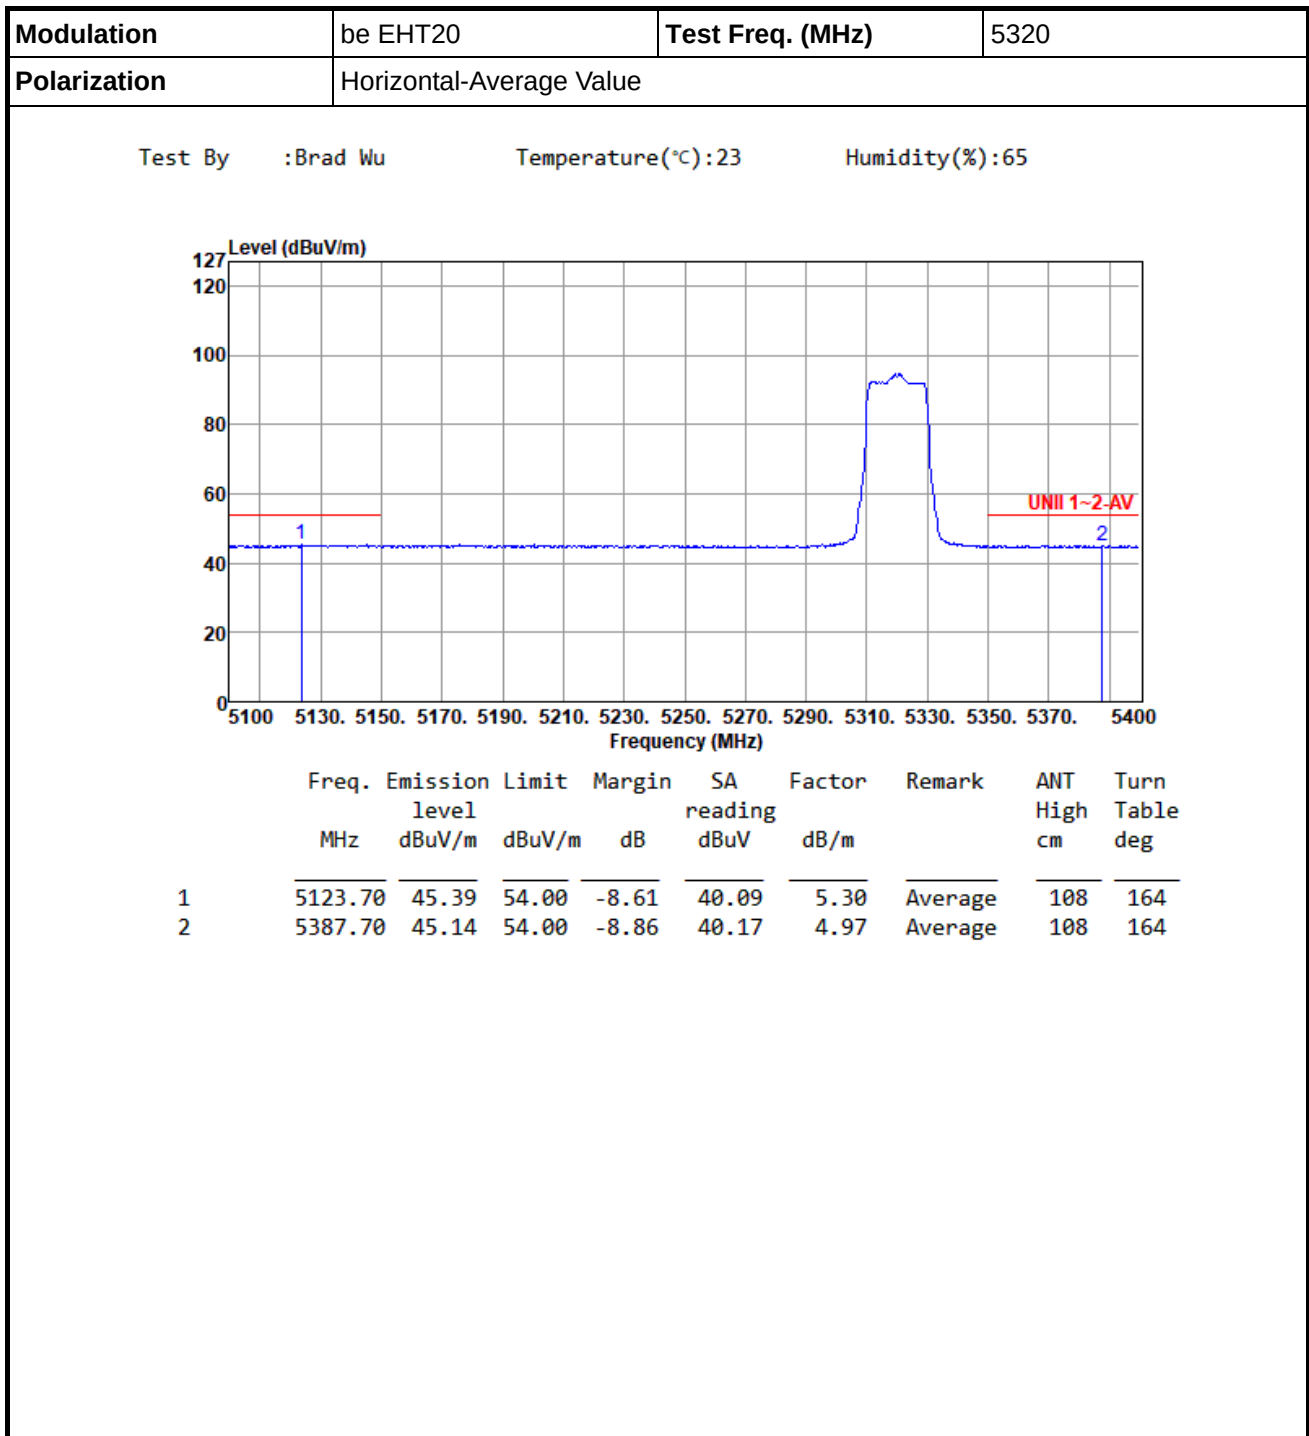


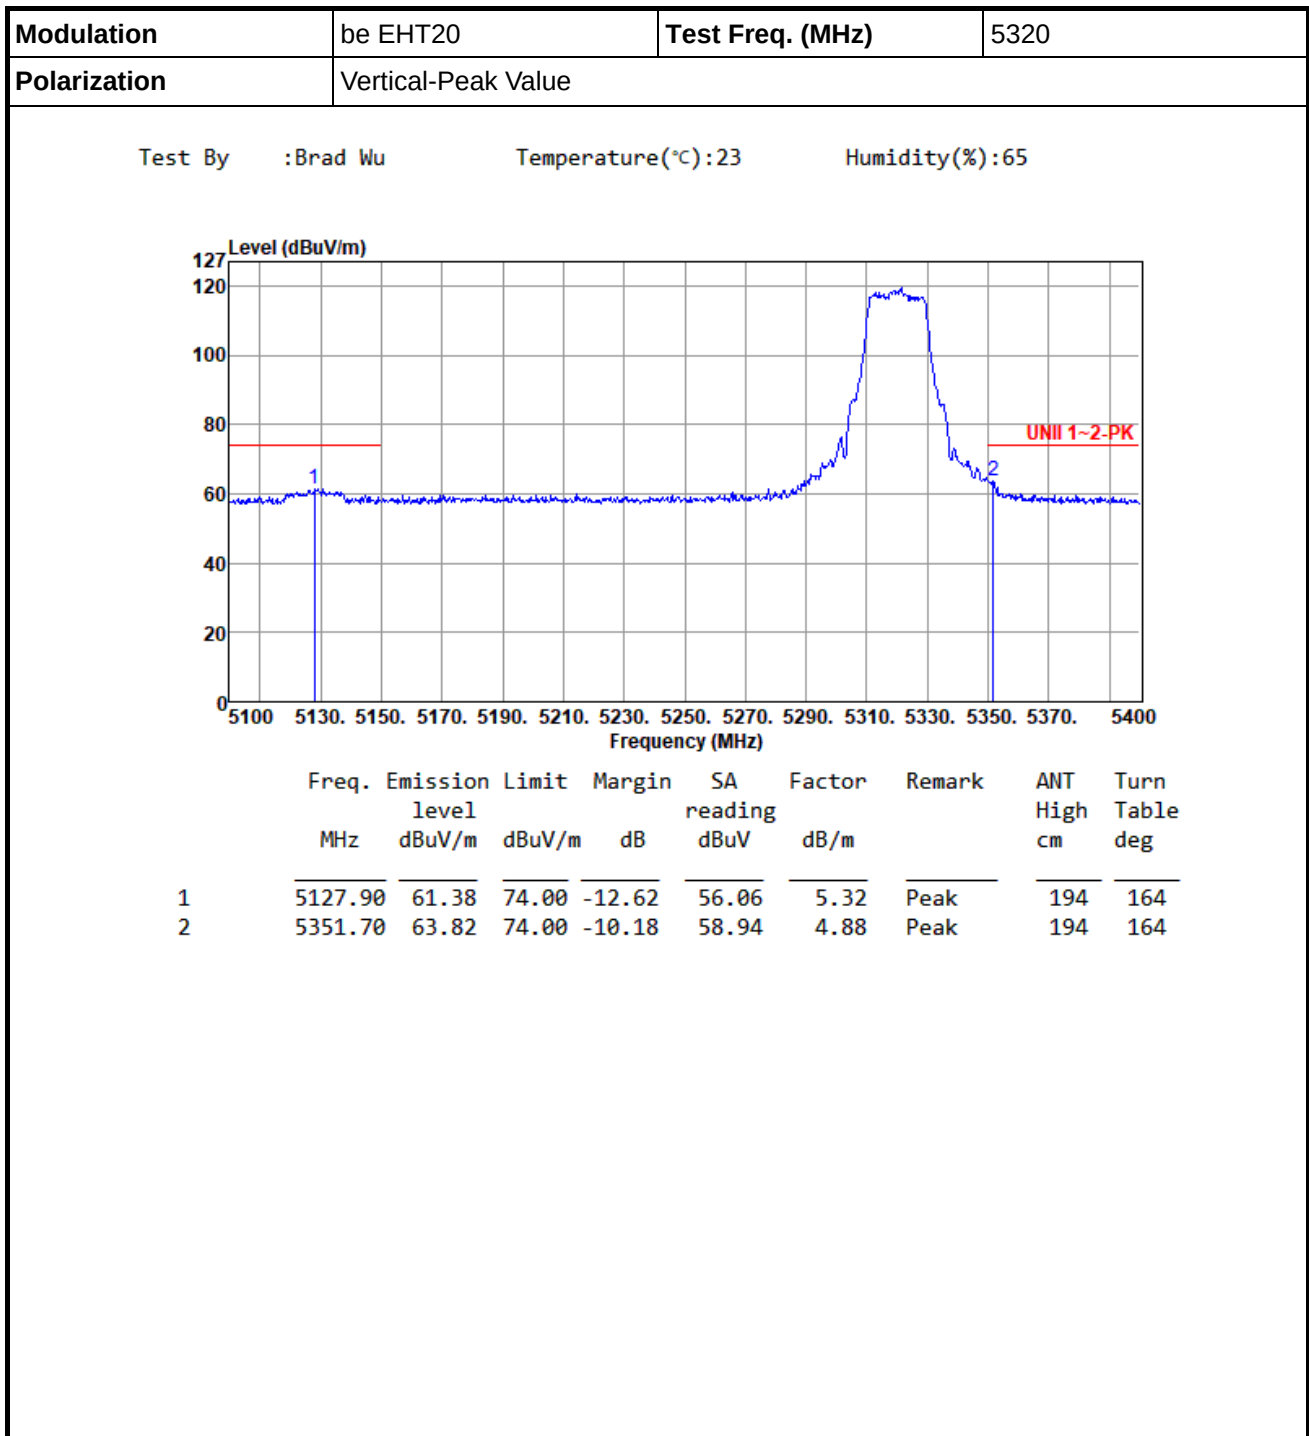


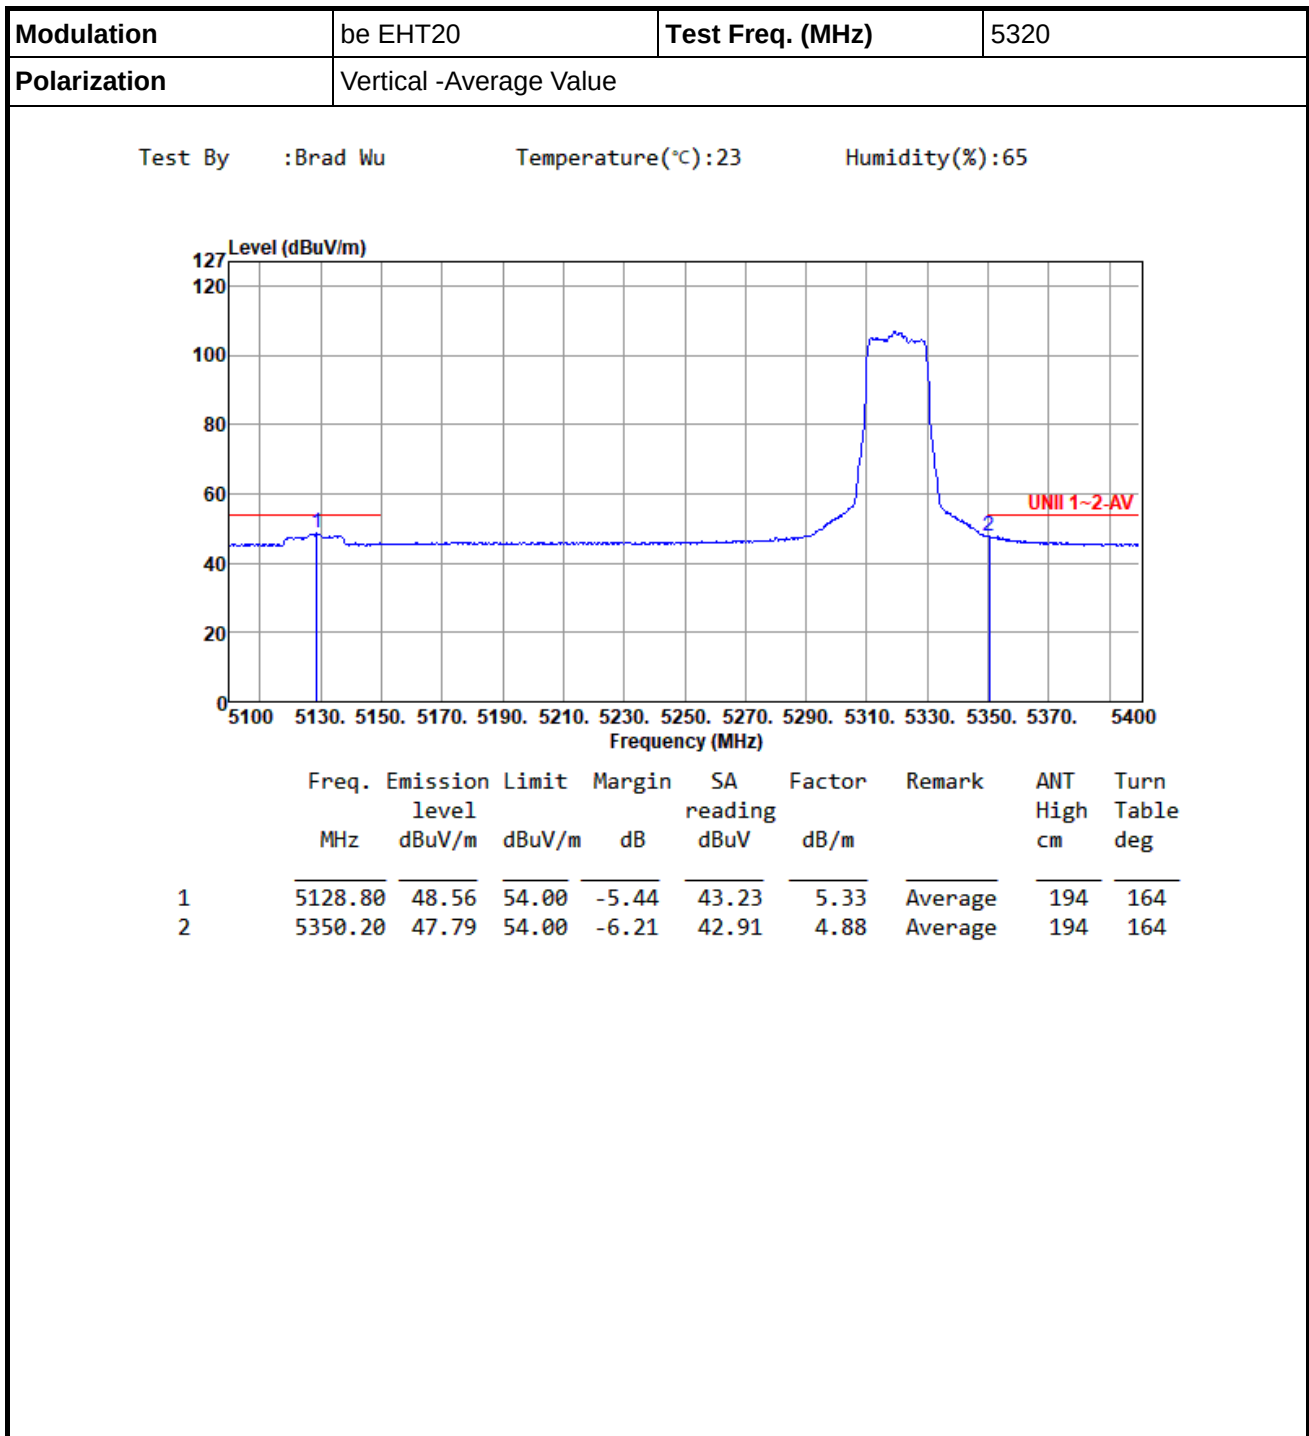


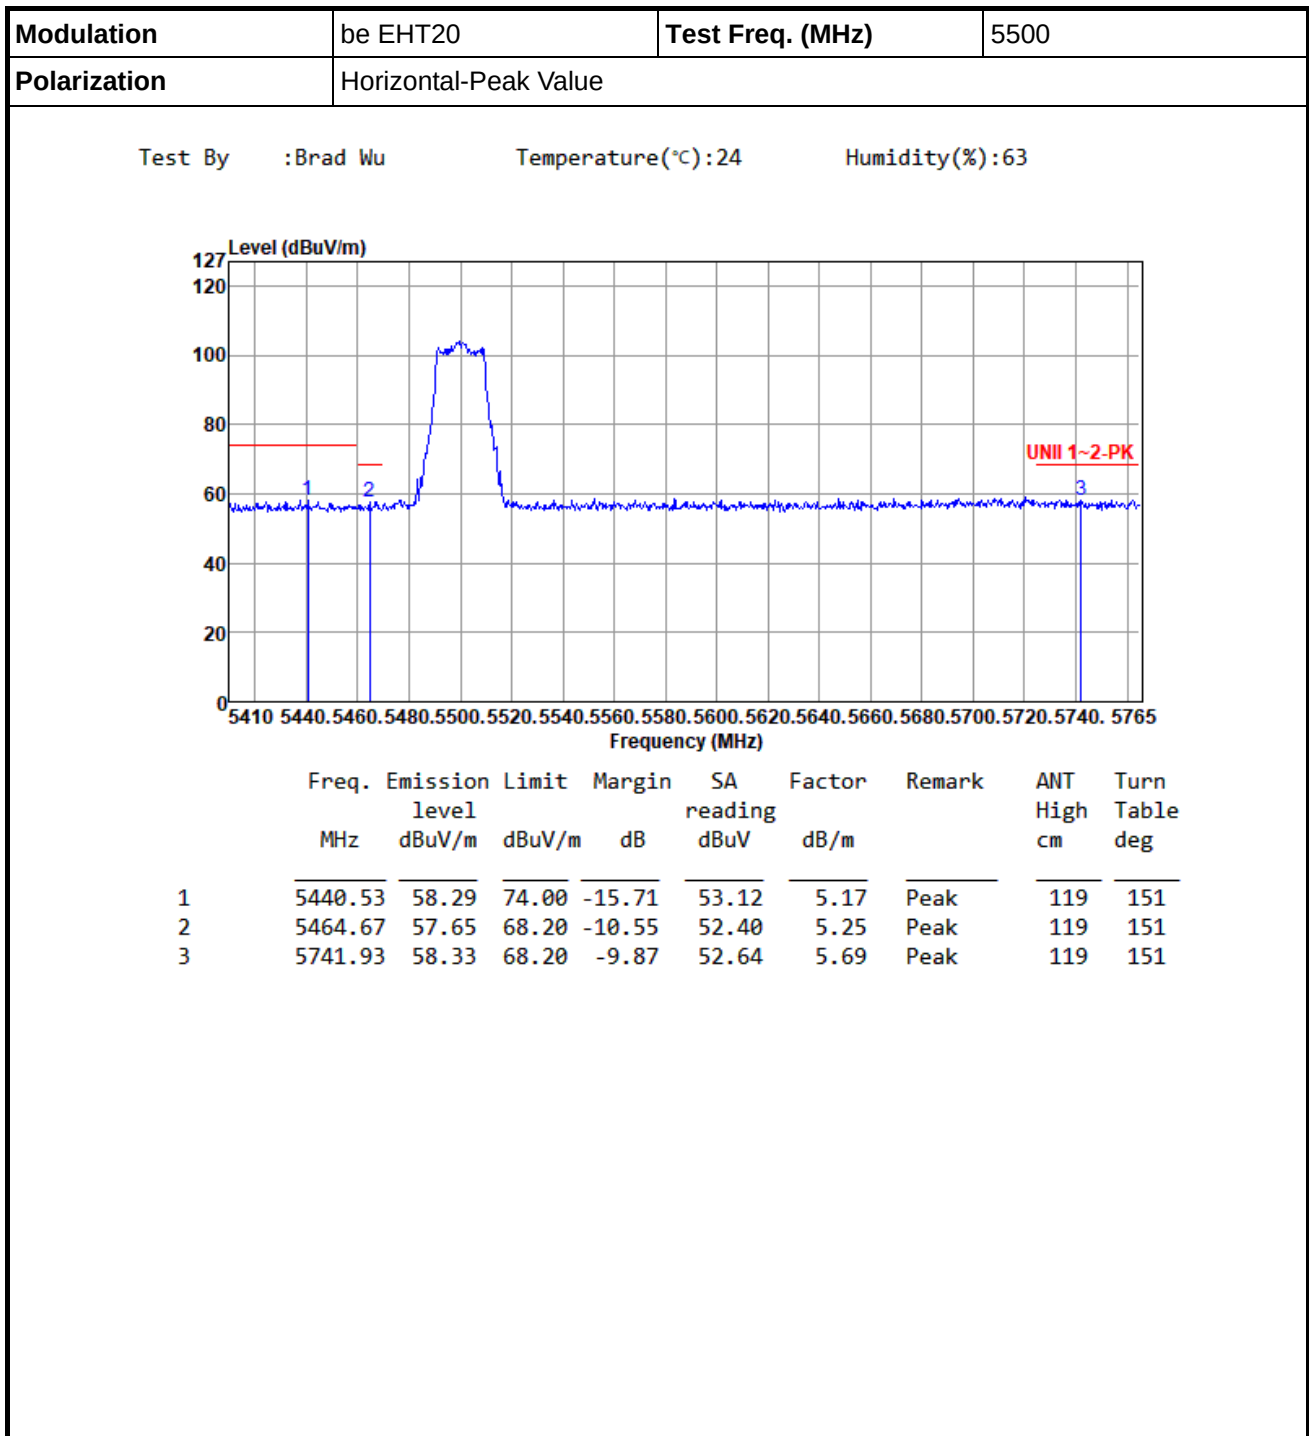


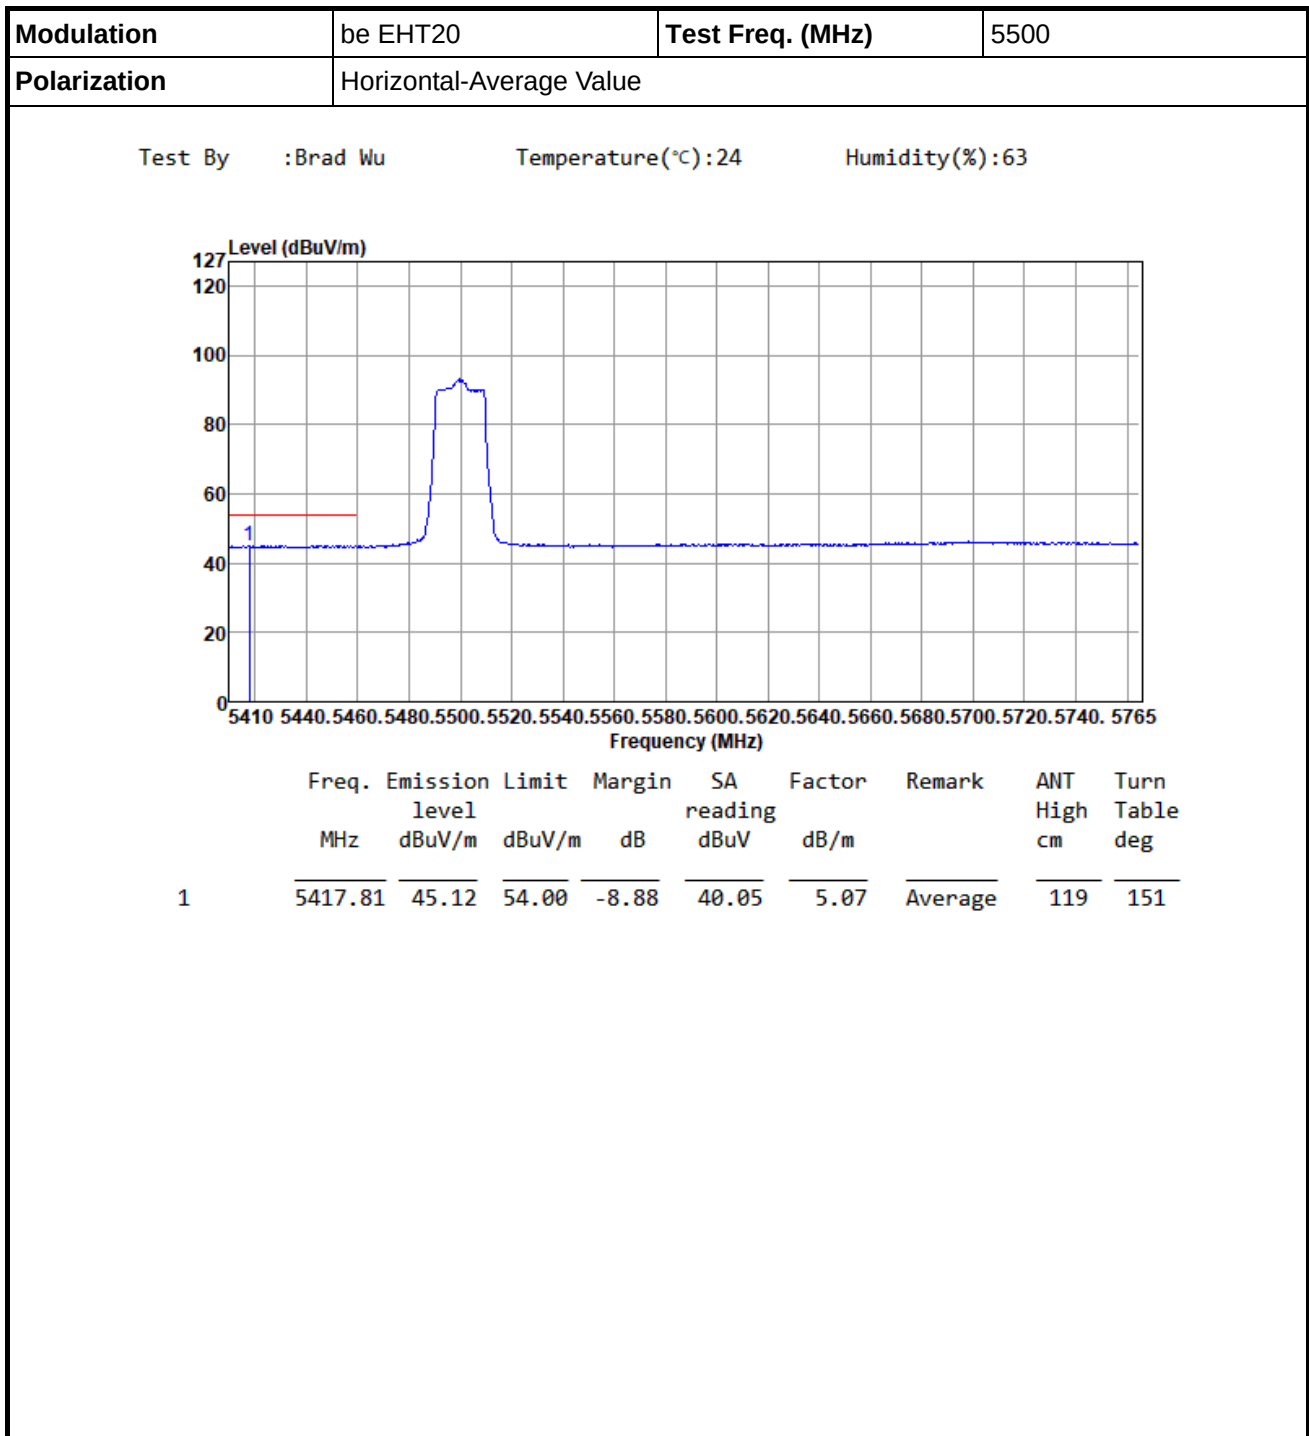

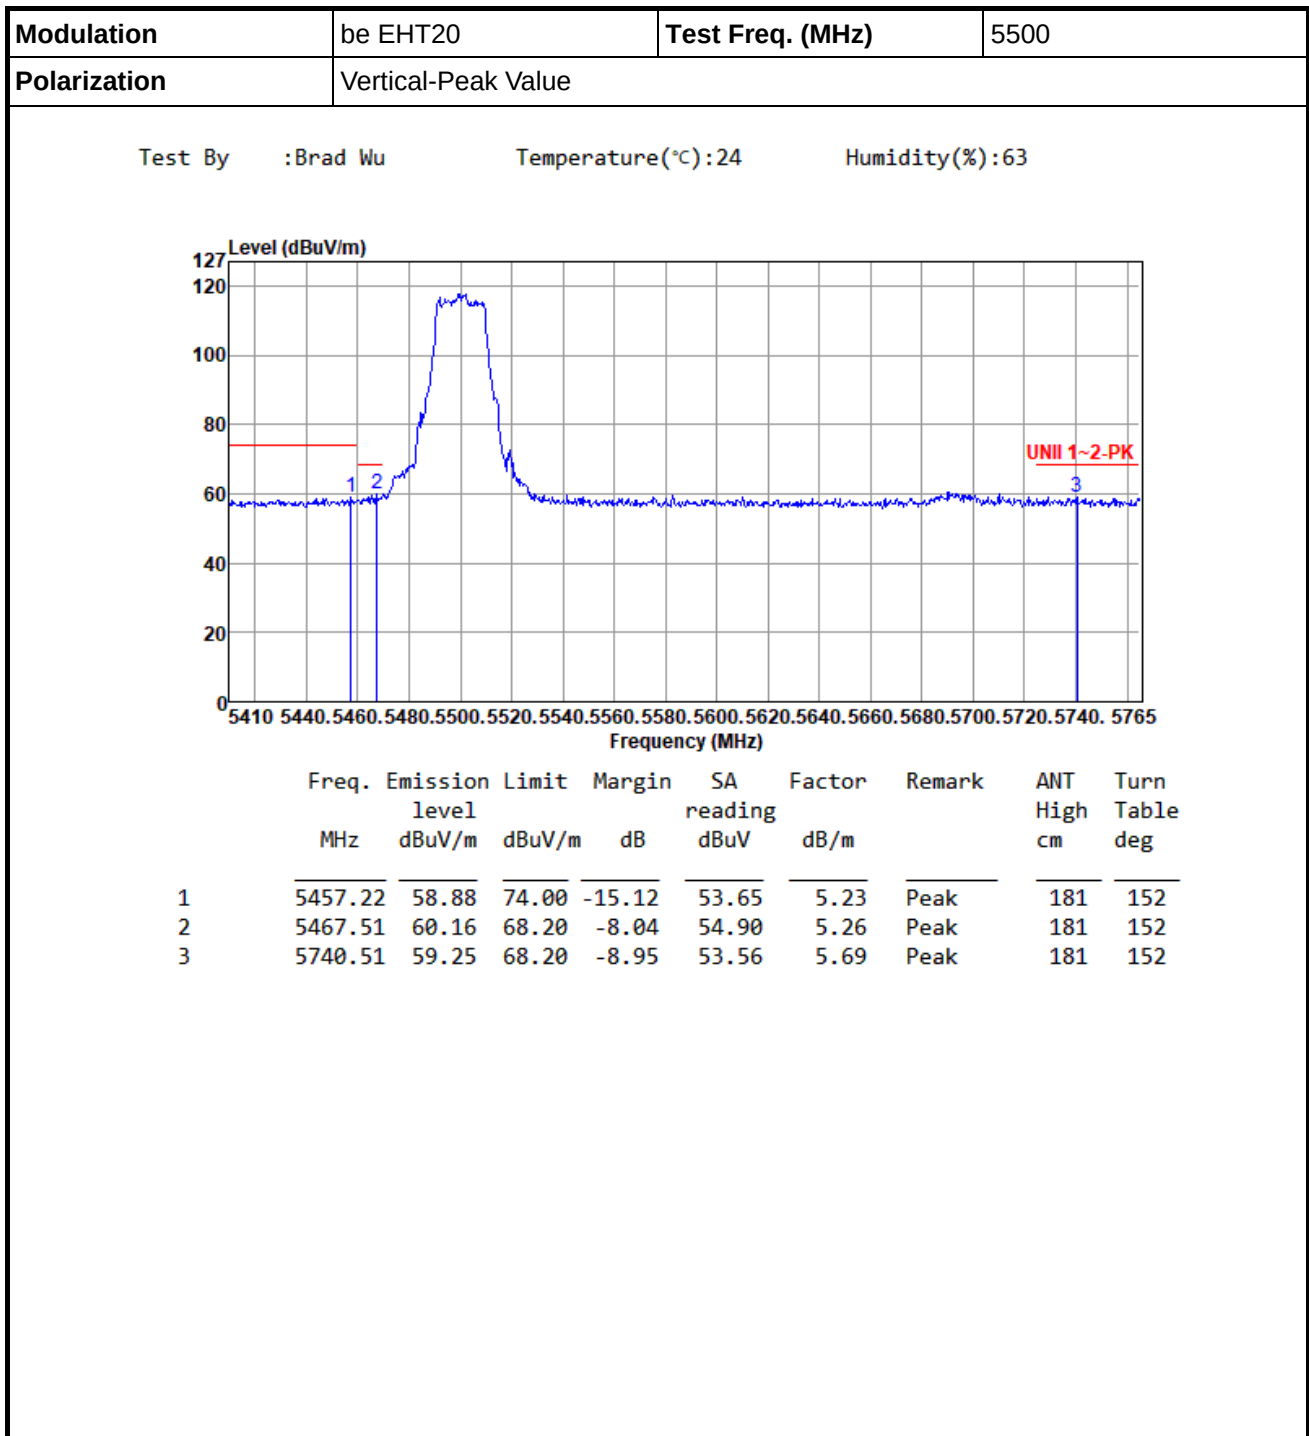

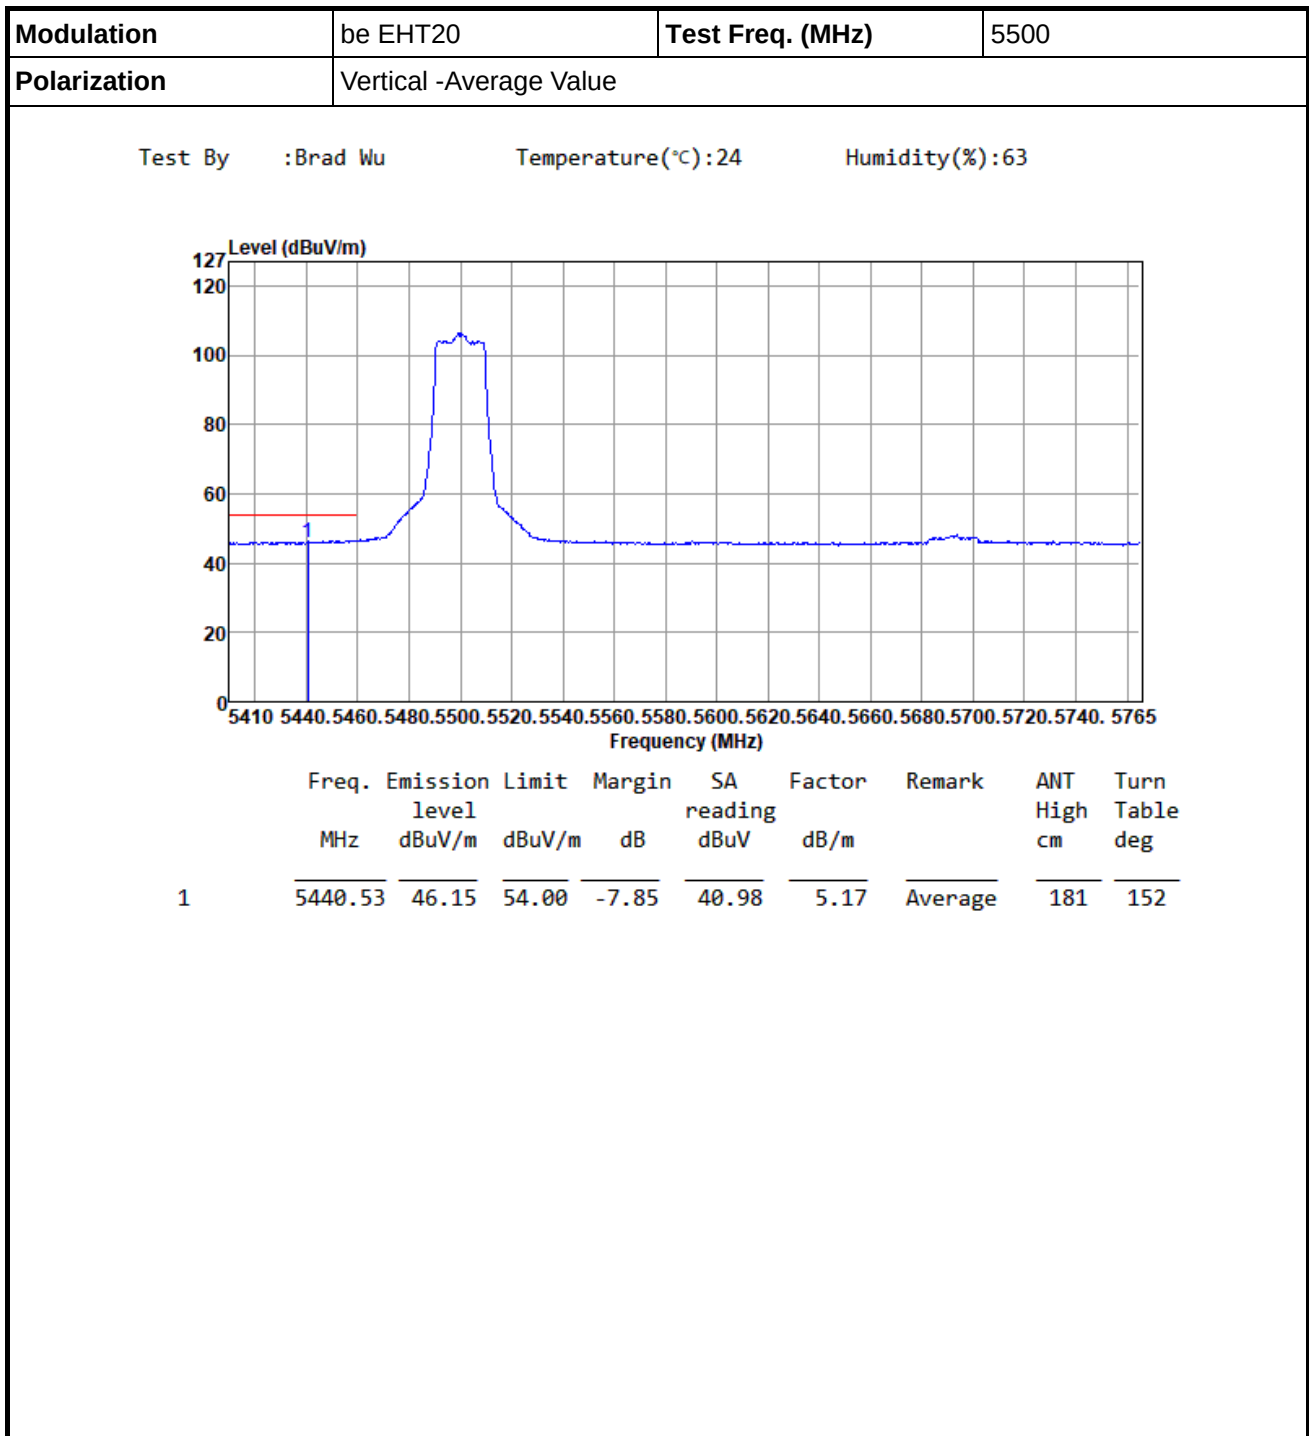

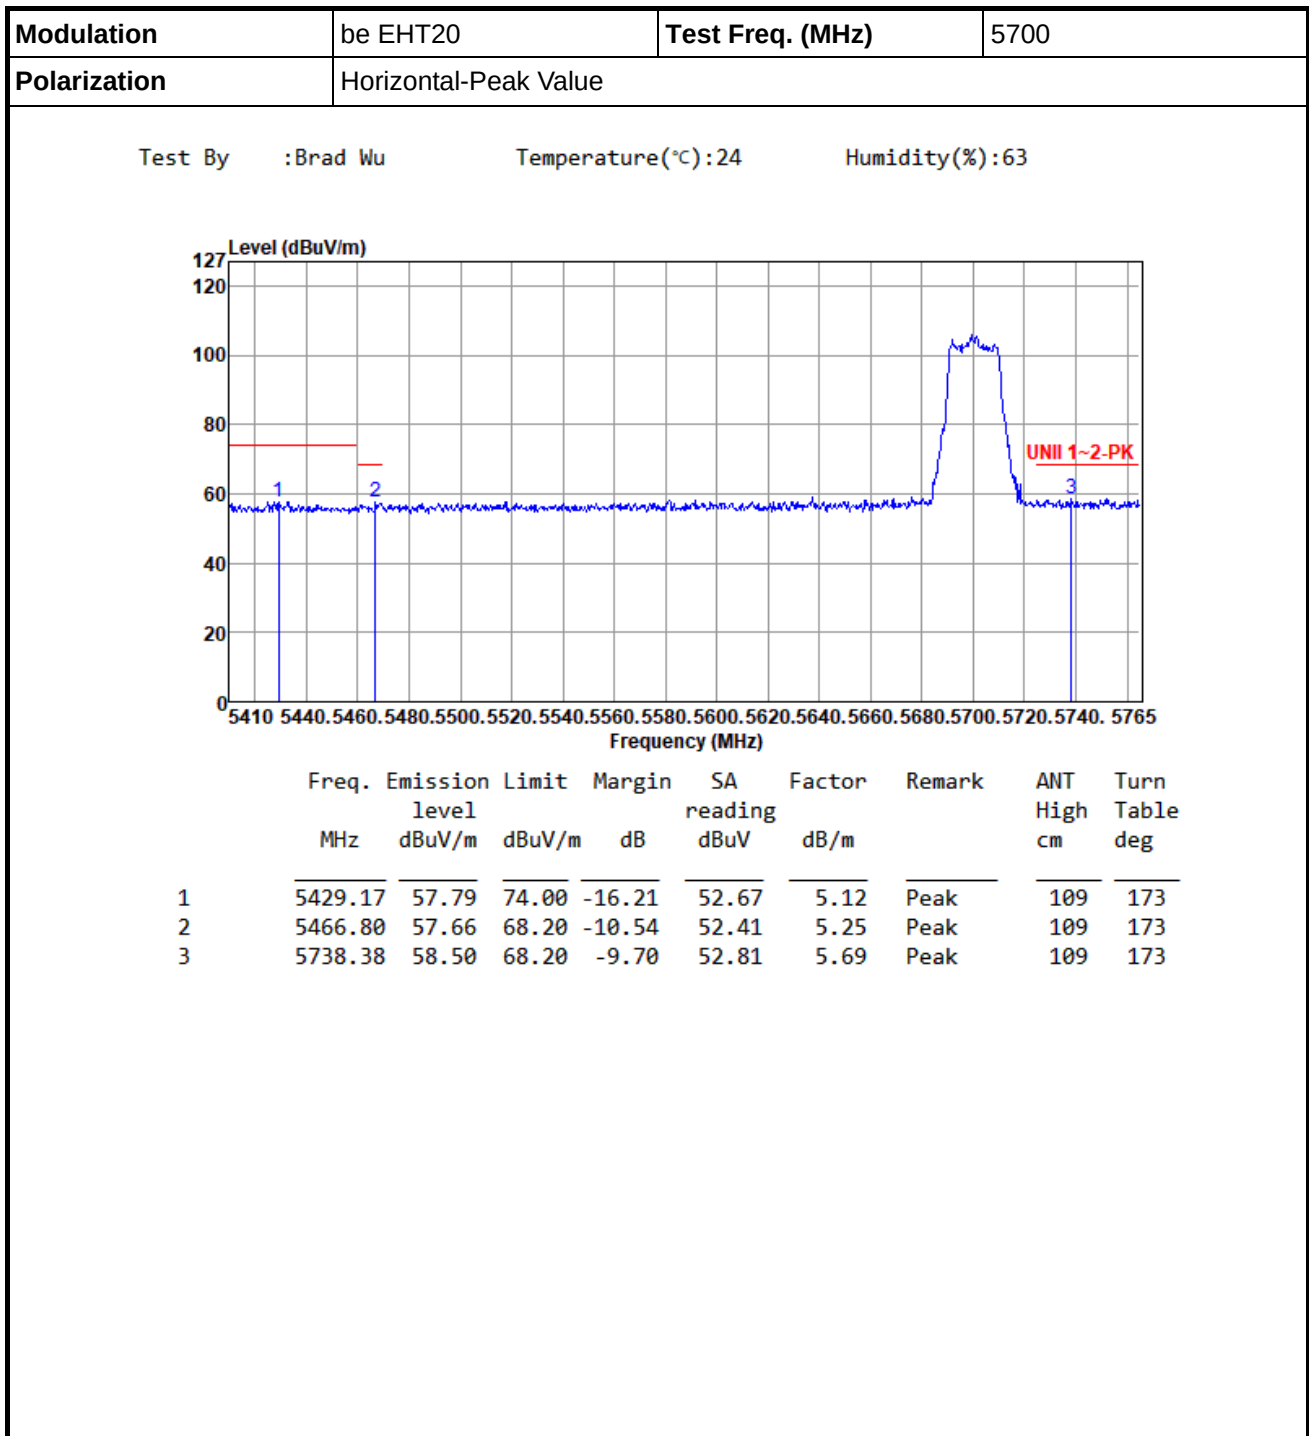


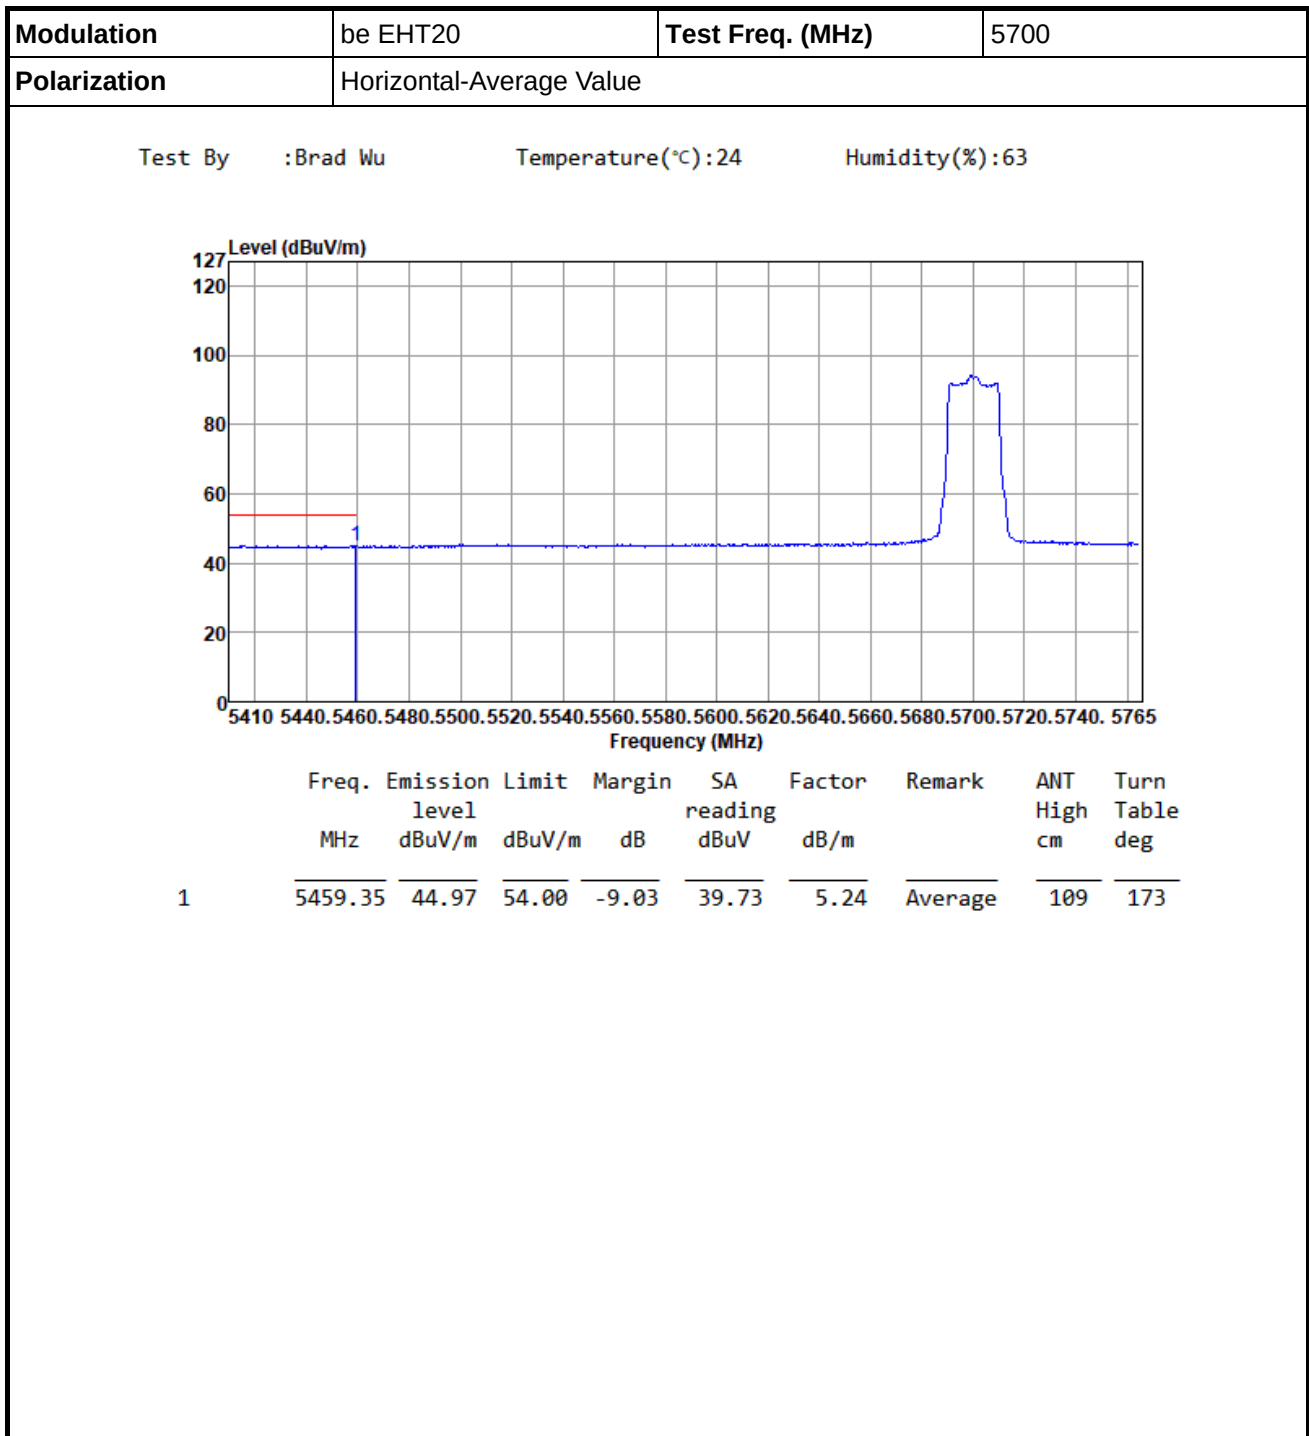






Band Edge measurement


Appendix D.9

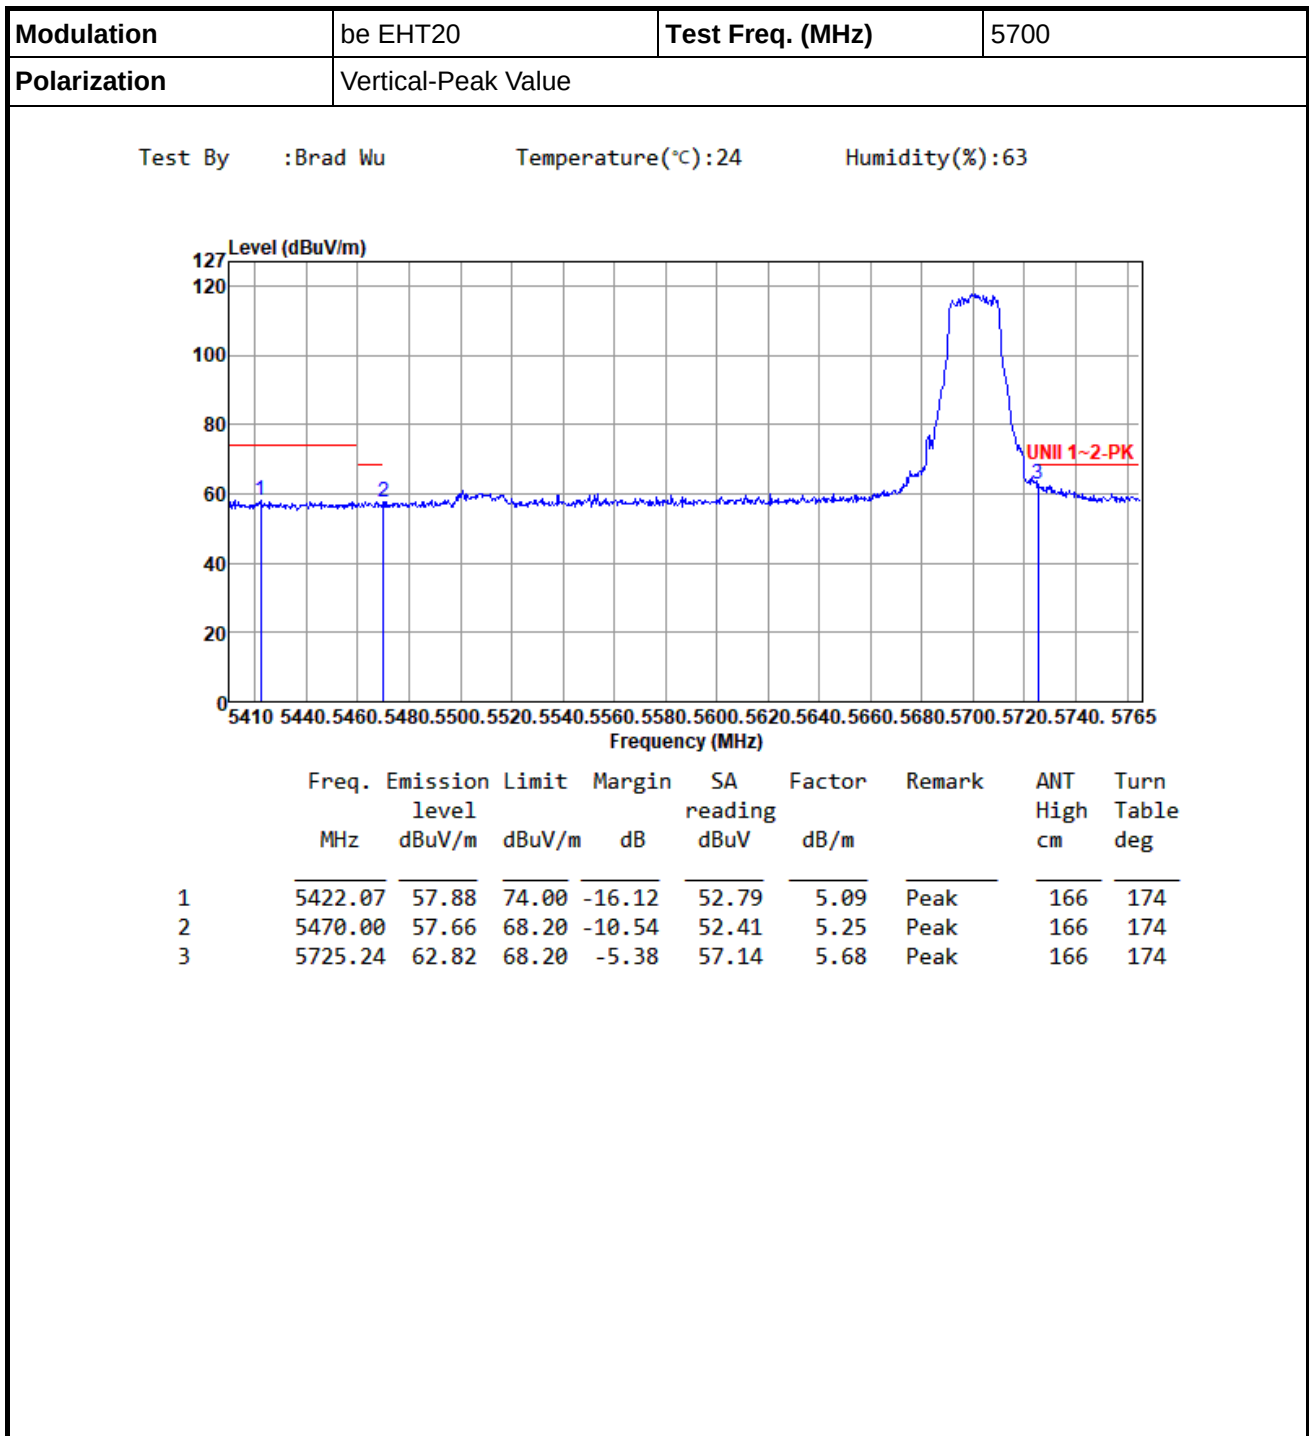


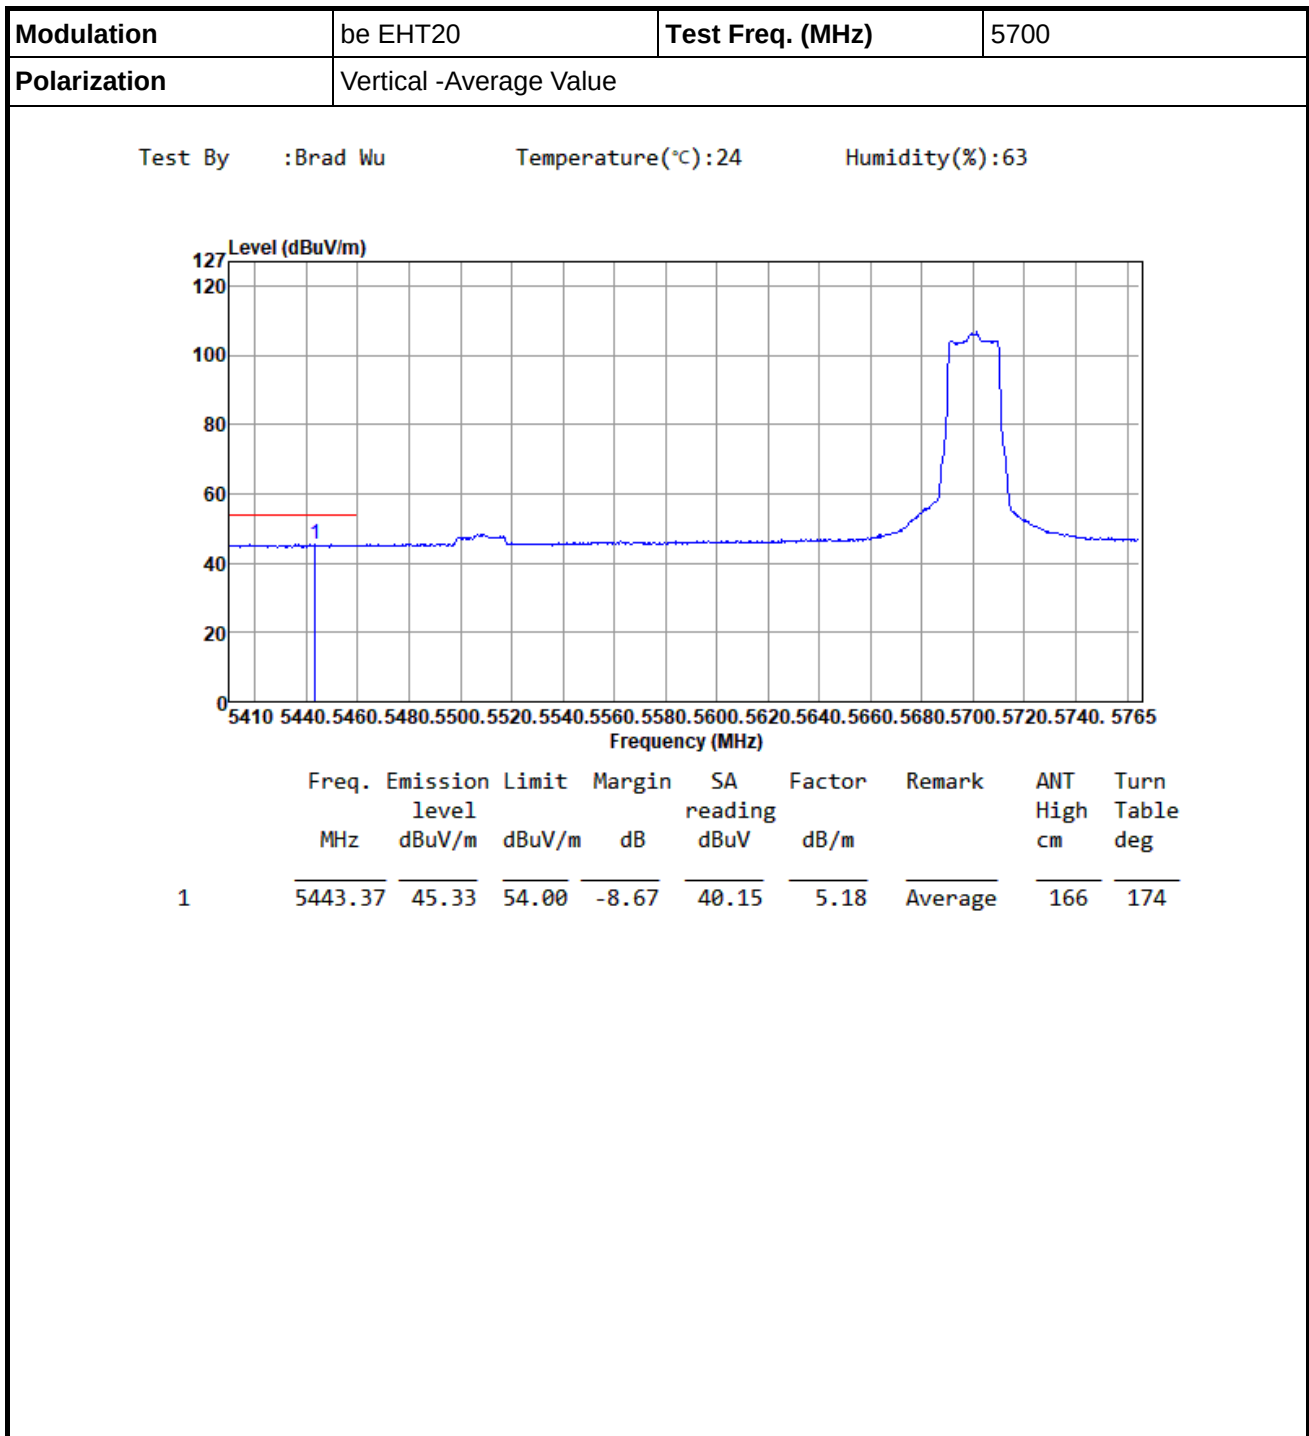

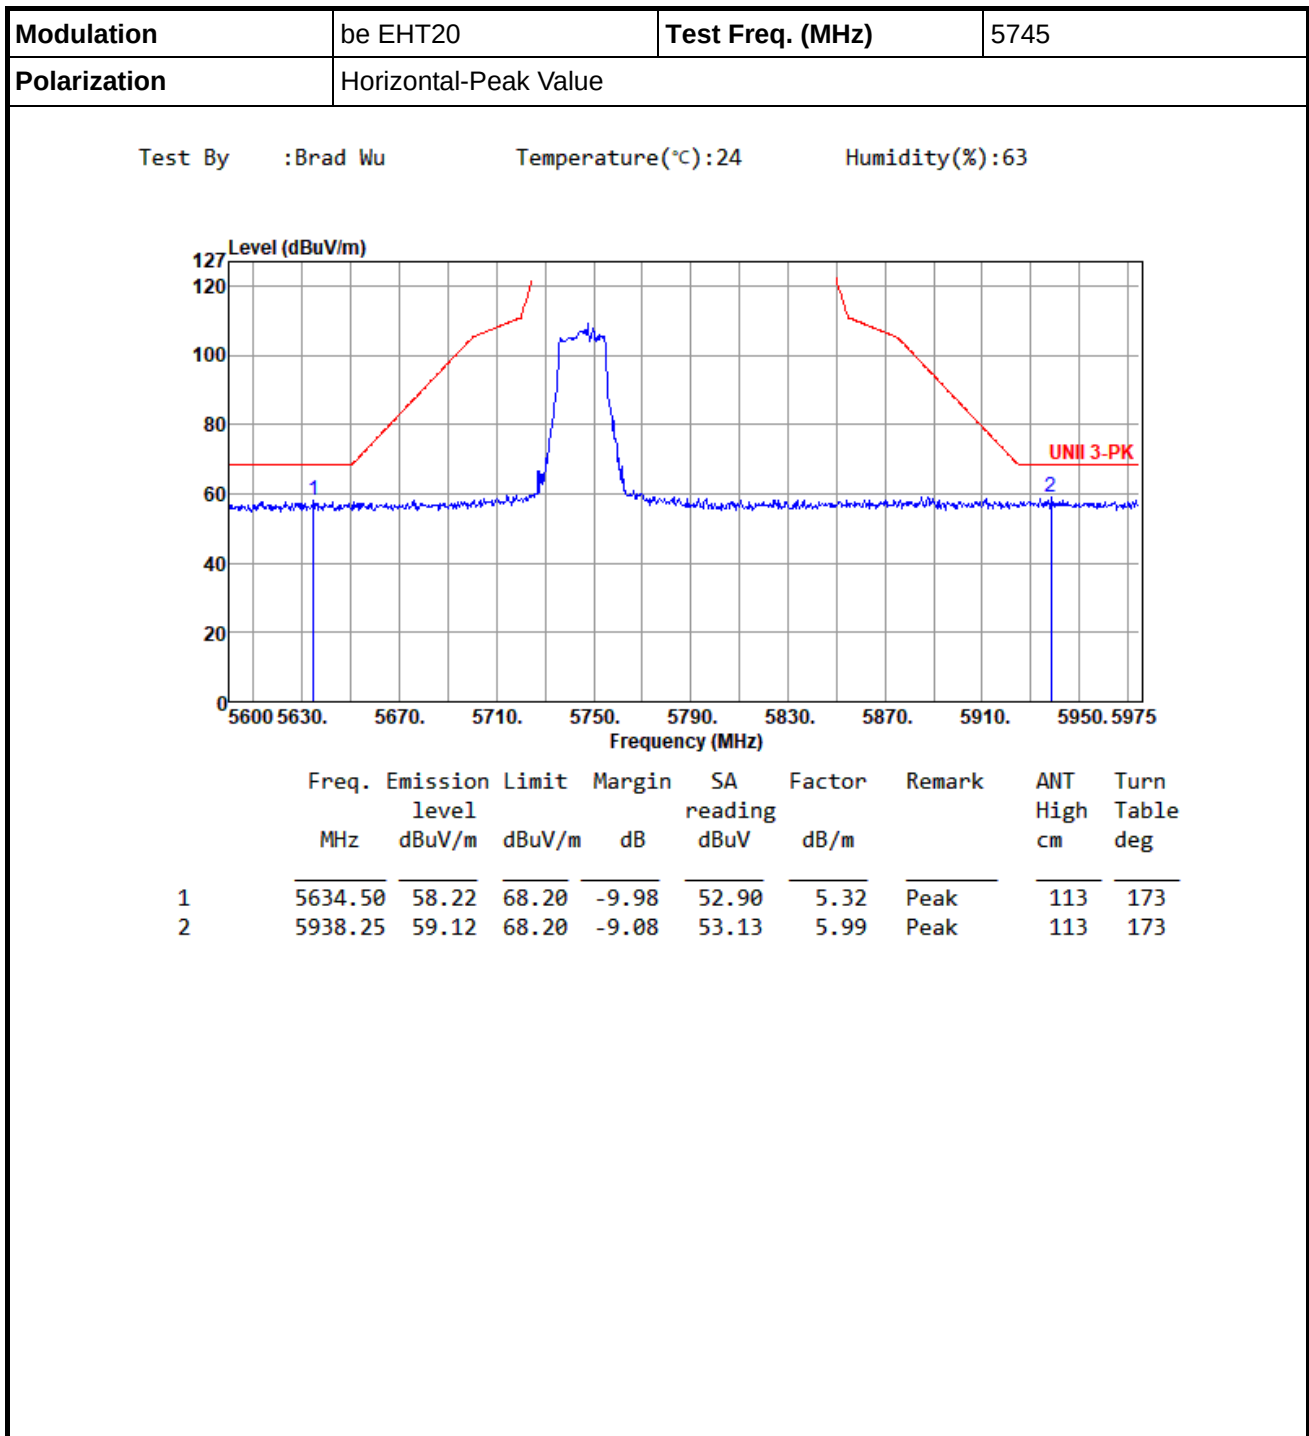

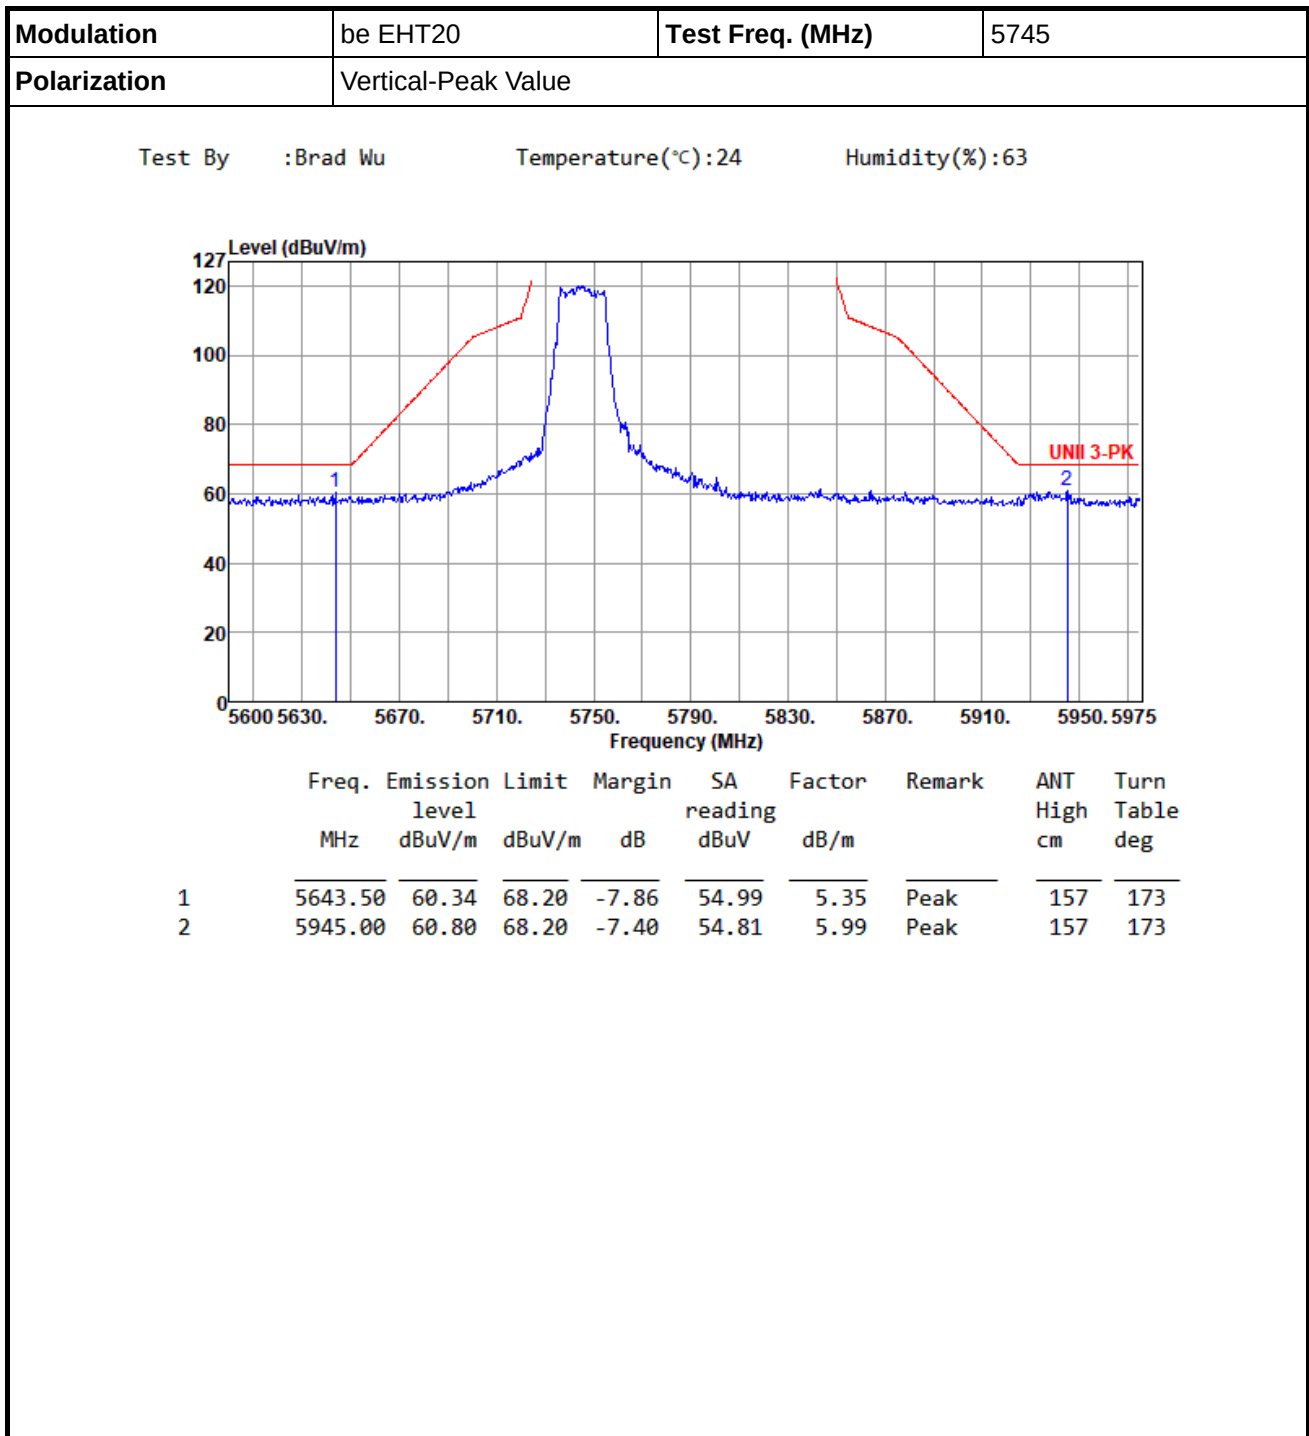


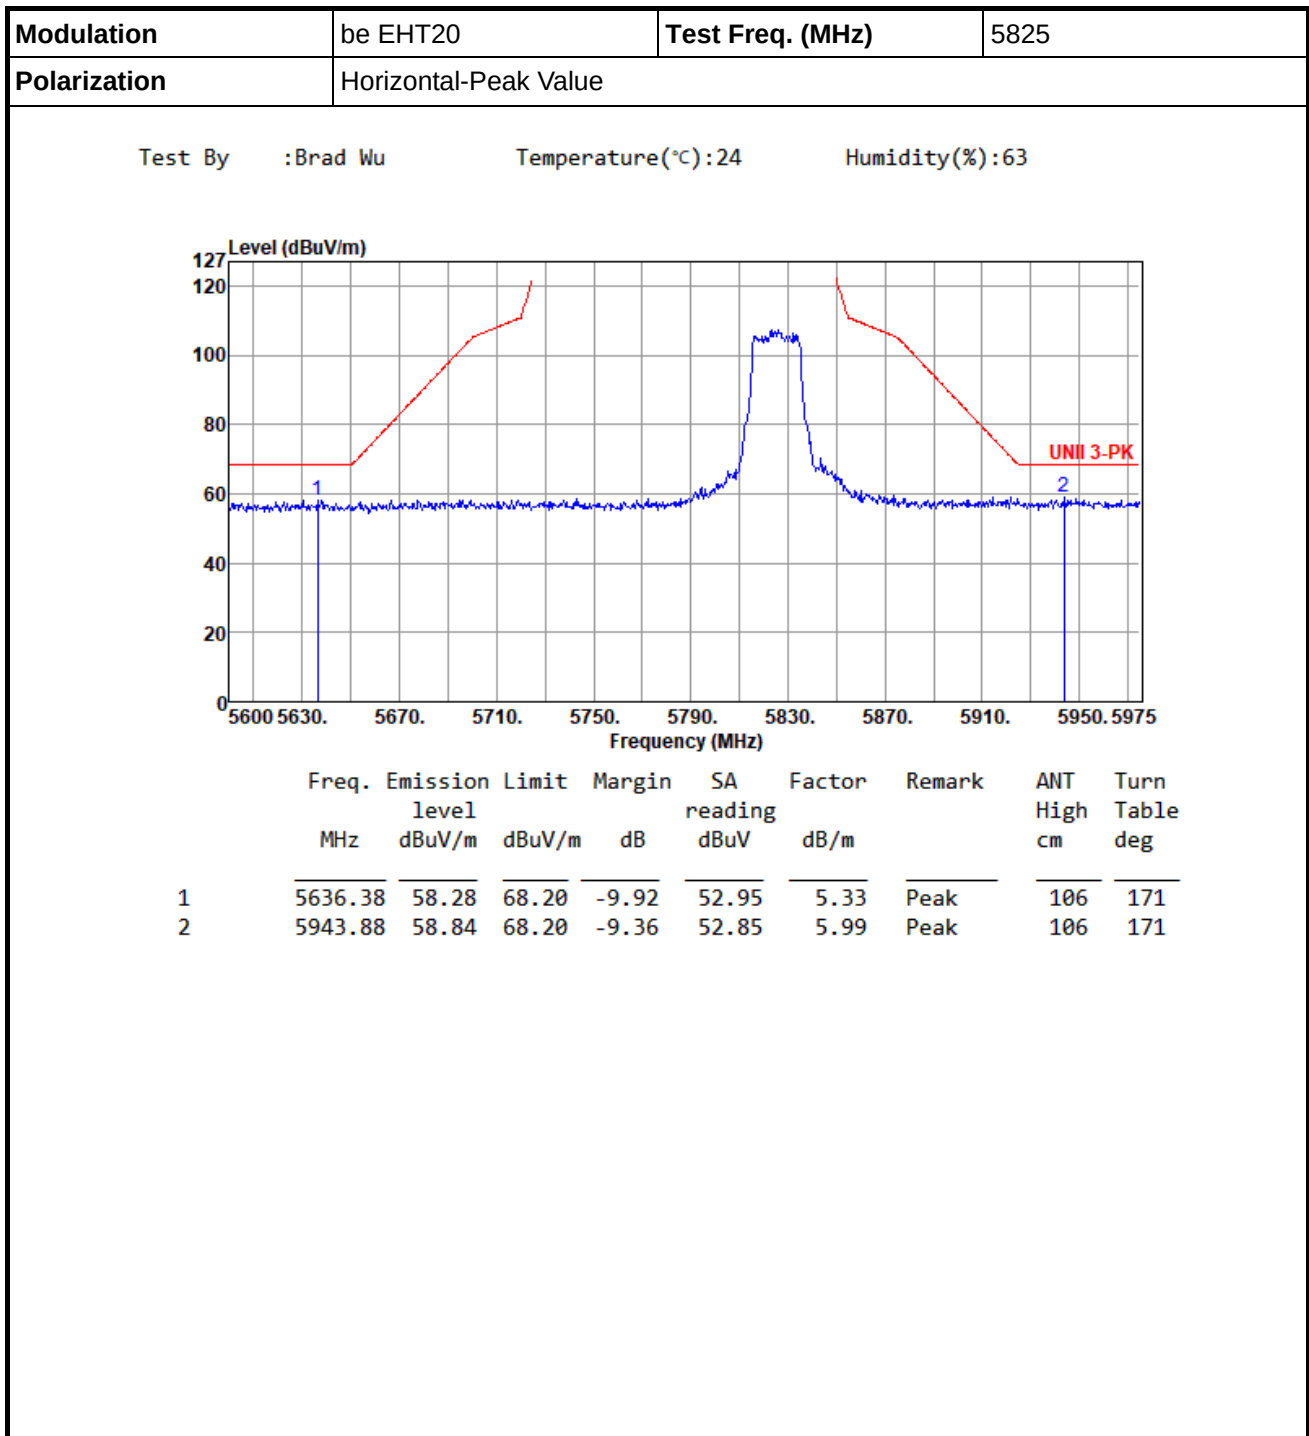


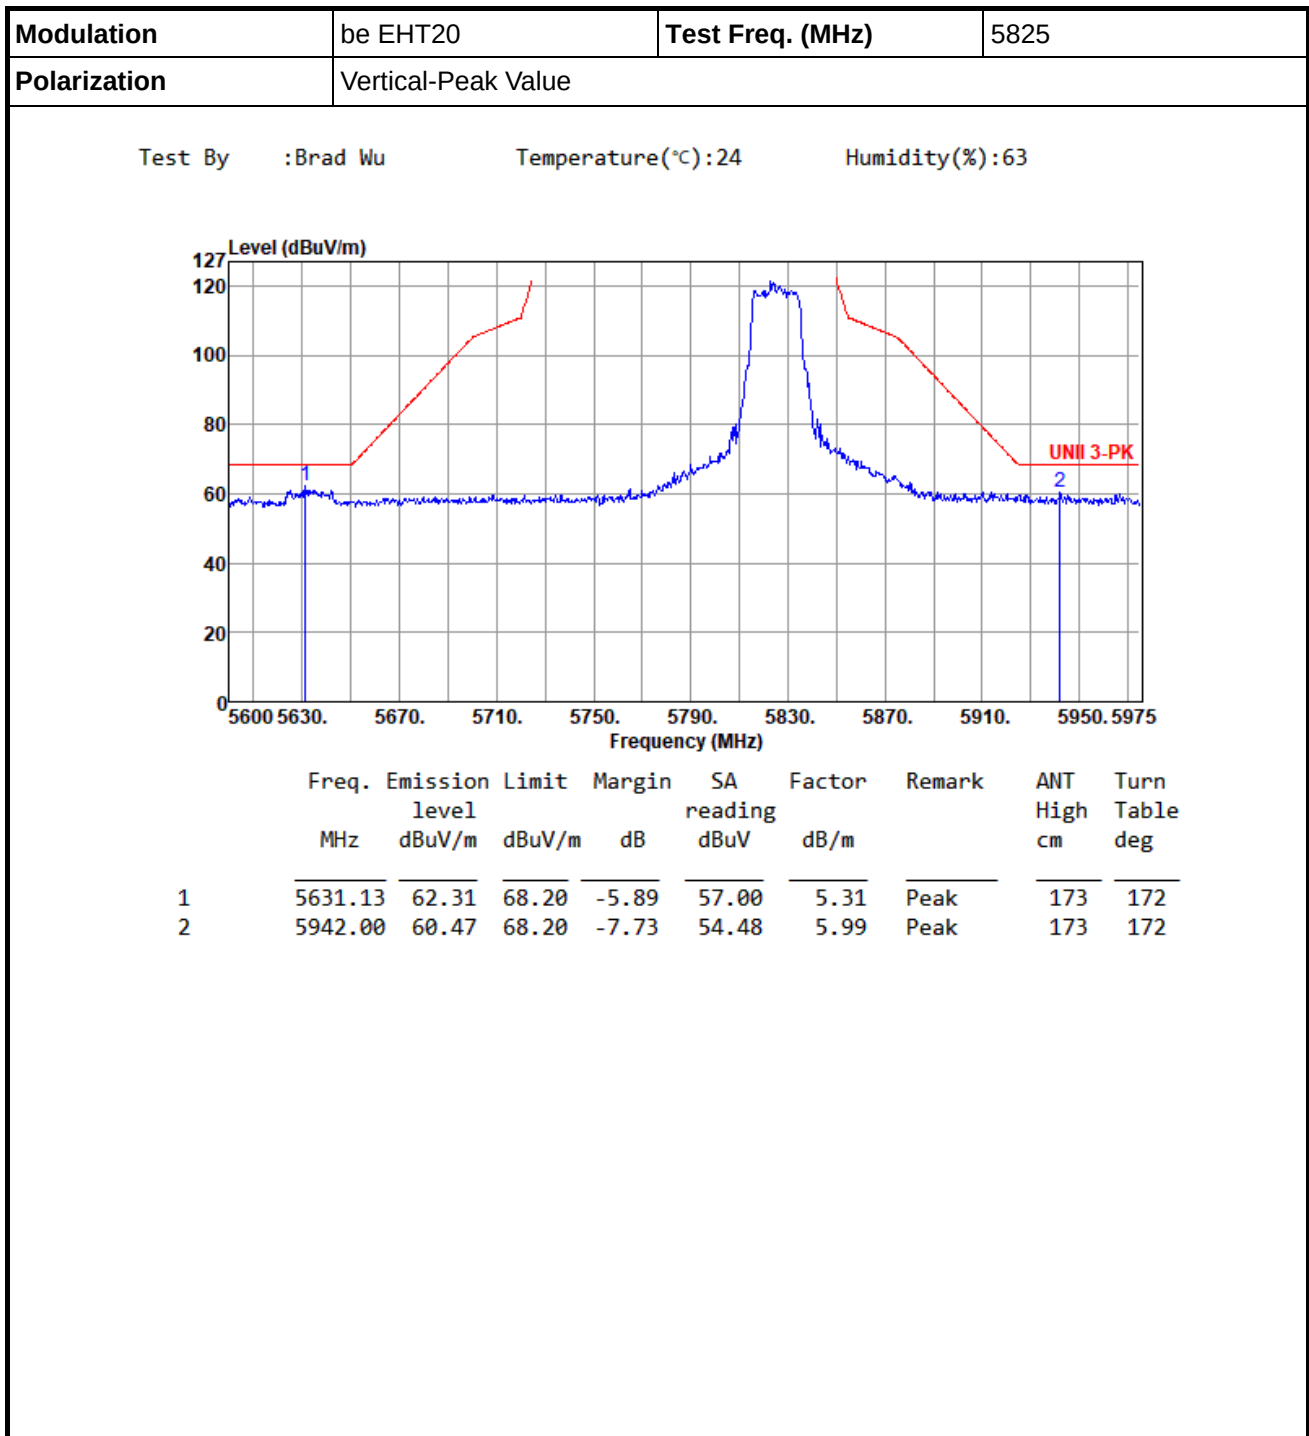






Modulation	be EHT40	Test Freq. (MHz)	5190
Polarization	Horizontal-Peak Value		
Test By :Brad Wu Temperature(°C):23 Humidity(%):65			
Level (dBUV/m) <			

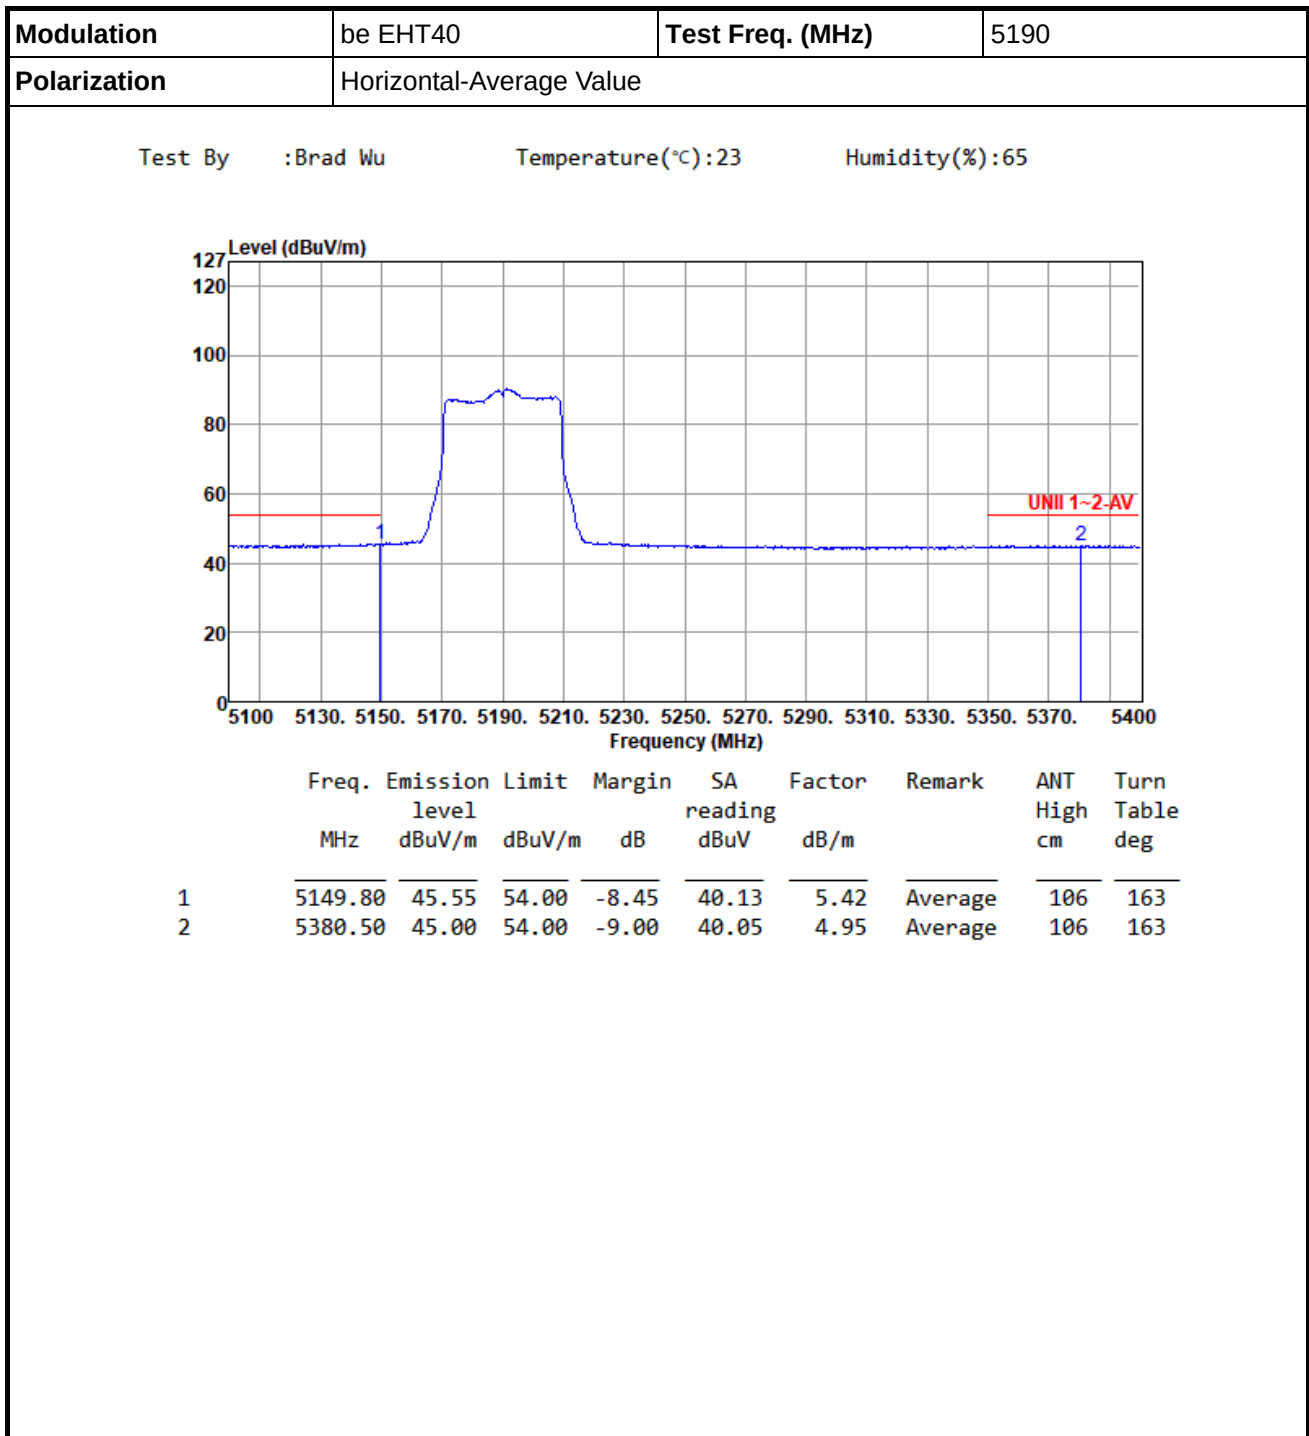


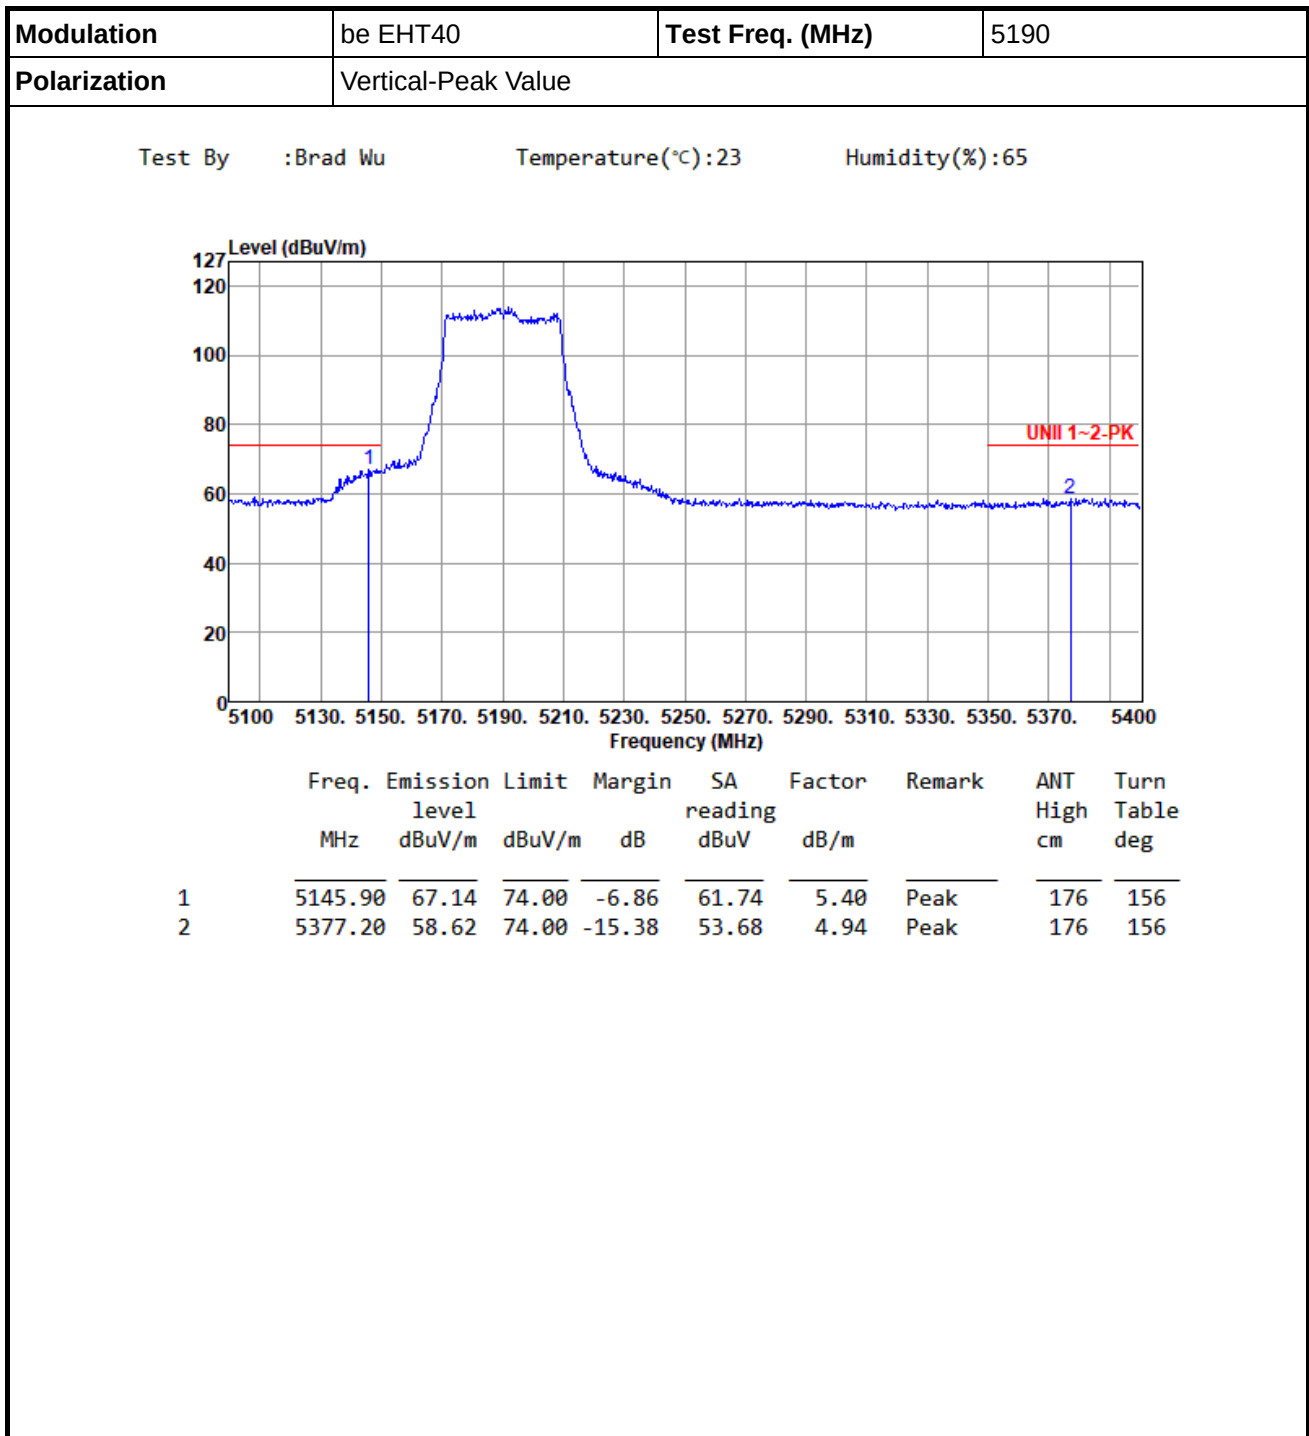


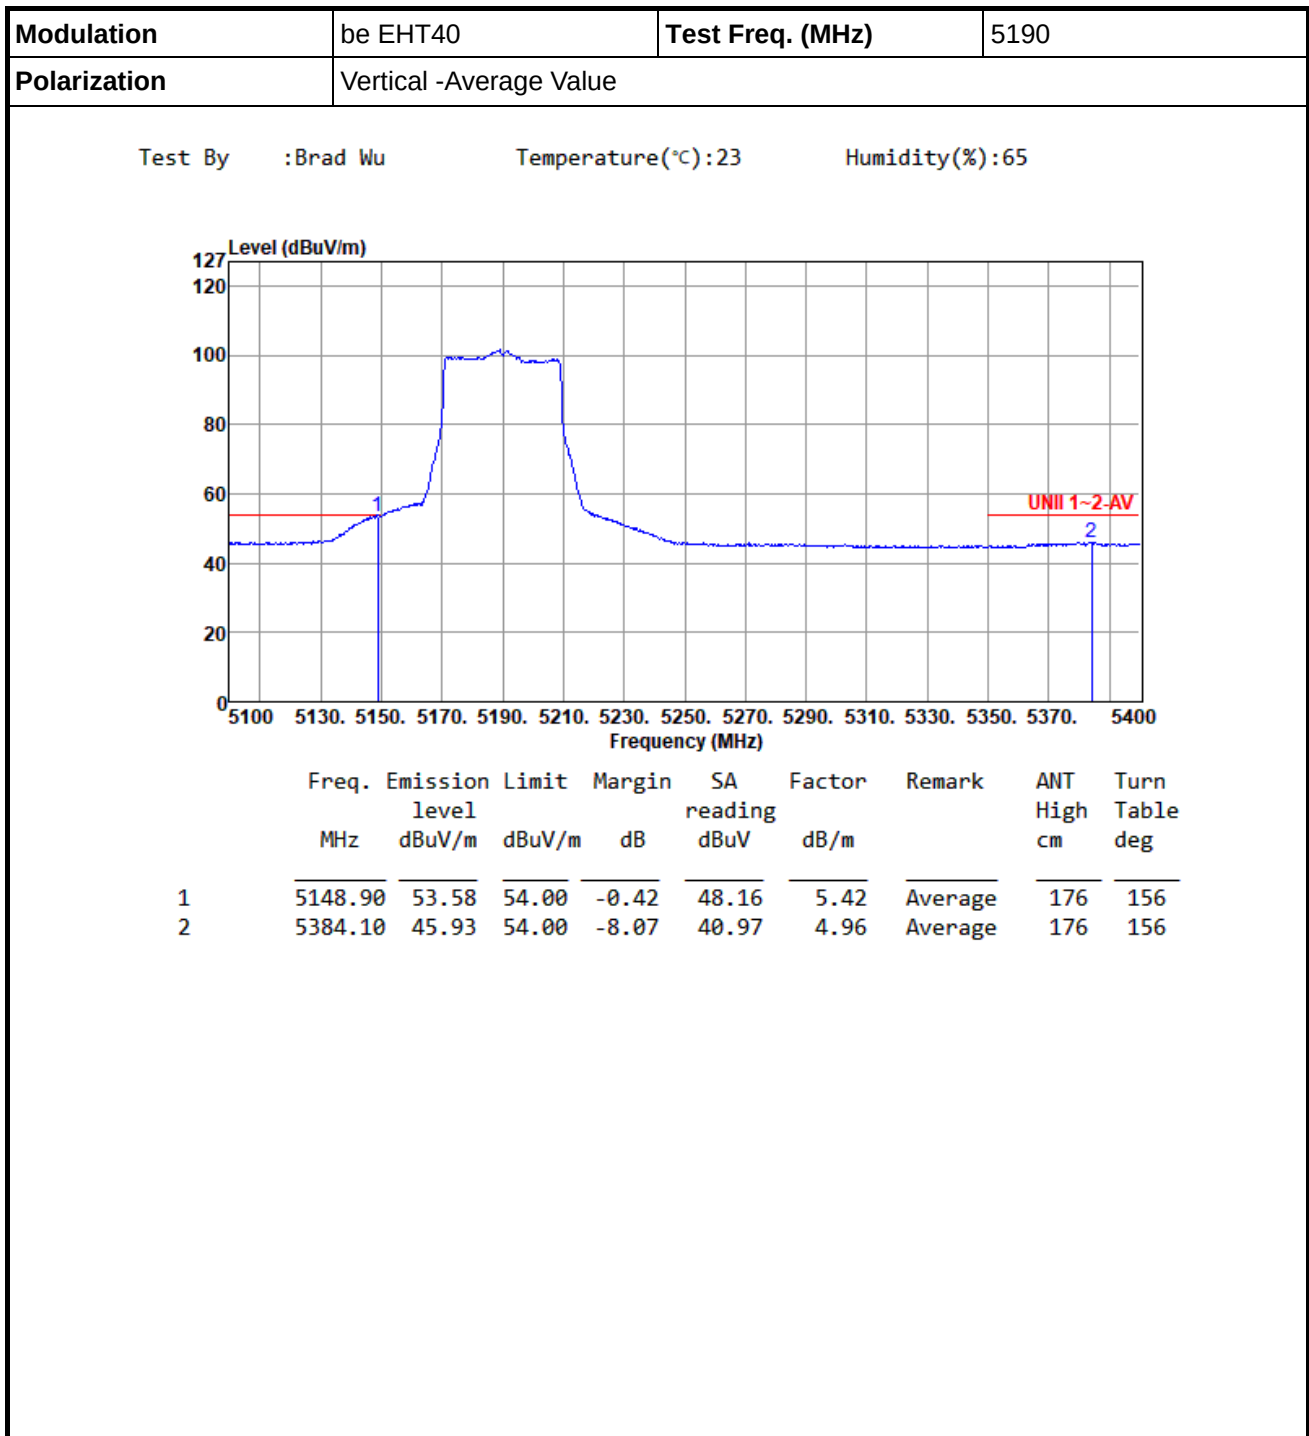


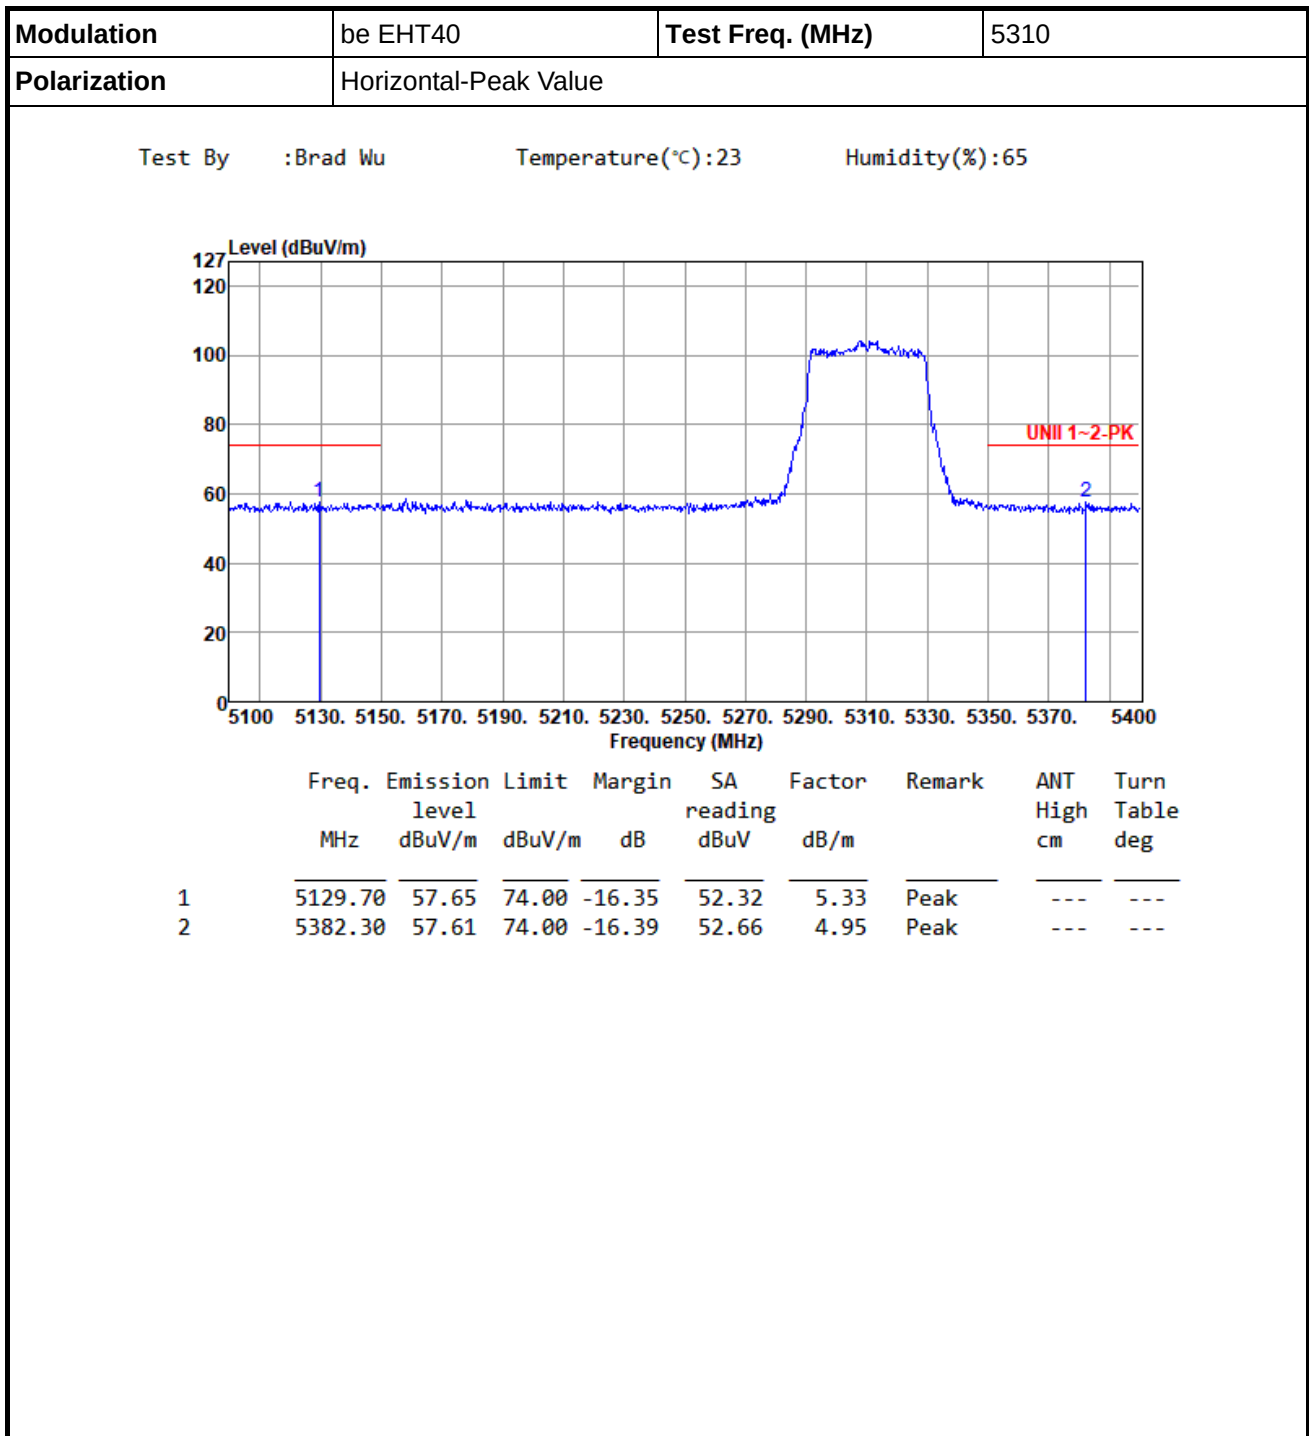


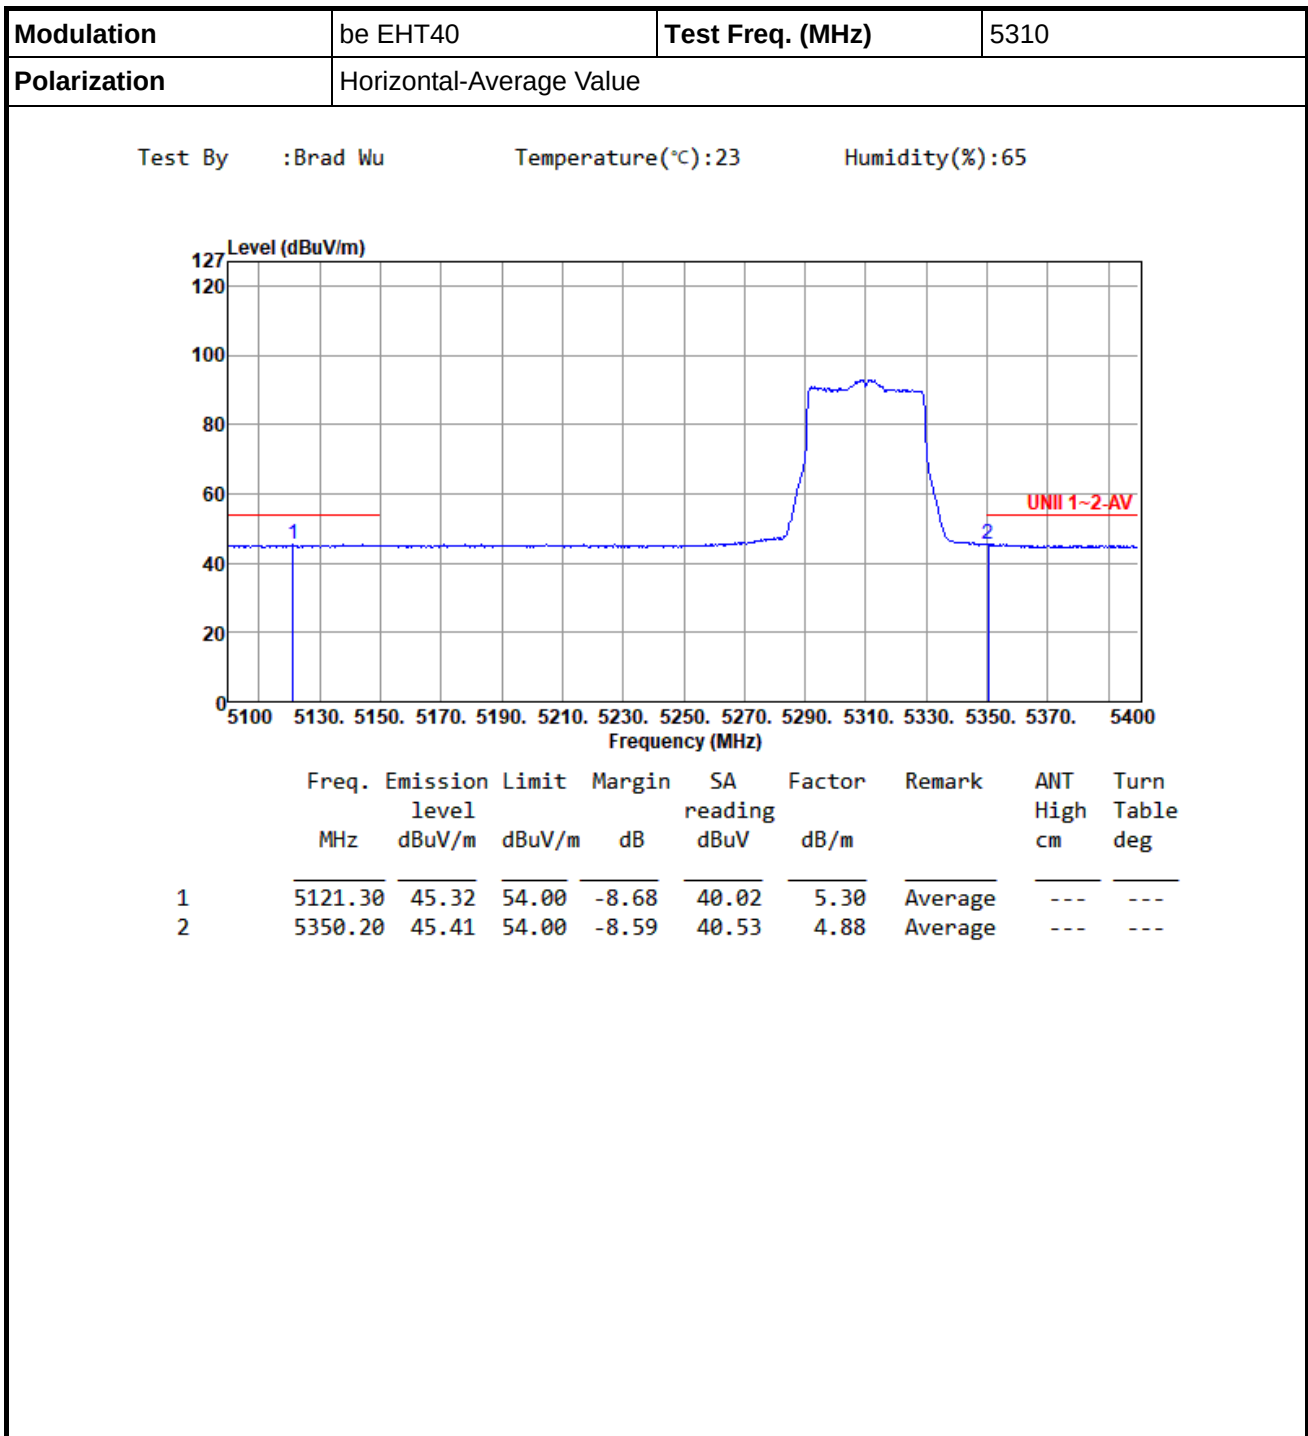


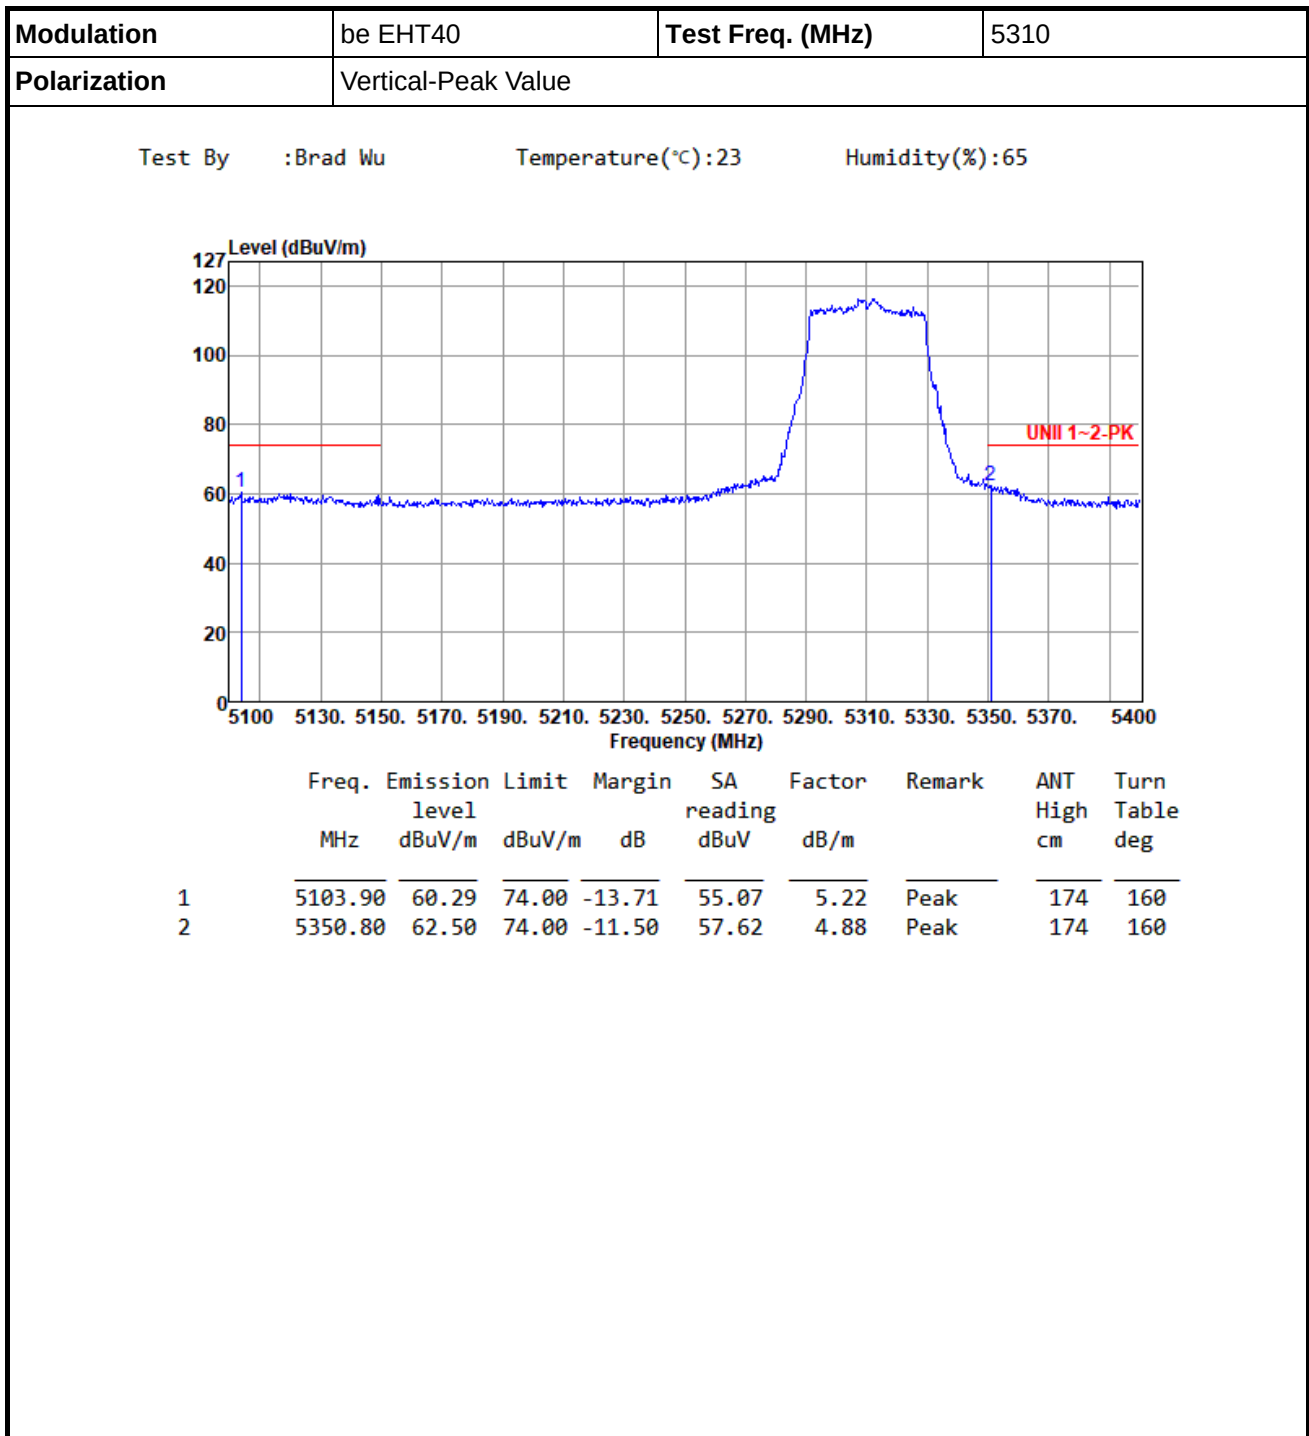

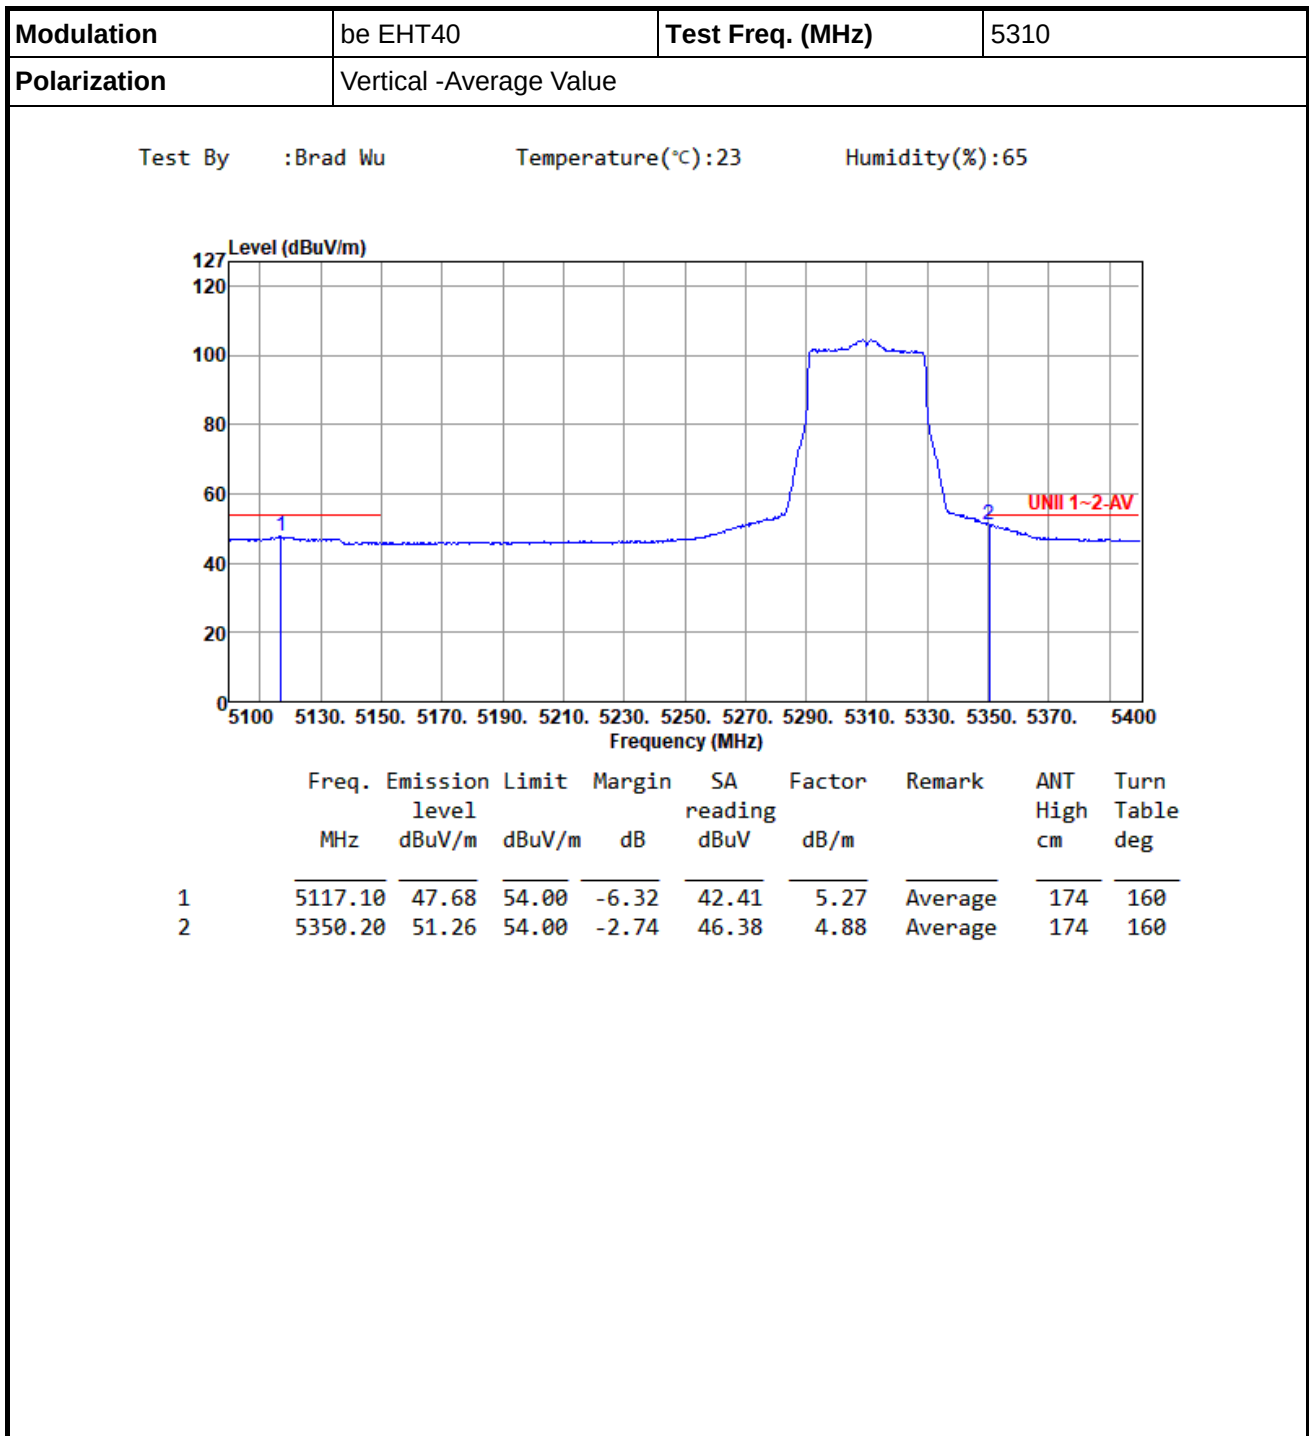

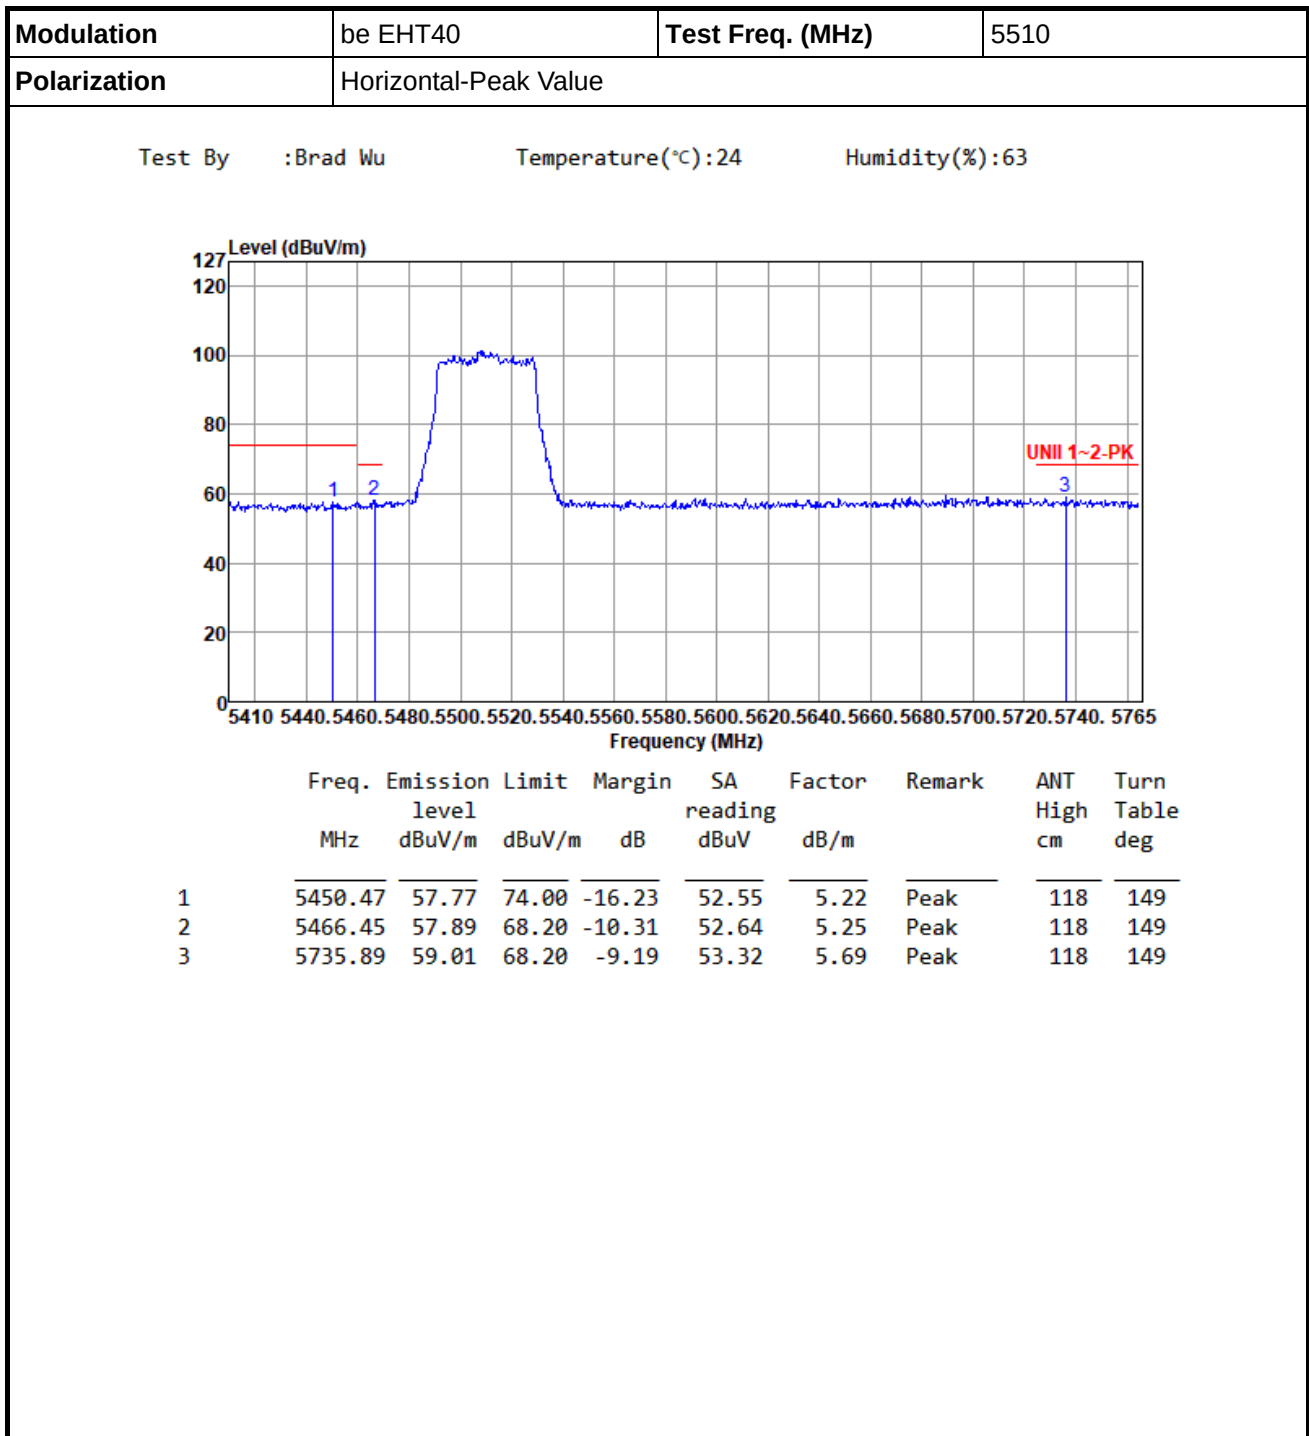


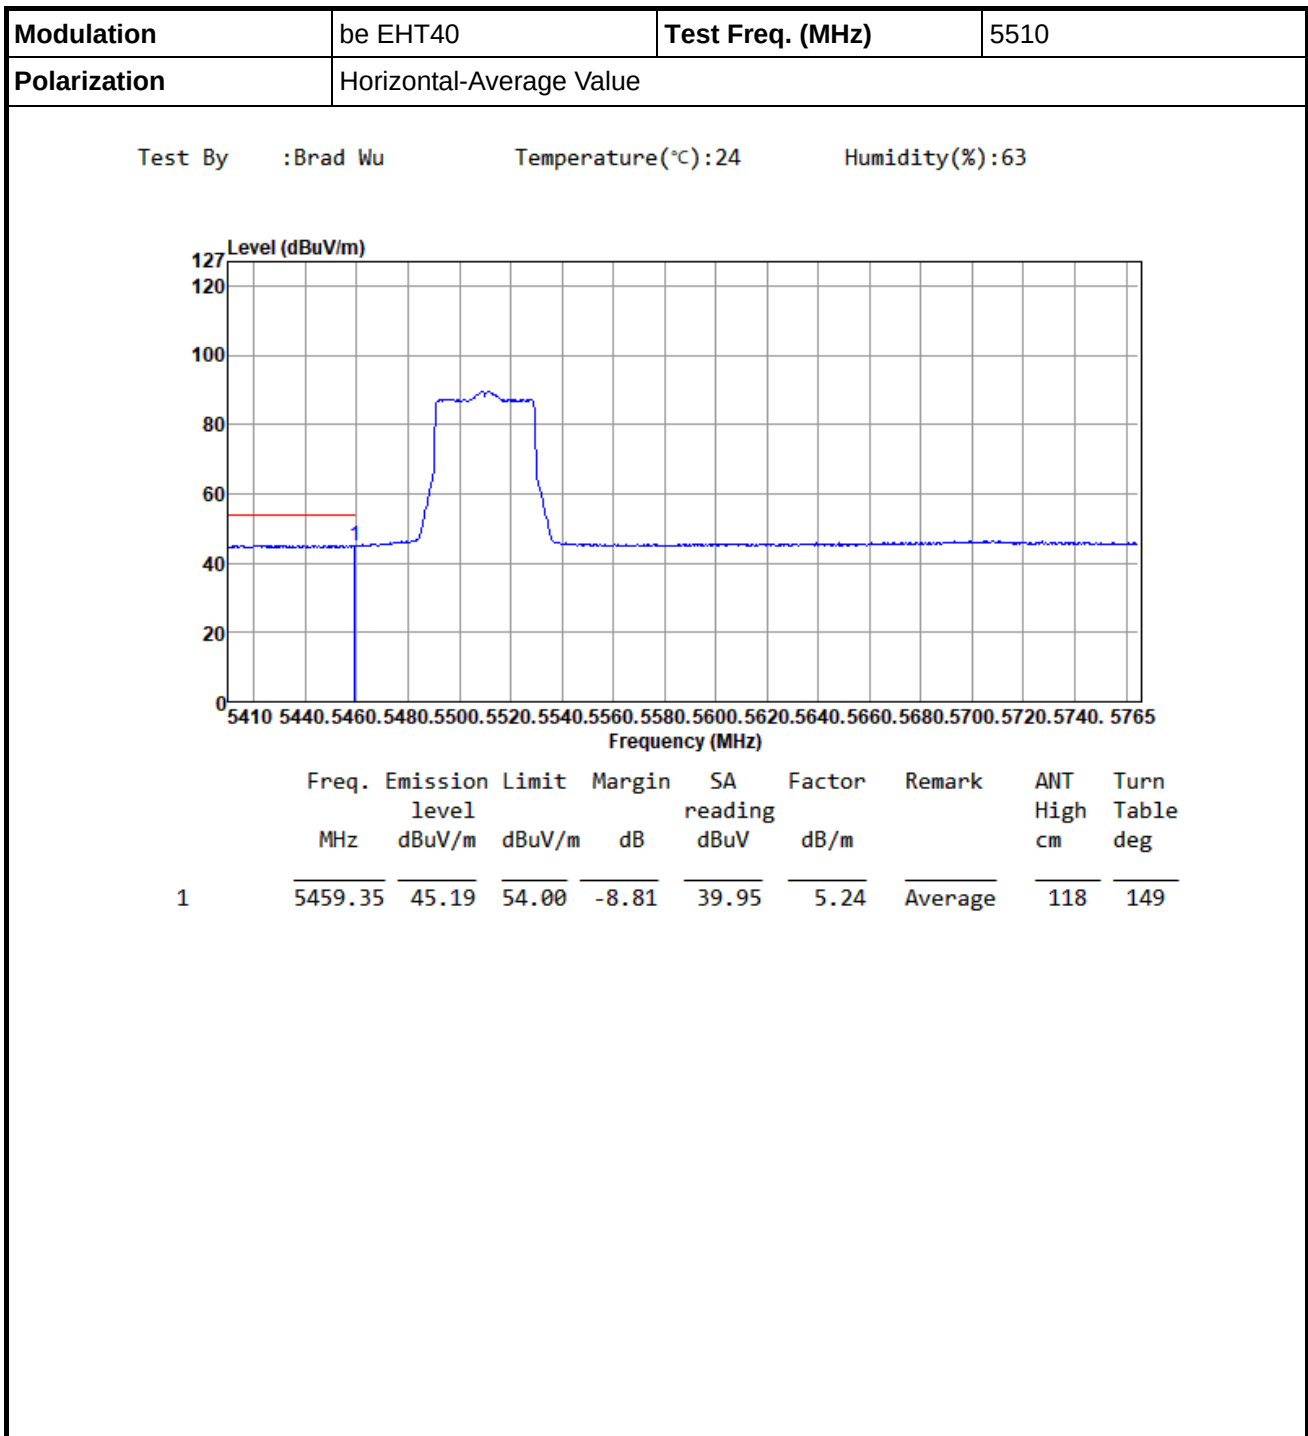


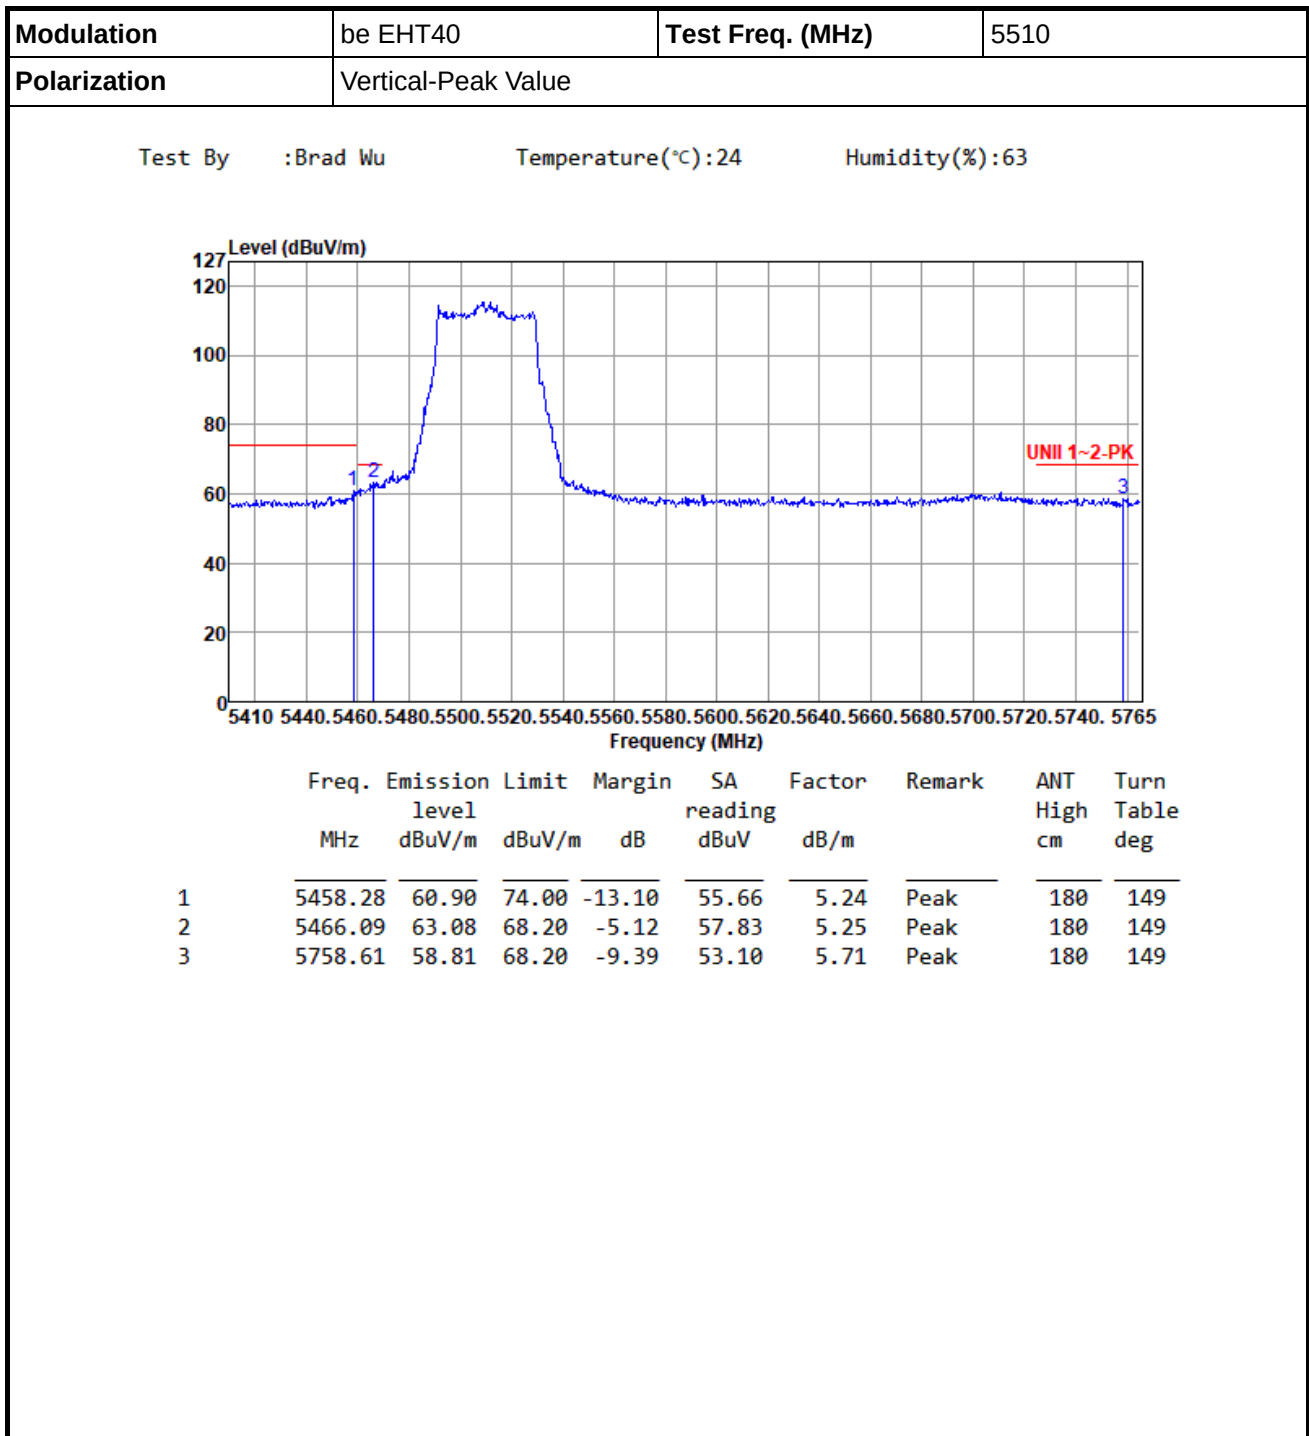






Modulation	be EHT40	Test Freq. (MHz)	5510						
Polarization	Vertical -Average Value								
Test By :Brad Wu Temperature(°C):24 Humidity(%):63									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5459.70	48.08	54.00	-5.92	42.84	5.24	Average	180	149

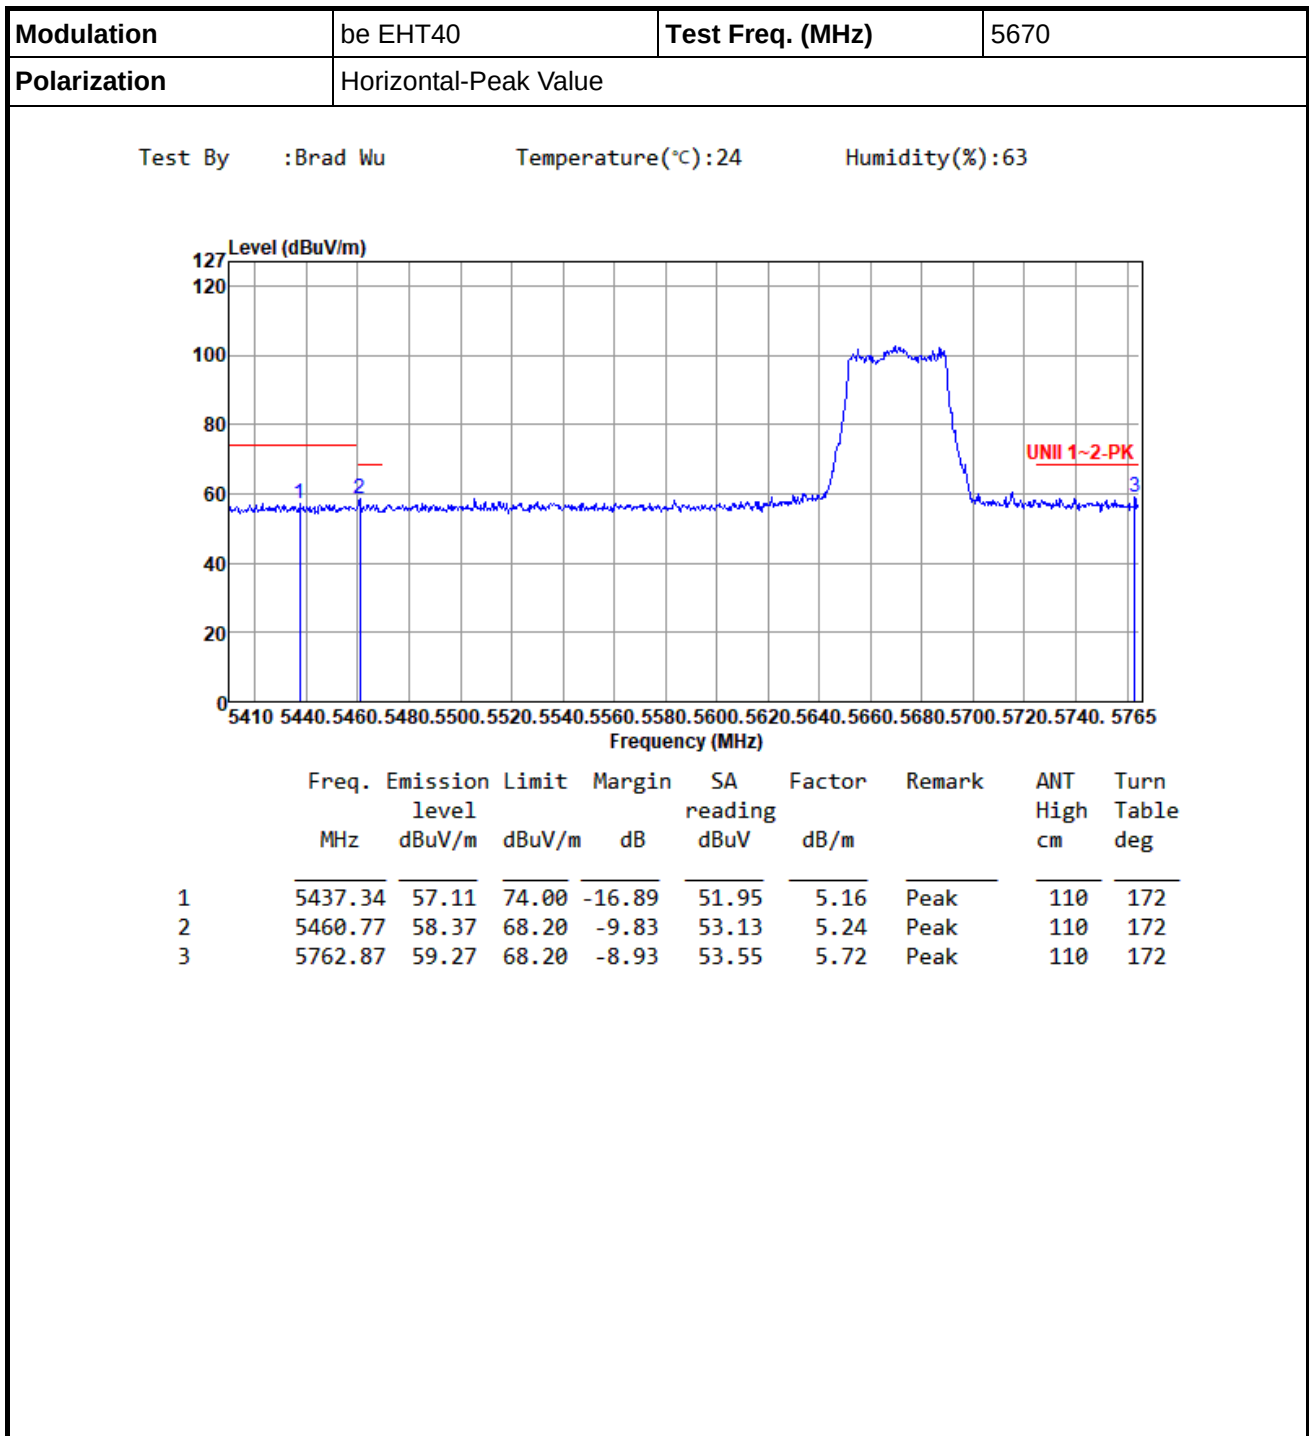


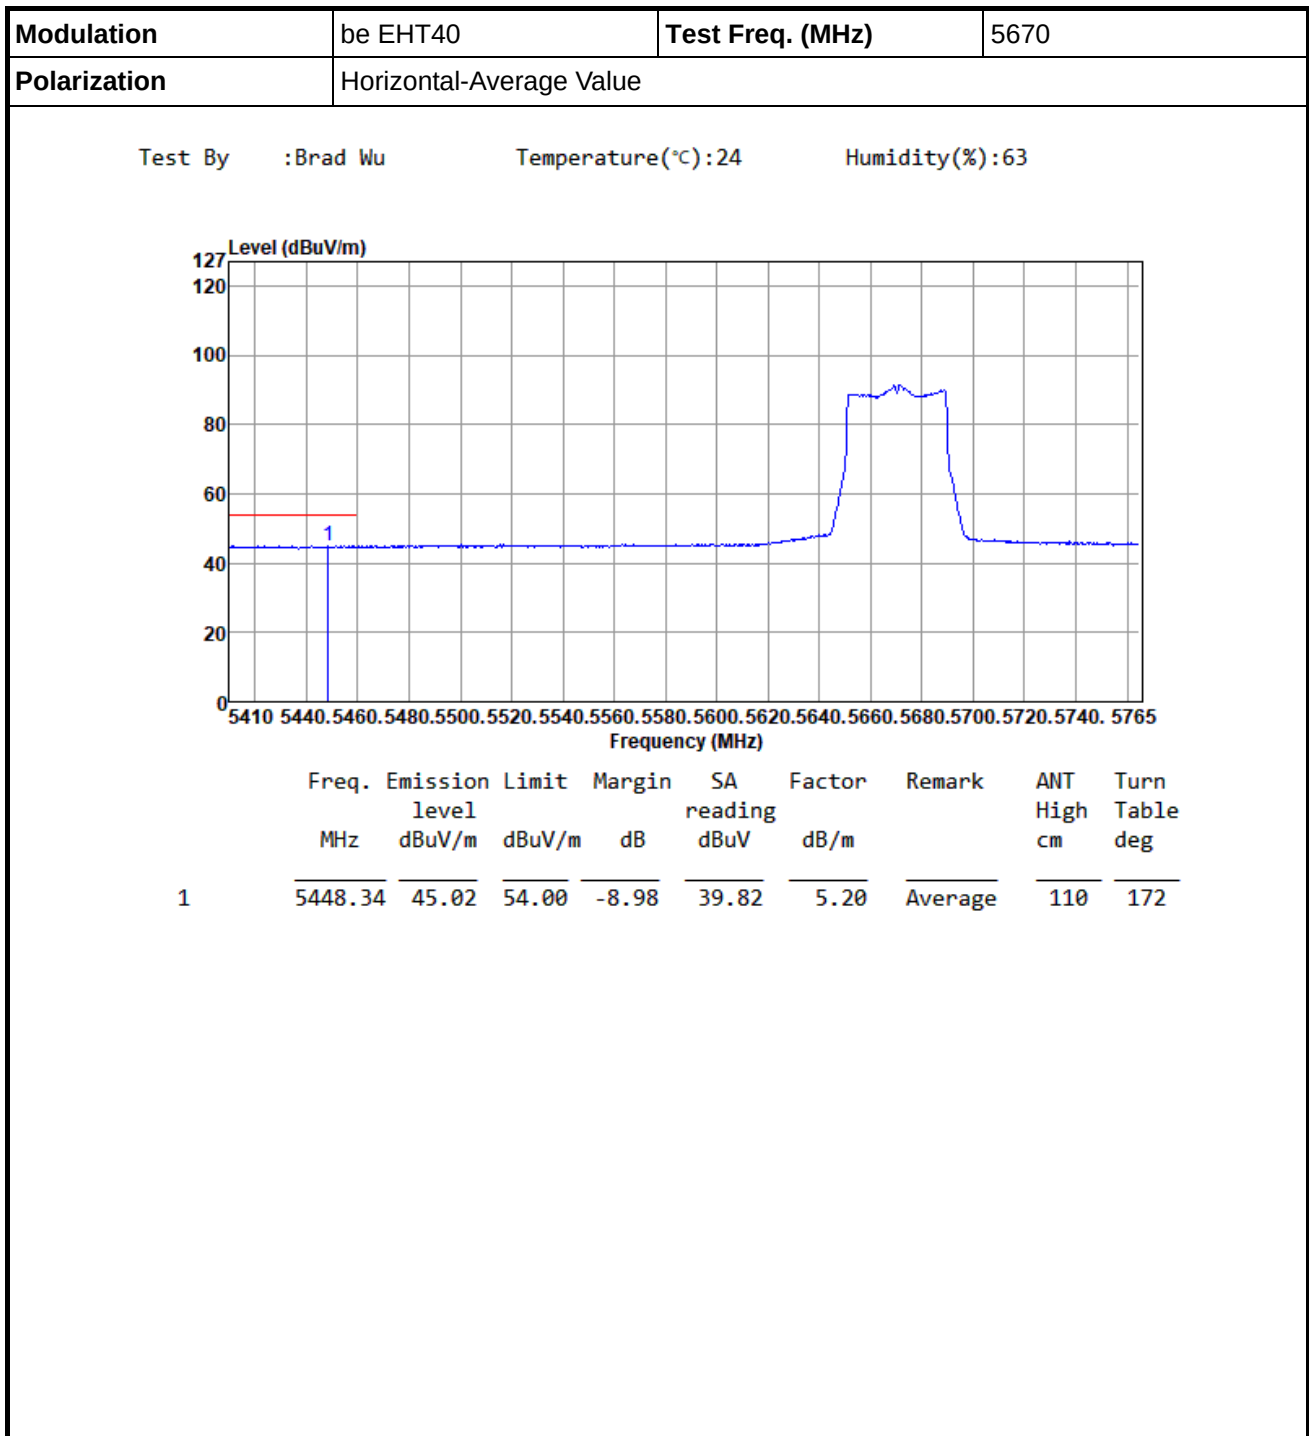


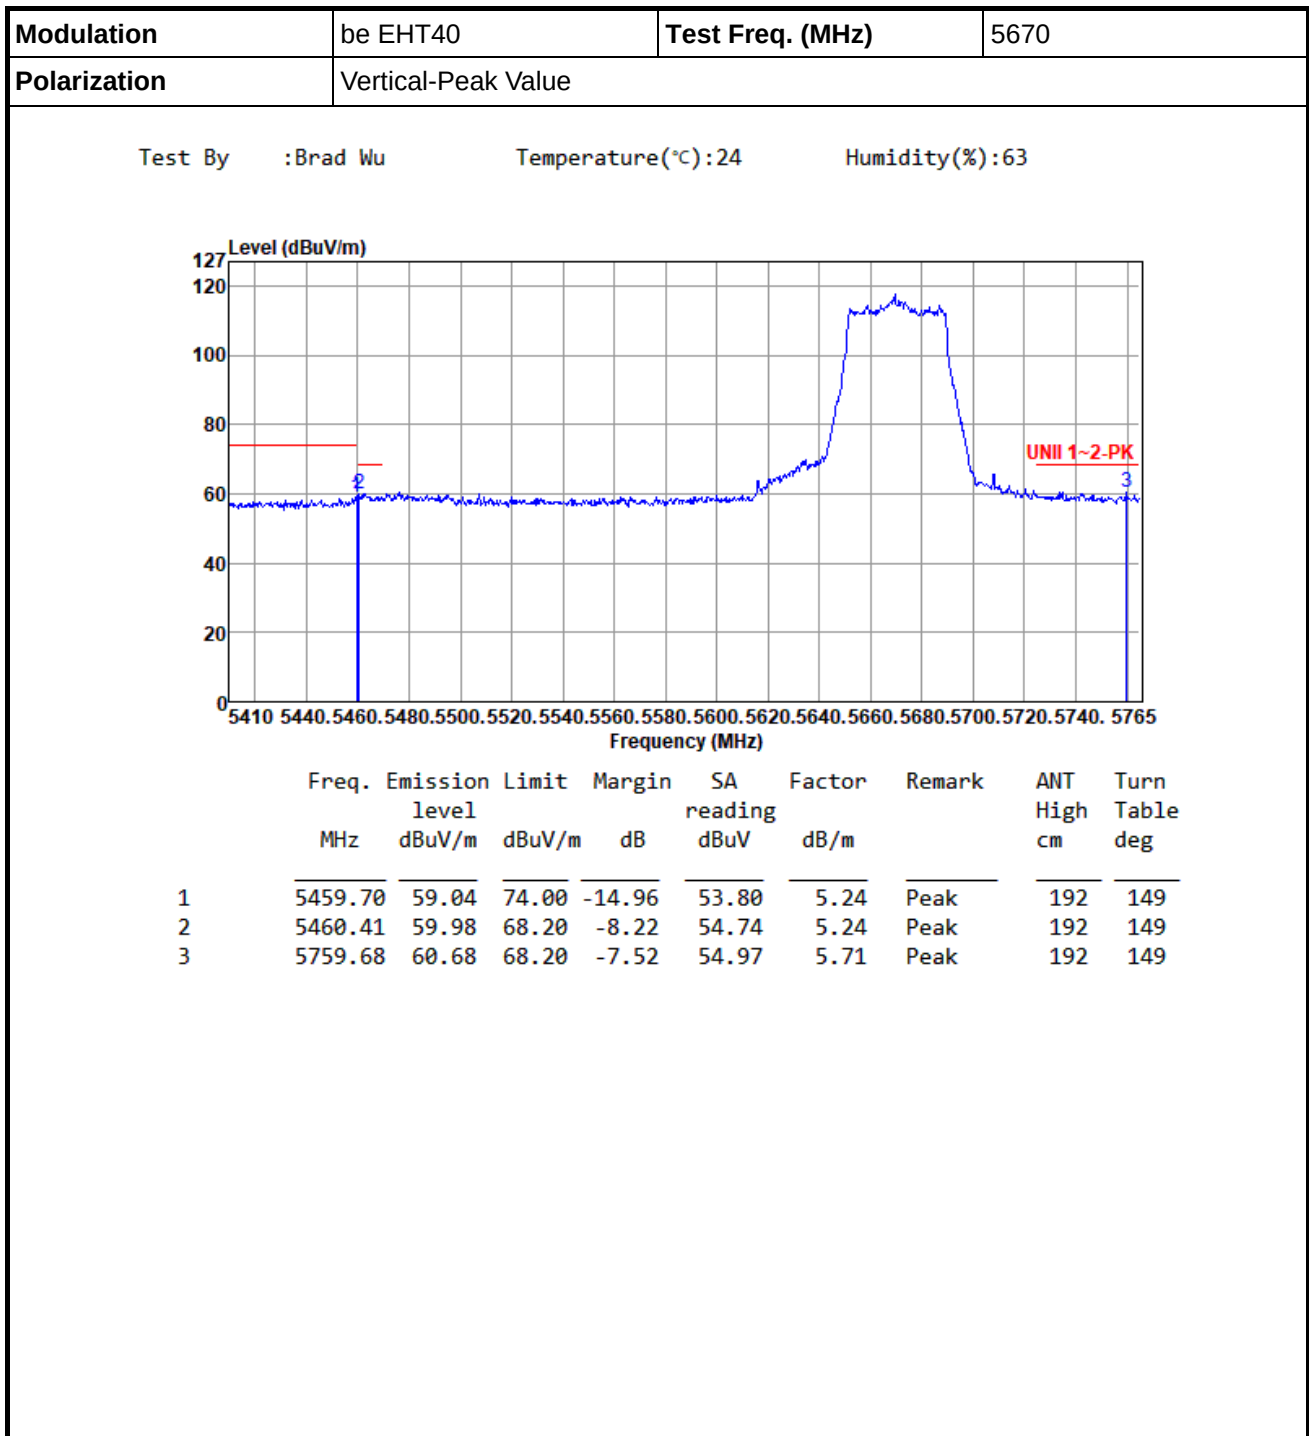


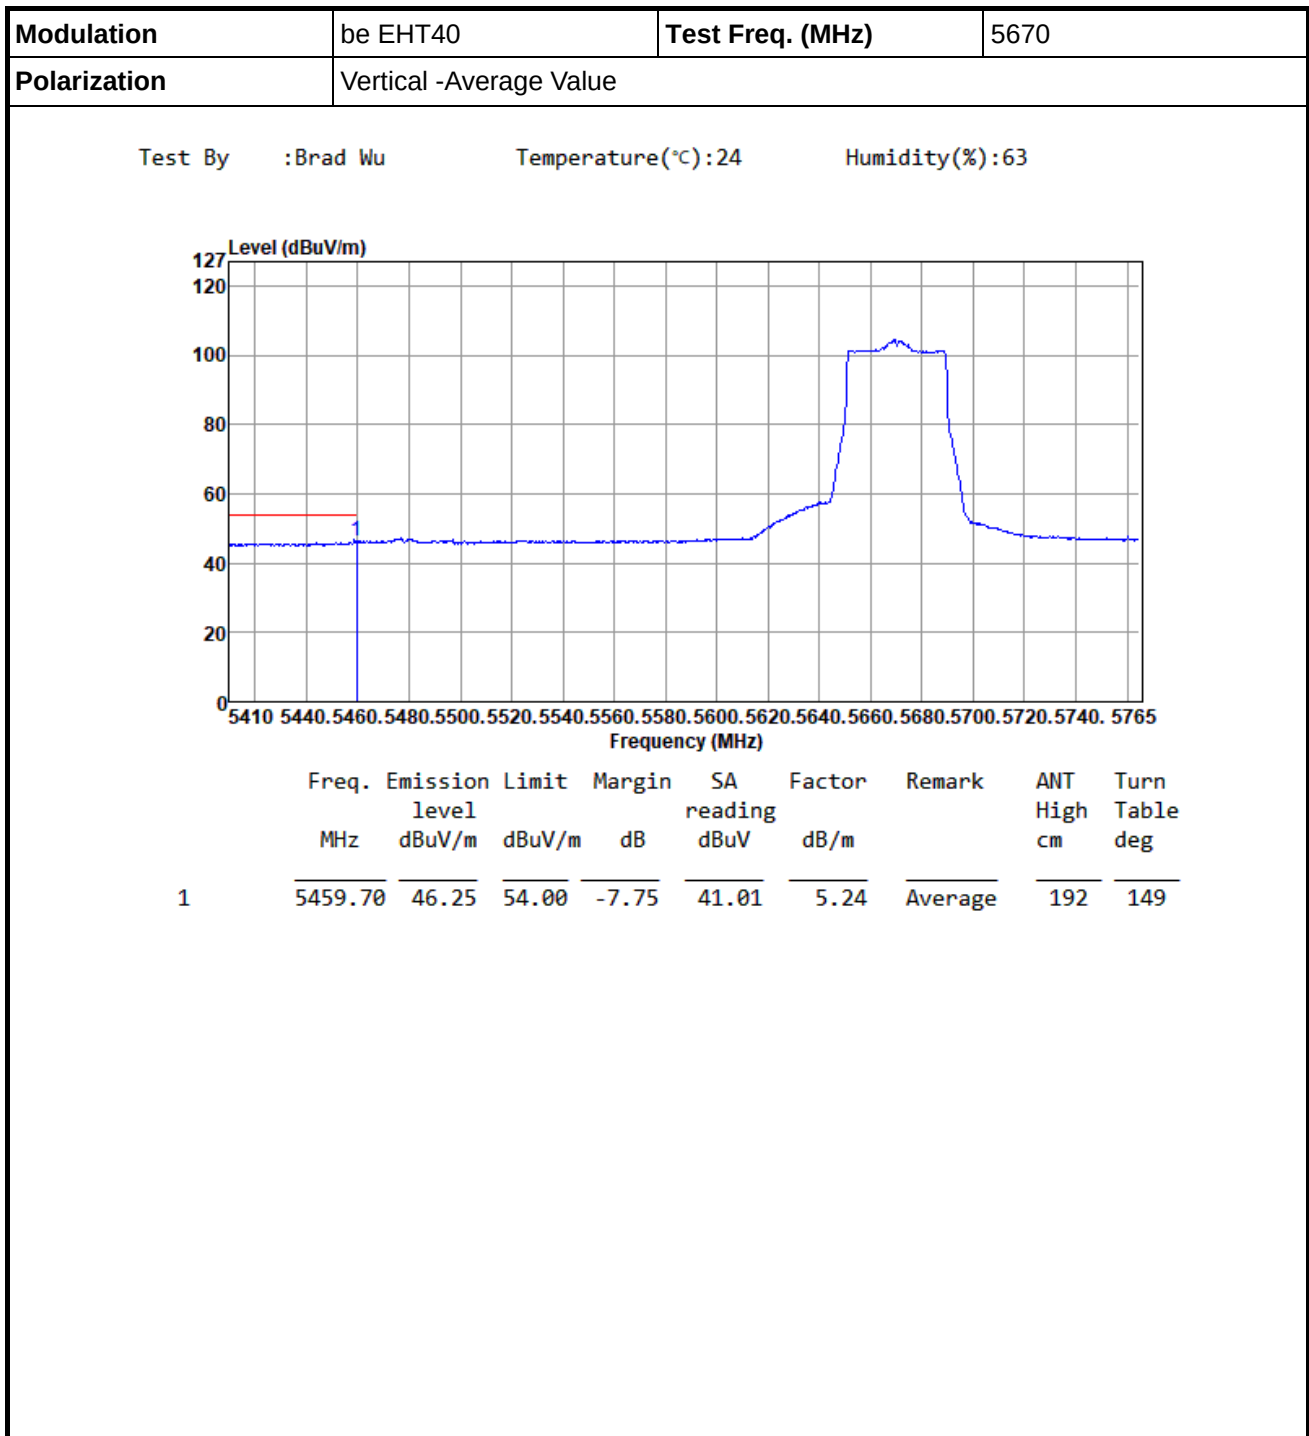


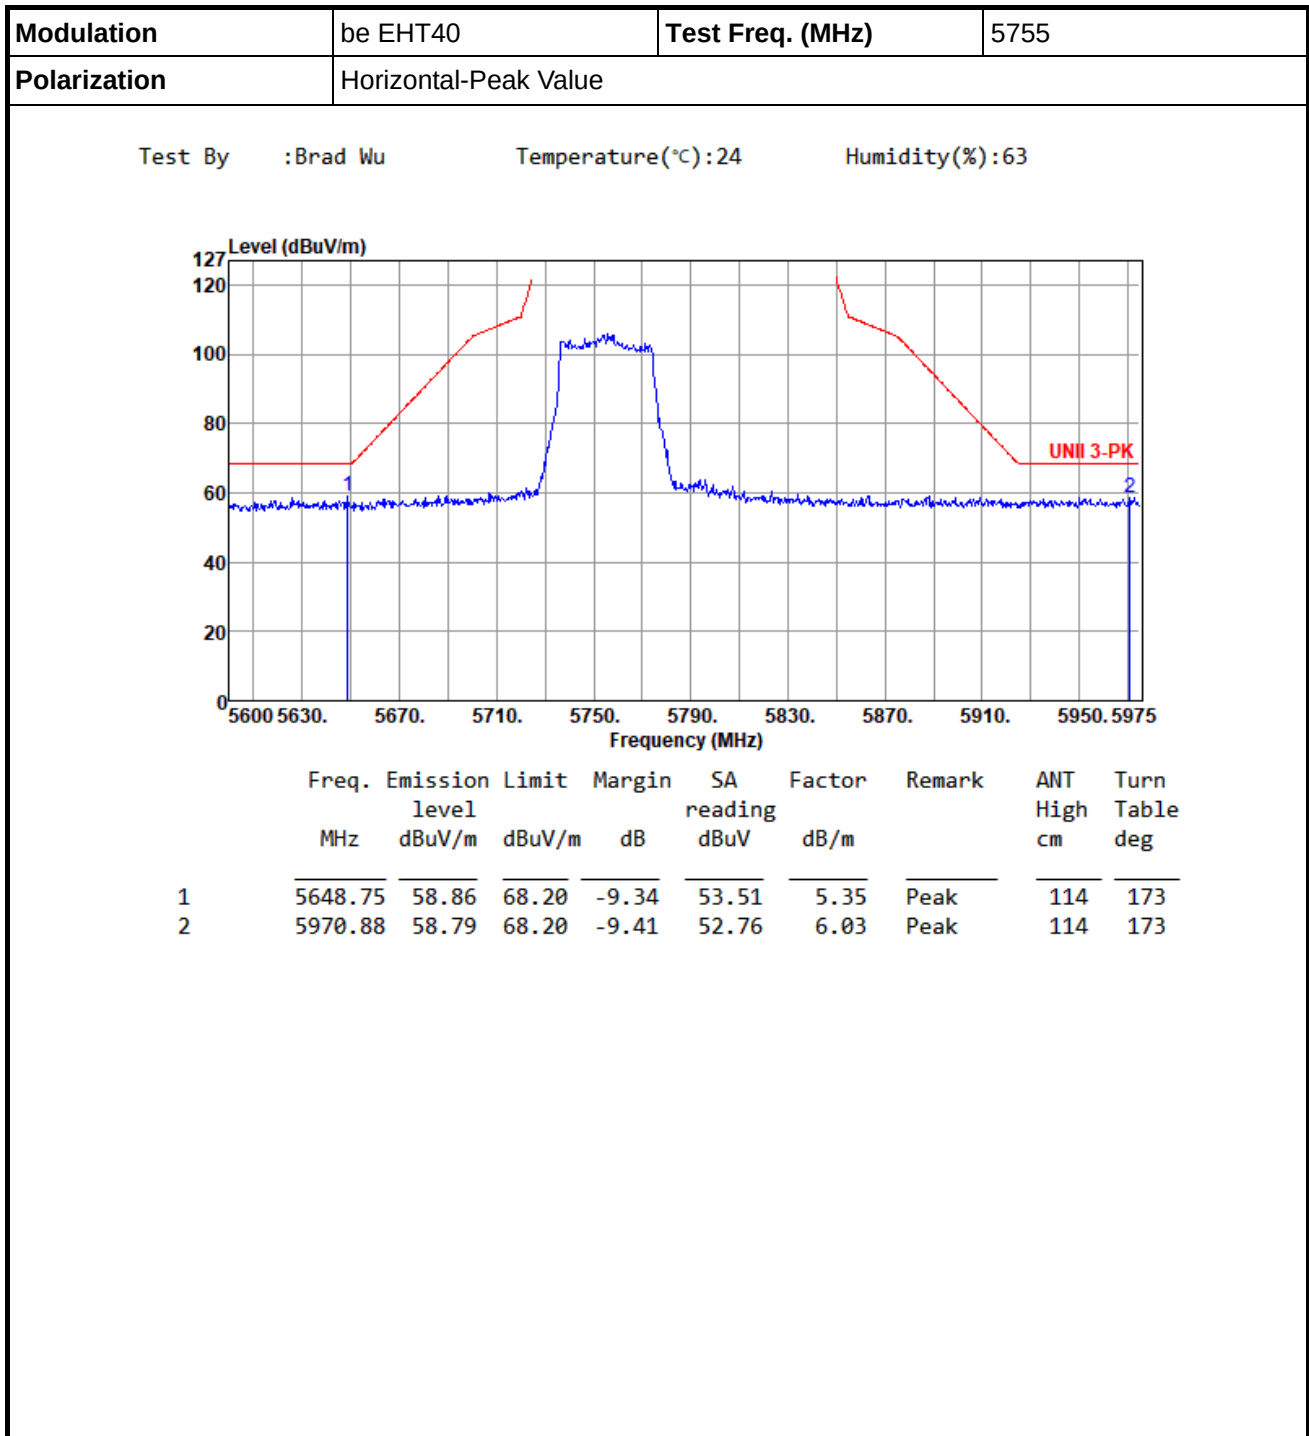


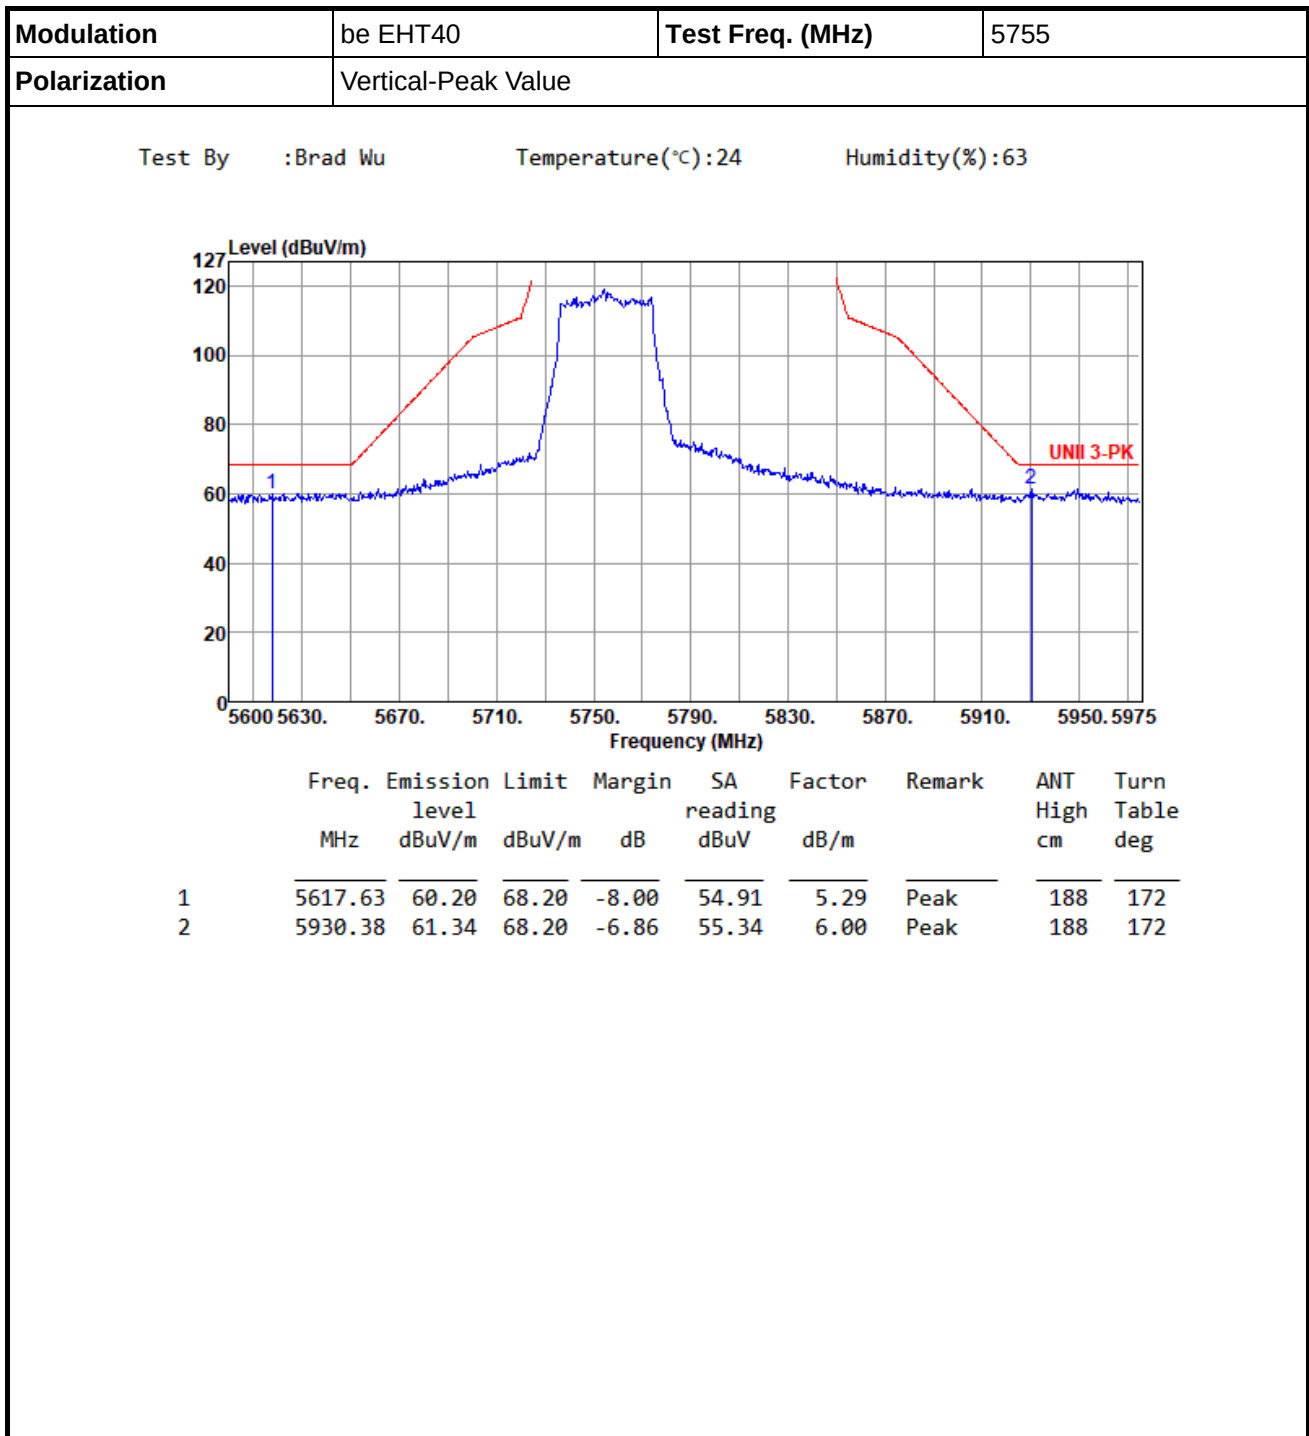


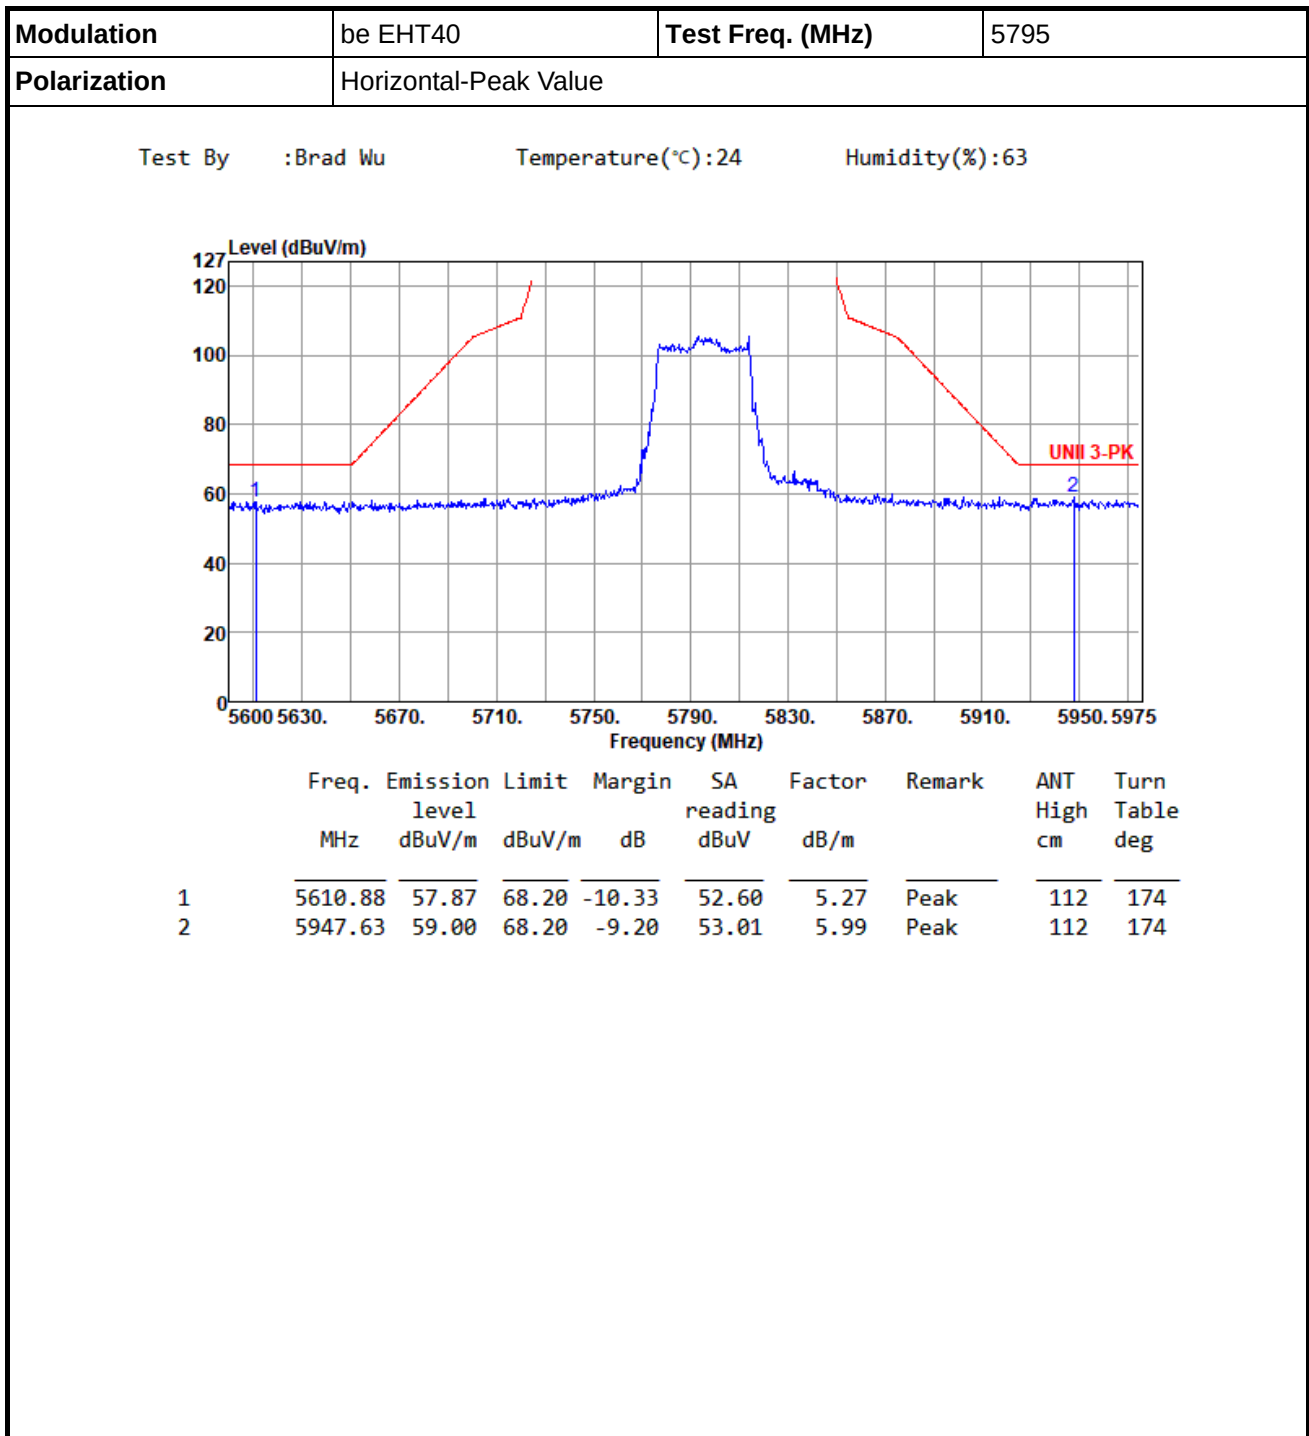


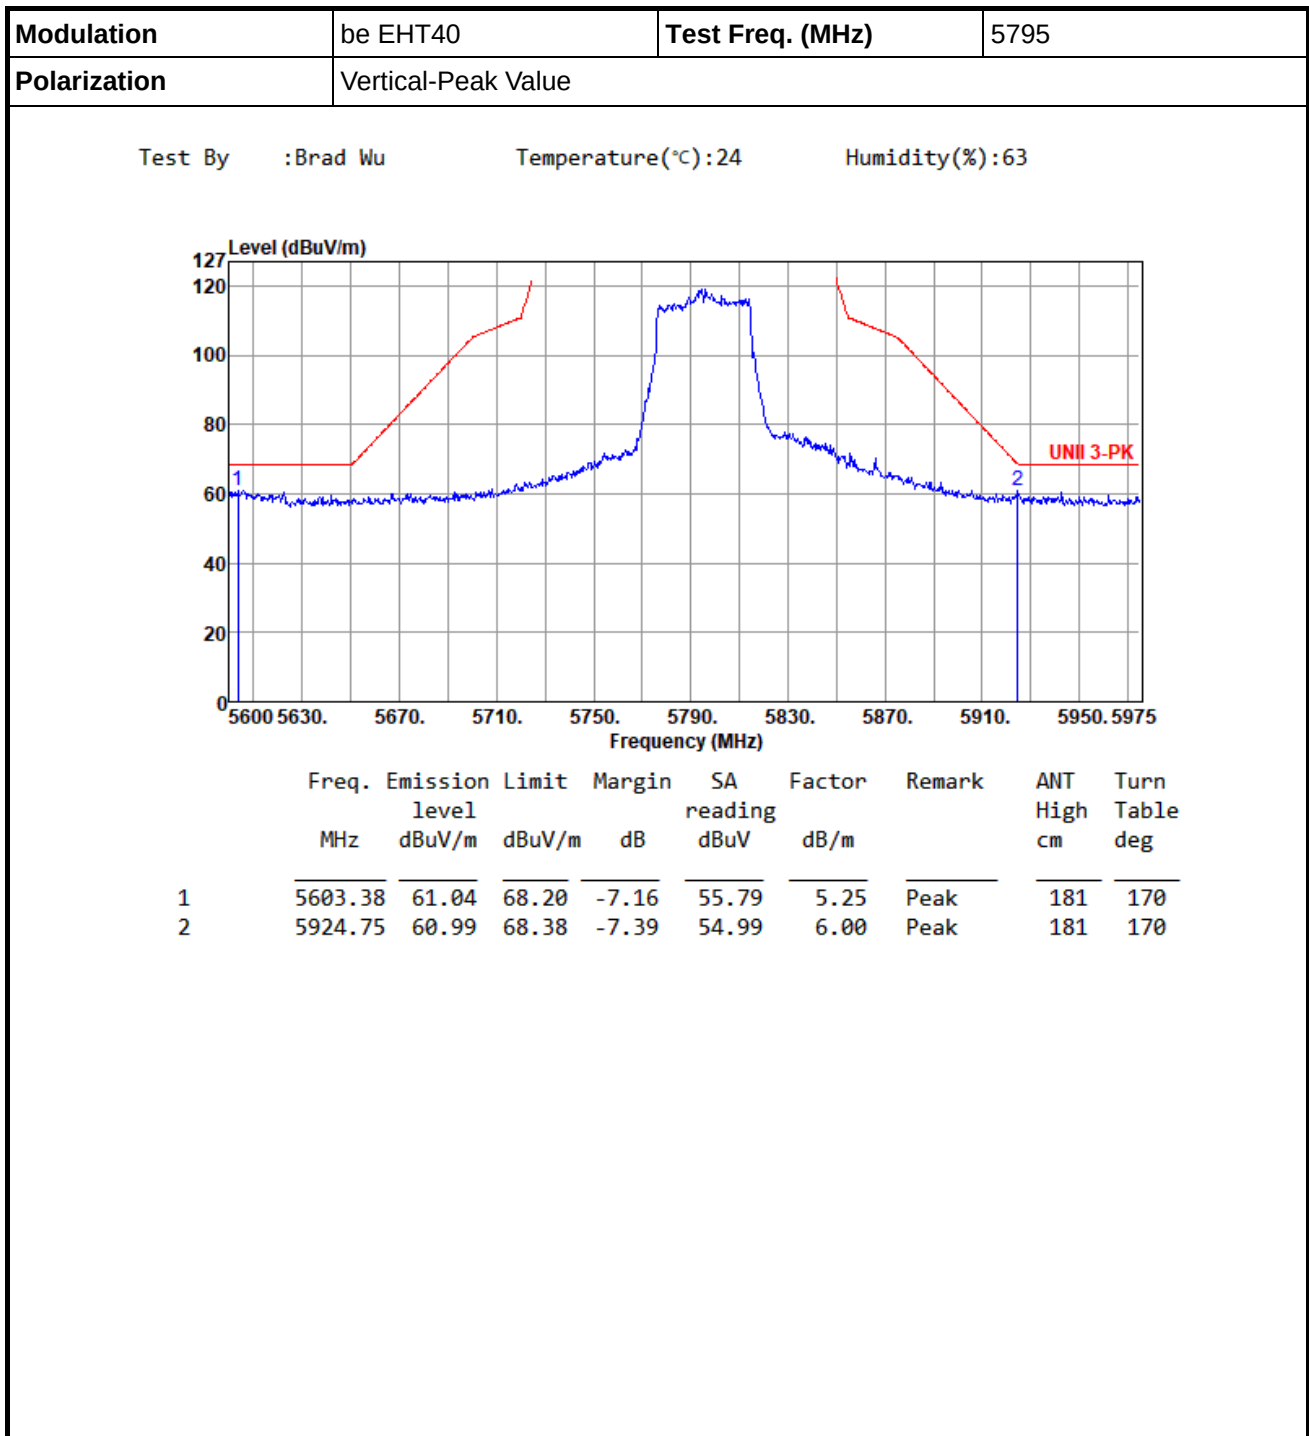


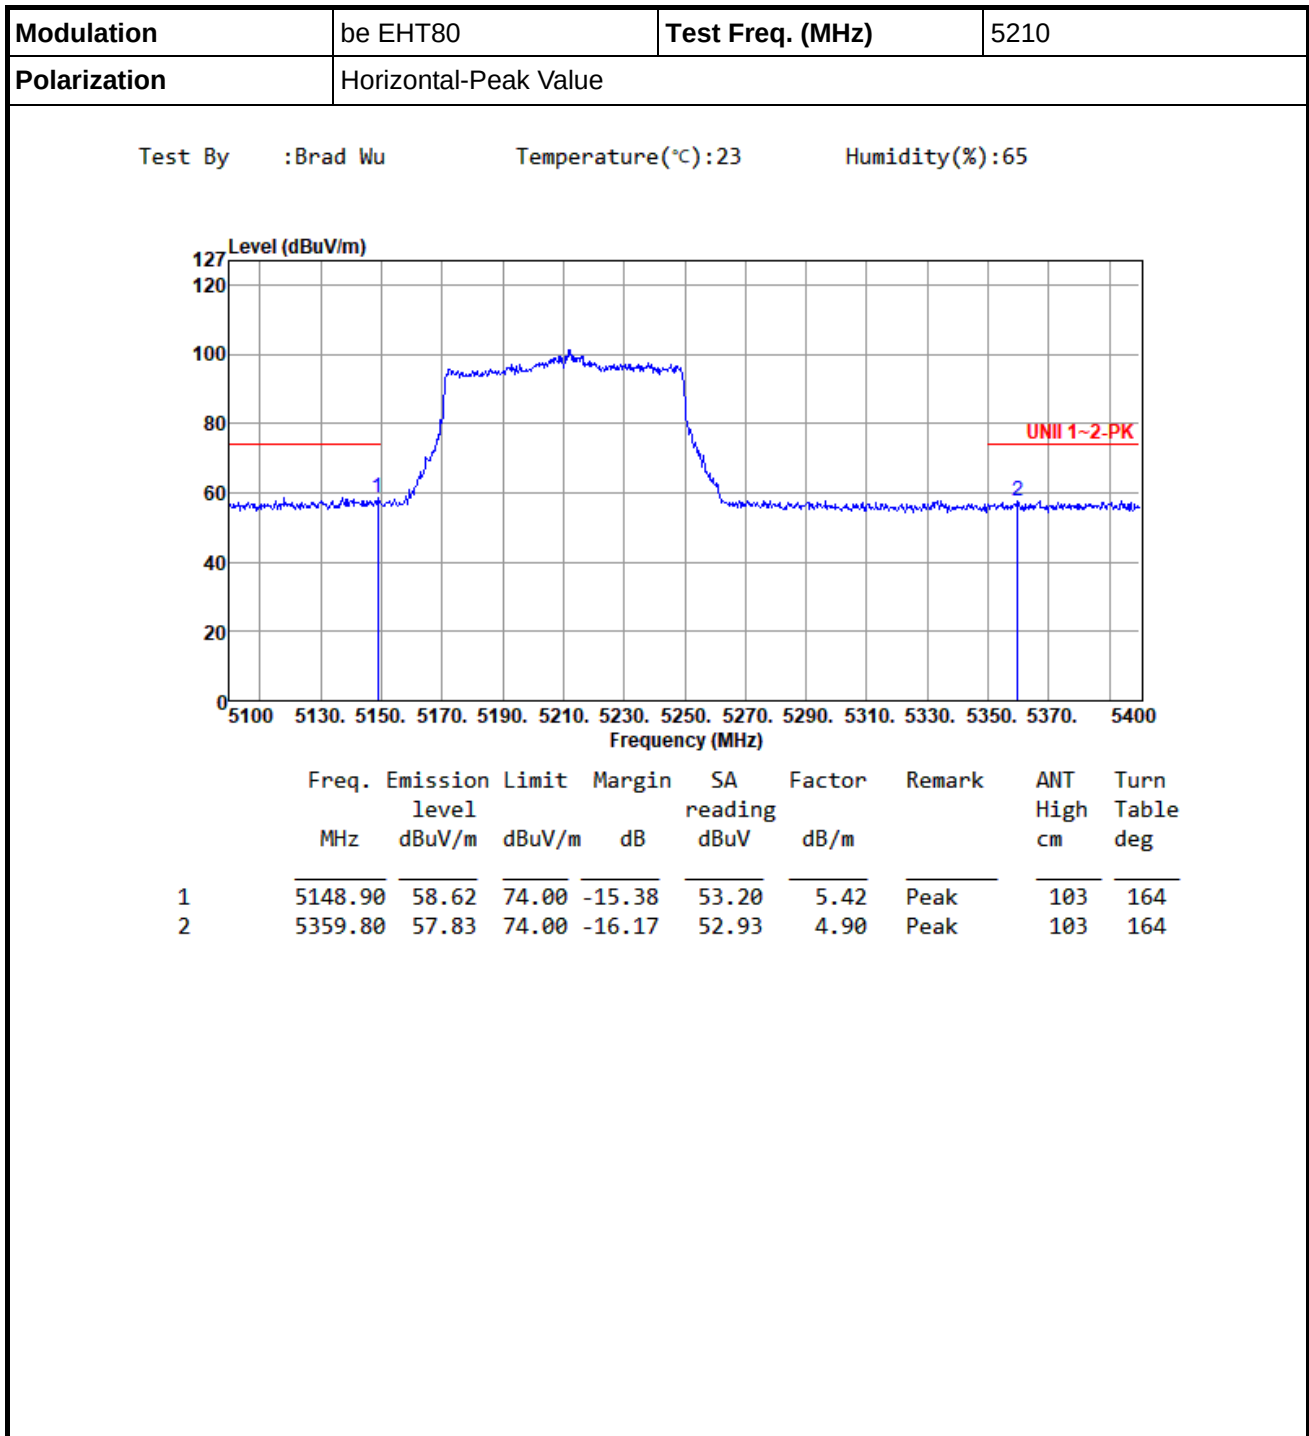


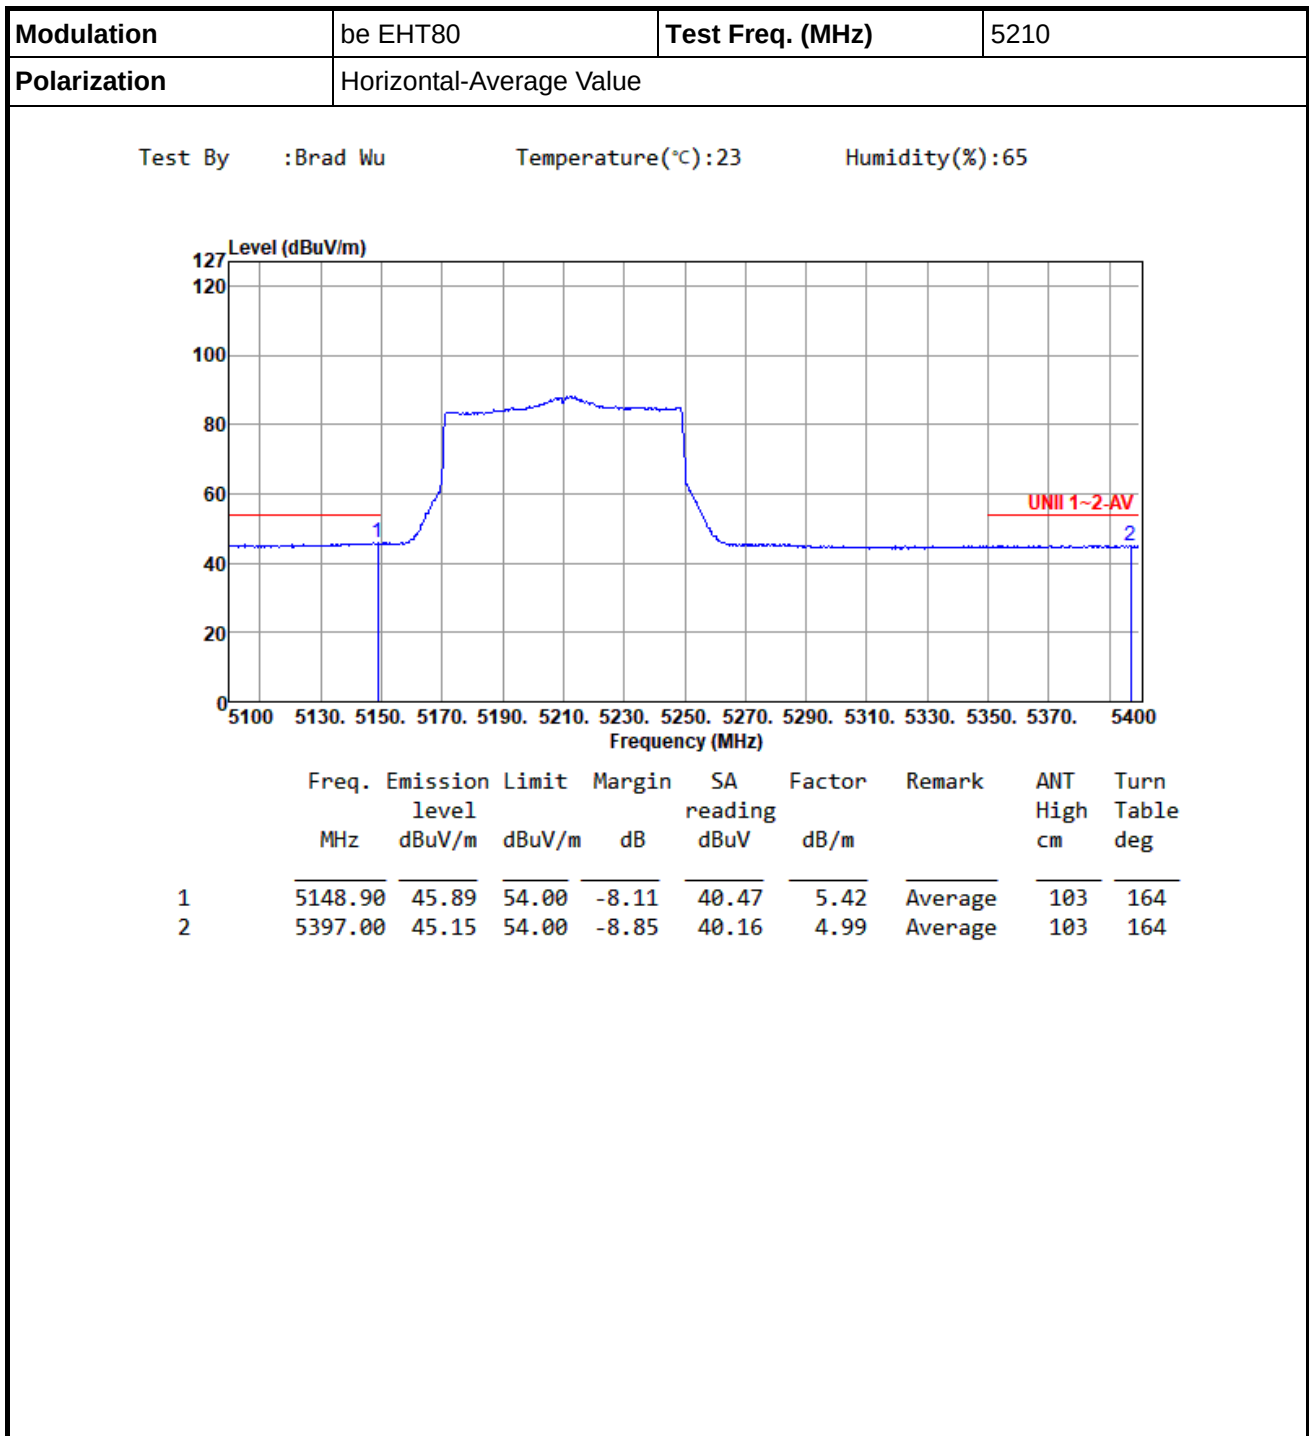


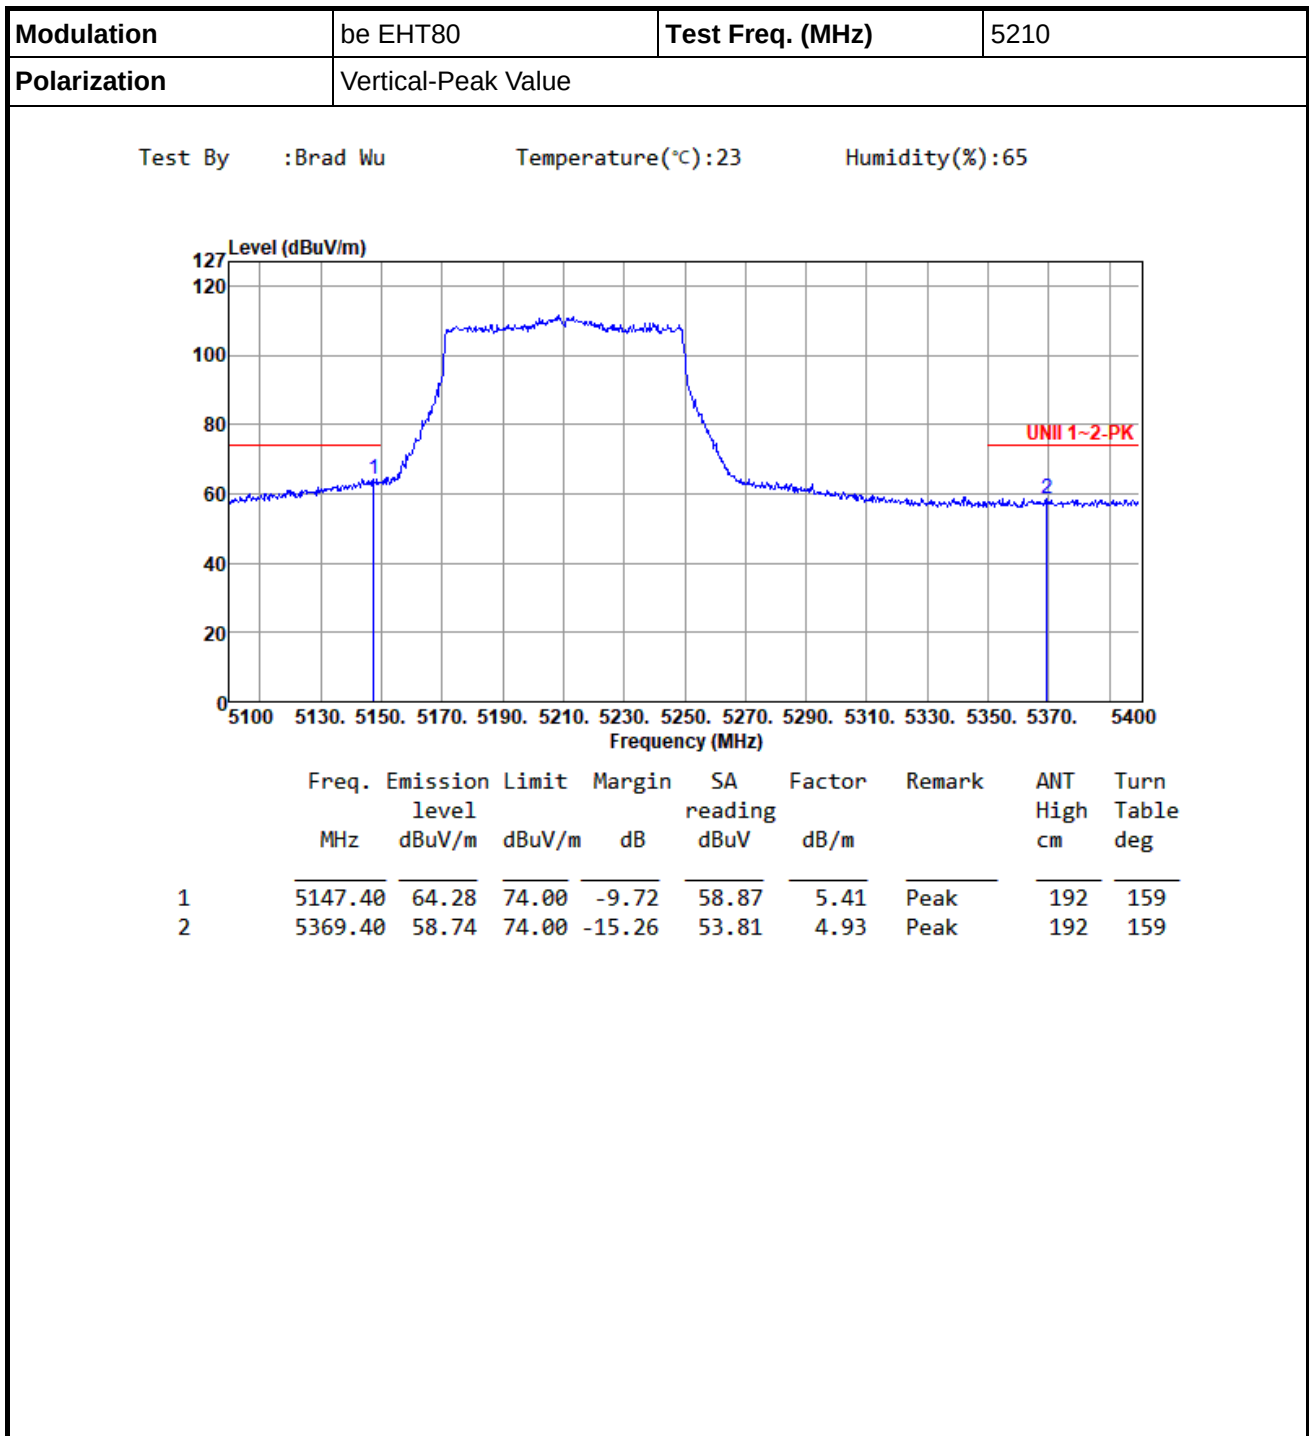


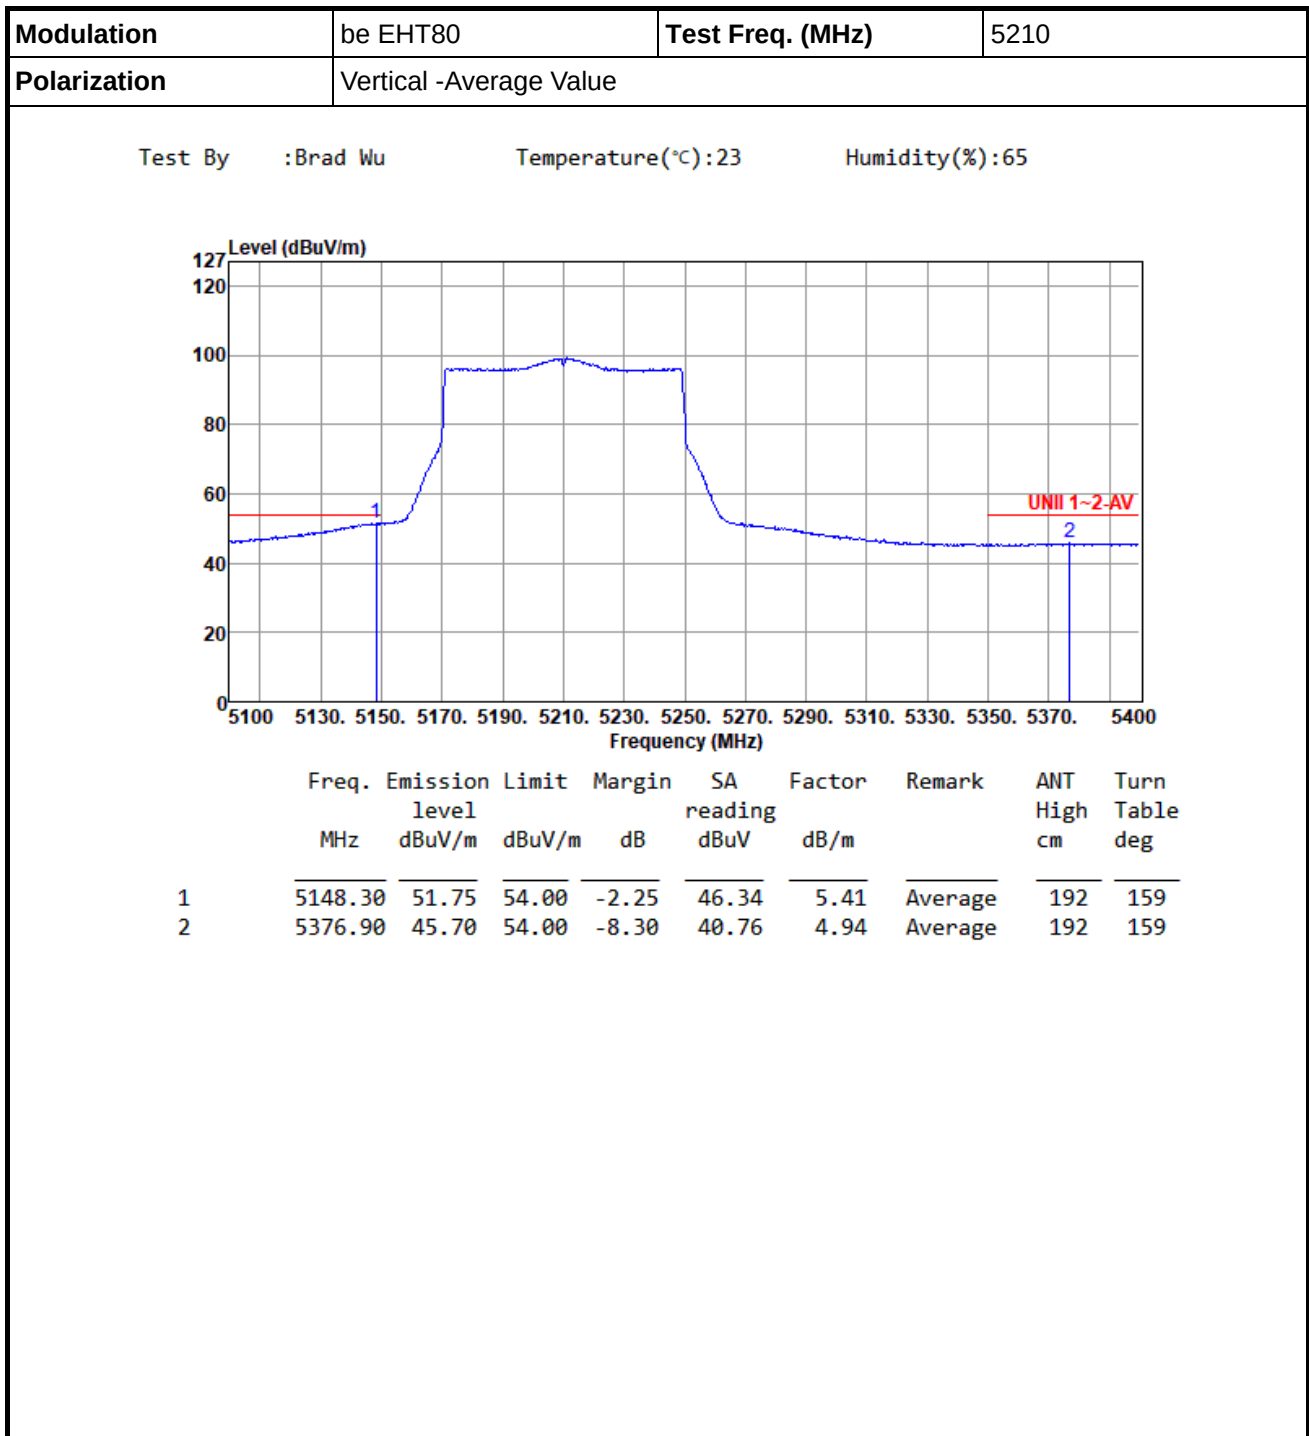


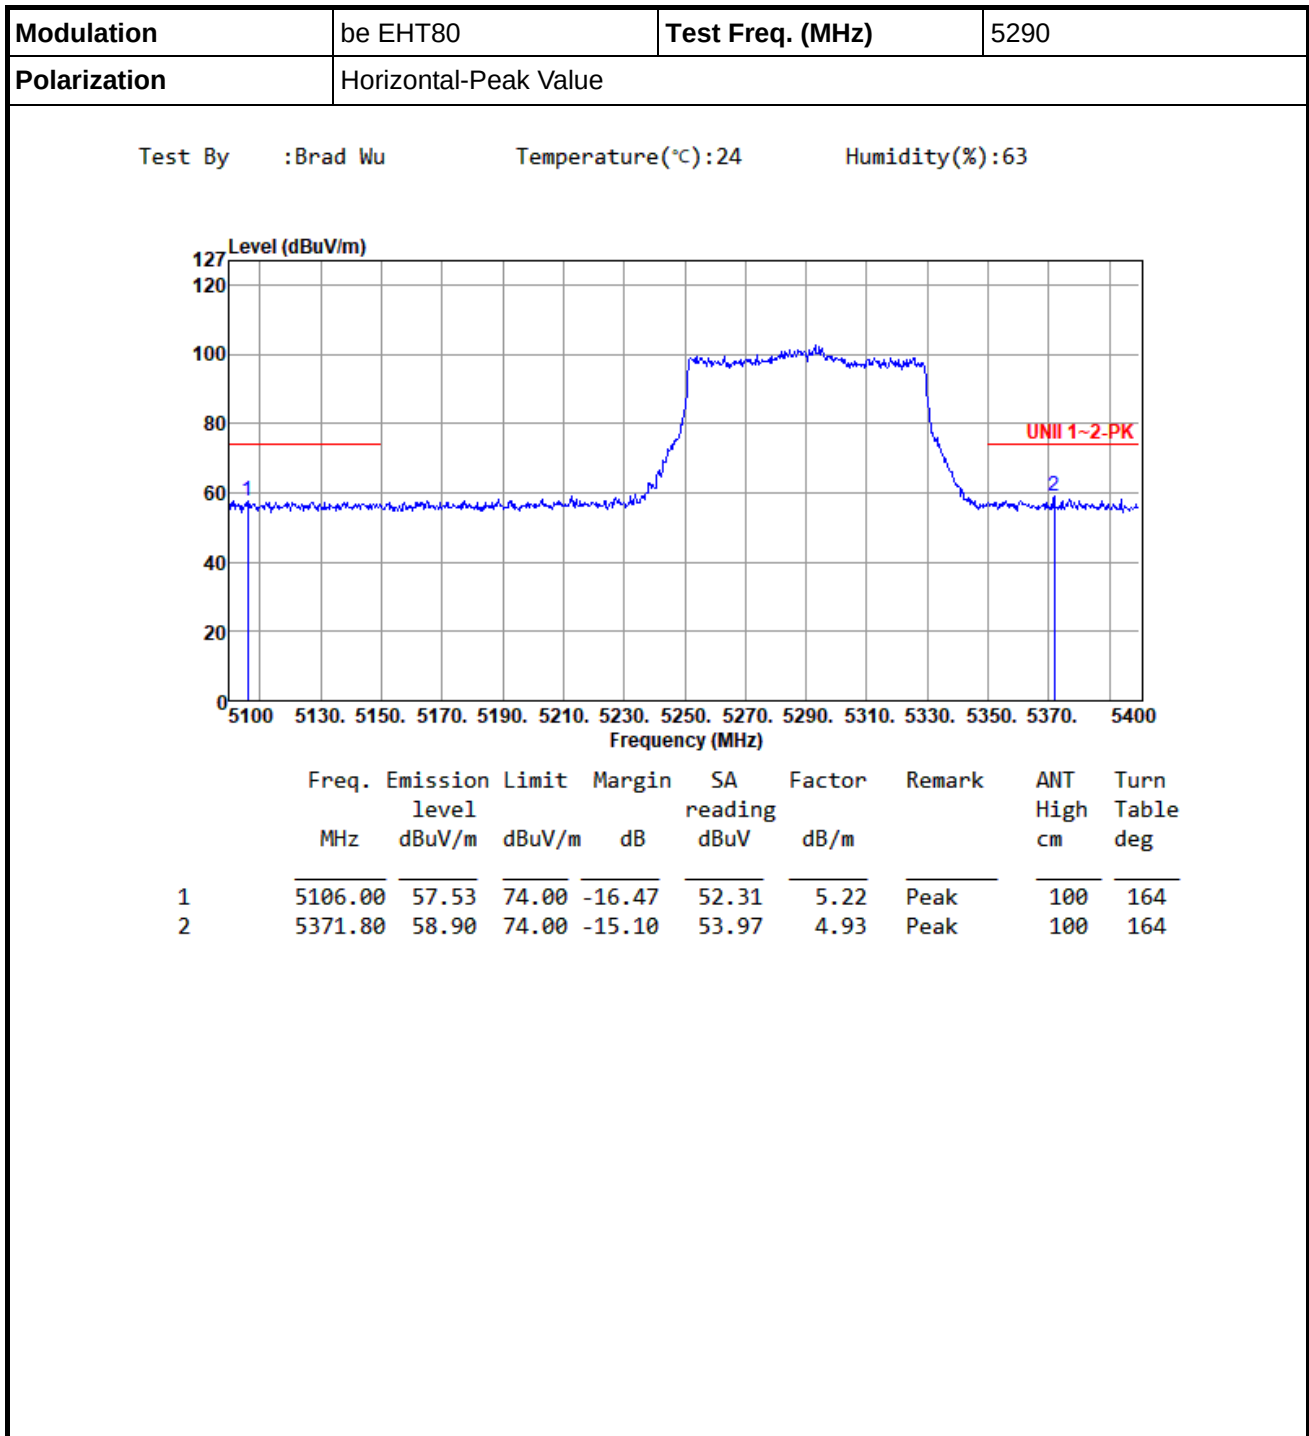


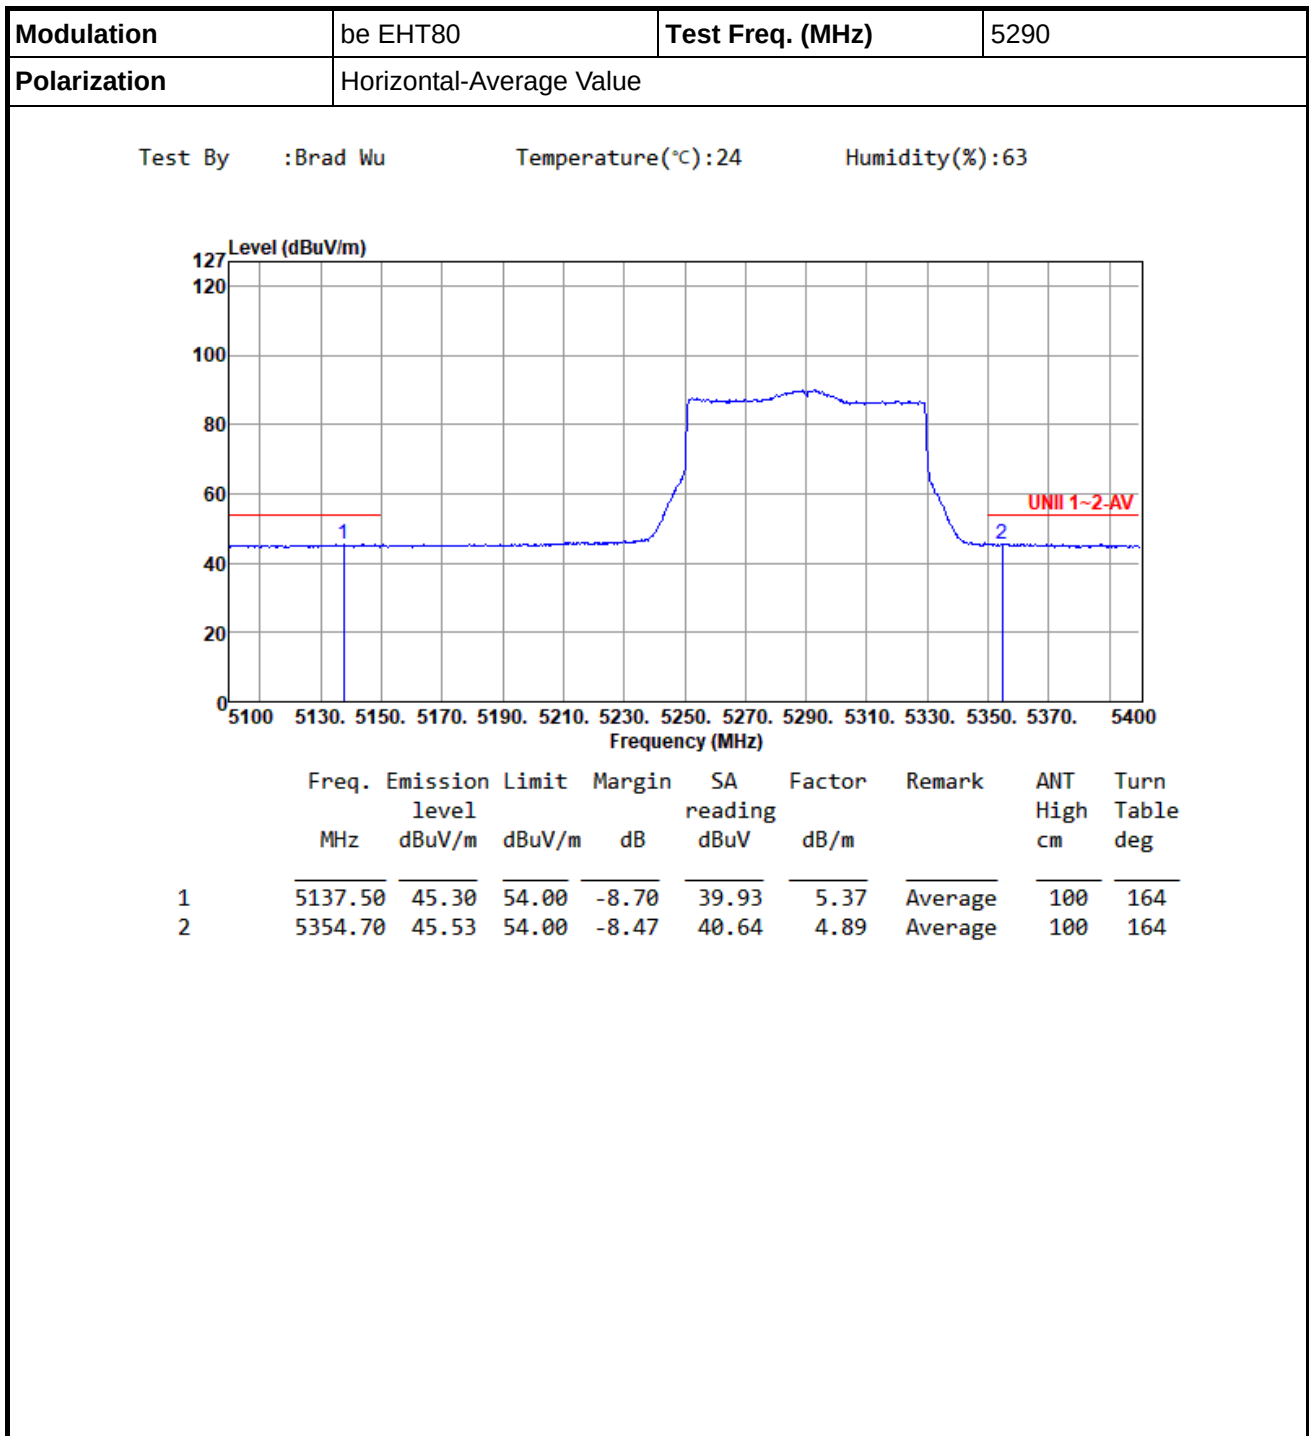


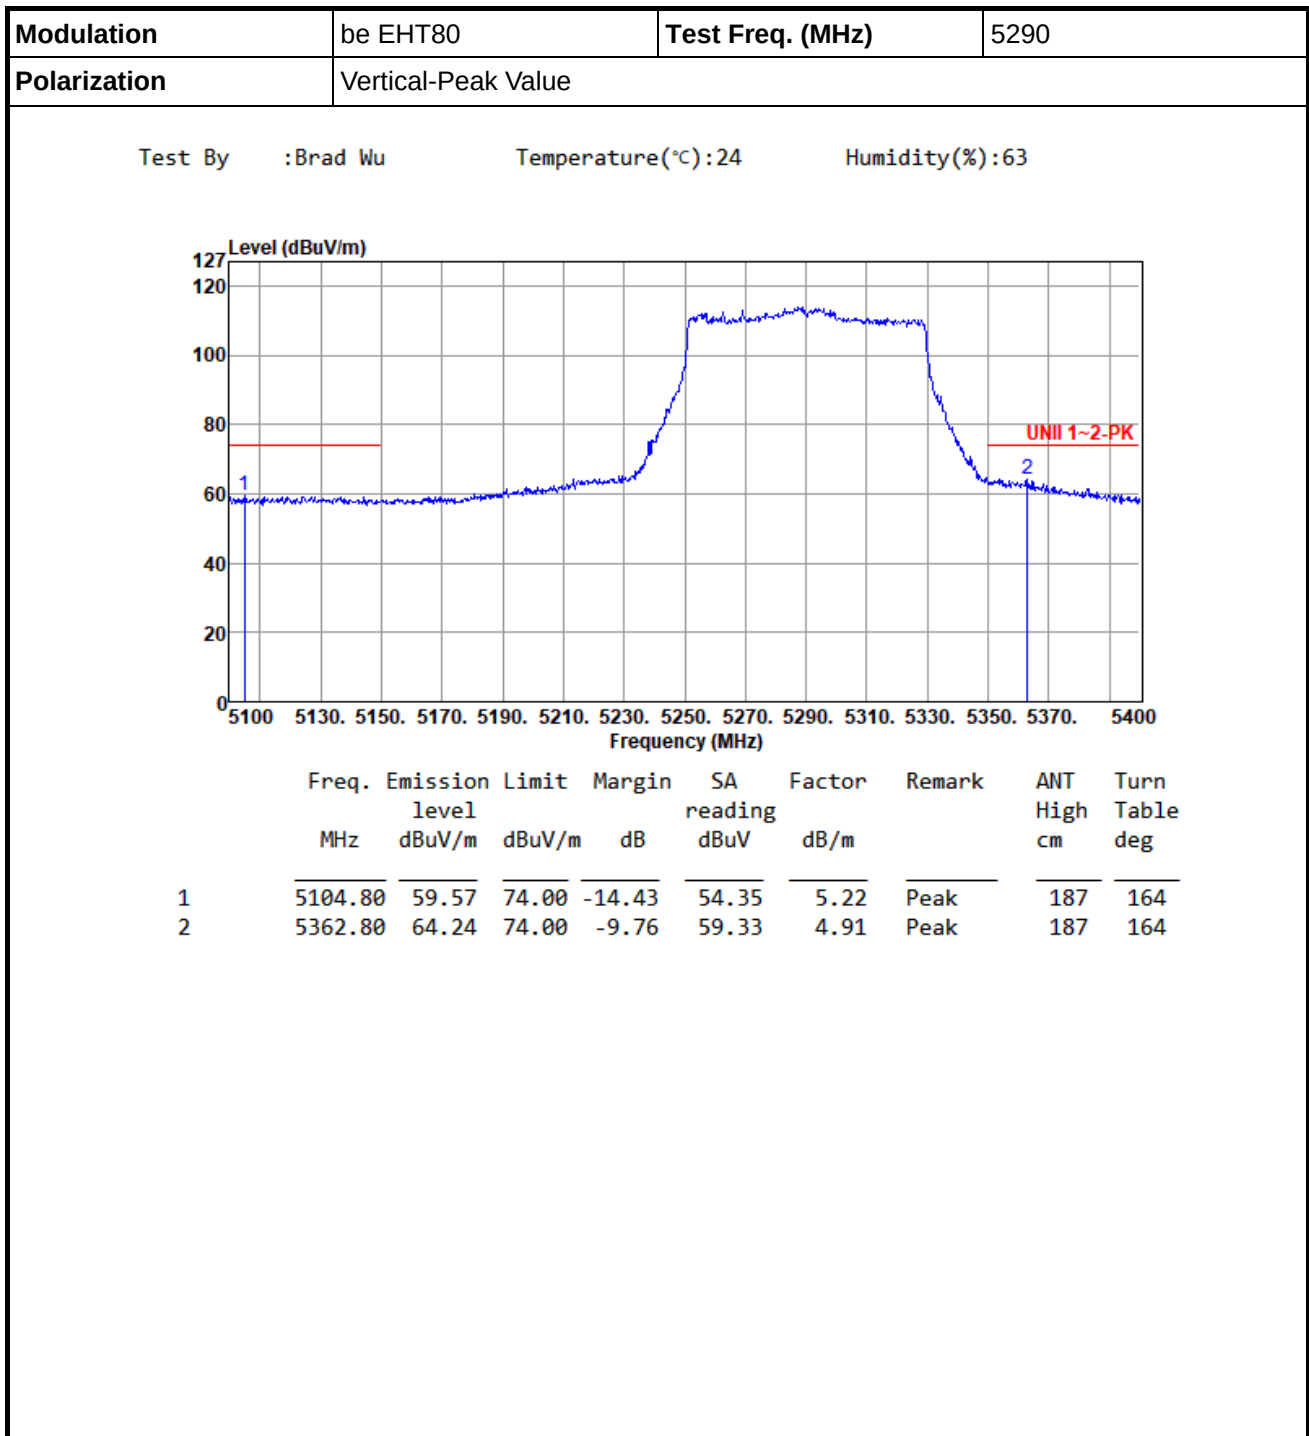


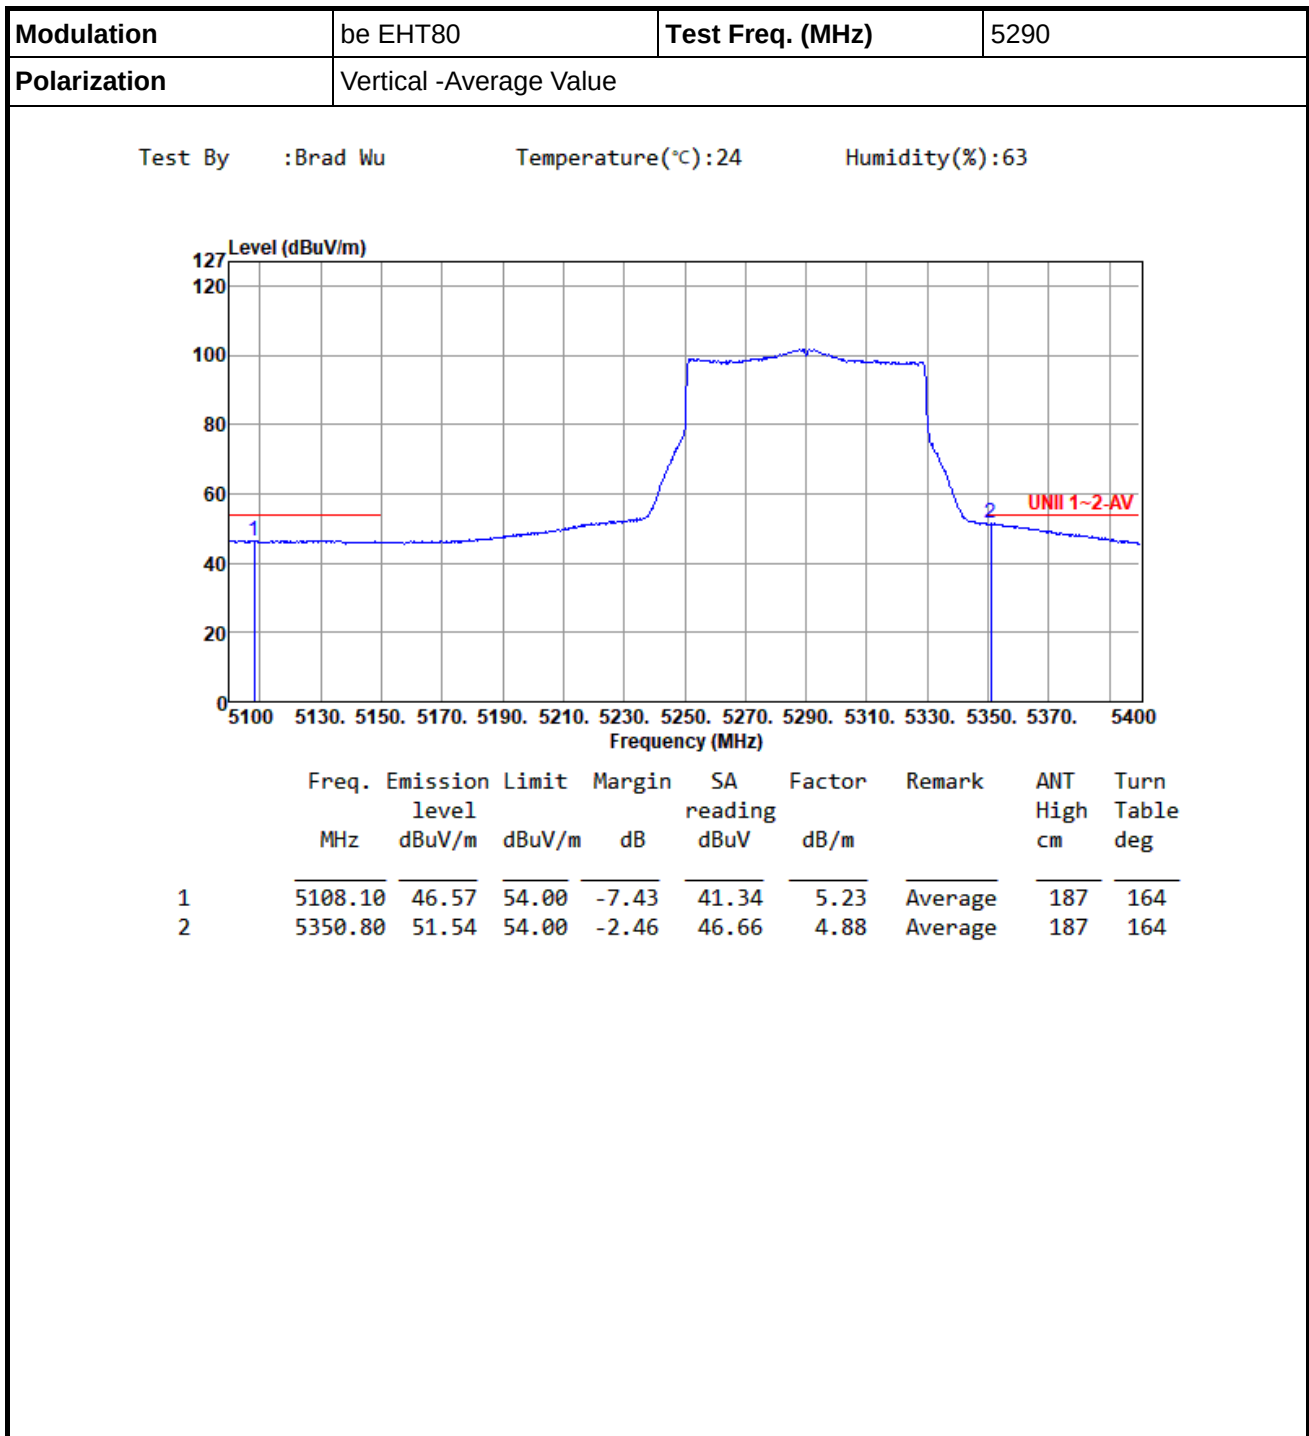


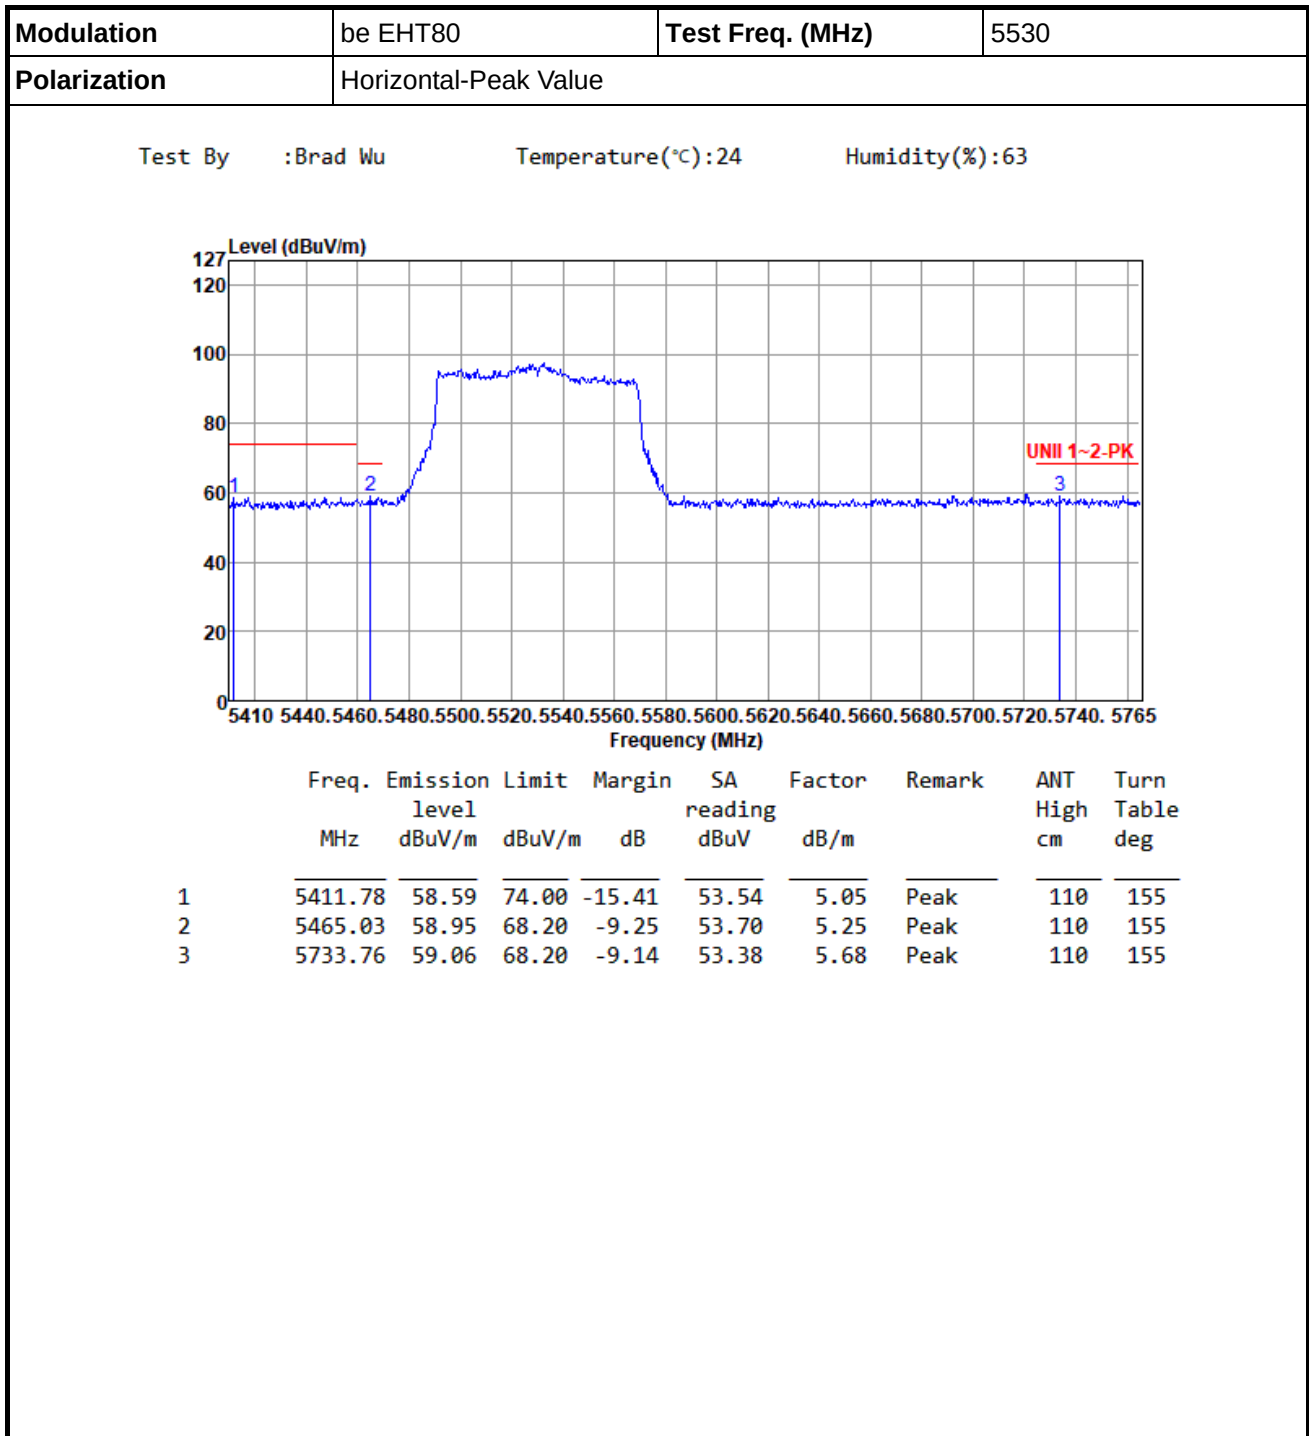


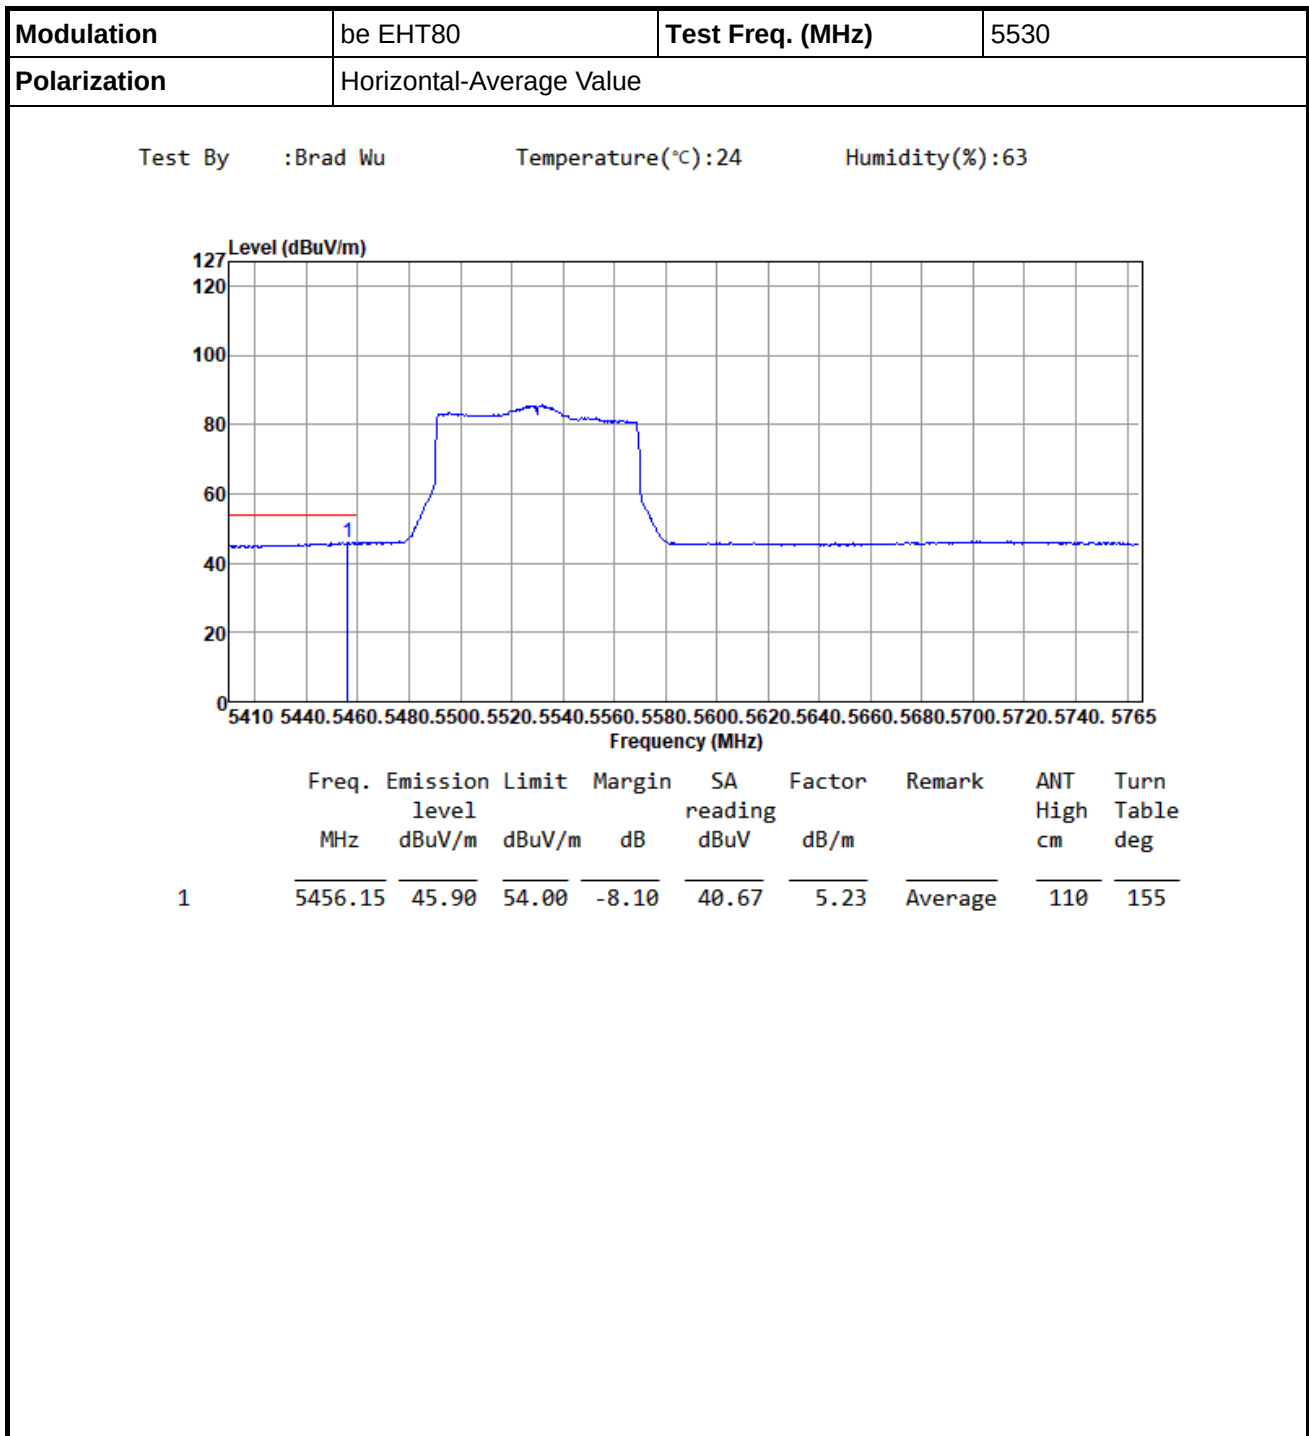


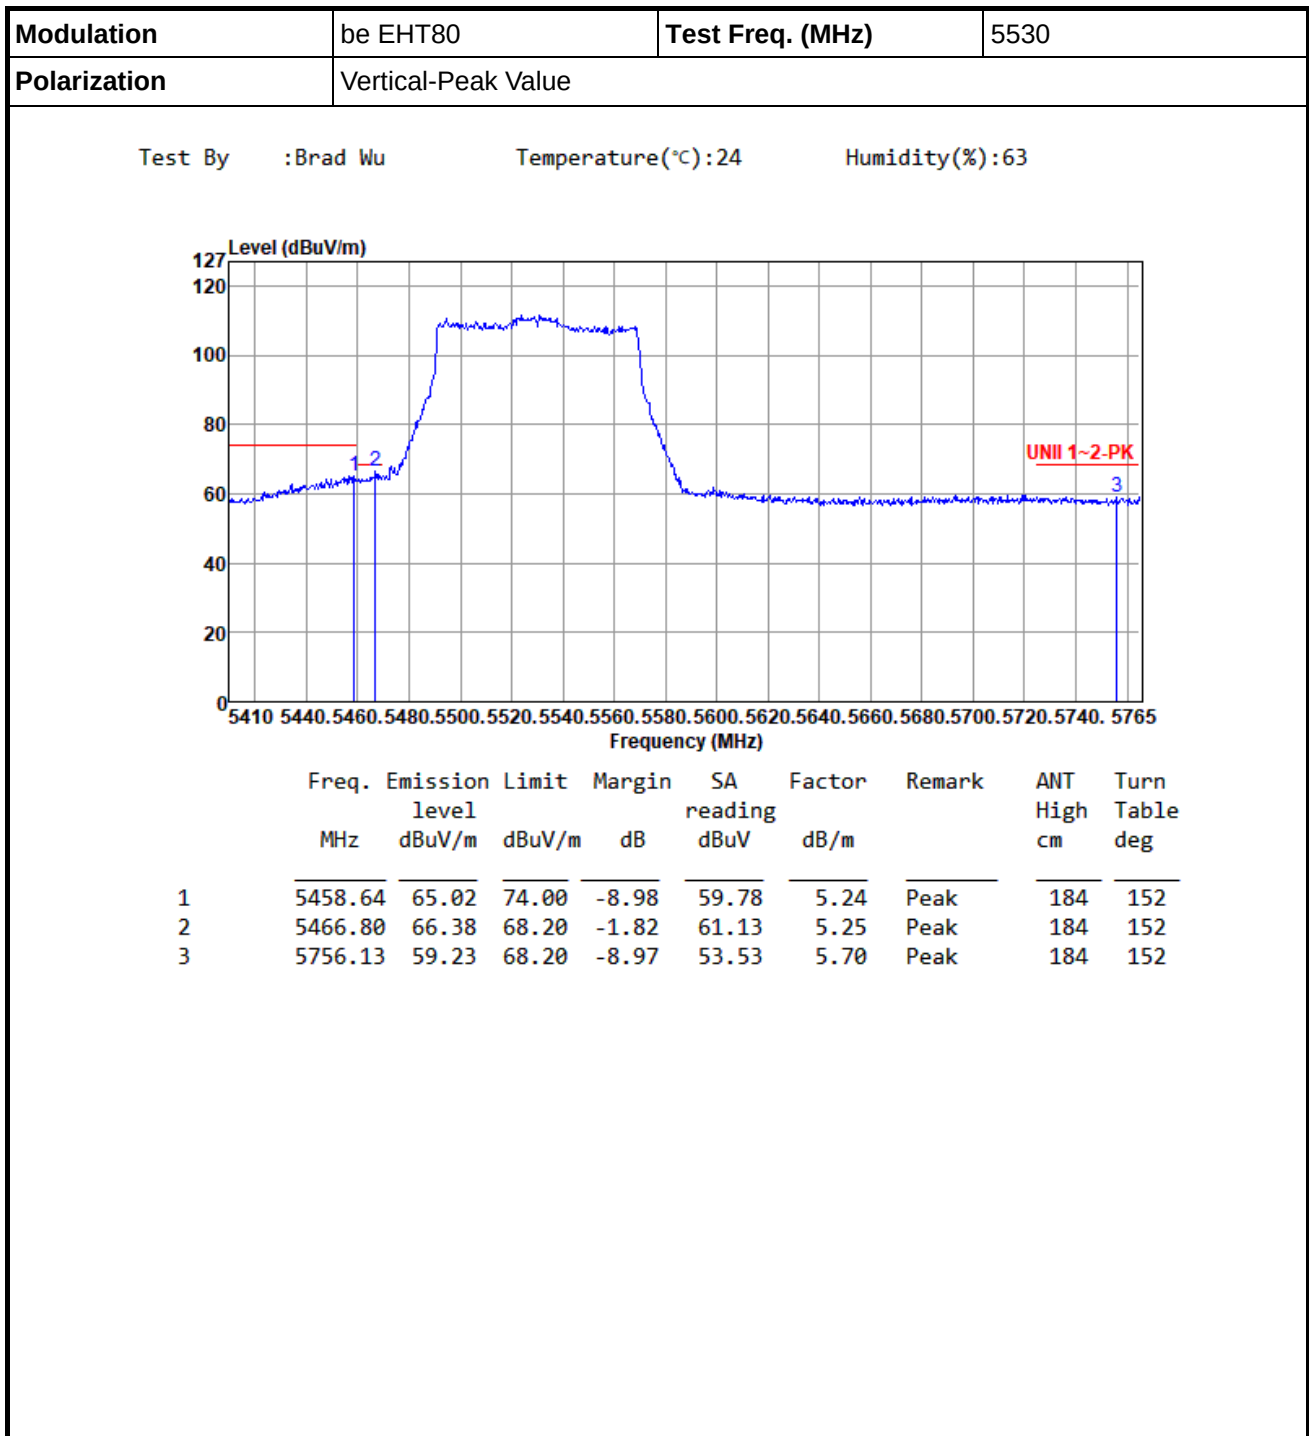


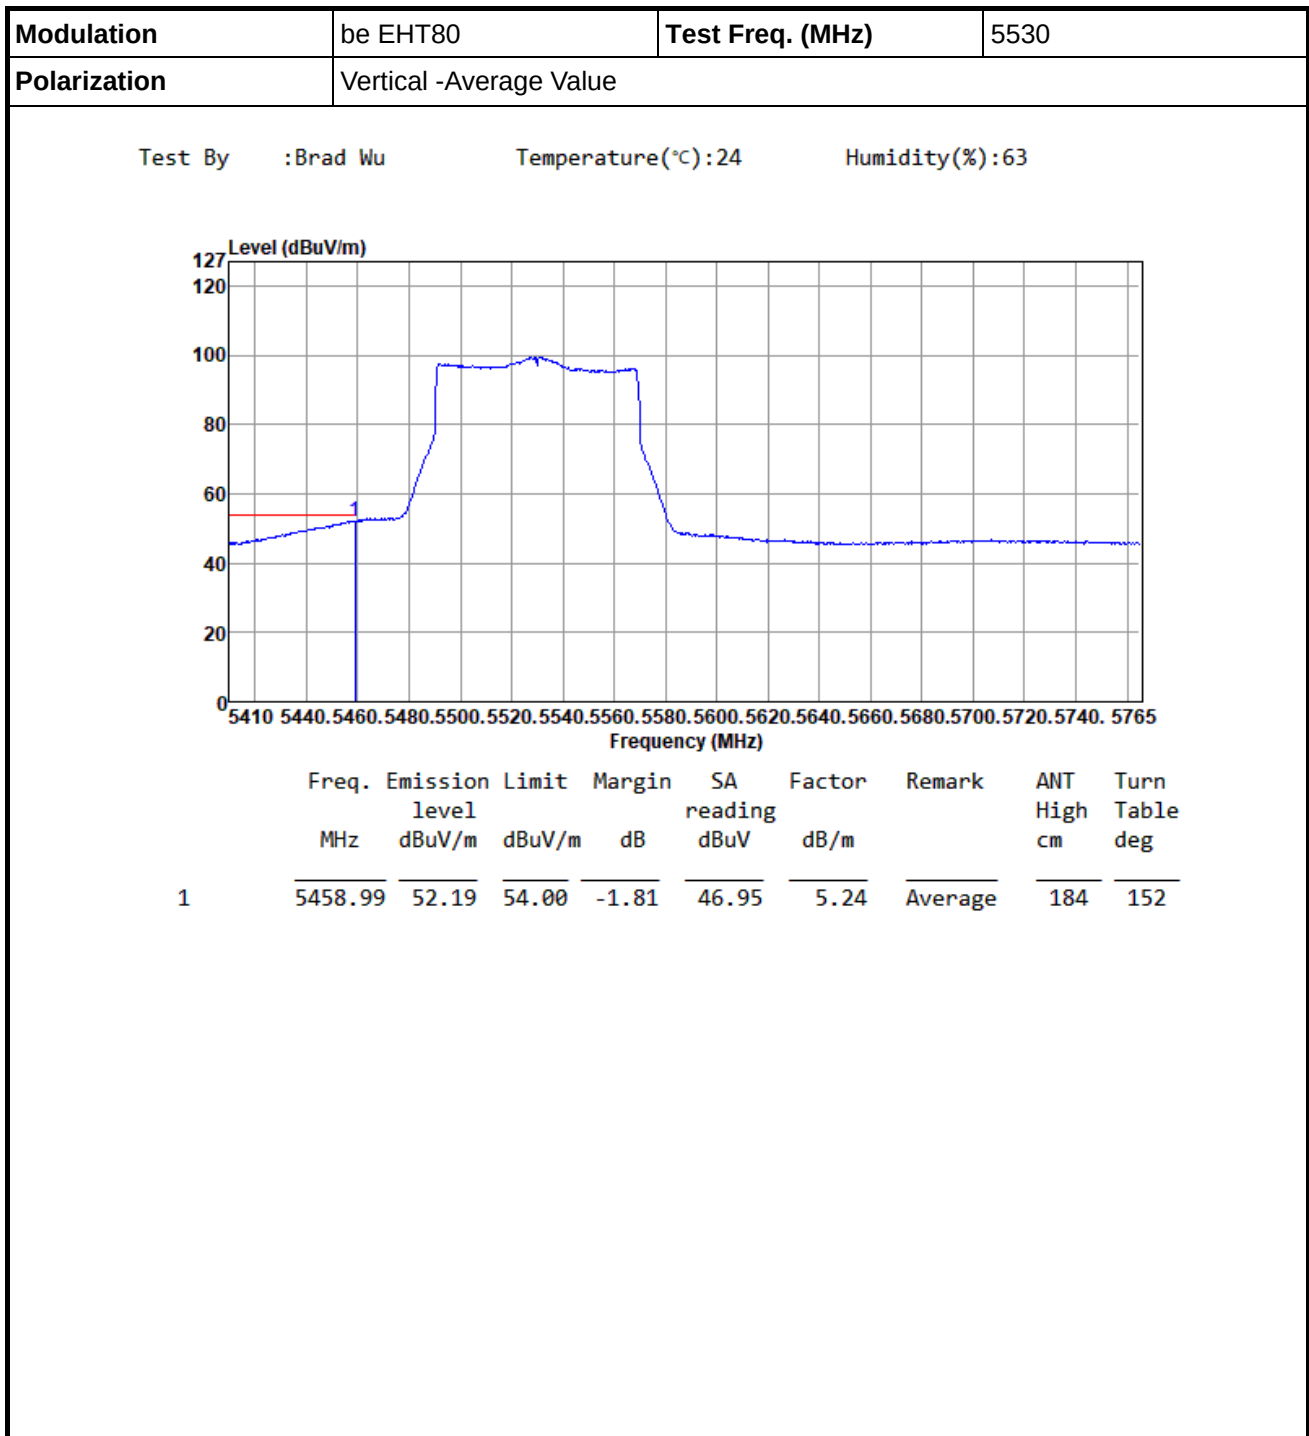


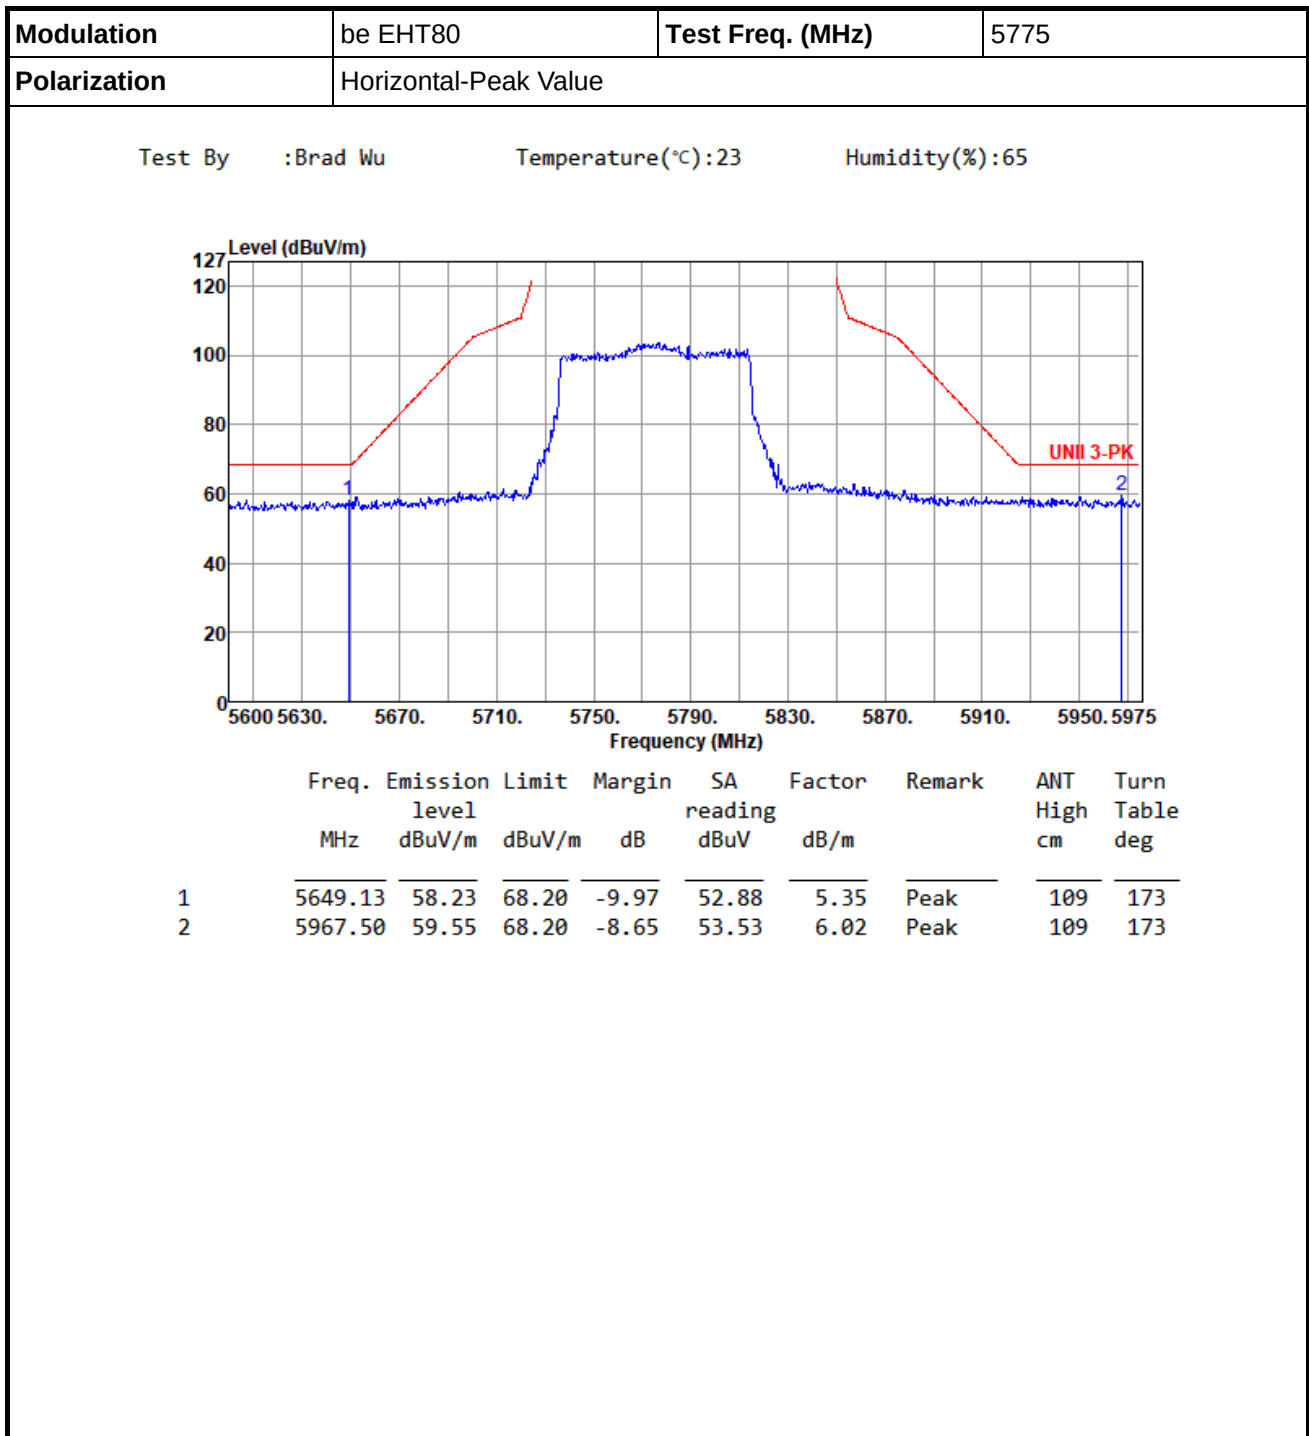


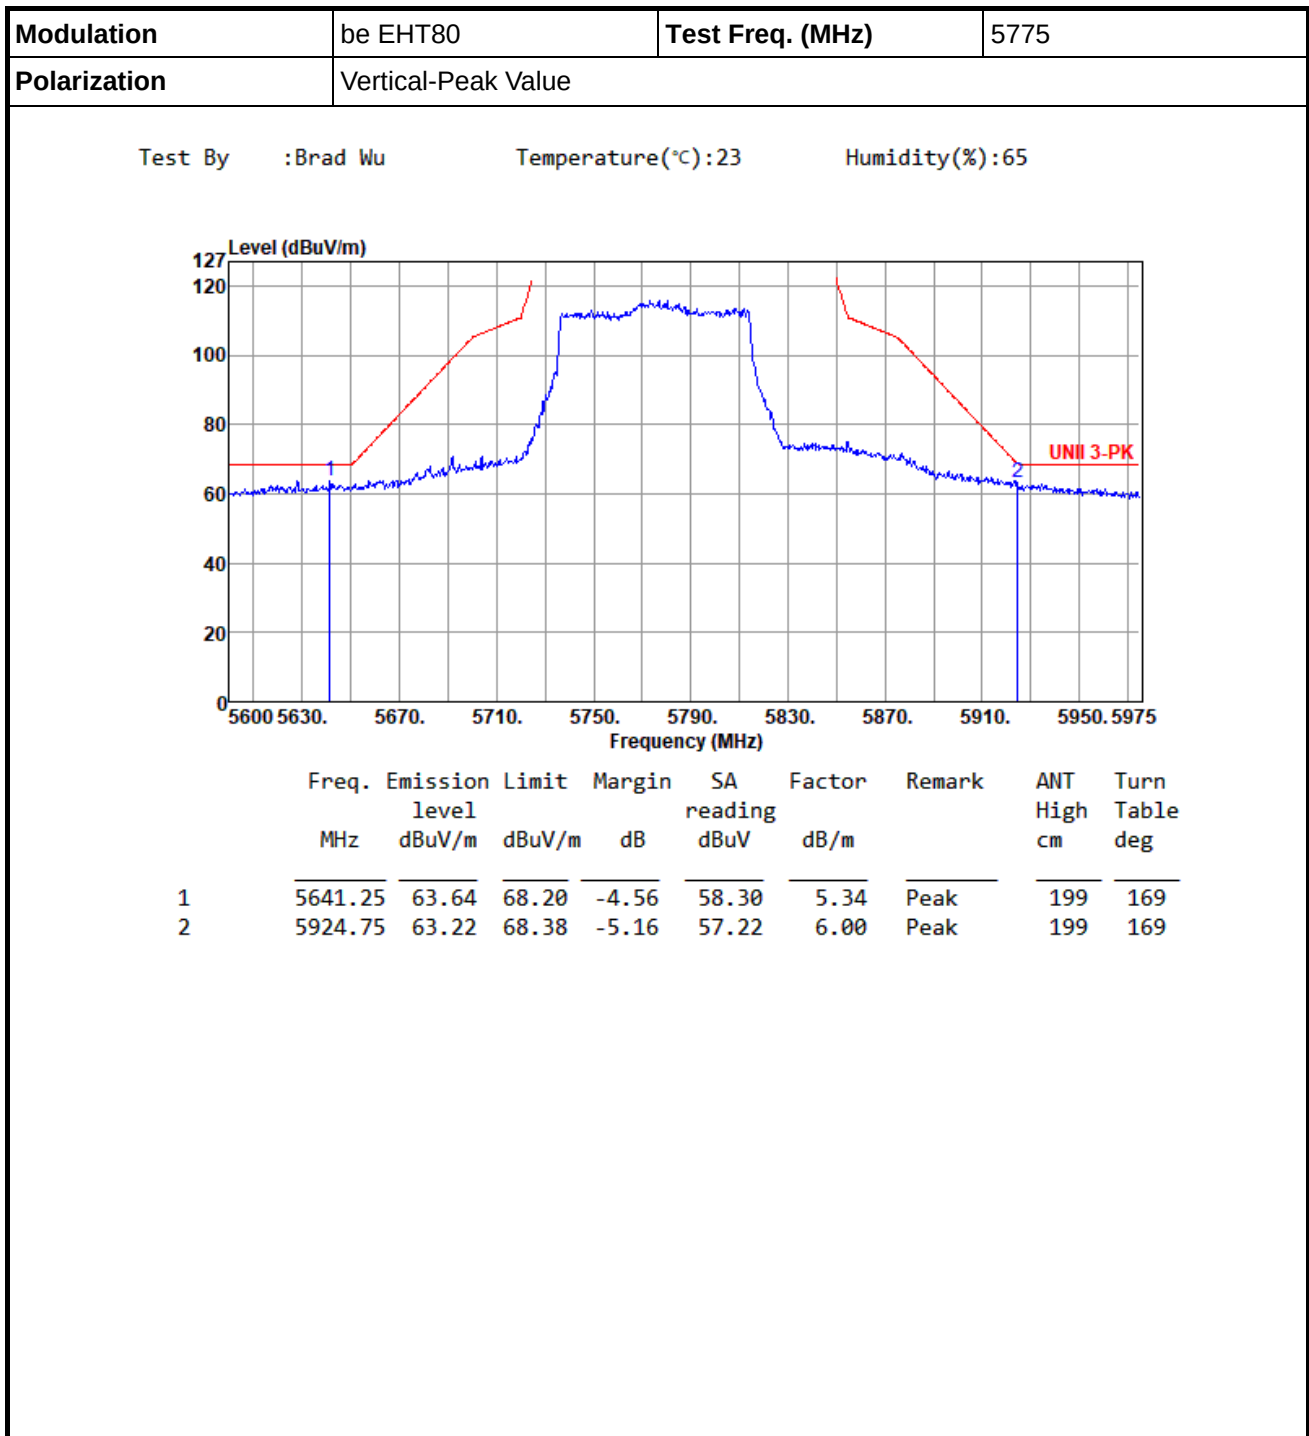


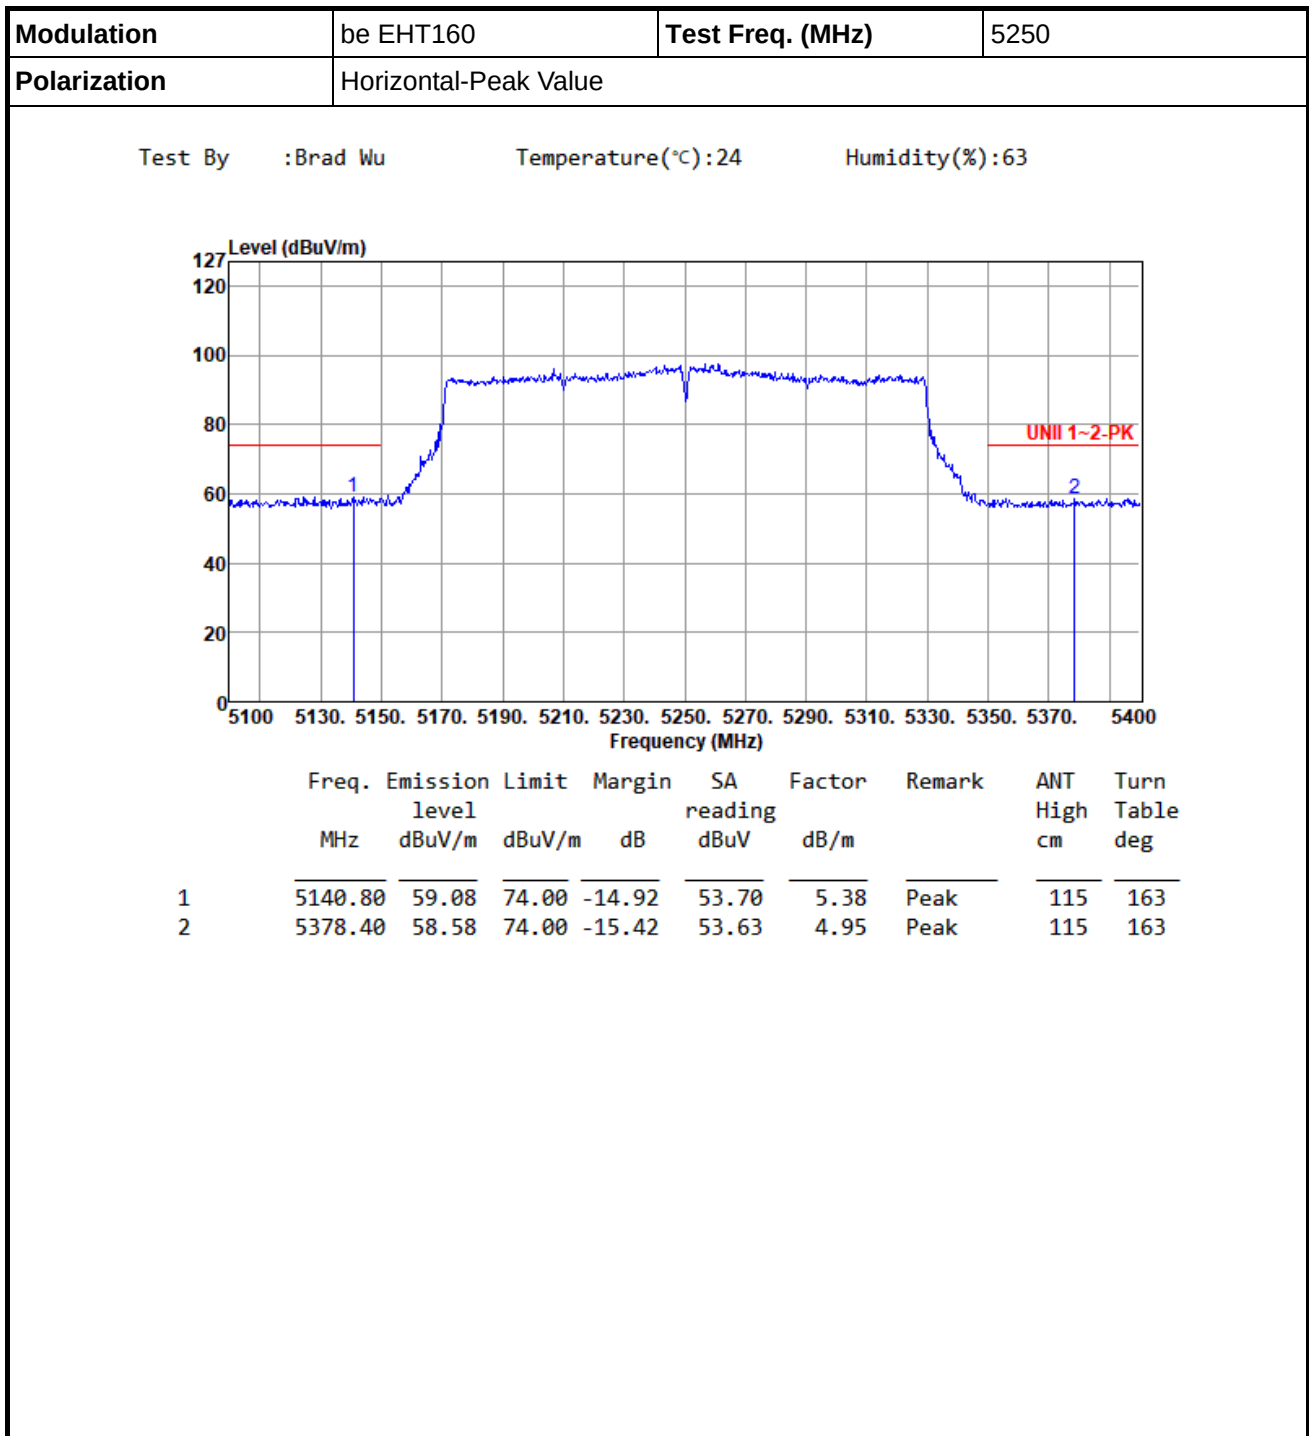


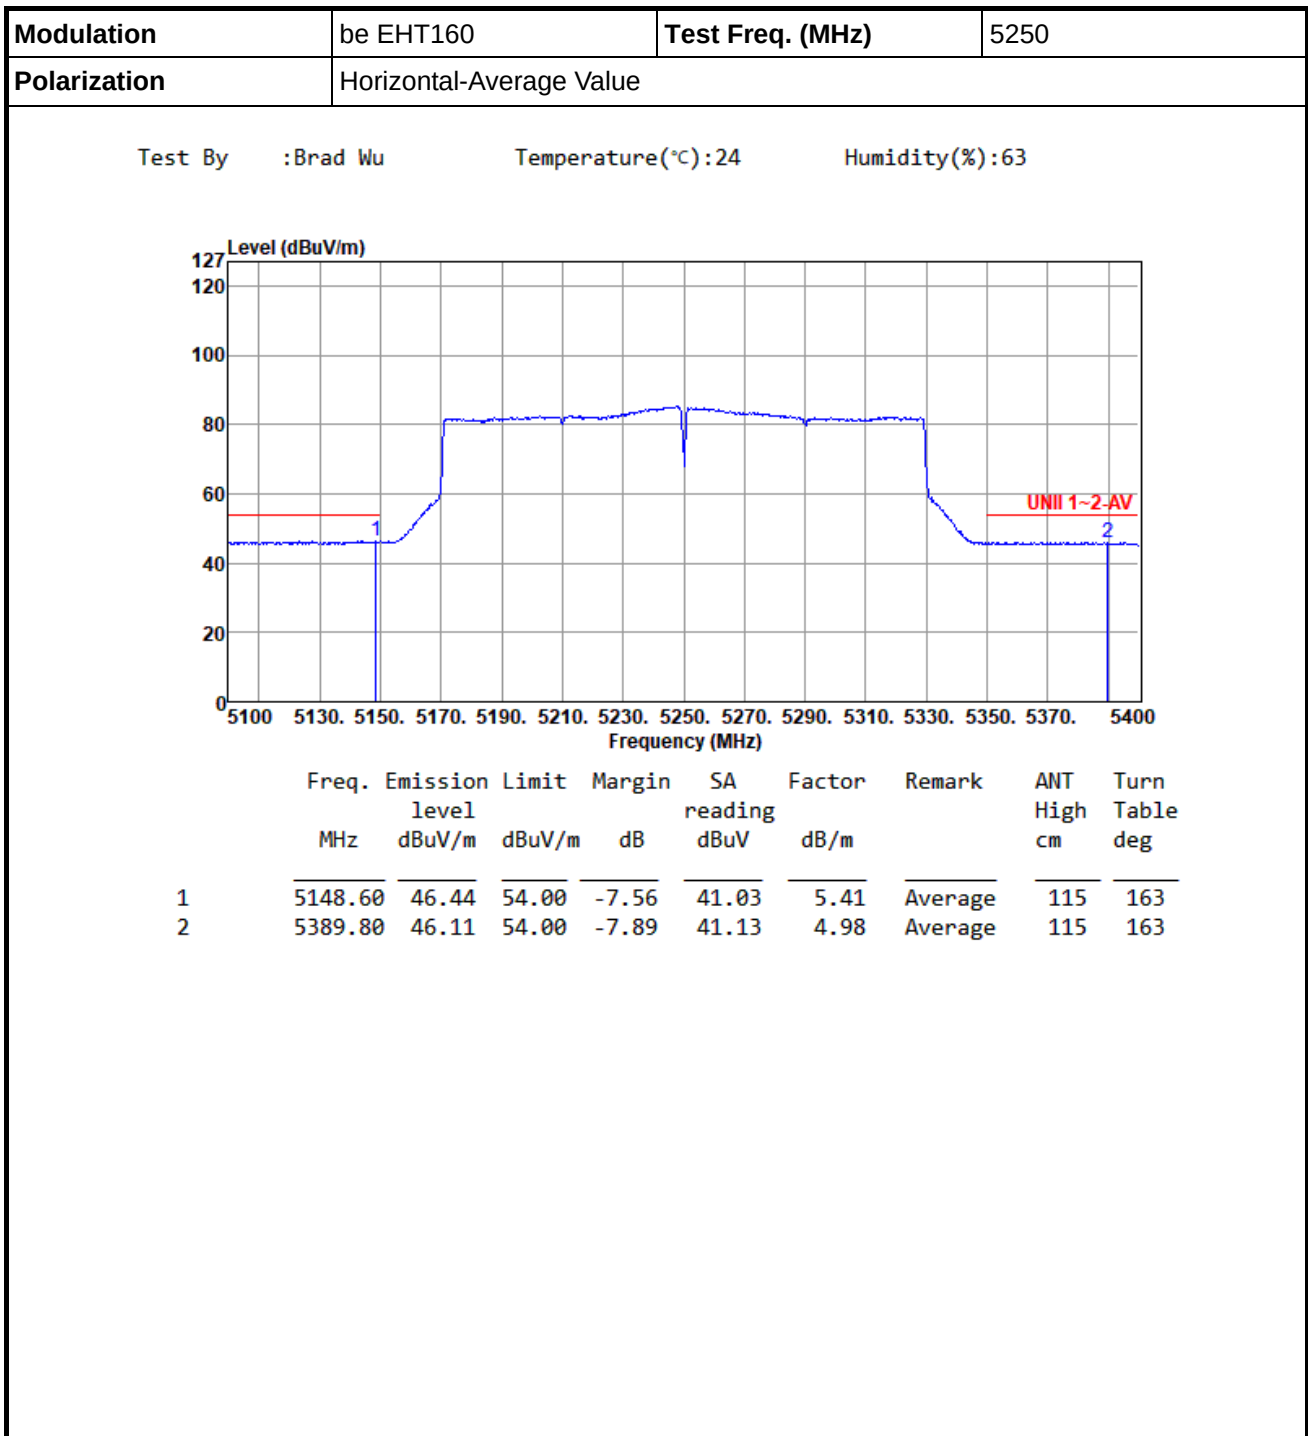


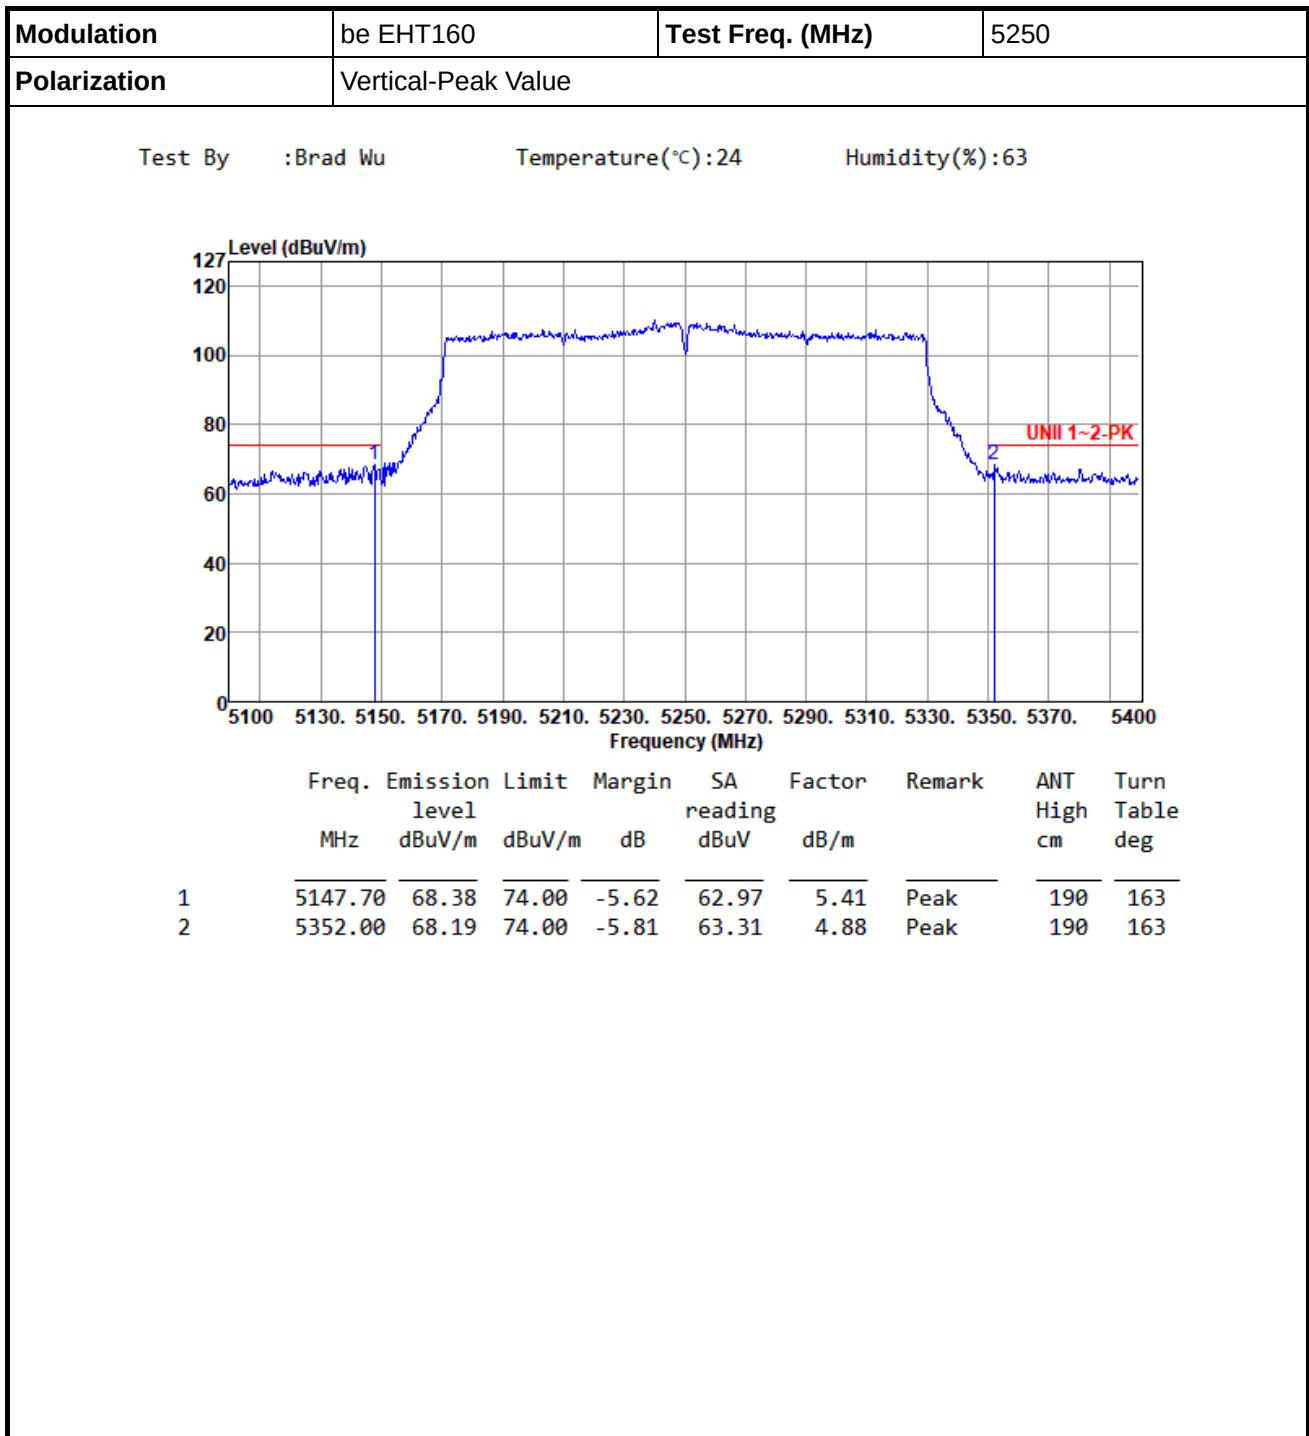


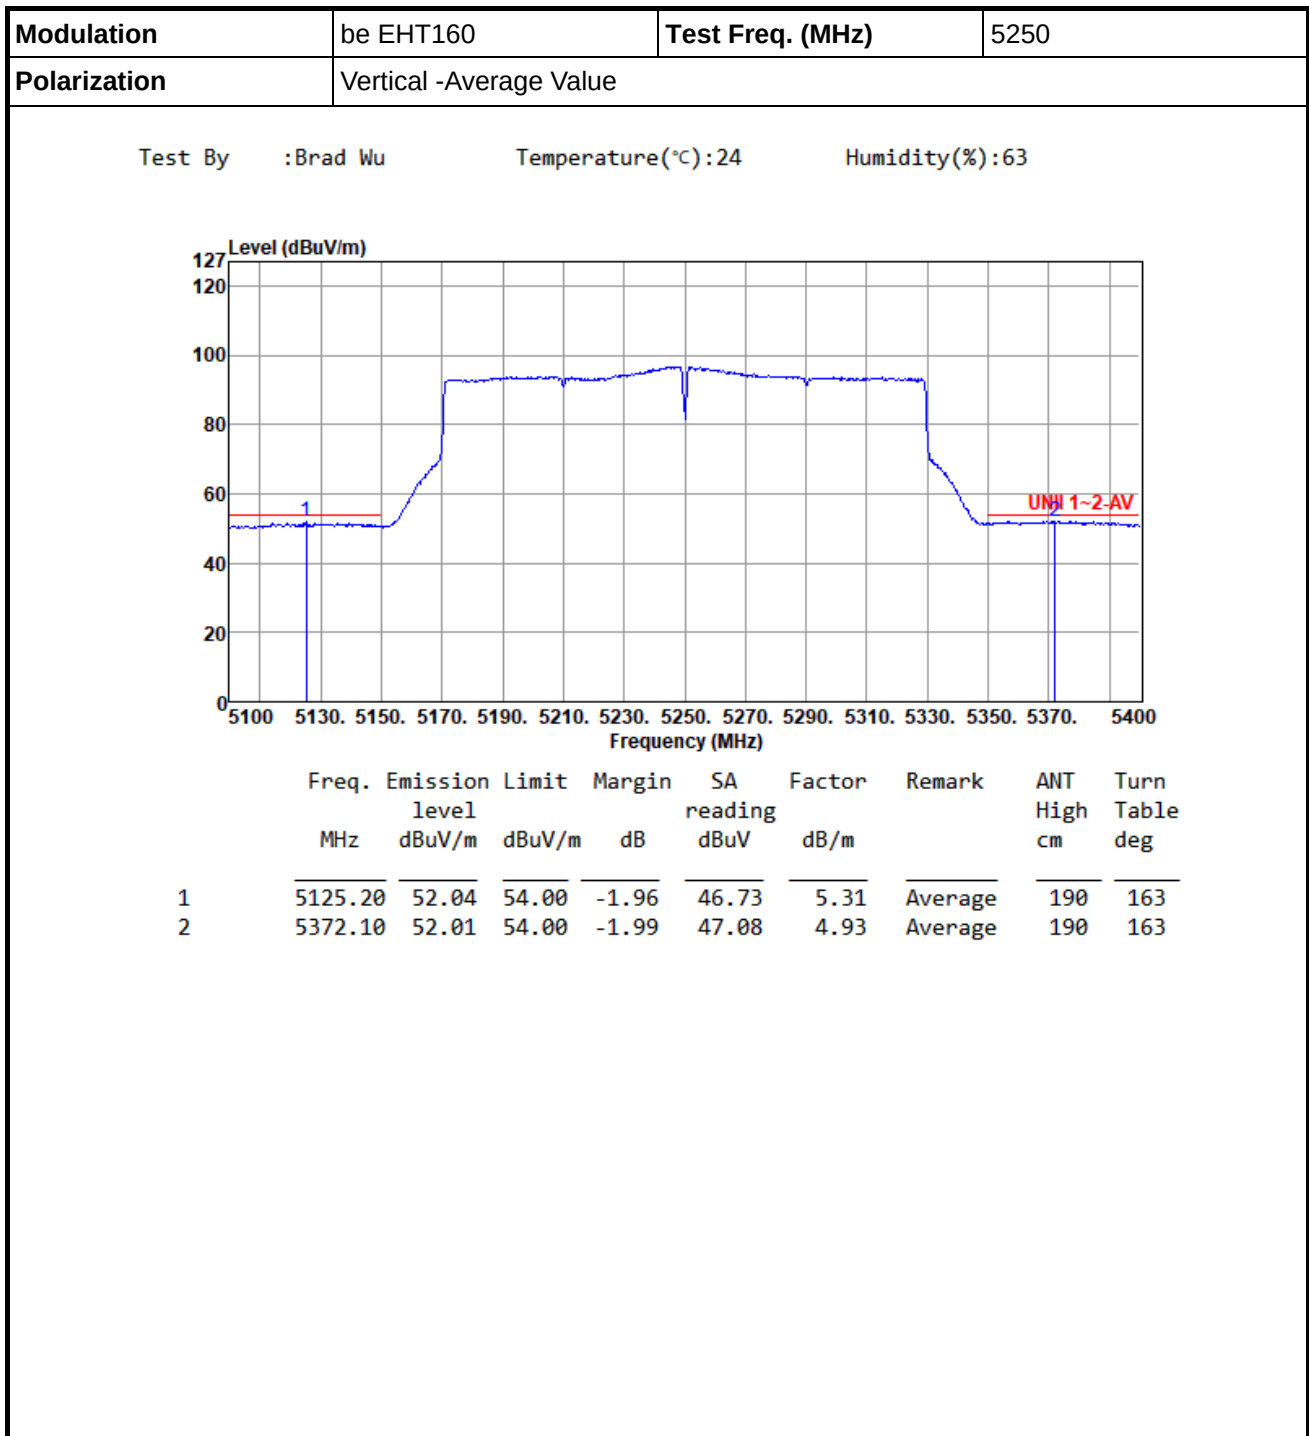


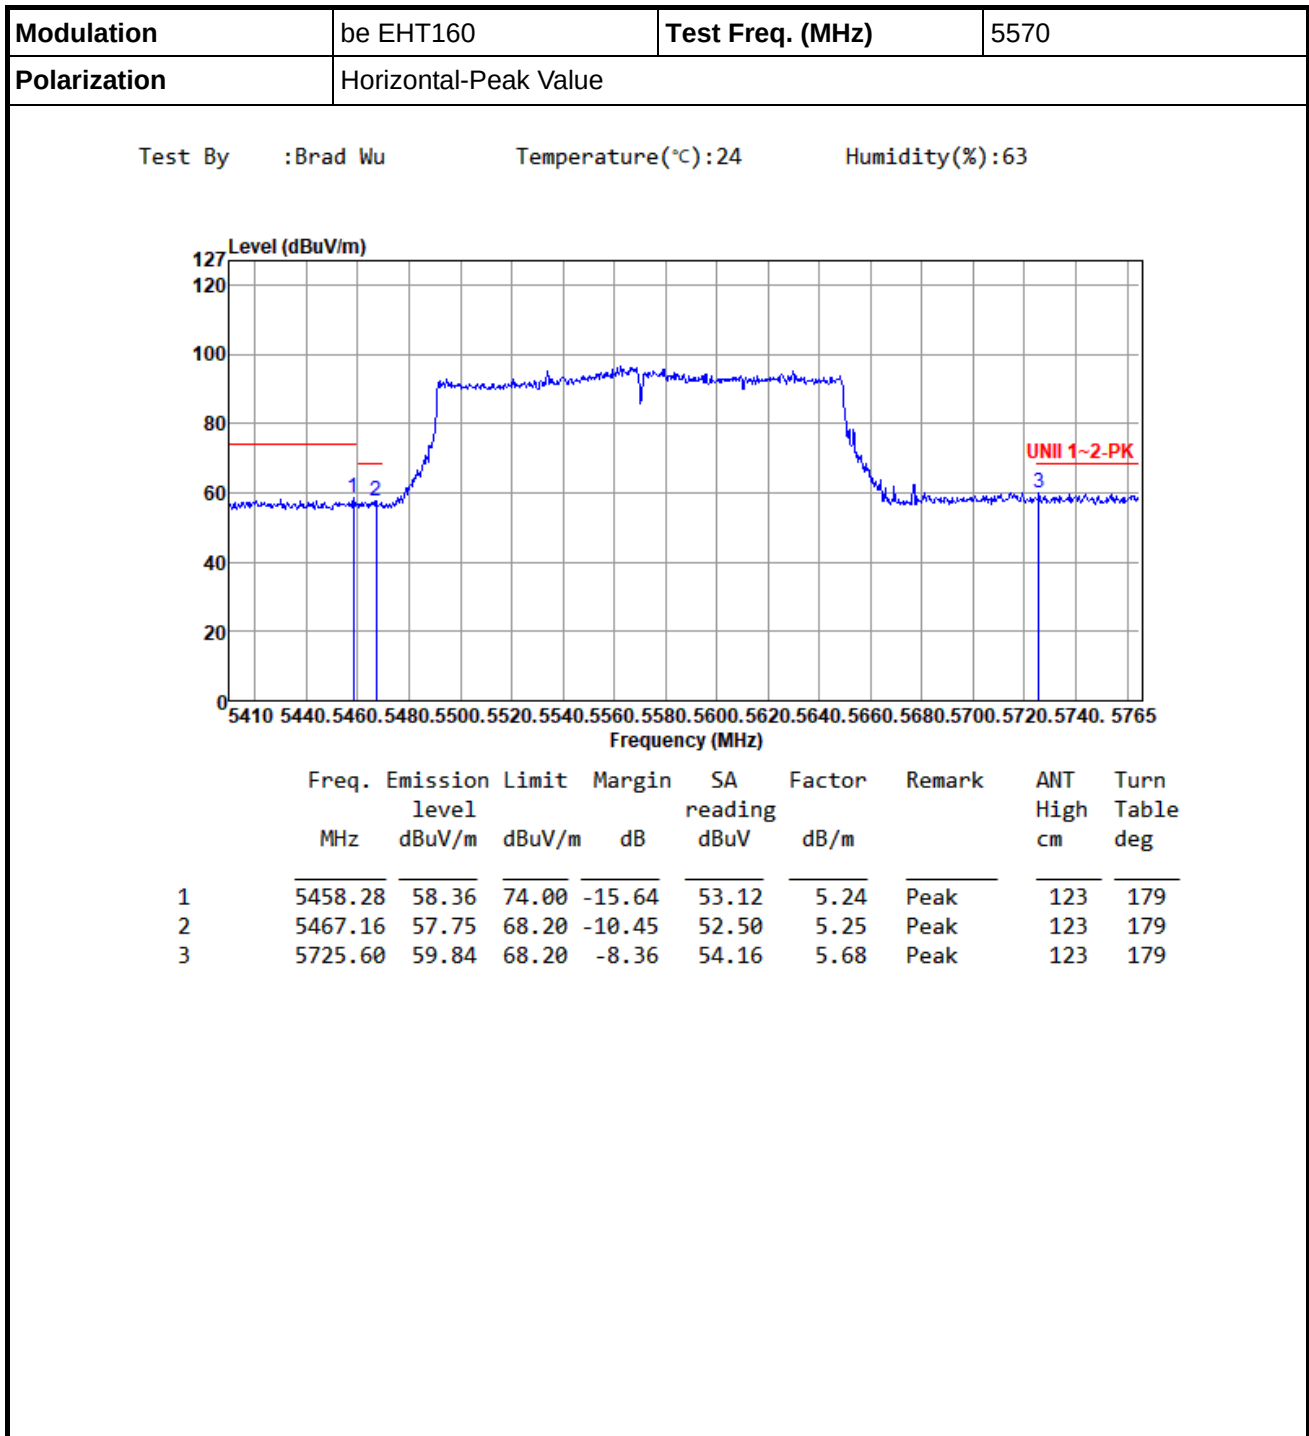

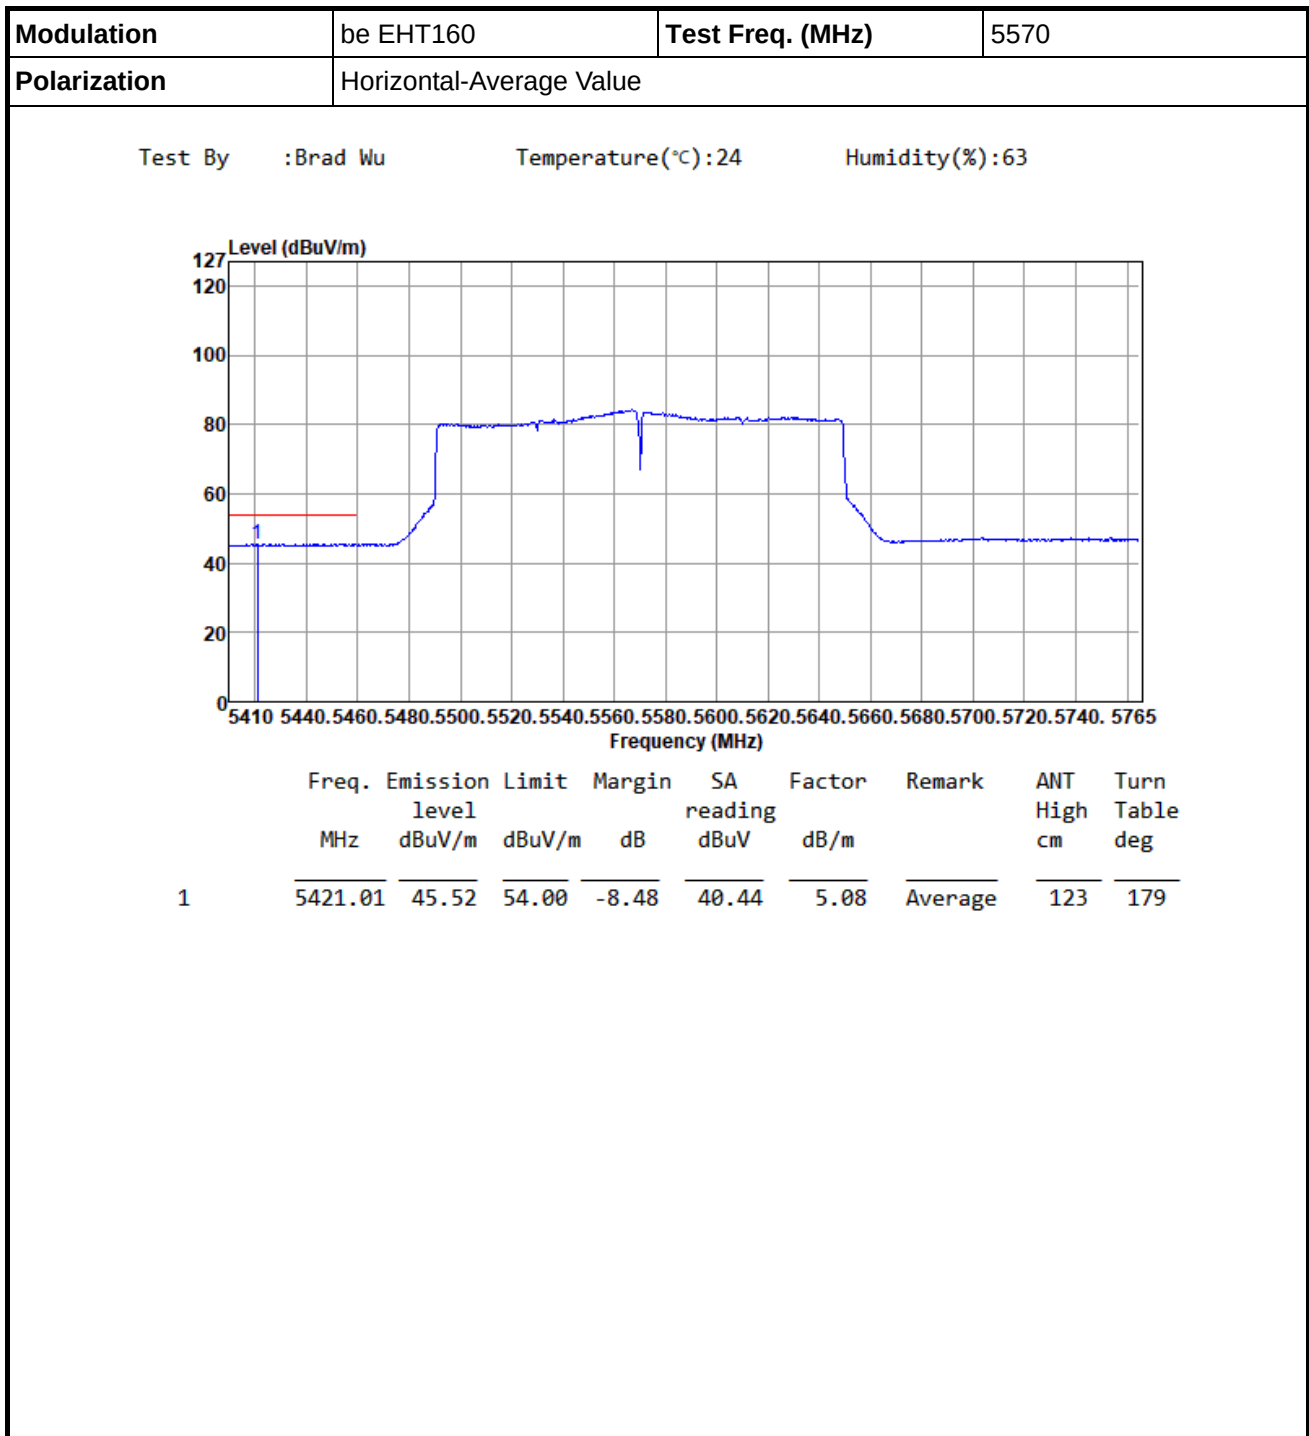

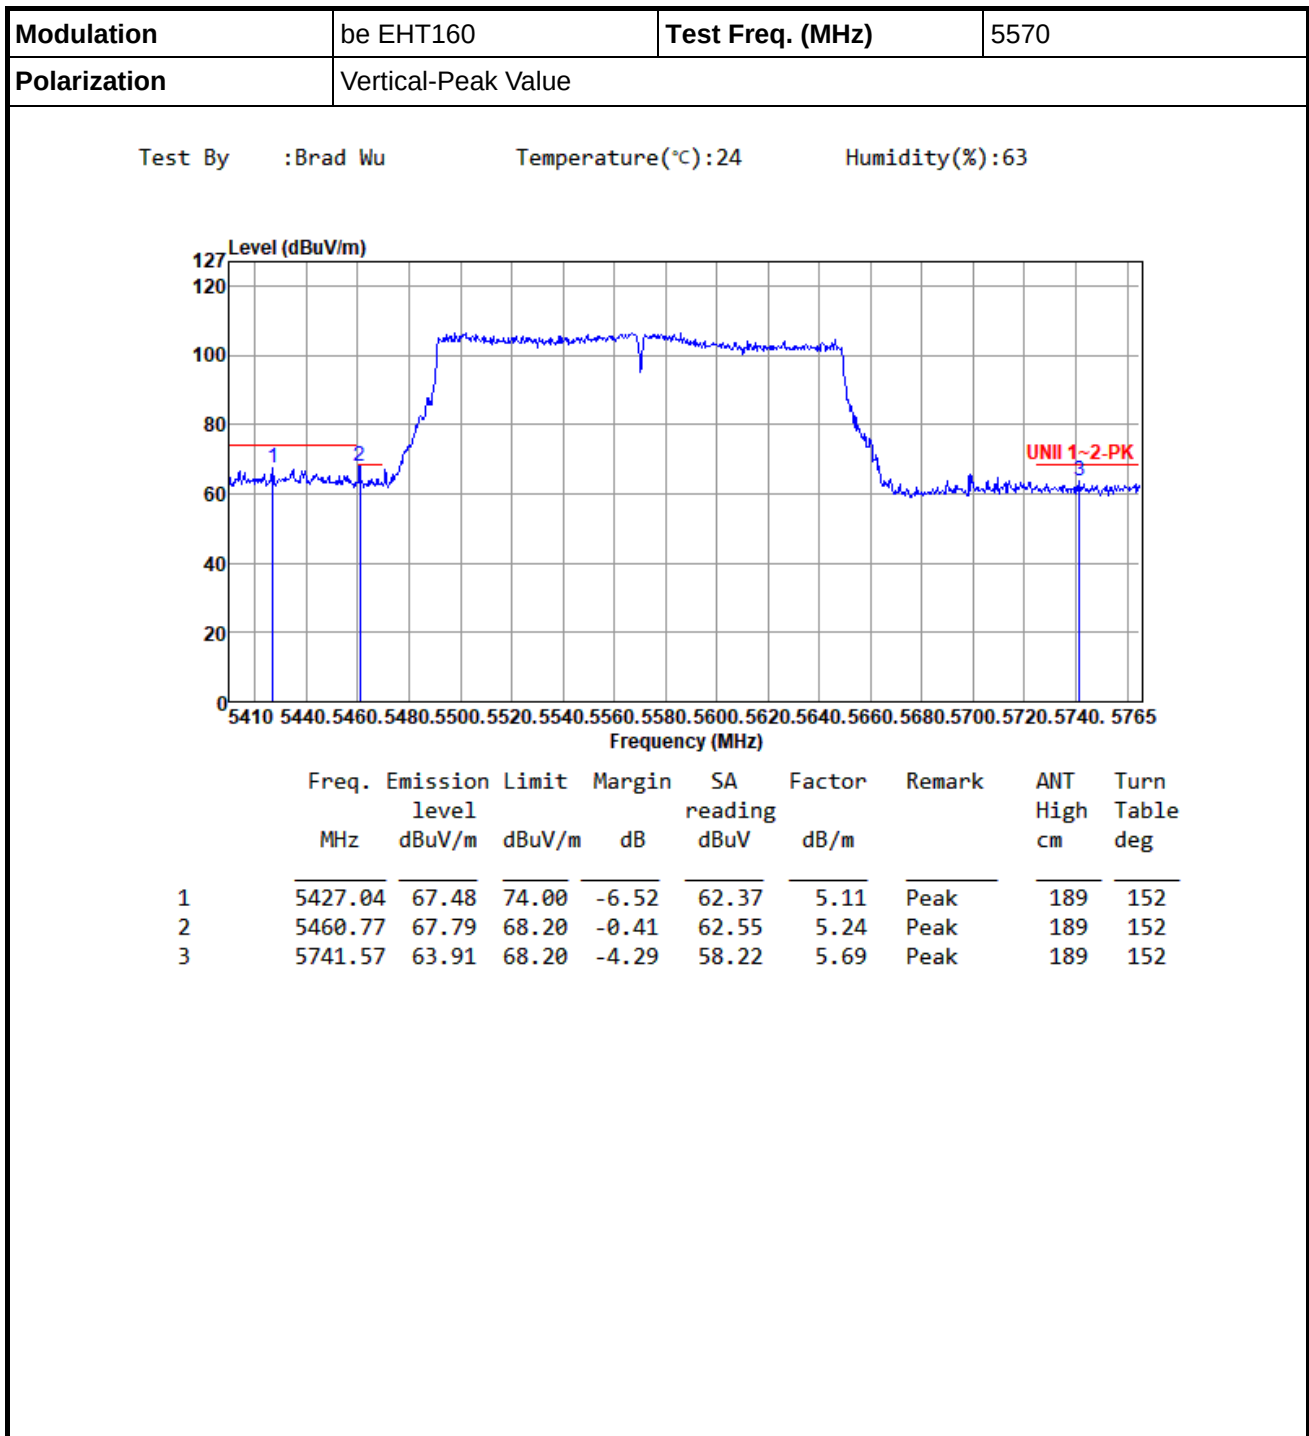


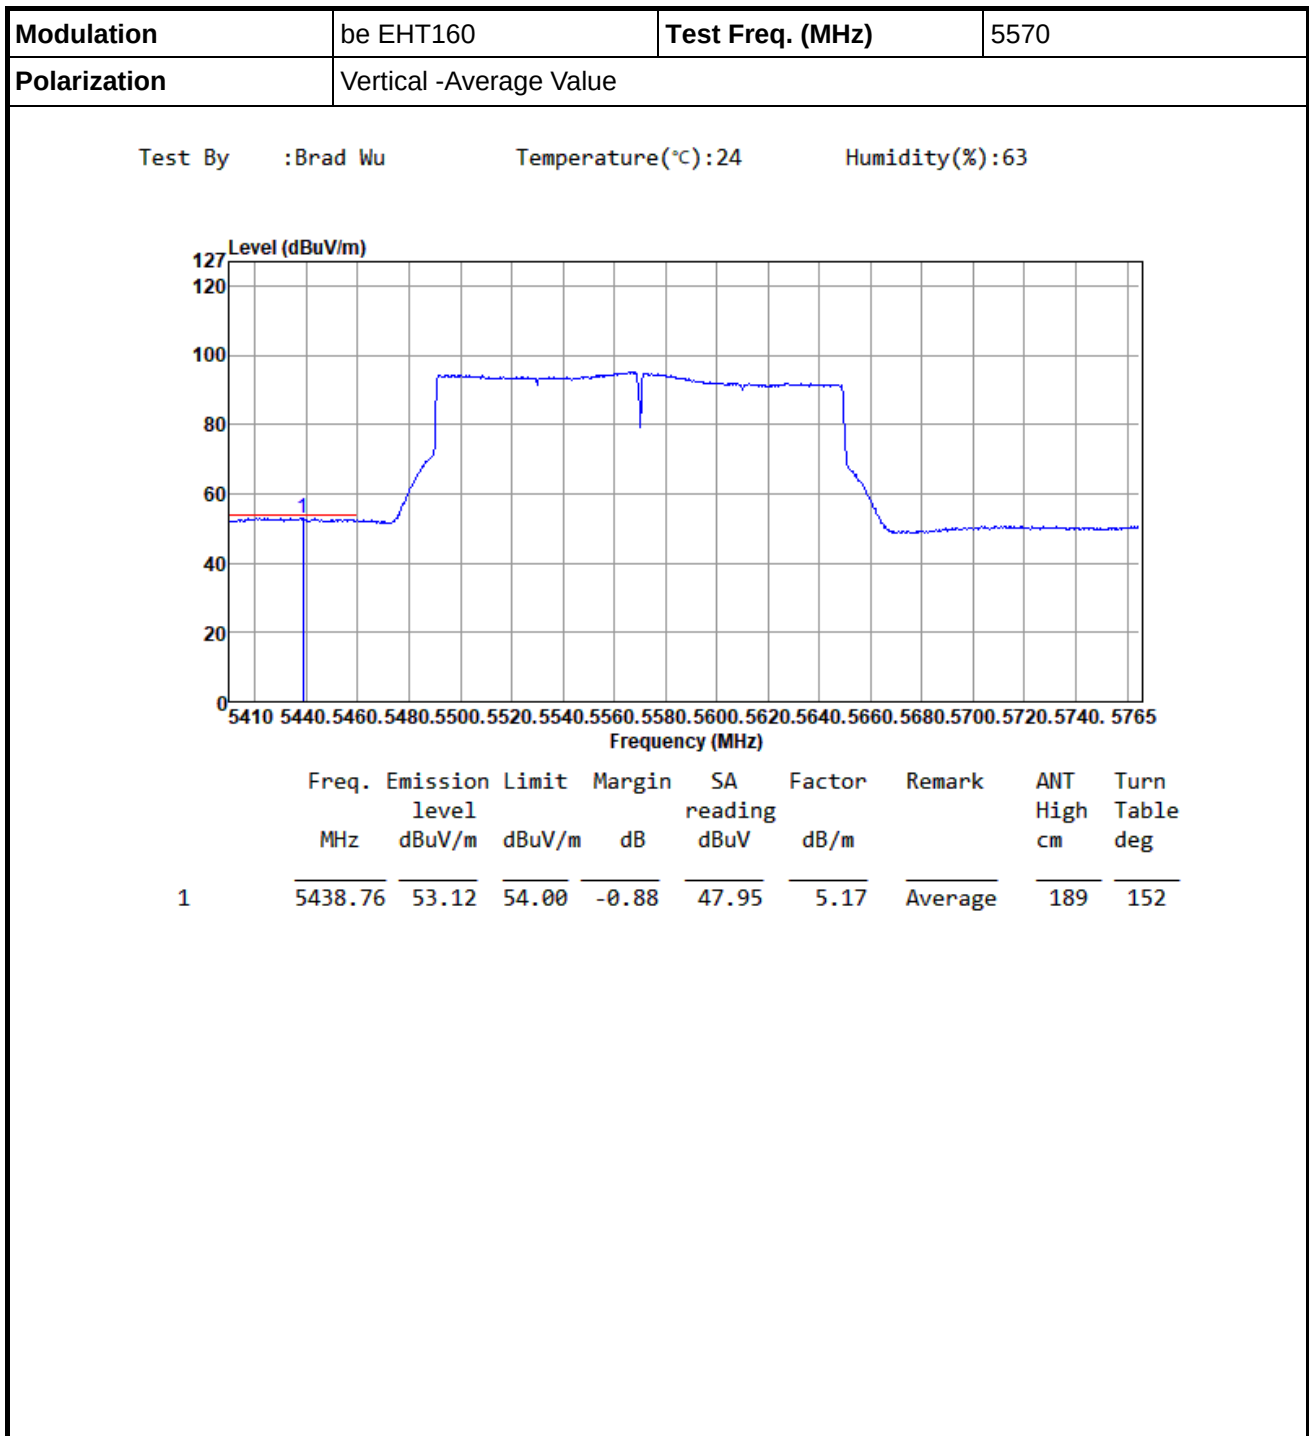

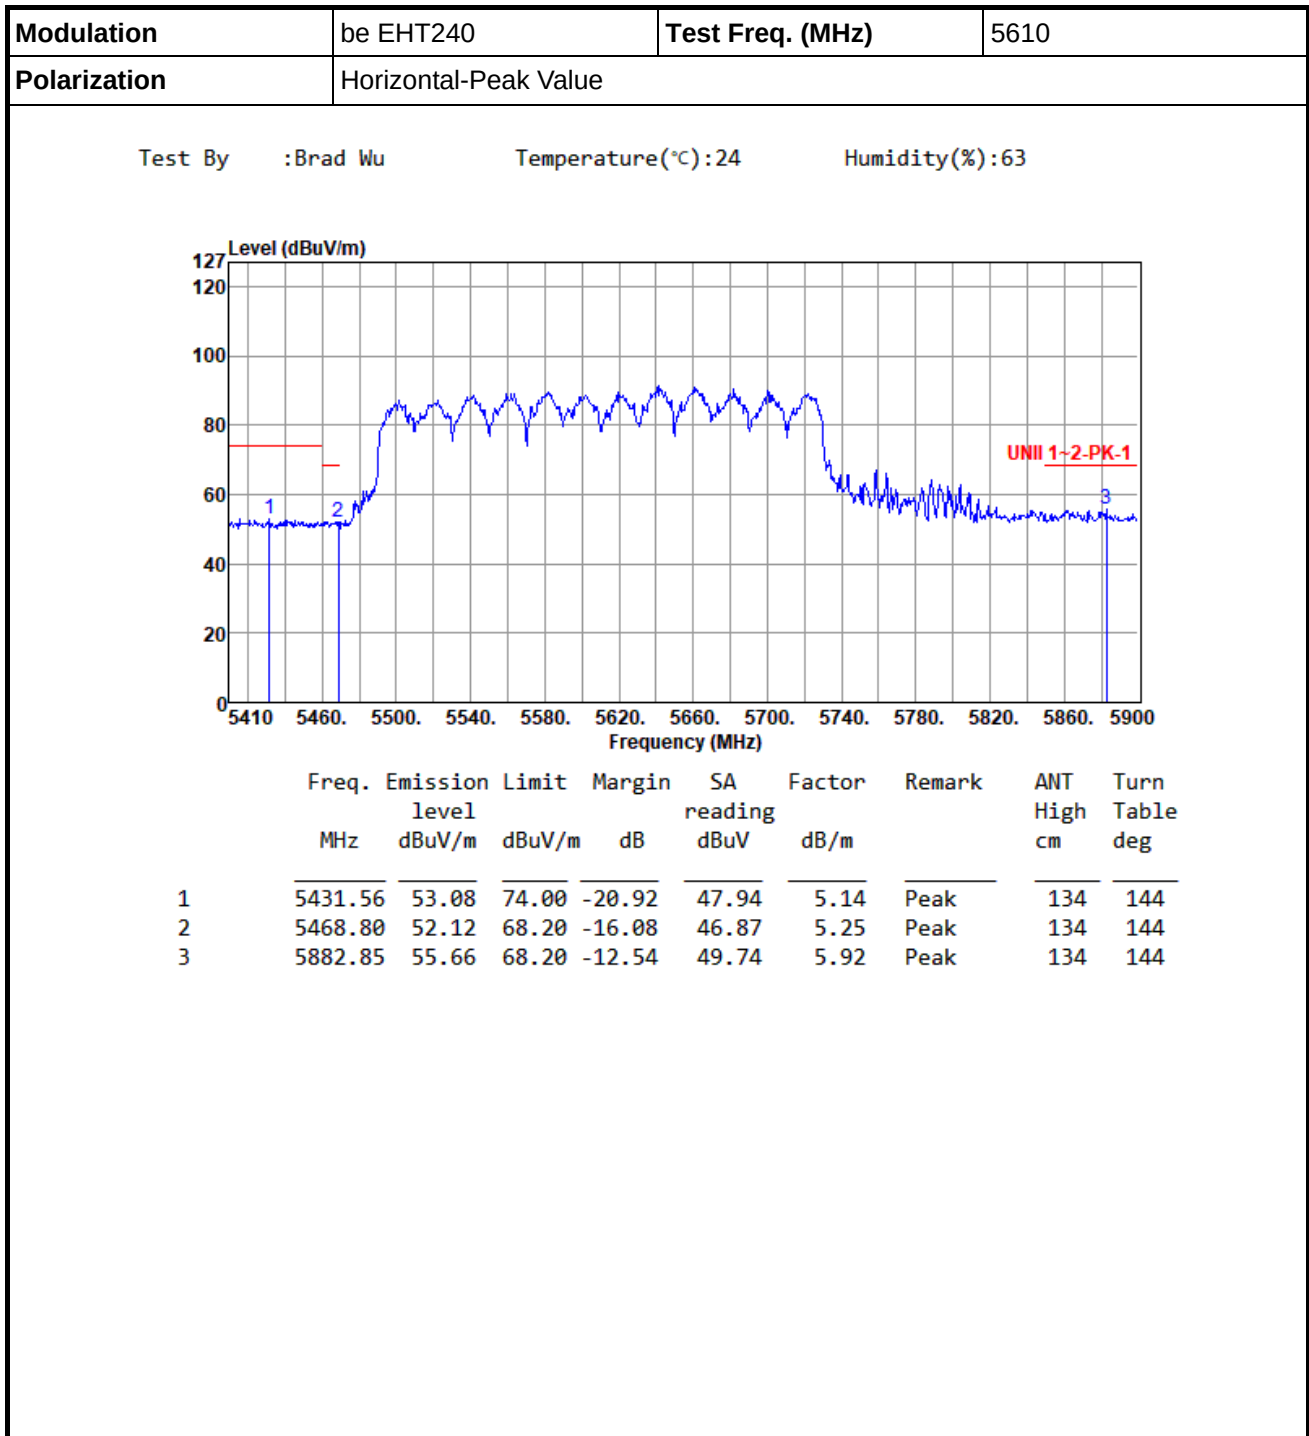



Modulation	be EHT240	Test Freq. (MHz)	5610						
Polarization	Horizontal-Average Value								
Test By :Brad Wu Temperature(°C):24 Humidity(%):63									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5458.51	40.24	54.00	-13.76	35.00	5.24	Average	134	144

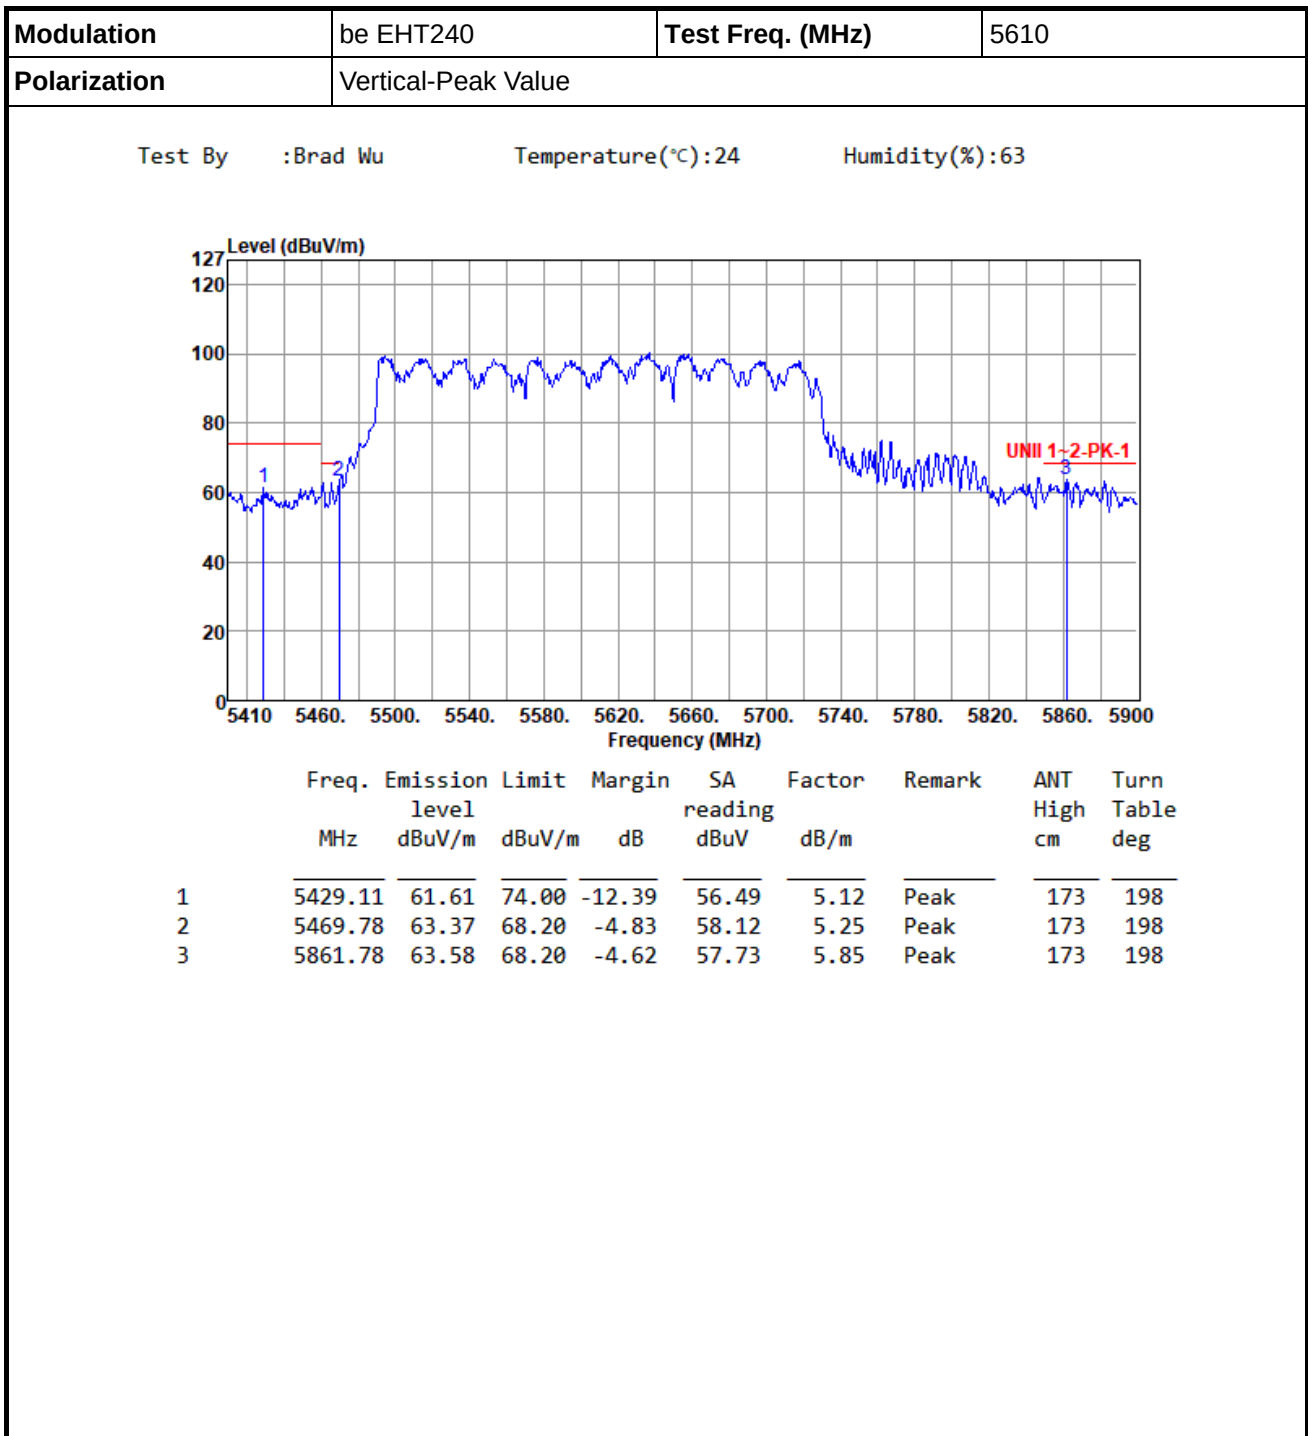



Modulation	be EHT240	Test Freq. (MHz)	5610						
Polarization	Vertical -Average Value								
Test By :Brad Wu Temperature(°C):24 Humidity(%):63									
Level (dBuV/m) Frequency (MHz)									
	Freq.	Emission Limit	Margin	SA	Factor	Remark	ANT	Turn	
	MHz	level		reading			High	Table	
		dBuV/m	dBuV/m	dB	dB/m		cm	deg	
1	5410.98	46.36	54.00	-7.64	41.32	5.04	Average	173	198

Configuration 1: Model: IAP500BE

Frequency: 5300 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	-3.86	-4.24	-3.51	-3.37
T20°CVmin	-3.72	-3.24	-4.01	-3.14
T60°CVnom	18.77	18.25	18.67	19.22
T50°CVnom	16.87	17.46	17.23	16.97
T40°CVnom	9.20	9.87	9.71	8.96
T30°CVnom	6.01	6.86	6.25	6.00
T20°CVnom	-4.61	-4.48	-4.61	-4.79
T10°CVnom	-1.40	-1.83	-1.00	-1.48
T0°CVnom	3.22	3.35	3.45	3.54
T-10°CVnom	2.83	2.90	3.01	2.55
T-20°CVnom	1.06	0.56	1.38	1.51
Vnom [V]: 30	Vmax [V]: 48		Vmin [V]: 12	
Tnom [°C]: 20	Tmax [°C]: 60		Tmin [°C]: -20	

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	-2.82	-2.17	-2.44	-2.44
T20°CVmin	-3.03	-2.67	-3.19	-2.48
T60°CVnom	17.19	17.72	17.64	16.97
T50°CVnom	15.55	15.53	15.50	15.66
T40°CVnom	8.33	8.22	8.83	8.77
T30°CVnom	5.31	5.88	5.73	4.93
T20°CVnom	-4.29	-3.68	-4.08	-4.05
T10°CVnom	-1.33	-1.05	-1.47	-0.70
T0°CVnom	3.09	3.38	3.35	3.31
T-10°CVnom	2.66	3.14	3.02	3.00
T-20°CVnom	1.32	1.37	1.13	1.18
Vnom [V]: 30	Vmax [V]: 48		Vmin [V]: 12	
Tnom [°C]: 20	Tmax [°C]: 60		Tmin [°C]: -20	

Configuration 2: Model: NWA30BE

Frequency: 5300 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	-5.81	-5.74	-5.31	-6.09
T20°C Vmin	-5.02	-4.91	-4.65	-4.88
T40°C Vnom	-5.03	-4.77	-4.22	-4.43
T30°C Vnom	-4.84	-4.48	-4.04	-4.72
T20°C Vnom	-4.62	-4.46	-4.47	-4.03
T10°C Vnom	-4.33	-4.04	-4.08	-4.51
T0°C Vnom	-3.73	-3.82	-3.72	-3.10
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 0	

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	-5.13	-4.93	-5.08	-5.00
T20°C Vmin	-4.24	-4.56	-3.99	-4.30
T40°C Vnom	-4.78	-4.28	-4.95	-4.91
T30°C Vnom	-4.52	-4.73	-3.83	-4.05
T20°C Vnom	-4.06	-3.86	-3.90	-3.53
T10°C Vnom	-3.88	-3.89	-3.45	-3.17
T0°C Vnom	-3.23	-3.29	-3.39	-2.80
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 0	

Configuration 3: Model: NWA55BE

Frequency: 5300 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	-9.43	-9.62	-9.13	-9.14
T20°CVmin	-8.86	-9.29	-9.30	-8.75
T60°CVnom	7.30	6.95	7.26	8.01
T50°CVnom	5.55	5.78	5.96	5.19
T40°CVnom	0.14	0.09	1.00	0.32
T30°CVnom	-3.77	-3.99	-2.87	-3.41
T20°CVnom	-9.46	-9.57	-9.48	-8.98
T10°CVnom	-5.36	-5.16	-5.80	-5.06
T0°CVnom	-3.12	-2.96	-2.82	-3.02
T-10°CVnom	-1.29	-1.43	-1.04	-1.10
T-20°CVnom	-0.56	-0.77	-0.09	-0.56
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 60		Tmin [°C]: -20	

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	-8.46	-7.85	-8.13	-7.96
T20°CVmin	-7.85	-7.39	-7.75	-8.10
T60°CVnom	6.72	6.45	7.06	6.48
T50°CVnom	5.33	5.11	5.98	5.23
T40°CVnom	0.41	0.35	0.90	0.62
T30°CVnom	-3.26	-3.11	-2.94	-2.90
T20°CVnom	-8.51	-8.68	-8.32	-8.13
T10°CVnom	-4.93	-4.91	-4.74	-4.56
T0°CVnom	-2.56	-2.33	-2.69	-2.74
T-10°CVnom	-0.70	-0.69	-0.28	-0.69
T-20°CVnom	-0.45	0.07	0.00	0.18
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 60		Tmin [°C]: -20	




Configuration 1: Model: IAP500BE

Modulation Mode	be EHT40	Test Freq. (MHz)	5755
Power Phase	Line		

Test by : Joe Liao

Temperature: 25°C

Humidity: 61%

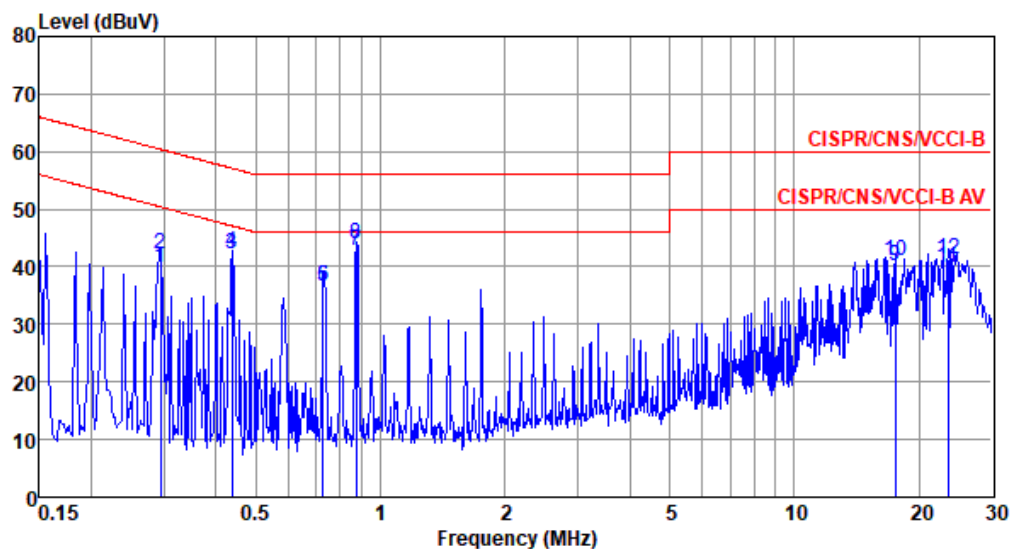

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.294	39.97	50.41	-10.44	30.24	9.64	0.09	0.00	Average
2	0.294	42.28	60.41	-18.13	32.55	9.64	0.09	0.00	QP
3	0.437	42.11	47.11	-5.00	32.38	9.64	0.09	0.00	Average
4	0.437	42.43	57.11	-14.68	32.70	9.64	0.09	0.00	QP
5	0.727	36.56	46.00	-9.44	26.81	9.65	0.10	0.00	Average
6	0.727	36.57	56.00	-19.43	26.82	9.65	0.10	0.00	QP
7*	0.876	42.89	46.00	-3.11	33.14	9.65	0.10	0.00	Average
8	0.876	43.87	56.00	-12.13	34.12	9.65	0.10	0.00	QP
9	17.533	40.05	50.00	-9.95	29.84	9.70	0.51	0.00	Average
10	17.533	40.90	60.00	-19.10	30.69	9.70	0.51	0.00	QP
11	23.522	39.83	50.00	-10.17	29.55	9.67	0.61	0.00	Average
12	23.522	41.21	60.00	-18.79	30.93	9.67	0.61	0.00	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).




Modulation Mod	be EHT40	Test Freq. (MHz)	5755																																																																																																																																																						
Power Phase	Neutral																																																																																																																																																								
Test by : Joe Liao Temperature: 25°C Humidity: 61%																																																																																																																																																									
<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Cable</th><th>Aux</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV</th><th>Line</th><th>Limit</th><th>Level</th><th>dB</th><th>loss</th><th>dB</th><th>Remark</th></tr><tr><th></th><th></th><th></th><th>dBuV</th><th>dB</th><th>dBuV</th><th></th><th>dB</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>0.162</td><td>16.06</td><td>55.34</td><td>-39.28</td><td>6.34</td><td>9.64</td><td>0.08</td><td>0.00</td><td>Average</td></tr><tr><td>2</td><td>0.162</td><td>39.45</td><td>65.34</td><td>-25.89</td><td>29.73</td><td>9.64</td><td>0.08</td><td>0.00</td><td>QP</td></tr><tr><td>3</td><td>0.291</td><td>39.09</td><td>50.50</td><td>-11.41</td><td>29.37</td><td>9.63</td><td>0.09</td><td>0.00</td><td>Average</td></tr><tr><td>4</td><td>0.291</td><td>41.52</td><td>60.50</td><td>-18.98</td><td>31.80</td><td>9.63</td><td>0.09</td><td>0.00</td><td>QP</td></tr><tr><td>5*</td><td>0.437</td><td>41.03</td><td>47.11</td><td>-6.08</td><td>31.31</td><td>9.63</td><td>0.09</td><td>0.00</td><td>Average</td></tr><tr><td>6</td><td>0.437</td><td>41.46</td><td>57.11</td><td>-15.65</td><td>31.74</td><td>9.63</td><td>0.09</td><td>0.00</td><td>QP</td></tr><tr><td>7</td><td>0.876</td><td>38.22</td><td>46.00</td><td>-7.78</td><td>28.48</td><td>9.64</td><td>0.10</td><td>0.00</td><td>Average</td></tr><tr><td>8</td><td>0.876</td><td>38.17</td><td>56.00</td><td>-17.83</td><td>28.43</td><td>9.64</td><td>0.10</td><td>0.00</td><td>QP</td></tr><tr><td>9</td><td>20.162</td><td>40.05</td><td>50.00</td><td>-9.95</td><td>29.69</td><td>9.79</td><td>0.57</td><td>0.00</td><td>Average</td></tr><tr><td>10</td><td>20.162</td><td>41.58</td><td>60.00</td><td>-18.42</td><td>31.22</td><td>9.79</td><td>0.57</td><td>0.00</td><td>QP</td></tr><tr><td>11</td><td>23.667</td><td>40.62</td><td>50.00</td><td>-9.38</td><td>30.21</td><td>9.79</td><td>0.62</td><td>0.00</td><td>Average</td></tr><tr><td>12</td><td>23.667</td><td>41.88</td><td>60.00</td><td>-18.12</td><td>31.47</td><td>9.79</td><td>0.62</td><td>0.00</td><td>QP</td></tr></tbody></table>					Freq	Level	Limit	Over	Read	Factor	Cable	Aux			MHz	dBuV	Line	Limit	Level	dB	loss	dB	Remark				dBuV	dB	dBuV		dB			1	0.162	16.06	55.34	-39.28	6.34	9.64	0.08	0.00	Average	2	0.162	39.45	65.34	-25.89	29.73	9.64	0.08	0.00	QP	3	0.291	39.09	50.50	-11.41	29.37	9.63	0.09	0.00	Average	4	0.291	41.52	60.50	-18.98	31.80	9.63	0.09	0.00	QP	5*	0.437	41.03	47.11	-6.08	31.31	9.63	0.09	0.00	Average	6	0.437	41.46	57.11	-15.65	31.74	9.63	0.09	0.00	QP	7	0.876	38.22	46.00	-7.78	28.48	9.64	0.10	0.00	Average	8	0.876	38.17	56.00	-17.83	28.43	9.64	0.10	0.00	QP	9	20.162	40.05	50.00	-9.95	29.69	9.79	0.57	0.00	Average	10	20.162	41.58	60.00	-18.42	31.22	9.79	0.57	0.00	QP	11	23.667	40.62	50.00	-9.38	30.21	9.79	0.62	0.00	Average	12	23.667	41.88	60.00	-18.12	31.47	9.79	0.62	0.00	QP
	Freq	Level	Limit	Over	Read	Factor	Cable	Aux																																																																																																																																																	
	MHz	dBuV	Line	Limit	Level	dB	loss	dB	Remark																																																																																																																																																
			dBuV	dB	dBuV		dB																																																																																																																																																		
1	0.162	16.06	55.34	-39.28	6.34	9.64	0.08	0.00	Average																																																																																																																																																
2	0.162	39.45	65.34	-25.89	29.73	9.64	0.08	0.00	QP																																																																																																																																																
3	0.291	39.09	50.50	-11.41	29.37	9.63	0.09	0.00	Average																																																																																																																																																
4	0.291	41.52	60.50	-18.98	31.80	9.63	0.09	0.00	QP																																																																																																																																																
5*	0.437	41.03	47.11	-6.08	31.31	9.63	0.09	0.00	Average																																																																																																																																																
6	0.437	41.46	57.11	-15.65	31.74	9.63	0.09	0.00	QP																																																																																																																																																
7	0.876	38.22	46.00	-7.78	28.48	9.64	0.10	0.00	Average																																																																																																																																																
8	0.876	38.17	56.00	-17.83	28.43	9.64	0.10	0.00	QP																																																																																																																																																
9	20.162	40.05	50.00	-9.95	29.69	9.79	0.57	0.00	Average																																																																																																																																																
10	20.162	41.58	60.00	-18.42	31.22	9.79	0.57	0.00	QP																																																																																																																																																
11	23.667	40.62	50.00	-9.38	30.21	9.79	0.62	0.00	Average																																																																																																																																																
12	23.667	41.88	60.00	-18.12	31.47	9.79	0.62	0.00	QP																																																																																																																																																
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).																																																																																																																																																									



Configuration 2: Model: NWA30BE

Modulation Mod	be EHT40	Test Freq. (MHz)	5755
Power Phase	Line		

Test by : Joe Liao Temperature: 25°C Humidity: 61%

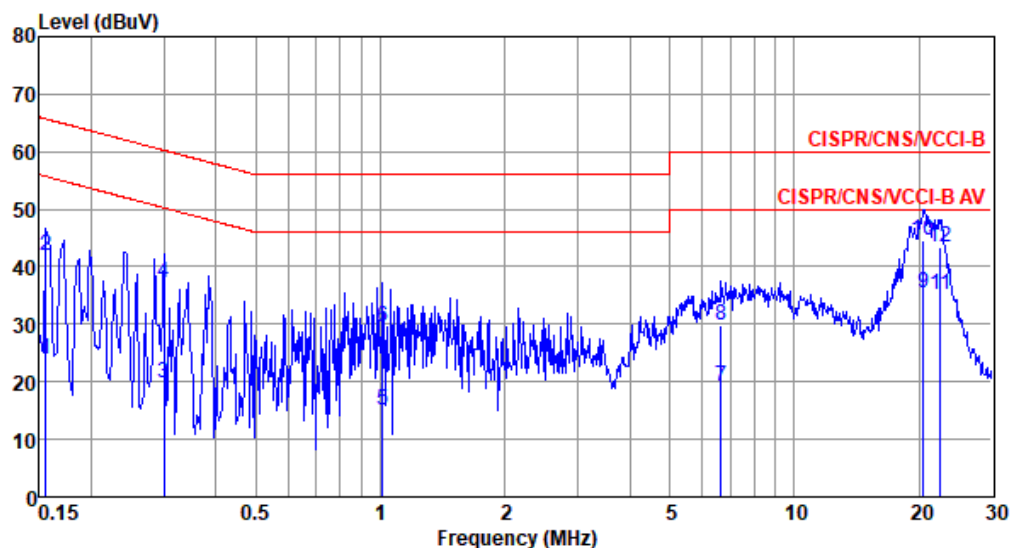

	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	
	MHz	dBuV	Line	Limit	Level	dB	loss	dB	Remark
			dBuV	dB	dBuV		dB		
1	0.156	24.05	55.69	-31.64	14.10	9.65	0.08	0.22	Average
2	0.156	41.90	65.69	-23.79	31.95	9.65	0.08	0.22	QP
3	0.300	19.69	50.24	-30.55	9.67	9.64	0.09	0.29	Average
4	0.300	37.34	60.24	-22.90	27.32	9.64	0.09	0.29	QP
5	1.010	15.01	46.00	-30.99	4.86	9.65	0.10	0.40	Average
6	1.010	29.53	56.00	-26.47	19.38	9.65	0.10	0.40	QP
7	6.662	19.19	50.00	-30.81	8.74	9.70	0.26	0.49	Average
8	6.662	29.90	60.00	-30.10	19.45	9.70	0.26	0.49	QP
9*	20.486	35.29	50.00	-14.71	24.36	9.69	0.58	0.66	Average
10	20.486	44.52	60.00	-15.48	33.59	9.69	0.58	0.66	QP
11	22.535	35.00	50.00	-15.00	24.02	9.68	0.60	0.70	Average
12	22.535	43.36	60.00	-16.64	32.38	9.68	0.60	0.70	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).




Modulation Mod	be EHT40	Test Freq. (MHz)	5755
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 25°C

Humidity: 61%

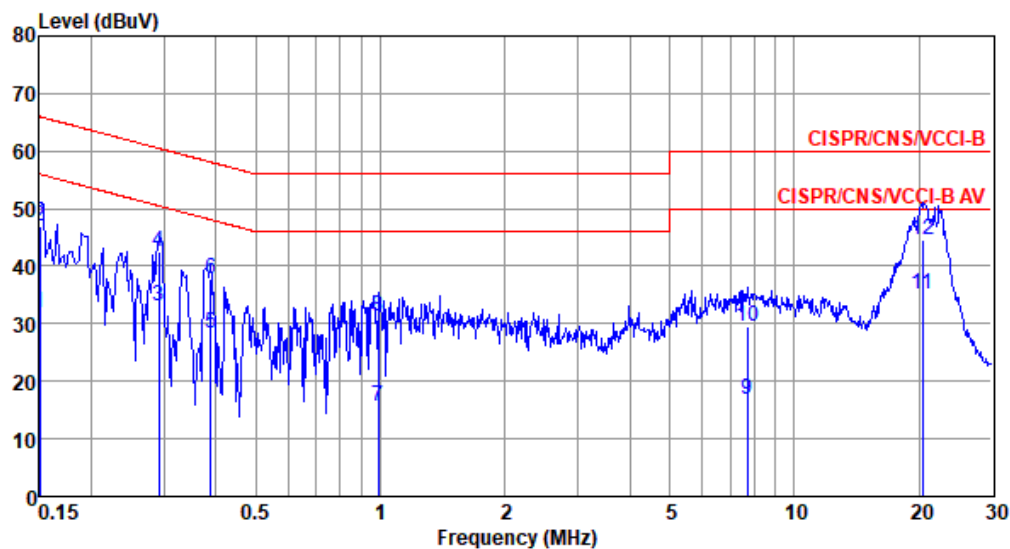

	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark
	MHz	dBuV	Line	Limit	Level	dB	loss	dB	
			dBuV	dB	dBuV		dB		
1	0.150	31.84	56.00	-24.16	21.98	9.64	0.08	0.14	Average
2	0.150	46.98	66.00	-19.02	37.12	9.64	0.08	0.14	QP
3	0.291	33.06	50.50	-17.44	23.11	9.63	0.09	0.23	Average
4	0.291	42.43	60.50	-18.07	32.48	9.63	0.09	0.23	QP
5	0.389	28.33	48.08	-19.75	18.35	9.63	0.09	0.26	Average
6	0.389	37.66	58.08	-20.42	27.68	9.63	0.09	0.26	QP
7	0.989	15.72	46.00	-30.28	5.63	9.64	0.10	0.35	Average
8	0.989	31.32	56.00	-24.68	21.23	9.64	0.10	0.35	QP
9	7.687	16.93	50.00	-33.07	6.43	9.70	0.28	0.52	Average
10	7.687	29.44	60.00	-30.56	18.94	9.70	0.28	0.52	QP
11*	20.377	35.08	50.00	-14.92	24.08	9.79	0.57	0.64	Average
12	20.377	44.70	60.00	-15.30	33.70	9.79	0.57	0.64	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).




Configuration 3: Model: NWA55BE

Modulation Mod	be EHT40	Test Freq. (MHz)	5755
Power Phase	Line		

Test by : Joe Liao

Temperature: 25°C

Humidity: 61%

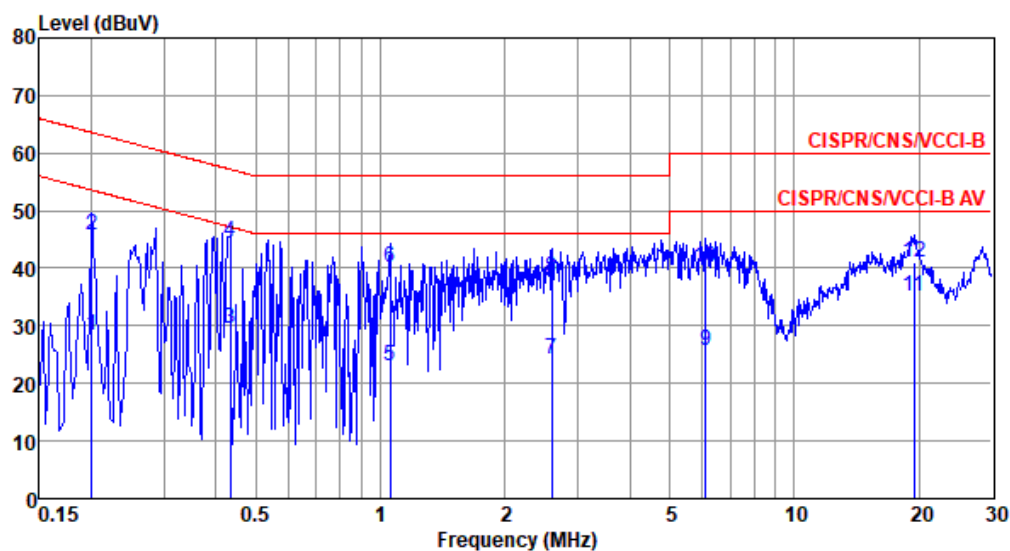

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.201	28.30	53.58	-25.28	18.32	9.64	0.08	0.26	Average
2	0.201	45.88	63.58	-17.70	35.90	9.64	0.08	0.26	QP
3	0.433	29.64	47.20	-17.56	19.58	9.64	0.09	0.33	Average
4*	0.433	44.53	57.20	-12.67	34.47	9.64	0.09	0.33	QP
5	1.054	22.94	46.00	-23.06	12.79	9.65	0.10	0.40	Average
6	1.054	40.11	56.00	-15.89	29.96	9.65	0.10	0.40	QP
7	2.594	24.12	46.00	-21.88	13.82	9.66	0.19	0.45	Average
8	2.594	38.48	56.00	-17.52	28.18	9.66	0.19	0.45	QP
9	6.121	25.76	50.00	-24.24	15.32	9.69	0.26	0.49	Average
10	6.121	40.24	60.00	-19.76	29.80	9.69	0.26	0.49	QP
11	19.428	35.22	50.00	-14.78	24.33	9.69	0.56	0.64	Average
12	19.428	40.98	60.00	-19.02	30.09	9.69	0.56	0.64	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).




Modulation Mod	be EHT40	Test Freq. (MHz)	5755
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 25°C

Humidity: 61%

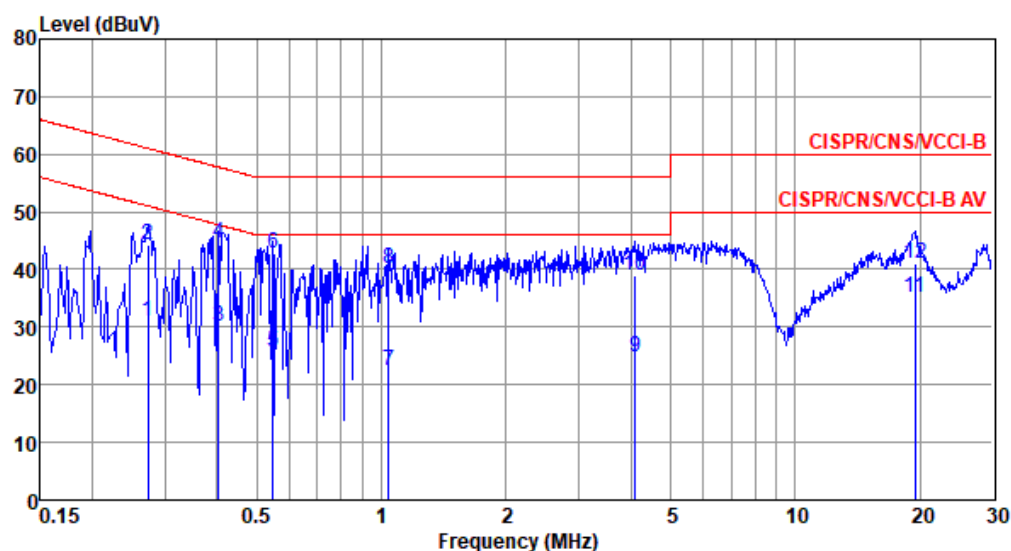

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.273	30.99	51.03	-20.04	21.04	9.64	0.08	0.23	Average
2	0.273	44.26	61.03	-16.77	34.31	9.64	0.08	0.23	QP
3	0.404	30.08	47.77	-17.69	20.10	9.63	0.09	0.26	Average
4*	0.404	44.71	57.77	-13.06	34.73	9.63	0.09	0.26	QP
5	0.546	25.56	46.00	-20.44	15.55	9.63	0.09	0.29	Average
6	0.546	42.73	56.00	-13.27	32.72	9.63	0.09	0.29	QP
7	1.043	22.31	46.00	-23.69	12.22	9.64	0.10	0.35	Average
8	1.043	40.20	56.00	-15.80	30.11	9.64	0.10	0.35	QP
9	4.114	24.83	46.00	-21.17	14.48	9.66	0.22	0.47	Average
10	4.114	39.10	56.00	-16.90	28.75	9.66	0.22	0.47	QP
11	19.428	35.05	50.00	-14.95	24.07	9.79	0.56	0.63	Average
12	19.428	41.00	60.00	-19.00	30.02	9.79	0.56	0.63	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).