
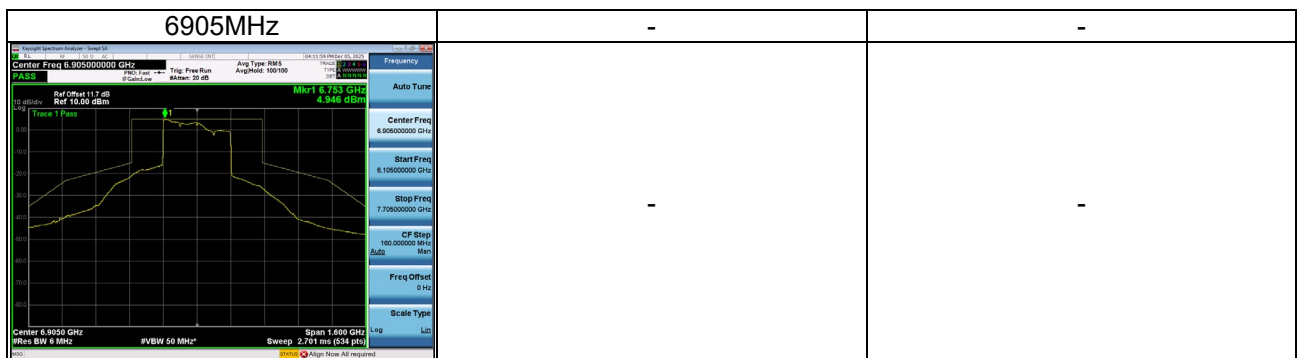
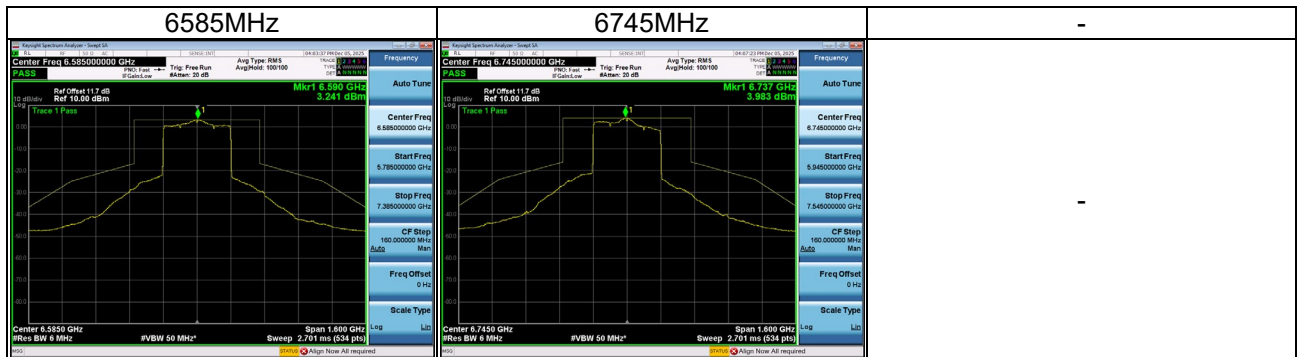
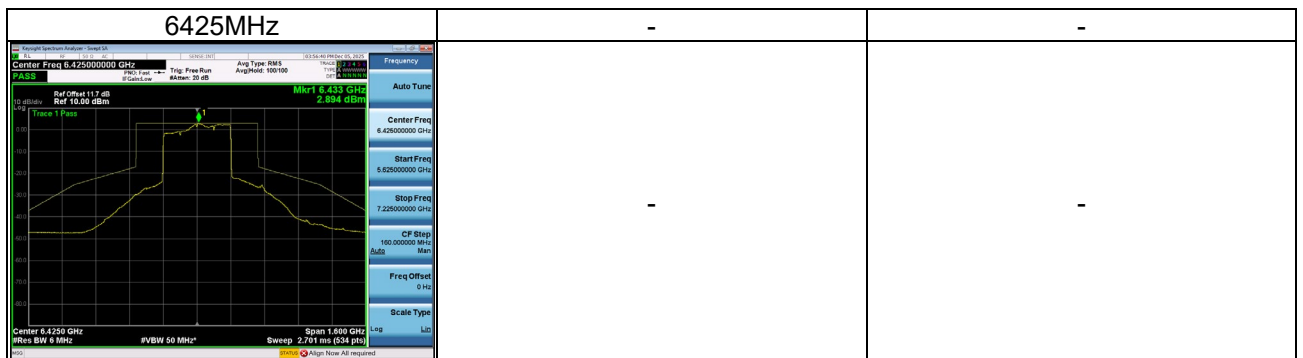


Test Mode	IEEE 802.11be(EHT320)_Ant_1
-----------	-----------------------------


6105MHz	6265MHz	-
6425MHz	-	-
6585MHz	6745MHz	-
6905MHz	-	-

Test Mode	IEEE 802.11be(EHT320)_Ant_2
-----------	-----------------------------

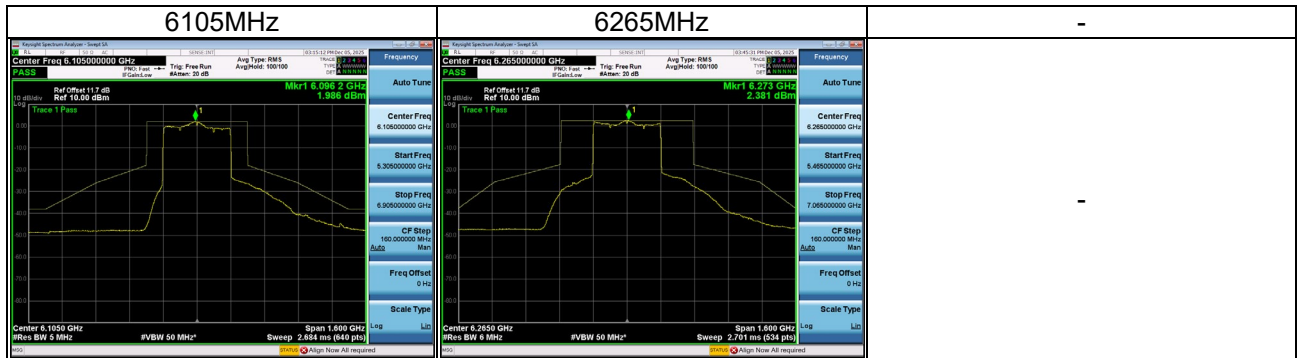

APPENDIX G AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Tested Date	2025/11/13
Test Frequency	-	Phase	Line
Temp	25°C	Hum.	45%

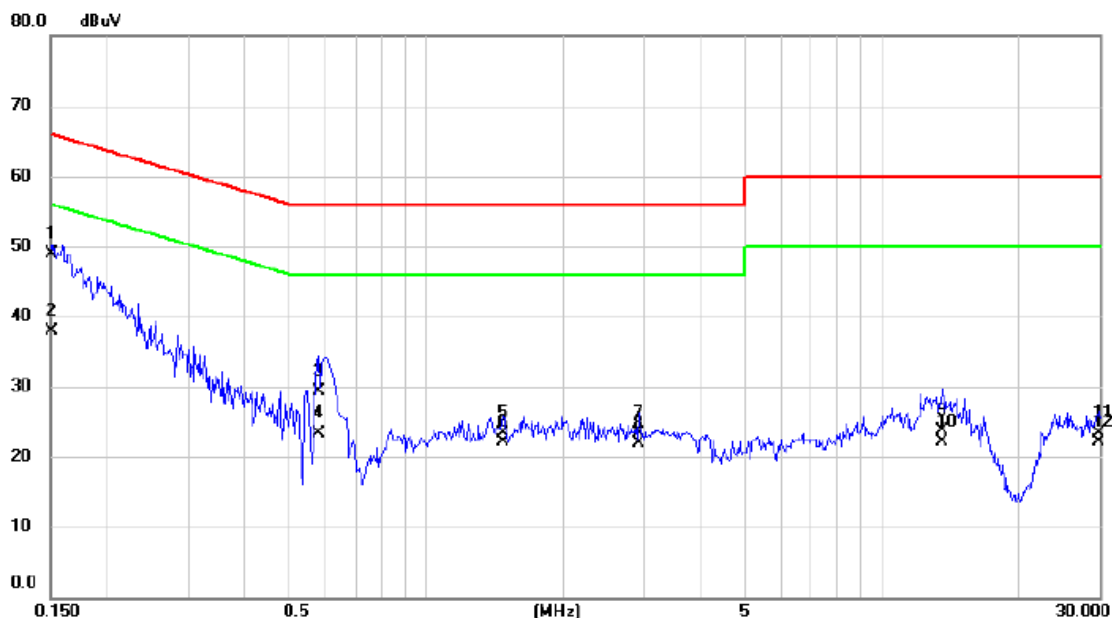


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1500	39.36	9.50	48.86	66.00	-17.14	QP	
2		0.1500	28.33	9.50	37.83	56.00	-18.17	AVG	
3		0.5810	19.74	9.53	29.27	56.00	-26.73	QP	
4		0.5810	13.85	9.53	23.38	46.00	-22.62	AVG	
5		1.4765	13.69	9.58	23.27	56.00	-32.73	QP	
6		1.4765	12.43	9.58	22.01	46.00	-23.99	AVG	
7		2.9300	13.67	9.66	23.33	56.00	-32.67	QP	
8		2.9300	12.32	9.66	21.98	46.00	-24.02	AVG	
9		13.5500	13.85	9.94	23.79	60.00	-36.21	QP	
10		13.5500	12.21	9.94	22.15	50.00	-27.85	AVG	
11		29.8000	13.21	10.12	23.33	60.00	-36.67	QP	
12		29.8000	12.02	10.12	22.14	50.00	-27.86	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2025/11/13
Test Frequency	-	Phase	Neutral
Temp	25°C	Hum.	45%

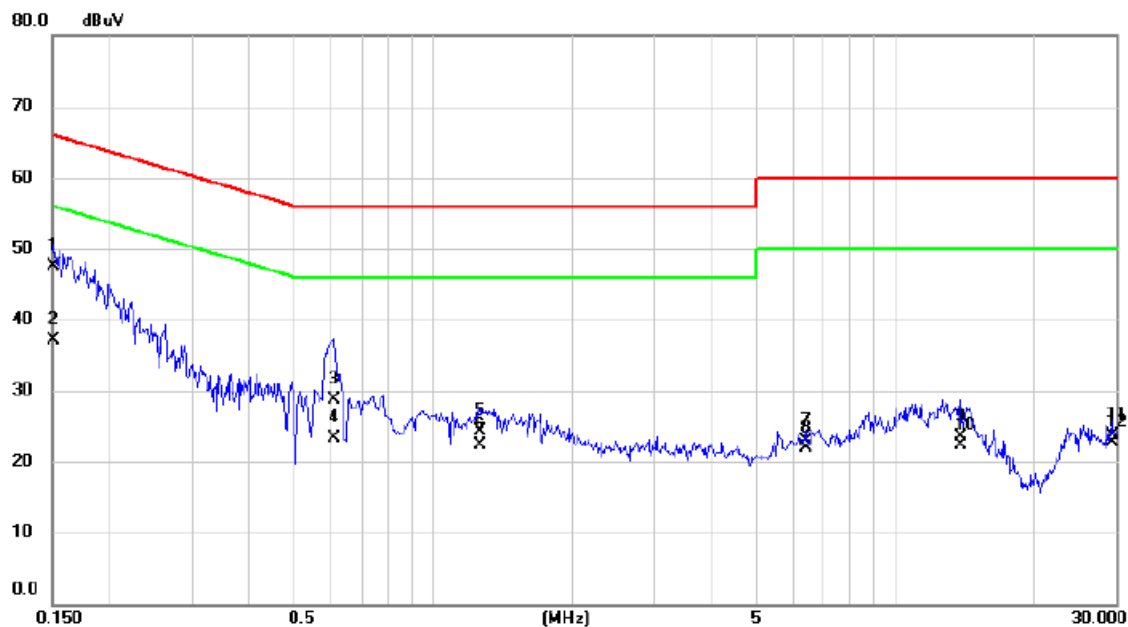

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1503	38.00	9.55	47.55	65.98	-18.43	QP	
2		0.1503	27.60	9.55	37.15	55.98	-18.83	AVG	
3		0.6080	19.07	9.57	28.64	56.00	-27.36	QP	
4		0.6080	13.77	9.57	23.34	46.00	-22.66	AVG	
5		1.2605	14.65	9.58	24.23	56.00	-31.77	QP	
6		1.2605	12.75	9.58	22.33	46.00	-23.67	AVG	
7		6.4000	13.16	9.79	22.95	60.00	-37.05	QP	
8		6.4000	12.14	9.79	21.93	50.00	-28.07	AVG	
9		13.8000	13.43	10.02	23.45	60.00	-36.55	QP	
10		13.8000	12.25	10.02	22.27	50.00	-27.73	AVG	
11		29.5000	13.38	10.29	23.67	60.00	-36.33	QP	
12		29.5000	12.40	10.29	22.69	50.00	-27.31	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.


APPENDIX H CONTENTION-BASED PROTOCOL

Test Mode	UNII-5, UNII-6, UNII-7, UNII-8
-----------	--------------------------------


Incumbent Signal (AWGN) Bandwidth

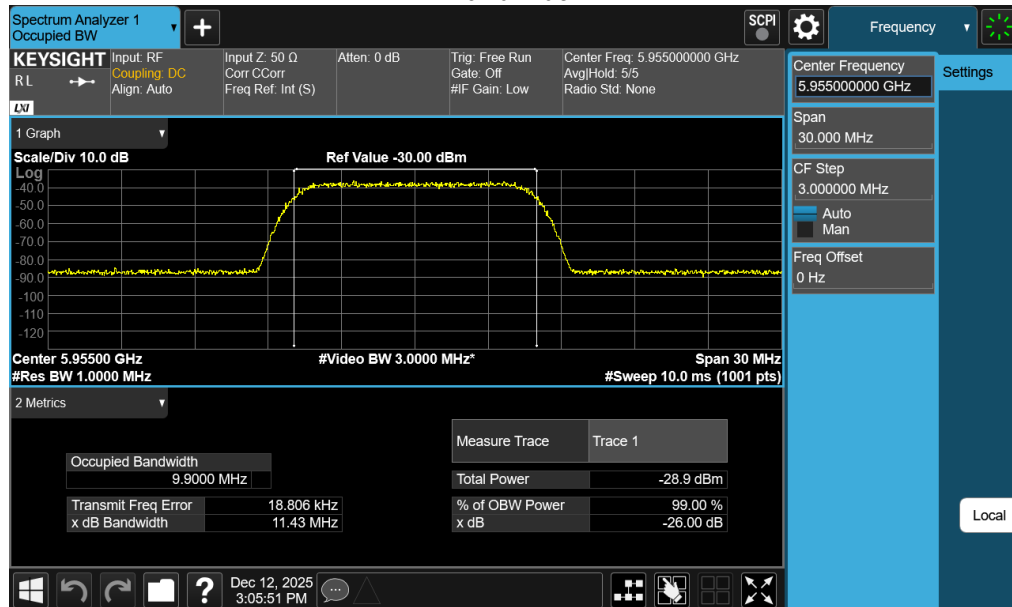


Frequency: 5955 MHz

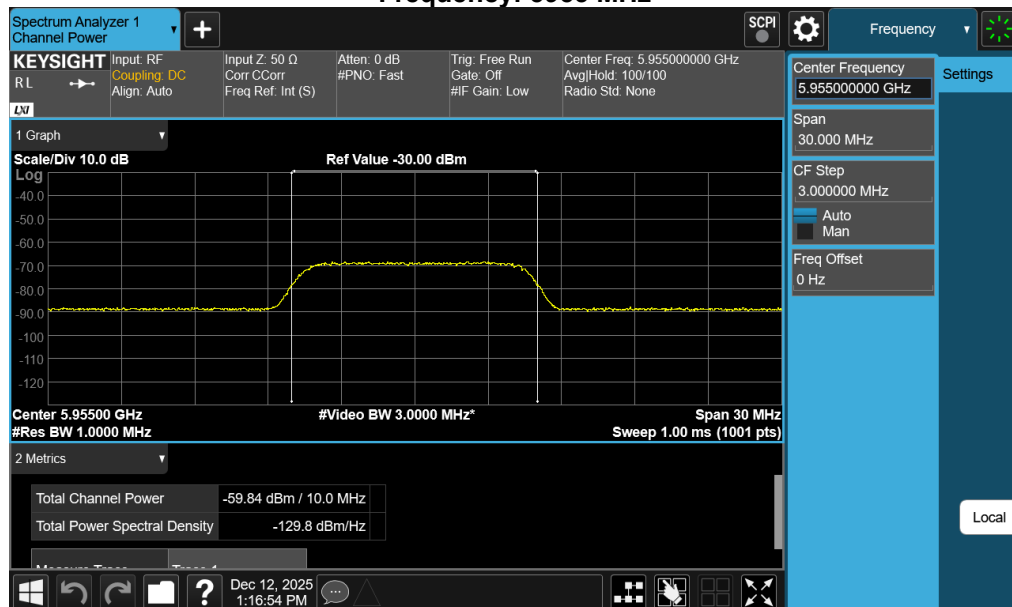


Frequency: 5950 MHz

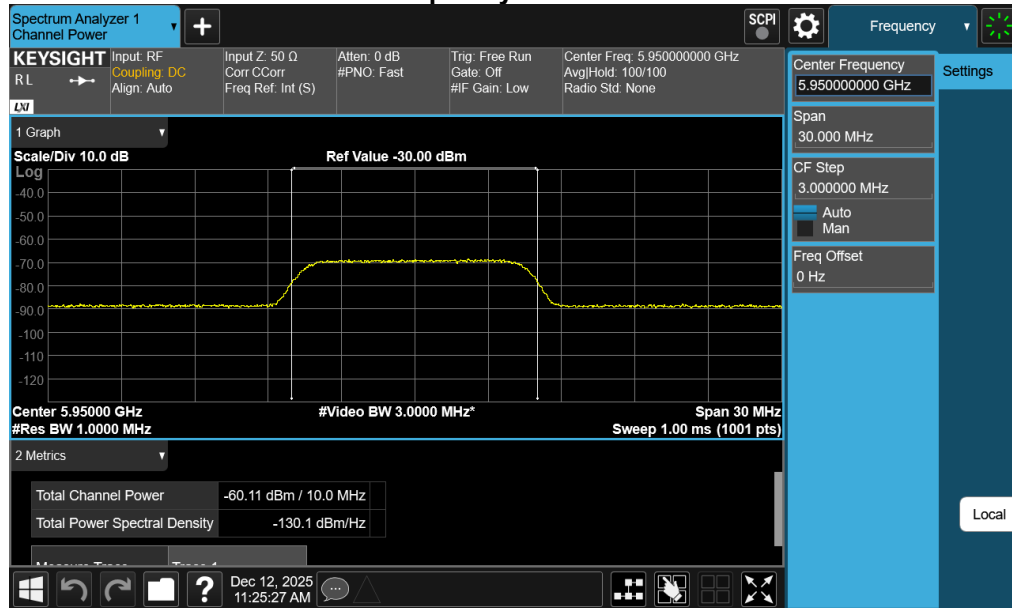


Frequency: 6105 MHz

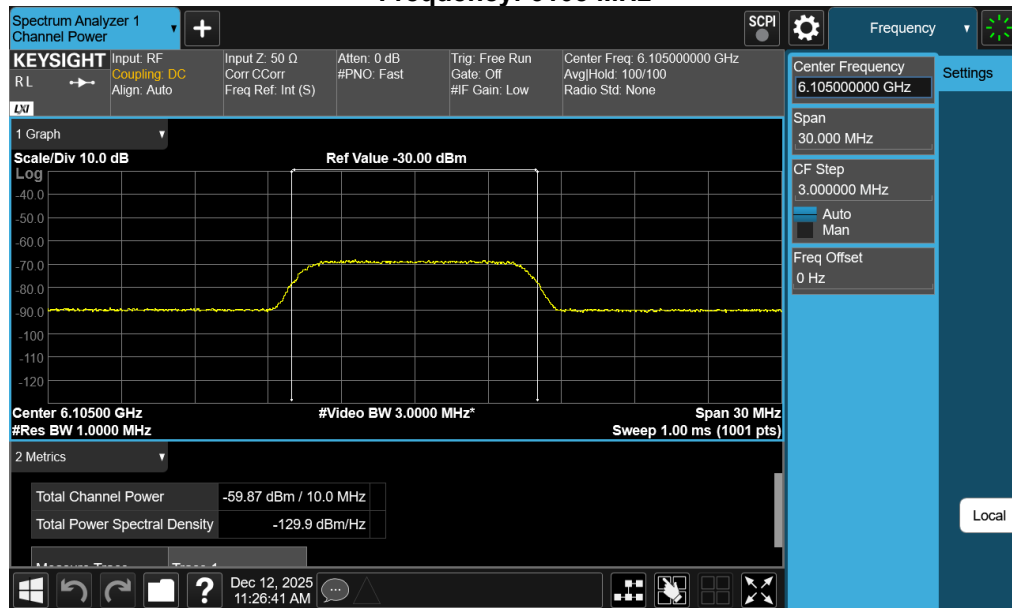


Frequency: 6260 MHz

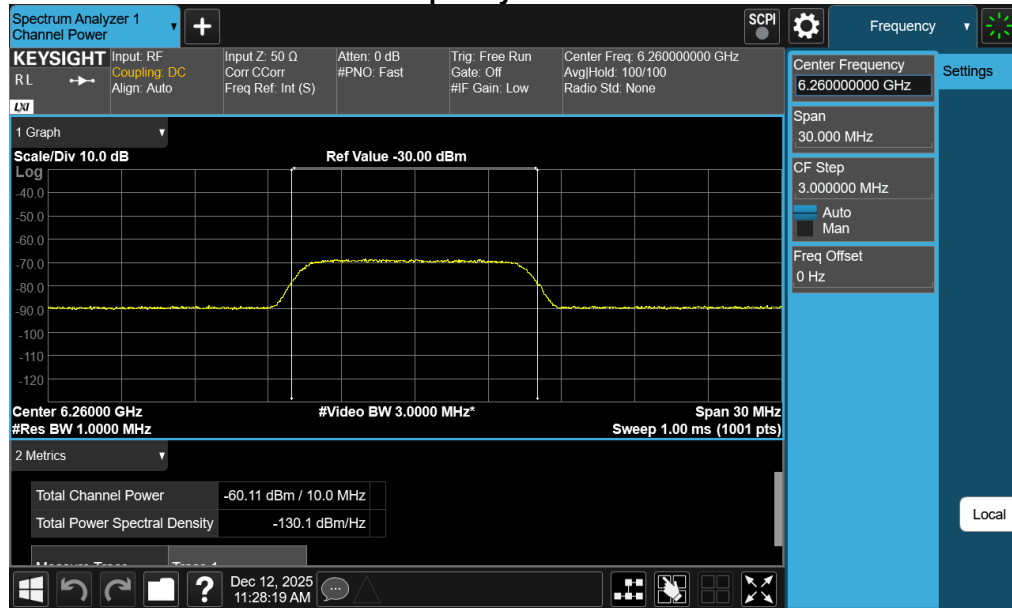


Frequency: 6435 MHz

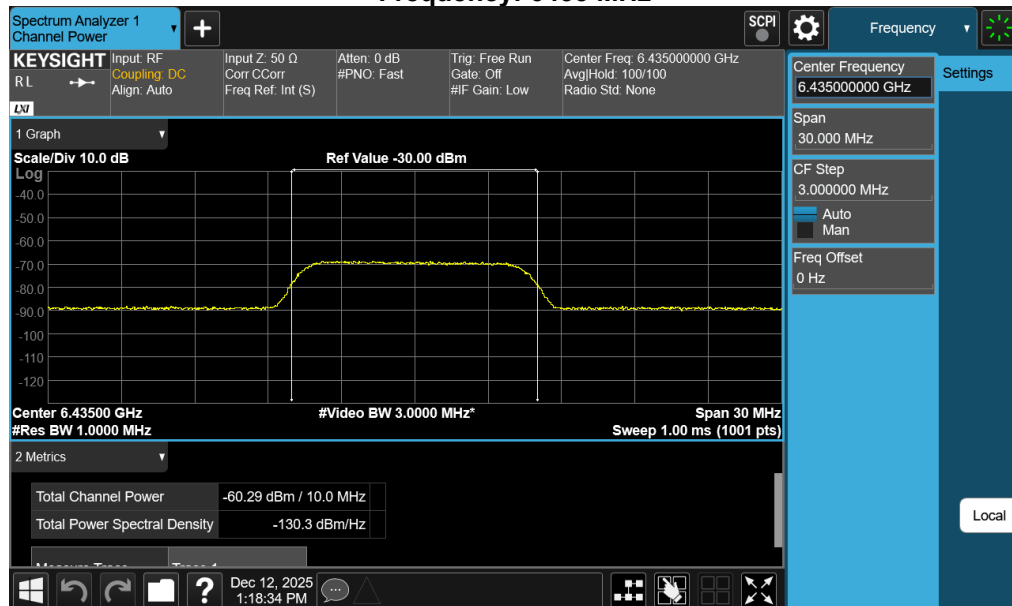


Frequency: 6270 MHz

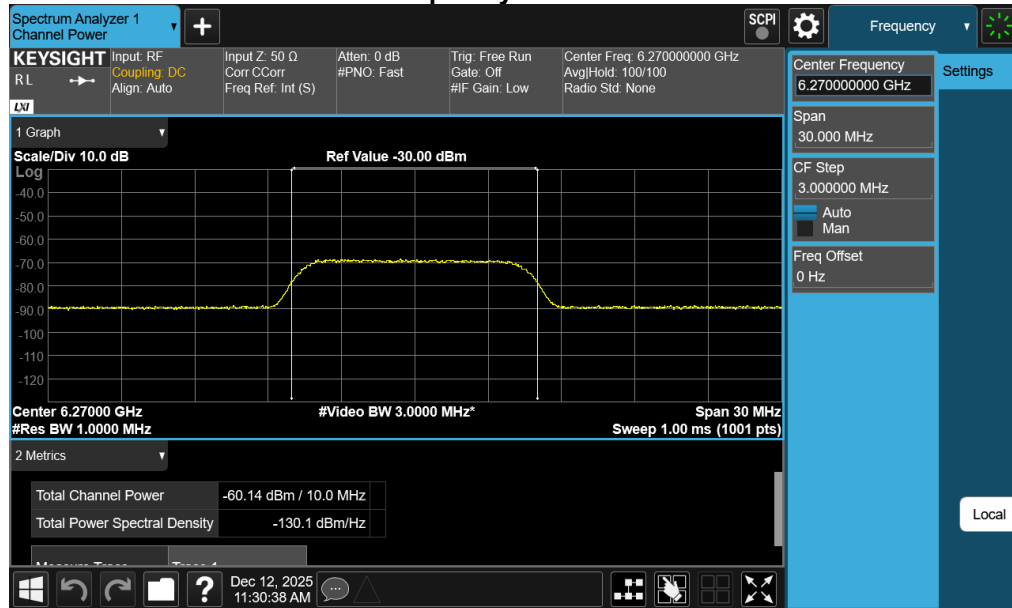


Frequency: 6425 MHz

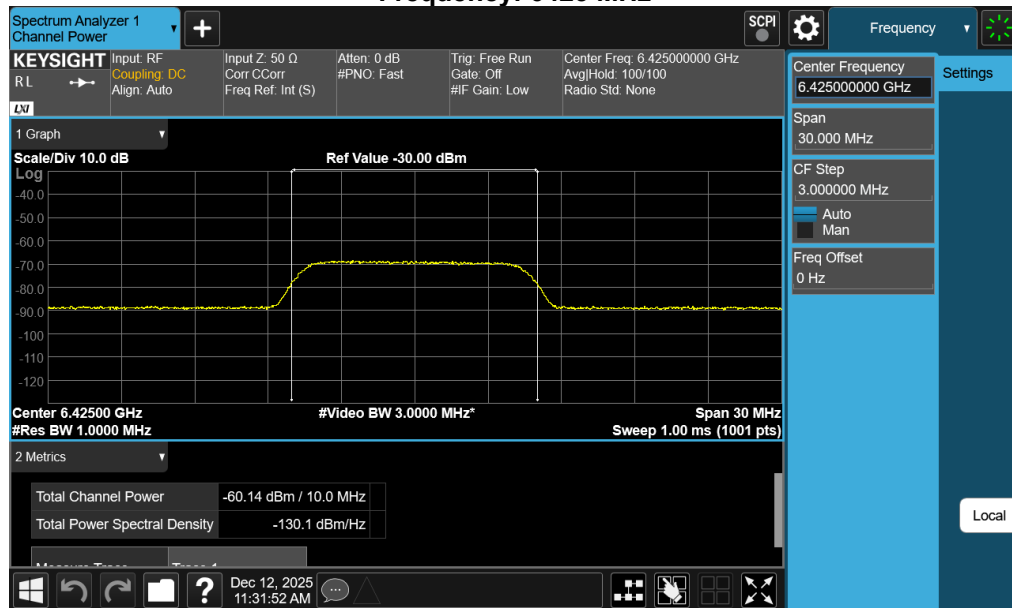


Frequency: 6580 MHz

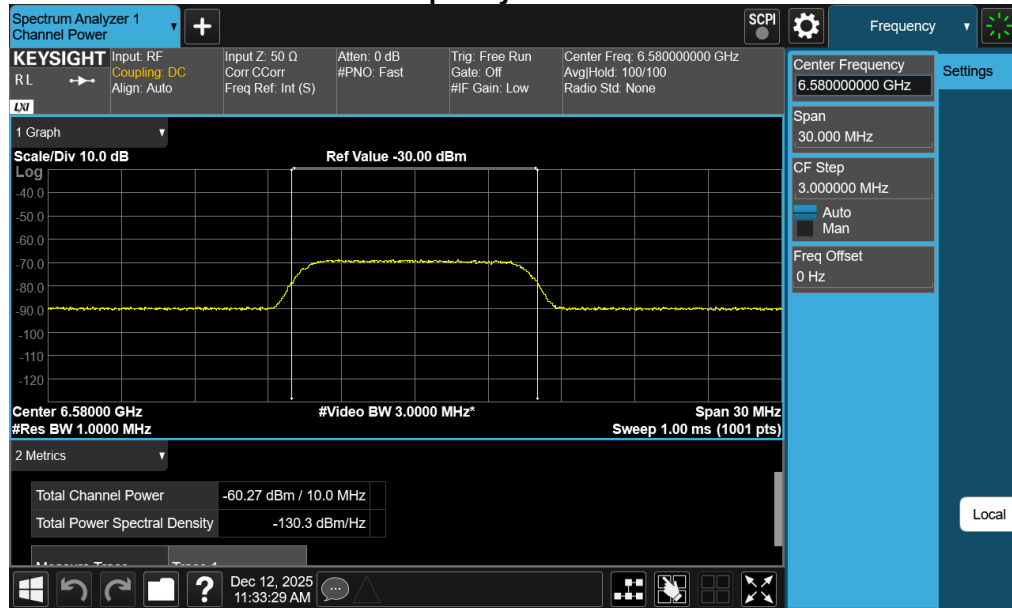


Frequency: 6535 MHz

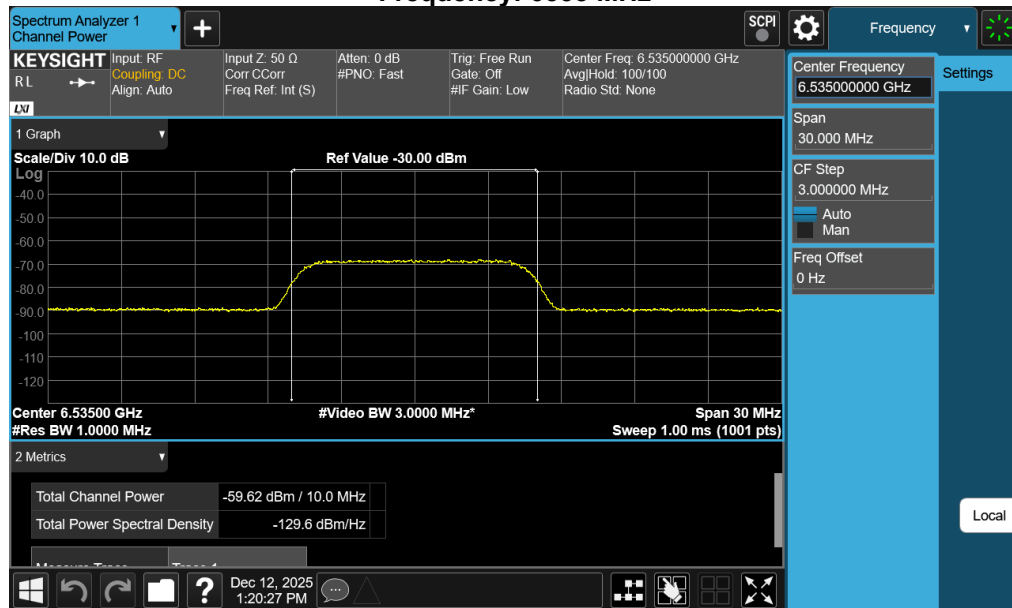


Frequency: 6430 MHz

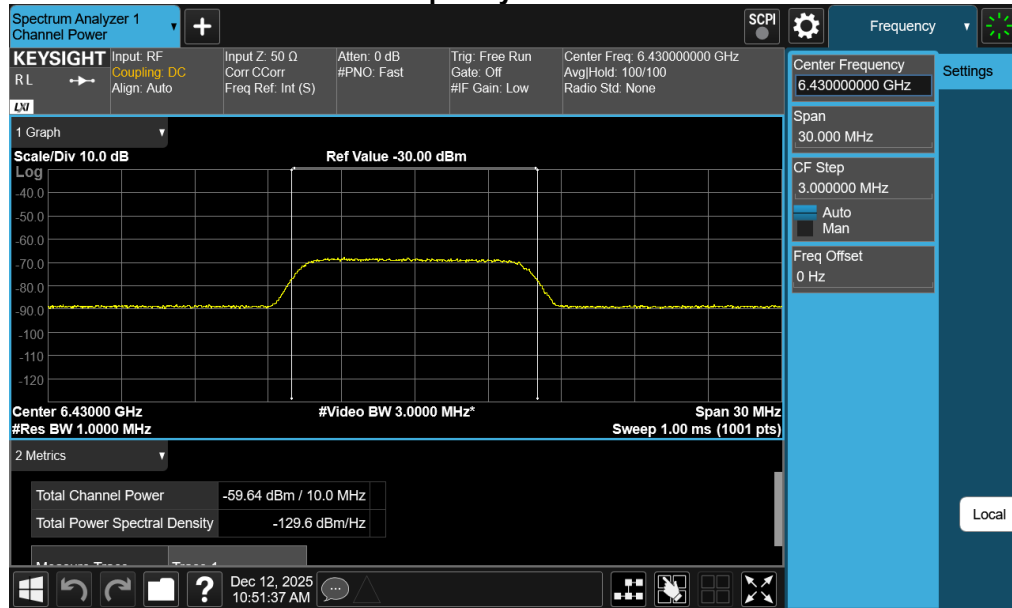


Frequency: 6585 MHz

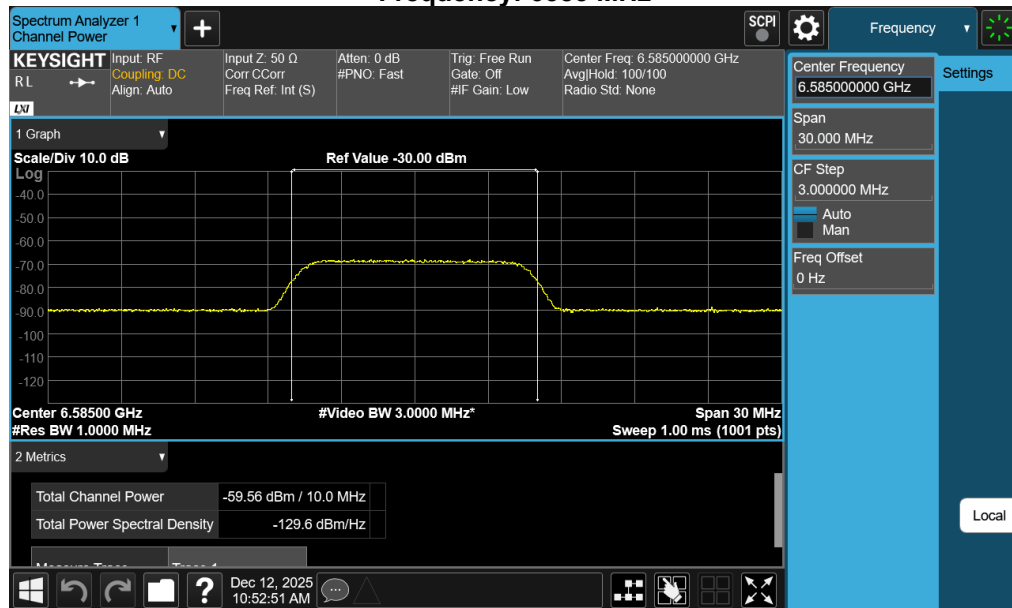


Frequency: 6740 MHz

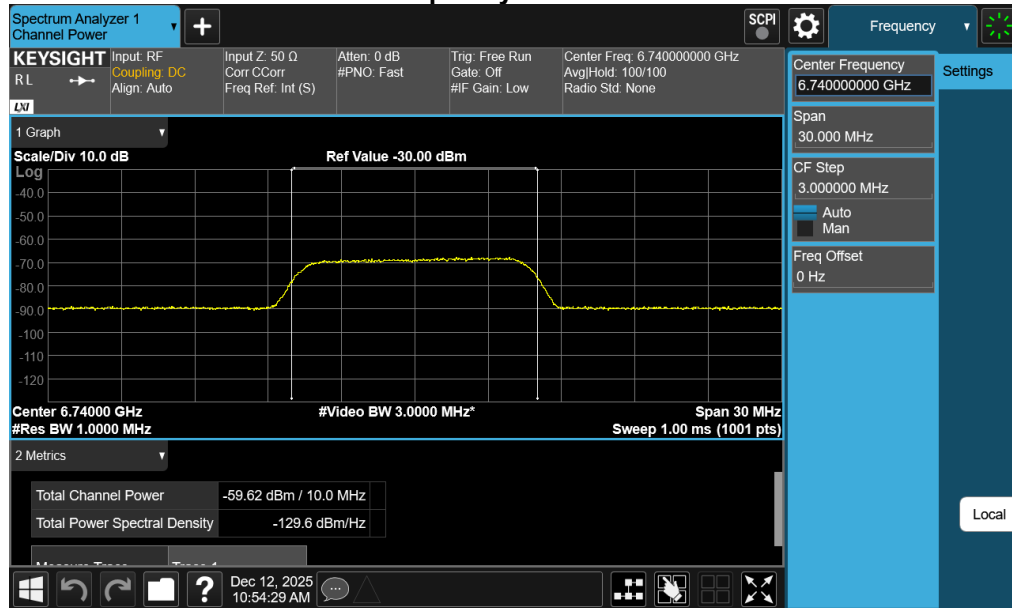


Frequency: 6875 MHz

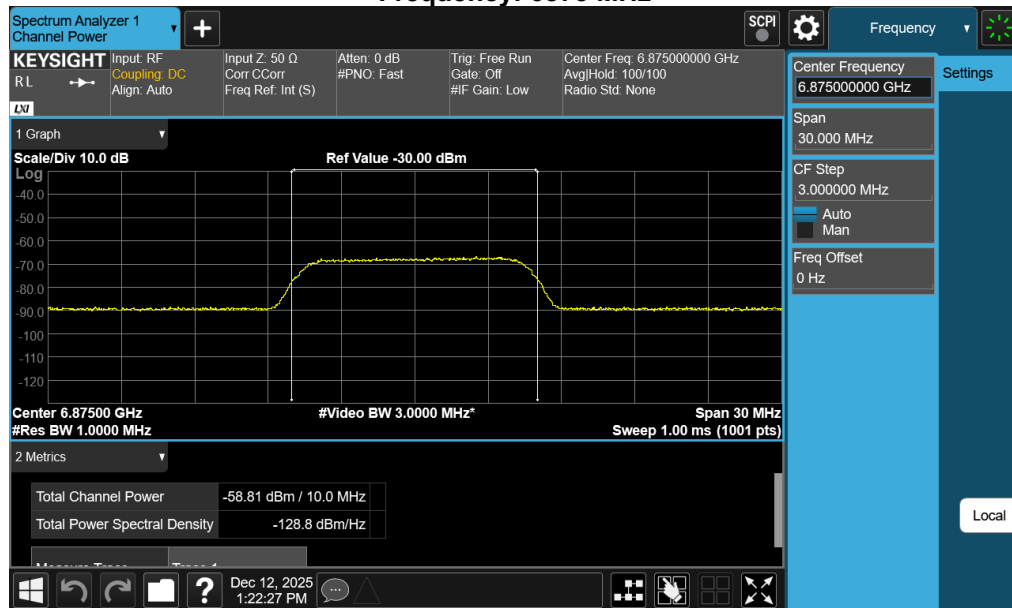


Frequency: 6750 MHz

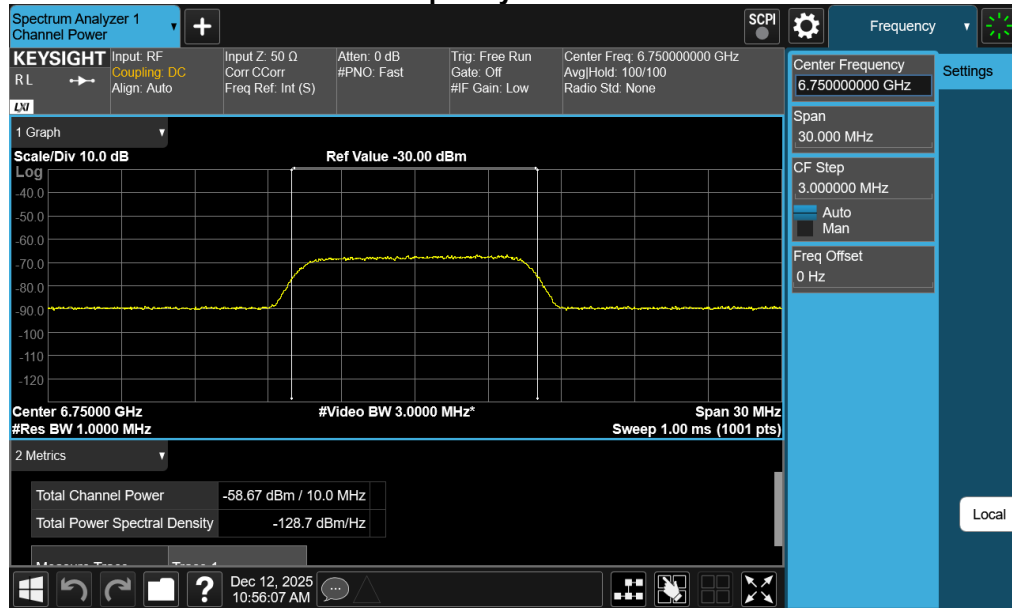

Frequency: 6905 MHz

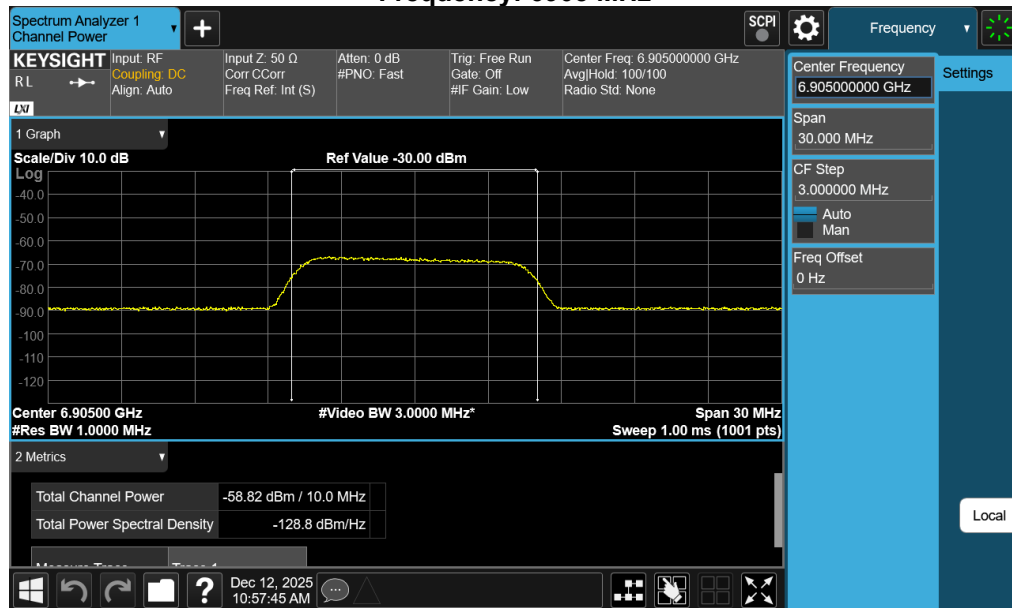

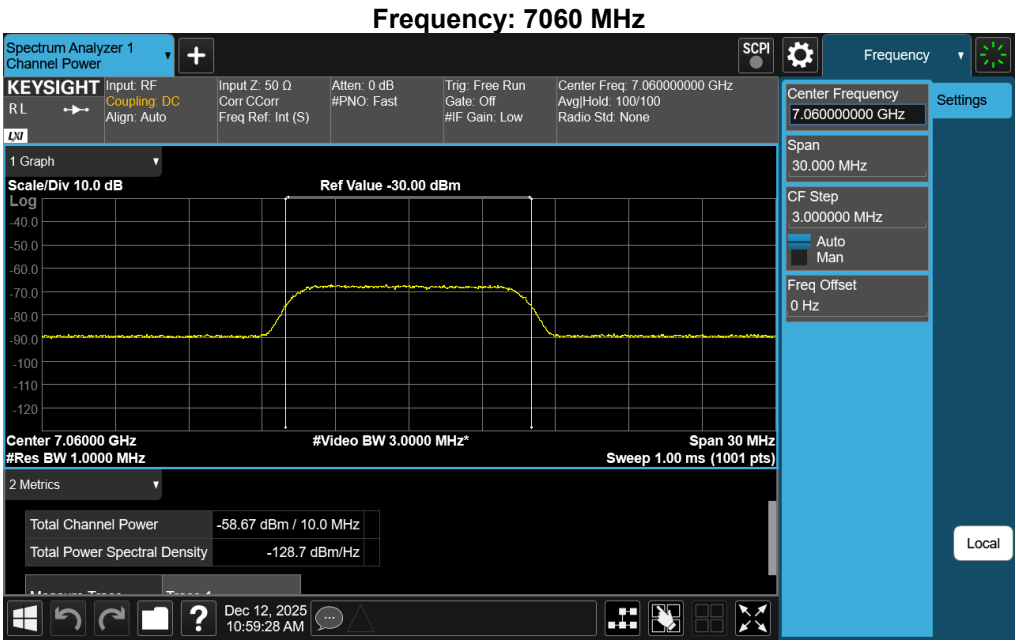


Detection power level and detection probability


	Test Mode	Bandwidth (MHz)	Channel	Frequency (MHz)	Interference Frequency (MHz)	Detection power level (dBm)	Detection Power Limit (dBm)	Number of Times	Number of Detected	Detection Probability	Detection Probability Limit	Test Result
UNII-5	802.11be	20	1	5955	5955	-49.92	-59.83	10	10	100%	90%	Pass
					5950	-50.57	-59.83	10	10	100%	90%	Pass
	802.11be	320	31	6105	6105	-49.91	-59.83	10	10	100%	90%	Pass
					6260	-49.24	-59.83	10	10	100%	90%	Pass
UNII-6	802.11be	20	97	6435	6435	-47.35	-60.13	10	10	100%	90%	Pass
					6270	-49.34	-60.13	10	10	100%	90%	Pass
	802.11be	320	95	6425	6425	-47.70	-60.13	10	10	100%	90%	Pass
					6580	-45.84	-60.13	10	10	100%	90%	Pass
UNII-7	802.11be	20	117	6535	6535	-45.66	-59.49	10	10	100%	90%	Pass
					6430	-46.81	-59.49	10	10	100%	90%	Pass
	802.11be	320	127	6585	6585	-45.08	-59.49	10	10	100%	90%	Pass
					6740	-43.46	-59.49	10	10	100%	90%	Pass
UNII-8	802.11be	20	185	6875	6875	-43.37	-58.61	10	10	100%	90%	Pass
					6750	-44.61	-58.61	10	10	100%	90%	Pass
	802.11be	320	191	6905	6905	-44.09	-58.61	10	10	100%	90%	Pass
					7060	-42.89	-58.61	10	10	100%	90%	Pass

NOTE: Detection Level = Injected AWGN Power (dBm) - Antenna Gain (dBi) + Path Loss (dB).


Contention-Based Protocol EUT Channel: CH1 Incumbent Signal Frequency: 5955 MHz

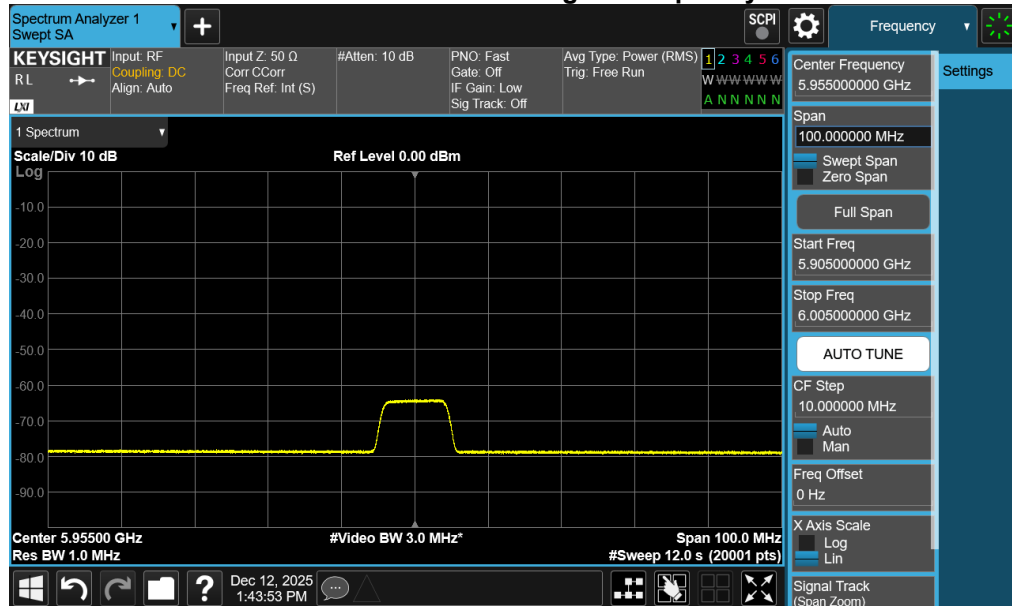

EUT Channel: CH31 Incumbent Signal Frequency: 6105 MHz

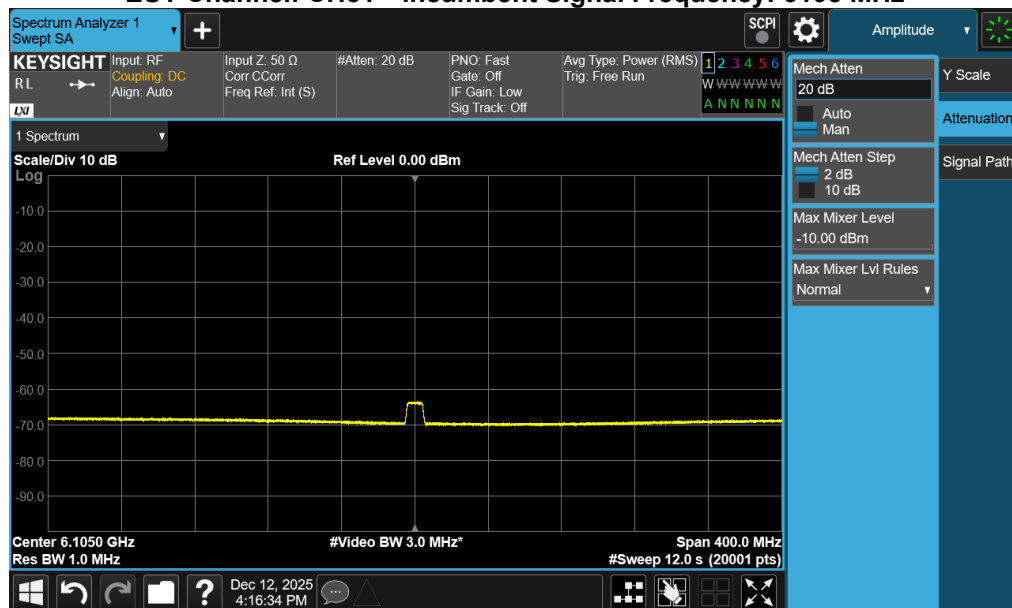

EUT Channel: CH97 Incumbent Signal Frequency: 6435 MHz

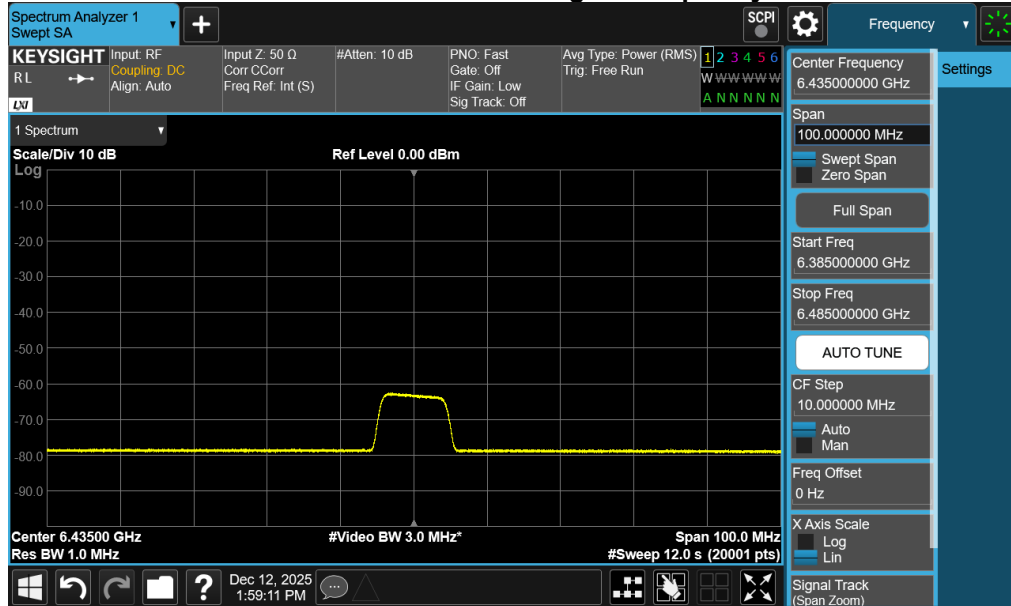

EUT Channel: CH95 Incumbent Signal Frequency: 6425 MHz




EUT Channel: CH117 Incumbent Signal Frequency: 6535 MHz



EUT Channel: CH127 Incumbent Signal Frequency: 6585 MHz



EUT Channel: CH185 Incumbent Signal Frequency: 6875 MHz

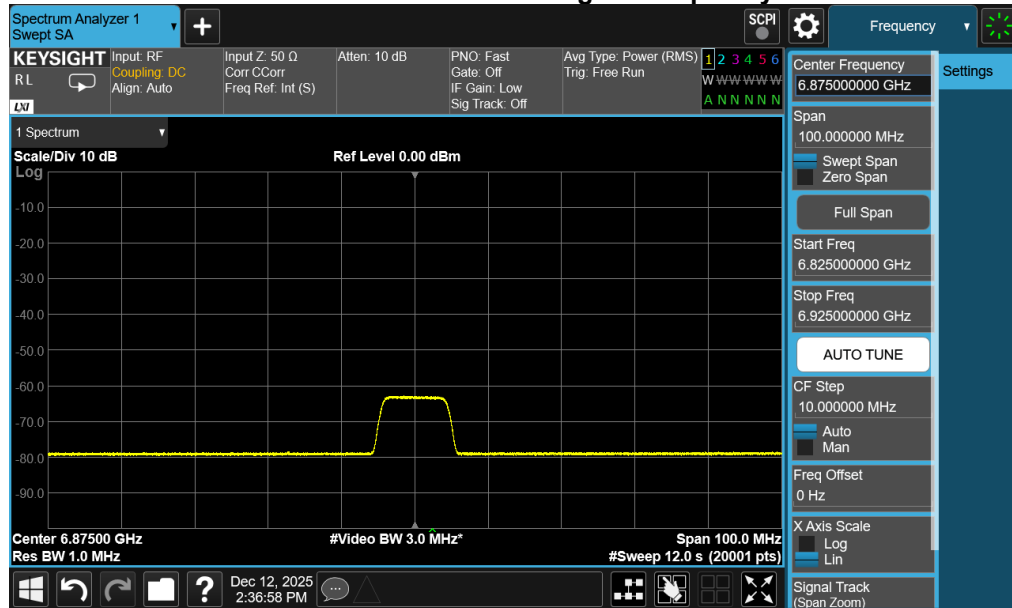

EUT Channel: CH191 Incumbent Signal Frequency: 6905 MHz



End of Test Report