



Test Frequency (MHz)	Conducted Power Spectral Density (dBm/MHz)	Duty Factor (dB)	e.i.r.p. Spectral Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
6585	-1.24	0.00	1.46	5.00	Pass
6745	-1.51	0.00	1.19	5.00	Pass

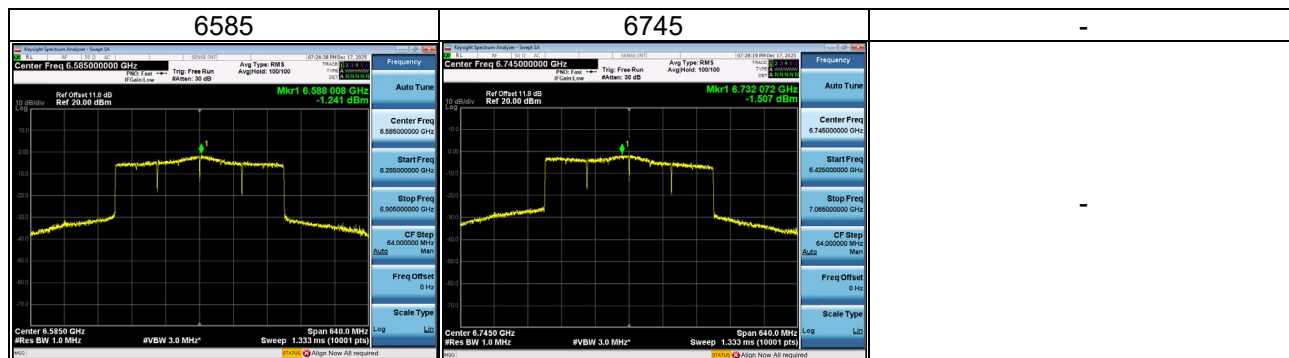

Test Frequency (MHz)	Conducted Power Spectral Density (dBm/MHz)	Duty Factor (dB)	e.i.r.p. Spectral Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
6905	-2.87	0.00	1.53	5.00	Pass

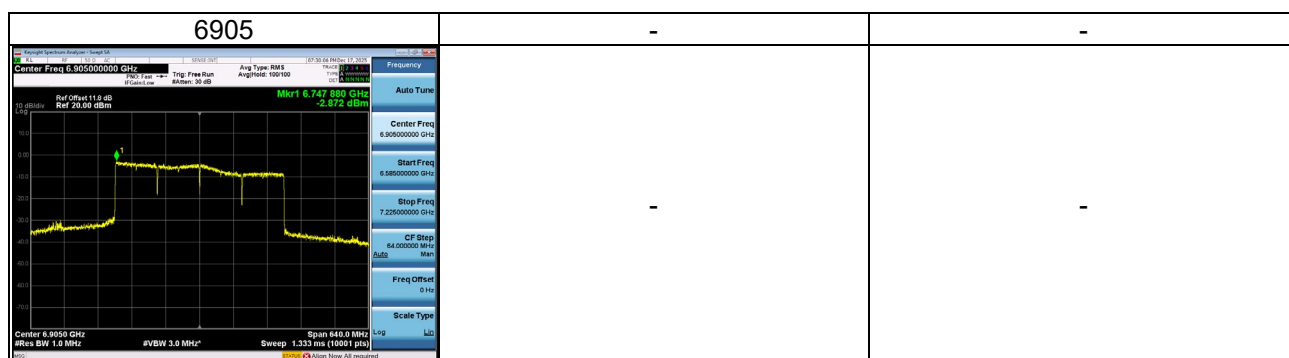


Test Mode	IEEE 802.11be(EHT320)_Total
-----------	-----------------------------

Test Frequency (MHz)	e.i.r.p. Spectral Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
6105	4.33	5.00	Pass
6265	4.53	5.00	Pass
6425	4.26	5.00	Pass
6585	4.38	5.00	Pass
6745	4.31	5.00	Pass
6905	4.69	5.00	Pass

APPENDIX D UNDESIRABLE EMISSIONS - 30 MHZ TO 1 GHZ

Test Mode	IEEE 802.11be (EHT320)	Test Date	2025/11/6
Test Frequency	6265MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

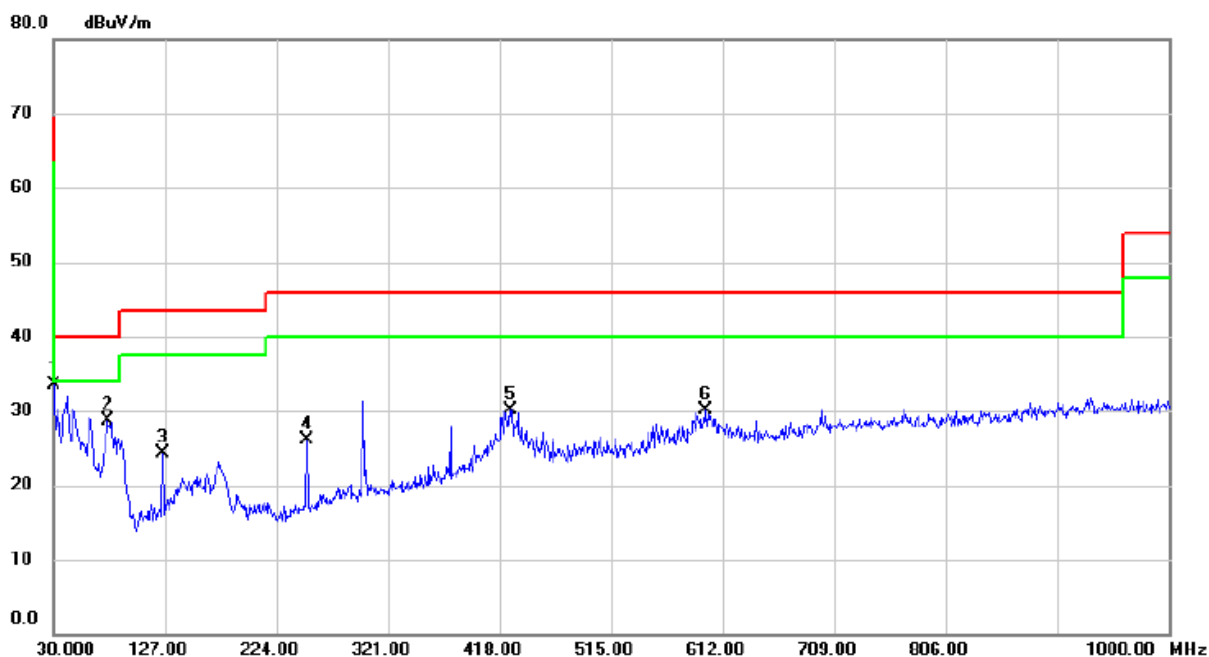


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	47.48	-13.93	33.55	40.00	-6.45	peak	
2		77.5300	44.14	-15.41	28.73	40.00	-11.27	peak	
3		125.0600	37.74	-13.38	24.36	43.50	-19.14	peak	
4		250.1900	37.95	-11.75	26.20	46.00	-19.80	peak	
5		427.7000	36.34	-6.23	30.11	46.00	-15.89	peak	
6		597.4500	32.54	-2.37	30.17	46.00	-15.83	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT320)	Test Date	2025/11/6
Test Frequency	6265MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

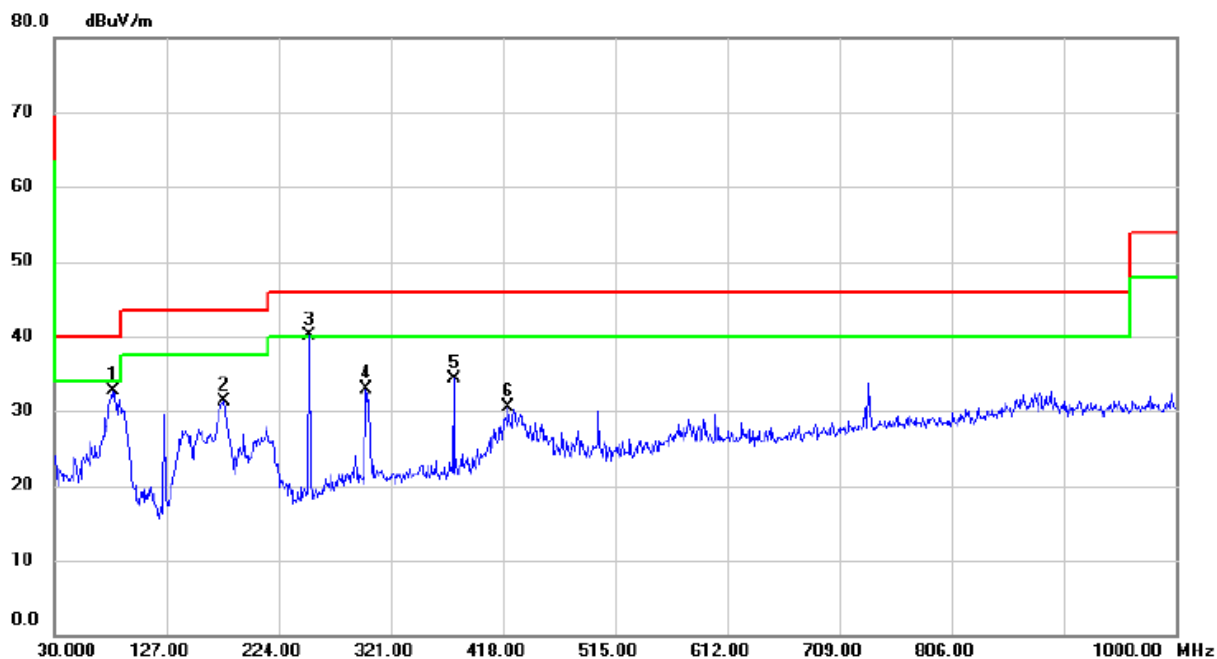


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		80.4400	48.73	-16.06	32.67	40.00	-7.33	peak	
2		176.4700	43.84	-12.51	31.33	43.50	-12.17	peak	
3	*	250.1900	51.88	-11.75	40.13	46.00	-5.87	peak	
4		299.6600	42.97	-10.00	32.97	46.00	-13.03	peak	
5		375.3200	42.29	-7.99	34.30	46.00	-11.70	peak	
6		422.8500	36.80	-6.35	30.45	46.00	-15.55	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E UNDESIRABLE EMISSIONS - ABOVE 1 GHZ

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	5955MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

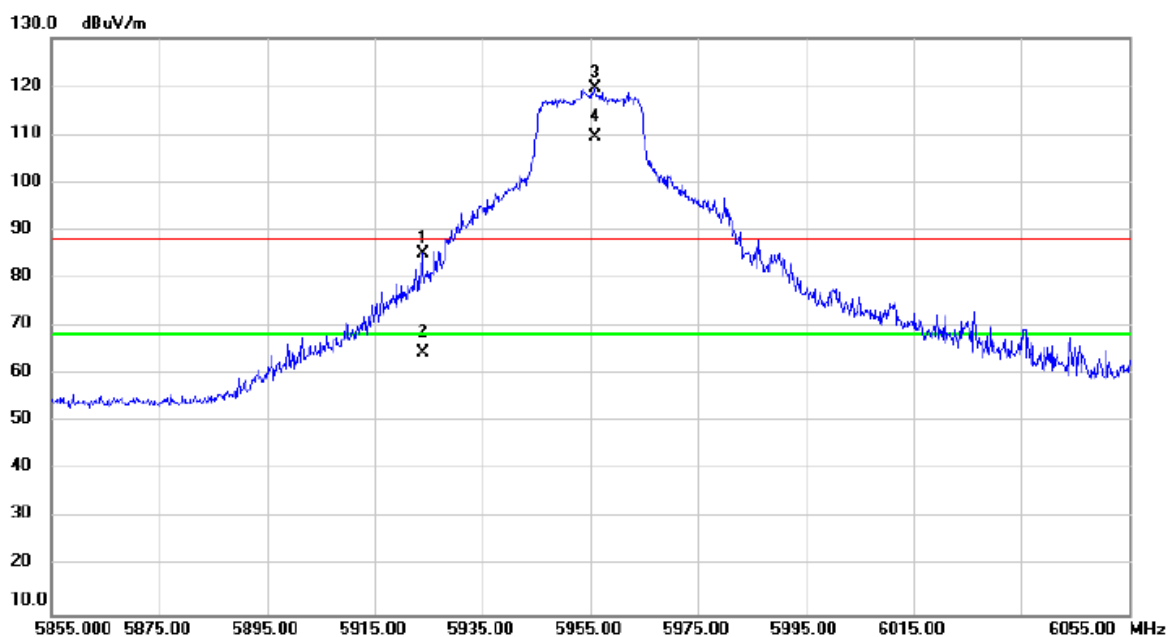


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5923.800	73.75	11.52	85.27	88.20	-2.93	peak	
2		5923.800	52.97	11.52	64.49	68.20	-3.71	AVG	
3	X	5955.800	108.0	11.57	119.62	88.20	31.42	peak	No Limit
4	*	5955.800	97.85	11.57	109.42	68.20	41.22	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	6415MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

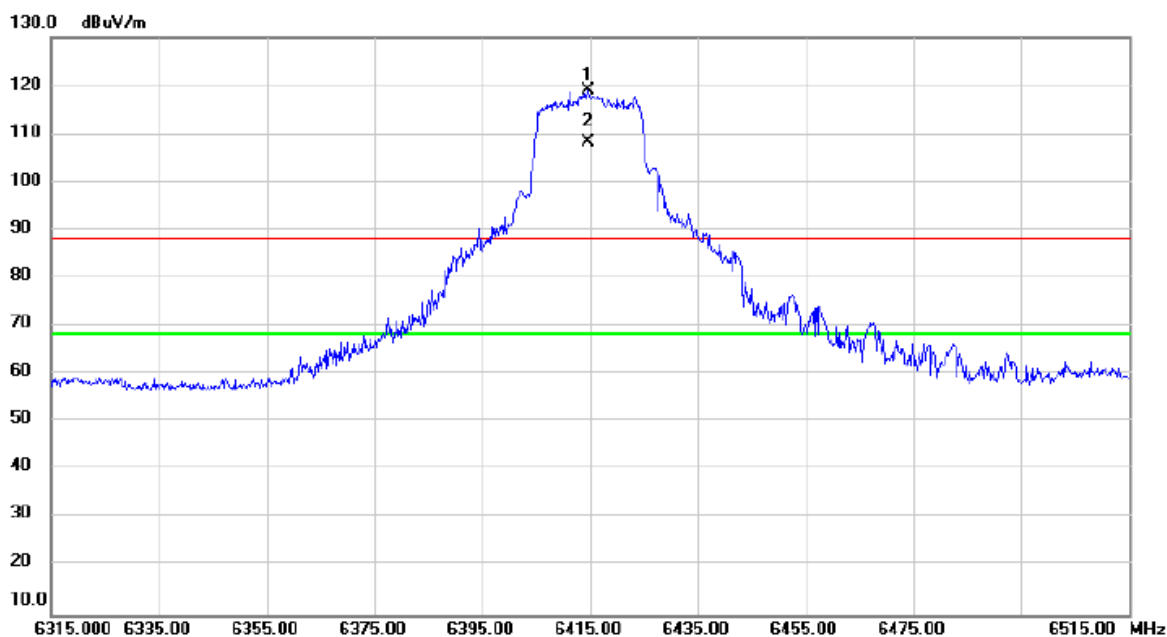


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6414.600	105.5	13.52	119.05	88.20	30.85	peak	No Limit
2	*	6414.600	94.59	13.52	108.11	68.20	39.91	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	6435MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

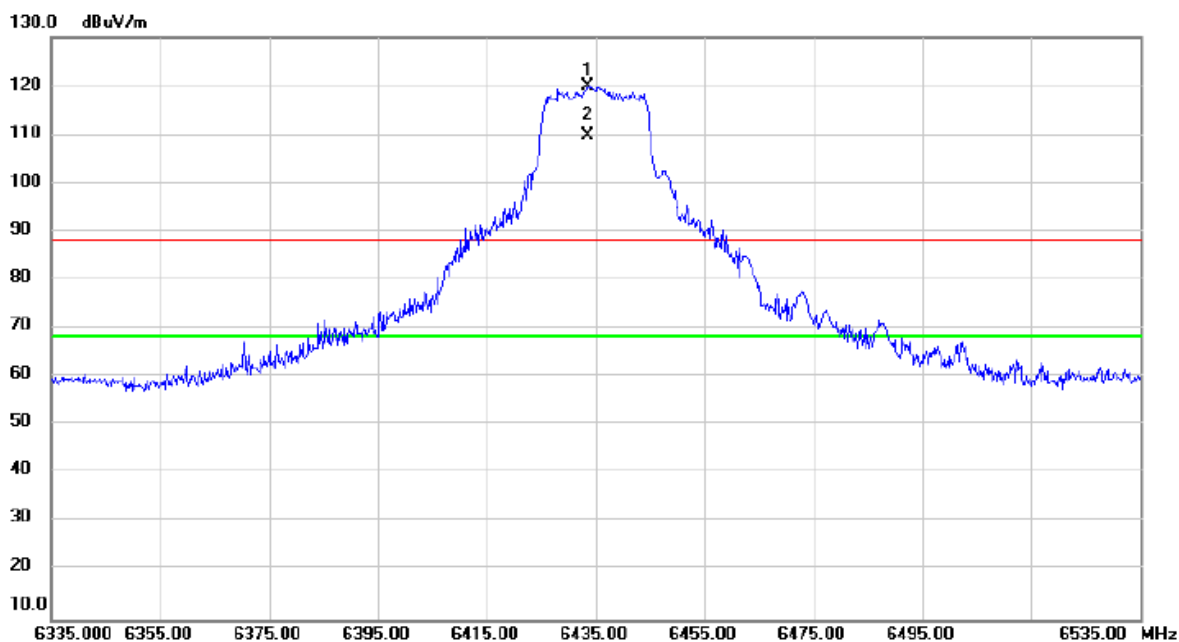


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6433.600	106.3	13.60	119.93	88.20	31.73	peak	No Limit
2	*	6433.600	96.11	13.60	109.71	68.20	41.51	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	6515MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

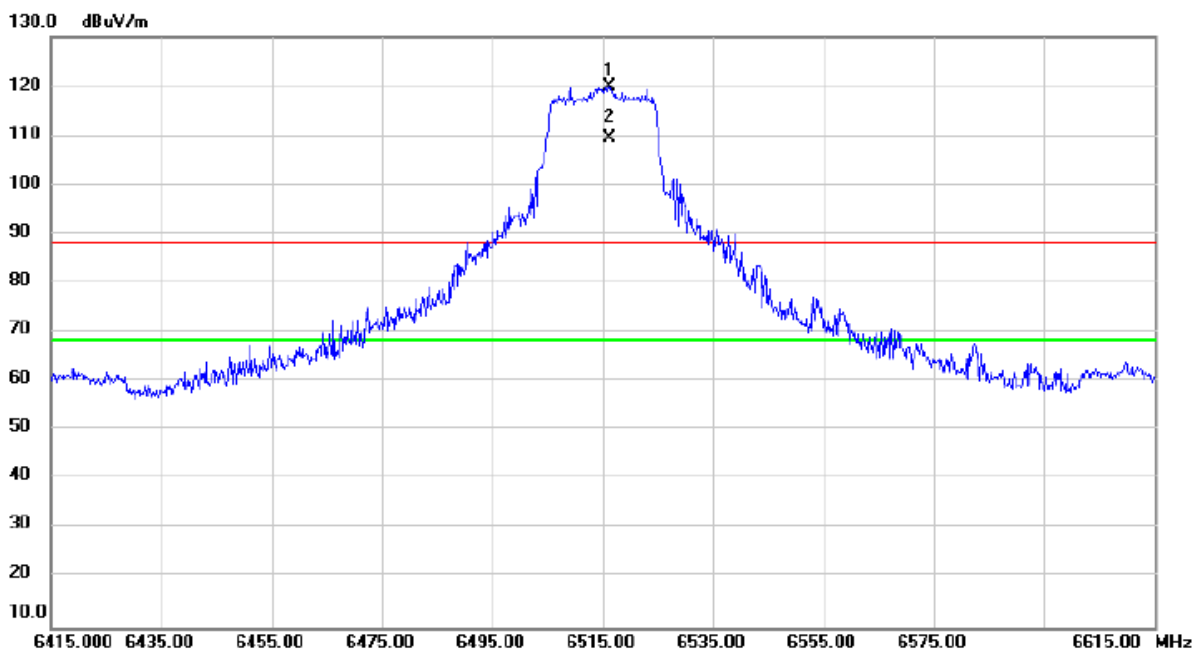


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6516.200	106.1	13.92	120.10	88.20	31.90	peak	No Limit
2	*	6516.200	95.67	13.92	109.59	68.20	41.39	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	6535MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

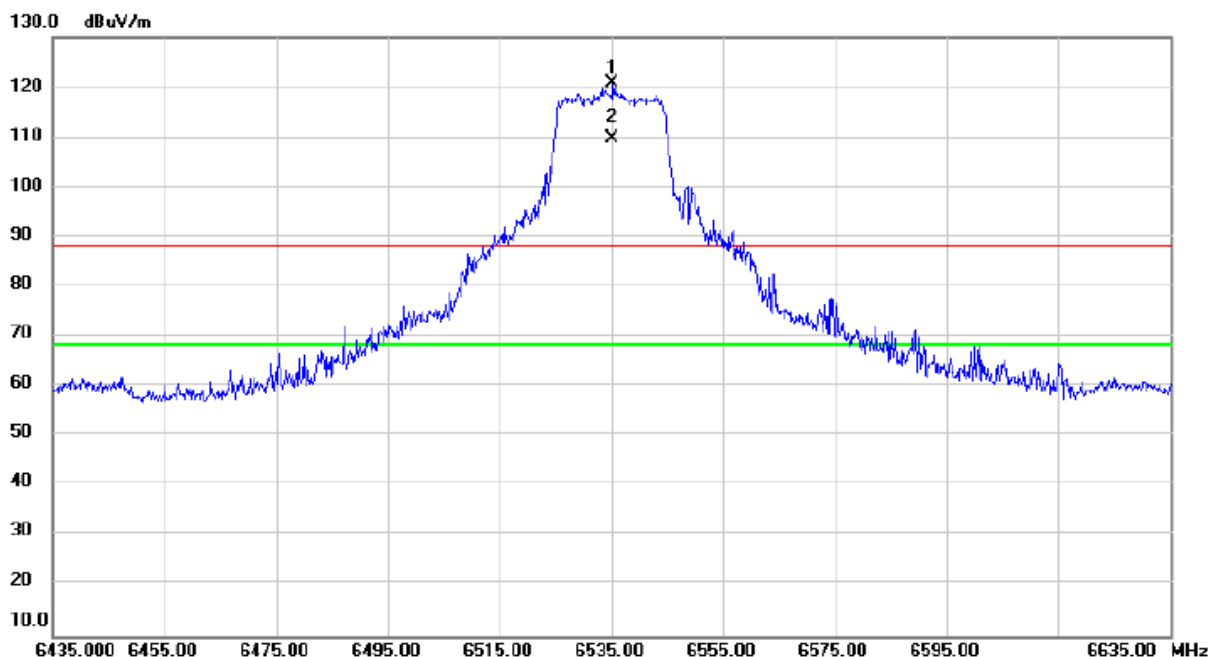


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6535.200	106.9	13.93	120.92	88.20	32.72	peak	No Limit
2	*	6535.200	95.89	13.93	109.82	68.20	41.62	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	6855MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

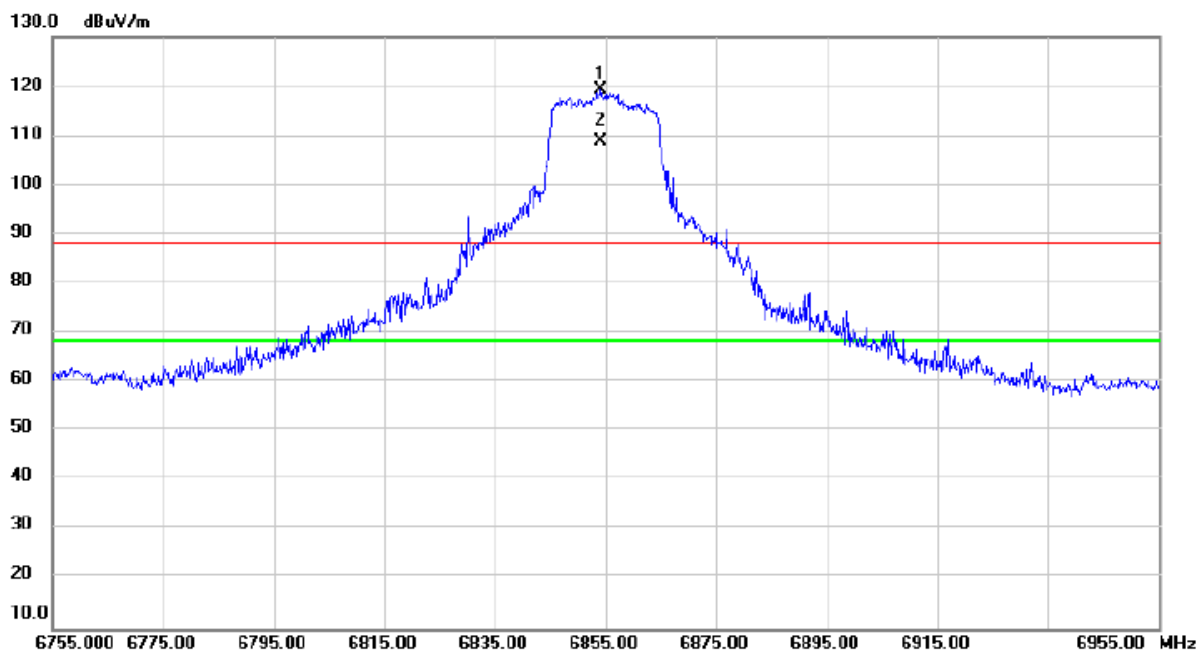


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6854.200	105.2	14.11	119.35	88.20	31.15	peak	No Limit
2	*	6854.200	94.85	14.11	108.96	68.20	40.76	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	6875MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

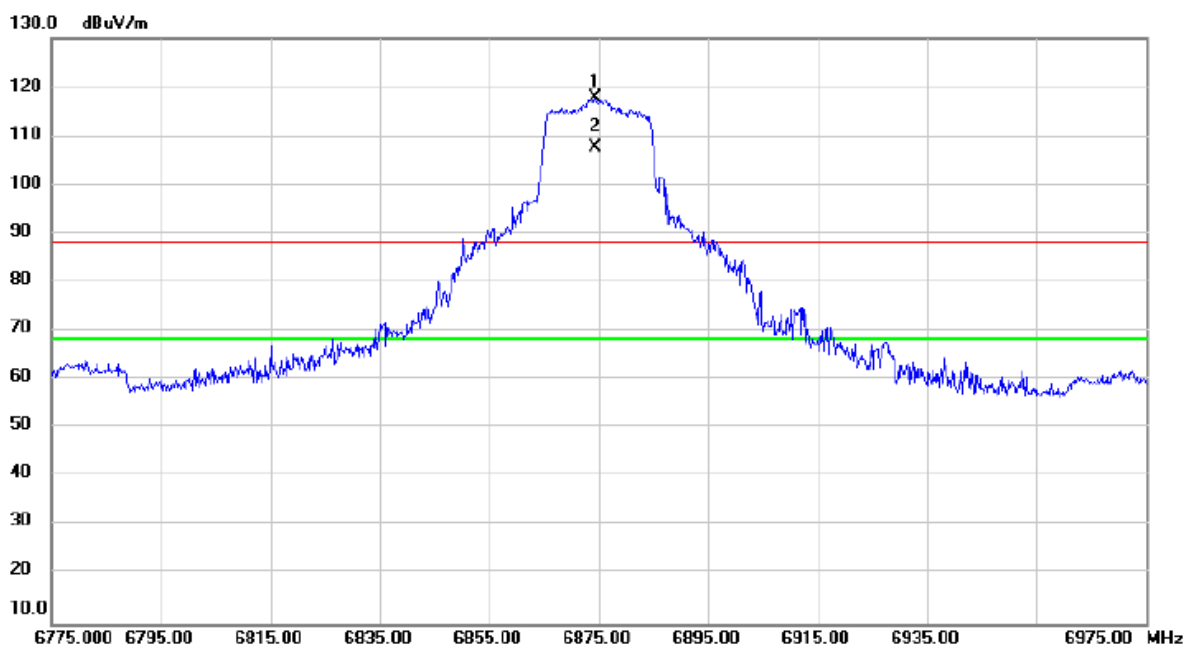


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6874.400	103.6	14.12	117.80	88.20	29.60	peak	No Limit
2	*	6874.400	93.53	14.12	107.65	68.20	39.45	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/5
Test Frequency	7095MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

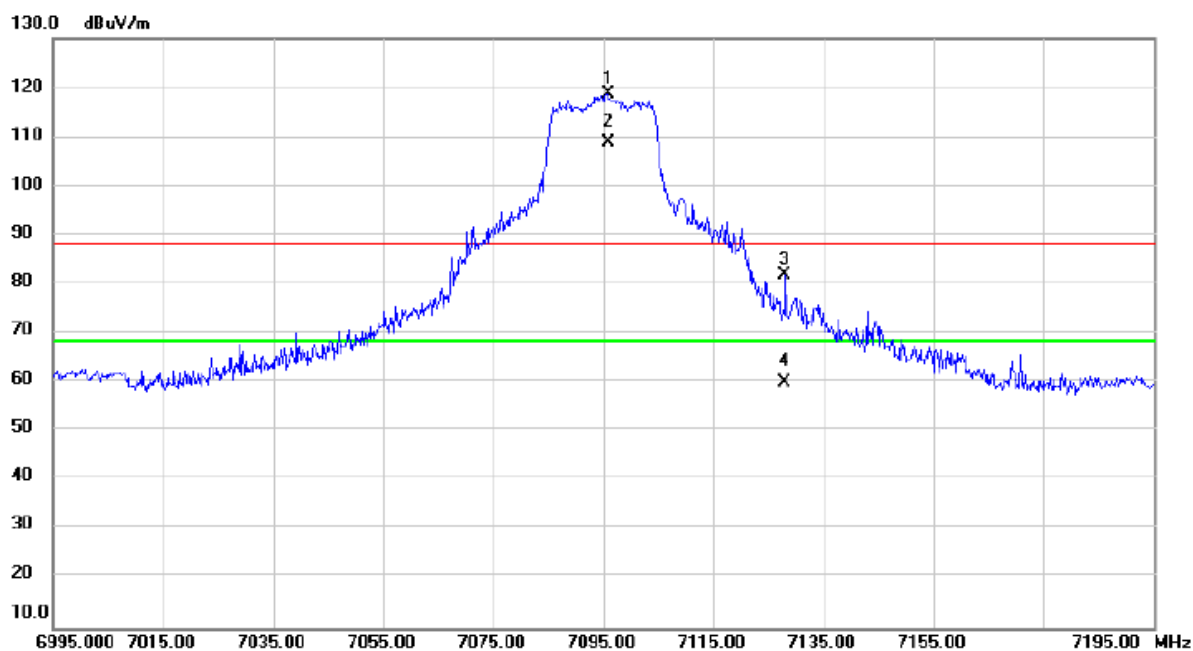


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	7095.800	104.4	14.30	118.79	88.20	30.59	peak	No Limit
2	*	7095.800	94.44	14.30	108.74	68.20	40.54	AVG	No Limit
3		7128.000	67.51	14.32	81.83	88.20	-6.37	peak	
4		7128.000	45.54	14.32	59.86	68.20	-8.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	5965MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

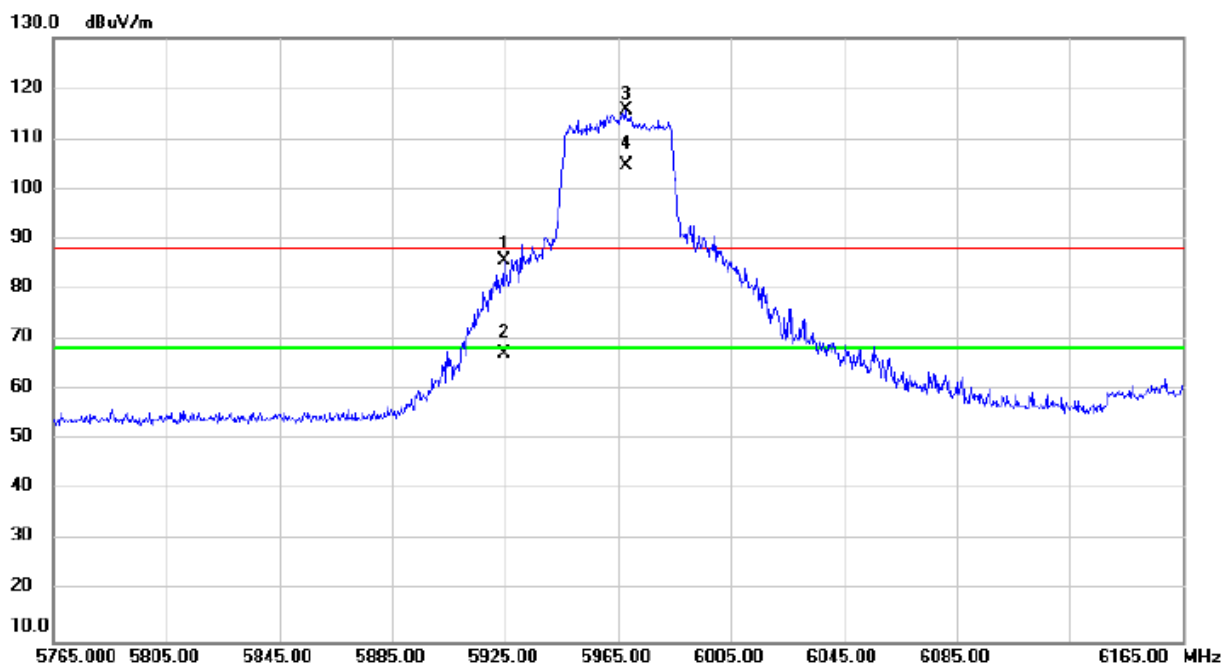


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5924.600	74.34	11.52	85.86	88.20	-2.34	peak	
2		5924.600	55.77	11.52	67.29	68.20	-0.91	AVG	
3	X	5967.800	104.2	11.59	115.79	88.20	27.59	peak	No Limit
4	*	5967.800	92.93	11.59	104.52	68.20	36.32	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	6405MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

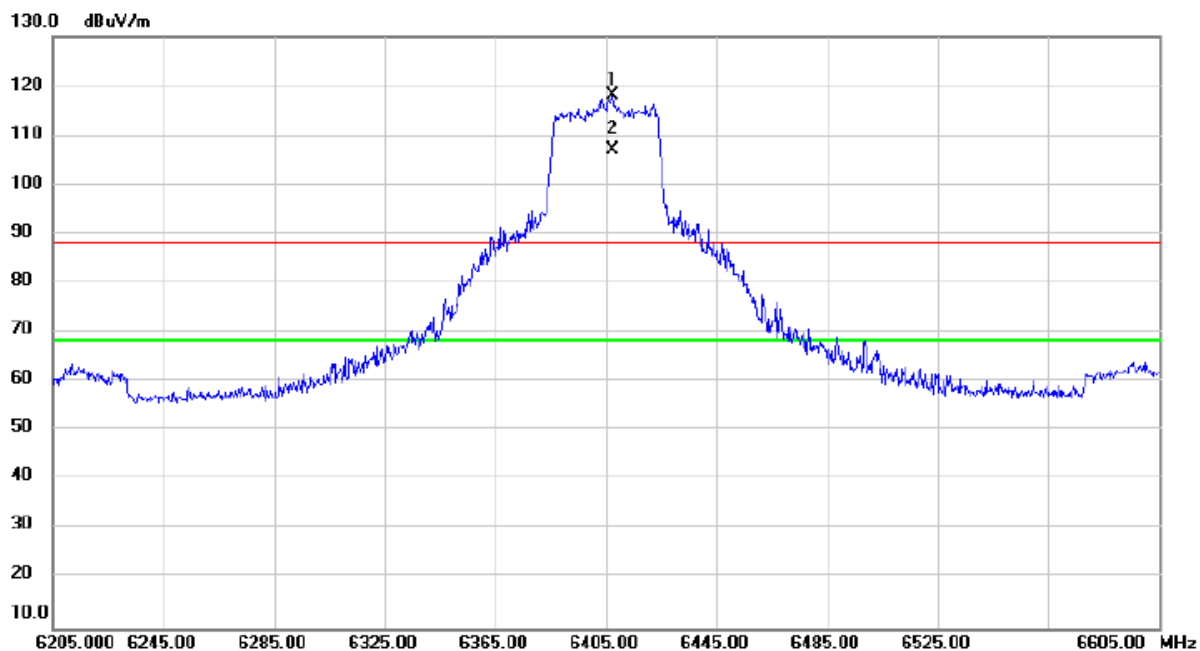


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6407.400	104.7	13.48	118.27	88.20	30.07	peak	No Limit
2	*	6407.400	93.64	13.48	107.12	68.20	38.92	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	6445MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

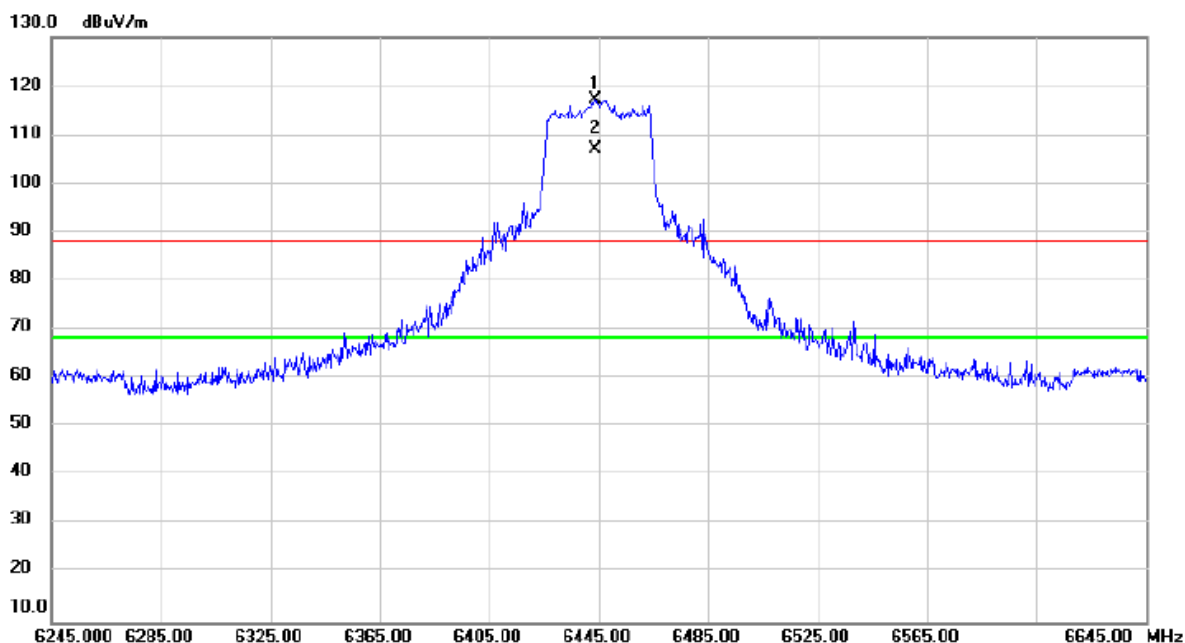


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6443.800	103.7	13.64	117.39	88.20	29.19	peak	No Limit
2	*	6443.800	93.36	13.64	107.00	68.20	38.80	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	6525MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

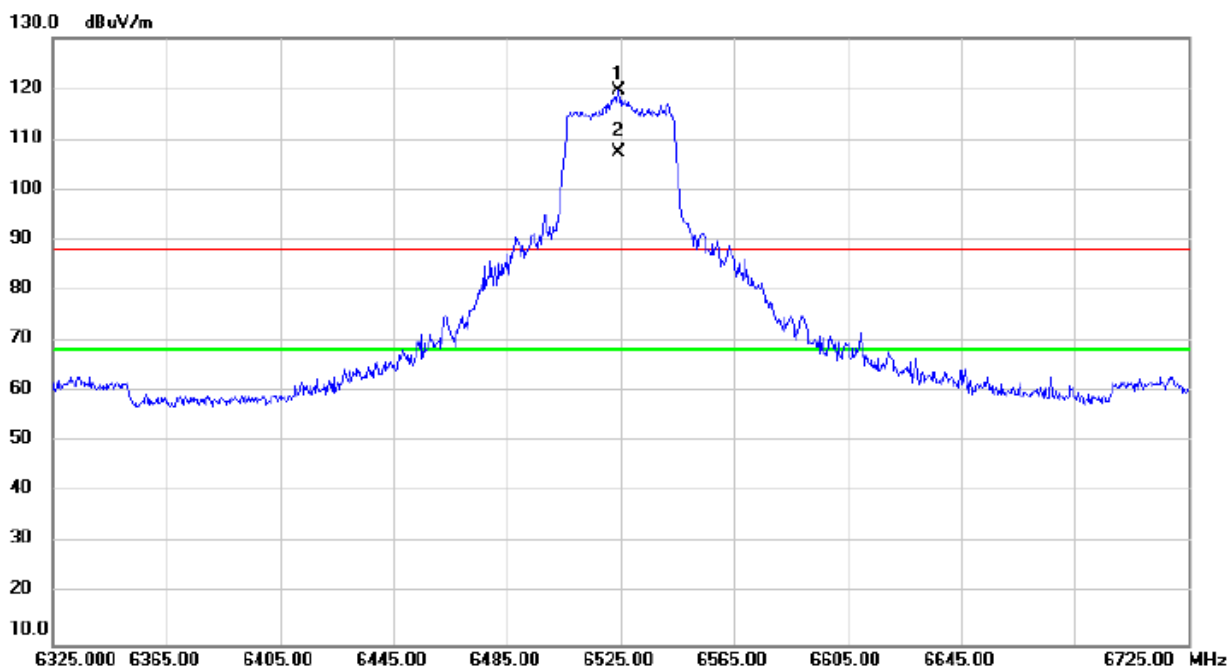


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6524.200	105.6	13.91	119.58	88.20	31.38	peak	No Limit
2	*	6524.200	93.50	13.91	107.41	68.20	39.21	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	6565MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

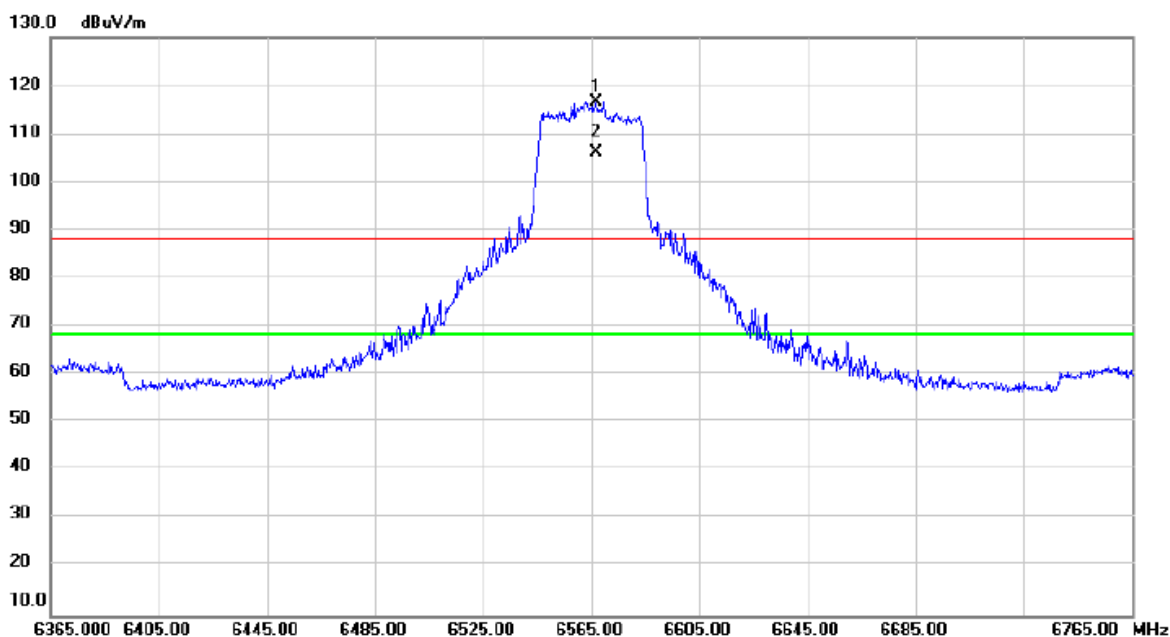


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6567.000	102.7	13.94	116.73	88.20	28.53	peak	No Limit
2	*	6567.000	92.17	13.94	106.11	68.20	37.91	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	6845MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

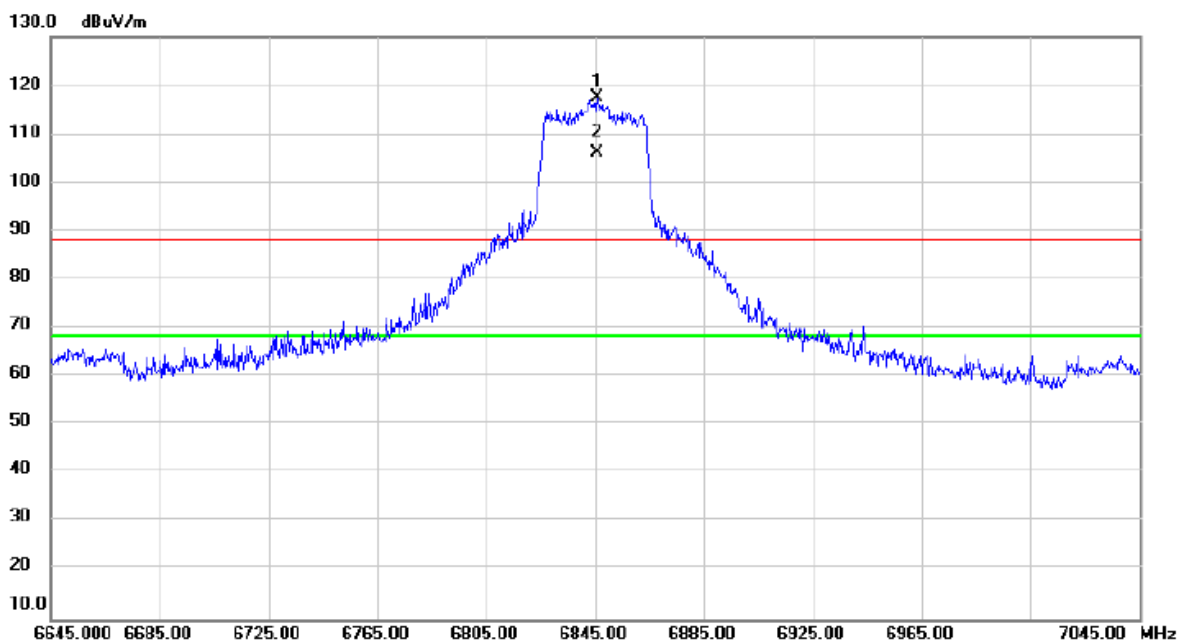


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6845.800	103.3	14.11	117.48	88.20	29.28	peak	No Limit
2	*	6845.800	92.17	14.11	106.28	68.20	38.08	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	6885MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

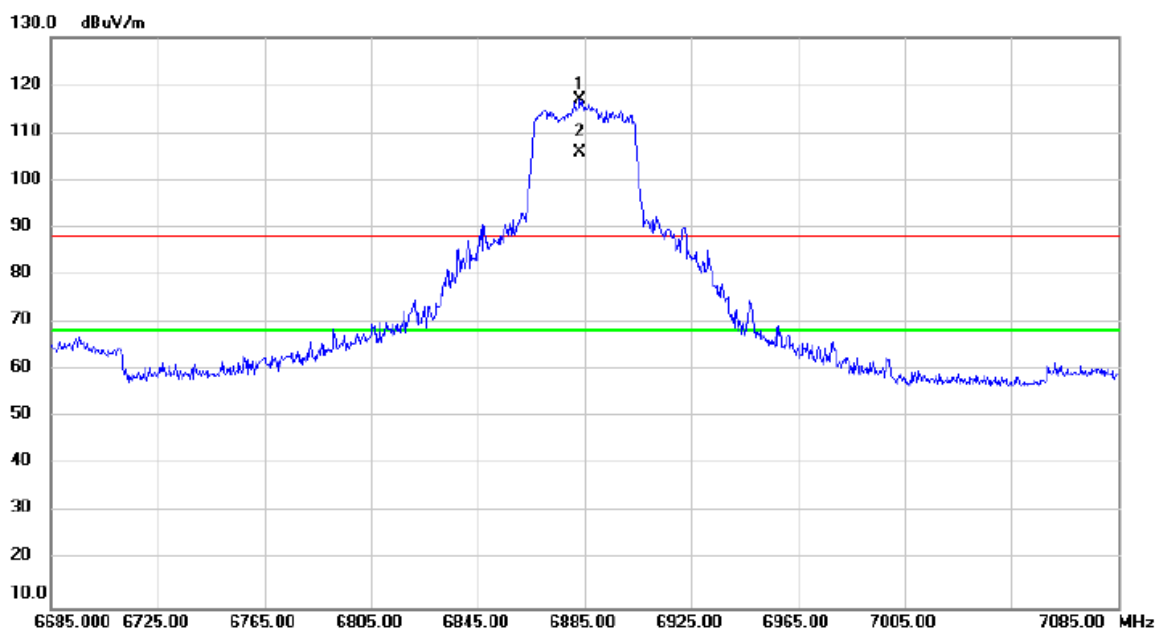


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6883.400	102.6	14.13	116.81	88.20	28.61	peak	No Limit
2	*	6883.400	91.71	14.13	105.84	68.20	37.64	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/5
Test Frequency	7085MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

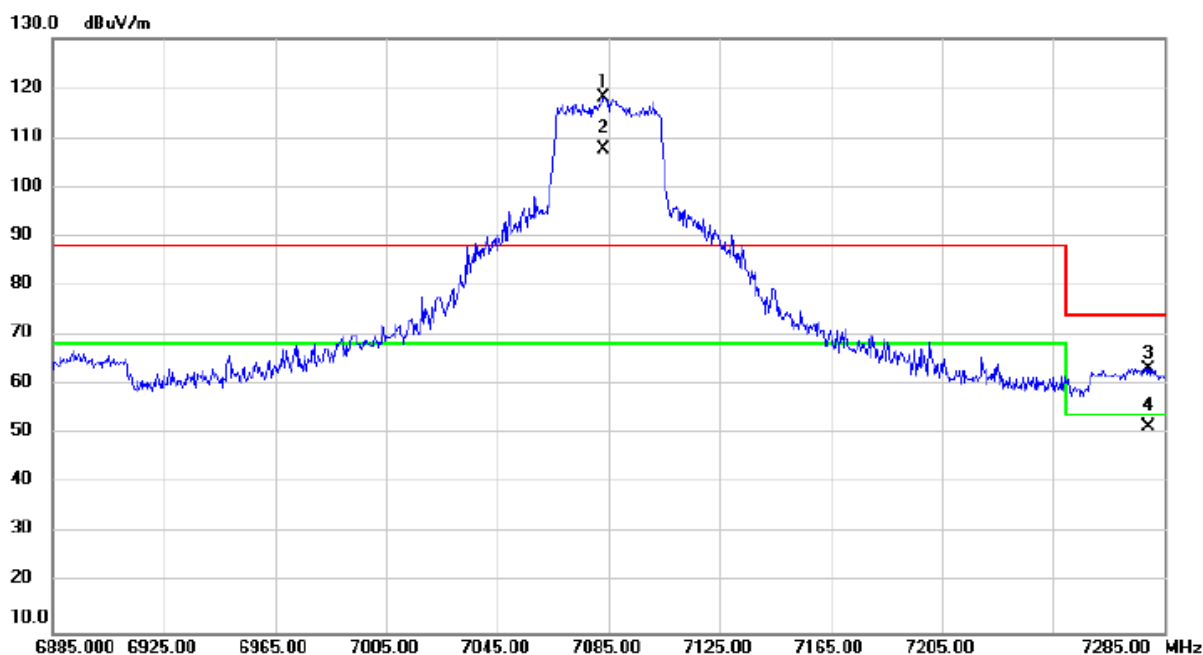


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	7083.400	103.8	14.28	118.11	88.20	29.91	peak	No Limit
2	*	7083.400	93.37	14.28	107.65	68.20	39.45	AVG	No Limit
3		7279.400	48.81	14.47	63.28	74.00	-10.72	peak	
4		7279.400	37.10	14.47	51.57	54.00	-2.43	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/5
Test Frequency	5985MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

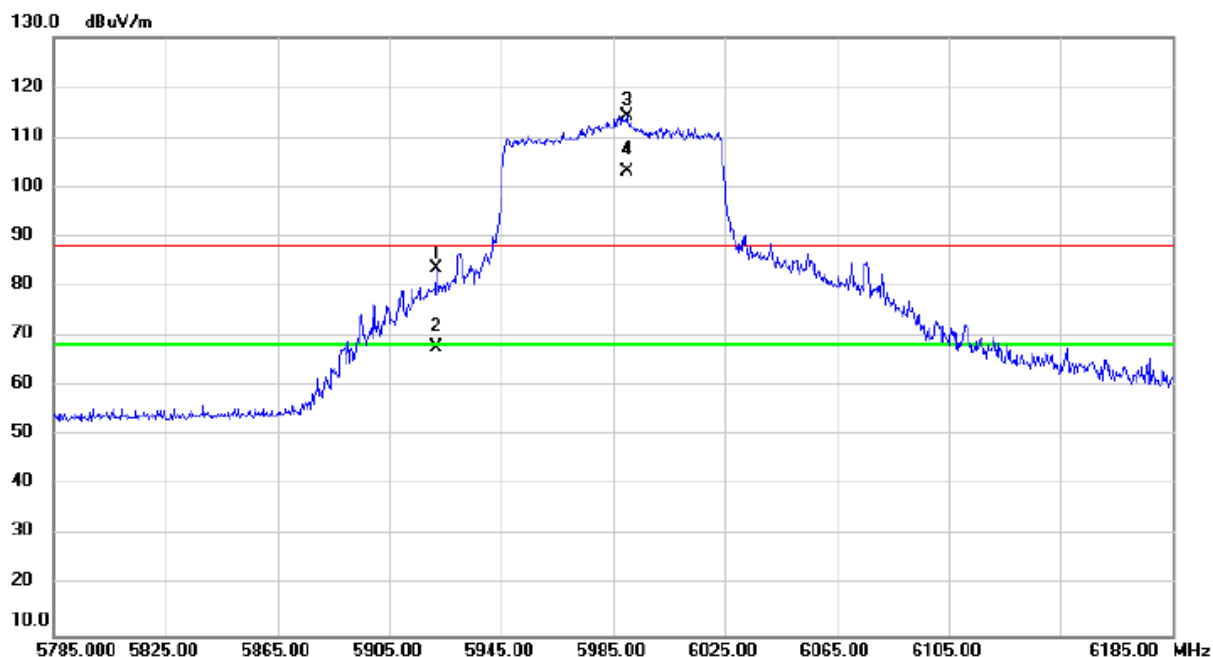


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5921.800	72.02	11.52	83.54	88.20	-4.66	peak	
2		5921.800	56.10	11.52	67.62	68.20	-0.58	AVG	
3	X	5989.800	102.5	11.63	114.18	88.20	25.98	peak	No Limit
4	*	5989.800	91.45	11.63	103.08	68.20	34.88	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/5
Test Frequency	6385MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

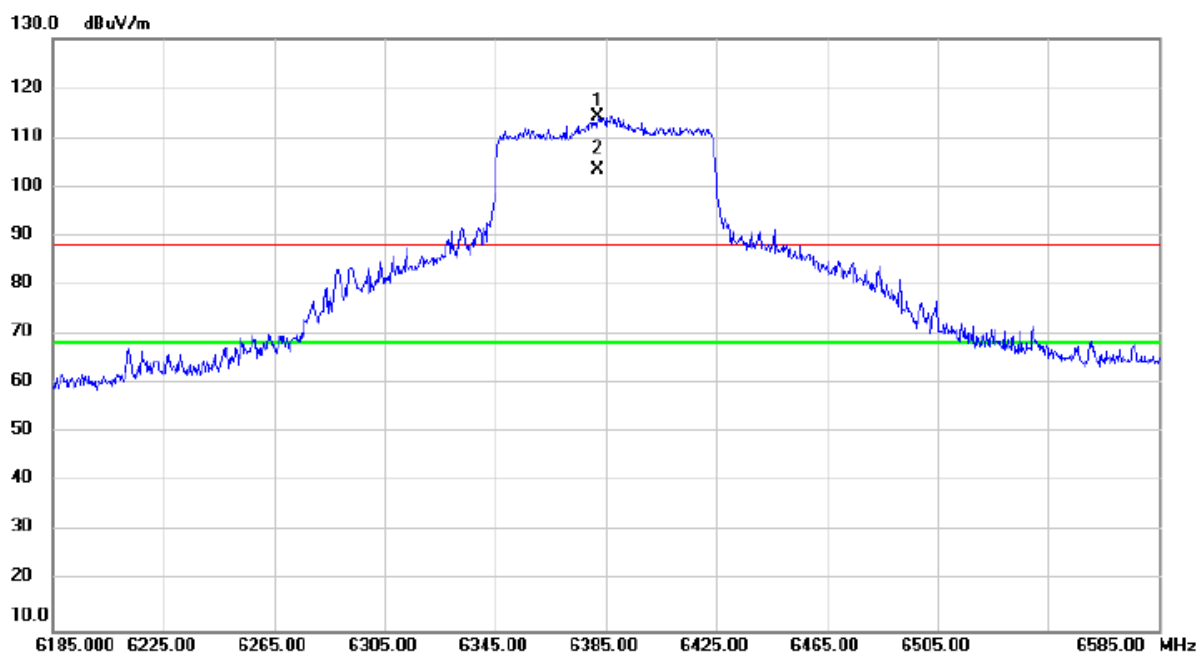


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6382.200	100.9	13.37	114.33	88.20	26.13	peak	No Limit
2	*	6382.200	90.03	13.37	103.40	68.20	35.20	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/6
Test Frequency	6465MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

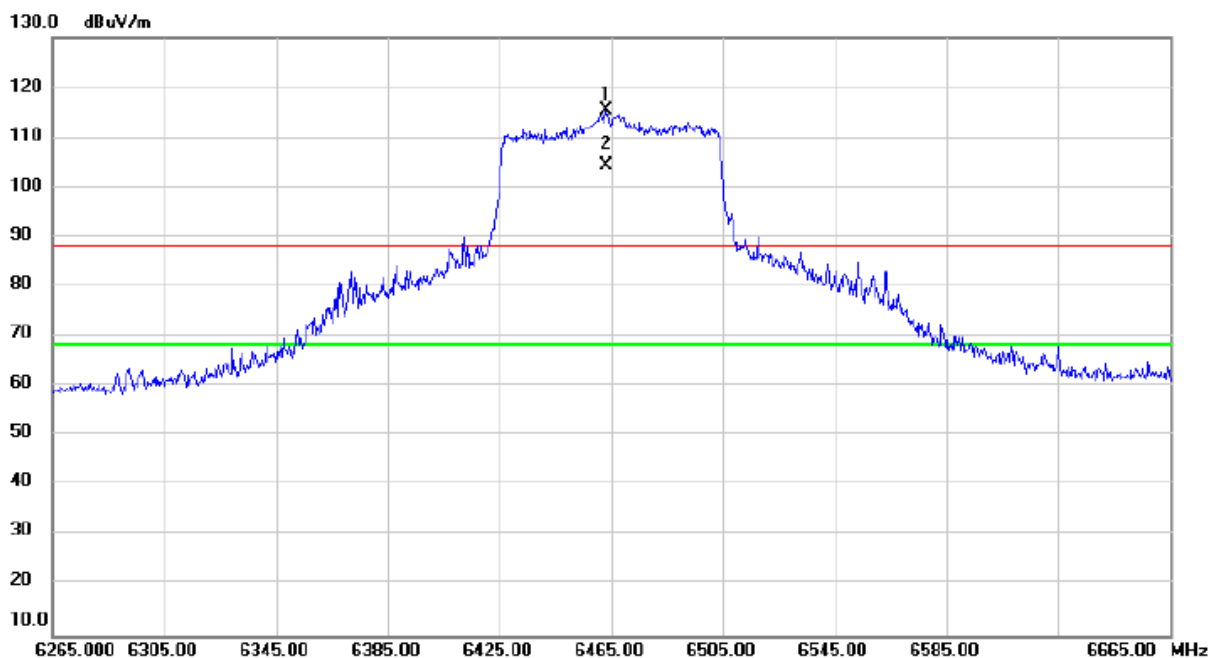


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6463.400	101.6	13.73	115.39	88.20	27.19	peak	No Limit
2	*	6463.400	90.49	13.73	104.22	68.20	36.02	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/6
Test Frequency	6545MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

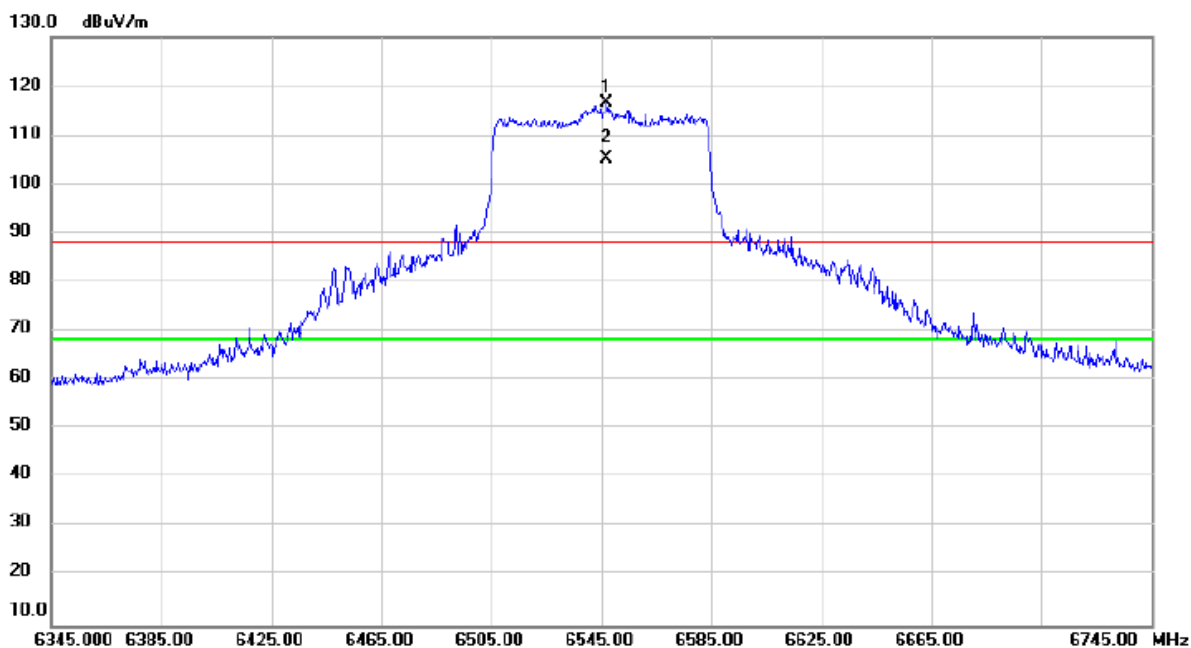


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6547.000	102.7	13.93	116.64	88.20	28.44	peak	No Limit
2	*	6547.000	91.18	13.93	105.11	68.20	36.91	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/6
Test Frequency	6865MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

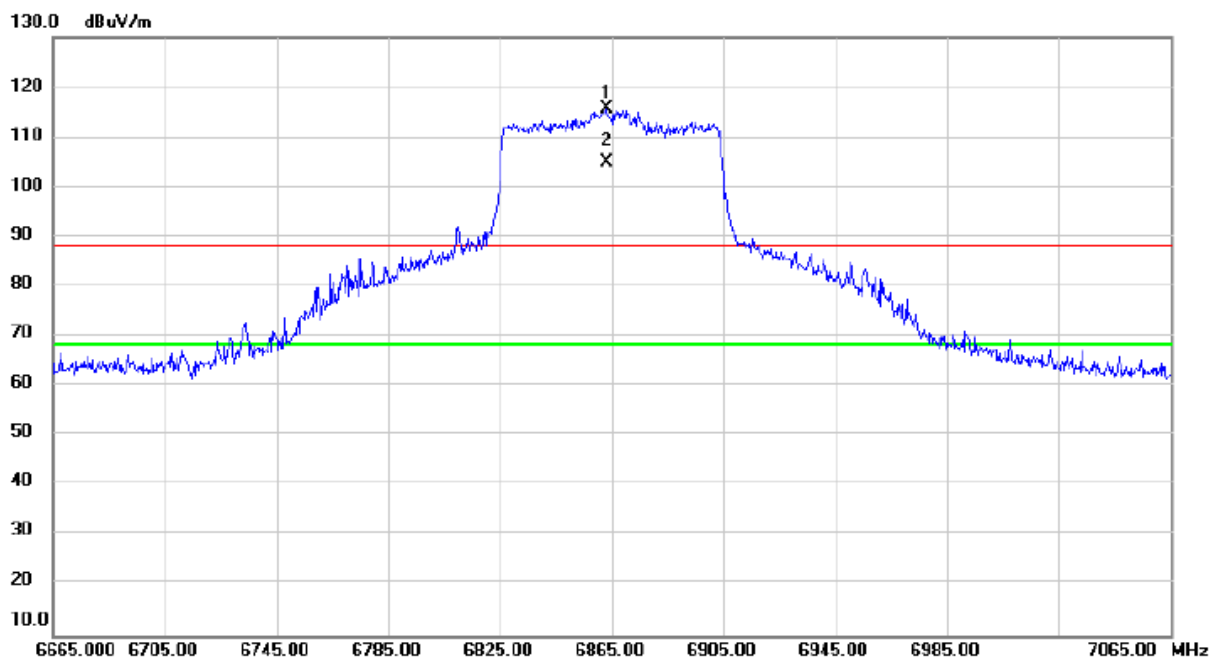


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6863.000	101.6	14.12	115.81	88.20	27.61	peak	No Limit
2	*	6863.000	90.74	14.12	104.86	68.20	36.66	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/6
Test Frequency	7025MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

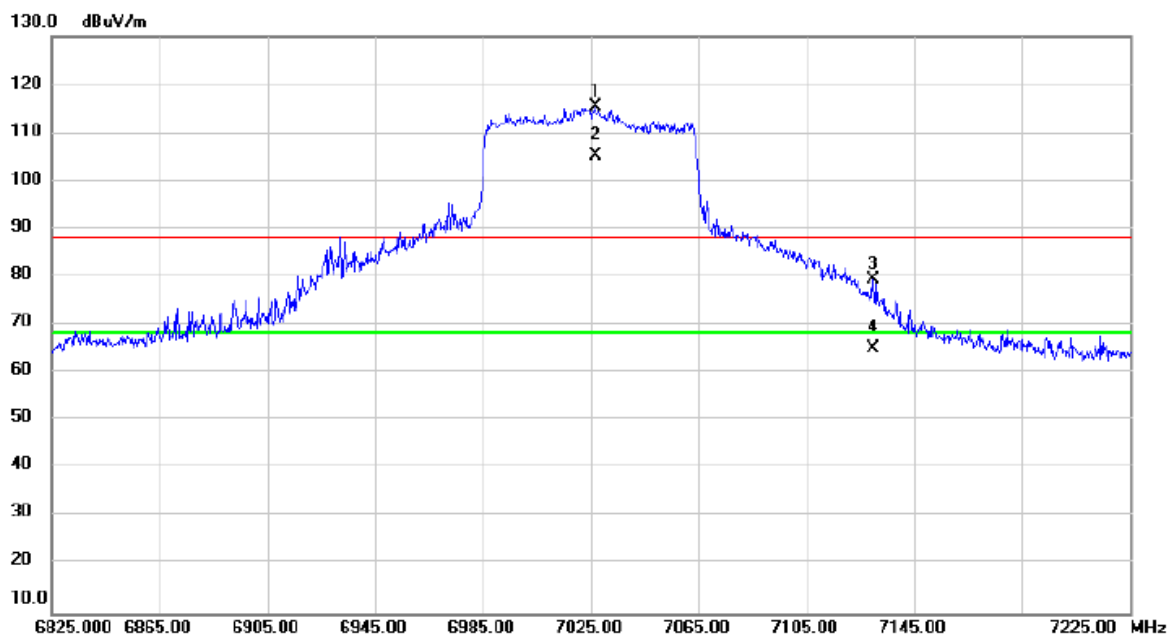


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	7026.600	101.2	14.22	115.42	88.20	27.22	peak	No Limit
2	*	7026.600	90.90	14.22	105.12	68.20	36.92	AVG	No Limit
3		7129.800	65.14	14.32	79.46	88.20	-8.74	peak	
4		7129.800	50.77	14.32	65.09	68.20	-3.11	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2025/12/6
Test Frequency	6025MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

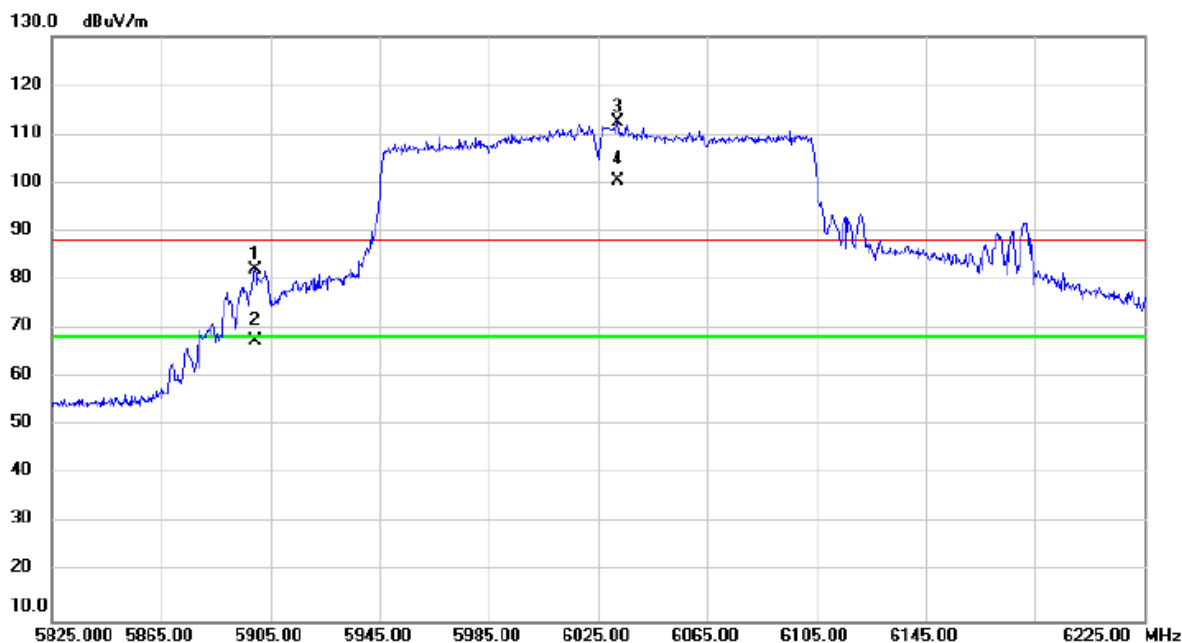


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5899.400	70.81	11.48	82.29	88.20	-5.91	peak	
2		5899.400	55.86	11.48	67.34	68.20	-0.86	AVG	
3	X	6032.200	100.5	11.78	112.36	88.20	24.16	peak	No Limit
4	*	6032.200	88.81	11.78	100.59	68.20	32.39	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2025/12/6
Test Frequency	6345MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

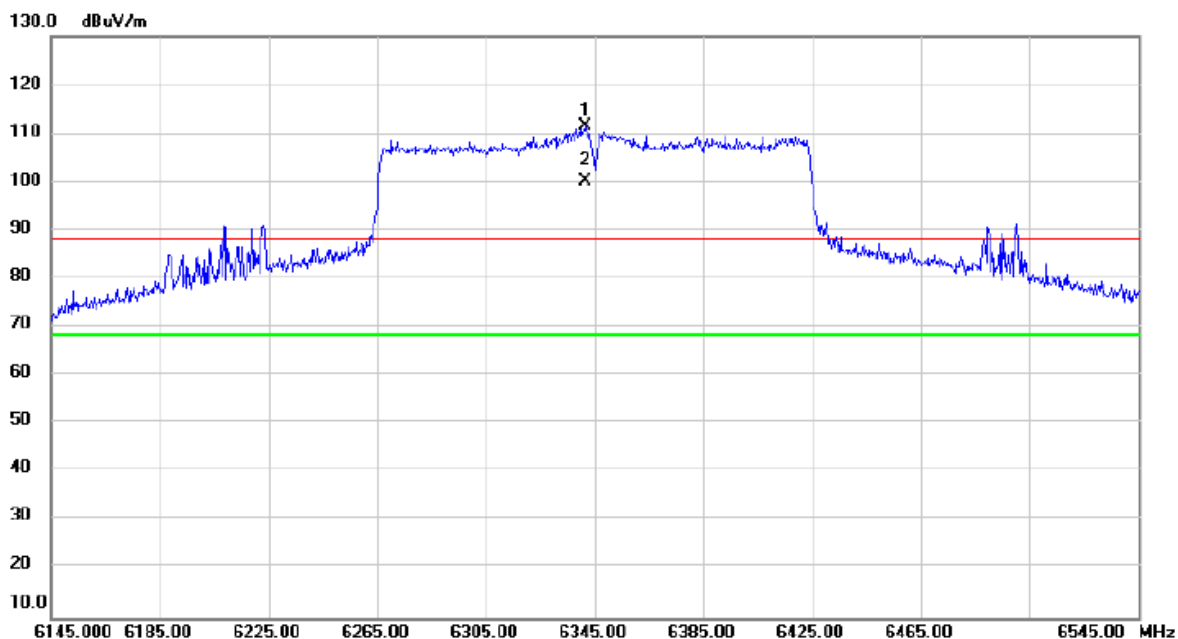


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6341.400	98.36	13.19	111.55	88.20	23.35	peak	No Limit
2	*	6341.400	86.93	13.19	100.12	68.20	31.92	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2025/12/6
Test Frequency	6505MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

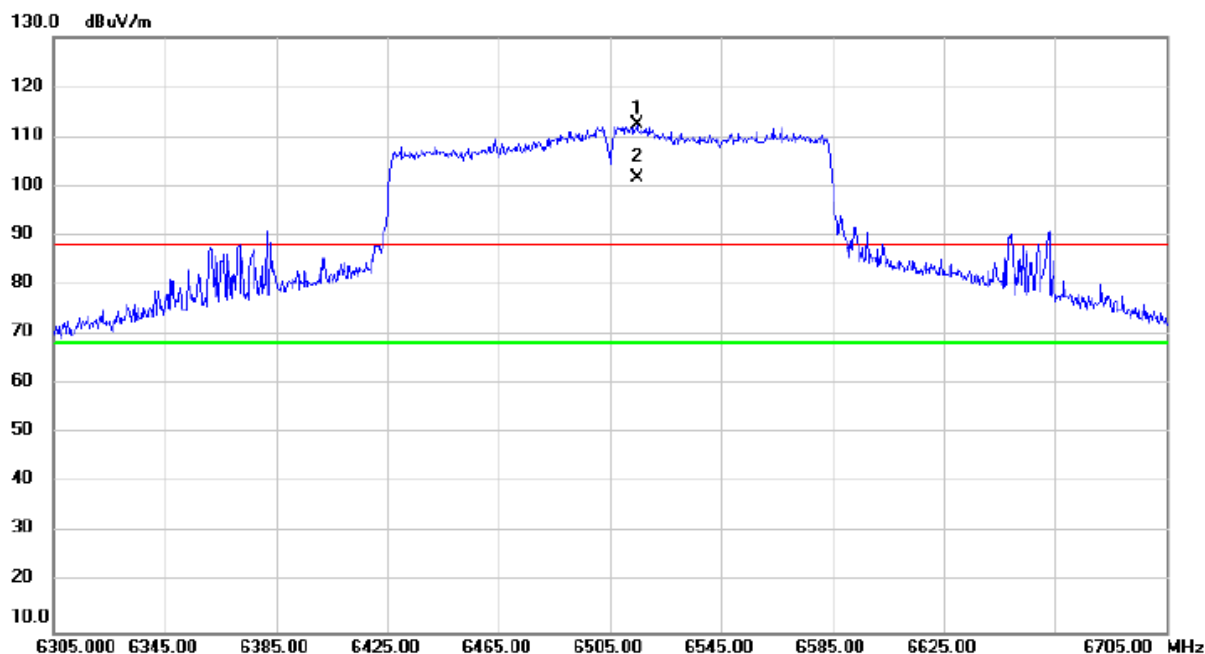


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6514.600	98.62	13.91	112.53	88.20	24.33	peak	No Limit
2	*	6514.600	87.78	13.91	101.69	68.20	33.49	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2025/12/6
Test Frequency	6665MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

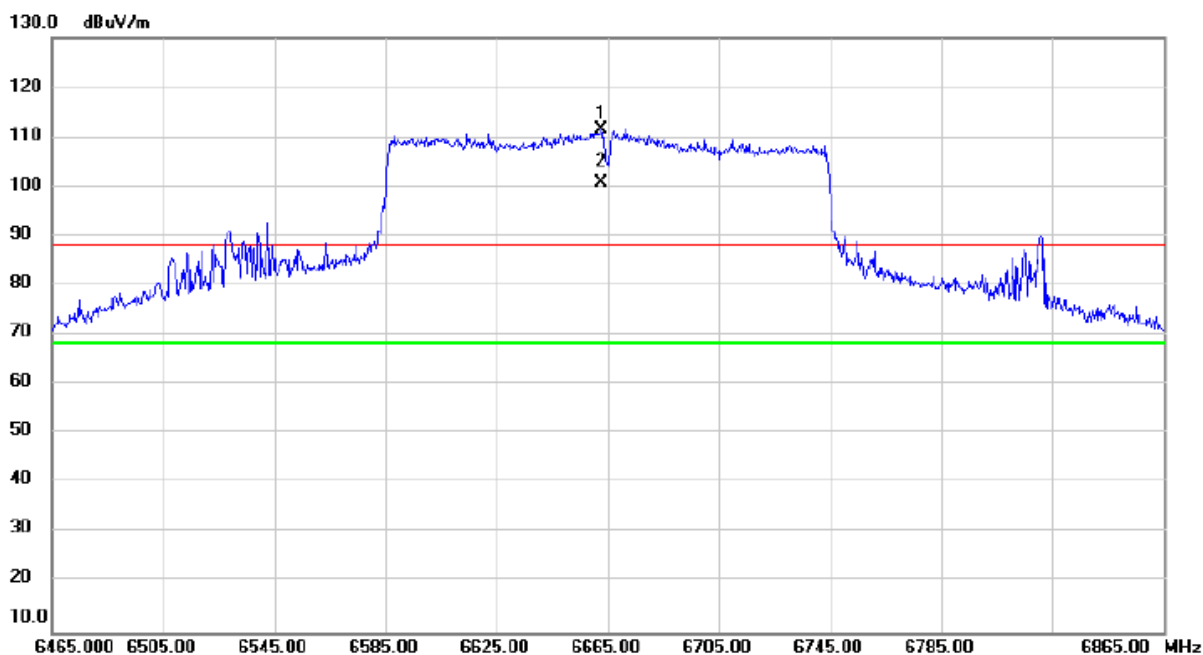


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6662.600	97.57	13.99	111.56	88.20	23.36	peak	No Limit
2	*	6662.600	86.86	13.99	100.85	68.20	32.65	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2025/12/6
Test Frequency	6985MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

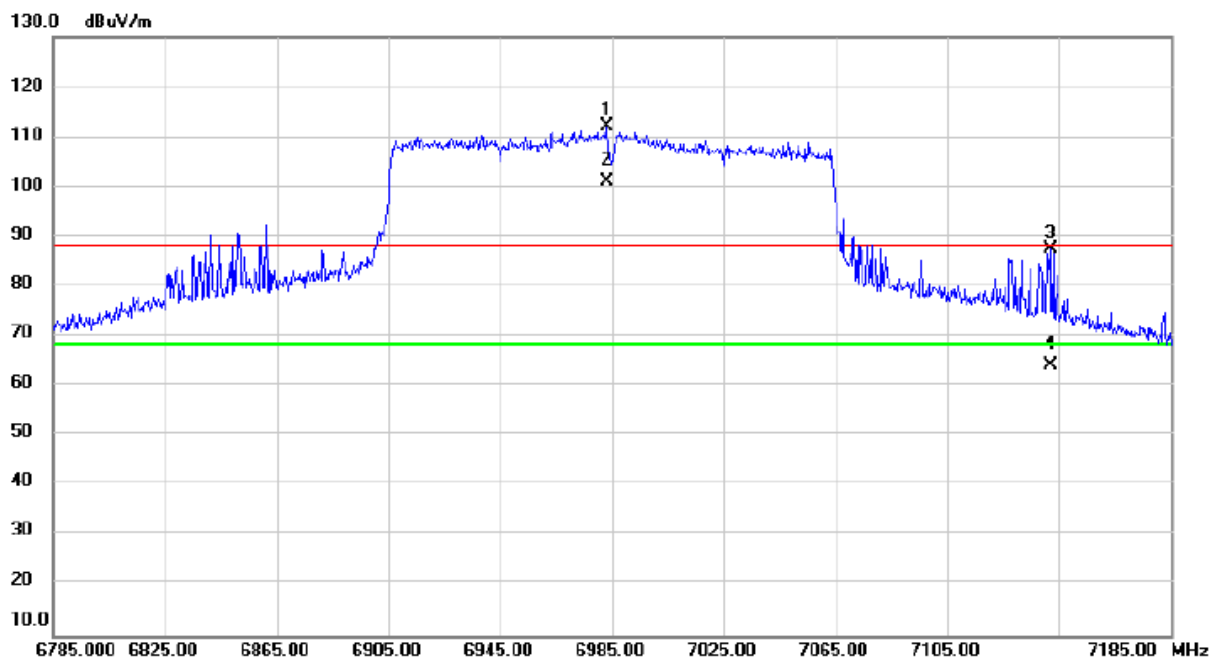


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6983.000	97.91	14.18	112.09	88.20	23.89	peak	No Limit
2	*	6983.000	86.86	14.18	101.04	68.20	32.84	AVG	No Limit
3		7141.800	73.35	14.33	87.68	88.20	-0.52	peak	
4		7141.800	49.72	14.33	64.05	68.20	-4.15	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT320)	Test Date	2025/12/8
Test Frequency	6105MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

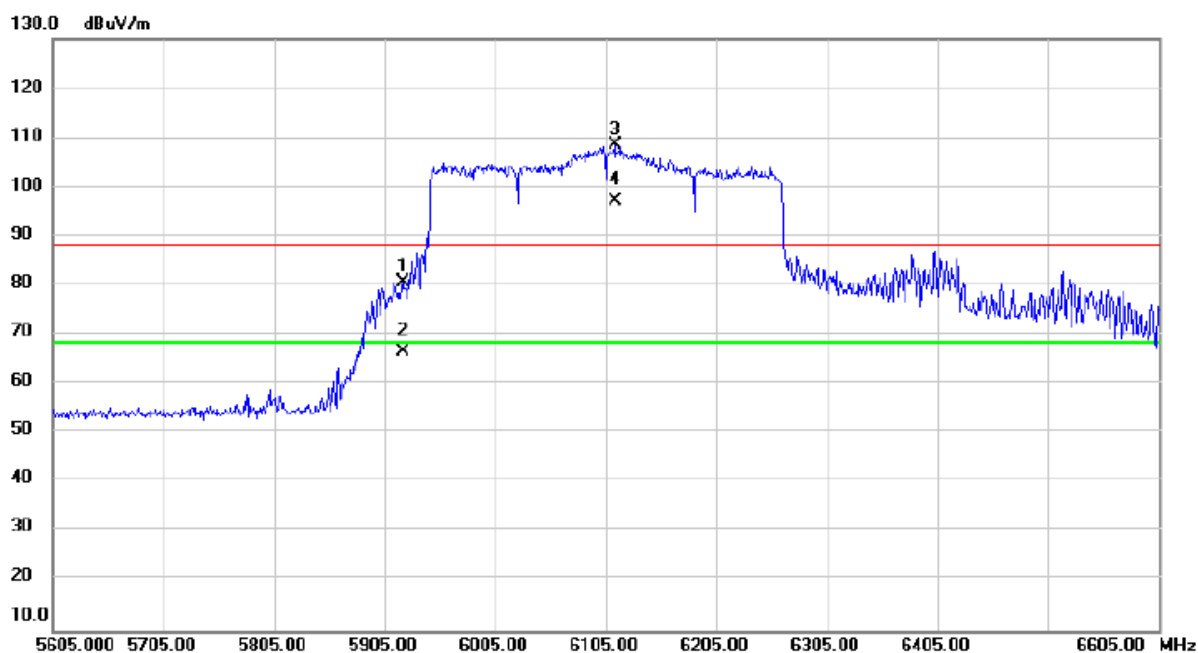


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5921.000	69.04	11.52	80.56	88.20	-7.64	peak	
2		5921.000	55.17	11.52	66.69	68.20	-1.51	AVG	
3	X	6113.000	96.50	12.15	108.65	88.20	20.45	peak	No Limit
4	*	6113.000	85.05	12.15	97.20	68.20	29.00	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT320)	Test Date	2025/12/8
Test Frequency	6265MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

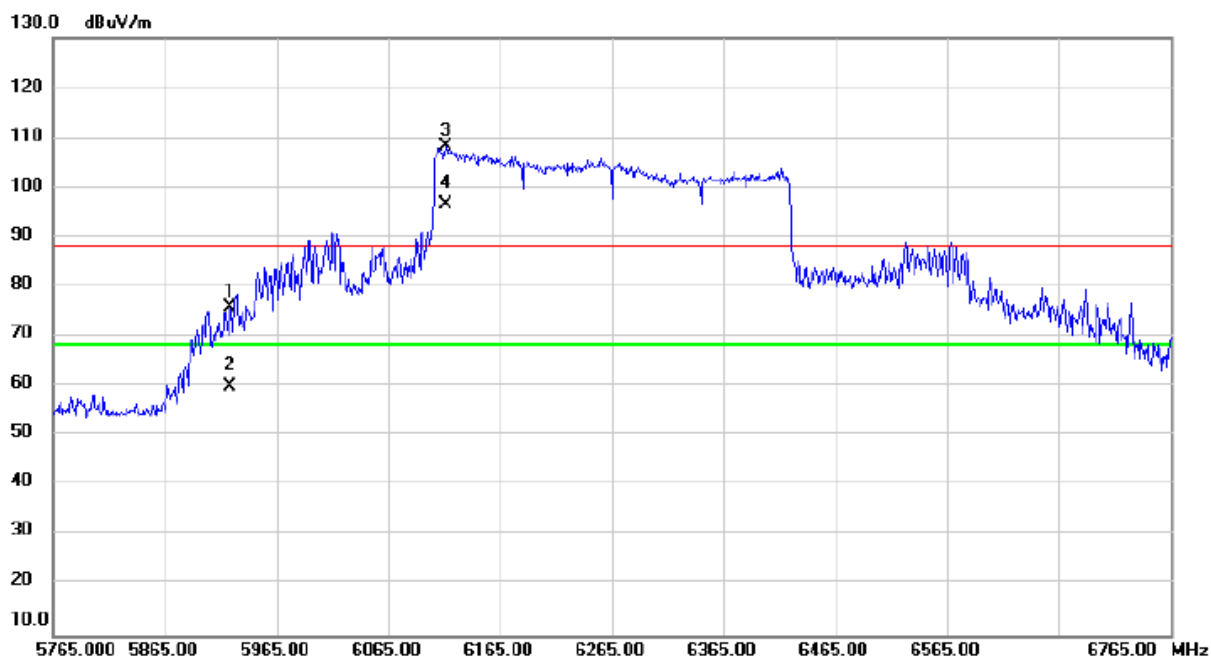


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5923.000	64.36	11.52	75.88	88.20	-12.32	peak	
2		5923.000	48.45	11.52	59.97	68.20	-8.23	AVG	
3	X	6116.000	96.19	12.16	108.35	88.20	20.15	peak	No Limit
4	*	6116.000	84.24	12.16	96.40	68.20	28.20	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT320)	Test Date	2025/12/8
Test Frequency	6425MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

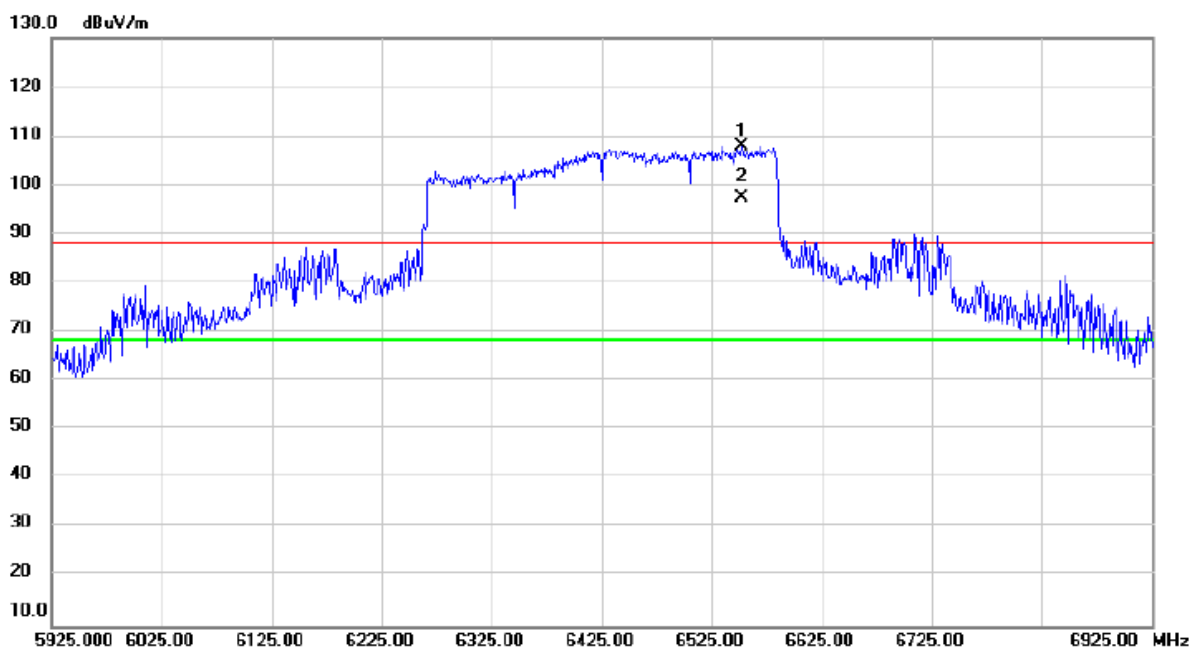


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6552.000	93.99	13.93	107.92	88.20	19.72	peak	No Limit
2	*	6552.000	83.41	13.93	97.34	68.20	29.14	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT320)	Test Date	2025/12/8
Test Frequency	6585MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

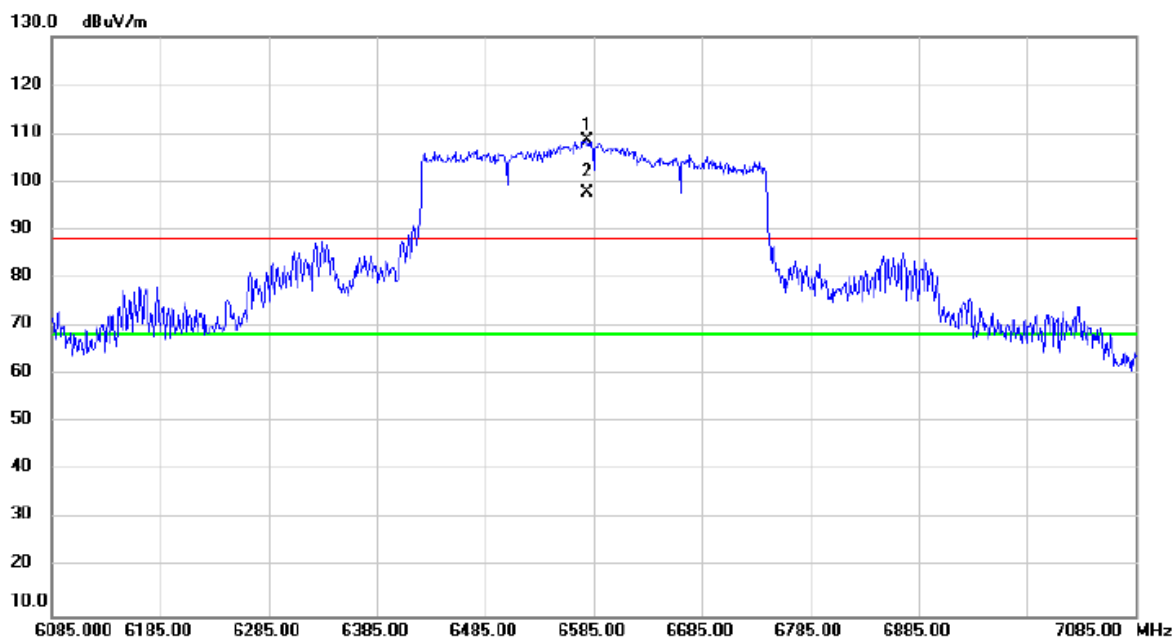


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6579.000	94.56	13.95	108.51	88.20	20.31	peak	No Limit
2	*	6579.000	83.75	13.95	97.70	68.20	29.50	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT320)	Test Date	2025/12/8
Test Frequency	6745MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

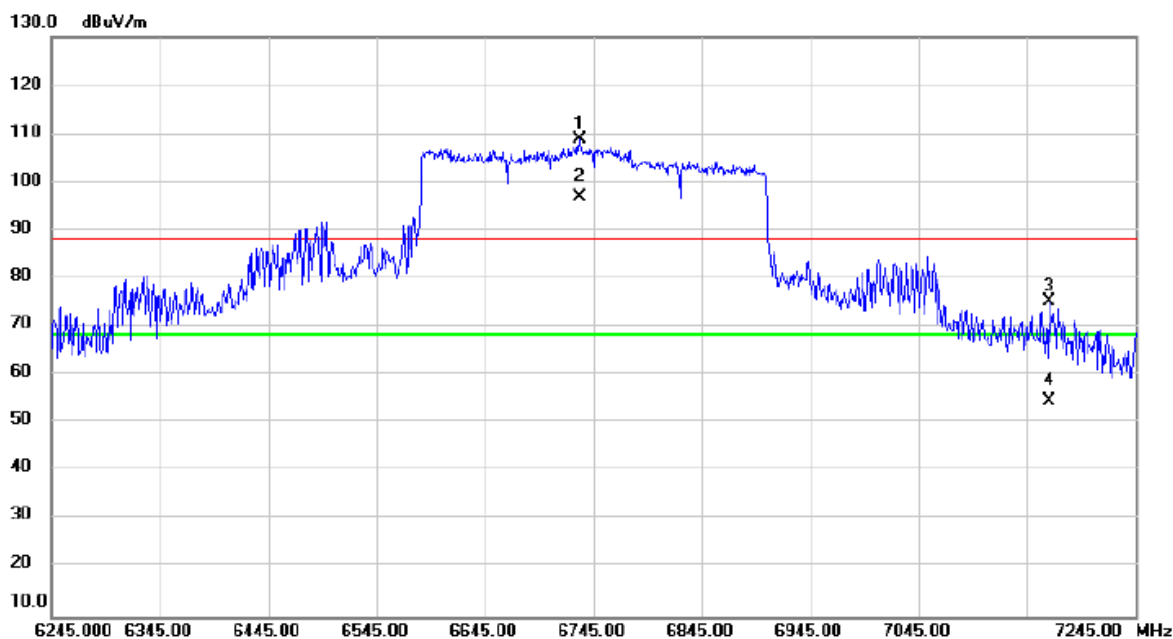


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6732.000	94.80	14.04	108.84	88.20	20.64	peak	No Limit
2	*	6732.000	82.77	14.04	96.81	68.20	28.61	AVG	No Limit
3		7165.000	61.02	14.36	75.38	88.20	-12.82	peak	
4		7165.000	40.30	14.36	54.66	68.20	-13.54	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT320)	Test Date	2025/12/8
Test Frequency	6905MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

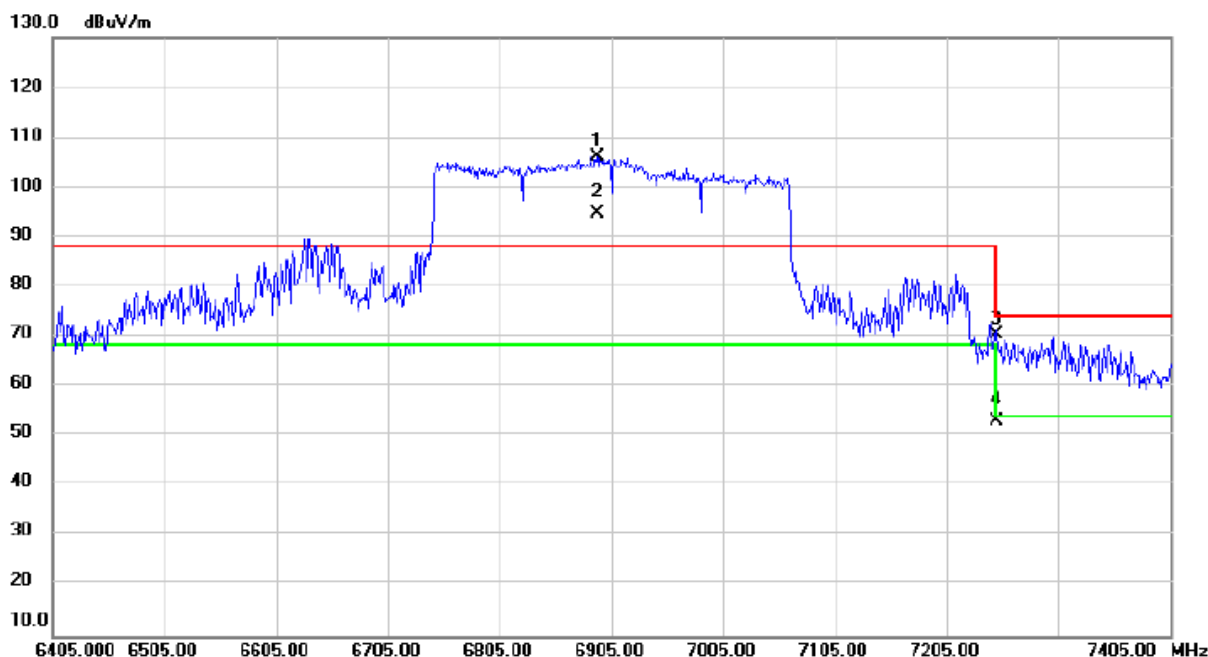


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	6892.000	92.09	14.13	106.22	88.20	18.02	peak	No Limit
2	*	6892.000	80.68	14.13	94.81	68.20	26.61	AVG	No Limit
3		7250.000	55.98	14.44	70.42	74.00	-3.58	peak	
4		7250.000	38.71	14.44	53.15	54.00	-0.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/8
Test Frequency	5955MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

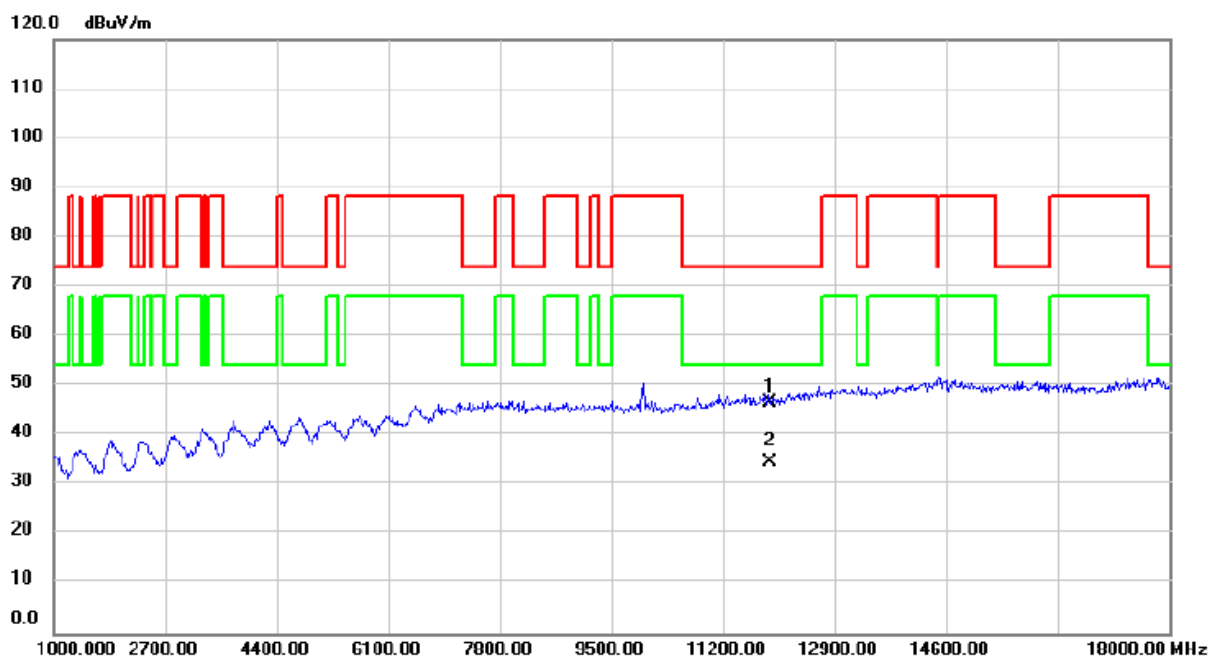


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11910.00	44.14	2.52	46.66	74.00	-27.34	peak	
2	*	11910.00	31.99	2.52	34.51	54.00	-19.49	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/8
Test Frequency	6175MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

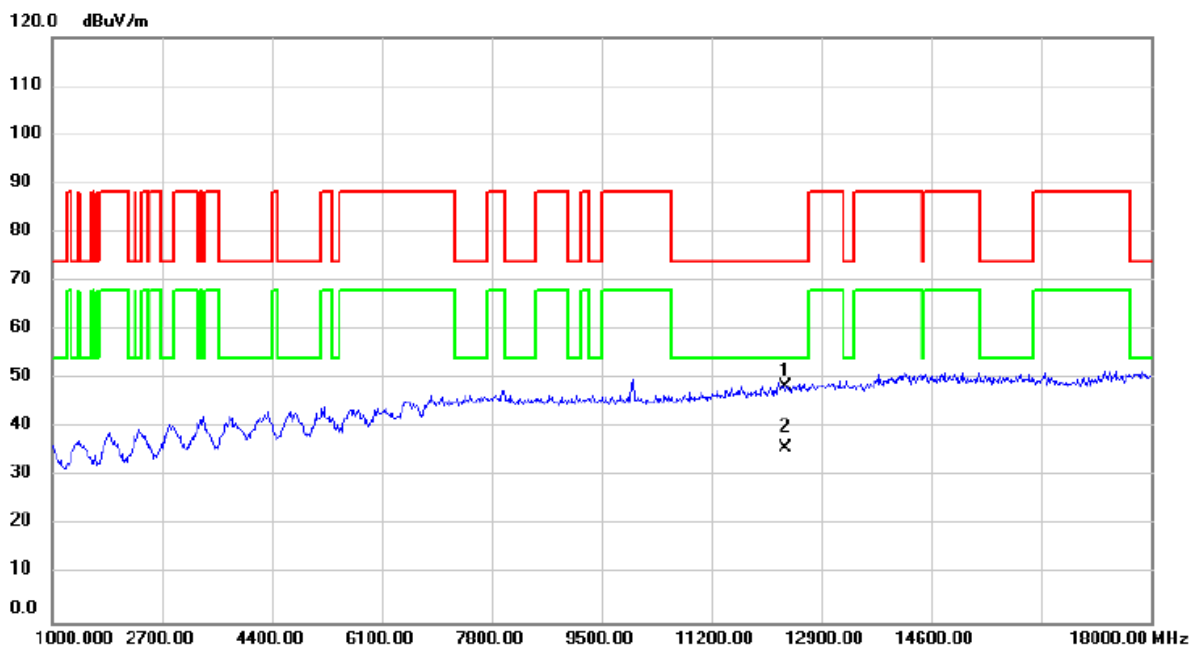


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		12350.00	45.60	2.88	48.48	74.00	-25.52	peak	
2	*	12350.00	33.12	2.88	36.00	54.00	-18.00	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/8
Test Frequency	6415MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

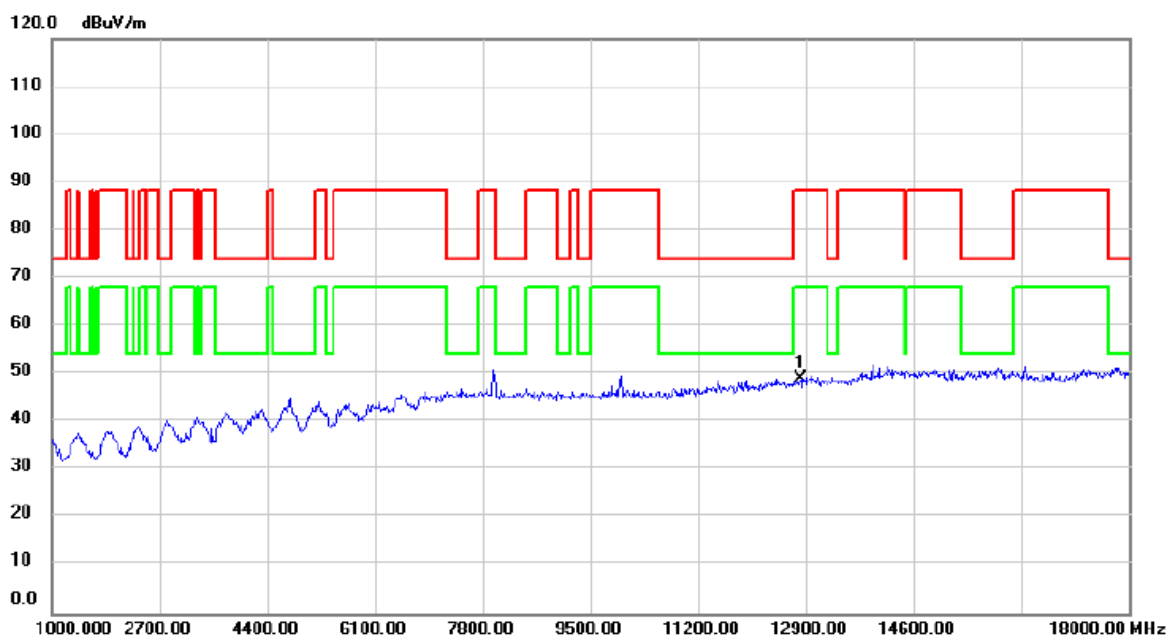


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	12830.00	45.69	3.23	48.92	88.20	-39.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/8
Test Frequency	6435MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

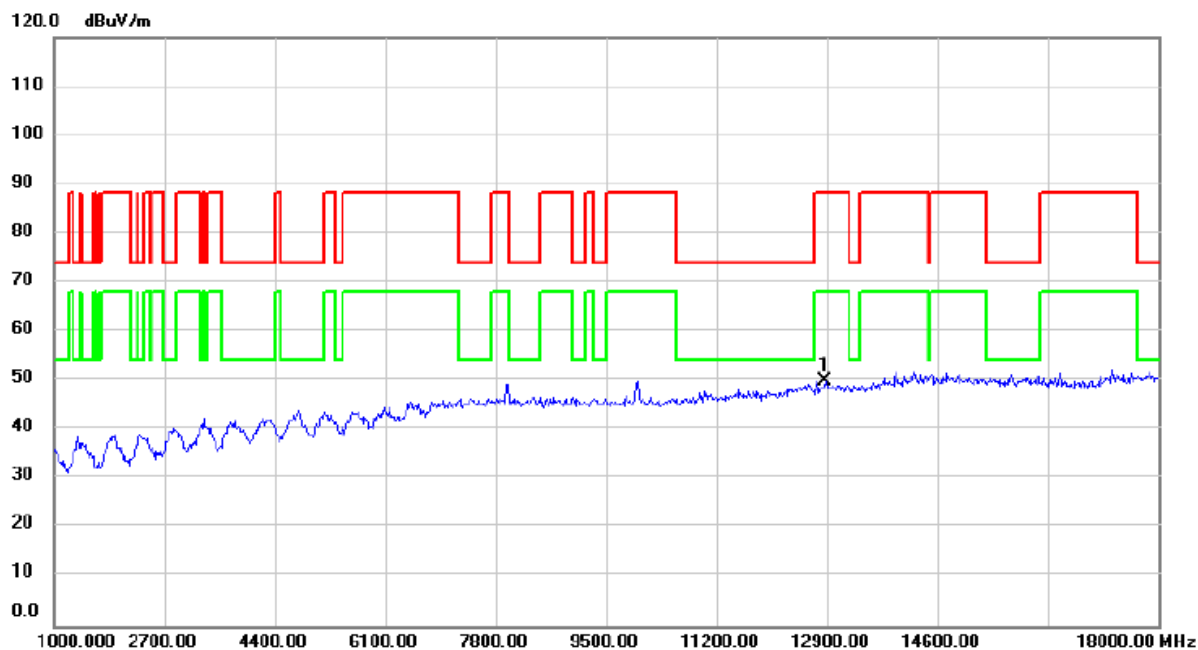


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	12870.00	46.70	3.26	49.96	88.20	-38.24	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/8
Test Frequency	6475MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

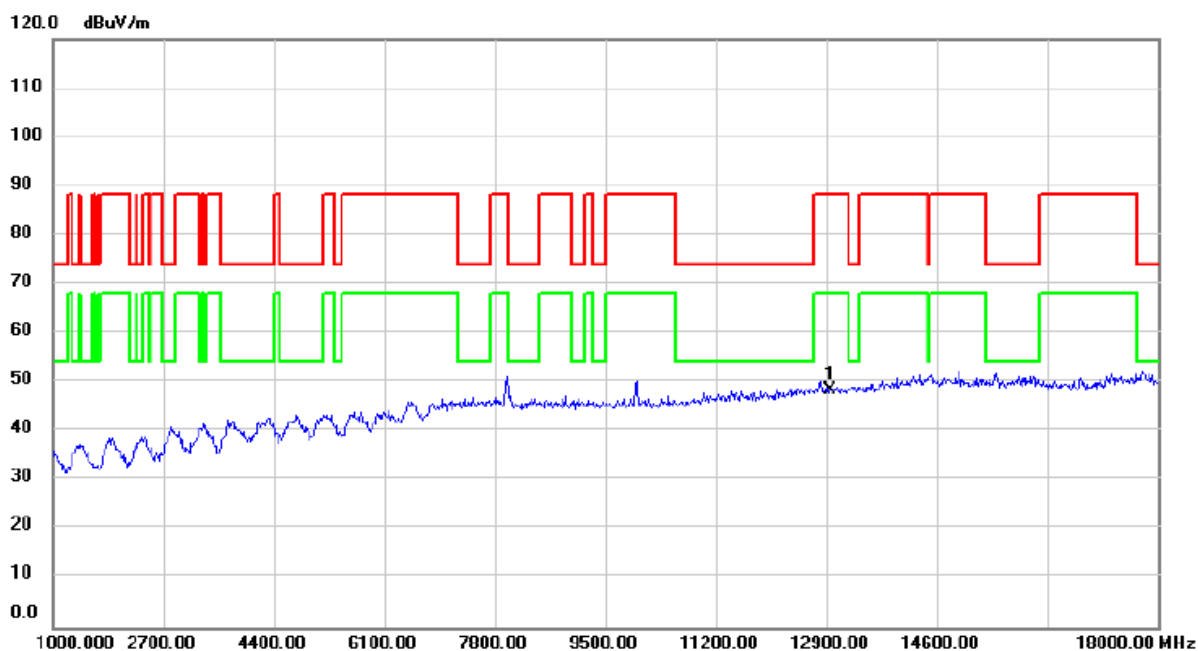


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	12950.00	45.02	3.30	48.32	88.20	-39.88	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/8
Test Frequency	6515MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

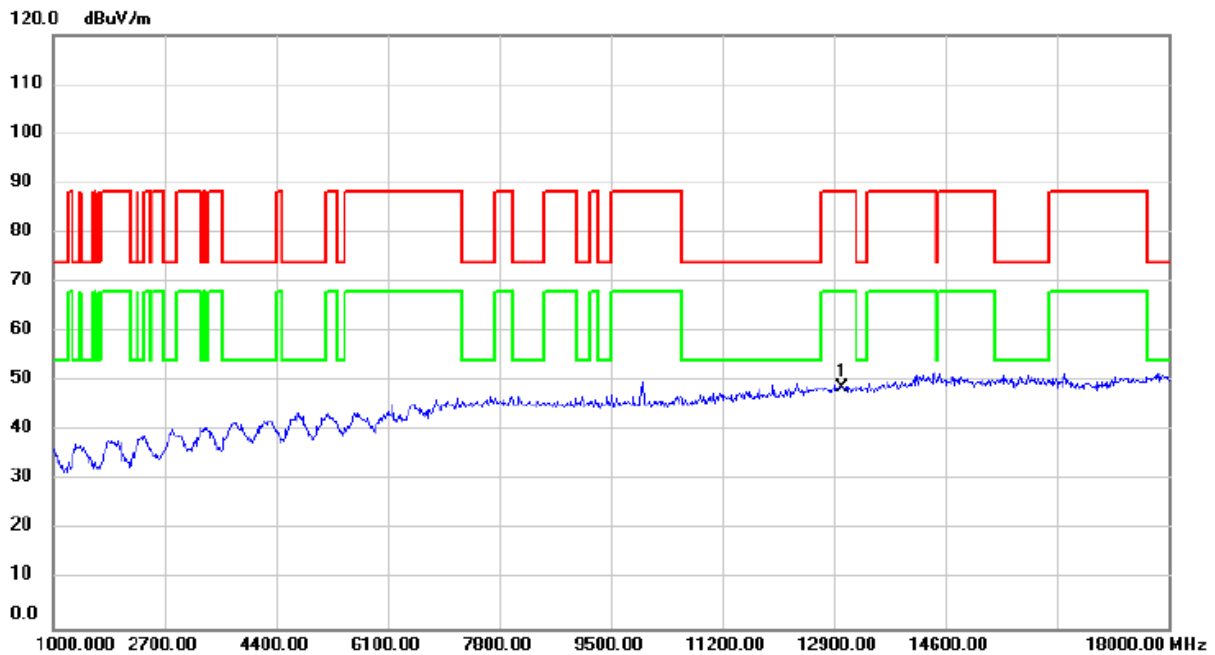


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13030.00	45.42	3.30	48.72	88.20	-39.48	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/8
Test Frequency	6535MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

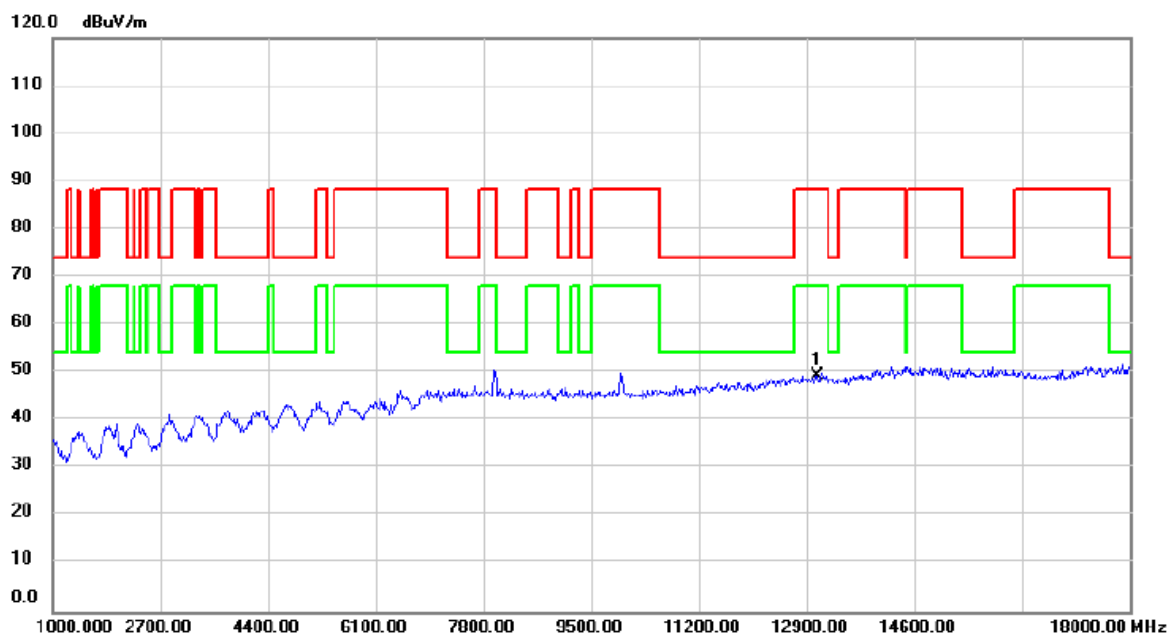


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13070.00	46.20	3.26	49.46	88.20	-38.74	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/8
Test Frequency	6695MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

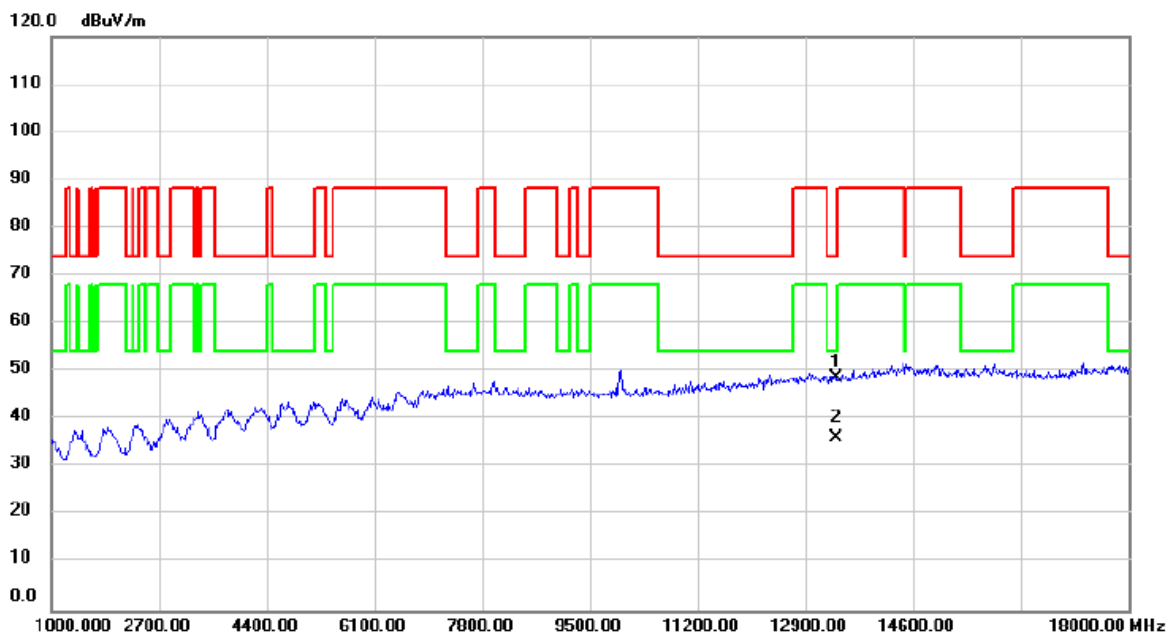


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13390.00	45.79	2.98	48.77	74.00	-25.23	peak	
2	*	13390.00	33.08	2.98	36.06	54.00	-17.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/8
Test Frequency	6855MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

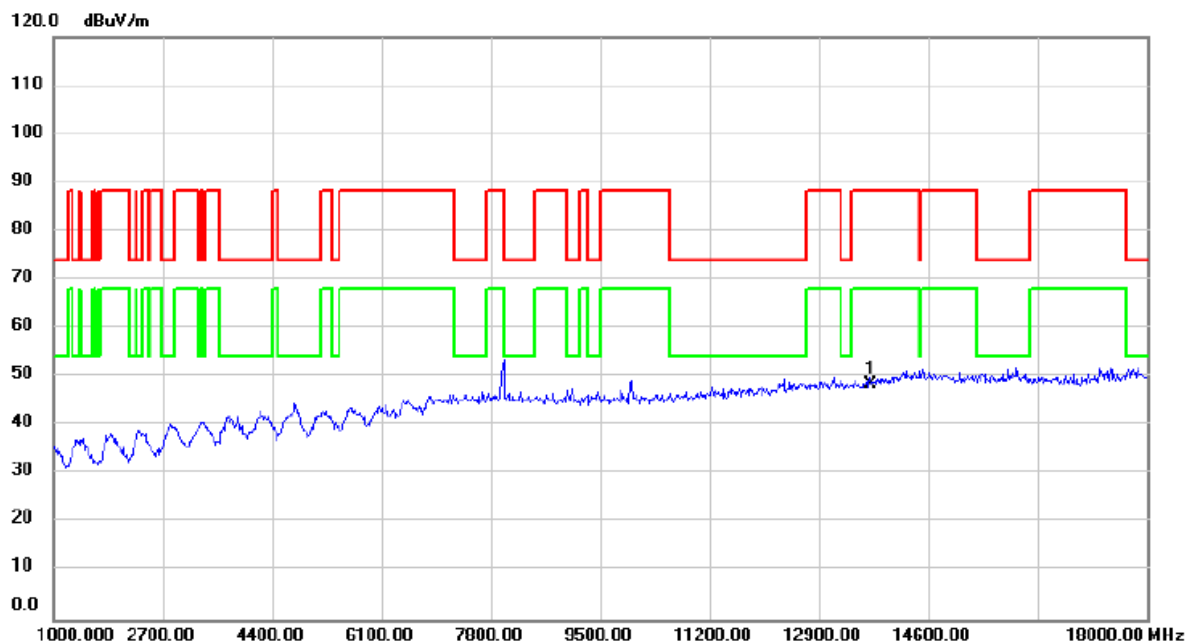


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13710.00	45.33	3.10	48.43	88.20	-39.77	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/8
Test Frequency	6875MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

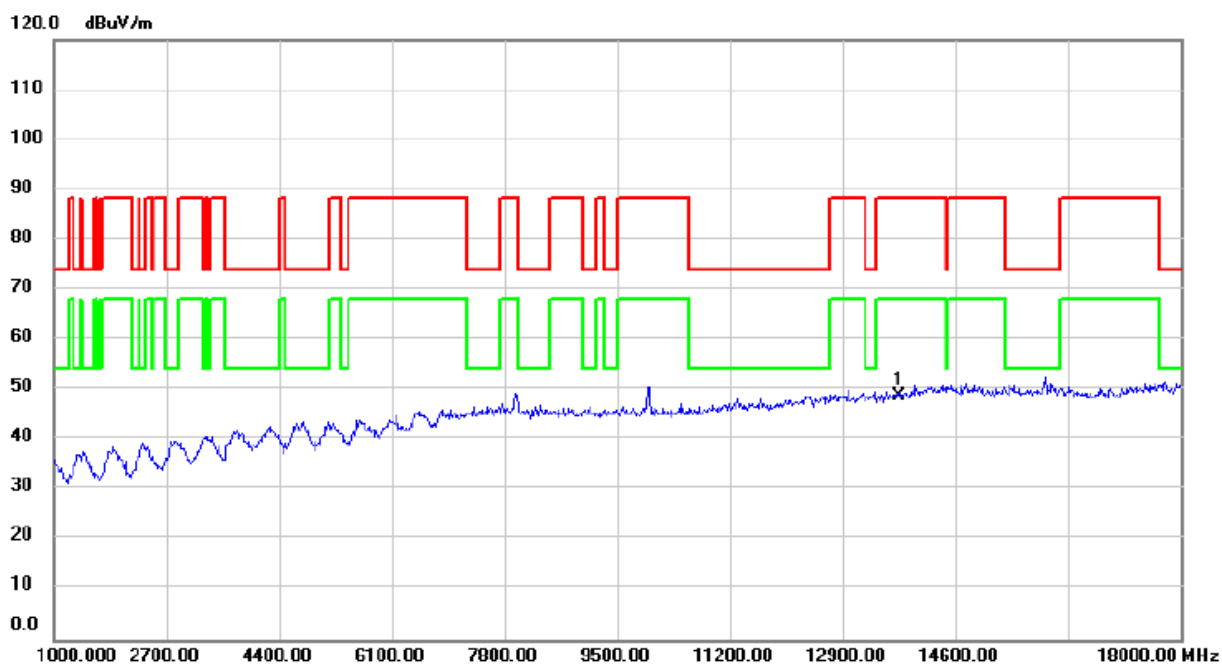


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13750.00	45.76	3.14	48.90	88.20	-39.30	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/8
Test Frequency	6995MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

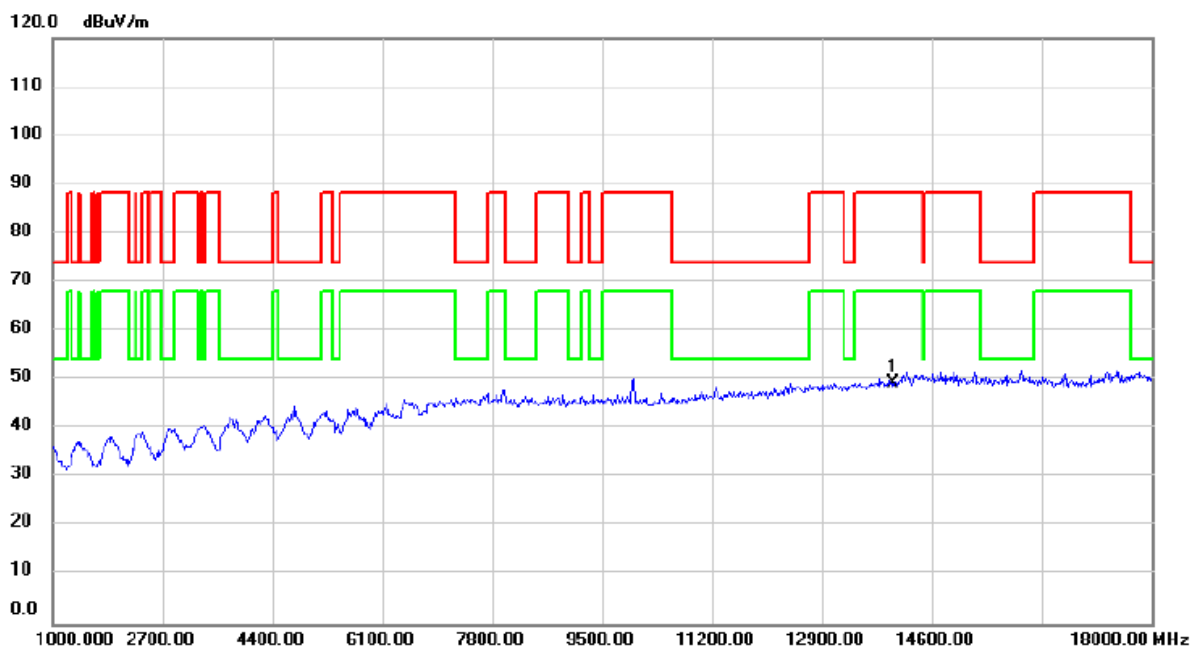


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13990.00	45.97	3.40	49.37	88.20	-38.83	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/12/8
Test Frequency	7095MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

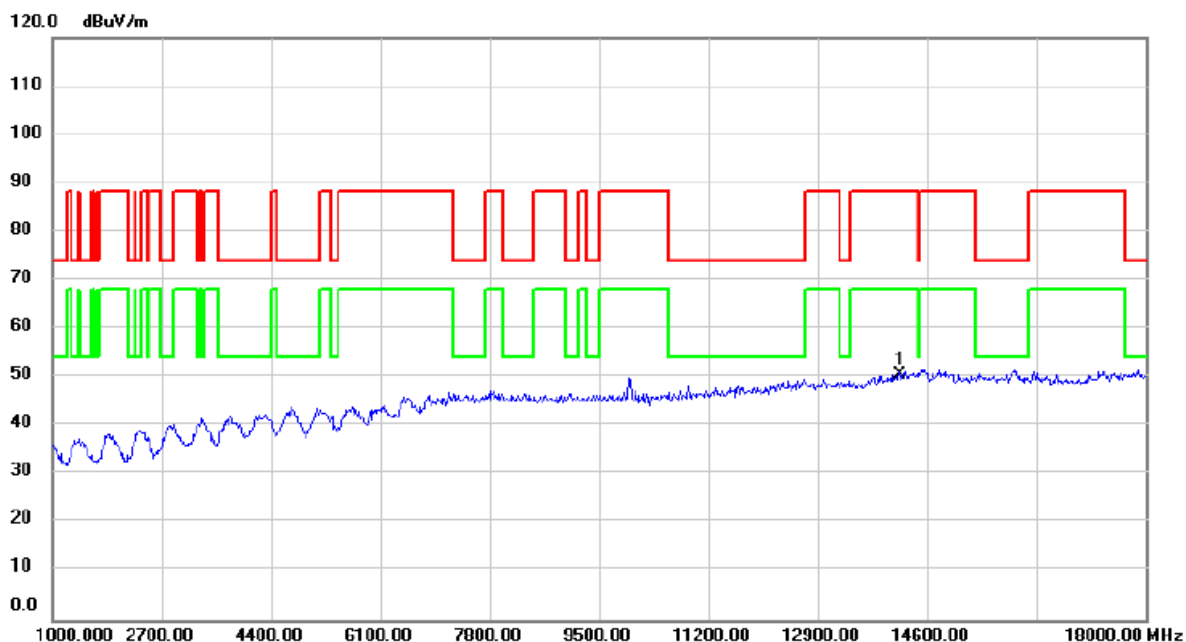


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	14190.00	46.73	3.76	50.49	88.20	-37.71	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/8
Test Frequency	5965MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

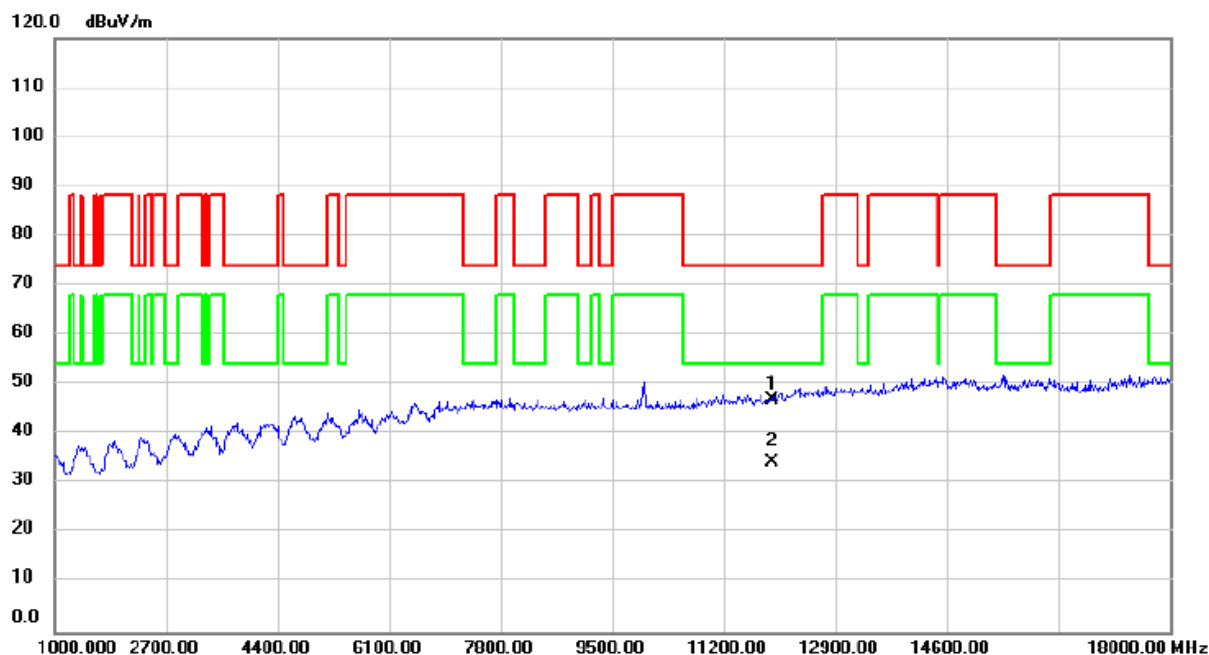


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11930.00	44.42	2.50	46.92	74.00	-27.08	peak	
2	*	11930.00	31.95	2.50	34.45	54.00	-19.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/8
Test Frequency	6165MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

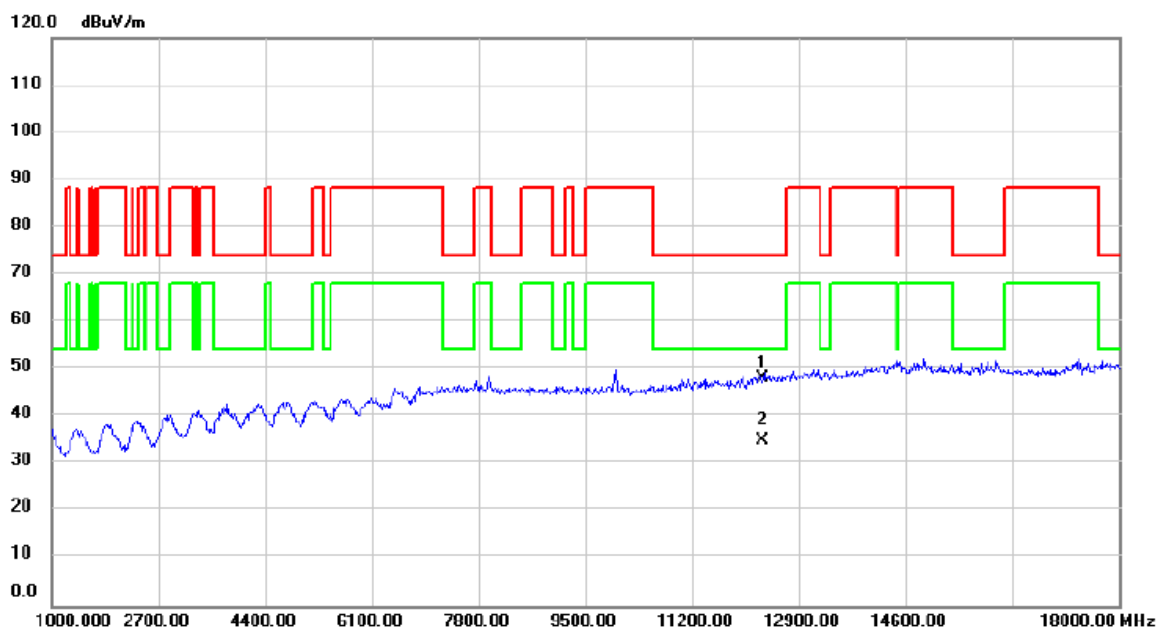


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		12330.00	45.38	2.85	48.23	74.00	-25.77	peak	
2	*	12330.00	32.12	2.85	34.97	54.00	-19.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/8
Test Frequency	6405MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

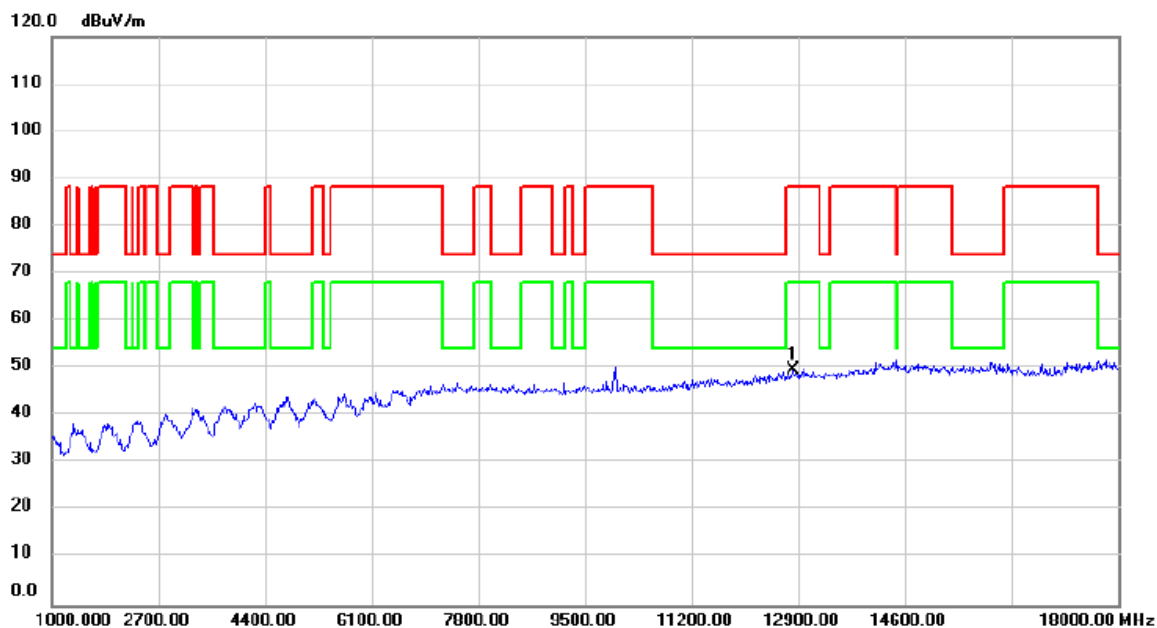


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	12810.00	46.39	3.23	49.62	88.20	-38.58	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/8
Test Frequency	6445MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

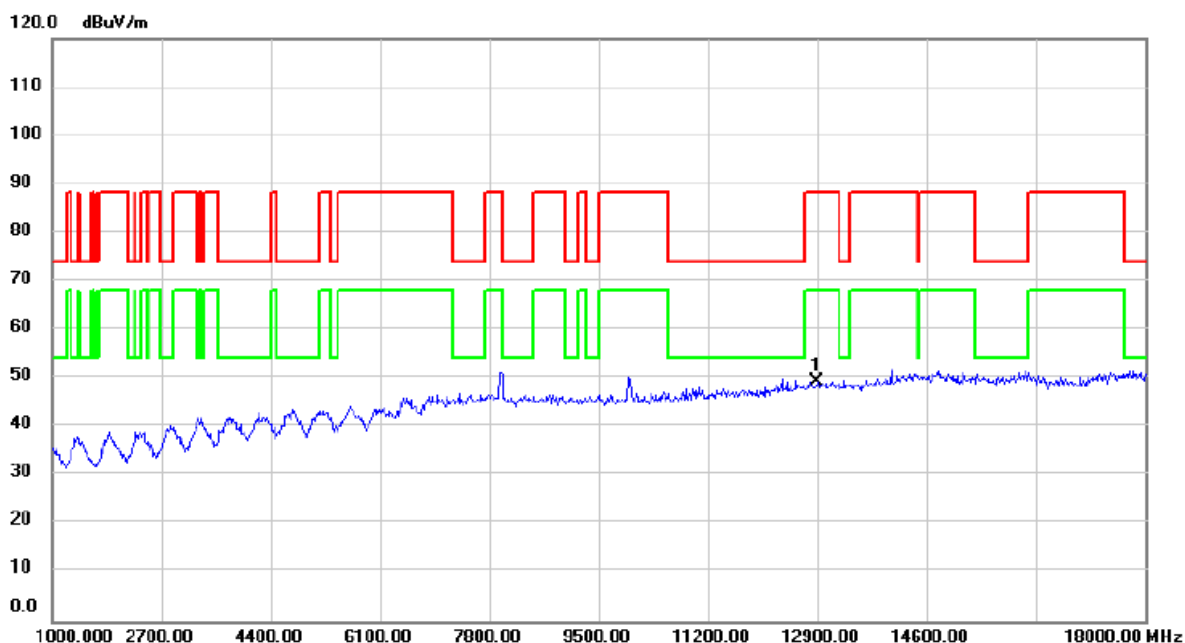


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	12890.00	46.09	3.27	49.36	88.20	-38.84	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/8
Test Frequency	6485MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

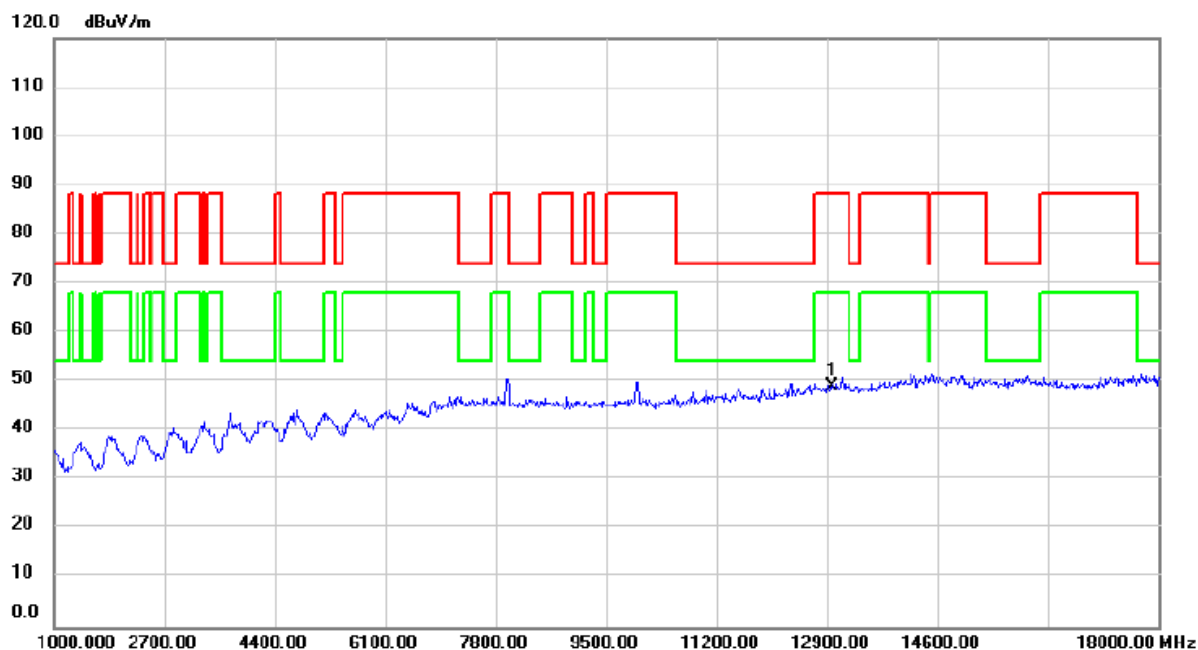


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	12970.00	45.75	3.31	49.06	88.20	-39.14	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/8
Test Frequency	6525MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

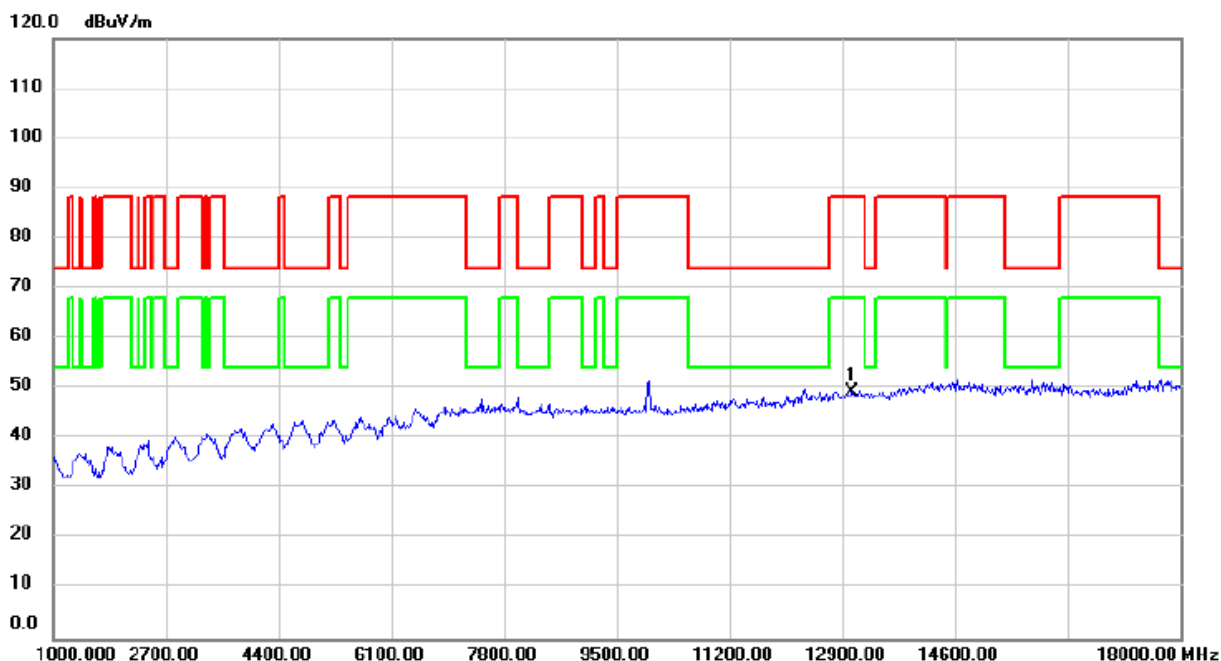


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13050.00	45.92	3.28	49.20	88.20	-39.00	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/8
Test Frequency	6565MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

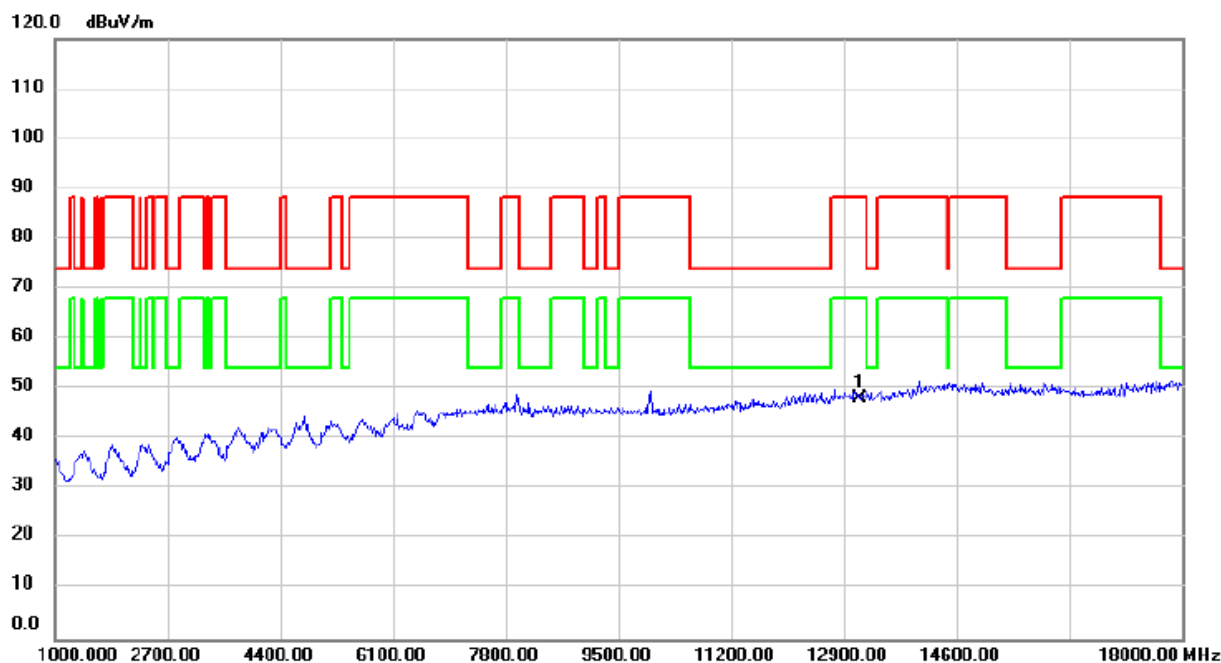


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13130.00	44.81	3.21	48.02	88.20	-40.18	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/8
Test Frequency	6725MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

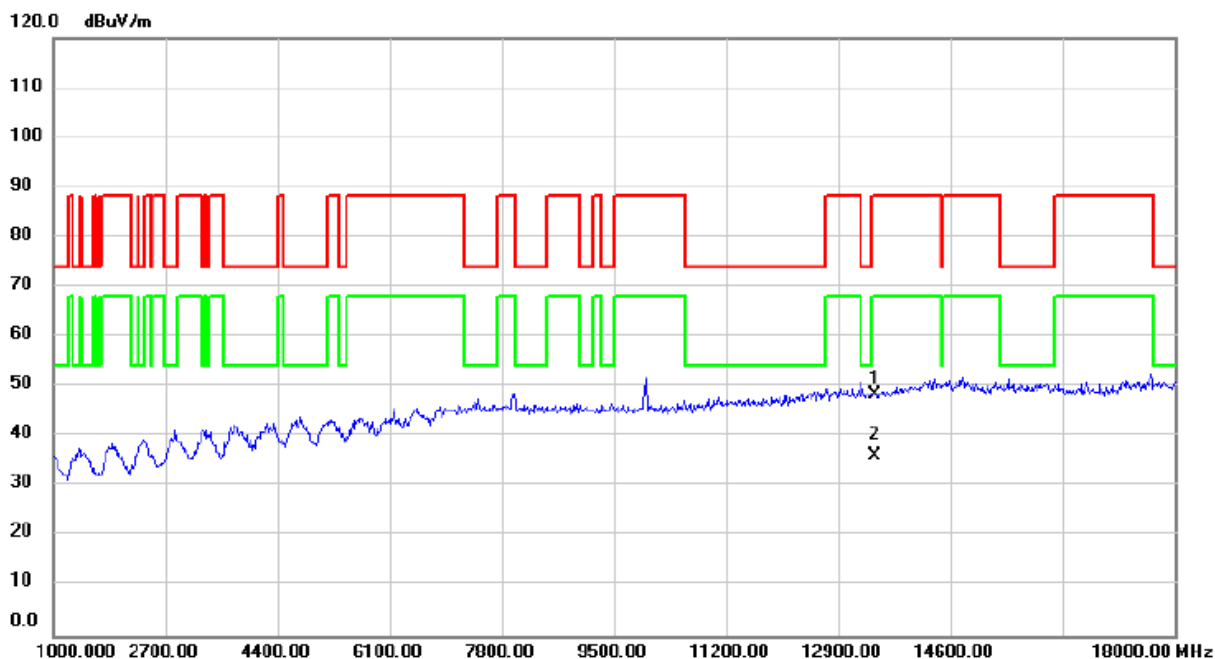


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13450.00	45.41	2.92	48.33	88.20	-39.87	peak	
2	*	13450.00	33.15	2.92	36.07	68.20	-32.13	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/8
Test Frequency	6845MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

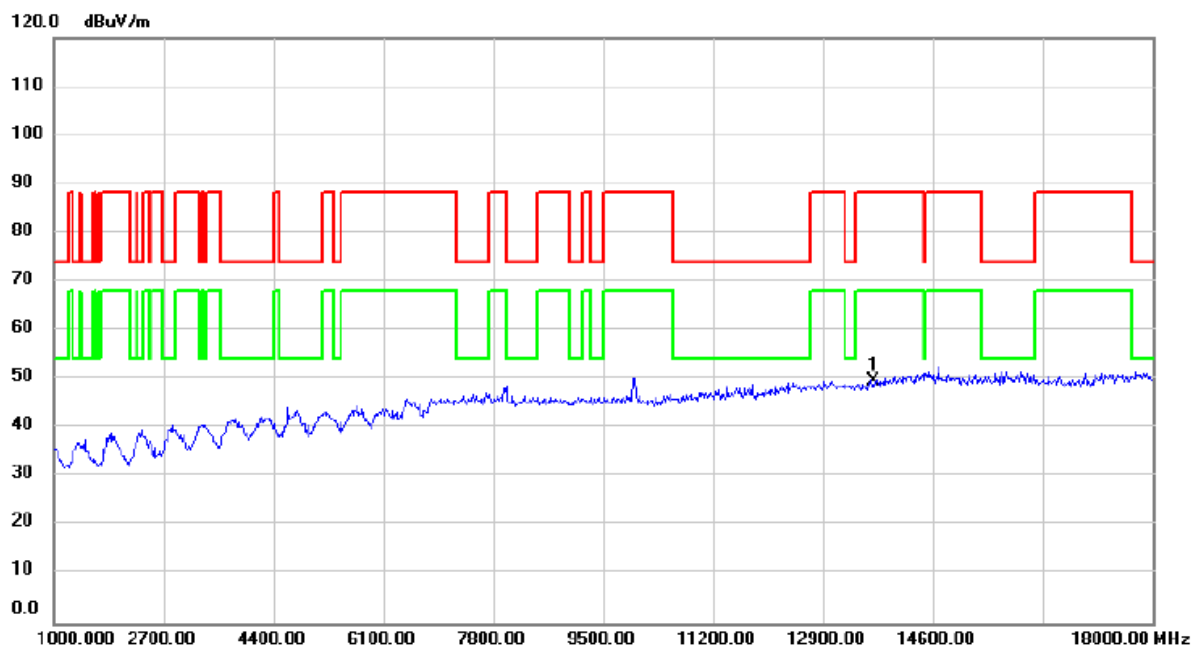


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13690.00	46.67	3.08	49.75	88.20	-38.45	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/8
Test Frequency	6885MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

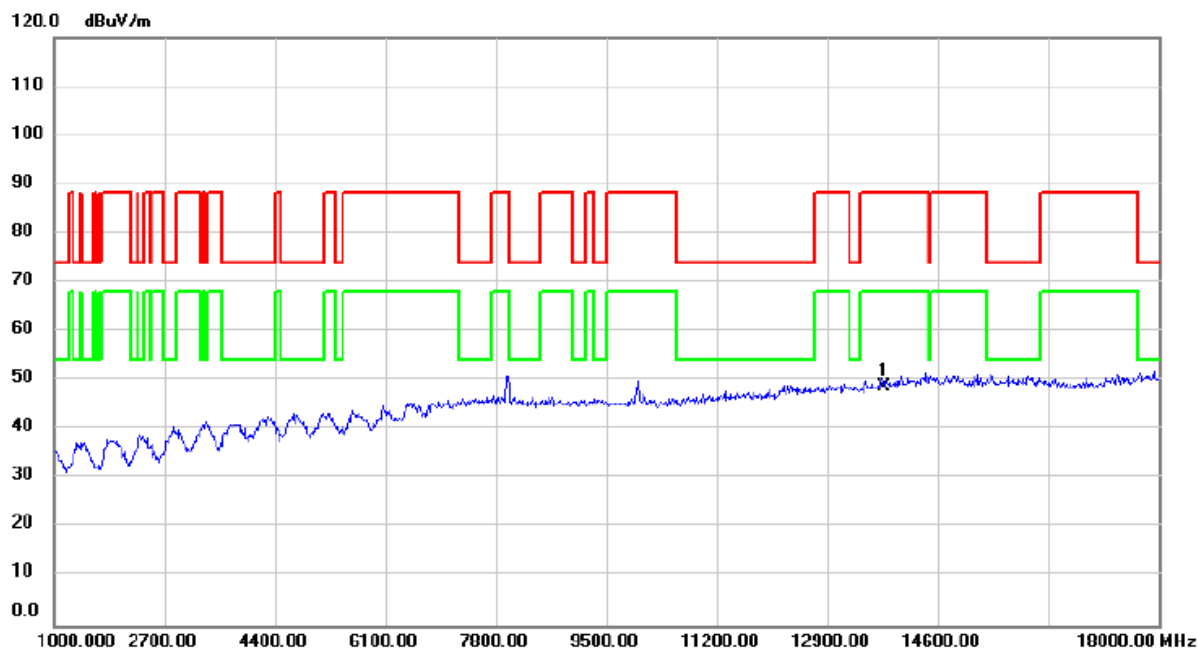


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13770.00	45.63	3.17	48.80	88.20	-39.40	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/8
Test Frequency	7005MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

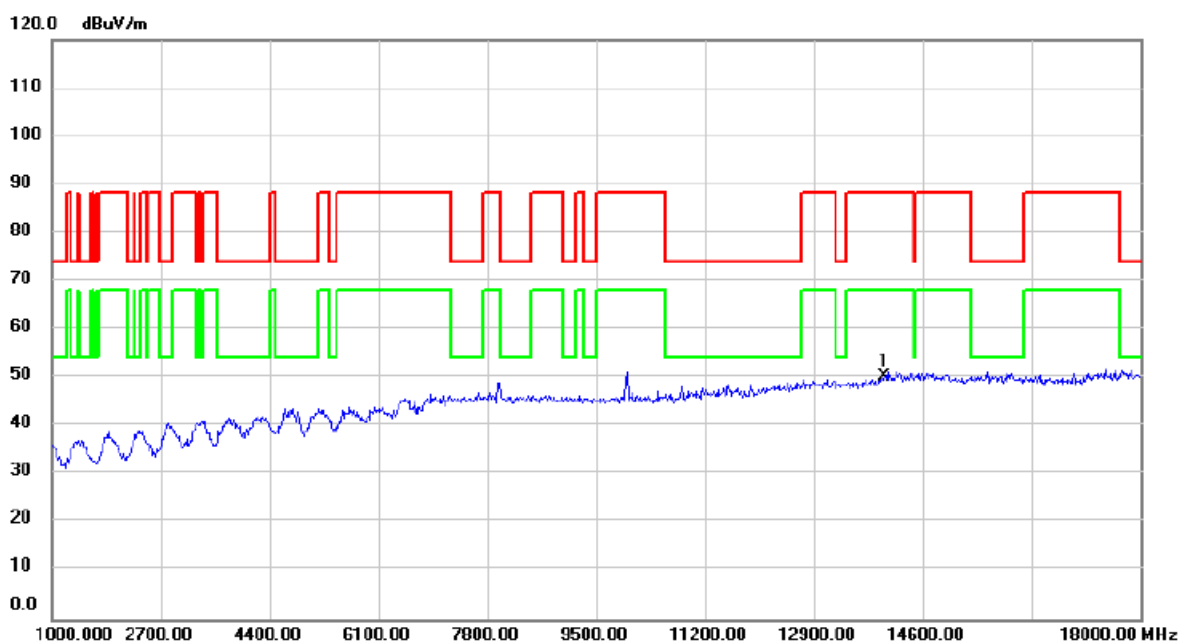


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	14010.00	46.69	3.44	50.13	88.20	-38.07	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/12/8
Test Frequency	7085MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

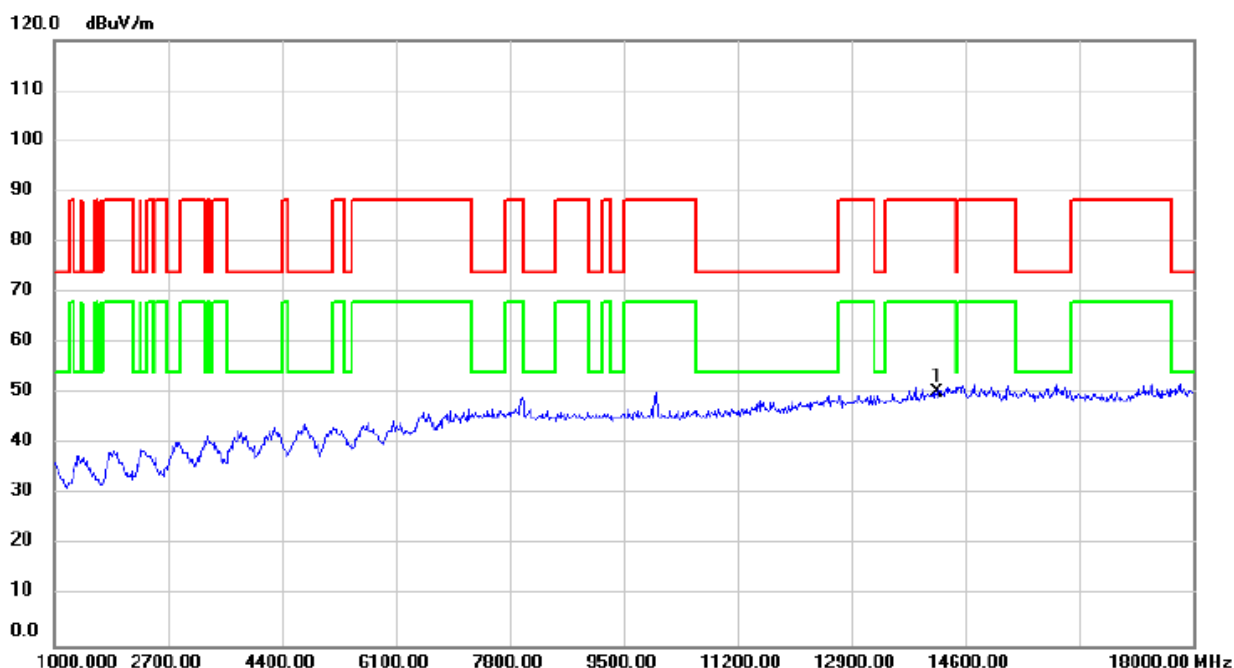


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	14170.00	46.42	3.72	50.14	88.20	-38.06	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/8
Test Frequency	5985MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

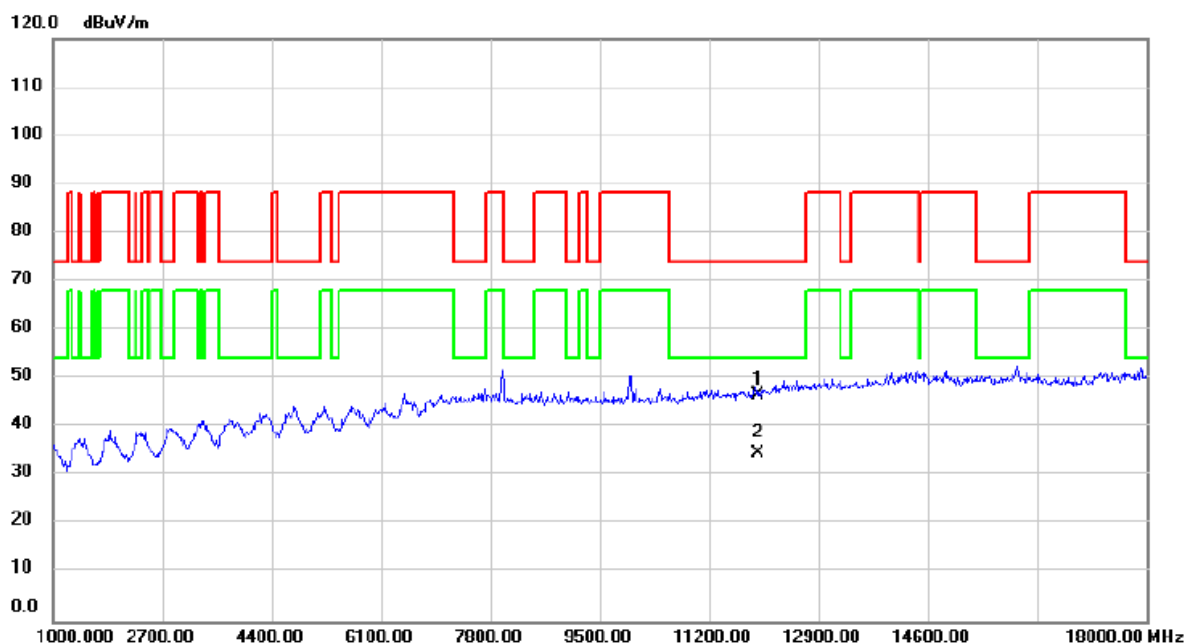


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11970.00	44.31	2.47	46.78	74.00	-27.22	peak	
2	*	11970.00	32.19	2.47	34.66	54.00	-19.34	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/8
Test Frequency	6145MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

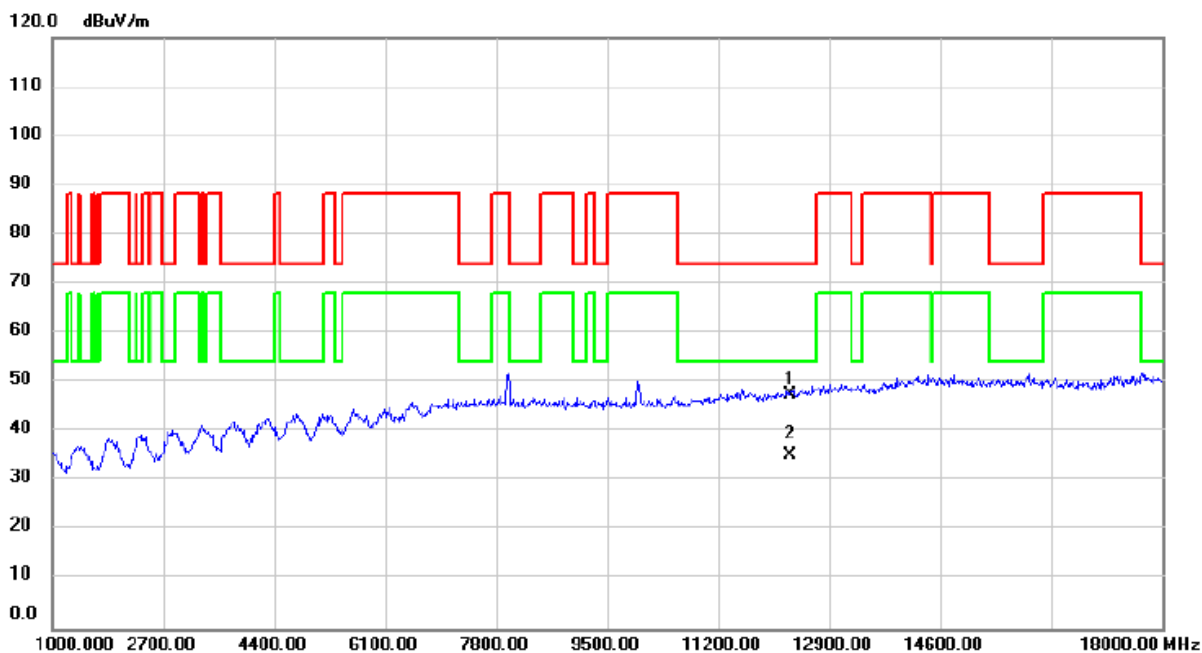


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		12290.00	44.63	2.80	47.43	74.00	-26.57	peak	
2	*	12290.00	32.31	2.80	35.11	54.00	-18.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/8
Test Frequency	6385MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

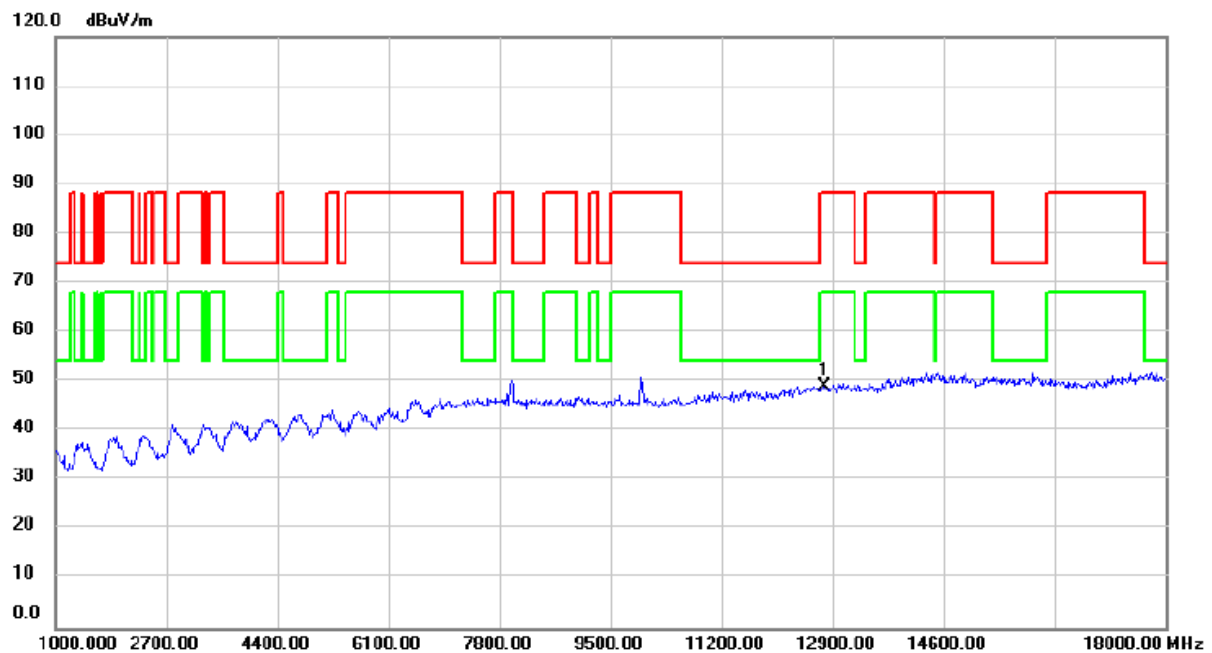


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	12770.00	45.70	3.21	48.91	88.20	-39.29	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/8
Test Frequency	6465MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

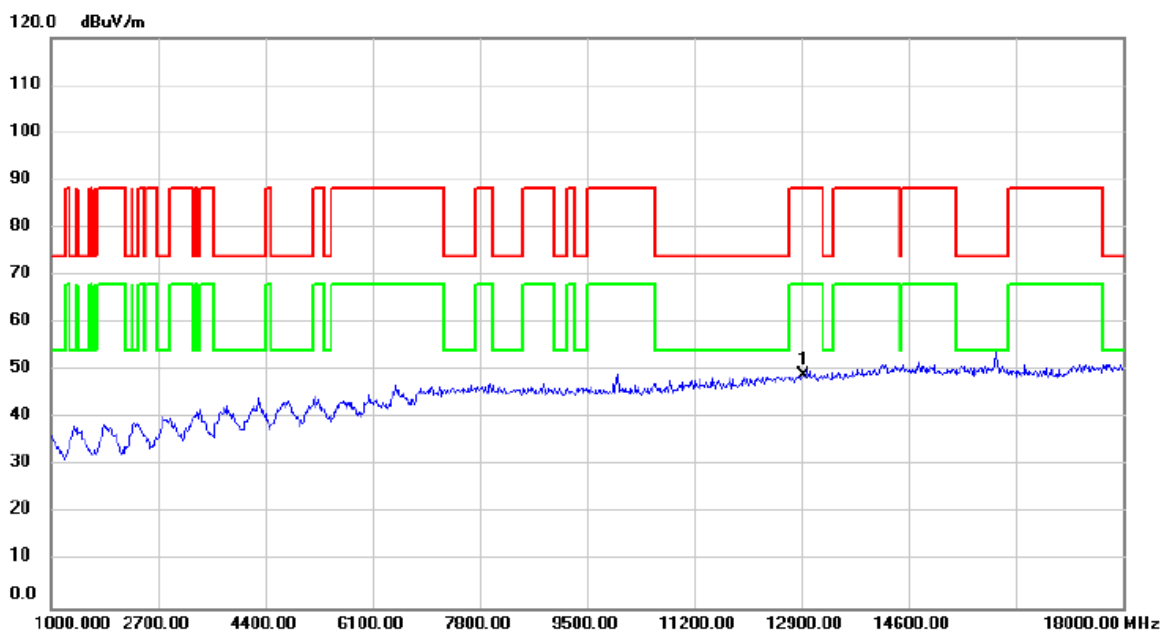


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	12930.00	45.72	3.30	49.02	88.20	-39.18	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/8
Test Frequency	6545MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

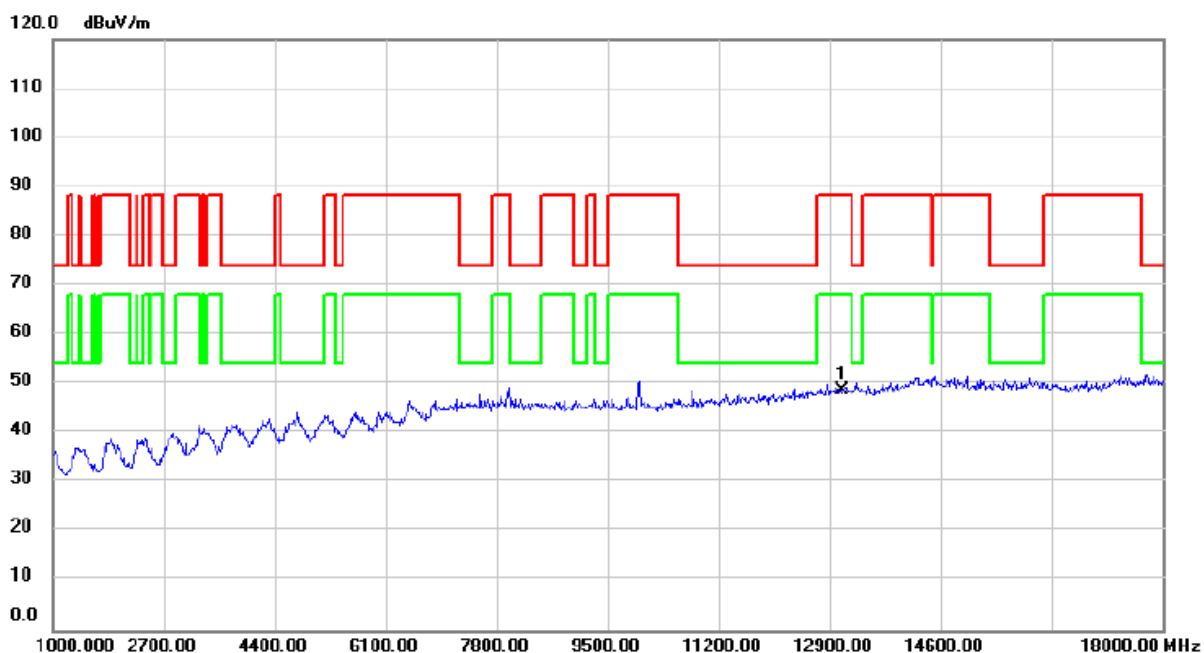


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13090.00	45.51	3.25	48.76	88.20	-39.44	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/8
Test Frequency	6705MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

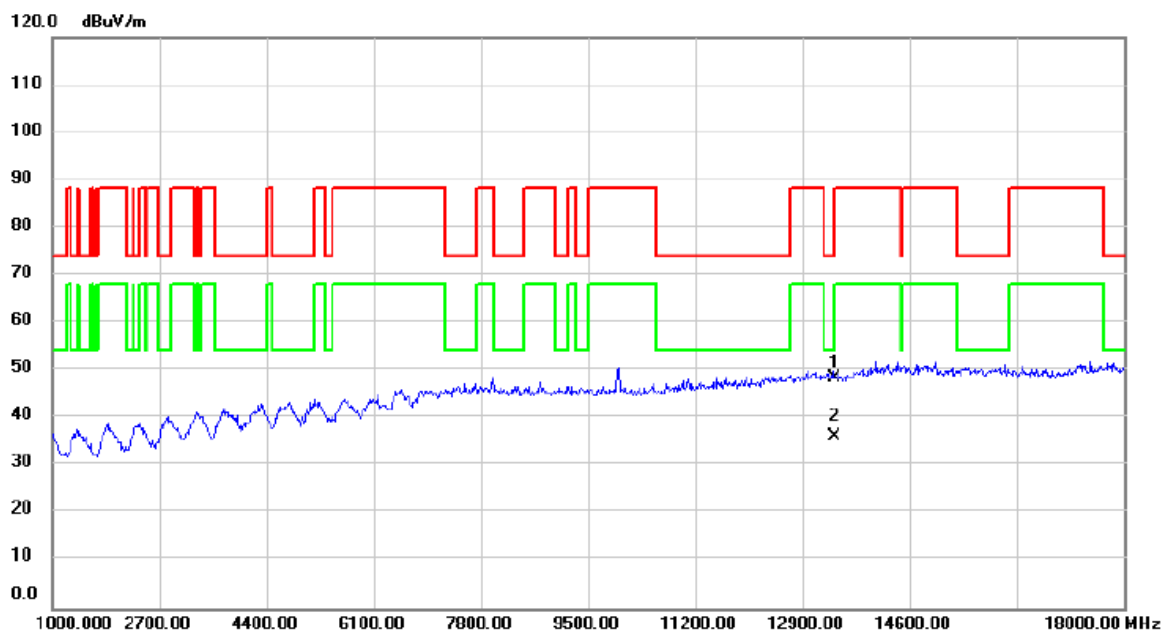


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13410.00	45.47	2.95	48.42	88.20	-39.78	peak	
2	*	13410.00	33.16	2.95	36.11	68.20	-32.09	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/8
Test Frequency	6865MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

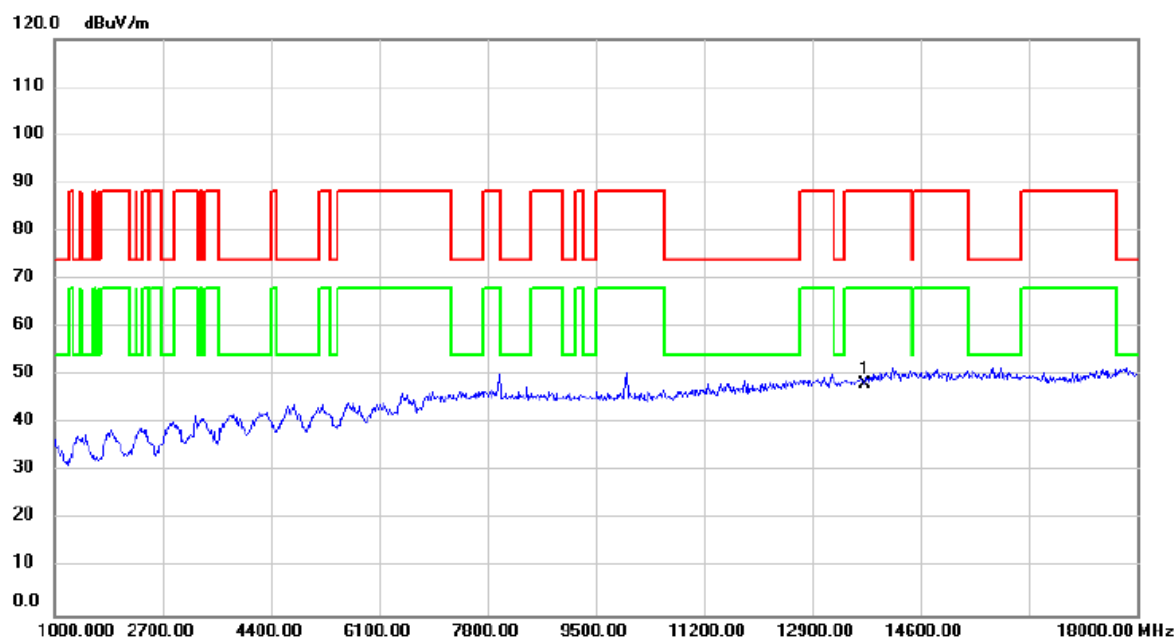


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13730.00	45.09	3.12	48.21	88.20	-39.99	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/8
Test Frequency	6945MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

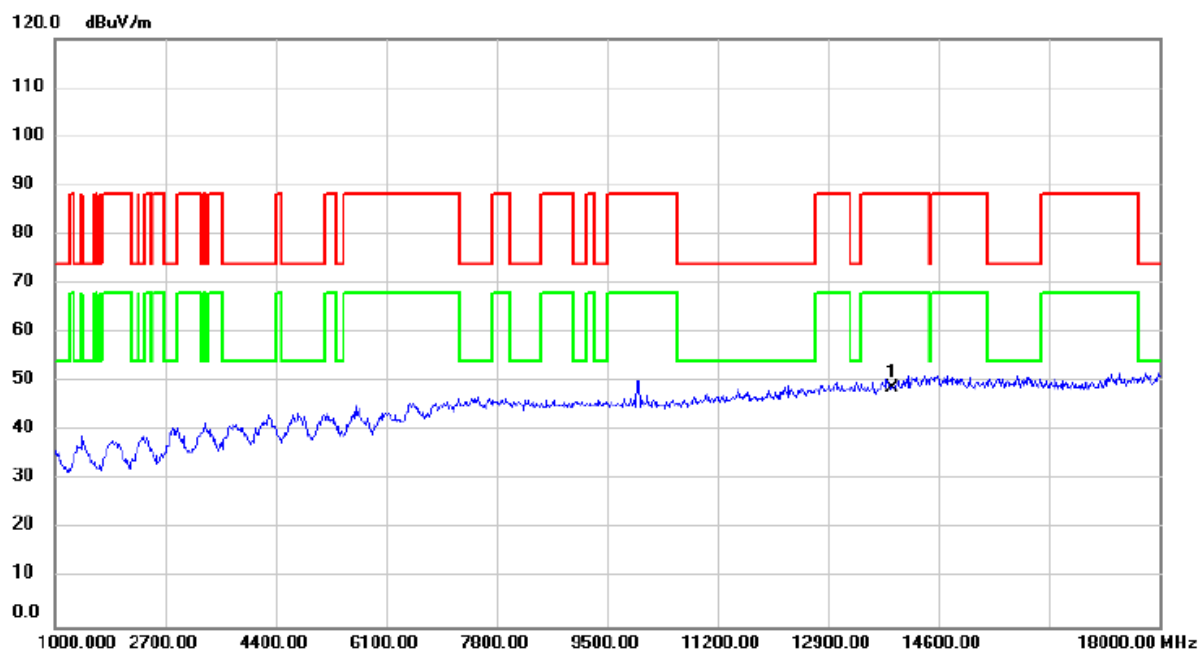


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13890.00	45.46	3.30	48.76	88.20	-39.44	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/12/8
Test Frequency	7025MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

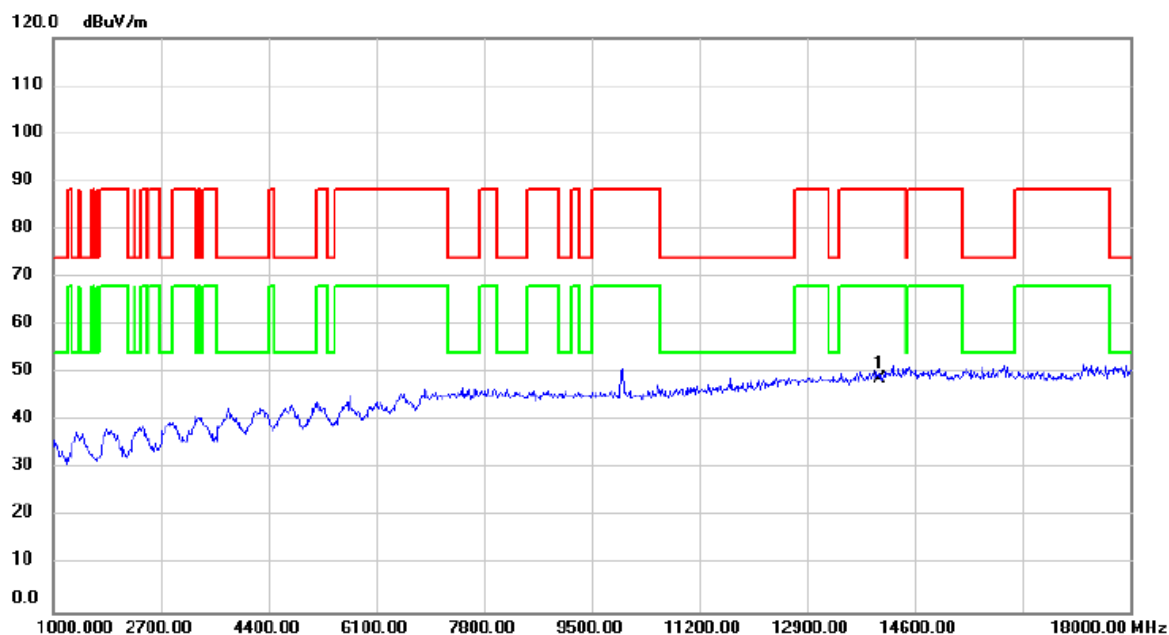


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	14050.00	45.34	3.51	48.85	88.20	-39.35	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2025/12/8
Test Frequency	6025MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

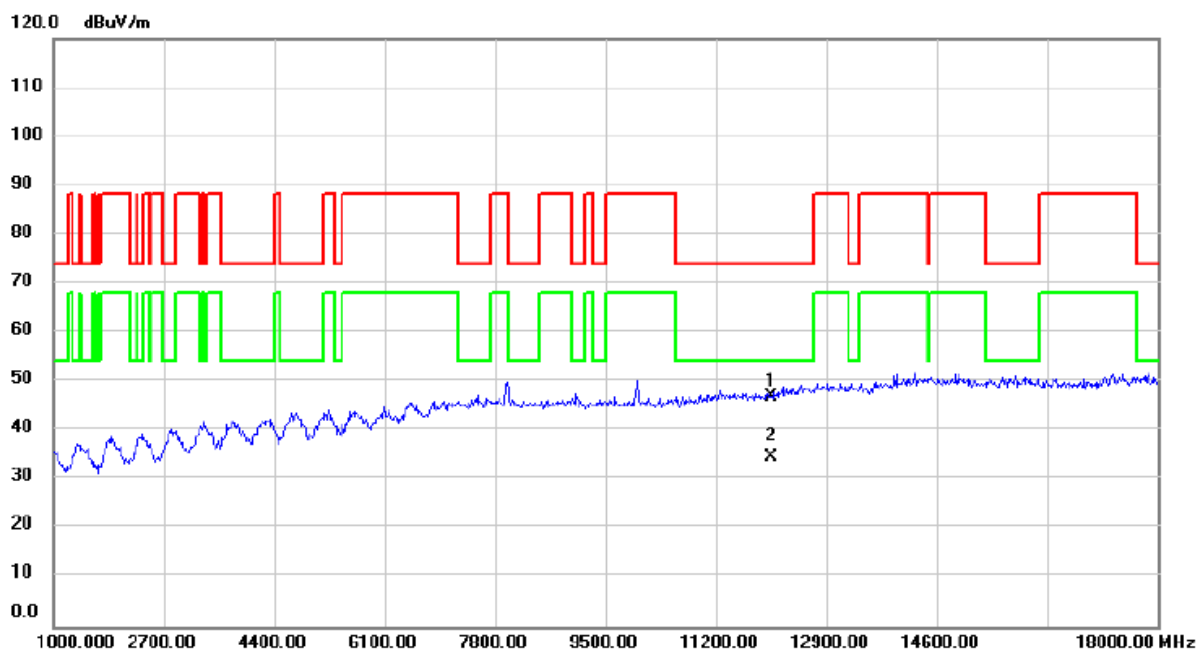


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		12050.00	44.55	2.51	47.06	74.00	-26.94	peak	
2	*	12050.00	32.06	2.51	34.57	54.00	-19.43	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2025/12/8
Test Frequency	6185MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

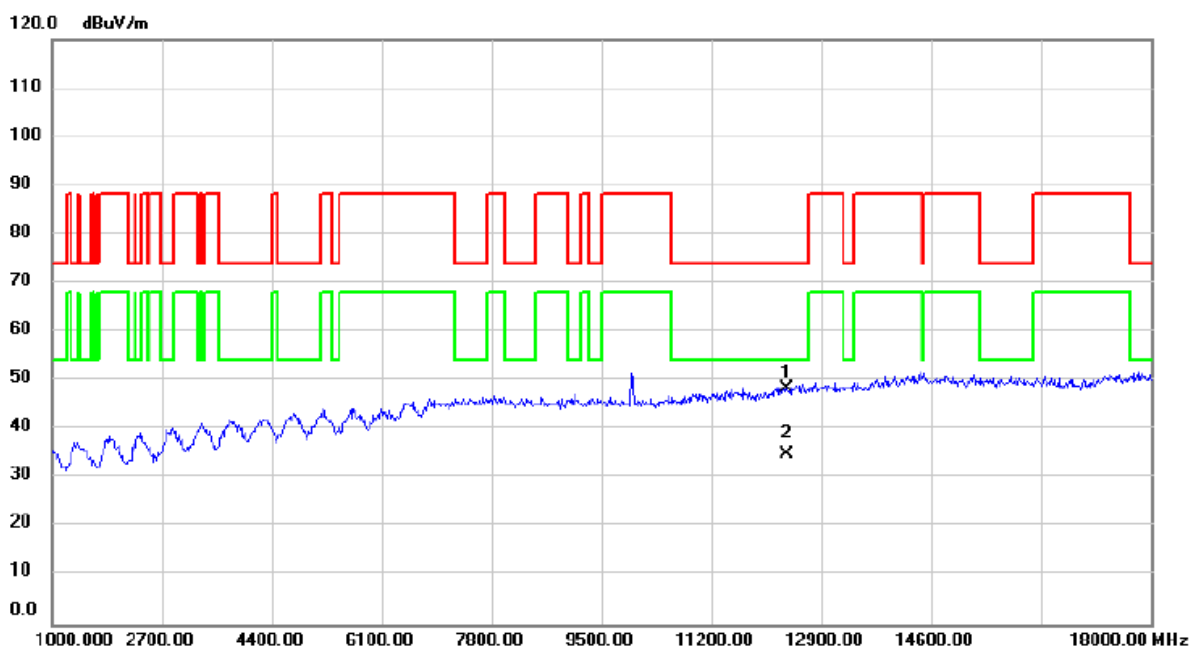


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		12370.00	45.65	2.90	48.55	74.00	-25.45	peak	
2	*	12370.00	32.14	2.90	35.04	54.00	-18.96	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2025/12/8
Test Frequency	6345MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

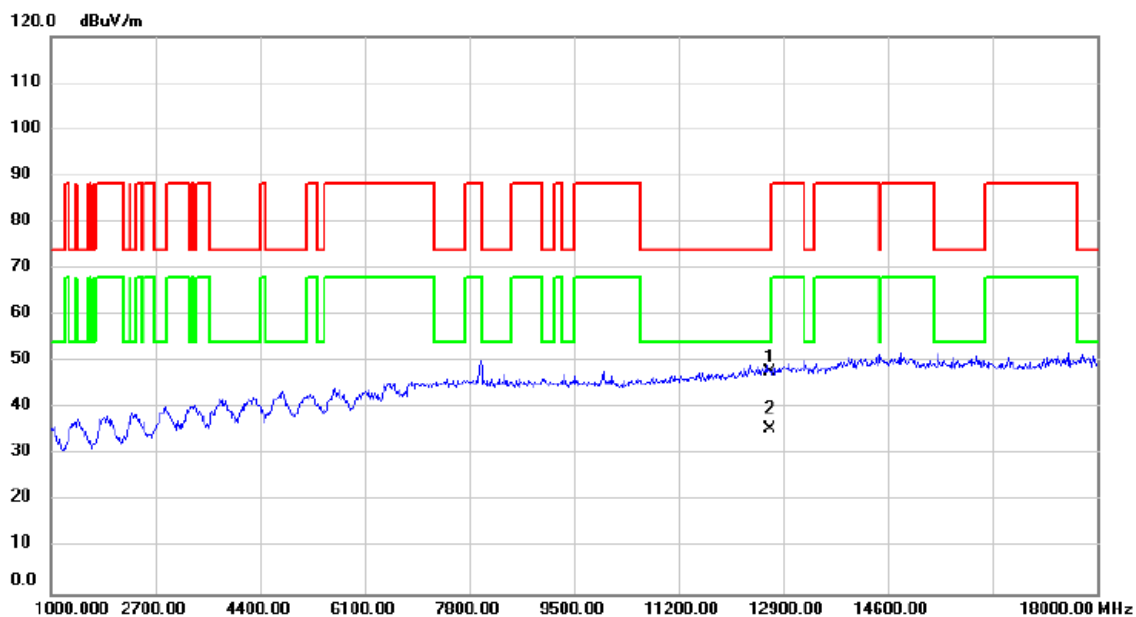


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		12690.00	44.66	3.16	47.82	74.00	-26.18	peak	
2	*	12690.00	32.48	3.16	35.64	54.00	-18.36	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2025/12/8
Test Frequency	6505MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

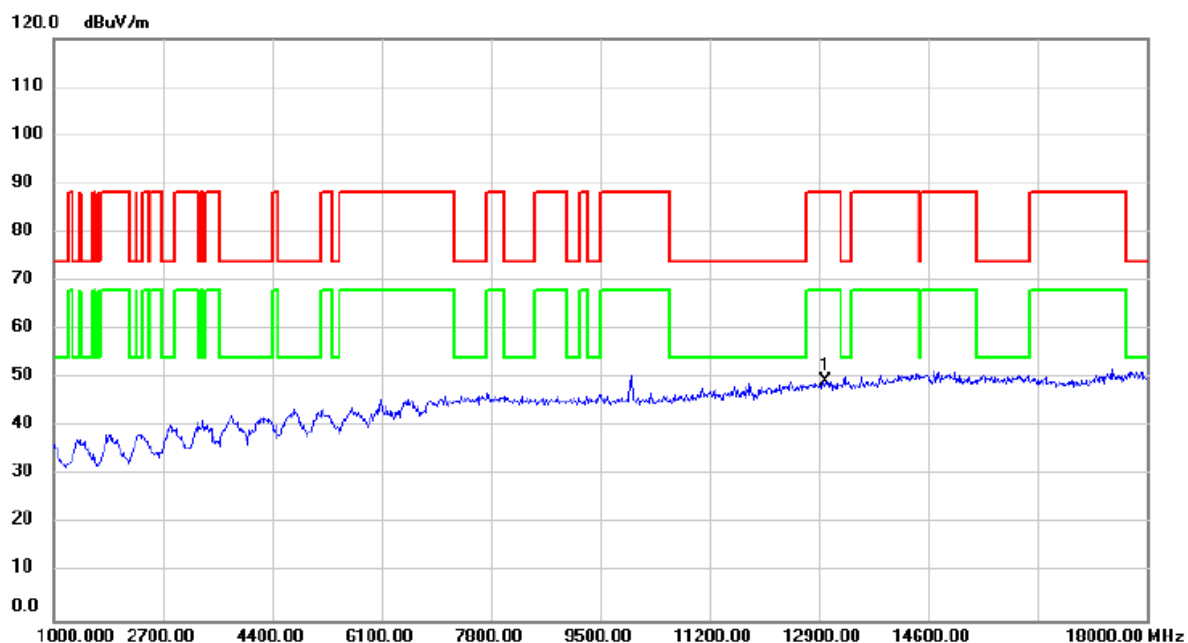


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13010.00	46.16	3.31	49.47	88.20	-38.73	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2025/12/8
Test Frequency	6665MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

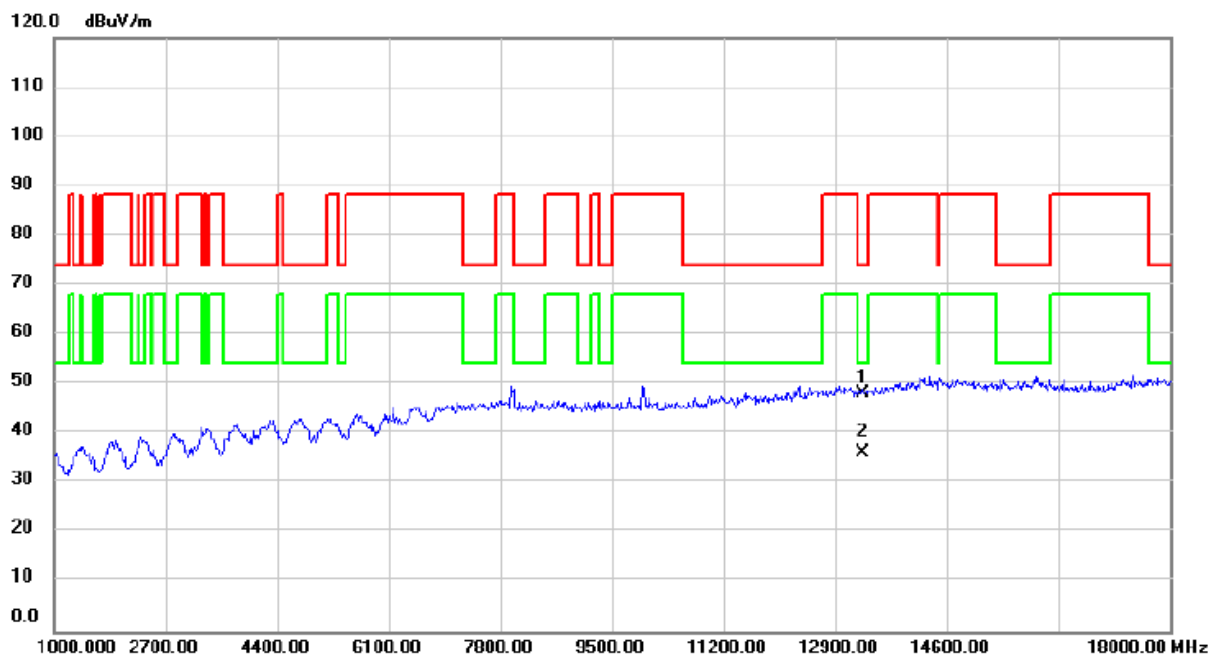


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13330.00	45.04	3.03	48.07	74.00	-25.93	peak	
2	*	13330.00	33.01	3.03	36.04	54.00	-17.96	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2025/12/8
Test Frequency	6825MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

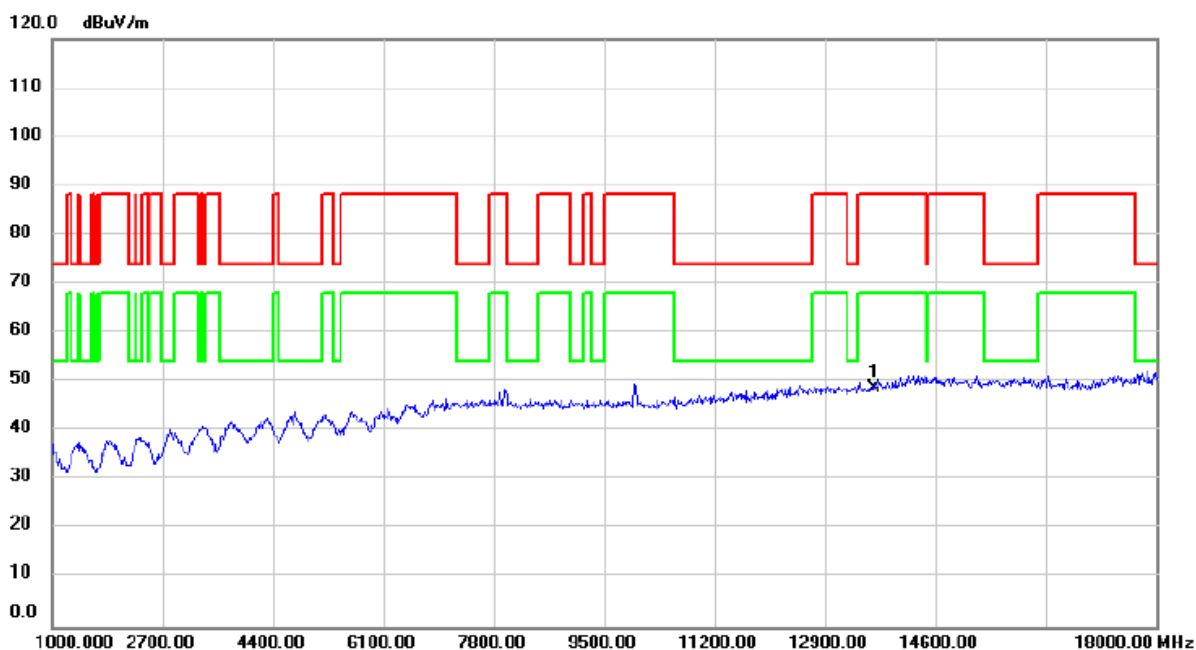


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13650.00	45.74	3.03	48.77	88.20	-39.43	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2025/12/8
Test Frequency	6985MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

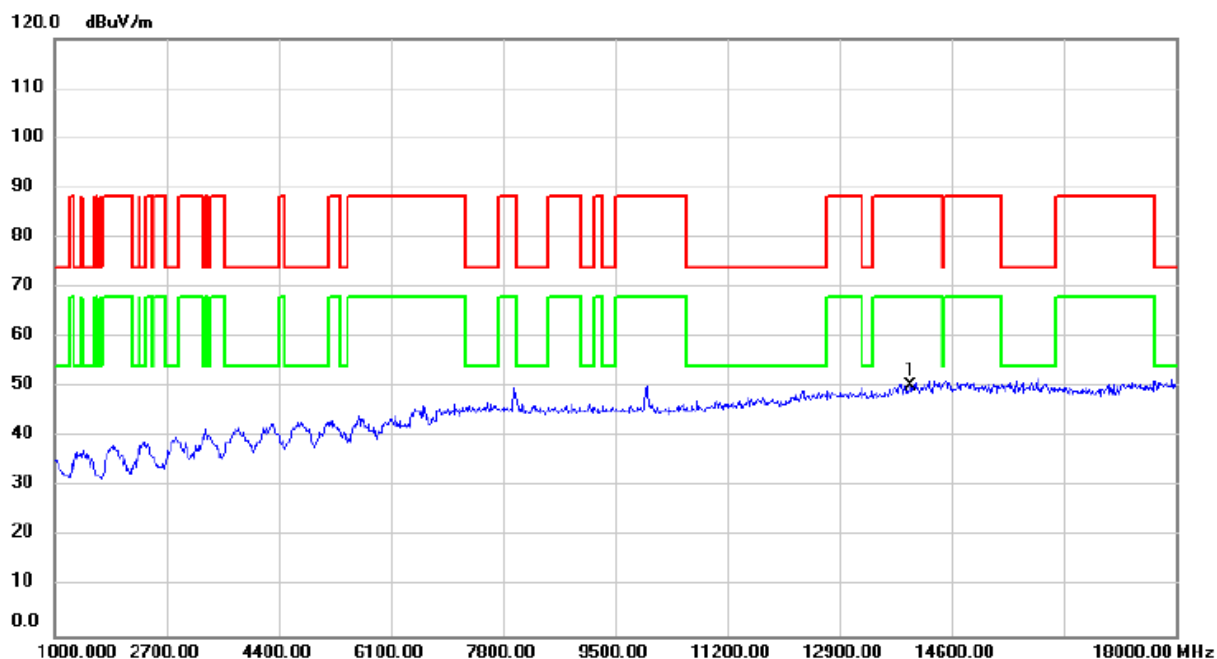


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13970.00	46.85	3.38	50.23	88.20	-37.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT320)	Test Date	2025/12/8
Test Frequency	6105MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

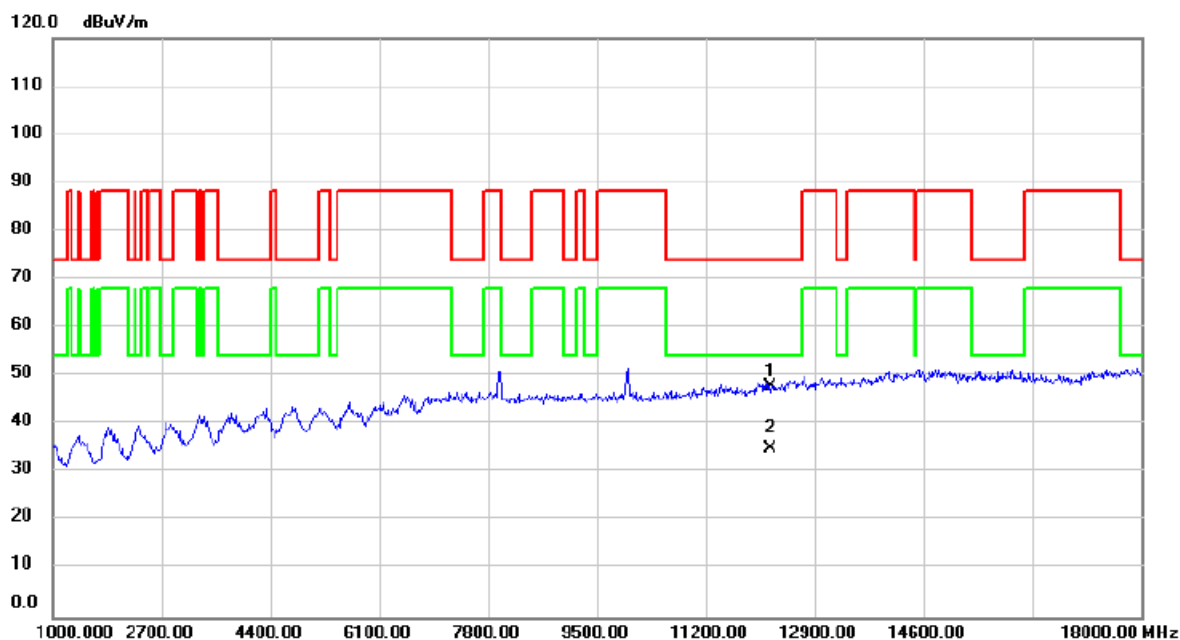


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		12210.00	45.02	2.71	47.73	74.00	-26.27	peak	
2	*	12210.00	32.29	2.71	35.00	54.00	-19.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT320)	Test Date	2025/12/8
Test Frequency	6265MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

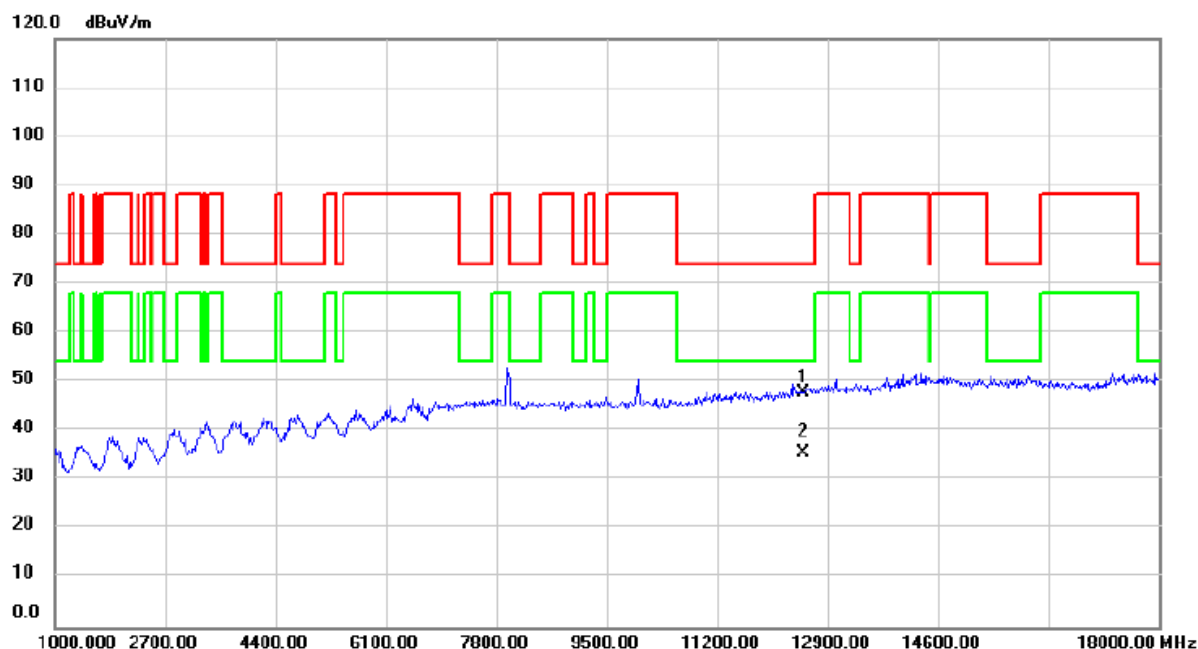


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		12530.00	44.91	3.08	47.99	74.00	-26.01	peak	
2	*	12530.00	32.44	3.08	35.52	54.00	-18.48	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT320)	Test Date	2025/12/8
Test Frequency	6425MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

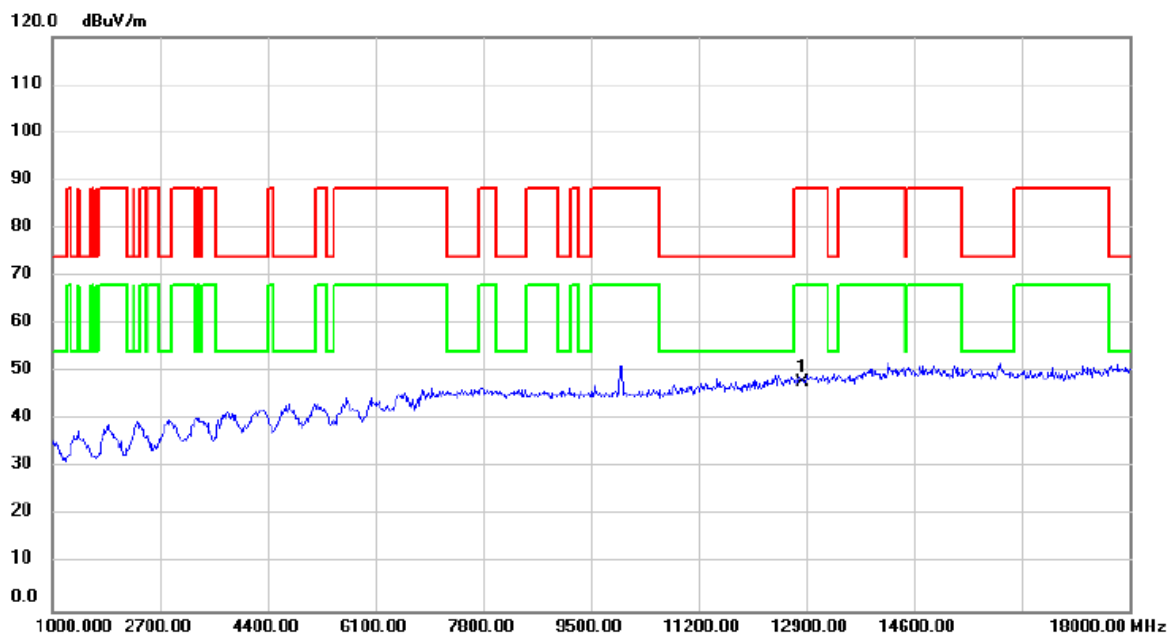


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	12850.00	44.66	3.25	47.91	88.20	-40.29	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT320)	Test Date	2025/12/8
Test Frequency	6585MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

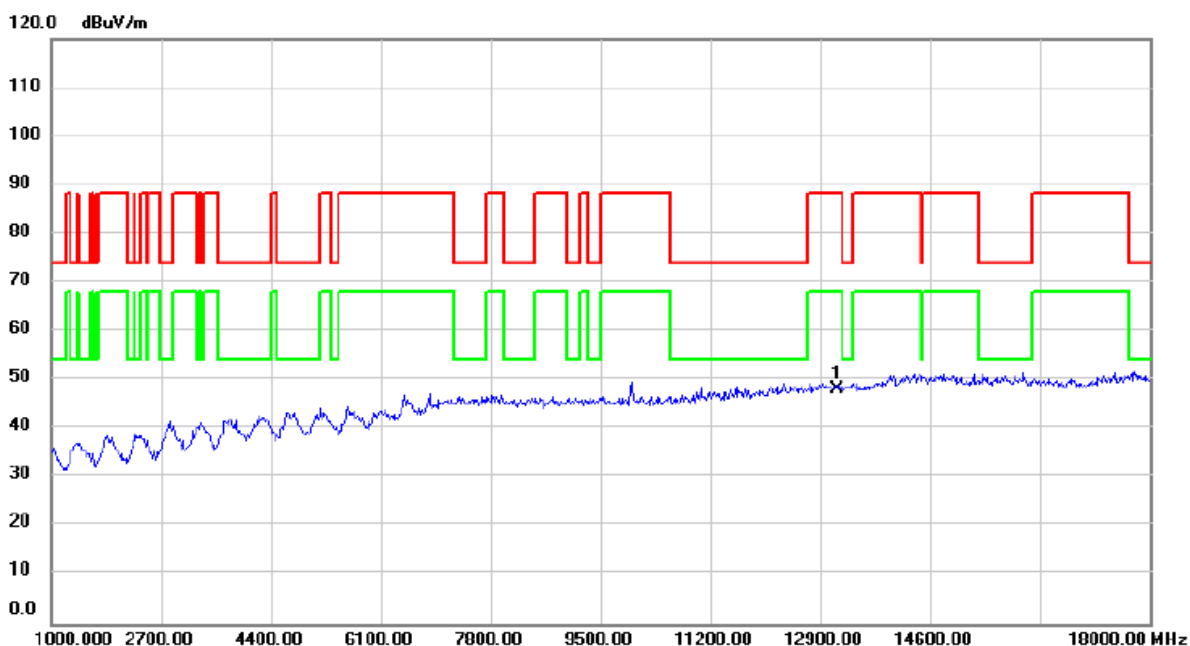


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13170.00	45.11	3.17	48.28	88.20	-39.92	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT320)	Test Date	2025/12/8
Test Frequency	6745MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

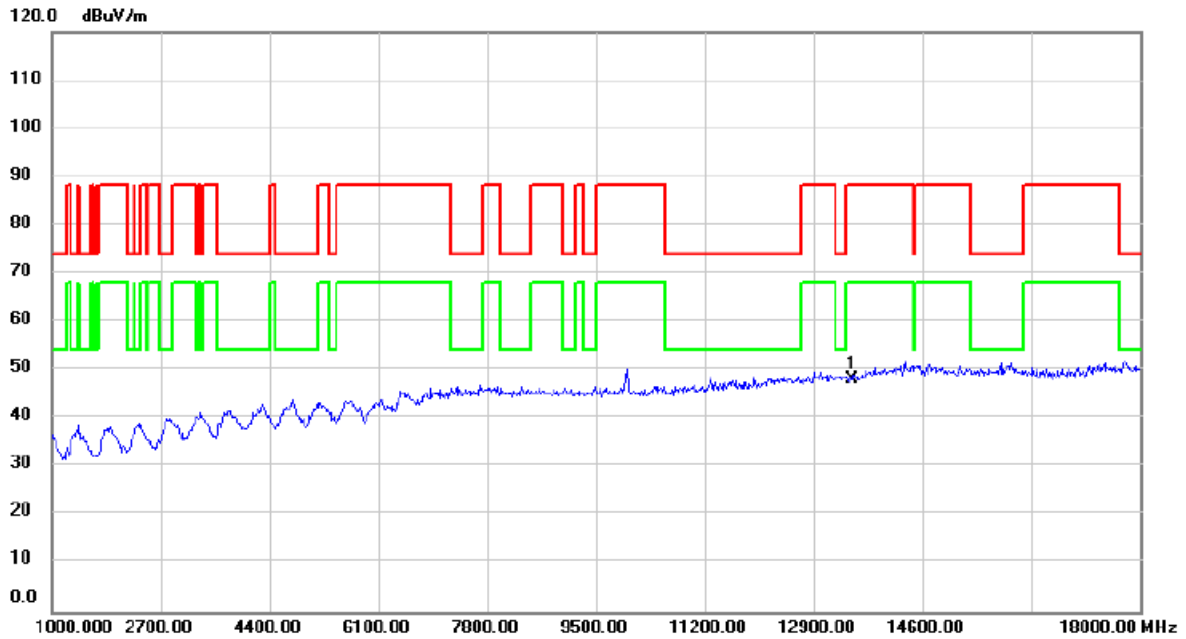


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13490.00	45.14	2.89	48.03	88.20	-40.17	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT320)	Test Date	2025/12/8
Test Frequency	6905MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

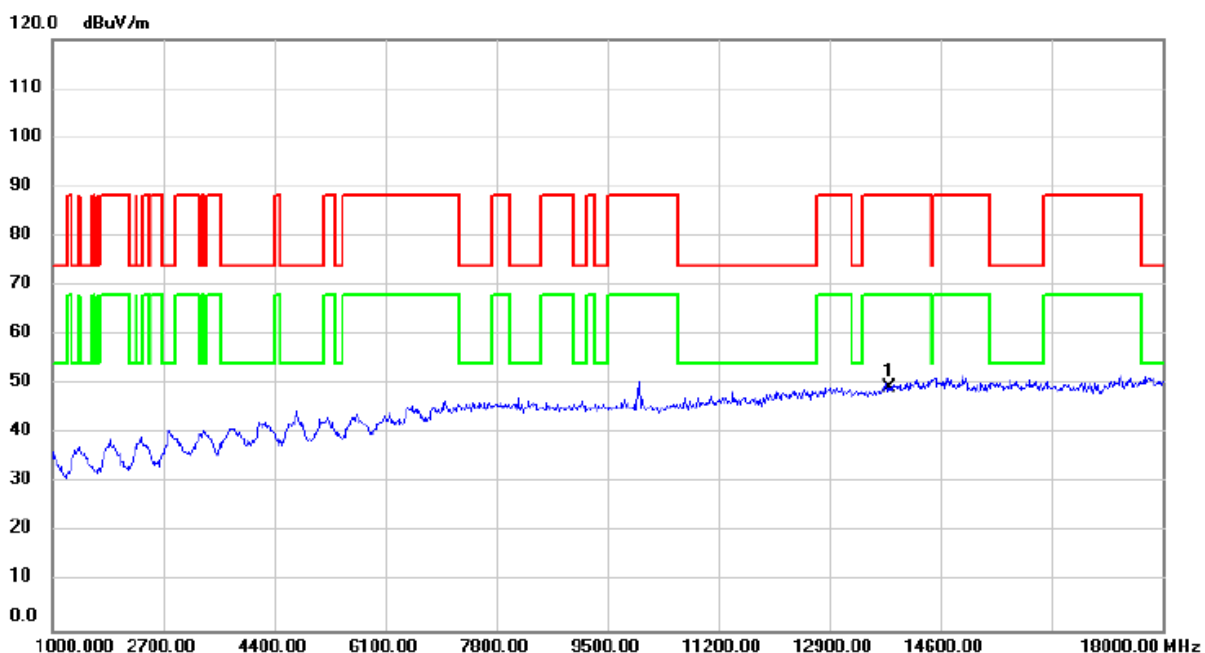


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13810.00	46.18	3.21	49.39	88.20	-38.81	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT320)	Test Date	2025/12/8
Test Frequency	6265MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

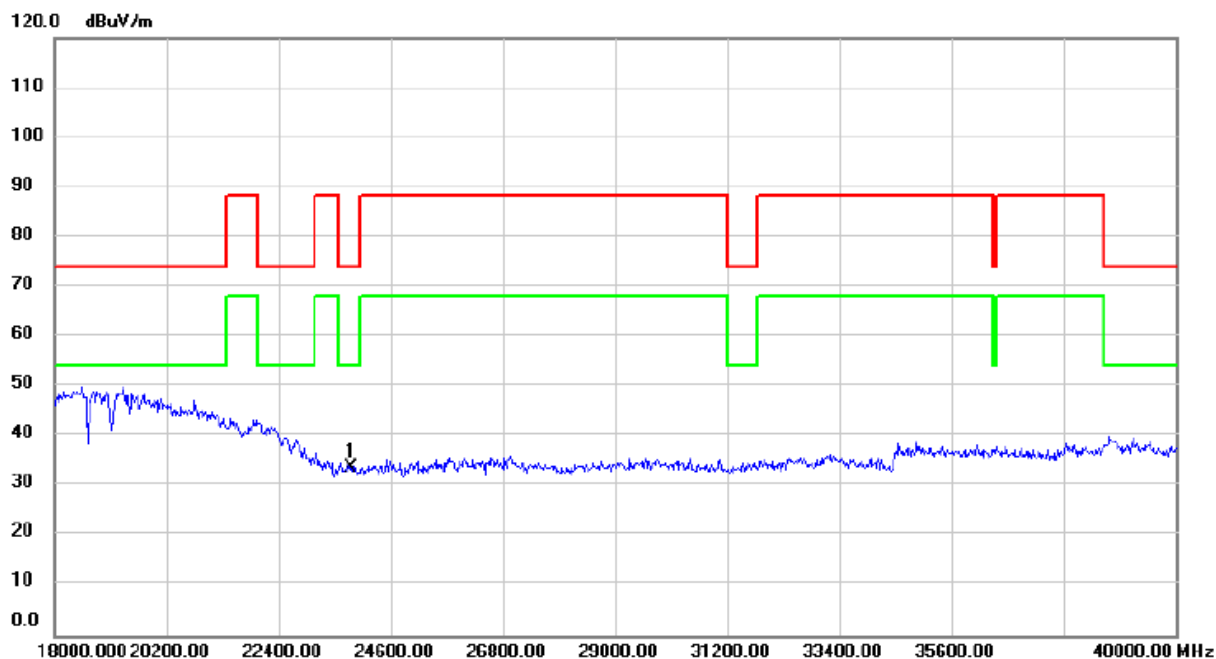





No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	23820.00	33.72	0.00	33.72	74.00	-40.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX F IN-BAND EMISSION (MASK)

Test Mode IEEE 802.11be(EHT20)_Ant_1

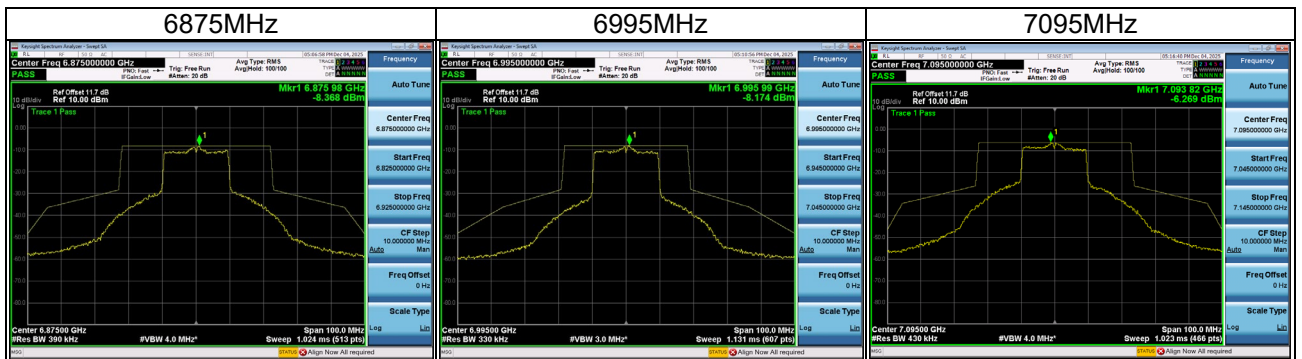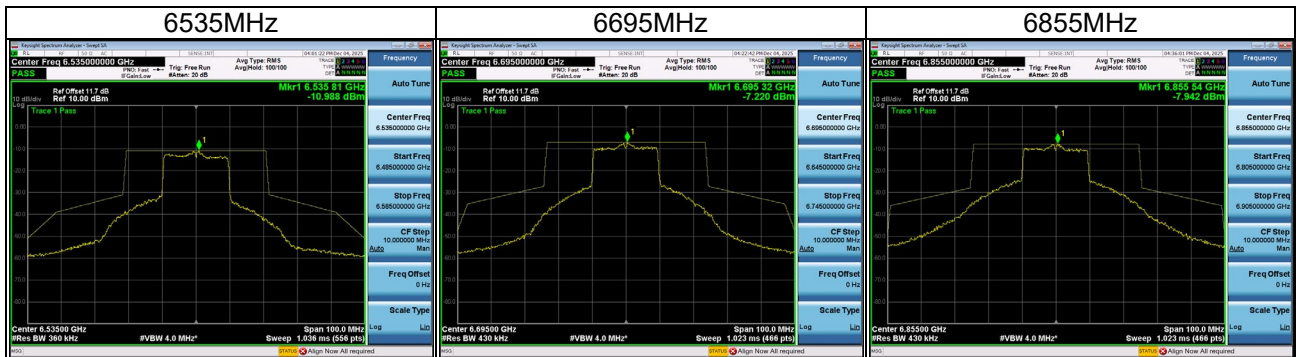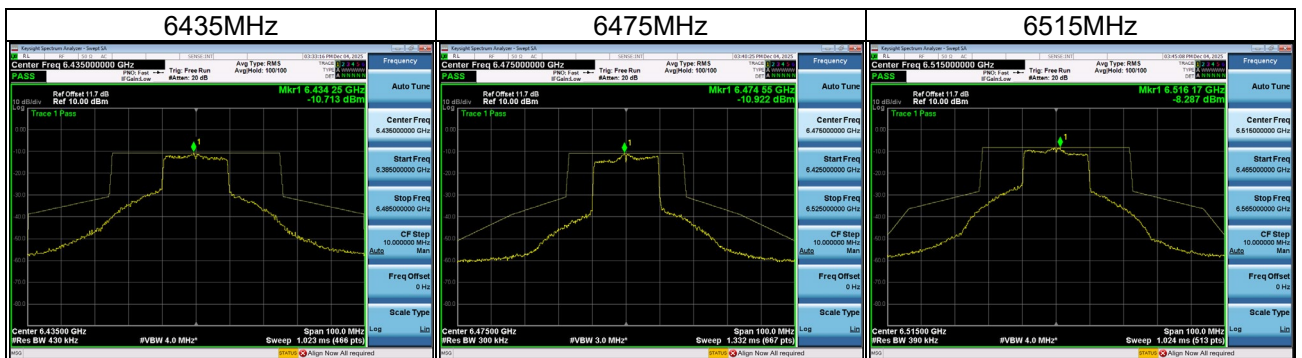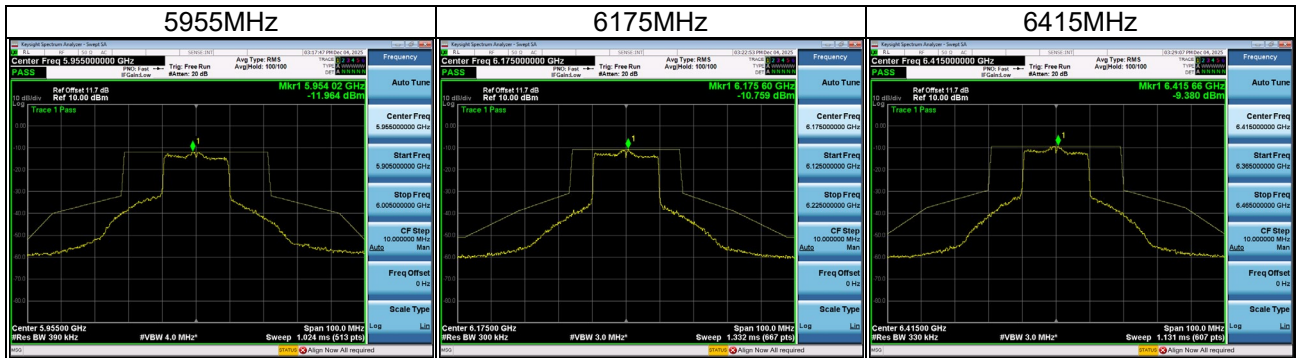

Test Mode IEEE 802.11be(EHT20)_Ant_2

