



RADIO TEST REPORT

FCC ID : 2AU6R04371
Equipment : 802.11be (WiFi 7) 5G/6G 2X2 Dual-Radio PTMP CPE,
802.11be (WiFi 7) 5G/6G 2X2 Dual-Radio PTMP Solution
Brand Name : ZYXEL
Model Name : Leaf Plus, Root
Applicant : Zyxel Networks Corporation
No.2 Industry East RD. IX, Hsinchu Science Park, Hsinchu
30075, Taiwan, R.O.C
Manufacturer : Zyxel Networks Corporation
No.2 Industry East RD. IX, Hsinchu Science Park, Hsinchu
30075, Taiwan, R.O.C
Standard : 47 CFR FCC Part 15.407

The product was received on Jul. 22, 2025, and testing was started from Nov. 20, 2025 and completed on Dec. 30, 2025. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.



Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	14
1.3 Testing Location Information	14
1.4 Measurement Uncertainty	15
2 Test Configuration of EUT	16
2.1 Test Channel Mode	16
2.2 The Worst Case Measurement Configuration	19
2.3 EUT Operation during Test	20
2.4 Accessories	20
2.5 Support Equipment.....	20
2.6 Test Setup Diagram	21
3 Transmitter Test Result	24
3.1 AC Power-line Conducted Emissions	24
3.2 Emission Bandwidth	26
3.3 Maximum Output Power	27
3.4 Power Spectral Density	30
3.5 Unwanted Emissions.....	33
4 Test Equipment and Calibration Data	37
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of Emission Bandwidth	
Appendix C. Test Results of Maximum Output Power	
Appendix D. Test Results of Power Spectral Density	
Appendix E. Test Results of Unwanted Emissions	
Appendix F. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_1 Ver1.4



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Output Power	PASS	-
3.4	15.407(a)	Power Spectral Density	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen**Report Producer: Cathy Chiu**



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5150-5250	a, n (HT20), ac (VHT20), ax (HEW20), be (EHT20)	5180-5240	36-48 [4]
5250-5350		5260-5320	52-64 [4]
5470-5725		5500-5720	100-144 [12]
5725-5850		5745-5825	149-165 [5]
5150-5250	n (HT40), ac (VHT40), ax (HEW40), be (EHT40)	5190-5230	38-46 [2]
5250-5350		5270-5310	54-62 [2]
5470-5725		5510-5710	102-142 [6]
5725-5850		5755-5795	151-159 [2]
5150-5250	ac (VHT80), ax (HEW80), be (EHT80)	5210	42 [1]
5250-5350		5290	58 [1]
5470-5725		5530-5690	106-138 [3]
5725-5850		5775	155 [1]
5150-5350	ac (VHT160), ax (HEW160), be (EHT160)	5250	50 [1]
5470-5725		5570	114 [1]
5470-5725	EHT 240	5610	122 [1]
5725-5850		5610	122 [1]



Band	Mode	BWch (MHz)	Nant
5.15-5.25GHz	802.11 a, 802.11 n HT20, 802.11 ac VHT20, 802.11 ax HEW20, 802.11 be EHT20	20	2TX
	802.11 n HT20-BF, 802.11 ac VHT20-BF, 802.11 ax HEW20-BF, 802.11 be EHT20-BF	20	2TX
	802.11 n HT40, 802.11 ac VHT40, 802.11 ax HEW40, 802.11 be EHT40	40	2TX
	802.11 n HT40-BF, 802.11 ac VHT40-BF, 802.11 ax HEW40-BF, 802.11 be EHT40-BF	40	2TX
	802.11 ac VHT80, 802.11 ax HEW80, 802.11 be EHT80	80	2TX
	802.11 ac VHT80-BF, 802.11 ax HEW80-BF, 802.11 be EHT80-BF	80	2TX
5.15-5.35GHz	802.11 ac VHT160, 802.11 ax HEW160, 802.11 be EHT160	160	2TX
	802.11 ac VHT160-BF, 802.11 ax HEW160-BF, 802.11 be EHT160-BF	160	2TX



Band	Mode	BWch (MHz)	Nant
5.25-5.35GHz	802.11 a, 802.11 n HT20, 802.11 ac VHT20, 802.11 ax HEW20, 802.11 be EHT20	20	2TX
	802.11 n HT20-BF, 802.11 ac VHT20-BF, 802.11 ax HEW20-BF, 802.11 be EHT20-BF	20	2TX
	802.11 n HT40, 802.11 ac VHT40, 802.11 ax HEW40, 802.11 be EHT40	40	2TX
	802.11 n HT40-BF, 802.11 ac VHT40-BF, 802.11 ax HEW40-BF, 802.11 be EHT40-BF	40	2TX
	802.11 ac VHT80, 802.11 ax HEW80, 802.11 be EHT80	80	2TX
	802.11 ac VHT80-BF, 802.11 ax HEW80-BF, 802.11 be EHT80-BF	80	2TX



Band	Mode	BWch (MHz)	Nant
5.47-5.725GHz	802.11 a, 802.11 n HT20, 802.11 ac VHT20, 802.11 ax HEW20, 802.11 be EHT20	20	2TX
	802.11 n HT20-BF, 802.11 ac VHT20-BF, 802.11 ax HEW20-BF, 802.11 be EHT20-BF	20	2TX
	802.11 n HT40, 802.11 ac VHT40, 802.11 ax HEW40, 802.11 be EHT40	40	2TX
	802.11 n HT40-BF, 802.11 ac VHT40-BF, 802.11 ax HEW40-BF, 802.11 be EHT40-BF	40	2TX
	802.11 ac VHT80, 802.11 ax HEW80, 802.11 be EHT80	80	2TX
	802.11 ac VHT80-BF, 802.11 ax HEW80-BF, 802.11 be EHT80-BF	80	2TX
	802.11 ac VHT160, 802.11 ax HEW160, 802.11 be EHT160	160	2TX
	802.11 ac VHT160-BF, 802.11 ax HEW160-BF, 802.11 be EHT160-BF	160	2TX
	EHT240	240	2TX
	EHT240-BF	240	2TX



Band	Mode	BWch (MHz)	Nant
5.725-5.85GHz	802.11 a, 802.11 n HT20, 802.11 ac VHT20, 802.11 ax HEW20, 802.11 be EHT20	20	2TX
	802.11 n HT20-BF, 802.11 ac VHT20-BF, 802.11 ax HEW20-BF, 802.11 be EHT20-BF	20	2TX
	802.11 n HT40, 802.11 ac VHT40, 802.11 ax HEW40, 802.11 be EHT40	40	2TX
	802.11 n HT40-BF, 802.11 ac VHT40-BF, 802.11 ax HEW40-BF, 802.11 be EHT40-BF	40	2TX
	802.11 ac VHT80, 802.11 ax HEW80, 802.11 be EHT80	80	2TX
	802.11 ac VHT80-BF, 802.11 ax HEW80-BF, 802.11 be EHT80-BF	80	2TX

Note:

- ♦ 11a, HT20, HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40, VHT80, VHT160 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
- ♦ HEW20, HEW40, HEW80, HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
- ♦ EHT20, EHT40, EHT80, EHT160, EHT240 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ BWch is the nominal channel bandwidth.

**1.1.2 Antenna Information**

Ant.	Port of EUT	Port		Brand	Model Name	Antenna Type	Connector	Gain (dBi)
		5GHz	6GHz					
1	1	2	-	LYNwave	OLA25B-247160-A	Patch Antenna	SMA	Note1
	2	1	-					
	3	-	2					
	4	-	1					

Note 1:

Port of EUT	Antenna Gain (dBi)				
	WLAN 5GHz				
	5150~5250MHz	5250~5350MHz	5470~5650MHz	5650~5800MHz	5800~5850MHz
1	11.1	11.6	10.7	11.3	10.4
2	11.0	10.9	10.8	10.5	10.8
3	-	-	-	-	-
4	-	-	-	-	-

Port of EUT	Antenna Gain (dBi)			
	WLAN 6GHz			
	5925~6125MHz	6125~6525MHz	6525~6825MHz	6825~6875MHz
1	-	-	-	-
2	-	-	-	-
3	10.0	11.4	11.1	11.4
4	10.3	11.3	11.6	10.8

Note2: The above information was declared by manufacturer.

Note 3: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ; NSS1(g1,3) = 10^{G3/20} ; NSS1(g1,4) = 10^{G4/20}$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2 / N_{ANT}] \Rightarrow 10$$

$$\log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20} + 10^{G4/20})^2 / N_{ANT}]$$

Where ;

$$5.150-5.250\text{GHz } G1 = 11.1 \text{ dBi} ; G2 = 11 \text{ dBi} ; DG = 14.06\text{dBi}$$

$$5.250-5.350\text{GHz } G1 = 11.6 \text{ dBi} ; G2 = 10.9 \text{ dBi} ; DG = 14.27\text{dBi}$$

$$5.470-5.650\text{GHz } G1 = 10.7 \text{ dBi} ; G2 = 10.8 \text{ dBi} ; DG = 13.76\text{dBi}$$

$$5.650-5.800\text{GHz } G1 = 11.3 \text{ dBi} ; G2 = 10.5 \text{ dBi} ; DG = 13.92\text{dBi}$$

$$5.800-5.850\text{GHz } G1 = 10.4 \text{ dBi} ; G2 = 10.8 \text{ dBi} ; DG = 13.61\text{dBi}$$

$$5.925-6.125\text{GHz } G1 = 10 \text{ dBi} ; G2 = 10.3 \text{ dBi} ; DG = 13.16\text{dBi}$$

$$6.125-6.525\text{GHz } G1 = 11.4 \text{ dBi} ; G2 = 11.3 \text{ dBi} ; DG = 14.36\text{dBi}$$

$$6.525-6.825\text{GHz } G1 = 11.1 \text{ dBi} ; G2 = 11.6 \text{ dBi} ; DG = 14.36\text{dBi}$$

$$6.825-6.875\text{GHz } G1 = 11.4 \text{ dBi} ; G2 = 10.8 \text{ dBi} ; DG = 14.12\text{dBi}$$

<For 5GHz function>

For IEEE 802.11a/n/ac/ax/be (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

<For 6GHz function>

For IEEE 802.11ax/be (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

**1.1.3 Mode Test Duty Cycle**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a_Nss 1,(6D)	0.992	0.03	1.977m	10Hz (DC>=0.98)
802.11be EHT20_Nss 1,(M0)	0.975	0.11	5.453m	200
802.11be EHT40_Nss 1,(M0)	0.981	0.08	5.453m	10Hz (DC>=0.98)
802.11be EHT80_Nss 1,(M0)	0.974	0.11	5.453m	200
802.11be EHT160_Nss 1,(M0)	0.975	0.11	5.453m	200
EHT240_Nss 1,(M0)	0.976	0.11	5.459m	200
802.11be EHT20-BF_Nss 1,(M0)	0.975	0.11	5.453m	200
802.11be EHT40-BF_Nss 1,(M0)	0.981	0.08	5.453m	10Hz (DC>=0.98)
802.11be EHT80-BF_Nss 1,(M0)	0.974	0.11	5.453m	200
802.11be EHT160-BF_Nss 1,(M0)	0.975	0.11	5.453m	200
EHT240,BF_Nss 1,(M0)	0.976	0.11	5.459m	200

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From PoE			
Beamforming Function	☒	With beamforming	☐	Without beamforming
	The product has beamforming function for n/ac/ax/be in 5GHz and ax/be in 6GHz.			
Weather Band	☒	With 5600~5650MHz	☐	Without 5600~5650MHz
Function	☐	Outdoor P2M	☐	Indoor P2M
	☐	Fixed P2P	☒	Client
	☐	Point-to-multipoint	☒	Point-to-point
TPC Function	☒	With TPC	☐	Without TPC
Channel Puncturing Function	☐	Supported Static Puncturing		
	☐	Supported Dynamic Puncturing (Reduce BW)		
	☒	Unsupported		
Support RU	☒	Full RU	☐	Partial RU 看 pjf 勾
Test Software Version	QRCT4 V4.0.170.1			

Note: The above information was declared by manufacturer.

**1.1.5 Table for Multiple Listing**

Equipment Name	Model Name	Channel Marketing
802.11be (WiFi 7) 5G/6G 2X2 dual-Radio PTMP CPE	Leaf Plus	Online Channels
802.11be (WiFi 7) 5G/6G 2X2 dual-Radio PTMP Solution	Root	Offline Channels

Note 1: From the above models, model: Leaf Plus was selected as representative model for the test and its data was recorded in this report.

Note 2: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2020
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 412172 D01 v01r01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH03-CB	Owen Hsu	20.4~21.6 / 60~64	Nov. 26, 2025~ Dec. 16, 2025
Radiated (Below 1GHz)	10CH01-CB	Gray Lee	22~23 / 56~57	Nov. 20, 2025
Radiated (Above 1GHz)	03CH04-CB	Nyle Chang	21.4~22.6 / 57~61	Nov. 20, 2025~ Dec. 30, 2025
AC Conduction	CO02-CB	Gray Lee	23~24 / 63~64	Nov. 21, 2025



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Parameter	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.4 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.7 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	2.5 dB	Confidence levels of 95%
Output Power Measurement	1.3 dB	Confidence levels of 95%
Power Density Measurement	2.0 dB	Confidence levels of 95%
Bandwidth Measurement	1.0 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode
802.11a_Nss1,(6Mbps)_2TX
5180MHz
5200MHz
5240MHz
5260MHz
5300MHz
5320MHz
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
5745MHz
5785MHz
5825MHz
802.11be EHT20_Nss1,(MCS0)_2TX
5180MHz
5200MHz
5240MHz
5260MHz
5300MHz
5320MHz
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
5745MHz
5785MHz
5825MHz
802.11be EHT40_Nss1,(MCS0)_2TX
5190MHz
5230MHz
5270MHz
5310MHz
5510MHz
5550MHz
5670MHz
5710MHz Straddle 5.47-5.725GHz
5710MHz Straddle 5.725-5.85GHz
5755MHz
5795MHz
802.11be EHT80_Nss1,(MCS0)_2TX



5210MHz
5290MHz
5530MHz
5610MHz
5690MHz Straddle 5.47-5.725GHz
5690MHz Straddle 5.725-5.85GHz
5775MHz
802.11be EHT160_Nss1,(MCS0)_2TX
5250MHz Straddle 5.15-5.25GHz
5250MHz Straddle 5.25-5.35GHz
5570MHz
EHT240_240MHz_Nss1,(MCS0)_2TX
5610MHz Straddle 5.47-5.725GHz
5610MHz Straddle 5.725-5.85GHz
802.11be EHT20-BF_Nss1,(MCS0)_2TX
5180MHz
5200MHz
5240MHz
5260MHz
5300MHz
5320MHz
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
5745MHz
5785MHz
5825MHz
802.11be EHT40-BF_Nss1,(MCS0)_2TX
5190MHz
5230MHz
5270MHz
5310MHz
5510MHz
5550MHz
5670MHz
5710MHz Straddle 5.47-5.725GHz
5710MHz Straddle 5.725-5.85GHz
5755MHz
5795MHz
802.11be EHT80-BF_Nss1,(MCS0)_2TX
5210MHz
5290MHz
5530MHz
5610MHz
5690MHz Straddle 5.47-5.725GHz
5690MHz Straddle 5.725-5.85GHz
5775MHz
802.11be EHT160-BF_Nss1,(MCS0)_2TX



5250MHz Straddle 5.15-5.25GHz
5250MHz Straddle 5.25-5.35GHz
5570MHz
EHT240,BF_240MHz_Nss1,(MCS0)_2TX
5610MHz Straddle 5.47-5.725GHz
5610MHz Straddle 5.725-5.85GHz

Note:

- ♦ Evaluated EHT20/EHT40/EHT80/EHT160 mode only, due to similar modulation. The power setting of HT20/HT40/VHT20/VHT40/VHT80/VHT160/HEW20/HEW40/HEW80/HEW160 mode are the same or lower than EHT20/EHT40/EHT80/EHT160.
- ♦ The EUT supports non-beamforming and beamforming modes, after evaluating, the non-beamforming mode has been evaluated to be the worst case, so it was selected to test. The beamforming mode evaluates the output power only.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Normal Link
1	EUT + PoE

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Output Power Power Spectral Density
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link
After evaluating, and the worst case was found at Y axis, so it was selected to perform test and its test result was written in the report.	
1	EUT in Y axis
Operating Mode > 1GHz	CTX
After evaluating, and the worst case was found at Y axis, so it was selected to perform test and its test result was written in the report.	
1	EUT in Y axis

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 5GHz+WLAN 6GHz
Refer to Sporton Test Report No.: FA542103 for Co-location RF Exposure Evaluation.	

Note: The PoE is for measurement only, would not be marketed.

The information as below:

Power	Brand	Model
PoE	GOSPELL	G0720-480-050



2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link:

During the test, the EUT operation to normal function.

2.4 Accessories

Accessories
Fixed Rack*1 (for antenna used)
Fixed Ring*2

2.5 Support Equipment


For AC Conduction and Radiated (below 1GHz):


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	GOSPELL	G0720-480-050	N/A
B	EUT PC	ASUS	S300TA	TX2-RTL8821CE
C	Wifi Device	ZYXEL	NWA50BE PRO	N/A
D	Wifi Device PoE	GOSPELL	G0720-480-050	N/A
E	Wif Device PC	ASUS	S300TA	TX2-RTL8821CE
F	GPS Simulator	WELNAVIGATE	GS-100	N/A

For Radiated (above 1GHz) and RF Conducted:


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	PoE	GOSPELL	G0720-480-050	N/A

2.6 Test Setup Diagram

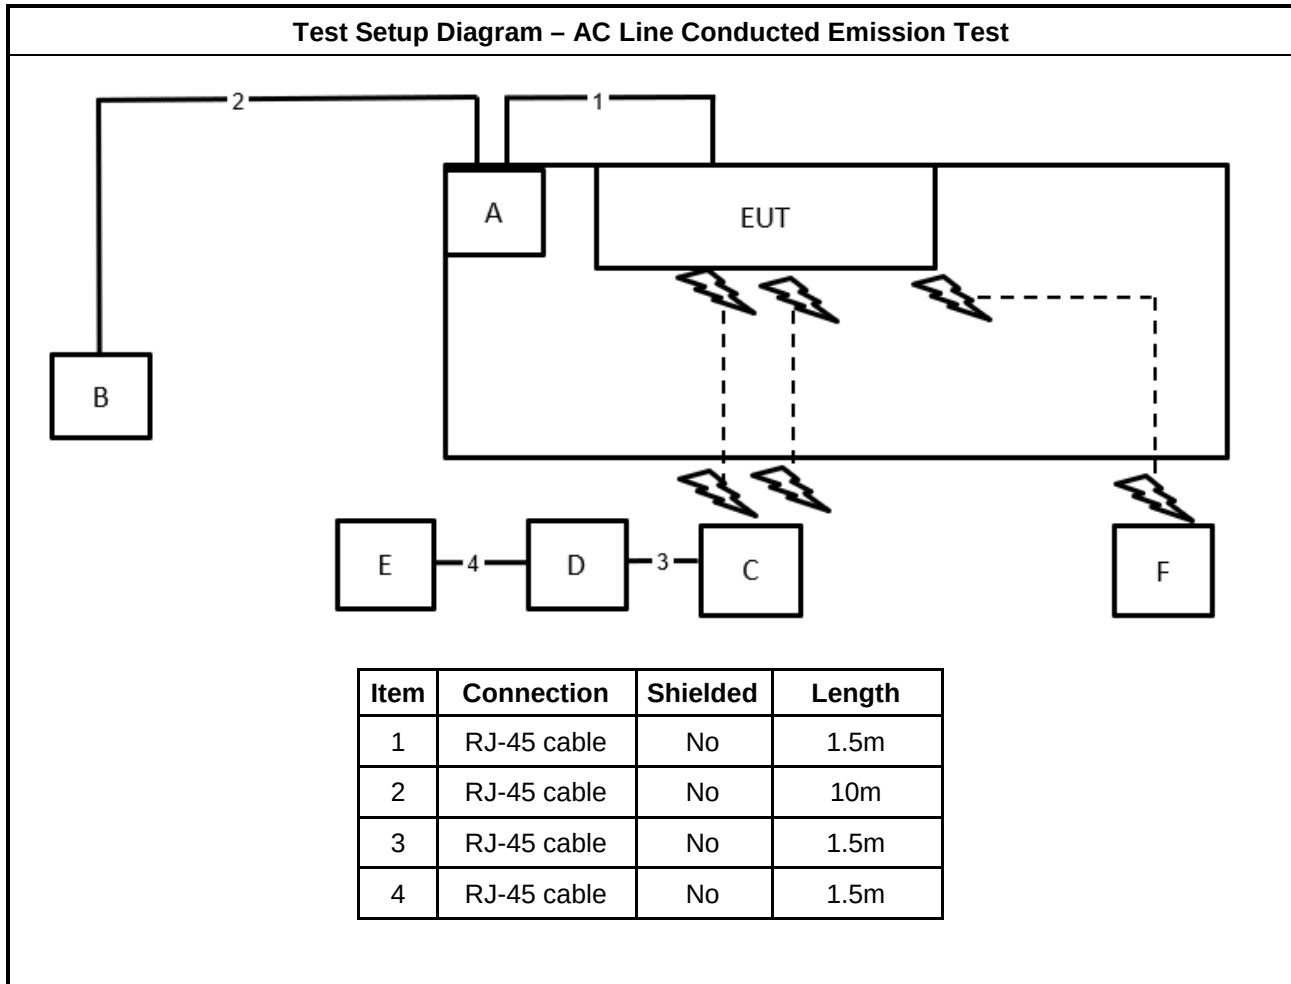

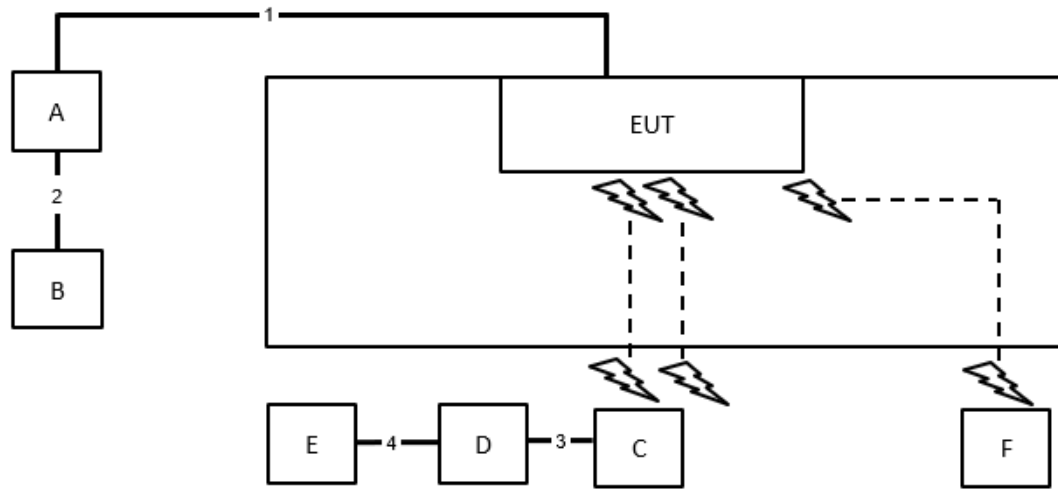Test Setup Diagram - Radiated Test < 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m
3	RJ-45 cable	No	1.5m
4	RJ-45 cable	No	1.5m

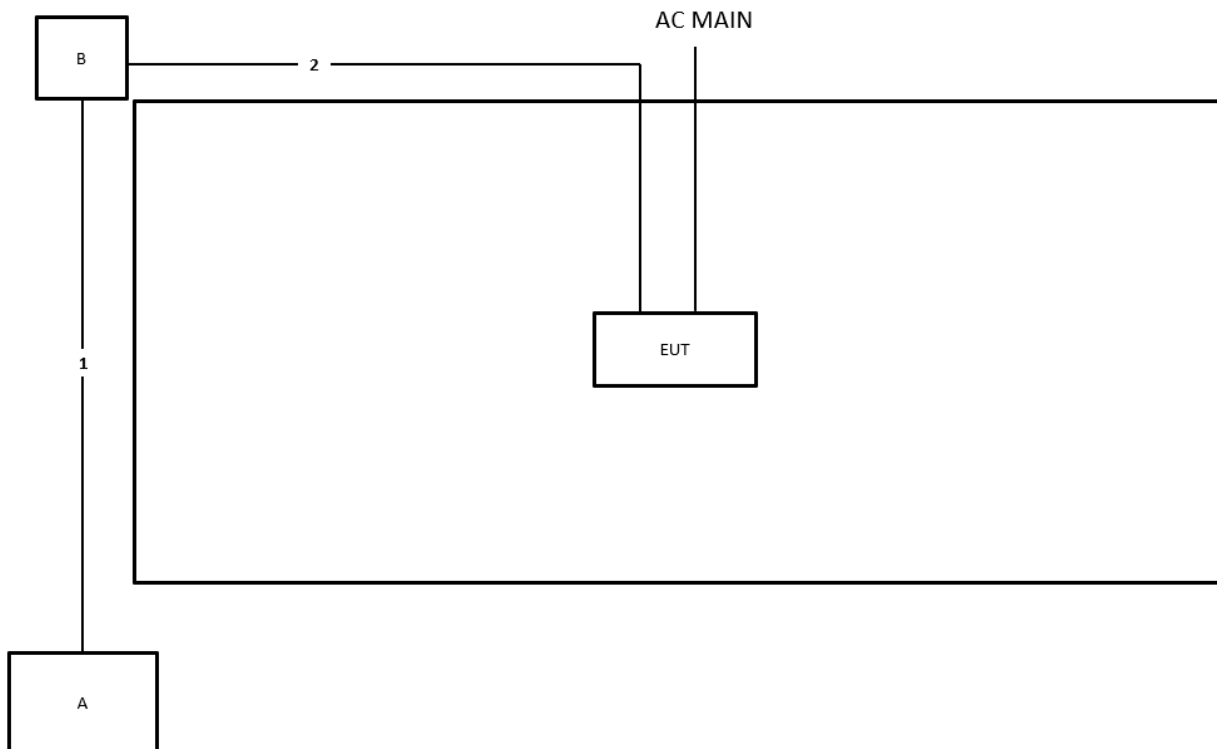Test Setup Diagram - Radiated Test > 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	1m
2	RJ-45 cable	No	10m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2020, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

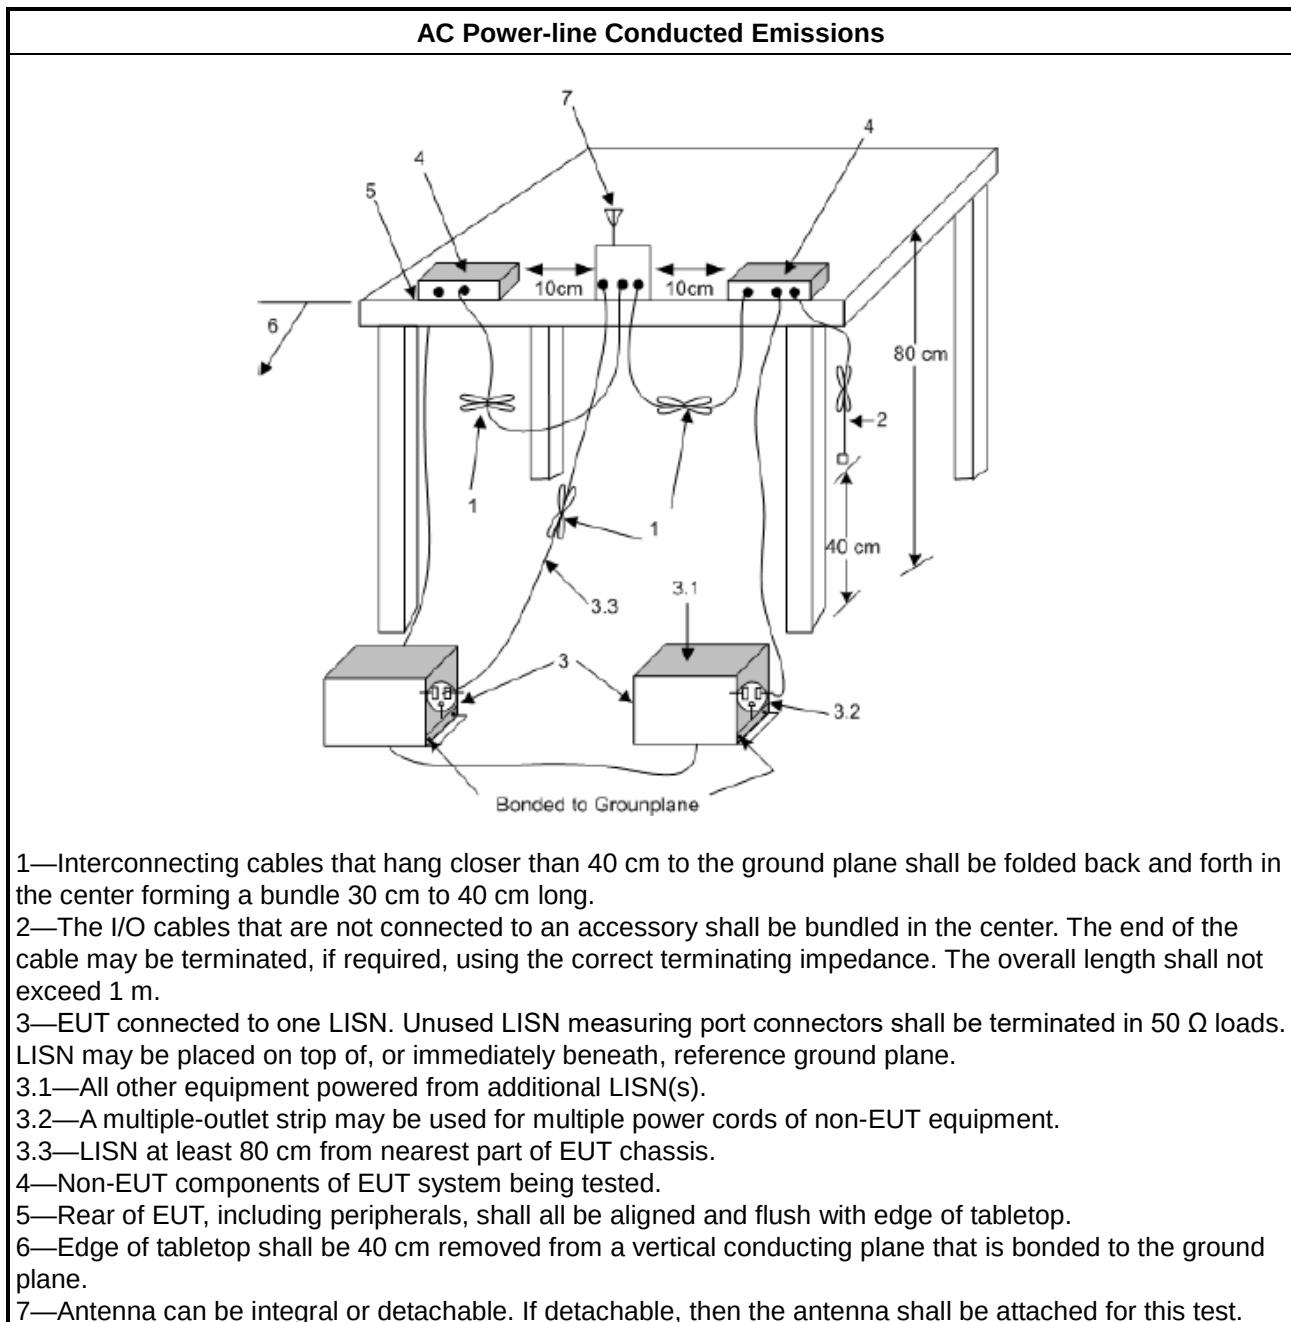

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- a. Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- b. Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band, N/A
☒	For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz.
☒	For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz.
☒	For the 5.725-5.85 GHz band, 26 dB emission bandwidth ,N/A. 6 dB emission bandwidth $\geq 500\text{kHz}$.
LE-LAN Devices	
☐	For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	For the 5.47-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq 500\text{kHz}$.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
For the emission bandwidth shall be measured using one of the options below:	
☒	Refer as FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.2.4 Test Setup

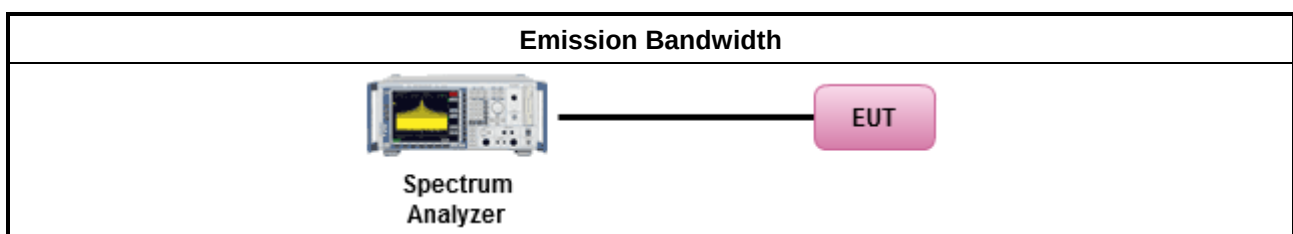

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Output Power

3.3.1 Limit

Maximum Output Power Limit	
UNII Devices	
☒ For the 5.15-5.25 GHz band:	
	▪ Outdoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees ≤ 125mW [21dBm] ▪ Indoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ ▪ Point-to-point AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$. ▪ Mobile or Portable Client: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☒ For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☒ For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☒ For the 5.725-5.85 GHz band:	
	▪ Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. ▪ Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
LE-LAN Devices	
☐ For the 5.15-5.25 GHz band:	
	▪ For other devices: The maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. ▪ Vehicles devices: The maximum e.i.r.p. shall not exceed 30 mW or 1.76 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐ For the 5.25-5.35 GHz band:	
	▪ For other devices: The maximum conducted output power shall not exceed 250 mW or 11 + 10 log 10 B, dBm, and the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz ▪ Vehicles devices: The maximum e.i.r.p. shall not exceed 30 mW or 1.76 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. ▪ Devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.
☐ For the 5.47-5.725 GHz band:	



☐	- The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log 10 B$, dBm, and the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. - Equipment with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.
☐	For the 5.725-5.85 GHz band:
☐	- Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	

3.3.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures


Test Method	
Maximum Output Power	
☐	Average over on/off periods with duty factor
☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☐	Wideband RF power meter and average over on/off periods with duty factor
☒	Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).
☒	For conducted measurement.
☐	- If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. - If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$
☐	For radiated measurement.
☐	- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. - Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.3.4 Test Setup

For Straddle channel:

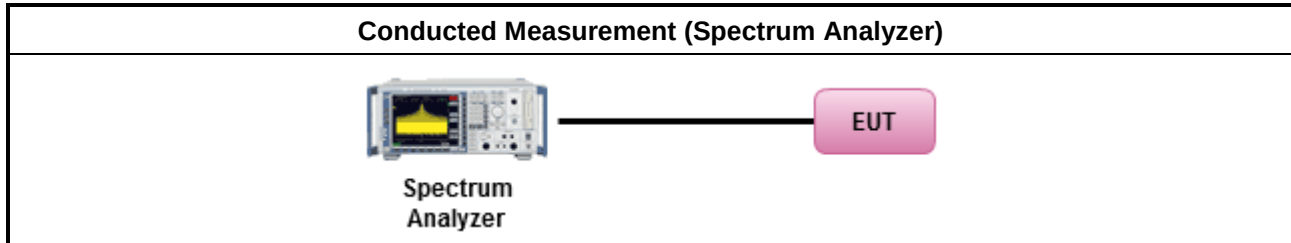

For Other tests:

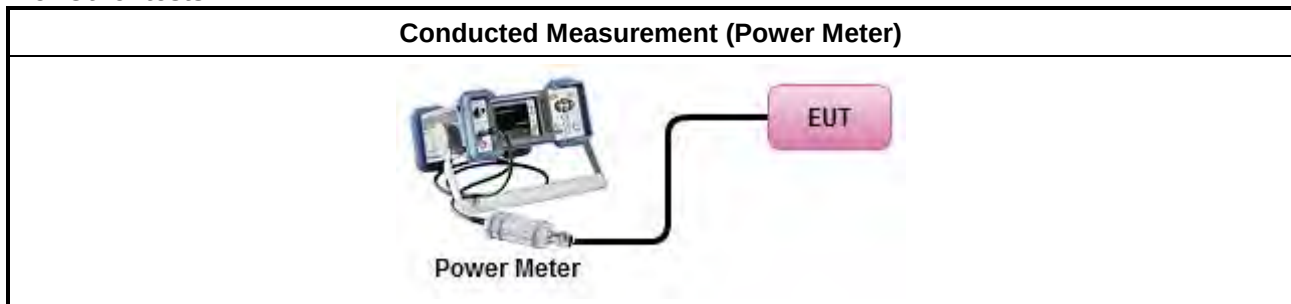

3.3.5 Test Result of Maximum Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Limit

Peak Power Spectral Density Limit	
UNII Devices	
☒ For the 5.15-5.25 GHz band:	
	- Outdoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$. - Indoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$. - Point-to-point AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 23$ dBi, then $P_{Out} = 17 - (G_{TX} - 23)$. - Mobile or Portable Client: the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☒ For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
☒ For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
☒ For the 5.725-5.85 GHz band:	
	- Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
LE-LAN Devices	
☐ For the 5.15-5.25 GHz band, the e.i.r.p. peak power spectral density (PPSD) ≤ 10 dBm/MHz.	
☐ For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz.	
	e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where θ is the angle above the local horizontal plane (of the Earth) as shown below: -13 dBW/MHz for $0^\circ \leq \theta < 8^\circ$; -13 - 0.716 (θ-8) dBW/MHz for $8^\circ \leq \theta < 40^\circ$ -35.9 - 1.22 (θ-40) dBW/MHz for $40^\circ \leq \theta \leq 45^\circ$; -42 dBW/MHz for $\theta > 45^\circ$
☐ For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz.	
☐ For the 5.725-5.85 GHz band:	
	- Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
PPSD = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz G_{TX} = the maximum transmitting antenna directional gain in dBi.	

3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




3.4.3 Test Procedures

Test Method	
Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033 D02, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth [duty cycle ≥ 98% or external video / power trigger]
☒	Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒ For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	
☐ For radiated measurement.	
- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.	

Test Method	
	Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.4.4 Test Setup

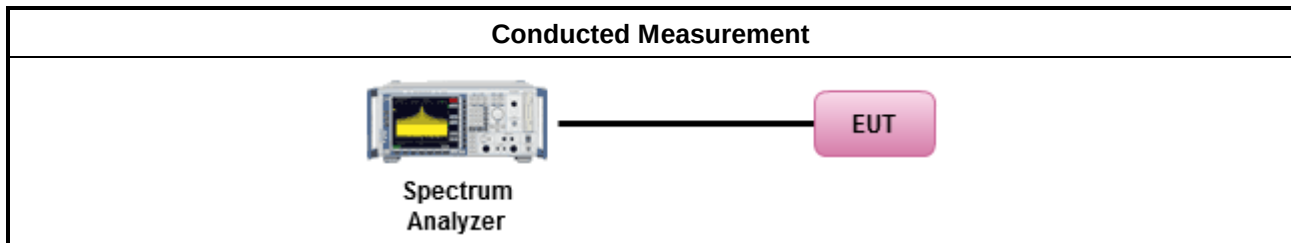

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D



3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
☒ 5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.725 - 5.85 GHz	all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of



linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).


3.5.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging).
	☒ Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.
☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.	
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	

3.5.4 Test Setup

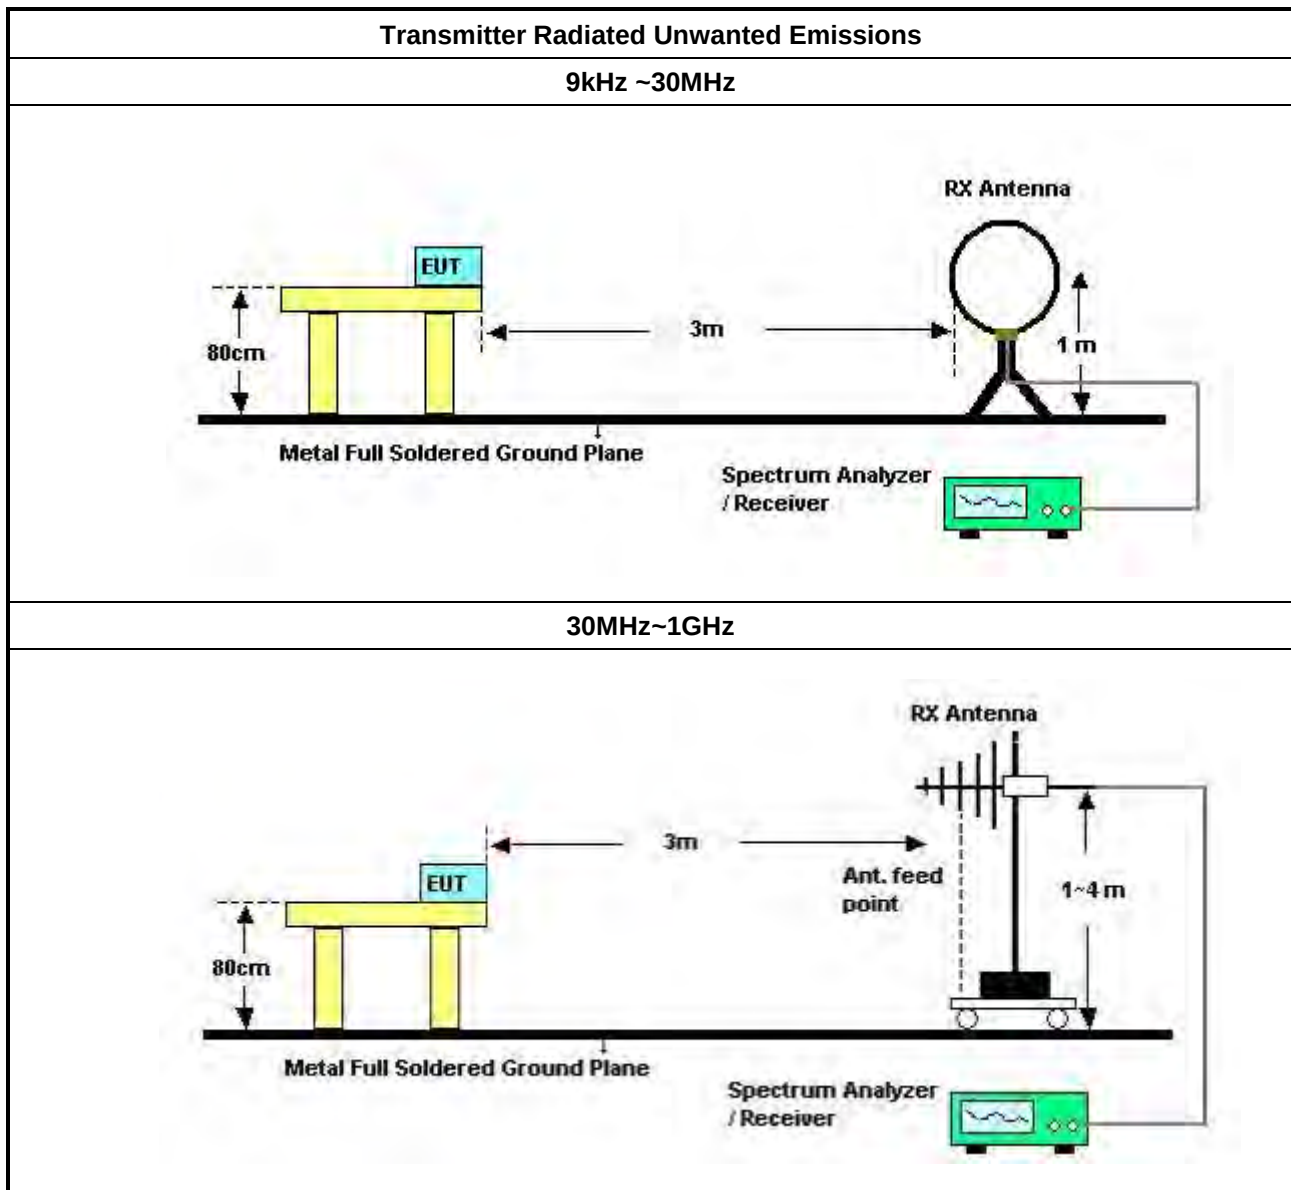

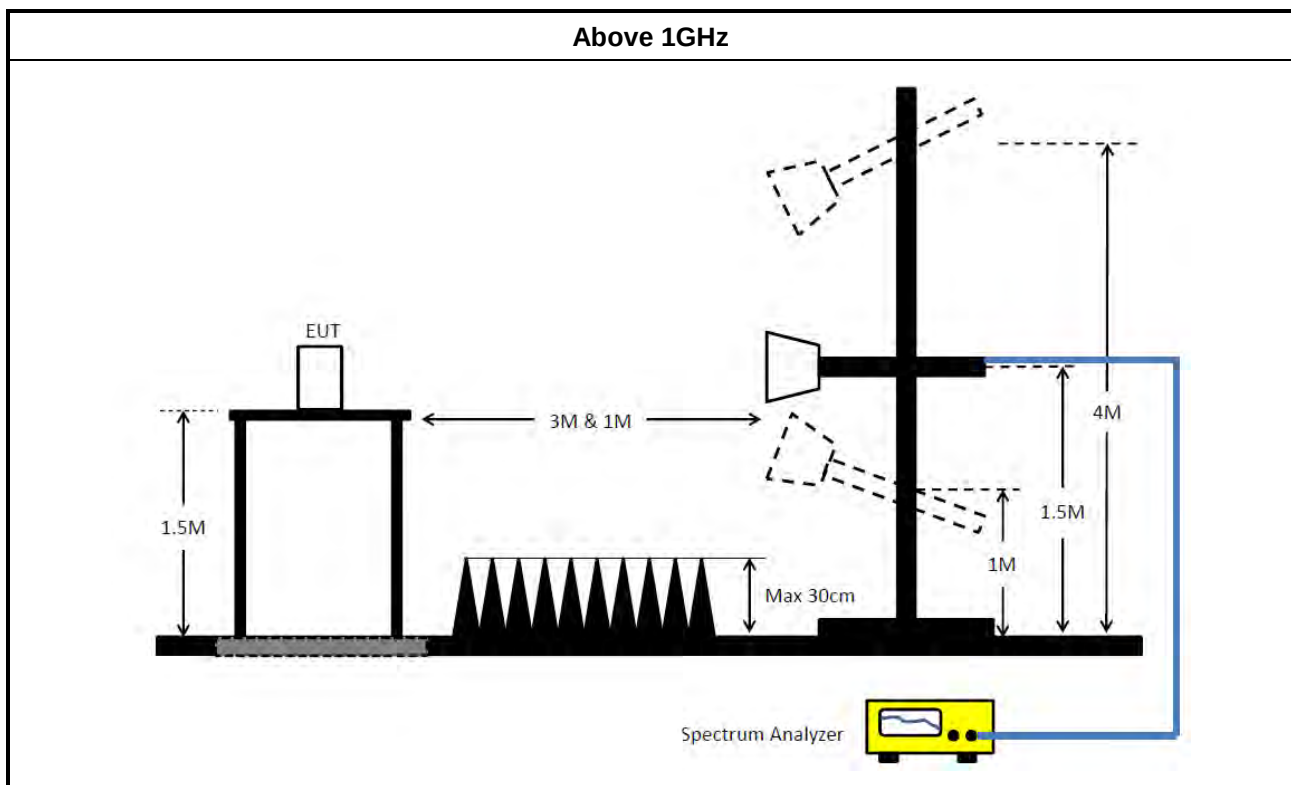

3.5.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Apr. 29, 2025	Apr. 28, 2026	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Feb. 06, 2025	Feb. 05, 2026	Conduction (CO02-CB)
EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 8.4GHz	May 14, 2025	May 13, 2026	Conduction (CO02-CB)
COND Cable	Woken	Cable	CO02	0.15MHz ~ 30MHz	Sep.14, 2025	Sep.13, 2026	Conduction (CO02-CB)
Pulse Limiter	Schwarzbeck	VTSD 9561F-N	00378	9kHz ~ 30MHz	Sep.14, 2025	Sep.13, 2026	Conduction (CO02-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Conduction (CO02-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30MHz	Oct. 20, 2025	Oct. 19, 2026	Radiation (10CH01-CB)
10m Semi Anechoic Chamber NSA	TDK	SAC-10M	10CH01-CB	30MHz~1GHz 10m,3m	Jan. 15, 2025	Jan. 14, 2026	Radiation (10CH01-CB)
Amplifier	Agilent	8447D	2944A10783	9kHz ~ 1.3GHz	Mar. 08, 2025	Mar. 07, 2026	Radiation (10CH01-CB)
Amplifier	Agilent	8447D	2944A10784	9kHz ~ 1.3GHz	Mar. 08, 2025	Mar. 07, 2026	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-01	25MHz ~ 1GHz	Oct. 14, 2025	Oct. 13, 2026	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-02	25MHz ~ 1GHz	Oct. 14, 2025	Oct. 13, 2026	Radiation (10CH01-CB)
EMI Test Receiver	Rohde&Schwarz	ESCI	100186	9kHz ~ 3GHz	Sep. 17, 2025	Sep. 16, 2026	Radiation (10CH01-CB)
Spectrum Analyzer	Rohde&Schwarz	FSV30	101026	9kHz ~ 30GHz	Apr. 16, 2025	Apr. 15, 2026	Radiation (10CH01-CB)
Bilog Ant & 6dB Attenuator	SCHWARZBECK & EMCi	VULB 9168 & N-6-06	1469 & AT-N06021	30MHz ~ 1GHz	Jan. 09, 2025	Jan. 08, 2026	Radiation (10CH01-CB)
Amplifier	EM	EM101	060703	10MHz ~ 1GHz	Oct. 15, 2025	Oct. 14, 2026	Radiation (10CH01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (10CH01-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH04-CB	1GHz ~18GHz 3m	Feb. 21, 2025	Feb. 20, 2026	Radiation (03CH04-CB)
Horn Antenna	ETS-Lindgren	3115	00143147	750MHz~18GHz	Nov. 05, 2025	Nov. 04, 2026	Radiation (03CH04-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA917025 2	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH04-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Pre-Amplifier	SGH	SGH5265	20211115-1	1~ 26.5GHz	Jan. 16, 2025	Jan. 15, 2026	Radiation (03CH04-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 25, 2024	Nov. 24, 2025	Radiation (03CH04-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH04-CB)
Spectrum Analyzer	R&S	FSP40	100142	9kHz~40GHz	Mar. 24, 2025	Mar. 23, 2026	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21	1GHz - 18GHz	Apr. 25, 2025	Apr. 24, 2026	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21+67	1GHz - 18GHz	Apr. 25, 2025	Apr. 24, 2026	Radiation (03CH04-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH04-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH04-CB)
Spectrum analyzer	R&S	FSV40	101028	9kHz~40GHz	Jan. 02, 2025	Jan. 01, 2026	Conducted (TH03-CB)
Power Sensor	Anritsu	MA2411B	1726195	300MHz~40GHz	Sep. 12, 2025	Sep. 11, 2026	Conducted (TH03-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 12, 2025	Sep. 11, 2026	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-11	30MHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-12	30MHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-13	30MHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-14	1 GHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Conducted (TH03-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




Conducted Emissions at Powerline

Appendix A

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	460.5k	49.71	56.69	-6.98	Line

Mode 1

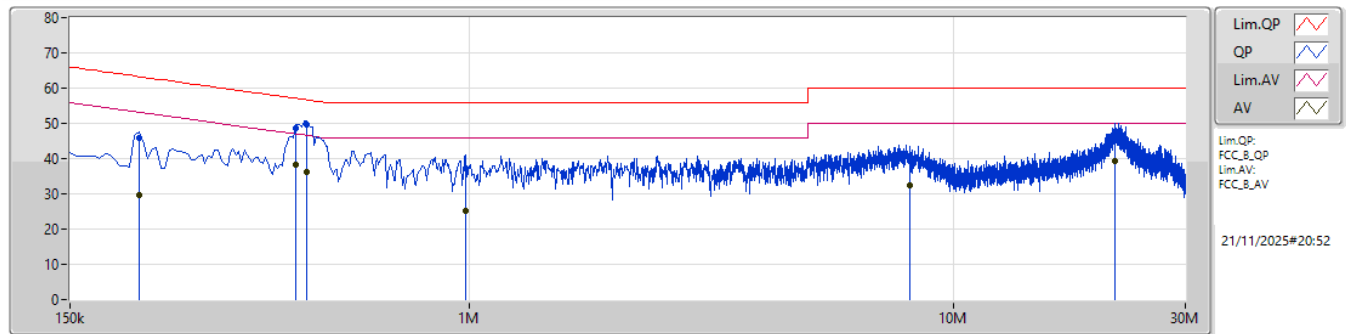

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	208.5k	45.73	63.27	-17.54	10.25	Line	-	35.48	0.06	0.21	9.98						
AV	208.5k	29.62	53.27	-23.65	10.25	Line	-	19.37	0.06	0.21	9.98						
QP	438k	48.68	57.11	-8.43	10.43	Line	-	38.25	0.06	0.28	10.09						
AV	438k	38.33	47.11	-8.78	10.43	Line	-	27.90	0.06	0.28	10.09						
QP	460.5k	49.71	56.69	-6.98	10.43	Line	"Worst"	39.28	0.06	0.27	10.10						
AV	460.5k	36.30	46.69	-10.39	10.43	Line	-	25.87	0.06	0.27	10.10						
QP	982.5k	37.17	56.00	-18.83	10.44	Line	-	26.73	0.07	0.24	10.13						
AV	982.5k	25.08	46.00	-20.92	10.44	Line	-	14.64	0.07	0.24	10.13						
QP	8.115M	40.53	60.00	-19.47	10.77	Line	-	29.76	0.20	0.34	10.23						
AV	8.115M	32.53	50.00	-17.47	10.77	Line	-	21.76	0.20	0.34	10.23						
QP	21.521M	46.20	60.00	-13.80	11.27	Line	-	34.93	0.41	0.35	10.51						
AV	21.521M	39.27	50.00	-10.73	11.27	Line	-	28.00	0.41	0.35	10.51						

Mode 1



Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	154.5k	49.68	65.75	-16.07	10.41	Neutral	-	39.27	0.07	0.26	10.08						
AV	154.5k	28.97	55.75	-26.78	10.41	Neutral	-	18.56	0.07	0.26	10.08						
QP	424.5k	43.74	57.36	-13.62	10.44	Neutral	-	33.30	0.07	0.28	10.09						
AV	424.5k	30.53	47.36	-16.83	10.44	Neutral	-	20.09	0.07	0.28	10.09						
QP	469.5k	49.37	56.52	-7.15	10.44	Neutral	"Worst"	38.93	0.07	0.27	10.10						
AV	469.5k	36.94	46.52	-9.58	10.44	Neutral	-	26.50	0.07	0.27	10.10						
QP	496.5k	44.61	56.06	-11.45	10.44	Neutral	-	34.17	0.07	0.27	10.10						
AV	496.5k	33.64	46.06	-12.42	10.44	Neutral	-	23.20	0.07	0.27	10.10						
QP	7.49M	40.29	60.00	-19.71	10.72	Neutral	-	29.57	0.18	0.33	10.21						
AV	7.49M	32.23	50.00	-17.77	10.72	Neutral	-	21.51	0.18	0.33	10.21						
QP	22.173M	45.66	60.00	-14.34	11.14	Neutral	-	34.52	0.28	0.36	10.50						
AV	22.173M	38.26	50.00	-11.74	11.14	Neutral	-	27.12	0.28	0.36	10.50						

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	21.56M	16.633M	16M6D1D	20.24M	16.573M
802.11be EHT20_Nss1,(MCS0)_2TX	23.815M	19.06M	19M1D1D	21.23M	18.992M
802.11be EHT40_Nss1,(MCS0)_2TX	43.56M	38.061M	38M1D1D	41.8M	37.924M
802.11be EHT80_Nss1,(MCS0)_2TX	86.9M	77.642M	77M6D1D	86.24M	77.594M
802.11be EHT160_Nss1,(MCS0)_2TX	137.12M	77.771M	77M8D1D	124.72M	77.694M
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	20.625M	16.602M	16M6D1D	19.8M	16.566M
802.11be EHT20_Nss1,(MCS0)_2TX	22M	19.08M	19M1D1D	21.23M	19.003M
802.11be EHT40_Nss1,(MCS0)_2TX	42.79M	38.032M	38M0D1D	41.69M	37.924M
802.11be EHT80_Nss1,(MCS0)_2TX	89.1M	77.633M	77M6D1D	84.48M	77.542M
802.11be EHT160_Nss1,(MCS0)_2TX	85.92M	77.72M	77M7D1D	84.08M	77.689M
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	20.735M	16.613M	16M6D1D	15.015M	13.275M
802.11be EHT20_Nss1,(MCS0)_2TX	21.835M	19.053M	19M1D1D	15.96M	14.453M
802.11be EHT40_Nss1,(MCS0)_2TX	43.34M	38.03M	38M0D1D	36.295M	33.829M
802.11be EHT80_Nss1,(MCS0)_2TX	87.56M	77.716M	77M7D1D	78.375M	73.406M
802.11be EHT160_Nss1,(MCS0)_2TX	213.4M	156.815M	157MD1D	170.72M	156.764M
EHT240_240MHz_Nss1,(MCS0)_2TX	246.28M	232.122M	232MD1D	241.11M	231.659M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	16.555M	34.657M	34M7D1D	3.16M	3.621M
802.11be EHT20_Nss1,(MCS0)_2TX	19.195M	34.931M	34M9D1D	4.54M	4.558M
802.11be EHT40_Nss1,(MCS0)_2TX	38.28M	38.392M	38M4D1D	4.06M	4.119M
802.11be EHT80_Nss1,(MCS0)_2TX	77.88M	77.542M	77M5D1D	4.06M	4.335M
EHT240_240MHz_Nss1,(MCS0)_2TX	4.06M	11.377M	11M4D1D	4M	11.056M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth

Result



Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	20.24M	16.577M	20.625M	16.573M
5200MHz	Pass	Inf	21.56M	16.633M	21.23M	16.625M
5240MHz	Pass	Inf	20.955M	16.605M	20.9M	16.589M
5260MHz	Pass	Inf	19.8M	16.584M	20.075M	16.566M
5300MHz	Pass	Inf	20.405M	16.602M	20.46M	16.596M
5320MHz	Pass	Inf	20.625M	16.577M	20.625M	16.592M
5500MHz	Pass	Inf	20.735M	16.613M	20.13M	16.568M
5580MHz	Pass	Inf	20.02M	16.578M	20.13M	16.57M
5700MHz	Pass	Inf	20.35M	16.591M	20.24M	16.595M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	15.27M	13.312M	15.015M	13.275M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.26M	3.621M	3.16M	3.659M
5745MHz	Pass	500k	16.335M	26.854M	16.555M	22.703M
5785MHz	Pass	500k	16.39M	34.657M	16.5M	32.923M
5825MHz	Pass	500k	16.445M	33.044M	15.07M	31.082M
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	22.055M	18.992M	21.23M	19.001M
5200MHz	Pass	Inf	23.815M	19.06M	21.615M	19.041M
5240MHz	Pass	Inf	21.45M	19.052M	21.45M	19.007M
5260MHz	Pass	Inf	21.23M	19.024M	21.89M	19.02M
5300MHz	Pass	Inf	21.89M	19.003M	22M	19.028M
5320MHz	Pass	Inf	21.56M	19.007M	21.23M	19.08M
5500MHz	Pass	Inf	21.725M	19.049M	21.505M	19.053M
5580MHz	Pass	Inf	21.835M	19.024M	21.56M	19.019M
5700MHz	Pass	Inf	21.505M	19.004M	21.67M	19.023M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	15.96M	14.463M	16.305M	14.453M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	4.54M	4.56M	4.56M	4.558M
5745MHz	Pass	500k	19.195M	29.115M	19.085M	23.964M
5785MHz	Pass	500k	18.755M	34.931M	19.03M	33.087M
5825MHz	Pass	500k	19.085M	31.97M	17.875M	27.12M
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	Inf	42.35M	38.061M	41.8M	37.924M
5230MHz	Pass	Inf	43.12M	37.974M	43.56M	37.955M
5270MHz	Pass	Inf	42.35M	37.924M	41.69M	38.028M
5310MHz	Pass	Inf	42.57M	38.016M	42.79M	38.032M
5510MHz	Pass	Inf	42.24M	38.03M	43.34M	37.923M
5550MHz	Pass	Inf	42.13M	38.01M	42.79M	38.027M
5670MHz	Pass	Inf	41.91M	38.008M	42.46M	38.003M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	36.47M	33.873M	36.295M	33.829M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	4.08M	4.166M	4.06M	4.119M
5755MHz	Pass	500k	38.17M	38.036M	38.17M	37.996M
5795MHz	Pass	500k	38.17M	38.392M	38.28M	38.175M
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	Inf	86.9M	77.594M	86.24M	77.642M
5290MHz	Pass	Inf	89.1M	77.542M	84.48M	77.633M
5530MHz	Pass	Inf	85.58M	77.615M	87.12M	77.655M
5610MHz	Pass	Inf	86.68M	77.713M	87.56M	77.716M
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	79.2M	73.406M	78.375M	73.513M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	4.08M	4.413M	4.06M	4.335M
5775MHz	Pass	500k	77.88M	77.542M	77.66M	77.491M
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	124.72M	77.694M	137.12M	77.771M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	85.92M	77.689M	84.08M	77.72M
5570MHz	Pass	Inf	213.4M	156.764M	170.72M	156.815M
EHT240_240MHz_Nss1,(MCS0)_2TX	-	-	-	-	-	-

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
5610MHz Straddle 5.47-5.725GHz	Pass	Inf	241.11M	232.122M	246.28M	231.659M
5610MHz Straddle 5.725-5.85GHz	Pass	500k	4M	11.377M	4.06M	11.056M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5180MHz

05/12/2025

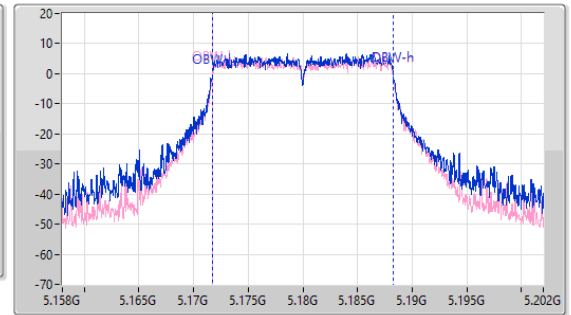
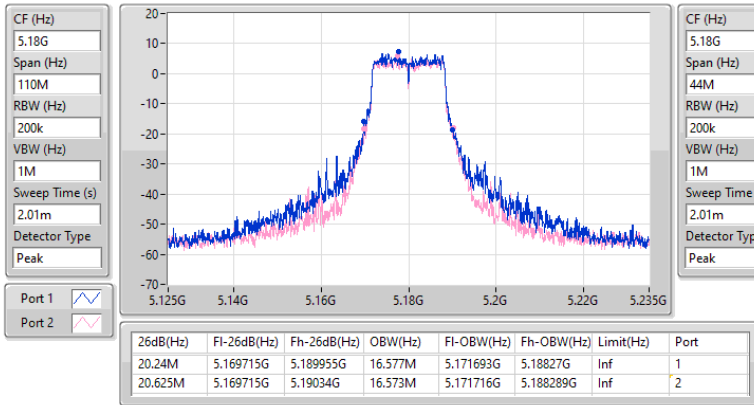

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5200MHz

05/12/2025

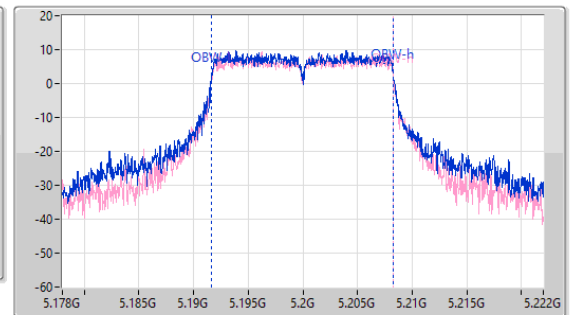
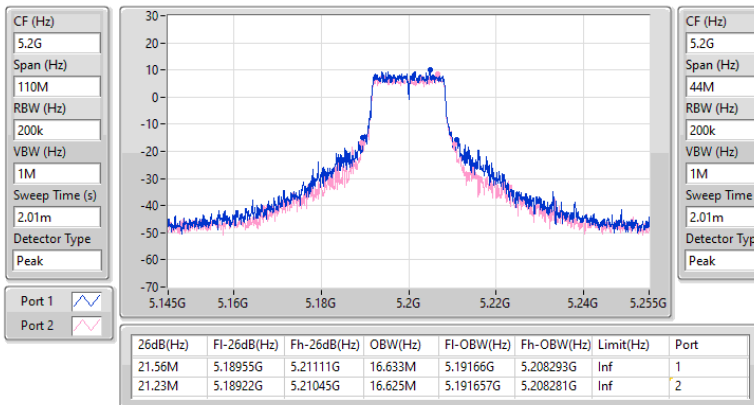


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5240MHz

05/12/2025

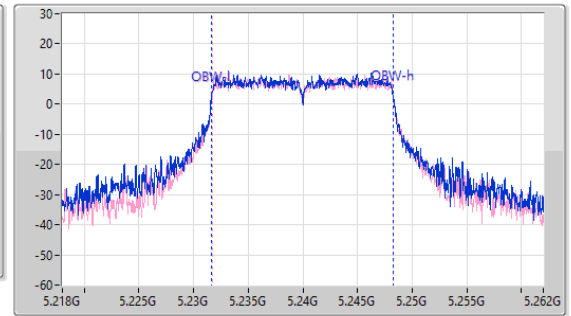
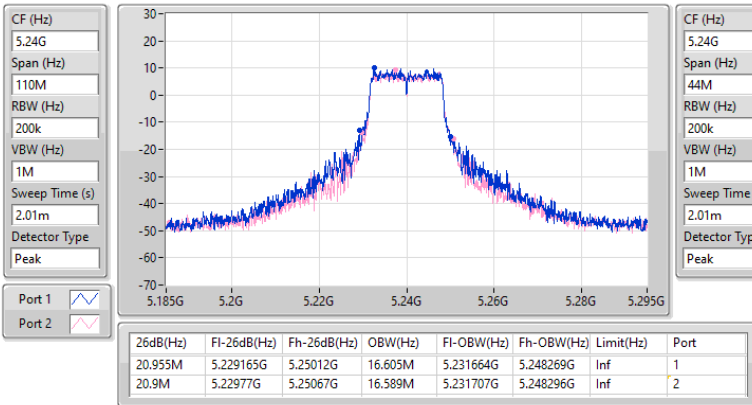

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5260MHz

26/11/2025

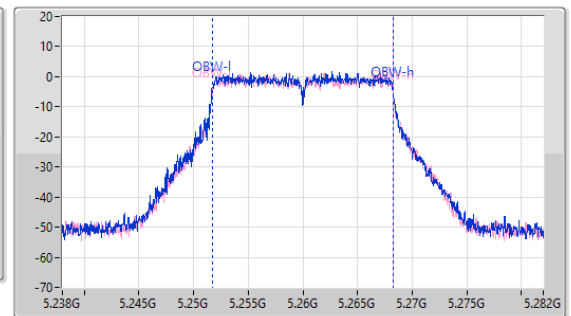
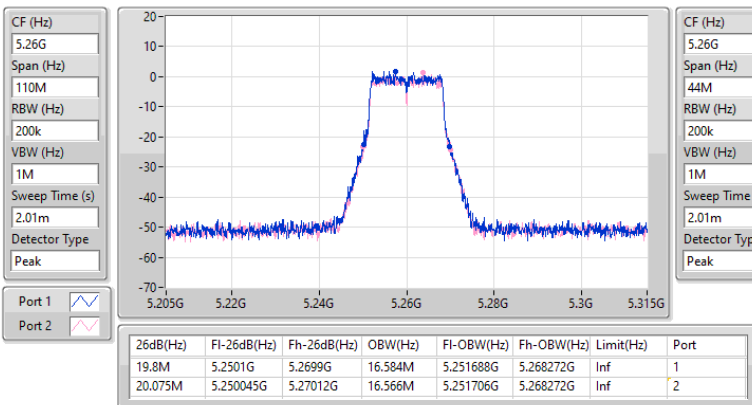


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5300MHz

26/11/2025

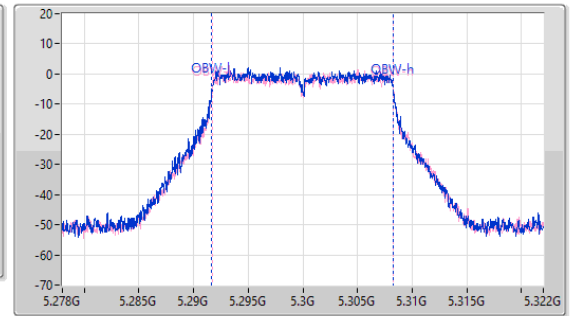
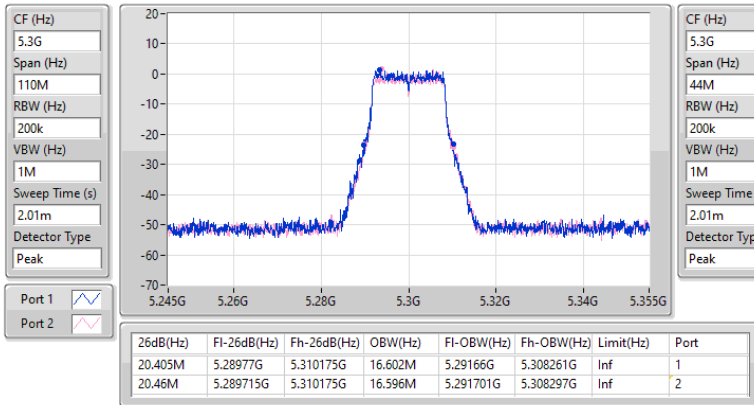

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5320MHz

26/11/2025

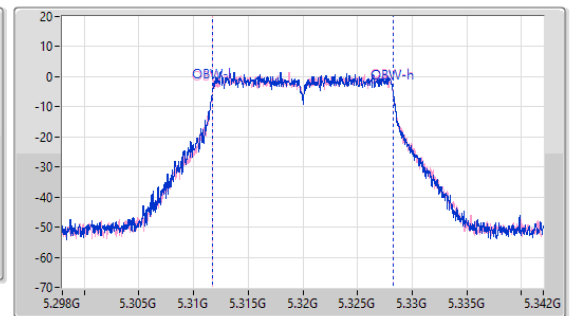
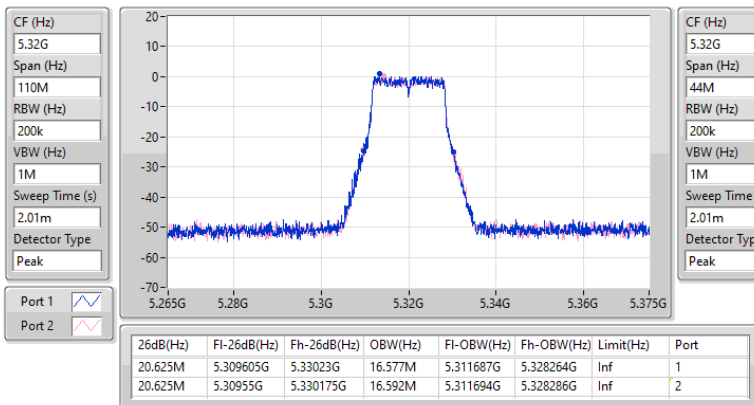


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5500MHz

26/11/2025

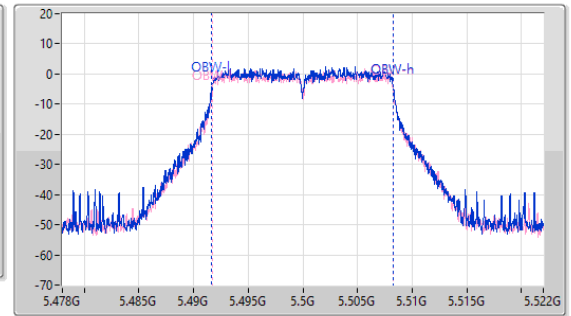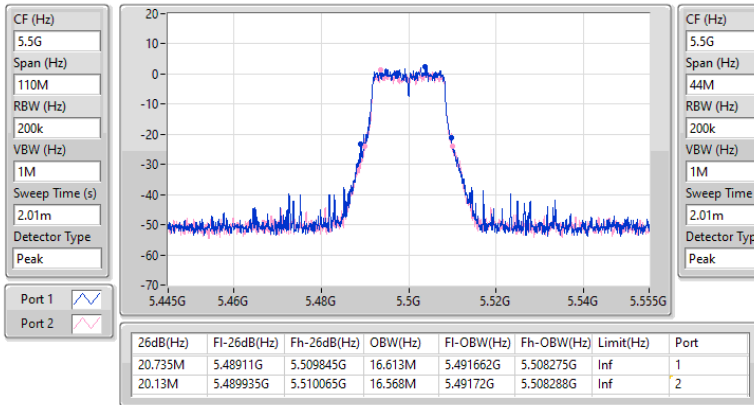

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5580MHz

26/11/2025

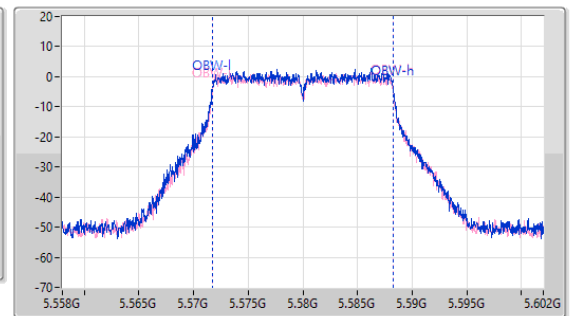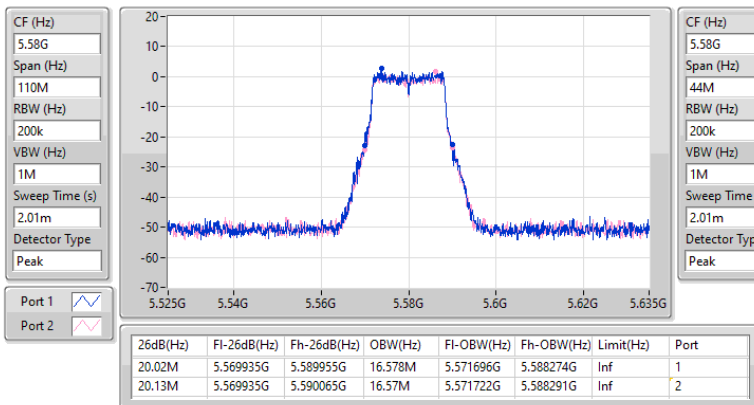


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5700MHz

26/11/2025

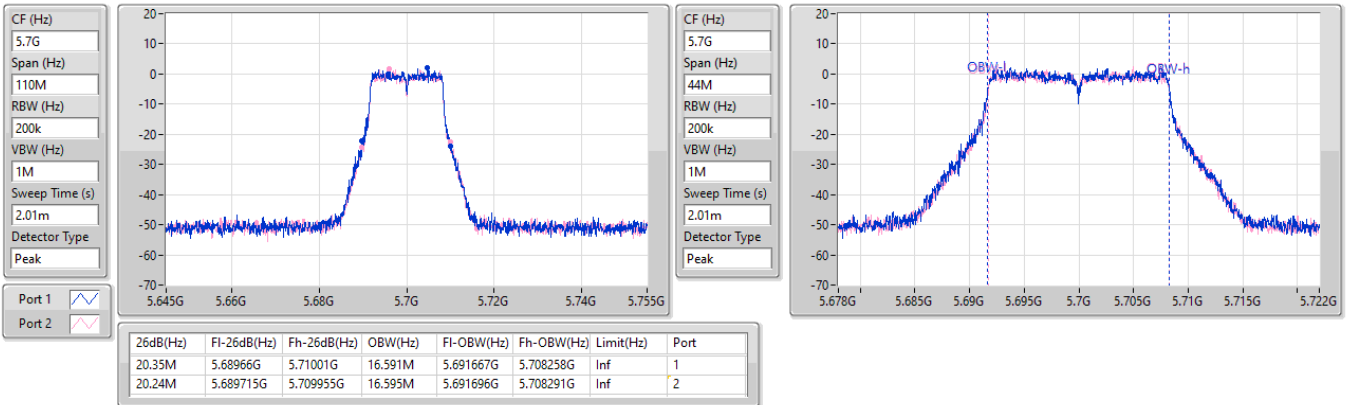
5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5720MHz Straddle 5.47-5.725GHz

26/11/2025

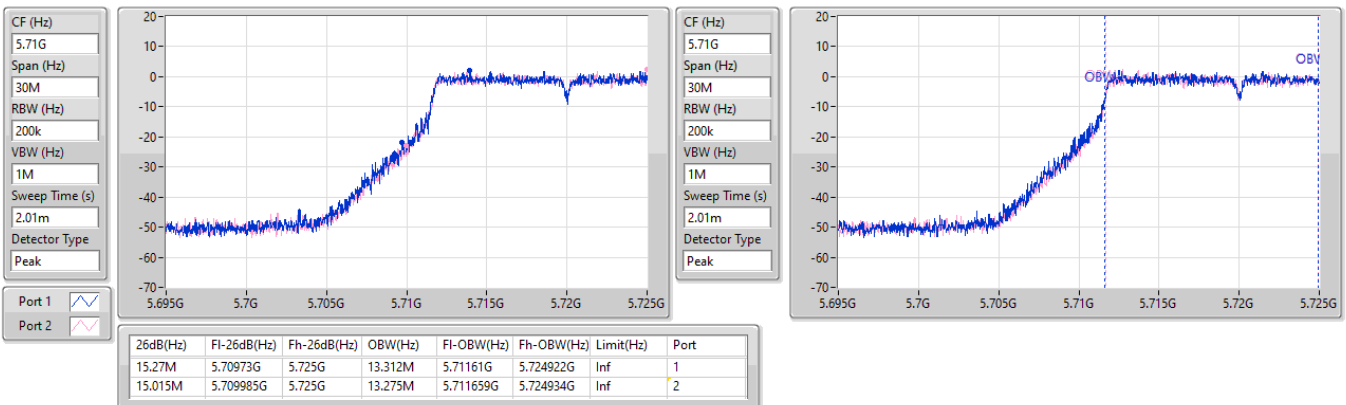


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5720MHz Straddle 5.725-5.85GHz

26/11/2025

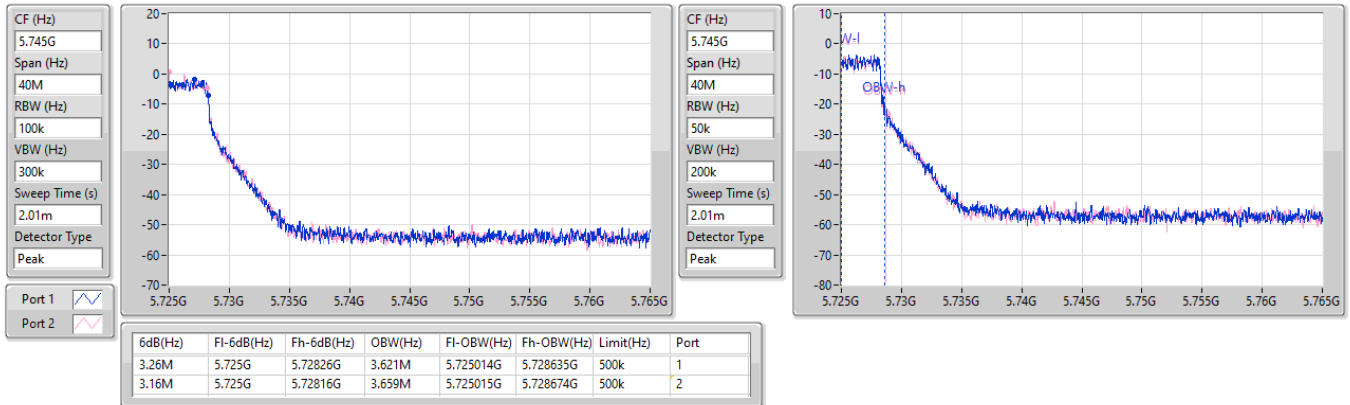


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5720MHz Straddle 5.725-5.85GHz

26/11/2025

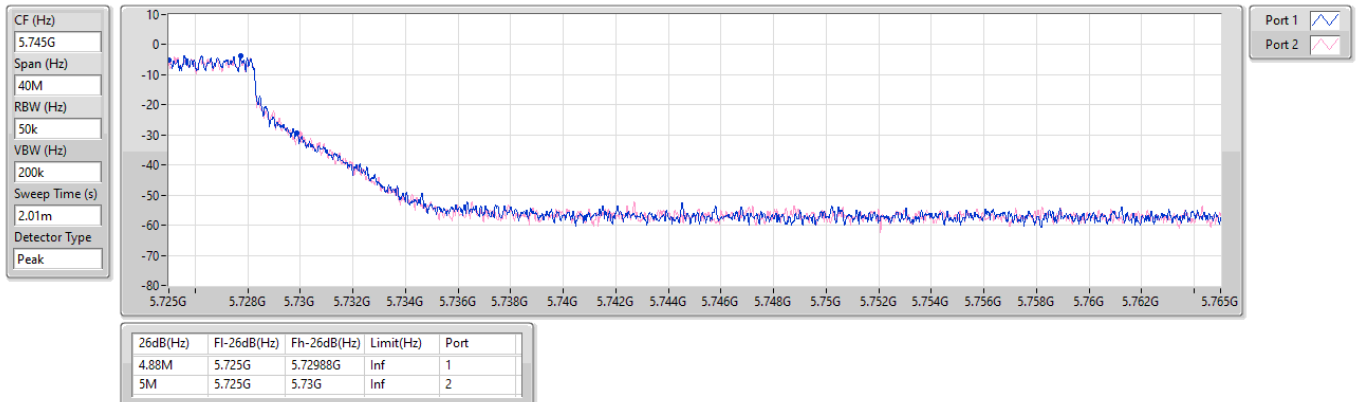


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5745MHz

26/11/2025

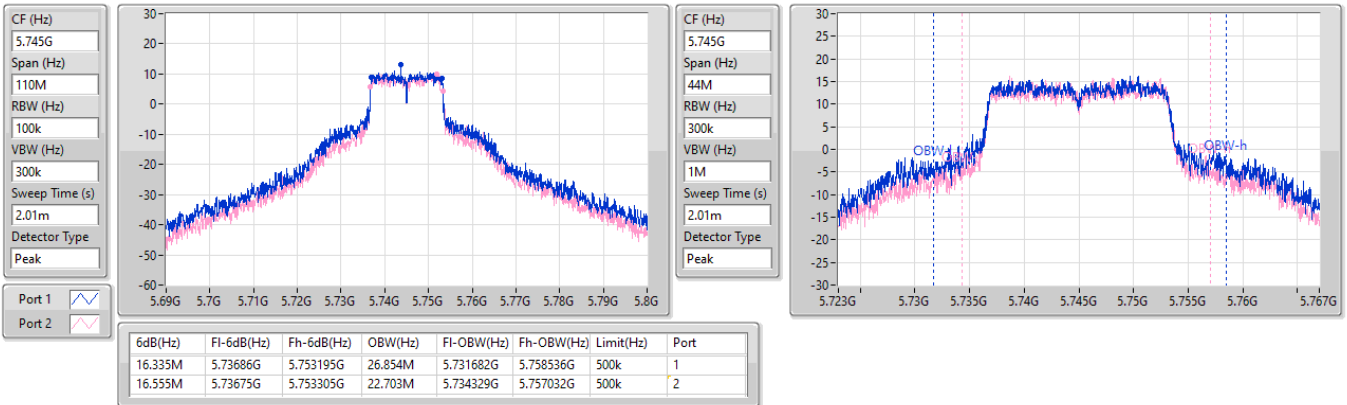


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

EBW


5745MHz

26/11/2025

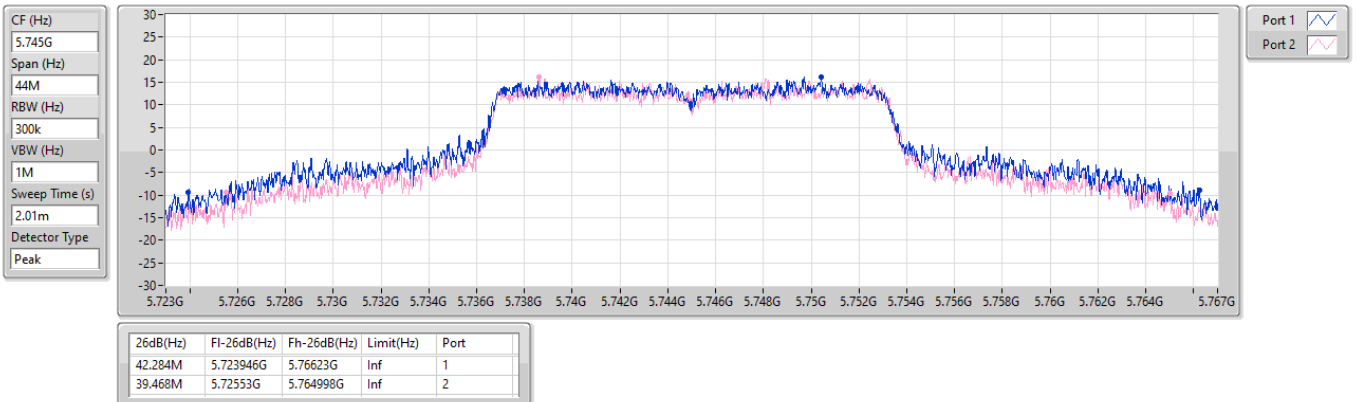


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5785MHz

26/11/2025

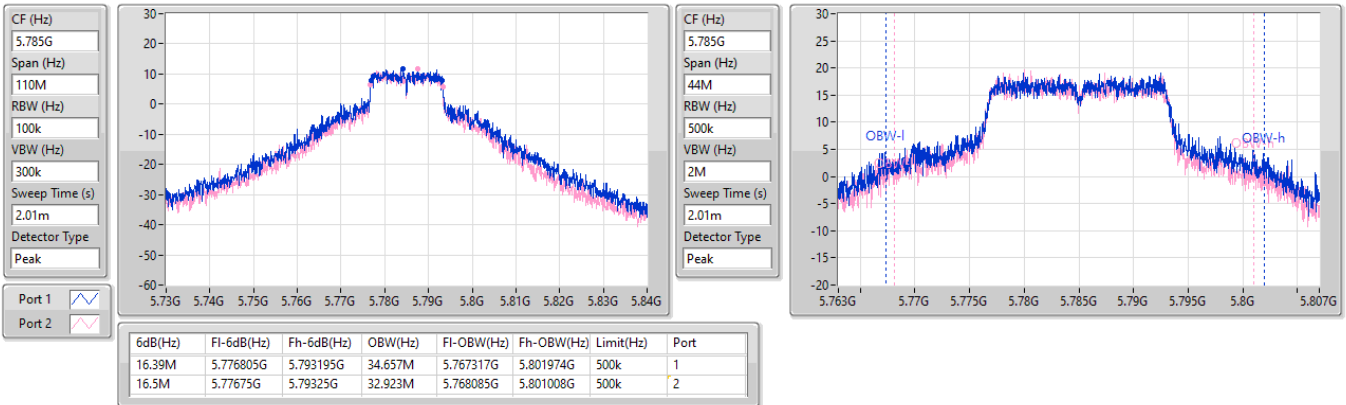

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5785MHz

26/11/2025

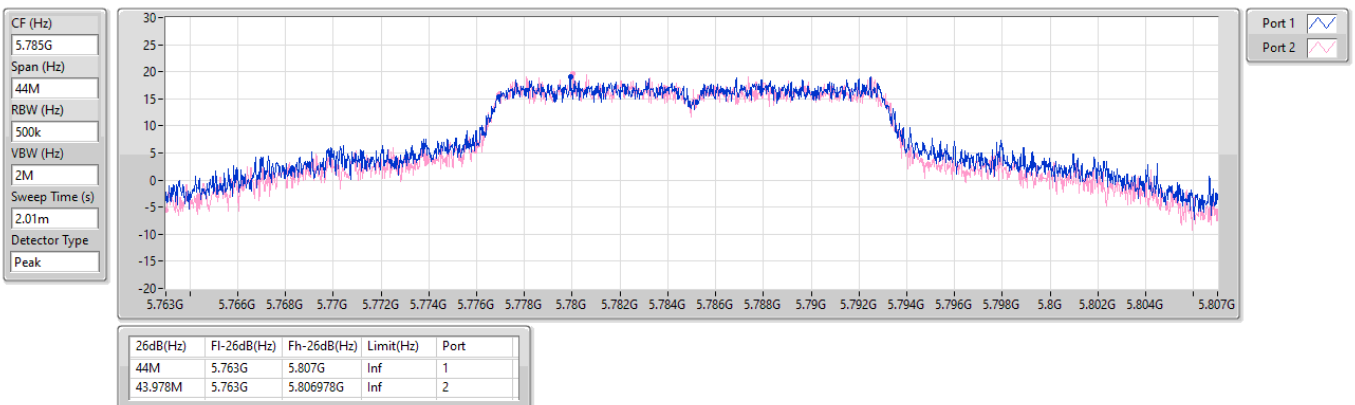


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5825MHz

26/11/2025


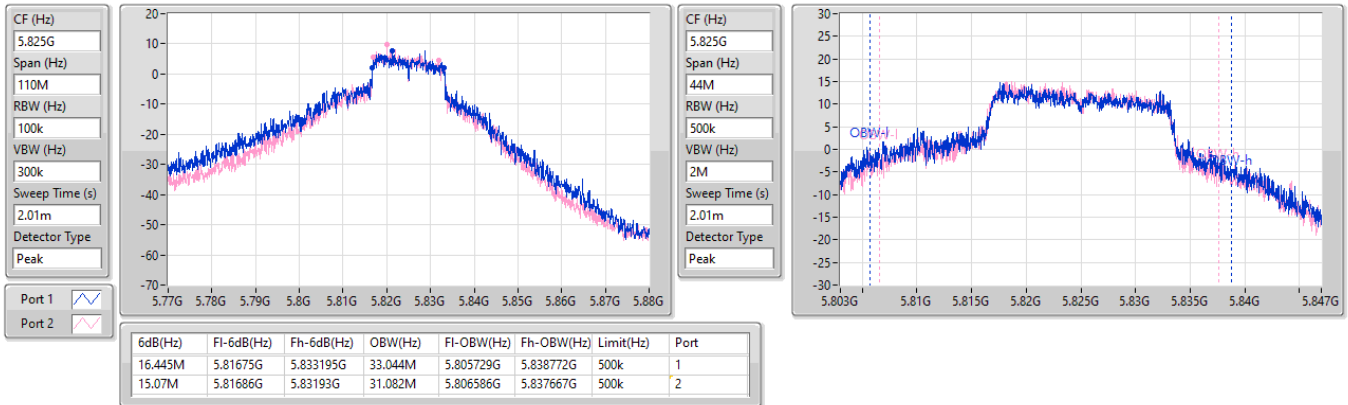

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5825MHz

26/11/2025


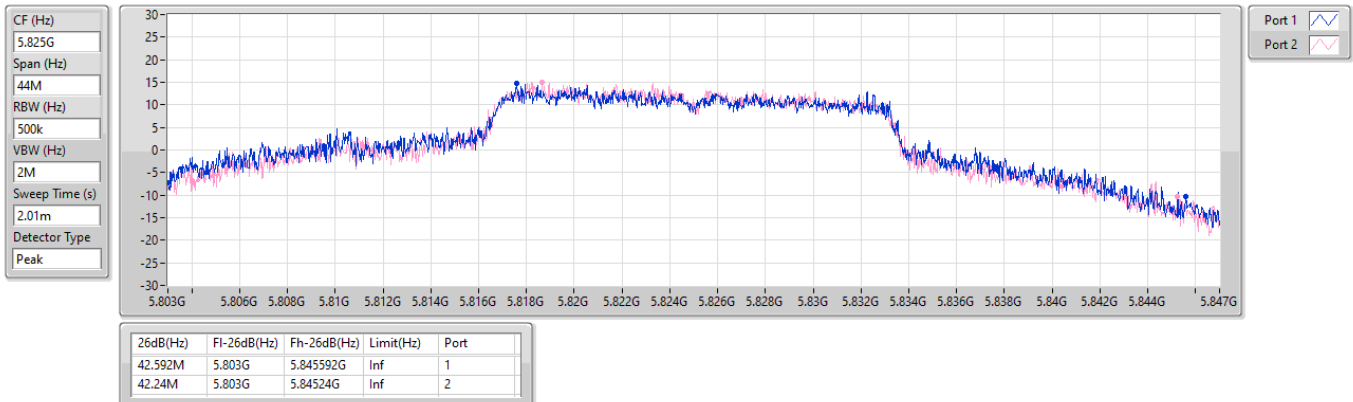


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5180MHz

05/12/2025

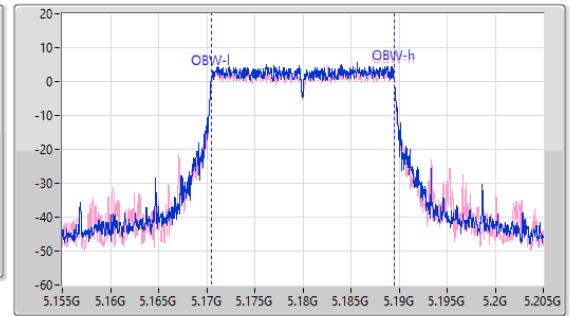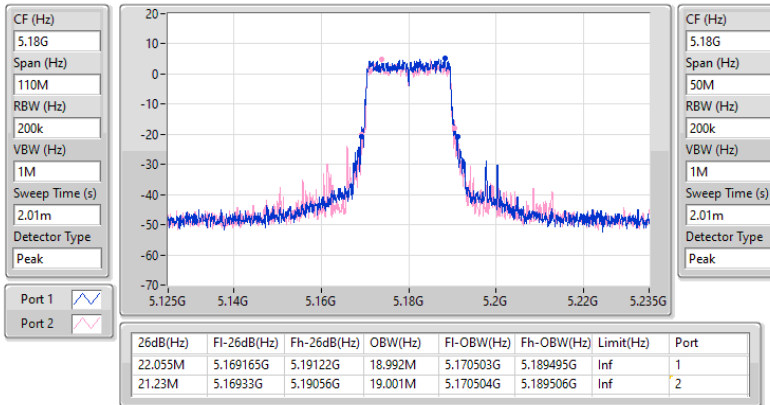

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5200MHz

05/12/2025

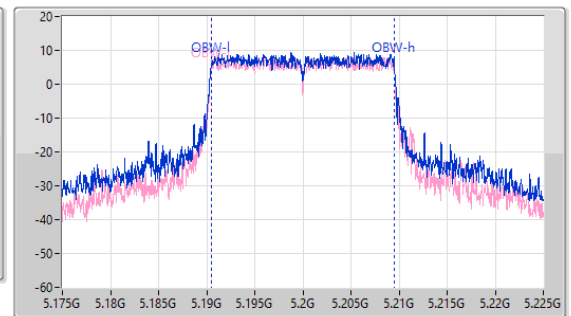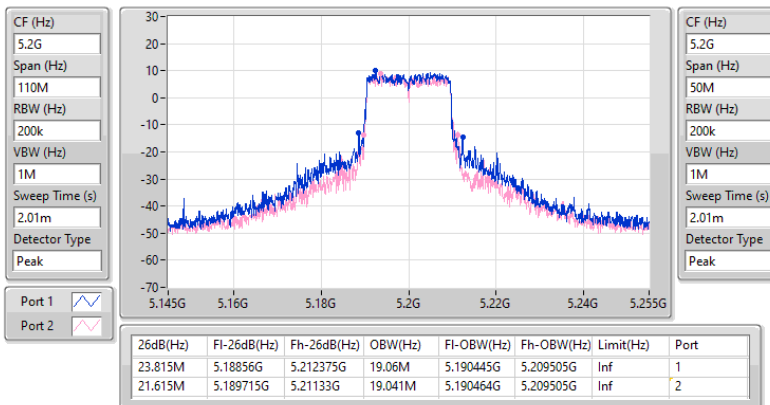


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5240MHz

05/12/2025

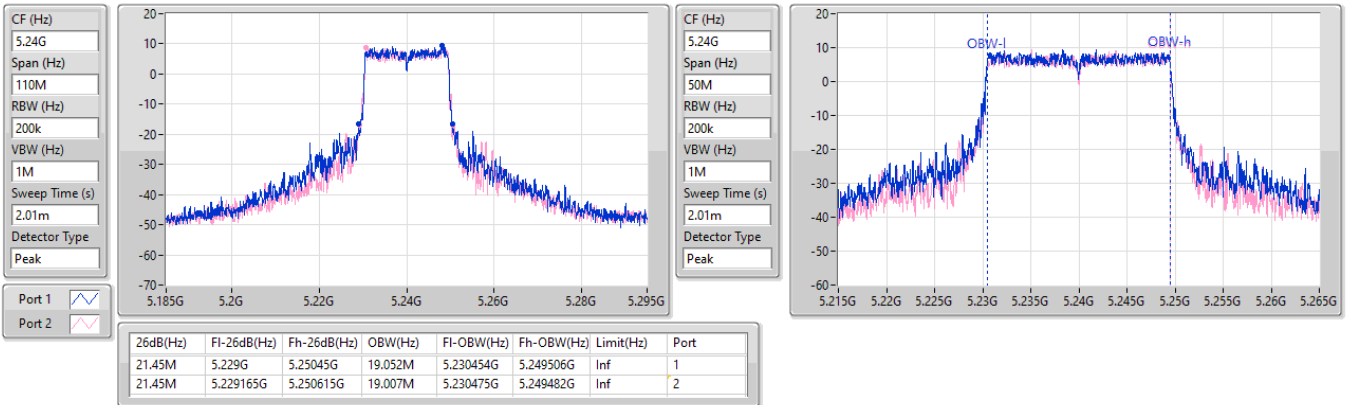

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5260MHz

26/11/2025

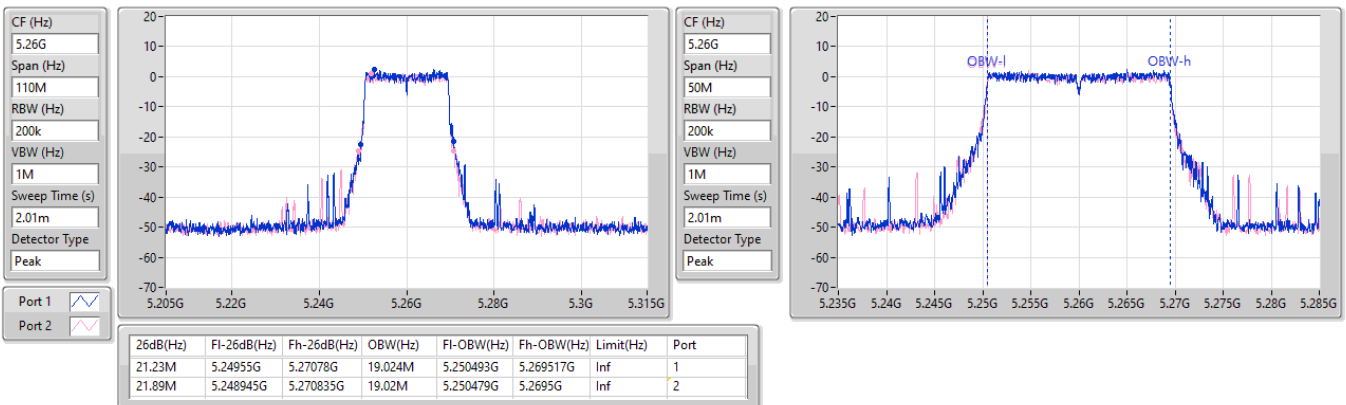


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5300MHz

26/11/2025

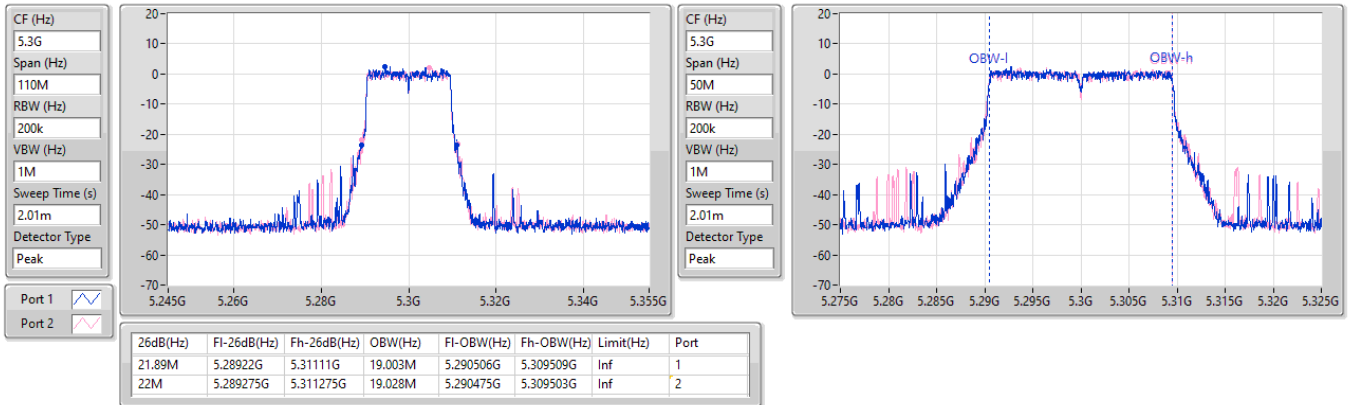
5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5320MHz

26/11/2025

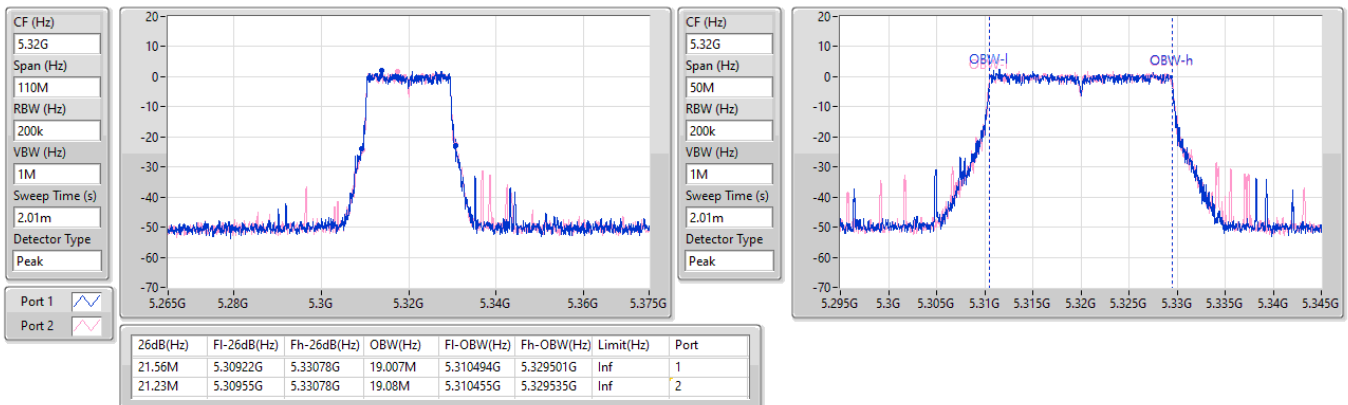


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5500MHz

26/11/2025

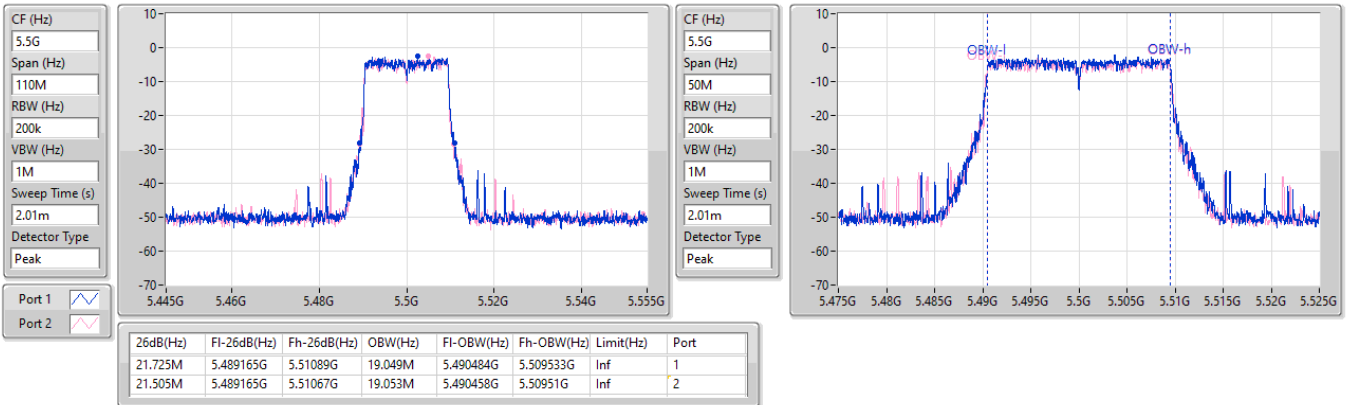


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW


5580MHz

26/11/2025

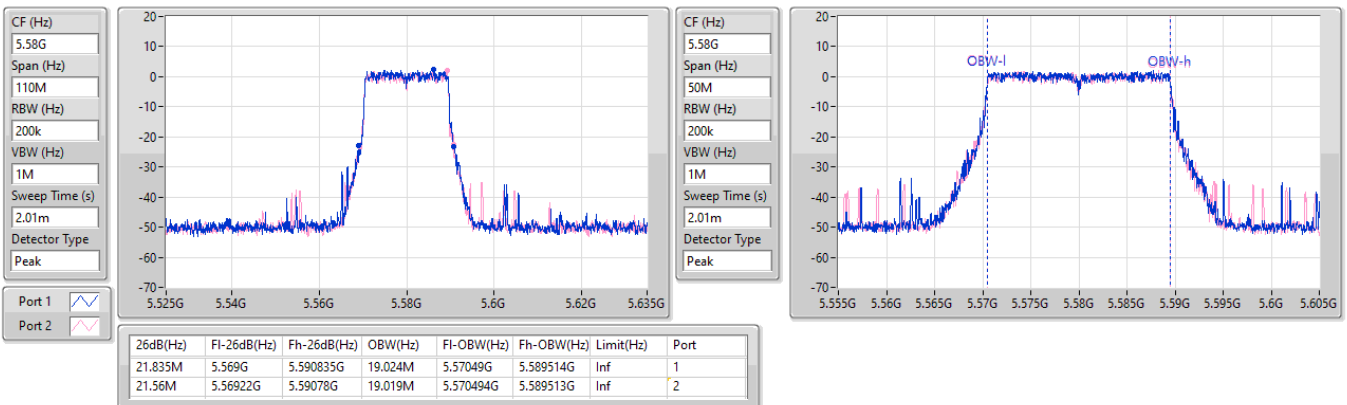


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5700MHz

26/11/2025

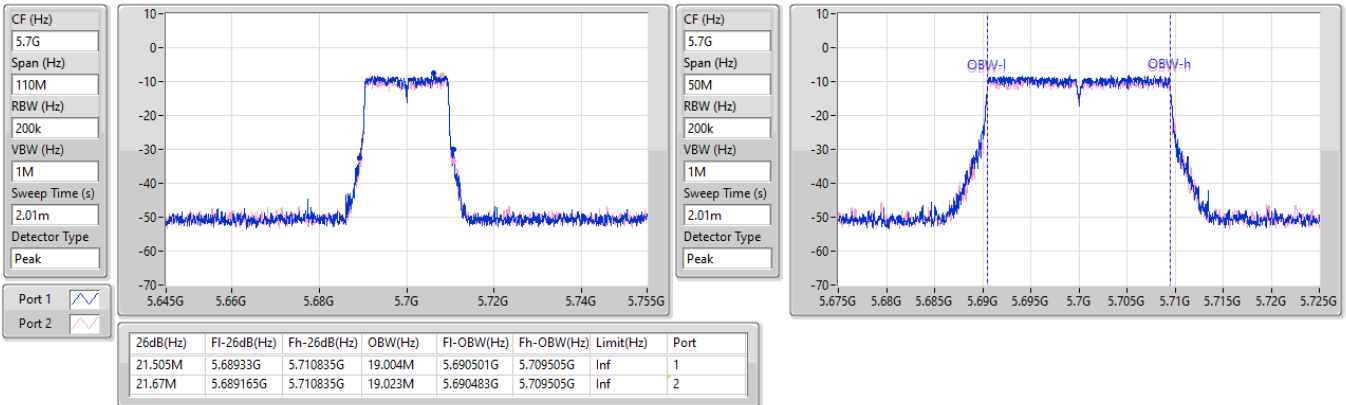
5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5720MHz Straddle 5.47-5.725GHz

26/11/2025

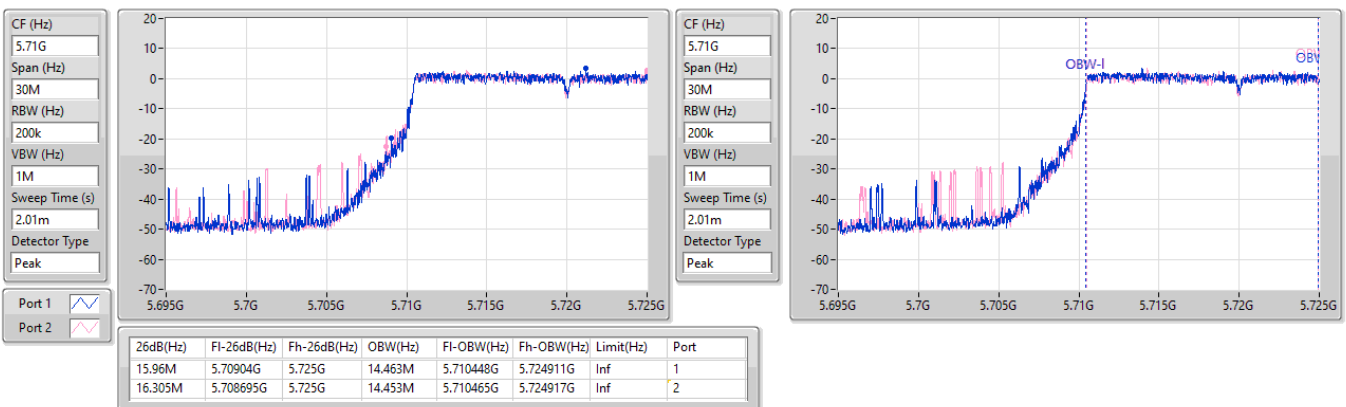


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5720MHz Straddle 5.725-5.85GHz

26/11/2025

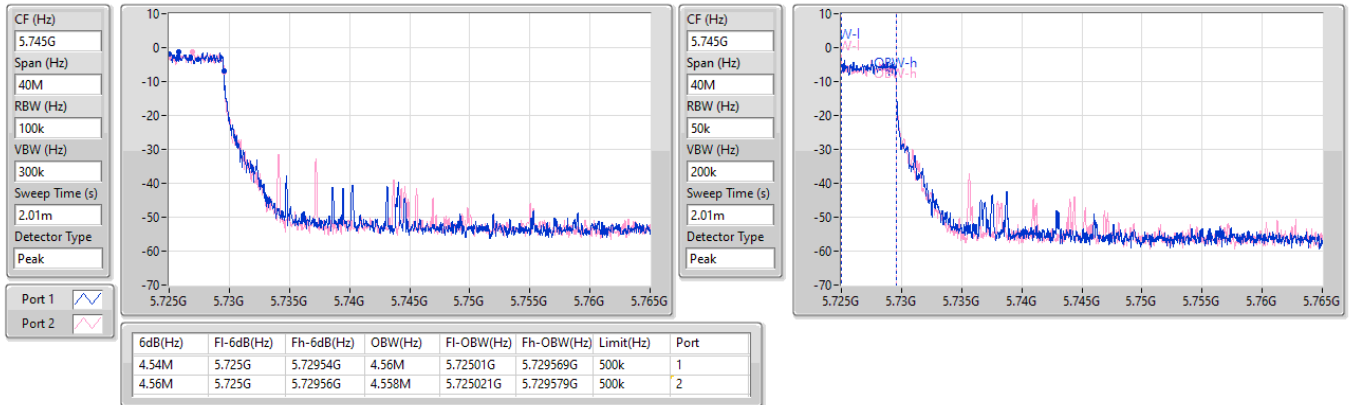


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW


5720MHz Straddle 5.725-5.85GHz

26/11/2025

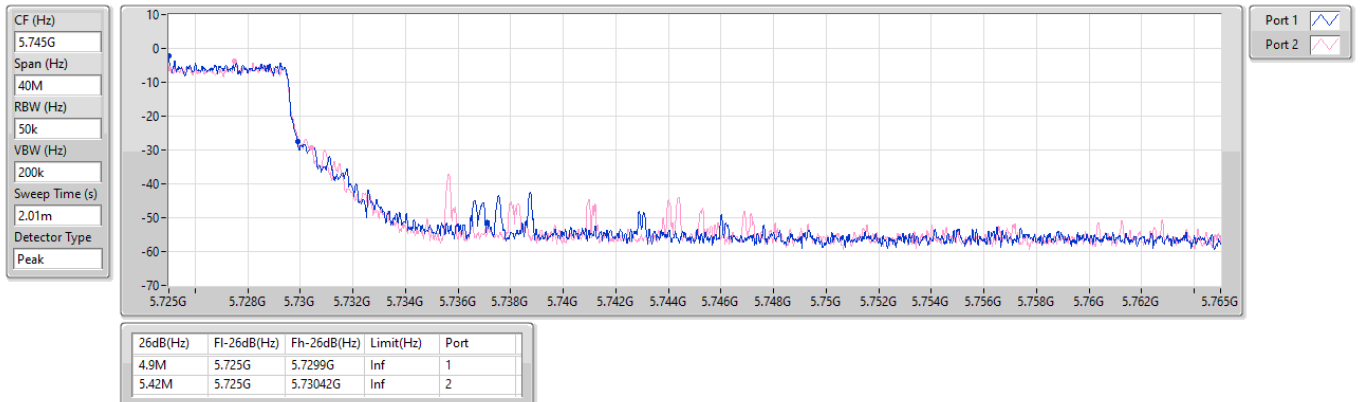


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5745MHz

26/11/2025

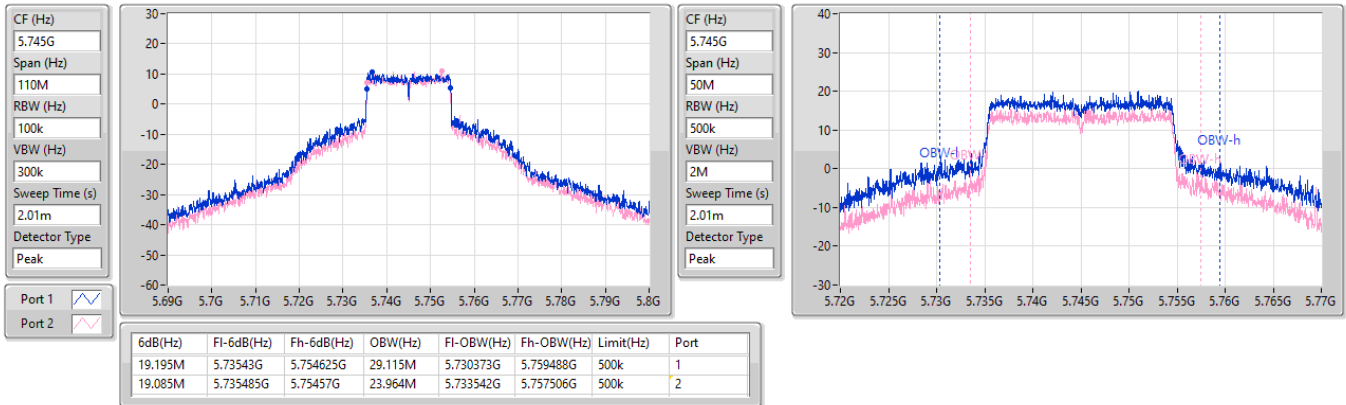

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5745MHz

26/11/2025

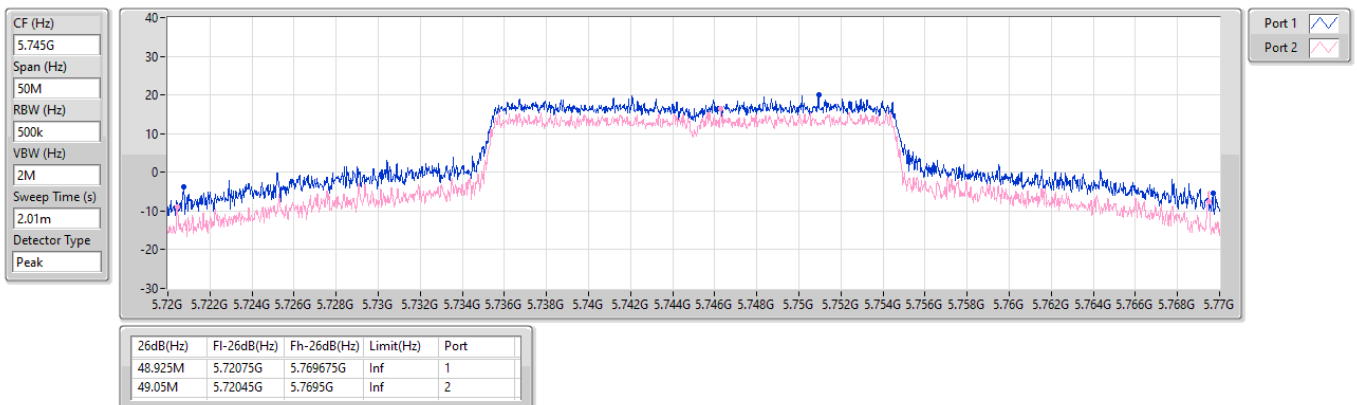


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5785MHz

26/11/2025

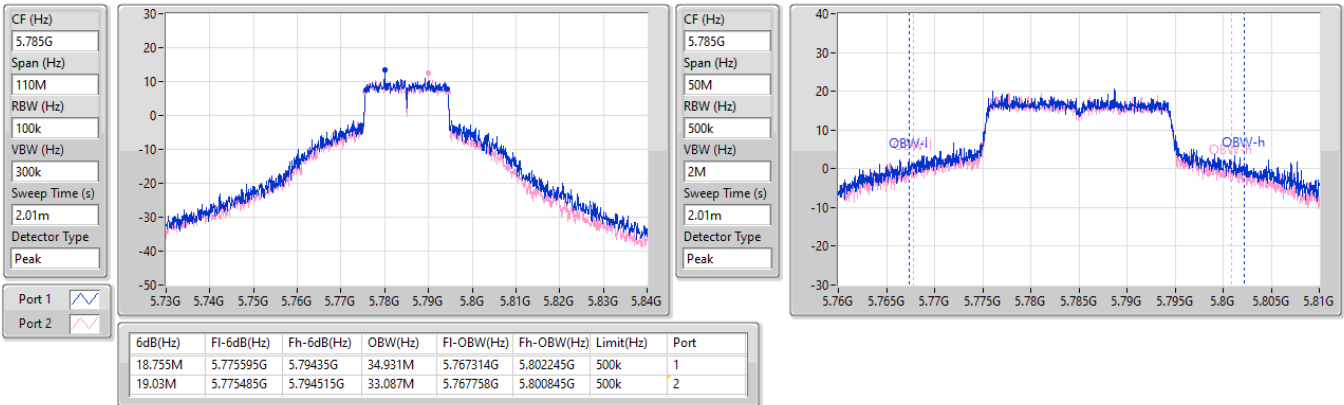
5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5785MHz

26/11/2025

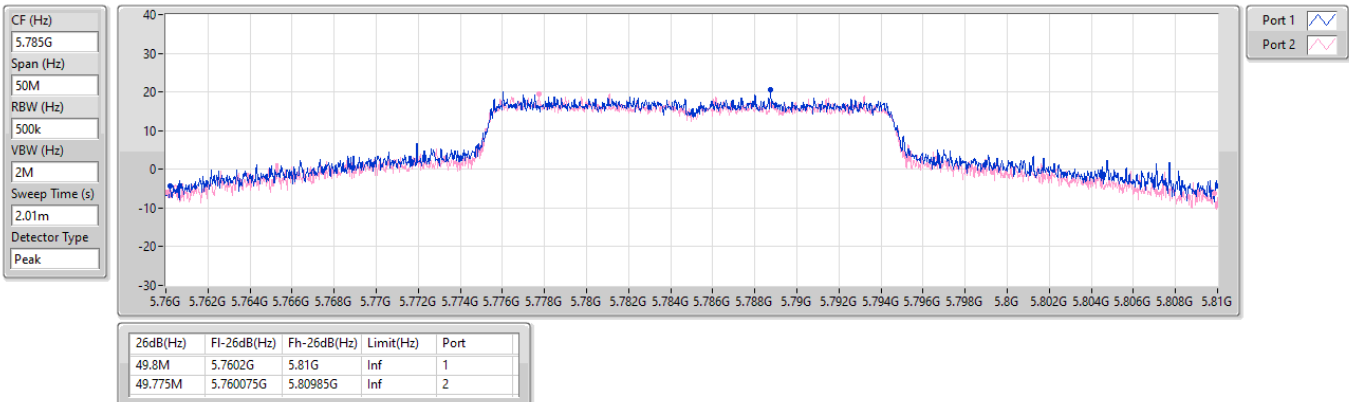


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5825MHz

26/11/2025

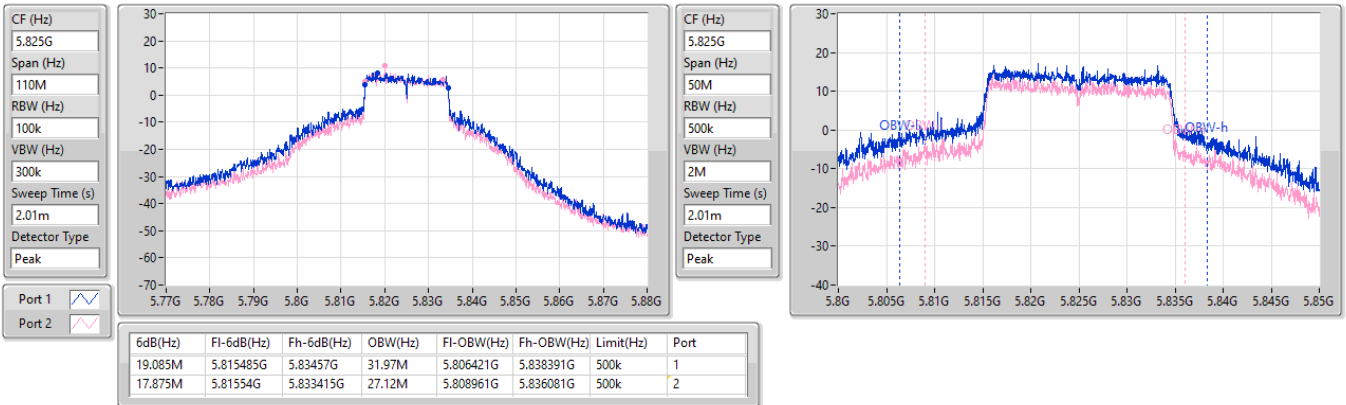


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5825MHz

26/11/2025

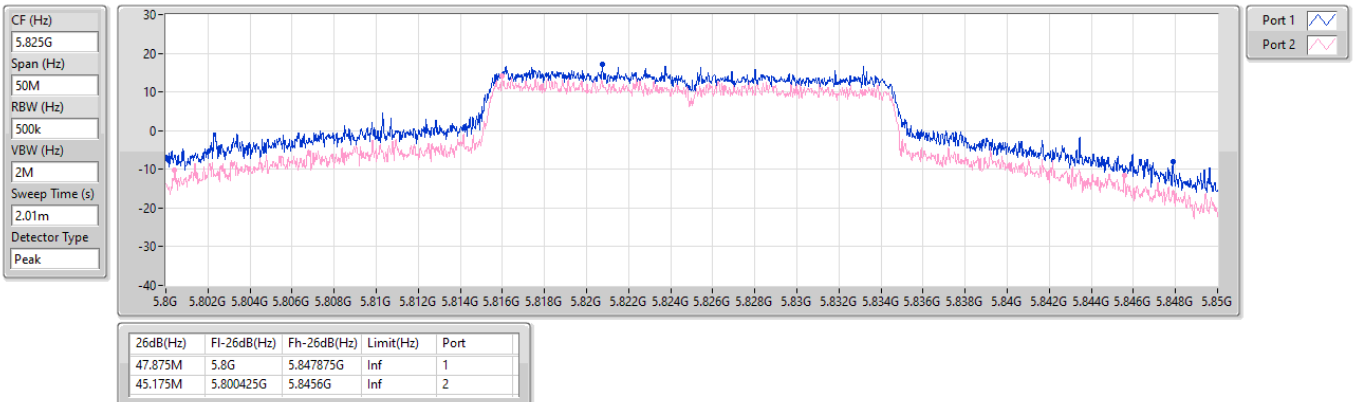


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX


EBW

5190MHz

26/11/2025

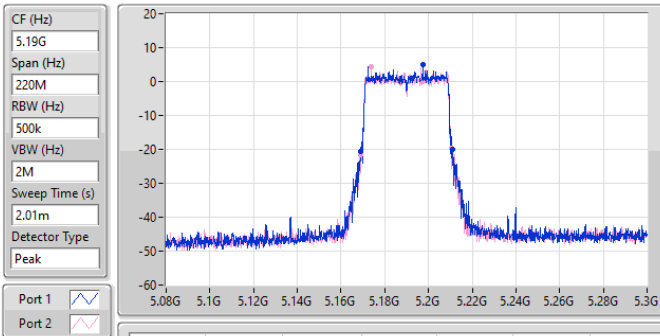

26dB(Hz)	FI-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	FI-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
42.35M	5.16888G	5.21123G	38.061M	5.170991G	5.209052G	Inf	1
41.8M	5.16877G	5.21057G	37.924M	5.17109G	5.209013G	Inf	2

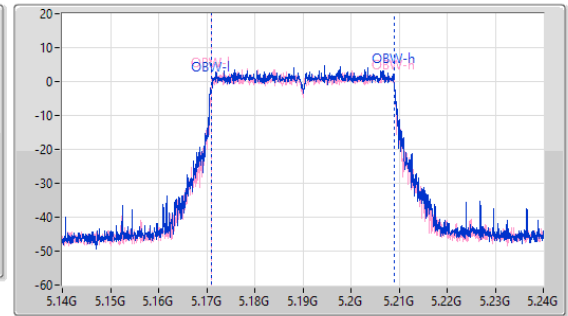


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX


EBW

5230MHz

05/12/2025

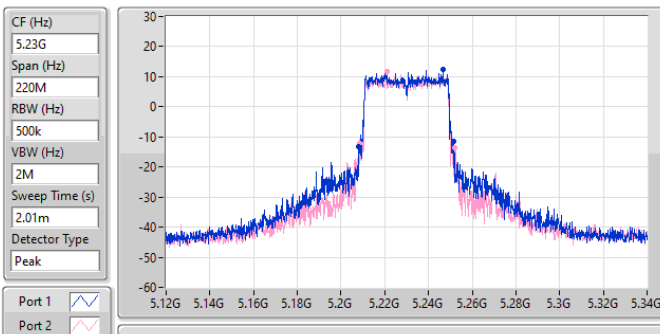


26dB(Hz)	FI-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	FI-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
43.12M	5.20822G	5.25134G	37.974M	5.210976G	5.24895G	Inf	1
43.56M	5.20855G	5.25211G	37.955M	5.211024G	5.248979G	Inf	2

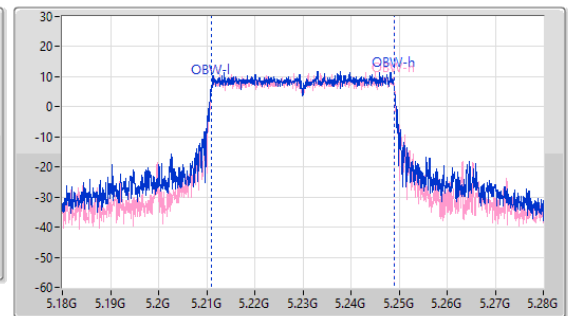


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
5270MHz

26/11/2025

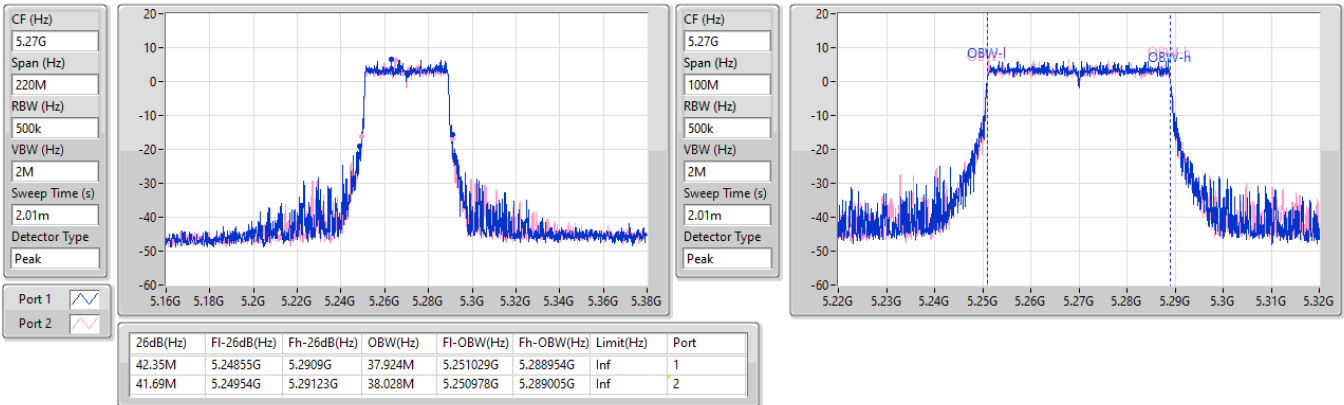
5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
5310MHz

26/11/2025

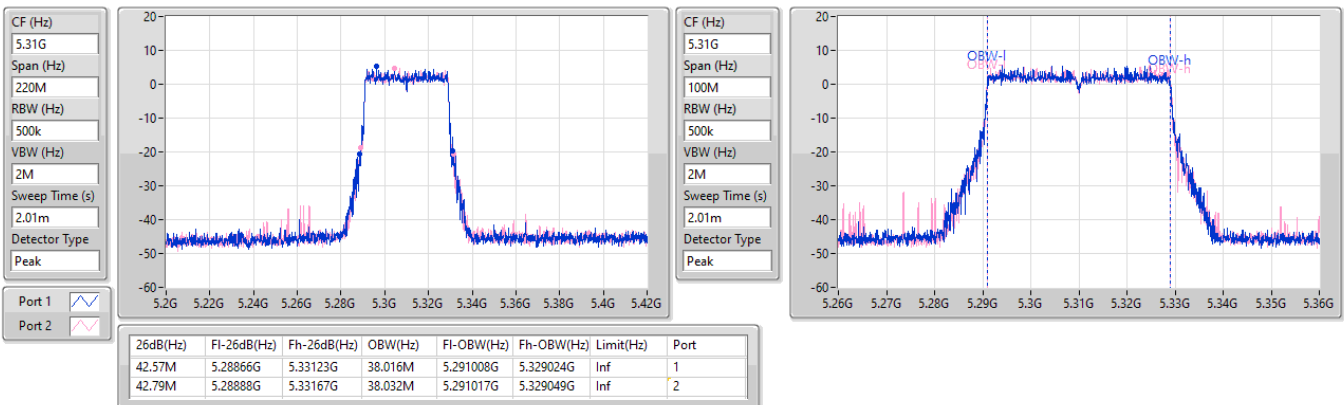


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5510MHz

26/11/2025

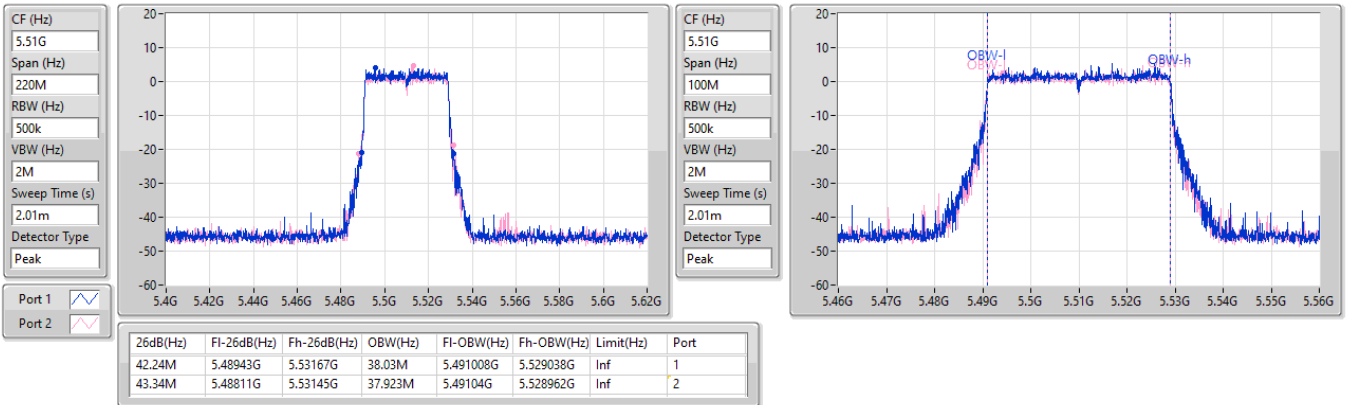


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW


5550MHz

26/11/2025

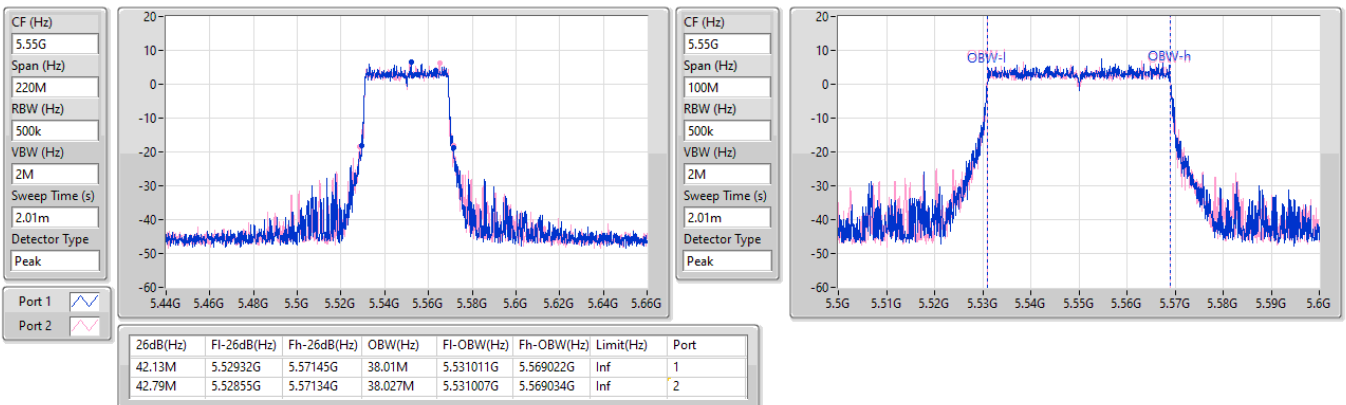


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
5670MHz

26/11/2025

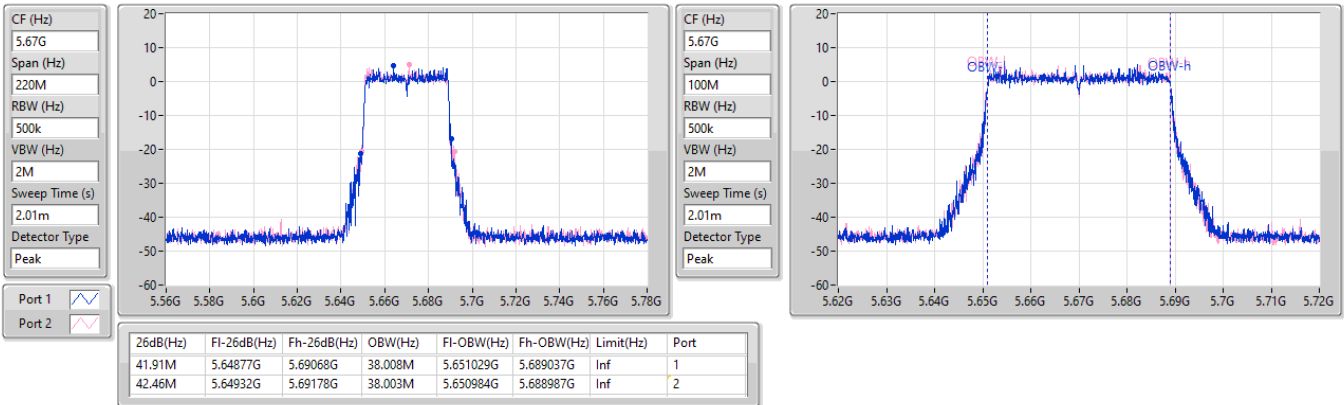
5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
5710MHz Straddle 5.47-5.725GHz

26/11/2025

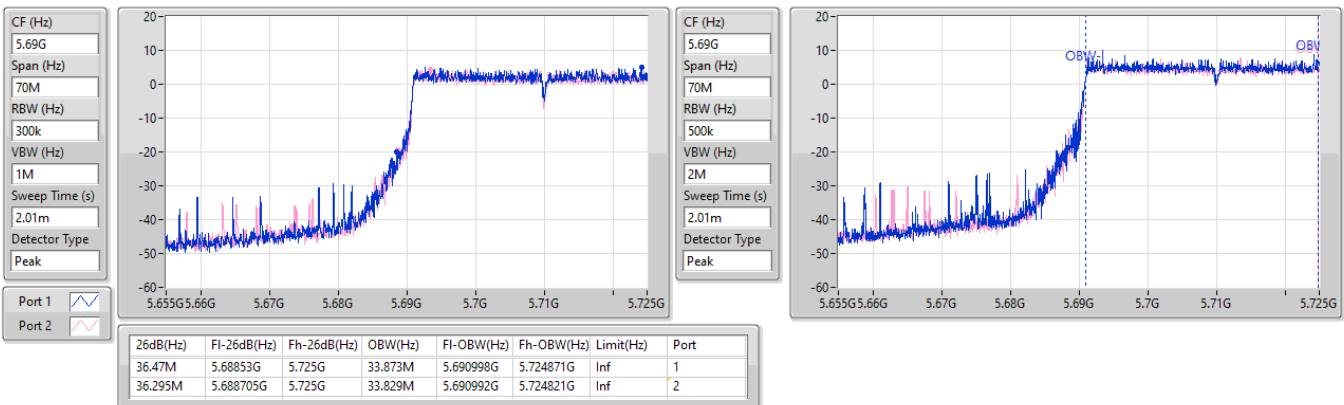


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5710MHz Straddle 5.725-5.85GHz

26/11/2025

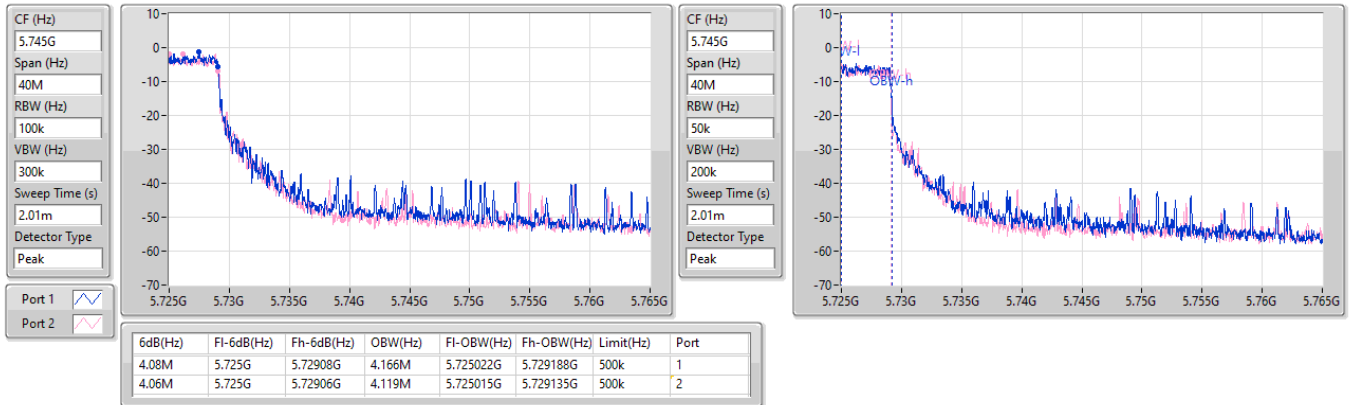


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5710MHz Straddle 5.725-5.85GHz

26/11/2025

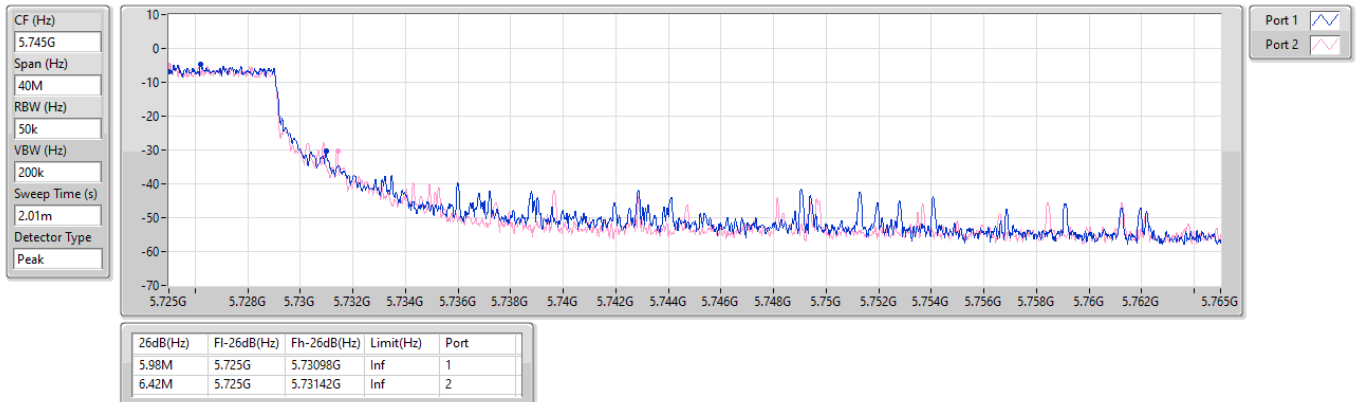


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5755MHz

26/11/2025

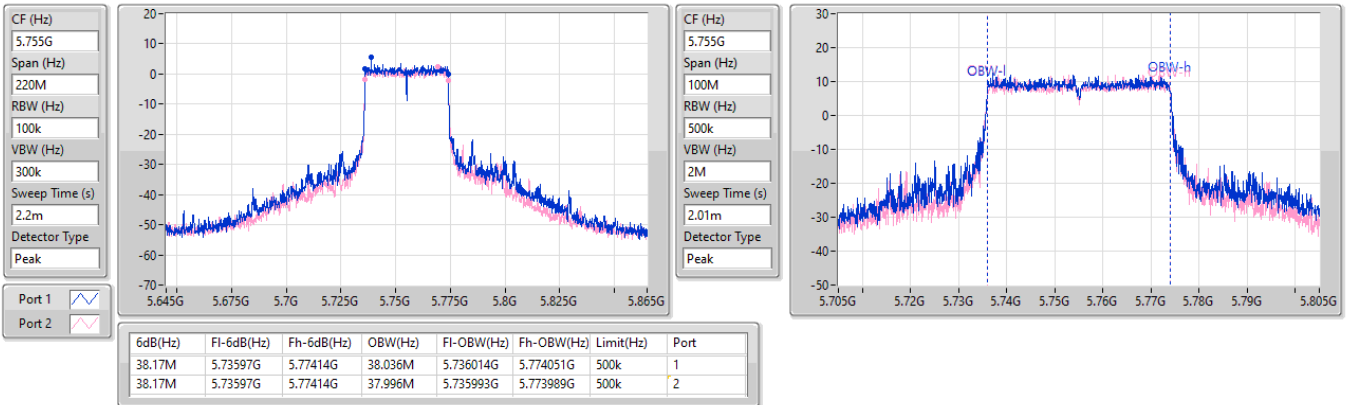


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW


5755MHz

26/11/2025

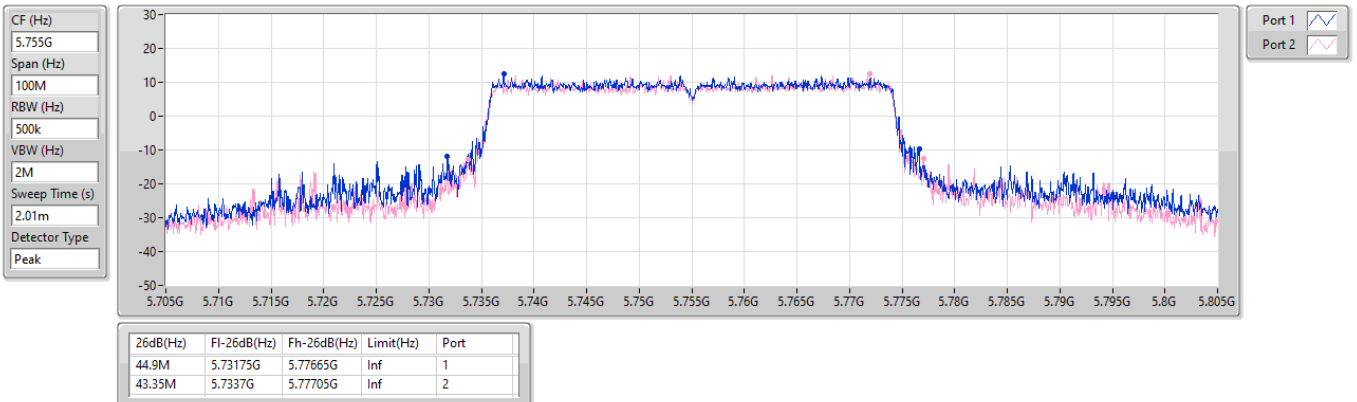


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
5795MHz

26/11/2025


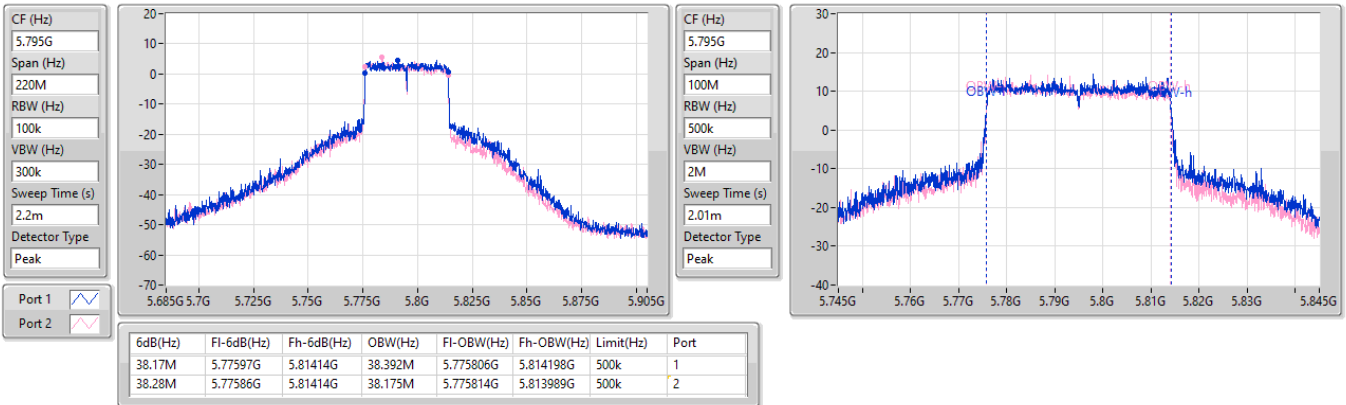

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
5795MHz

26/11/2025


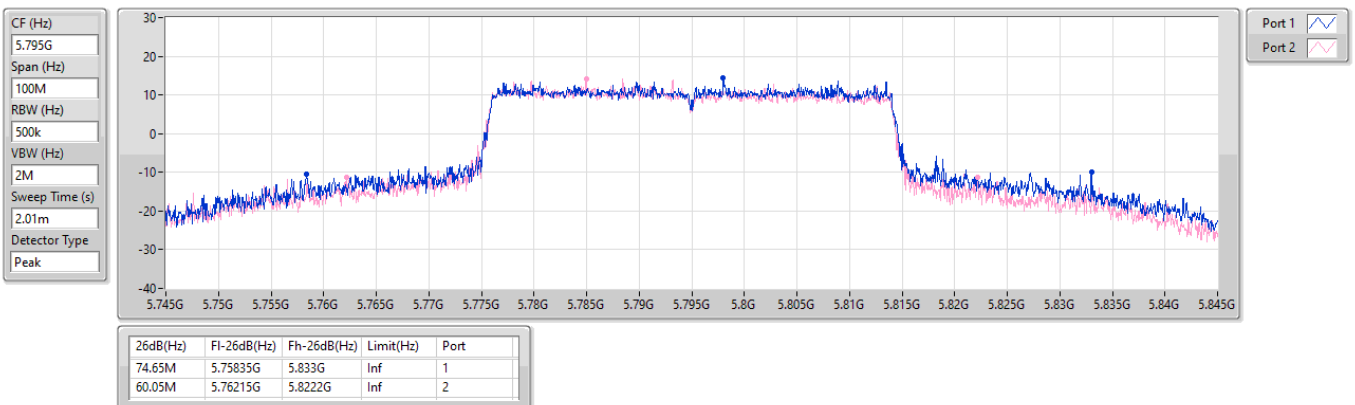


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
5210MHz

26/11/2025

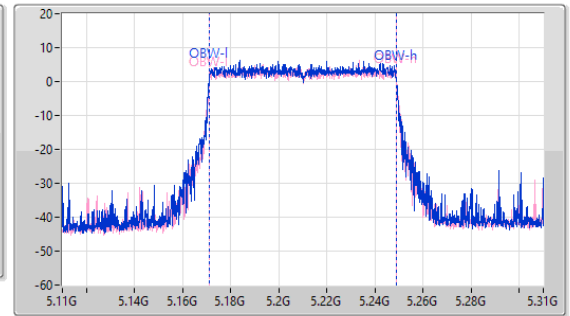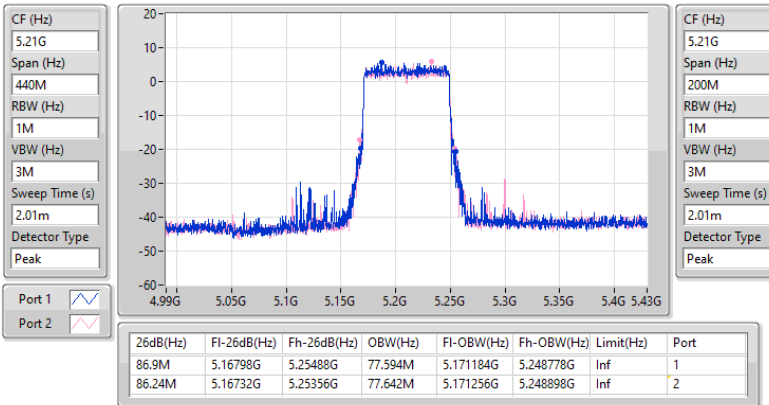

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
5290MHz

26/11/2025

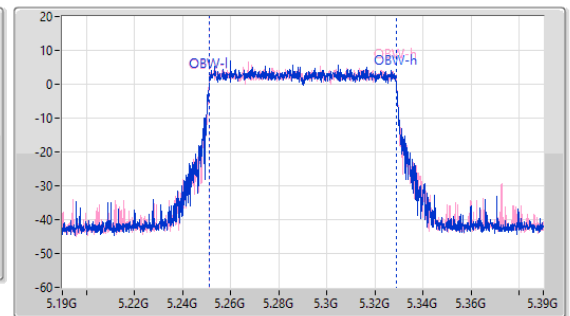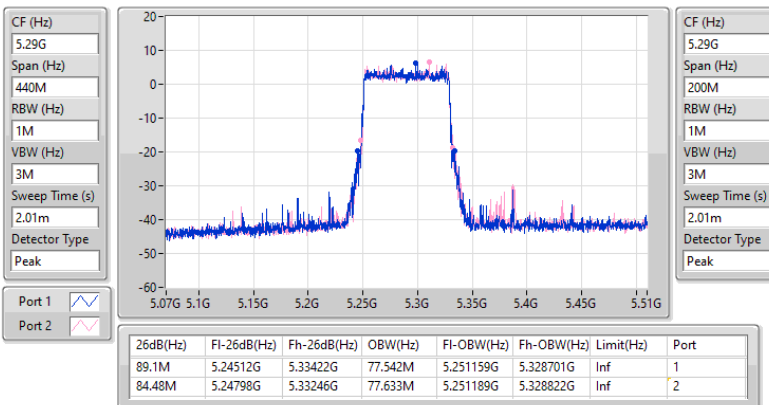


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
5530MHz

26/11/2025

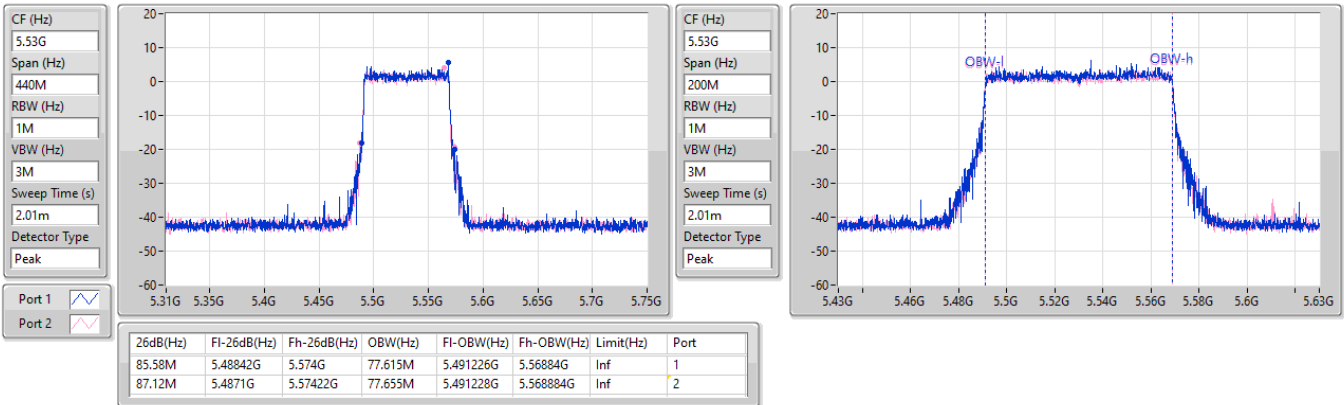
5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
5610MHz

26/11/2025

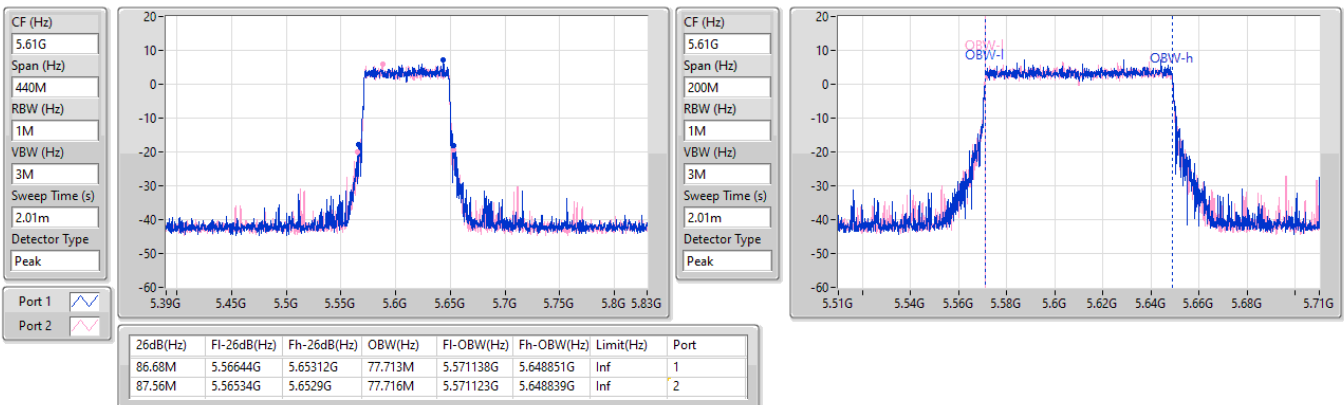


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5690MHz Straddle 5.47-5.725GHz

26/11/2025

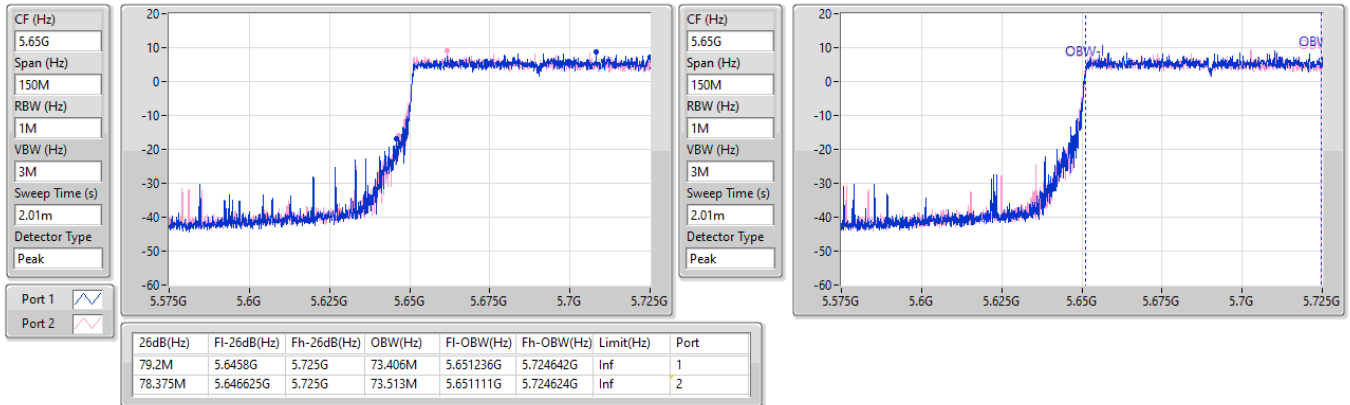


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW


5690MHz Straddle 5.725-5.85GHz

26/11/2025

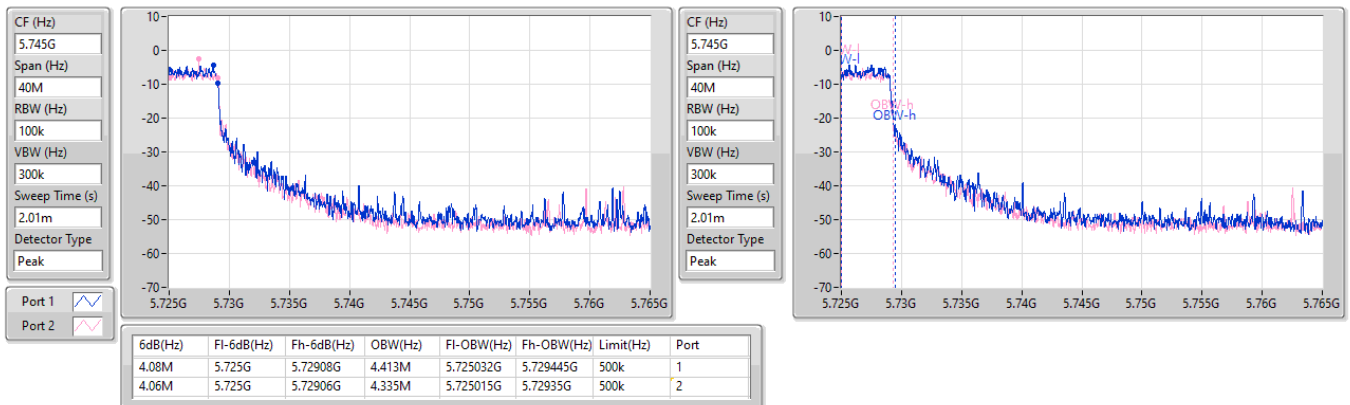


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
5690MHz Straddle 5.725-5.85GHz

26/11/2025

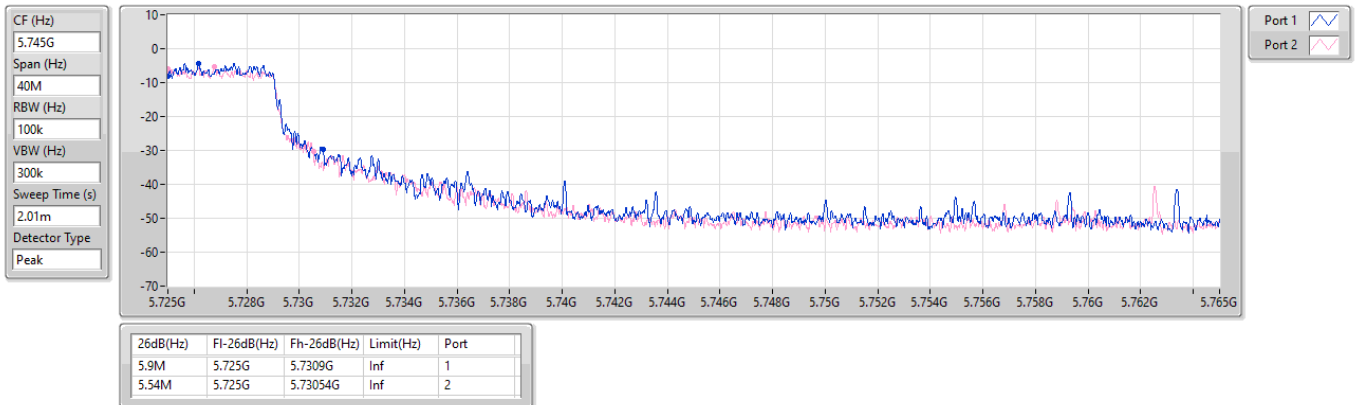

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
5775MHz

26/11/2025

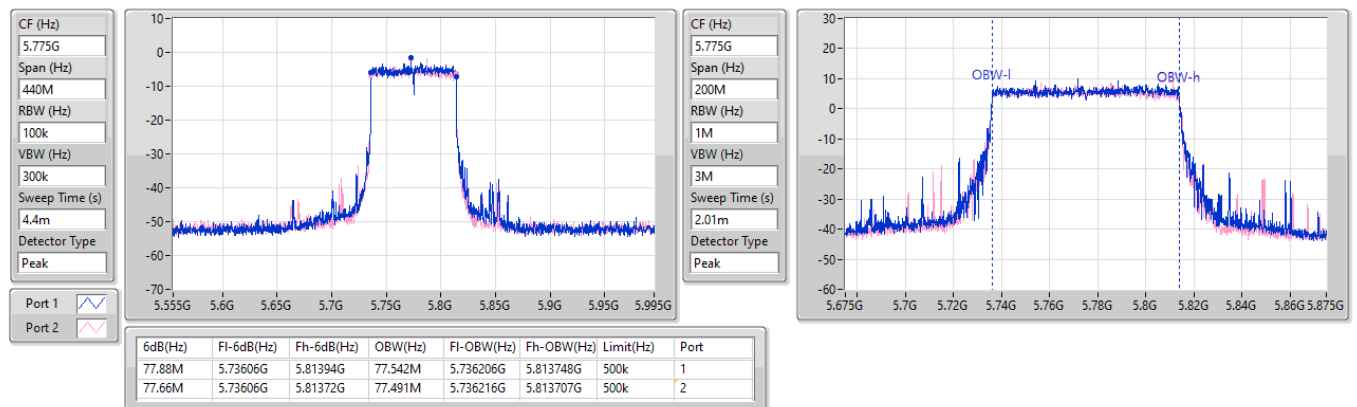


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
5775MHz

26/11/2025

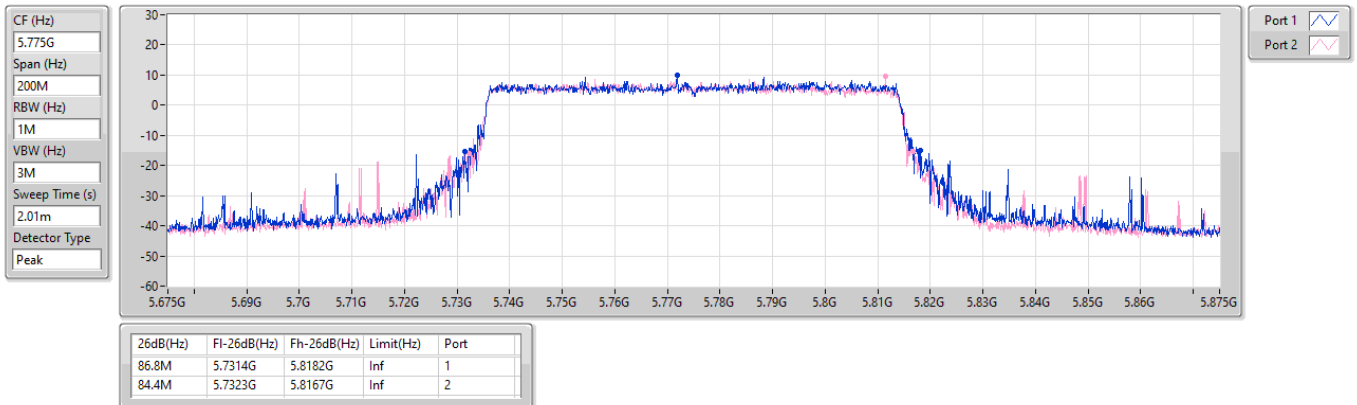
5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX
EBW
5250MHz Straddle 5.15-5.25GHz

26/11/2025

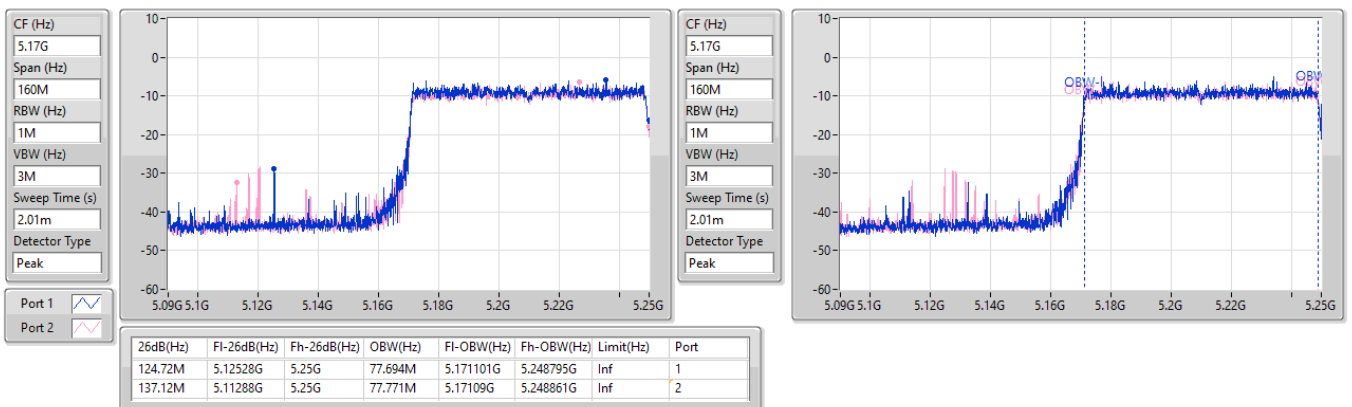


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

5250MHz Straddle 5.25-5.35GHz

26/11/2025

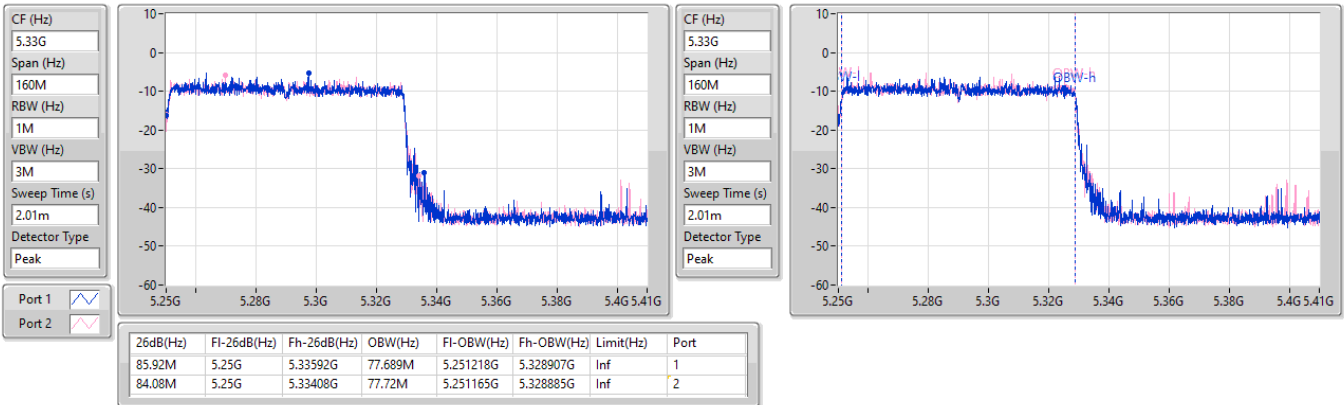


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

5570MHz

26/11/2025

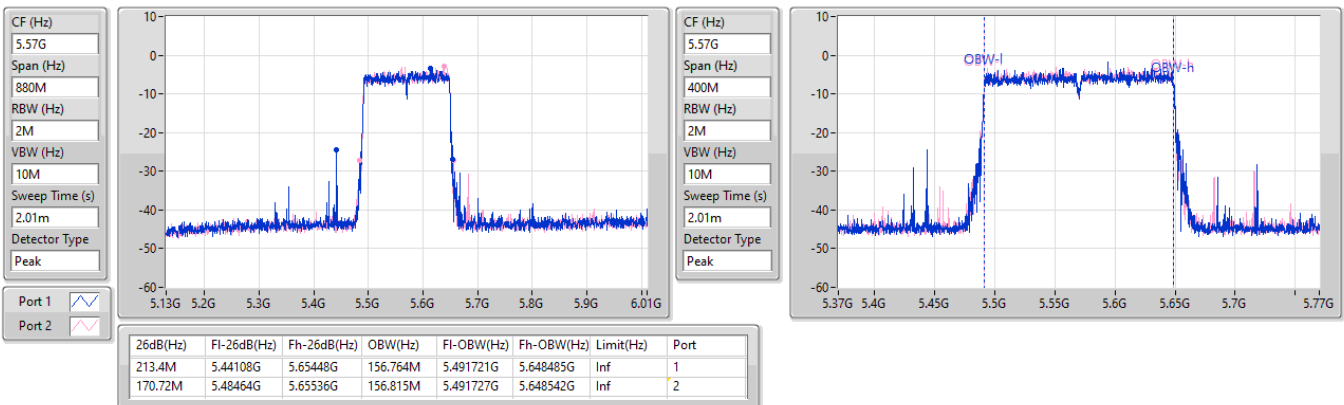


5.47-5.725GHz_EHT240_240MHz_Nss1,(MCS0)_2TX

EBW

5610MHz Straddle 5.47-5.725GHz

26/11/2025

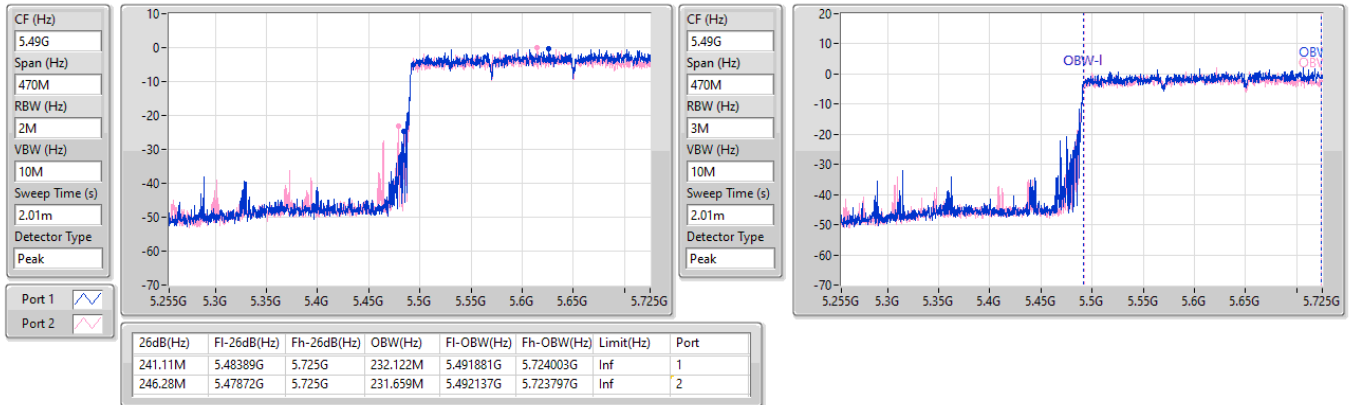


5.725-5.85GHz_EHT240_240MHz_Nss1,(MCS0)_2TX

EBW

5610MHz Straddle 5.725-5.85GHz

26/11/2025

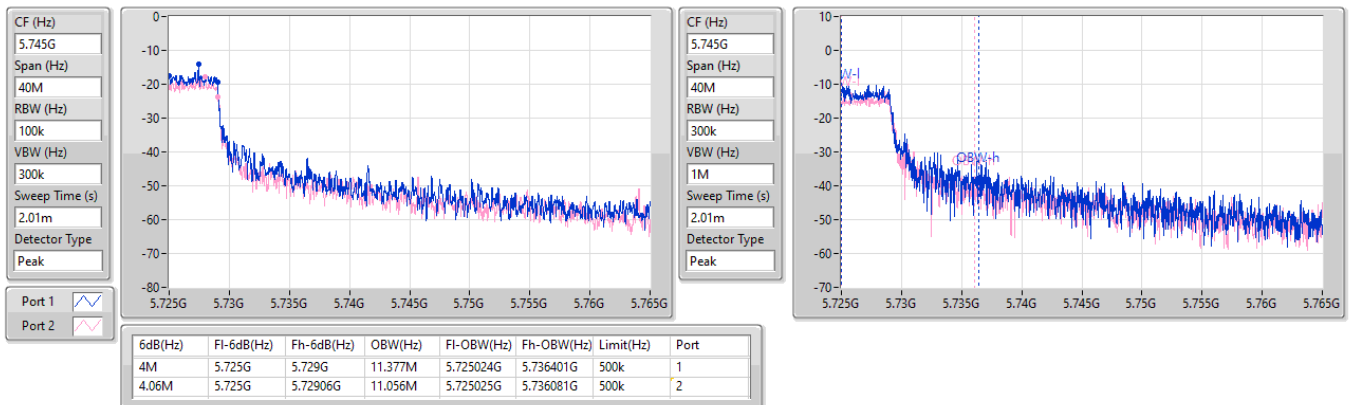


5.725-5.85GHz_EHT240_240MHz_Nss1,(MCS0)_2TX

EBW

5610MHz Straddle 5.725-5.85GHz

26/11/2025

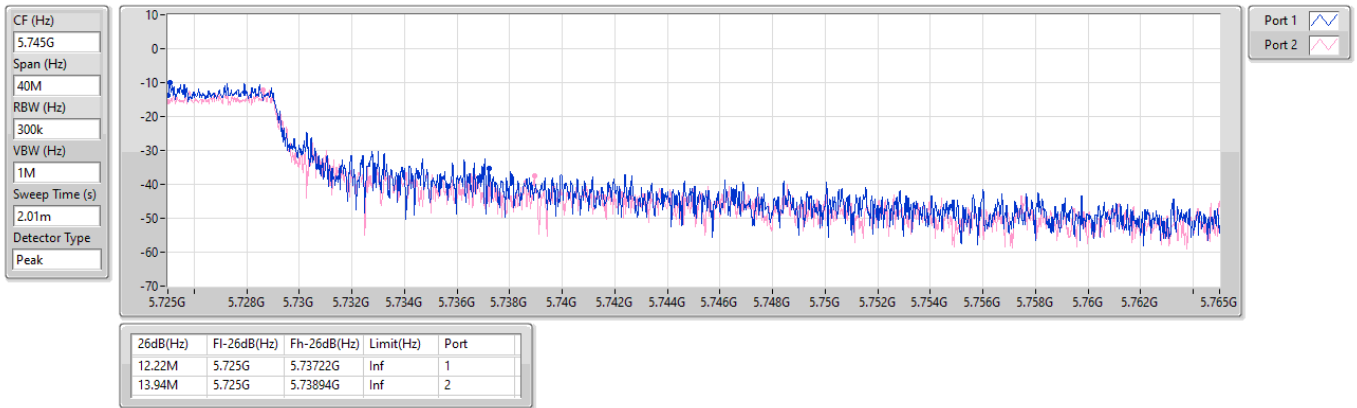

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	23.54	0.22594
802.11be EHT20_Nss1,(MCS0)_2TX	23.56	0.22699
802.11be EHT20-BF_Nss1,(MCS0)_2TX	23.56	0.22699
802.11be EHT40_Nss1,(MCS0)_2TX	23.69	0.23388
802.11be EHT40-BF_Nss1,(MCS0)_2TX	23.69	0.23388
802.11be EHT80_Nss1,(MCS0)_2TX	16.91	0.04909
802.11be EHT80-BF_Nss1,(MCS0)_2TX	16.91	0.04909
802.11be EHT160_Nss1,(MCS0)_2TX	4.72	0.00296
802.11be EHT160-BF_Nss1,(MCS0)_2TX	4.72	0.00296
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	15.98	0.03963
802.11be EHT20_Nss1,(MCS0)_2TX	16.50	0.04467
802.11be EHT20-BF_Nss1,(MCS0)_2TX	15.59	0.03622
802.11be EHT40_Nss1,(MCS0)_2TX	18.06	0.06397
802.11be EHT40-BF_Nss1,(MCS0)_2TX	15.57	0.03606
802.11be EHT80_Nss1,(MCS0)_2TX	16.91	0.04909
802.11be EHT80-BF_Nss1,(MCS0)_2TX	15.50	0.03548
802.11be EHT160_Nss1,(MCS0)_2TX	4.64	0.00291
802.11be EHT160-BF_Nss1,(MCS0)_2TX	4.64	0.00291
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	16.57	0.04539
802.11be EHT20_Nss1,(MCS0)_2TX	16.70	0.04677
802.11be EHT20-BF_Nss1,(MCS0)_2TX	15.85	0.03846
802.11be EHT40_Nss1,(MCS0)_2TX	18.30	0.06761
802.11be EHT40-BF_Nss1,(MCS0)_2TX	16.20	0.04169
802.11be EHT80_Nss1,(MCS0)_2TX	18.50	0.07079
802.11be EHT80-BF_Nss1,(MCS0)_2TX	15.95	0.03936
802.11be EHT160_Nss1,(MCS0)_2TX	8.29	0.00675
802.11be EHT160-BF_Nss1,(MCS0)_2TX	8.29	0.00675
EHT240_240MHz_Nss1,(MCS0)_2TX	11.79	0.01510
EHT240,BF_240MHz_Nss1,(MCS0)_2TX	11.79	0.01510
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	28.45	0.69984
802.11be EHT20_Nss1,(MCS0)_2TX	28.16	0.65464
802.11be EHT20-BF_Nss1,(MCS0)_2TX	28.16	0.65464
802.11be EHT40_Nss1,(MCS0)_2TX	25.05	0.31989
802.11be EHT40-BF_Nss1,(MCS0)_2TX	25.05	0.31989
802.11be EHT80_Nss1,(MCS0)_2TX	19.93	0.09840
802.11be EHT80-BF_Nss1,(MCS0)_2TX	19.93	0.09840
EHT240_240MHz_Nss1,(MCS0)_2TX	-5.61	0.00027
EHT240,BF_240MHz_Nss1,(MCS0)_2TX	-5.61	0.00027

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	11.10	17.86	17.15	20.53	23.98
5200MHz	Pass	11.10	20.82	20.22	23.54	23.98
5240MHz	Pass	11.10	20.68	20.24	23.48	23.98
5260MHz	Pass	11.60	13.22	12.71	15.98	18.37
5300MHz	Pass	11.60	13.07	12.71	15.90	18.38
5320MHz	Pass	11.60	12.63	12.69	15.67	18.38
5500MHz	Pass	10.80	13.74	13.28	16.53	19.18
5580MHz	Pass	10.80	13.74	13.37	16.57	19.18
5700MHz	Pass	11.30	13.42	13.36	16.40	18.68
5720MHz Straddle 5.47-5.725GHz	Pass	11.30	12.13	12	15.08	17.47
5720MHz Straddle 5.725-5.85GHz	Pass	11.30	6.34	6.07	9.22	30.00
5745MHz	Pass	11.30	25.41	24.72	28.09	30.00
5785MHz	Pass	11.30	25.64	25.24	28.45	30.00
5825MHz	Pass	10.80	22.24	21.97	25.12	30.00
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	11.10	16.43	15.49	19.00	23.98
5200MHz	Pass	11.10	20.86	20.07	23.49	23.98
5240MHz	Pass	11.10	20.76	20.33	23.56	23.98
5260MHz	Pass	11.60	13.69	13.28	16.50	18.38
5300MHz	Pass	11.60	13.37	13.42	16.41	18.38
5320MHz	Pass	11.60	13.12	13.32	16.23	18.38
5500MHz	Pass	10.80	9.02	8.73	11.89	19.18
5580MHz	Pass	10.80	13.83	13.54	16.70	19.18
5700MHz	Pass	11.30	3.93	3.32	6.65	18.68
5720MHz Straddle 5.47-5.725GHz	Pass	11.30	12.26	12.15	15.22	17.73
5720MHz Straddle 5.725-5.85GHz	Pass	11.30	7.37	7.23	10.31	30.00
5745MHz	Pass	11.30	25.43	24.76	28.12	30.00
5785MHz	Pass	11.30	25.33	24.97	28.16	30.00
5825MHz	Pass	10.80	22.37	22.26	25.33	30.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	11.10	12.98	12.26	15.65	23.98
5230MHz	Pass	11.10	21.02	20.32	23.69	23.98
5270MHz	Pass	11.60	15.26	14.82	18.06	18.38
5310MHz	Pass	11.60	13.87	13.85	16.87	18.38
5510MHz	Pass	10.80	13.41	12.96	16.20	19.18
5550MHz	Pass	10.80	15.02	14.74	17.89	19.18
5670MHz	Pass	11.30	12.85	12.98	15.93	18.68
5710MHz Straddle 5.47-5.725GHz	Pass	11.30	15.49	15.09	18.30	18.68
5710MHz Straddle 5.725-5.85GHz	Pass	11.30	6.44	5.96	9.22	30.00
5755MHz	Pass	11.30	20.87	20.22	23.57	30.00
5795MHz	Pass	11.30	22.23	21.84	25.05	30.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	11.10	14.05	13.75	16.91	23.98
5290MHz	Pass	11.60	13.96	13.83	16.91	18.38
5530MHz	Pass	10.80	12.97	12.72	15.86	19.18
5610MHz	Pass	10.80	14.63	14.42	17.54	19.18
5690MHz Straddle 5.47-5.725GHz	Pass	11.30	15.57	15.40	18.50	18.68
5690MHz Straddle 5.725-5.85GHz	Pass	11.30	3.10	2.61	5.87	30.00
5775MHz	Pass	11.30	17.07	16.76	19.93	30.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	11.60	1.98	1.42	4.72	23.98
5250MHz Straddle 5.25-5.35GHz	Pass	11.60	1.64	1.61	4.64	18.38
5570MHz	Pass	10.80	5.21	5.34	8.29	19.18
EHT240_240MHz_Nss1,(MCS0)_2TX	-	-	-	-	-	-


Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
5610MHz Straddle 5.47-5.725GHz	Pass	10.80	9.12	8.41	11.79	19.18
5610MHz Straddle 5.725-5.85GHz	Pass	10.80	-7.88	-9.52	-5.61	30.00
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	14.06	16.43	15.49	19.00	23.98
5200MHz	Pass	14.06	20.86	20.07	23.49	23.98
5240MHz	Pass	14.06	20.76	20.33	23.56	23.98
5260MHz	Pass	14.27	12.82	12.32	15.59	15.71
5300MHz	Pass	14.27	12.41	12.59	15.51	15.71
5320MHz	Pass	14.27	12.26	12.41	15.35	15.71
5500MHz	Pass	13.76	9.02	8.73	11.89	16.22
5580MHz	Pass	13.76	13.04	12.64	15.85	16.22
5700MHz	Pass	13.92	3.93	3.32	6.65	16.06
5720MHz Straddle 5.47-5.725GHz	Pass	13.92	12.12	11.99	15.07	15.11
5720MHz Straddle 5.725-5.85GHz	Pass	13.92	7.31	7.02	10.18	30.00
5745MHz	Pass	13.92	25.43	24.76	28.12	30.00
5785MHz	Pass	13.92	25.33	24.97	28.16	30.00
5825MHz	Pass	13.61	22.37	22.26	25.33	30.00
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	14.06	12.98	12.26	15.65	23.98
5230MHz	Pass	14.06	21.02	20.32	23.69	23.98
5270MHz	Pass	14.27	12.79	12.31	15.57	15.71
5310MHz	Pass	14.27	12.49	12.29	15.40	15.71
5510MHz	Pass	13.76	13.41	12.96	16.20	16.22
5550MHz	Pass	13.76	12.96	12.69	15.84	16.22
5670MHz	Pass	13.92	12.85	12.98	15.93	16.06
5710MHz Straddle 5.47-5.725GHz	Pass	13.92	12.77	12.61	15.70	16.06
5710MHz Straddle 5.725-5.85GHz	Pass	13.92	3.76	3.48	6.63	30.00
5755MHz	Pass	13.92	20.87	20.22	23.57	30.00
5795MHz	Pass	13.92	22.23	21.84	25.05	30.00
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	14.06	14.05	13.75	16.91	23.98
5290MHz	Pass	14.27	12.67	12.31	15.50	15.71
5530MHz	Pass	13.76	12.97	12.72	15.86	16.22
5610MHz	Pass	13.76	13.02	12.86	15.95	16.22
5690MHz Straddle 5.47-5.725GHz	Pass	13.92	12.92	12.88	15.91	16.06
5690MHz Straddle 5.725-5.85GHz	Pass	13.92	0.41	-0.05	3.20	30.00
5775MHz	Pass	13.92	17.07	16.76	19.93	30.00
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	14.27	1.98	1.42	4.72	23.98
5250MHz Straddle 5.25-5.35GHz	Pass	14.27	1.64	1.61	4.64	15.71
5570MHz	Pass	13.76	5.21	5.34	8.29	16.22
EHT240,BF_240MHz_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5610MHz Straddle 5.47-5.725GHz	Pass	13.76	9.12	8.41	11.79	16.22
5610MHz Straddle 5.725-5.85GHz	Pass	13.76	-7.88	-9.52	-5.61	30.00

DG = Directional Gain; Port X = Port X output power

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

AV Power


5720MHz Straddle 5.47-5.725GHz_TX

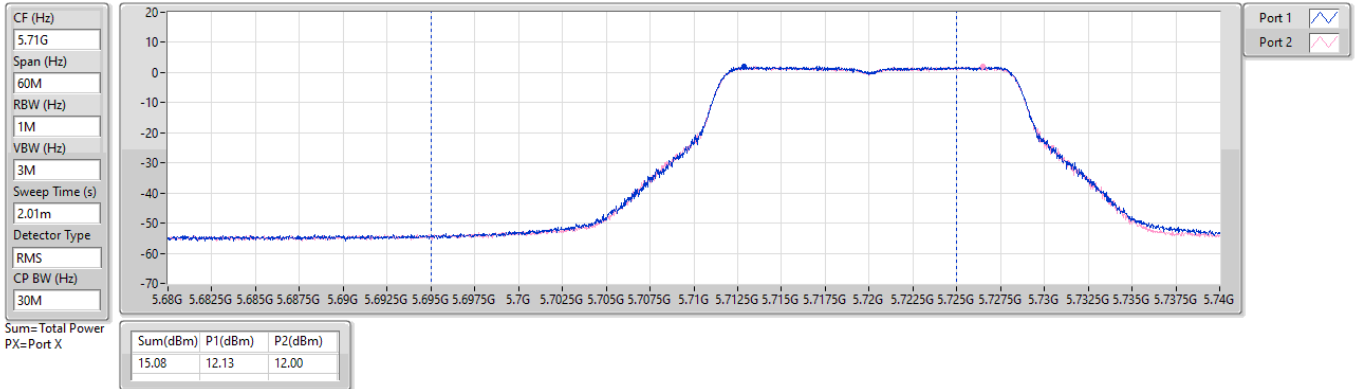

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

AV Power


5720MHz Straddle 5.725-5.85GHz_TX

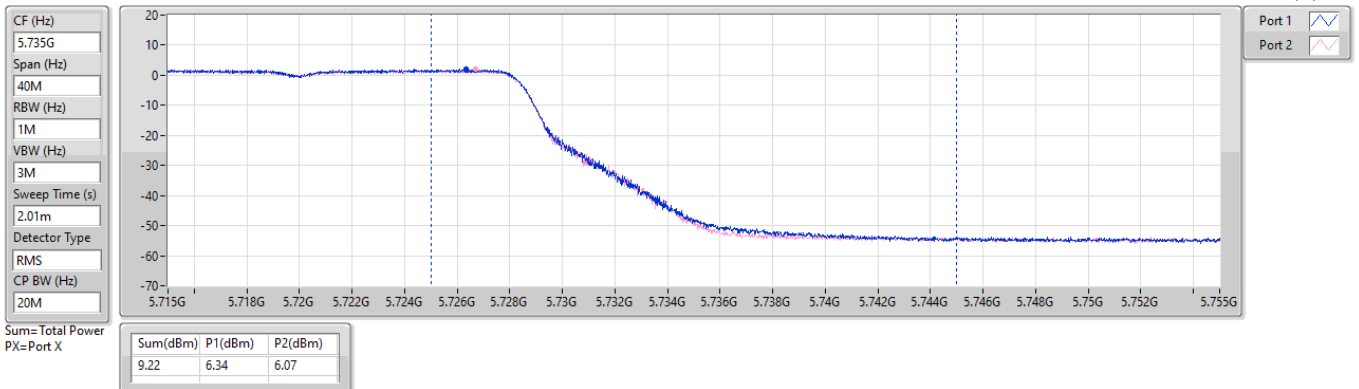

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

AV Power


5720MHz Straddle 5.47-5.725GHz_TX

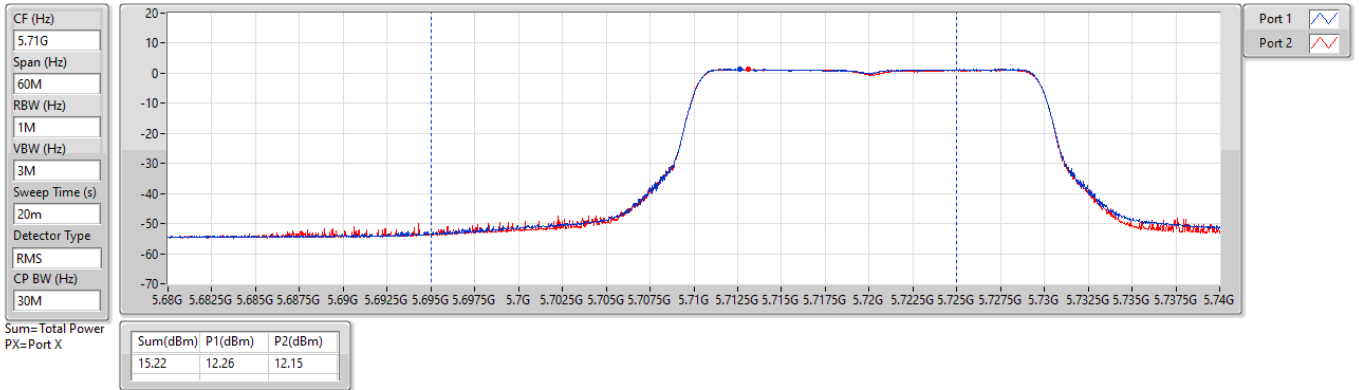

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

AV Power


5720MHz Straddle 5.725-5.85GHz_TX

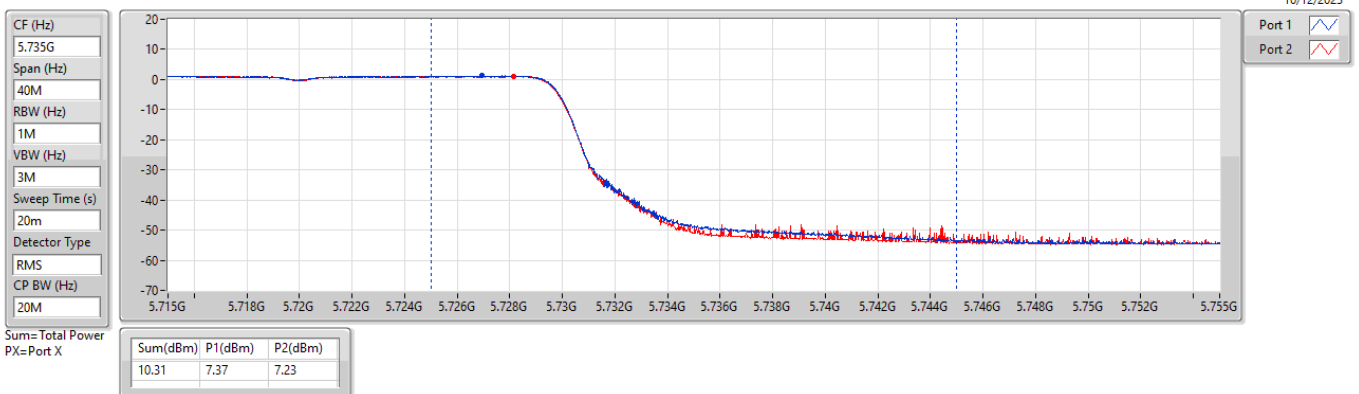

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

AV Power


5710MHz Straddle 5.47-5.725GHz_TX

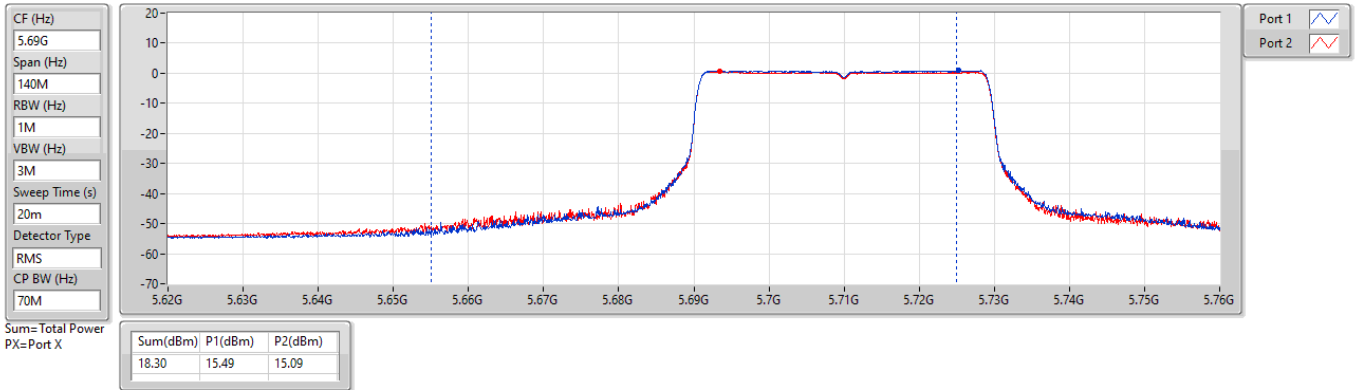

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

AV Power


5710MHz Straddle 5.725-5.85GHz_TX

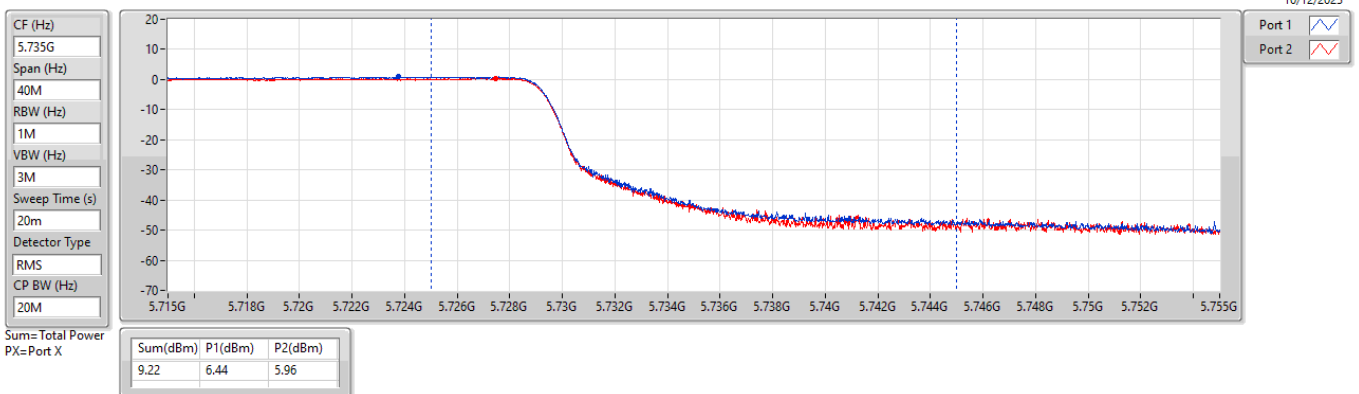

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

AV Power


5690MHz Straddle 5.47-5.725GHz_TX

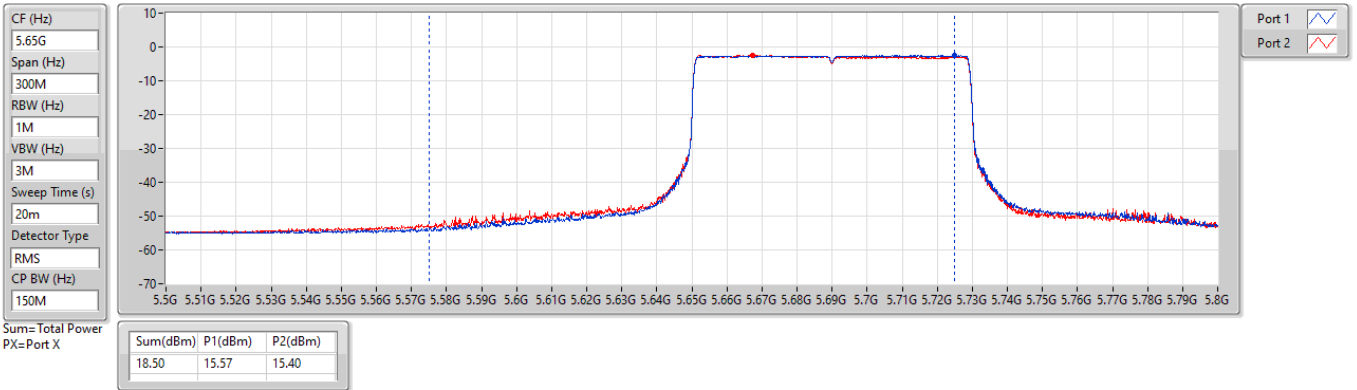

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

AV Power

5690MHz Straddle 5.725-5.85GHz_TX

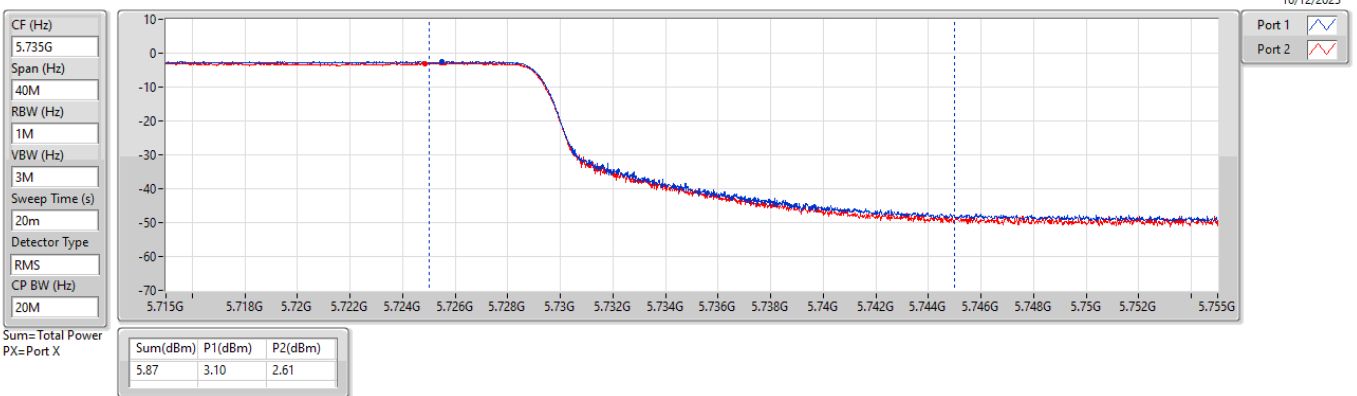


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

26/11/2025

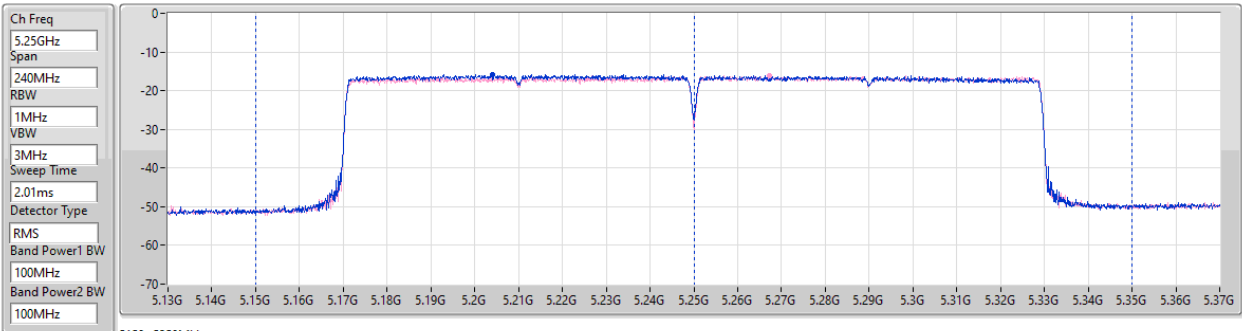

Sum= Total Power
PX=Port X

Sum(dBm)	P1(dBm)	P2(dBm)
4.72	1.98	1.42

5250~5350MHz


Sum(dBm)	P1(dBm)	P2(dBm)
4.64	1.64	1.61

5.47-5.725GHz_EHT240_240MHz_Nss1,(MCS0)_2TX

AV Power

5610MHz Straddle 5.47-5.725GHz_TX

26/11/2025

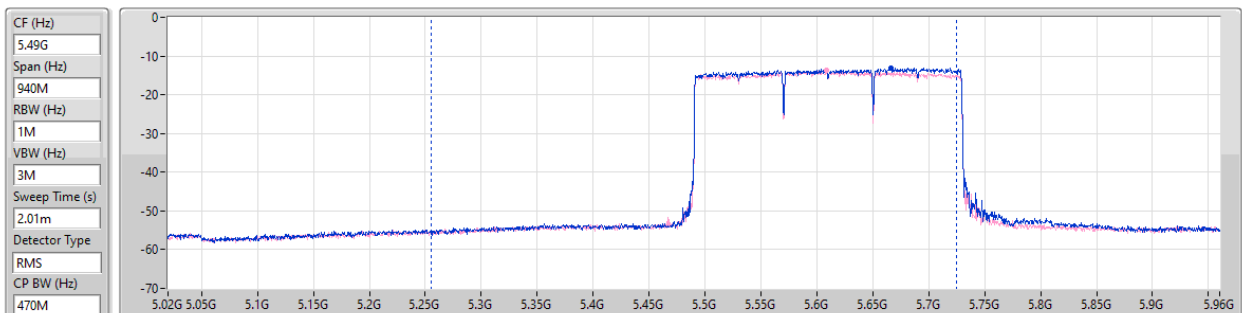


Sum= Total Power
PX=Port X

Sum(dBm)	P1(dBm)	P2(dBm)
11.79	9.12	8.41

5.725-5.85GHz_EHT240_240MHz_Nss1,(MCS0)_2TX

AV Power


5610MHz Straddle 5.725-5.85GHz_TX

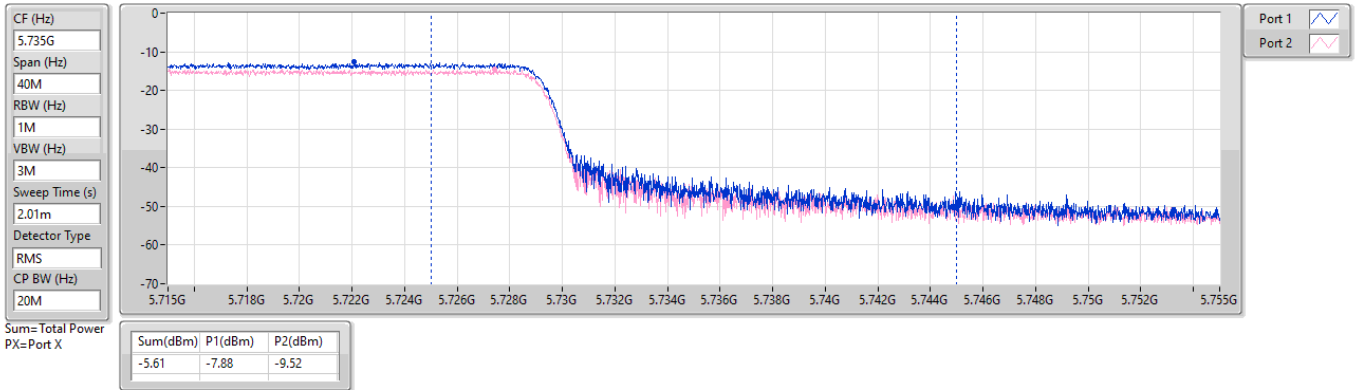

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

AV Power


5720MHz Straddle 5.47-5.725GHz_TX

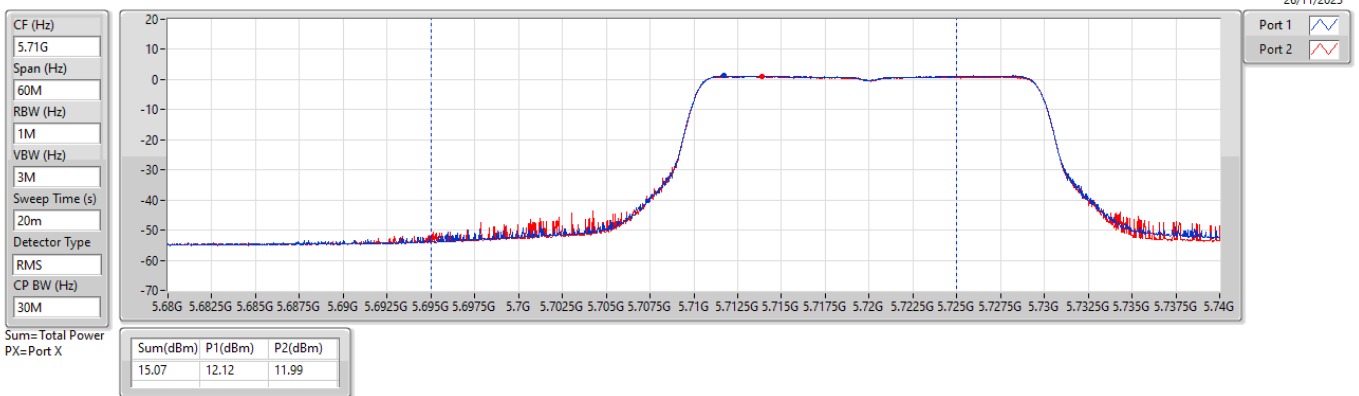

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

AV Power


5720MHz Straddle 5.725-5.85GHz_TX

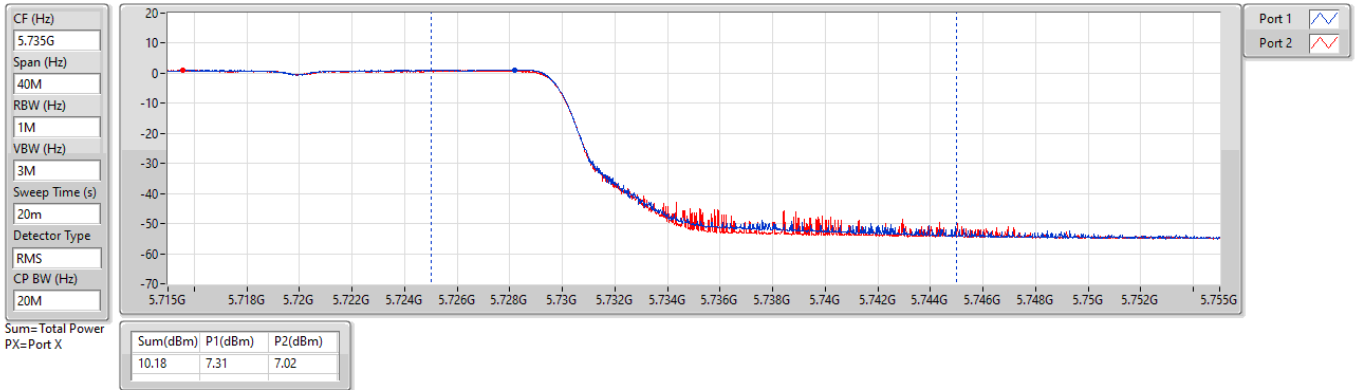

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

AV Power


5710MHz Straddle 5.47-5.725GHz_TX

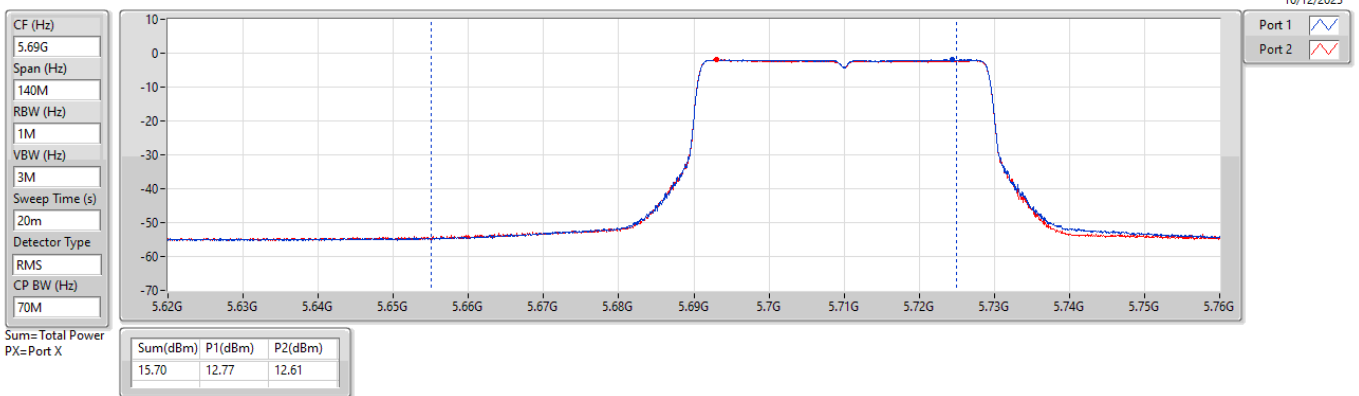

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

AV Power


5710MHz Straddle 5.725-5.85GHz_TX

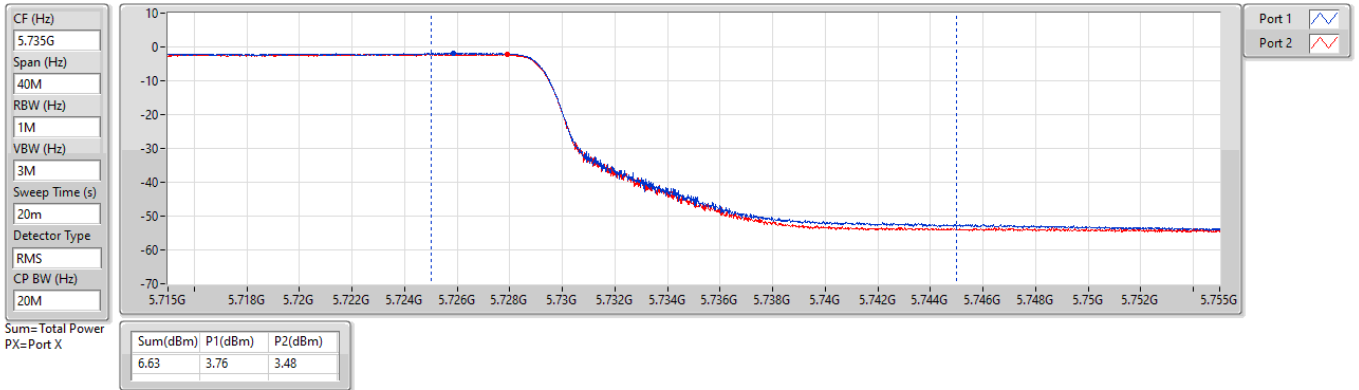


5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

AV Power

5690MHz Straddle 5.47-5.725GHz_TX

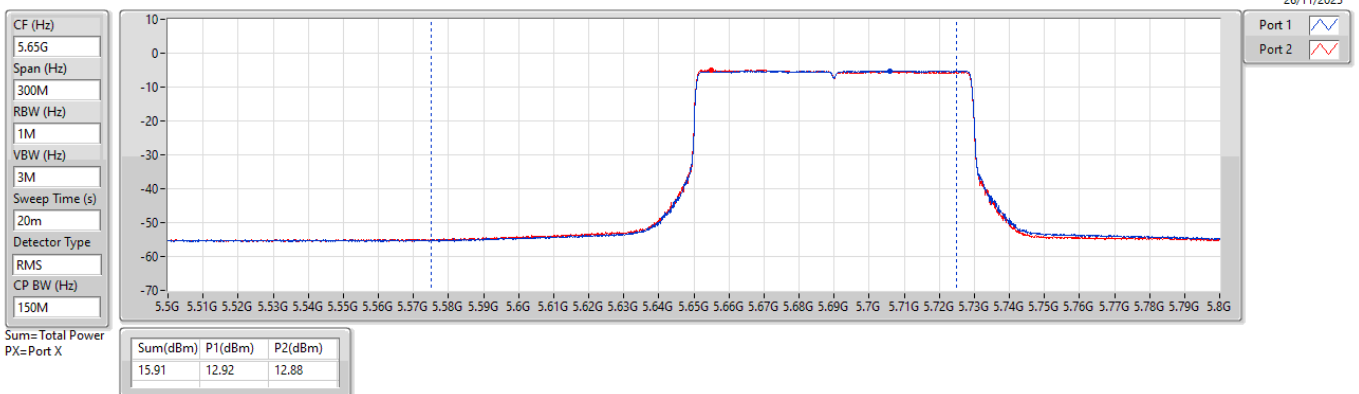

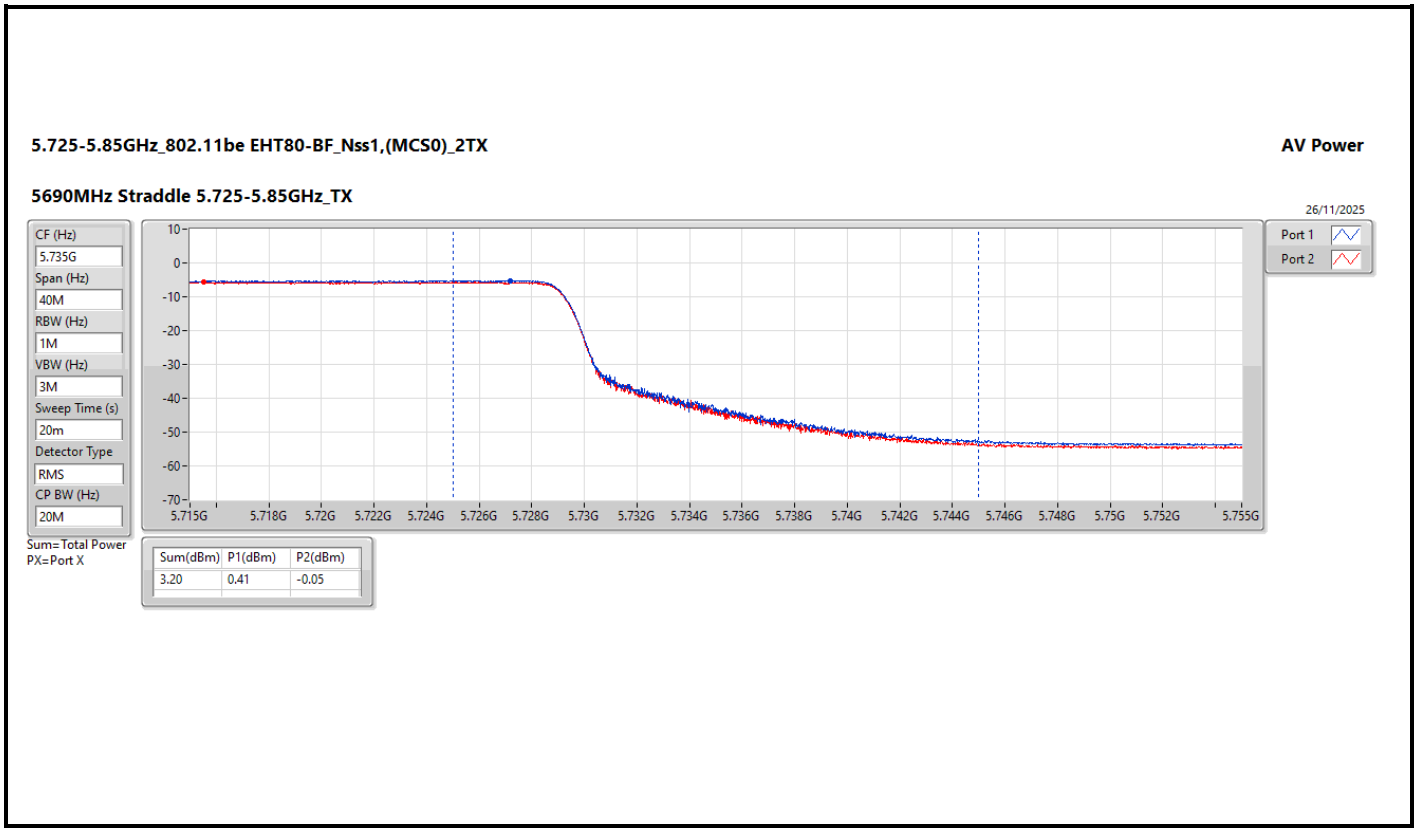

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_2TX	10.52
802.11be EHT20_Nss1,(MCS0)_2TX	10.00
802.11be EHT40_Nss1,(MCS0)_2TX	7.00
802.11be EHT80_Nss1,(MCS0)_2TX	-3.13
802.11be EHT160_Nss1,(MCS0)_2TX	-15.19
5.25-5.35GHz	-
802.11a_Nss1,(6Mbps)_2TX	2.60
802.11be EHT20_Nss1,(MCS0)_2TX	2.64
802.11be EHT40_Nss1,(MCS0)_2TX	1.06
802.11be EHT80_Nss1,(MCS0)_2TX	-3.17
802.11be EHT160_Nss1,(MCS0)_2TX	-15.27
5.47-5.725GHz	-
802.11a_Nss1,(6Mbps)_2TX	3.18
802.11be EHT20_Nss1,(MCS0)_2TX	2.91
802.11be EHT40_Nss1,(MCS0)_2TX	2.11
802.11be EHT80_Nss1,(MCS0)_2TX	-1.05
802.11be EHT160_Nss1,(MCS0)_2TX	-14.86
EHT240_240MHz_Nss1,(MCS0)_2TX	-12.53
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_2TX	13.94
802.11be EHT20_Nss1,(MCS0)_2TX	12.92
802.11be EHT40_Nss1,(MCS0)_2TX	6.92
802.11be EHT80_Nss1,(MCS0)_2TX	-1.59
EHT240_240MHz_Nss1,(MCS0)_2TX	-14.36

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	14.06	4.97	4.26	7.57	11.00
5200MHz	Pass	14.06	7.91	7.15	10.52	11.00
5240MHz	Pass	14.06	7.67	7.25	10.40	11.00
5260MHz	Pass	14.27	-0.14	-0.62	2.60	2.73
5300MHz	Pass	14.27	-0.27	-0.62	2.57	2.73
5320MHz	Pass	14.27	-0.59	-0.6	2.36	2.73
5500MHz	Pass	13.76	0.41	-0.14	3.11	3.24
5580MHz	Pass	13.76	0.41	0.04	3.18	3.24
5700MHz	Pass	13.92	0.12	-0.01	3.01	3.08
5720MHz Straddle 5.47-5.725GHz	Pass	13.92	0.05	-0.11	2.94	3.08
5720MHz Straddle 5.725-5.85GHz	Pass	13.92	-1.52	-1.62	1.43	30.00
5745MHz	Pass	13.92	10.61	9.98	13.29	30.00
5785MHz	Pass	13.92	11.06	10.85	13.94	30.00
5825MHz	Pass	13.61	6.5	7.02	9.77	30.00
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	14.06	2.86	1.83	5.34	11.00
5200MHz	Pass	14.06	7.43	6.57	10.00	11.00
5240MHz	Pass	14.06	7.16	6.63	9.83	11.00
5260MHz	Pass	14.27	-0.11	-0.6	2.64	2.73
5300MHz	Pass	14.27	-0.34	-0.48	2.60	2.73
5320MHz	Pass	14.27	-0.51	-0.6	2.43	2.73
5500MHz	Pass	13.76	-4.84	-5.37	-2.10	3.24
5580MHz	Pass	13.76	0.08	-0.43	2.83	3.24
5700MHz	Pass	13.92	-10.1	-10.65	-7.38	3.08
5720MHz Straddle 5.47-5.725GHz	Pass	13.92	-0.11	-0.01	2.91	3.08
5720MHz Straddle 5.725-5.85GHz	Pass	13.92	-1.81	-1.94	1.10	30.00
5745MHz	Pass	13.92	10.06	9.35	12.67	30.00
5785MHz	Pass	13.92	9.99	9.89	12.92	30.00
5825MHz	Pass	13.61	7.75	7.47	10.59	30.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	14.06	-4.02	-4.66	-1.34	11.00
5230MHz	Pass	14.06	4.25	3.83	7.00	11.00
5270MHz	Pass	14.27	-1.74	-2.11	1.06	2.73
5310MHz	Pass	14.27	-3.02	-3.09	-0.09	2.73
5510MHz	Pass	13.76	-3.5	-4.11	-0.81	3.24
5550MHz	Pass	13.76	-1.97	-1.87	1.06	3.24
5670MHz	Pass	13.92	-3.94	-3.93	-1.05	3.08
5710MHz Straddle 5.47-5.725GHz	Pass	13.92	-0.75	-1.02	2.11	3.08
5710MHz Straddle 5.725-5.85GHz	Pass	13.92	-2.21	-2.68	0.54	30.00
5755MHz	Pass	13.92	2.69	1.89	5.27	30.00
5795MHz	Pass	13.92	3.95	4	6.92	30.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	14.06	-5.84	-6.28	-3.13	11.00
5290MHz	Pass	14.27	-6.02	-6.23	-3.17	2.73
5530MHz	Pass	13.76	-6.96	-7.28	-4.18	3.24
5610MHz	Pass	13.76	-5.4	-5.65	-2.60	3.24
5690MHz Straddle 5.47-5.725GHz	Pass	13.92	-4.06	-3.97	-1.05	3.08
5690MHz Straddle 5.725-5.85GHz	Pass	13.92	-5.58	-6.17	-2.90	30.00
5775MHz	Pass	13.92	-4.21	-4.72	-1.59	30.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	14.27	-17.94	-18.26	-15.19	11.00
5250MHz Straddle 5.25-5.35GHz	Pass	14.27	-18.24	-18.28	-15.27	2.73
5570MHz	Pass	13.76	-17.96	-17.71	-14.86	3.24
EHT240_240MHz_Nss1,(MCS0)_2TX	-	-	-	-	-	-

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
5610MHz Straddle 5.47-5.725GHz	Pass	13.76	-15.01	-15.78	-12.53	3.24
5610MHz Straddle 5.725-5.85GHz	Pass	13.76	-16.58	-18.2	-14.36	30.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

Inf = There's no restriction for the limit.


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5180MHz

05/12/2025

CF (Hz)
5.18G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
19.946
Detector Type
RMS

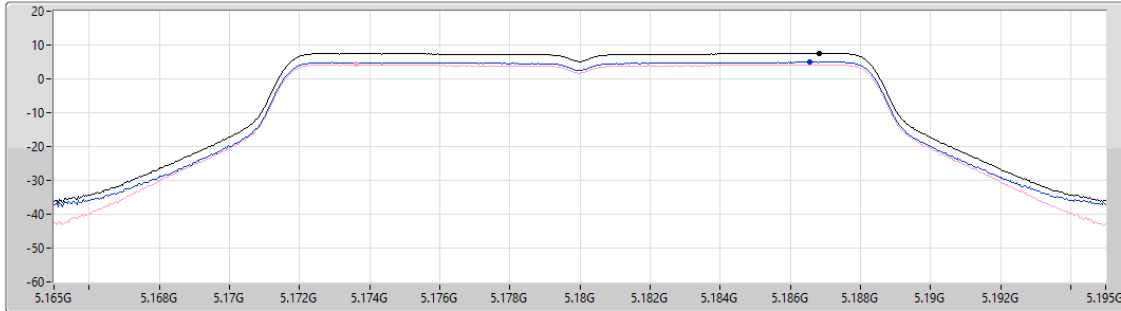

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
7.57	7.57	4.97	4.26

Sum
Port 1
Port 2


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5200MHz

05/12/2025

CF (Hz)
5.2G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
19.946
Detector Type
RMS

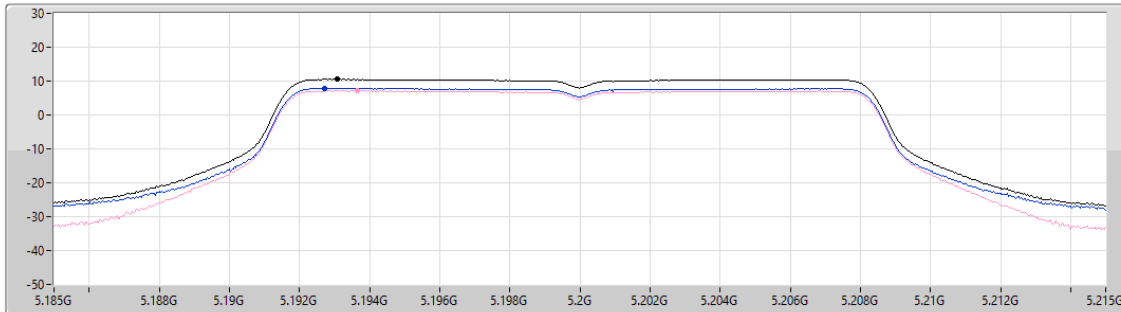

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
10.52	10.52	7.91	7.15

Sum
Port 1
Port 2


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5240MHz

05/12/2025

CF (Hz)
5.24G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
19.946
Detector Type
RMS

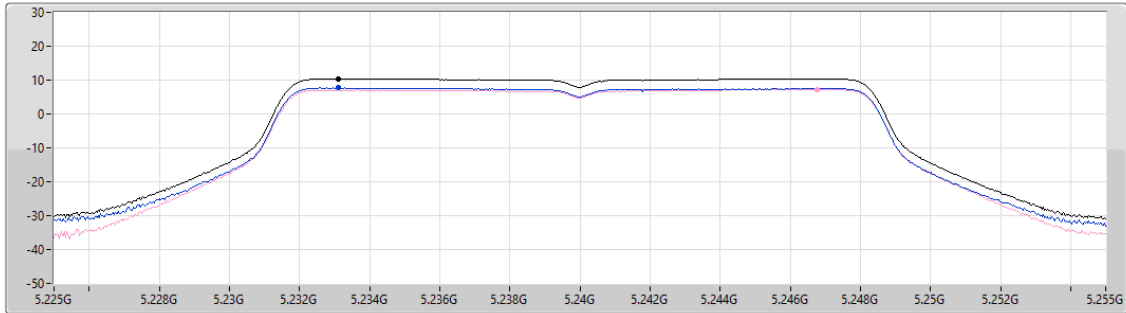

Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
10.40	10.40	7.67	7.25

Sum
Port 1
Port 2


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5260MHz

26/11/2025

CF (Hz)
5.26G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
19.946
Detector Type
RMS

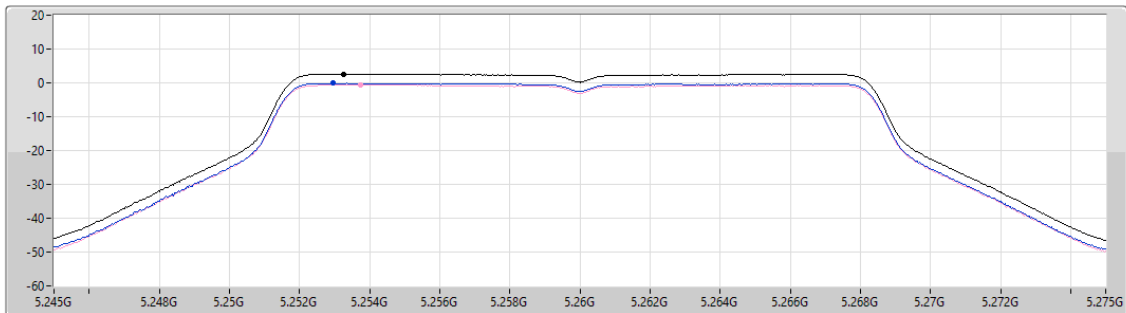

Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
2.60	2.60	-0.14	-0.62

Sum
Port 1
Port 2


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5300MHz

26/11/2025

CF (Hz)
5.3G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
19.946
Detector Type
RMS

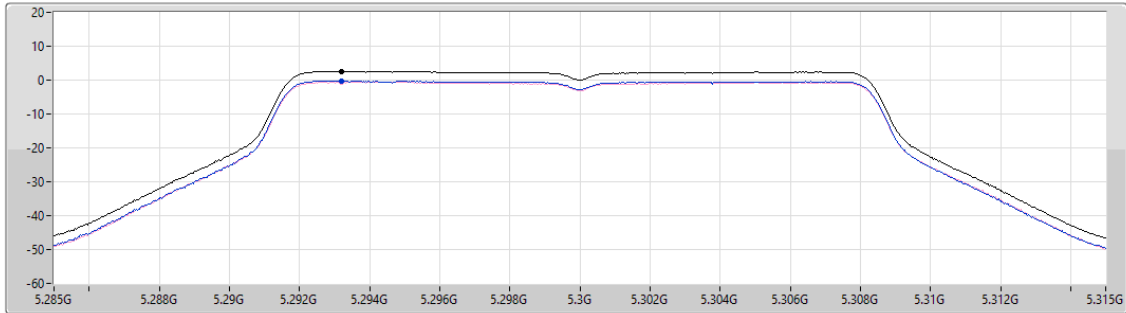

Sum (dBm/Hz)	PD (dBm/Hz)	Port 1 (dBm/Hz)	Port 2 (dBm/Hz)
2.57	2.57	-0.27	-0.62

Sum
Port 1
Port 2


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5320MHz

26/11/2025

CF (Hz)
5.32G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
19.946
Detector Type
RMS

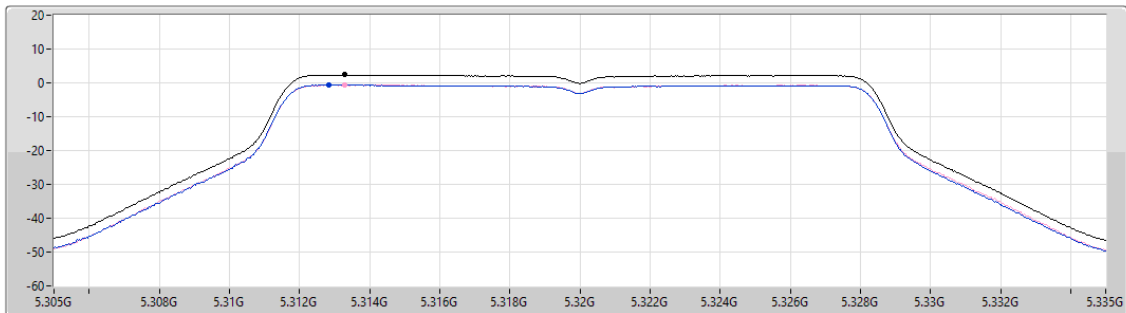

Sum (dBm/Hz)	PD (dBm/Hz)	Port 1 (dBm/Hz)	Port 2 (dBm/Hz)
2.36	2.36	-0.59	-0.60


Sum
Port 1
Port 2

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5500MHz

26/11/2025

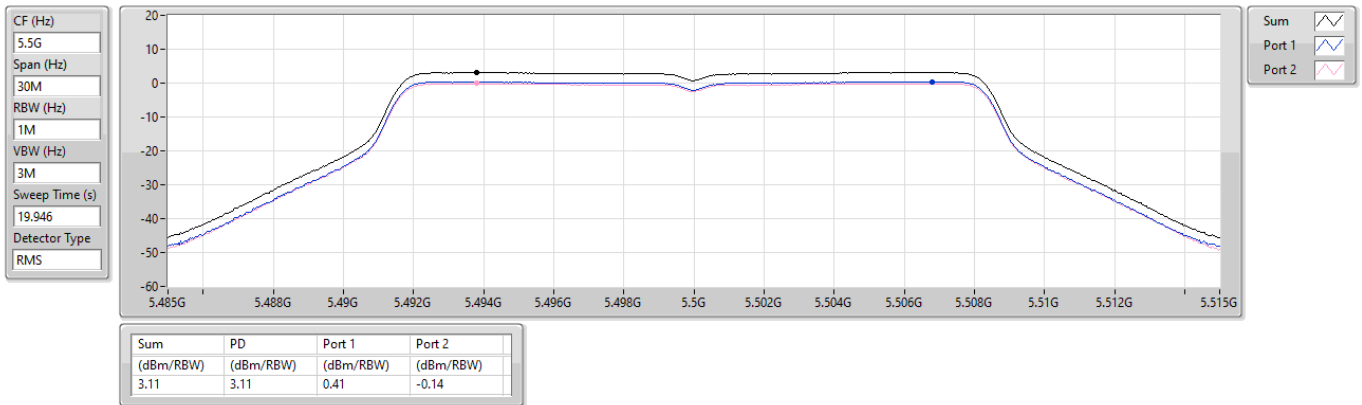


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5580MHz

26/11/2025

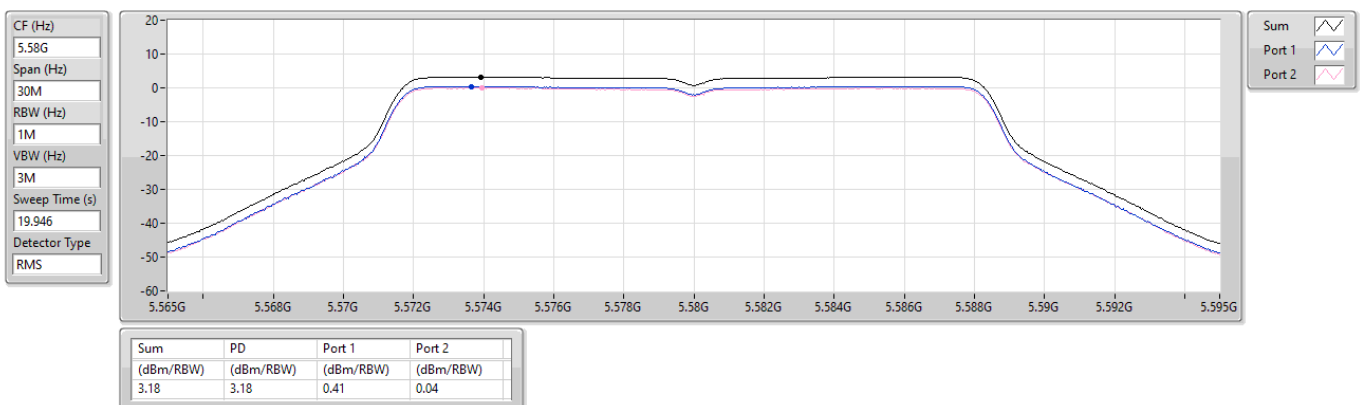


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5700MHz

26/11/2025

CF (Hz)
5.7G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
19.946
Detector Type
RMS

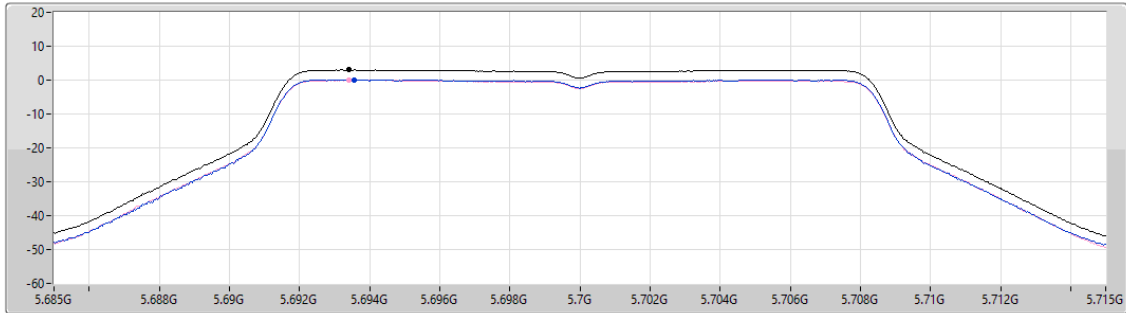

Sum
Port 1
Port 2


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5720MHz Straddle 5.47-5.725GHz

26/11/2025

CF (Hz)
5.71G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
19.946
Detector Type
RMS

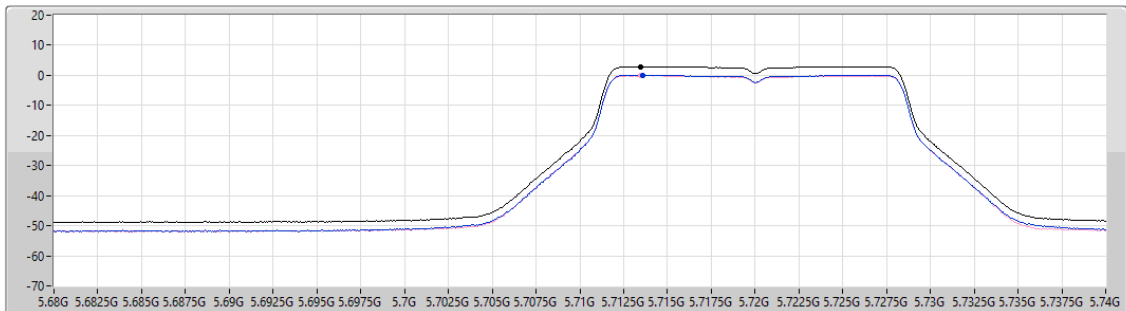


Sum
Port 1
Port 2

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5720MHz Straddle 5.725-5.85GHz

26/11/2025

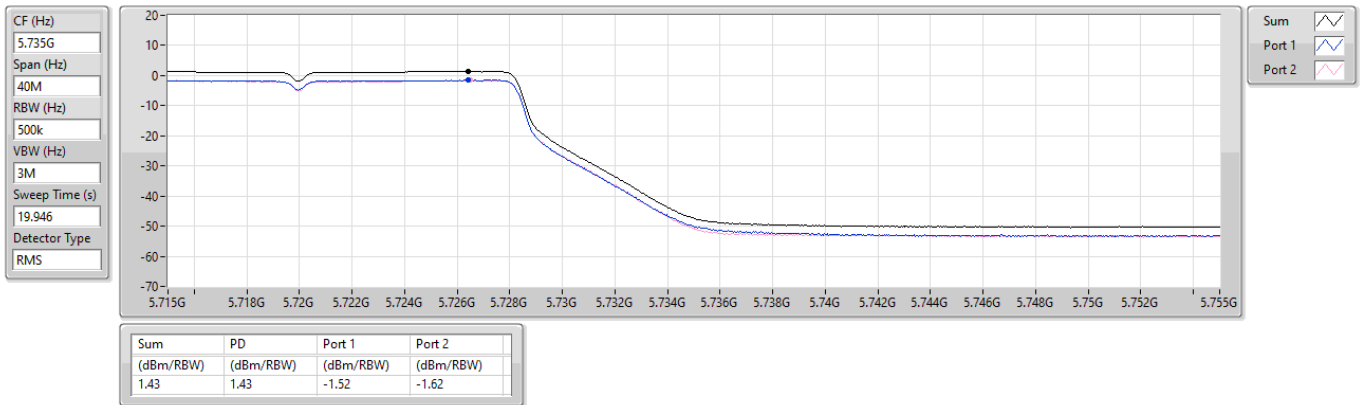


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5745MHz

26/11/2025

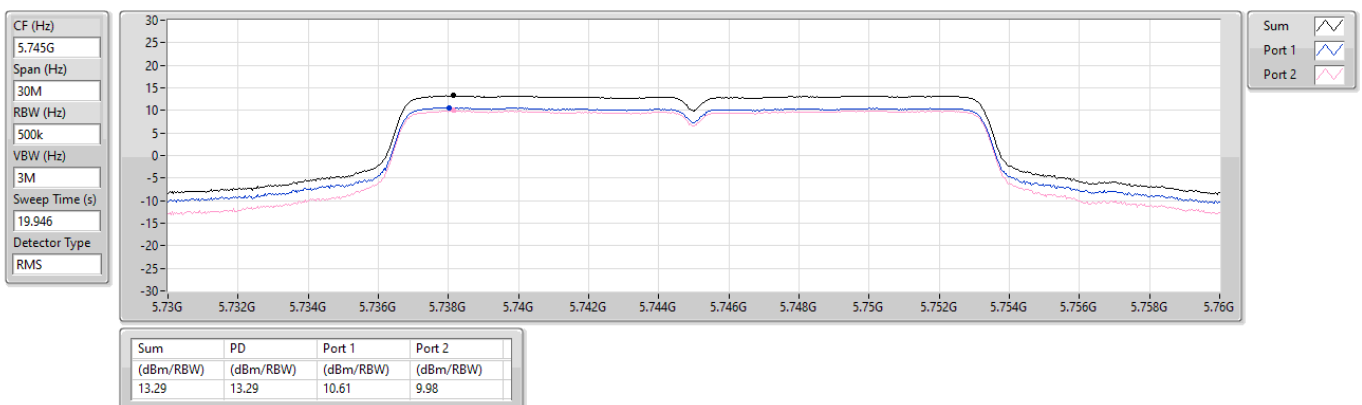


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5785MHz

26/11/2025

CF (Hz)
5.785G
Span (Hz)
30M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
19.946
Detector Type
RMS

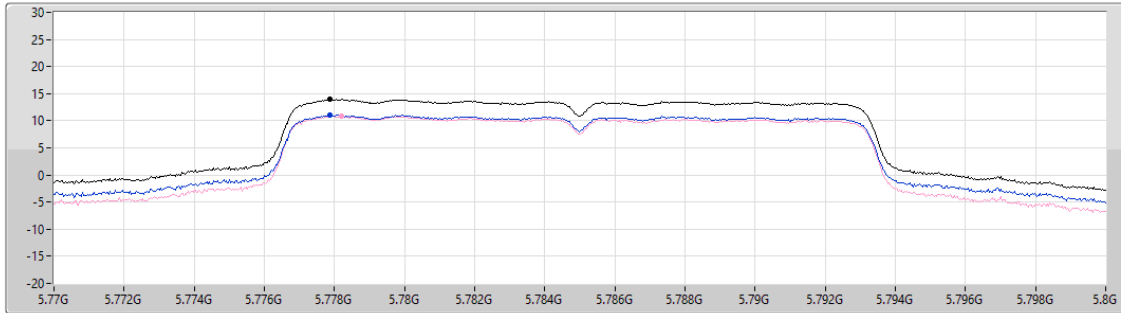

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
13.94	13.94	11.06	10.85


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5825MHz

26/11/2025

CF (Hz)
5.825G
Span (Hz)
30M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
19.946
Detector Type
RMS

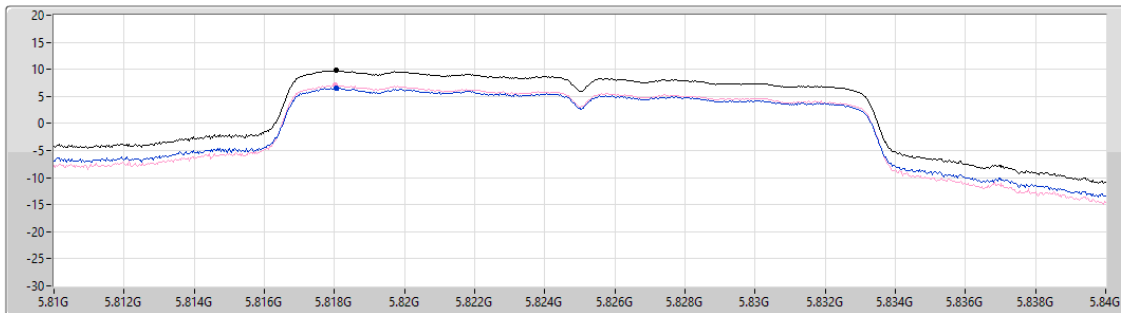

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.77	9.77	6.50	7.02


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5180MHz

05/12/2025

CF (Hz)
5.18G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.235
Detector Type
RMS

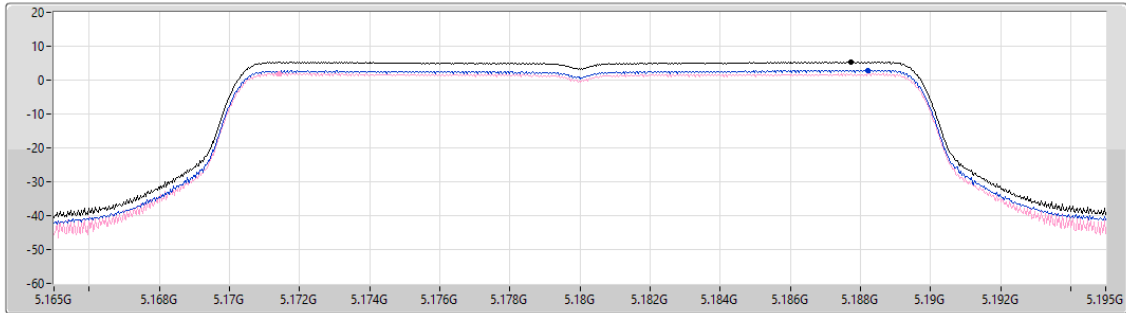

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.34	5.34	2.86	1.83


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5200MHz

05/12/2025

CF (Hz)
5.2G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.235
Detector Type
RMS

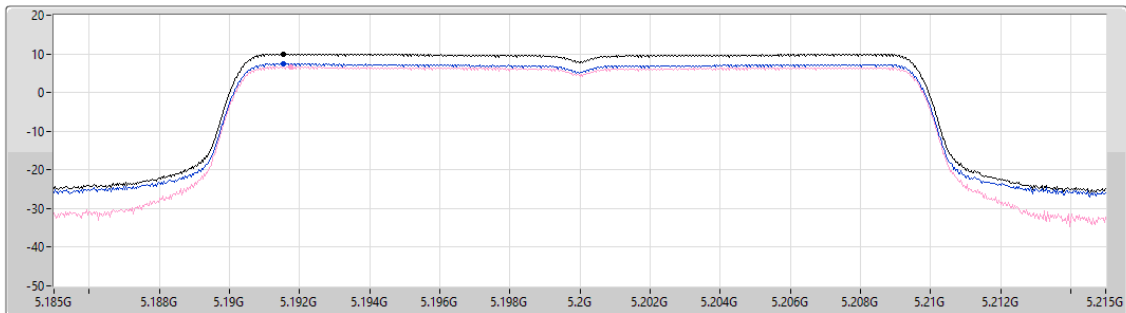

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
10.00	10.00	7.43	6.57


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5240MHz

05/12/2025

CF (Hz)
5.24G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.235
Detector Type
RMS

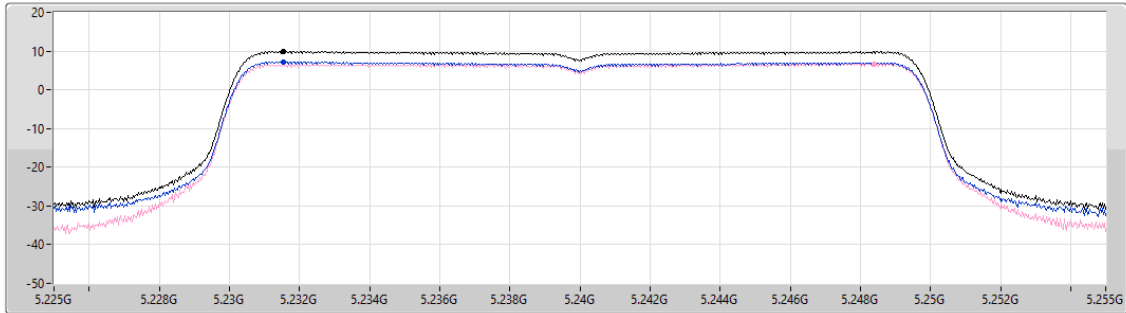

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.83	9.83	7.16	6.63

Sum
Port 1
Port 2


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5260MHz

26/11/2025

CF (Hz)
5.26G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.235
Detector Type
RMS

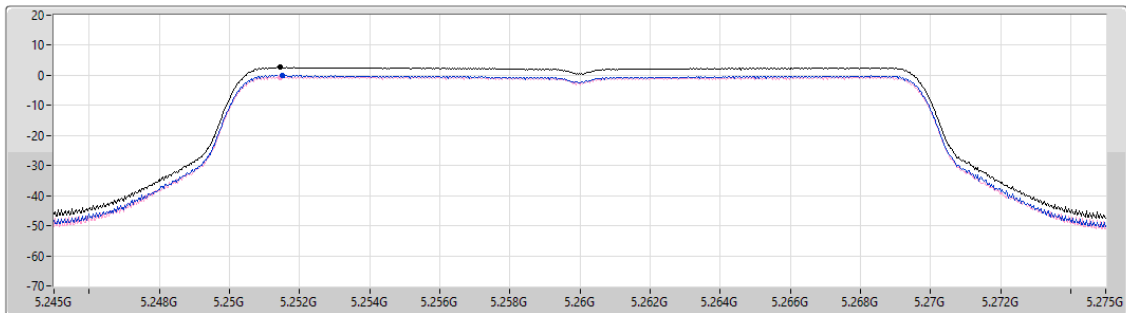

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.64	2.64	-0.11	-0.60

Sum
Port 1
Port 2


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5300MHz

26/11/2025

CF (Hz)
5.3G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.235
Detector Type
RMS

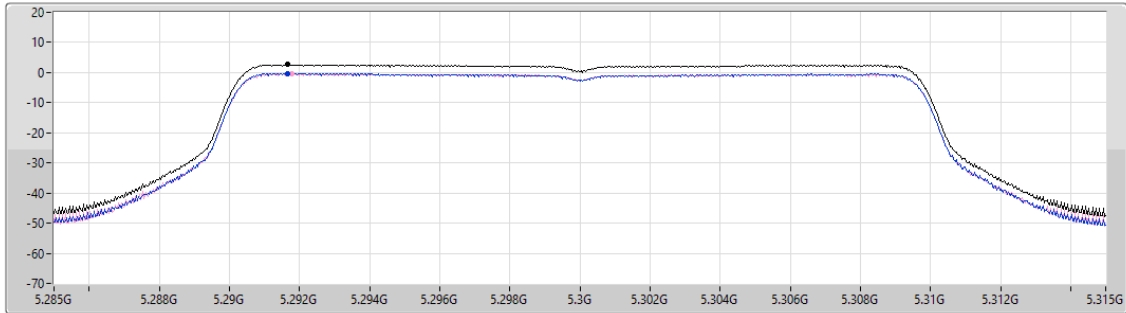

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.60	2.60	-0.34	-0.48

Sum
Port 1
Port 2


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5320MHz

26/11/2025

CF (Hz)
5.32G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.235
Detector Type
RMS

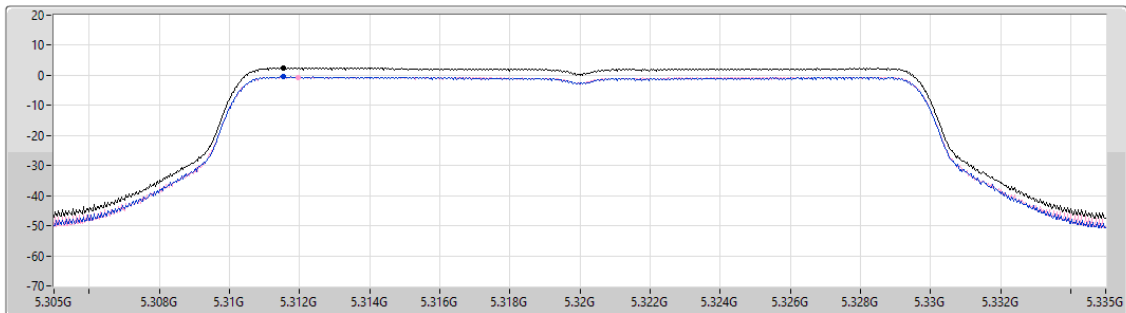

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.43	2.43	-0.51	-0.60

Sum
Port 1
Port 2


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5500MHz

26/11/2025

CF (Hz)
5.5G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.235
Detector Type
RMS

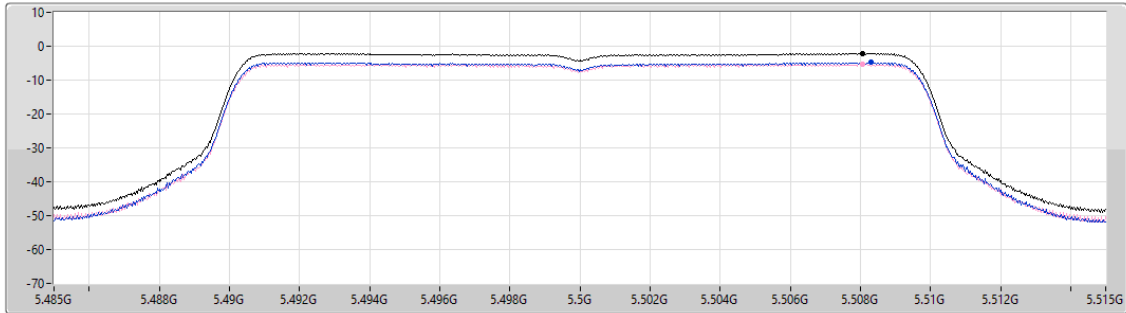

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.10	-2.10	-4.84	-5.37

Sum
Port 1
Port 2


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5580MHz

26/11/2025

CF (Hz)
5.58G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.235
Detector Type
RMS

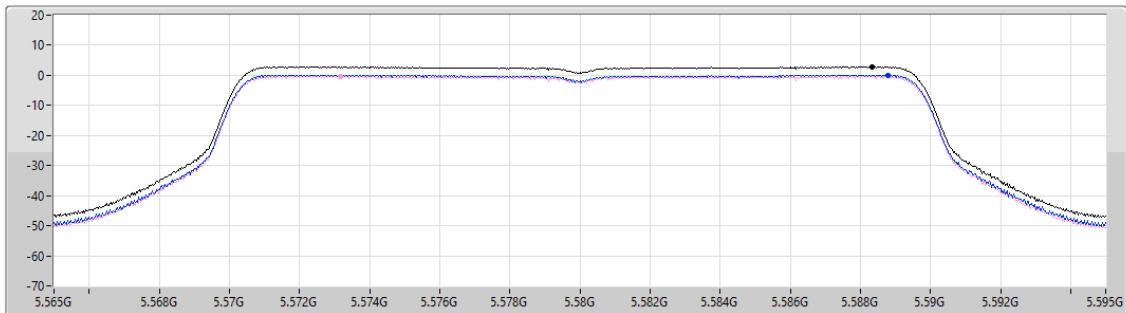

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.83	2.83	0.08	-0.43

Sum
Port 1
Port 2


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5700MHz

26/11/2025

CF (Hz)
5.7G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.235
Detector Type
RMS

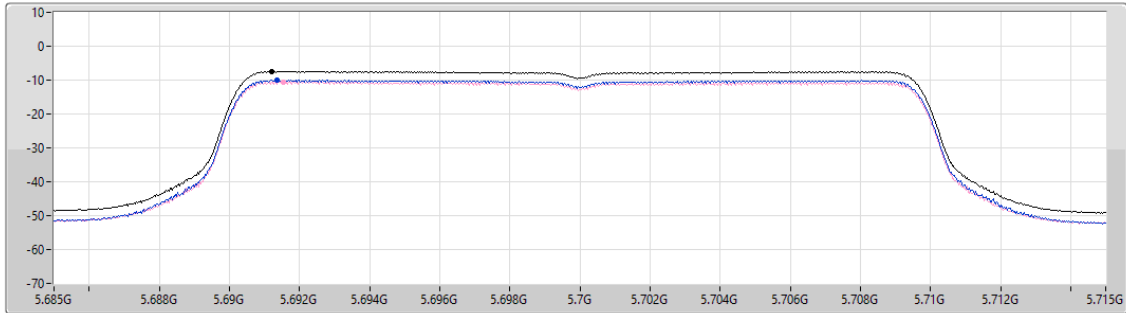

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-7.38	-7.38	-10.10	-10.65

Sum
Port 1
Port 2


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.47-5.725GHz

10/12/2025

CF (Hz)
5.71G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.235
Detector Type
RMS

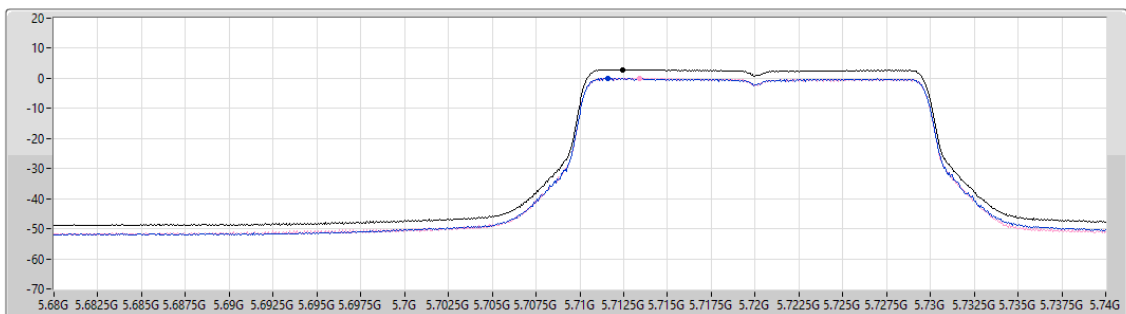

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.91	2.91	-0.11	-0.01


Sum
Port 1
Port 2

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.725-5.85GHz

10/12/2025

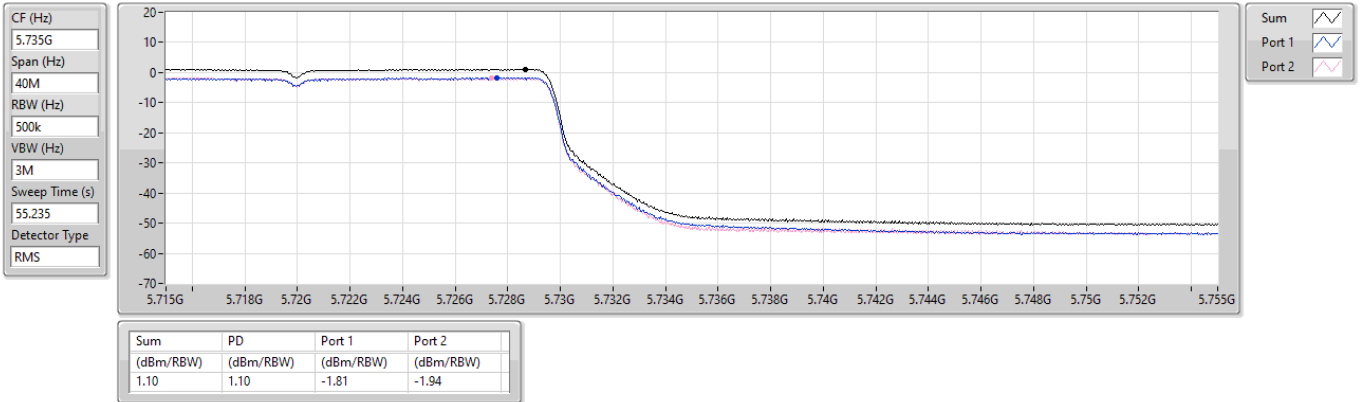


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5745MHz

26/11/2025

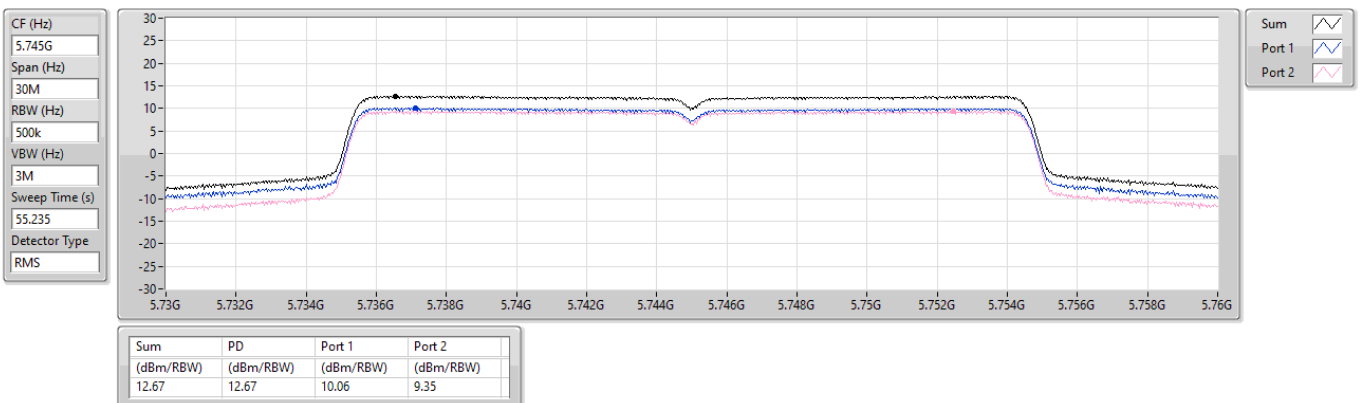


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5785MHz

26/11/2025

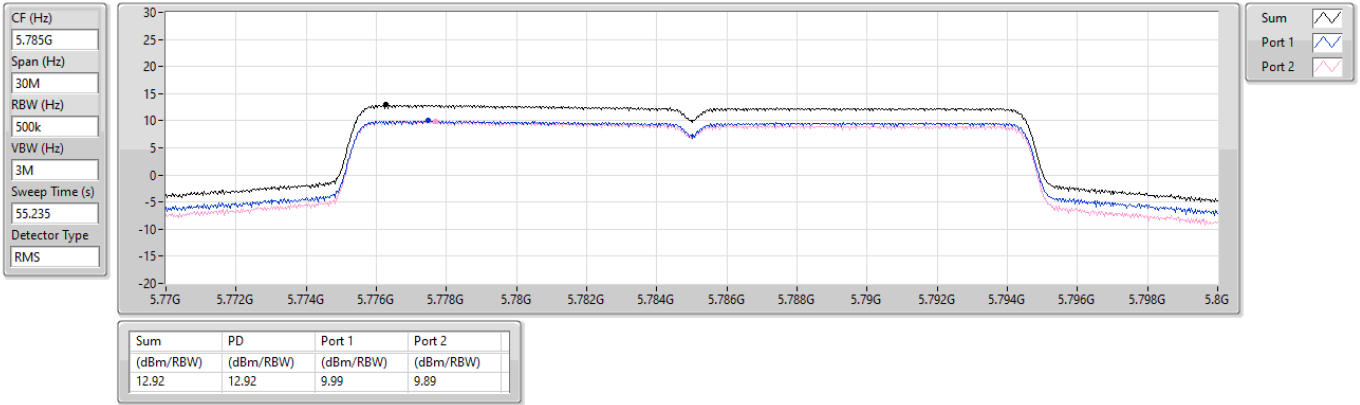


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5825MHz

26/11/2025

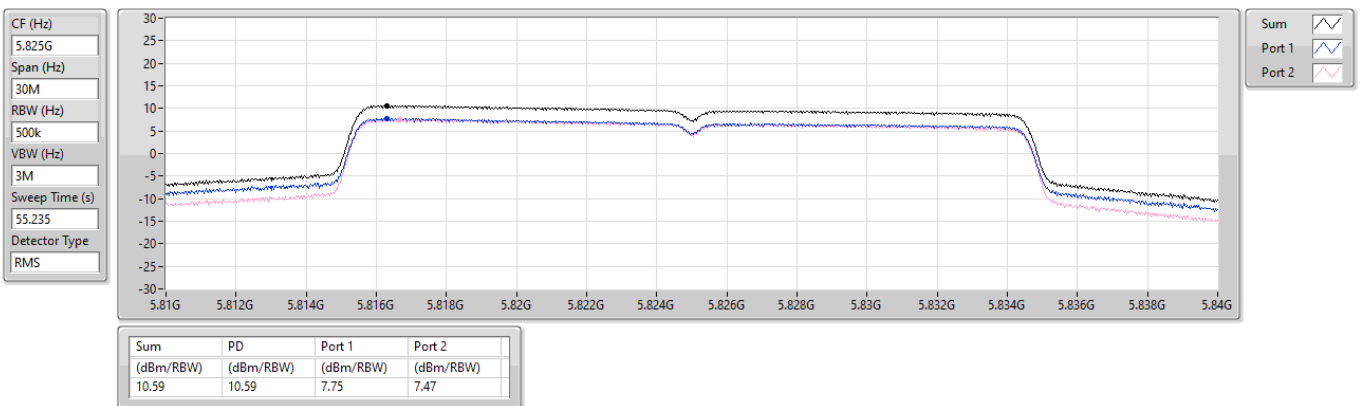

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5190MHz

26/11/2025

CF (Hz)
5.19G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
55.41

Detector Type
RMS

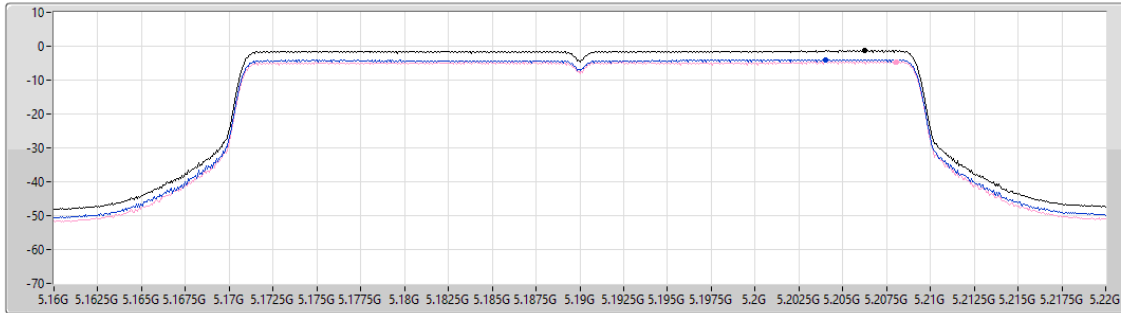

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.34	-1.34	-4.02	-4.66

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5230MHz

05/12/2025

CF (Hz)
5.23G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
55.41

Detector Type
RMS

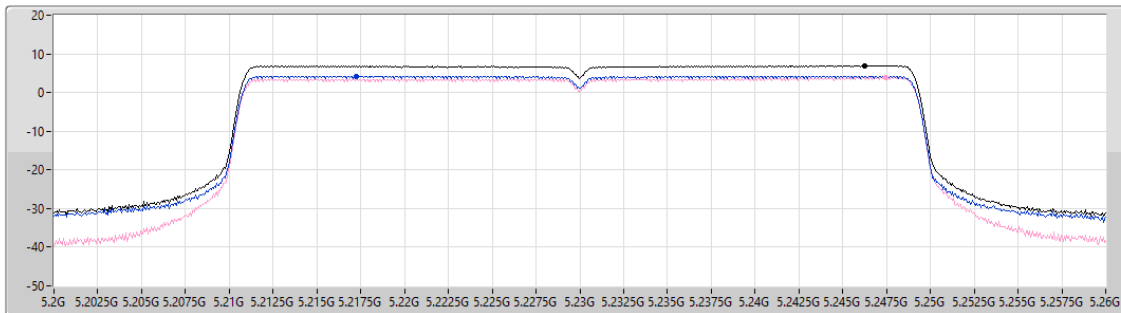

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
7.00	7.00	4.25	3.83


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5270MHz

26/11/2025

CF (Hz)
5.27G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.41
Detector Type
RMS

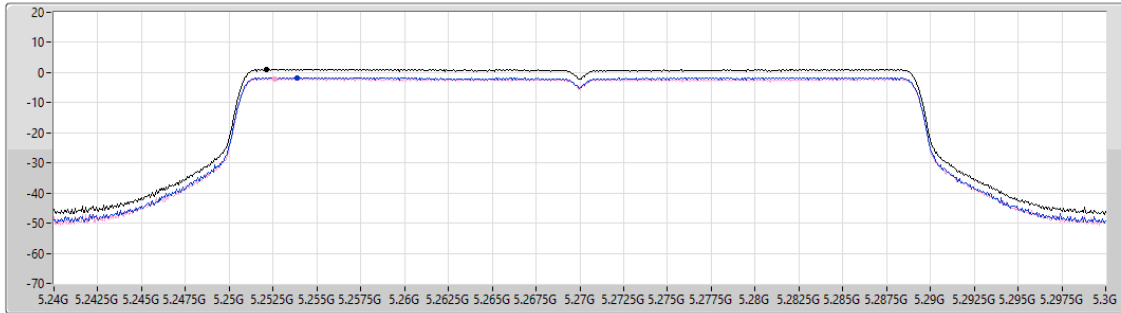

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.06	1.06	-1.74	-2.11


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5310MHz

26/11/2025

CF (Hz)
5.31G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.41
Detector Type
RMS

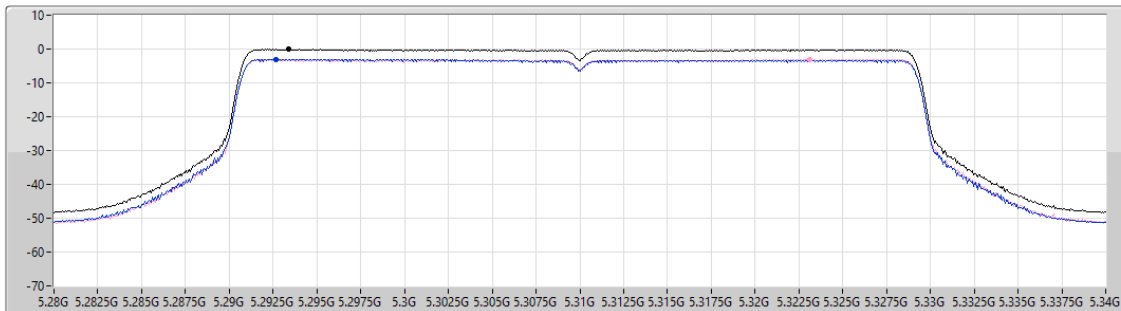

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.09	-0.09	-3.02	-3.09


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5510MHz

26/11/2025

CF (Hz)
5.51G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.41
Detector Type
RMS

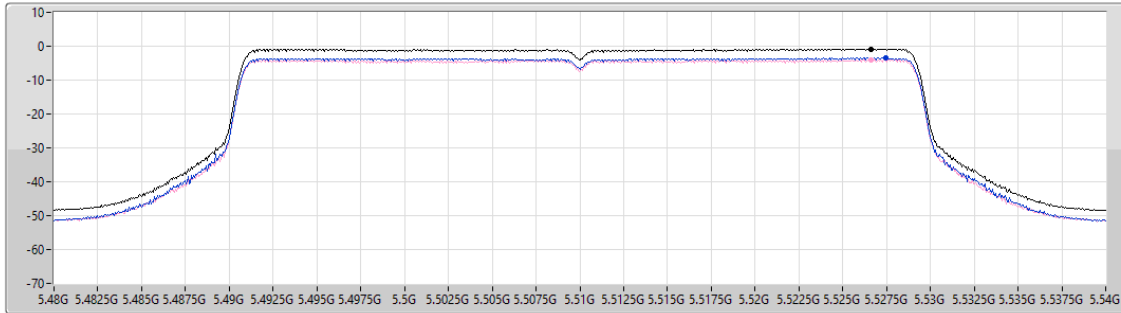

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.81	-0.81	-3.50	-4.11


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5550MHz

26/11/2025

CF (Hz)
5.55G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.41
Detector Type
RMS

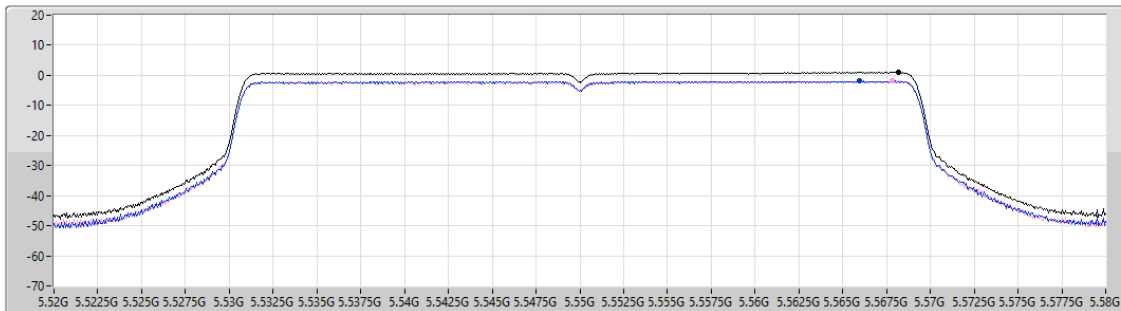

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.06	1.06	-1.97	-1.87

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5670MHz

26/11/2025

CF (Hz)
5.67G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
55.41

Detector Type
RMS

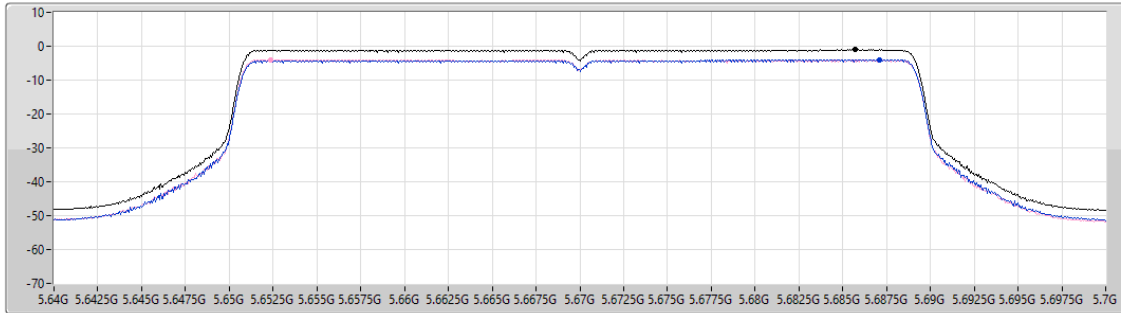

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.05	-1.05	-3.94	-3.93

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.47-5.725GHz

10/12/2025

CF (Hz)
5.69G


Span (Hz)
140M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
55.41

Detector Type
RMS

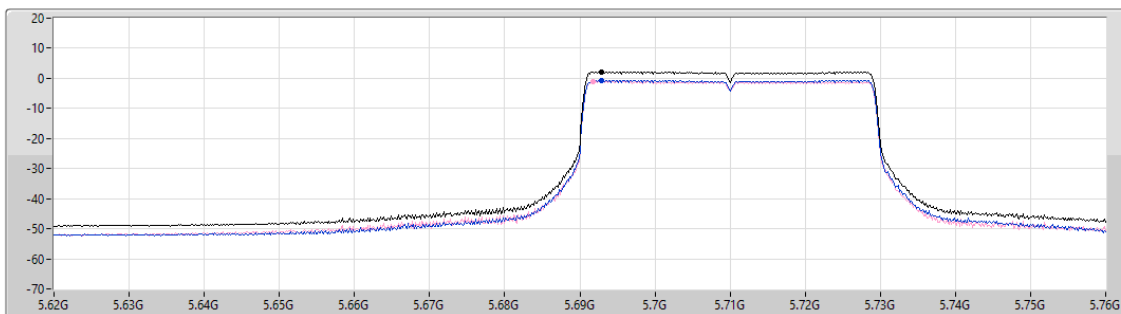

Sum 

Port 1 

Port 2 


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.11	2.11	-0.75	-1.02

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.725-5.85GHz

10/12/2025

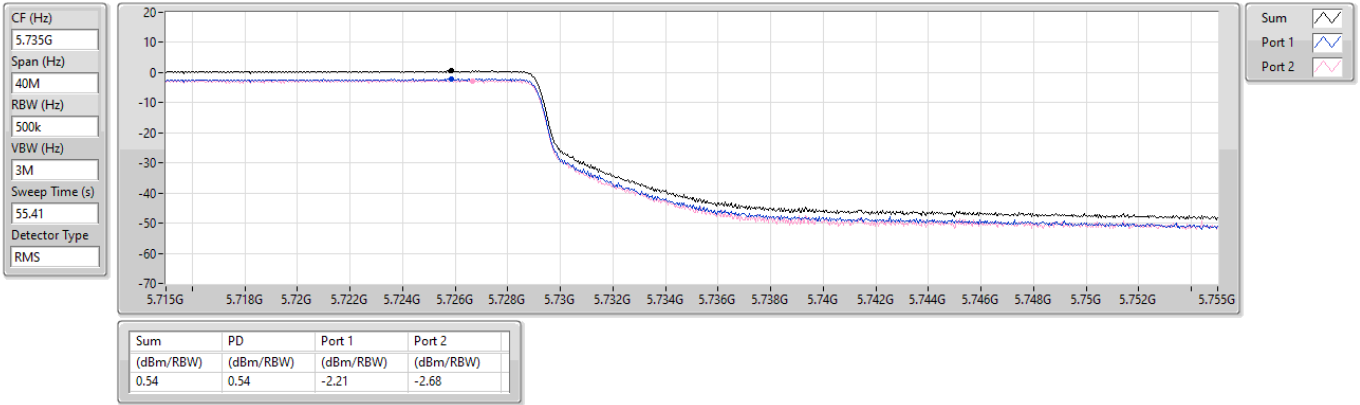


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5755MHz

26/11/2025

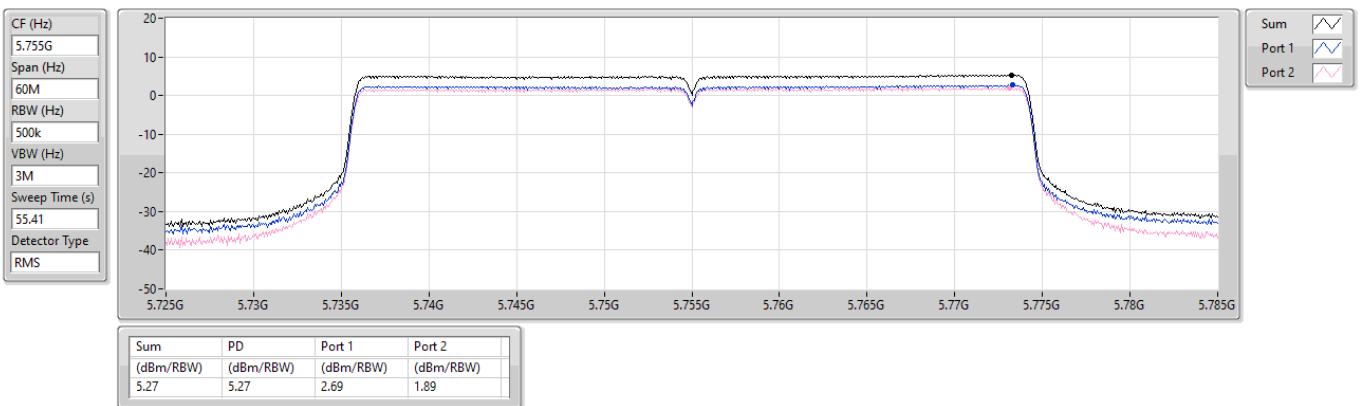


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5795MHz

26/11/2025

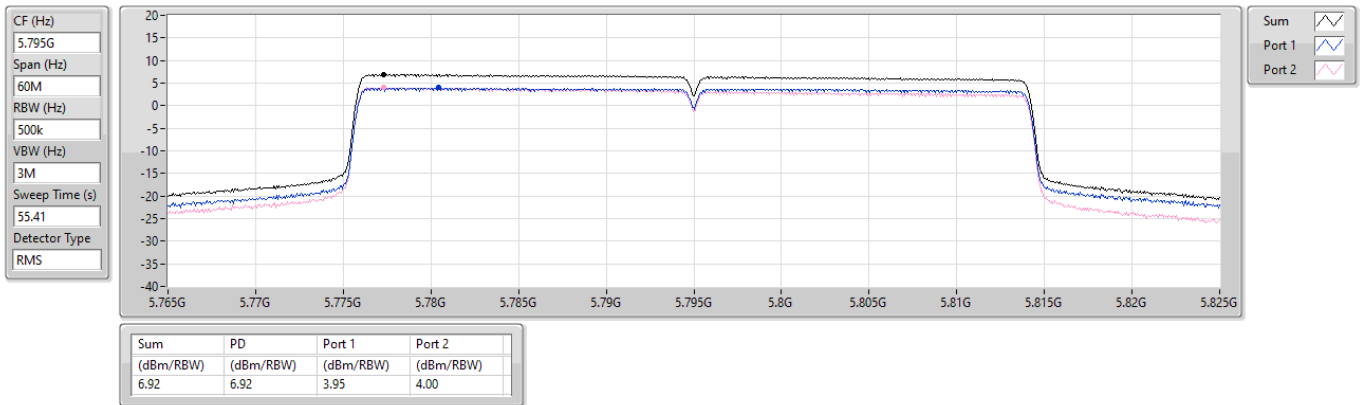


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5210MHz

26/11/2025

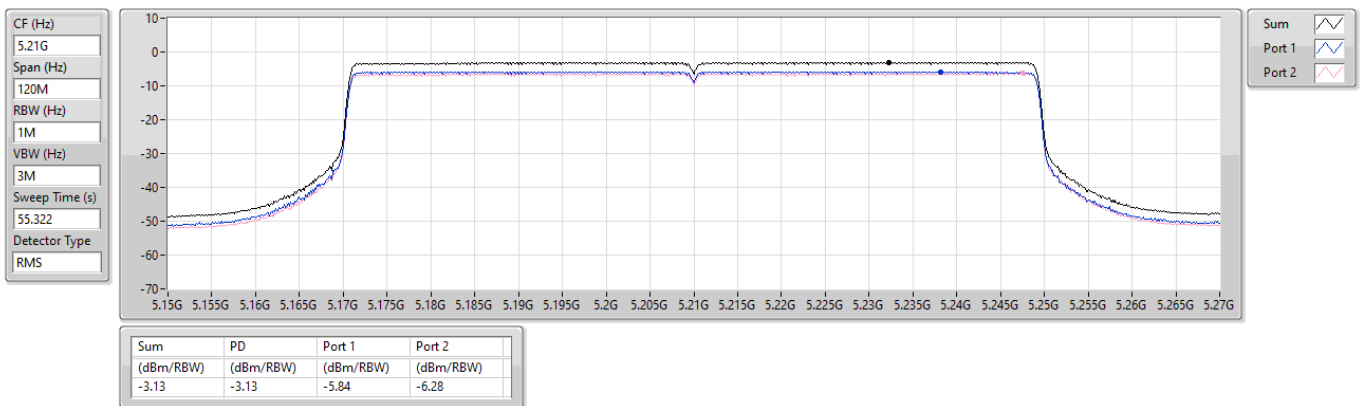


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5290MHz

26/11/2025

CF (Hz)
5.29G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.322
Detector Type
RMS

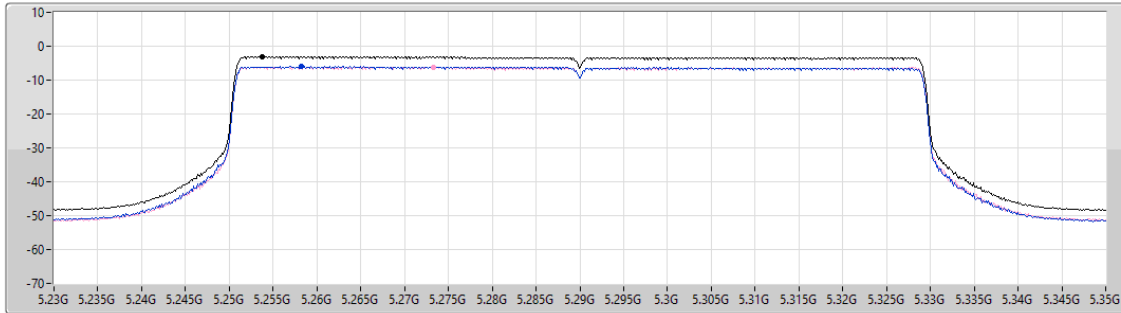

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.17	-3.17	-6.02	-6.23


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5530MHz

26/11/2025

CF (Hz)
5.53G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.322
Detector Type
RMS

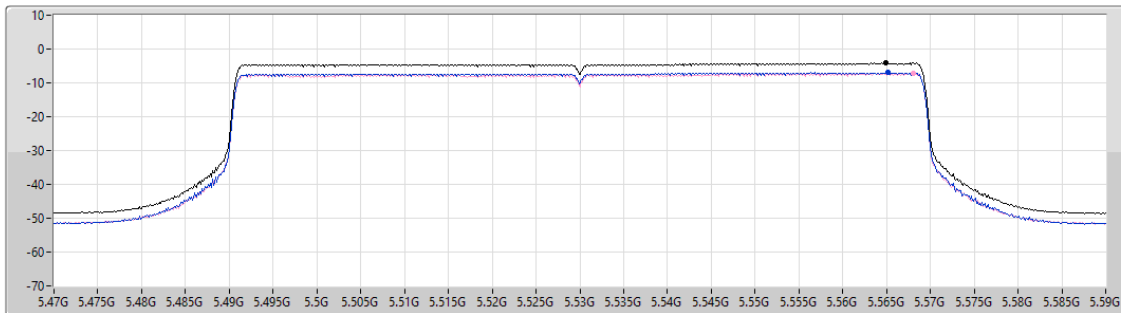

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-4.18	-4.18	-6.96	-7.28


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5610MHz

26/11/2025

CF (Hz)
5.61G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.322
Detector Type
RMS

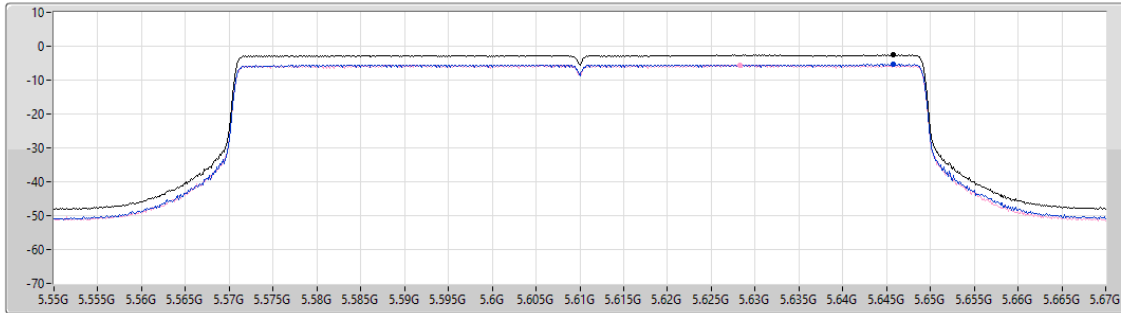

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.60	-2.60	-5.40	-5.65

Sum
Port 1
Port 2


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

10/12/2025

CF (Hz)
5.65G
Span (Hz)
300M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.322
Detector Type
RMS

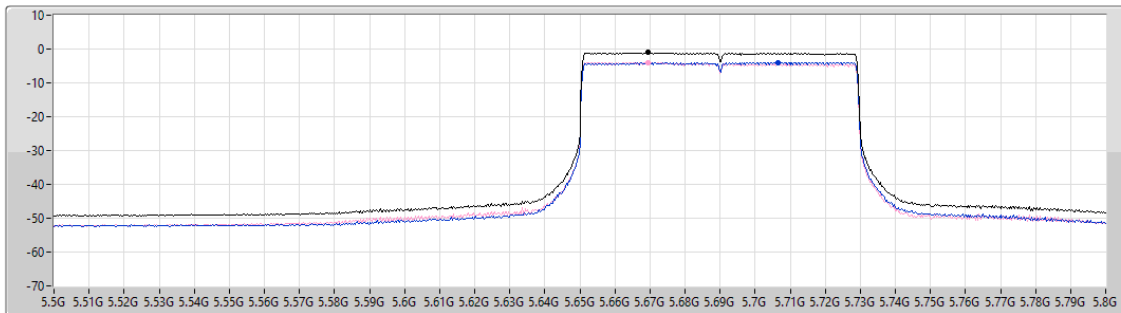

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.05	-1.05	-4.06	-3.97


Sum
Port 1
Port 2

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.725-5.85GHz

10/12/2025

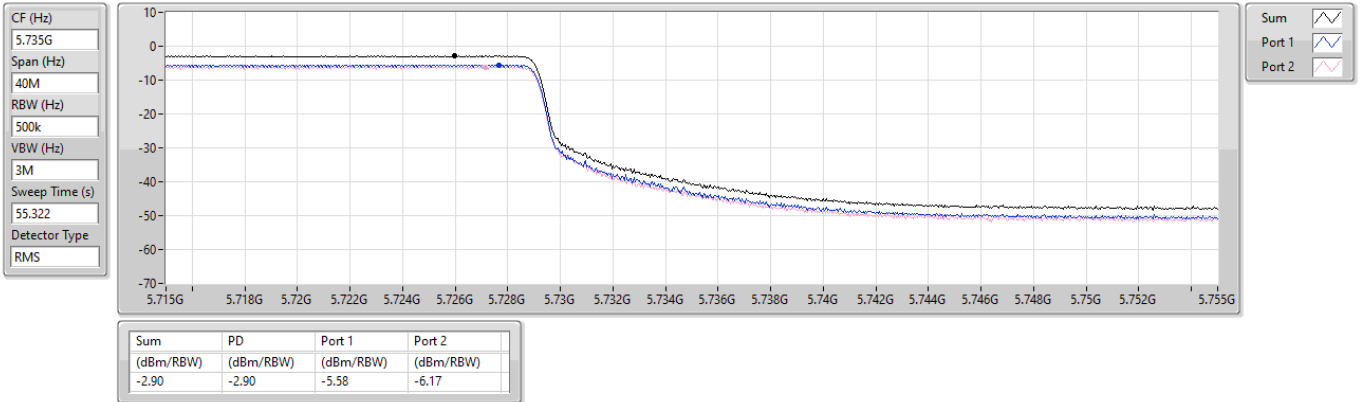


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5775MHz

26/11/2025

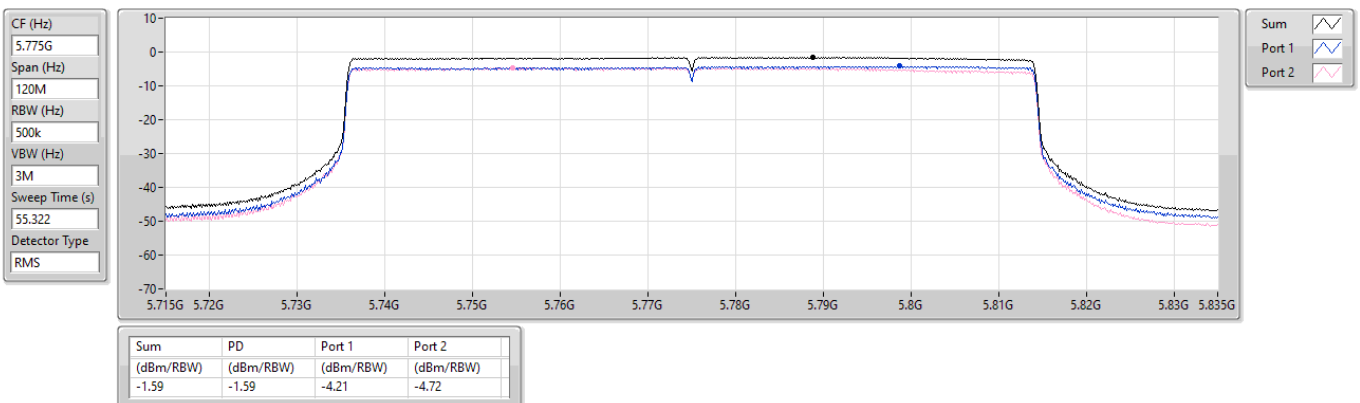


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

5250MHz Straddle 5.15-5.25GHz

26/11/2025

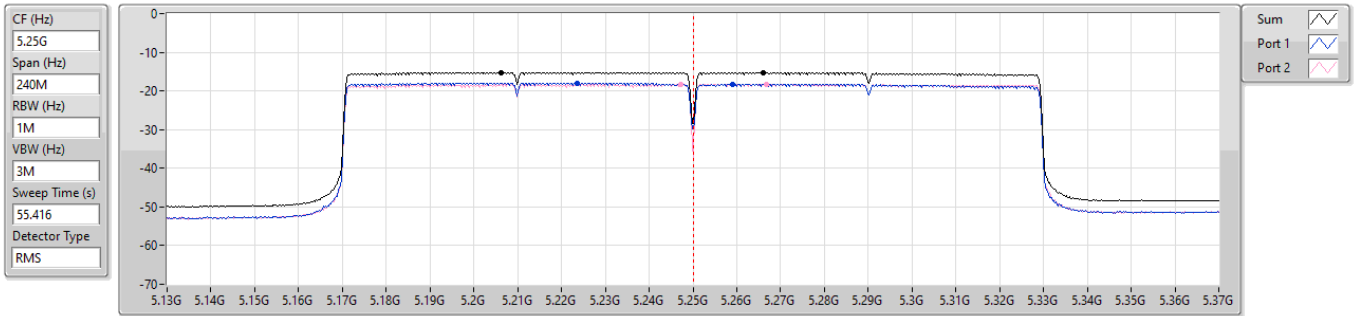

5150~5250MHz

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-15.19	-15.19	-17.94	-18.26

5250~5350MHz


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-15.27	-15.27	-18.24	-18.28

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

5570MHz

26/11/2025

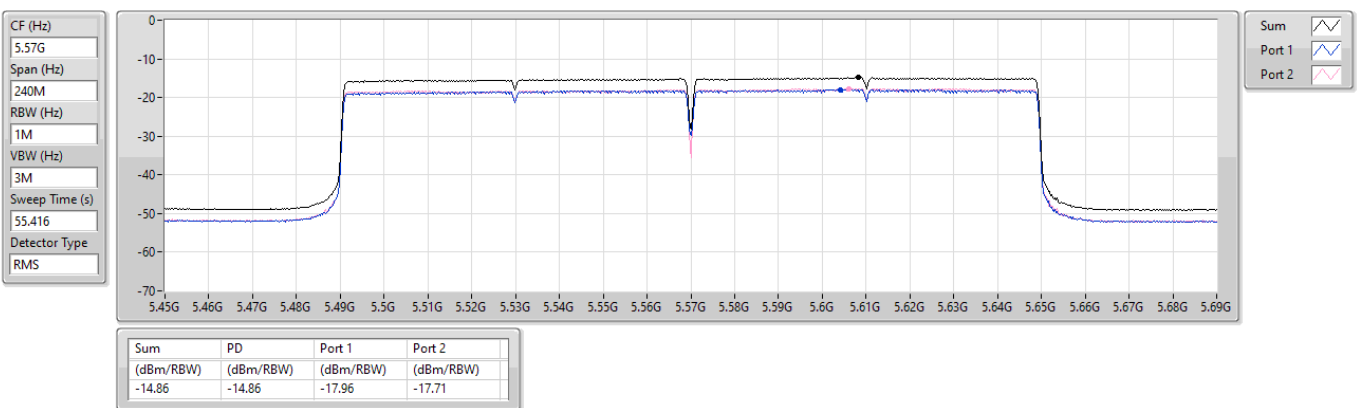


5.47-5.725GHz_EHT240_240MHz_Nss1,(MCS0)_2TX

PSD

5610MHz Straddle 5.47-5.725GHz

26/11/2025

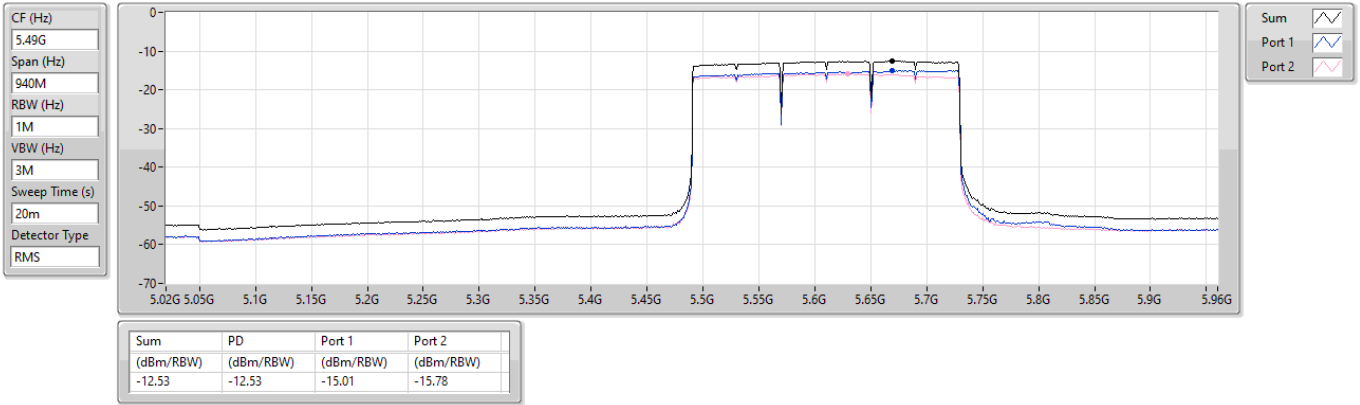


5.725-5.85GHz_EHT240_240MHz_Nss1,(MCS0)_2TX

PSD

5610MHz Straddle 5.725-5.85GHz

26/11/2025

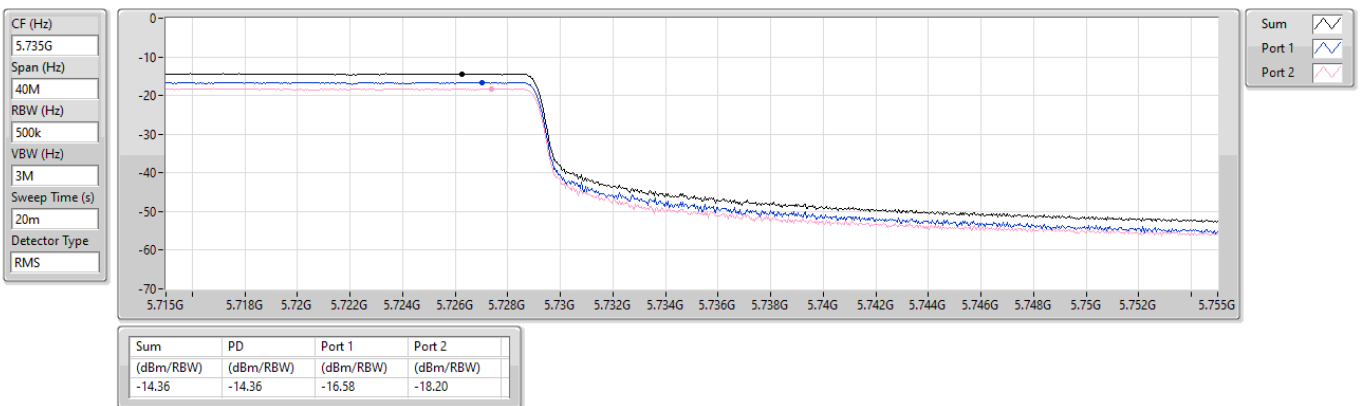




Radiated Emissions below 1GHz

Appendix E.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	QP	49.4M	36.32	40.00	-3.68	Vertical

Mode 1

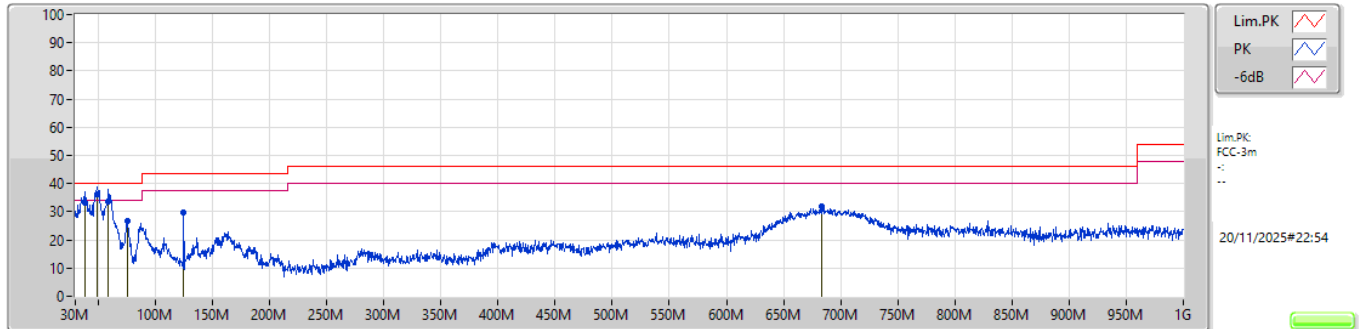

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)		
QP	38.73M	33.31	40.00	-6.69	-34.29	3	Vertical	24	1.00	-	67.60	18.95	0.66	53.90		
QP	49.4M	36.32	40.00	-3.68	-33.28	3	Vertical	122	1.00	"Worst"	69.60	20.09	0.75	54.12		
QP	59.1M	33.54	40.00	-6.46	-33.96	3	Vertical	24	2.00	-	67.50	19.26	0.74	53.96		
PK	75.59M	26.52	40.00	-13.48	-37.11	3	Vertical	221	1.00	-	63.63	15.94	0.93	53.98		
PK	124.58M	29.90	43.50	-13.60	-35.26	3	Vertical	47	1.00	-	65.16	17.29	1.26	53.81		
PK	683.3M	31.71	46.00	-14.29	-22.22	3	Vertical	108	2.00	-	53.93	26.64	3.82	52.68		

Mode 1

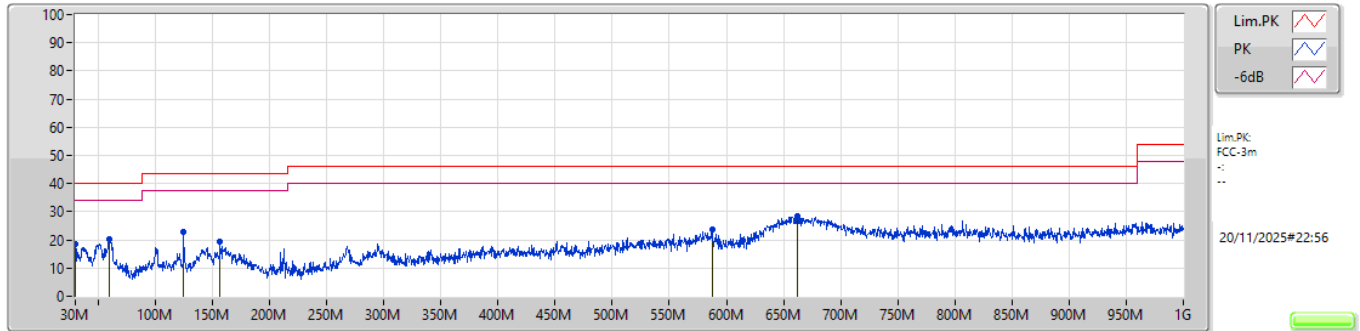

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)		
PK	30.49M	18.45	40.00	-21.55	-34.82	3	Horizontal	24	1.00	-	53.27	18.19	0.56	53.57		
PK	59.59M	20.10	40.00	-19.90	-34.02	3	Horizontal	147	2.00	-	54.12	19.21	0.73	53.96		
PK	124.58M	22.71	43.50	-20.79	-35.26	3	Horizontal	253	2.00	-	57.97	17.29	1.26	53.81		
PK	156.59M	19.19	43.50	-24.31	-32.84	3	Horizontal	322	1.00	-	52.03	19.44	1.44	53.72		
PK	587.27M	23.69	46.00	-22.31	-24.02	3	Horizontal	8	1.00	-	47.71	25.53	3.44	52.99		
PK	661.96M	28.46	46.00	-17.54	-22.61	3	Horizontal	17	1.00	"Worst"	51.07	26.44	3.73	52.78		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	PK	5.3528G	73.92	74.00	-0.08	3	Horizontal	177	1.80	-

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

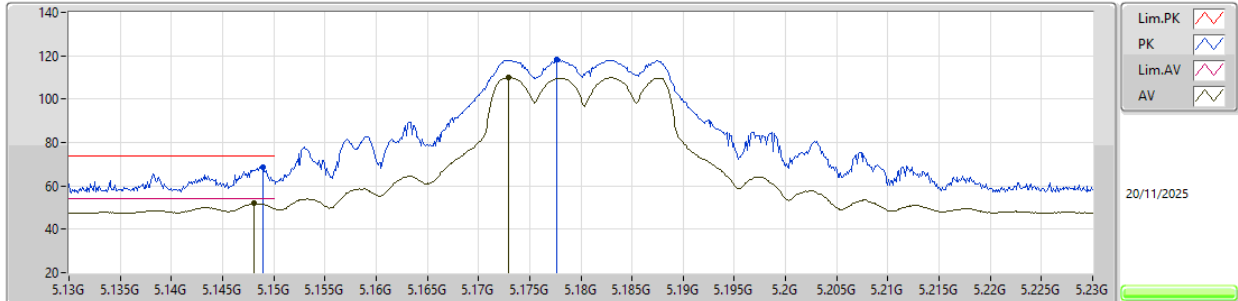


EUT Y_2TX
Setting 17.5
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1489G	68.43	74.00	-5.57	71.93	3	Vertical	181	1.80	-	31.99	8.39	43.88			
AV	5.1481G	51.91	54.00	-2.09	55.41	3	Vertical	181	1.80	-	31.99	8.39	43.88			
PK	5.1776G	118.38	Inf	-Inf	122.00	3	Vertical	181	1.80	-	31.83	8.41	43.86			
AV	5.1729G	109.91	Inf	-Inf	113.50	3	Vertical	181	1.80	-	31.86	8.41	43.86			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

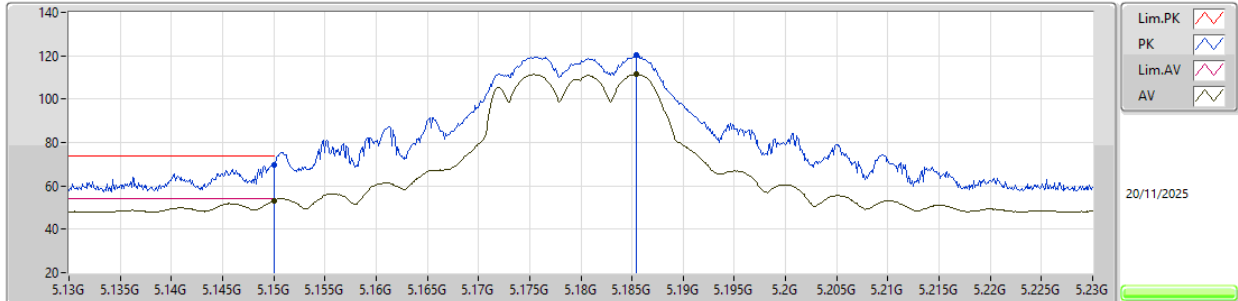


EUT Y_2TX
Setting 17.5
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.15G	69.75	74.00	-4.25	73.23	3	Horizontal	185	1.80	-	32.00	8.39	43.87			
AV	5.15G	53.30	54.00	-0.70	56.78	3	Horizontal	185	1.80	-	32.00	8.39	43.87			
PK	5.1854G	120.09	Inf	-Inf	123.75	3	Horizontal	185	1.80	-	31.79	8.41	43.86			
AV	5.1854G	111.36	Inf	-Inf	115.02	3	Horizontal	185	1.80	-	31.79	8.41	43.86			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

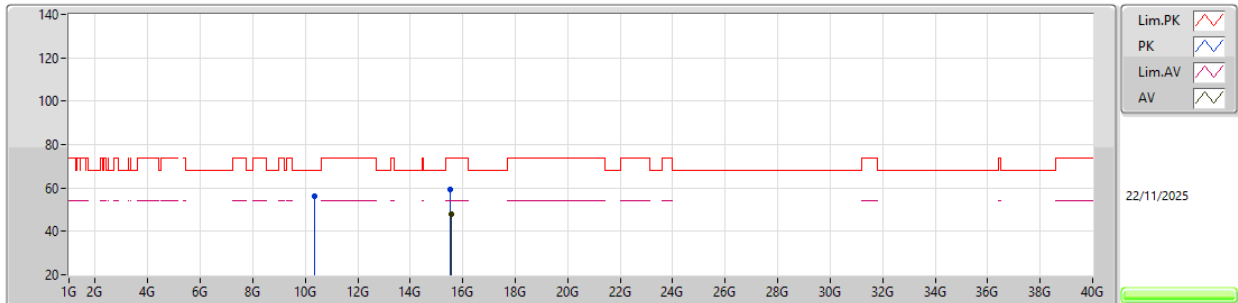


EUT Y_2TX
Setting 17.5
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.35966G	55.95	68.20	-12.25	47.49	3	Vertical	56	2.62	-	39.12	12.42	43.08			
PK	15.51915G	59.19	74.00	-14.81	47.23	3	Vertical	329	1.67	-	38.02	16.17	42.23			
AV	15.54535G	47.82	54.00	-6.18	35.99	3	Vertical	329	1.67	-	37.92	16.17	42.26			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

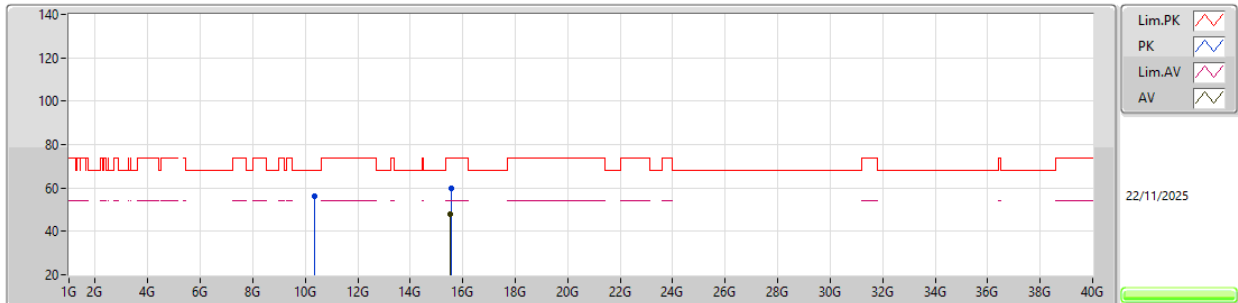


EUT Y_2TX
Setting 17.5
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.35022G	56.21	68.20	-11.99	47.77	3	Horizontal	284	1.60	-	39.10	12.41	43.07			
PK	15.54856G	59.63	74.00	-14.37	47.81	3	Horizontal	47	1.44	-	37.91	16.17	42.26			
AV	15.53504G	47.83	54.00	-6.17	35.95	3	Horizontal	47	1.44	-	37.96	16.17	42.25			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

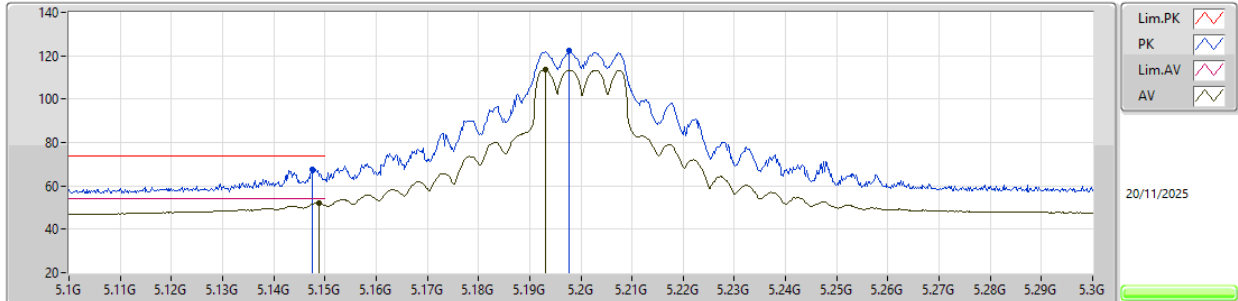


EUT Y_2TX
Setting 22
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1476G	67.75	74.00	-6.25	71.25	3	Vertical	177	1.80	-	31.99	8.39	43.88			
AV	5.1488G	52.10	54.00	-1.90	55.60	3	Vertical	177	1.80	-	31.99	8.39	43.88			
PK	5.1976G	122.28	Inf	-Inf	126.00	3	Vertical	177	1.80	-	31.71	8.42	43.85			
AV	5.193G	113.65	Inf	-Inf	117.34	3	Vertical	177	1.80	-	31.74	8.42	43.85			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

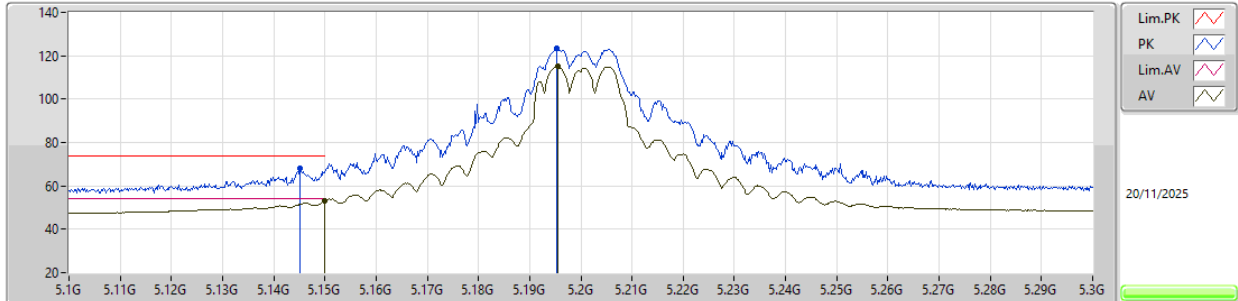


EUT Y_2TX
Setting 22
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1452G	68.12	74.00	-5.88	71.64	3	Horizontal	182	1.80	-	31.97	8.39	43.88			
AV	5.15G	53.14	54.00	-0.86	56.62	3	Horizontal	182	1.80	-	32.00	8.39	43.87			
PK	5.1952G	123.27	Inf	-Inf	126.97	3	Horizontal	182	1.80	-	31.73	8.42	43.85			
AV	5.1954G	115.03	Inf	-Inf	118.73	3	Horizontal	182	1.80	-	31.73	8.42	43.85			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

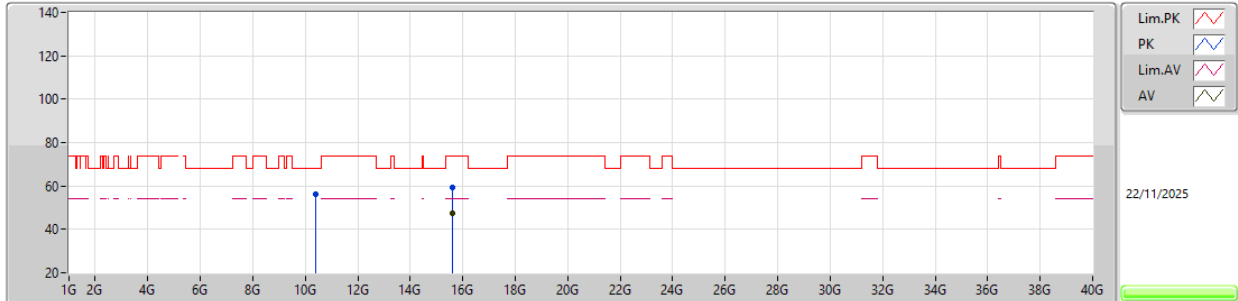


EUT Y_2TX
Setting 22
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.4056G	55.98	68.20	-12.22	47.44	3	Vertical	330	1.46	-	39.21	12.45	43.12			
PK	15.59564G	59.25	74.00	-14.75	47.73	3	Vertical	107	1.11	-	37.63	16.18	42.29			
AV	15.59204G	47.18	54.00	-6.82	35.64	3	Vertical	107	1.11	-	37.65	16.18	42.29			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

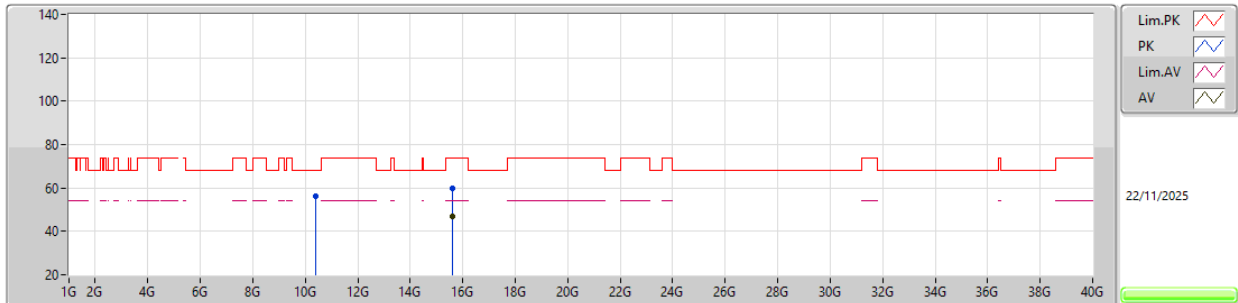


EUT Y_2TX
Setting 22
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.39808G	56.13	68.20	-12.07	47.61	3	Horizontal	341	2.94	-	39.20	12.44	43.12			
PK	15.60136G	59.68	74.00	-14.32	48.21	3	Horizontal	201	2.30	-	37.59	16.18	42.30			
AV	15.59818G	47.14	54.00	-6.86	35.65	3	Horizontal	201	2.30	-	37.61	16.18	42.30			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5240MHz_TX

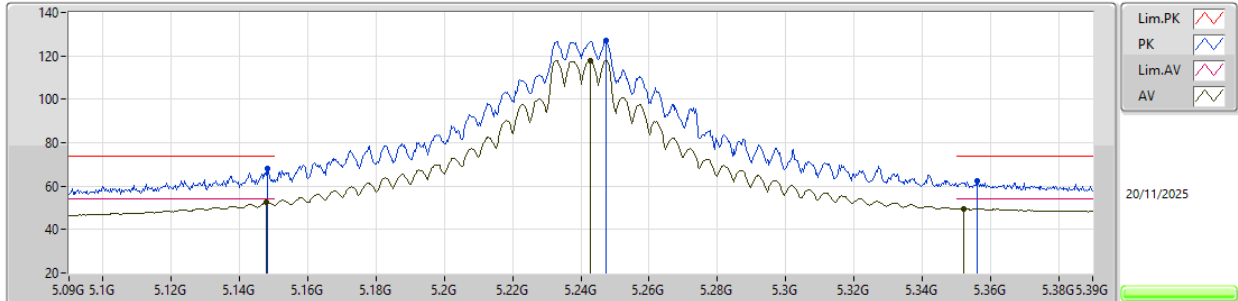


EUT Y_2TX
Setting 27.5
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1482G	67.99	74.00	-6.01	71.49	3	Vertical	178	1.80	-	31.99	8.39	43.88			
AV	5.1479G	52.64	54.00	-1.36	56.14	3	Vertical	178	1.80	-	31.99	8.39	43.88			
PK	5.2475G	127.17	Inf	-Inf	131.14	3	Vertical	178	1.80	-	31.42	8.44	43.83			
AV	5.2427G	117.85	Inf	-Inf	121.81	3	Vertical	178	1.80	-	31.44	8.43	43.83			
PK	5.3561G	62.19	74.00	-11.81	66.09	3	Vertical	178	1.80	-	31.40	8.47	43.77			
AV	5.3522G	49.73	54.00	-4.27	53.63	3	Vertical	178	1.80	-	31.40	8.47	43.77			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5240MHz_TX

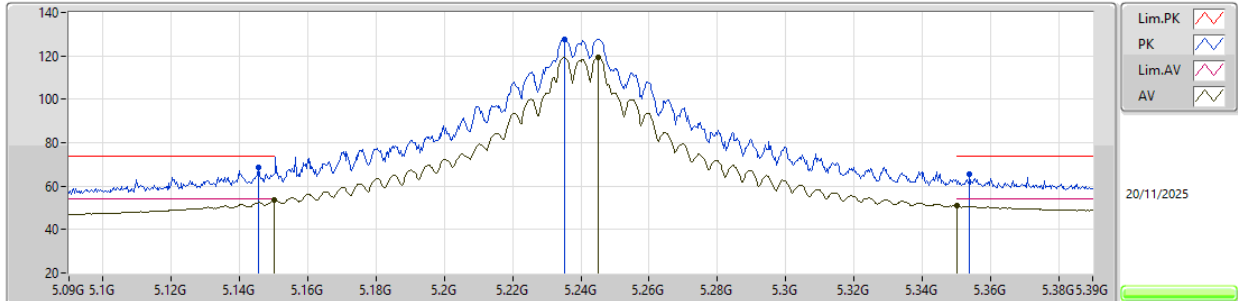


EUT Y_2TX
Setting 27.5
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1455G	68.63	74.00	-5.37	72.15	3	Horizontal	184	1.80	-	31.97	8.39	43.88			
AV	5.15G	53.53	54.00	-0.47	57.01	3	Horizontal	184	1.80	-	32.00	8.39	43.87			
PK	5.2352G	127.66	Inf	-Inf	131.57	3	Horizontal	184	1.80	-	31.49	8.43	43.83			
AV	5.2451G	119.30	Inf	-Inf	123.26	3	Horizontal	184	1.80	-	31.43	8.44	43.83			
PK	5.354G	65.49	74.00	-8.51	69.39	3	Horizontal	184	1.80	-	31.40	8.47	43.77			
AV	5.3501G	50.90	54.00	-3.10	54.80	3	Horizontal	184	1.80	-	31.40	8.47	43.77			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5240MHz_TX

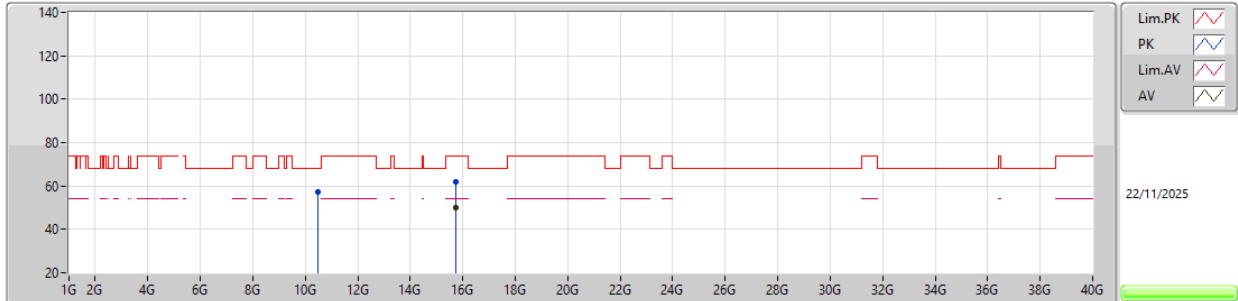


EUT Y_2TX
Setting 27.5
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.47122G	57.21	68.20	-10.99	48.56	3	Vertical	359	1.22	-	39.34	12.50	43.19			
PK	15.7207G	61.94	74.00	-12.06	50.51	3	Vertical	20	1.80	-	37.64	16.18	42.39			
AV	15.71958G	49.89	54.00	-4.11	38.46	3	Vertical	20	1.80	-	37.64	16.18	42.39			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5240MHz_TX

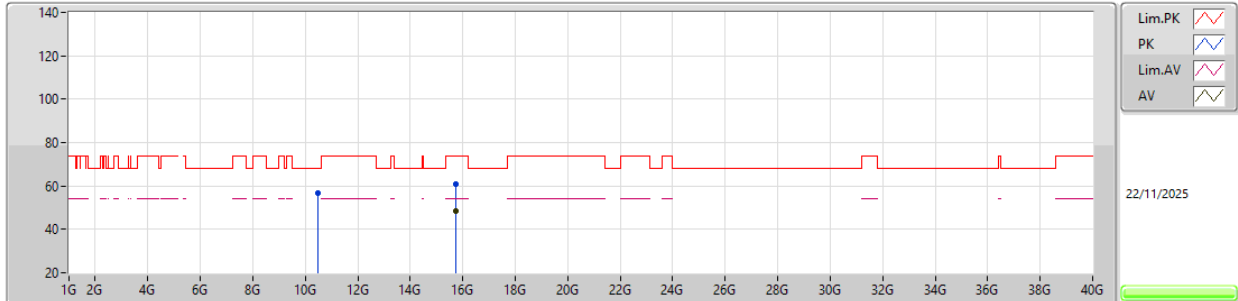


EUT Y_2TX
Setting 27.5
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.47426G	56.58	68.20	-11.62	47.92	3	Horizontal	328	2.70	-	39.35	12.50	43.19			
PK	15.71968G	60.66	74.00	-13.34	49.23	3	Horizontal	337	1.80	-	37.64	16.18	42.39			
AV	15.71928G	48.69	54.00	-5.31	37.26	3	Horizontal	337	1.80	-	37.64	16.18	42.39			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5260MHz_TX

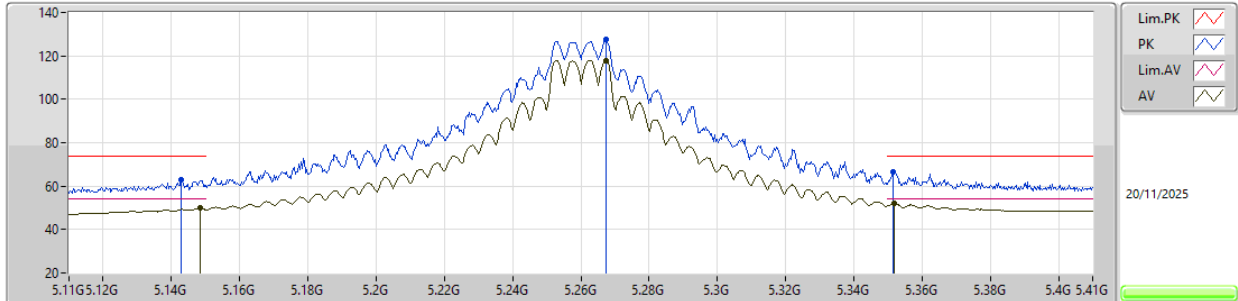


EUT Y_2TX
Setting 27.5
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1427G	62.85	74.00	-11.15	66.38	3	Vertical	179	1.80	-	31.96	8.39	43.88			
AV	5.1484G	49.78	54.00	-4.22	53.28	3	Vertical	179	1.80	-	31.99	8.39	43.88			
PK	5.2675G	127.52	Inf	-Inf	131.57	3	Vertical	179	1.80	-	31.33	8.44	43.82			
AV	5.2675G	118.01	Inf	-Inf	122.06	3	Vertical	179	1.80	-	31.33	8.44	43.82			
PK	5.3515G	66.51	74.00	-7.49	70.41	3	Vertical	179	1.80	-	31.40	8.47	43.77			
AV	5.3518G	52.26	54.00	-1.74	56.16	3	Vertical	179	1.80	-	31.40	8.47	43.77			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5260MHz_TX

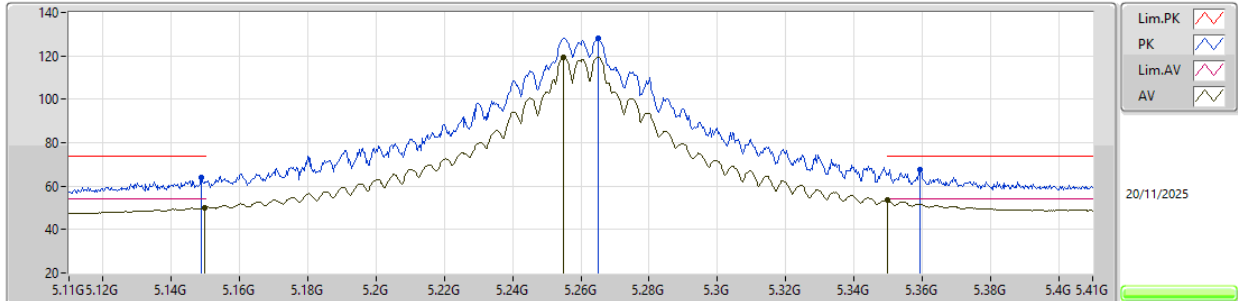


EUT Y_2TX
Setting 27.5
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1487G	64.18	74.00	-9.82	67.68	3	Horizontal	186	1.80	-	31.99	8.39	43.88			
AV	5.1499G	50.15	54.00	-3.85	53.64	3	Horizontal	186	1.80	-	32.00	8.39	43.88			
PK	5.2651G	128.05	Inf	-Inf	132.09	3	Horizontal	186	1.80	-	31.34	8.44	43.82			
AV	5.2549G	119.17	Inf	-Inf	123.17	3	Horizontal	186	1.80	-	31.38	8.44	43.82			
PK	5.3593G	67.37	74.00	-6.63	71.26	3	Horizontal	186	1.80	-	31.40	8.48	43.77			
AV	5.35G	53.47	54.00	-0.53	57.38	3	Horizontal	186	1.80	-	31.40	8.47	43.78			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX


5260MHz_TX

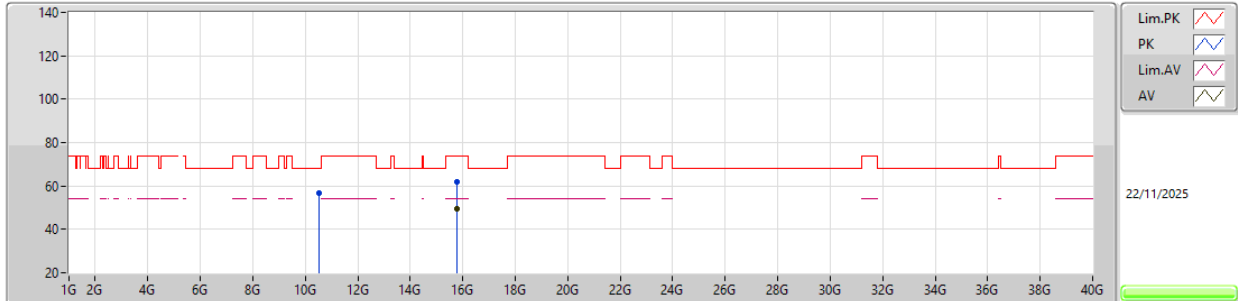EUT Y_2TX
Setting 27.5
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51896G	56.79	68.20	-11.41	48.07	3	Vertical	216	2.88	-	39.40	12.53	43.21			
PK	15.77958G	61.99	74.00	-12.01	50.66	3	Vertical	334	1.80	-	37.58	16.19	42.44			
AV	15.77918G	49.58	54.00	-4.42	38.25	3	Vertical	334	1.80	-	37.58	16.19	42.44			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5260MHz_TX

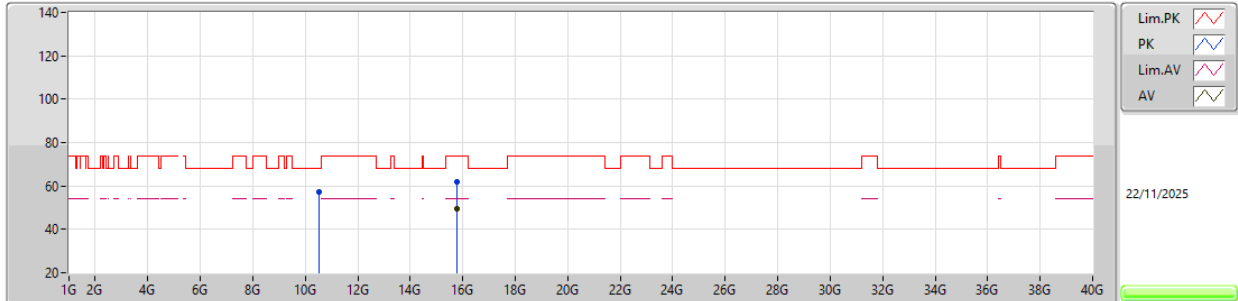


EUT Y_2TX
Setting 27.5
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51982G	57.29	68.20	-10.91	48.57	3	Horizontal	254	1.15	-	39.40	12.53	43.21			
PK	15.77904G	61.90	74.00	-12.10	50.57	3	Horizontal	334	1.80	-	37.58	16.19	42.44			
AV	15.78428G	49.52	54.00	-4.48	38.21	3	Horizontal	334	1.80	-	37.56	16.19	42.44			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

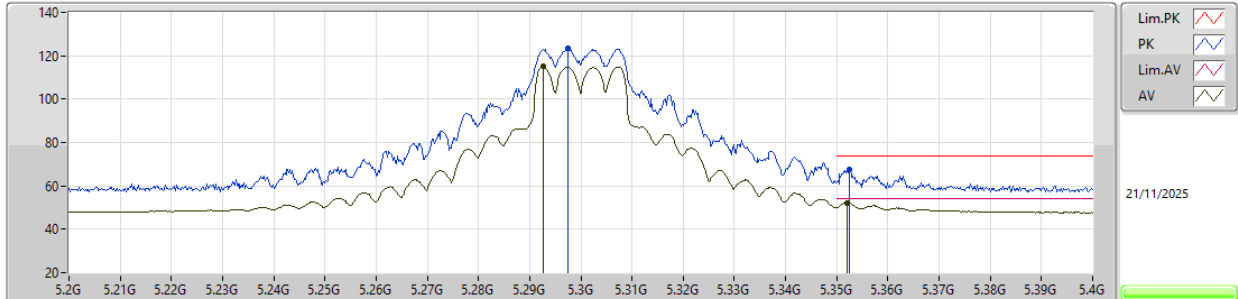


EUT Y_2TX
Setting 23
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.2974G	123.52	Inf	-Inf	127.66	3	Vertical	178	1.80	-	31.21	8.45	43.80			
AV	5.2926G	114.93	Inf	-Inf	119.05	3	Vertical	178	1.80	-	31.23	8.45	43.80			
PK	5.3524G	67.51	74.00	-6.49	71.41	3	Vertical	178	1.80	-	31.40	8.47	43.77			
AV	5.352G	52.27	54.00	-1.73	56.17	3	Vertical	178	1.80	-	31.40	8.47	43.77			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

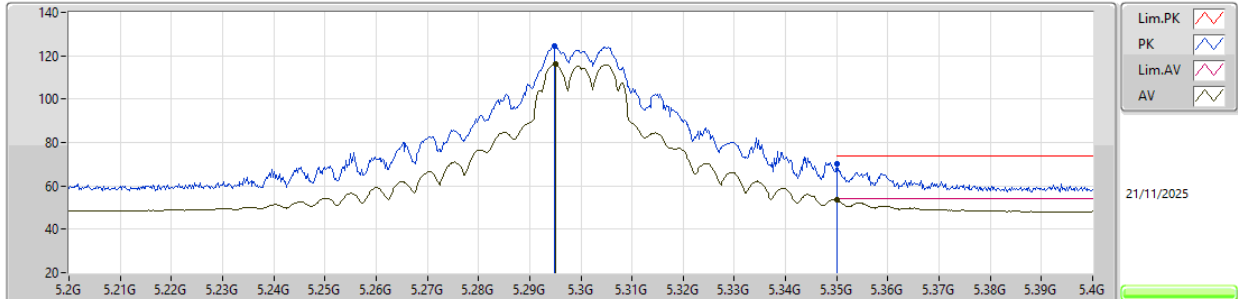


EUT Y_2TX
Setting 23
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.2948G	124.24	Inf	-Inf	128.37	3	Horizontal	185	1.80	-	31.22	8.45	43.80			
AV	5.295G	116.06	Inf	-Inf	120.19	3	Horizontal	185	1.80	-	31.22	8.45	43.80			
PK	5.35G	70.21	74.00	-3.79	74.12	3	Horizontal	185	1.80	-	31.40	8.47	43.78			
AV	5.35G	53.86	54.00	-0.14	57.77	3	Horizontal	185	1.80	-	31.40	8.47	43.78			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

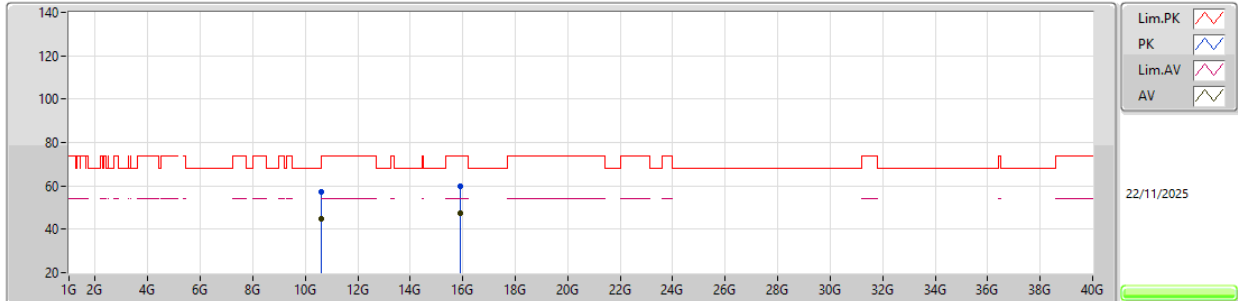


EUT Y_2TX
Setting 23
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.60166G	57.00	74.00	-17.00	48.17	3	Vertical	68	2.41	-	39.40	12.59	43.16			
AV	10.6088G	45.02	54.00	-8.98	36.15	3	Vertical	68	2.41	-	39.42	12.60	43.15			
PK	15.90526G	59.70	74.00	-14.30	48.77	3	Vertical	291	1.33	-	37.28	16.19	42.54			
AV	15.89432G	47.23	54.00	-6.77	36.28	3	Vertical	291	1.33	-	37.29	16.19	42.53			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

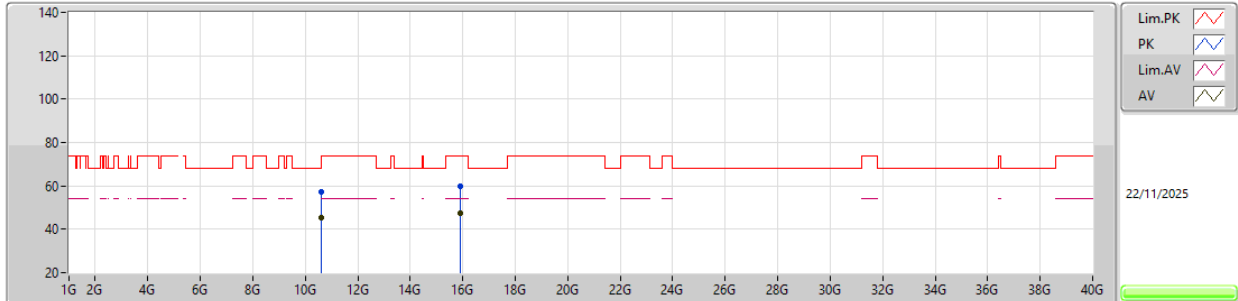


EUT Y_2TX
Setting 23
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.59761G	57.06	68.20	-11.14	48.23	3	Horizontal	298	2.26	-	39.40	12.59	43.16			
AV	10.60352G	45.17	54.00	-8.83	36.33	3	Horizontal	298	2.26	-	39.41	12.59	43.16			
PK	15.89906G	59.81	74.00	-14.19	48.85	3	Horizontal	87	2.83	-	37.30	16.19	42.53			
AV	15.8946G	47.21	54.00	-6.79	36.26	3	Horizontal	87	2.83	-	37.29	16.19	42.53			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX


5320MHz_TX

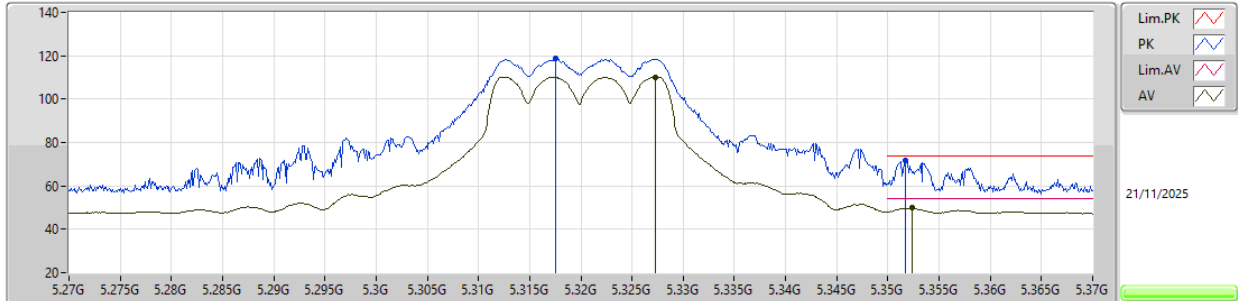EUT Y_2TX
Setting 17.5
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3175G	118.90	Inf	-Inf	122.96	3	Vertical	178	1.80	-	31.27	8.46	43.79			
AV	5.3273G	110.24	Inf	-Inf	114.26	3	Vertical	178	1.80	-	31.31	8.46	43.79			
PK	5.3517G	71.79	74.00	-2.21	75.69	3	Vertical	178	1.80	-	31.40	8.47	43.77			
AV	5.3524G	49.75	54.00	-4.25	53.65	3	Vertical	178	1.80	-	31.40	8.47	43.77			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX


5320MHz_TX

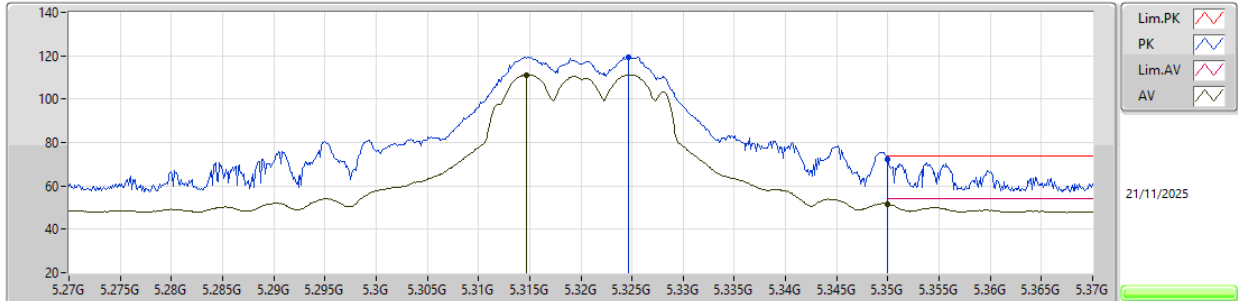EUT Y_2TX
Setting 17.5
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3247G	119.49	Inf	-Inf	123.52	3	Horizontal	182	1.80	-	31.30	8.46	43.79			
AV	5.3147G	111.27	Inf	-Inf	115.34	3	Horizontal	182	1.80	-	31.26	8.46	43.79			
PK	5.35G	72.23	74.00	-1.77	76.14	3	Horizontal	182	1.80	-	31.40	8.47	43.78			
AV	5.35G	51.64	54.00	-2.36	55.55	3	Horizontal	182	1.80	-	31.40	8.47	43.78			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

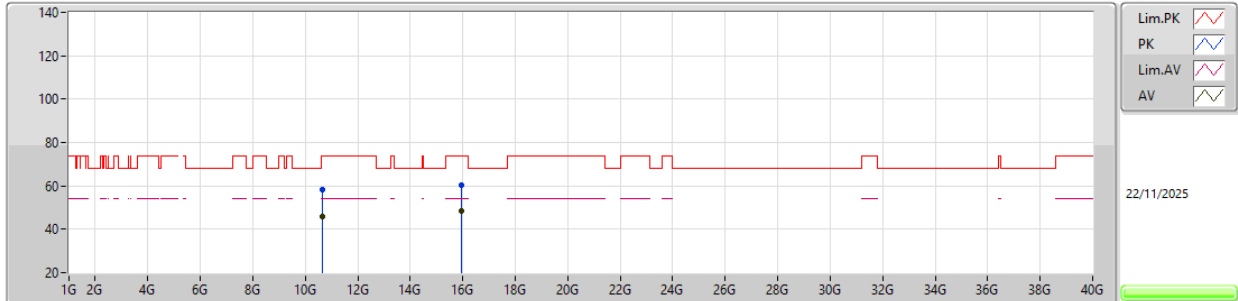


EUT Y_2TX
Setting 17.5
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.6445G	58.27	74.00	-15.73	49.29	3	Vertical	265	1.00	-	39.49	12.62	43.13			
AV	10.64267G	45.77	54.00	-8.23	36.79	3	Vertical	265	1.00	-	39.49	12.62	43.13			
PK	15.96043G	60.36	74.00	-13.64	49.68	3	Vertical	274	1.86	-	37.06	16.20	42.58			
AV	15.9602G	48.23	54.00	-5.77	37.55	3	Vertical	274	1.86	-	37.06	16.20	42.58			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

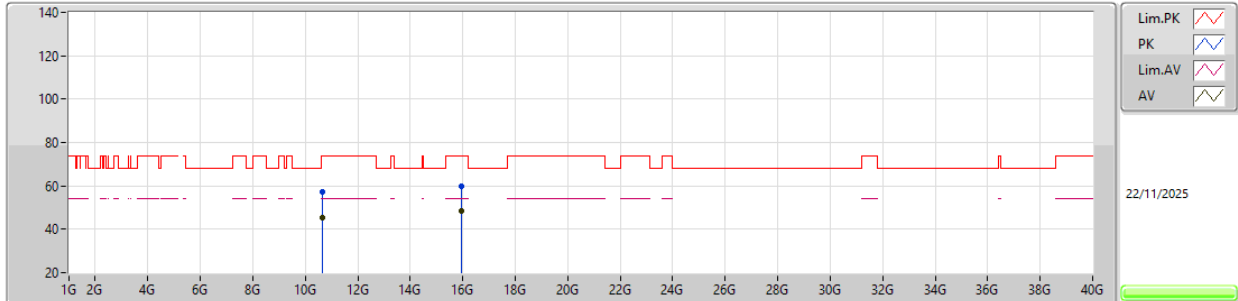


EUT Y_2TX
Setting 17.5
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.64251G	57.37	74.00	-16.63	48.39	3	Horizontal	81	1.64	-	39.49	12.62	43.13			
AV	10.63733G	45.57	54.00	-8.43	36.61	3	Horizontal	81	1.64	-	39.47	12.62	43.13			
PK	15.95935G	59.98	74.00	-14.02	49.30	3	Horizontal	156	2.99	-	37.06	16.20	42.58			
AV	15.9598G	48.36	54.00	-5.64	37.68	3	Horizontal	156	2.99	-	37.06	16.20	42.58			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5500MHz_TX

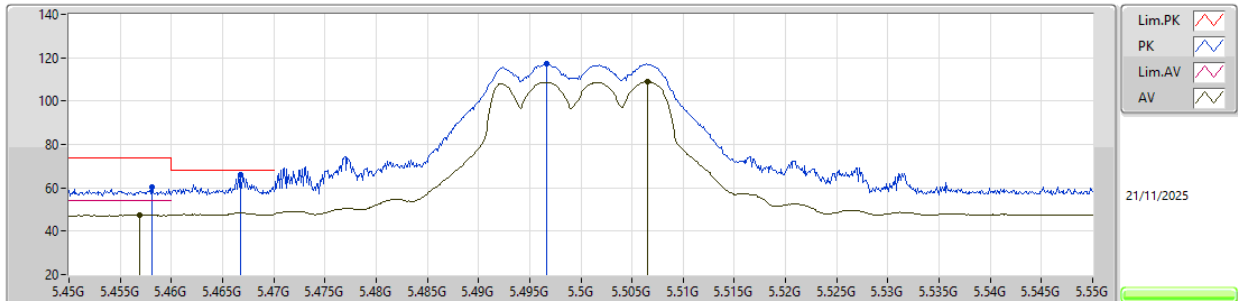EUT Y_2TX
Setting 18
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4581G	60.33	74.00	-13.67	63.87	3	Vertical	178	1.80	-	31.63	8.55	43.72			
AV	5.4569G	47.47	54.00	-6.53	51.01	3	Vertical	178	1.80	-	31.63	8.55	43.72			
PK	5.4668G	65.93	68.20	-2.27	69.42	3	Vertical	178	1.80	-	31.67	8.56	43.72			
PK	5.4967G	117.31	Inf	-Inf	120.63	3	Vertical	178	1.80	-	31.79	8.59	43.70			
AV	5.5065G	108.95	Inf	-Inf	112.25	3	Vertical	178	1.80	-	31.79	8.60	43.69			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5500MHz_TX

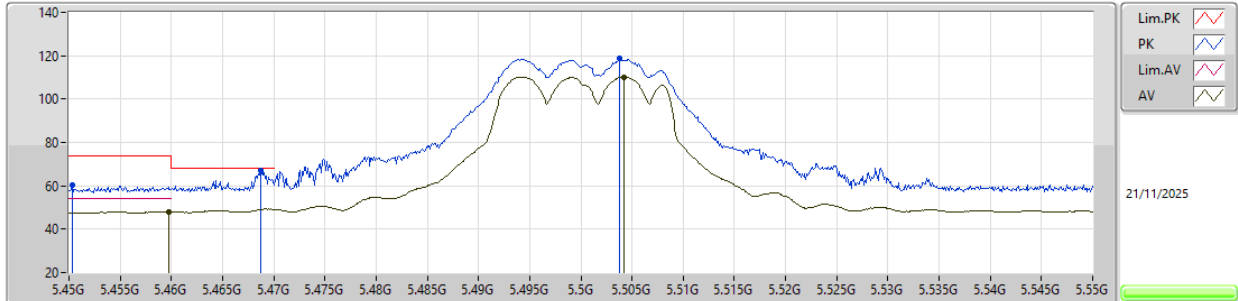EUT Y_2TX
Setting 18
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4503G	60.15	74.00	-13.85	63.73	3	Horizontal	180	1.80	-	31.60	8.54	43.72			
PK	5.4687G	67.04	68.20	-1.16	70.53	3	Horizontal	180	1.80	-	31.67	8.56	43.72			
AV	5.4598G	48.11	54.00	-5.89	51.64	3	Horizontal	180	1.80	-	31.64	8.55	43.72			
PK	5.5038G	119.01	Inf	-Inf	122.32	3	Horizontal	180	1.80	-	31.79	8.60	43.70			
AV	5.5042G	110.17	Inf	-Inf	113.48	3	Horizontal	180	1.80	-	31.79	8.60	43.70			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5500MHz_TX

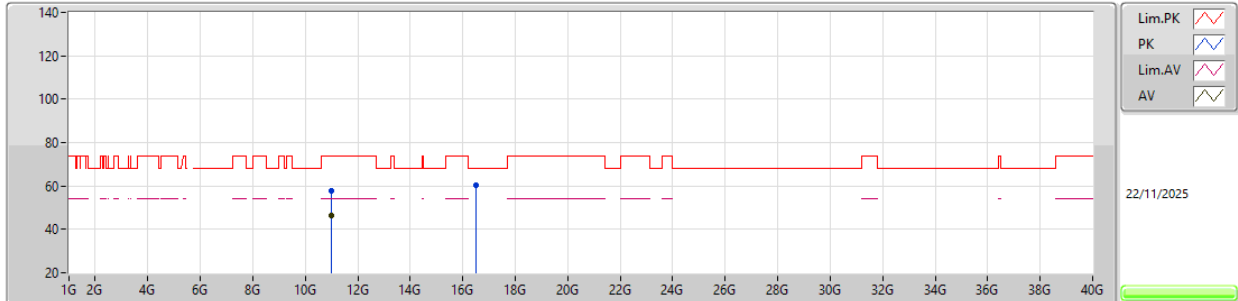EUT Y_2TX
Setting 18
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.00352G	57.97	74.00	-16.03	48.01	3	Vertical	294	2.41	-	39.99	12.88	42.91			
AV	10.99924G	46.21	54.00	-7.79	36.25	3	Vertical	294	2.41	-	40.00	12.87	42.91			
PK	16.50099G	60.29	68.20	-7.91	47.06	3	Vertical	210	1.14	-	39.10	16.26	42.13			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5500MHz_TX

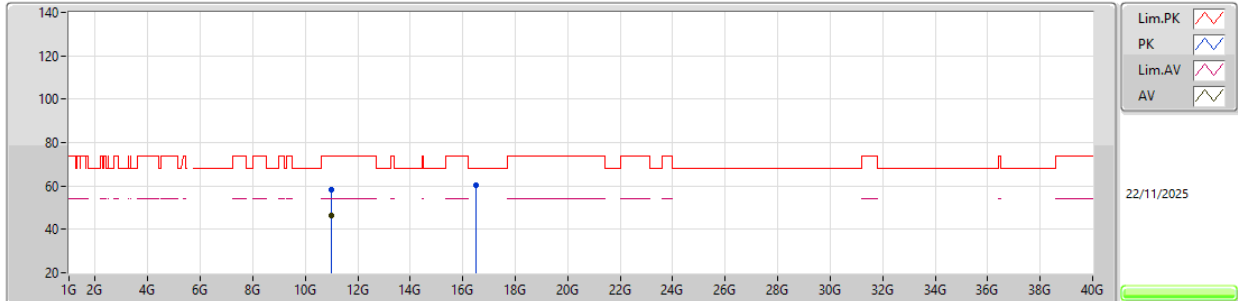EUT Y_2TX
Setting 18
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.99829G	58.06	74.00	-15.94	48.10	3	Horizontal	33	2.38	-	40.00	12.87	42.91			
AV	11.00072G	46.33	54.00	-7.67	36.36	3	Horizontal	33	2.38	-	40.00	12.88	42.91			
PK	16.4992G	60.52	68.20	-7.68	47.31	3	Horizontal	193	2.35	-	39.09	16.25	42.13			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5580MHz_TX

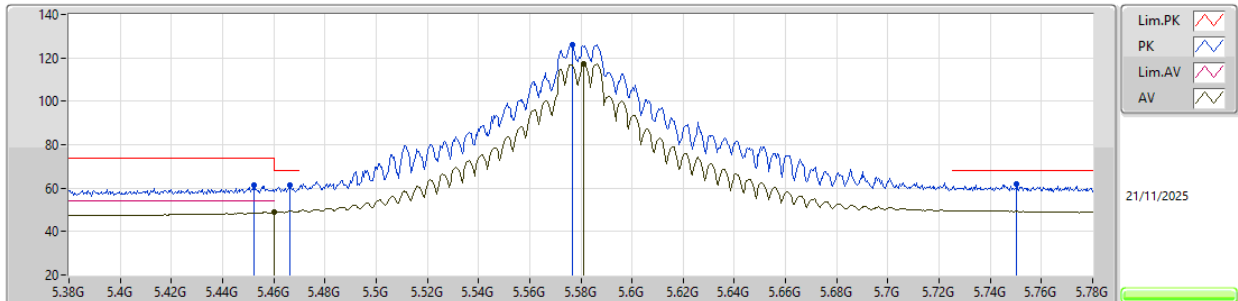EUT Y_2TX
Setting 28
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4524G	61.43	74.00	-12.57	64.99	3	Vertical	178	1.80	-	31.61	8.55	43.72			
PK	5.4664G	61.42	68.20	-6.78	64.91	3	Vertical	178	1.80	-	31.67	8.56	43.72			
AV	5.46G	48.84	54.00	-5.16	52.37	3	Vertical	178	1.80	-	31.64	8.55	43.72			
PK	5.5768G	126.07	Inf	-Inf	129.36	3	Vertical	178	1.80	-	31.65	8.68	43.62			
AV	5.5812G	117.08	Inf	-Inf	120.38	3	Vertical	178	1.80	-	31.64	8.68	43.62			
PK	5.7504G	61.84	68.20	-6.36	64.33	3	Vertical	178	1.80	-	32.10	8.86	43.45			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5580MHz_TX

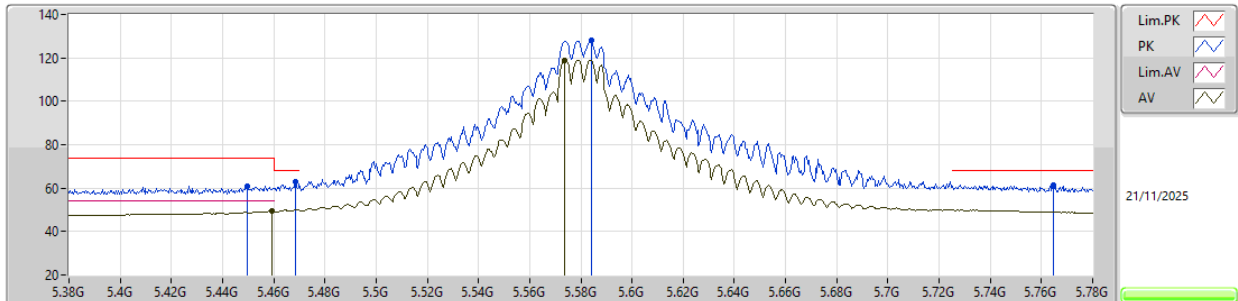EUT Y_2TX
Setting 28
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4496G	61.04	74.00	-12.96	64.63	3	Horizontal	179	1.80	-	31.60	8.54	43.73			
PK	5.4684G	62.73	68.20	-5.47	66.22	3	Horizontal	179	1.80	-	31.67	8.56	43.72			
AV	5.4592G	49.43	54.00	-4.57	52.96	3	Horizontal	179	1.80	-	31.64	8.55	43.72			
PK	5.584G	128.27	Inf	-Inf	131.58	3	Horizontal	179	1.80	-	31.63	8.68	43.62			
AV	5.5736G	118.92	Inf	-Inf	122.23	3	Horizontal	179	1.80	-	31.65	8.67	43.63			
PK	5.7648G	61.41	68.20	-6.79	63.88	3	Horizontal	179	1.80	-	32.10	8.87	43.44			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5580MHz_TX

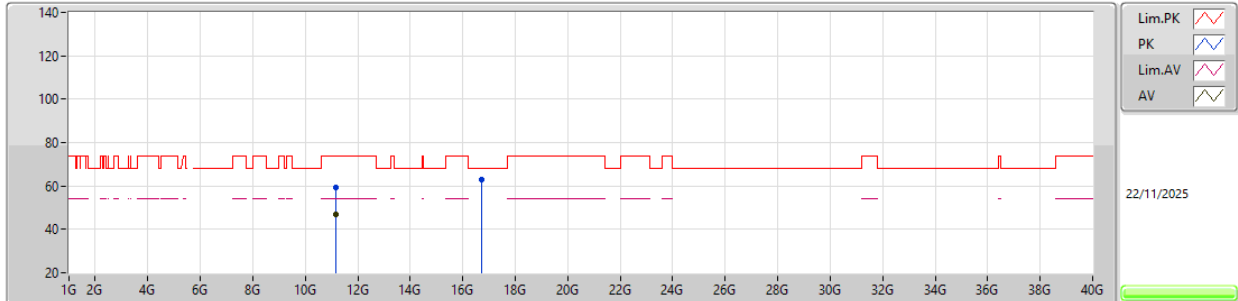EUT Y_2TX
Setting 28
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.15092G	59.40	74.00	-14.60	49.78	3	Vertical	210	1.80	-	39.50	12.98	42.86			
AV	11.15922G	46.87	54.00	-7.13	37.26	3	Vertical	210	1.80	-	39.48	12.99	42.86			
PK	16.73916G	63.15	68.20	-5.05	49.69	3	Vertical	231	1.79	-	39.43	16.28	42.25			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5580MHz_TX

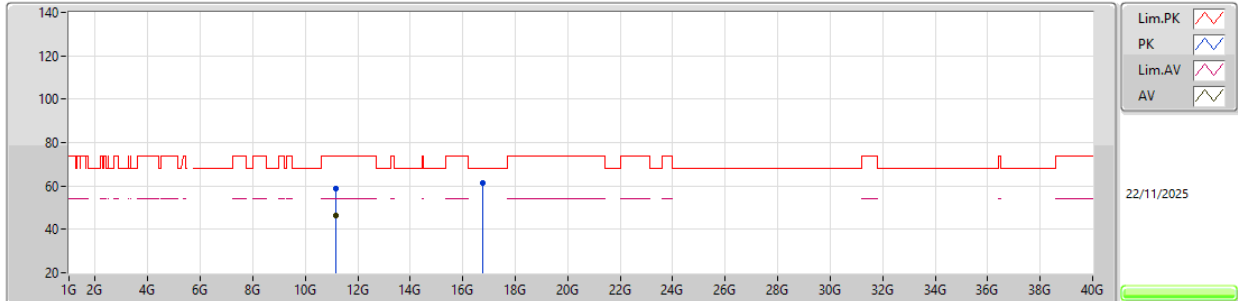EUT Y_2TX
Setting 28
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.16444G	58.77	74.00	-15.23	49.16	3	Horizontal	127	1.80	-	39.47	12.99	42.85			
AV	11.15842G	46.57	54.00	-7.43	36.96	3	Horizontal	127	1.80	-	39.48	12.99	42.86			
PK	16.74638G	61.34	68.20	-6.86	47.84	3	Horizontal	40	1.79	-	39.48	16.28	42.26			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5700MHz_TX

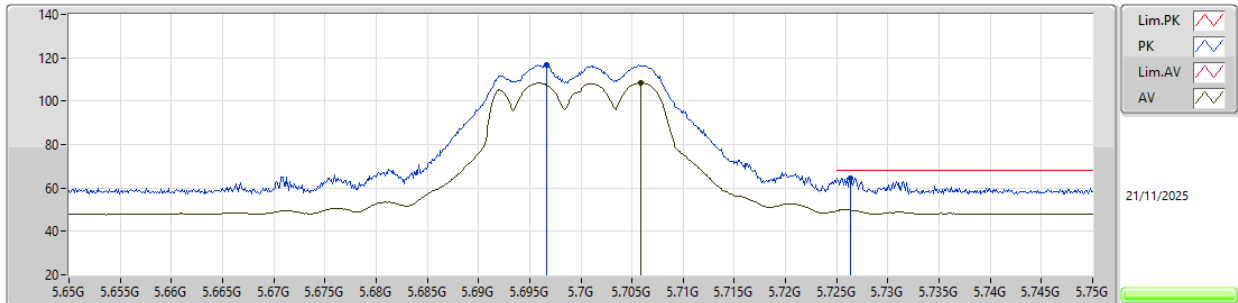


EUT Y_2TX
Setting 16.5
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6967G	116.62	Inf	-Inf	119.33	3	Vertical	178	1.80	-	31.99	8.80	43.50			
AV	5.7059G	108.43	Inf	-Inf	111.10	3	Vertical	178	1.80	-	32.01	8.81	43.49			
PK	5.7263G	64.71	68.20	-3.49	67.30	3	Vertical	178	1.80	-	32.05	8.83	43.47			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5700MHz_TX

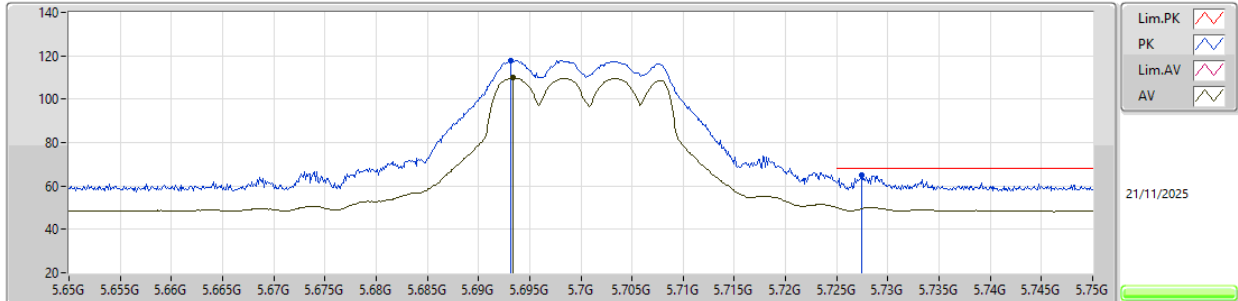


EUT Y_2TX
Setting 16.5
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6932G	117.92	Inf	-Inf	120.66	3	Horizontal	180	1.80	-	31.97	8.80	43.51			
AV	5.6934G	109.77	Inf	-Inf	112.51	3	Horizontal	180	1.80	-	31.97	8.80	43.51			
PK	5.7274G	65.10	68.20	-3.10	67.69	3	Horizontal	180	1.80	-	32.05	8.83	43.47			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5700MHz_TX

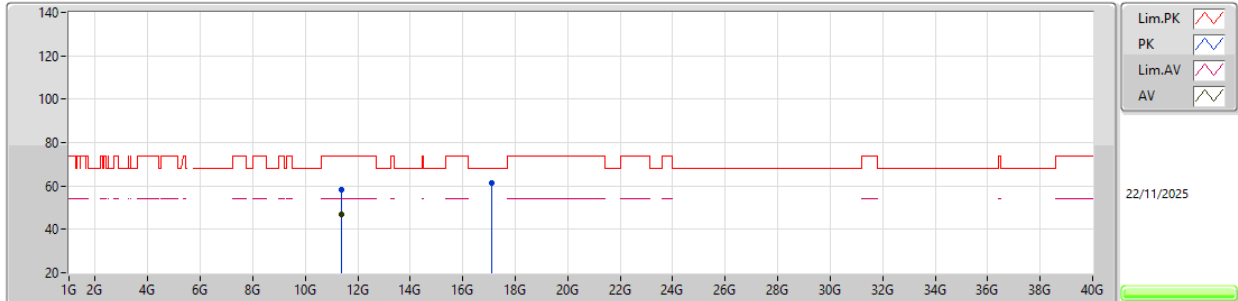EUT Y_2TX
Setting 16.5
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40097G	58.33	74.00	-15.67	48.04	3	Vertical	169	1.91	-	39.90	13.16	42.77			
AV	11.39666G	46.69	54.00	-7.31	36.42	3	Vertical	169	1.91	-	39.89	13.16	42.78			
PK	17.09587G	61.37	68.20	-6.83	47.58	3	Vertical	186	2.08	-	40.01	16.32	42.54			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5700MHz_TX

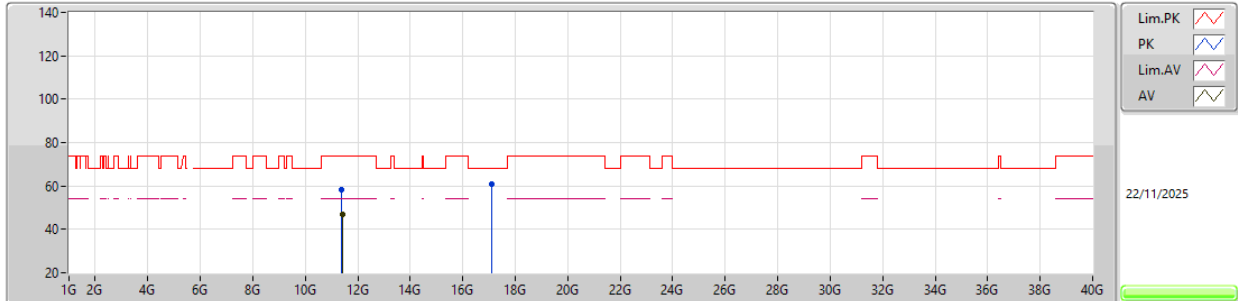EUT Y_2TX
Setting 16.5
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.39969G	58.29	74.00	-15.71	48.00	3	Horizontal	266	1.16	-	39.90	13.16	42.77			
AV	11.402G	46.69	54.00	-7.31	36.40	3	Horizontal	266	1.16	-	39.90	13.16	42.77			
PK	17.10214G	60.85	68.20	-7.35	47.06	3	Horizontal	136	2.42	-	40.02	16.32	42.55			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

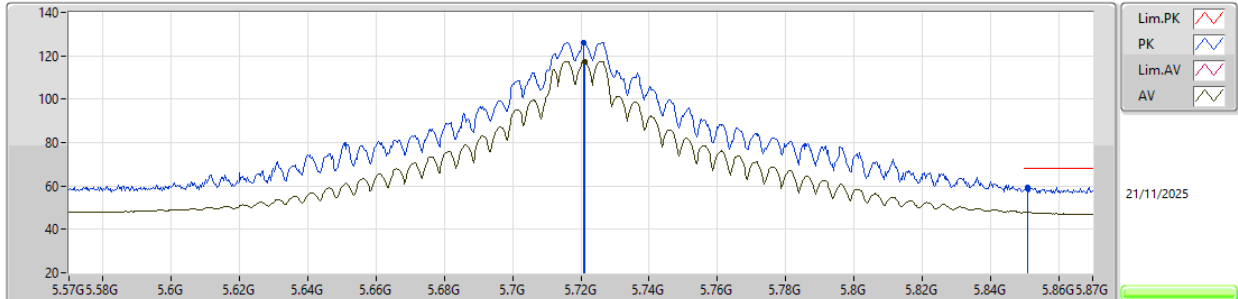


EUT Y_2TX
Setting 28
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7209G	126.17	Inf	-Inf	128.78	3	Vertical	180	1.80	-	32.04	8.83	43.48			
RMS	5.7212G	117.47	Inf	-Inf	120.08	3	Vertical	180	1.80	-	32.04	8.83	43.48			
PK	5.8511G	59.38	68.20	-8.82	61.66	3	Vertical	180	1.80	-	32.10	8.97	43.35			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5720MHz Straddle 5.47-5.725GHz_TX

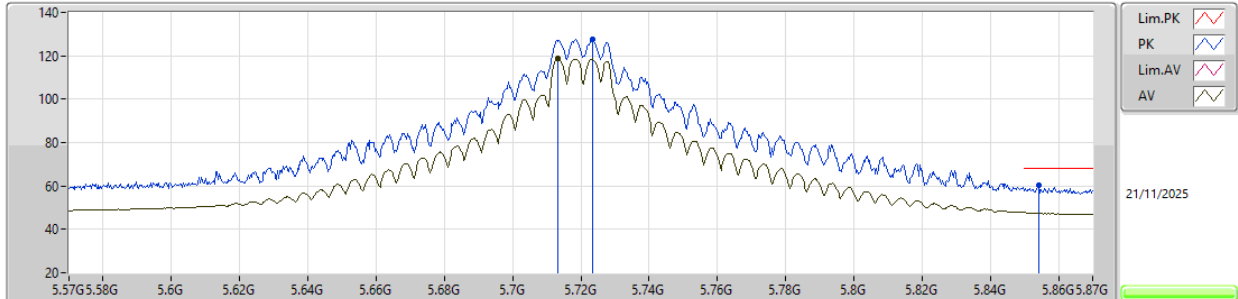EUT Y_2TX
Setting 28
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7233G	127.63	Inf	-Inf	130.23	3	Horizontal	178	1.80	-	32.05	8.83	43.48			
RMS	5.7131G	118.69	Inf	-Inf	121.33	3	Horizontal	178	1.80	-	32.03	8.82	43.49			
PK	5.8541G	60.33	68.20	-7.87	62.59	3	Horizontal	178	1.80	-	32.12	8.97	43.35			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5720MHz Straddle 5.47-5.725GHz_TX

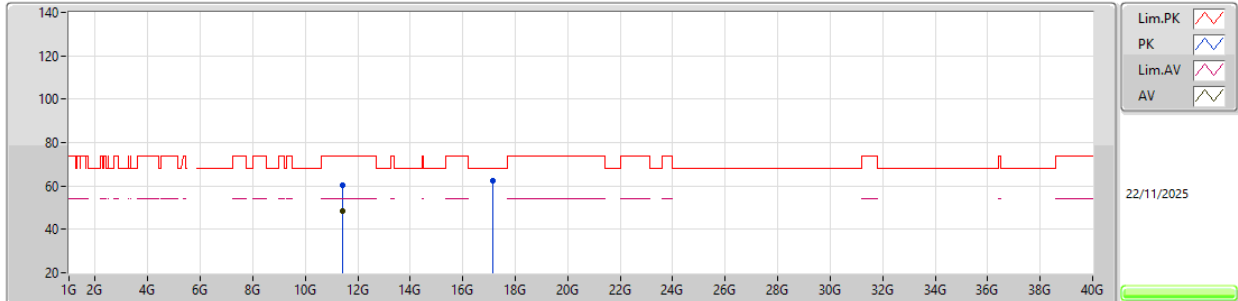EUT Y_2TX
Setting 28
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.43206G	60.48	74.00	-13.52	50.16	3	Vertical	153	1.62	-	39.90	13.18	42.76			
AV	11.43818G	48.38	54.00	-5.62	38.05	3	Vertical	153	1.62	-	39.90	13.19	42.76			
PK	17.1552G	62.50	68.20	-5.70	48.39	3	Vertical	131	1.80	-	40.42	16.33	42.64			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5720MHz Straddle 5.47-5.725GHz_TX

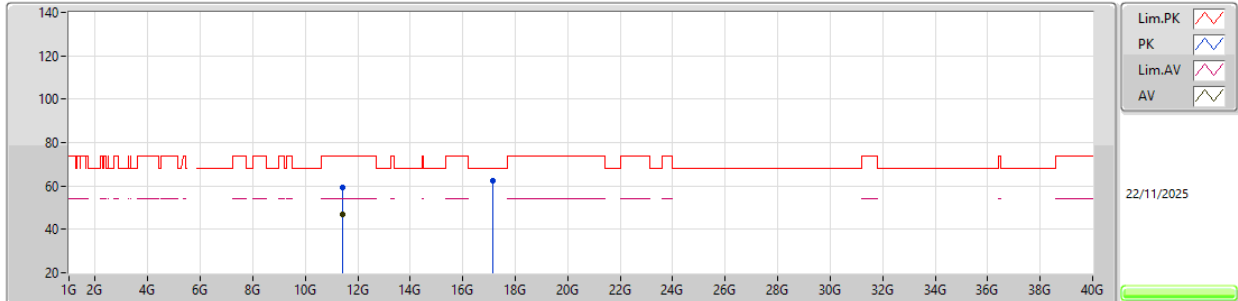EUT Y_2TX
Setting 28
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.43442G	59.42	74.00	-14.58	49.09	3	Horizontal	110	1.80	-	39.90	13.19	42.76			
AV	11.44112G	47.09	54.00	-6.91	36.76	3	Horizontal	110	1.80	-	39.90	13.19	42.76			
PK	17.16134G	62.34	68.20	-5.86	48.20	3	Horizontal	311	1.81	-	40.45	16.33	42.64			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5745MHz_TX

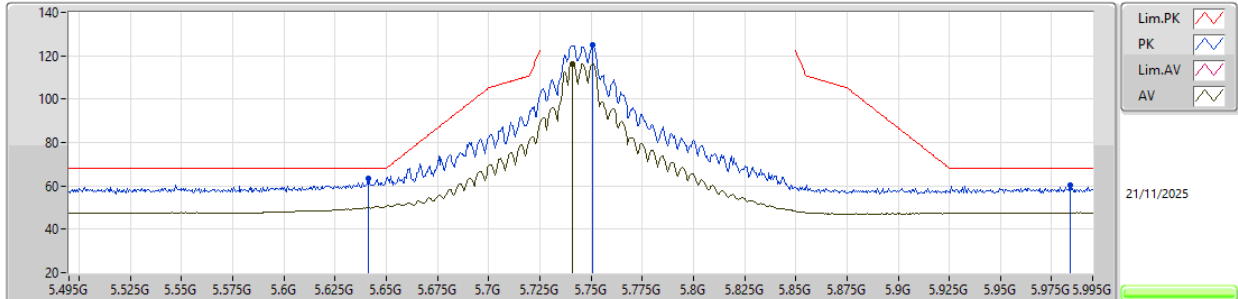


EUT Y_2TX
Setting 27
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.641G	63.52	68.20	-4.68	66.58	3	Vertical	180	1.80	-	31.76	8.74	43.56			
PK	5.751G	125.00	Inf	-Inf	127.49	3	Vertical	180	1.80	-	32.10	8.86	43.45			
AV	5.741G	116.27	Inf	-Inf	118.80	3	Vertical	180	1.80	-	32.08	8.85	43.46			
PK	5.984G	60.13	68.20	-8.07	61.86	3	Vertical	180	1.80	-	32.37	9.12	43.22			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5745MHz_TX

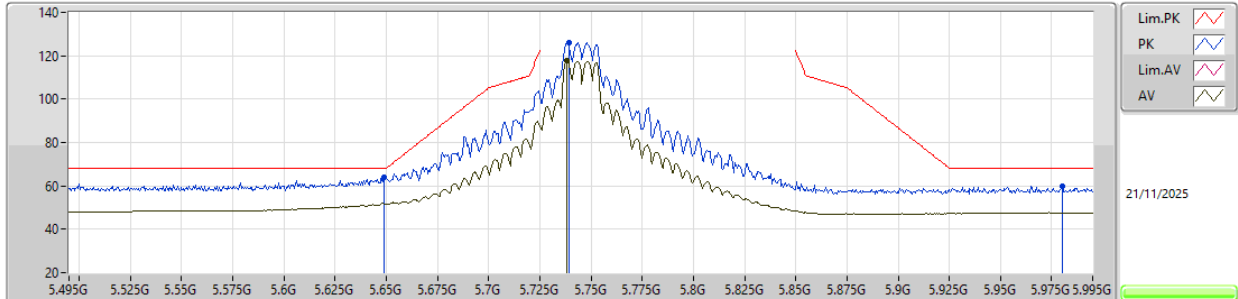


EUT Y_2TX
Setting 27
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.649G	64.20	68.20	-4.00	67.20	3	Horizontal	179	1.80	-	31.80	8.75	43.55			
PK	5.739G	126.12	Inf	-Inf	128.65	3	Horizontal	179	1.80	-	32.08	8.85	43.46			
AV	5.738G	117.76	Inf	-Inf	120.30	3	Horizontal	179	1.80	-	32.08	8.84	43.46			
PK	5.98G	59.81	68.20	-8.39	61.55	3	Horizontal	179	1.80	-	32.36	9.12	43.22			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX


5745MHz_TX

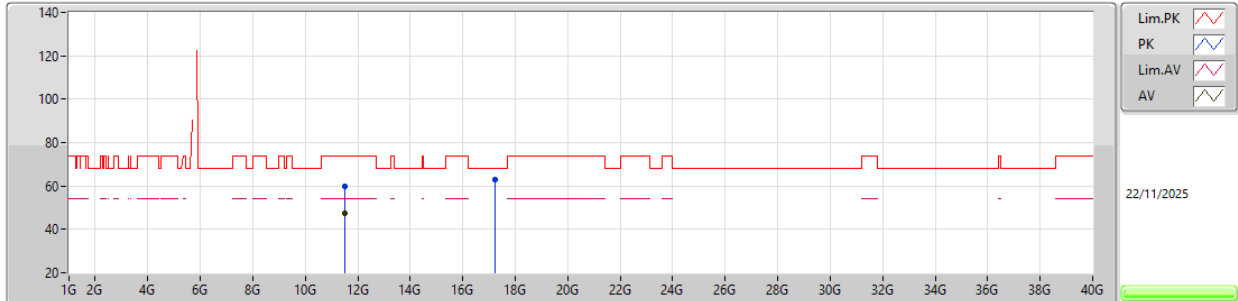EUT Y_2TX
Setting 27
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.49336G	59.73	74.00	-14.27	49.25	3	Vertical	149	1.76	-	39.99	13.23	42.74			
AV	11.49392G	47.34	54.00	-6.66	36.86	3	Vertical	149	1.76	-	39.99	13.23	42.74			
PK	17.23334G	62.93	68.20	-5.27	48.75	3	Vertical	169	1.81	-	40.60	16.34	42.76			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX


5745MHz_TX

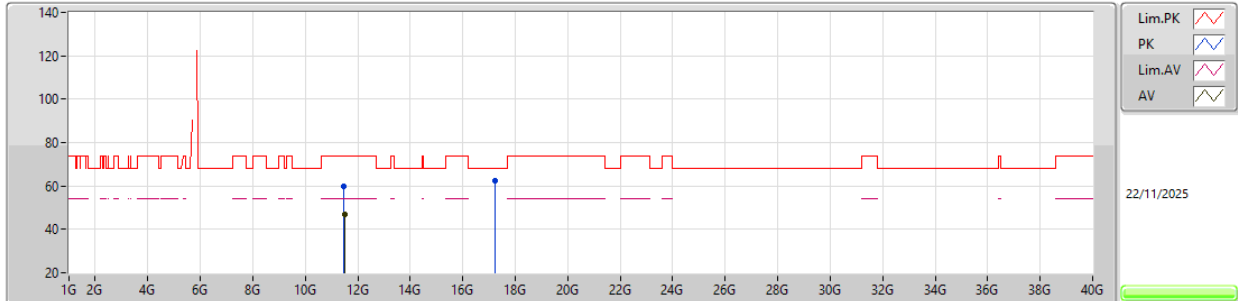EUT Y_2TX
Setting 27
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.48486G	59.78	74.00	-14.22	49.34	3	Horizontal	246	1.80	-	39.97	13.22	42.75			
AV	11.49466G	47.11	54.00	-6.89	36.63	3	Horizontal	246	1.80	-	39.99	13.23	42.74			
PK	17.241G	62.67	68.20	-5.53	48.50	3	Horizontal	294	2.46	-	40.60	16.34	42.77			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5785MHz_TX

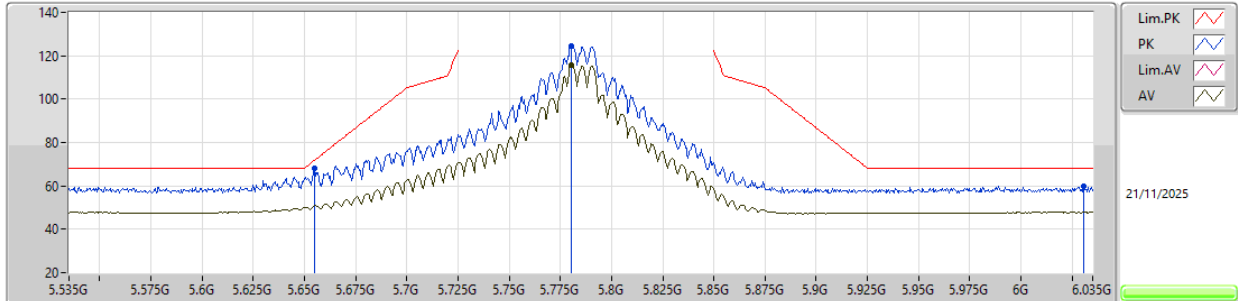


EUT Y_2TX
Setting 28
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.655G	68.16	71.90	-3.74	71.13	3	Vertical	182	1.80	-	31.82	8.76	43.55			
PK	5.7805G	124.43	Inf	-Inf	126.86	3	Vertical	182	1.80	-	32.10	8.89	43.42			
AV	5.7805G	115.74	Inf	-Inf	118.17	3	Vertical	182	1.80	-	32.10	8.89	43.42			
PK	6.0305G	59.97	68.20	-8.23	61.60	3	Vertical	182	1.80	-	32.40	9.16	43.19			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5785MHz_TX

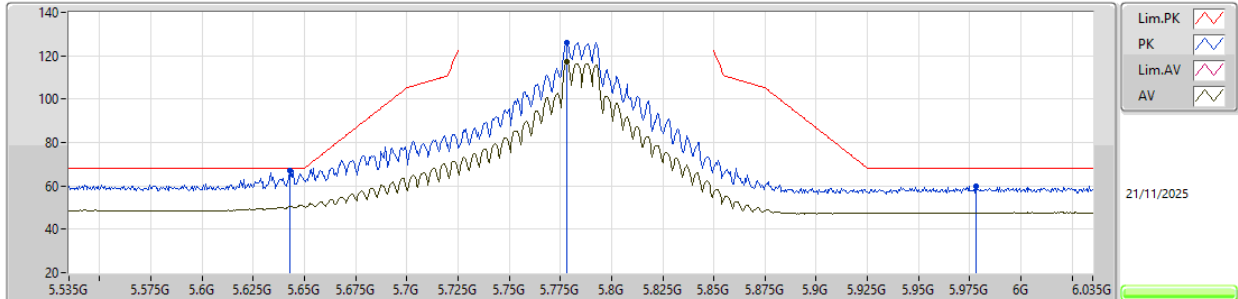


EUT Y_2TX
Setting 28
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.643G	67.17	68.20	-1.03	70.21	3	Horizontal	177	1.80	-	31.77	8.75	43.56			
PK	5.778G	126.11	Inf	-Inf	128.54	3	Horizontal	177	1.80	-	32.10	8.89	43.42			
AV	5.778G	117.06	Inf	-Inf	119.49	3	Horizontal	177	1.80	-	32.10	8.89	43.42			
PK	5.978G	59.77	68.20	-8.43	61.52	3	Horizontal	177	1.80	-	32.36	9.11	43.22			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX


5785MHz_TX

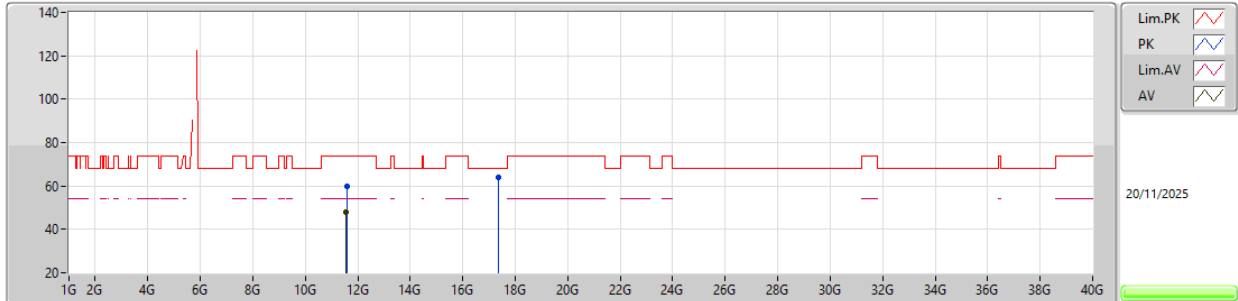EUT Y_2TX
Setting 28
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.57288G	60.07	74.00	-13.93	49.82	3	Vertical	159	1.72	-	39.81	13.28	42.84			
AV	11.57214G	48.03	54.00	-5.97	37.78	3	Vertical	159	1.72	-	39.81	13.28	42.84			
PK	17.34968G	63.74	68.20	-4.46	49.03	3	Vertical	234	2.50	-	41.30	16.35	42.94			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX


5785MHz_TX

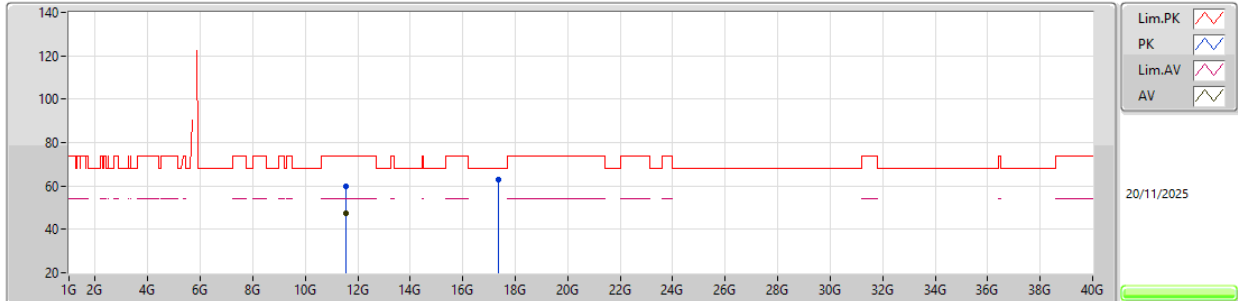EUT Y_2TX
Setting 28
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.57088G	59.60	74.00	-14.40	49.34	3	Horizontal	120	1.67	-	39.82	13.28	42.84			
AV	11.57168G	47.42	54.00	-6.58	37.17	3	Horizontal	120	1.67	-	39.81	13.28	42.84			
PK	17.3457G	62.68	68.20	-5.52	48.02	3	Horizontal	292	2.42	-	41.25	16.35	42.94			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5825MHz_TX

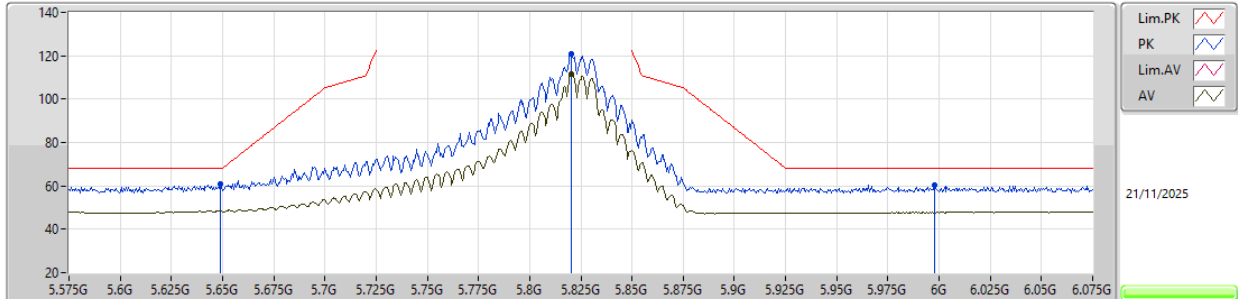


EUT Y_2TX
Setting 28
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.649G	60.74	68.20	-7.46	63.74	3	Vertical	186	1.80	-	31.80	8.75	43.55			
PK	5.8205G	120.67	Inf	-Inf	123.02	3	Vertical	186	1.80	-	32.10	8.93	43.38			
AV	5.8205G	111.57	Inf	-Inf	113.92	3	Vertical	186	1.80	-	32.10	8.93	43.38			
PK	5.998G	60.19	68.20	-8.01	61.85	3	Vertical	186	1.80	-	32.40	9.14	43.20			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5825MHz_TX

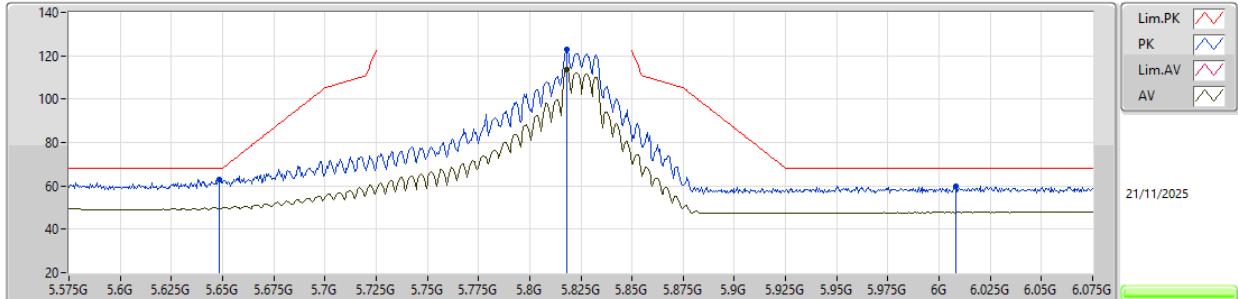


EUT Y_2TX
Setting 28
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6485G	63.11	68.20	-5.09	66.12	3	Horizontal	177	1.80	-	31.79	8.75	43.55			
PK	5.818G	122.79	Inf	-Inf	125.14	3	Horizontal	177	1.80	-	32.10	8.93	43.38			
AV	5.818G	113.49	Inf	-Inf	115.84	3	Horizontal	177	1.80	-	32.10	8.93	43.38			
PK	6.008G	59.82	68.20	-8.38	61.47	3	Horizontal	177	1.80	-	32.40	9.15	43.20			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX


5825MHz_TX

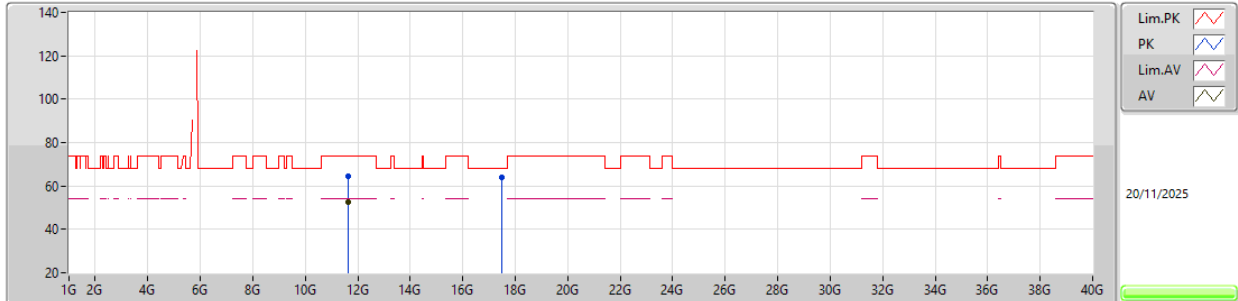EUT Y_2TX
Setting 28
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.6509G	64.37	74.00	-9.63	54.48	3	Vertical	157	1.56	-	39.50	13.34	42.95			
AV	11.6513G	52.37	54.00	-1.63	42.48	3	Vertical	157	1.56	-	39.50	13.34	42.95			
PK	17.47174G	63.80	68.20	-4.40	48.41	3	Vertical	7	1.80	-	42.17	16.36	43.14			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX


5825MHz_TX

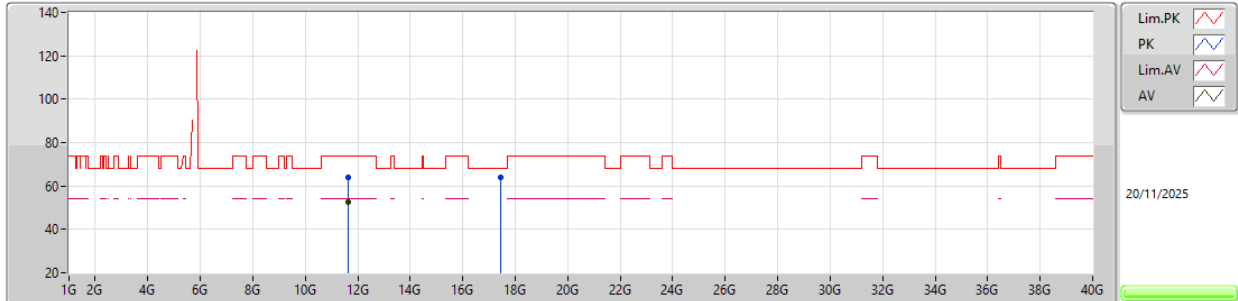EUT Y_2TX
Setting 28
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.65304G	64.10	74.00	-9.90	54.23	3	Horizontal	154	1.66	-	39.49	13.34	42.96			
AV	11.65222G	52.43	54.00	-1.57	42.55	3	Horizontal	154	1.66	-	39.50	13.34	42.96			
PK	17.46562G	63.91	68.20	-4.29	48.56	3	Horizontal	162	1.80	-	42.12	16.36	43.13			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5180MHz_TX

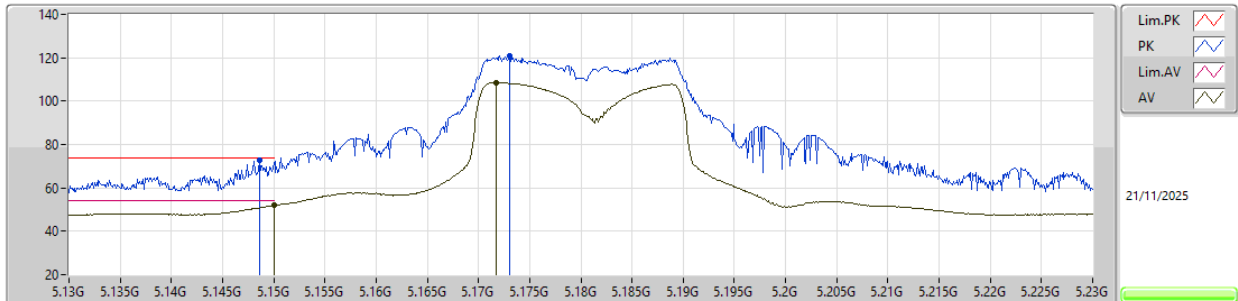


EUT Y_2TX
Setting 16
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1486G	72.91	74.00	-1.09	76.41	3	Vertical	180	1.80	-	31.99	8.39	43.88			
AV	5.15G	51.96	54.00	-2.04	55.44	3	Vertical	180	1.80	-	32.00	8.39	43.87			
PK	5.173G	120.77	Inf	-Inf	124.36	3	Vertical	180	1.80	-	31.86	8.41	43.86			
AV	5.1717G	108.41	Inf	-Inf	112.00	3	Vertical	180	1.80	-	31.87	8.40	43.86			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5180MHz_TX

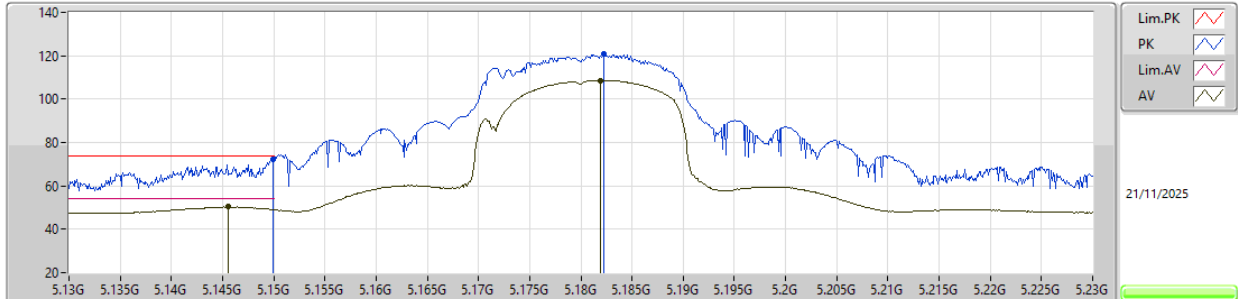EUT Y_2TX
Setting 16
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1499G	72.16	74.00	-1.84	75.65	3	Horizontal	184	1.80	-	32.00	8.39	43.88			
AV	5.1455G	50.35	54.00	-3.65	53.87	3	Horizontal	184	1.80	-	31.97	8.39	43.88			
PK	5.1823G	120.87	Inf	-Inf	124.51	3	Horizontal	184	1.80	-	31.81	8.41	43.86			
AV	5.1819G	108.70	Inf	-Inf	112.34	3	Horizontal	184	1.80	-	31.81	8.41	43.86			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5180MHz_TX

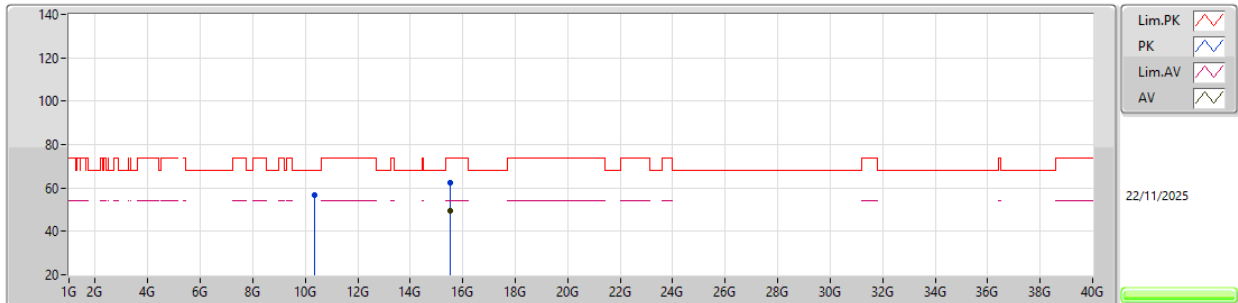


EUT Y_2TX
Setting 16
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.35762G	56.98	68.20	-11.22	48.51	3	Vertical	66	2.83	-	39.12	12.42	43.07			
PK	15.53945G	62.45	74.00	-11.55	50.59	3	Vertical	25	2.82	-	37.94	16.17	42.25			
AV	15.53663G	49.70	54.00	-4.30	37.83	3	Vertical	25	2.82	-	37.95	16.17	42.25			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5180MHz_TX

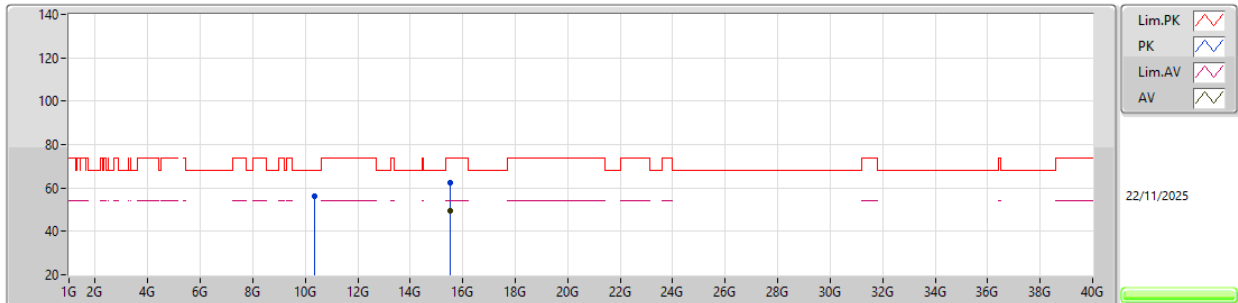


EUT Y_2TX
Setting 16
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.3619G	56.39	68.20	-11.81	47.93	3	Horizontal	94	1.16	-	39.12	12.42	43.08			
PK	15.53834G	62.54	74.00	-11.46	50.67	3	Horizontal	334	1.80	-	37.95	16.17	42.25			
AV	15.53597G	49.74	54.00	-4.26	37.86	3	Horizontal	334	1.80	-	37.96	16.17	42.25			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5200MHz_TX

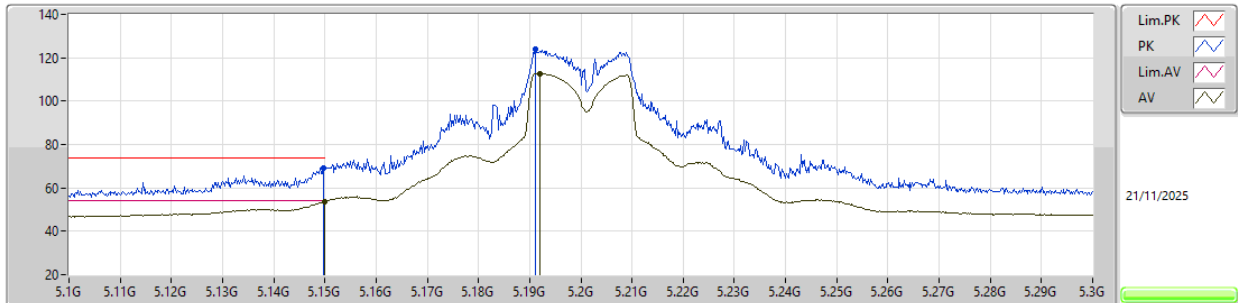EUT Y_2TX
Setting 22
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1498G	69.00	74.00	-5.00	72.49	3	Vertical	181	1.80	-	32.00	8.39	43.88			
AV	5.15G	53.72	54.00	-0.28	57.20	3	Vertical	181	1.80	-	32.00	8.39	43.87			
PK	5.1912G	123.75	Inf	-Inf	127.43	3	Vertical	181	1.80	-	31.75	8.42	43.85			
AV	5.192G	112.77	Inf	-Inf	116.45	3	Vertical	181	1.80	-	31.75	8.42	43.85			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5200MHz_TX

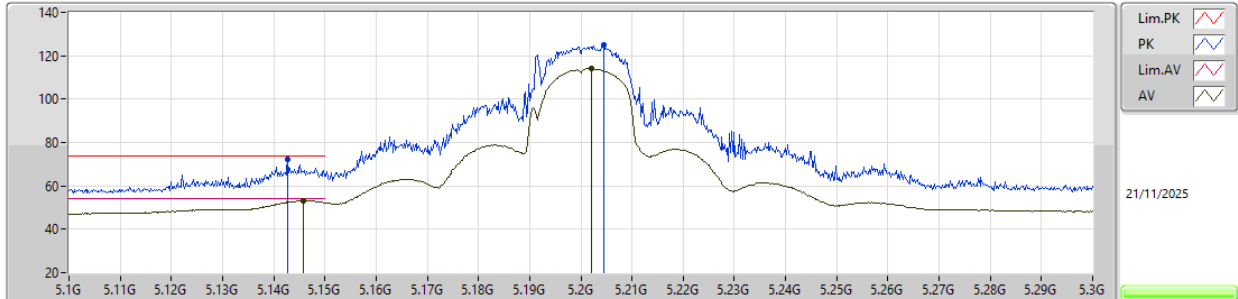


EUT Y_2TX
Setting 22
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1428G	72.01	74.00	-1.99	75.54	3	Horizontal	182	1.80	-	31.96	8.39	43.88			
AV	5.1458G	53.15	54.00	-0.85	56.67	3	Horizontal	182	1.80	-	31.97	8.39	43.88			
PK	5.2046G	124.81	Inf	-Inf	128.57	3	Horizontal	182	1.80	-	31.67	8.42	43.85			
AV	5.202G	114.01	Inf	-Inf	117.75	3	Horizontal	182	1.80	-	31.69	8.42	43.85			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5200MHz_TX

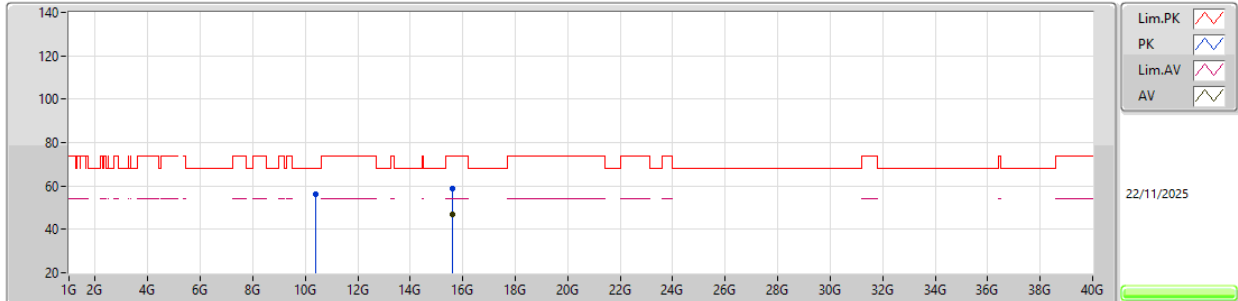


EUT Y_2TX
Setting 22
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.39956G	56.12	68.20	-12.08	47.59	3	Vertical	326	1.80	-	39.20	12.45	43.12			
PK	15.60256G	59.00	74.00	-15.00	47.54	3	Vertical	199	2.82	-	37.58	16.18	42.30			
AV	15.59563G	46.65	54.00	-7.35	35.13	3	Vertical	199	2.82	-	37.63	16.18	42.29			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5200MHz_TX

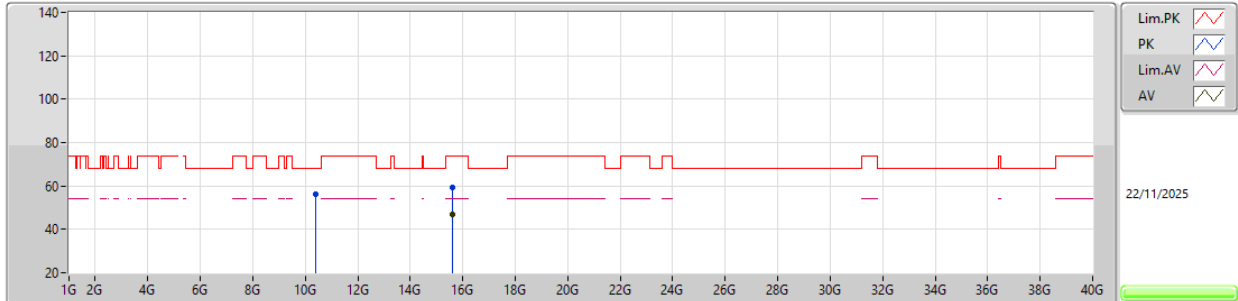


EUT Y_2TX
Setting 22
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.40168G	56.29	68.20	-11.91	47.76	3	Horizontal	280	2.50	-	39.20	12.45	43.12			
PK	15.5996G	59.15	74.00	-14.85	47.67	3	Horizontal	154	2.60	-	37.60	16.18	42.30			
AV	15.59614G	46.66	54.00	-7.34	35.15	3	Horizontal	154	2.60	-	37.62	16.18	42.29			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5240MHz_TX

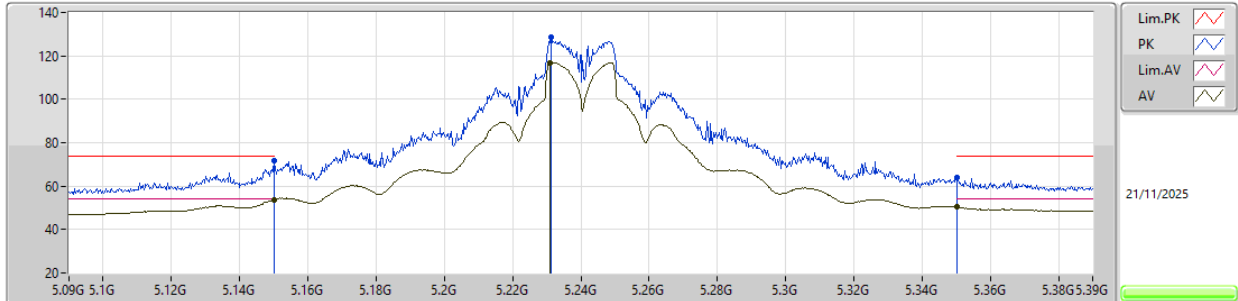


EUT Y_2TX
Setting 27
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.15G	71.62	74.00	-2.38	75.10	3	Vertical	179	1.80	-	32.00	8.39	43.87			
AV	5.15G	53.65	54.00	-0.35	57.13	3	Vertical	179	1.80	-	32.00	8.39	43.87			
PK	5.2313G	128.68	Inf	-Inf	132.57	3	Vertical	179	1.80	-	31.51	8.43	43.83			
AV	5.231G	116.95	Inf	-Inf	120.84	3	Vertical	179	1.80	-	31.51	8.43	43.83			
PK	5.3501G	64.02	74.00	-9.98	67.92	3	Vertical	179	1.80	-	31.40	8.47	43.77			
AV	5.3504G	50.31	54.00	-3.69	54.21	3	Vertical	179	1.80	-	31.40	8.47	43.77			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5240MHz_TX

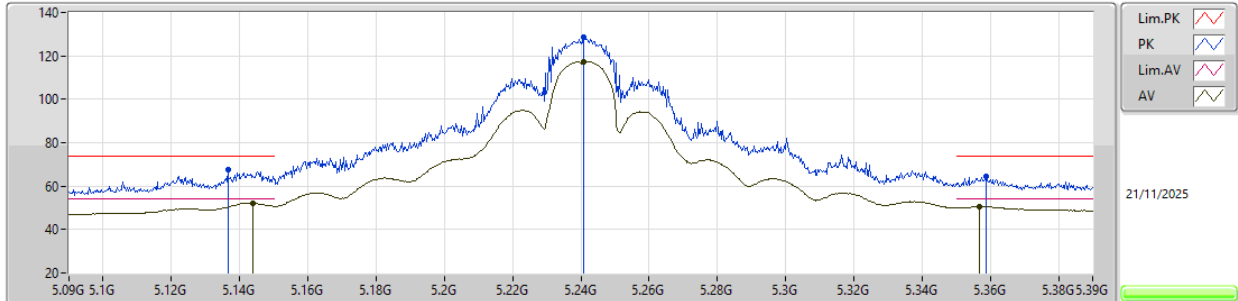


EUT Y_2TX
Setting 27
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1365G	67.73	74.00	-6.27	71.30	3	Horizontal	182	1.80	-	31.92	8.39	43.88
AV	5.144G	52.17	54.00	-1.83	55.70	3	Horizontal	182	1.80	-	31.96	8.39	43.88
PK	5.2409G	128.75	Inf	-Inf	132.70	3	Horizontal	182	1.80	-	31.45	8.43	43.83
AV	5.2409G	117.50	Inf	-Inf	121.45	3	Horizontal	182	1.80	-	31.45	8.43	43.83
PK	5.3588G	64.56	74.00	-9.44	68.45	3	Horizontal	182	1.80	-	31.40	8.48	43.77
AV	5.3567G	50.58	54.00	-3.42	54.48	3	Horizontal	182	1.80	-	31.40	8.47	43.77

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5240MHz_TX

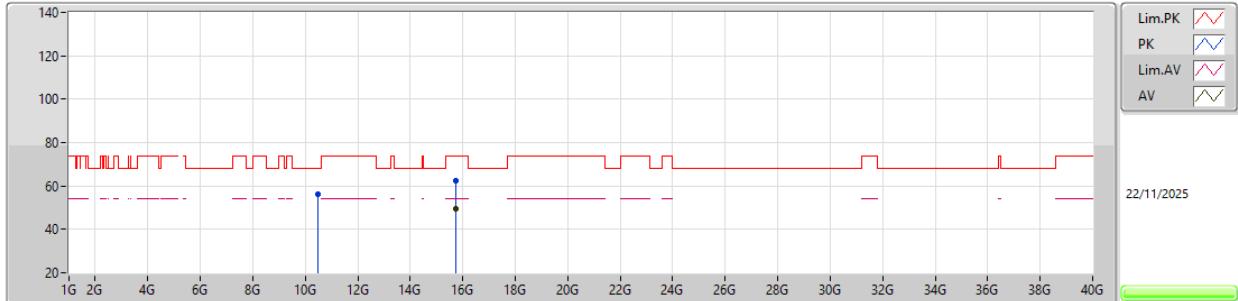


EUT Y_2TX
Setting 27
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.47946G	56.39	68.20	-11.81	47.73	3	Vertical	54	2.95	-	39.36	12.50	43.20			
PK	15.71812G	62.39	74.00	-11.61	50.96	3	Vertical	23	1.80	-	37.64	16.18	42.39			
AV	15.71964G	49.46	54.00	-4.54	38.03	3	Vertical	23	1.80	-	37.64	16.18	42.39			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5240MHz_TX

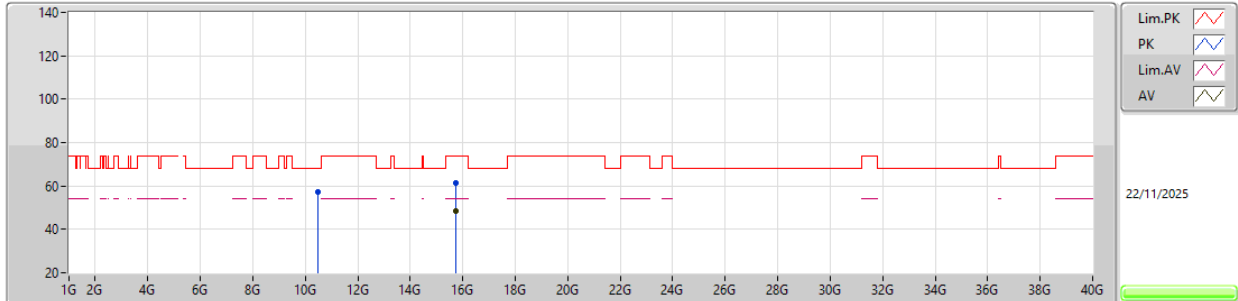


EUT Y_2TX
Setting 27
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.48145G	57.07	68.20	-11.13	48.41	3	Horizontal	310	1.38	-	39.36	12.50	43.20			
PK	15.71946G	61.45	74.00	-12.55	50.02	3	Horizontal	321	1.80	-	37.64	16.18	42.39			
AV	15.7208G	48.55	54.00	-5.45	37.12	3	Horizontal	321	1.80	-	37.64	16.18	42.39			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5260MHz_TX

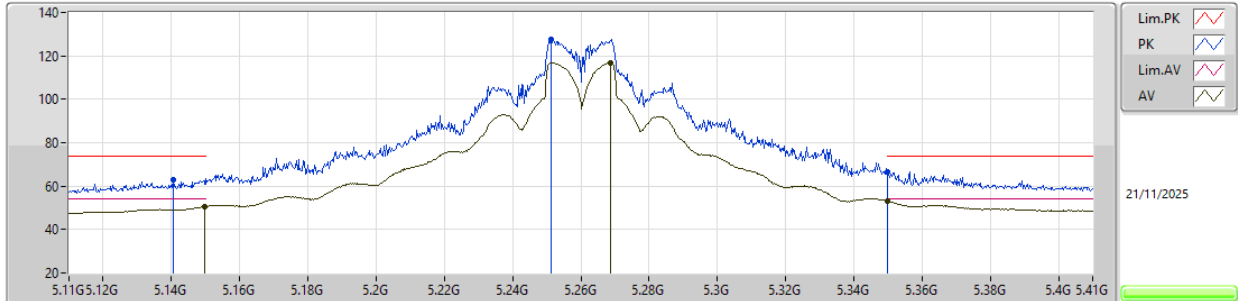EUT Y_2TX
Setting 27
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1406G	62.96	74.00	-11.04	66.51	3	Vertical	177	1.80	-	31.94	8.39	43.88			
AV	5.1499G	50.63	54.00	-3.37	54.12	3	Vertical	177	1.80	-	32.00	8.39	43.88			
PK	5.2513G	127.61	Inf	-Inf	131.60	3	Vertical	177	1.80	-	31.39	8.44	43.82			
AV	5.2687G	116.94	Inf	-Inf	120.99	3	Vertical	177	1.80	-	31.33	8.44	43.82			
PK	5.35G	66.53	74.00	-7.47	70.44	3	Vertical	177	1.80	-	31.40	8.47	43.78			
AV	5.35G	53.05	54.00	-0.95	56.96	3	Vertical	177	1.80	-	31.40	8.47	43.78			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5260MHz_TX

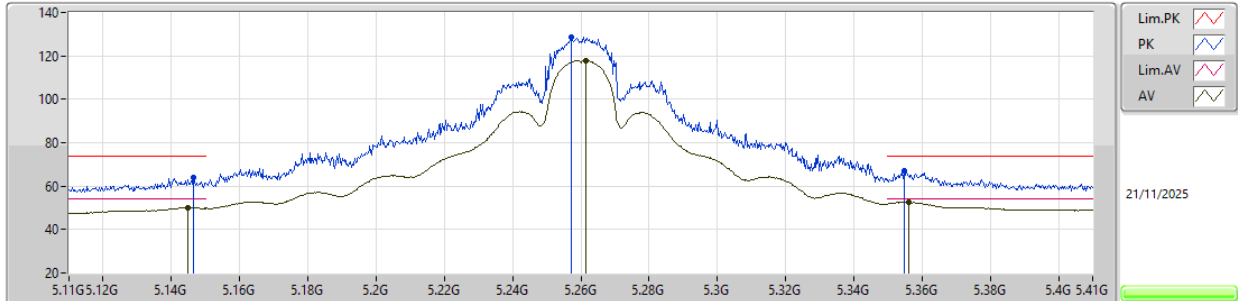


EUT Y_2TX
Setting 27
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1466G	63.72	74.00	-10.28	67.23	3	Horizontal	184	1.80	-	31.98	8.39	43.88			
AV	5.1448G	49.98	54.00	-4.02	53.50	3	Horizontal	184	1.80	-	31.97	8.39	43.88			
PK	5.2573G	128.60	Inf	-Inf	132.61	3	Horizontal	184	1.80	-	31.37	8.44	43.82			
AV	5.2615G	117.82	Inf	-Inf	121.85	3	Horizontal	184	1.80	-	31.35	8.44	43.82			
PK	5.3548G	66.90	74.00	-7.10	70.80	3	Horizontal	184	1.80	-	31.40	8.47	43.77			
AV	5.356G	52.68	54.00	-1.32	56.58	3	Horizontal	184	1.80	-	31.40	8.47	43.77			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5260MHz_TX

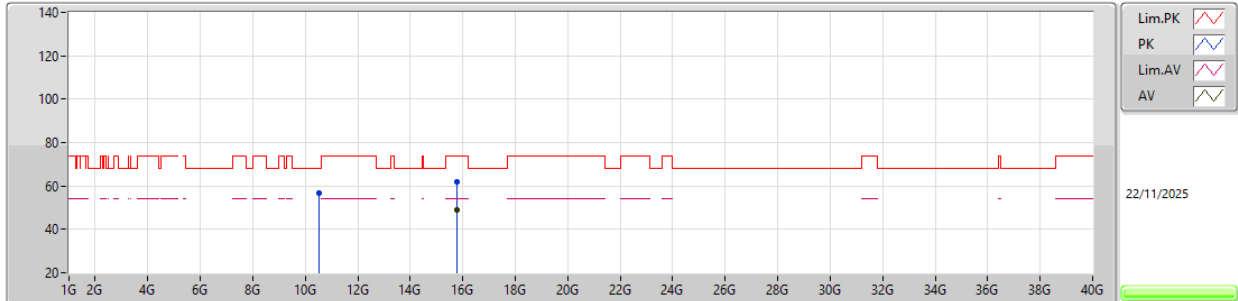EUT Y_2TX
Setting 27
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51782G	56.82	68.20	-11.38	48.10	3	Vertical	205	2.19	-	39.40	12.53	43.21			
PK	15.78429G	61.91	74.00	-12.09	50.60	3	Vertical	355	1.80	-	37.56	16.19	42.44			
AV	15.78413G	49.12	54.00	-4.88	37.81	3	Vertical	355	1.80	-	37.56	16.19	42.44			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5260MHz_TX

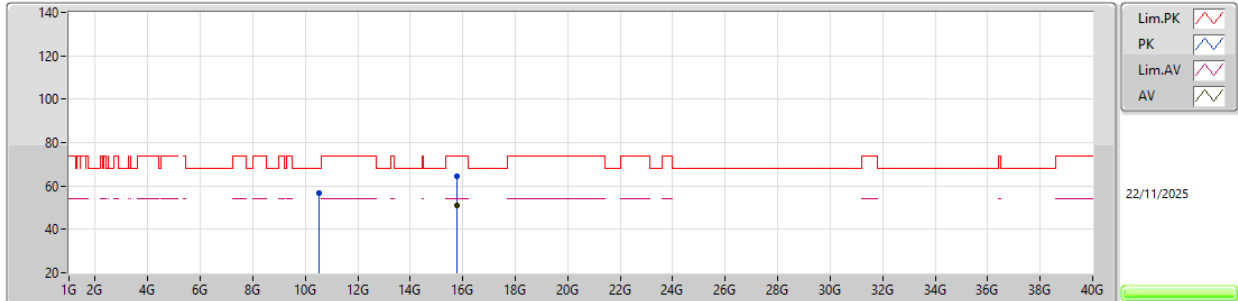


EUT Y_2TX
Setting 27
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51985G	56.81	68.20	-11.39	48.09	3	Horizontal	306	1.29	-	39.40	12.53	43.21			
PK	15.78253G	64.40	74.00	-9.60	53.08	3	Horizontal	57	1.46	-	37.57	16.19	42.44			
AV	15.78003G	51.25	54.00	-2.75	39.92	3	Horizontal	57	1.46	-	37.58	16.19	42.44			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5300MHz_TX

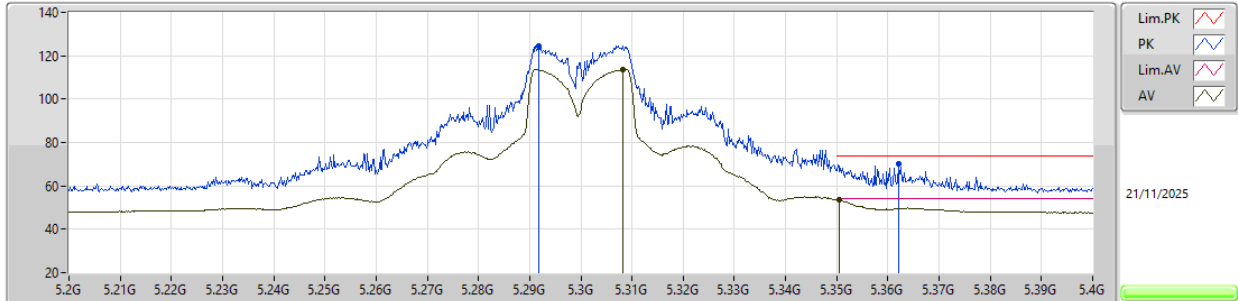


EUT Y_2TX
Setting 22.5
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.2918G	124.65	Inf	-Inf	128.77	3	Vertical	178	1.80	-	31.23	8.45	43.80			
AV	5.3082G	113.73	Inf	-Inf	117.84	3	Vertical	178	1.80	-	31.23	8.46	43.80			
PK	5.362G	69.92	74.00	-4.08	73.81	3	Vertical	178	1.80	-	31.40	8.48	43.77			
AV	5.3504G	53.38	54.00	-0.62	57.28	3	Vertical	178	1.80	-	31.40	8.47	43.77			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5300MHz_TX

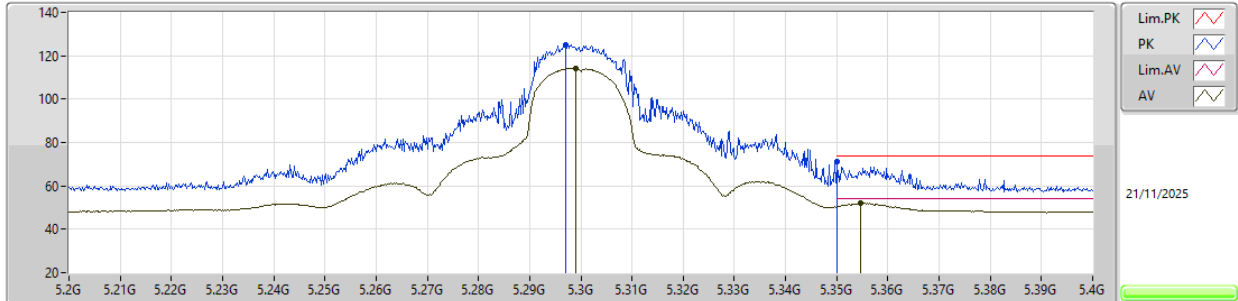EUT Y_2TX
Setting 22.5
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.297G	125.09	Inf	-Inf	129.23	3	Horizontal	184	1.80	-	31.21	8.45	43.80			
AV	5.299G	114.33	Inf	-Inf	118.48	3	Horizontal	184	1.80	-	31.20	8.45	43.80			
PK	5.35G	71.11	74.00	-2.89	75.02	3	Horizontal	184	1.80	-	31.40	8.47	43.78			
AV	5.3546G	52.00	54.00	-2.00	55.90	3	Horizontal	184	1.80	-	31.40	8.47	43.77			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5300MHz_TX

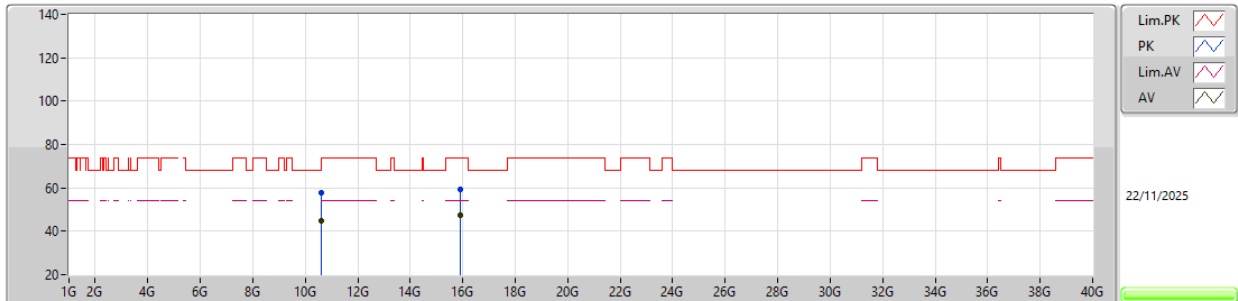


EUT Y_2TX
Setting 22.5
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.59926G	57.58	68.20	-10.62	48.75	3	Vertical	300	2.29	-	39.40	12.59	43.16			
AV	10.60974G	44.86	54.00	-9.14	35.99	3	Vertical	300	2.29	-	39.42	12.60	43.15			
PK	15.90333G	59.49	74.00	-14.51	48.54	3	Vertical	293	2.59	-	37.29	16.19	42.53			
AV	15.90463G	47.39	54.00	-6.61	36.46	3	Vertical	293	2.59	-	37.28	16.19	42.54			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5300MHz_TX

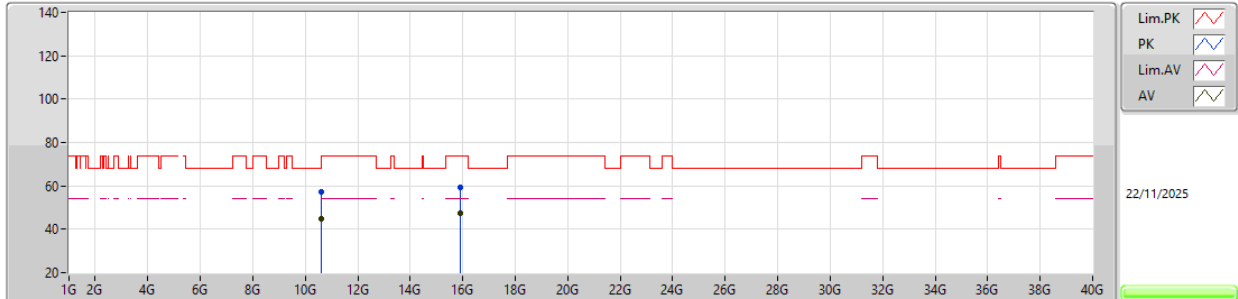EUT Y_2TX
Setting 22.5
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.59864G	57.31	68.20	-10.89	48.48	3	Horizontal	301	2.89	-	39.40	12.59	43.16			
AV	10.60828G	44.83	54.00	-9.17	35.97	3	Horizontal	301	2.89	-	39.42	12.59	43.15			
PK	15.90185G	59.08	74.00	-14.92	48.13	3	Horizontal	132	2.32	-	37.29	16.19	42.53			
AV	15.90247G	47.35	54.00	-6.65	36.40	3	Horizontal	132	2.32	-	37.29	16.19	42.53			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5320MHz_TX

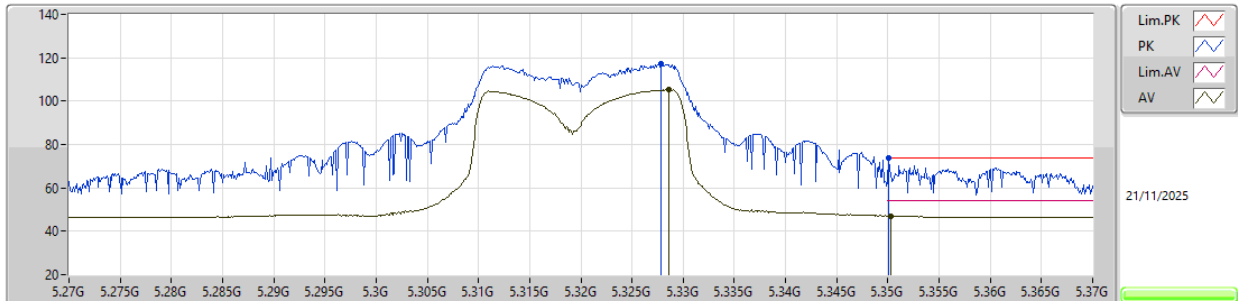EUT Y_2TX
Setting 13
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3278G	117.18	Inf	-Inf	121.20	3	Vertical	182	1.80	-	31.31	8.46	43.79			
AV	5.3286G	105.20	Inf	-Inf	109.21	3	Vertical	182	1.80	-	31.31	8.47	43.79			
PK	5.3501G	73.87	74.00	-0.13	77.77	3	Vertical	182	1.80	-	31.40	8.47	43.77			
AV	5.3503G	47.13	54.00	-6.87	51.03	3	Vertical	182	1.80	-	31.40	8.47	43.77			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5320MHz_TX

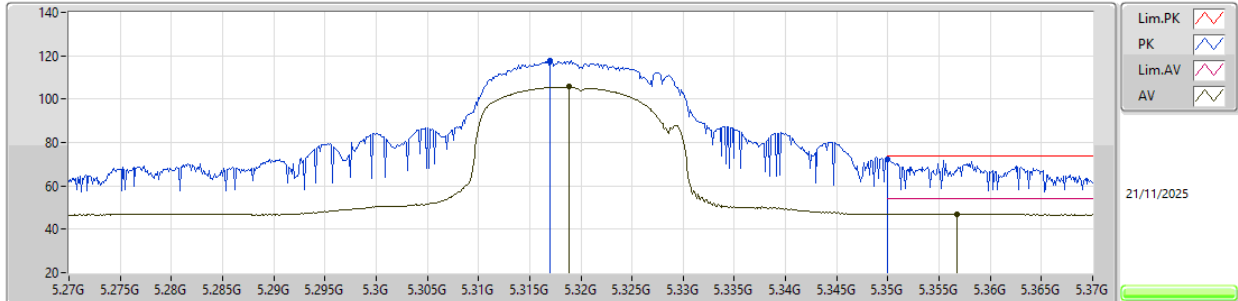EUT Y_2TX
Setting 13
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.317G	117.78	Inf	-Inf	121.84	3	Horizontal	178	1.80	-	31.27	8.46	43.79			
AV	5.3188G	105.61	Inf	-Inf	109.66	3	Horizontal	178	1.80	-	31.28	8.46	43.79			
PK	5.35G	72.44	74.00	-1.56	76.35	3	Horizontal	178	1.80	-	31.40	8.47	43.78			
AV	5.3567G	47.15	54.00	-6.85	51.05	3	Horizontal	178	1.80	-	31.40	8.47	43.77			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

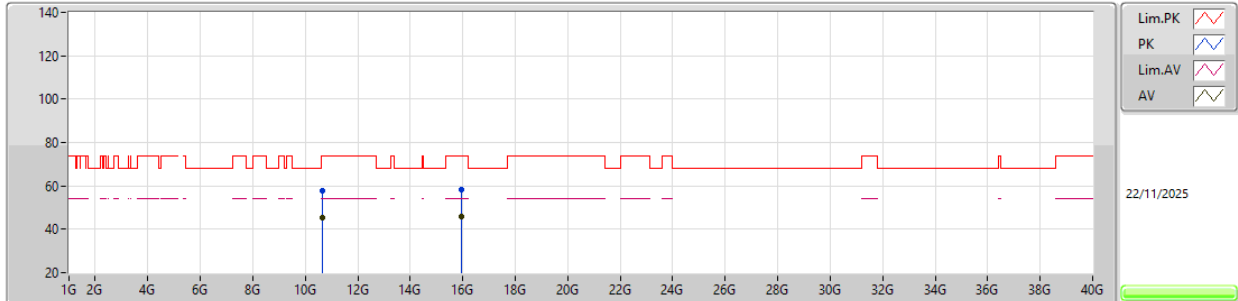


EUT Y_2TX
Setting 13
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.63941G	57.58	74.00	-16.42	48.61	3	Vertical	344	1.28	-	39.48	12.62	43.13			
AV	10.64077G	45.40	54.00	-8.60	36.43	3	Vertical	344	1.28	-	39.48	12.62	43.13			
PK	15.96185G	58.07	74.00	-15.93	47.40	3	Vertical	318	2.32	-	37.05	16.20	42.58			
AV	15.96049G	45.68	54.00	-8.32	35.00	3	Vertical	318	2.32	-	37.06	16.20	42.58			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

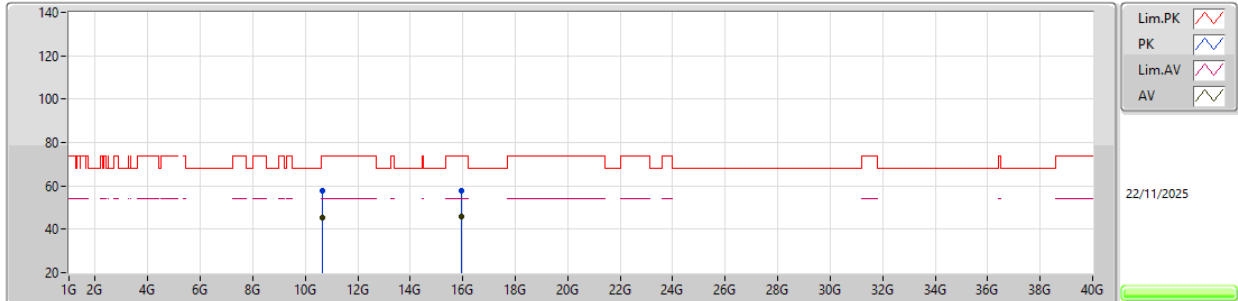


EUT Y_2TX
Setting 13
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.63814G	57.65	74.00	-16.35	48.68	3	Horizontal	61	1.22	-	39.48	12.62	43.13			
AV	10.6375G	45.35	54.00	-8.65	36.38	3	Horizontal	61	1.22	-	39.48	12.62	43.13			
PK	15.96091G	57.86	74.00	-16.14	47.18	3	Horizontal	299	1.23	-	37.06	16.20	42.58			
AV	15.9591G	45.82	54.00	-8.18	35.14	3	Horizontal	299	1.23	-	37.06	16.20	42.58			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5500MHz_TX

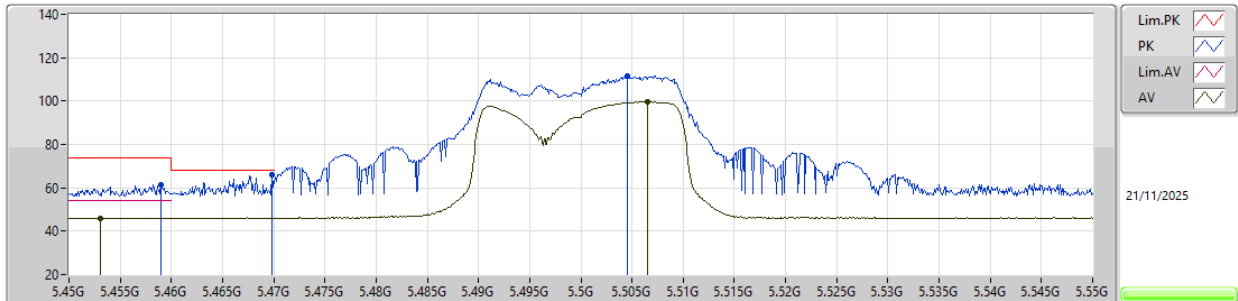


EUT Y_2TX
Setting 9
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.459G	61.50	74.00	-12.50	65.03	3	Vertical	179	1.80	-	31.64	8.55	43.72			
AV	5.4531G	46.10	54.00	-7.90	49.66	3	Vertical	179	1.80	-	31.61	8.55	43.72			
PK	5.4698G	65.84	68.20	-2.36	69.32	3	Vertical	179	1.80	-	31.68	8.56	43.72			
PK	5.5045G	111.77	Inf	-Inf	115.08	3	Vertical	179	1.80	-	31.79	8.60	43.70			
AV	5.5065G	99.59	Inf	-Inf	102.89	3	Vertical	179	1.80	-	31.79	8.60	43.69			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5500MHz_TX

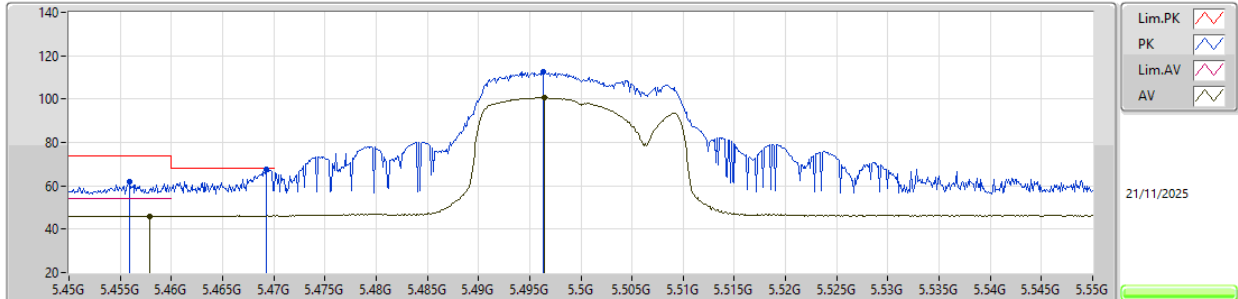


EUT Y_2TX
Setting 9
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4559G	61.69	74.00	-12.31	65.24	3	Horizontal	177	1.80	-	31.62	8.55	43.72			
AV	5.4579G	46.08	54.00	-7.92	49.62	3	Horizontal	177	1.80	-	31.63	8.55	43.72			
PK	5.4693G	67.84	68.20	-0.36	71.32	3	Horizontal	177	1.80	-	31.68	8.56	43.72			
PK	5.4963G	112.69	Inf	-Inf	116.01	3	Horizontal	177	1.80	-	31.79	8.59	43.70			
AV	5.4964G	100.52	Inf	-Inf	103.84	3	Horizontal	177	1.80	-	31.79	8.59	43.70			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5500MHz_TX

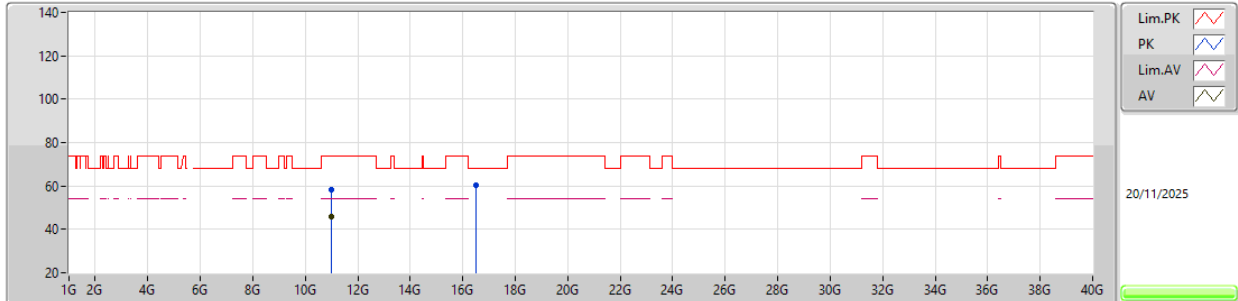EUT Y_2TX
Setting 9
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.00169G	58.49	74.00	-15.51	48.52	3	Vertical	278	2.88	-	40.00	12.88	42.91			
AV	11.00017G	46.04	54.00	-7.96	36.07	3	Vertical	278	2.88	-	40.00	12.88	42.91			
PK	16.50113G	60.41	68.20	-7.79	47.18	3	Vertical	81	2.50	-	39.10	16.26	42.13			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5500MHz_TX

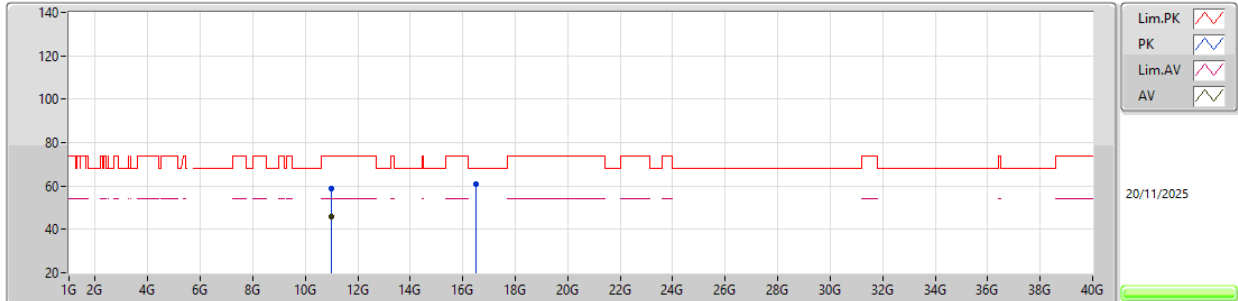EUT Y_2TX
Setting 9
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.99902G	58.54	74.00	-15.46	48.58	3	Horizontal	136	1.59	-	40.00	12.87	42.91			
AV	11.00003G	46.11	54.00	-7.89	36.14	3	Horizontal	136	1.59	-	40.00	12.88	42.91			
PK	16.50153G	60.80	68.20	-7.40	47.57	3	Horizontal	174	1.17	-	39.10	16.26	42.13			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5580MHz_TX

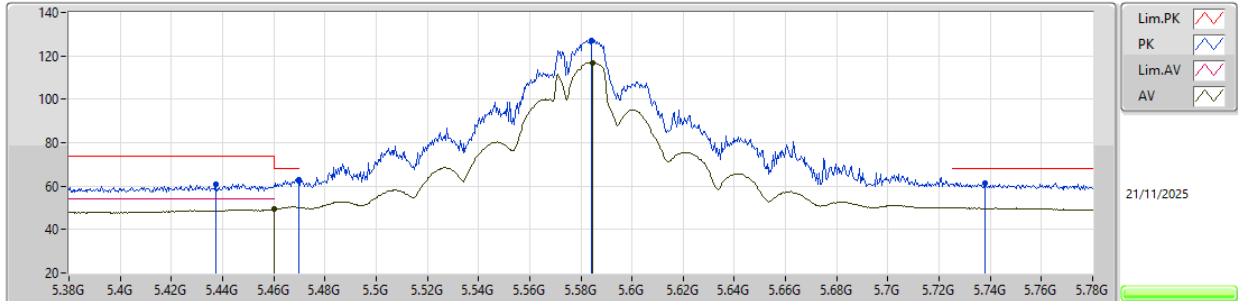


EUT Y_2TX
Setting 28
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4372G	61.05	74.00	-12.95	64.70	3	Vertical	179	1.80	-	31.55	8.53	43.73			
PK	5.47G	63.02	68.20	-5.18	66.50	3	Vertical	179	1.80	-	31.68	8.56	43.72			
AV	5.46G	49.33	54.00	-4.67	52.86	3	Vertical	179	1.80	-	31.64	8.55	43.72			
PK	5.584G	127.30	Inf	-Inf	130.61	3	Vertical	179	1.80	-	31.63	8.68	43.62			
AV	5.5848G	116.96	Inf	-Inf	120.27	3	Vertical	179	1.80	-	31.63	8.68	43.62			
PK	5.738G	61.54	68.20	-6.66	64.08	3	Vertical	179	1.80	-	32.08	8.84	43.46			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5580MHz_TX

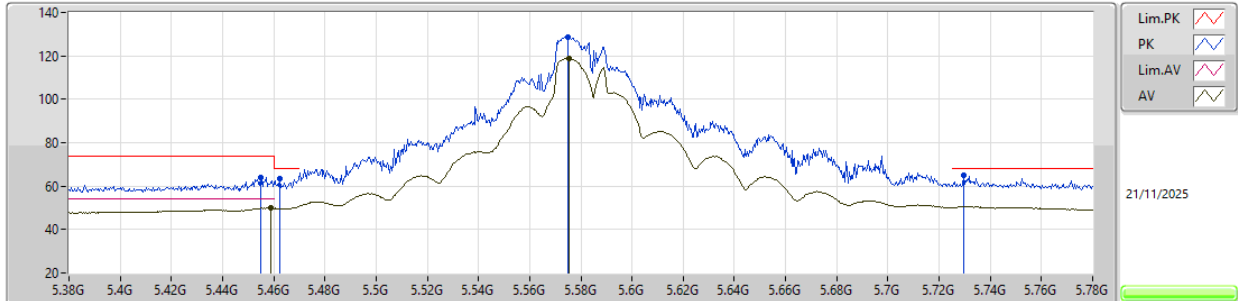EUT Y_2TX
Setting 28
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4548G	64.19	74.00	-9.81	67.74	3	Horizontal	179	1.80	-	31.62	8.55	43.72			
PK	5.4624G	63.33	68.20	-4.87	66.84	3	Horizontal	179	1.80	-	31.65	8.56	43.72			
AV	5.4588G	49.88	54.00	-4.12	53.41	3	Horizontal	179	1.80	-	31.64	8.55	43.72			
PK	5.5748G	128.84	Inf	-Inf	132.15	3	Horizontal	179	1.80	-	31.65	8.67	43.63			
AV	5.5752G	118.72	Inf	-Inf	122.02	3	Horizontal	179	1.80	-	31.65	8.67	43.62			
PK	5.7296G	65.00	68.20	-3.20	67.57	3	Horizontal	179	1.80	-	32.06	8.84	43.47			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5580MHz_TX

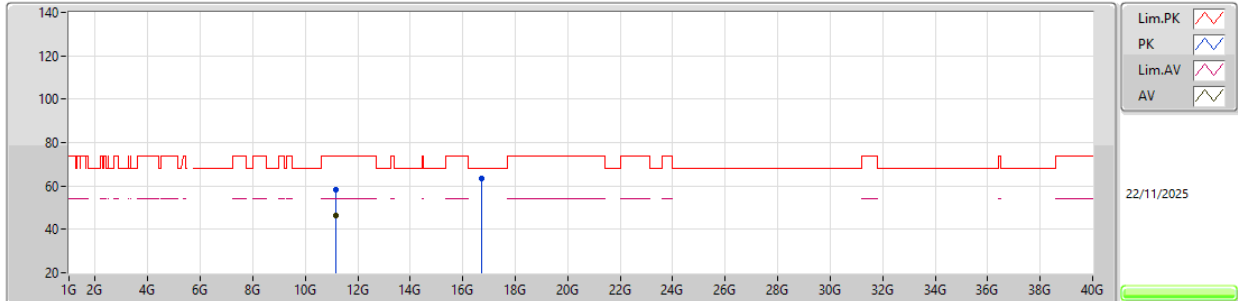EUT Y_2TX
Setting 28
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.15983G	58.38	74.00	-15.62	48.77	3	Vertical	189	1.33	-	39.48	12.99	42.86			
AV	11.15875G	46.31	54.00	-7.69	36.70	3	Vertical	189	1.33	-	39.48	12.99	42.86			
PK	16.73858G	63.50	68.20	-4.70	50.04	3	Vertical	190	1.80	-	39.43	16.28	42.25			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5580MHz_TX

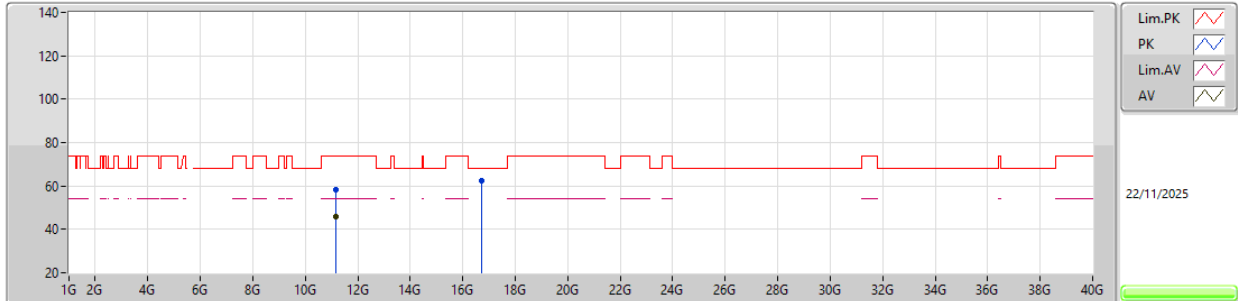EUT Y_2TX
Setting 28
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.15827G	58.13	74.00	-15.87	48.52	3	Horizontal	246	2.53	-	39.48	12.99	42.86			
AV	11.15902G	46.01	54.00	-7.99	36.40	3	Horizontal	246	2.53	-	39.48	12.99	42.86			
PK	16.74017G	62.50	68.20	-5.70	49.03	3	Horizontal	54	1.60	-	39.44	16.28	42.25			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5700MHz_TX

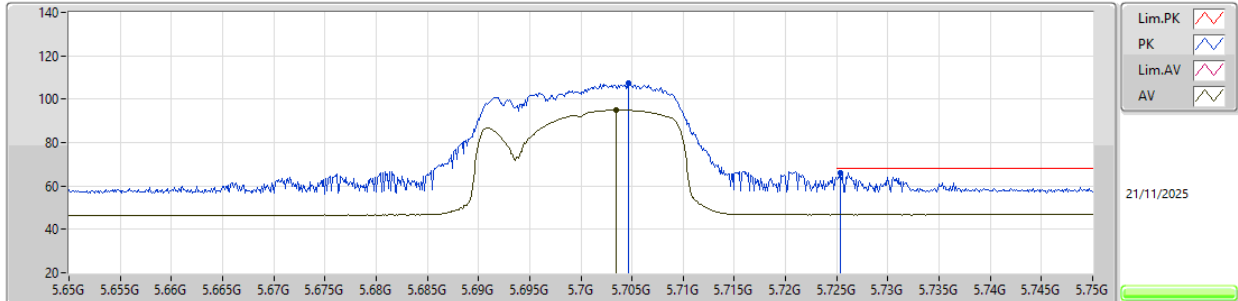EUT Y_2TX
Setting 3
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7047G	107.40	Inf	-Inf	110.08	3	Vertical	185	1.80	-	32.01	8.81	43.50			
AV	5.7034G	95.02	Inf	-Inf	97.70	3	Vertical	185	1.80	-	32.01	8.81	43.50			
PK	5.7254G	66.07	68.20	-2.13	68.66	3	Vertical	185	1.80	-	32.05	8.83	43.47			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5700MHz_TX

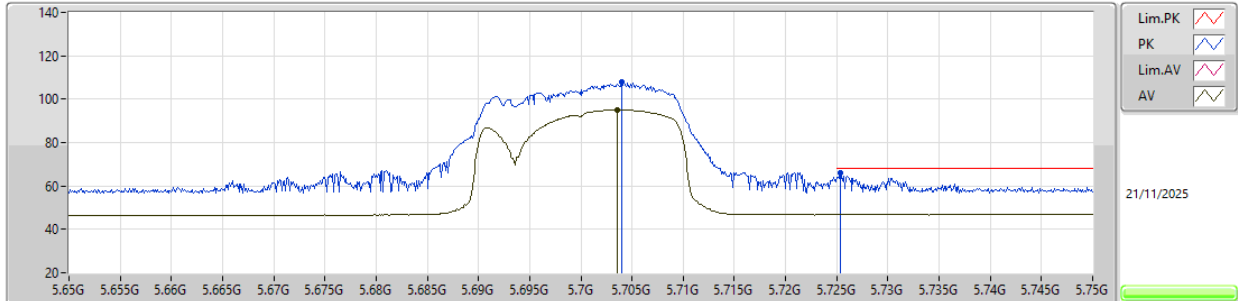EUT Y_2TX
Setting 3
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.704G	107.77	Inf	-Inf	110.45	3	Horizontal	182	1.80	-	32.01	8.81	43.50			
AV	5.7036G	95.09	Inf	-Inf	97.77	3	Horizontal	182	1.80	-	32.01	8.81	43.50			
PK	5.7254G	65.90	68.20	-2.30	68.49	3	Horizontal	182	1.80	-	32.05	8.83	43.47			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5700MHz_TX

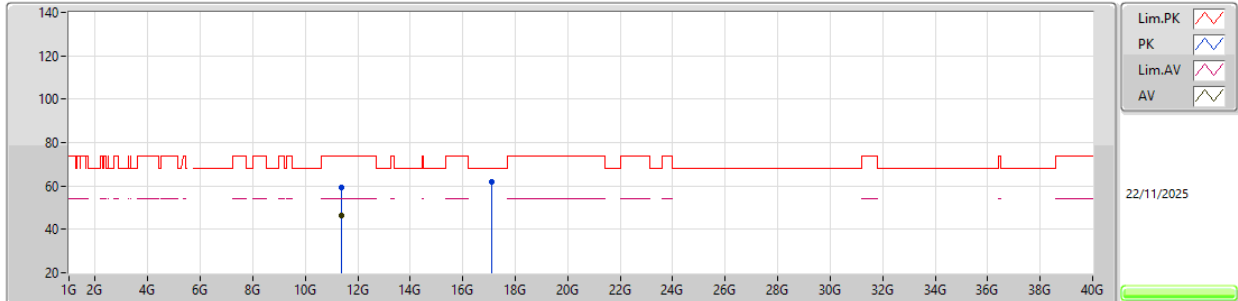EUT Y_2TX
Setting 3
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40024G	59.08	74.00	-14.92	48.79	3	Vertical	24	1.99	-	39.90	13.16	42.77			
AV	11.40082G	46.59	54.00	-7.41	36.30	3	Vertical	24	1.99	-	39.90	13.16	42.77			
PK	17.09877G	61.65	68.20	-6.55	47.88	3	Vertical	217	1.58	-	40.00	16.32	42.55			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5700MHz_TX

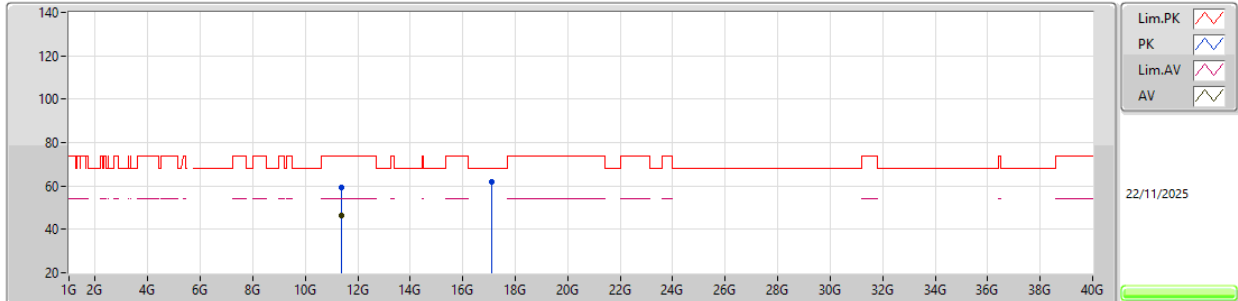EUT Y_2TX
Setting 3
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.39764G	59.55	74.00	-14.45	49.26	3	Horizontal	305	2.30	-	39.90	13.16	42.77			
AV	11.39761G	46.46	54.00	-7.54	36.17	3	Horizontal	305	2.30	-	39.90	13.16	42.77			
PK	17.09772G	61.70	68.20	-6.50	47.92	3	Horizontal	84	2.20	-	40.00	16.32	42.54			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5720MHz Straddle 5.47-5.725GHz_TX

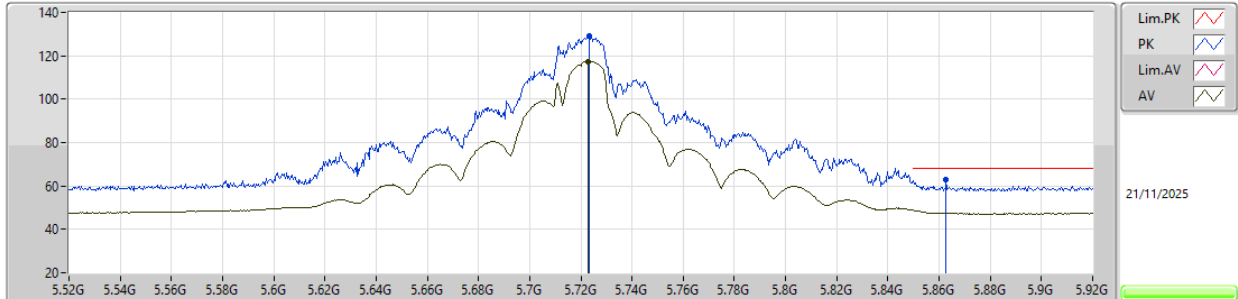EUT Y_2TX
Setting 28
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7232G	128.99	Inf	-Inf	131.59	3	Vertical	182	1.80	-	32.05	8.83	43.48			
AV	5.7228G	117.45	Inf	-Inf	120.05	3	Vertical	182	1.80	-	32.05	8.83	43.48			
PK	5.8628G	62.83	68.20	-5.37	65.04	3	Vertical	182	1.80	-	32.15	8.98	43.34			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5720MHz Straddle 5.47-5.725GHz_TX

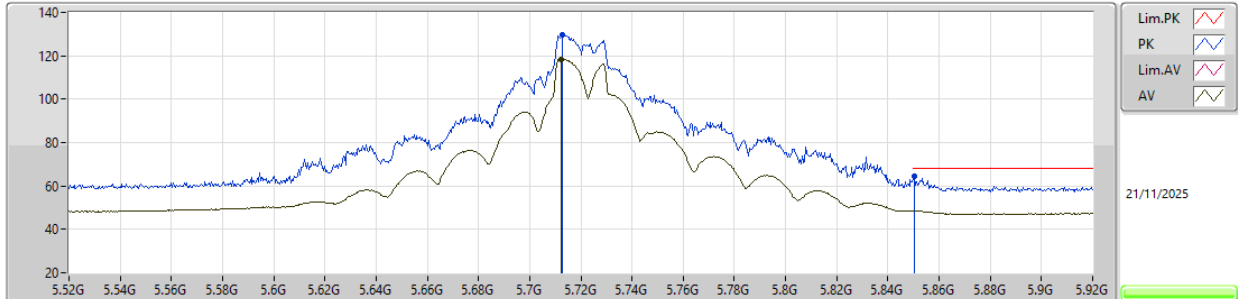EUT Y_2TX
Setting 28
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7128G	129.63	Inf	-Inf	132.27	3	Horizontal	177	1.80	-	32.03	8.82	43.49			
AV	5.7124G	118.34	Inf	-Inf	120.99	3	Horizontal	177	1.80	-	32.02	8.82	43.49			
PK	5.8504G	64.73	68.20	-3.47	67.01	3	Horizontal	177	1.80	-	32.10	8.97	43.35			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5720MHz Straddle 5.47-5.725GHz_TX

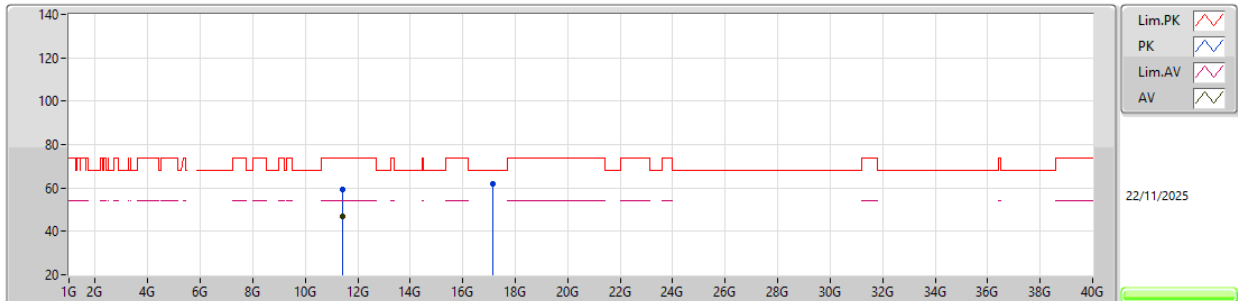EUT Y_2TX
Setting 28
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.44044G	59.42	74.00	-14.58	49.09	3	Vertical	222	2.82	-	39.90	13.19	42.76			
AV	11.43777G	46.92	54.00	-7.08	36.59	3	Vertical	222	2.82	-	39.90	13.19	42.76			
PK	17.16195G	62.01	68.20	-6.19	47.88	3	Vertical	207	2.61	-	40.45	16.33	42.65			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5720MHz Straddle 5.47-5.725GHz_TX

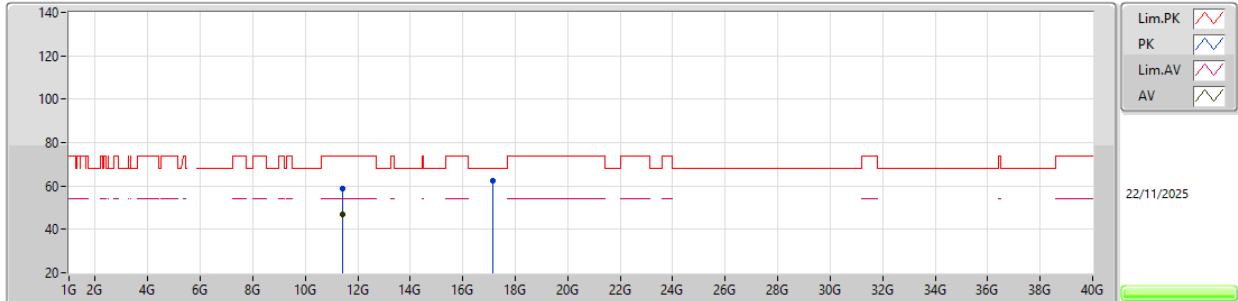EUT Y_2TX
Setting 28
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.43775G	58.73	74.00	-15.27	48.40	3	Horizontal	356	2.52	-	39.90	13.19	42.76			
AV	11.43913G	46.87	54.00	-7.13	36.54	3	Horizontal	356	2.52	-	39.90	13.19	42.76			
PK	17.15817G	62.60	68.20	-5.60	48.48	3	Horizontal	53	1.80	-	40.43	16.33	42.64			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5745MHz_TX

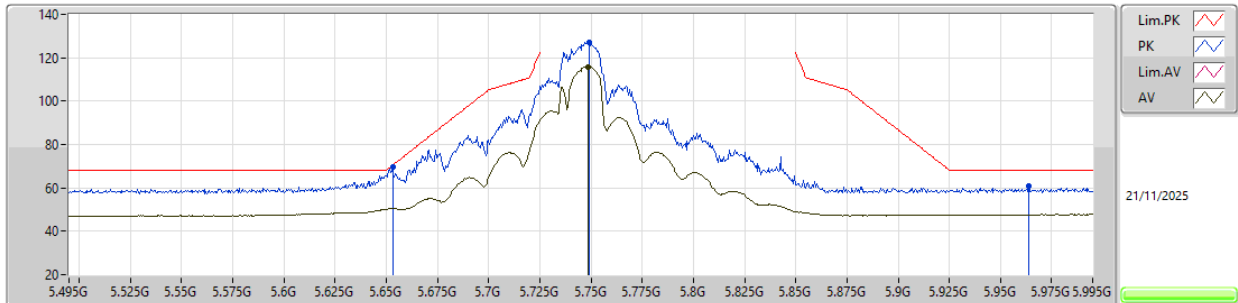


EUT Y_2TX
Setting 27
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.653G	69.78	70.42	-0.64	72.76	3	Vertical	186	1.80	-	31.81	8.76	43.55			
PK	5.749G	127.02	Inf	-Inf	129.51	3	Vertical	186	1.80	-	32.10	8.86	43.45			
AV	5.7485G	115.91	Inf	-Inf	118.40	3	Vertical	186	1.80	-	32.10	8.86	43.45			
PK	5.964G	61.07	68.20	-7.13	62.88	3	Vertical	186	1.80	-	32.33	9.10	43.24			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5745MHz_TX

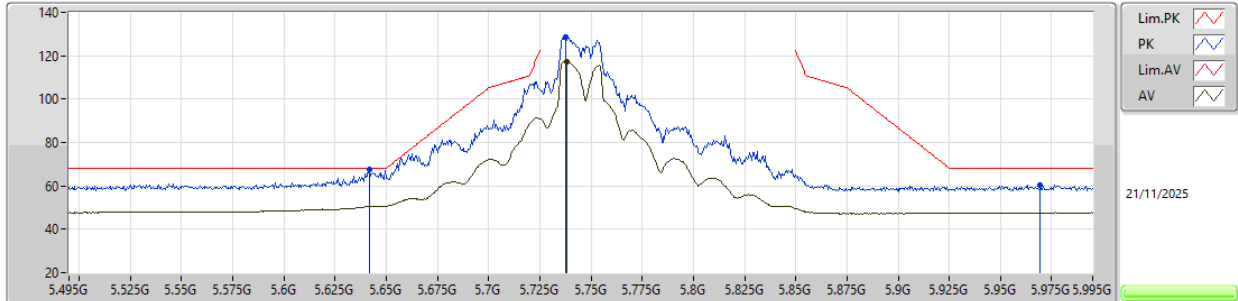


EUT Y_2TX
Setting 27
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.642G	67.83	68.20	-0.37	70.88	3	Horizontal	176	1.80	-	31.77	8.74	43.56			
PK	5.7375G	128.44	Inf	-Inf	130.98	3	Horizontal	176	1.80	-	32.08	8.84	43.46			
AV	5.738G	117.16	Inf	-Inf	119.70	3	Horizontal	176	1.80	-	32.08	8.84	43.46			
PK	5.9695G	60.49	68.20	-7.71	62.28	3	Horizontal	176	1.80	-	32.34	9.10	43.23			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5745MHz_TX

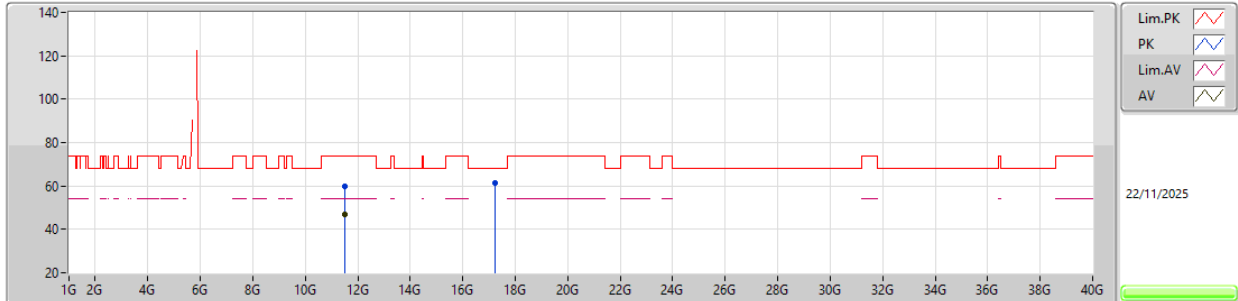EUT Y_2TX
Setting 27
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.48847G	59.75	74.00	-14.25	49.29	3	Vertical	246	1.53	-	39.98	13.22	42.74			
AV	11.48827G	46.91	54.00	-7.09	36.45	3	Vertical	246	1.53	-	39.98	13.22	42.74			
PK	17.23617G	61.53	68.20	-6.67	47.35	3	Vertical	300	2.24	-	40.60	16.34	42.76			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5745MHz_TX

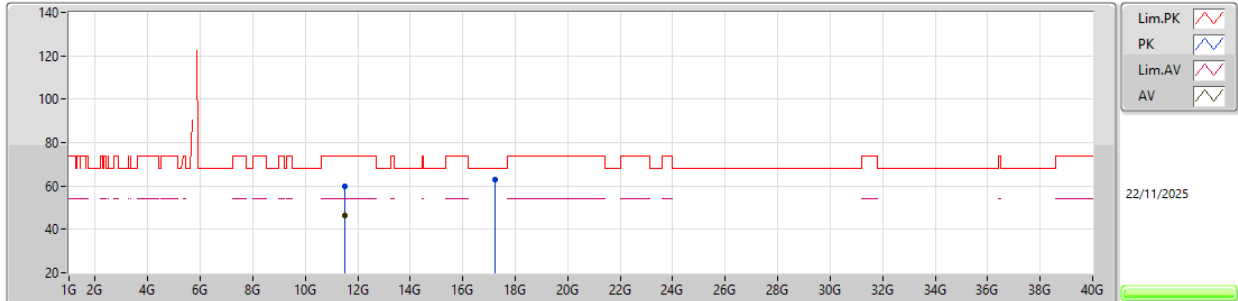EUT Y_2TX
Setting 27
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.48778G	59.60	74.00	-14.40	49.14	3	Horizontal	226	2.00	-	39.98	13.22	42.74			
AV	11.49152G	46.51	54.00	-7.49	36.04	3	Horizontal	226	2.00	-	39.98	13.23	42.74			
PK	17.23493G	63.14	68.20	-5.06	48.96	3	Horizontal	40	1.80	-	40.60	16.34	42.76			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5785MHz_TX

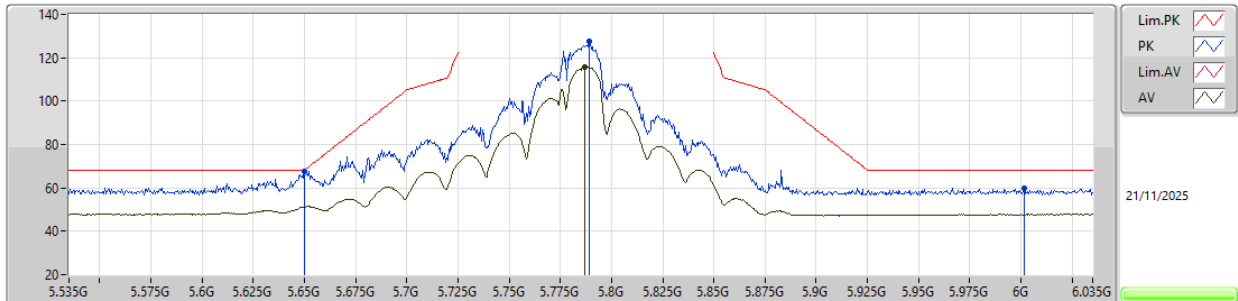


EUT Y_2TX
Setting 27.5
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.65G	67.58	68.20	-0.62	70.58	3	Vertical	184	1.80	-	31.80	8.75	43.55			
PK	5.789G	127.83	Inf	-Inf	130.24	3	Vertical	184	1.80	-	32.10	8.90	43.41			
AV	5.787G	115.79	Inf	-Inf	118.20	3	Vertical	184	1.80	-	32.10	8.90	43.41			
PK	6.0015G	59.98	68.20	-8.22	61.64	3	Vertical	184	1.80	-	32.40	9.14	43.20			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5785MHz_TX

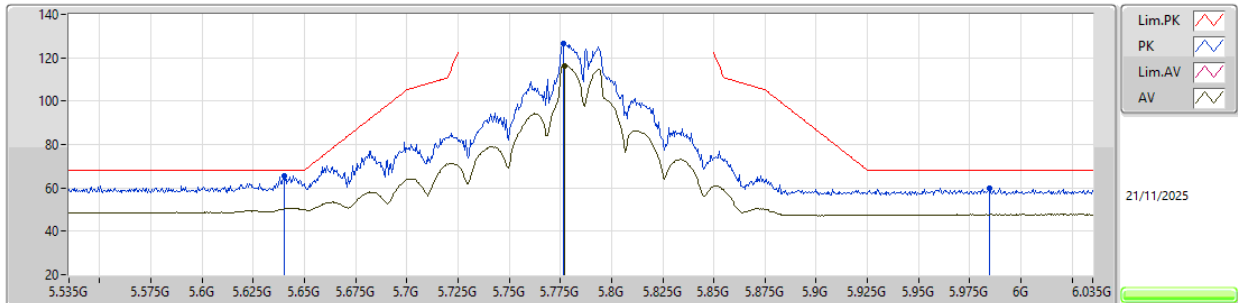EUT Y_2TX
Setting 27.5
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.64G	65.56	68.20	-2.64	68.62	3	Horizontal	176	1.80	-	31.76	8.74	43.56			
PK	5.7765G	126.41	Inf	-Inf	128.84	3	Horizontal	176	1.80	-	32.10	8.89	43.42			
AV	5.777G	116.32	Inf	-Inf	118.75	3	Horizontal	176	1.80	-	32.10	8.89	43.42			
PK	5.9845G	59.95	68.20	-8.25	61.68	3	Horizontal	176	1.80	-	32.37	9.12	43.22			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5785MHz_TX

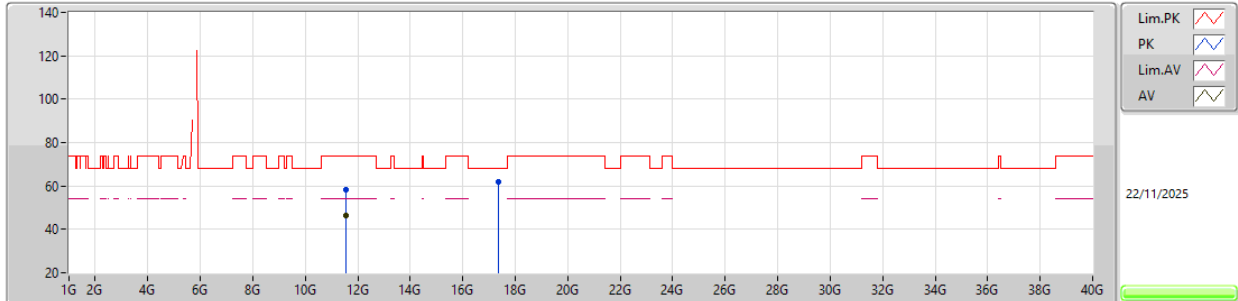EUT Y_2TX
Setting 27.5
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.56952G	58.52	74.00	-15.48	48.26	3	Vertical	239	2.42	-	39.82	13.28	42.84			
AV	11.56757G	46.14	54.00	-7.86	35.87	3	Vertical	239	2.42	-	39.83	13.28	42.84			
PK	17.35455G	61.73	68.20	-6.47	46.99	3	Vertical	129	2.36	-	41.34	16.35	42.95			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5785MHz_TX

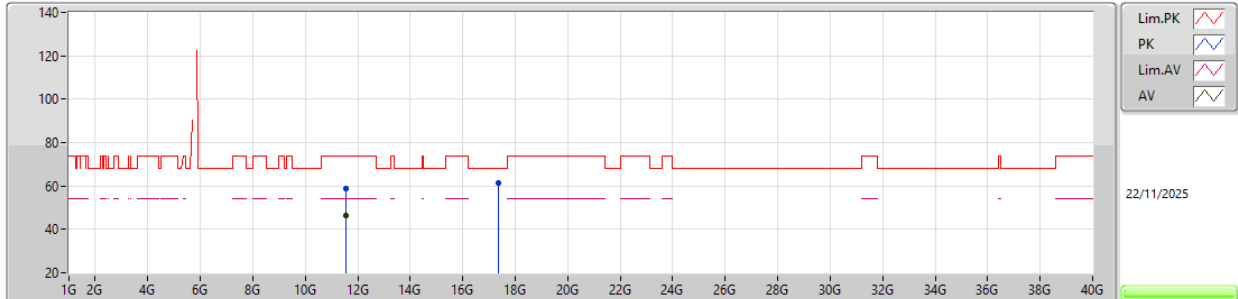EUT Y_2TX
Setting 27.5
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.57136G	58.67	74.00	-15.33	48.42	3	Horizontal	267	2.51	-	39.81	13.28	42.84			
AV	11.56781G	46.53	54.00	-7.47	36.26	3	Horizontal	267	2.51	-	39.83	13.28	42.84			
PK	17.35741G	61.63	68.20	-6.57	46.87	3	Horizontal	323	2.21	-	41.36	16.35	42.95			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5825MHz_TX

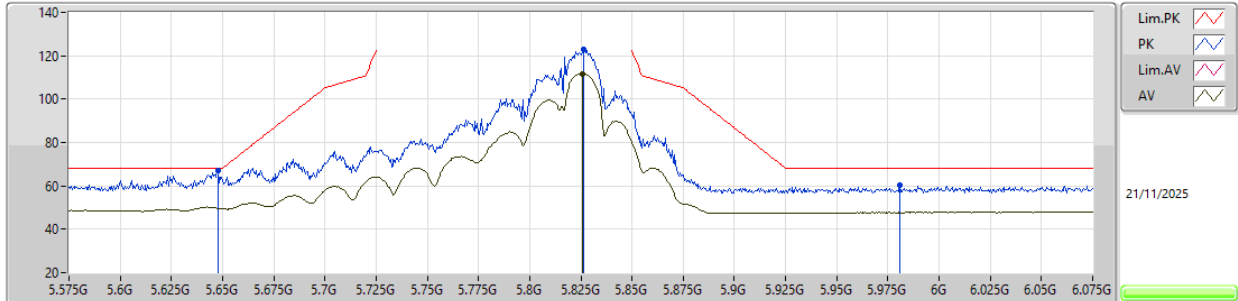


EUT Y_2TX
Setting 28
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.648G	67.25	68.20	-0.95	70.26	3	Vertical	184	1.80	-	31.79	8.75	43.55			
PK	5.8265G	123.04	Inf	-Inf	125.37	3	Vertical	184	1.80	-	32.10	8.94	43.37			
AV	5.826G	111.81	Inf	-Inf	114.14	3	Vertical	184	1.80	-	32.10	8.94	43.37			
PK	5.981G	60.15	68.20	-8.05	61.89	3	Vertical	184	1.80	-	32.36	9.12	43.22			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5825MHz_TX

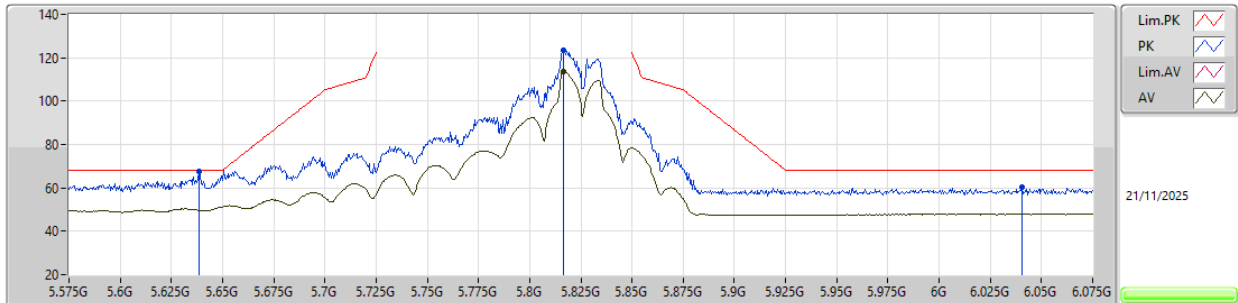


EUT Y_2TX
Setting 28
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6385G	67.66	68.20	-0.54	70.73	3	Horizontal	179	1.80	-	31.75	8.74	43.56			
PK	5.8165G	123.44	Inf	-Inf	125.79	3	Horizontal	179	1.80	-	32.10	8.93	43.38			
AV	5.8165G	113.45	Inf	-Inf	115.80	3	Horizontal	179	1.80	-	32.10	8.93	43.38			
PK	6.0405G	60.41	68.20	-7.79	62.03	3	Horizontal	179	1.80	-	32.40	9.17	43.19			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5825MHz_TX

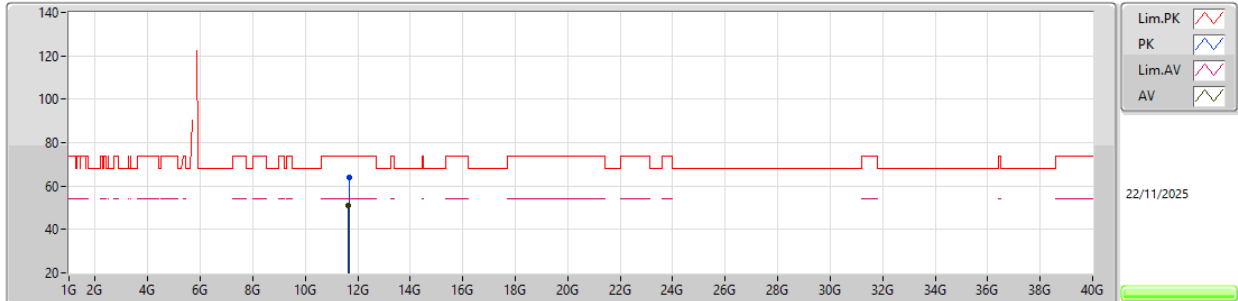EUT Y_2TX
Setting 28
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.66G	63.83	74.00	-10.17	53.97	3	Vertical	154	1.68	-	39.48	13.35	42.97			
AV	11.657G	51.08	54.00	-2.92	41.21	3	Vertical	154	1.68	-	39.49	13.34	42.96			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5825MHz_TX

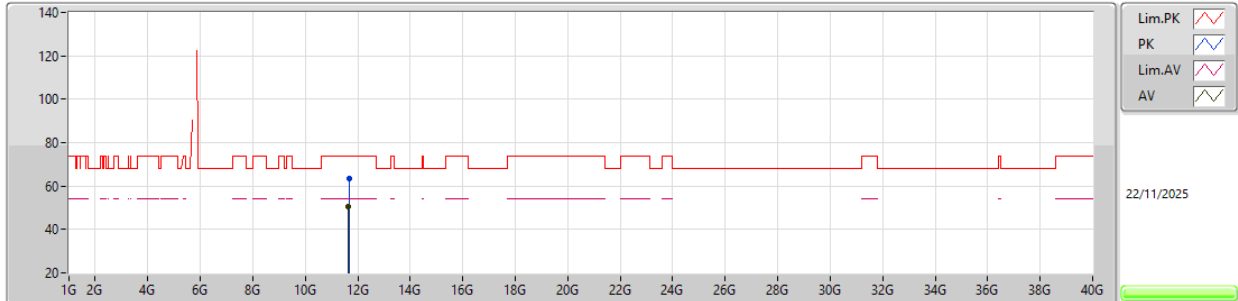EUT Y_2TX
Setting 28
04-W-N-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.6621G	63.29	74.00	-10.71	53.43	3	Horizontal	255	1.80	-	39.48	13.35	42.97			
AV	11.64385G	50.60	54.00	-3.40	40.68	3	Horizontal	255	1.80	-	39.52	13.34	42.94			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5190MHz_TX

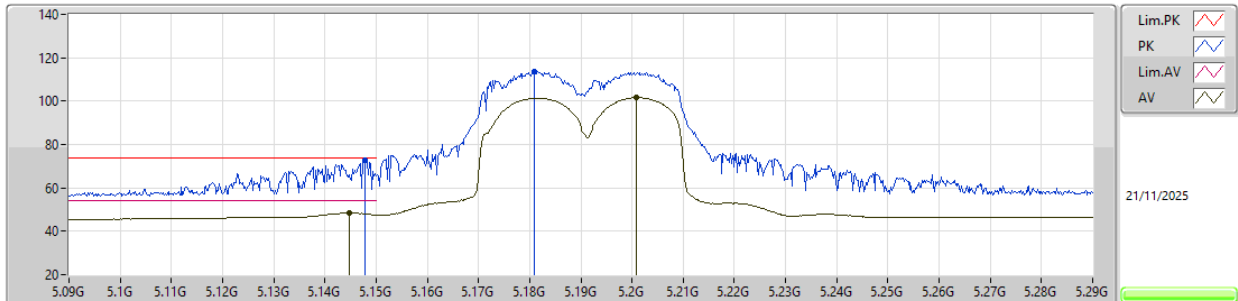

EUT Y_2TX
Setting 12.5
04-W-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1478G	72.87	74.00	-1.13	76.37	3	Vertical	181	1.80	-	31.99	8.39	43.88			
AV	5.1448G	48.48	54.00	-5.52	52.00	3	Vertical	181	1.80	-	31.97	8.39	43.88			
PK	5.1808G	113.52	Inf	-Inf	117.15	3	Vertical	181	1.80	-	31.82	8.41	43.86			
AV	5.2008G	101.65	Inf	-Inf	105.38	3	Vertical	181	1.80	-	31.70	8.42	43.85			