



RADIO TEST REPORT

FCC ID : 2AU6R04371
Equipment : 802.11be (WiFi 7) 5G/6G 2X2 Dual-Radio PTMP CPE,
802.11be (WiFi 7) 5G/6G 2X2 Dual-Radio PTMP Solution
Brand Name : ZYXEL
Model Name : Leaf Plus, Root
Applicant : Zyxel Networks Corporation
No.2 Industry East RD. IX, Hsinchu Science Park, Hsinchu
30075, Taiwan, R.O.C
Manufacturer : Zyxel Networks Corporation
No.2 Industry East RD. IX, Hsinchu Science Park, Hsinchu
30075, Taiwan, R.O.C
Standard : 47 CFR FCC Part 15.407

The product was received on Jul. 22, 2025, and testing was started from Nov. 20, 2025 and completed on Dec. 30, 2025. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	12
1.3 Testing Location Information	12
1.4 Measurement Uncertainty	13
2 Test Configuration of EUT.....	14
2.1 Test Channel Mode	14
2.2 The Worst Case Measurement Configuration	16
2.3 EUT Operation during Test	17
2.4 Accessories	17
2.5 Support Equipment.....	17
2.6 Test Setup Diagram	18
3 Transmitter Test Result	21
3.1 AC Power-line Conducted Emissions	21
3.2 Emission Bandwidth	23
3.3 Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	24
3.4 Peak Power Spectral Density (E.I.R.P.)	27
3.5 Unwanted Emissions.....	30
4 Test Equipment and Calibration Data	35
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of Emission Bandwidth	
Appendix C. Test Results of Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	
Appendix D. Test Results of Peak Power Spectral Density (E.I.R.P.)	
Appendix E. Test Results of Unwanted Emissions	
Appendix F. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_5 Ver2.0



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	PASS	-
-	15.407(a)	Proper Power Adjustment	N/A	Non-Dual Client Device / non-Standard Client Device w/o test
-	15.407(a)	Transmit Power Control	N/A	Non-Very Low Power Device w/o test
3.4	15.407(a)	Peak Power Spectral Density (E.I.R.P.)	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-
-	15.407(d)	Contention-Based Protocol	N/A	Fixed Client Device w/o test

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen**Report Producer: Cathy Chiu**



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925-6425	ax (HEW20), be (EHT20)	5955-6415	1-93 [24]
6525-6875		6535-6855	117-181 [17]
5925-6425	ax (HEW40), be (EHT40)	5965-6405	3-91 [12]
6525-6875		6565-6845	123-179 [8]
5925-6425	ax (HEW80), be (EHT80)	5985-6385	7-87 [6]
6525-6875		6625-6785	135-167 [3]
5925-6425	ax (HEW160), be (EHT160)	6025-6345	15-79 [3]
6525-6875		6665	143 [1]
5925-6425	be (EHT320)	6105-6265	31-63 [2]



Band	Mode	BWch (MHz)	Nant
5.925-6.425GHz	802.11 ax HEW20, 802.11 be EHT20	20	2TX
	802.11 ax HEW20-BF, 802.11 be EHT20-BF	20	2TX
	802.11 ax HEW40, 802.11 be EHT40	40	2TX
	802.11 ax HEW40-BF, 802.11 be EHT40-BF	40	2TX
	802.11 ax HEW80, 802.11 be EHT80	80	2TX
	802.11 ax HEW80-BF, 802.11 be EHT80-BF	80	2TX
	802.11 ax HEW160, 802.11 be EHT160	160	2TX
	802.11 ax HEW160-BF, 802.11 be EHT160-BF	160	2TX
	802.11 be EHT320	320	2TX
	802.11 be EHT320-BF	320	2TX
6.525-6.875GHz	802.11 ax HEW20, 802.11 be EHT20	20	2TX
	802.11 ax HEW20-BF, 802.11 be EHT20-BF	20	2TX
	802.11 ax HEW40, 802.11 be EHT40	40	2TX
	802.11 ax HEW40-BF, 802.11 be EHT40-BF	40	2TX
	802.11 ax HEW80, 802.11 be EHT80	80	2TX
	802.11 ax HEW80-BF, 802.11 be EHT80-BF	80	2TX
	802.11 ax HEW160, 802.11 be EHT160	160	2TX
	802.11 ax HEW160-BF, 802.11 be EHT160-BF	160	2TX
	802.11 be EHT320	320	2TX
	802.11 be EHT320-BF	320	2TX



Note:

- ♦ HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40, EHT80 and EHT160, EHT320 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.

**1.1.2 Antenna Information**

Ant.	Port of EUT	Port		Brand	Model Name	Antenna Type	Connector	Gain (dBi)
		5GHz	6GHz					
1	1	2	-	LYNwave	OLA25B-247160-A	Patch Antenna	SMA	Note1
	2	1	-					
	3	-	2					
	4	-	1					

Note 1:

Port of EUT	Antenna Gain (dBi)				
	WLAN 5GHz				
	5150~5250MHz	5250~5350MHz	5470~5650MHz	5650~5800MHz	5800~5850MHz
1	11.1	11.6	10.7	11.3	10.4
2	11.0	10.9	10.8	10.5	10.8
3	-	-	-	-	-
4	-	-	-	-	-

Port of EUT	Antenna Gain (dBi)			
	WLAN 6GHz			
	5925~6125MHz	6125~6525MHz	6525~6825MHz	6825~6875MHz
1	-	-	-	-
2	-	-	-	-
3	10.0	11.4	11.1	11.4
4	10.3	11.3	11.6	10.8

Note2: The above information was declared by manufacturer.

Note 3: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ; NSS1(g1,3) = 10^{G3/20} ; NSS1(g1,4) = 10^{G4/20}$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2 / N_{ANT}] \Rightarrow 10$$

$$\log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20} + 10^{G4/20})^2 / N_{ANT}]$$

Where ;

5.150-5.250GHz G1= 11.1 dBi ; G2= 11 dBi ;DG= 14.06dBi

5.250-5.350GHz G1= 11.6 dBi ; G2= 10.9 dBi ;DG= 14.27dBi

5.470-5.650GHz G1= 10.7 dBi ; G2= 10.8 dBi ;DG= 13.76dBi

5.650-5.800GHz G1= 11.3 dBi ; G2= 10.5 dBi ;DG= 13.92dBi

5.800-5.850GHz G1= 10.4 dBi ; G2= 10.8 dBi ;DG= 13.61dBi

5.925-6.125GHz G1= 10 dBi ; G2= 10.3 dBi ;DG= 13.16dBi

6.125-6.525GHz G1= 11.4 dBi ; G2= 11.3 dBi ;DG= 14.36dBi

6.525-6.825GHz G1= 11.1 dBi ; G2= 11.6 dBi ;DG= 14.36dBi

6.825-6.875GHz G1= 11.4 dBi ; G2= 10.8 dBi ;DG= 14.12dBi

<For 5GHz function>

For IEEE 802.11a/n/ac/ax/be (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

<For 6GHz function>

For IEEE 802.11ax/be (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

**1.1.3 Mode Test Duty Cycle**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT20_Nss 1,(M0)	0.977	0.1	5.456m	200
802.11be EHT40_Nss 1,(M0)	0.973	0.12	5.456m	200
802.11be EHT80_Nss 1,(M0)	0.976	0.11	5.456m	200
802.11be EHT160_Nss 1,(M0)	0.974	0.11	5.456m	200
802.11be EHT320_Nss 1,(M0)	0.976	0.11	5.46m	200
802.11be EHT20-BF_Nss 1,(M0)	0.977	0.1	5.456m	200
802.11be EHT40-BF_Nss 1,(M0)	0.973	0.12	5.456m	200
802.11be EHT80-BF_Nss 1,(M0)	0.976	0.11	5.456m	200
802.11be EHT160-BF_Nss 1,(M0)	0.974	0.11	5.456m	200
802.11be EHT320-BF_Nss 1,(M0)	0.976	0.11	5.46m	200

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From PoE	
Beamforming Function	☒ With beamforming	☐ Without beamforming
	The product has beamforming function for n/ac/ax/be in 5GHz and ax/be in 6GHz.	
Device Type	☐ Indoor Access Point	☐ Subordinate
	☐ Indoor Client	☐ Standard Power Access Point
	☐ Dual Client	☐ Standard Client
	☒ Fixed Client	☐ Very Low Power
Condition of EUT	☐ Indoor	☒ Outdoor
Channel Puncturing Function	☐ Supported Static Puncturing	
	☐ Supported Dynamic Puncturing (Reduce BW)	
	☒ Unsupported	
	Note: The EUT doesn't support puncturing for CBP	
Support RU	☒ Full RU	☐ Partial RU
Test Software Version	QRCT4 V4.0.170.1	

Note: The above information was declared by manufacturer.

**1.1.5 Table for Multiple Listing**

Equipment Name	Model Name	Channel Marketing
802.11be (WiFi 7) 5G/6G 2X2 dual-Radio PTMP CPE	Leaf Plus	Online Channels
802.11be (WiFi 7) 5G/6G 2X2 dual-Radio PTMP Solution	Root	Offline Channels

Note 1: From the above models, model: Leaf Plus was selected as representative model for the test and its data was recorded in this report.

Note 2: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.407
- ♦ ANSI C63.10-2020
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 987594 D02 v03
- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 412172 D01 v01r01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH03-CB	Owen Hsu	20.4~21.6 / 60~64	Nov. 26, 2025~ Dec. 16, 2025
Radiated (Below 1GHz)	10CH01-CB	Gray Lee	22~23 / 56~57	Nov. 20, 2025
Radiated (Above 1GHz)	03CH04-CB	Nyle Chang	21.4~22.6 / 57~61	Nov. 20, 2025~ Dec. 30, 2025
AC Conduction	CO02-CB	Gray Lee	23~24 / 63~64	Nov. 21, 2025



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.4 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.7 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	2.5 dB	Confidence levels of 95%
Output Power Measurement	1.3 dB	Confidence levels of 95%
Power Density Measurement	2.0 dB	Confidence levels of 95%
Bandwidth Measurement	1.0 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode
802.11be EHT20_Nss1,(MCS0)_2TX
5955MHz
6195MHz
6415MHz
6535MHz
6695MHz
6855MHz
802.11be EHT40_Nss1,(MCS0)_2TX
5965MHz
6205MHz
6405MHz
6565MHz
6685MHz
6845MHz
802.11be EHT80_Nss1,(MCS0)_2TX
5985MHz
6225MHz
6385MHz
6625MHz
6705MHz
6785MHz
802.11be EHT160_Nss1,(MCS0)_2TX
6025MHz
6185MHz
6345MHz
6665MHz
802.11be EHT320_Nss1,(MCS0)_2TX
6105MHz
6265MHz
802.11be EHT20-BF_Nss1,(MCS0)_2TX
5955MHz
6195MHz
6415MHz
6535MHz
6695MHz
6855MHz
802.11be EHT40-BF_Nss1,(MCS0)_2TX
5965MHz
6205MHz
6405MHz
6565MHz
6685MHz



6845MHz
802.11be EHT80-BF_Nss1,(MCS0)_2TX
5985MHz
6225MHz
6385MHz
6625MHz
6705MHz
6785MHz
802.11be EHT160-BF_Nss1,(MCS0)_2TX
6025MHz
6185MHz
6345MHz
6665MHz
802.11be EHT320-BF_Nss1,(MCS0)_2TX
6105MHz
6265MHz

Note:

- ♦ Evaluated EHT20/EHT40/EHT80/EHT160 mode only due to the similar modulation. The power setting of HEW20/HEW40/HEW80/HEW160 mode are the same or lower than EHT20/EHT40/EHT80/EHT160.
- ♦ The EUT supports non-beamforming and beamforming modes, after evaluating, the non-beamforming mode has been evaluated to be the worst case, so it was selected to test. The beamforming mode evaluates the output power only.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Normal Link
1	EUT + PoE

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Equivalent Isotopically Radiated Power (E.I.R.P.) Peak Power Spectral Density (E.I.R.P.)
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link
1	EUT in Y axis
After evaluating, and the worst case was found at Y axis, so it was selected to perform test and its test result was written in the report.	
Operating Mode > 1GHz	CTX
After evaluating, and the worst case was found at Y axis, so it was selected to perform test and its test result was written in the report.	
1	EUT in Y axis

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission MASK
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 5GHz+WLAN 6GHz
Refer to Sporton Test Report No.: FA542103 for Co-location RF Exposure Evaluation.	



Note: The PoE is for measurement only, would not be marketed.

The information as below:

Power	Brand	Model
PoE	GOSPELL	G0720-480-050

2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link:

During the test, the EUT operation to normal function.

2.4 Accessories

Accessories
Fixed Rack*1 (for antenna used)
Fixed Ring*2

2.5 Support Equipment


For AC Conduction and Radiated (below 1GHz):


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	GOSPELL	G0720-480-050	N/A
B	EUT PC	ASUS	S300TA	TX2-RTL8821CE
C	Wifi Device	ZYXEL	NWA50BE PRO	N/A
D	Wifi Device PoE	GOSPELL	G0720-480-050	N/A
E	Wif Device PC	ASUS	S300TA	TX2-RTL8821CE
F	GPS Simulator	WELNAVIGATE	GS-100	N/A

For Radiated (above 1GHz) and RF Conducted:


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	PoE	GOSPELL	G0720-480-050	N/A

2.6 Test Setup Diagram

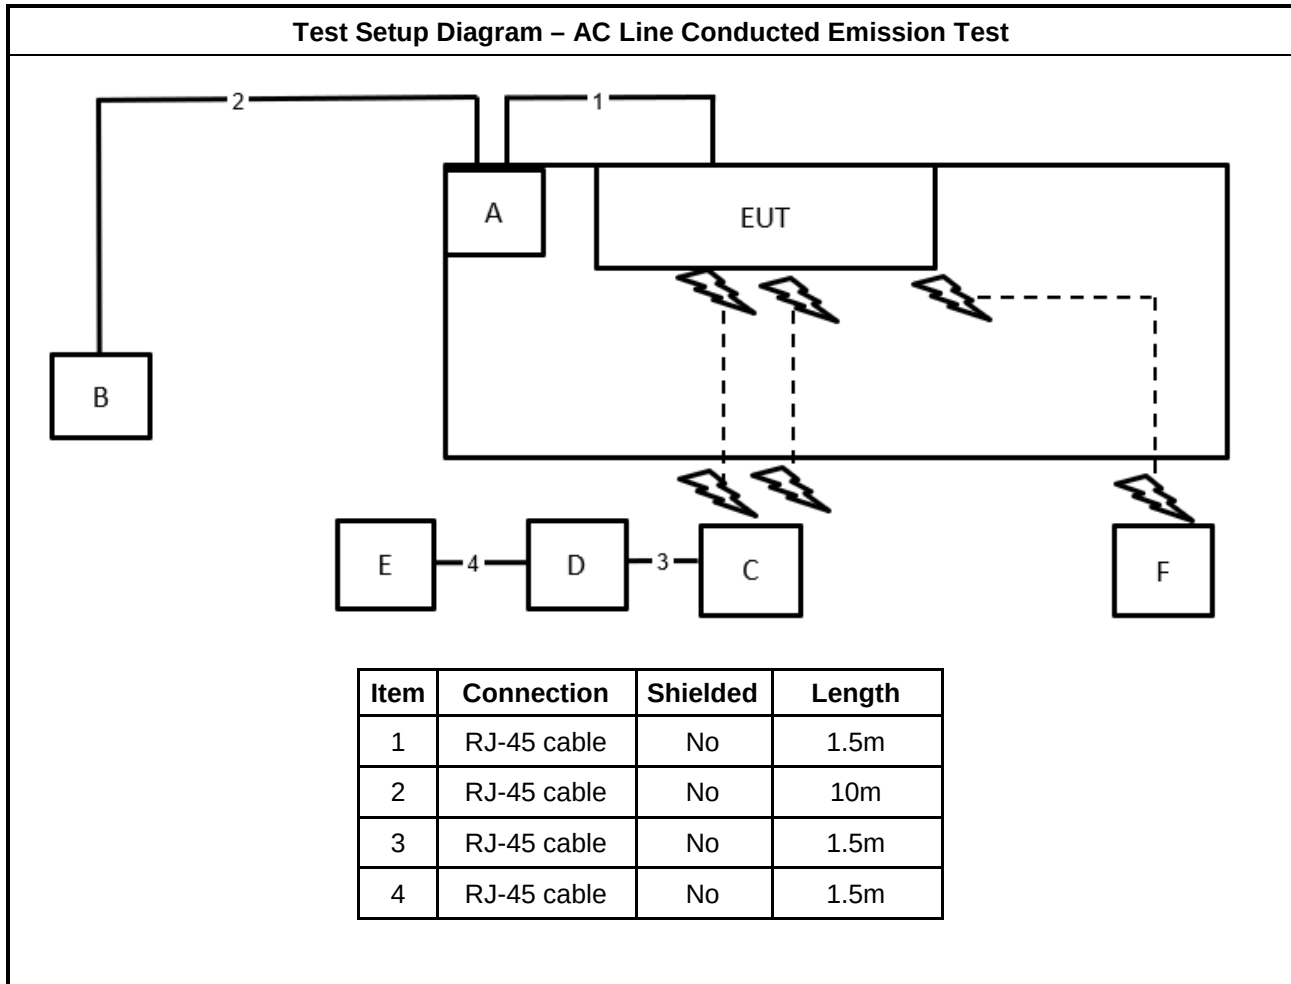

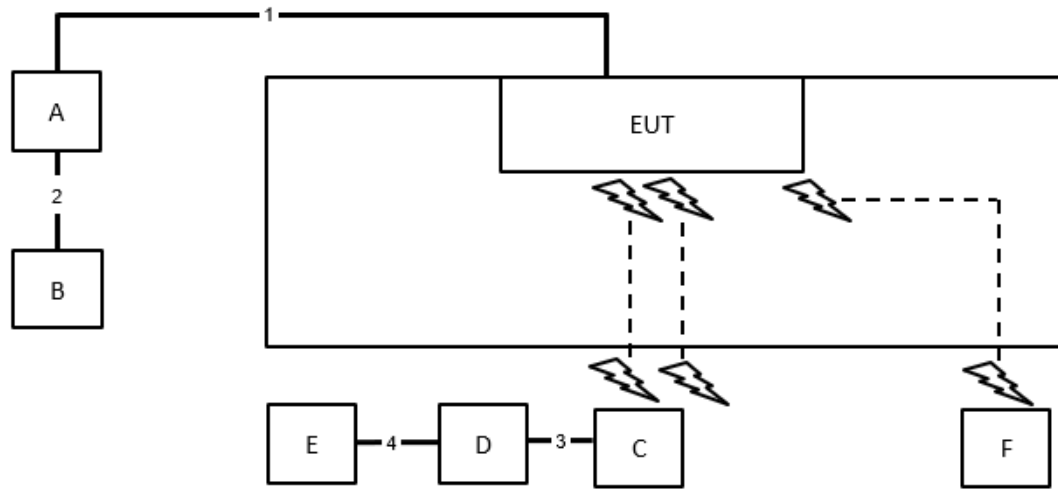Test Setup Diagram - Radiated Test < 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m
3	RJ-45 cable	No	1.5m
4	RJ-45 cable	No	1.5m

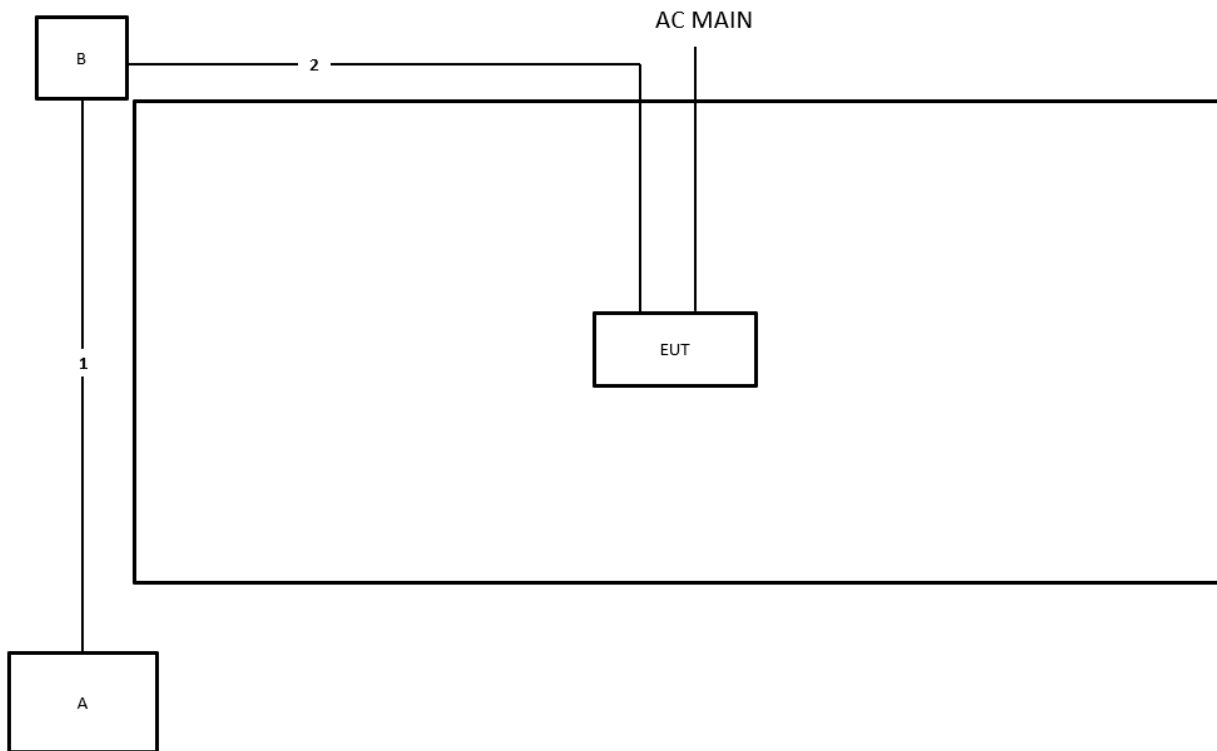Test Setup Diagram - Radiated Test > 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	1m
2	RJ-45 cable	No	10m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2020, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

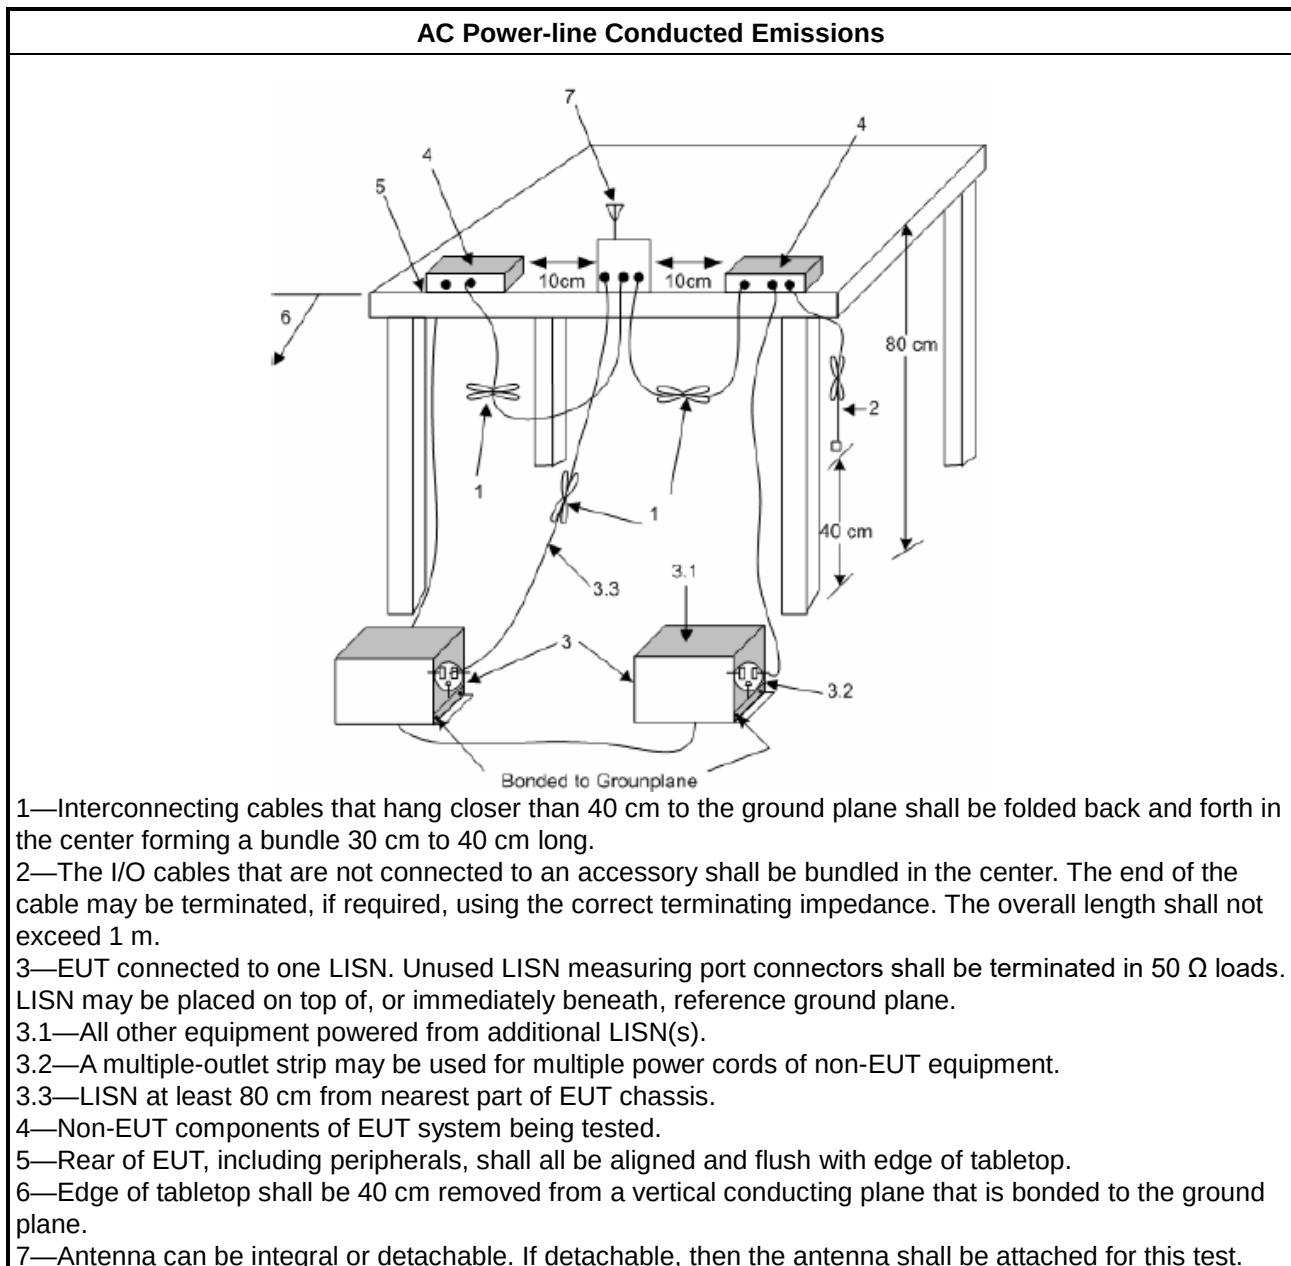

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- Corrected Reading (dBuV) = LISN Factor + Cable Loss + Read Level = Level
- Marginal = - Limit + (Read Level + LISN Factor + Cable Loss)

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5925-6425 GHz band, need less than 320 MHz bandwidth.
☐	For the 6425-6525 GHz band, need less than 320 MHz bandwidth.
☒	For the 6525-6875 GHz band, need less than 320 MHz bandwidth.
☐	For the 6875-7125 GHz band, need less than 320 MHz bandwidth.
RLAN Devices	
☐	For the 5925-6425 GHz band, need less than 320 MHz bandwidth.
☐	For the 6425-6525 GHz band, need less than 320 MHz bandwidth.
☐	For the 6525-6875 GHz band, need less than 320 MHz bandwidth.
☐	For the 6875-7125 GHz band, need less than 320 MHz bandwidth.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
For the emission bandwidth shall be measured using one of the options below:	
☒	According to FCC KDB 987594 D02 clause II.C, measurement procedure shall refer to FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.2.4 Test Setup

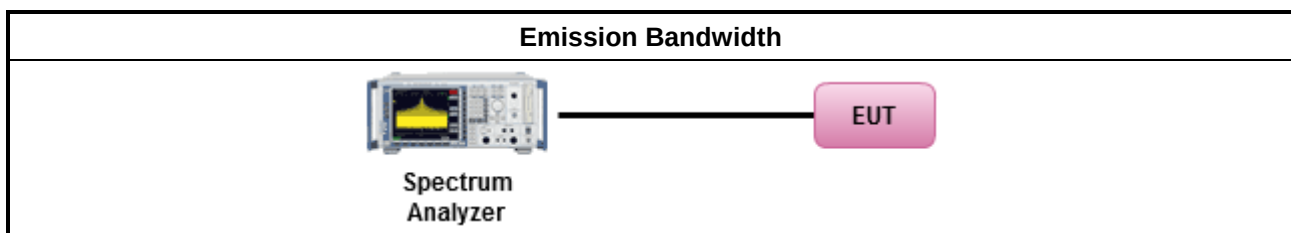

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

Note:

The 99% OBW of BW320 should be less than 320 MHz of limit, and the other BWs less than 320 MHz of limit are 26 dB EBW.



3.3 Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)

3.3.1 Maximum Equivalent Isotopically Radiated Power (E.I.R.P.) Limit

Maximum Equivalent Isotopically Radiated Power (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☐ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☐ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
RLAN Devices	
☐ For the 5.925 ~ 7.125 GHz band:	
	■ For low-power indoor access-points & indoor subordinate devices < 30 dBm .
	■ For low-power client devices < 24 dBm.
	■ For very low-power devices < 14 dBm.
☐ For the 5.925 ~ 6.875 GHz band:	

- For standard-power access points & fixed client devices < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
- For standard client devices < 30 dBm.


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
▪ According to FCC KDB 987594 D02 clause II.E, the test measurement procedure shall refer to KDB 789033.	
Average over on/off periods with duty factor	
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging). Spectrum analyzer setting: RBW/VBW : 1/3MHz ; Detector : RMS ; Trace mode : Average ; Sweep Count 100.
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
Wideband RF power meter and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).
☒ For conducted measurement.	
▪ If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
▪ If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	
☐ For radiated measurement.	
▪ Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" ▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. ▪ Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.	

3.3.4 Test Setup

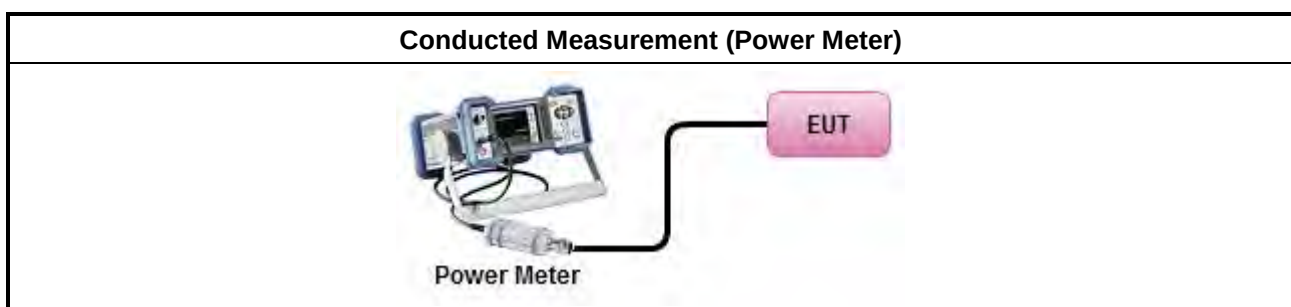



3.3.5 Test Result of Maximum Equivalent Isotopically Radiated Power (E.I.R.P)

Refer as Appendix C



3.4 Peak Power Spectral Density (E.I.R.P.)

3.4.1 Peak Power Spectral Density (E.I.R.P.) Limit

Peak Power Spectral Density (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☐ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☐ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
RLAN Devices	
☐ For the 5.925 ~ 7.125 GHz band:	
	■ For low-power indoor access-points & indoor subordinate devices < 5 dBm / MHz.
	■ For low-power client devices < -1 dBm / MHz.
	■ For very low-power devices < -5 dBm / MHz.
☐ For the 5.925 ~ 6.875 GHz band:	
	■ For standard-power access points & fixed client devices < 23 dBm / MHz.
	■ For standard client devices < 17 dBm / MHz.



3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 clause II.F, the measurement procedure shall refer to KDB 789033. Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033 D02, F5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
[duty cycle ≥ 98% or external video / power trigger]	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒ For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	
☐ For radiated measurement.	

Test Method	
	- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. - Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.4.4 Test Setup

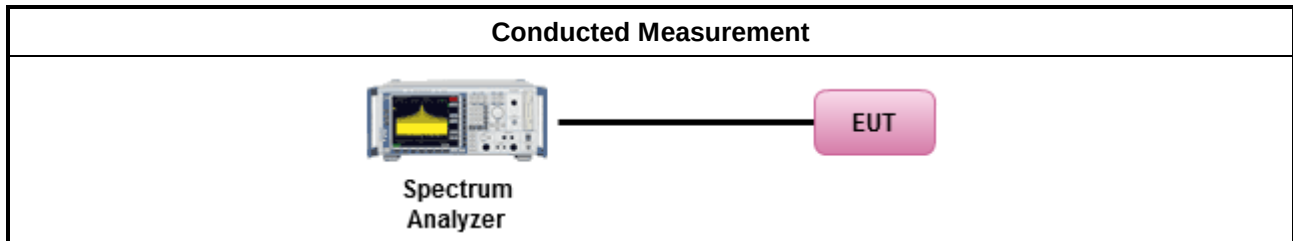

3.4.5 Test Result of Peak Power Spectral Density (E.I.R.P.)

Refer as Appendix D



3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit


Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$).
EX. Above 18GHz emission limit calculation (3m to 1m) = $54\text{dBuV/m at 3m} + 9.54\text{dB} = 63.54\text{ dBuV/m at 1m}$.

Un-restricted band emissions above 1GHz Limit	
Frequency	Limit
Any outside the 5.925 – 7.125 GHz emission	e.i.r.p. -27 dBm [68.2 dBuV/m@3m] Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$). EX. Above 18GHz emission limit calculation (3m to 1m) = $68.2\text{dBuV/m at 3m} + 9.54\text{dB} = 77.74\text{ dBuV/m at 1m}$. Note 2:-27 dBm EIRP OOBE is measured RMS which is a deviation from the current 15E rules for 5 GHz bands. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

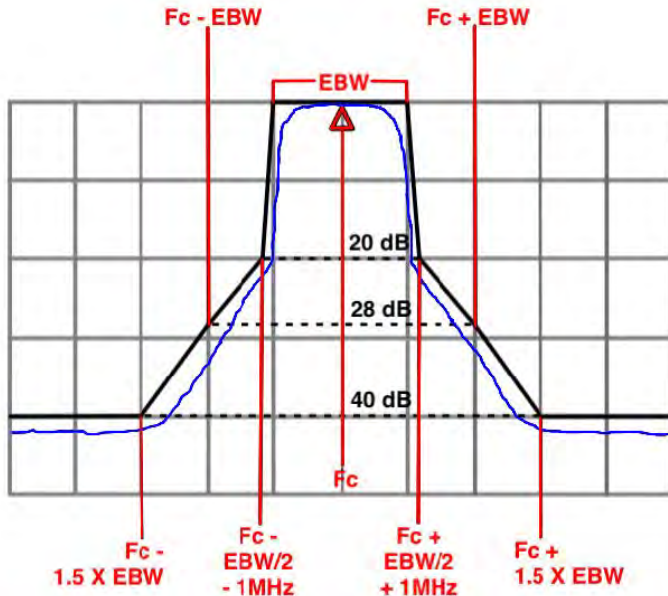Frequency	Emission MASK Limit
5.925 – 7.125 GHz	Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB. 




3.5.2 Measuring Instruments



Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 II.G. the unwanted emission measurement procedure shall refer to KDB 789300(except emission MASK). Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.
	☒ Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging). (For unrestricted band measurement)
	☐ Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).
	☒ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.(For restricted band average measurement)
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.
	☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
Refer as FCC KDB 789033 D02, clause G)3)d)ii) for Band edge Integration measurements.	
For emission MASK shall be measured using following options below:	
	☒ Refer as FCC KDB 987594 D02, J) In-Band Emissions
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	

3.5.4 Test Setup

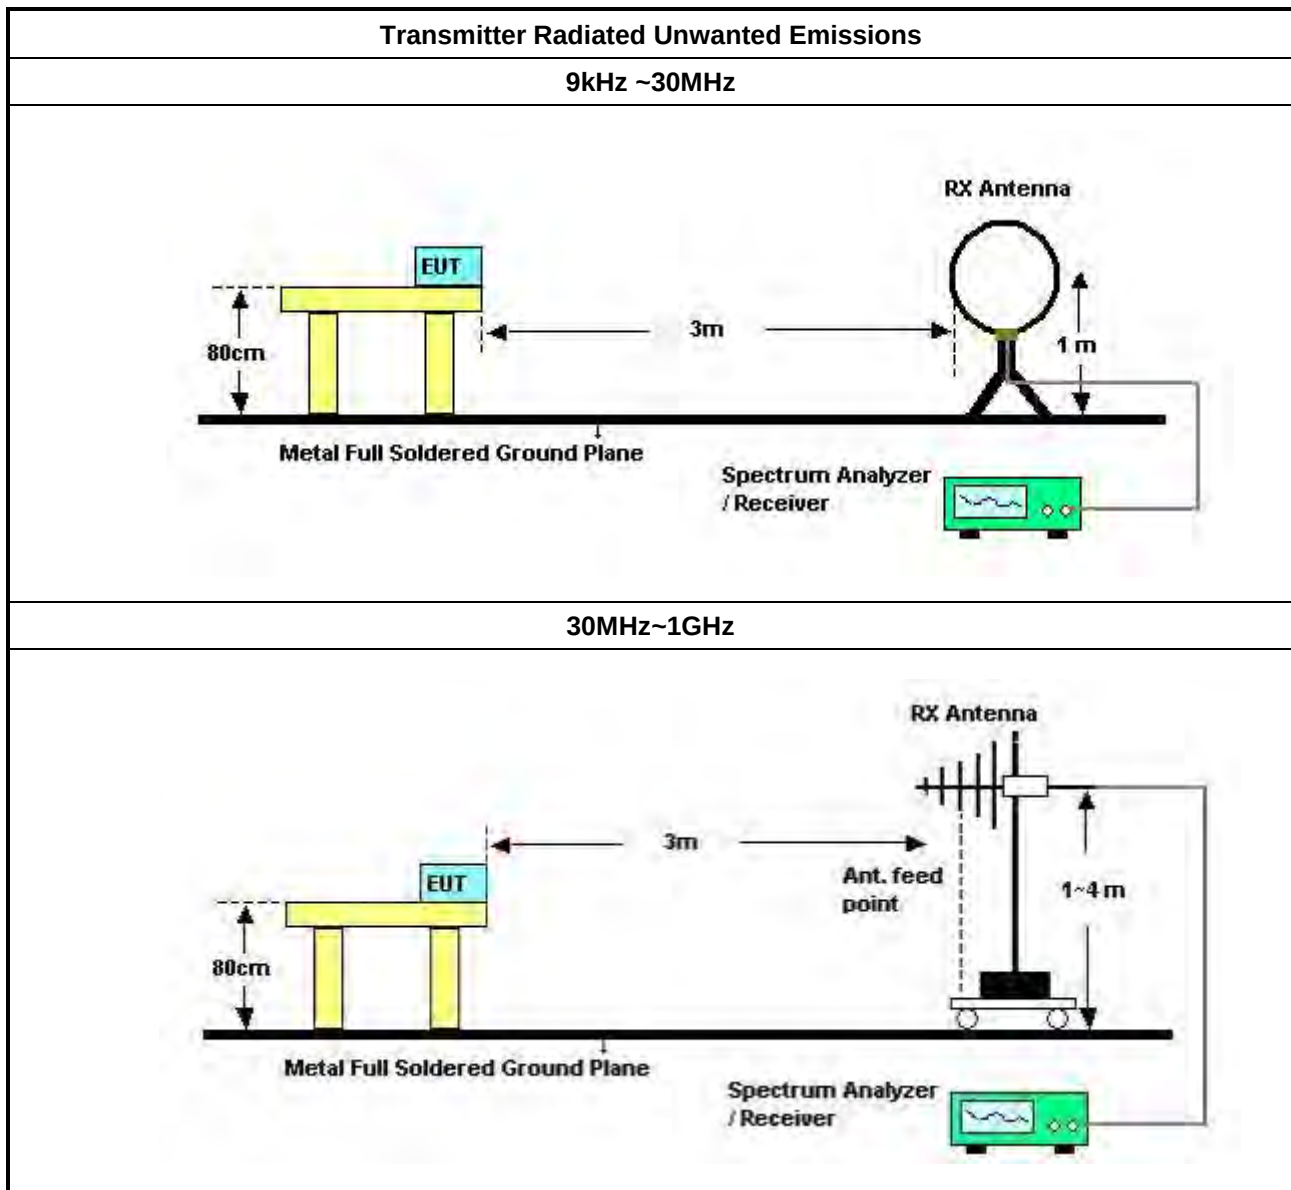

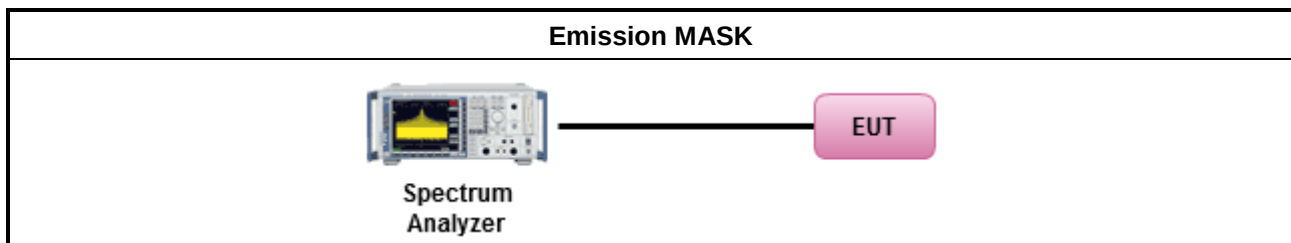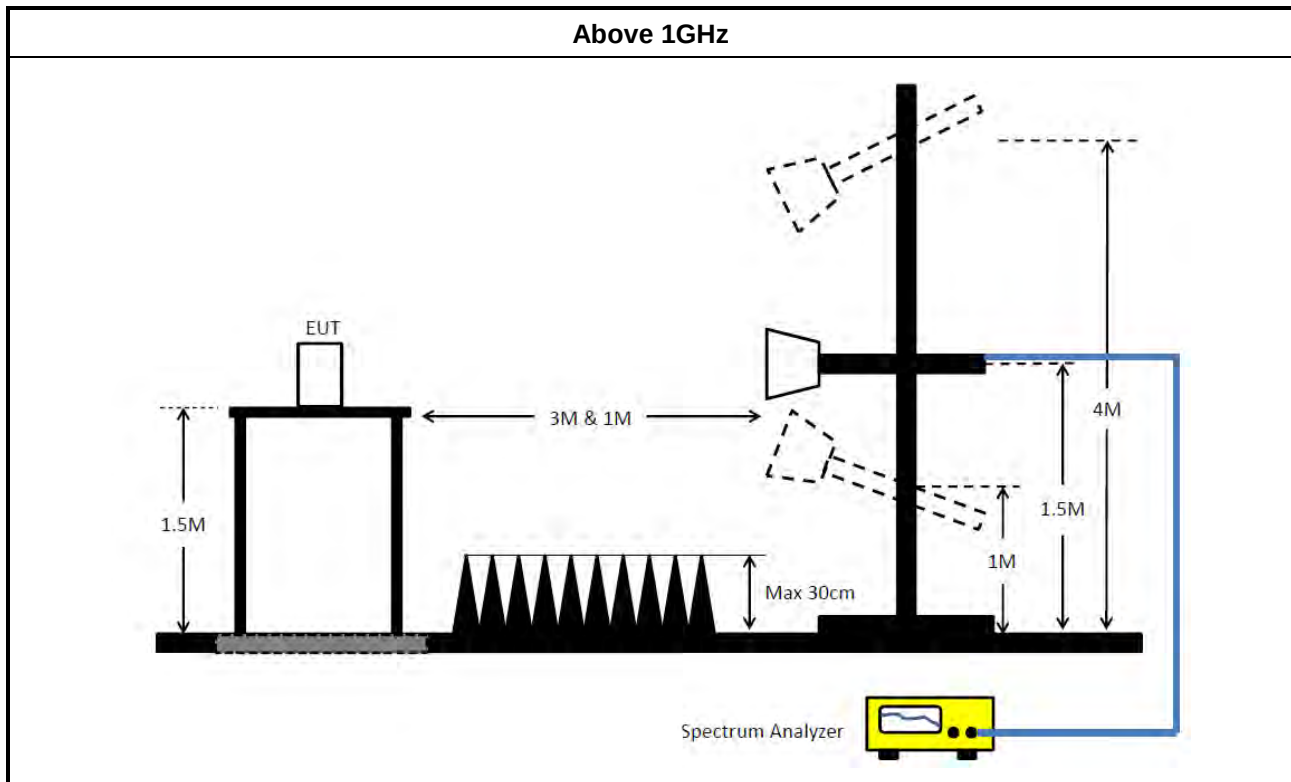

3.5.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable)
= Level

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Apr. 29, 2025	Apr. 28, 2026	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Feb. 06, 2025	Feb. 05, 2026	Conduction (CO02-CB)
EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 8.4GHz	May 14, 2025	May 13, 2026	Conduction (CO02-CB)
COND Cable	Woken	Cable	CO02	0.15MHz ~ 30MHz	Sep.14, 2025	Sep.13, 2026	Conduction (CO02-CB)
Pulse Limiter	Schwarzbeck	VTSD 9561F-N	00378	9kHz ~ 30MHz	Sep.14, 2025	Sep.13, 2026	Conduction (CO02-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Conduction (CO02-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30MHz	Oct. 20, 2025	Oct. 19, 2026	Radiation (10CH01-CB)
10m Semi Anechoic Chamber NSA	TDK	SAC-10M	10CH01-CB	30MHz~1GHz 10m,3m	Jan. 15, 2025	Jan. 14, 2026	Radiation (10CH01-CB)
Amplifier	Agilent	8447D	2944A10783	9kHz ~ 1.3GHz	Mar. 08, 2025	Mar. 07, 2026	Radiation (10CH01-CB)
Amplifier	Agilent	8447D	2944A10784	9kHz ~ 1.3GHz	Mar. 08, 2025	Mar. 07, 2026	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-01	25MHz ~ 1GHz	Oct. 14, 2025	Oct. 13, 2026	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-02	25MHz ~ 1GHz	Oct. 14, 2025	Oct. 13, 2026	Radiation (10CH01-CB)
EMI Test Receiver	Rohde&Schwarz	ESCI	100186	9kHz ~ 3GHz	Sep. 17, 2025	Sep. 16, 2026	Radiation (10CH01-CB)
Spectrum Analyzer	Rohde&Schwarz	FSV30	101026	9kHz ~ 30GHz	Apr. 16, 2025	Apr. 15, 2026	Radiation (10CH01-CB)
Bilog Ant & 6dB Attenuator	SCHWARZBECK & EMCi	VULB 9168 & N-6-06	1469 & AT-N06021	30MHz ~ 1GHz	Jan. 09, 2025	Jan. 08, 2026	Radiation (10CH01-CB)
Amplifier	EM	EM101	060703	10MHz ~ 1GHz	Oct. 15, 2025	Oct. 14, 2026	Radiation (10CH01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (10CH04-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH04-CB	1GHz ~18GHz 3m	Feb. 21, 2025	Feb. 20, 2026	Radiation (03CH04-CB)
Horn Antenna	ETS-Lindgren	3115	00143147	750MHz~18GHz	Nov. 05, 2025	Nov. 04, 2026	Radiation (03CH01-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH04-CB)
Pre-Amplifier	SGH	SGH5265	20211115-1	1~ 26.5GHz	Jan. 16, 2025	Jan. 15, 2026	Radiation (03CH04-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 25, 2024	Nov. 24, 2025	Radiation (03CH04-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH04-CB)
Spectrum Analyzer	R&S	FSP40	100142	9kHz~40GHz	Mar. 24, 2025	Mar. 23, 2026	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21	1GHz - 18GHz	Apr. 25, 2025	Apr. 24, 2026	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21+67	1GHz - 18GHz	Apr. 25, 2025	Apr. 24, 2026	Radiation (03CH04-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH04-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH04-CB)
Spectrum analyzer	R&S	FSV40	101028	9kHz~40GHz	Jan. 02, 2025	Jan. 01, 2026	Conducted (TH03-CB)
Power Sensor	Anritsu	MA2411B	1726195	300MHz~40GHz	Sep. 12, 2025	Sep. 11, 2026	Conducted (TH03-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 12, 2025	Sep. 11, 2026	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-11	30MHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-12	30MHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-13	30MHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-14	1 GHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Conducted (TH03-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




Conducted Emissions at Powerline

Appendix A

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	460.5k	49.71	56.69	-6.98	Line

Mode 1

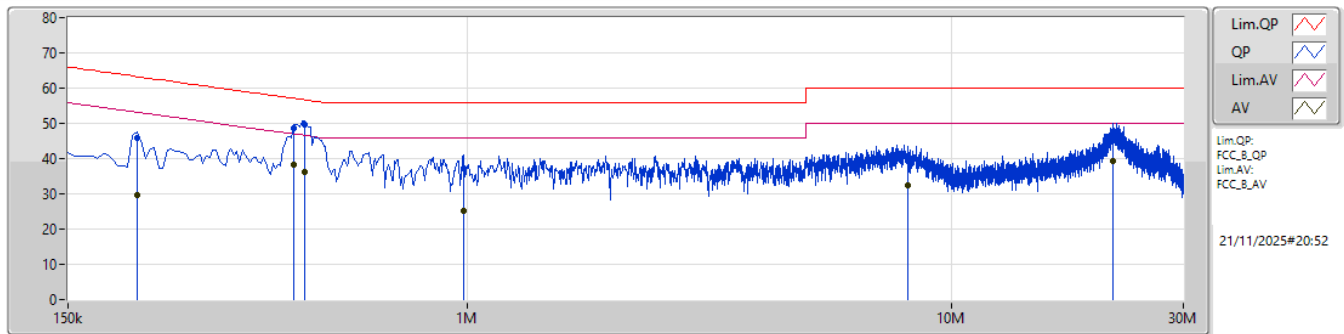

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	208.5k	45.73	63.27	-17.54	10.25	Line	-	35.48	0.06	0.21	9.98						
AV	208.5k	29.62	53.27	-23.65	10.25	Line	-	19.37	0.06	0.21	9.98						
QP	438k	48.68	57.11	-8.43	10.43	Line	-	38.25	0.06	0.28	10.09						
AV	438k	38.33	47.11	-8.78	10.43	Line	-	27.90	0.06	0.28	10.09						
QP	460.5k	49.71	56.69	-6.98	10.43	Line	"Worst"	39.28	0.06	0.27	10.10						
AV	460.5k	36.30	46.69	-10.39	10.43	Line	-	25.87	0.06	0.27	10.10						
QP	982.5k	37.17	56.00	-18.83	10.44	Line	-	26.73	0.07	0.24	10.13						
AV	982.5k	25.08	46.00	-20.92	10.44	Line	-	14.64	0.07	0.24	10.13						
QP	8.115M	40.53	60.00	-19.47	10.77	Line	-	29.76	0.20	0.34	10.23						
AV	8.115M	32.53	50.00	-17.47	10.77	Line	-	21.76	0.20	0.34	10.23						
QP	21.521M	46.20	60.00	-13.80	11.27	Line	-	34.93	0.41	0.35	10.51						
AV	21.521M	39.27	50.00	-10.73	11.27	Line	-	28.00	0.41	0.35	10.51						

Mode 1



Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	154.5k	49.68	65.75	-16.07	10.41	Neutral	-	39.27	0.07	0.26	10.08						
AV	154.5k	28.97	55.75	-26.78	10.41	Neutral	-	18.56	0.07	0.26	10.08						
QP	424.5k	43.74	57.36	-13.62	10.44	Neutral	-	33.30	0.07	0.28	10.09						
AV	424.5k	30.53	47.36	-16.83	10.44	Neutral	-	20.09	0.07	0.28	10.09						
QP	469.5k	49.37	56.52	-7.15	10.44	Neutral	"Worst"	38.93	0.07	0.27	10.10						
AV	469.5k	36.94	46.52	-9.58	10.44	Neutral	-	26.50	0.07	0.27	10.10						
QP	496.5k	44.61	56.06	-11.45	10.44	Neutral	-	34.17	0.07	0.27	10.10						
AV	496.5k	33.64	46.06	-12.42	10.44	Neutral	-	23.20	0.07	0.27	10.10						
QP	7.49M	40.29	60.00	-19.71	10.72	Neutral	-	29.57	0.18	0.33	10.21						
AV	7.49M	32.23	50.00	-17.77	10.72	Neutral	-	21.51	0.18	0.33	10.21						
QP	22.173M	45.66	60.00	-14.34	11.14	Neutral	-	34.52	0.28	0.36	10.50						
AV	22.173M	38.26	50.00	-11.74	11.14	Neutral	-	27.12	0.28	0.36	10.50						

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	42.24M	19.443M	19M4D1D	22.935M	19.086M
802.11be EHT40_Nss1,(MCS0)_2TX	60.72M	38.283M	38M3D1D	43.78M	38.075M
802.11be EHT80_Nss1,(MCS0)_2TX	103.84M	77.959M	78MOD1D	89.98M	77.824M
802.11be EHT160_Nss1,(MCS0)_2TX	319M	158.012M	158MD1D	238.92M	157.206M
802.11be EHT320_Nss1,(MCS0)_2TX	633.6M	317.971M	318MD1D	510.4M	317.139M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	26.675M	19.133M	19M1D1D	22.88M	19.077M
802.11be EHT40_Nss1,(MCS0)_2TX	46.75M	38.101M	38M1D1D	43.23M	38.031M
802.11be EHT80_Nss1,(MCS0)_2TX	96.58M	78.017M	78MOD1D	89.98M	77.852M
802.11be EHT160_Nss1,(MCS0)_2TX	318.12M	157.715M	158MD1D	314.6M	157.367M

Max-N dB = Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5955MHz	Pass	320M	42.24M	19.443M	35.695M	19.256M
6195MHz	Pass	320M	26.73M	19.124M	25.3M	19.109M
6415MHz	Pass	320M	22.935M	19.086M	26.345M	19.111M
6535MHz	Pass	320M	23.485M	19.13M	26.675M	19.133M
6695MHz	Pass	320M	24.42M	19.077M	24.805M	19.107M
6855MHz	Pass	320M	24.31M	19.105M	22.88M	19.094M
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5965MHz	Pass	320M	60.72M	38.283M	47.19M	38.133M
6205MHz	Pass	320M	45.54M	38.075M	43.78M	38.124M
6405MHz	Pass	320M	45.76M	38.1M	46.75M	38.106M
6565MHz	Pass	320M	45.1M	38.089M	46.42M	38.095M
6685MHz	Pass	320M	45.32M	38.097M	46.75M	38.101M
6845MHz	Pass	320M	43.56M	38.034M	43.23M	38.031M
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5985MHz	Pass	320M	103.84M	77.959M	90.86M	77.92M
6225MHz	Pass	320M	89.98M	77.933M	95.92M	77.824M
6385MHz	Pass	320M	89.98M	77.929M	90.86M	77.844M
6625MHz	Pass	320M	89.98M	77.926M	93.72M	77.852M
6705MHz	Pass	320M	94.82M	78.017M	95.7M	77.886M
6785MHz	Pass	320M	96.58M	77.977M	90.86M	77.924M
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6025MHz	Pass	320M	238.92M	157.51M	291.72M	157.206M
6185MHz	Pass	320M	318.56M	158.012M	319M	157.679M
6345MHz	Pass	320M	315.04M	157.518M	318.56M	157.506M
6665MHz	Pass	320M	318.12M	157.715M	314.6M	157.367M
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6105MHz	Pass	320M	512.16M	317.664M	510.4M	317.139M
6265MHz	Pass	320M	633.6M	317.971M	621.28M	317.577M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5955MHz

16/12/2025

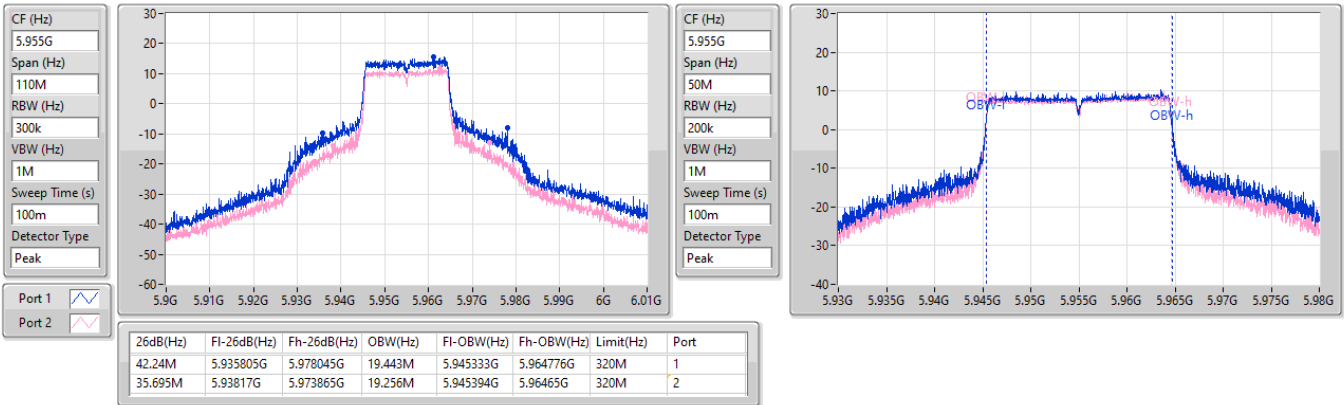
5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6195MHz

16/12/2025

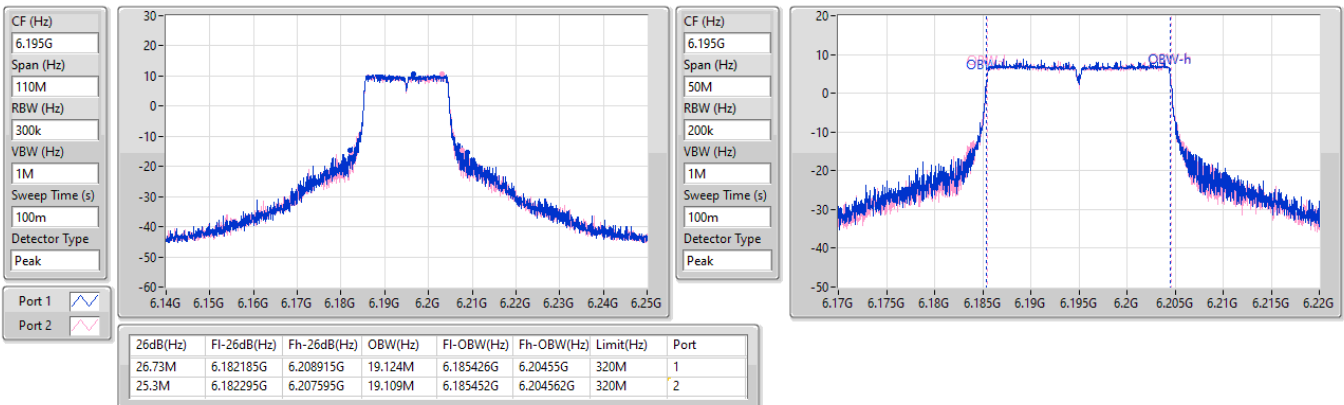


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

6415MHz

16/12/2025

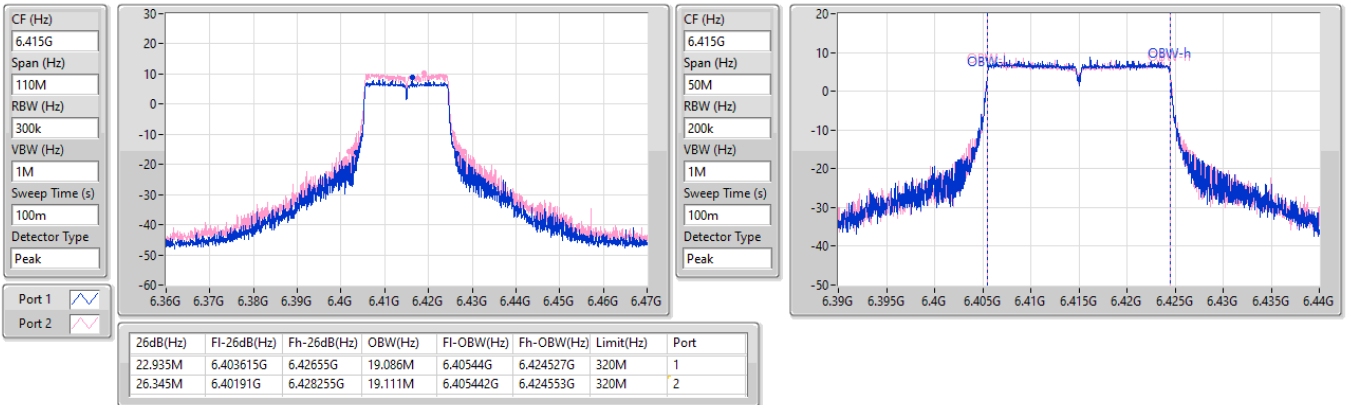


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW


6535MHz

16/12/2025

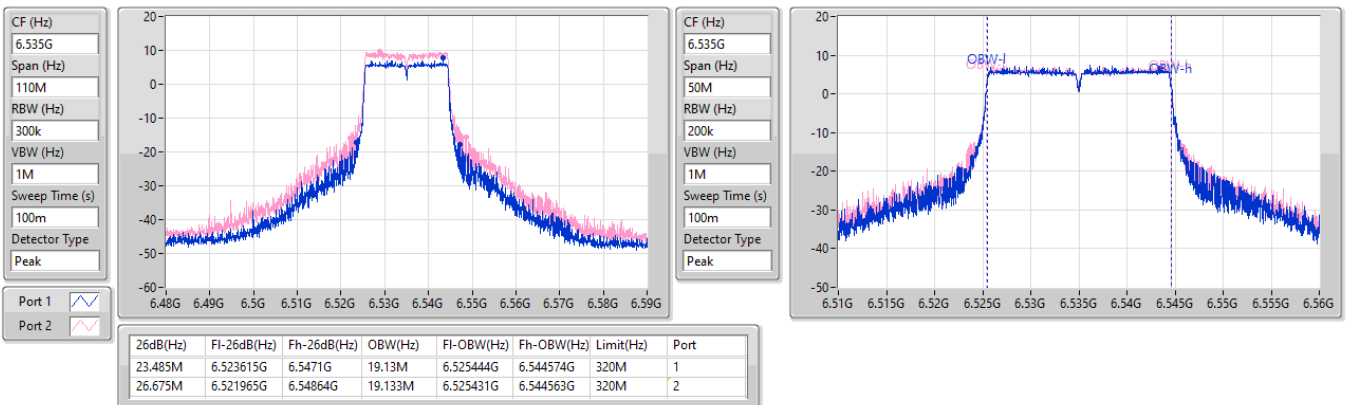


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6695MHz

16/12/2025

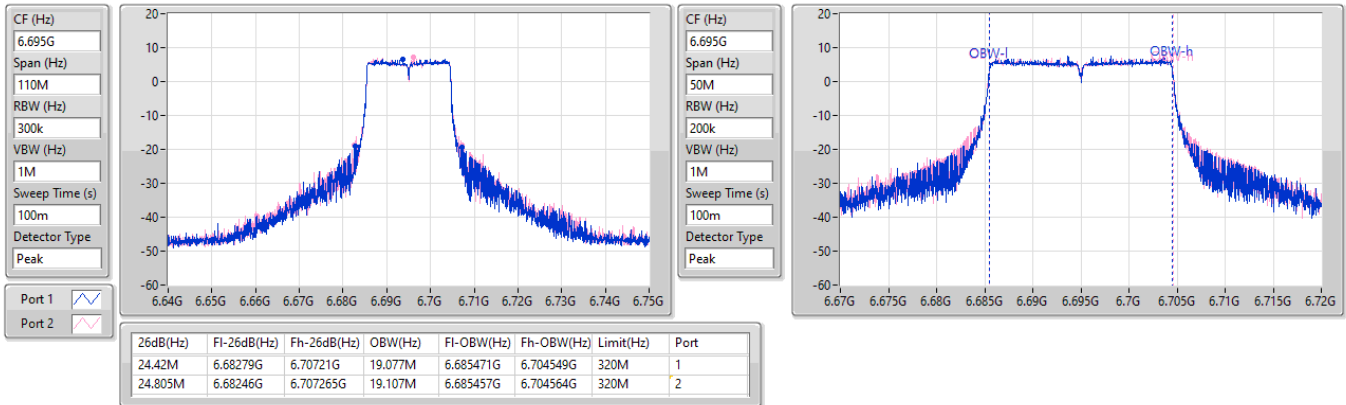
6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6855MHz

16/12/2025


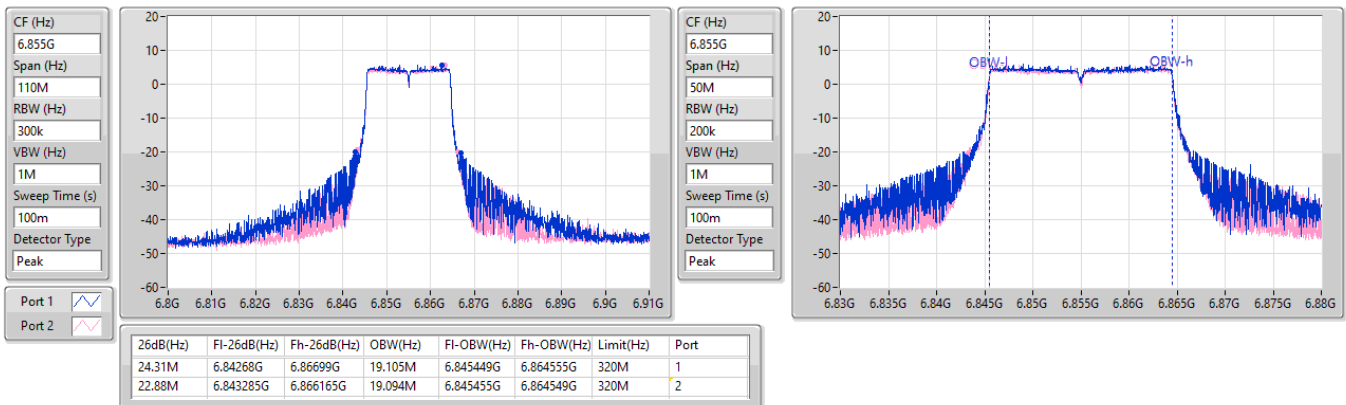


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5965MHz

16/12/2025

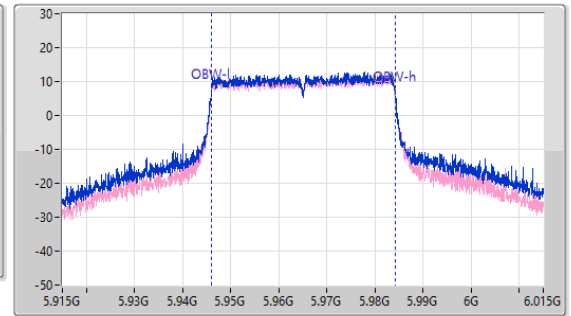
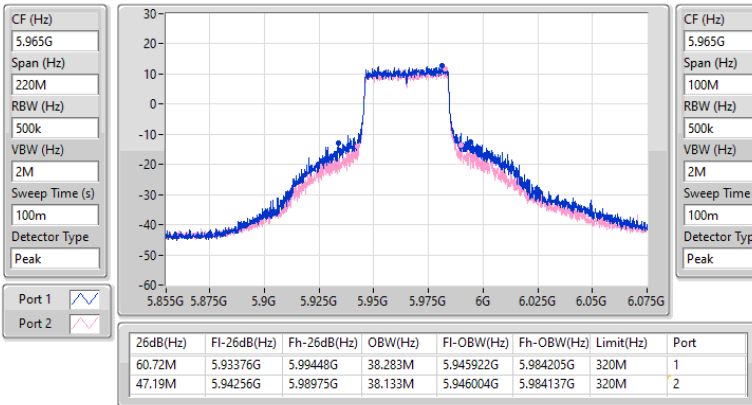


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

6205MHz

16/12/2025

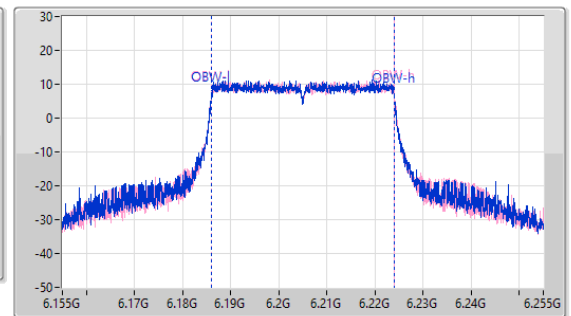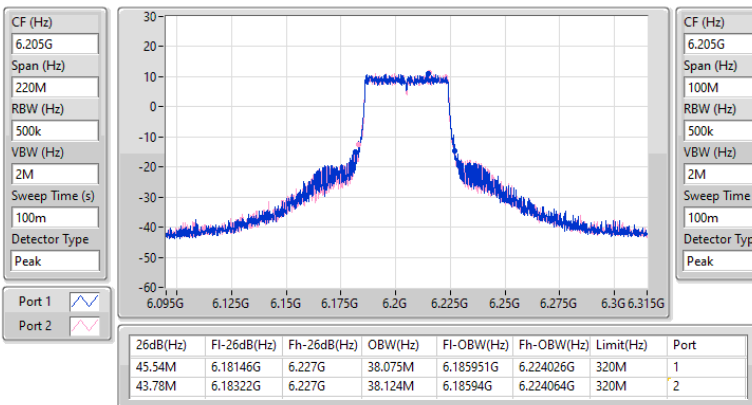


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

6405MHz

16/12/2025

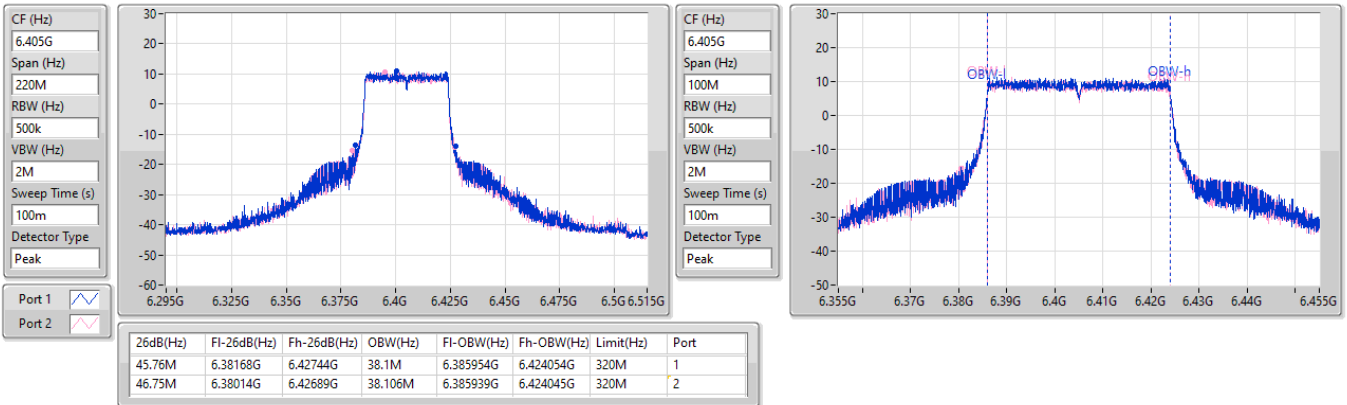


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

6565MHz

16/12/2025

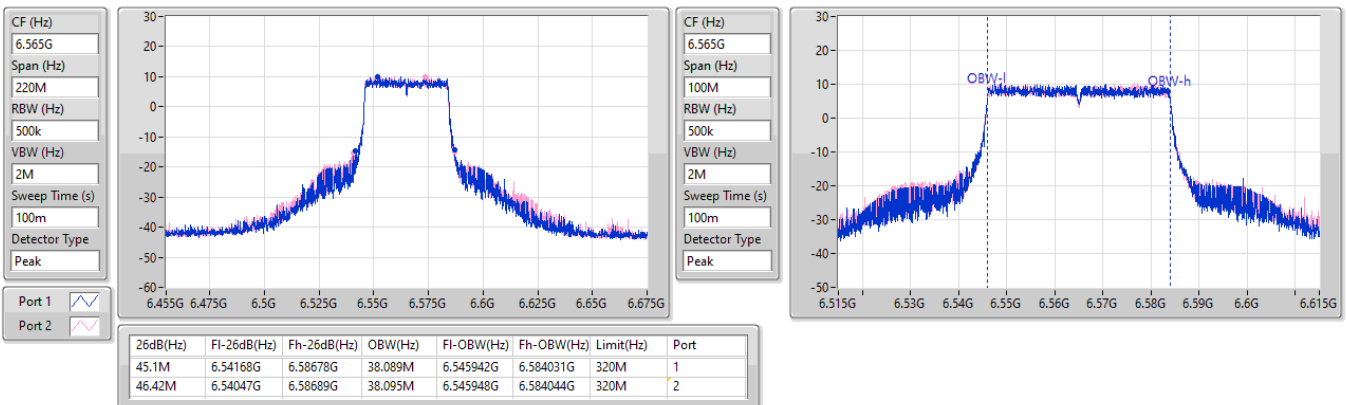


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

6685MHz

16/12/2025

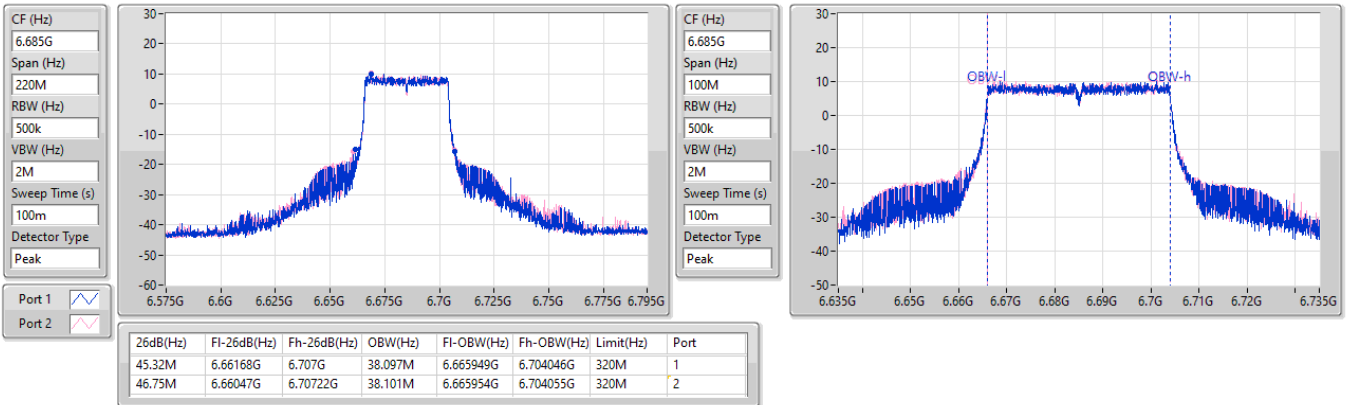


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW



6845MHz

16/12/2025


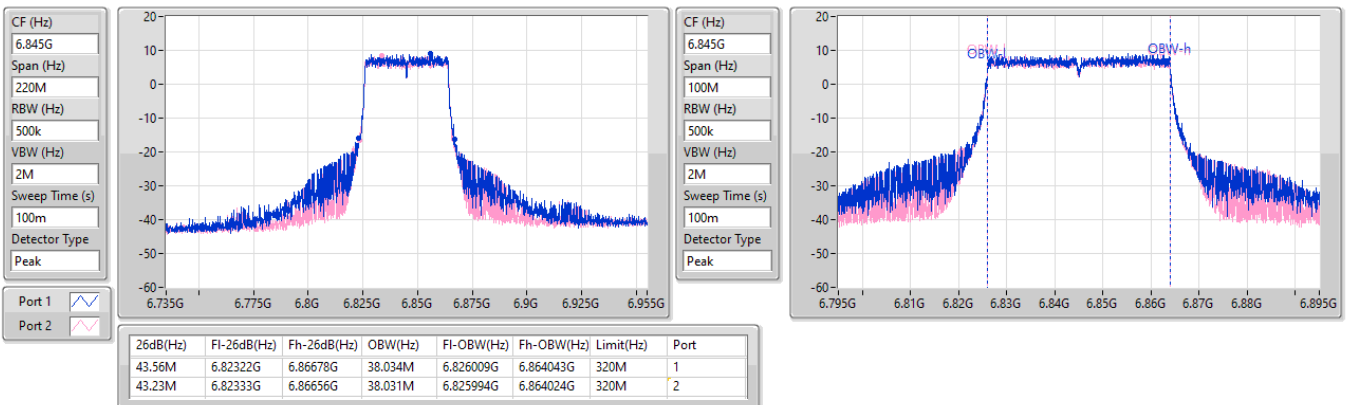


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
5985MHz

16/12/2025

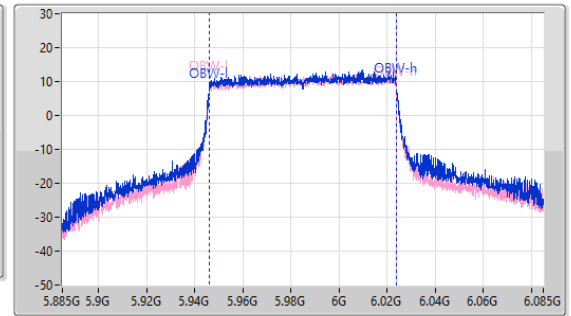
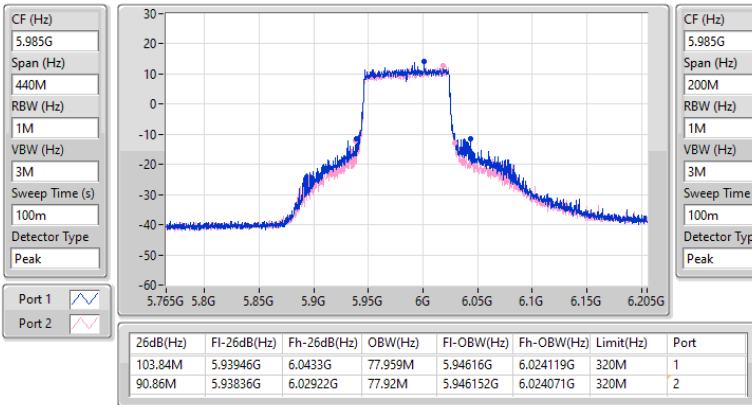

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6225MHz

16/12/2025

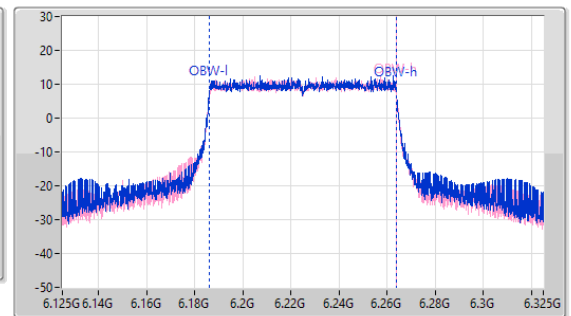
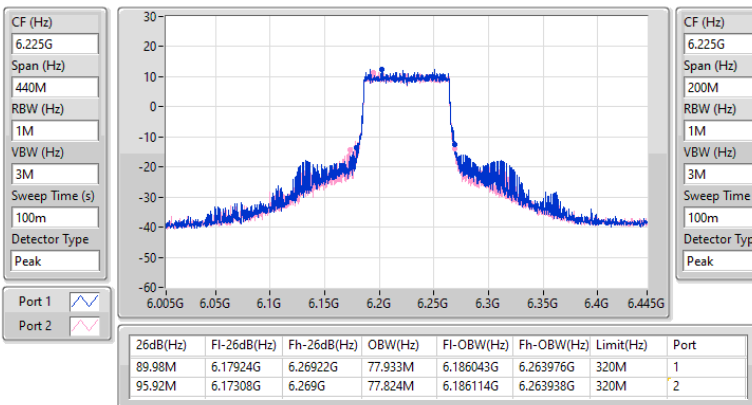


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6385MHz

16/12/2025

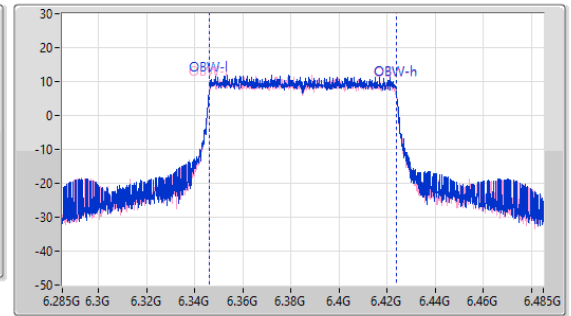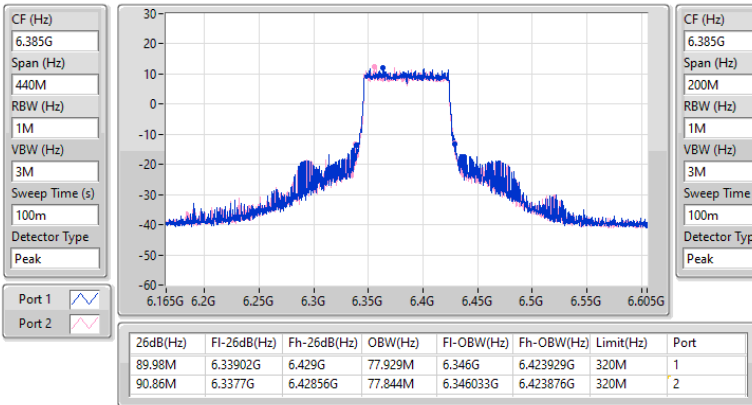

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6625MHz

16/12/2025

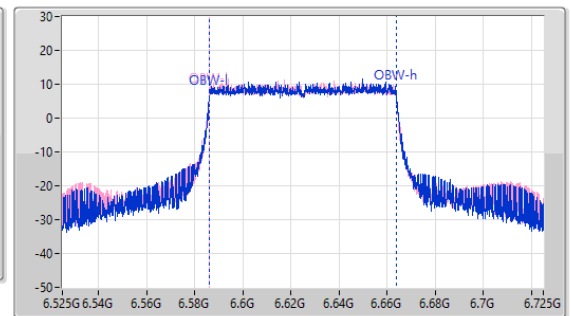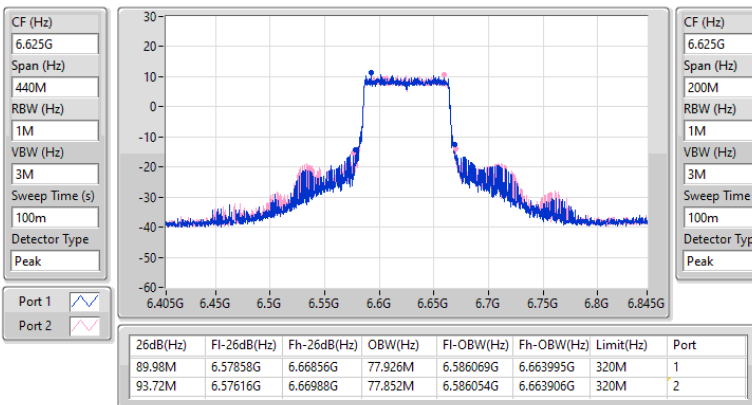


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6705MHz

16/12/2025

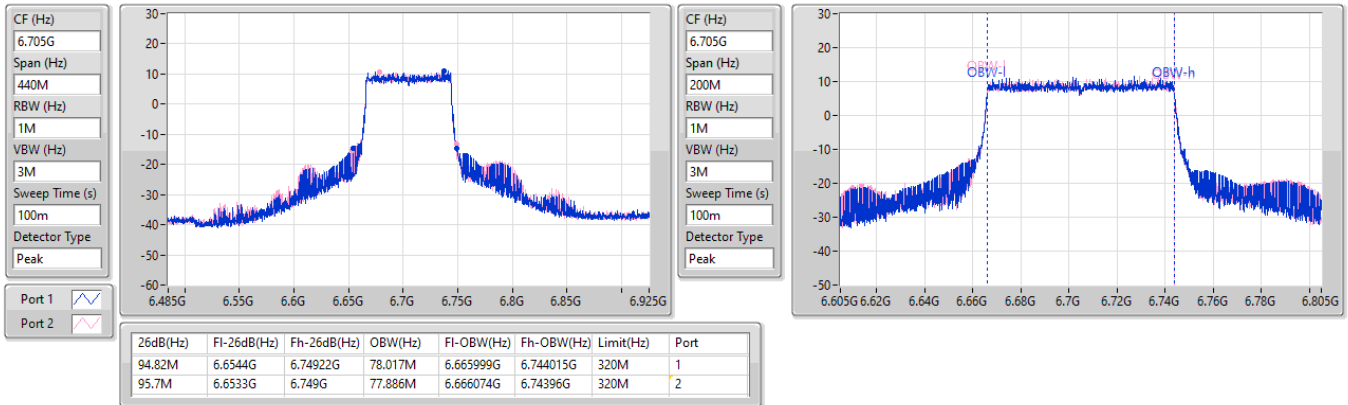
6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6785MHz

16/12/2025


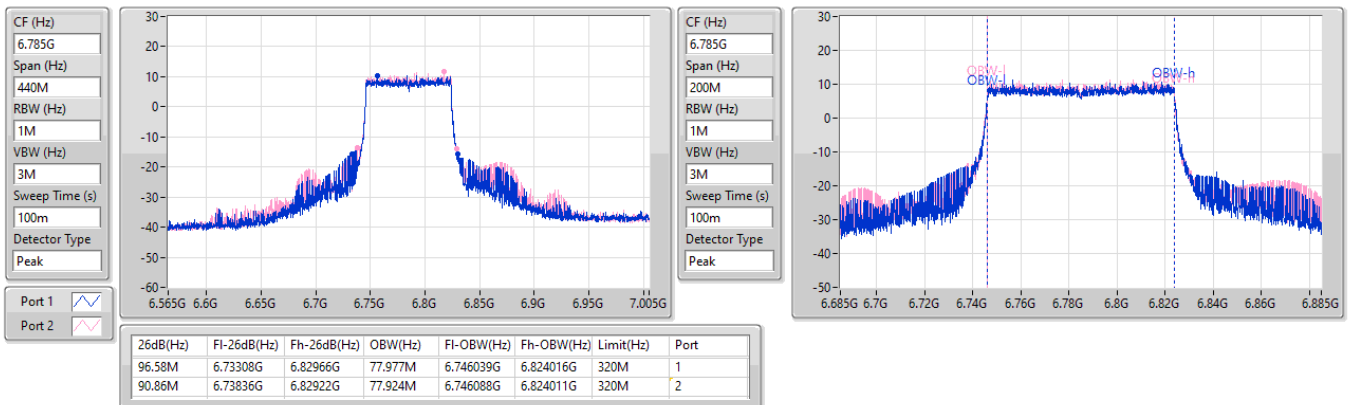


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6025MHz

16/12/2025

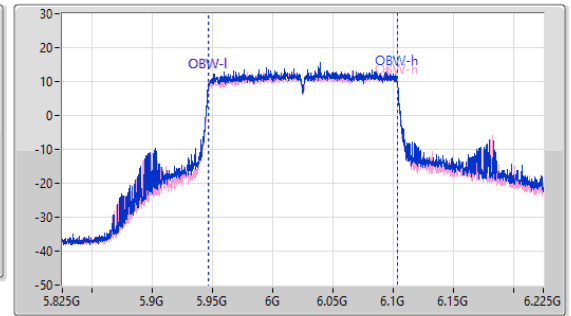
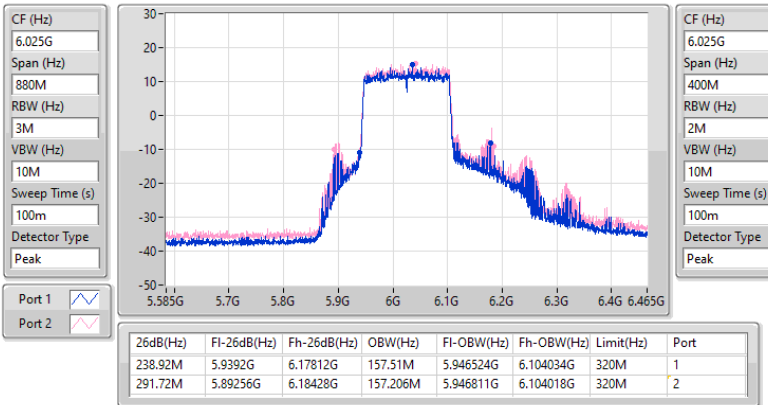


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6185MHz

16/12/2025

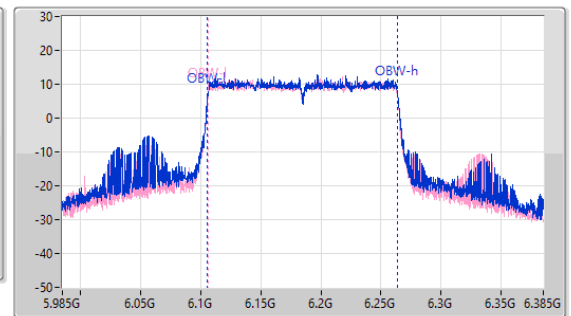
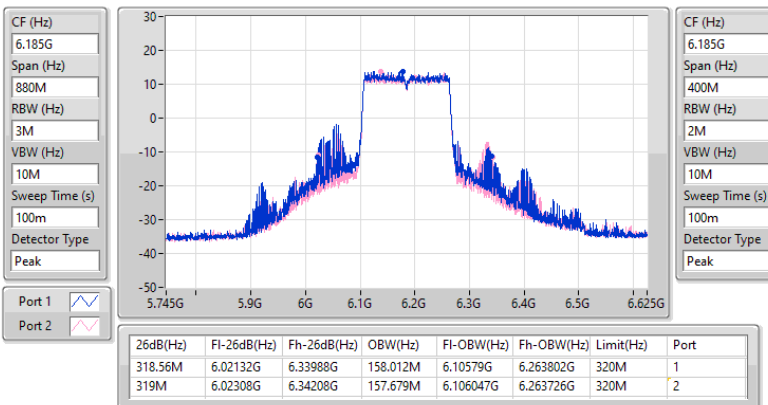


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6345MHz

16/12/2025

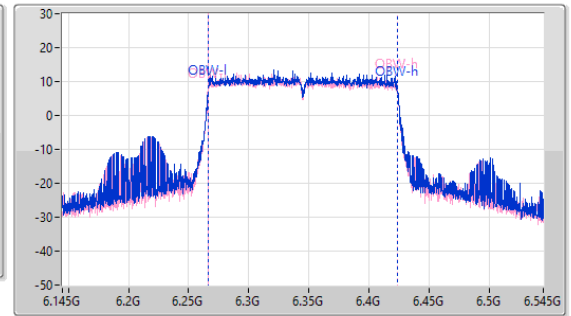
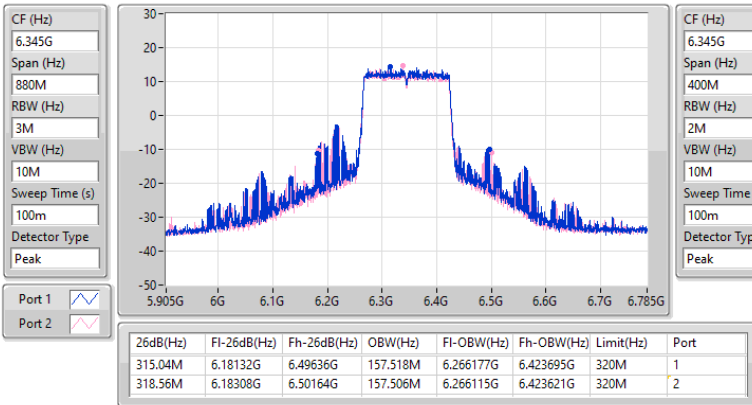


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6665MHz

16/12/2025

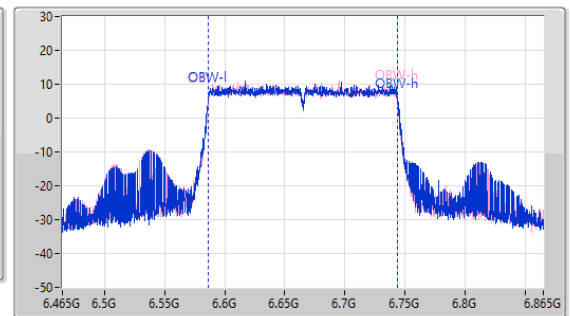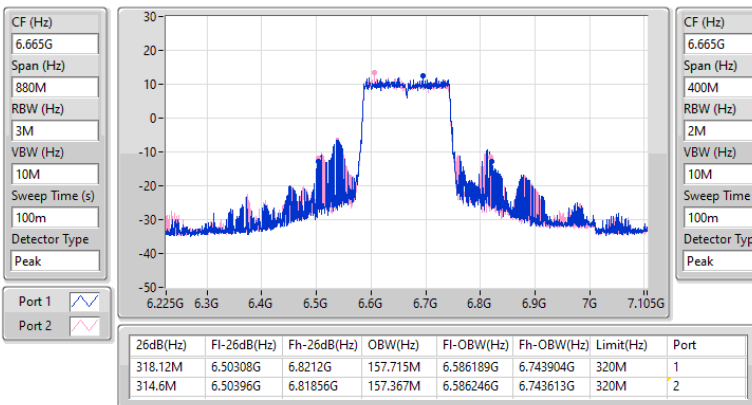


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX


EBW

6105MHz

16/12/2025

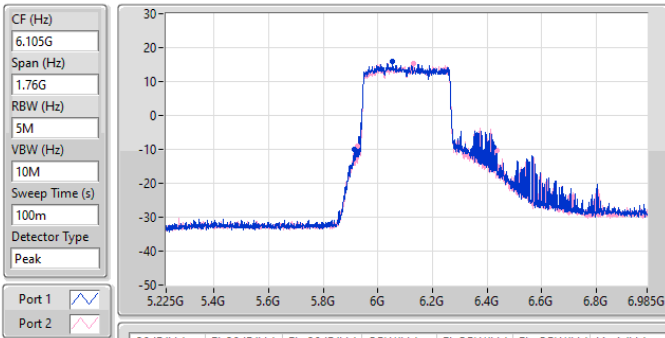

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
512.16M	5.91316G	6.42532G	317.664M	5.947162G	6.264826G	320M	1
510.4M	5.92636G	6.43676G	317.139M	5.947635G	6.264774G	320M	2

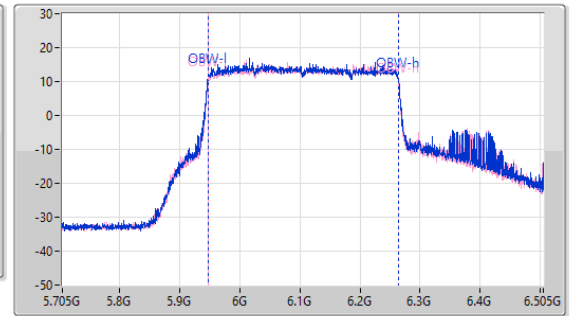


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX


EBW

6265MHz

16/12/2025

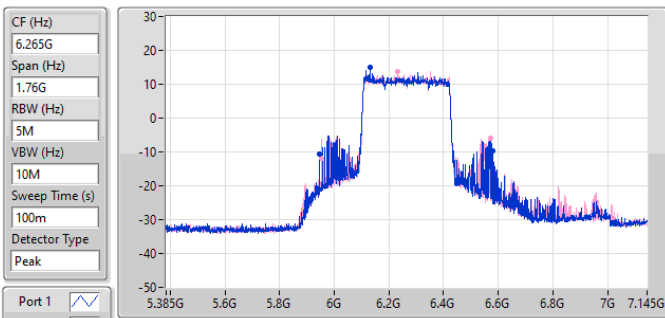

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
633.6M	5.94556G	6.57916G	317.971M	6.10538G	6.423351G	320M	1
621.28M	5.9526G	6.57388G	317.577M	6.105965G	6.423542G	320M	2

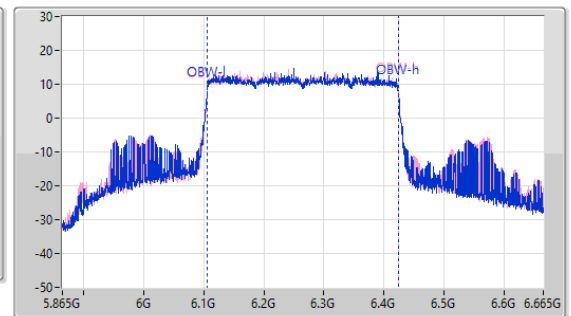

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP / EIRP [Phi 30°] (dBm)	EIRP / EIRP [Phi 30°] (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	22.82	0.19143	33.22/20.94	2.09894/0.124165
802.11be EHT20-BF_Nss1,(MCS0)_2TX	22.82	0.19143	35.98/17.55	3.96278/0.056885
802.11be EHT40_Nss1,(MCS0)_2TX	22.61	0.18239	32.95/20.67	1.97242/0.116681
802.11be EHT40-BF_Nss1,(MCS0)_2TX	22.61	0.18239	35.77/17.34	3.77572/0.054200
802.11be EHT80_Nss1,(MCS0)_2TX	22.37	0.17258	33.25/20.97	2.11349/0.125026
802.11be EHT80-BF_Nss1,(MCS0)_2TX	22.37	0.17258	35.53/17.10	3.57273/0.051286
802.11be EHT160_Nss1,(MCS0)_2TX	22.81	0.19099	33.11/14.82	2.04644/0.030339
802.11be EHT160-BF_Nss1,(MCS0)_2TX	22.81	0.19099	35.97/17.54	3.95367/0.056754
802.11be EHT320_Nss1,(MCS0)_2TX	23.65	0.23174	33.95/15.66	2.48313/0.036813
802.11be EHT320-BF_Nss1,(MCS0)_2TX	22.64	0.18365	35.80/17.37	3.80189/0.054576
6.525-6.875GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	21.06	0.12764	32.66/20.90	1.84502/0.123027
802.11be EHT20-BF_Nss1,(MCS0)_2TX	19.68	0.09290	34.04/20.96	2.53513/0.124738
802.11be EHT40_Nss1,(MCS0)_2TX	20.81	0.12050	32.41/20.65	1.74181/0.116145
802.11be EHT40-BF_Nss1,(MCS0)_2TX	19.40	0.08710	33.76/20.68	2.37684/0.116950
802.11be EHT80_Nss1,(MCS0)_2TX	21.12	0.12942	32.72/20.96	1.87068/0.124738
802.11be EHT80-BF_Nss1,(MCS0)_2TX	19.69	0.09311	34.05/20.97	2.54097/0.125026
802.11be EHT160_Nss1,(MCS0)_2TX	19.90	0.09772	31.50/19.74	1.41254/0.094189
802.11be EHT160-BF_Nss1,(MCS0)_2TX	19.40	0.08710	33.76/20.68	2.37684/0.116950

Result

Mode	Result	DG[Power]/DG[Phi 30°] (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	EIRP / EIRP [Phi 30°] (dBm)	EIRP / EIRP [Phi 30°] Limit (dBm)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	10.30/-7.99	20.01	19.61	22.82	33.12/14.83	36.00/21.00
6195MHz	Pass	11.40/-0.88	18.93	18.69	21.82	33.22/20.94	36.00/21.00
6415MHz	Pass	11.40/-0.88	18.64	18.43	21.55	32.95/20.67	36.00/21.00
6535MHz	Pass	11.60/-0.16	17.97	18.13	21.06	32.66/20.90	36.00/21.00
6695MHz	Pass	11.60/-0.16	17.71	17.88	20.81	32.41/20.65	36.00/21.00
6855MHz	Pass	11.40/1.21	16.81	16.36	19.60	31.00/20.81	36.00/21.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5965MHz	Pass	10.30/-7.99	19.93	19.25	22.61	32.91/14.62	36.00/21.00
6205MHz	Pass	11.40/-0.88	18.55	18.52	21.55	32.95/20.67	36.00/21.00
6405MHz	Pass	11.40/-0.88	18.62	18.43	21.54	32.94/20.66	36.00/21.00
6565MHz	Pass	11.60/-0.16	17.76	17.83	20.81	32.41/20.65	36.00/21.00
6685MHz	Pass	11.60/-0.16	17.67	17.78	20.74	32.34/20.58	36.00/21.00
6845MHz	Pass	11.40/1.21	16.73	16.29	19.53	30.93/20.74	36.00/21.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5985MHz	Pass	10.30/-7.99	19.64	19.06	22.37	32.67/14.38	36.00/21.00
6225MHz	Pass	11.40/-0.88	18.89	18.78	21.85	33.25/20.97	36.00/21.00
6385MHz	Pass	11.40/-0.88	18.58	18.46	21.53	32.93/20.65	36.00/21.00
6625MHz	Pass	11.60/-0.16	17.67	17.82	20.76	32.36/20.60	36.00/21.00
6705MHz	Pass	11.60/-0.16	18.05	18.16	21.12	32.72/20.96	36.00/21.00
6785MHz	Pass	11.60/-0.16	17.81	18.15	20.99	32.59/20.83	36.00/21.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6025MHz	Pass	10.30/-7.99	20.07	19.52	22.81	33.11/14.82	36.00/21.00
6185MHz	Pass	11.40/-0.88	18.79	18.45	21.63	33.03/20.75	36.00/21.00
6345MHz	Pass	11.40/-0.88	18.89	18.37	21.65	33.05/20.77	36.00/21.00
6665MHz	Pass	11.60/-0.16	16.91	16.86	19.90	31.50/19.74	36.00/21.00
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6105MHz	Pass	10.30/-7.99	20.78	20.49	23.65	33.95/15.66	36.00/21.00
6265MHz	Pass	11.40/-0.88	18.57	18.72	21.66	33.06/20.78	36.00/21.00
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	13.16/-5.27	20.01	19.61	22.82	35.98/17.55	36.00/21.00
6195MHz	Pass	14.36/-0.03	17.91	17.82	20.88	35.24/20.85	36.00/21.00
6415MHz	Pass	14.36/-0.03	17.74	17.56	20.66	35.02/20.63	36.00/21.00
6535MHz	Pass	14.36/1.28	16.64	16.69	19.68	34.04/20.96	36.00/21.00
6695MHz	Pass	14.36/1.28	16.48	16.41	19.46	33.82/20.74	36.00/21.00
6855MHz	Pass	14.12/1.69	16.28	15.82	19.07	33.19/20.76	36.00/21.00
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5965MHz	Pass	13.16/-5.27	19.93	19.25	22.61	35.77/17.34	36.00/21.00
6205MHz	Pass	14.36/-0.03	17.67	17.55	20.62	34.98/20.59	36.00/21.00
6405MHz	Pass	14.36/-0.03	17.73	17.52	20.64	35.00/20.61	36.00/21.00
6565MHz	Pass	14.36/1.28	16.32	16.46	19.40	33.76/20.68	36.00/21.00
6685MHz	Pass	14.36/1.28	16.38	16.26	19.33	33.69/20.61	36.00/21.00
6845MHz	Pass	14.12/1.69	16.21	15.78	19.01	33.13/20.70	36.00/21.00
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5985MHz	Pass	13.16/-5.27	19.64	19.06	22.37	35.53/17.10	36.00/21.00
6225MHz	Pass	14.36/-0.03	17.61	17.52	20.58	34.94/20.55	36.00/21.00
6385MHz	Pass	14.36/-0.03	17.67	17.55	20.62	34.98/20.59	36.00/21.00
6625MHz	Pass	14.36/1.28	16.34	16.41	19.39	33.75/20.67	36.00/21.00
6705MHz	Pass	14.36/1.28	16.64	16.72	19.69	34.05/20.97	36.00/21.00
6785MHz	Pass	14.36/1.28	16.47	16.69	19.59	33.95/20.87	36.00/21.00
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6025MHz	Pass	13.16/-5.27	20.07	19.52	22.81	35.97/17.54	36.00/21.00
6185MHz	Pass	14.36/-0.03	17.81	17.55	20.69	35.05/20.66	36.00/21.00
6345MHz	Pass	14.36/-0.03	18.02	17.38	20.72	35.08/20.69	36.00/21.00



Average Power

Appendix C

Mode	Result	DG[Power]/DG[Phi 30°] (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	EIRP / EIRP [Phi 30°] (dBm)	EIRP / EIRP [Phi 30°] Limit (dBm)
6665MHz	Pass	14.36/1.28	16.43	16.35	19.40	33.76/20.68	36.00/21.00
802.11be EHT320-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6105MHz	Pass	13.16/-5.27	19.69	19.56	22.64	35.80/17.37	36.00/21.00
6265MHz	Pass	14.36/-0.03	17.56	17.68	20.63	34.99/20.60	36.00/21.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	9.29	22.45
802.11be EHT40_Nss1,(MCS0)_2TX	6.27	19.43
802.11be EHT80_Nss1,(MCS0)_2TX	2.91	16.70
802.11be EHT160_Nss1,(MCS0)_2TX	0.22	13.75
802.11be EHT320_Nss1,(MCS0)_2TX	-1.77	11.39
6.525-6.875GHz	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	7.12	21.48
802.11be EHT40_Nss1,(MCS0)_2TX	3.91	18.27
802.11be EHT80_Nss1,(MCS0)_2TX	1.40	15.76
802.11be EHT160_Nss1,(MCS0)_2TX	-2.77	11.59

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	13.16	6.60	6.00	9.29	22.45	23.00
6195MHz	Pass	14.36	5.17	4.98	8.08	22.44	23.00
6415MHz	Pass	14.36	4.98	4.90	7.91	22.27	23.00
6535MHz	Pass	14.36	3.97	4.33	7.12	21.48	23.00
6695MHz	Pass	14.36	3.77	3.99	6.85	21.21	23.00
6855MHz	Pass	14.12	2.73	2.29	5.53	19.65	23.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5965MHz	Pass	13.16	3.54	3.01	6.27	19.43	23.00
6205MHz	Pass	14.36	1.87	1.89	4.88	19.24	23.00
6405MHz	Pass	14.36	1.94	1.62	4.75	19.11	23.00
6565MHz	Pass	14.36	0.95	0.99	3.91	18.27	23.00
6685MHz	Pass	14.36	0.65	0.80	3.66	18.02	23.00
6845MHz	Pass	14.12	-0.32	-0.80	2.37	16.49	23.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5985MHz	Pass	13.16	0.17	-0.34	2.91	16.07	23.00
6225MHz	Pass	14.36	-0.45	-0.75	2.34	16.70	23.00
6385MHz	Pass	14.36	-0.69	-1.19	2.02	16.38	23.00
6625MHz	Pass	14.36	-1.85	-1.64	1.15	15.51	23.00
6705MHz	Pass	14.36	-1.68	-1.45	1.40	15.76	23.00
6785MHz	Pass	14.36	-1.95	-1.54	1.21	15.57	23.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6025MHz	Pass	13.16	-2.48	-2.99	0.22	13.38	23.00
6185MHz	Pass	14.36	-3.72	-4.18	-0.97	13.39	23.00
6345MHz	Pass	14.36	-3.17	-3.97	-0.61	13.75	23.00
6665MHz	Pass	14.36	-5.77	-5.58	-2.77	11.59	23.00
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6105MHz	Pass	13.16	-4.49	-5.08	-1.77	11.39	23.00
6265MHz	Pass	14.36	-6.80	-6.86	-3.90	10.46	23.00


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5955MHz

16/12/2025

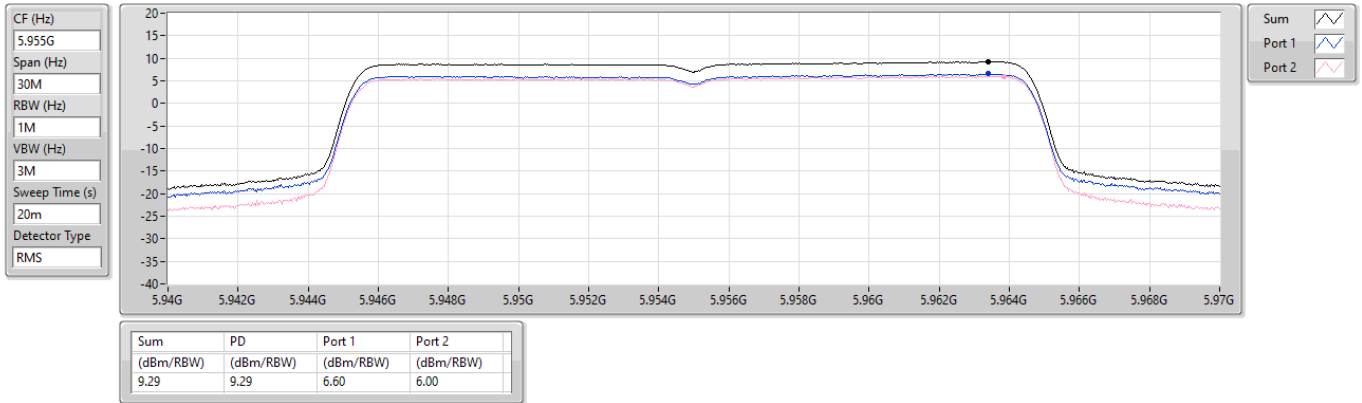


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6195MHz

16/12/2025

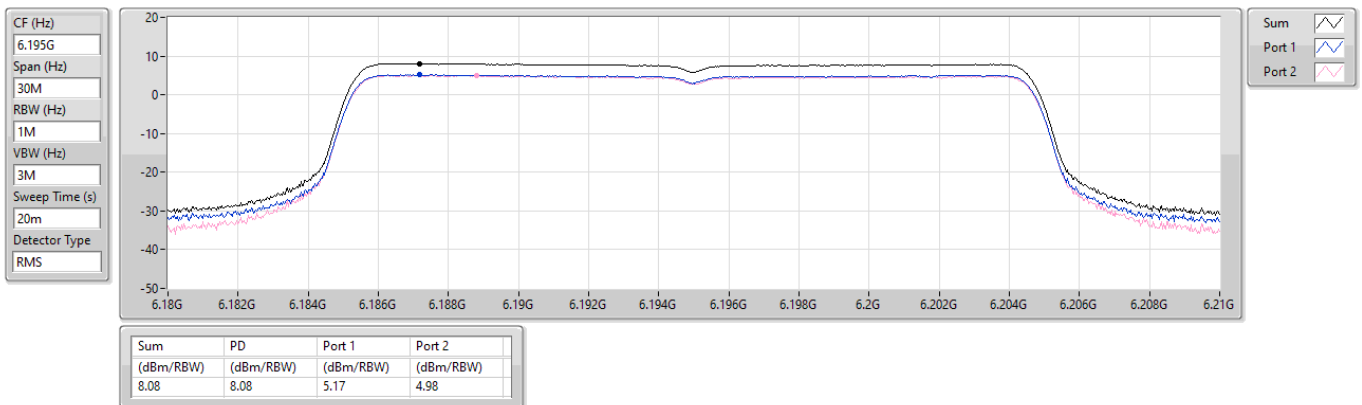


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6415MHz

16/12/2025

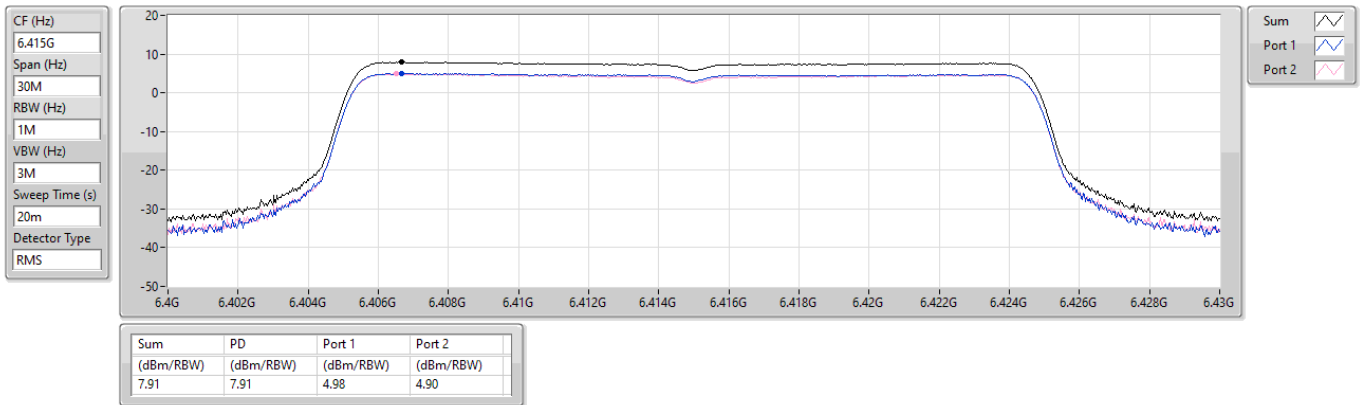


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6535MHz

16/12/2025

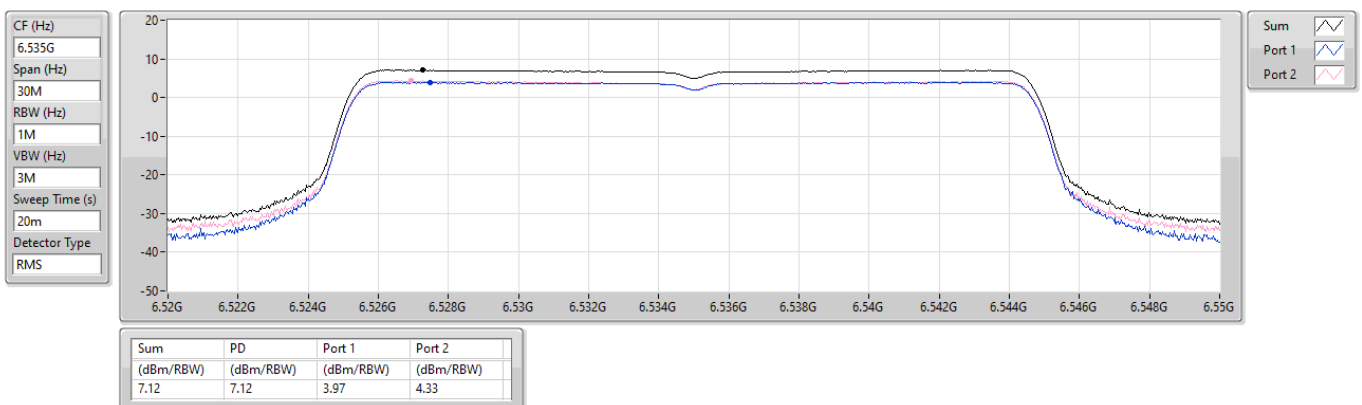


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6695MHz

16/12/2025

CF (Hz)
6.695G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

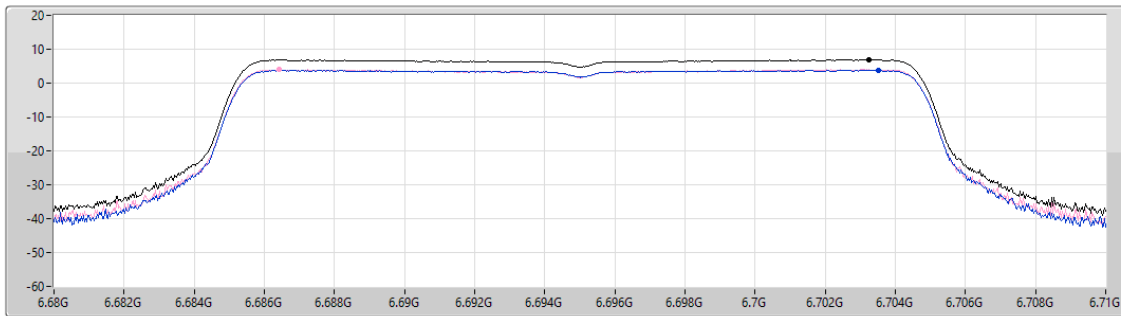

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.85	6.85	3.77	3.99

Sum
Port 1
Port 2


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6855MHz

16/12/2025

CF (Hz)
6.855G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

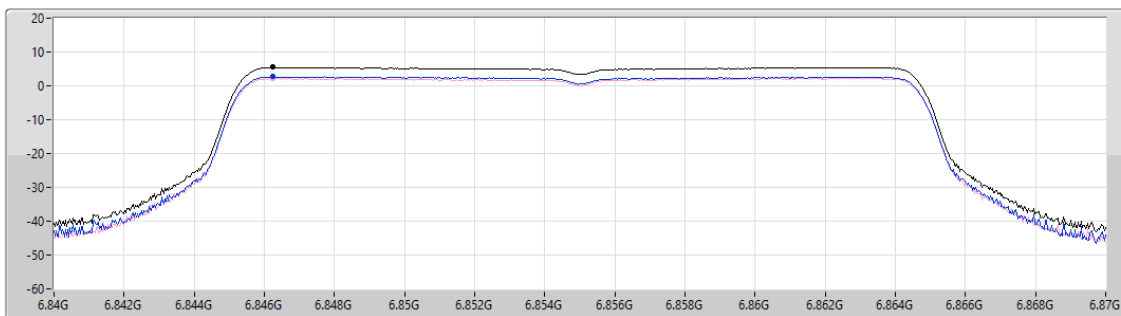

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.53	5.53	2.73	2.29

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5965MHz

16/12/2025

CF (Hz)
5.965G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

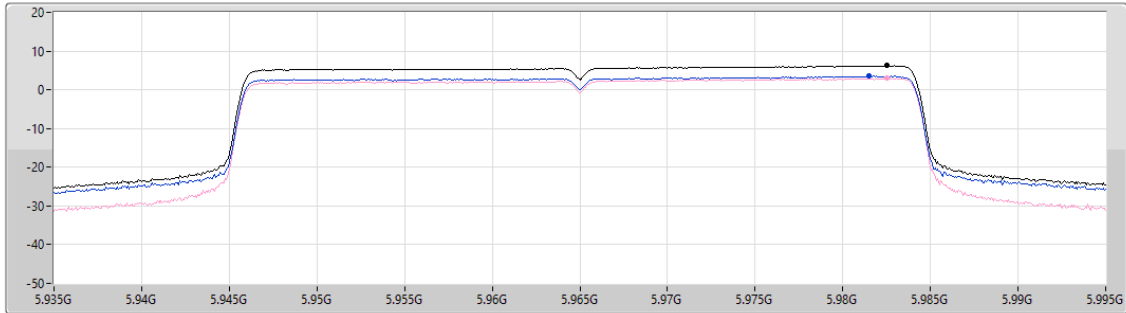

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.27	6.27	3.54	3.01

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6205MHz

16/12/2025

CF (Hz)
6.205G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

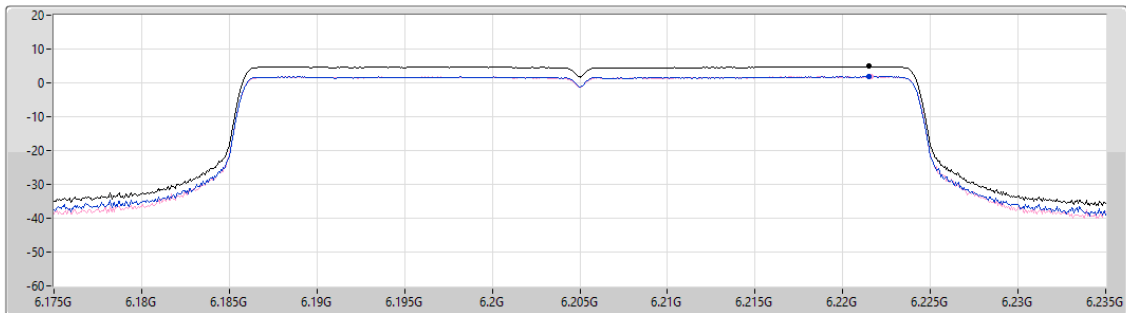

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
4.88	4.88	1.87	1.89

Sum
Port 1
Port 2

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6405MHz

16/12/2025

CF (Hz)
6.405G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

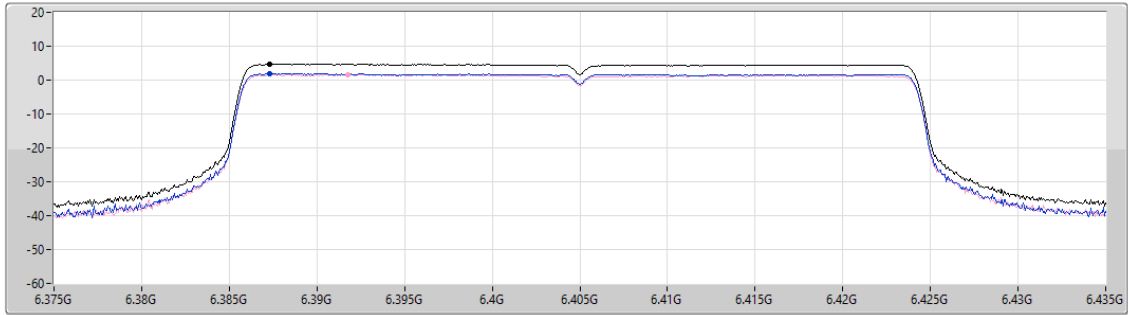

Sum 

Port 1 

Port 2 

Sum (dBm/Hz)	PD (dBm/Hz)	Port 1 (dBm/Hz)	Port 2 (dBm/Hz)
4.75	4.75	1.94	1.62

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6565MHz

16/12/2025

CF (Hz)
6.565G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

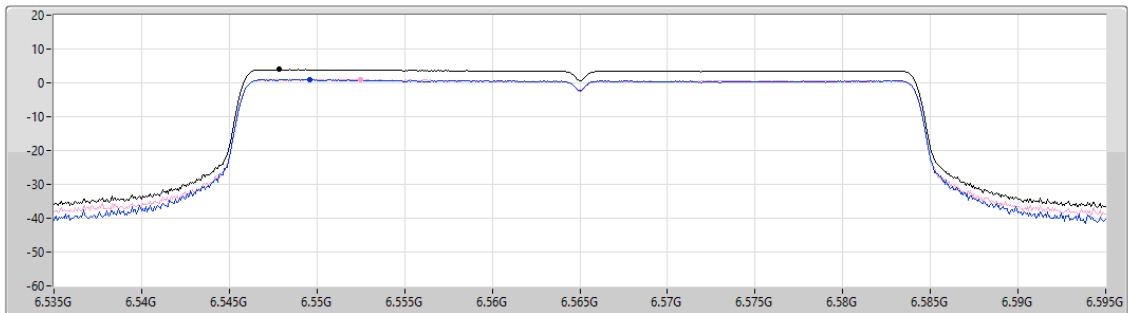

Sum 

Port 1 

Port 2 

Sum (dBm/Hz)	PD (dBm/Hz)	Port 1 (dBm/Hz)	Port 2 (dBm/Hz)
3.91	3.91	0.95	0.99


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6685MHz

16/12/2025

CF (Hz)
6.685G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

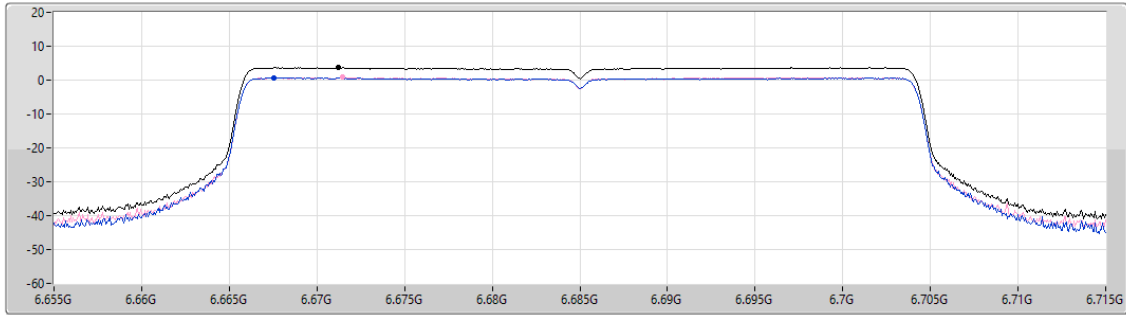

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
3.66	3.66	0.65	0.80


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6845MHz

16/12/2025

CF (Hz)
6.845G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

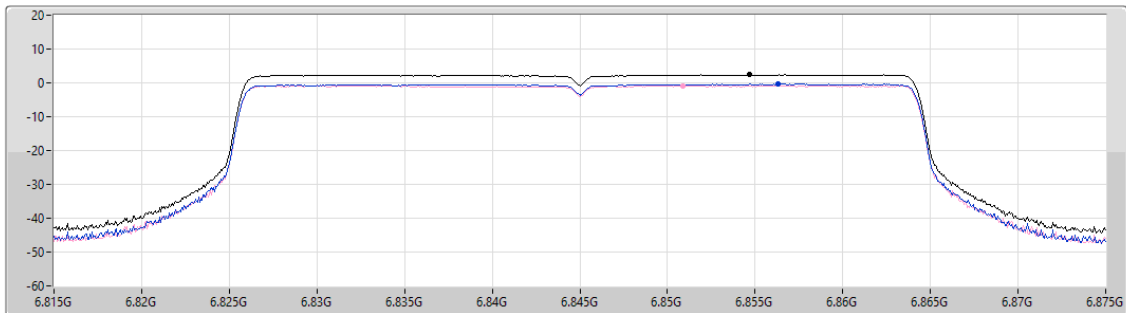

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.37	2.37	-0.32	-0.80


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5985MHz

16/12/2025

CF (Hz)
5.985G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

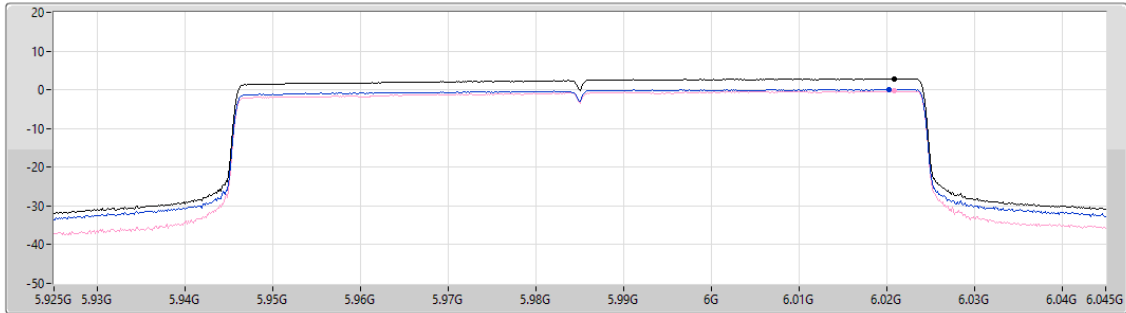

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.91	2.91	0.17	-0.34

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6225MHz

16/12/2025

CF (Hz)
6.225G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

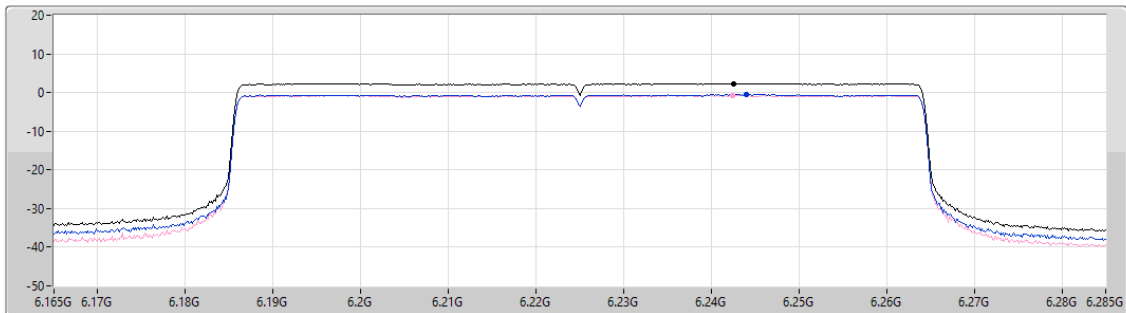

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.34	2.34	-0.45	-0.75

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6385MHz

16/12/2025

CF (Hz)
6.385G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

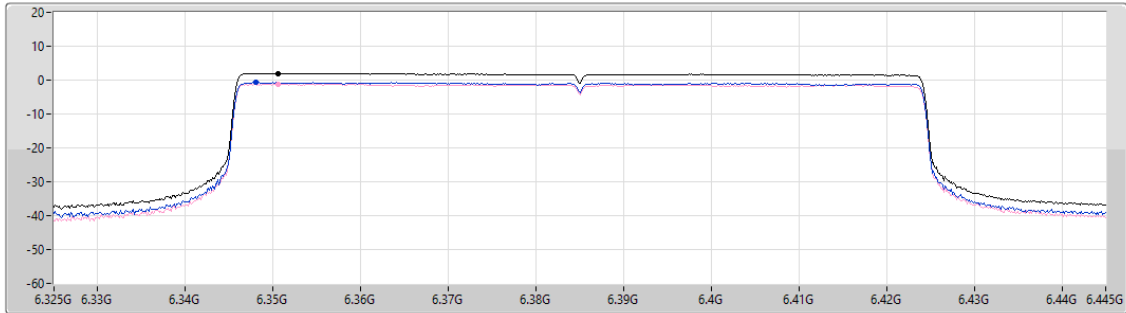

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
2.02	2.02	-0.69	-1.19

Sum
Port 1
Port 2


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6625MHz

16/12/2025

CF (Hz)
6.625G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

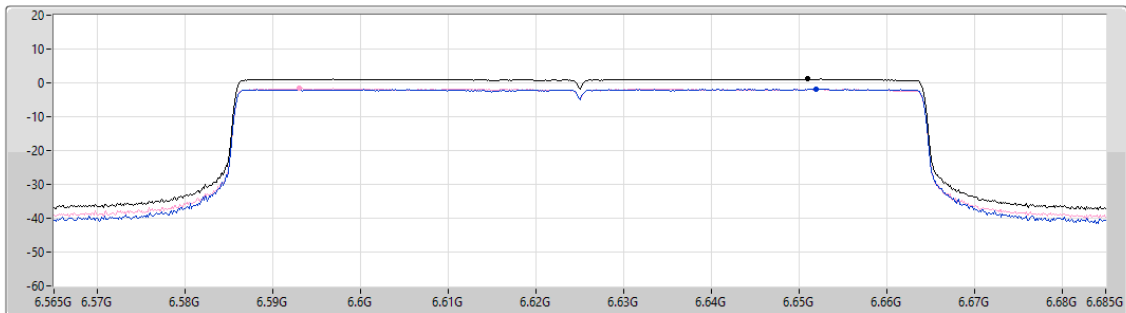

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
1.15	1.15	-1.85	-1.64


Sum
Port 1
Port 2

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6705MHz

16/12/2025

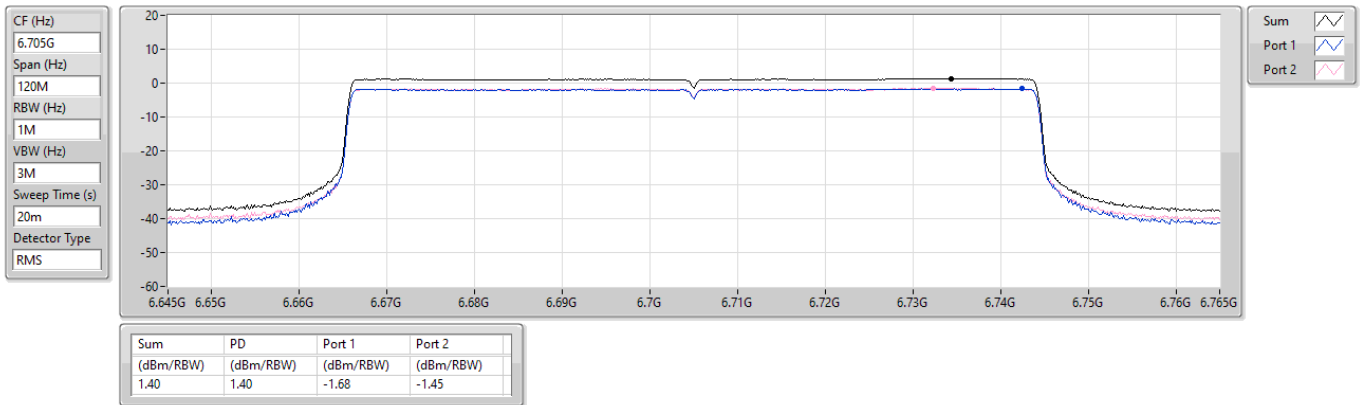


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6785MHz

16/12/2025

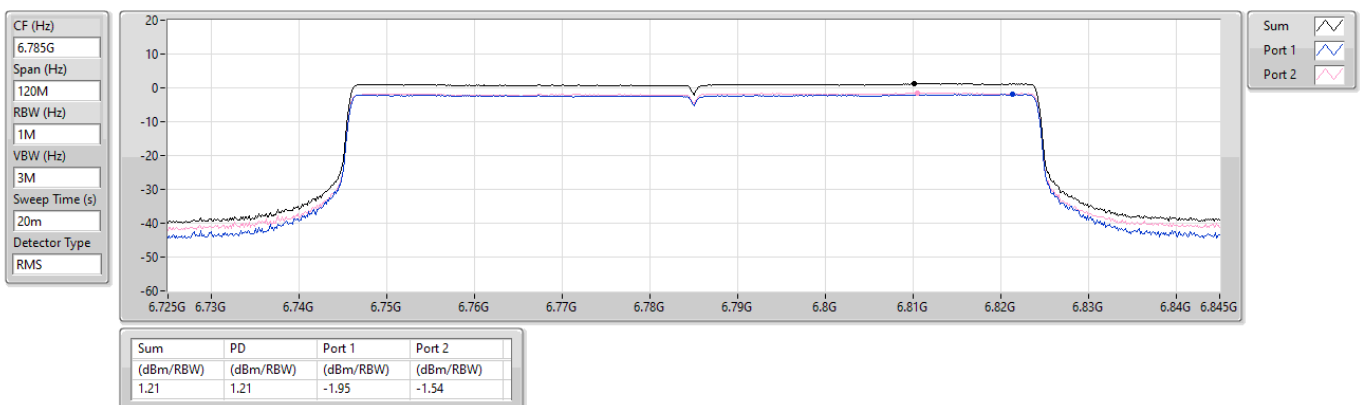


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6025MHz

16/12/2025

CF (Hz)
6.025G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

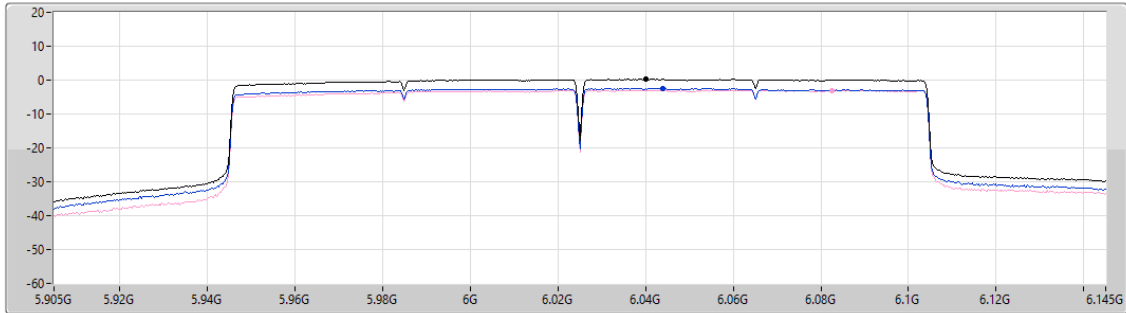

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.22	0.22	-2.48	-2.99

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6185MHz

16/12/2025

CF (Hz)
6.185G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

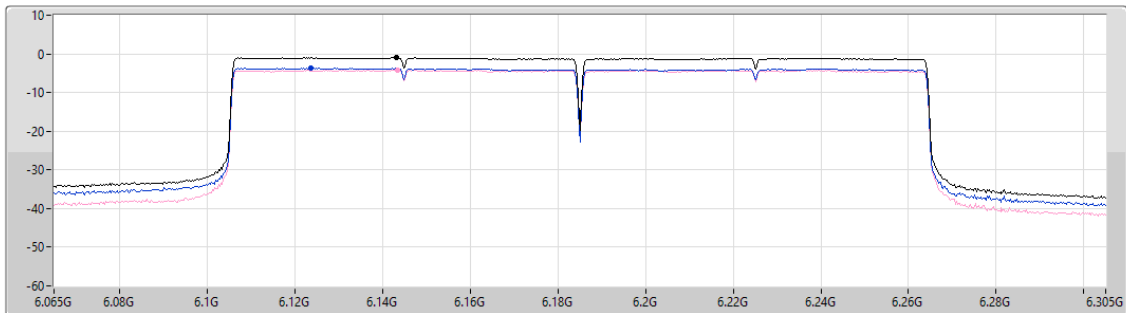

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.97	-0.97	-3.72	-4.18

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6345MHz

16/12/2025

CF (Hz)
6.345G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

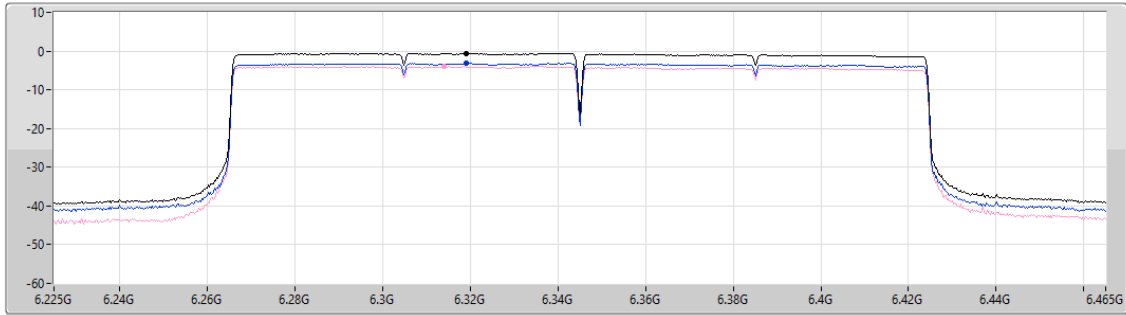

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.61	-0.61	-3.17	-3.97

Sum
Port 1
Port 2


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6665MHz

16/12/2025

CF (Hz)
6.665G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

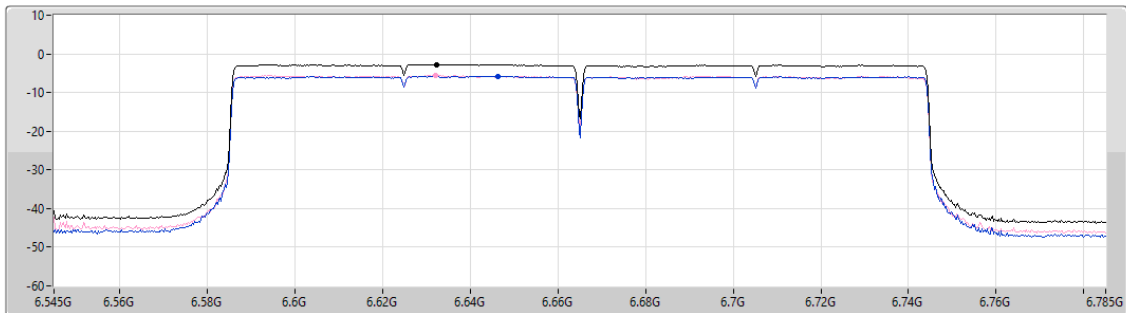

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.77	-2.77	-5.77	-5.58

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

PSD

6105MHz

16/12/2025

CF (Hz)
6.105G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

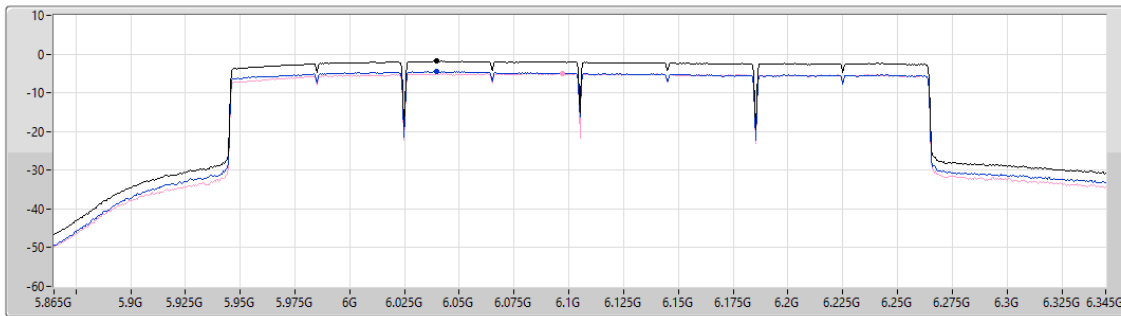

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.77	-1.77	-4.49	-5.08


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

PSD

6265MHz

16/12/2025

CF (Hz)
6.265G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

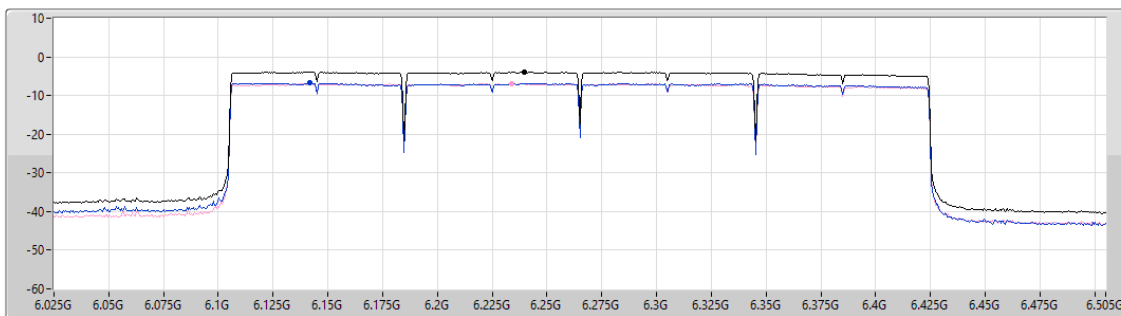

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.90	-3.90	-6.80	-6.86




Radiated Emissions below 1GHz

Appendix E.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	QP	49.4M	36.32	40.00	-3.68	Vertical

Mode 1

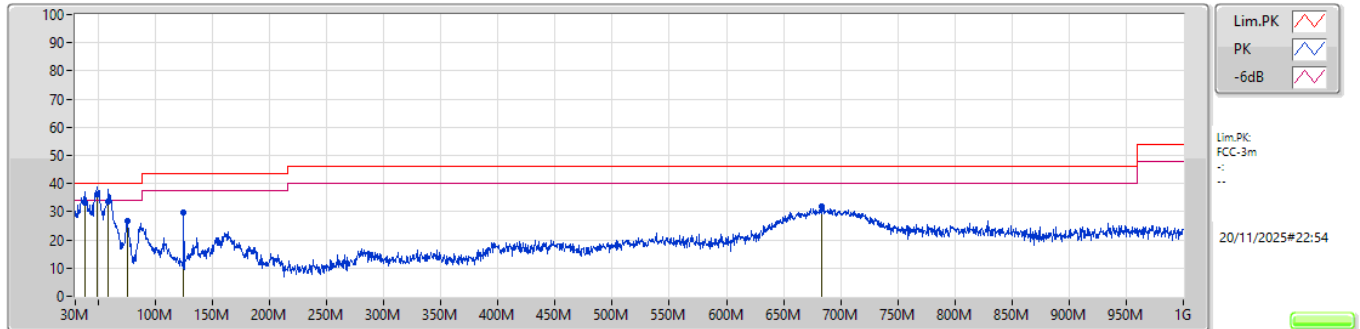

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)		
QP	38.73M	33.31	40.00	-6.69	-34.29	3	Vertical	24	1.00	-	67.60	18.95	0.66	53.90		
QP	49.4M	36.32	40.00	-3.68	-33.28	3	Vertical	122	1.00	"Worst"	69.60	20.09	0.75	54.12		
QP	59.1M	33.54	40.00	-6.46	-33.96	3	Vertical	24	2.00	-	67.50	19.26	0.74	53.96		
PK	75.59M	26.52	40.00	-13.48	-37.11	3	Vertical	221	1.00	-	63.63	15.94	0.93	53.98		
PK	124.58M	29.90	43.50	-13.60	-35.26	3	Vertical	47	1.00	-	65.16	17.29	1.26	53.81		
PK	683.3M	31.71	46.00	-14.29	-22.22	3	Vertical	108	2.00	-	53.93	26.64	3.82	52.68		

Mode 1

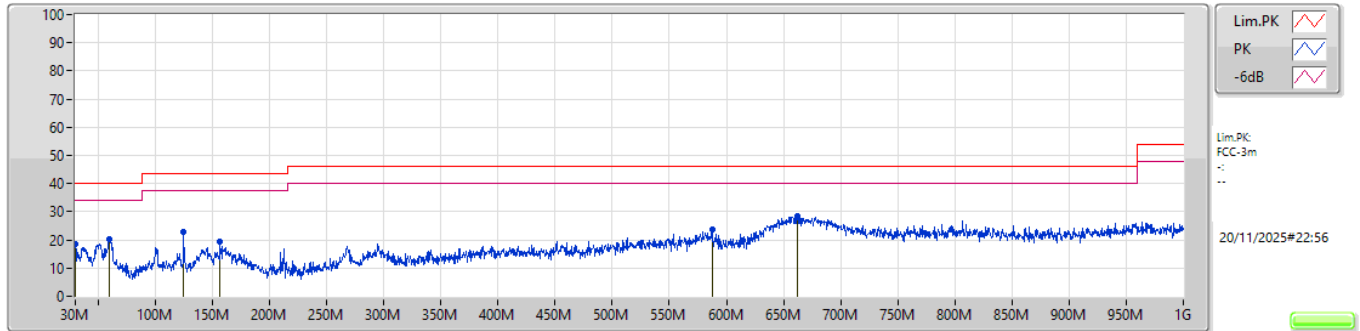

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)		
PK	30.49M	18.45	40.00	-21.55	-34.82	3	Horizontal	24	1.00	-	53.27	18.19	0.56	53.57		
PK	59.59M	20.10	40.00	-19.90	-34.02	3	Horizontal	147	2.00	-	54.12	19.21	0.73	53.96		
PK	124.58M	22.71	43.50	-20.79	-35.26	3	Horizontal	253	2.00	-	57.97	17.29	1.26	53.81		
PK	156.59M	19.19	43.50	-24.31	-32.84	3	Horizontal	322	1.00	-	52.03	19.44	1.44	53.72		
PK	587.27M	23.69	46.00	-22.31	-24.02	3	Horizontal	8	1.00	-	47.71	25.53	3.44	52.99		
PK	661.96M	28.46	46.00	-17.54	-22.61	3	Horizontal	17	1.00	"Worst"	51.07	26.44	3.73	52.78		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT40_Nss1.(MCS0)_2TX	Pass	RMS	5.925G	68.16	68.20	-0.04	3	Vertical	173	1.80	-

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

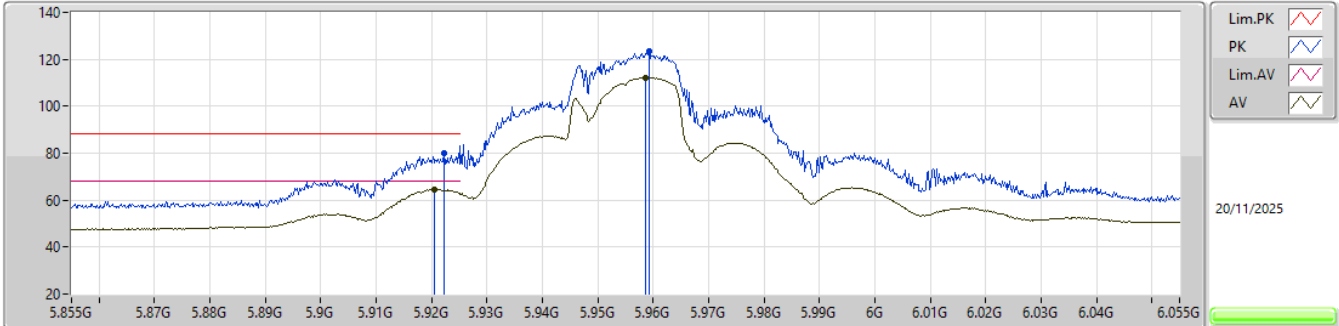


EUT V_2TX
Setting 22
04-W-N-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9222G	80.07	88.20	-8.13	82.00	3	Vertical	176	1.80	-	32.30	9.05	43.28			
RMS	5.9206G	64.72	68.20	-3.48	66.65	3	Vertical	176	1.80	-	32.30	9.05	43.28			
PK	5.9592G	123.26	Inf	-Inf	125.09	3	Vertical	176	1.80	-	32.32	9.09	43.24			
RMS	5.9586G	112.23	Inf	-Inf	114.06	3	Vertical	176	1.80	-	32.32	9.09	43.24			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

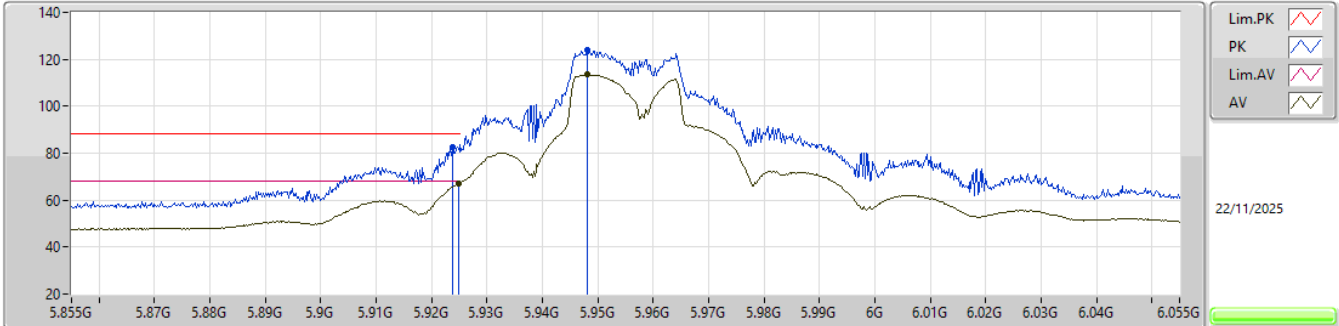


EUT_V_2TX
Setting 22
04-W-N-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9238G	82.76	88.20	-5.44	84.69	3	Horizontal	182	1.80	-	32.30	9.05	43.28			
RMS	5.9248G	67.15	68.20	-1.05	69.08	3	Horizontal	182	1.80	-	32.30	9.05	43.28			
PK	5.9482G	124.14	Inf	-Inf	126.01	3	Horizontal	182	1.80	-	32.30	9.08	43.25			
RMS	5.9482G	113.39	Inf	-Inf	115.26	3	Horizontal	182	1.80	-	32.30	9.08	43.25			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

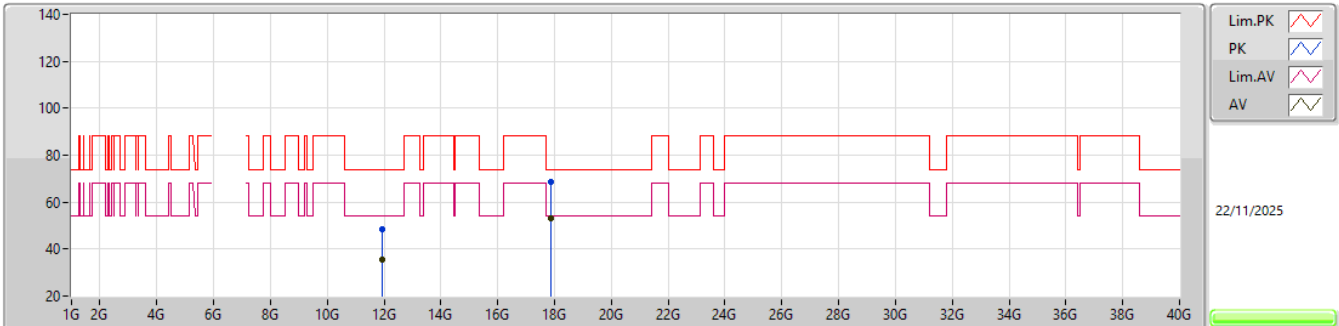


EUT V_2TX
Setting 20.5
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.918G	48.31	74.00	-25.69	39.37	3	Vertical	196	1.80	-	38.74	13.53	43.33			
AV	11.9176G	35.69	54.00	-18.31	26.75	3	Vertical	196	1.80	-	38.74	13.53	43.33			
PK	17.8781G	68.65	74.00	-5.35	48.60	3	Vertical	220	1.77	-	46.17	16.41	42.53			
AV	17.8583G	52.94	54.00	-1.06	33.40	3	Vertical	220	1.77	-	45.70	16.40	42.56			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5955MHz_TX

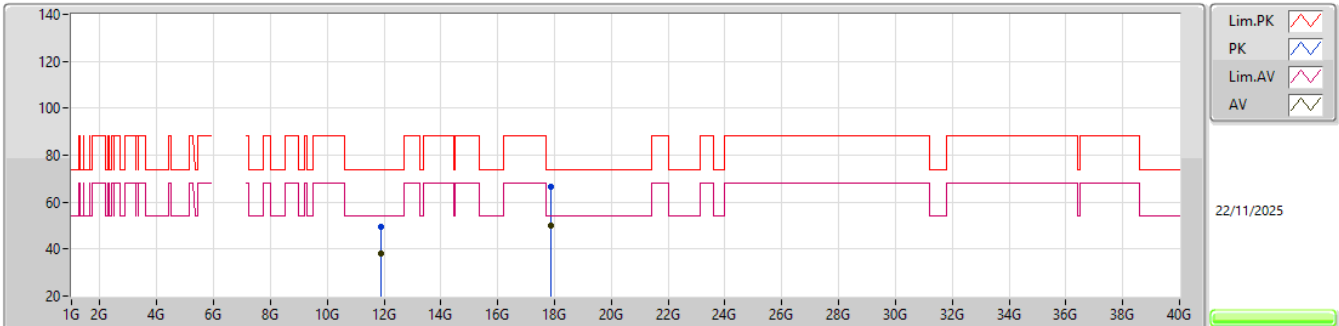EUT_V_2TX
Setting 20.5
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.9101G	49.35	74.00	-24.65	40.42	3	Horizontal	265	1.80	-	38.72	13.53	43.32			
AV	11.91G	38.31	54.00	-15.69	29.38	3	Horizontal	265	1.80	-	38.72	13.53	43.32			
PK	17.8733G	66.49	74.00	-7.51	46.56	3	Horizontal	248	1.01	-	46.06	16.41	42.54			
AV	17.8704G	49.87	54.00	-4.13	30.01	3	Horizontal	248	1.01	-	45.99	16.41	42.54			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5955MHz_TX

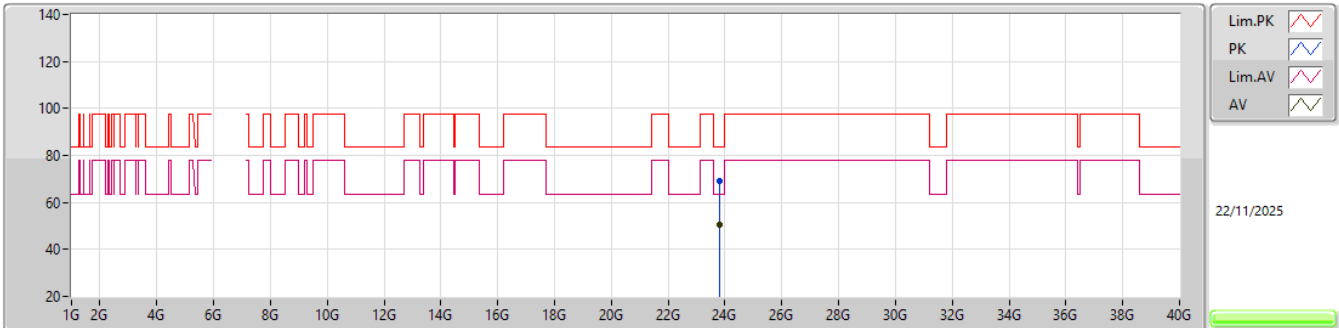EUT V_2TX
Setting 20.5
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	23.81725G	69.11	83.54	-14.43	58.76	1	Vertical	258	1.41	-	38.73	18.76	47.14			
AV	23.8199G	50.29	63.54	-13.25	39.95	1	Vertical	258	1.41	-	38.72	18.76	47.14			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

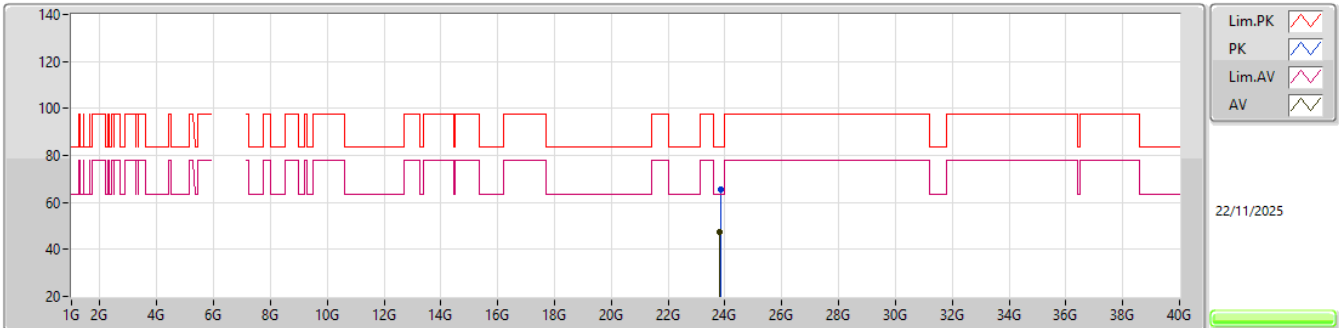


EUT V_2TX
Setting 20.5
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.8368G	65.56	83.54	-17.98	55.29	1	Horizontal	258	1.76	-	38.65	18.76	47.14			
AV	23.816G	47.40	63.54	-16.14	37.04	1	Horizontal	258	1.76	-	38.74	18.76	47.14			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6195MHz_TX

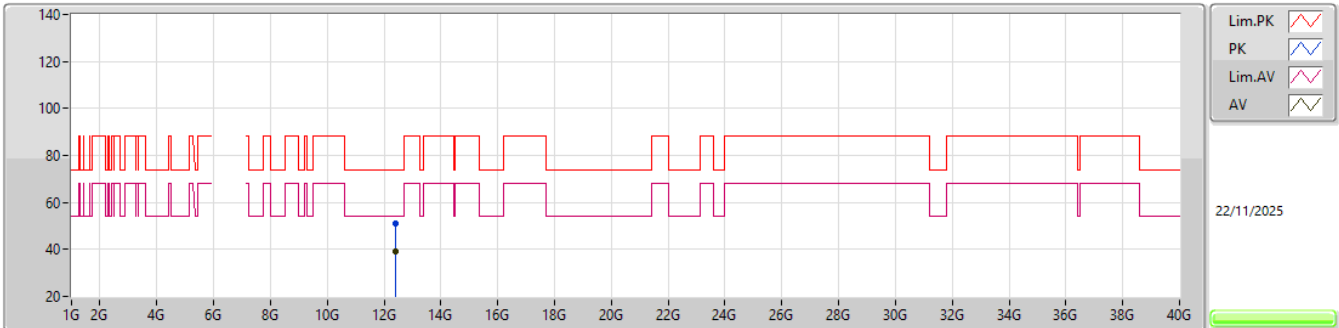EUT V_2TX
Setting 26
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.3878G	50.98	74.00	-23.02	42.10	3	Vertical	180	1.80	-	38.55	14.07	43.74			
AV	12.3849G	39.02	54.00	-14.98	30.12	3	Vertical	180	1.80	-	38.56	14.07	43.73			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6195MHz_TX

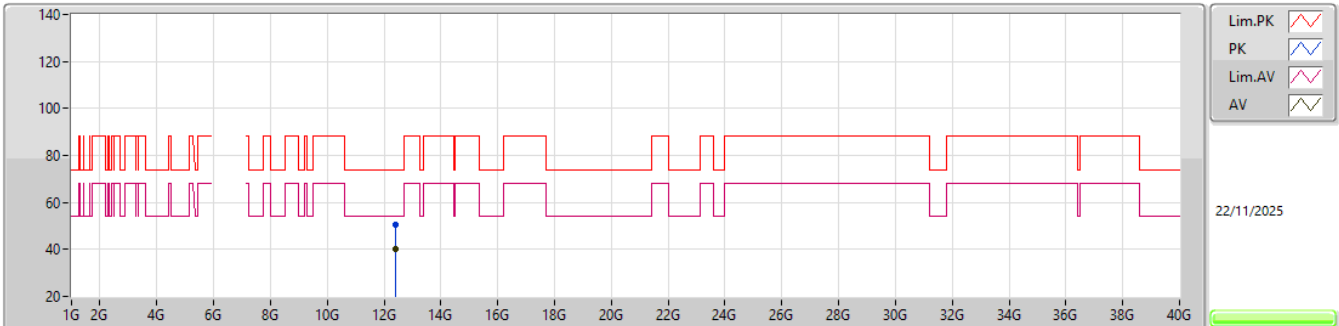


EUT_V_2TX
Setting 26
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.39G	50.31	74.00	-23.69	41.43	3	Horizontal	268	1.80	-	38.54	14.08	43.74			
AV	12.3901G	39.94	54.00	-14.06	31.06	3	Horizontal	268	1.80	-	38.54	14.08	43.74			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6195MHz_TX

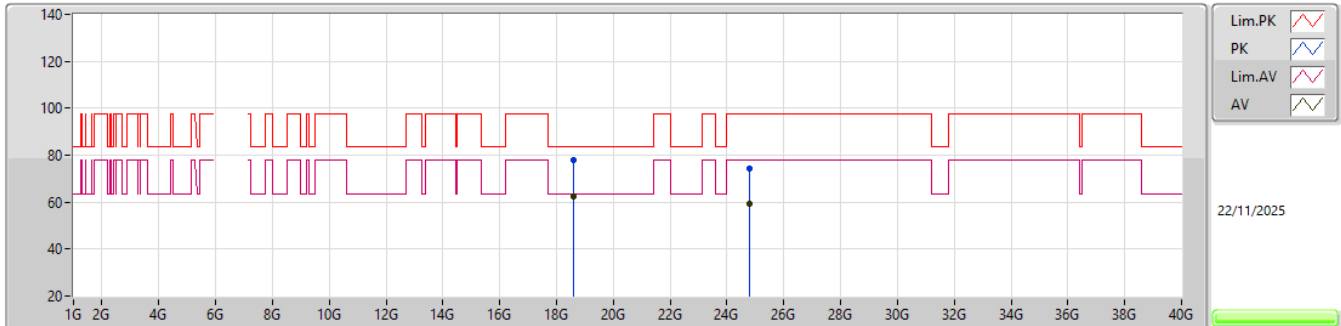EUT Y_2TX
Setting 26
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.5942G	77.76	83.54	-5.78	73.13	1	Vertical	250	1.62	-	37.69	16.58	49.64			
AV	18.57785G	62.64	63.54	-0.90	58.07	1	Vertical	250	1.62	-	37.66	16.57	49.66			
PK	24.78215G	74.40	97.74	-23.34	62.29	1	Vertical	254	1.67	-	39.26	19.45	46.60			
AV	24.7793G	59.49	77.74	-18.25	47.38	1	Vertical	254	1.67	-	39.26	19.45	46.60			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6195MHz_TX

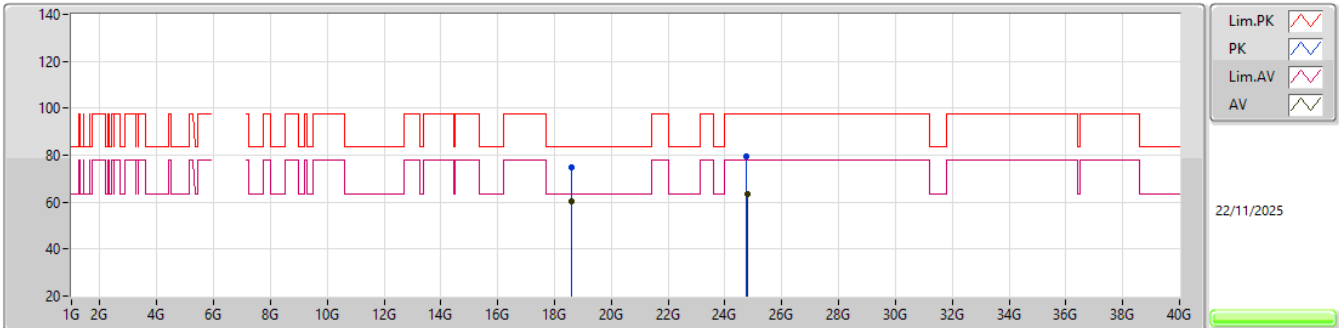EUT Y_2TX
Setting 26
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.59105G	74.87	83.54	-8.67	70.26	1	Horizontal	286	1.99	-	37.68	16.58	49.65			
AV	18.58965G	60.44	63.54	-3.10	55.83	1	Horizontal	286	1.99	-	37.68	16.58	49.65			
PK	24.76785G	79.57	97.74	-18.17	67.50	1	Horizontal	283	1.81	-	39.24	19.44	46.61			
AV	24.7731G	63.36	77.74	-14.38	51.27	1	Horizontal	283	1.81	-	39.25	19.44	46.60			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6415MHz_TX

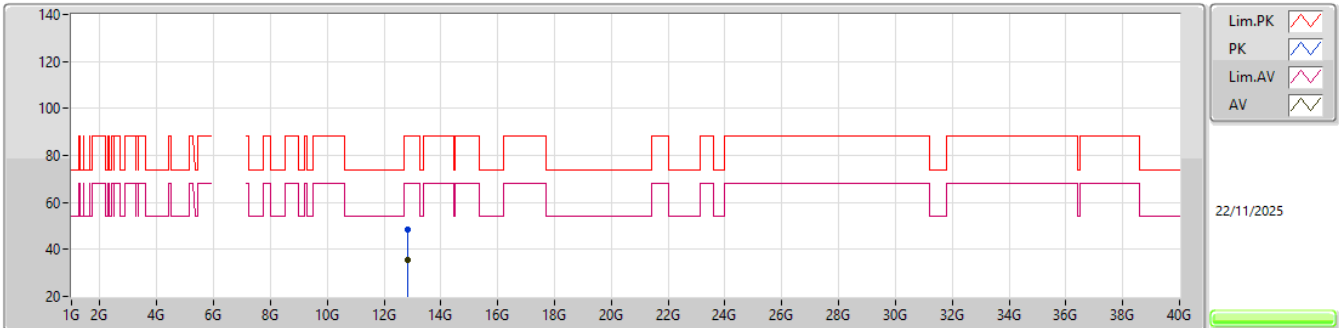


EUT V_2TX
Setting 26.5
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.8354G	48.19	88.20	-40.01	38.06	3	Vertical	206	1.80	-	39.07	14.63	43.57			
RMS	12.8177G	35.57	68.20	-32.63	25.50	3	Vertical	206	1.80	-	39.04	14.61	43.58			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6415MHz_TX

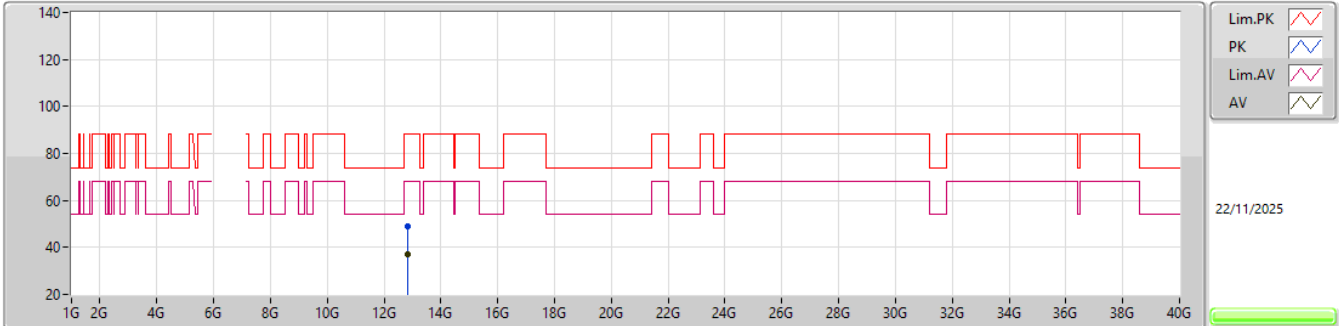


EUT V_2TX
Setting 26.5
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.8256G	49.12	88.20	-39.08	39.03	3	Horizontal	243	1.80	-	39.05	14.62	43.58			
RMS	12.8302G	36.90	68.20	-31.30	26.80	3	Horizontal	243	1.80	-	39.06	14.62	43.58			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6415MHz_TX

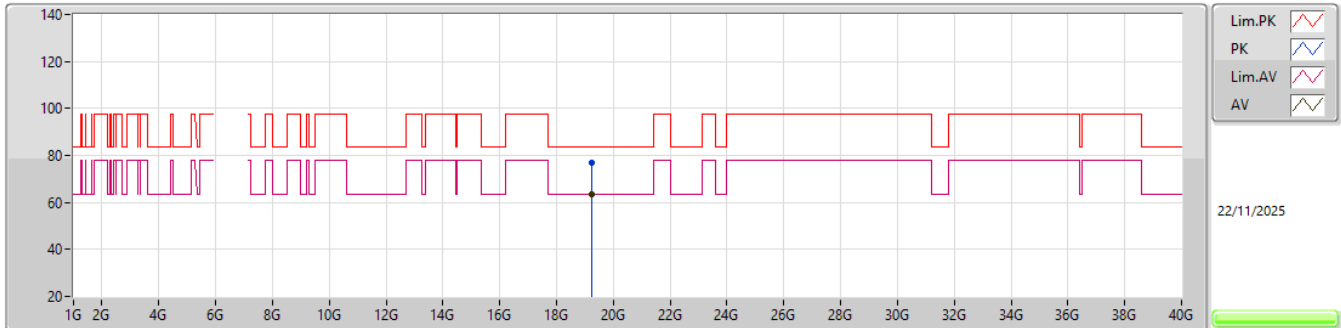


EUT V_2TX
Setting 26.5
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.2504G	77.09	83.54	-6.45	71.71	1	Vertical	280	1.83	-	37.90	16.94	49.46			
AV	19.25085G	63.45	63.54	-0.09	58.07	1	Vertical	280	1.83	-	37.90	16.94	49.46			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6415MHz_TX

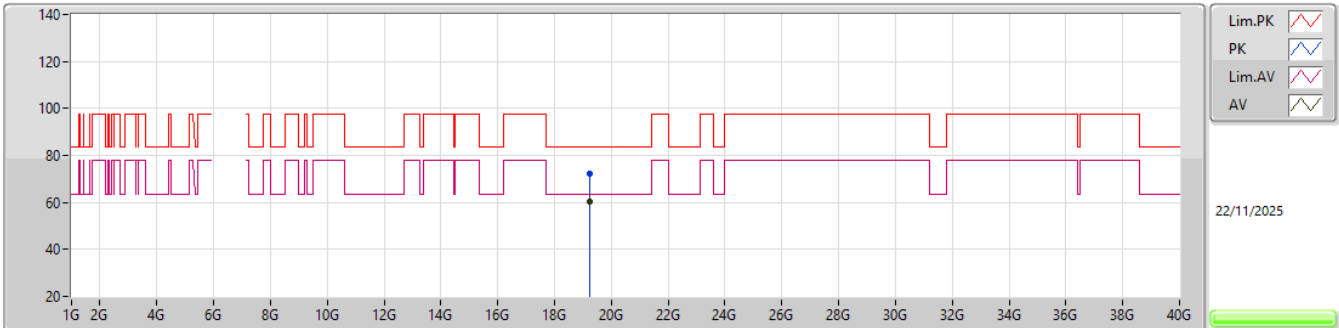


EUT V_2TX
Setting 26.5
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.24825G	72.13	83.54	-11.41	66.76	1	Horizontal	279	1.40	-	37.89	16.93	49.45			
AV	19.2504G	60.11	63.54	-3.43	54.73	1	Horizontal	279	1.40	-	37.90	16.94	49.46			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6535MHz_TX

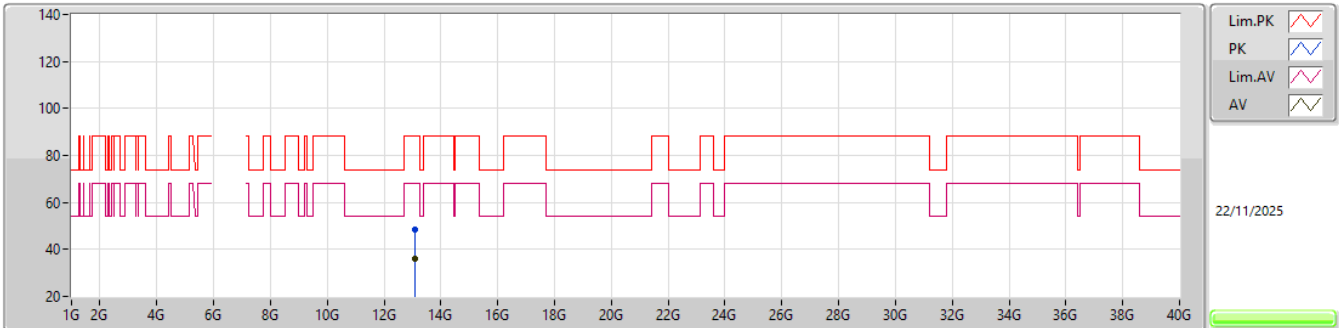EUT_V_2TX
Setting 28
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.0942G	48.56	88.20	-39.64	38.03	3	Vertical	119	1.84	-	38.99	14.95	43.41			
RMS	13.1088G	36.02	68.20	-32.18	25.41	3	Vertical	119	1.84	-	39.04	14.97	43.40			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6535MHz_TX

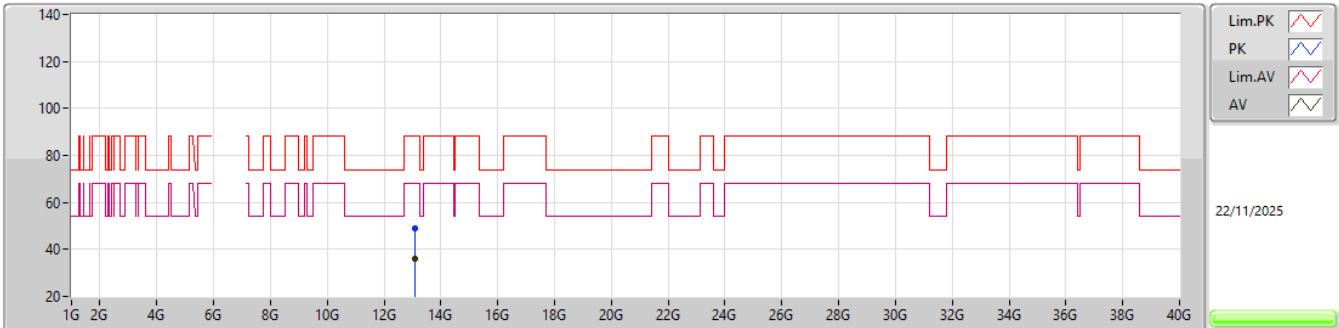EUT_V_2TX
Setting 28
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.0792G	48.94	88.20	-39.26	38.47	3	Horizontal	359	1.39	-	38.96	14.93	43.42			
RMS	13.1086G	36.02	68.20	-32.18	25.42	3	Horizontal	359	1.39	-	39.03	14.97	43.40			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6535MHz_TX

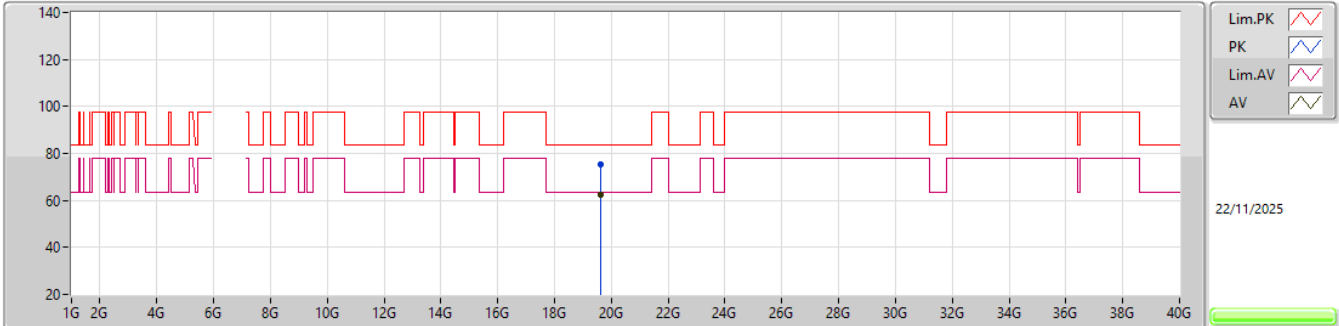


EUT V_2TX
Setting 28
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.6142G	75.48	83.54	-8.06	70.18	1	Vertical	250	1.58	-	37.67	17.15	49.52			
AV	19.6128G	62.25	63.54	-1.29	56.95	1	Vertical	250	1.58	-	37.67	17.15	49.52			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6535MHz_TX

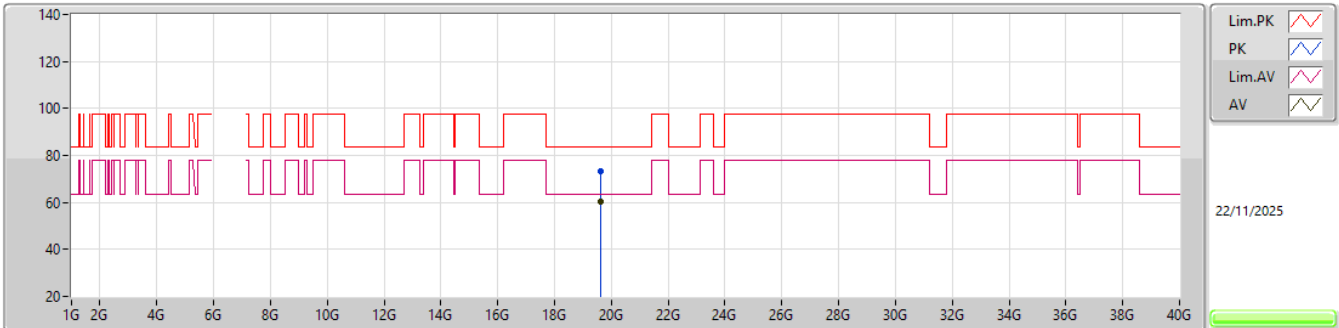


EUT V_2TX
Setting 28
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.61345G	73.22	83.54	-10.32	67.92	1	Horizontal	265	1.84	-	37.67	17.15	49.52			
AV	19.6119G	60.34	63.54	-3.20	55.04	1	Horizontal	265	1.84	-	37.68	17.14	49.52			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6695MHz_TX

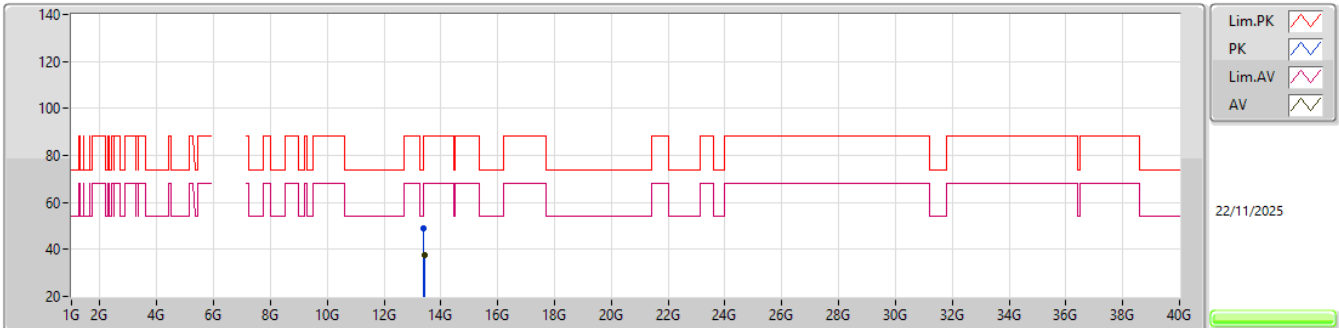EUT V_2TX
Setting 28
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.4005G	49.21	88.20	-38.99	37.45	3	Vertical	207	2.52	-	39.70	15.33	43.27			
RMS	13.4385G	37.34	68.20	-30.86	25.29	3	Vertical	207	2.52	-	39.93	15.38	43.26			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6695MHz_TX

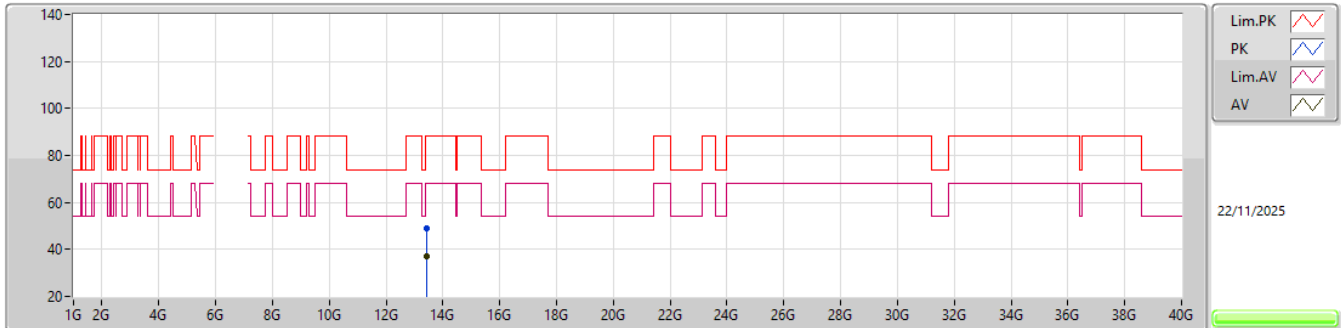EUT V_2TX
Setting 28
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.4216G	48.79	88.20	-39.41	36.86	3	Horizontal	50	2.53	-	39.83	15.36	43.26			
RMS	13.4393G	37.26	68.20	-30.94	25.20	3	Horizontal	50	2.53	-	39.94	15.38	43.26			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6695MHz_TX

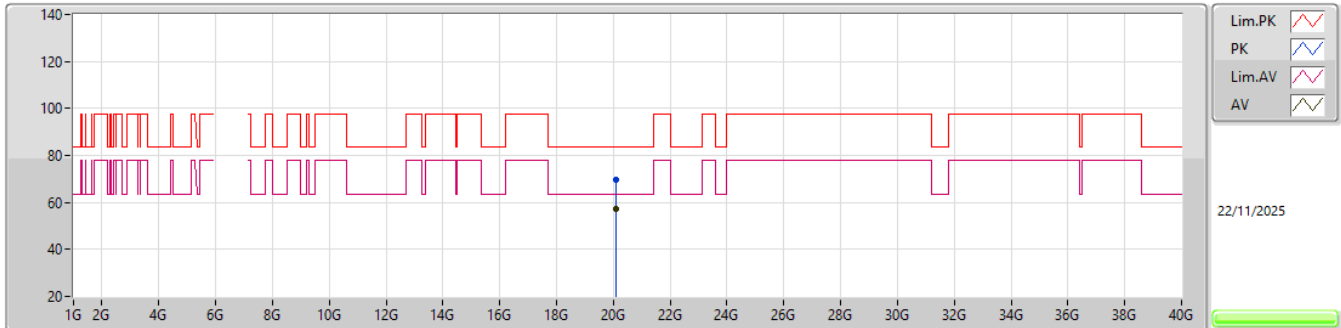EUT V_2TX
Setting 28
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.07585G	69.55	83.54	-13.99	63.78	1	Vertical	252	1.76	-	37.65	17.38	49.26			
AV	20.0763G	57.18	63.54	-6.36	51.41	1	Vertical	252	1.76	-	37.65	17.38	49.26			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6695MHz_TX

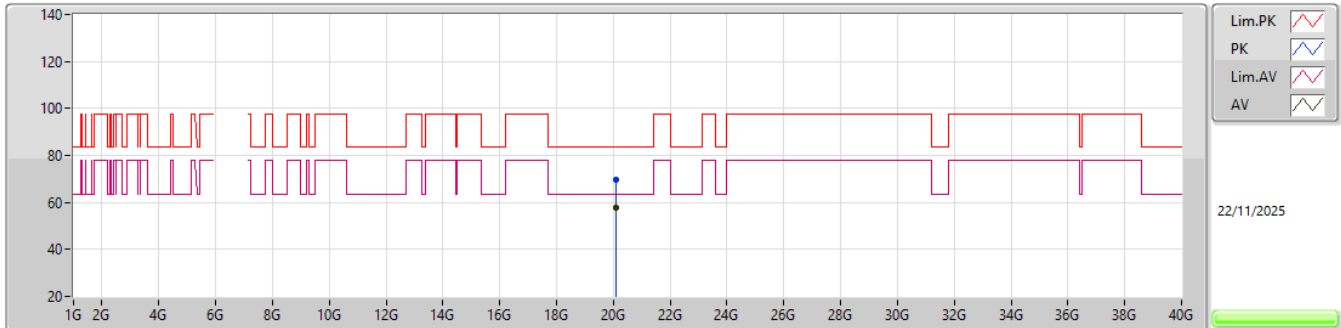


EUT V_2TX
Setting 28
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.08325G	69.71	83.54	-13.83	63.92	1	Horizontal	264	1.60	-	37.67	17.38	49.26			
AV	20.08325G	57.62	63.54	-5.92	51.83	1	Horizontal	264	1.60	-	37.67	17.38	49.26			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6855MHz_TX

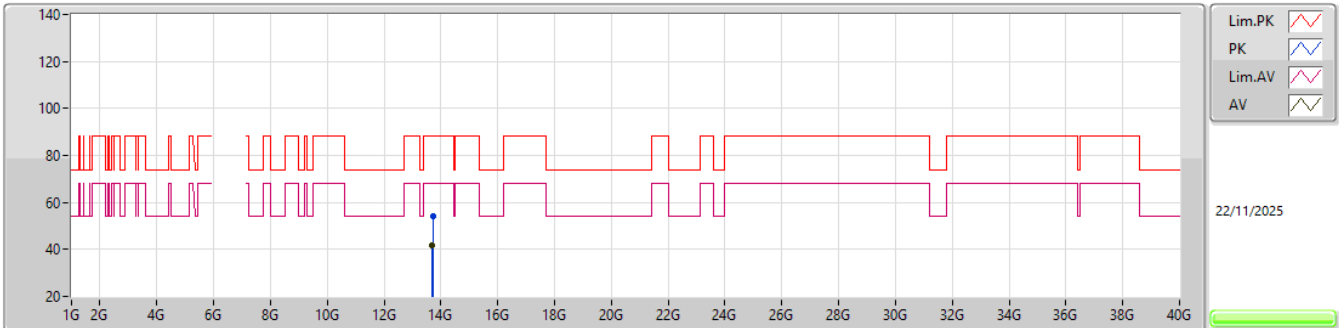


EUT V_2TX
Setting 28
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.7099G	53.98	88.20	-34.22	41.33	3	Vertical	333	1.80	-	40.22	15.72	43.29			
RMS	13.7076G	41.95	68.20	-26.25	29.30	3	Vertical	333	1.80	-	40.22	15.72	43.29			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6855MHz_TX

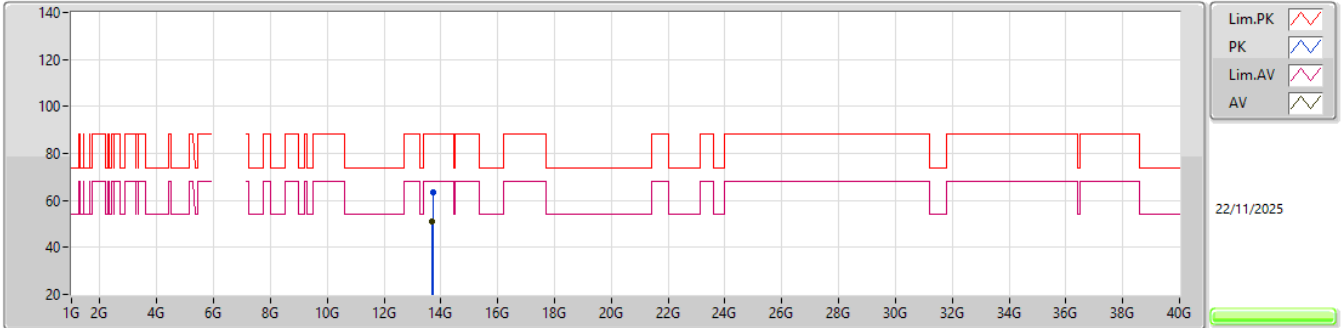


EUT V_2TX
Setting 28
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.7101G	63.29	88.20	-24.91	50.64	3	Horizontal	321	1.80	-	40.22	15.72	43.29			
RMS	13.7078G	51.24	68.20	-16.96	38.59	3	Horizontal	321	1.80	-	40.22	15.72	43.29			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6855MHz_TX

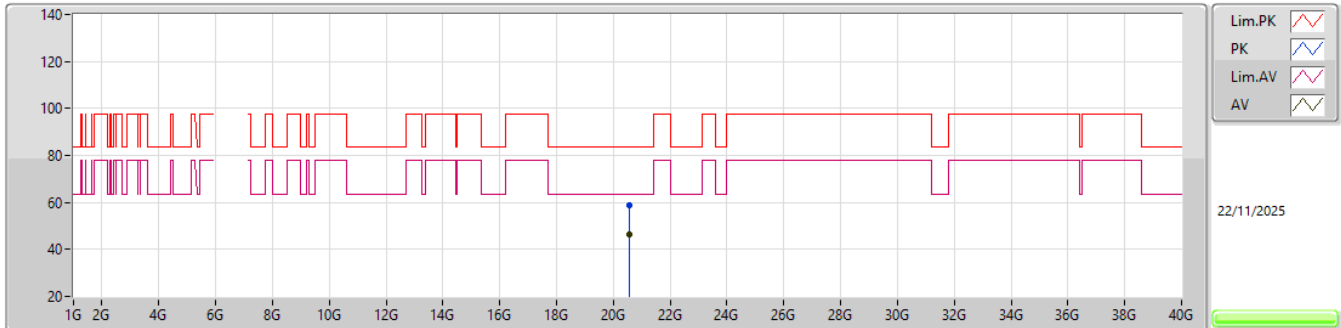EUT V_2TX
Setting 28
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.5661G	58.73	83.54	-24.81	52.75	1	Vertical	259	1.70	-	37.73	17.45	49.20			
AV	20.5681G	46.37	63.54	-17.17	40.37	1	Vertical	259	1.70	-	37.74	17.45	49.19			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6855MHz_TX

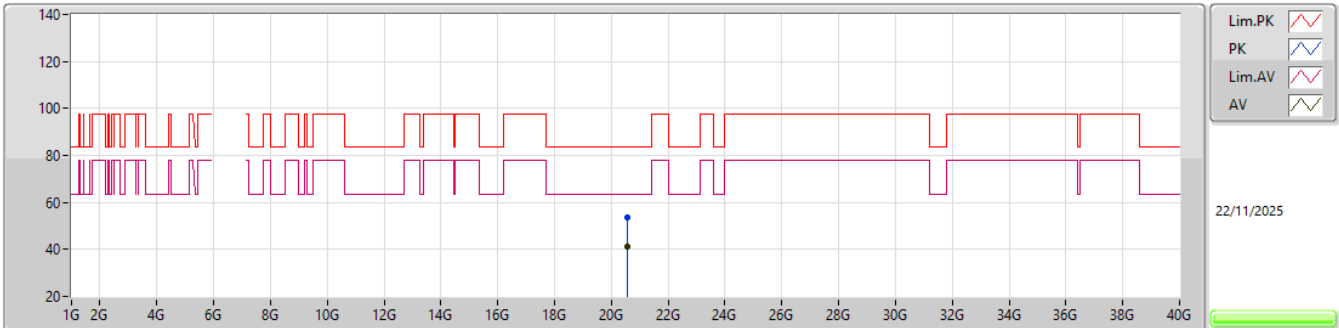EUT V_2TX
Setting 28
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.567G	53.67	83.54	-29.87	47.69	1	Horizontal	24	2.52	-	37.73	17.45	49.20			
AV	20.5647G	41.09	63.54	-22.45	35.11	1	Horizontal	24	2.52	-	37.73	17.45	49.20			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

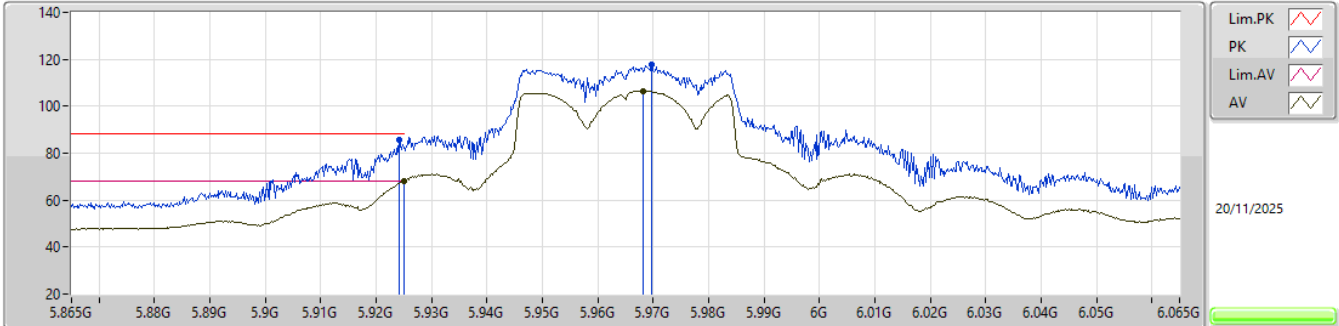


EUT V_2TX
Setting 20
04-W-N-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9242G	85.75	88.20	-2.45	87.68	3	Vertical	173	1.80	-	32.30	9.05	43.28			
RMS	5.925G	68.16	68.20	-0.04	70.09	3	Vertical	173	1.80	-	32.30	9.05	43.28			
PK	5.9698G	117.57	Inf	-Inf	119.35	3	Vertical	173	1.80	-	32.34	9.11	43.23			
RMS	5.9682G	106.62	Inf	-Inf	108.41	3	Vertical	173	1.80	-	32.34	9.10	43.23			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

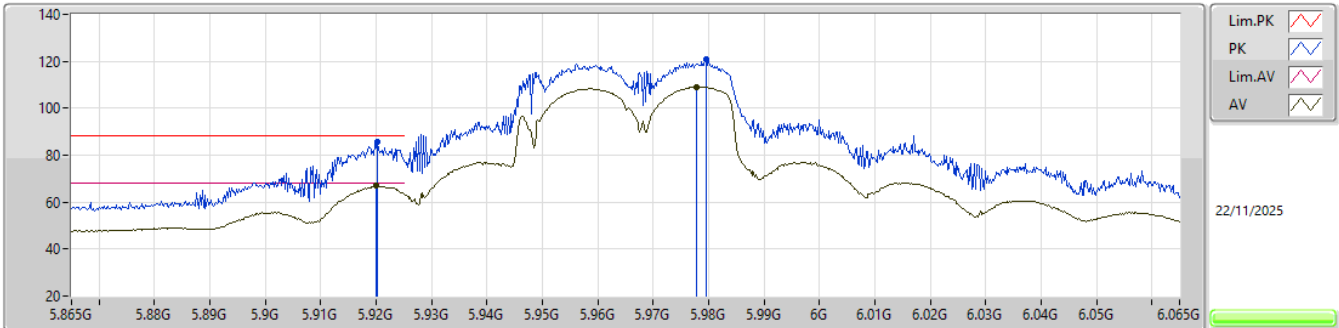


EUT_V_2TX
Setting 20
04-W-N-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9202G	85.84	88.20	-2.36	87.77	3	Horizontal	185	1.80	-	32.30	9.05	43.28			
RMS	5.92G	66.96	68.20	-1.24	68.89	3	Horizontal	185	1.80	-	32.30	9.05	43.28			
PK	5.9796G	120.77	Inf	-Inf	122.51	3	Horizontal	185	1.80	-	32.36	9.12	43.22			
RMS	5.9778G	109.02	Inf	-Inf	110.77	3	Horizontal	185	1.80	-	32.36	9.11	43.22			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

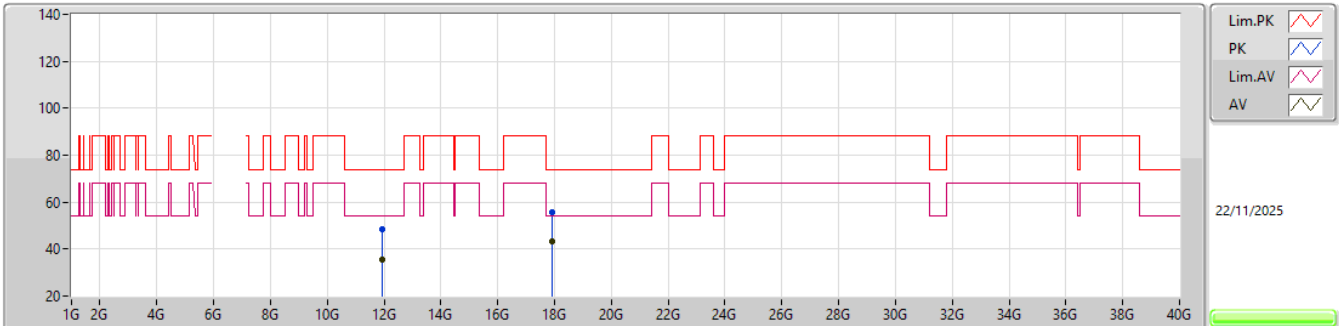


EUT_V_2TX
Setting 20
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.92605G	48.35	74.00	-25.65	39.40	3	Vertical	198	2.93	-	38.75	13.54	43.34			
AV	11.93835G	35.53	54.00	-18.47	26.56	3	Vertical	198	2.93	-	38.78	13.55	43.36			
PK	17.8945G	55.55	74.00	-18.45	35.07	3	Vertical	223	1.58	-	46.57	16.41	42.50			
AV	17.9137G	43.03	54.00	-10.97	22.01	3	Vertical	223	1.58	-	47.08	16.41	42.47			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5965MHz_TX

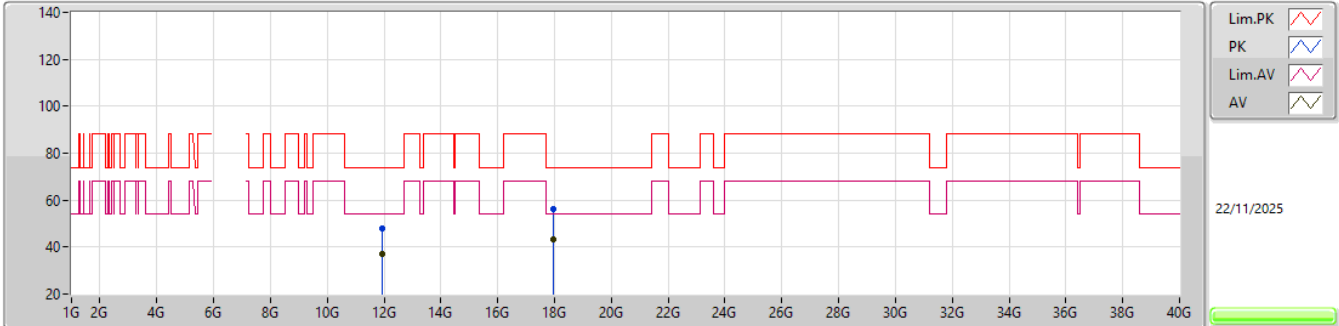EUT_V_2TX
Setting 20
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.9392G	47.98	74.00	-26.02	39.01	3	Horizontal	266	1.80	-	38.78	13.55	43.36			
AV	11.9301G	37.08	54.00	-16.92	28.13	3	Horizontal	266	1.80	-	38.76	13.54	43.35			
PK	17.9402G	56.03	74.00	-17.97	34.21	3	Horizontal	254	1.80	-	47.83	16.41	42.42			
AV	17.943G	43.38	54.00	-10.62	21.49	3	Horizontal	254	1.80	-	47.90	16.41	42.42			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

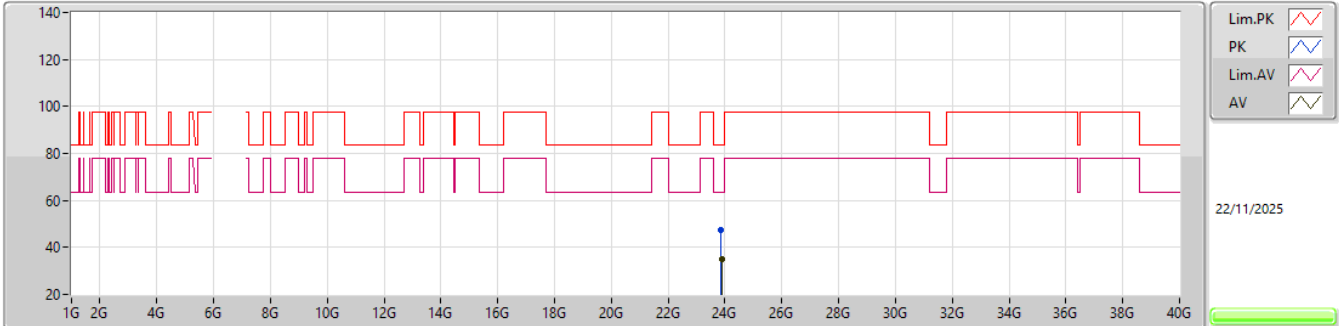


EUT V_2TX
Setting 20
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.8653G	47.49	83.54	-36.05	37.22	1	Vertical	257	2.68	-	38.63	18.76	47.12			
AV	23.875G	34.96	63.54	-28.58	24.67	1	Vertical	257	2.68	-	38.65	18.76	47.12			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5965MHz_TX

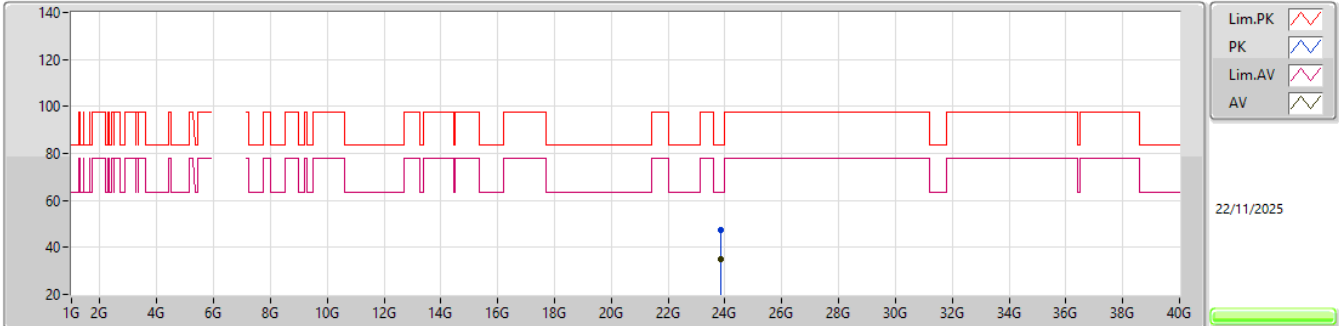EUT V_2TX
Setting 20
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.86265G	47.22	83.54	-36.32	36.95	1	Horizontal	265	2.69	-	38.63	18.76	47.12			
AV	23.8356G	35.21	63.54	-28.33	24.93	1	Horizontal	265	2.69	-	38.66	18.76	47.14			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6205MHz_TX

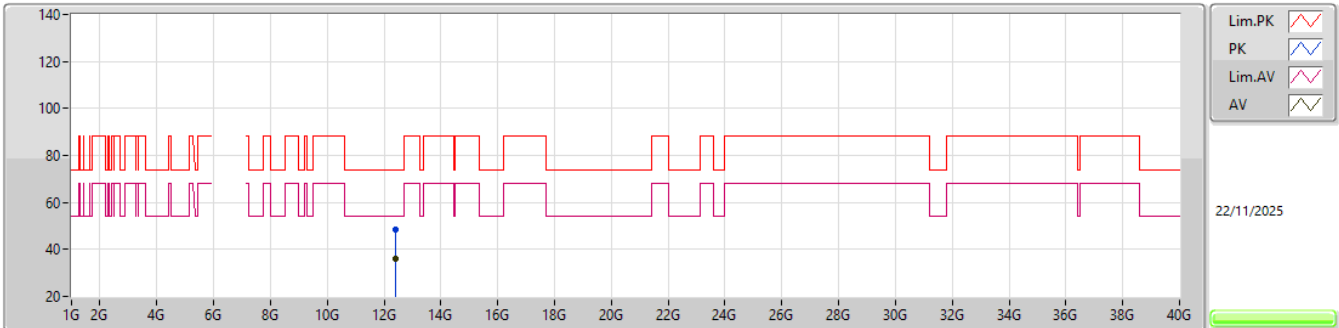EUT V_2TX
Setting 25.5
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.3854G	48.46	74.00	-25.54	39.57	3	Vertical	182	1.80	-	38.56	14.07	43.74			
AV	12.4048G	35.81	54.00	-18.19	26.98	3	Vertical	182	1.80	-	38.49	14.09	43.75			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6205MHz_TX

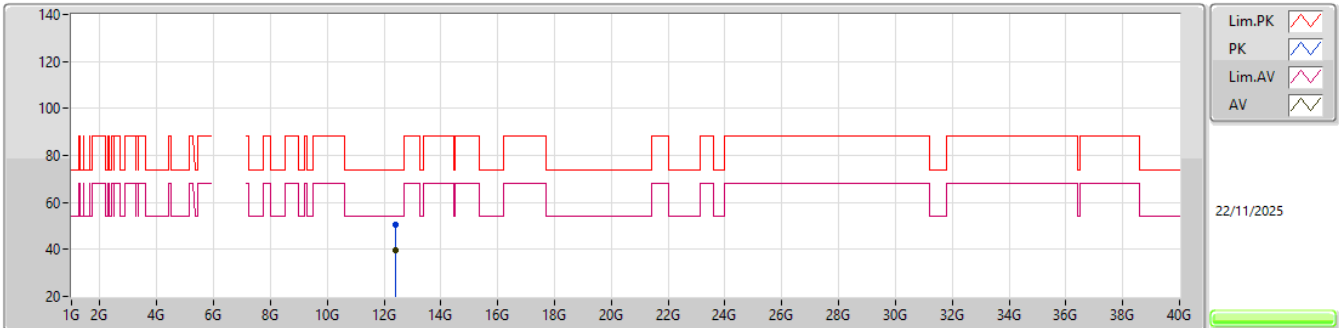


EUT V_2TX
Setting 25.5
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.40995G	50.34	74.00	-23.66	41.51	3	Horizontal	266	1.80	-	38.48	14.10	43.75			
AV	12.4101G	39.63	54.00	-14.37	30.80	3	Horizontal	266	1.80	-	38.48	14.10	43.75			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6205MHz_TX

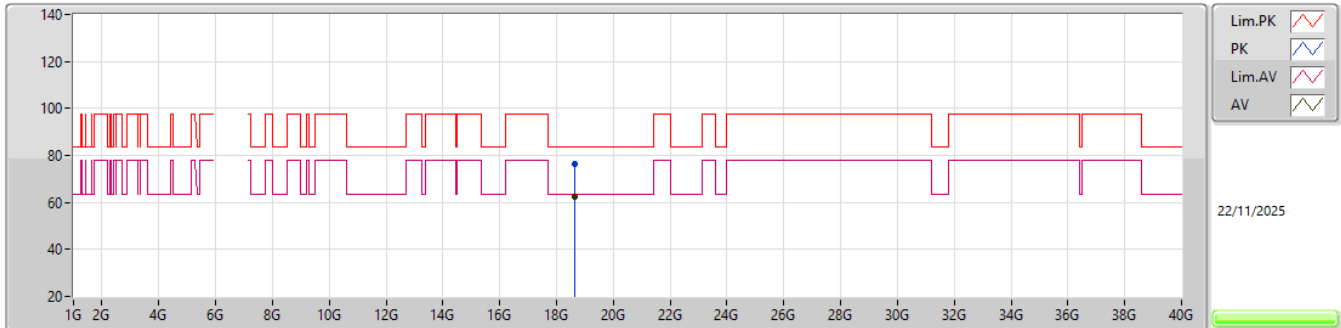


EUT V_2TX
Setting 25.5
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.6266G	76.23	83.54	-7.31	71.55	1	Vertical	248	1.62	-	37.70	16.60	49.62			
AV	18.62325G	62.65	63.54	-0.89	57.97	1	Vertical	248	1.62	-	37.70	16.60	49.62			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6205MHz_TX

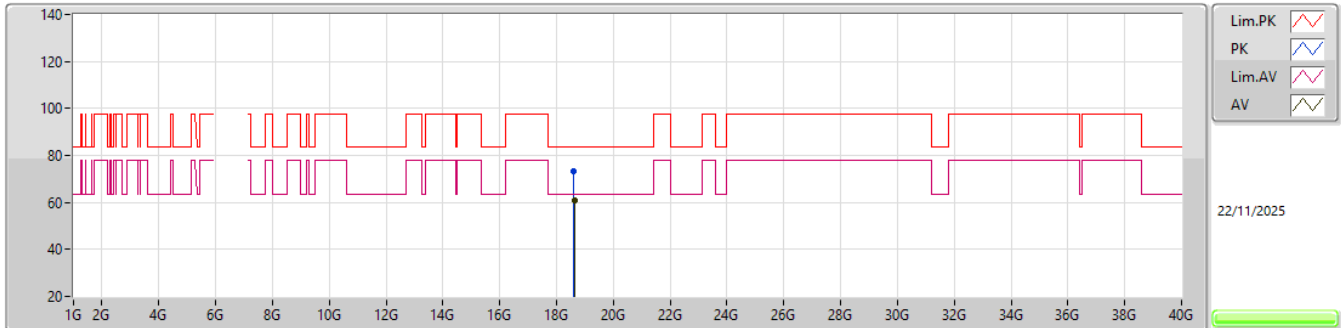


EUT V_2TX
Setting 25.5
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.6202G	73.27	83.54	-10.27	68.59	1	Horizontal	289	1.89	-	37.70	16.60	49.62			
AV	18.62065G	60.79	63.54	-2.75	56.11	1	Horizontal	289	1.89	-	37.70	16.60	49.62			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6405MHz_TX

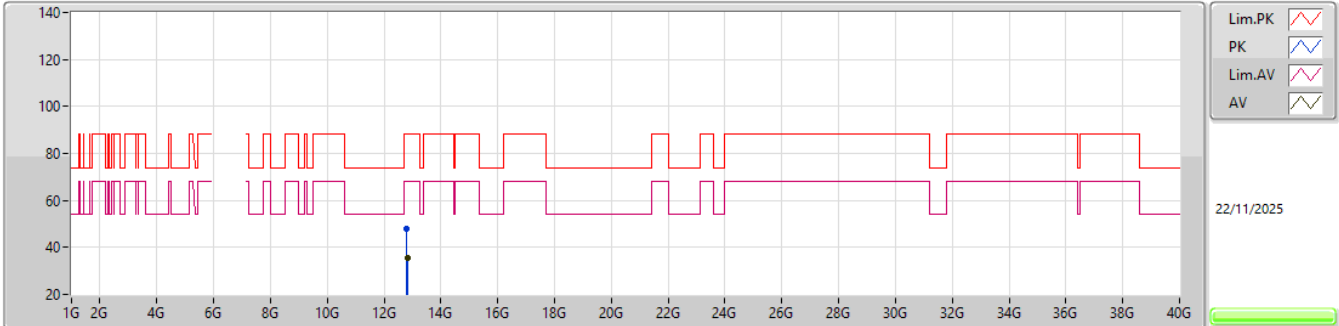


EUT V_2TX
Setting 26
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.8094G	47.94	88.20	-40.26	37.91	3	Vertical	27	1.79	-	39.02	14.60	43.59			
RMS	12.81325G	35.58	68.20	-32.62	25.54	3	Vertical	27	1.79	-	39.03	14.60	43.59			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6405MHz_TX

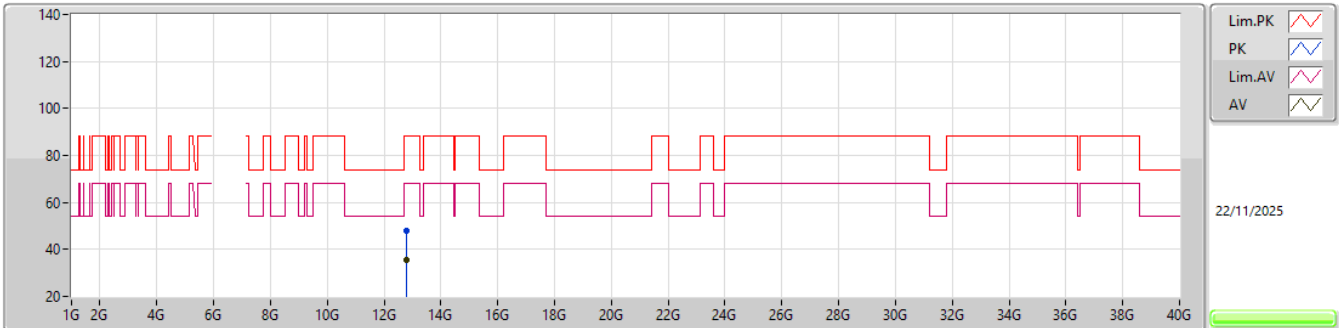


EUT V_2TX
Setting 26
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.80105G	47.82	88.20	-40.38	37.83	3	Horizontal	22	1.15	-	39.00	14.59	43.60			
RMS	12.80775G	35.65	68.20	-32.55	25.62	3	Horizontal	22	1.15	-	39.02	14.60	43.59			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6405MHz_TX

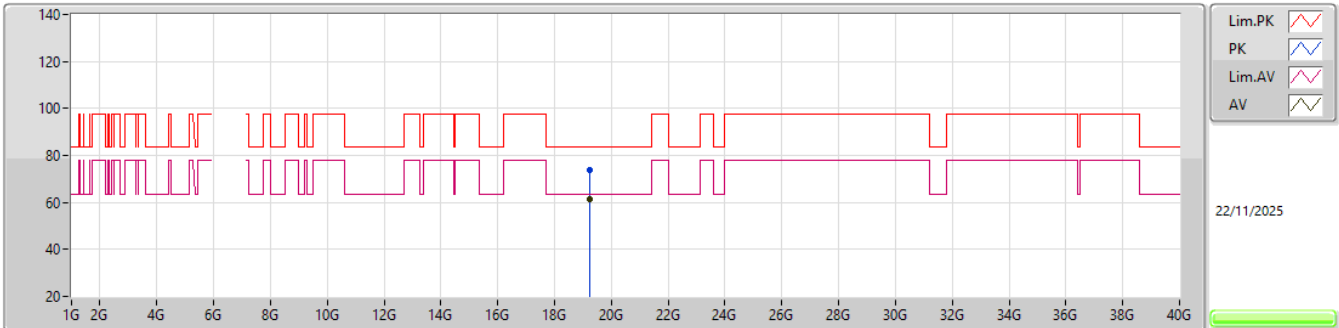


EUT_V_2TX
Setting 26
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.2246G	73.73	83.54	-9.81	68.45	1	Vertical	255	1.54	-	37.80	16.92	49.44			
AV	19.2245G	61.44	63.54	-2.10	56.16	1	Vertical	255	1.54	-	37.80	16.92	49.44			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6405MHz_TX

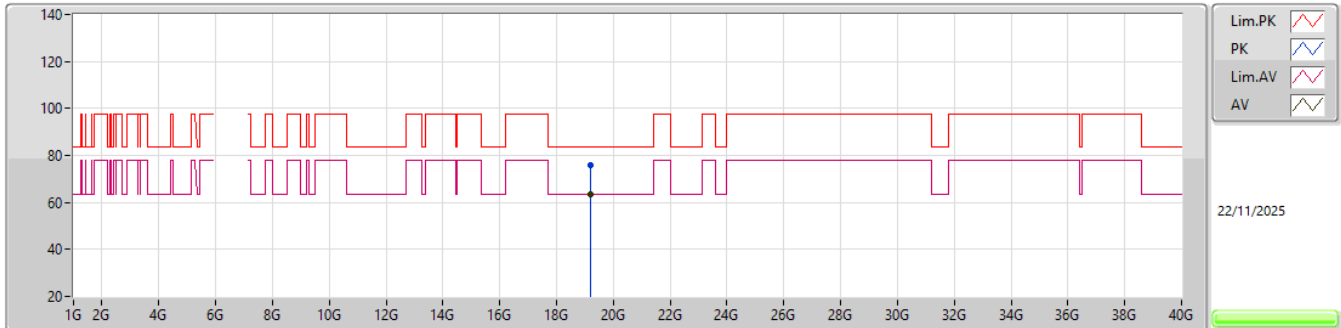


EUT_V_2TX
Setting 26
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.20595G	76.00	83.54	-7.54	70.80	1	Horizontal	284	1.90	-	37.72	16.91	49.43			
AV	19.20415G	63.38	63.54	-0.16	58.18	1	Horizontal	284	1.90	-	37.72	16.91	49.43			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6565MHz_TX

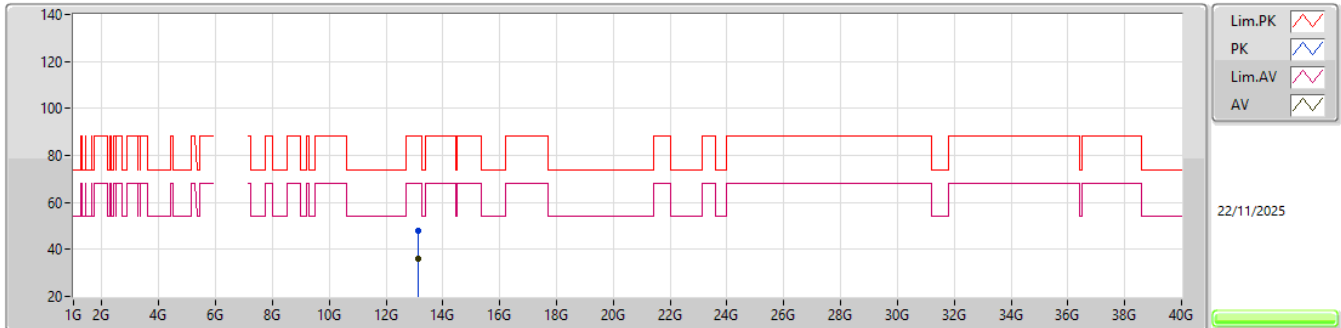EUT_V_2TX
Setting 27
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.1234G	48.11	88.20	-40.09	37.43	3	Vertical	218	1.53	-	39.09	14.99	43.40			
RMS	13.11045G	36.20	68.20	-32.00	25.59	3	Vertical	218	1.53	-	39.04	14.97	43.40			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6565MHz_TX

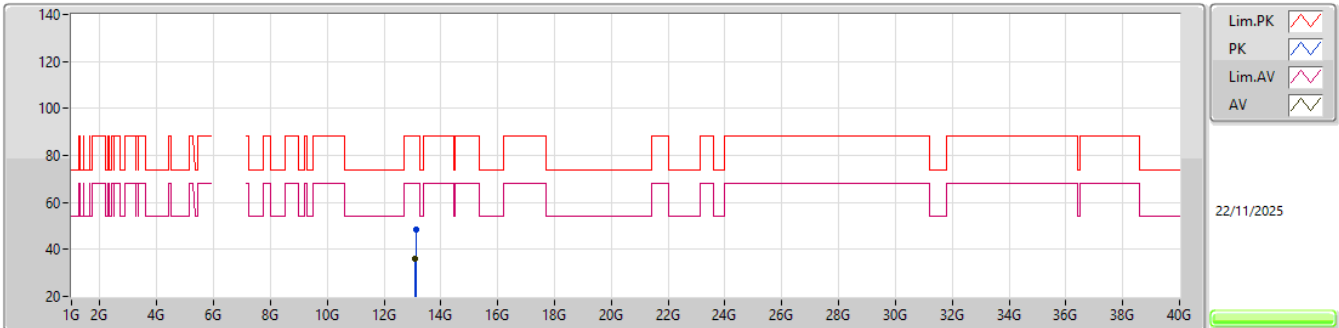EUT_V_2TX
Setting 27
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.1484G	48.31	88.20	-39.89	37.48	3	Horizontal	267	2.99	-	39.19	15.02	43.38			
RMS	13.1059G	36.28	68.20	-31.92	25.69	3	Horizontal	267	2.99	-	39.02	14.97	43.40			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6565MHz_TX

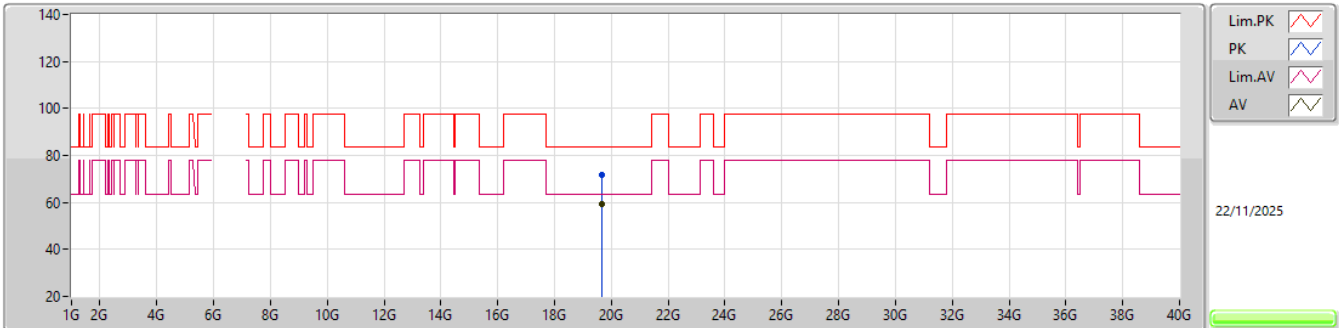


EUT V_2TX
Setting 27
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.68405G	71.61	83.54	-11.93	66.15	1	Vertical	257	1.66	-	37.74	17.19	49.47			
AV	19.68545G	59.30	63.54	-4.24	53.84	1	Vertical	257	1.66	-	37.74	17.19	49.47			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6565MHz_TX

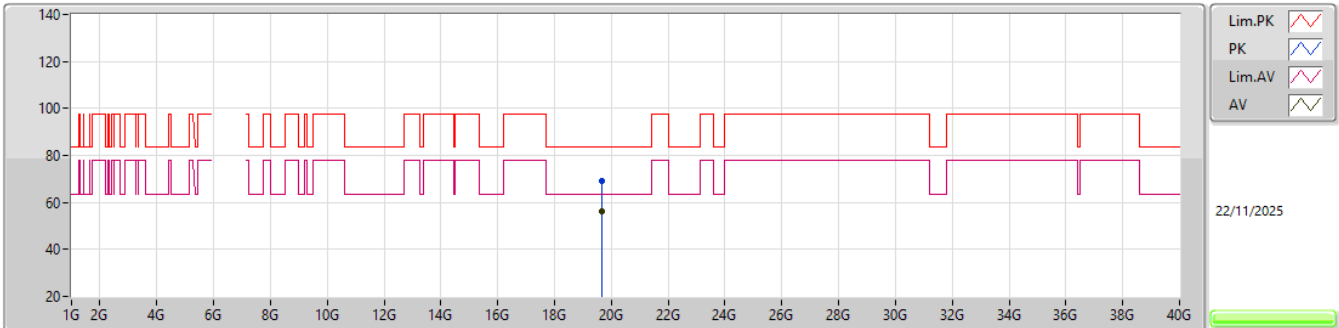EUT V_2TX
Setting 27
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.6861G	68.88	83.54	-14.66	63.42	1	Horizontal	223	1.60	-	37.74	17.19	49.47			
AV	19.6848G	56.46	63.54	-7.08	51.00	1	Horizontal	223	1.60	-	37.74	17.19	49.47			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6685MHz_TX

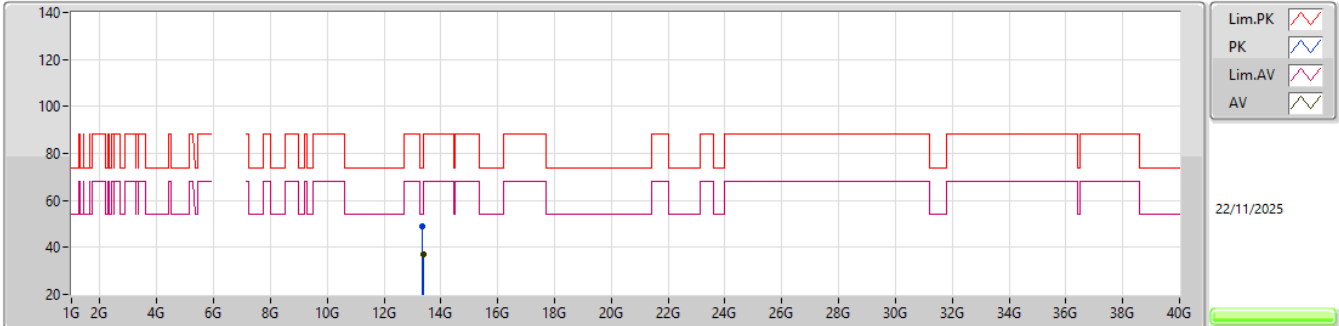


EUT V_2TX
Setting 27
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.36495G	49.16	74.00	-24.84	37.46	3	Vertical	201	2.14	-	39.70	15.29	43.29			
RMS	13.374G	37.14	54.00	-16.86	25.43	3	Vertical	201	2.14	-	39.70	15.30	43.29			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6685MHz_TX

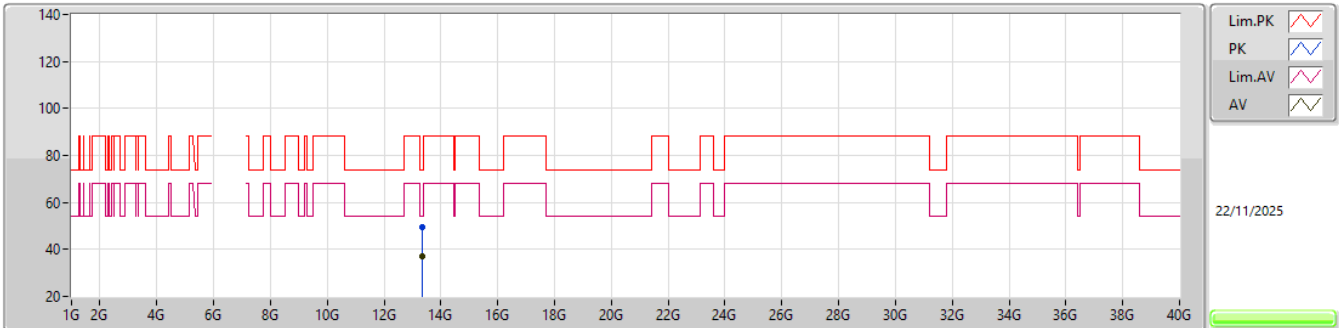EUT_V_2TX
Setting 27
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.35255G	49.73	74.00	-24.27	38.05	3	Horizontal	229	2.22	-	39.70	15.27	43.29			
RMS	13.35015G	37.12	54.00	-16.88	25.45	3	Horizontal	229	2.22	-	39.70	15.27	43.30			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6685MHz_TX

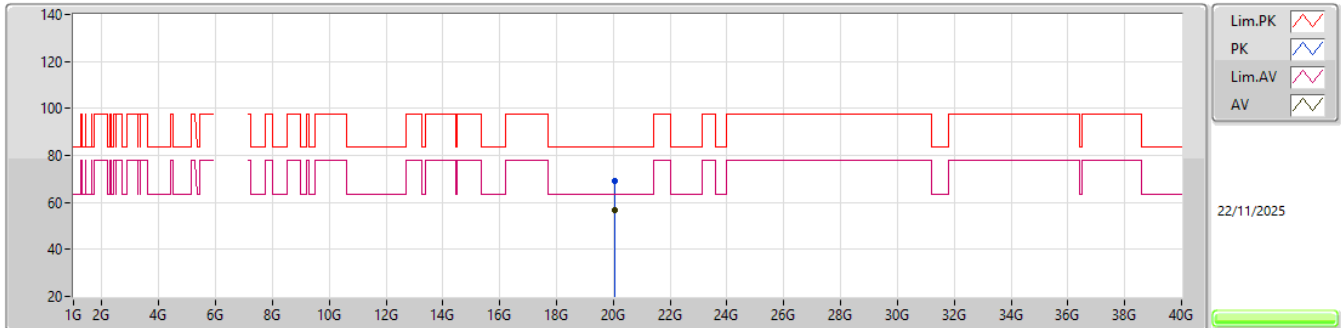EUT V_2TX
Setting 27
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.04555G	68.96	83.54	-14.58	63.22	1	Vertical	176	1.95	-	37.62	17.38	49.26			
AV	20.0447G	56.95	63.54	-6.59	51.21	1	Vertical	176	1.95	-	37.62	17.38	49.26			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6685MHz_TX

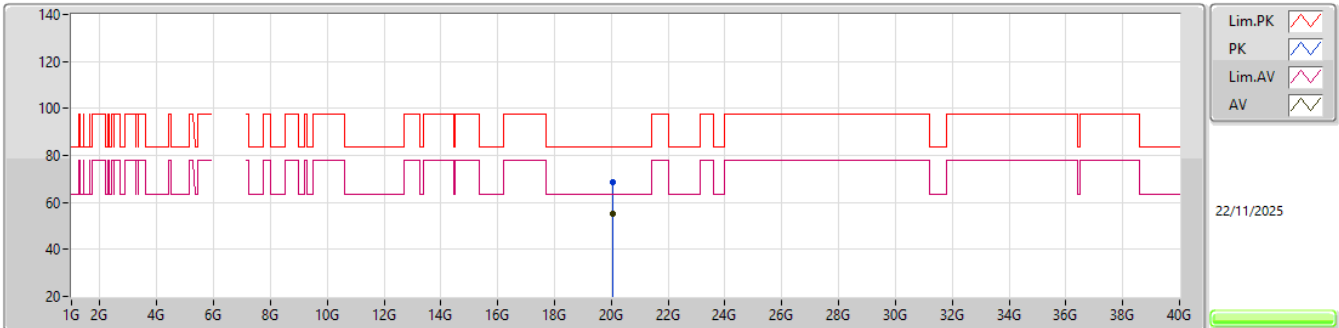EUT_V_2TX
Setting 27
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.0412G	68.80	83.54	-14.74	63.04	1	Horizontal	264	1.80	-	37.64	17.38	49.26			
AV	20.04185G	55.29	63.54	-8.25	49.54	1	Horizontal	264	1.80	-	37.63	17.38	49.26			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6845MHz_TX

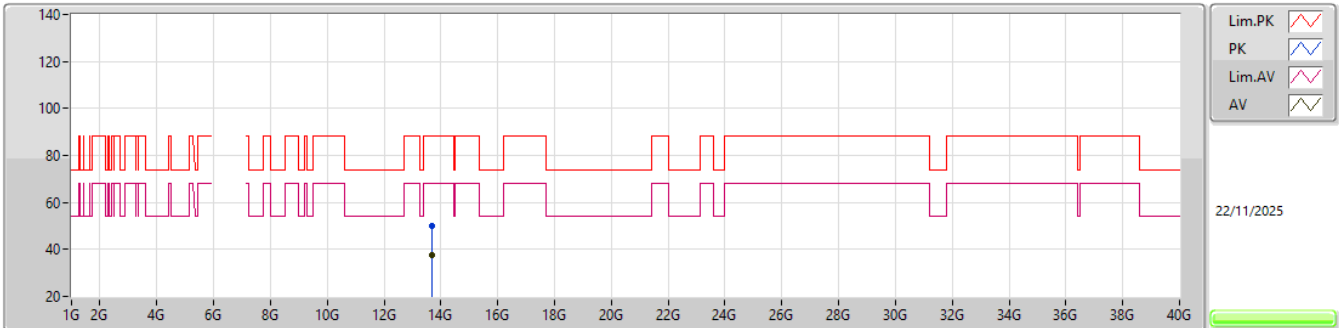


EUT V_2TX
Setting 27
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.6708G	49.80	88.20	-38.40	37.21	3	Vertical	164	1.42	-	40.20	15.67	43.28			
RMS	13.66765G	37.74	68.20	-30.46	25.15	3	Vertical	164	1.42	-	40.20	15.67	43.28			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6845MHz_TX

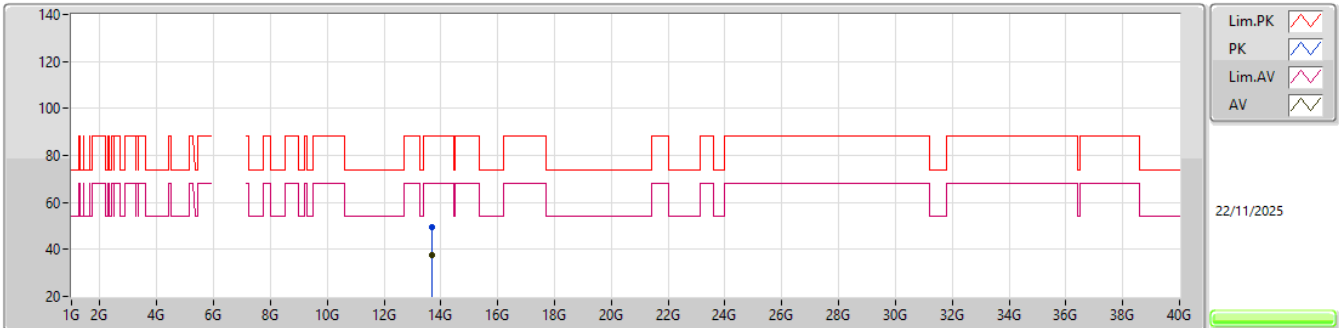EUT_V_2TX
Setting 27
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.7004G	49.61	88.20	-38.59	36.99	3	Horizontal	109	1.02	-	40.20	15.71	43.29			
RMS	13.666G	37.79	68.20	-30.41	25.21	3	Horizontal	109	1.02	-	40.20	15.66	43.28			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6845MHz_TX

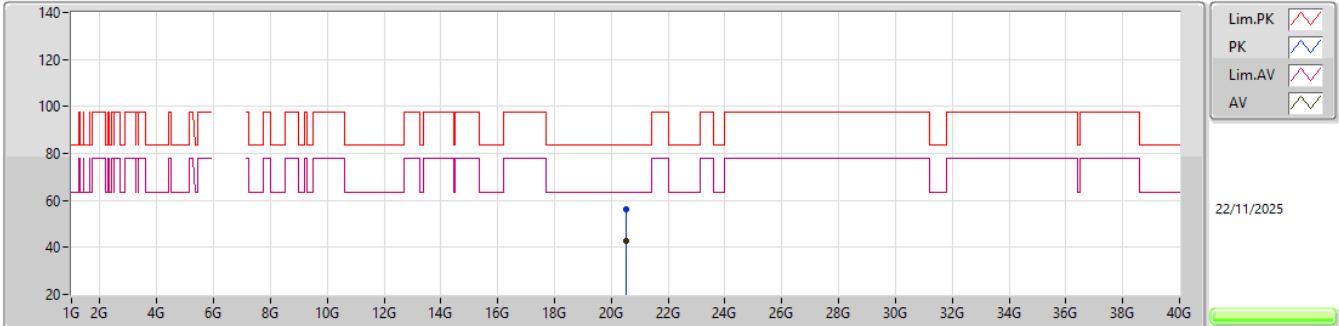


EUT V_2TX
Setting 27
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.53265G	56.20	83.54	-27.34	50.27	1	Vertical	262	1.70	-	37.70	17.44	49.21			
AV	20.54115G	42.62	63.54	-20.92	36.68	1	Vertical	262	1.70	-	37.70	17.45	49.21			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6845MHz_TX

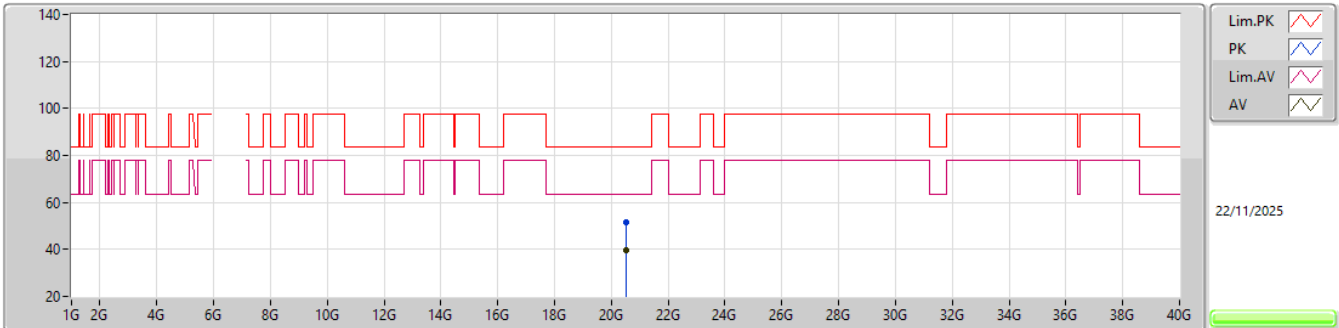


EUT V_2TX
Setting 27
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.5406G	51.42	83.54	-32.12	45.48	1	Horizontal	298	2.28	-	37.70	17.45	49.21			
AV	20.52355G	39.46	63.54	-24.08	33.54	1	Horizontal	298	2.28	-	37.70	17.44	49.22			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5985MHz_TX

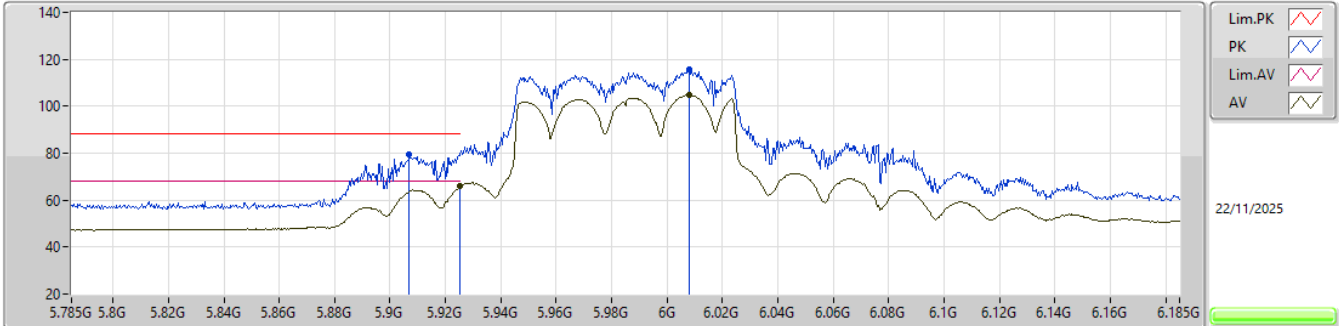


EUT_V_2TX
Setting 20
04-W-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.907G	79.45	88.20	-8.75	81.41	3	Vertical	190	1.80	-	32.30	9.03	43.29			
RMS	5.925G	65.84	68.20	-2.36	67.77	3	Vertical	190	1.80	-	32.30	9.05	43.28			
PK	6.0078G	115.88	Inf	-Inf	117.53	3	Vertical	190	1.80	-	32.40	9.15	43.20			
RMS	6.0082G	104.86	Inf	-Inf	106.51	3	Vertical	190	1.80	-	32.40	9.15	43.20			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5985MHz_TX

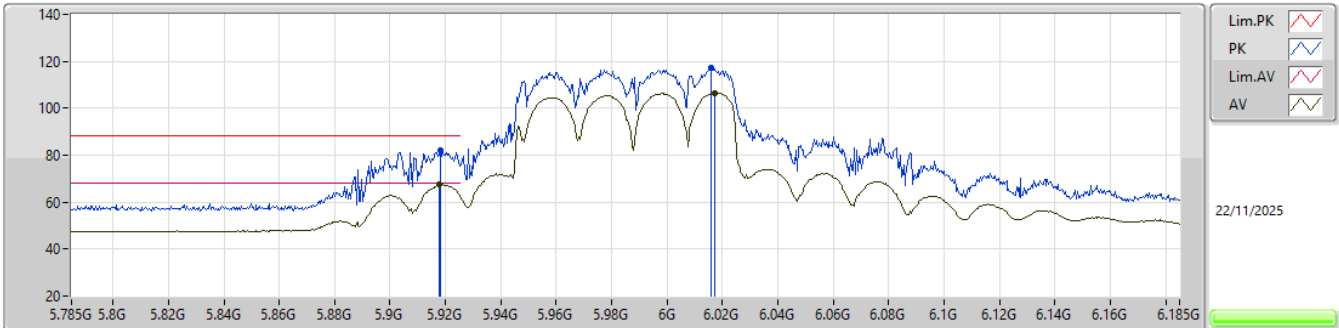


EUT V_2TX
Setting 20
04-W-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9182G	81.96	88.20	-6.24	83.89	3	Horizontal	183	1.80	-	32.30	9.05	43.28			
RMS	5.9178G	67.65	68.20	-0.55	69.58	3	Horizontal	183	1.80	-	32.30	9.05	43.28			
PK	6.0158G	117.16	Inf	-Inf	118.80	3	Horizontal	183	1.80	-	32.40	9.15	43.19			
RMS	6.0174G	106.63	Inf	-Inf	108.27	3	Horizontal	183	1.80	-	32.40	9.15	43.19			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5985MHz_TX

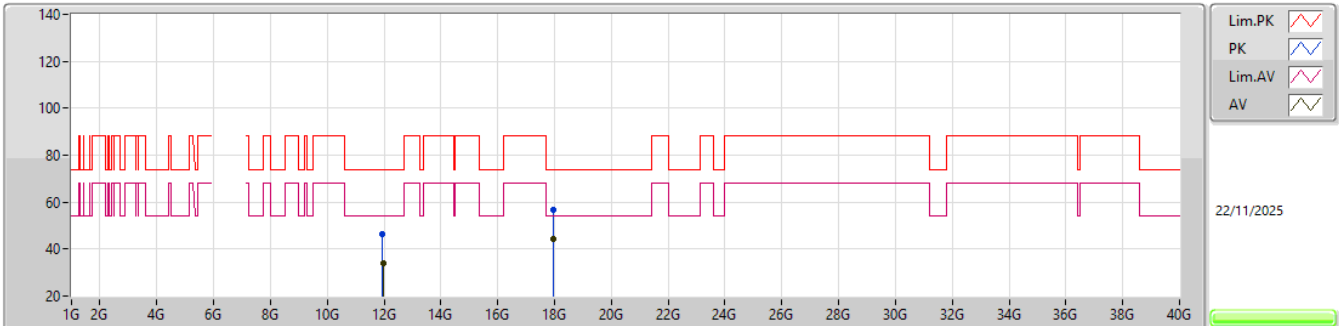


EUT V_2TX
Setting 20
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.95535G	46.23	74.00	-27.77	37.25	3	Vertical	69	2.62	-	38.81	13.56	43.39			
AV	11.97875G	34.19	54.00	-19.81	25.18	3	Vertical	69	2.62	-	38.86	13.57	43.42			
PK	17.97G	56.86	74.00	-17.14	34.11	3	Vertical	244	1.40	-	48.70	16.42	42.37			
AV	17.97795G	44.13	54.00	-9.87	21.13	3	Vertical	244	1.40	-	48.94	16.42	42.36			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX


5985MHz_TX

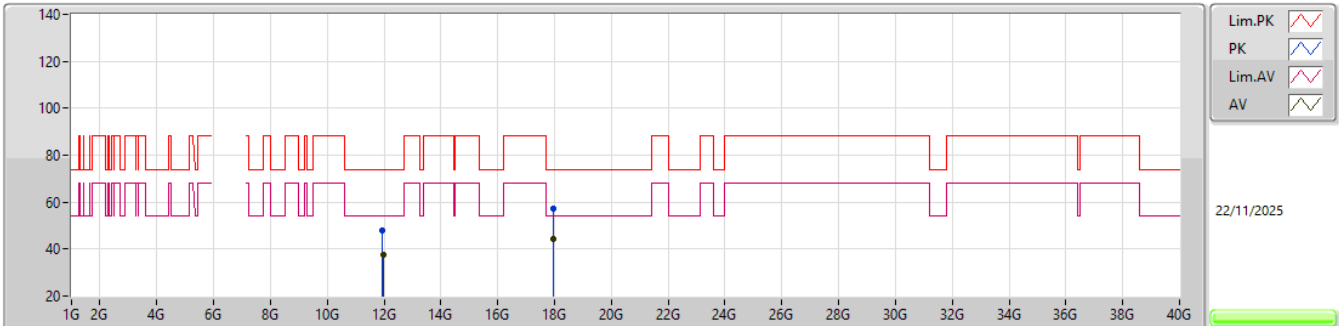EUT_V_2TX
Setting 20
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.94815G	47.99	74.00	-26.01	39.02	3	Horizontal	264	1.80	-	38.80	13.55	43.38			
AV	11.9701G	37.56	54.00	-16.44	28.56	3	Horizontal	264	1.80	-	38.84	13.57	43.41			
PK	17.976G	57.26	74.00	-16.74	34.32	3	Horizontal	175	1.80	-	48.88	16.42	42.36			
AV	17.9793G	44.41	54.00	-9.59	21.37	3	Horizontal	175	1.80	-	48.98	16.42	42.36			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX


5985MHz_TX

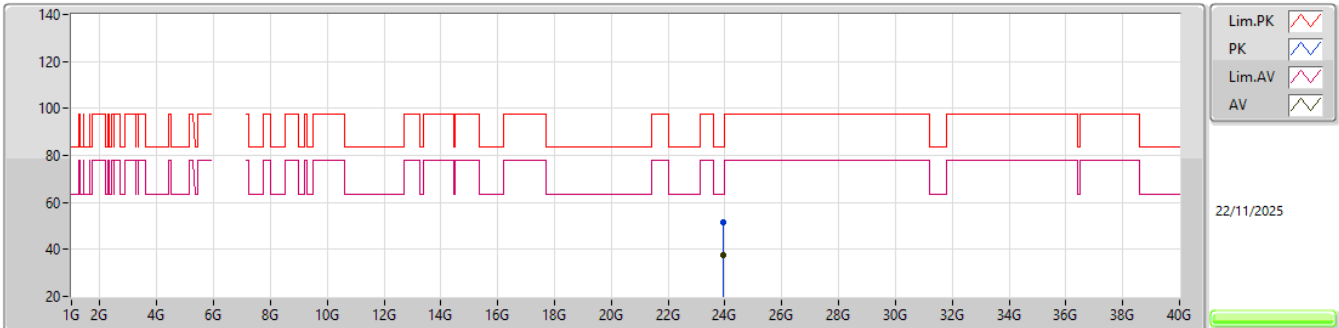EUT_V_2TX
Setting 20
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.9328G	51.36	83.54	-32.18	40.85	1	Vertical	292	1.62	-	38.83	18.77	47.09			
AV	23.9354G	37.59	63.54	-25.95	27.07	1	Vertical	292	1.62	-	38.84	18.77	47.09			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX


5985MHz_TX

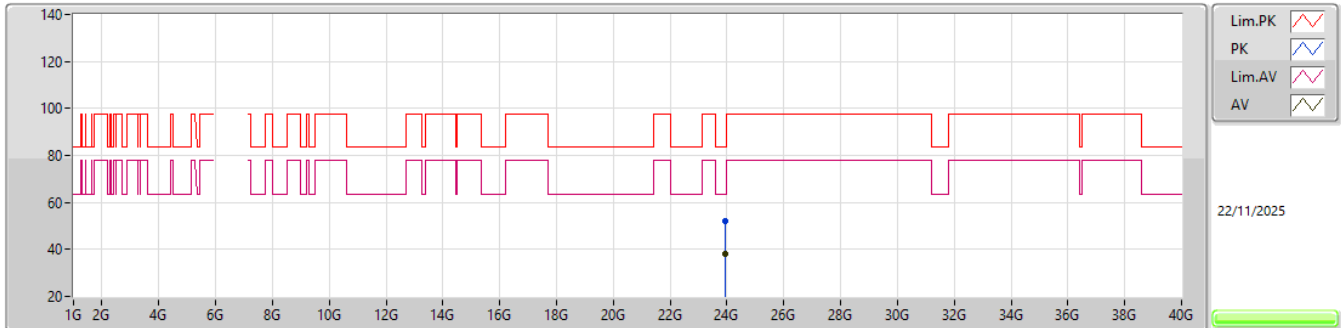EUT V_2TX
Setting 20
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.919G	52.14	83.54	-31.40	41.70	1	Horizontal	305	1.18	-	38.78	18.76	47.10			
AV	23.9345G	38.28	63.54	-25.26	27.76	1	Horizontal	305	1.18	-	38.84	18.77	47.09			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6225MHz_TX

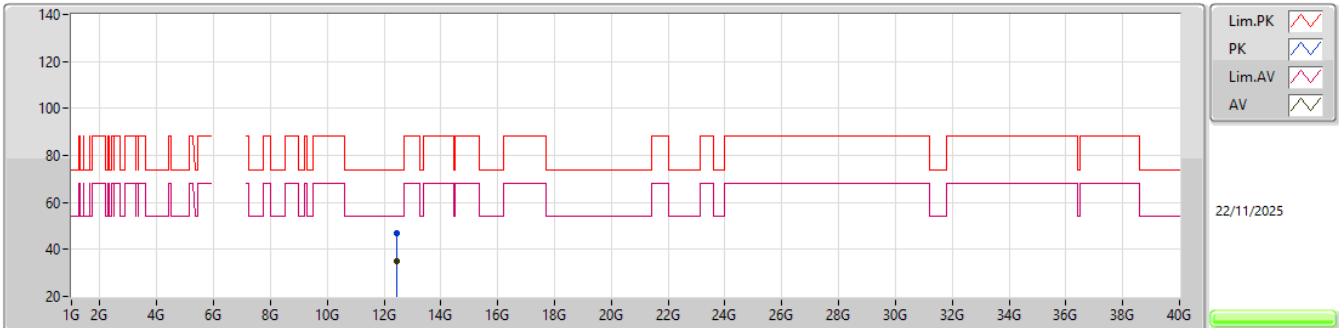


EUT V_2TX
Setting 27
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.4613G	46.69	74.00	-27.31	37.92	3	Vertical	195	1.80	-	38.40	14.16	43.79			
AV	12.4404G	34.89	54.00	-19.11	26.11	3	Vertical	195	1.80	-	38.42	14.14	43.78			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6225MHz_TX

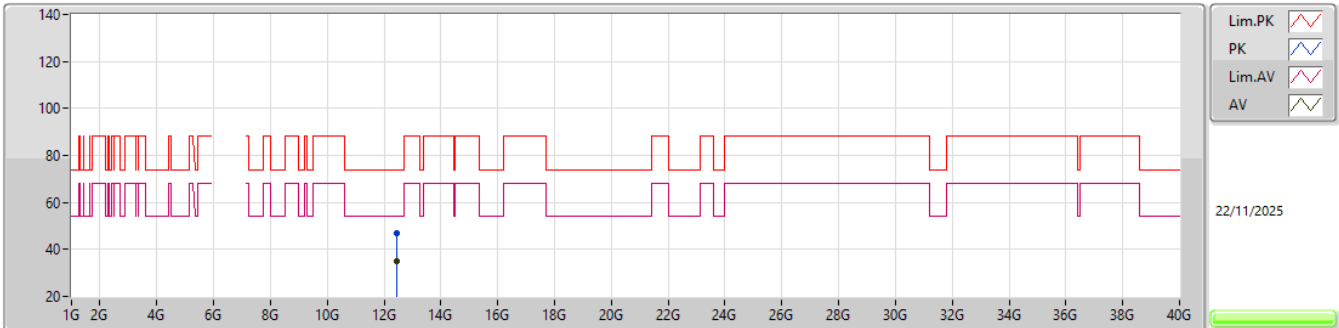EUT V_2TX
Setting 27
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.45315G	46.91	74.00	-27.09	38.15	3	Horizontal	285	2.35	-	38.40	14.15	43.79			
AV	12.43955G	34.86	54.00	-19.14	26.08	3	Horizontal	285	2.35	-	38.42	14.14	43.78			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6225MHz_TX

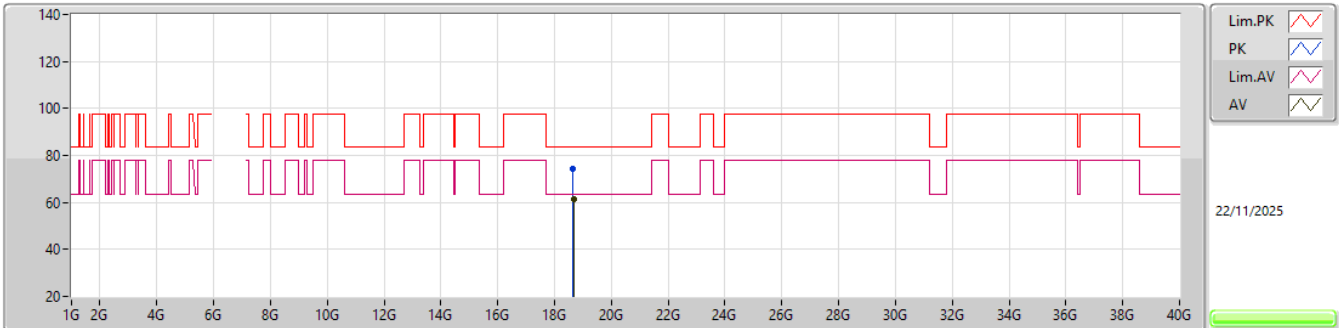


EUT V_2TX
Setting 27
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.66005G	74.13	83.54	-9.41	69.42	1	Vertical	253	1.64	-	37.68	16.62	49.59			
AV	18.6661G	61.60	63.54	-1.94	56.89	1	Vertical	253	1.64	-	37.67	16.62	49.58			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6225MHz_TX

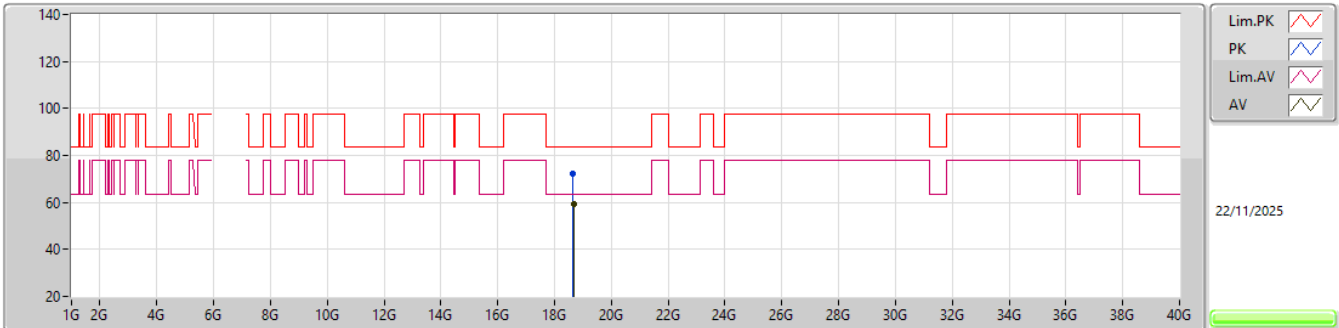EUT_V_2TX
Setting 27
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.6583G	72.47	83.54	-11.07	67.76	1	Horizontal	281	1.99	-	37.68	16.62	49.59			
AV	18.6778G	59.36	63.54	-4.18	54.66	1	Horizontal	281	1.99	-	37.64	16.63	49.57			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6385MHz_TX

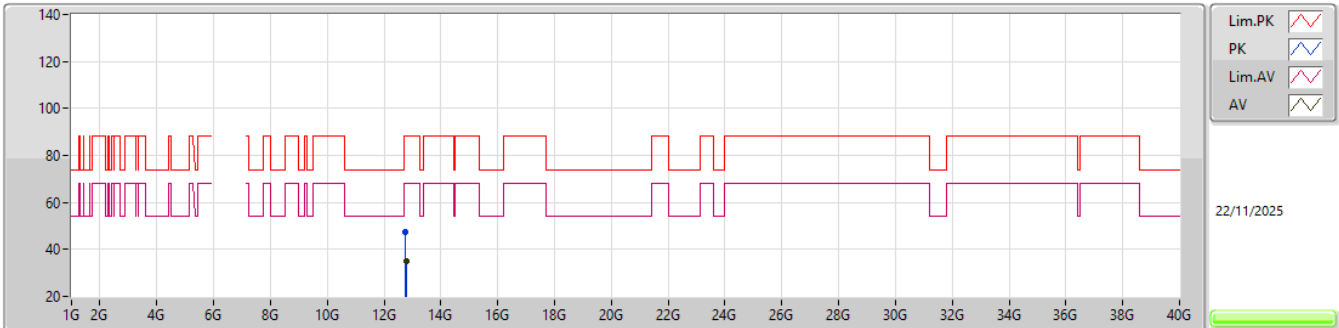EUT_V_2TX
Setting 27
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.7471G	47.59	88.20	-40.61	38.01	3	Vertical	293	1.54	-	38.70	14.52	43.64			
RMS	12.79245G	34.88	68.20	-33.32	24.95	3	Vertical	293	1.54	-	38.95	14.58	43.60			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6385MHz_TX

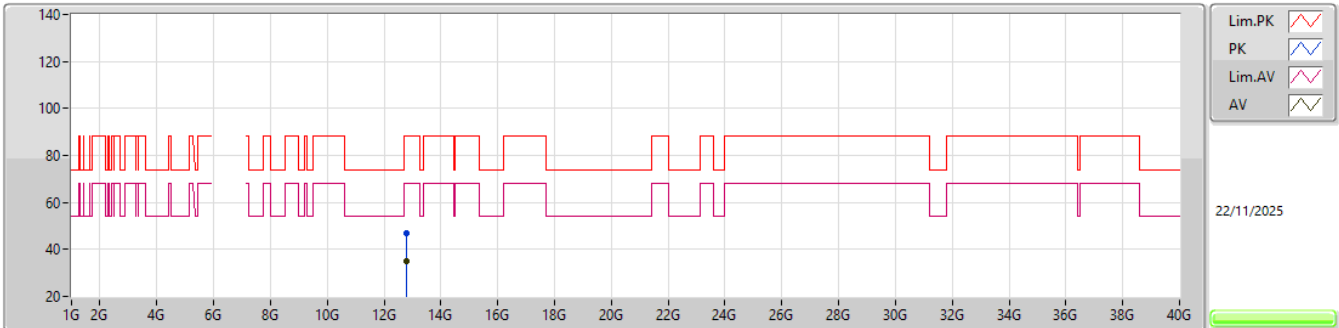EUT_V_2TX
Setting 27
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.78205G	46.74	88.20	-41.46	36.90	3	Horizontal	225	1.77	-	38.89	14.56	43.61			
RMS	12.7902G	34.91	68.20	-33.29	25.01	3	Horizontal	225	1.77	-	38.94	14.57	43.61			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6385MHz_TX

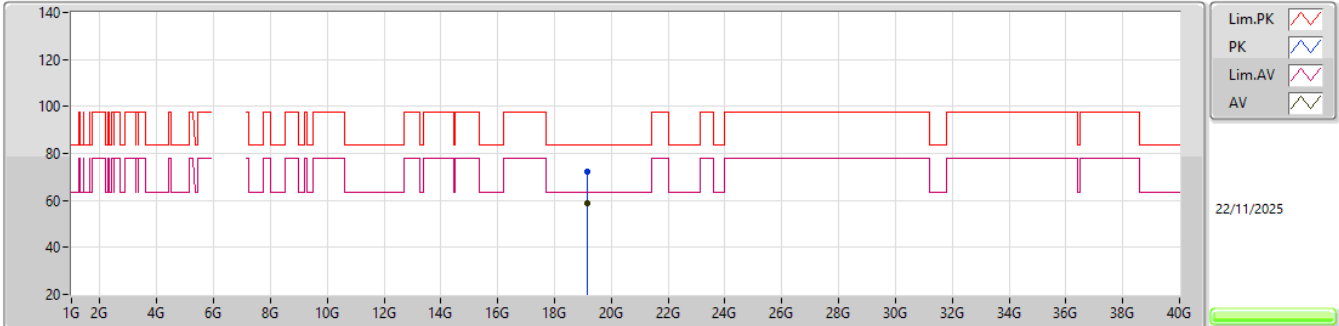


EUT V_2TX
Setting 27
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.14465G	72.28	83.54	-11.26	66.92	1	Vertical	254	1.63	-	37.88	16.87	49.39			
AV	19.14505G	58.57	63.54	-4.97	53.21	1	Vertical	254	1.63	-	37.88	16.87	49.39			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6385MHz_TX

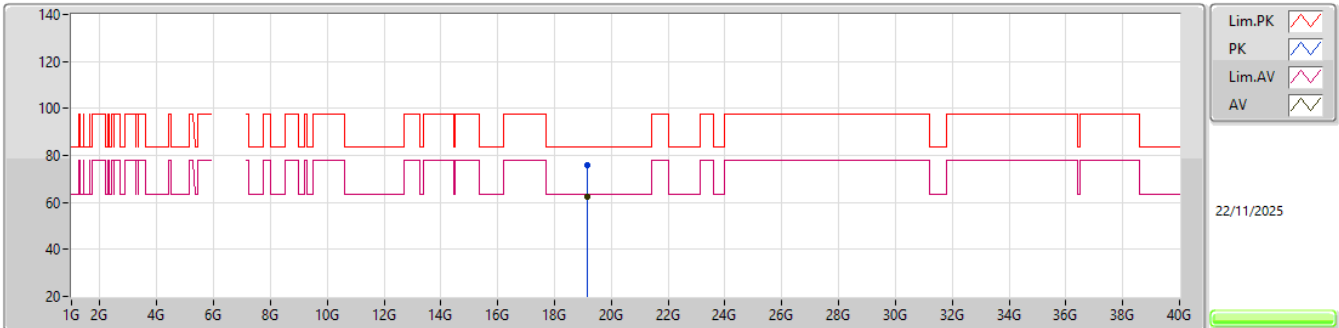EUT V_2TX
Setting 27
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.14365G	75.67	83.54	-7.87	70.32	1	Horizontal	279	1.86	-	37.87	16.87	49.39			
AV	19.1423G	62.21	63.54	-1.33	56.86	1	Horizontal	279	1.86	-	37.87	16.87	49.39			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6625MHz_TX

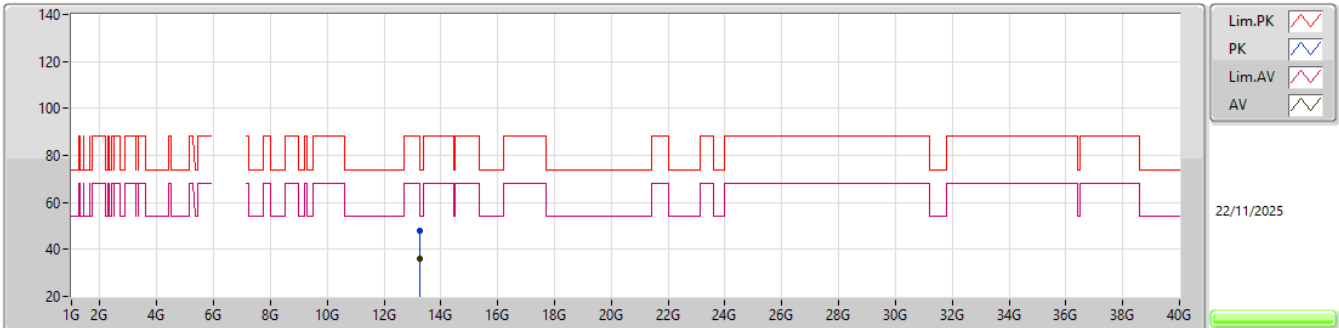EUT V_2TX
Setting 27
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.25485G	48.03	74.00	-25.97	37.00	3	Vertical	249	2.58	-	39.22	15.15	43.34			
AV	13.26985G	35.99	54.00	-18.01	24.87	3	Vertical	249	2.58	-	39.28	15.17	43.33			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6625MHz_TX

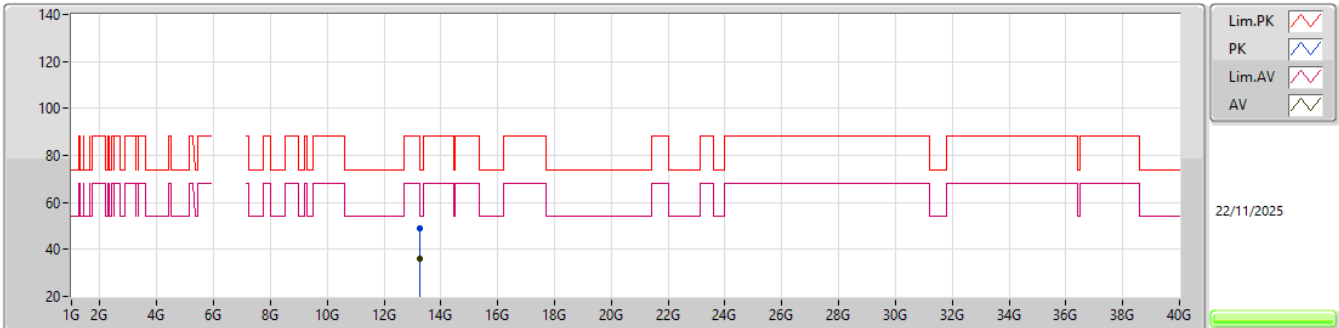EUT V_2TX
Setting 27
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.2569G	48.74	74.00	-25.26	37.70	3	Horizontal	24	2.18	-	39.23	15.15	43.34			
AV	13.2718G	35.99	54.00	-18.01	24.86	3	Horizontal	24	2.18	-	39.29	15.17	43.33			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6625MHz_TX

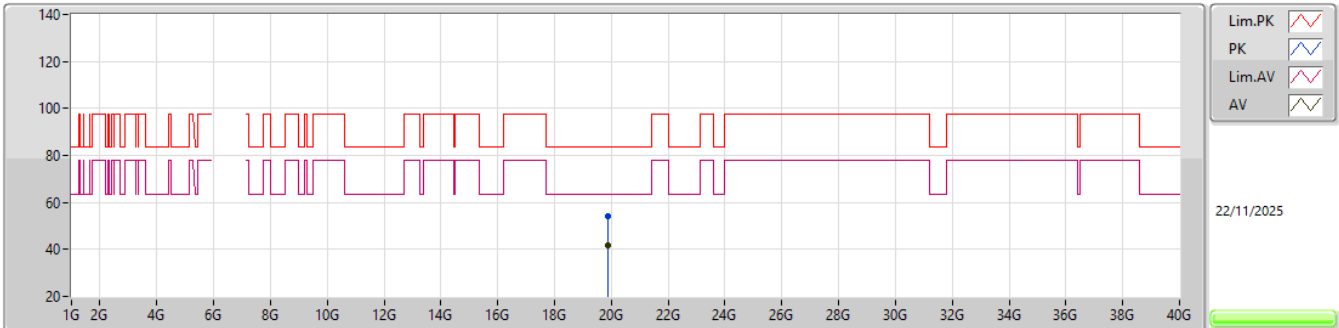EUT V_2TX
Setting 27
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.8628G	54.37	83.54	-29.17	48.76	1	Vertical	137	1.81	-	37.67	17.29	49.35			
AV	19.86255G	41.74	63.54	-21.80	36.13	1	Vertical	137	1.81	-	37.67	17.29	49.35			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6625MHz_TX

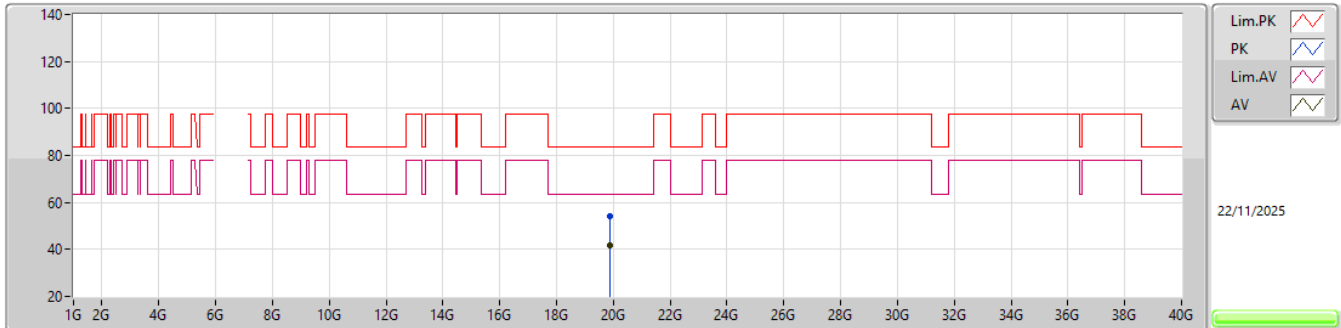EUT_V_2TX
Setting 27
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.86255G	53.88	83.54	-29.66	48.27	1	Horizontal	322	2.15	-	37.67	17.29	49.35			
AV	19.86385G	41.71	63.54	-21.83	36.10	1	Horizontal	322	2.15	-	37.67	17.29	49.35			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6705MHz_TX

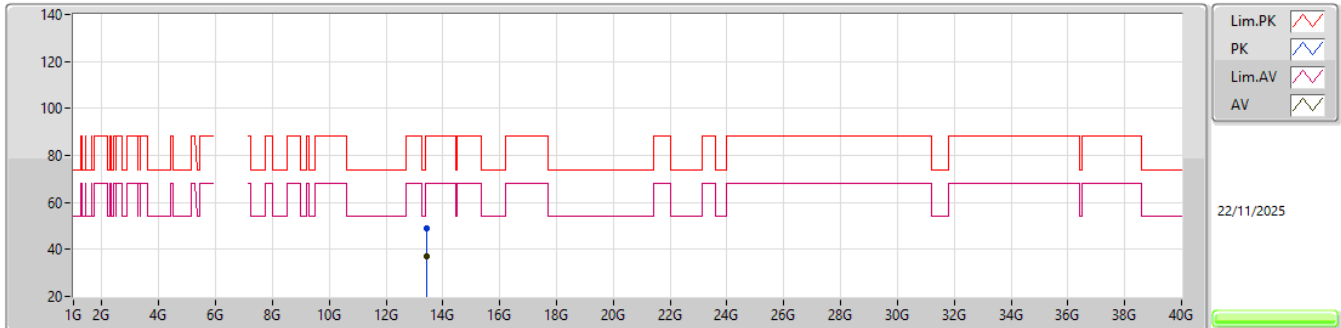EUT_V_2TX
Setting 27
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.41765G	49.13	88.20	-39.07	37.24	3	Vertical	313	2.37	-	39.81	15.35	43.27			
RMS	13.43145G	37.14	68.20	-31.06	25.14	3	Vertical	313	2.37	-	39.89	15.37	43.26			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6705MHz_TX

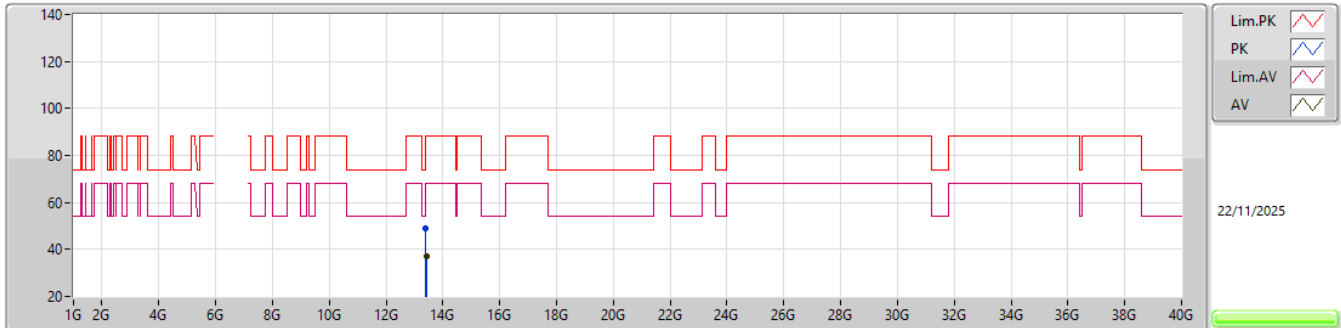EUT_V_2TX
Setting 27
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.4036G	48.83	88.20	-39.37	37.04	3	Horizontal	285	1.91	-	39.72	15.34	43.27			
RMS	13.43385G	37.00	68.20	-31.20	24.98	3	Horizontal	285	1.91	-	39.90	15.38	43.26			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6705MHz_TX

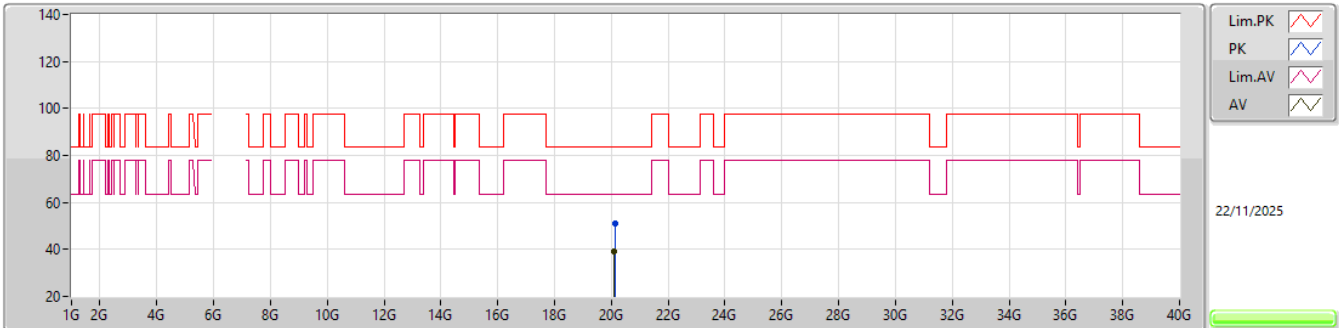EUT_V_2TX
Setting 27
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.12595G	51.29	83.54	-32.25	45.45	1	Vertical	91	2.49	-	37.70	17.39	49.25			
AV	20.10625G	39.19	63.54	-24.35	33.36	1	Vertical	91	2.49	-	37.70	17.38	49.25			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6705MHz_TX

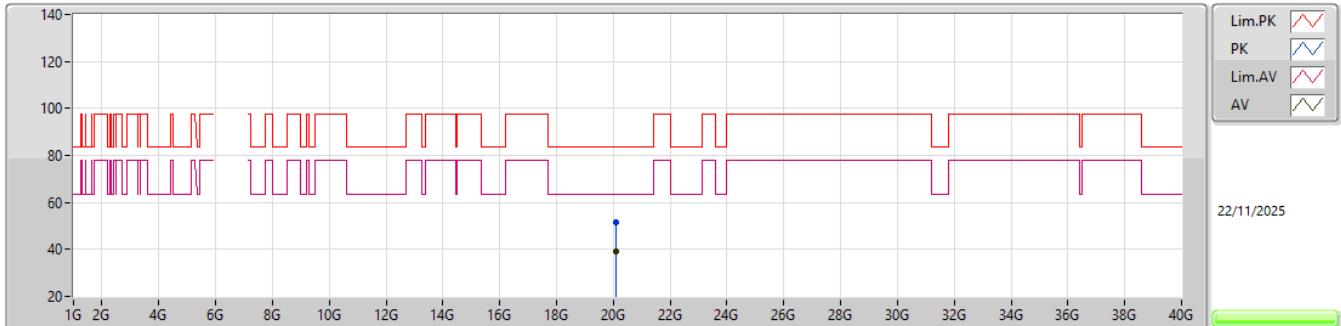


EUT V_2TX
Setting 27
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.10455G	51.56	83.54	-31.98	45.73	1	Horizontal	301	1.11	-	37.70	17.38	49.25			
AV	20.10545G	39.16	63.54	-24.38	33.33	1	Horizontal	301	1.11	-	37.70	17.38	49.25			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6785MHz_TX

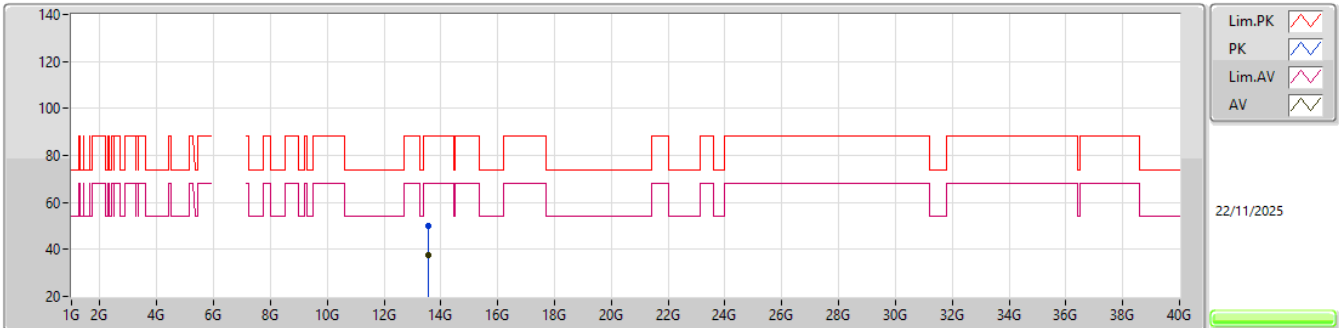EUT_V_2TX
Setting 27
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.54825G	50.05	88.20	-38.15	37.48	3	Vertical	267	1.51	-	40.29	15.52	43.24			
RMS	13.5498G	37.67	68.20	-30.53	25.09	3	Vertical	267	1.51	-	40.30	15.52	43.24			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6785MHz_TX

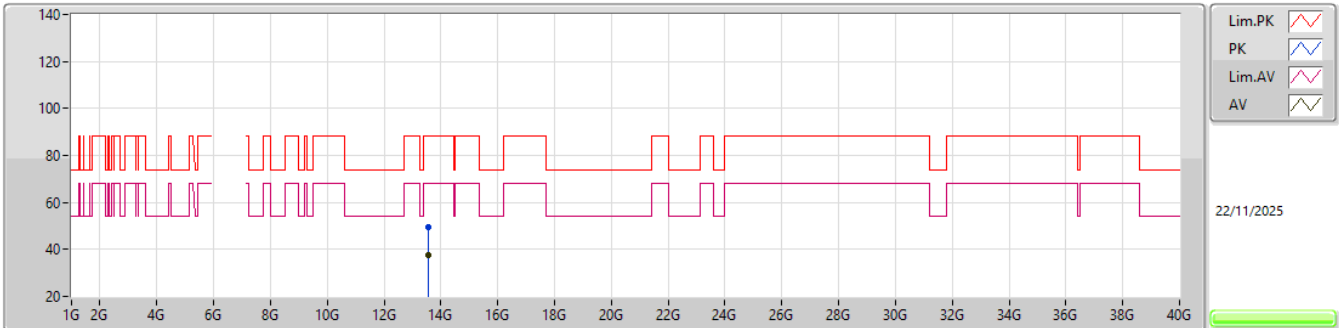EUT_V_2TX
Setting 27
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.57485G	49.36	88.20	-38.84	36.81	3	Horizontal	104	2.43	-	40.25	15.55	43.25			
RMS	13.55295G	37.70	68.20	-30.50	25.14	3	Horizontal	104	2.43	-	40.29	15.52	43.25			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6785MHz_TX

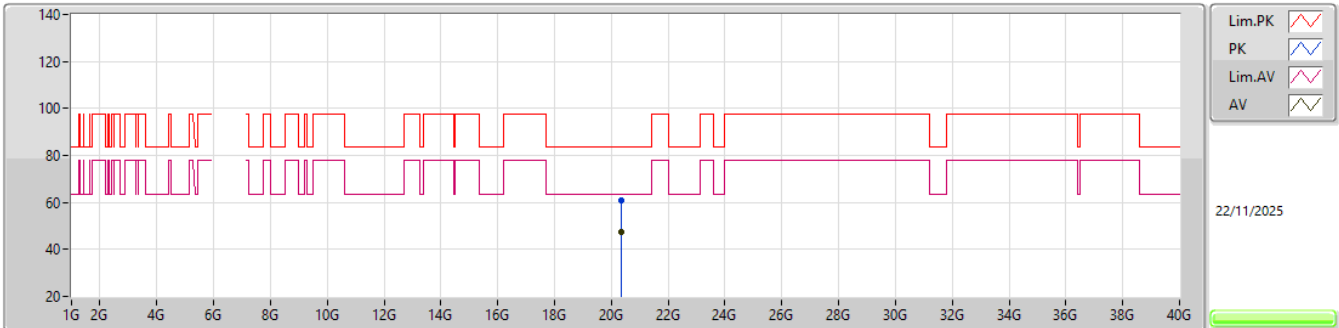EUT V_2TX
Setting 27
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.33215G	60.80	83.54	-22.74	54.86	1	Vertical	258	1.69	-	37.76	17.42	49.24			
AV	20.3425G	47.57	63.54	-15.97	41.61	1	Vertical	258	1.69	-	37.78	17.42	49.24			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6785MHz_TX

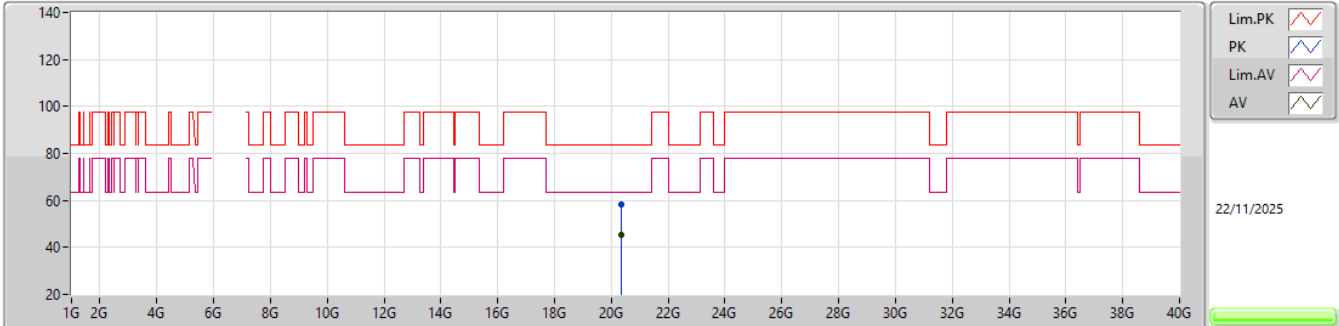


EUT V_2TX
Setting 27
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.33265G	58.46	83.54	-25.08	52.51	1	Horizontal	260	1.73	-	37.77	17.42	49.24			
AV	20.342G	45.10	63.54	-18.44	39.14	1	Horizontal	260	1.73	-	37.78	17.42	49.24			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6025MHz_TX

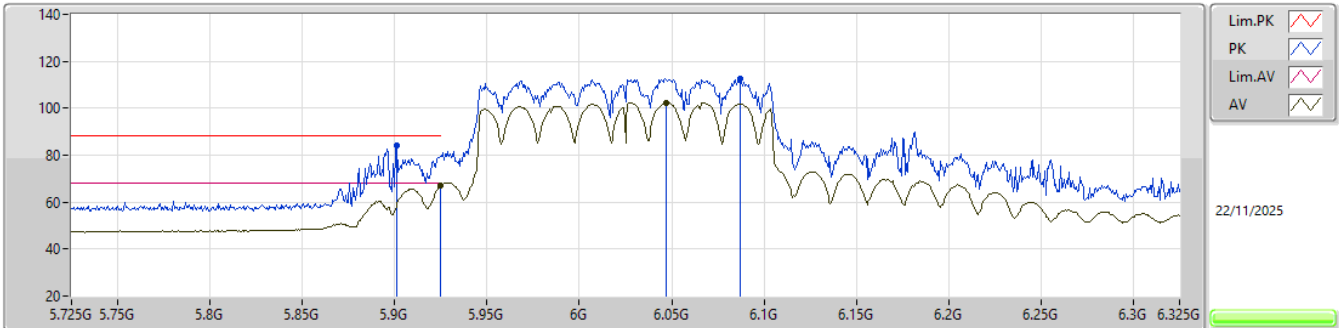


EUT_V_2TX
Setting 20.5
04-W-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9014G	84.22	88.20	-3.98	86.19	3	Vertical	178	1.80	-	32.30	9.03	43.30			
RMS	5.9248G	66.85	68.20	-1.35	68.78	3	Vertical	178	1.80	-	32.30	9.05	43.28			
PK	6.0874G	112.55	Inf	-Inf	114.05	3	Vertical	178	1.80	-	32.47	9.20	43.17			
RMS	6.0472G	102.34	Inf	-Inf	103.95	3	Vertical	178	1.80	-	32.40	9.17	43.18			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6025MHz_TX

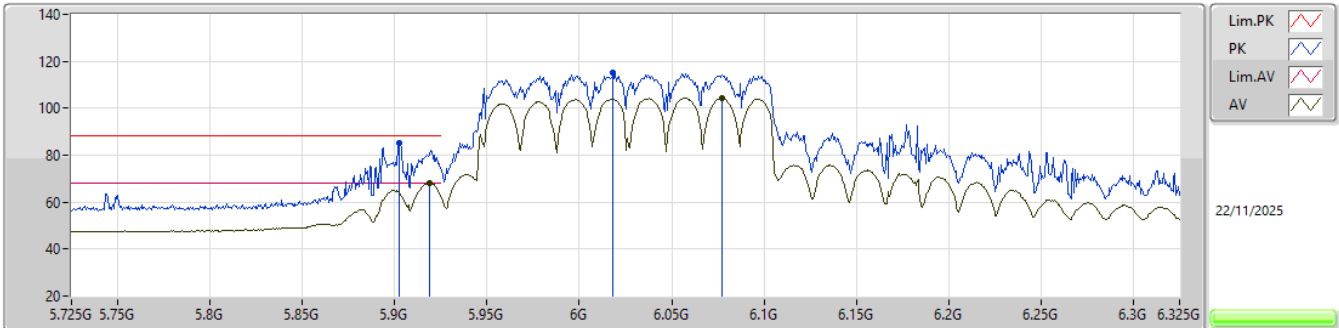


EUT_V_2TX
Setting 20.5
04-W-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9026G	85.19	88.20	-3.01	87.16	3	Horizontal	183	1.80	-	32.30	9.03	43.30			
RMS	5.9188G	68.08	68.20	-0.12	70.01	3	Horizontal	183	1.80	-	32.30	9.05	43.28			
PK	6.0184G	115.02	Inf	-Inf	116.66	3	Horizontal	183	1.80	-	32.40	9.15	43.19			
RMS	6.0772G	104.37	Inf	-Inf	105.90	3	Horizontal	183	1.80	-	32.45	9.19	43.17			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6025MHz_TX

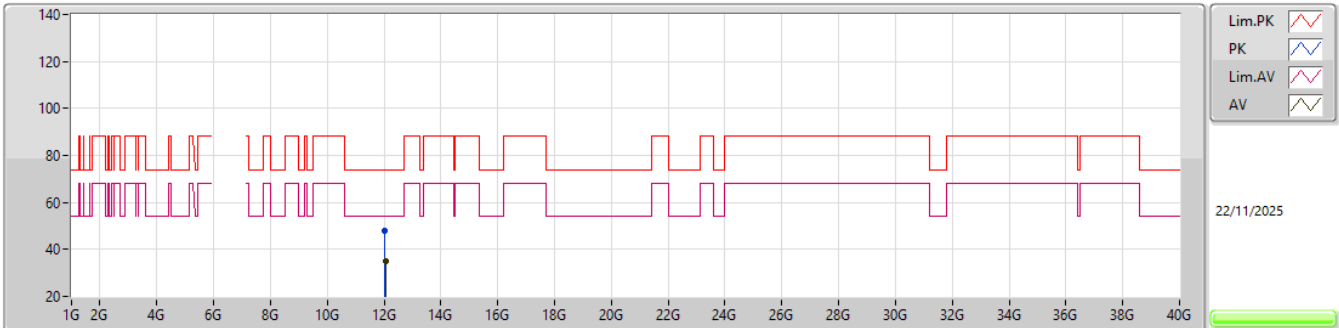


EUT_V_2TX
Setting 20.5
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.03705G	48.06	74.00	-25.94	38.93	3	Vertical	14	1.80	-	38.97	13.64	43.48			
AV	12.0566G	35.25	54.00	-18.75	26.05	3	Vertical	14	1.80	-	39.03	13.66	43.49			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6025MHz_TX

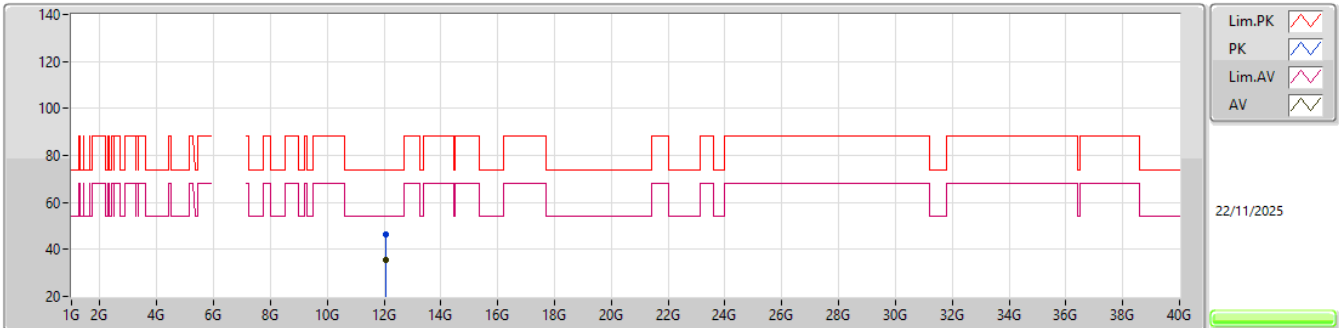EUT_V_2TX
Setting 20.5
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.05535G	46.41	74.00	-27.59	37.22	3	Horizontal	263	2.33	-	39.02	13.66	43.49			
AV	12.04985G	35.32	54.00	-18.68	26.16	3	Horizontal	263	2.33	-	39.00	13.65	43.49			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6025MHz_TX

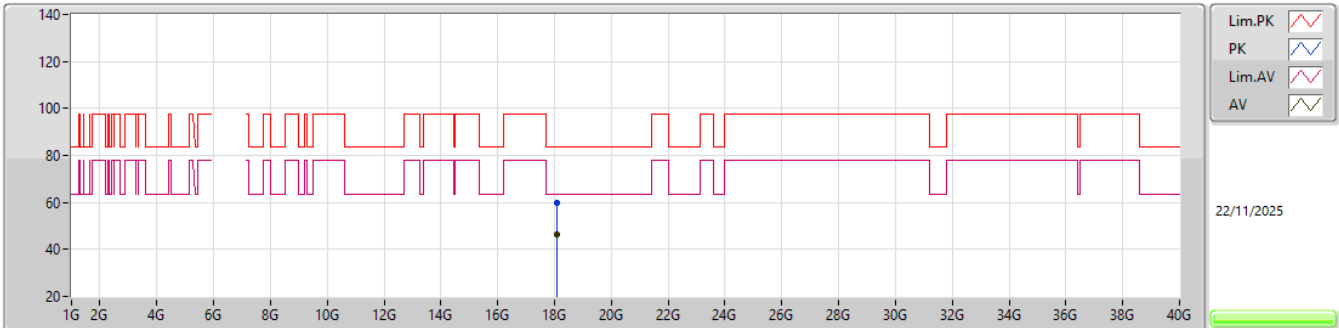


EUT V_2TX
Setting 20.5
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.0826G	59.78	83.54	-23.76	55.62	1	Vertical	305	1.02	-	37.37	16.32	49.53			
AV	18.0846G	46.50	63.54	-17.04	42.34	1	Vertical	305	1.02	-	37.37	16.32	49.53			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6025MHz_TX

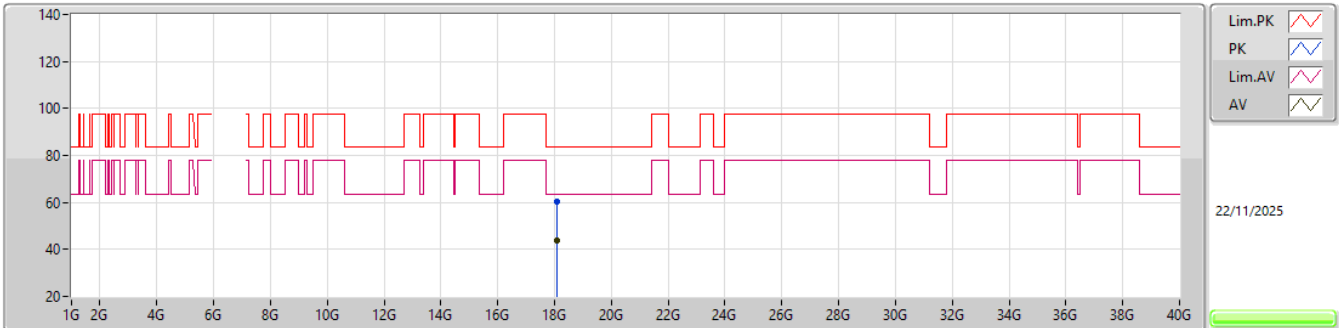EUT_V_2TX
Setting 20.5
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.0714G	60.21	83.54	-23.33	56.07	1	Horizontal	96	1.20	-	37.34	16.32	49.52			
AV	18.0858G	43.92	63.54	-19.62	39.76	1	Horizontal	96	1.20	-	37.37	16.32	49.53			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6185MHz_TX

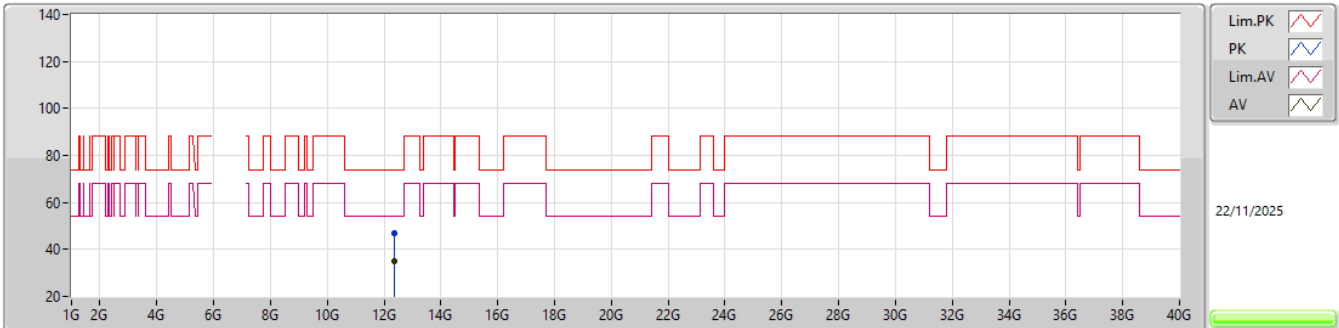EUT_V_2TX
Setting 26
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.36575G	46.76	74.00	-27.24	37.79	3	Vertical	286	1.63	-	38.64	14.05	43.72			
AV	12.35105G	34.85	54.00	-19.15	25.83	3	Vertical	286	1.63	-	38.70	14.03	43.71			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6185MHz_TX

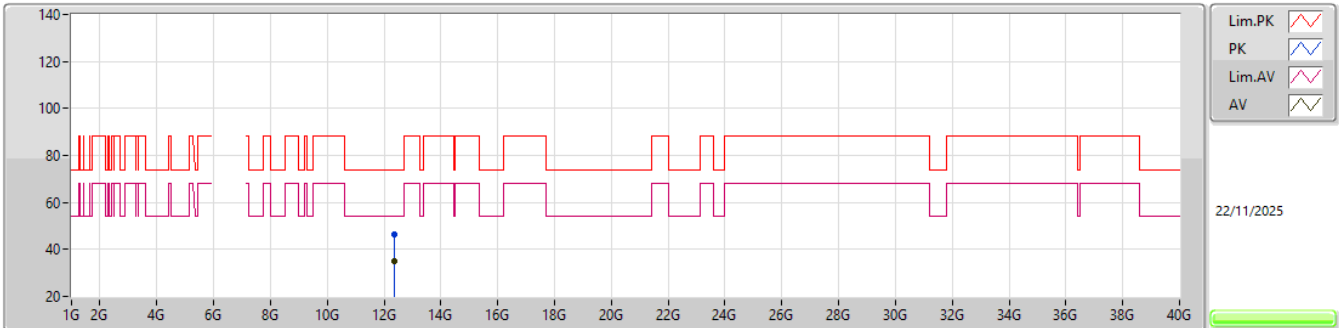EUT_V_2TX
Setting 26
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.3732G	46.57	74.00	-27.43	37.64	3	Horizontal	253	2.81	-	38.61	14.05	43.73			
AV	12.3527G	34.84	54.00	-19.16	25.83	3	Horizontal	253	2.81	-	38.69	14.03	43.71			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6185MHz_TX




EUT V_2TX
Setting 26
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.54525G	73.44	83.54	-10.10	68.95	1	Vertical	254	1.64	-	37.61	16.56	49.68			
AV	18.5456G	59.99	63.54	-3.55	55.50	1	Vertical	254	1.64	-	37.61	16.56	49.68			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6185MHz_TX

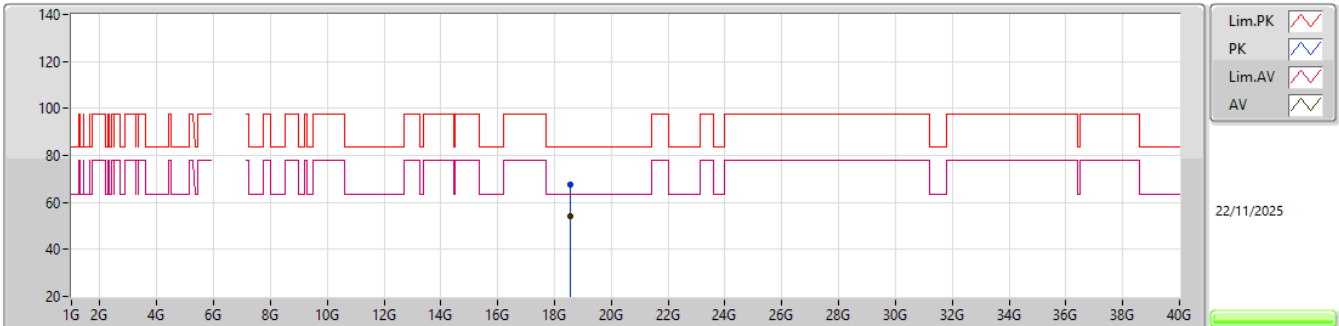EUT V_2TX
Setting 26
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.54655G	67.64	83.54	-15.90	63.15	1	Horizontal	257	1.80	-	37.61	16.56	49.68			
AV	18.5458G	54.08	63.54	-9.46	49.59	1	Horizontal	257	1.80	-	37.61	16.56	49.68			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6345MHz_TX

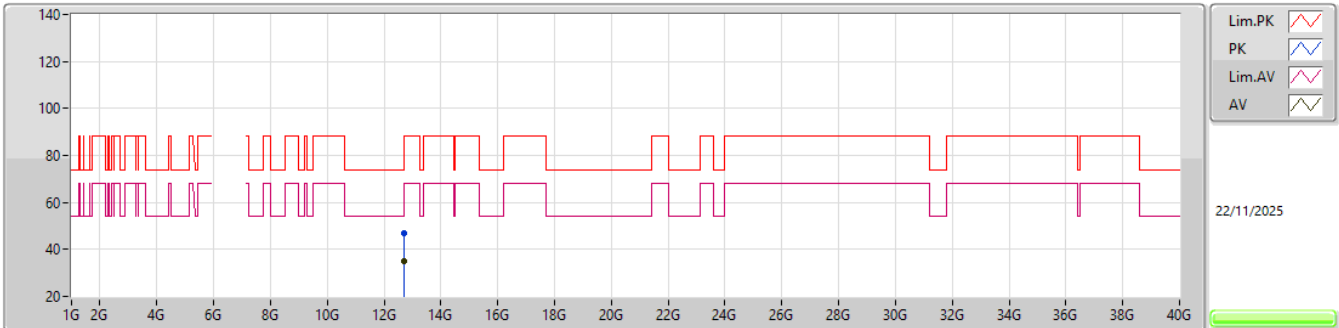EUT_V_2TX
Setting 26
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.70235G	47.10	88.20	-41.10	37.61	3	Vertical	62	2.23	-	38.70	14.46	43.67			
RMS	12.71125G	34.86	68.20	-33.34	25.34	3	Vertical	62	2.23	-	38.70	14.48	43.66			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6345MHz_TX

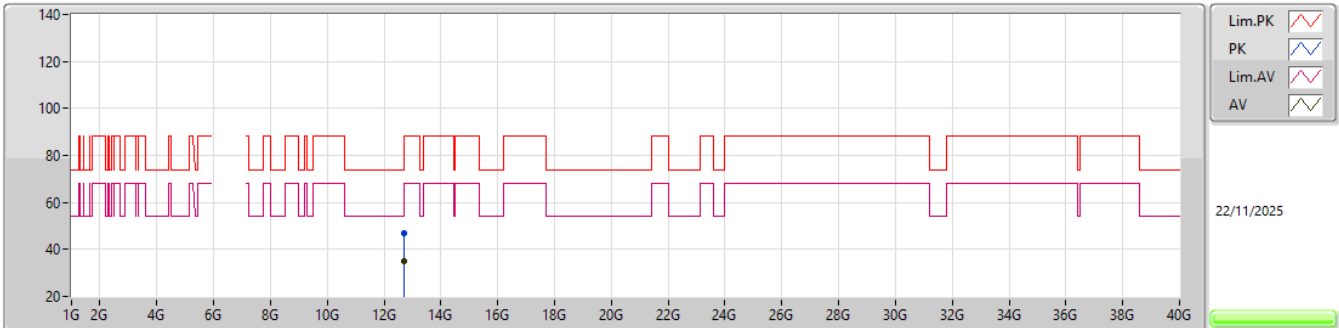EUT_V_2TX
Setting 26
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.70885G	46.98	88.20	-41.22	37.48	3	Horizontal	349	2.57	-	38.70	14.47	43.67			
RMS	12.71185G	34.99	68.20	-33.21	25.47	3	Horizontal	349	2.57	-	38.70	14.48	43.66			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6345MHz_TX

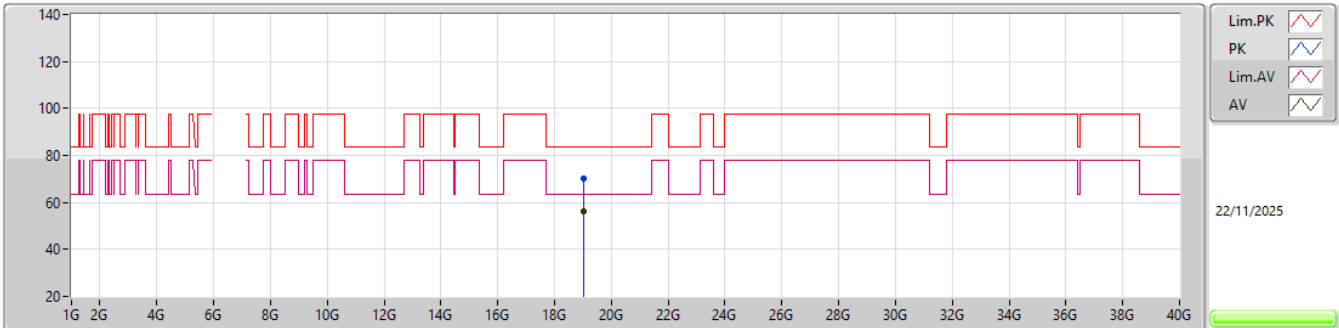EUT_V_2TX
Setting 26
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.0184G	70.02	83.54	-13.52	64.70	1	Vertical	285	2.07	-	37.84	16.80	49.32			
AV	19.03615G	56.46	63.54	-7.08	51.11	1	Vertical	285	2.07	-	37.87	16.81	49.33			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6345MHz_TX

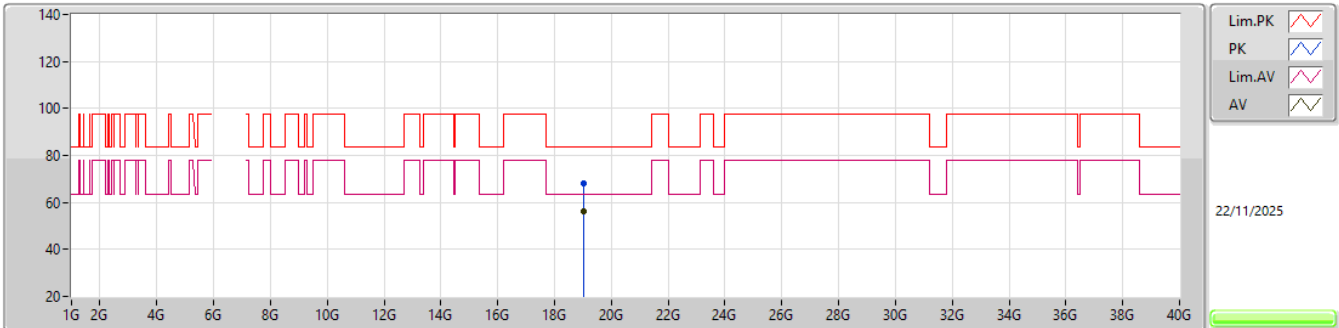EUT_V_2TX
Setting 26
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.01595G	68.29	83.54	-15.25	62.98	1	Horizontal	332	2.99	-	37.83	16.80	49.32			
AV	19.0171G	56.40	63.54	-7.14	51.09	1	Horizontal	332	2.99	-	37.83	16.80	49.32			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6665MHz_TX

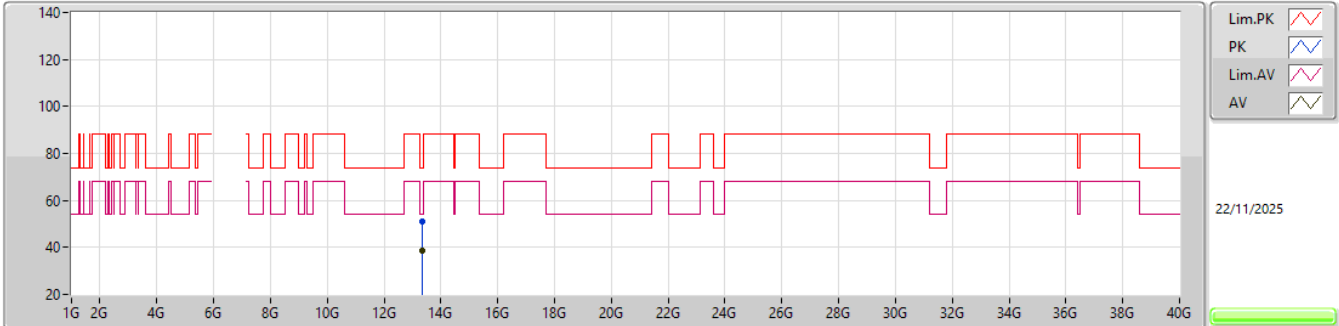


EUT V_2TX
Setting 26
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.32421G	51.29	74.00	-22.71	39.81	3	Vertical	48	1.61	-	39.55	15.24	43.31			
AV	13.33345G	38.79	54.00	-15.21	27.24	3	Vertical	48	1.61	-	39.60	15.25	43.30			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6665MHz_TX

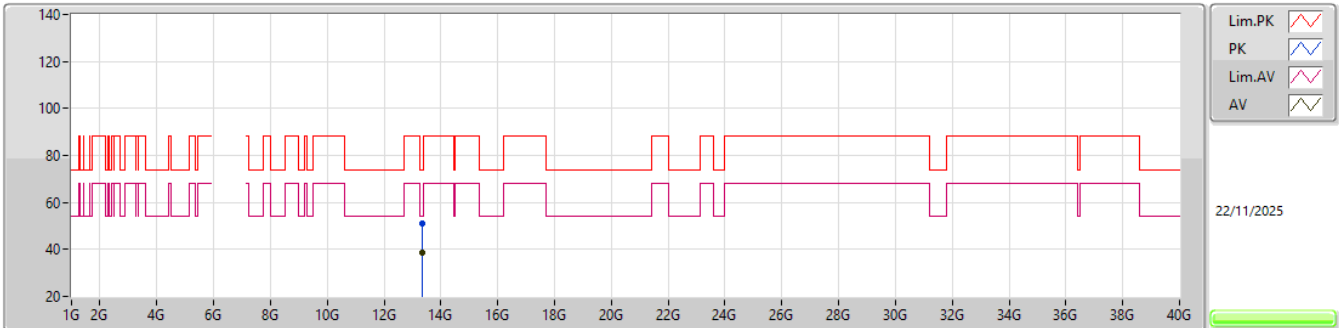EUT_V_2TX
Setting 26
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.34134G	51.03	74.00	-22.97	39.42	3	Horizontal	309	1.68	-	39.65	15.26	43.30			
AV	13.33336G	38.79	54.00	-15.21	27.24	3	Horizontal	309	1.68	-	39.60	15.25	43.30			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6665MHz_TX

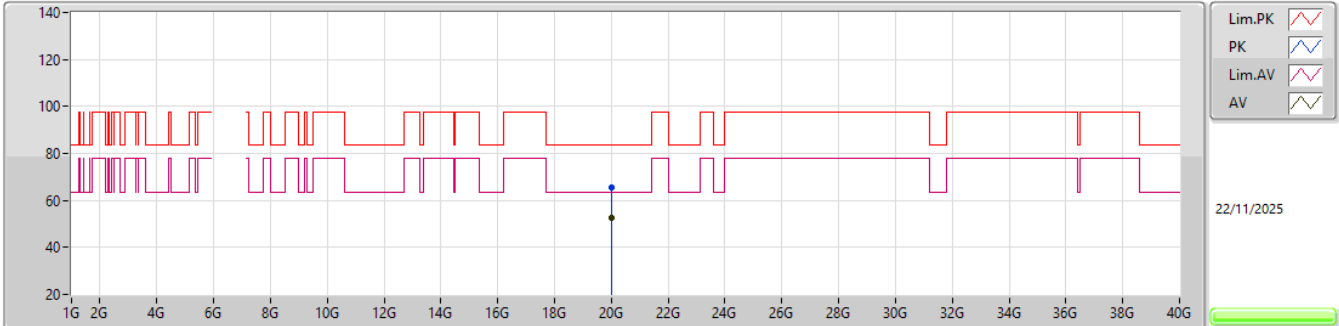


EUT V_2TX
Setting 26
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.99428G	65.75	83.54	-17.79	59.85	1	Vertical	264	1.60	-	37.79	17.37	49.26			
AV	19.99497G	52.63	63.54	-10.91	46.73	1	Vertical	264	1.60	-	37.79	17.37	49.26			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6665MHz_TX

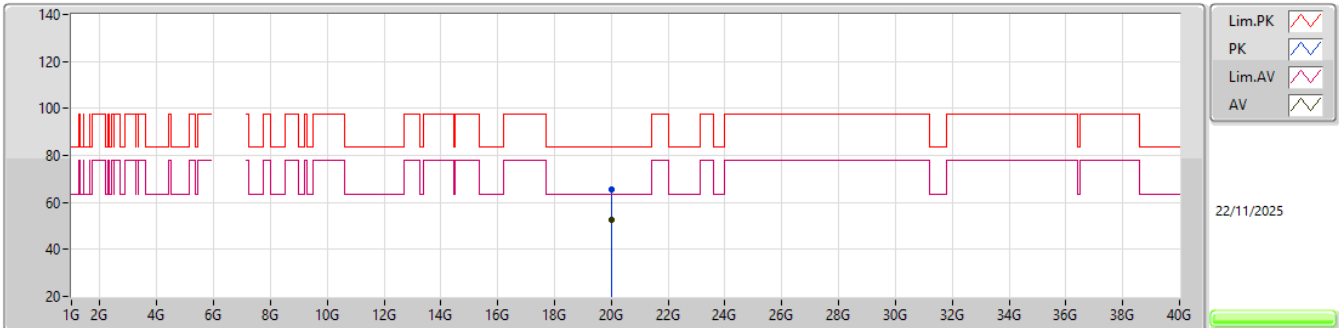EUT V_2TX
Setting 26
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.98942G	65.76	83.54	-17.78	59.89	1	Horizontal	99	1.45	-	37.78	17.36	49.27			
AV	20.00958G	52.61	63.54	-10.93	46.74	1	Horizontal	99	1.45	-	37.76	17.37	49.26			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX


6105MHz_TX

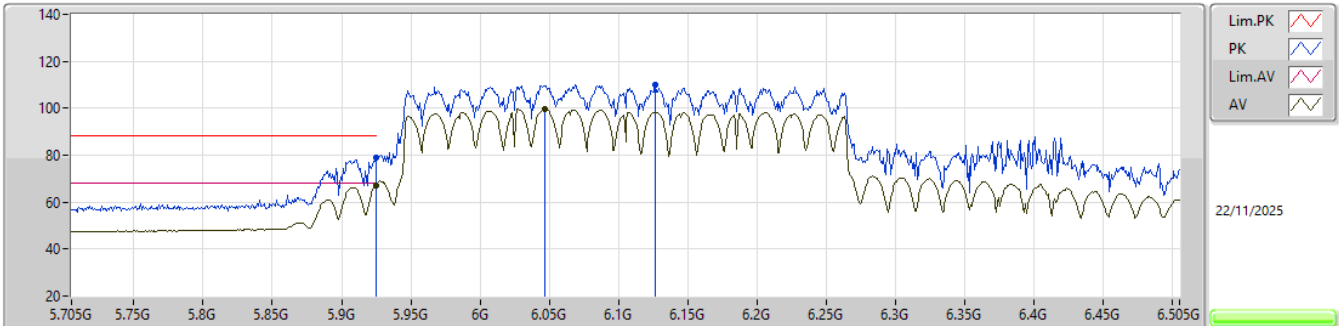EUT Y_2TX
Setting 21.5
04-W-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.925G	78.83	88.20	-9.37	80.76	3	Vertical	177	1.80	-	32.30	9.05	43.28			
RMS	5.925G	67.27	68.20	-0.93	69.20	3	Vertical	177	1.80	-	32.30	9.05	43.28			
PK	6.1266G	110.14	Inf	-Inf	111.53	3	Vertical	177	1.80	-	32.55	9.22	43.16			
RMS	6.0466G	99.52	Inf	-Inf	101.13	3	Vertical	177	1.80	-	32.40	9.17	43.18			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6105MHz_TX

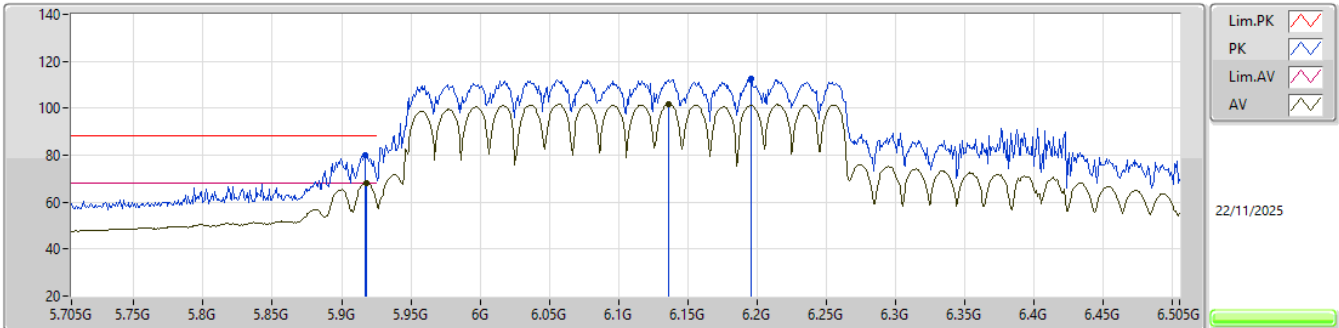


EUT_V_2TX
Setting 21.5
04-W-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.917G	79.94	88.20	-8.26	81.88	3	Horizontal	176	1.80	-	32.30	9.04	43.28			
RMS	5.9178G	68.06	68.20	-0.14	69.99	3	Horizontal	176	1.80	-	32.30	9.05	43.28			
PK	6.1954G	112.53	Inf	-Inf	113.61	3	Horizontal	176	1.80	-	32.78	9.27	43.13			
RMS	6.1362G	101.81	Inf	-Inf	103.16	3	Horizontal	176	1.80	-	32.57	9.23	43.15			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6105MHz_TX

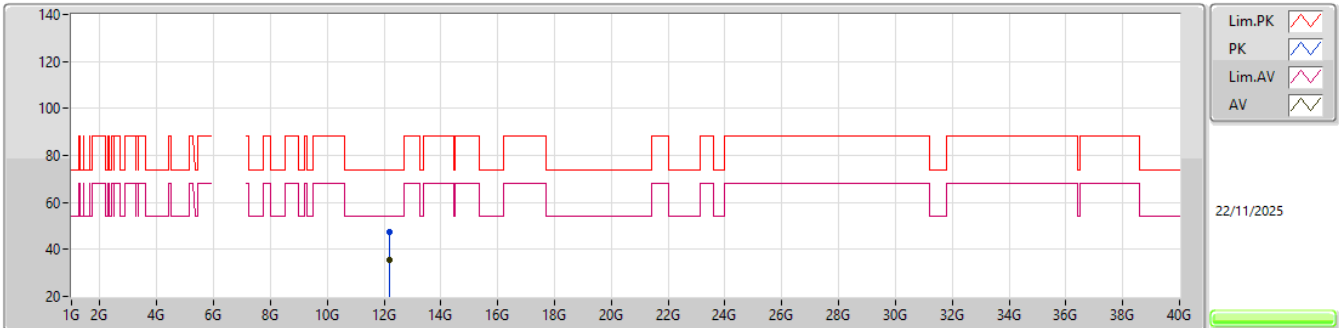


EUT V_2TX
Setting 21.5
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.2069G	47.43	74.00	-26.57	38.19	3	Vertical	97	2.49	-	38.99	13.85	43.60			
AV	12.2099G	35.60	54.00	-18.40	26.38	3	Vertical	97	2.49	-	38.98	13.85	43.61			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX


6105MHz_TX

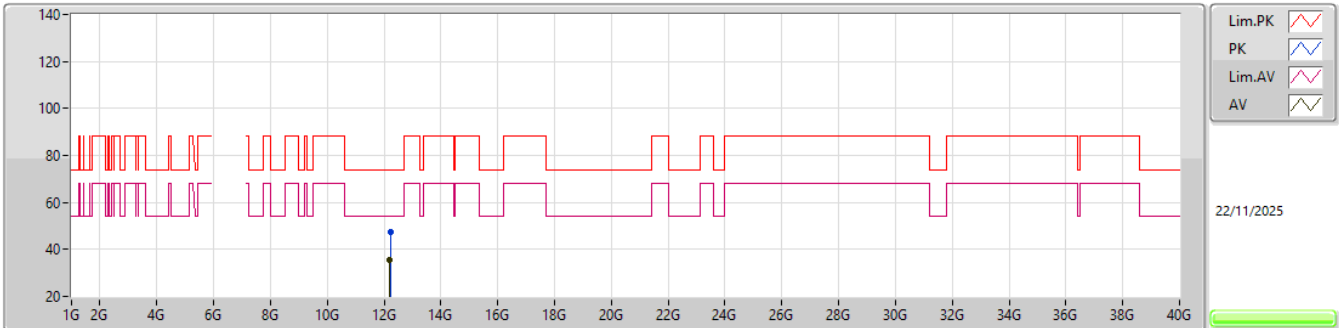EUT_V_2TX
Setting 21.5
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.233G	47.50	74.00	-26.50	38.31	3	Horizontal	84	1.46	-	38.93	13.88	43.62			
AV	12.2101G	35.57	54.00	-18.43	26.35	3	Horizontal	84	1.46	-	38.98	13.85	43.61			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6105MHz_TX

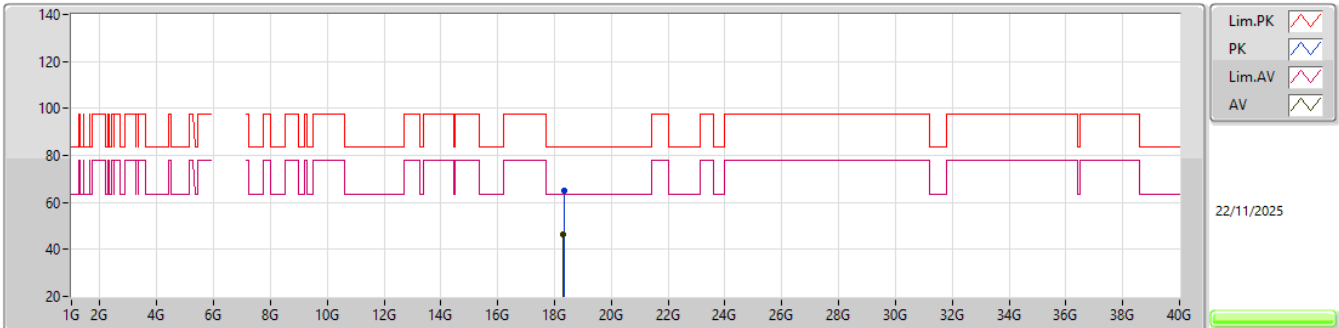


EUT V_2TX
Setting 21.5
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.33645G	65.07	83.54	-18.47	60.76	1	Vertical	19	2.95	-	37.50	16.45	49.64			
AV	18.30405G	46.61	63.54	-16.93	42.30	1	Vertical	19	2.95	-	37.50	16.44	49.63			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6105MHz_TX

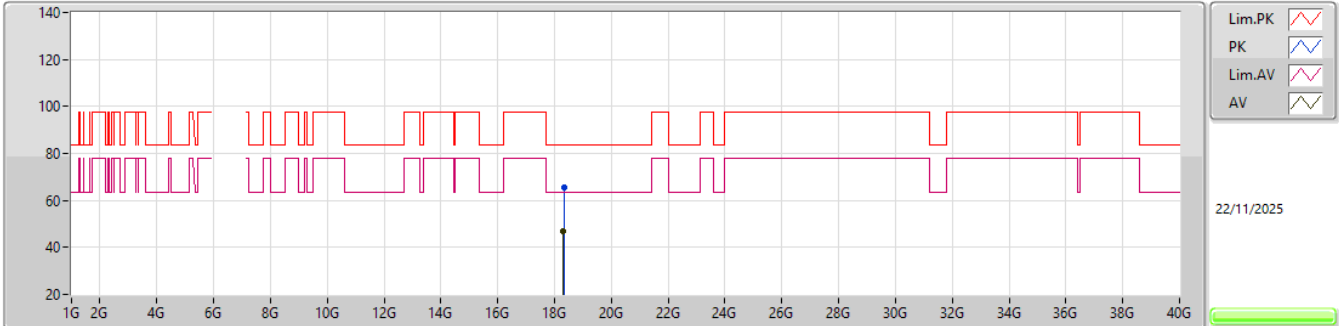


EUT V_2TX
Setting 21.5
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.3367G	65.34	83.54	-18.20	61.03	1	Horizontal	195	1.02	-	37.50	16.45	49.64			
AV	18.3046G	46.64	63.54	-16.90	42.33	1	Horizontal	195	1.02	-	37.50	16.44	49.63			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX


6265MHz_TX

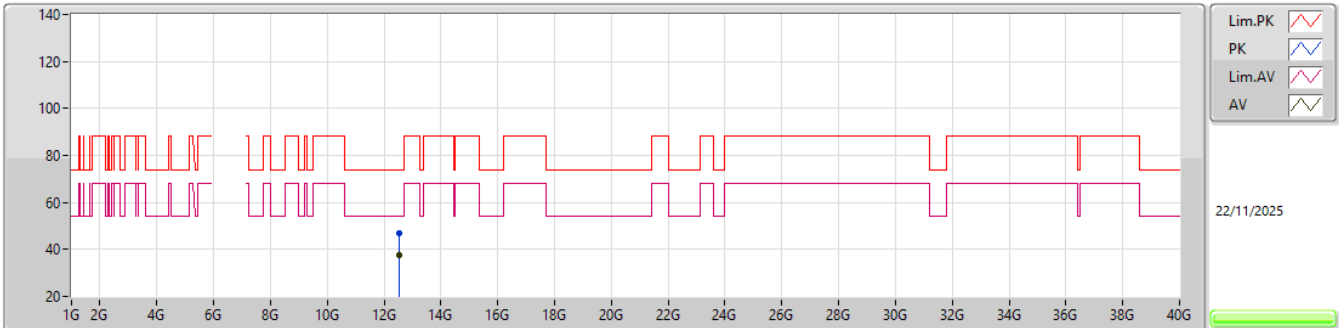EUT V_2TX
Setting 26
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.52585G	47.05	74.00	-26.95	38.26	3	Vertical	49	2.87	-	38.35	14.24	43.80			
AV	12.5301G	37.68	54.00	-16.32	28.89	3	Vertical	49	2.87	-	38.34	14.25	43.80			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX


6265MHz_TX

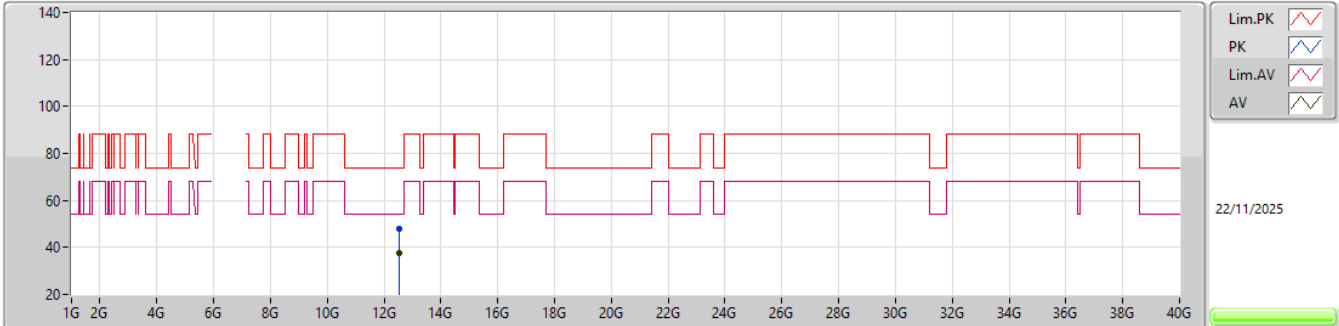EUT_V_2TX
Setting 26
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.53015G	47.98	74.00	-26.02	39.19	3	Horizontal	273	1.80	-	38.34	14.25	43.80			
AV	12.53005G	37.78	54.00	-16.22	28.99	3	Horizontal	273	1.80	-	38.34	14.25	43.80			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX


6265MHz_TX

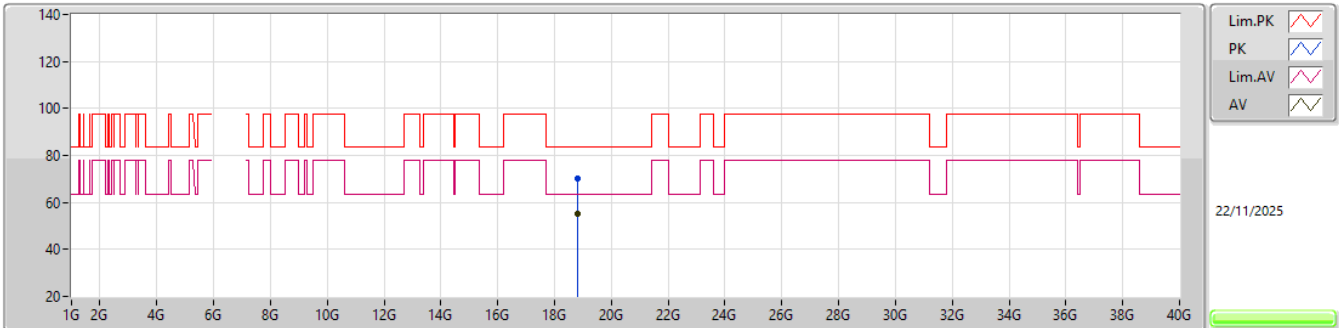EUT_V_2TX
Setting 26
04-W-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.81775G	70.31	83.54	-13.23	65.37	1	Vertical	255	1.78	-	37.70	16.70	49.46			
AV	18.8066G	55.05	63.54	-8.49	50.13	1	Vertical	255	1.78	-	37.70	16.69	49.47			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6265MHz_TX

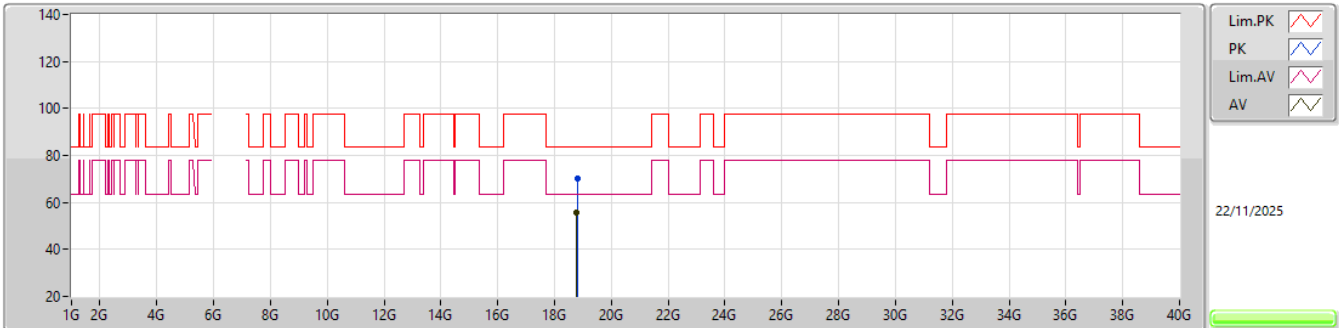EUT_V_2TX
Setting 26
04-W-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.8154G	69.97	83.54	-13.57	65.03	1	Horizontal	285	1.99	-	37.70	16.70	49.46			
AV	18.7777G	55.70	63.54	-7.84	50.77	1	Horizontal	285	1.99	-	37.74	16.68	49.49			


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

5955MHz_TX

16/12/2025

CF (Hz)
5.955G
Span (Hz)
100M
RBW (Hz)
300k
VBW (Hz)
1M
Sweep Time (s)
20m
Detector Type
RMS

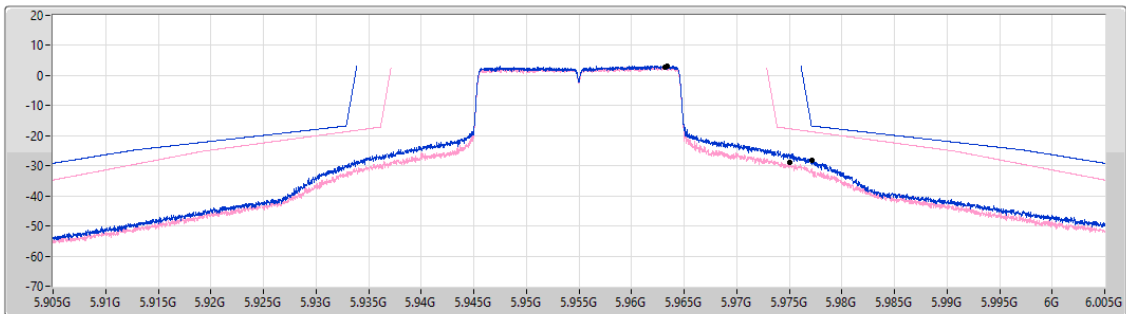

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
5.963398G	3.24	5.977125G	-28.06	-16.76	-11.30	1
5.963198G	2.88	5.9751G	-28.93	-17.71	-11.22	2


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

6195MHz_TX

16/12/2025

CF (Hz)
6.195G
Span (Hz)
100M
RBW (Hz)
300k
VBW (Hz)
1M
Sweep Time (s)
20m
Detector Type
RMS

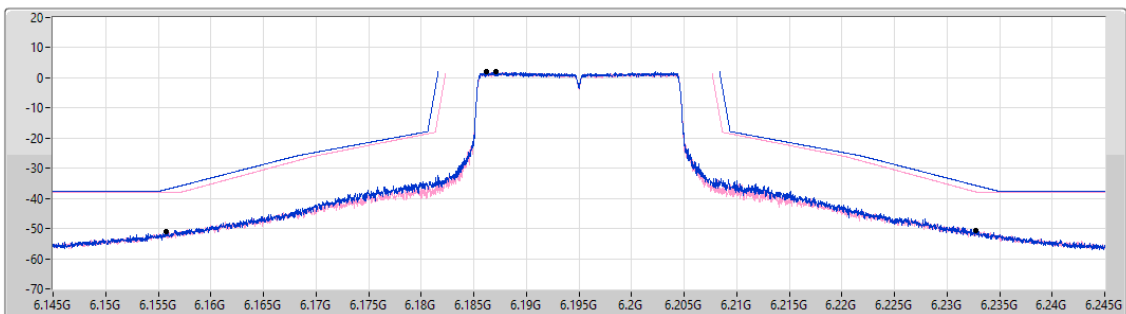


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.187077G	2.18	6.15575G	-50.90	-37.06	-13.84	1
6.186252G	1.93	6.23275G	-50.58	-37.88	-12.70	2

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

6415MHz_TX

16/12/2025

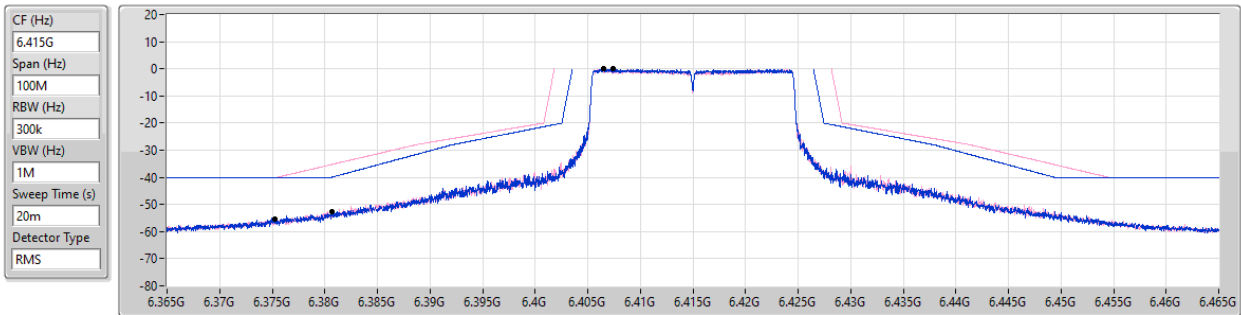


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.407402G	-0.04	6.380725G	-52.50	-39.91	-12.59	1
6.406552G	0.01	6.375225G	-55.26	-39.99	-15.27	2

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

6535MHz_TX

16/12/2025

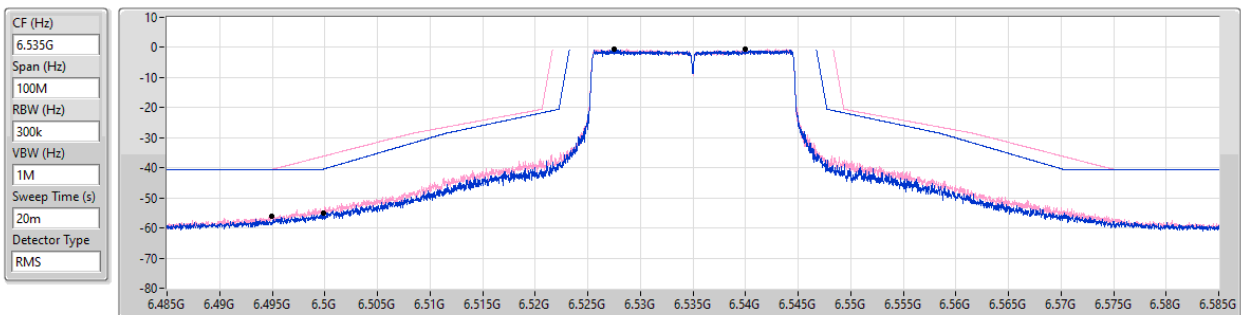


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.539974G	-0.53	6.499875G	-55.04	-40.43	-14.61	1
6.527502G	-0.54	6.49495G	-56.02	-40.54	-15.48	2

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

6695MHz_TX

16/12/2025

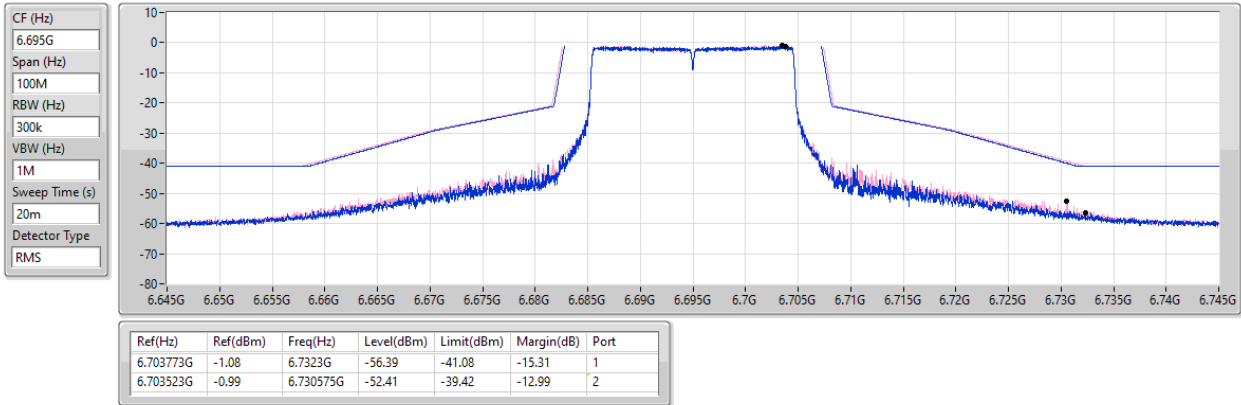


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

6855MHz_TX

16/12/2025

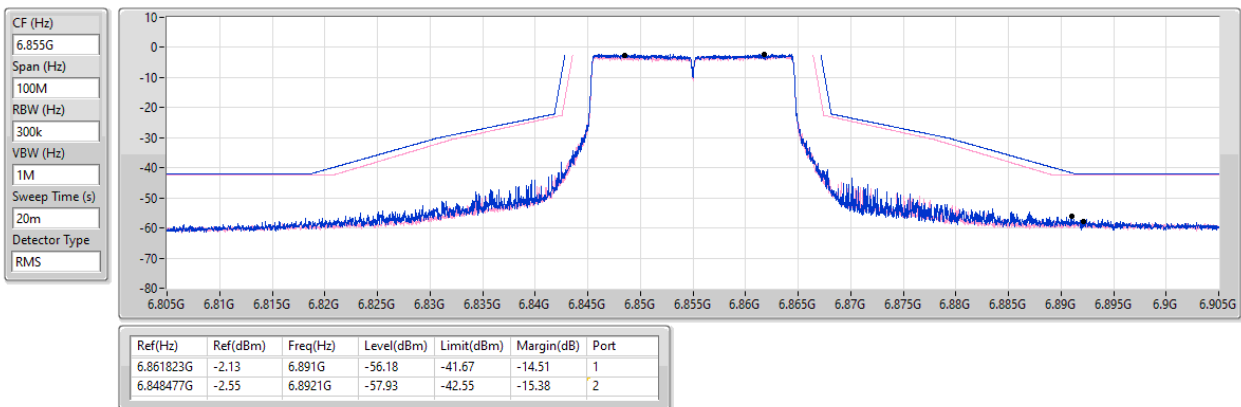


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

5965MHz_TX

16/12/2025

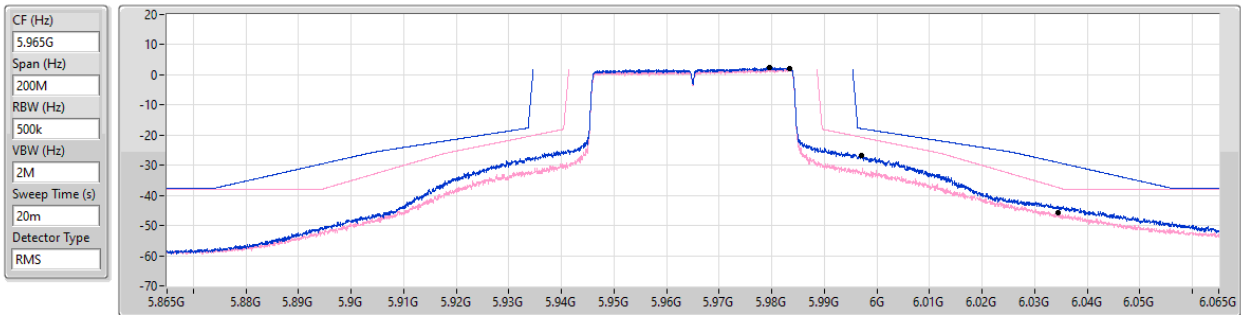


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
5.979596G	2.35	5.9971G	-26.77	-17.85	-8.92	1
5.983395G	1.93	6.03435G	-45.74	-37.34	-8.40	2

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

6205MHz_TX

16/12/2025

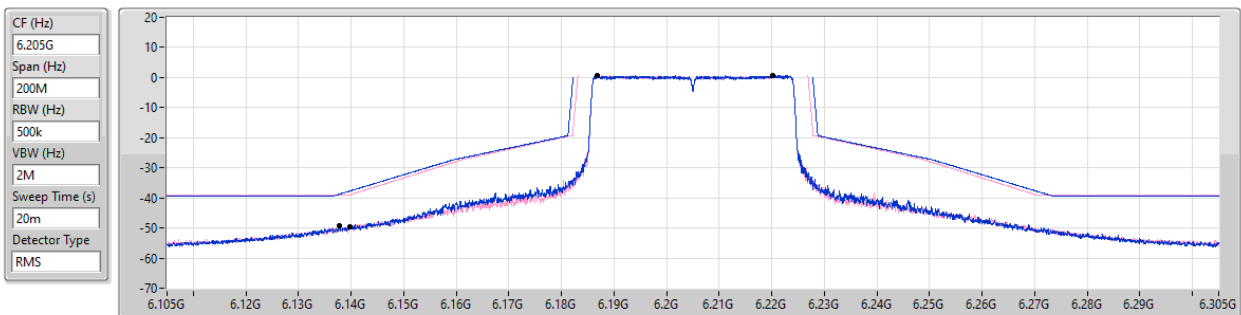


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.186905G	0.67	6.13775G	-49.42	-38.77	-10.65	1
6.220246G	0.77	6.1397G	-49.48	-39.03	-10.45	2

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

6405MHz_TX

16/12/2025

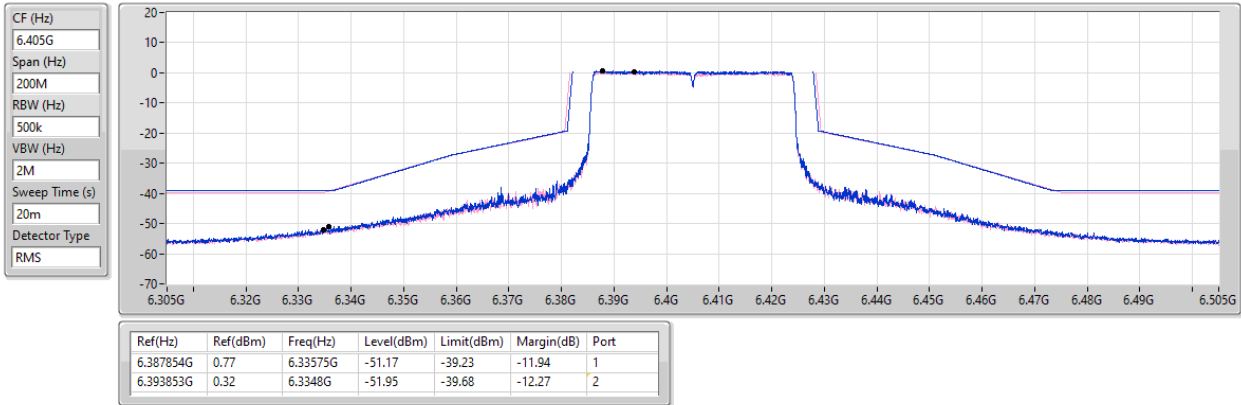


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

6565MHz_TX

16/12/2025

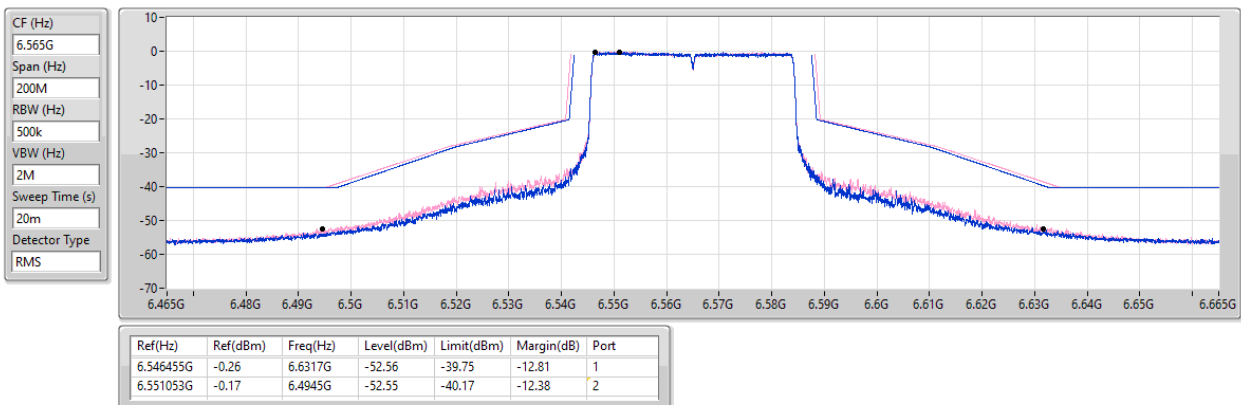


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

6685MHz_TX

16/12/2025

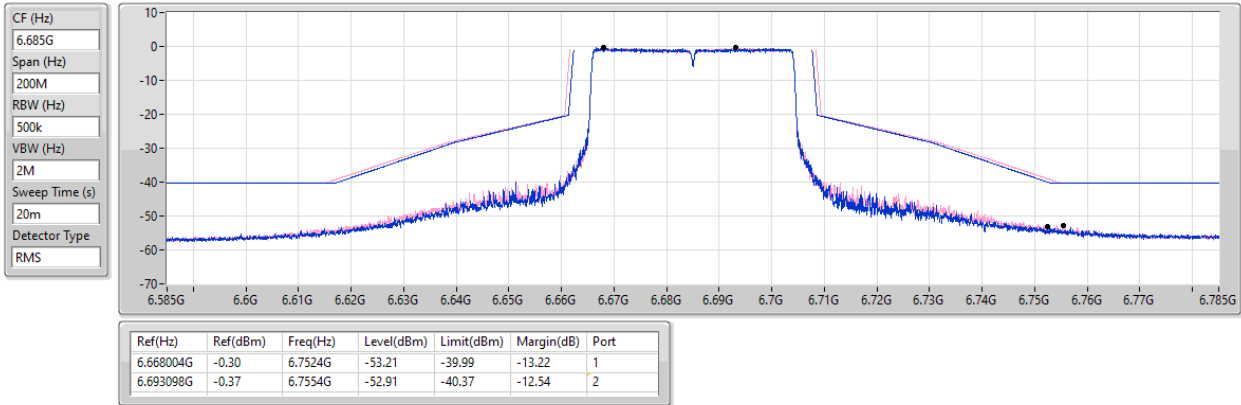


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

6845MHz_TX

16/12/2025

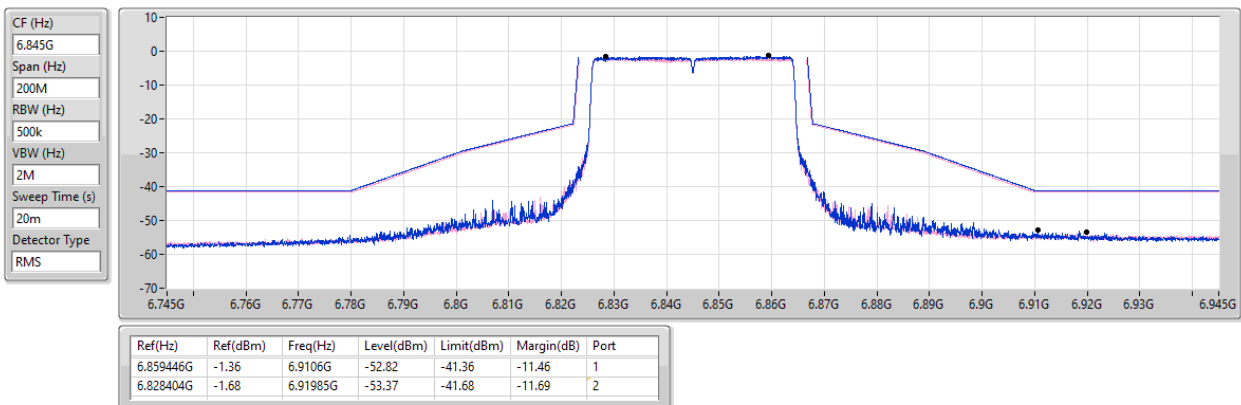


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK

5985MHz_TX

16/12/2025

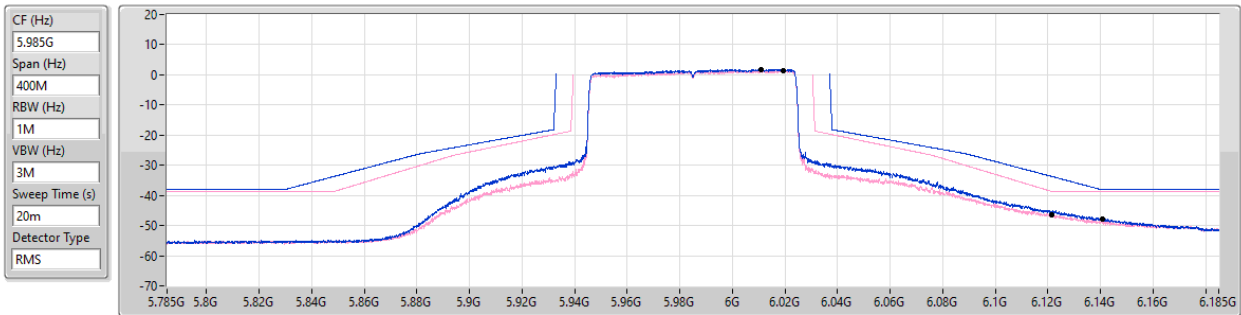


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.01109G	1.82	6.1406G	-47.74	-38.14	-9.60	1
6.01919G	1.34	6.1214G	-46.30	-38.66	-7.64	2

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK

6225MHz_TX

16/12/2025

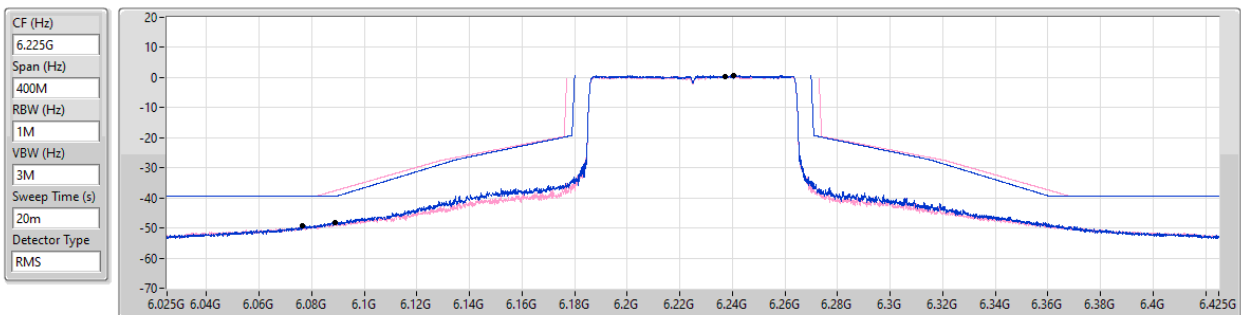


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.2404G	0.72	6.0889G	-48.17	-39.28	-8.89	1
6.2373G	0.43	6.0764G	-49.43	-39.57	-9.86	2

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK

6385MHz_TX

16/12/2025

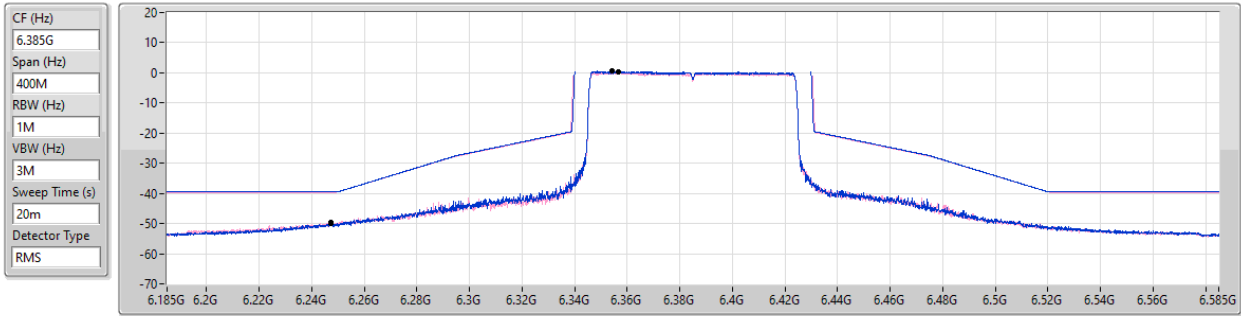


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.35441G	0.52	6.2472G	-49.81	-39.48	-10.33	1
6.35661G	0.18	6.2473G	-49.73	-39.82	-9.91	2

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK

6625MHz_TX

16/12/2025

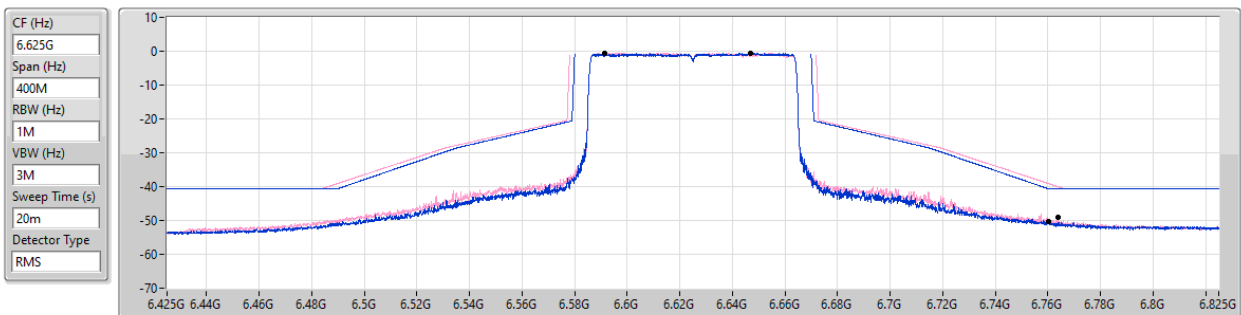


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.64699G	-0.59	6.7603G	-50.23	-40.59	-9.64	1
6.59161G	-0.47	6.7638G	-48.91	-40.01	-8.90	2

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK

6705MHz_TX

16/12/2025

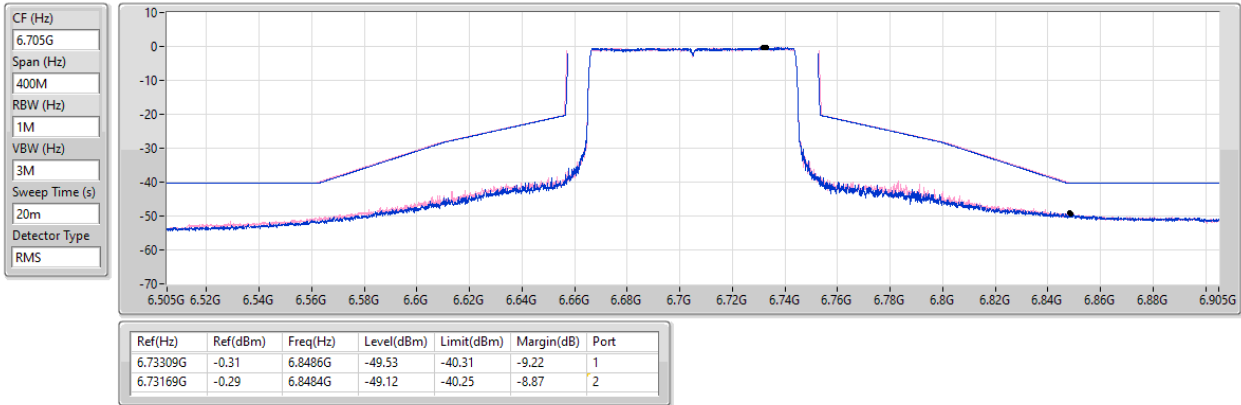


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK

6785MHz_TX

16/12/2025

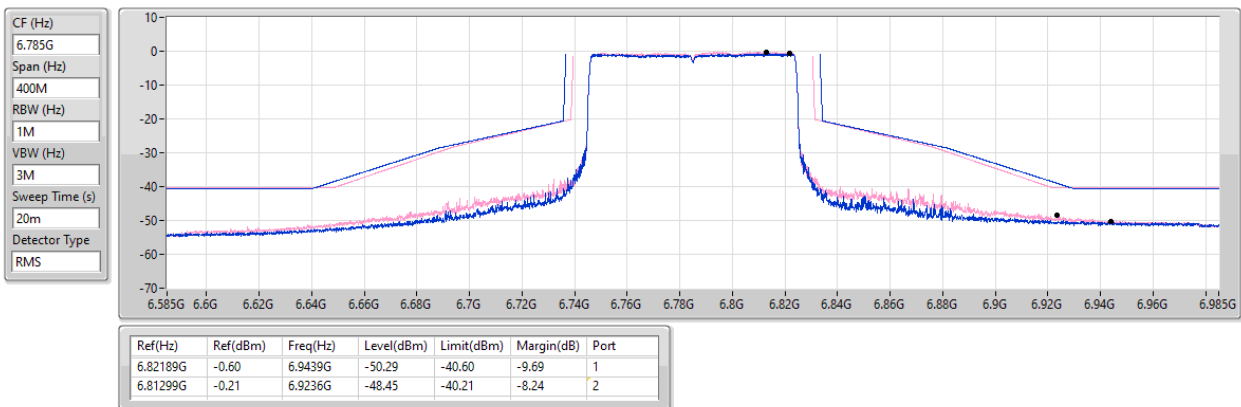

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

MASK

6025MHz_TX

16/12/2025

CF (Hz)
6.025G


Span (Hz)
800M

RBW (Hz)
3M

VBW (Hz)
10M

Sweep Time (s)
20m

Detector Type
RMS

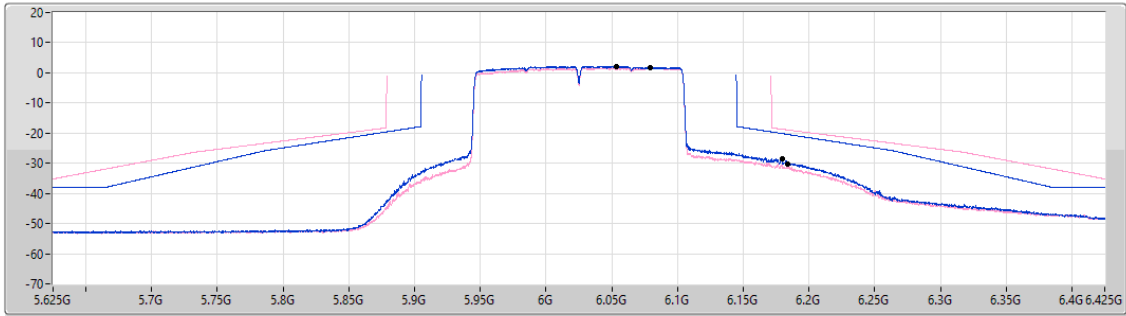

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.05379G	2.16	6.1794G	-28.44	-20.13	-8.31	1
6.07899G	1.71	6.1834G	-30.42	-18.93	-11.49	2

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

MASK

6185MHz_TX

16/12/2025

CF (Hz)
6.185G


Span (Hz)
800M

RBW (Hz)
3M

VBW (Hz)
10M

Sweep Time (s)
20m

Detector Type
RMS

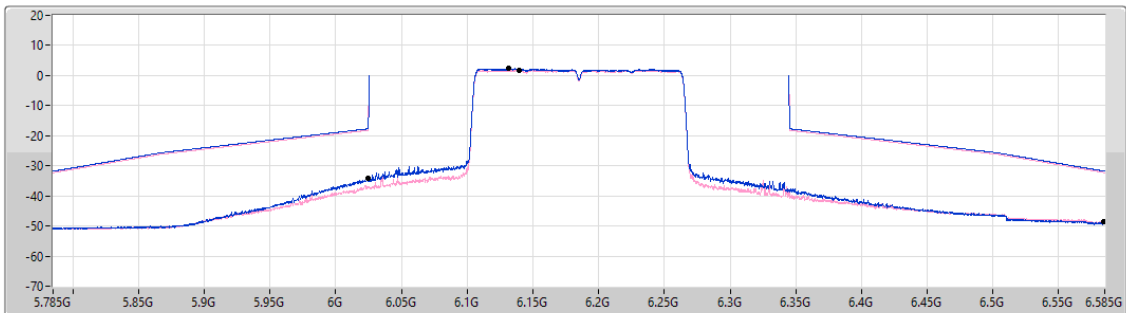


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.13161G	2.30	6.0244G	-34.01	-17.72	-16.29	1
6.13921G	1.79	6.5842G	-48.69	-32.24	-16.45	2

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

MASK

6345MHz_TX

16/12/2025

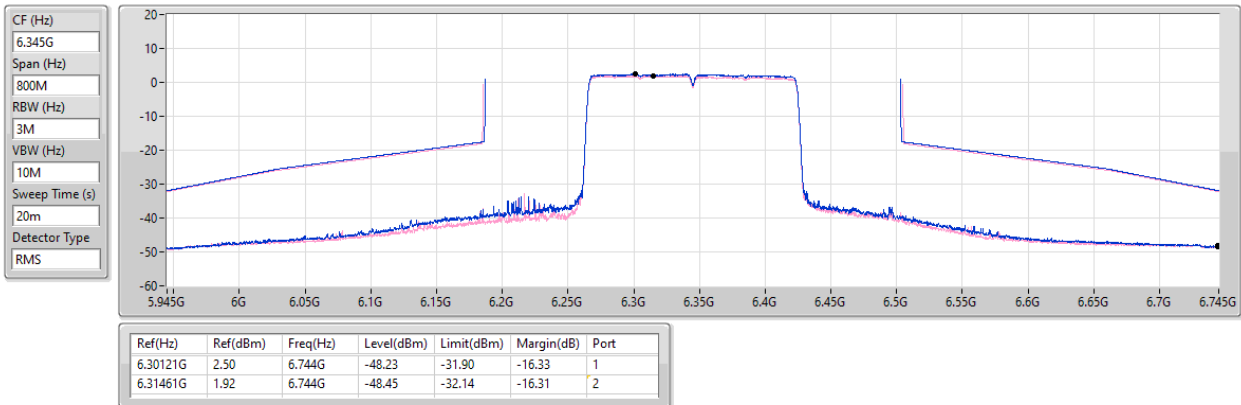


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

MASK

6665MHz_TX

16/12/2025

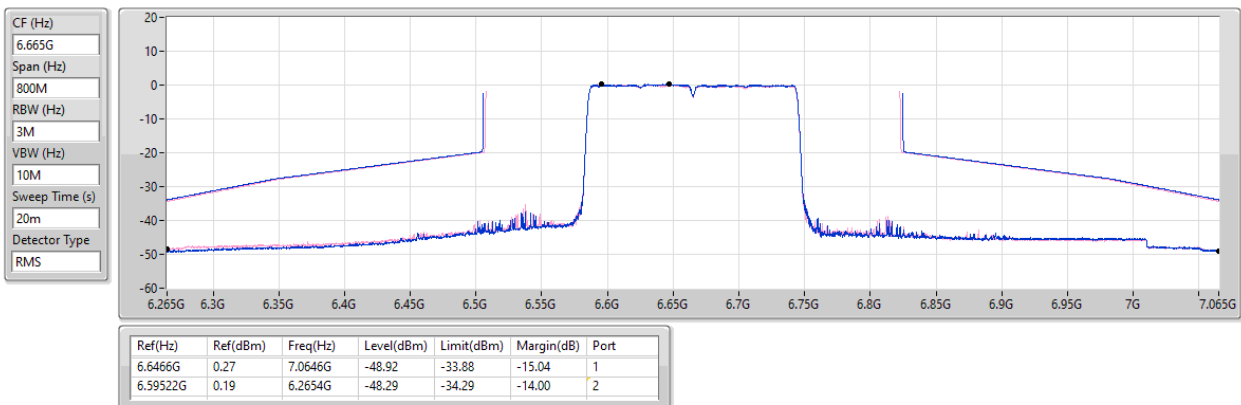


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

MASK

6105MHz_TX

16/12/2025

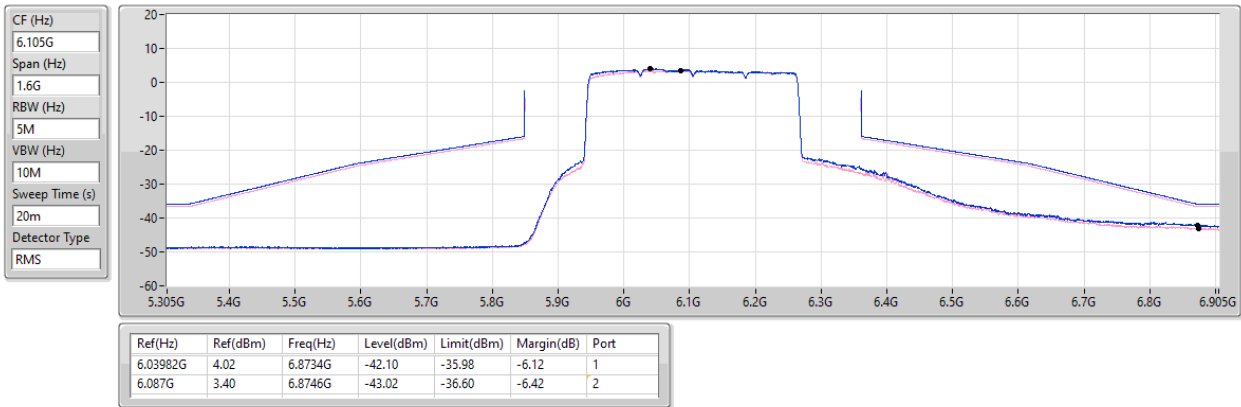

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

MASK

6265MHz_TX

16/12/2025

