

FCC PART 15.247 TEST REPORT

For

IMachine (Xiamen) Intelligent Devices Co.,Ltd.

Unit 1502-2, No.3 Jinzhong Road, Huli District, Xiamen, China

FCC ID: 2AUA5-P1

Report Type: Original Report	Product Type: ALL-IN-ONE
Report Number: RXM190916056-00B	
Report Date: 2019-11-07	
Simon Wang <i>Simon wang</i>	
Reviewed By: RF Engineer	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “*”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS.....	8
TEST EQUIPMENT LIST	9
FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	11
APPLICABLE STANDARD	11
RESULT	11
FCC §15.203 – ANTENNA REQUIREMENT	12
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	12
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	13
APPLICABLE STANDARD	13
EUT SETUP.....	13
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
CORRECTED FACTOR & MARGIN CALCULATION	14
TEST RESULTS SUMMARY	14
TEST DATA	14
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	17
APPLICABLE STANDARD	17
EUT SETUP	17
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	18
TEST PROCEDURE	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST RESULTS SUMMARY	18
TEST DATA	18
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	25
APPLICABLE STANDARD	25
TEST PROCEDURE	25

TEST DATA	25
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST DATA	32
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST DATA	38
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	41
APPLICABLE STANDARD	41
TEST PROCEDURE	41
TEST DATA	41
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	57
APPLICABLE STANDARD	57
TEST PROCEDURE	57
TEST DATA	57
FCC §15.247(d) - BAND EDGES TESTING	58
APPLICABLE STANDARD	58
TEST PROCEDURE	58
TEST DATA	58

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	ALL-IN-ONE
Tested Model	iMachine P1
Multiple Model	iMachine Q1, iMachine K1, iMachine L1, iMachine M1, iMachine N1, iMachine R1, iMachine S1, iMachine T1, iMachine U1
Frequency Range	Bluetooth: 2402~2480MHz
Transmit Power	Bluetooth: 1.43dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification	3dBi
Voltage Range	DC 24V from adapter
Date of Test	2019-09-26 to 2019-10-22
Sample serial number	190916056(Assigned by BACL, Shenzhen)
Received date	2019-09-16
Sample/EUT Status	Good condition
Adapter information	Model: DJ-240250-SA Input: AC 100-240V, 50/60Hz, 0.15A Output: DC 24V, 2.5A

Notes: This series products model: iMachine Q1, iMachine K1, iMachine L1, iMachine M1, iMachine N1, iMachine R1, iMachine S1, iMachine T1, iMachine U1 and iMachine P1 are electrically identical. Model iMachine P1 was selected for fully testing, the detailed information can be referred to the product similarity declaration letter.

Objective

This test report is prepared on behalf of *iMachine (Xiamen) Intelligent Devices Co.,Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS, Part 15B JBC submissions with FCC ID: 2AUA5-P1.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

For Radiated Emissions testing, please refer to DA 00-705 Released March 30, 2000, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.73dB
RF conducted test with spectrum		±1.6dB
AC Power Lines Conducted Emissions		±1.95dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±1 °C
Humidity		±6%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

“DRTU” exercise software was used.

Mode	Data rate	Power level		
		Low channel	Middle channel	High channel
BT	/	4	6	6

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Microsoft	Keyboard	1406	0200706128743
DELL	Mouse	MOC5UO	G1900NKD
TECLAST	U-disk	Unkown	Unkown
ADATA	U-disk	Unkown	Unkown
SAGEM	Router	SAGEM F@ST TM 2604 White	Unkown
MAKEN	Cash Drawer	MT-350T	Unkown
YD	PIN Pad	YD511DA-RJ	Unkown

External I/O Cable

Cable Description	Length (m)	From/Port	To
Un-Shielding Detachable USB Cable	1.5	EUT	Mouse
Shielding Detachable K/B Cable With Magnet Ring	1.5	EUT	Keyboard
Un-Shielding Detachable AC Cable	1.2	LISN	Adapter
Un-Shielding Detachable DC Cable	1.2	EUT	Adapter
Un-Shielding Detachable RJ45 Cable	10	EUT	Router
Un-Shielding Detachable RJ11 Cable	10	EUT	Cash Drawer
Un-Shielding Detachable RJ9 to RS232 Cable	10	EUT	PIN Pad

Block Diagram of Test Setup

For conducted emission:

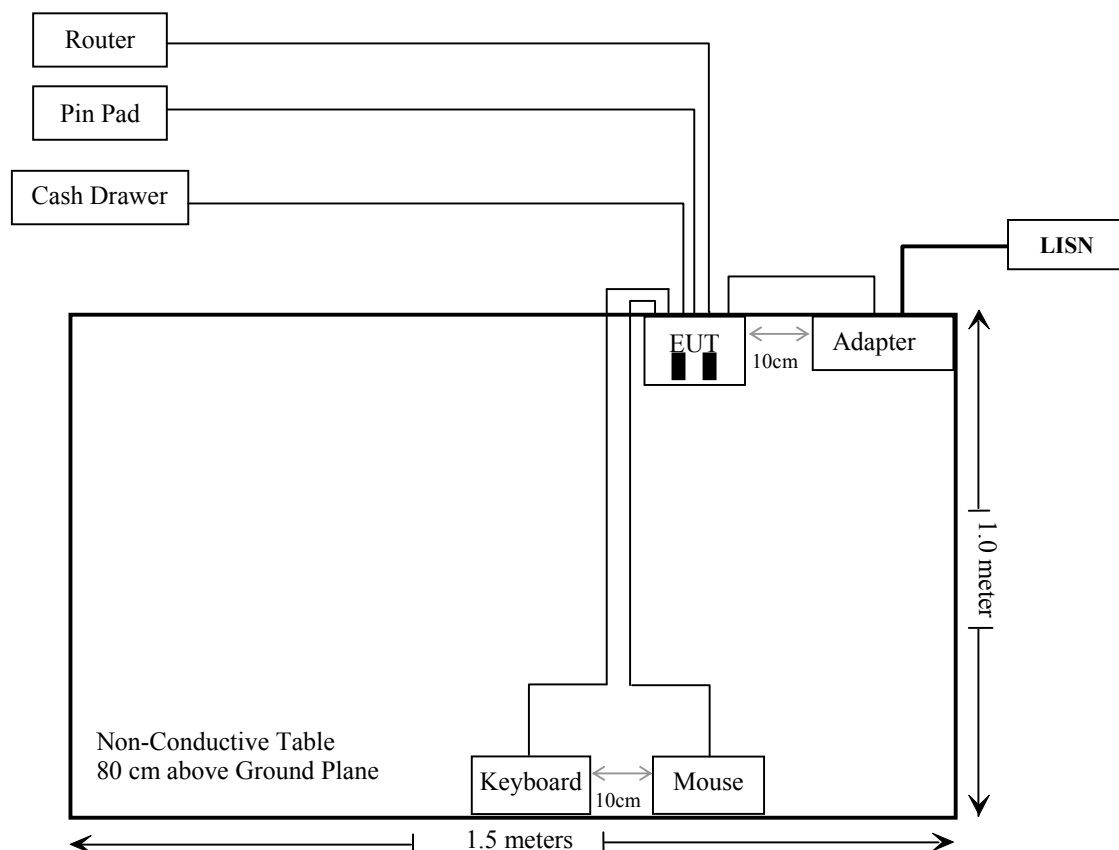

Note: ■ mark U-disk

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1091	Maximum Permissible Exposure(MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2019-07-11	2020-07-11
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2019-01-25	2020-01-25
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2019-03-02	2020-03-01
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
Unknown	Conducted Emission Cable	78652	UF A210B-1-0720-504504	2018-11-12	2019-11-12
Radiated Emission Test					
A.H. System	Horn Antenna	SAS-200/571	135	2018-09-01	2021-08-31
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2019-07-22	2020-07-21
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017-12-22	2020-12-21
COM-POWER	Pre-amplifier	PA-122	181919	2018-11-12	2019-11-12
Sonoma Instrument	Amplifier	310N	186238	2018-11-12	2019-11-12
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2019-07-09	2020-07-08
UTIFLEX MICRO-C0AX	RF Cable	UFA147A-2362-100100	MFR64639 231029-003	2018-11-12	2019-11-12
Ducommun Technologies	RF Cable	104PEA	218124002	2018-11-12	2019-11-12
Ducommun Technologies	RF Cable	RG-214	1	2019-05-21	2019-11-19
Ducommun Technologies	RF Cable	RG-214	2	2018-11-12	2019-11-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2017-12-29	2020-12-28
Heatsink Required	Amplifier	QLW-18405536-J0	15964001002	2018-11-12	2019-11-12
Sinoscite	Band Reject Filter	BSF2402-2480MN-0898-001	99632	2018-11-12	2019-11-12
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Agilent	USB wideband power meter	U2021XA	MY54250003	2019-07-10	2020-07-09
WEINSCHTEL	3dB Attenuator	6231	666	Each Time	
Rohde & Schwarz	Spectrum Analyzer	FSU26	200120	2019-03-02	2020-03-01
Ducommun Technologies	RF Cable	RG-214	3	Each Time	

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Frequency (MHz)	Antenna Gain		Max Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2402-2480	3.0	2.0	2.0	1.58	20	0.0006	1.0

Note: Bluetooth and Wifi can not transmitting simultaneously.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: compliance.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is 3 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup



Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the EUT complied with the FCC Part 15.207,


Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Kiki Geng on 2019-10-21.

EUT operation mode: Transmitting & charging (the worst case is 8DPSK Mode, High channel)

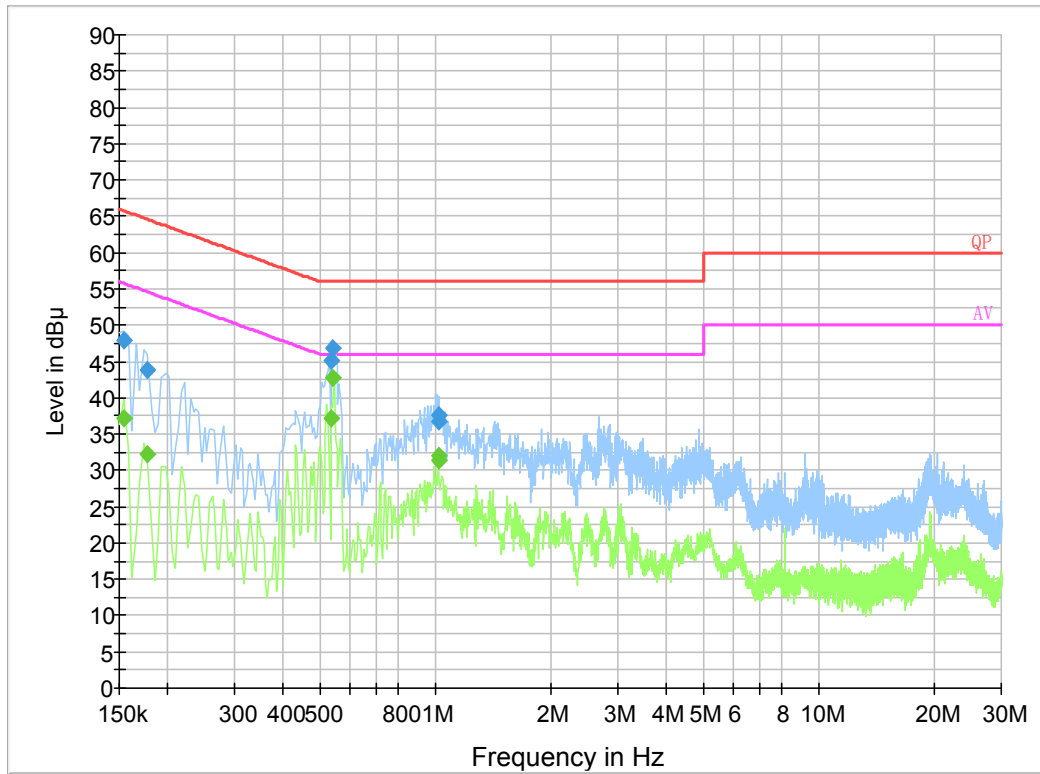AC 120V/60 Hz, Line

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.154000	48.0	19.8	65.8	17.8	QP
0.177500	43.9	19.9	64.6	20.7	QP
0.537950	45.2	19.8	56.0	10.8	QP
0.541810	46.9	19.8	56.0	9.1	QP
1.018790	36.7	19.9	56.0	19.3	QP
1.021090	37.6	19.9	56.0	18.4	QP
0.154000	37.1	19.8	55.8	18.7	Ave.
0.177500	32.1	19.9	54.6	22.5	Ave.
0.537950	37.1	19.8	46.0	8.9	Ave.
0.541810	42.7	19.8	46.0	3.3	Ave.
1.018790	31.3	19.9	46.0	14.7	Ave.
1.021090	32.0	19.9	46.0	14.0	Ave.

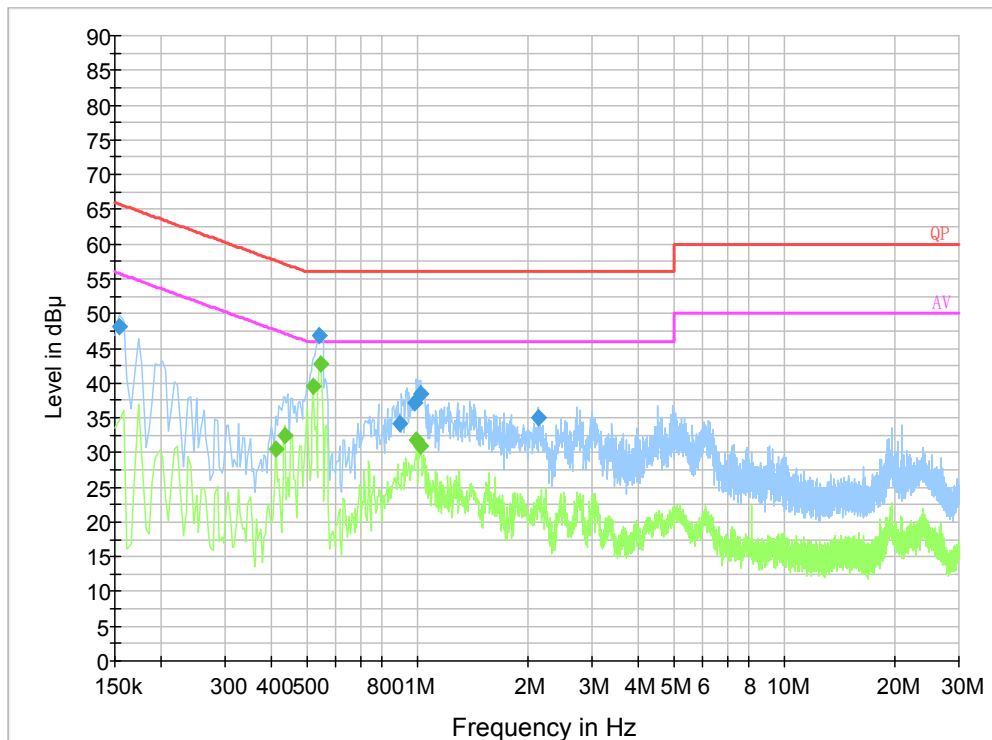AC 120V/60 Hz, Neutral

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.154000	48.1	19.8	65.8	17.7	QP
0.541870	46.9	19.8	56.0	9.1	QP
2.146000	35.0	19.8	56.0	21.0	QP
0.892410	34.1	19.7	56.0	21.9	QP
0.987030	37.1	19.8	56.0	18.9	QP
1.022730	38.4	19.8	56.0	17.6	QP
0.414000	30.6	19.8	47.6	17.0	Ave.
0.438000	32.5	19.8	47.1	14.6	Ave.
0.522000	39.5	19.8	46.0	6.5	Ave.
0.546000	42.8	19.8	46.0	3.2	Ave.
0.998000	31.8	19.8	46.0	14.2	Ave.
1.026000	31.0	19.8	46.0	15.0	Ave.

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, according to the DA 00-705 Released March 30, 2000, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Zero Yan on 2019-10-14 for below 1G and Curry Xiang on 2019-09-26 for above 1G.

EUT operation mode: Transmitting (Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK mode, the worst case is 8DPSK Mode)

30 MHz~1 GHz: (the worst case is 8DPSK Mode, high channel)

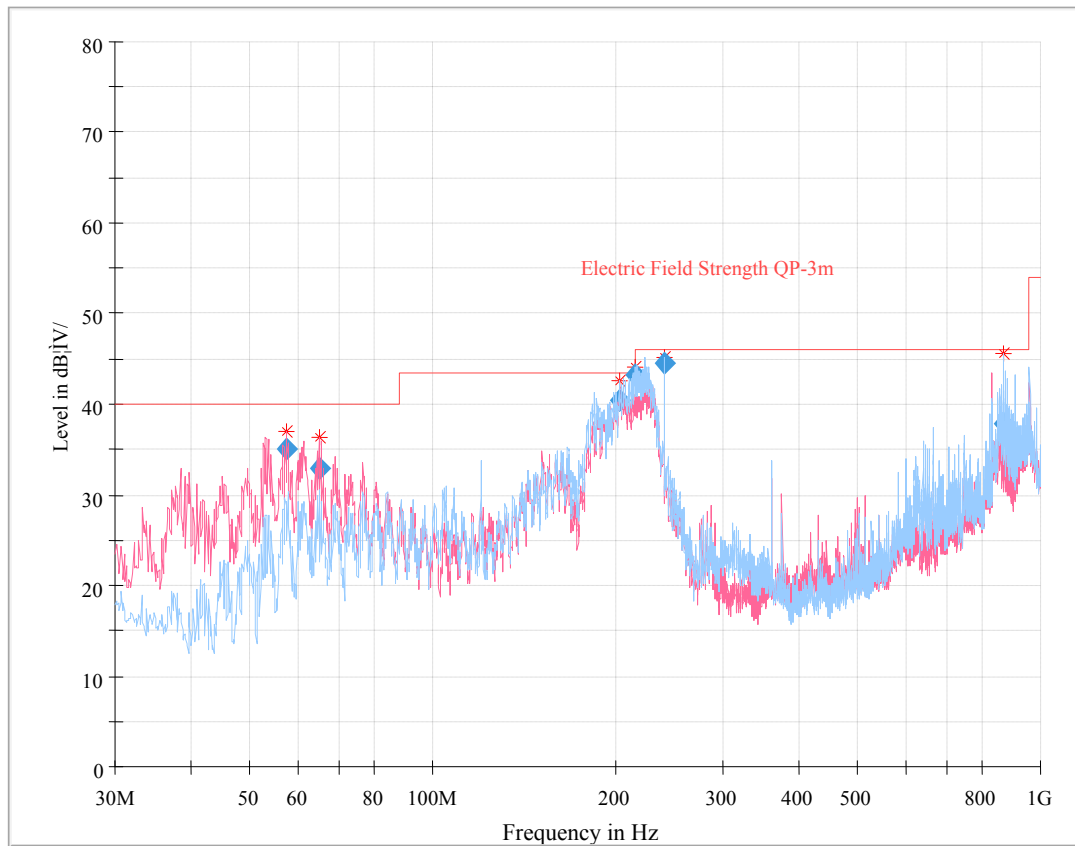

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
57.463500	35.16	108.0	V	155.0	-20.0	40.00	4.84
64.920000	33.00	176.0	V	173.0	-20.4	40.00	7.00
203.334625	40.42	149.0	H	107.0	-13.8	43.50	3.08
215.322375	43.33	146.0	H	121.0	-13.9	43.50	0.17
240.033375	44.49	122.0	H	0.0	-14.1	46.00	1.51
868.080000	37.85	203.0	V	56.0	5.2	46.00	8.15

1 GHz - 25 GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2402 MHz)									
2339.23	28.86	PK	297	1.9	V	31.64	60.50	74	13.50
2339.23	14.77	Ave.	297	1.9	V	31.64	46.41	54	7.59
2485.16	28.19	PK	196	1.4	V	32.13	60.32	74	13.68
2485.16	14.35	Ave.	196	1.4	V	32.13	46.48	54	7.52
1677.00	65.71	PK	59	1.6	V	-1.85	63.86	74	10.14
1677.00	37.44	Ave.	59	1.6	V	-1.85	35.59	54	18.41
4804.00	43.74	PK	265	1.7	V	5.40	49.14	74	24.86
4804.00	28.69	Ave.	265	1.7	V	5.40	34.09	54	19.91
Middle Channel (2441 MHz)									
1677.00	65.97	PK	289	2.3	V	-1.85	64.12	74	9.88
1677.00	38.88	Ave.	289	2.3	V	-1.85	37.03	54	16.97
4882.00	43.68	PK	90	2.1	V	6.43	50.11	74	23.89
4882.00	28.77	Ave.	90	2.1	V	6.43	35.20	54	18.80
High Channel (2480 MHz)									
2350.28	27.63	PK	134	2.1	V	31.77	59.40	74	14.60
2350.28	13.88	Ave.	134	2.1	V	31.77	45.65	54	8.35
2490.19	28.61	PK	20	2.4	V	32.13	60.74	74	13.26
2490.19	14.75	Ave.	20	2.4	V	32.13	46.88	54	7.12
1677.00	65.66	PK	104	1.6	V	-1.85	63.81	74	10.19
1677.00	38.16	Ave.	104	1.6	V	-1.85	36.31	54	17.69
4960.00	43.82	PK	121	2.2	V	6.95	50.77	74	23.23
4960.00	29.13	Ave.	121	2.2	V	6.95	36.08	54	17.92

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude


The other spurious emission which is 20dB to the limit was not recorded.

And for the pre-scan is performed with the 2400-2483.5MHz band filter.

Pre-scan with high channel Peak Horizontal

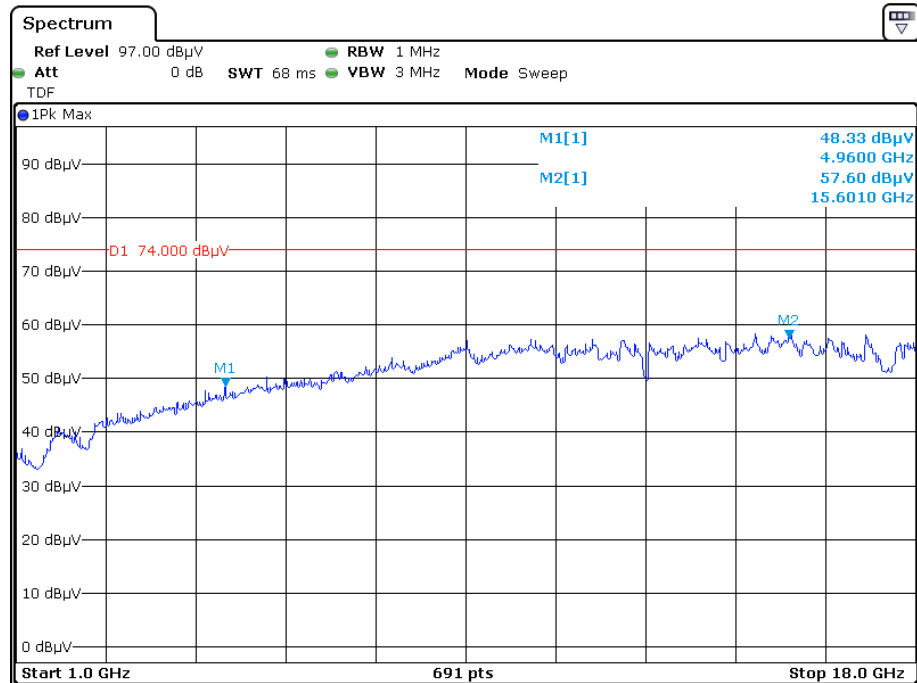


Date: 26.SEP.2019 20:40:43

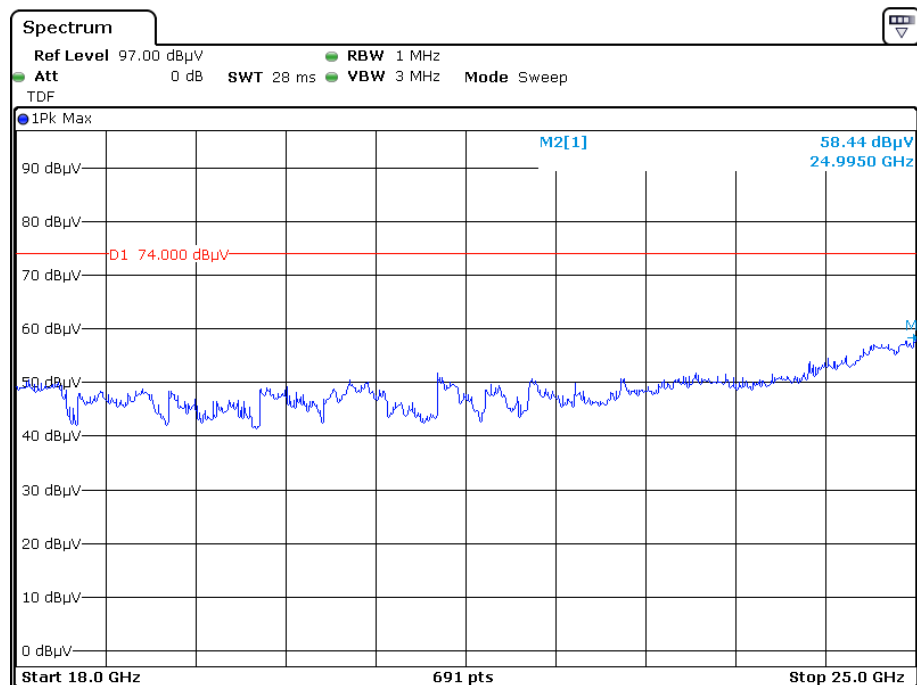


Date: 26.SEP.2019 21:31:56

Vertical

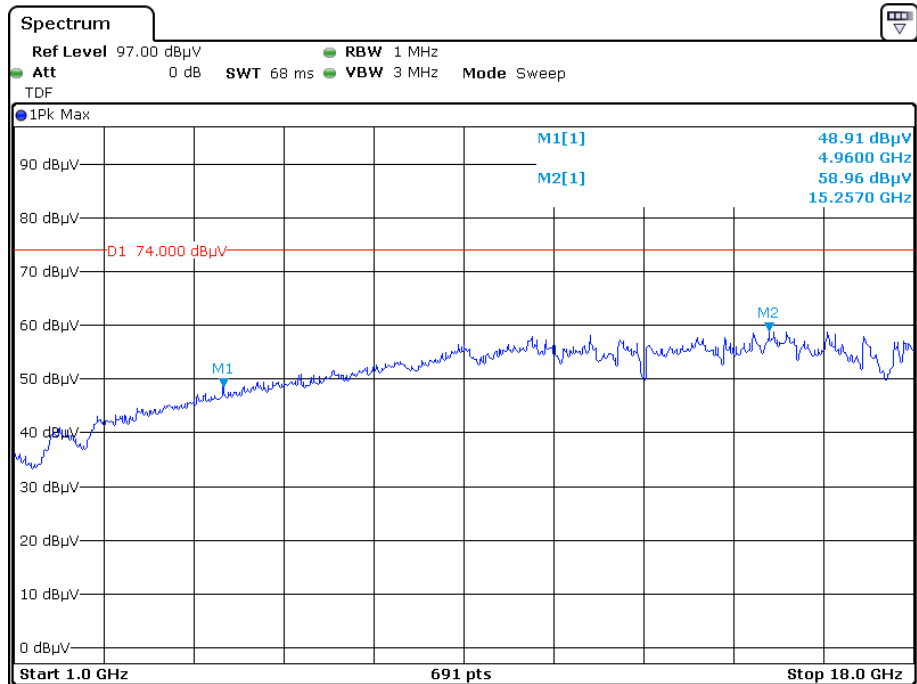


Date: 26.SEP.2019 20:33:34

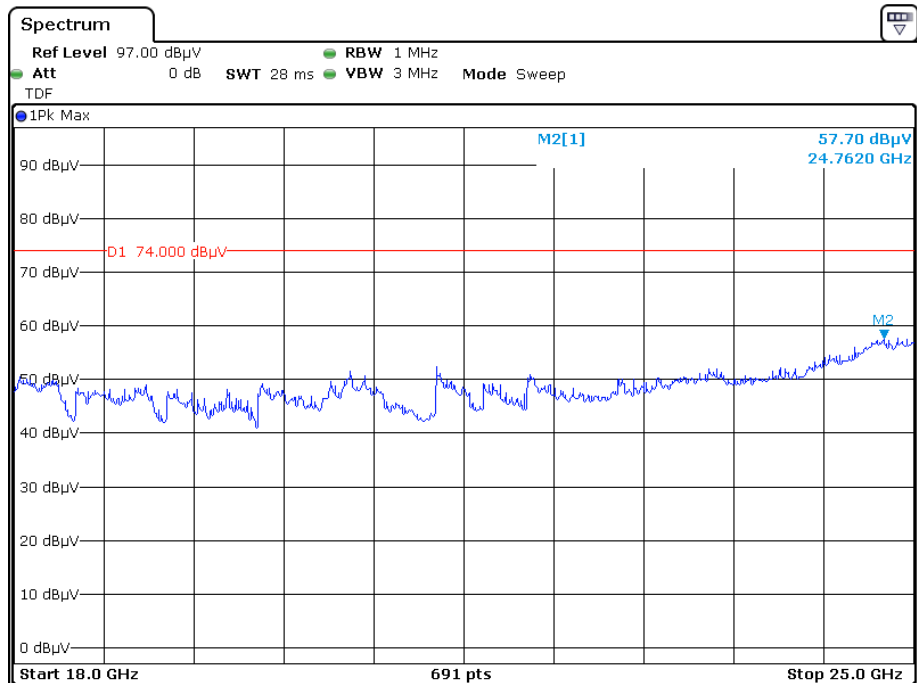


Date: 26.SEP.2019 21:38:52

Pre-scan for Average Horizontal

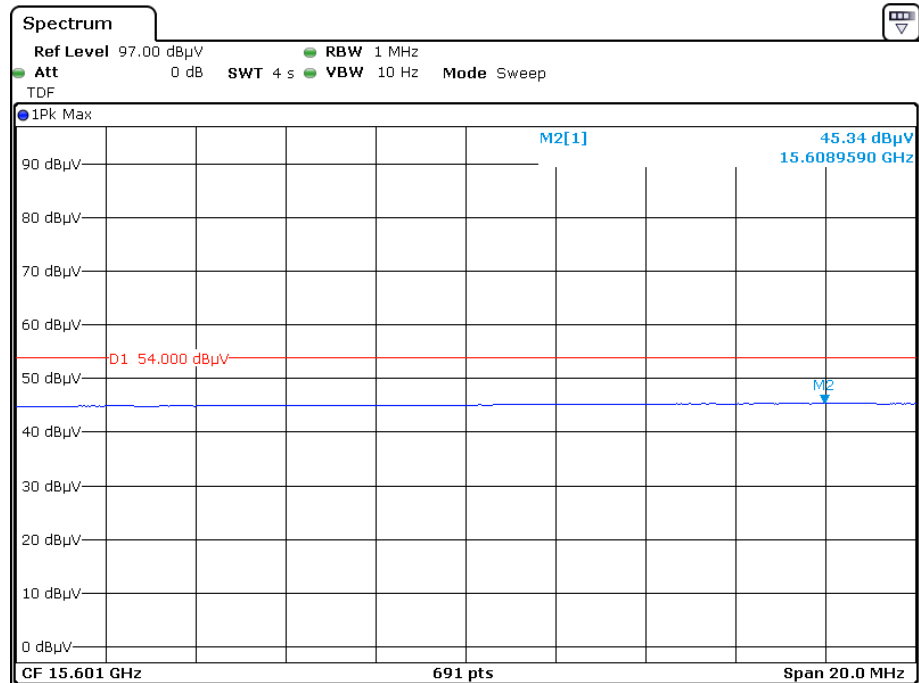


Date: 26.SEP.2019 20:44:10

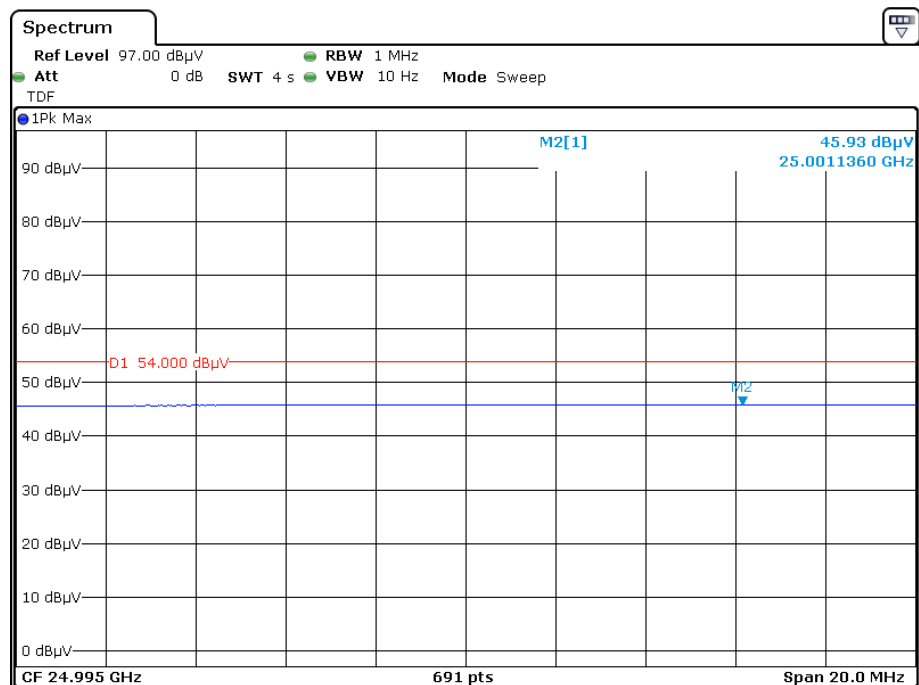


Date: 26.SEP.2019 21:35:29

Vertical

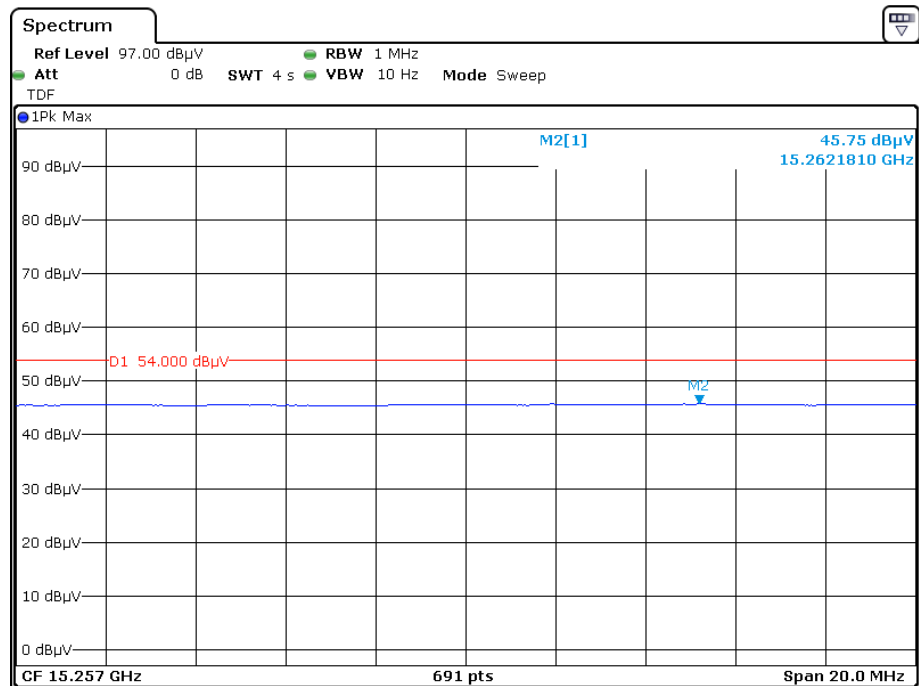

Date: 26.SEP.2019 20:37:01

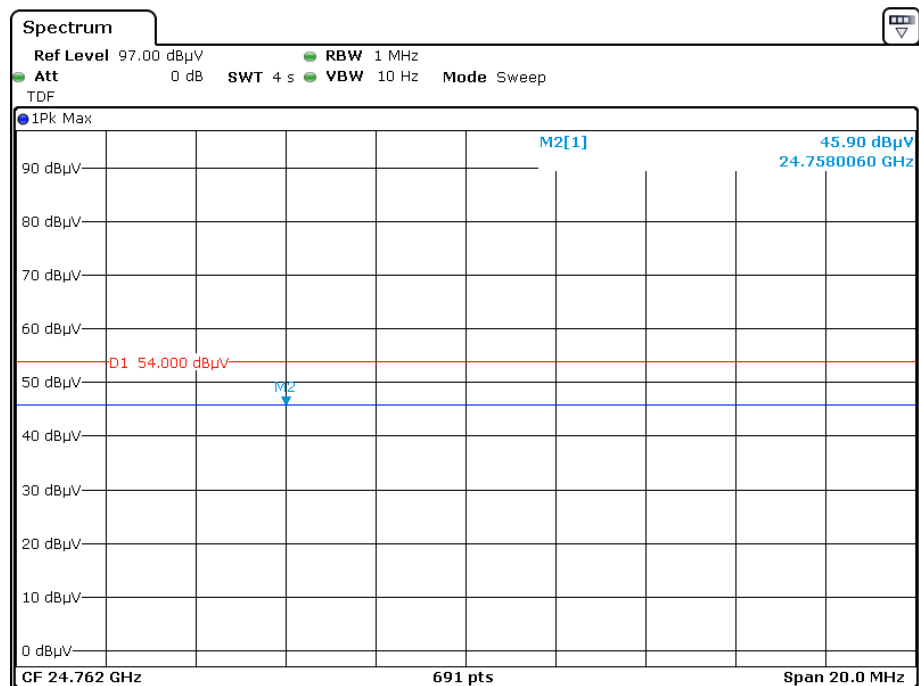

Date: 26.SEP.2019 21:42:25

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by George Zhong on 2019-10-22.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.

Channel	Channel Separation (MHz)	20 dBc BW (MHz)	Two-thirds of the 20 dB bandwidth (MHz)	Channel Separation Limit	Result
BDR(GFSK)					
Low	1.000	0.94	0.627	> two-thirds of the 20 dB bandwidth	Compliance
Middle	0.997	0.945	0.630	> two-thirds of the 20 dB bandwidth	Compliance
High	0.997	0.956	0.637	> two-thirds of the 20 dB bandwidth	Compliance
EDR($\pi/4$ -DQPSK)					
Low	1.000	1.470	0.980	> two-thirds of the 20 dB bandwidth	Compliance
Middle	1.006	1.468	0.979	> two-thirds of the 20 dB bandwidth	Compliance
High	0.997	1.473	0.982	> two-thirds of the 20 dB bandwidth	Compliance
EDR(8DPSK)					
Low	1.010	1.466	0.977	> two-thirds of the 20 dB bandwidth	Compliance
Middle	1.003	1.467	0.978	> two-thirds of the 20 dB bandwidth	Compliance
High	1.003	1.469	0.979	> two-thirds of the 20 dB bandwidth	Compliance


Please refer to the following plots.

BDR (GFSK): Low Channel

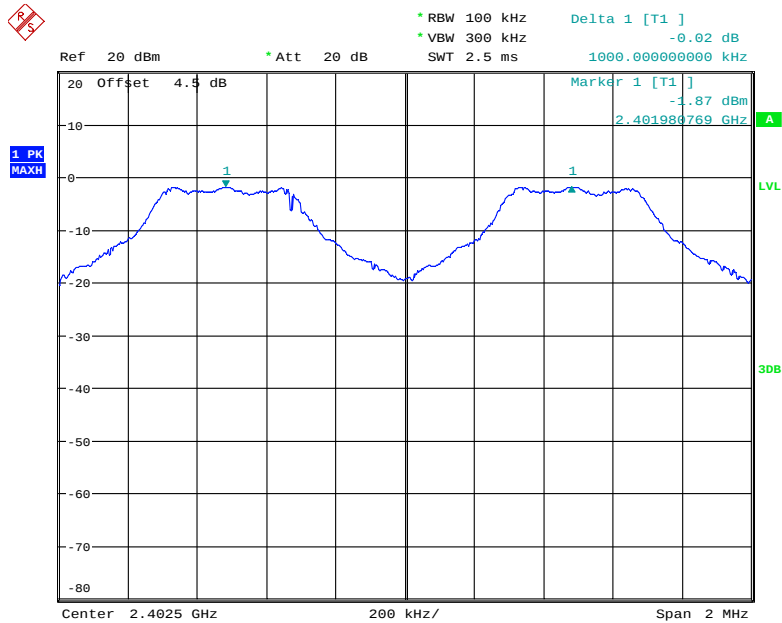


Date: 22.OCT.2019 20:52:17

BDR (GFSK): Middle Channel

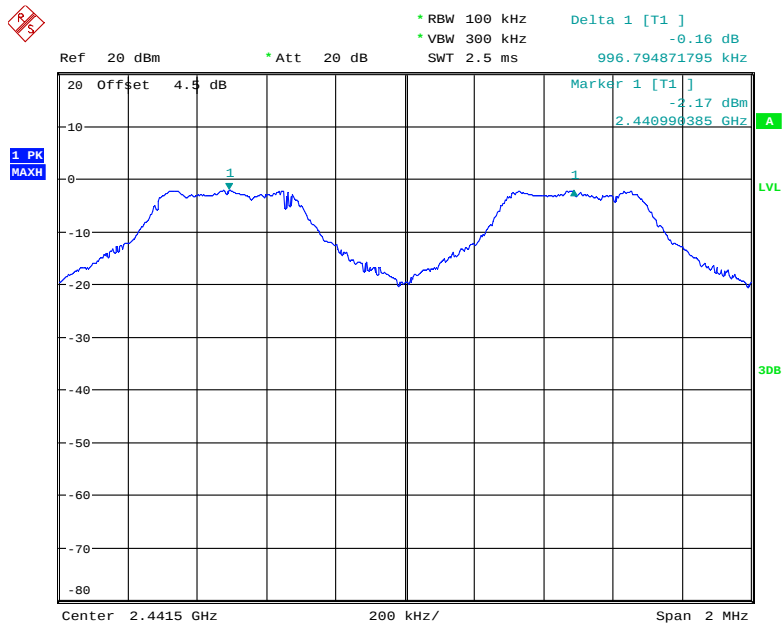


Date: 22.OCT.2019 20:59:19

BDR (GFSK): High Channel

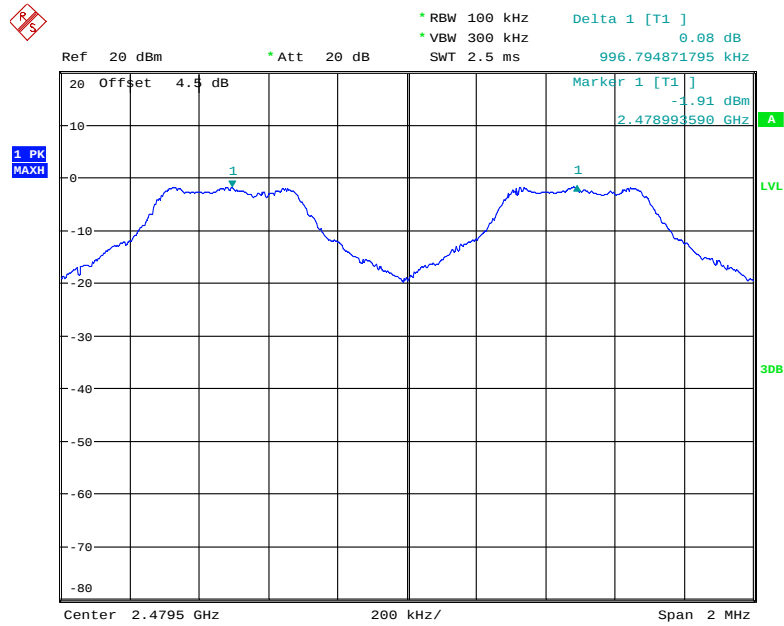


Date: 22.OCT.2019 21:06:48

EDR ($\pi/4$ -DQPSK): Low Channel

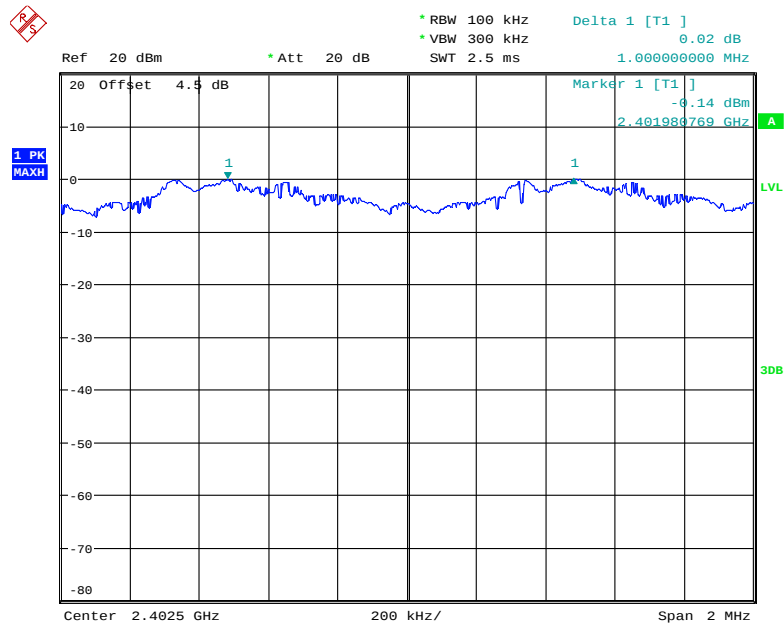


Date: 22.OCT.2019 20:45:15

EDR ($\pi/4$ -DQPSK): Middle Channel

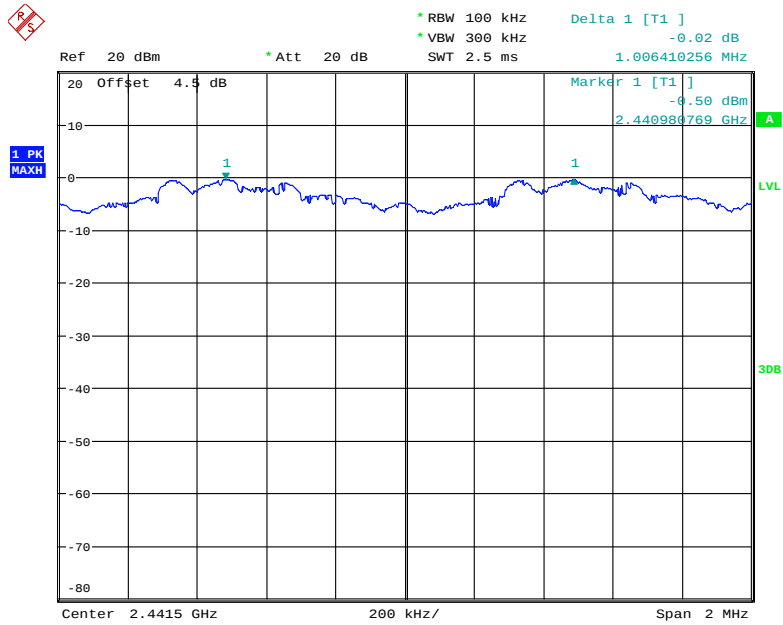


Date: 22.OCT.2019 20:38:20

EDR ($\pi/4$ -DQPSK): High Channel

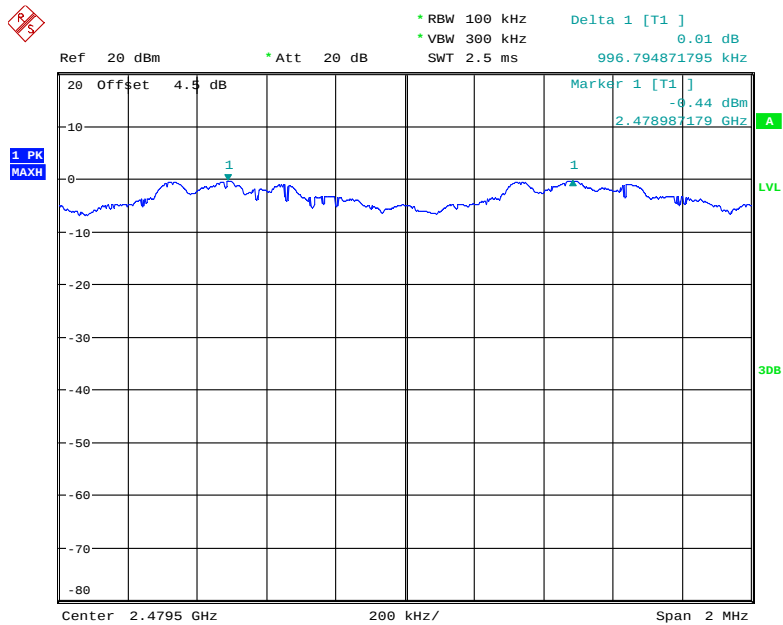


Date: 22.OCT.2019 20:26:07

EDR (8DPSK): Low Channel

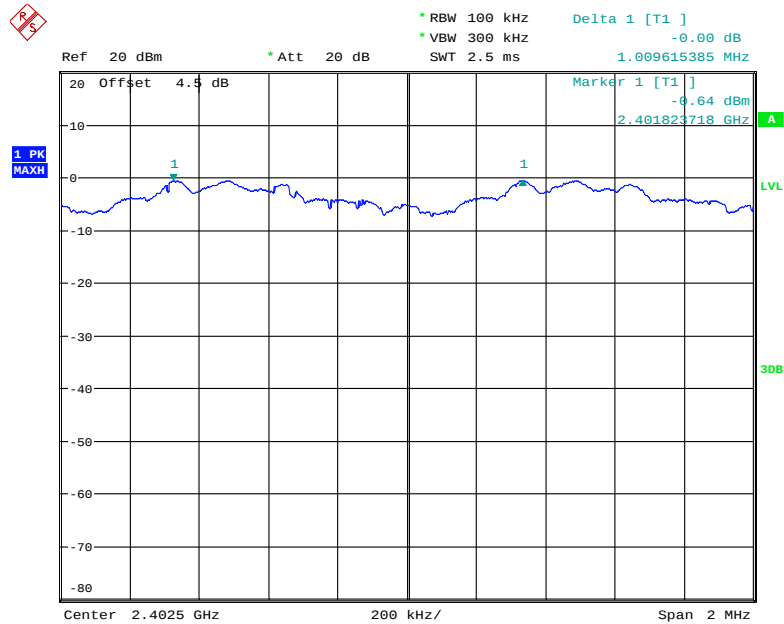


Date: 22.OCT.2019 20:00:25

EDR (8DPSK): Middle Channel

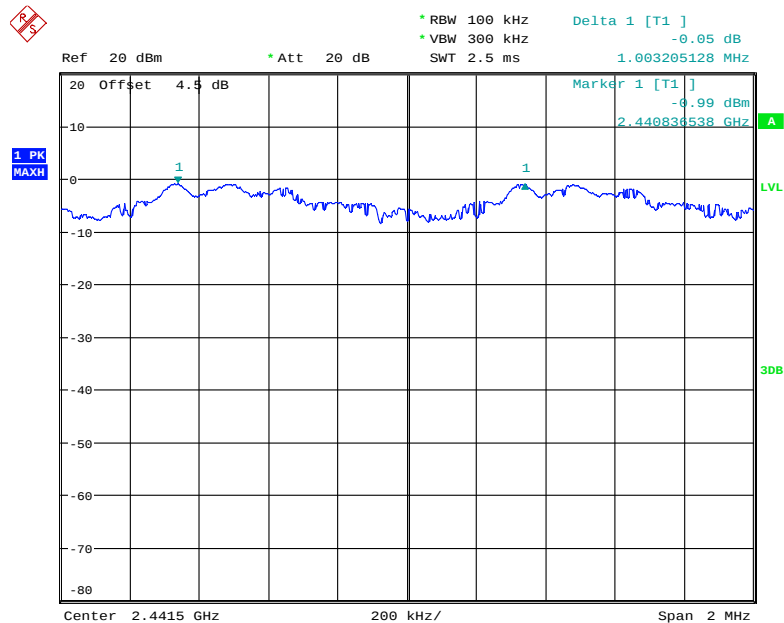

Date: 22.OCT.2019 20:08:14

EDR (8DPSK): High Channel

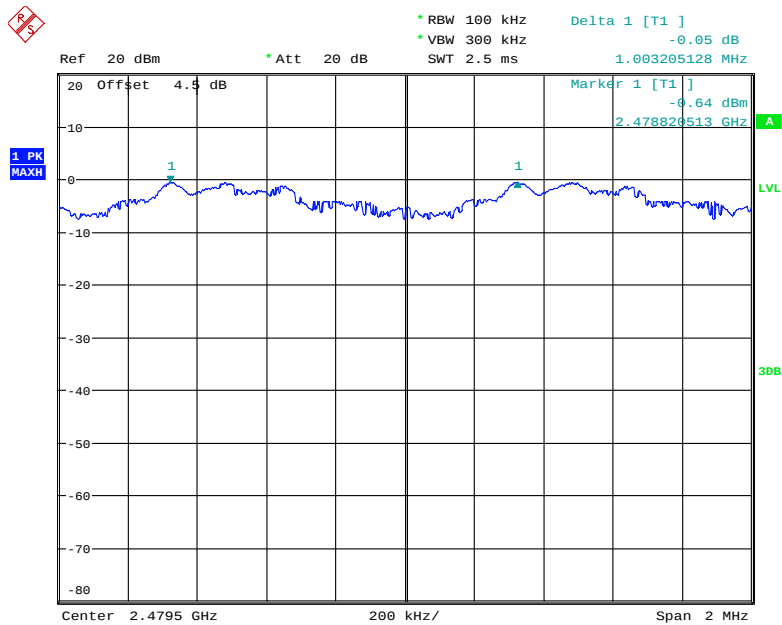

Date: 22.OCT.2019 20:15:30

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa


The testing was performed by George Zhong on 2019-10-22.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.


Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.940
	Middle	2441	0.945
	High	2480	0.956
EDR ($\pi/4$ -DQPSK)	Low	2402	1.470
	Middle	2441	1.468
	High	2480	1.473
EDR (8DPSK)	Low	2402	1.466
	Middle	2441	1.467
	High	2480	1.469

BDR (GFSK): Low Channel

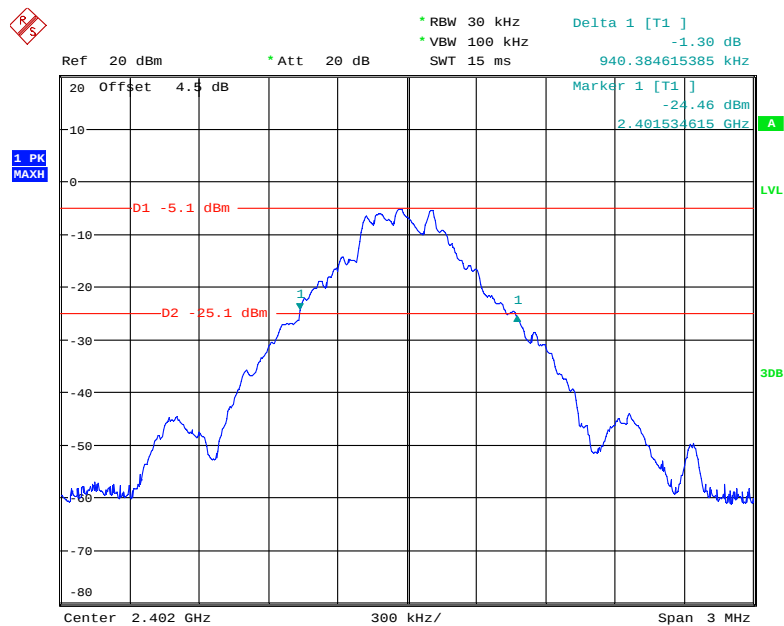


Date: 22.OCT.2019 19:40:05

BDR (GFSK): Middle Channel

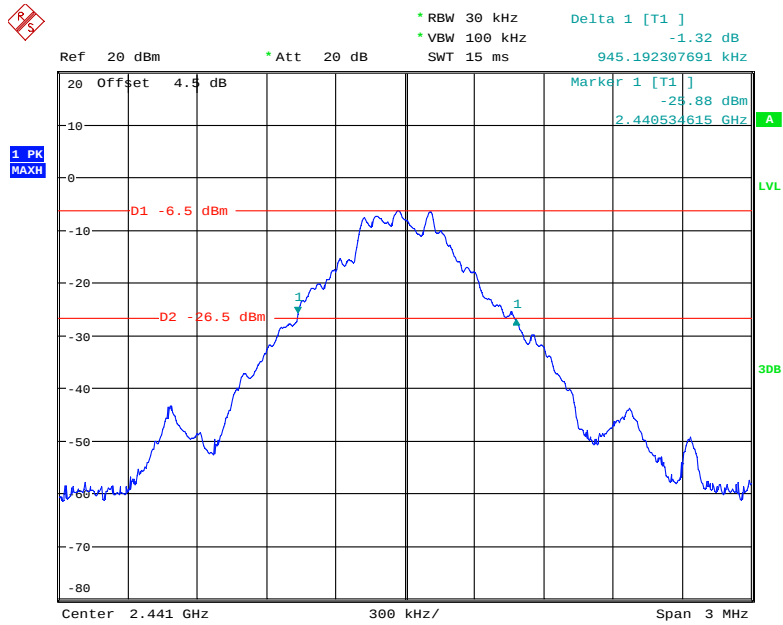


Date: 22.OCT.2019 19:38:55

BDR (GFSK): High Channel

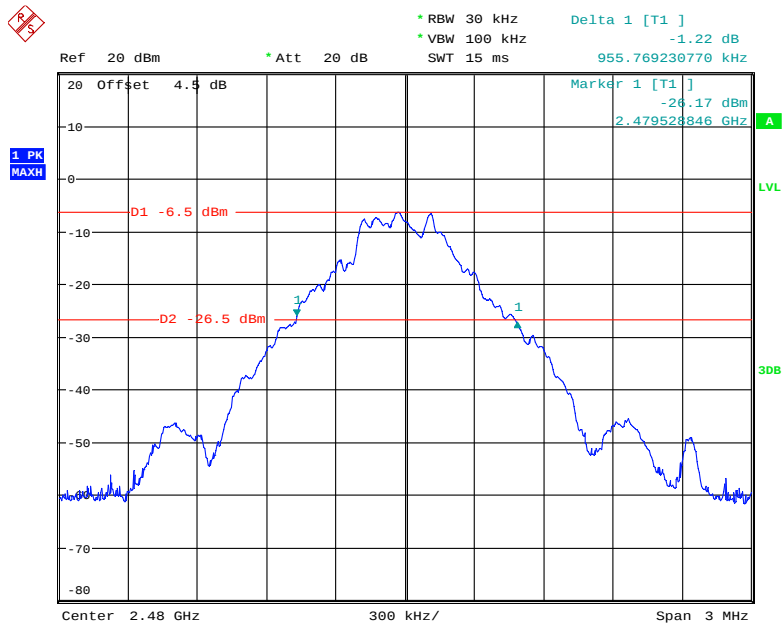


Date: 22.OCT.2019 19:37:57

EDR ($\pi/4$ -DQPSK): Low Channel

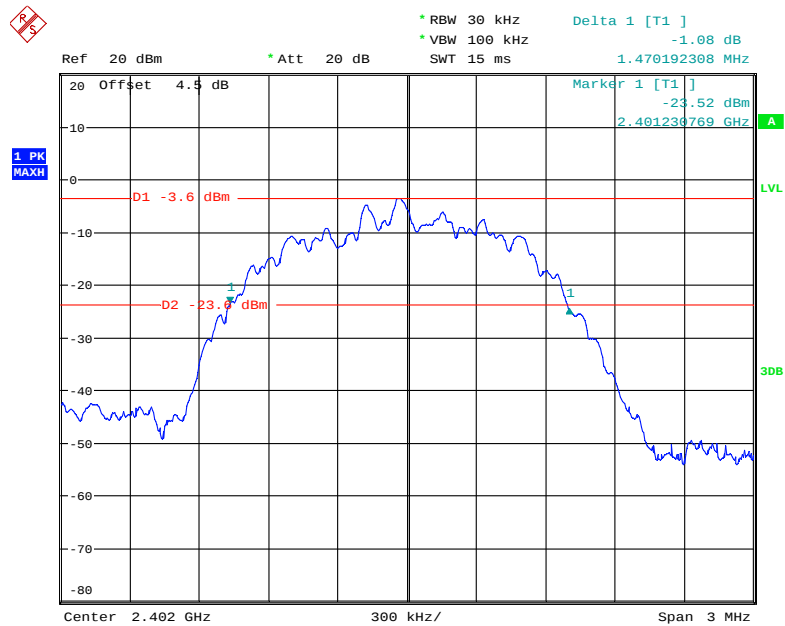


Date: 22.OCT.2019 19:34:12

EDR ($\pi/4$ -DQPSK): Middle Channel

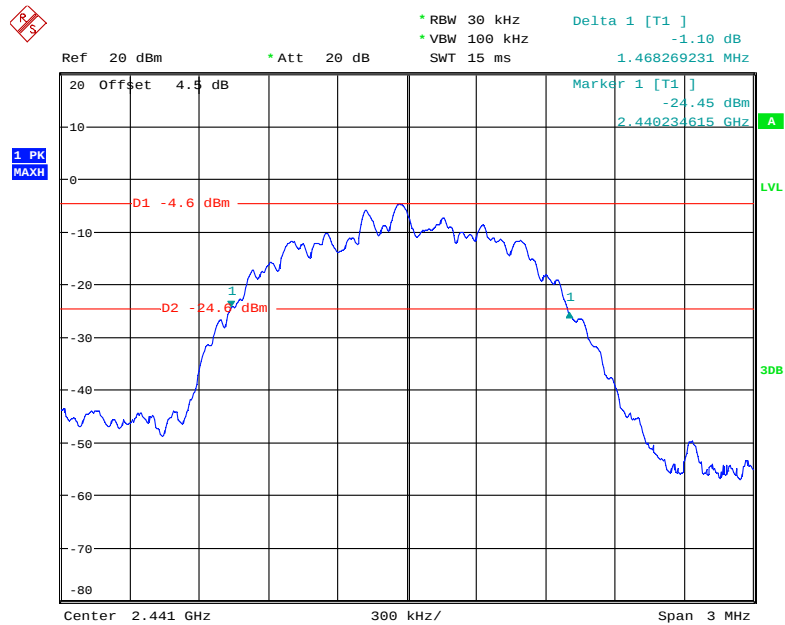


Date: 22.OCT.2019 19:35:50

EDR ($\pi/4$ -DQPSK): High Channel

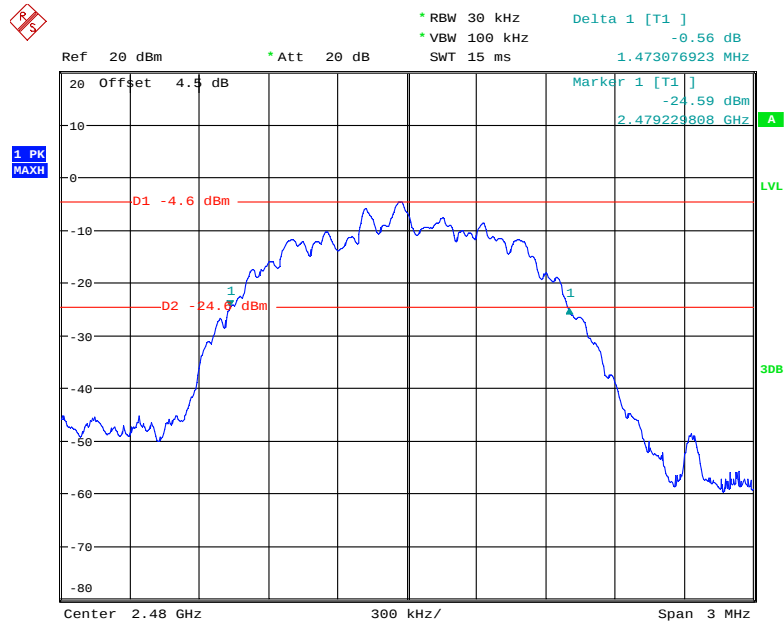


Date: 22.OCT.2019 19:36:57

EDR (8DPSK): Low Channel

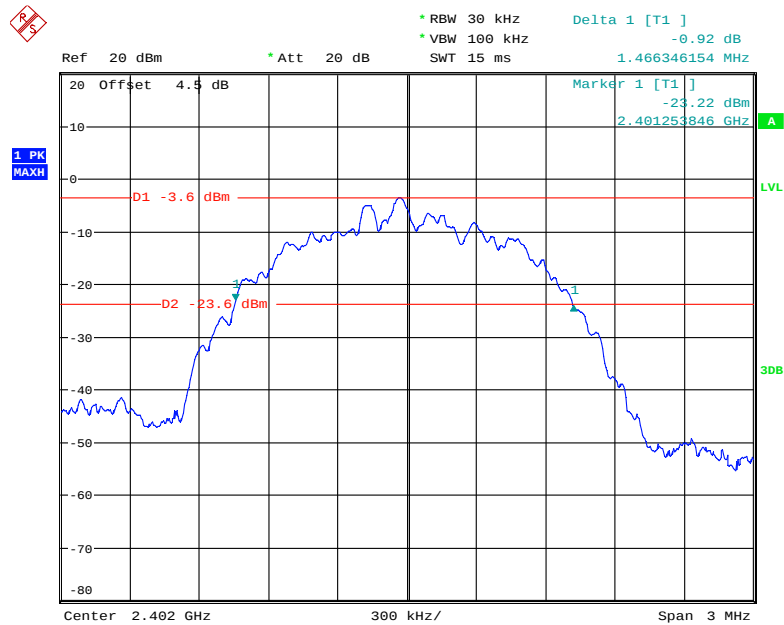


Date: 22.OCT.2019 19:33:12

EDR (8DPSK): Middle Channel

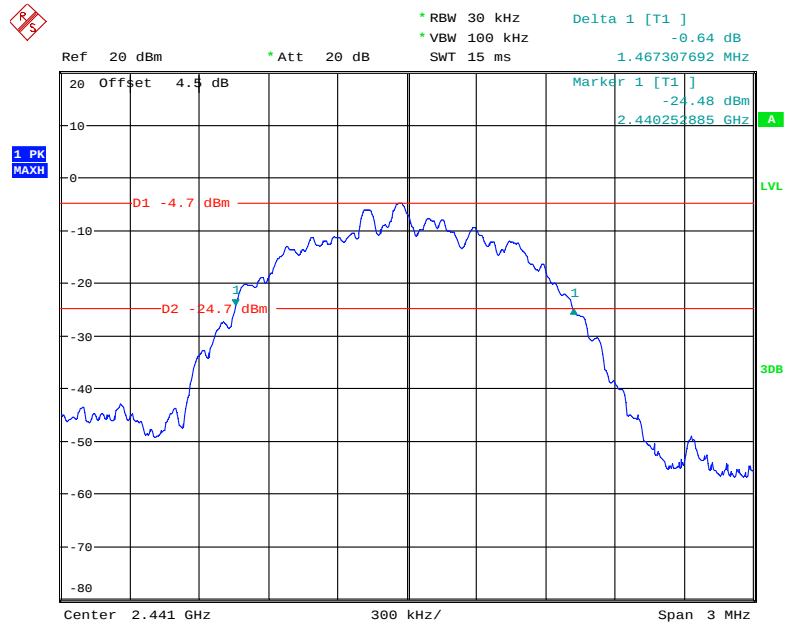

Date: 22.OCT.2019 19:32:08

EDR (8DPSK): High Channel

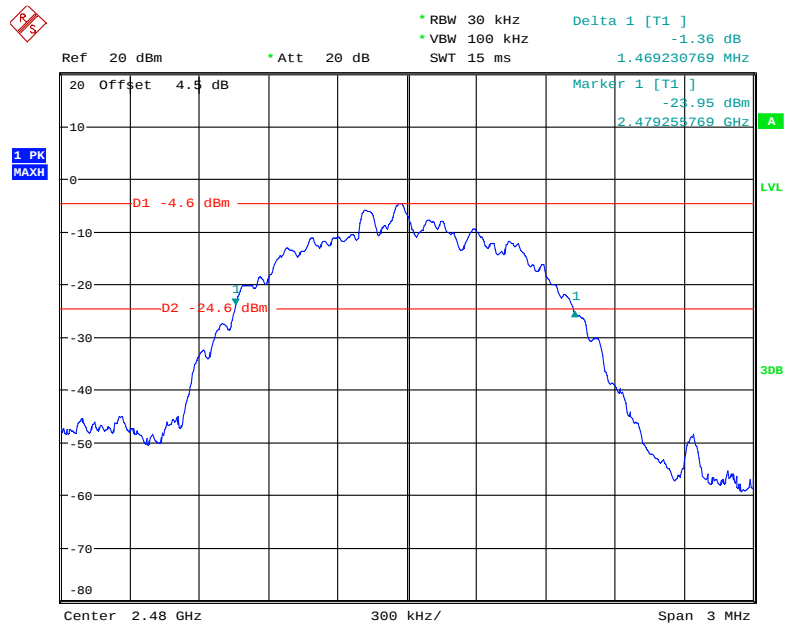

Date: 22.OCT.2019 19:31:12

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa


The testing was performed by George Zhong on 2019-10-22.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.


Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥ 15
EDR ($\pi/4$ -DQPSK)	2400-2483.5	79	≥ 15
EDR (8DPSK)	2400-2483.5	79	≥ 15

BDR (GFSK): Number of Hopping Channels

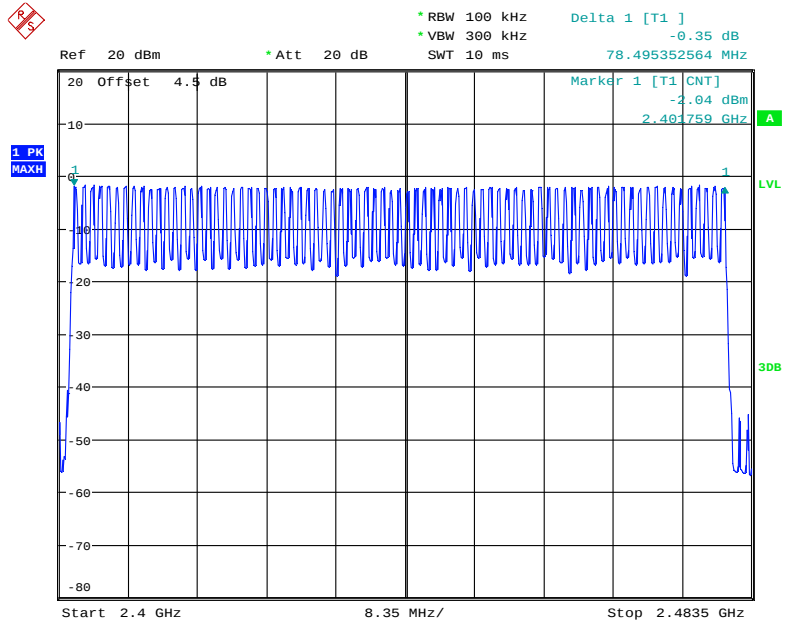


Date: 22.OCT.2019 21:13:32

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

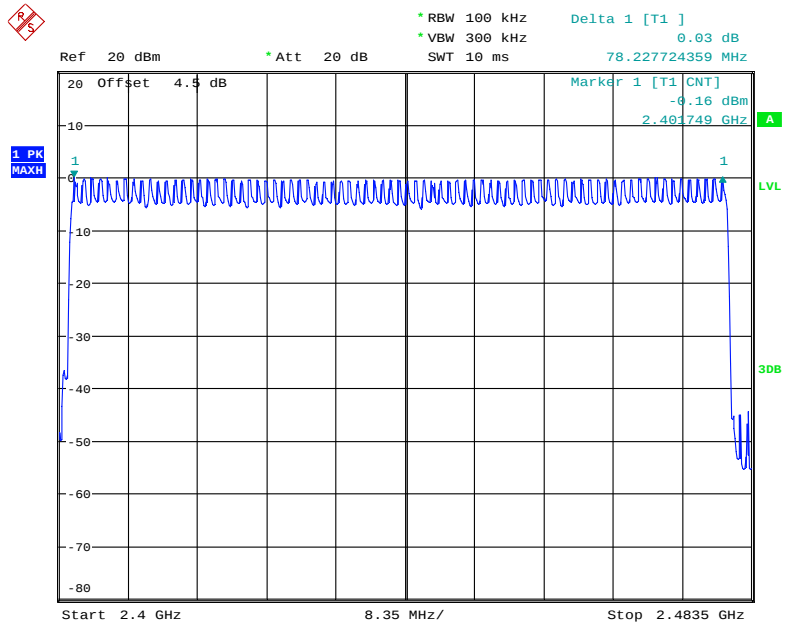

Date: 22.OCT.2019 21:30:49

EDR (8DPSK): Number of Hopping Channels

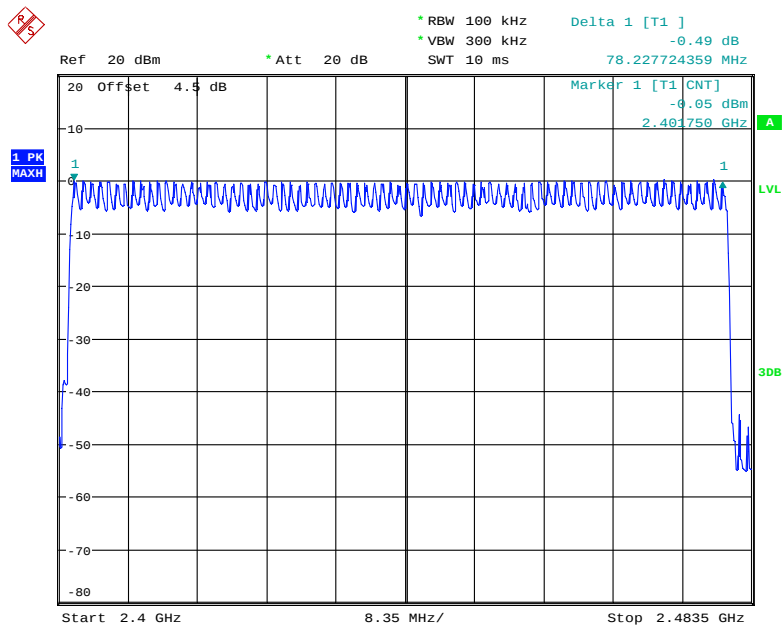

Date: 22.OCT.2019 21:42:56

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWEELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by George Zhong on 2019-10-22.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots

Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
BDR (GFSK)	DH 1	Low	0.393	0.126	0.4	Pass
		Middle	0.393	0.126	0.4	Pass
		High	0.393	0.126	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.662	0.266	0.4	Pass
		Middle	1.662	0.266	0.4	Pass
		High	1.662	0.266	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.923	0.312	0.4	Pass
		Middle	2.923	0.312	0.4	Pass
		High	2.923	0.312	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR ($\pi/4$ -DQPSK)	2DH 1	Low	0.404	0.129	0.4	Pass
		Middle	0.404	0.129	0.4	Pass
		High	0.404	0.129	0.4	Pass
		Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	2DH 3	Low	1.672	0.268	0.4	Pass
		Middle	1.672	0.268	0.4	Pass
		High	1.672	0.268	0.4	Pass
		Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	2DH 5	Low	2.923	0.312	0.4	Pass
		Middle	2.923	0.312	0.4	Pass
		High	2.923	0.312	0.4	Pass
		Note: 2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	3DH 1	Low	0.404	0.129	0.4	Pass
		Middle	0.404	0.129	0.4	Pass
		High	0.404	0.129	0.4	Pass
		Note: 3DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	3DH 3	Low	1.672	0.268	0.4	Pass
		Middle	1.672	0.268	0.4	Pass
		High	1.672	0.268	0.4	Pass
		Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	3DH 5	Low	2.923	0.312	0.4	Pass
		Middle	2.923	0.312	0.4	Pass
		High	2.923	0.312	0.4	Pass
		Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				


BDR (GFSK):

Pulse time, Low Channel, DH1

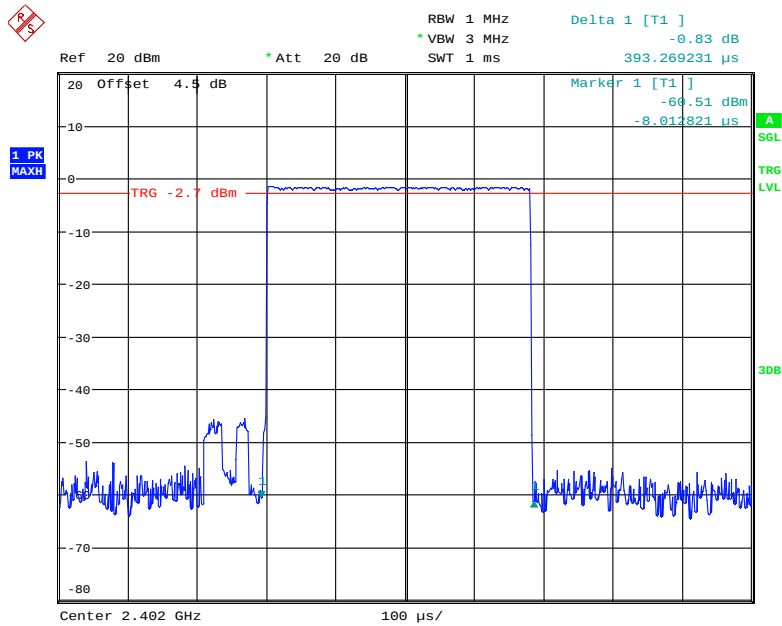


Date: 22.OCT.2019 22:01:58

Pulse time, Middle Channel, DH1

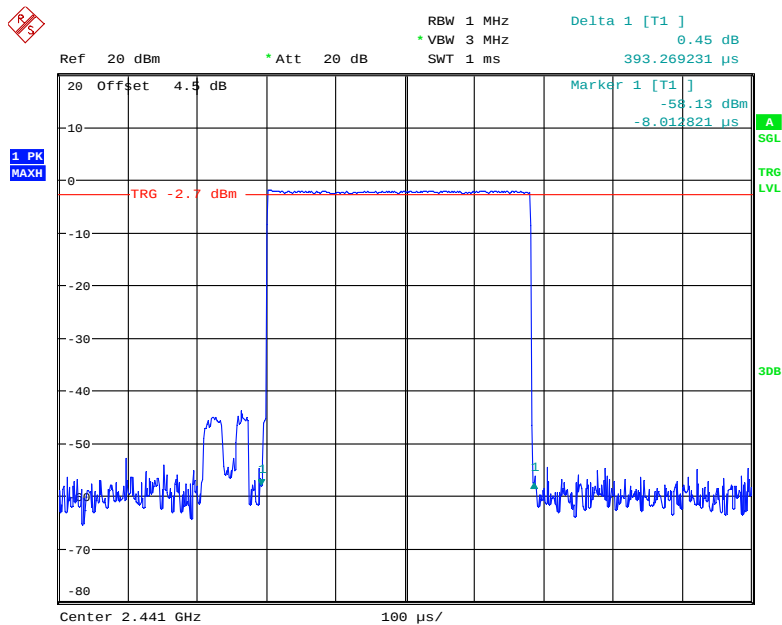


Date: 22.OCT.2019 22:02:18

Pulse time, High Channel, DH1

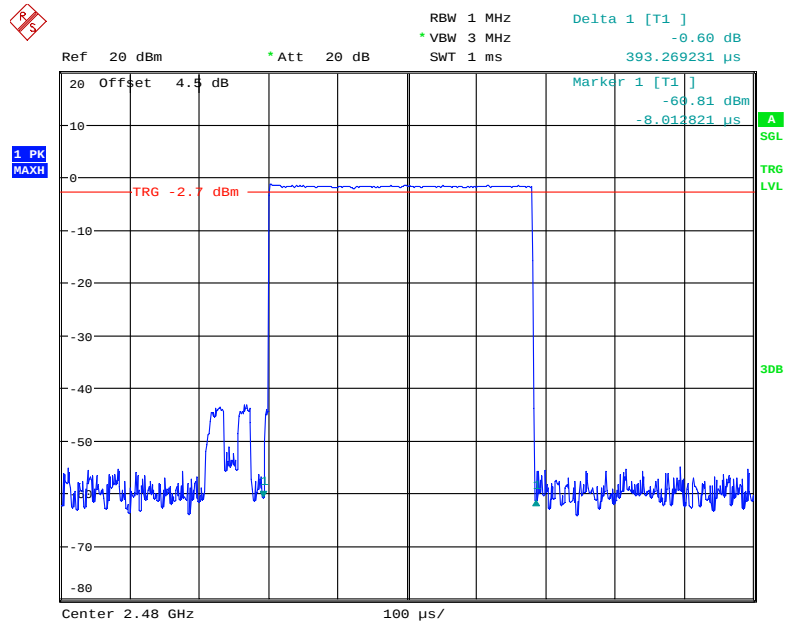


Date: 22.OCT.2019 22:02:32

Pulse time, Low Channel, DH3

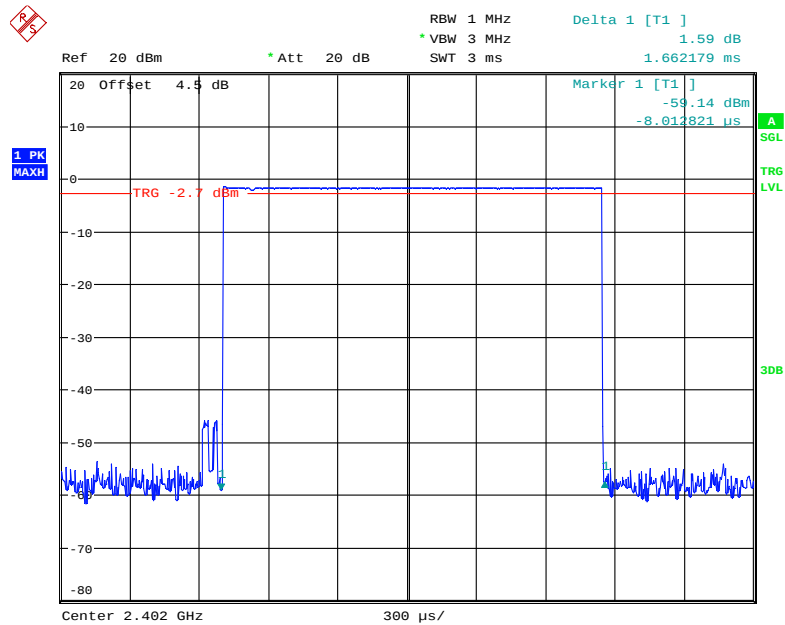


Date: 22.OCT.2019 22:05:37

Pulse time, Middle Channel, DH3

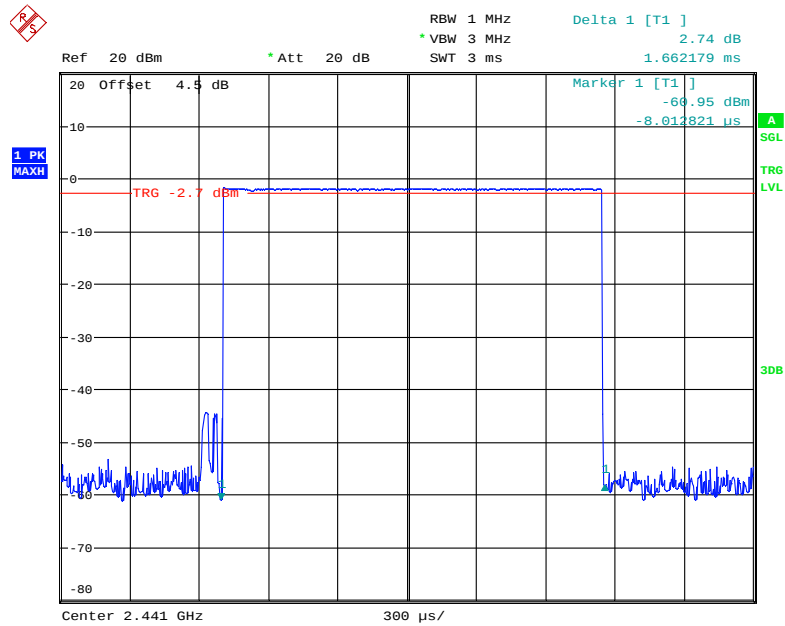


Date: 22.OCT.2019 22:05:25

Pulse time, High Channel, DH3

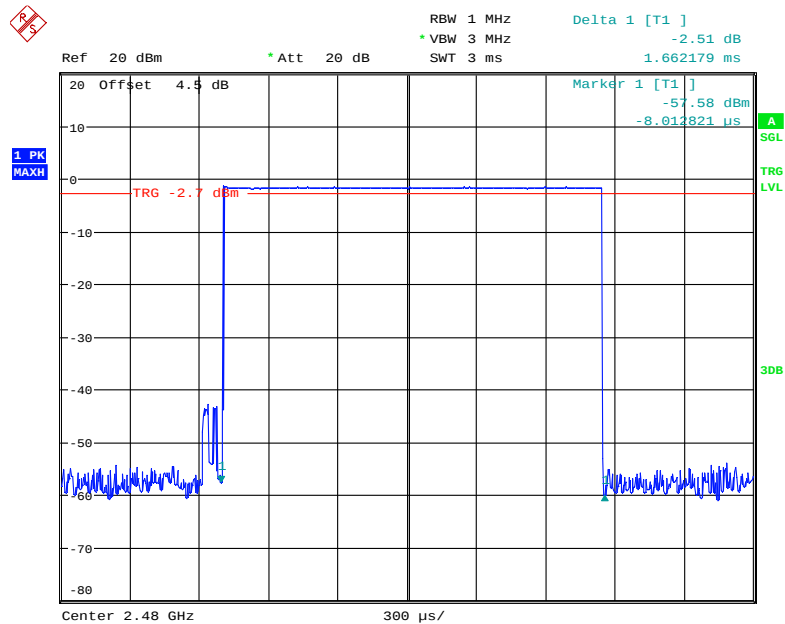


Date: 22.OCT.2019 22:05:07

Pulse time, Low Channel, DH5

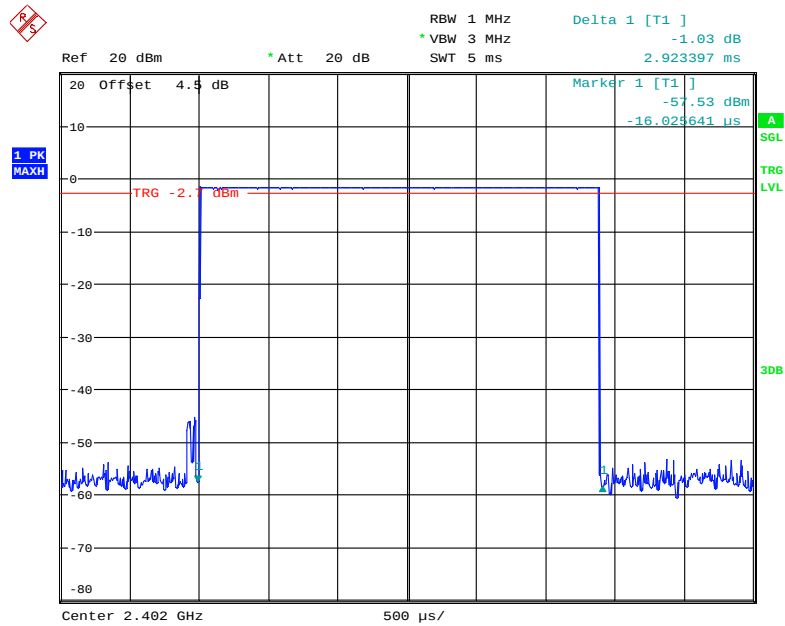


Date: 22.OCT.2019 22:07:52

Pulse time, Middle Channel, DH5

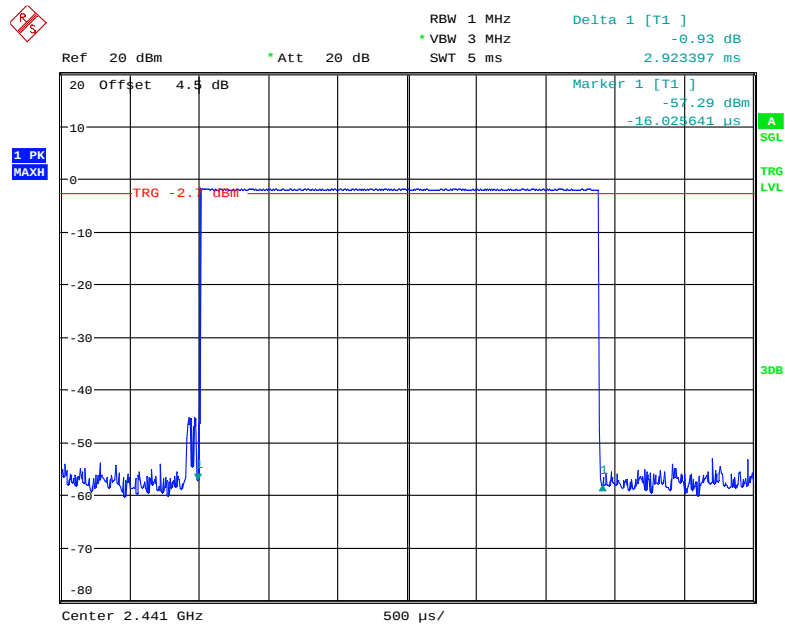

Date: 22.OCT.2019 22:08:10


Pulse time, High Channel, DH5

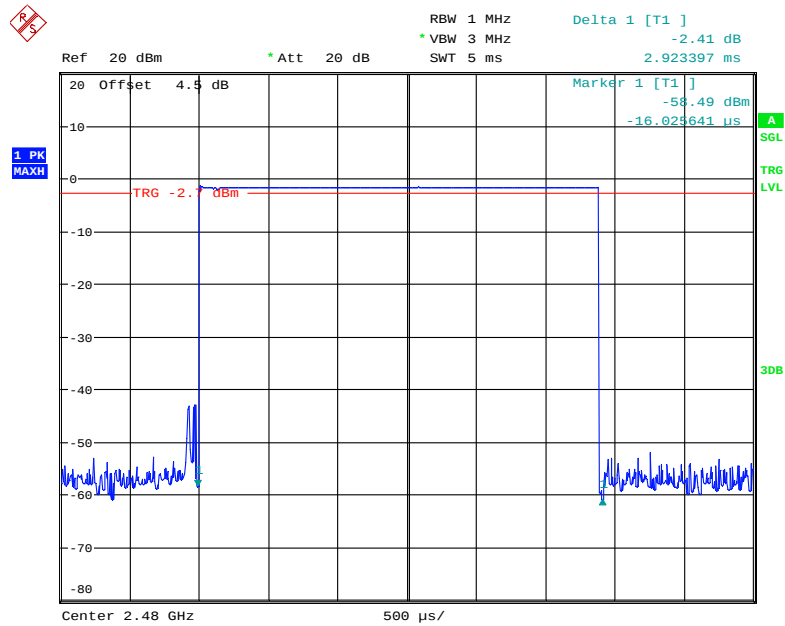

Date: 22.OCT.2019 22:08:25


EDR ($\pi/4$ -DQPSK):

Pulse time, Low Channel, 2DH1

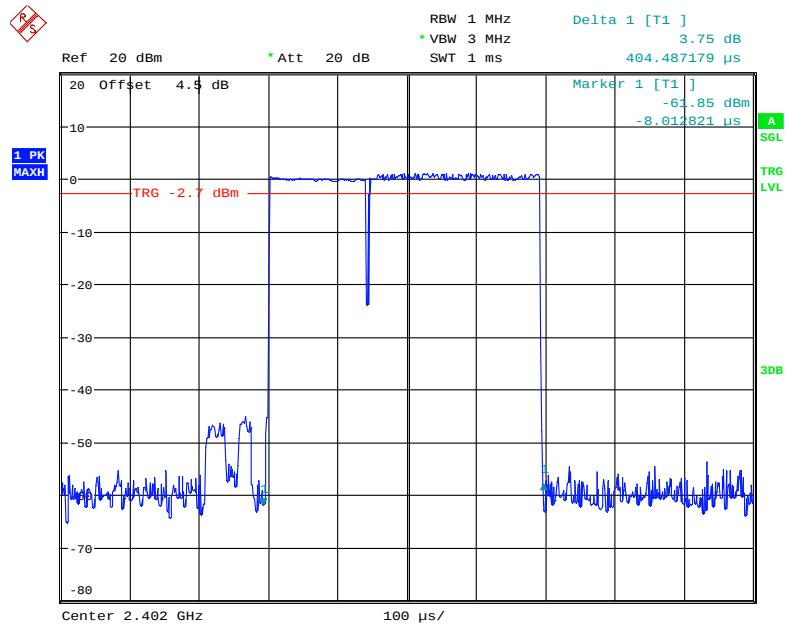


Date: 22.OCT.2019 22:03:28

Pulse time, Middle Channel, 2DH1

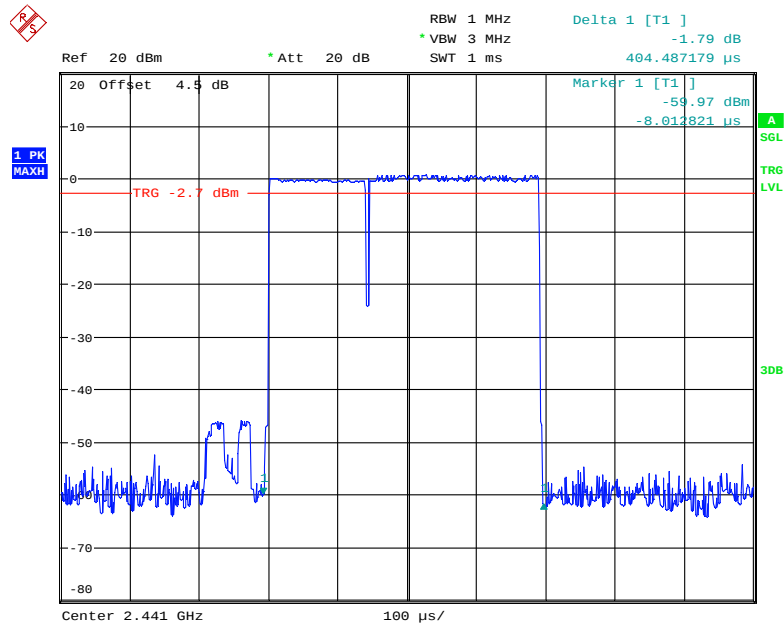


Date: 22.OCT.2019 22:03:17

Pulse time, High Channel, 2DH1

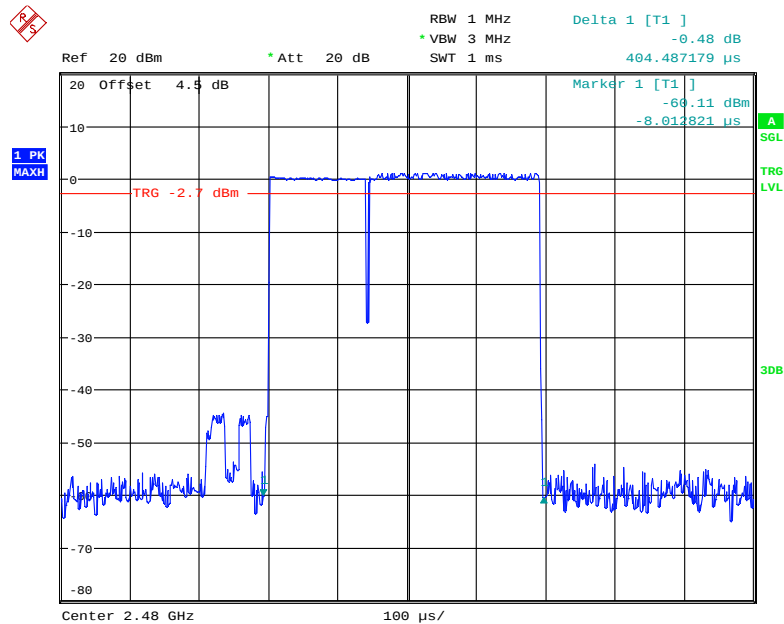


Date: 22.OCT.2019 22:03:04

Pulse time, Low Channel, 2DH3

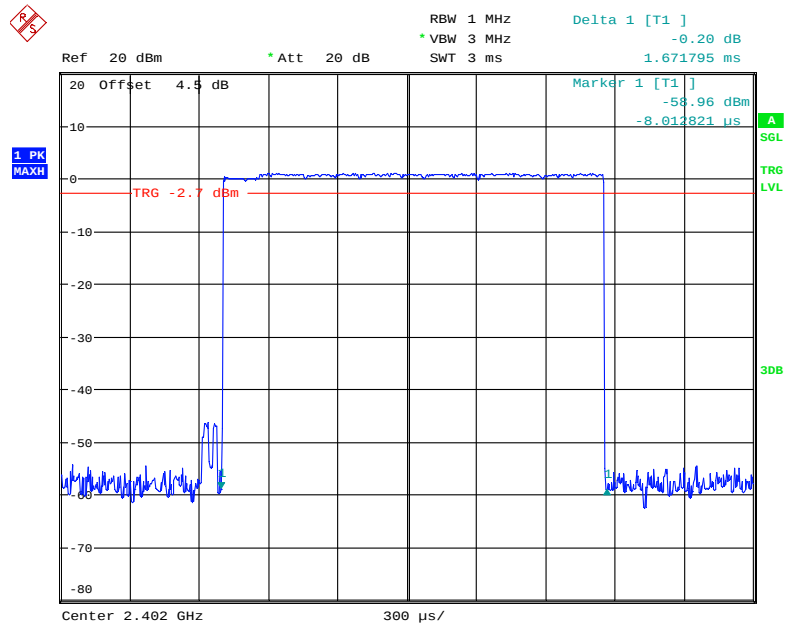


Date: 22.OCT.2019 22:05:57

Pulse time, Middle Channel, 2DH3

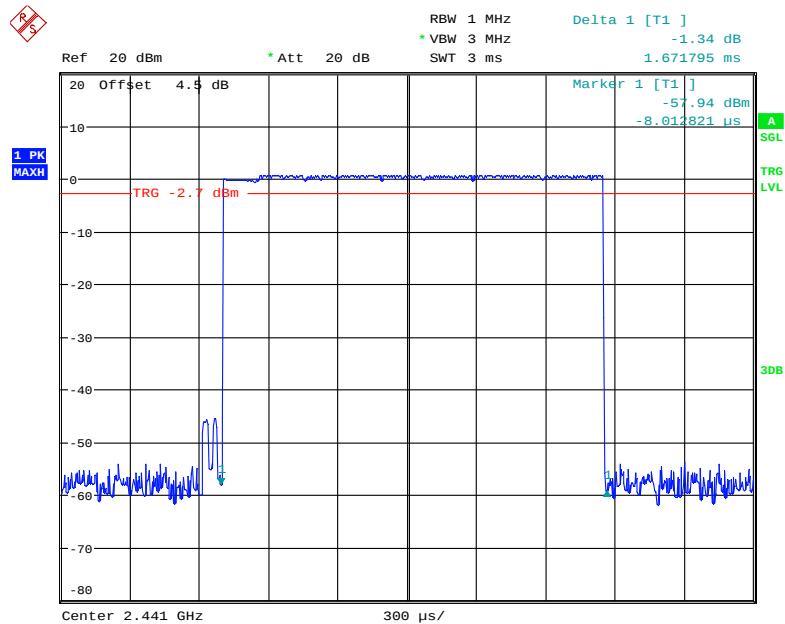


Date: 22.OCT.2019 22:06:13

Pulse time, High Channel, 2DH3

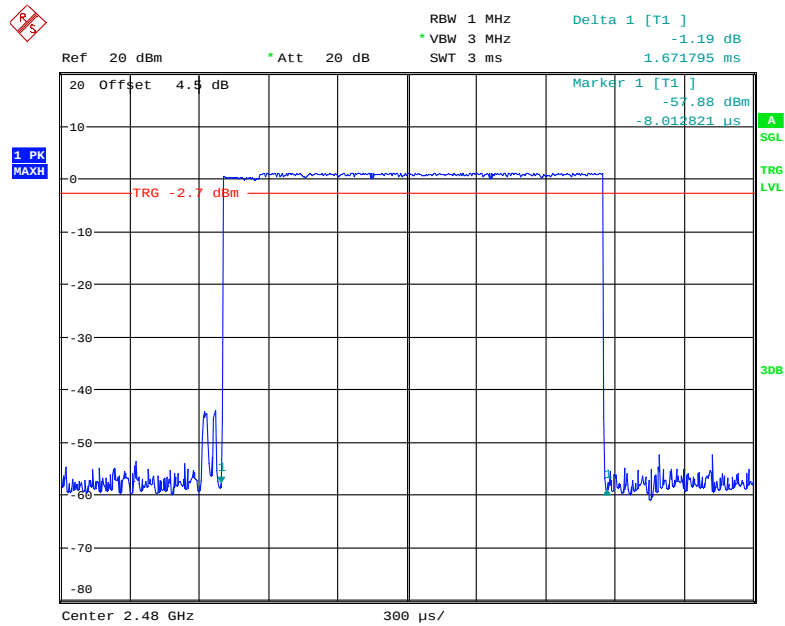


Date: 22.OCT.2019 22:06:23

Pulse time, Low Channel, 2DH5

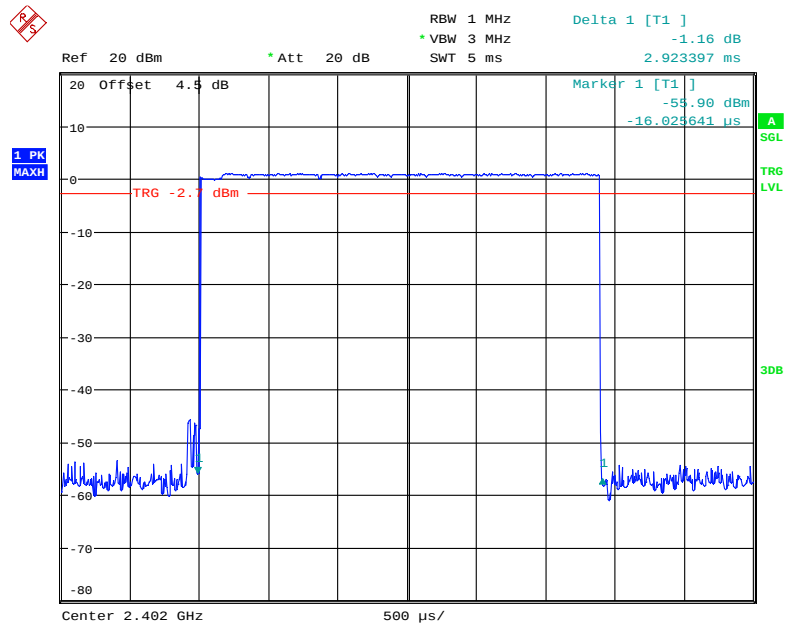


Date: 22.OCT.2019 22:08:59

Pulse time, Middle Channel, 2DH5

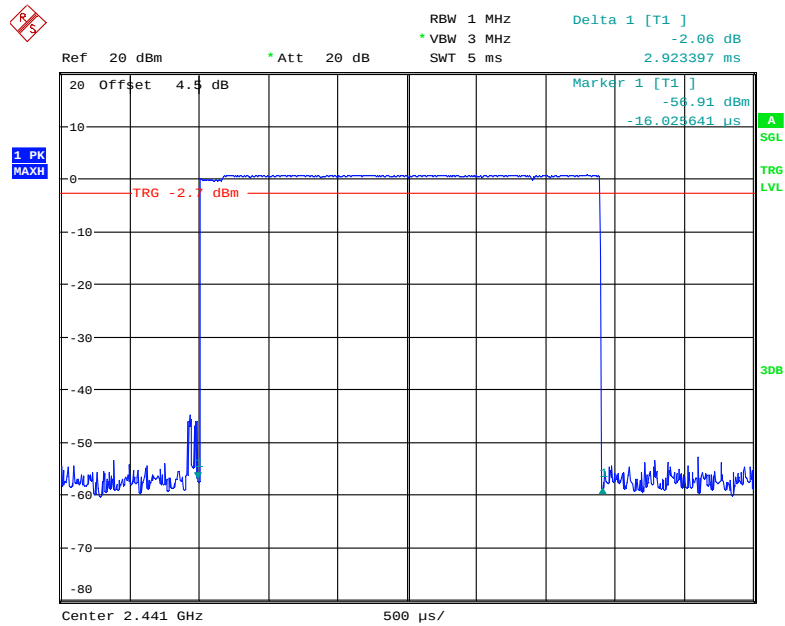


Date: 22.OCT.2019 22:08:47

Pulse time, High Channel, 2DH5

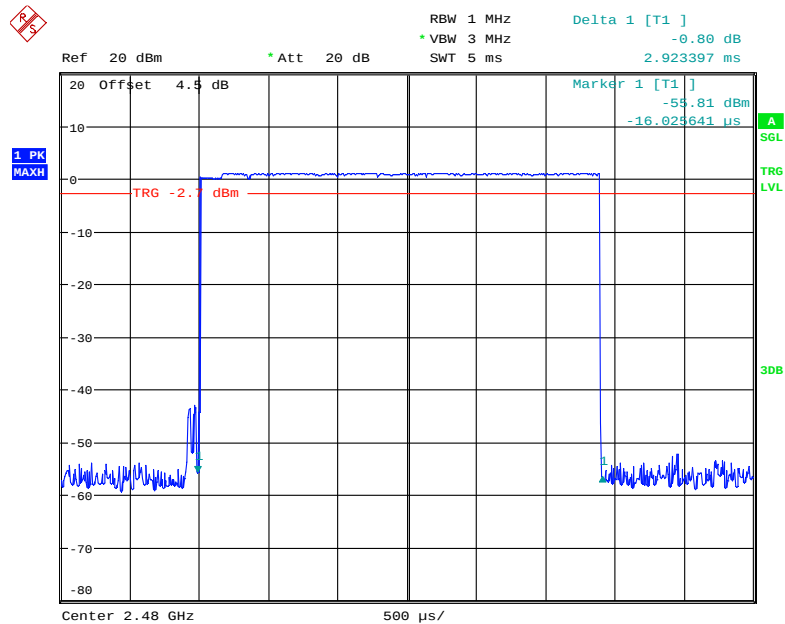


Date: 22.OCT.2019 22:08:37

EDR (8DPSK): Pulse time, Low Channel, 3DH1

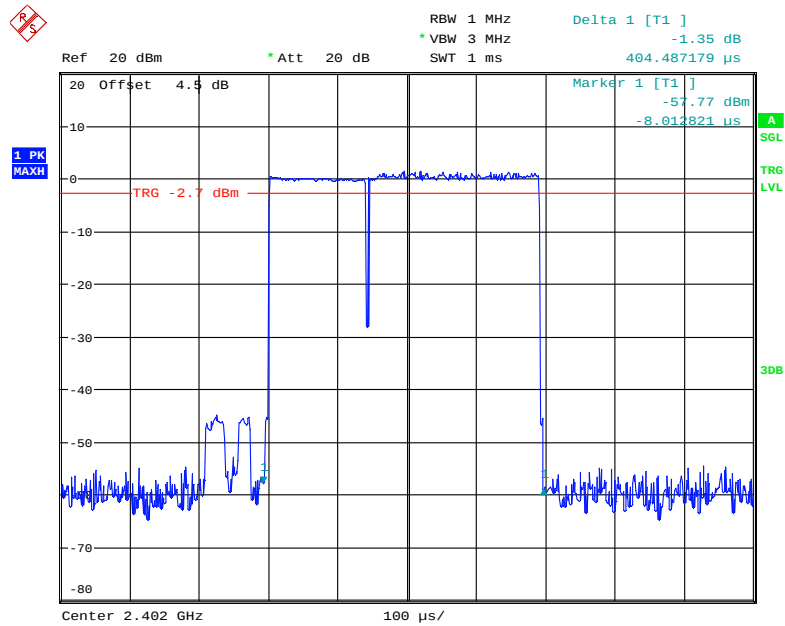


Date: 22.OCT.2019 22:03:47

Pulse time, Middle Channel, 3DH1

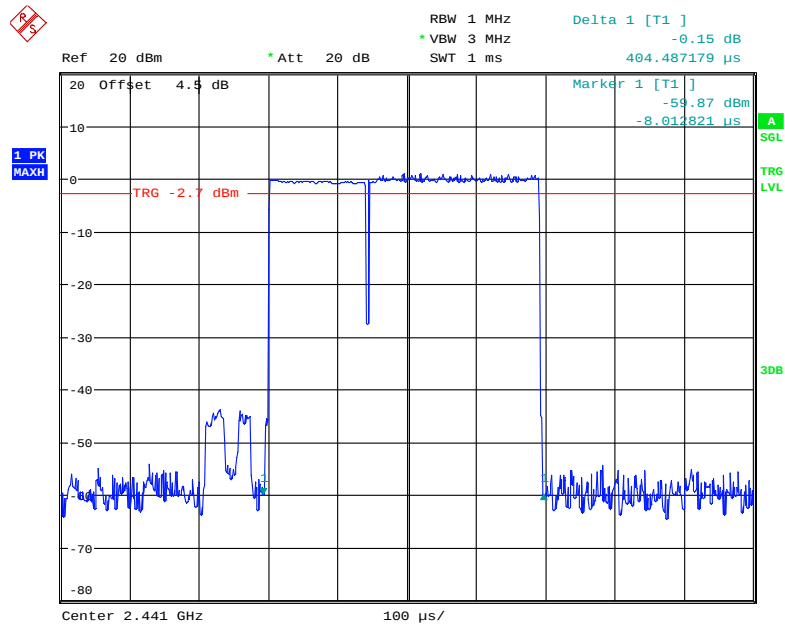


Date: 22.OCT.2019 22:03:57

Pulse time, High Channel, 3DH1

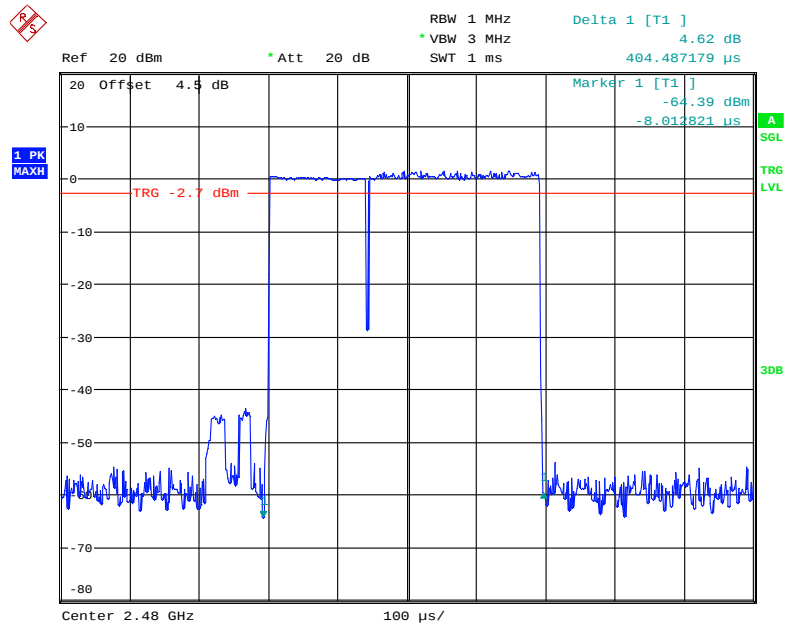


Date: 22.OCT.2019 22:04:06

Pulse time, Low Channel, 3DH3

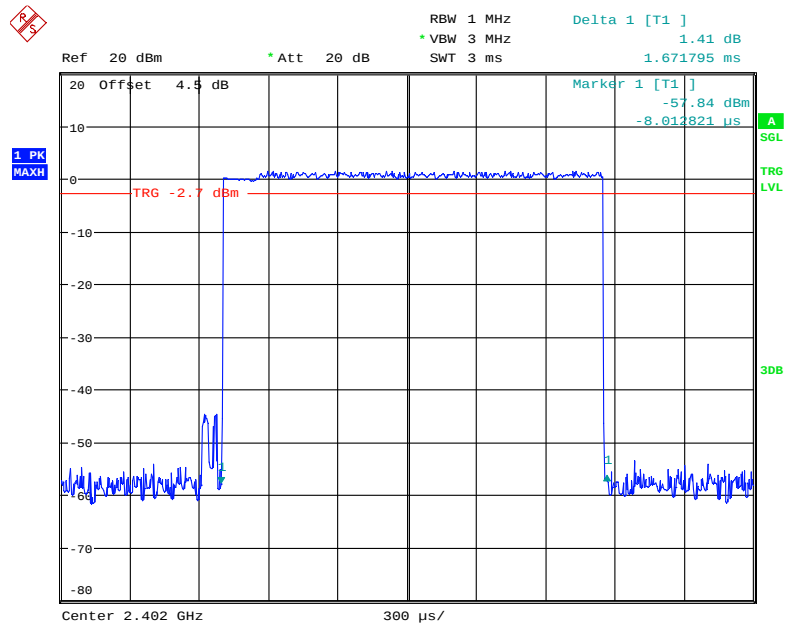


Date: 22.OCT.2019 22:07:09

Pulse time, Middle Channel, 3DH3

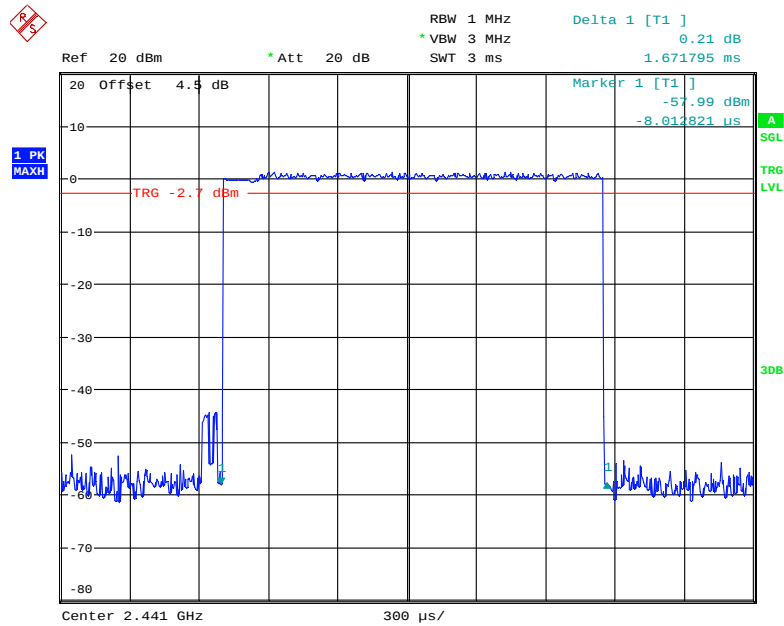


Date: 22.OCT.2019 22:06:57

Pulse time, High Channel, 3DH3

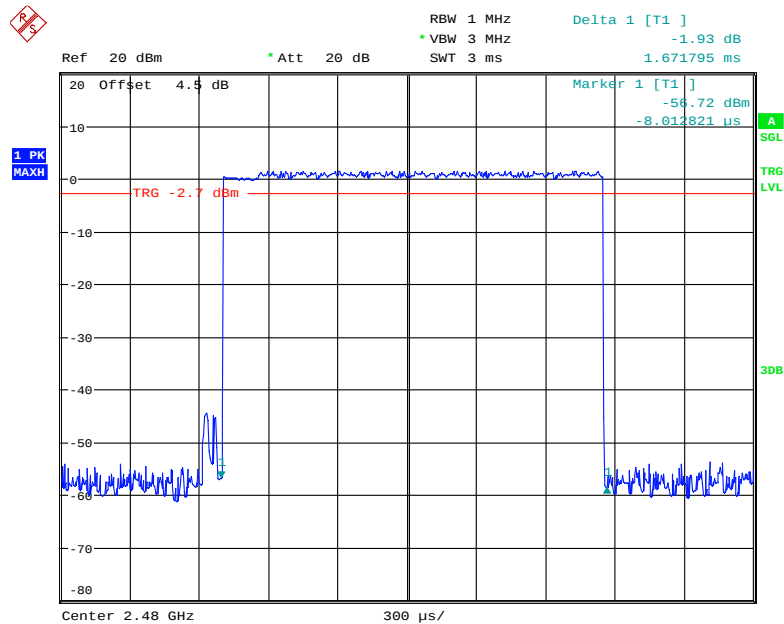


Date: 22.OCT.2019 22:06:39

Pulse time, Low Channel, 3DH5

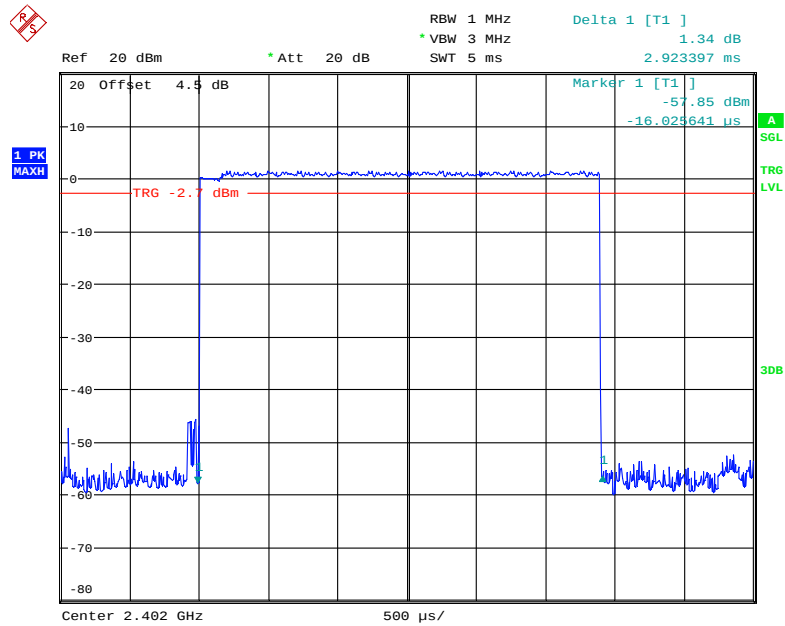


Date: 22.OCT.2019 22:09:12

Pulse time, Middle Channel, 3DH5

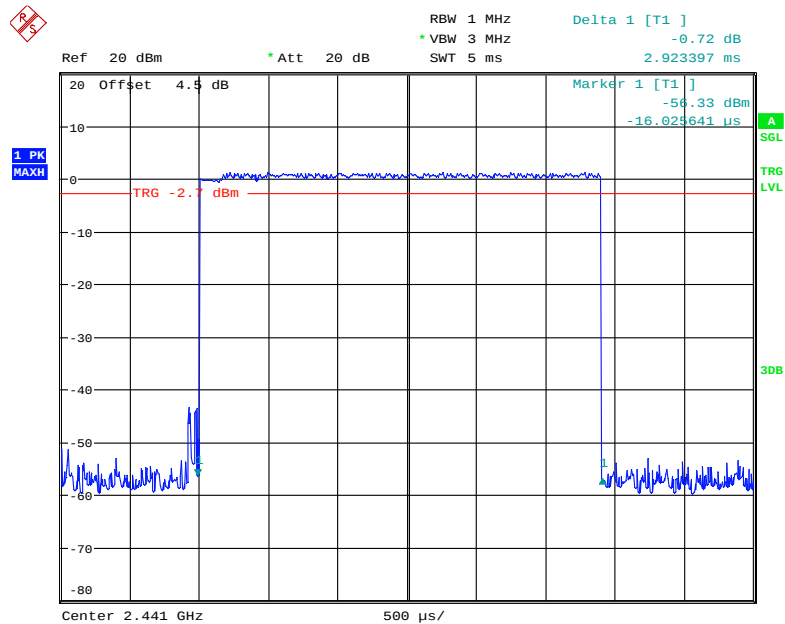

Date: 22.OCT.2019 22:09:21

Pulse time, High Channel, 3DH5

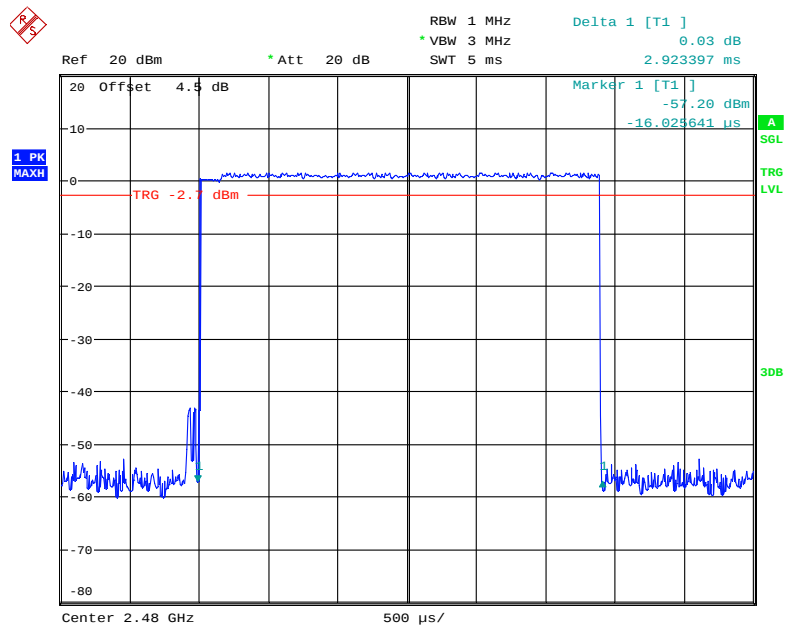

Date: 22.OCT.2019 22:09:31

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by George Zhong on 2019-10-22.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table.

Mode	Channel	Frequency (MHz)	Peak Output Power		Limit (mW)
			(dBm)	(mW)	
BDR (GFSK)	Low	2402	-2.26	0.594	125
	Middle	2441	-3.47	0.450	125
	High	2480	-3.42	0.455	125
EDR ($\pi/4$-DQPSK)	Low	2402	1.24	1.330	125
	Middle	2441	0.09	1.021	125
	High	2480	0.15	1.035	125
EDR (8DPSK)	Low	2402	1.43	1.390	125
	Middle	2441	0.30	1.072	125
	High	2480	0.28	1.067	125

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa


The testing was performed by George Zhong on 2019-10-22.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following plots.


BDR (GFSK): Band Edge-Left Side

Hopping

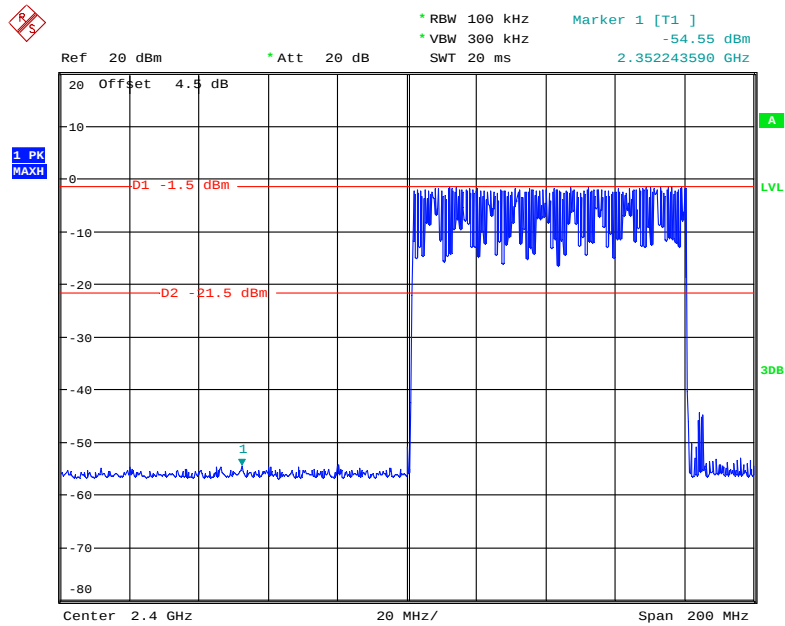


Date: 22.OCT.2019 21:56:36

Single

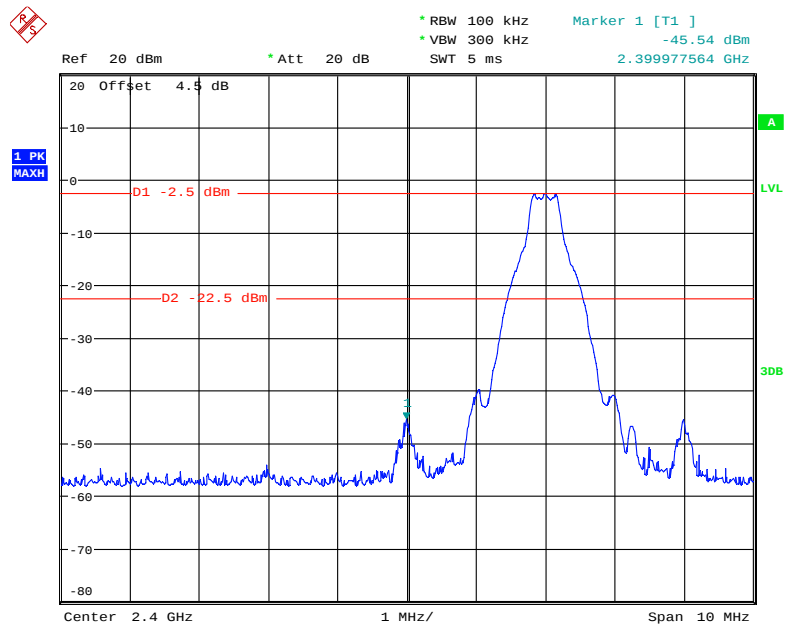


Date: 22.OCT.2019 19:41:42

BDR (GFSK): Band Edge-Right Side Hopping

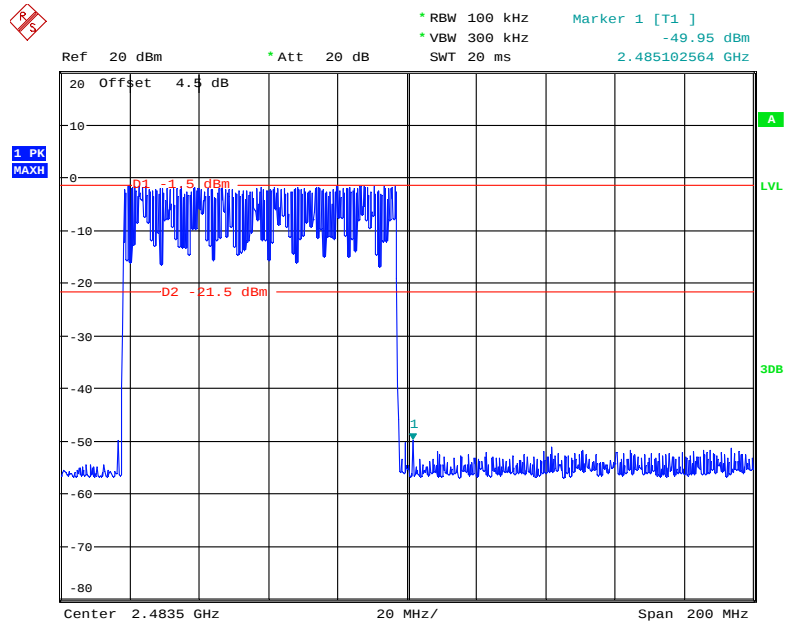


Date: 22.OCT.2019 21:58:29

Single

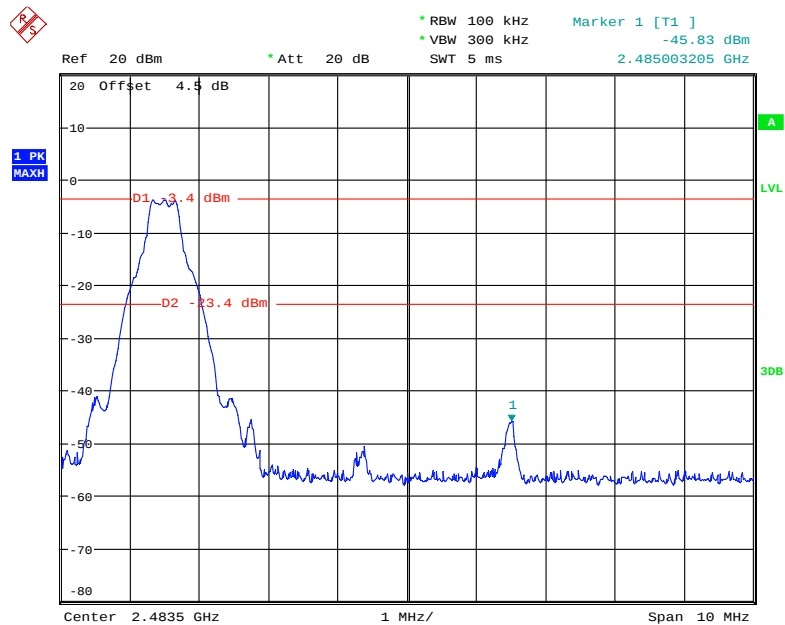


Date: 22.OCT.2019 19:43:21

EDR ($\pi/4$ -DQPSK): Band Edge-Left Side Hopping

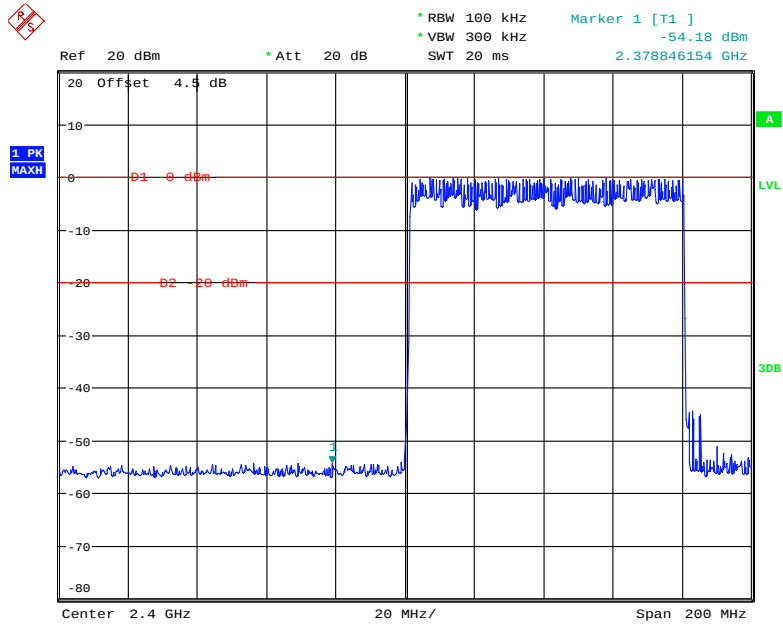


Date: 22.OCT.2019 21:53:43

Single

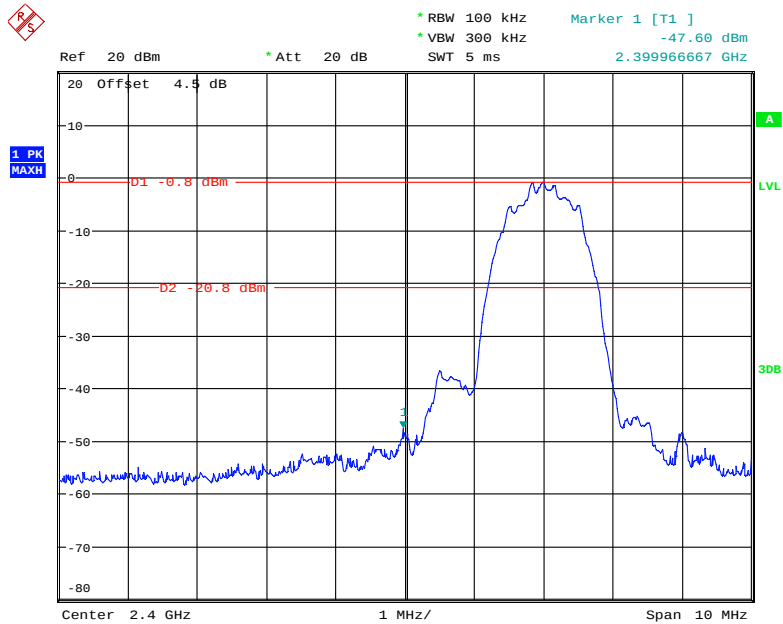


Date: 22.OCT.2019 19:47:44

EDR ($\pi/4$ -DQPSK): Band Edge-Right Side Hopping

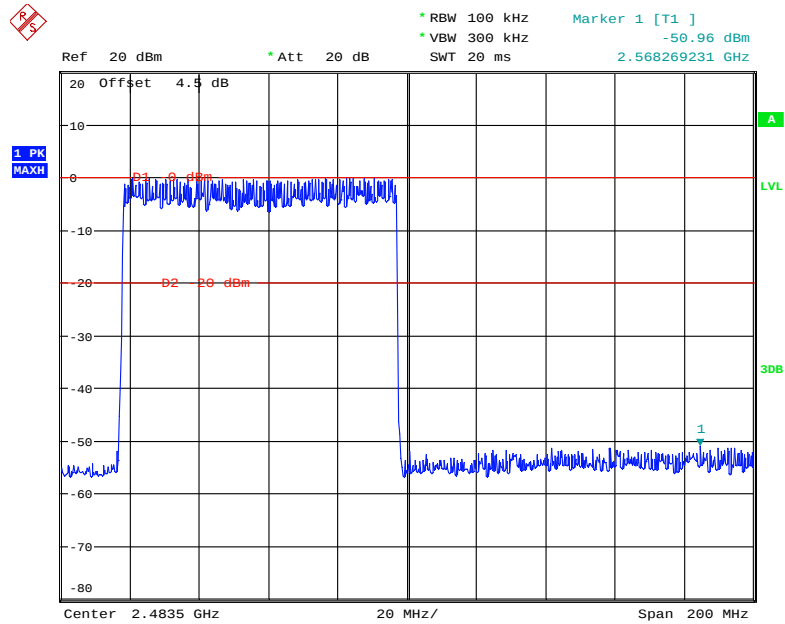


Date: 22.OCT.2019 21:50:46

Single

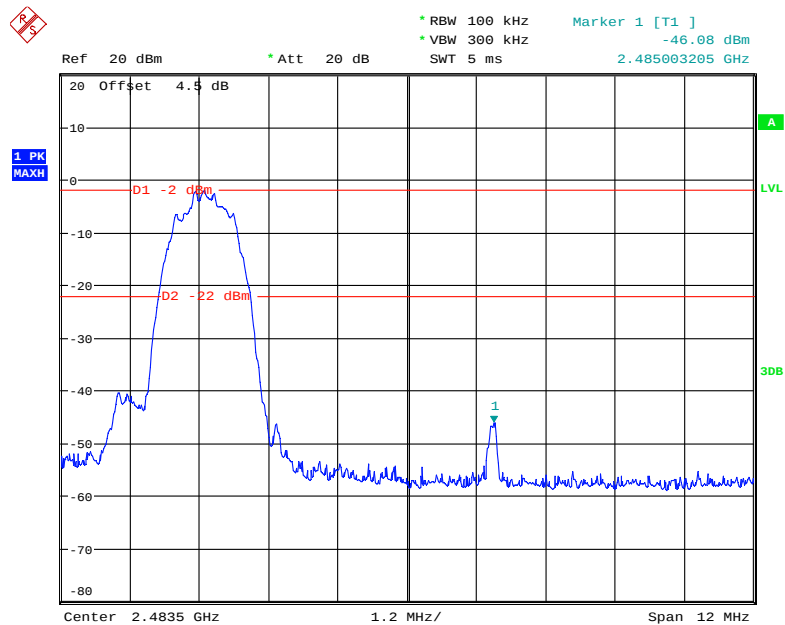


Date: 22.OCT.2019 19:44:10

EDR (8DPSK): Band Edge-Left Side Hopping

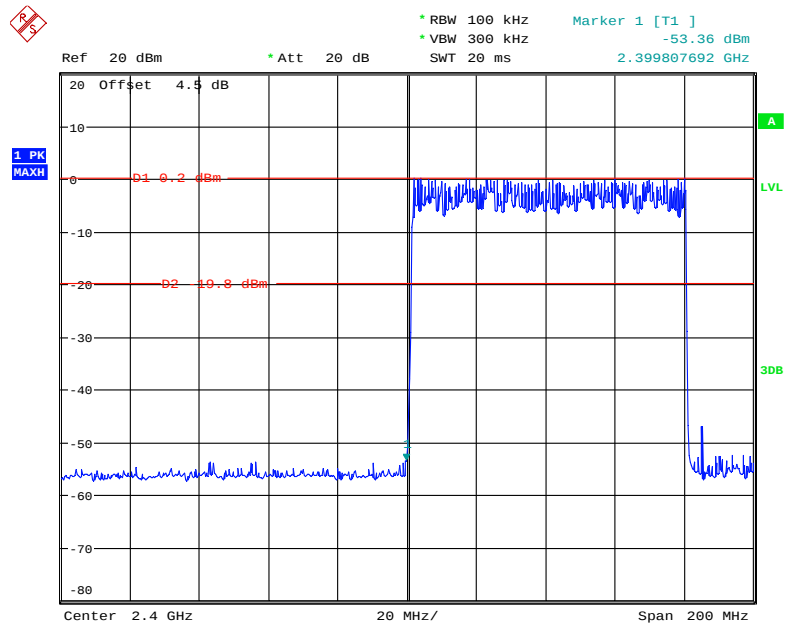

Date: 22.OCT.2019 21:45:57


Single

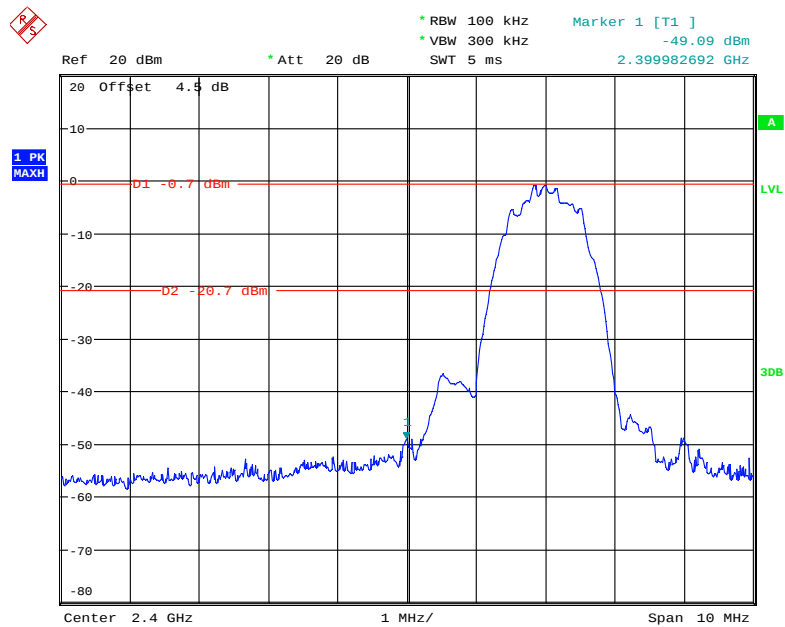

Date: 22.OCT.2019 19:46:38


EDR (8DPSK): Band Edge-Right Side

Hopping

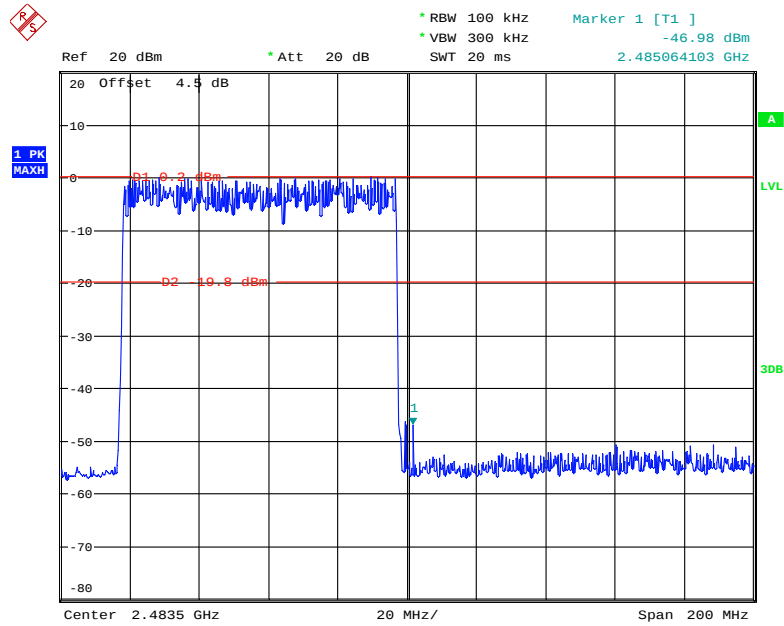

Date: 22.OCT.2019 21:47:39

Single

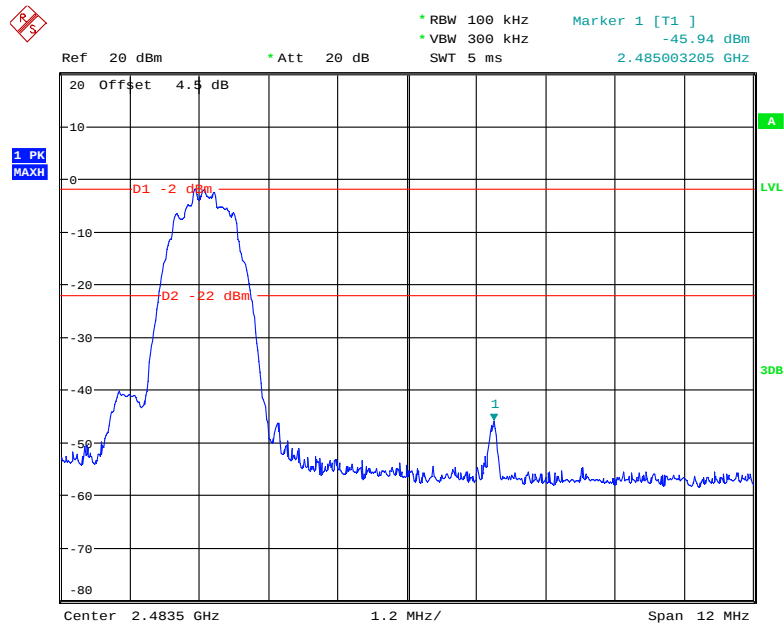

Date: 22.OCT.2019 19:45:12

***** END OF REPORT *****