

# Bluetooth antenna of PCB on-board specification

## 1, Index

| Item | Content               | Page | Remark |
|------|-----------------------|------|--------|
| 1    | Index                 | 1    |        |
| 2    | Spec Drawing          | 2    |        |
| 3    | Specification         | 2    |        |
| 4    | Antenna On Test Board | 3    |        |
| 5    | Return Loss           | 3    |        |
| 6    | Radiation Pattern     | 3    |        |


Document Type: 2.4GHZ PCB antenna  
Document Version: V1.0  
Release Date: Aug. 22, 2023

Shenzhen Feasycom Co., LTD

Telephone: 86-755-27924639

[www.feasycom.com](http://www.feasycom.com)

## 2, Spec Drawing

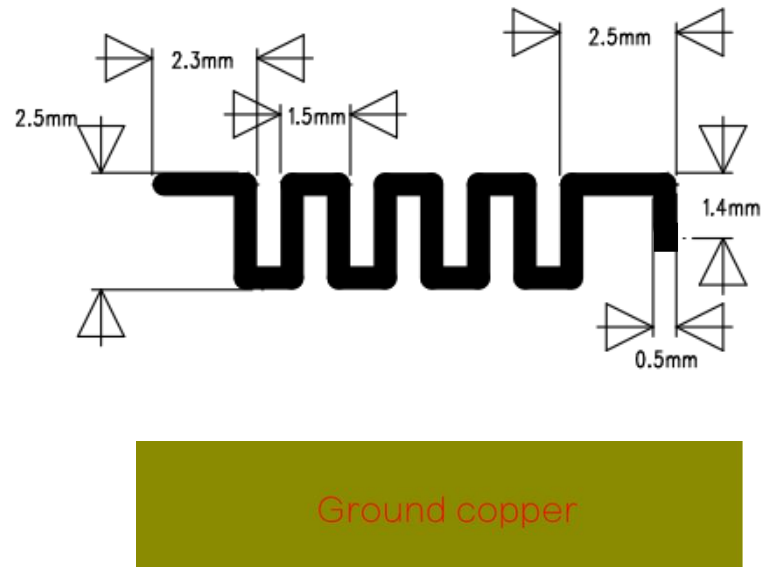

## 3, Specification


Product Number: 2.4GHZ PCB antenna

Sample Photo:




| A. Electrical Characteristics            |                    |
|------------------------------------------|--------------------|
| Frequency                                | 2400 ~ 2500 MHz    |
| S.W.R.                                   | $\leq 2.0$         |
| Gain                                     | -0.49 dBi          |
| Efficiency                               | ~ 35%              |
| Polarization                             | Linear             |
| Impedance                                | 50 Ohm             |
| B. Material & Mechanical Characteristics |                    |
| Material of Radiator                     | Gold-plated copper |
| C. Environmental                         |                    |
| Operation Temperature                    | - 40°C ~ + 85°C    |
| Storage Temperature                      | - 40°C ~ + 105°C   |

## 4, Antenna On Test Board

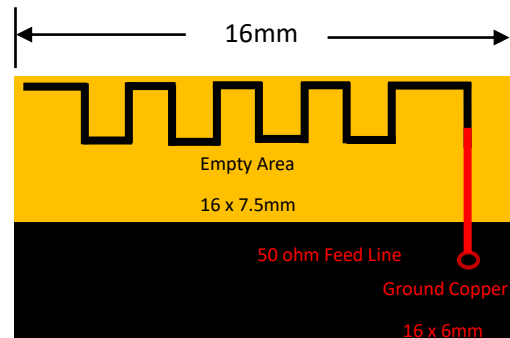

FR4 Thickness 0.8mm


## 5, Return Loss

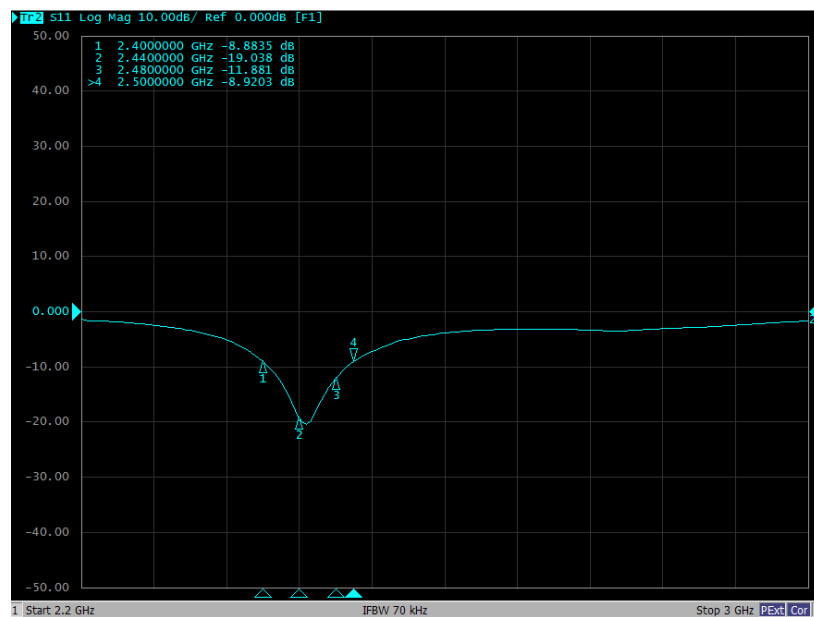

## 6, Radiation Pattern


Radiation Pattern and Gain were dependent on measurement board design. The specification of PCB antenna was measured based on the PCB size and installation position as shown in the below figure Test Board.



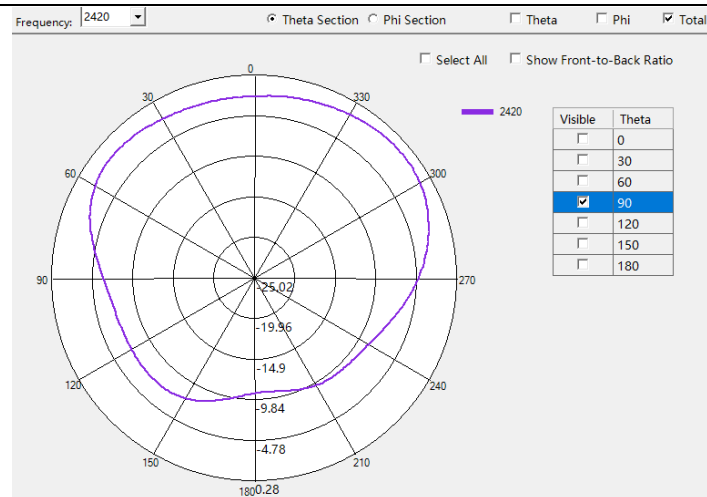


Frequency: 2420MHz

Gain: -1.14 dBi

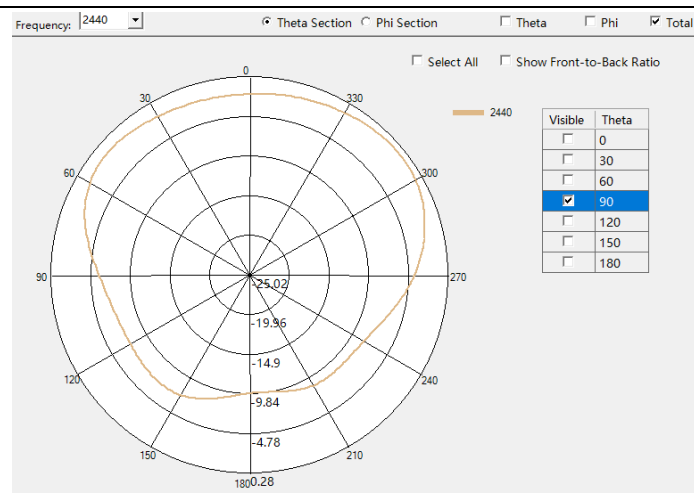


Frequency: 2440MHz

Gain: -0.61 dBi

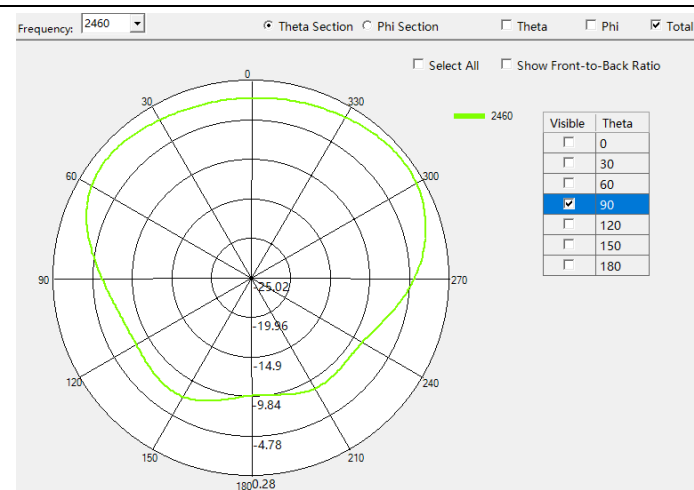

Frequency: 2460MHz

Gain: -0.65dBi

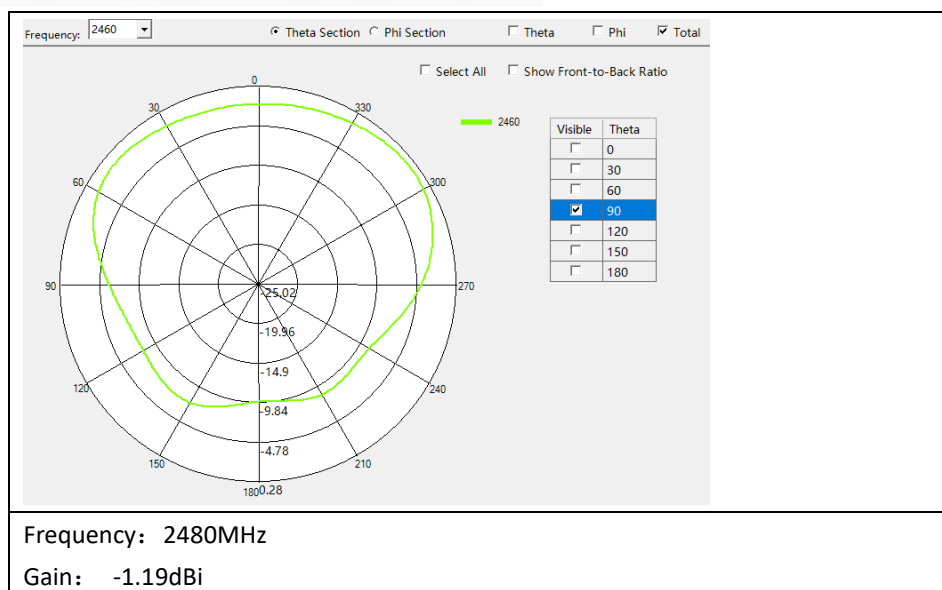

## Test Result:

| Frequency VNA | E Total. dB(dBi) | Efficiency |
|---------------|------------------|------------|
| 2400MHz       | -2.29            | 24.83%     |
| 2410MHz       | -1.50            | 28.94%     |
| 2420MHz       | -1.14            | 30.75%     |
| 2430MHz       | -0.92            | 31.75%     |
| 2440MHz       | -0.61            | 33.30%     |
| 2450MHz       | -0.49            | 34.67%     |
| 2460MHz       | -0.65            | 33.15%     |
| 2470MHz       | -0.83            | 31.96%     |
| 2480MHz       | -1.19            | 29.85%     |
| 2490MHz       | -1.52            | 27.58%     |
| 2500MHz       | -1.71            | 26.26%     |