

Bluetooth antenna of PCB on-board specification

Model: FSC- BW256

1, Index

Item	Content	Page	Remark
1	Index	1	
2	Specification	2	
3	Return Loss	3	
4	Radiation Pattern	4-5	
5	Spec Drawing	5	

Document Type: PCB antenna
Document Version: V1.0
Release Date: May. 20, 2024

Shenzhen Feasycom Co., LTD

Telephone: 86-755-27924639

www.feasycom.com

Shenzhen Feasycom Co., LTD

Box 508, Building A, Fenghuang Zhigu, No. 50, Tiezai Road,

Gongle Community, Xixiang Street, Baoan District, Shenzhen

www.feasycom.com

2, Specification

Product Number: PCB antenna

Sample Photo:



A. Electrical Characteristics

Frequency	2400 ~ 2500 MHz
Gain	-1.88 dBi
Efficiency	~ 22%
Polarization	Linear
Impedance	50 Ohm


B. Material & Mechanical Characteristics

Material of Radiator	copper
----------------------	--------


C. Environmental

Operation Temperature	- 40℃ ~ + 85℃
Storage Temperature	- 40℃ ~ + 105℃


3, Return Loss

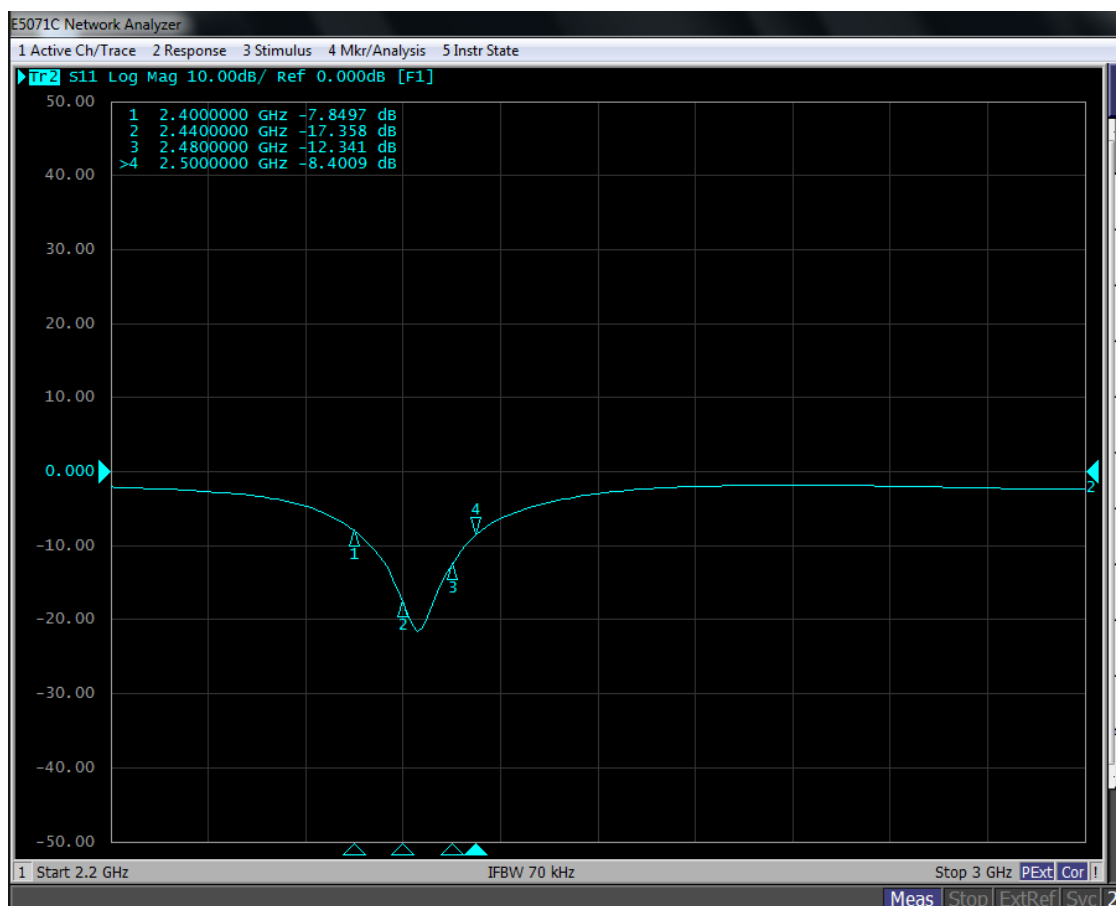

4, Radiation Pattern

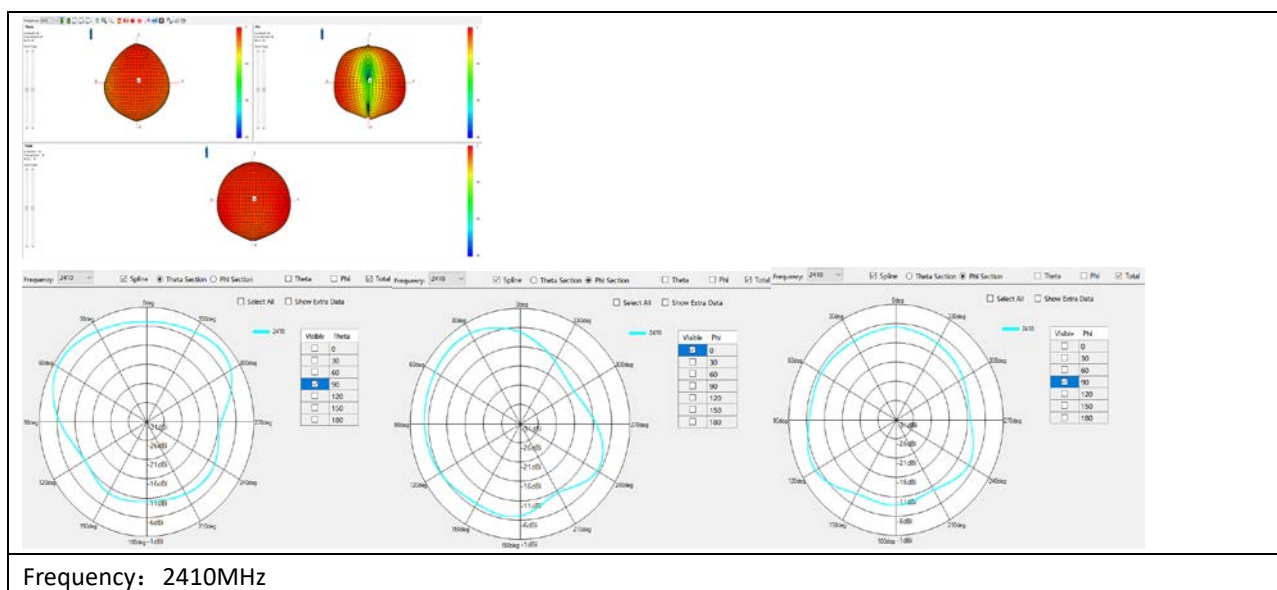


Gain: -1.55 dBi

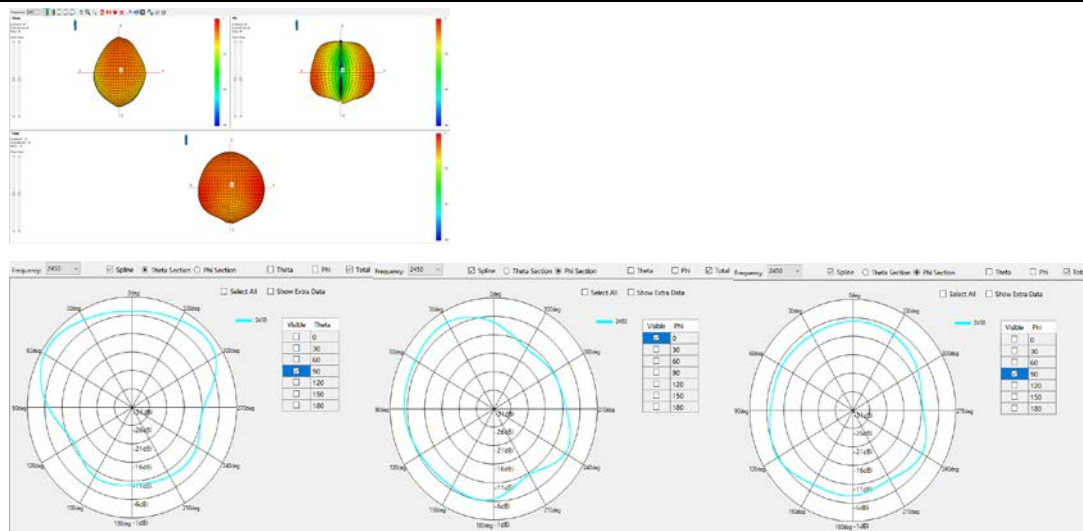

Frequency: 2450MHz

Gain: -0.66 dBi

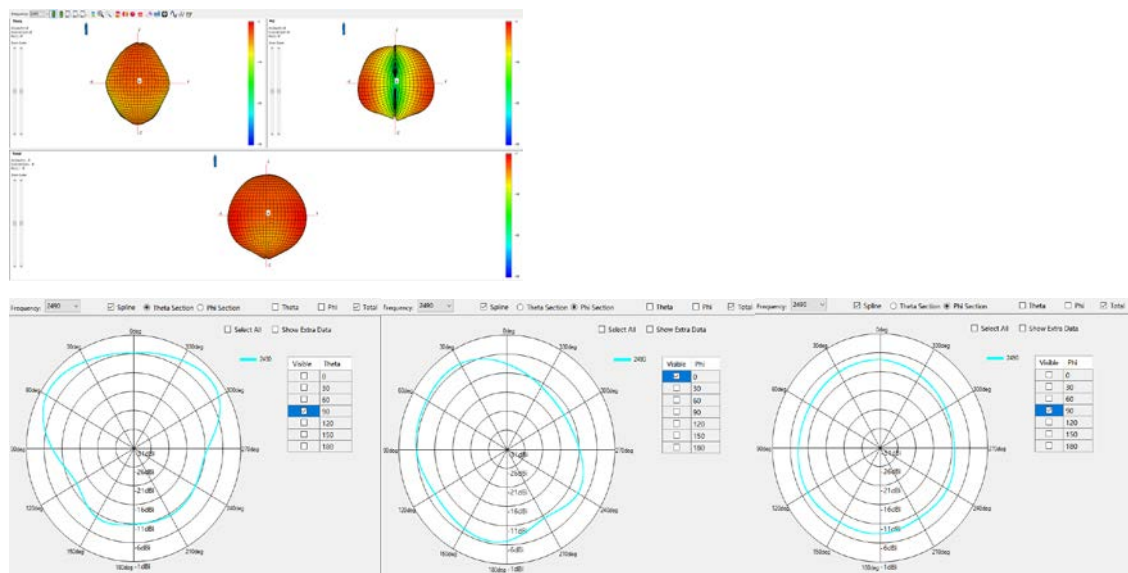

Frequency: 2480MHz

Gain: -1.54dBi

Test Result:

Freq(MHz)	Gain (dBi)	Efficiency %
2400MHz	-2.06	23.72
2410MHz	-2.03	23.46
2420MHz	-1.97	23.33
2430MHz	-1.9	23.24
2440MHz	-1.88	23.13
2450MHz	-1.88	23.01
2460MHz	-2.11	22.02
2470MHz	-2.25	21.18
2480MHz	-2.45	20.34
2490MHz	-2.69	19.07
2500MHz	-3	17.64

5, Spec Drawing

Unit: mm

