





<2Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

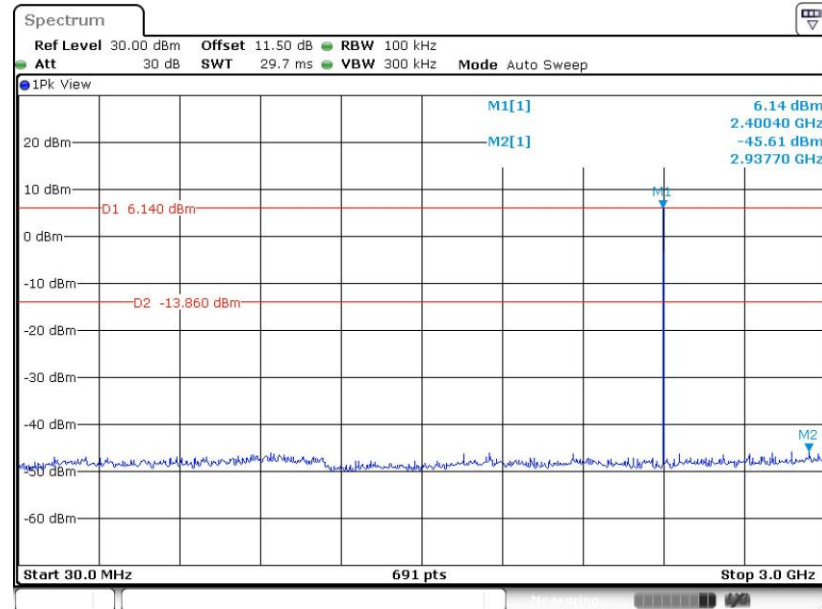

Date: 6 APR 2022 23:07:19


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

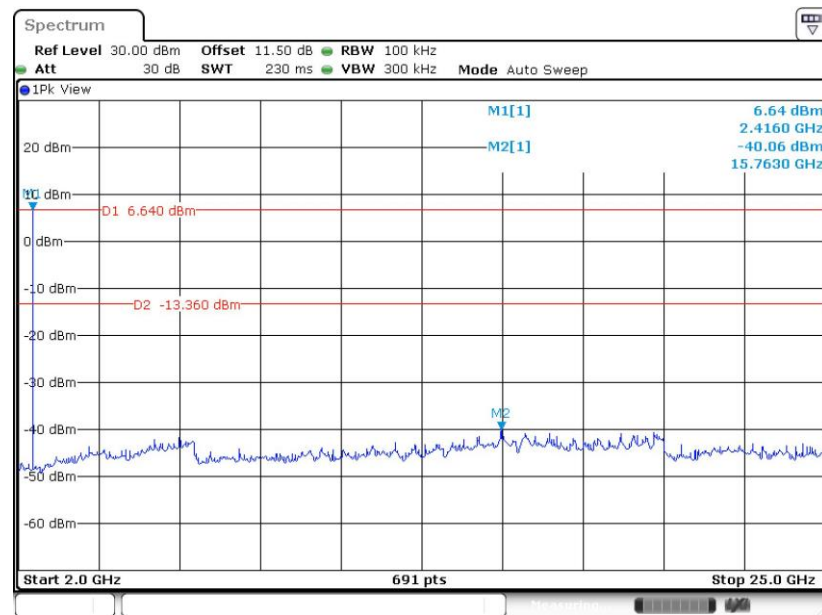


Date: 6 APR 2022 23:07:48



CSE Plot on Ch 39 between 30MHz ~ 3 GHz

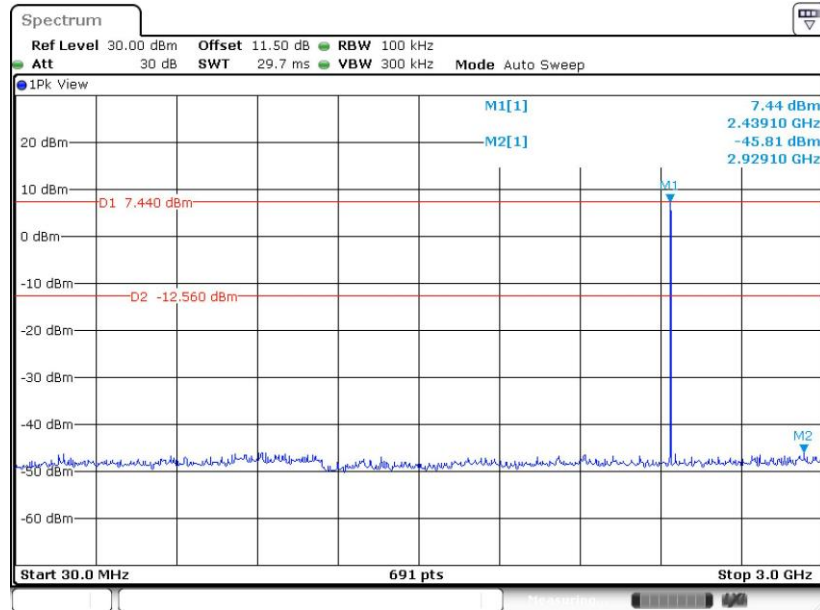


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

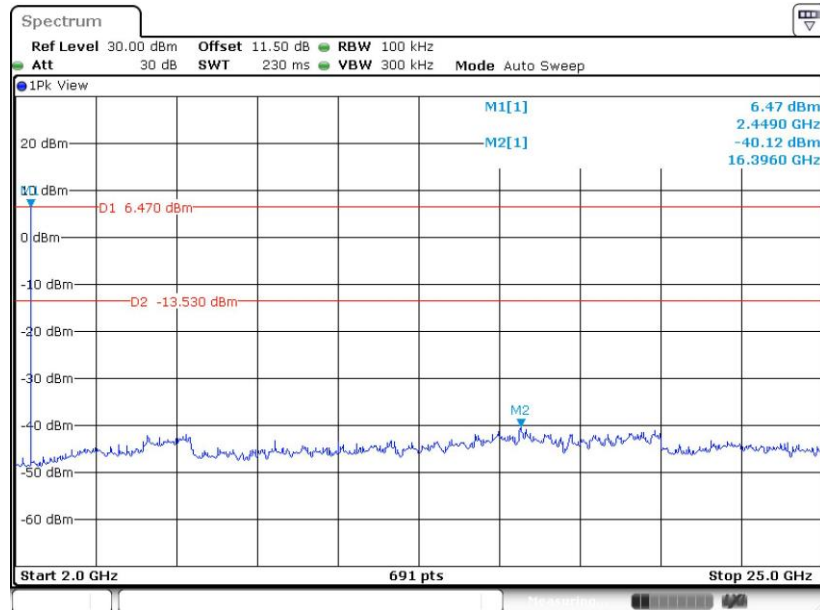




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

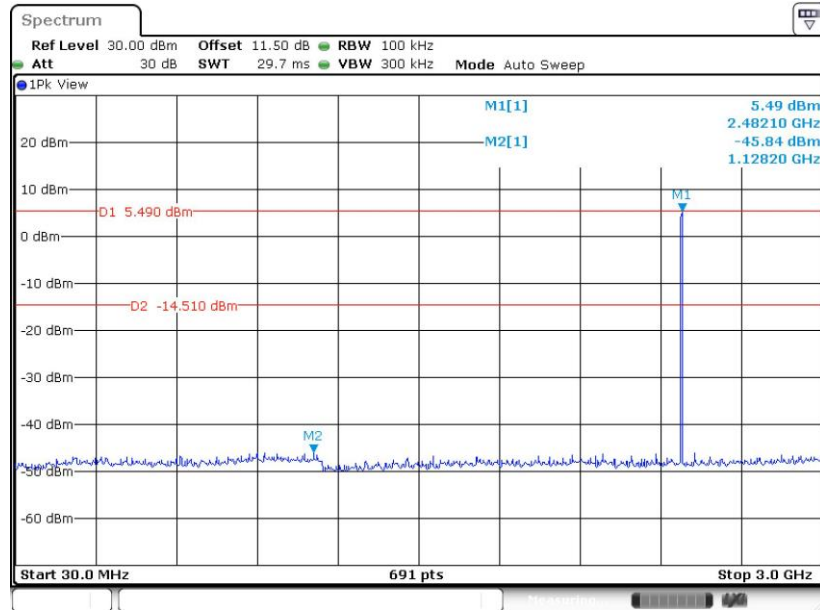

Date: 6 APR 2022 23:46:22


CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

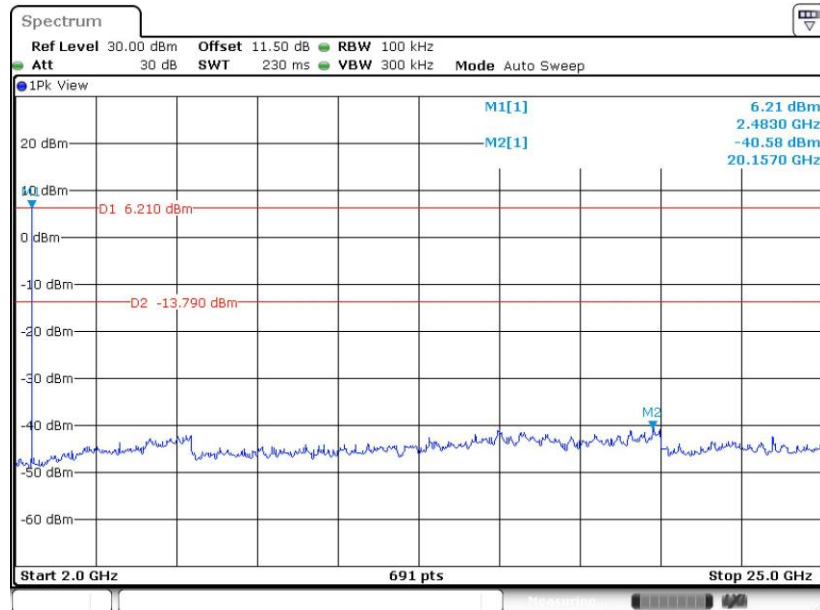

Date: 6 APR 2022 23:46:52


<3Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

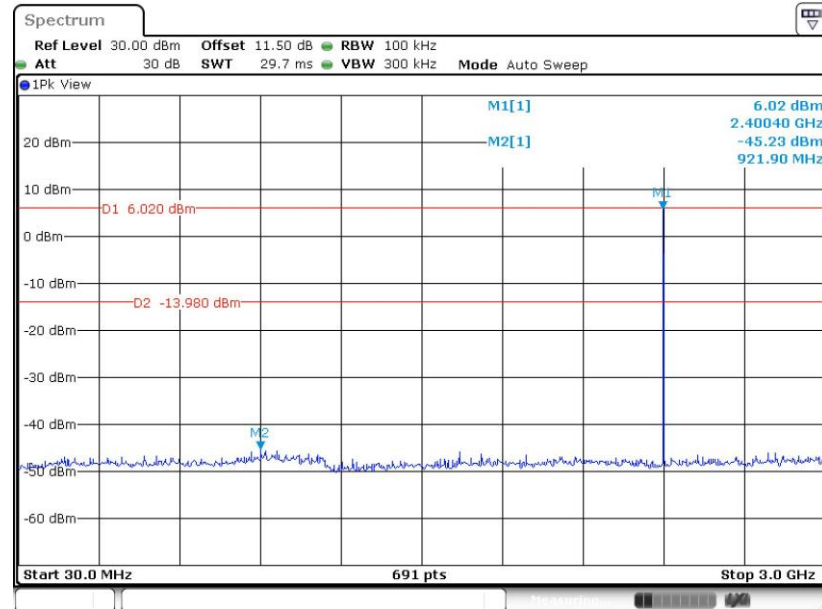

Date: 6.APR.2022 23:51:55


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

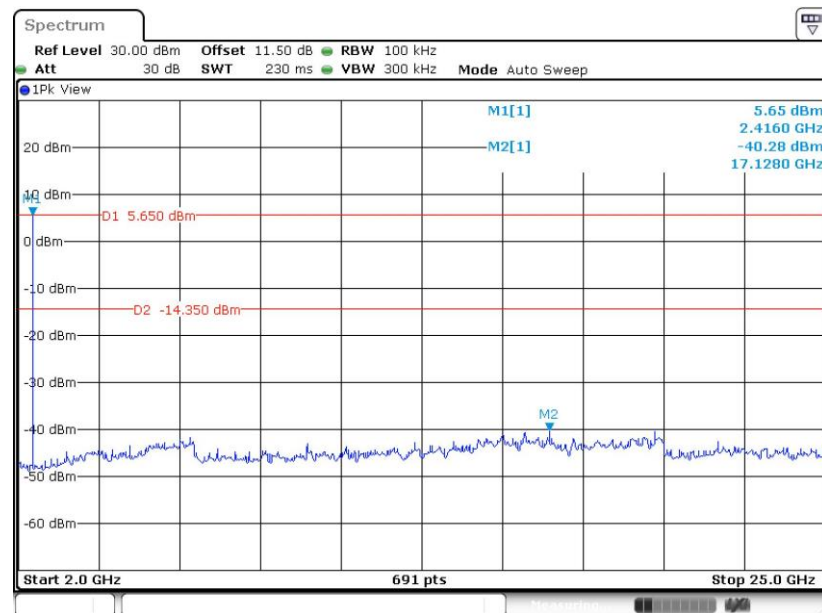

Date: 6.APR.2022 23:52:25




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

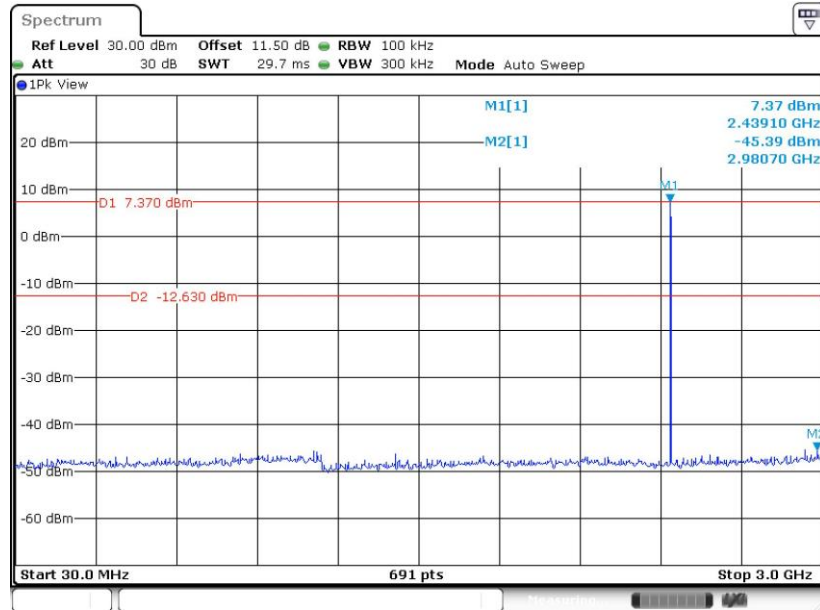

Date: 6 APR 2022 23:59:10


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

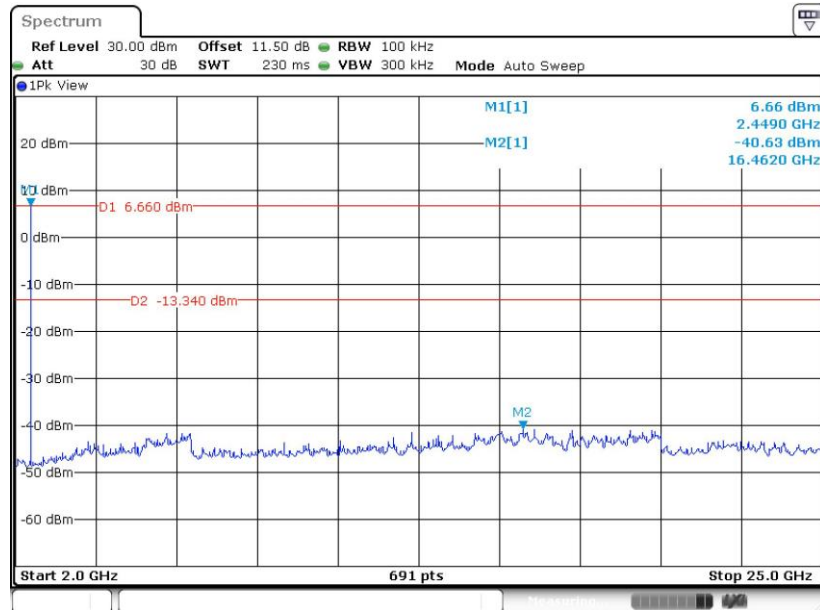

Date: 6 APR 2022 23:59:40




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

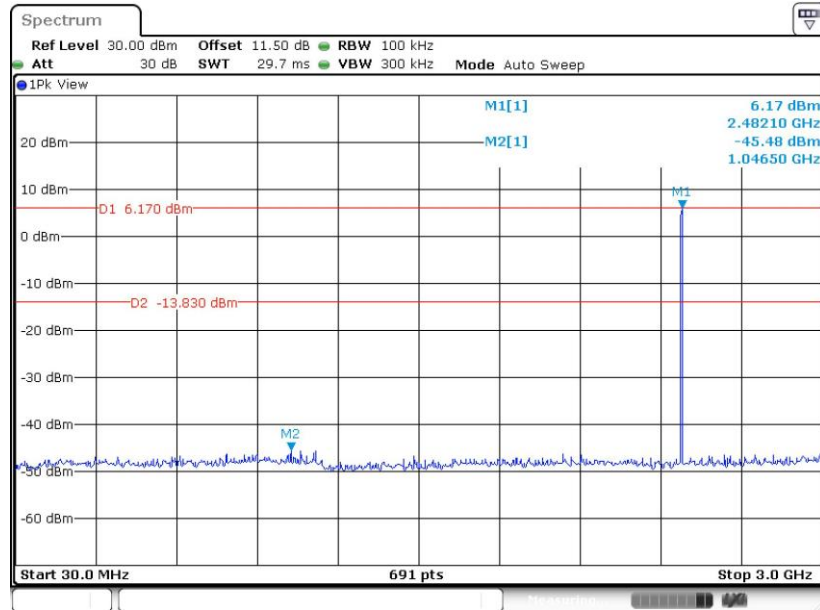

Date: 7.APR.2022 00:08:11

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

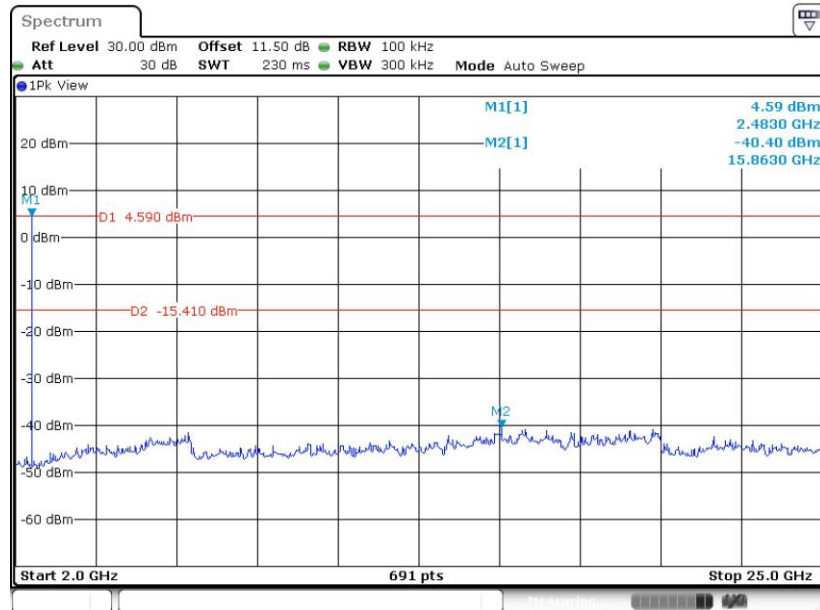


Date: 7.APR.2022 00:08:50



For Ant.1


<1Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

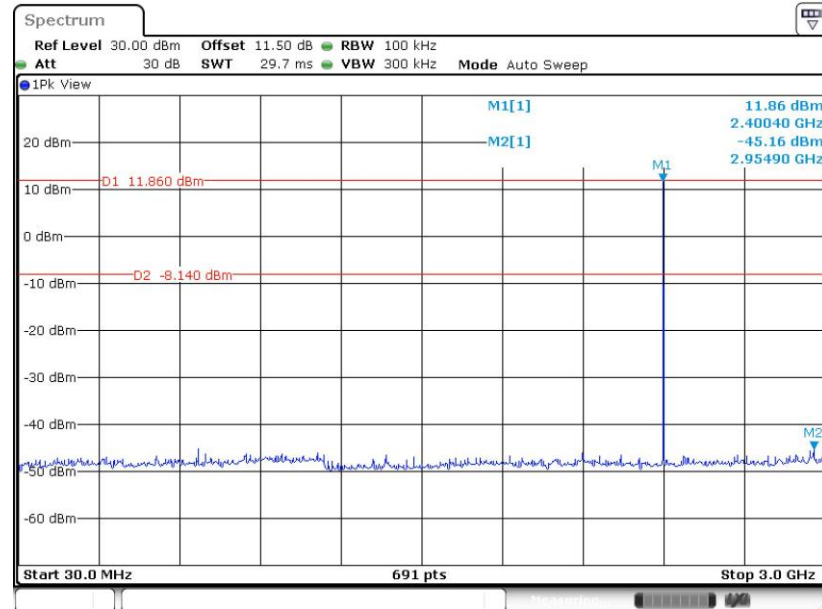

Date: 7.APR.2022 00:34:38


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

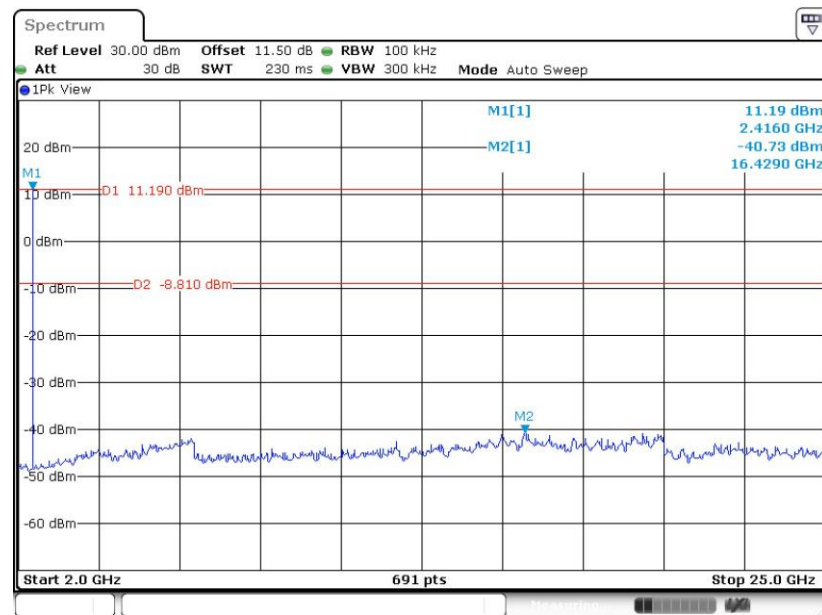

Date: 7.APR.2022 00:35:09




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

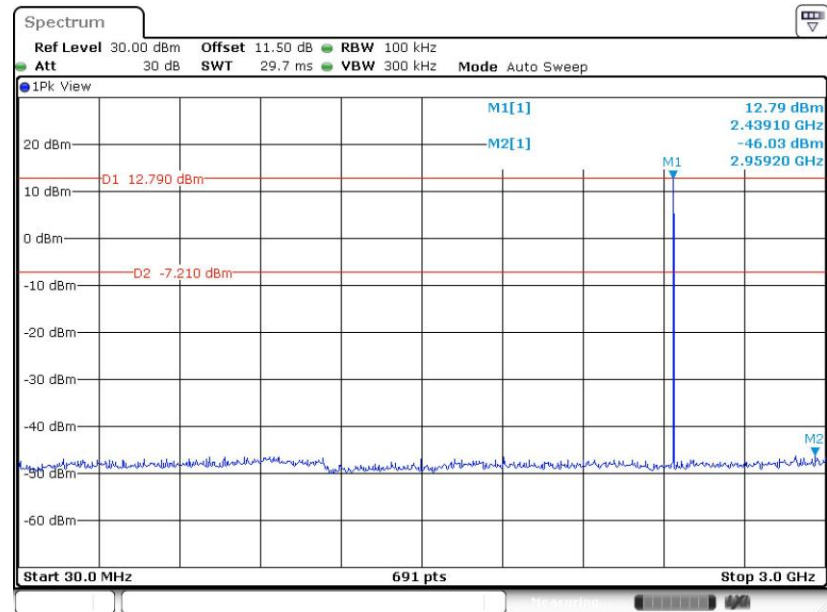

Date: 7.APR.2022 00:52:26


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

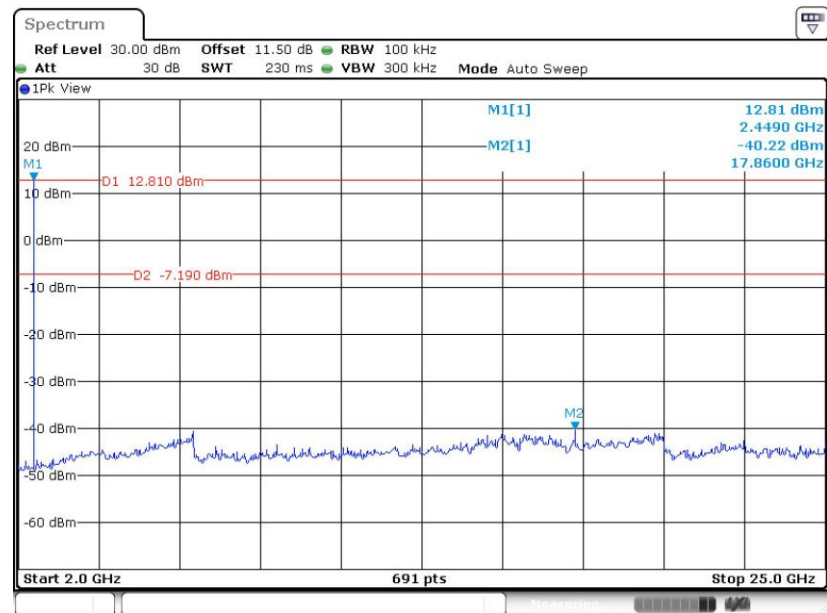

Date: 7.APR.2022 00:53:03




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

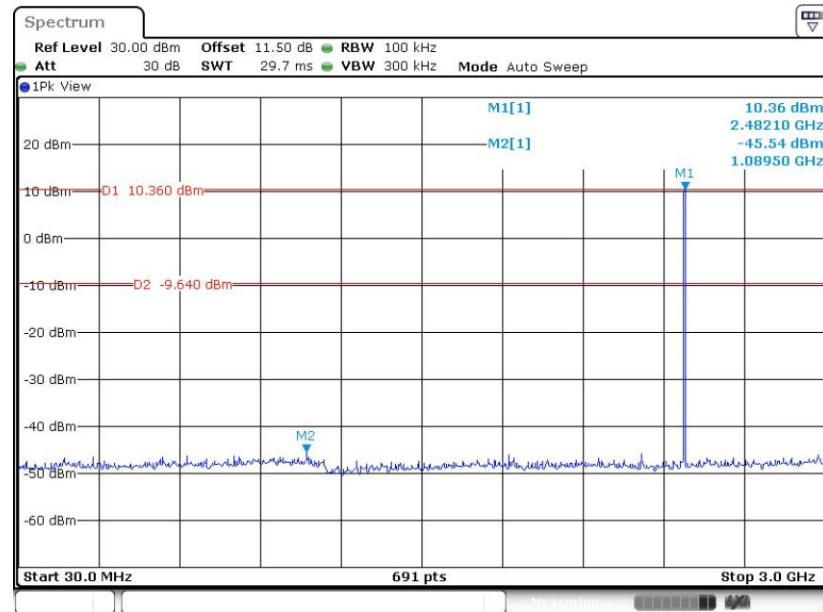

Date: 7.APR.2022 01:00:00


CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

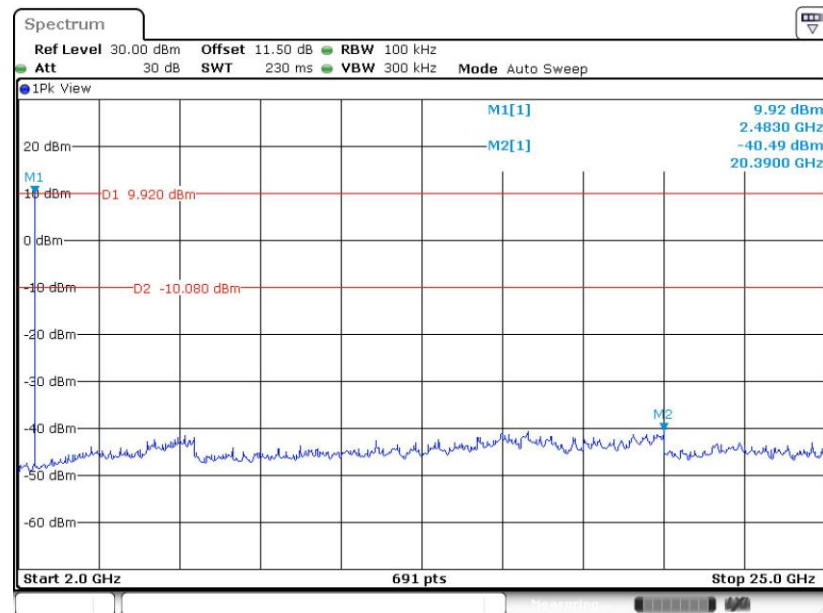

Date: 7.APR.2022 01:00:31


<2Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

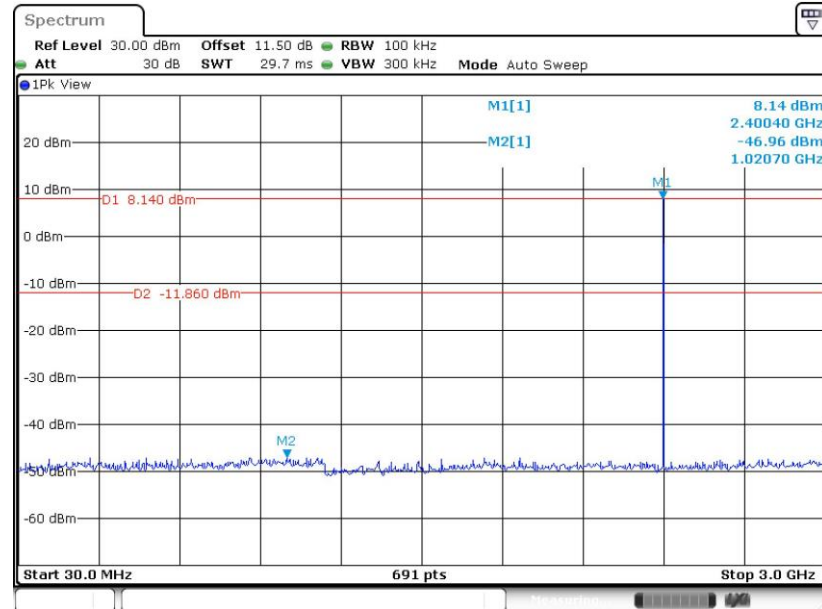

Date: 13.APR.2022 21:28:49


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

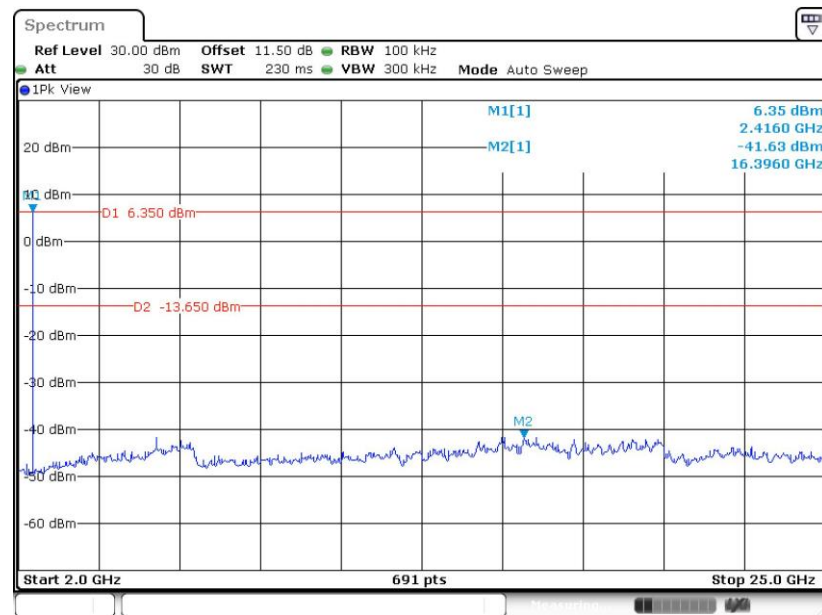

Date: 13.APR.2022 21:29:20




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

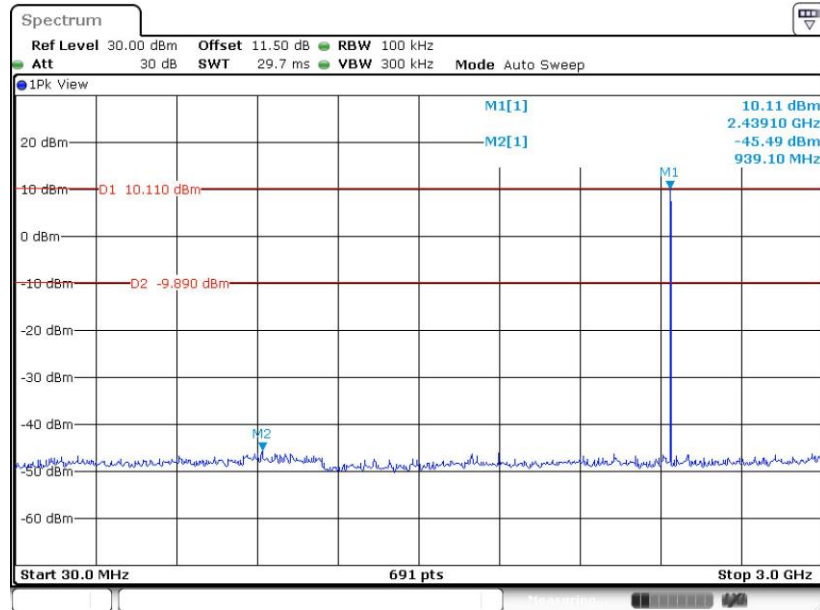

Date: 7.APR.2022 01:14:27


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

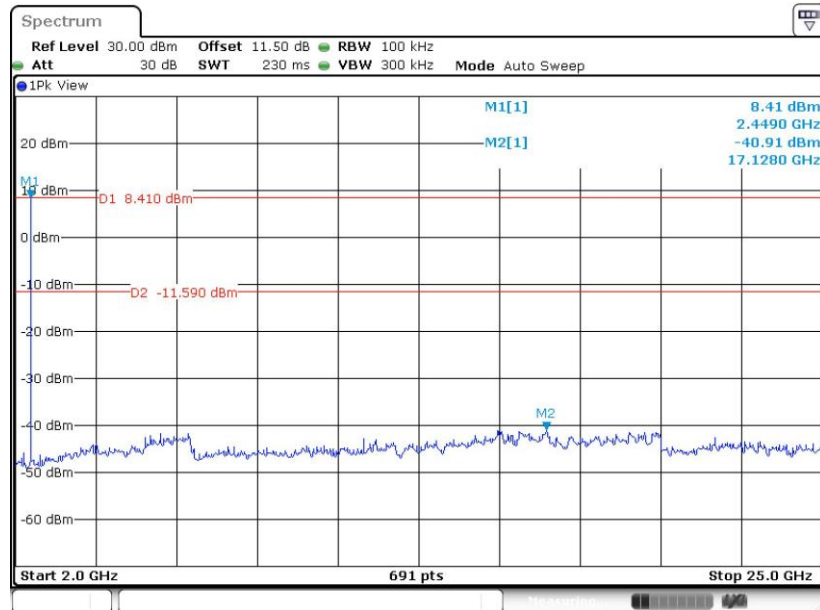

Date: 7.APR.2022 01:15:03




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

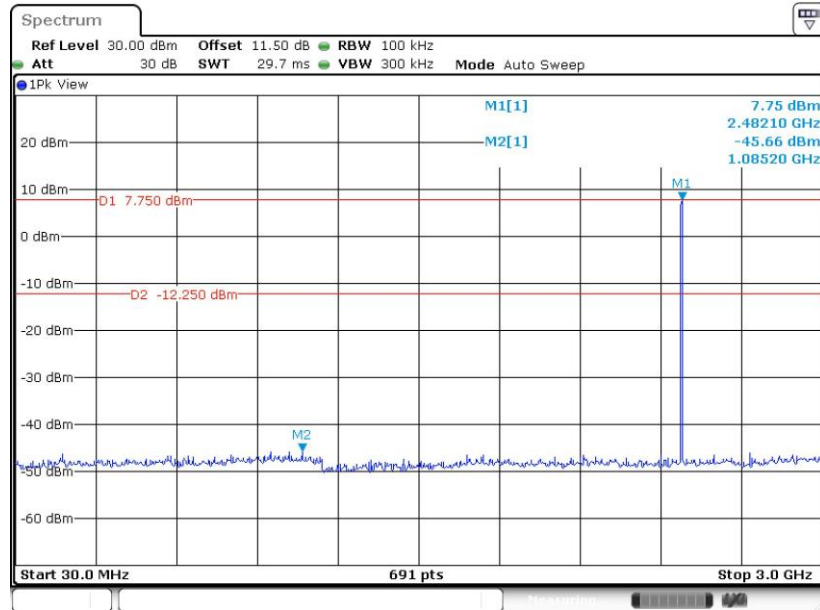

Date: 7.APR.2022 01:22:35

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

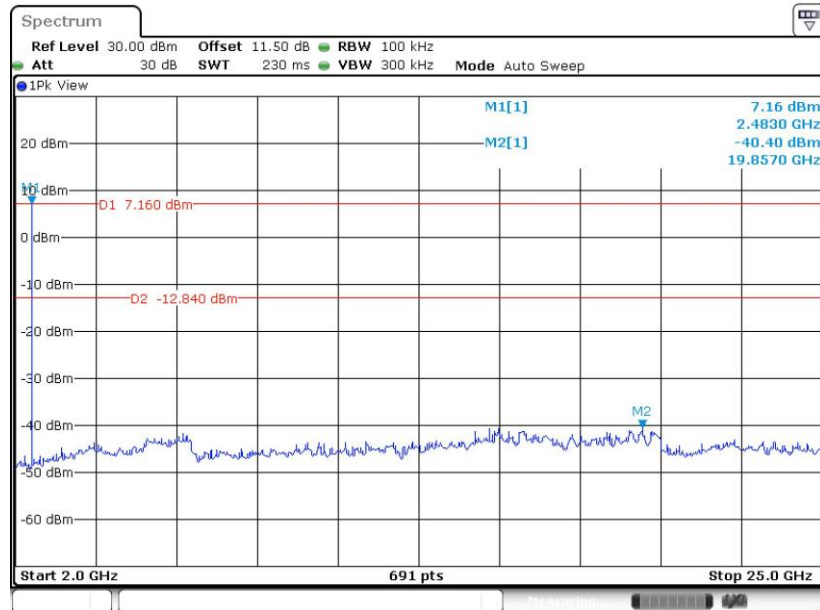


Date: 7.APR.2022 01:23:04




<3Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

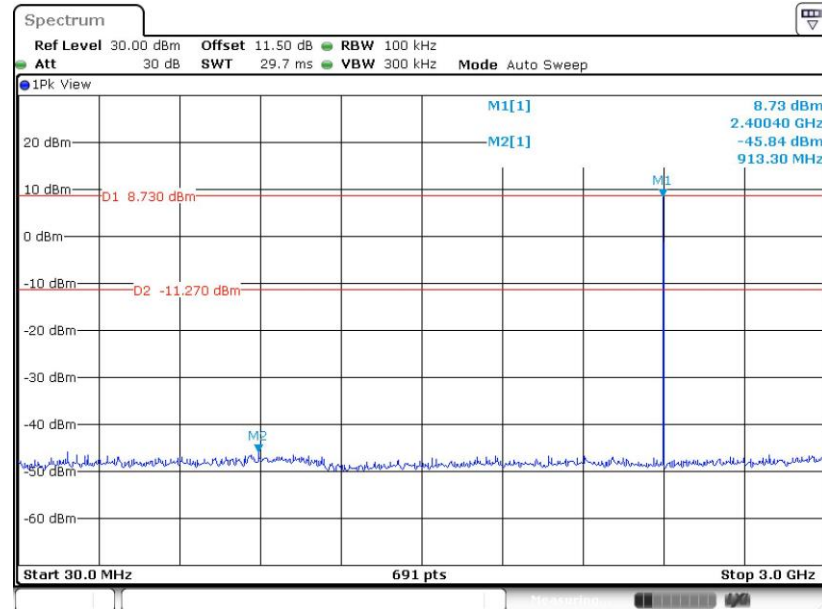

Date: 7.APR.2022 01:44:51


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

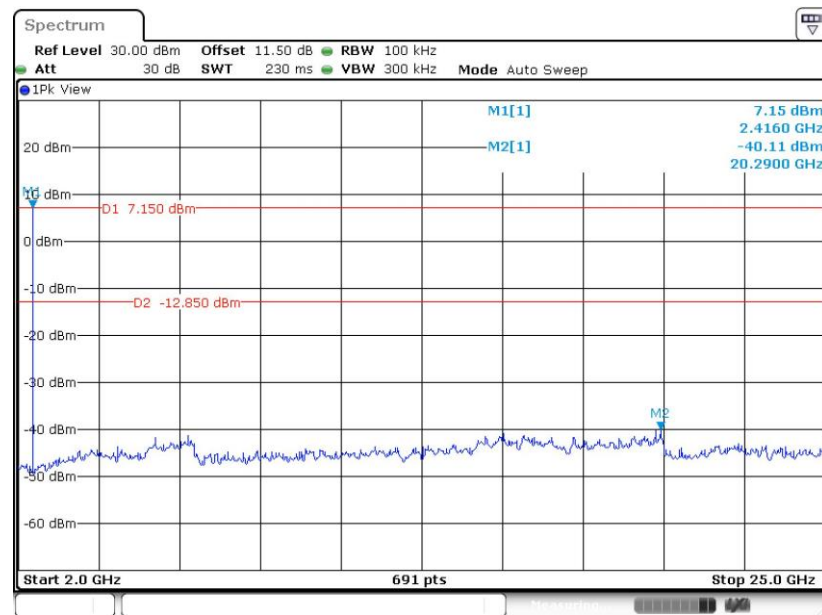

Date: 7.APR.2022 01:45:32




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

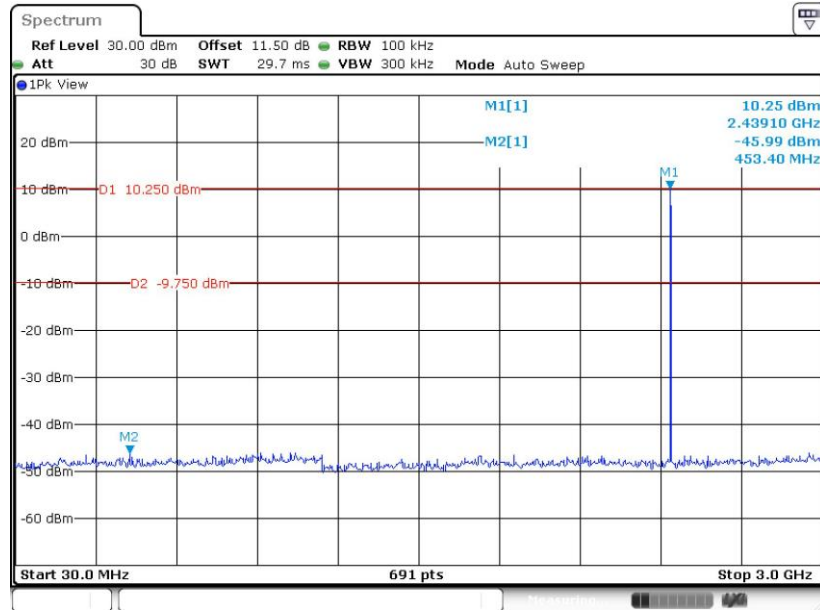

Date: 7.APR.2022 01:35:37


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

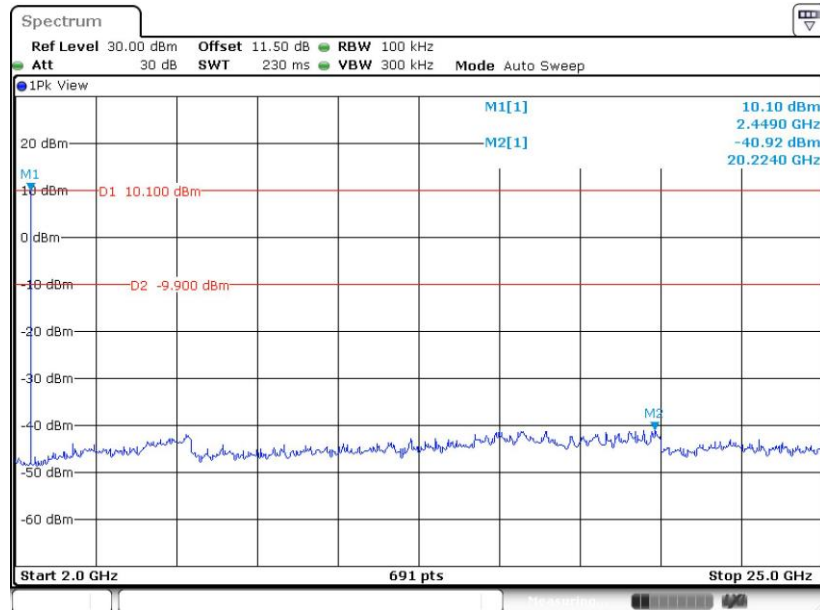


Date: 7.APR.2022 01:36:10



CSE Plot on Ch 78 between 30MHz ~ 3 GHz

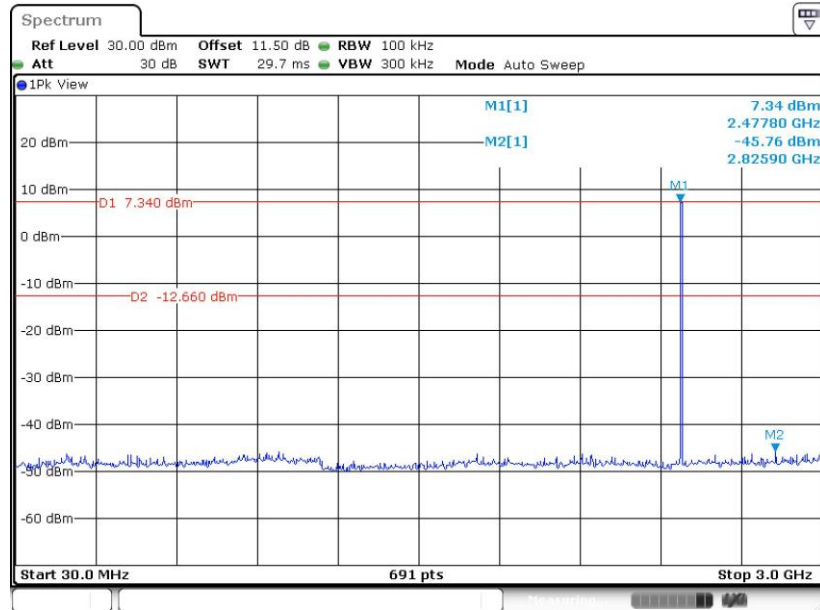

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

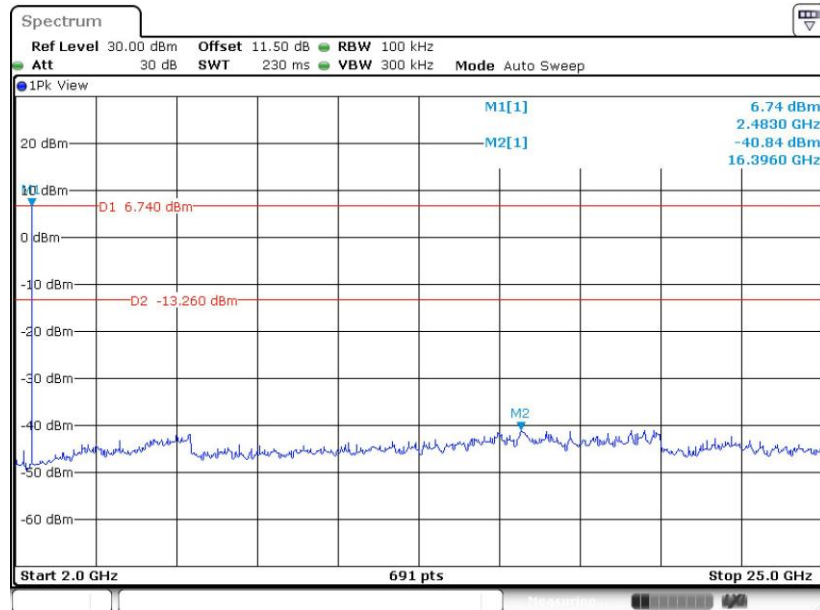

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.8.3 Test Procedures


1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
$$\text{On time} = N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$$

Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

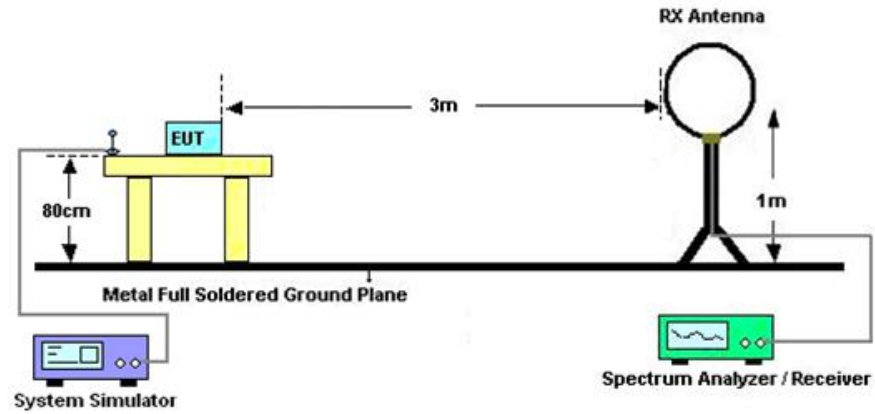

For radiated emissions from 30MHz to 1GHz

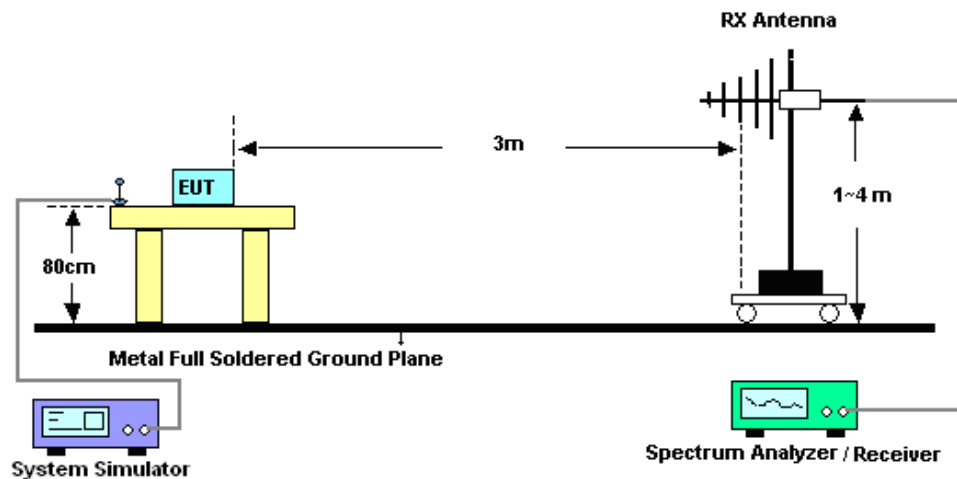

For radiated emissions above 1GHz

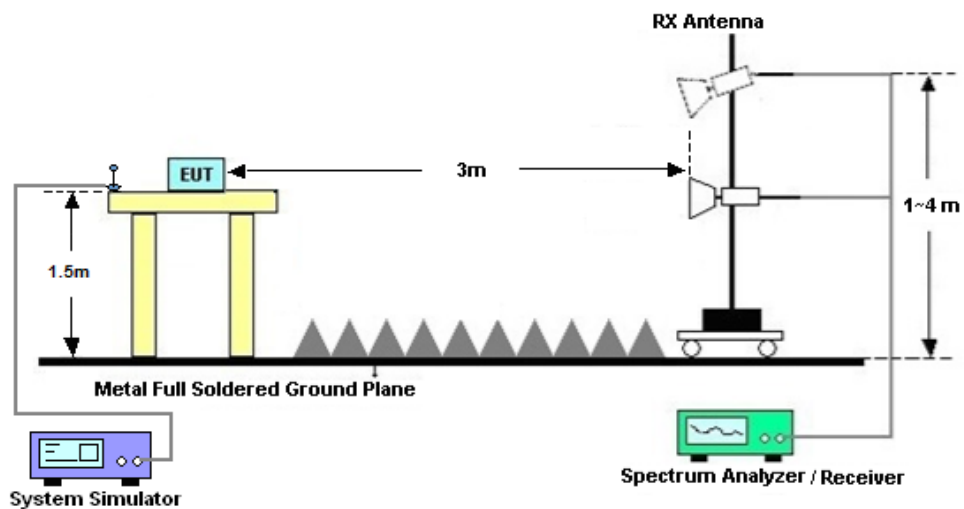

**3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.8.8 Duty cycle correction factor for average measurement

Please refer to Appendix D.

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

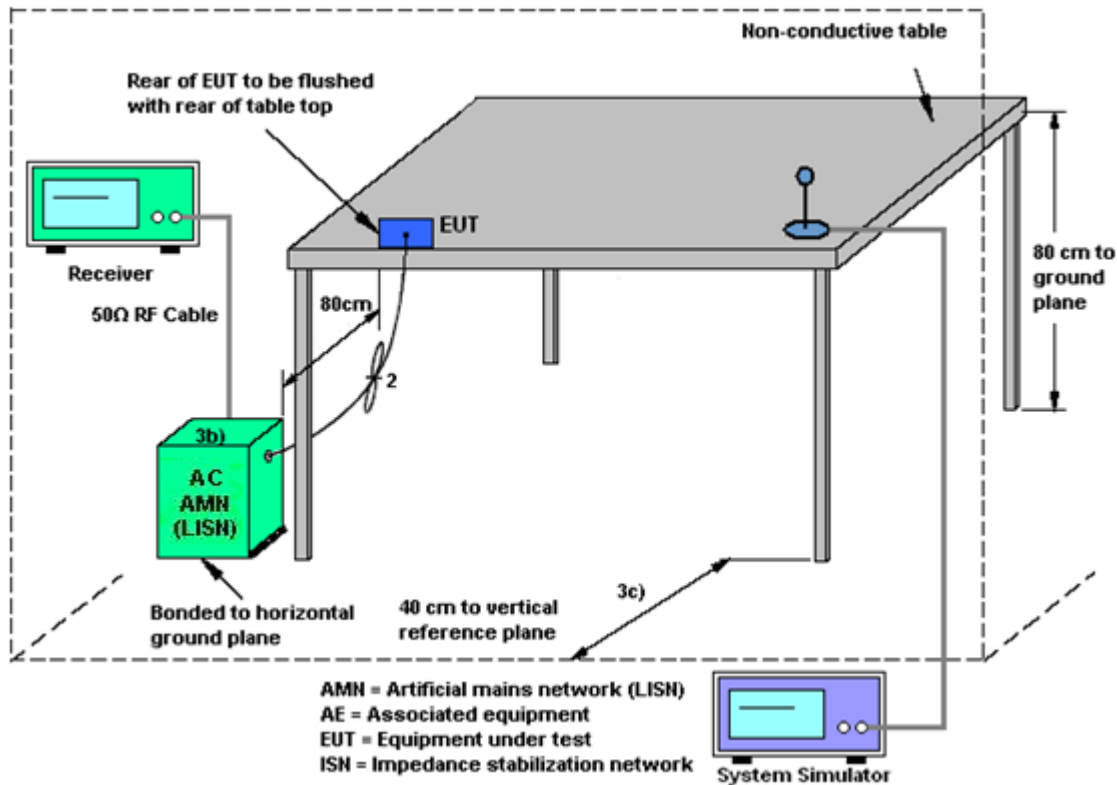

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Mar. 06, 2022	Mar. 26, 2022	Mar. 05, 2023	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2 LISN	00103912	9kHz~30MHz	Dec. 25, 2020	Mar. 26, 2022	Dec 24, 2021	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 15, 2020	Mar. 26, 2022	Oct. 14, 2021	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	61602000 0891	100Vac~250Vac	Jul. 21, 2020	Mar. 26, 2022	Jul. 20, 2021	Conduction (CO01-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 08, 2021	Mar. 12, 2022~ Apr. 06, 2022	Apr. 07, 2022	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhongroup	LP-150U	H2014081 803	-40~+150°C	Jul. 22, 2020	Mar. 12, 2022~ Apr. 06, 2022	Jul. 21, 2021	Conducted (TH01-SZ)
Power Sensor	Anritsu	MA24440A	11707	50MHz~40GHz	Jun. 04, 2021	Mar. 12, 2022~ Apr. 06, 2022	Jun.03, 2022	Conducted (TH01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY544500 83	20Hz~8.4GHz	Apr. 06, 2022	Apr. 08, 2022	Apr. 05, 2023	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY551502 46	10Hz~44GHz;	Apr. 06, 2022	Apr. 08, 2022	Apr. 05, 2023	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 22, 2020	Apr. 08, 2022	Jun. 21, 2022	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz-2GHz	Jun. 22, 2020	Apr. 08, 2022	Jun. 21, 2022	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120 D	9120D-135 5	1GHz~18GHz	Apr. 25 2021	Apr. 08, 2022	Apr. 24 2022	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-3 5-HG	1871923	18GHz~40GHz	Oct. 22,2021	Apr. 08, 2022	Oct. 21,2022	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 11, 2021	Apr. 08, 2022	Apr. 10, 2022	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz ~3000MHz	Oct. 22, 2021	Apr. 08, 2022	Oct. 21, 2022	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-10P-R	1943528	1GHz~18GHz	Oct. 22, 2021	Apr. 08, 2022	Oct. 21, 2022	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY395013 02	500MHz~26.5 GHz	Dec. 30, 2021	Apr. 08, 2022	Dec. 29, 2022	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	61601000 1985	N/A	NCR	Apr. 08, 2022	NCR	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Apr. 08, 2022	NCR	Radiation (03CH03-SZ)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Bluetooth ANT0

Test Engineer:	Zhang Xue Yi	Temperature:	21~25	°C
Test Date:	2022/3/12~2022/04/06	Relative Humidity:	51~54	%

TEST RESULTS DATA**20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.938	0.836	1.003	0.6252	Pass
DH	1Mbps	1	39	2441	0.938	0.834	1.003	0.6252	Pass
DH	1Mbps	1	78	2480	0.941	0.834	1.003	0.6271	Pass
2DH	2Mbps	1	0	2402	1.311	1.175	1.003	0.8740	Pass
2DH	2Mbps	1	39	2441	1.311	1.172	0.999	0.8740	Pass
2DH	2Mbps	1	78	2480	1.311	1.172	1.003	0.8740	Pass
3DH	3Mbps	1	0	2402	1.298	1.172	0.999	0.8654	Pass
3DH	3Mbps	1	39	2441	1.294	1.172	1.003	0.8625	Pass
3DH	3Mbps	1	78	2480	1.294	1.172	0.999	0.8625	Pass

TEST RESULTS DATA**Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec) (MHz)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.89	0.31	0.4	Pass
AFH	20	53.33	2.89	0.15	0.4	Pass

TEST RESULTS DATA**Peak Power Table**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH5	0	1	10.14	20.97	Pass
	39	1	11.14	20.97	Pass
	78	1	9.92	20.97	Pass
2DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
2DH5	0	1	9.12	20.97	Pass
	39	1	10.35	20.97	Pass
	78	1	8.94	20.97	Pass
3DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
3DH5	0	1	9.68	20.97	Pass
	39	1	10.88	20.97	Pass
	78	1	9.47	20.97	Pass

TEST RESULTS DATA**Number of Hopping Frequency**

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass

Bluetooth ANT1

Test Engineer:	Zhang Xue Yi	Temperature:	21~25	°C
Test Date:	2022/3/12~2022/04/06	Relative Humidity:	51~54	%

TEST RESULTS DATA**20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.941	0.836	0.999	0.6271	Pass
DH	1Mbps	1	39	2441	0.941	0.836	1.003	0.6271	Pass
DH	1Mbps	1	78	2480	0.938	0.834	1.003	0.6252	Pass
2DH	2Mbps	1	0	2402	1.311	1.166	0.999	0.8740	Pass
2DH	2Mbps	1	39	2441	1.311	1.169	1.003	0.8740	Pass
2DH	2Mbps	1	78	2480	1.307	1.169	0.994	0.8712	Pass
3DH	3Mbps	1	0	2402	1.298	1.169	0.999	0.8654	Pass
3DH	3Mbps	1	39	2441	1.294	1.172	0.999	0.8625	Pass
3DH	3Mbps	1	78	2480	1.294	1.172	1.007	0.8625	Pass

TEST RESULTS DATA**Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec) (MHz)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.89	0.31	0.4	Pass
AFH	20	53.33	2.89	0.15	0.4	Pass

TEST RESULTS DATA**Peak Power Table**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH5	0	1	12.28	20.97	Pass
	39	1	13.75	20.97	Pass
	78	1	10.93	20.97	Pass
2DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
2DH5	0	1	11.47	20.97	Pass
	39	1	12.89	20.97	Pass
	78	1	10.17	20.97	Pass
3DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
3DH5	0	1	11.98	20.97	Pass
	39	1	13.35	20.97	Pass
	78	1	10.77	20.97	Pass


TEST RESULTS DATA**Number of Hopping Frequency**

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Xie YuQiang	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

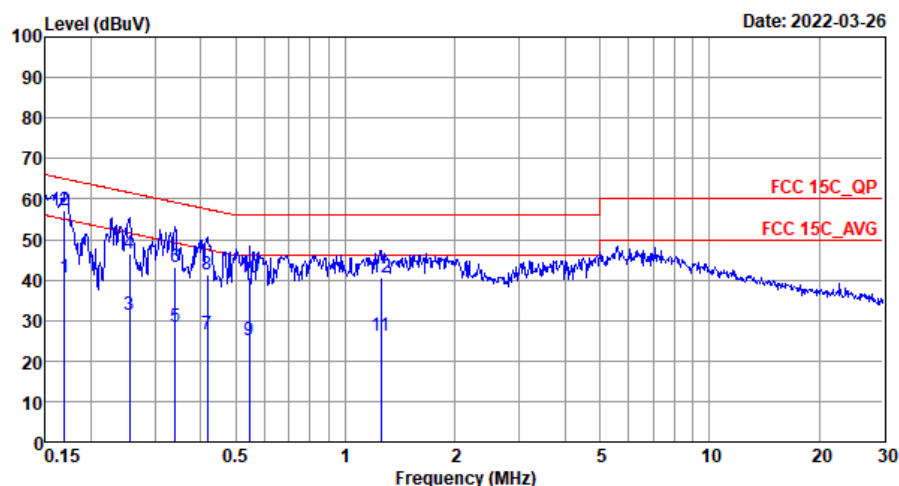


Site : CO01-SZ
Condition: FCC 15C QP LISN 20210901 L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.17	40.65	-14.34	54.99	19.90	10.20	10.55	Average
2 *	0.17	57.05	-7.94	64.99	36.30	10.20	10.55	QP
3	0.25	31.18	-20.42	51.60	10.40	10.18	10.60	Average
4	0.25	46.48	-15.12	61.60	25.70	10.18	10.60	QP
5	0.34	28.44	-20.74	49.18	7.20	10.09	11.15	Average
6	0.34	43.24	-15.94	59.18	22.00	10.09	11.15	QP
7	0.42	26.63	-20.88	47.51	5.00	10.10	11.53	Average
8	0.42	41.33	-16.18	57.51	19.70	10.10	11.53	QP
9	0.54	25.06	-20.94	46.00	3.30	10.11	11.65	Average
10	0.54	40.66	-15.34	56.00	18.90	10.11	11.65	QP
11	1.25	26.37	-19.63	46.00	6.00	10.14	10.23	Average
12	1.25	40.57	-15.43	56.00	20.20	10.14	10.23	QP



Test Engineer :	Xie YuQiang	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

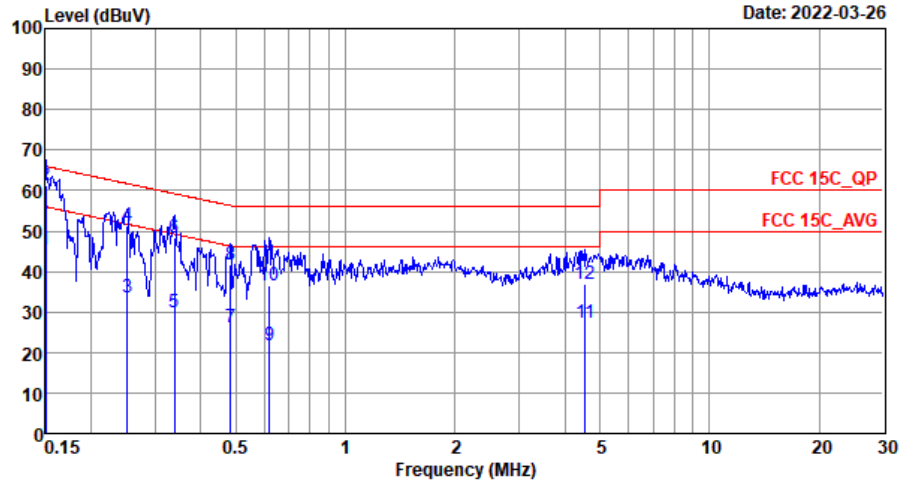

Site : C001-SZ
Condition: FCC 15C QP LISN 20210901 N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.15	45.26	-10.74	56.00	24.10	10.31	10.85	Average
2 *	0.15	61.36	-4.64	66.00	40.20	10.31	10.85	QP
3	0.25	33.74	-17.95	51.69	12.90	10.25	10.59	Average
4	0.25	51.44	-10.25	61.69	30.60	10.25	10.59	QP
5	0.34	29.81	-19.41	49.22	8.50	10.18	11.13	Average
6	0.34	48.51	-10.71	59.22	27.20	10.18	11.13	QP
7	0.48	26.09	-20.18	46.27	4.10	10.19	11.80	Average
8	0.48	41.79	-14.48	56.27	19.80	10.19	11.80	QP
9	0.62	21.80	-24.20	46.00	0.19	10.24	11.37	Average
10	0.62	36.60	-19.40	56.00	14.99	10.24	11.37	QP
11	4.55	27.48	-18.52	46.00	7.10	10.14	10.24	Average
12	4.55	36.78	-19.22	56.00	16.40	10.14	10.24	QP

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

ANT 1

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH00 2402MHz		2319.03	42.3	-31.7	74	43.37	27.86	4.78	33.71	356	326	P	H
		2319.03	17.51	-36.49	54	-	-	-	-	356	326	A	H
		2402	96.41	-	-	97.37	27.79	4.91	33.66	356	326	P	H
	*	2402	71.62	-	-	-	-	-	-	356	326	A	H
		2368.485	42.63	-31.37	74	43.67	27.8	4.84	33.68	396	247	P	V
		2368.485	17.84	-36.16	54	-	-	-	-	396	247	A	V
		2402	95.4	-	-	96.35	27.8	4.91	33.66	396	247	P	V
	*	2402	70.61	-	-	-	-	-	-	396	247	A	V
BT CH 39 2441MHz		2330.58	41.92	-32.08	74	43.01	27.84	4.78	33.71	388	326	P	H
		2330.58	17.13	-36.87	54	-	-	-	-	388	326	A	H
		2441	98.43	-	-	99.46	27.64	4.96	33.63	388	326	P	H
	*	2441	73.64	-	-	-	-	-	-	388	326	A	H
		2487.4	41.9	-32.1	74	43	27.53	4.99	33.62	388	326	P	H
		2487.4	17.11	-36.89	54	-	-	-	-	388	326	A	H
		2385.6	42.18	-31.82	74	43.13	27.8	4.91	33.66	379	247	P	V
		2385.6	17.39	-36.61	54	-	-	-	-	379	247	A	V
		2441	95.78	-	-	96.85	27.6	4.96	33.63	379	247	P	V
	*	2441	70.99	-	-	-	-	-	-	379	247	A	V
		2490.83	42.35	-31.65	74	43.44	27.5	5.01	33.6	379	247	P	V
		2484.25	43.5	-30.5	74	39.65	27.76	7.91	31.82	100	255	A	V



BT CH 78 2480MHz	*	2480	95.5	-	-	96.59	27.54	4.99	33.62	375	325	P	H
		2480	70.71	-	-	-	-	-	-	375	325	A	H
		2484.16	46.3	-27.7	74	47.4	27.53	4.99	33.62	375	325	P	H
		2484.16	21.51	-32.49	54	-	-	-	-	375	325	A	H
	*	2480	93.42	-	-	94.52	27.53	4.99	33.62	372	253	P	V
		2480	68.63	-	-	-	-	-	-	372	253	A	V
		2483.52	45.7	-28.3	74	46.8	27.53	4.99	33.62	372	253	P	V
		2483.52	20.91	-33.09	54	-	-	-	-	372	253	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH 00 2402MHz		4804	42.37	-31.63	74	56.81	31.4	7.09	52.93	-	-	P	H
		4804	17.58	-36.42	54	-	-	-	-	-	-	A	H
		4804	42.66	-31.34	74	57.1	31.4	7.09	52.93	-	-	P	V
		4804	17.87	-36.13	54	-	-	-	-	-	-	A	V
BT CH 39 2441MHz		4882	44.4	-29.6	74	58.59	31.46	7.19	52.84	-	-	P	H
		4882	19.61	-34.39	54	-	-	-	-	-	-	A	H
		7323	44.07	-29.93	74	52.88	36.5	8.8	54.11	-	-	P	H
		7323	19.28	-34.72	54	-	-	-	-	-	-	A	H
		4882	44.76	-29.24	74	58.94	31.47	7.19	52.84	-	-	P	V
		4882	19.97	-34.03	54	-	-	-	-	-	-	A	V
		7323	45.12	-28.88	74	53.93	36.5	8.8	54.11	-	-	P	V
		7323	20.33	-33.67	54	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4960	42.31	-31.69	74	56.23	31.6	7.22	52.74	-	-	P	H
		4960	17.52	-36.48	54	-	-	-	-	-	-	A	H
		7440	46.22	-27.78	74	54.87	36.44	8.95	54.04	-	-	P	H
		7440	21.43	-32.57	54	-	-	-	-	-	-	A	H
		4960	42.98	-31.02	74	56.9	31.6	7.22	52.74	-	-	P	V
		4960	18.19	-35.81	54	-	-	-	-	-	-	A	V
		7440	45.89	-28.11	74	54.48	36.5	8.95	54.04	-	-	P	V
		7440	21.1	-32.9	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BT LF		50.37	19.1	-20.9	40	34.75	15.42	0.63	31.7	-	-	P	H
		91.11	26.16	-17.34	43.5	40.66	16.11	0.83	31.44	-	-	P	H
		133.79	21.73	-21.77	43.5	34.11	18.14	1.01	31.53	-	-	P	H
		175.5	21.94	-21.56	43.5	36.12	16.08	1.09	31.35	-	-	P	H
		348.16	21.17	-24.83	46	29.52	21.09	1.61	31.05	-	-	P	H
		590.66	24.79	-21.21	46	28.28	25.41	2.08	30.98	-	-	P	H
		55.22	28.15	-11.85	40	45.15	14.32	0.63	31.95	-	-	P	V
		91.11	26.35	-17.15	43.5	40.85	16.11	0.83	31.44	-	-	P	V
		172.59	25.9	-17.6	43.5	39.96	16.2	1.09	31.35	-	-	P	V
		329.73	20.48	-25.52	46	29.37	20.62	1.56	31.07	-	-	P	V
		473.29	22.4	-23.6	46	27.76	23.58	1.91	30.85	-	-	P	V
		724.52	25.88	-20.12	46	28.36	26.12	2.3	30.9	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)

2. Level(dBμV/m) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)


= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots

DH5 on time (One Pulse) Plot on Channel 39

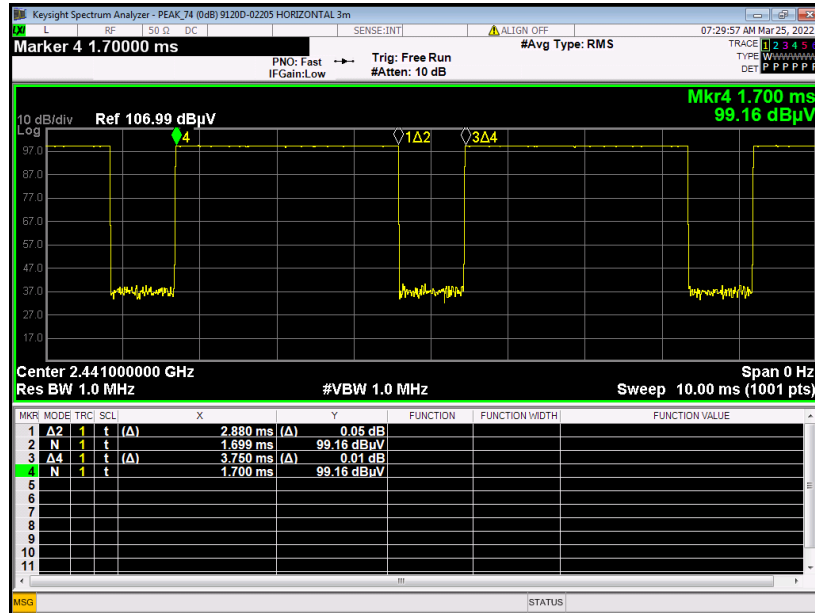

DH5 on time (Count Pulses) Plot on Channel 39

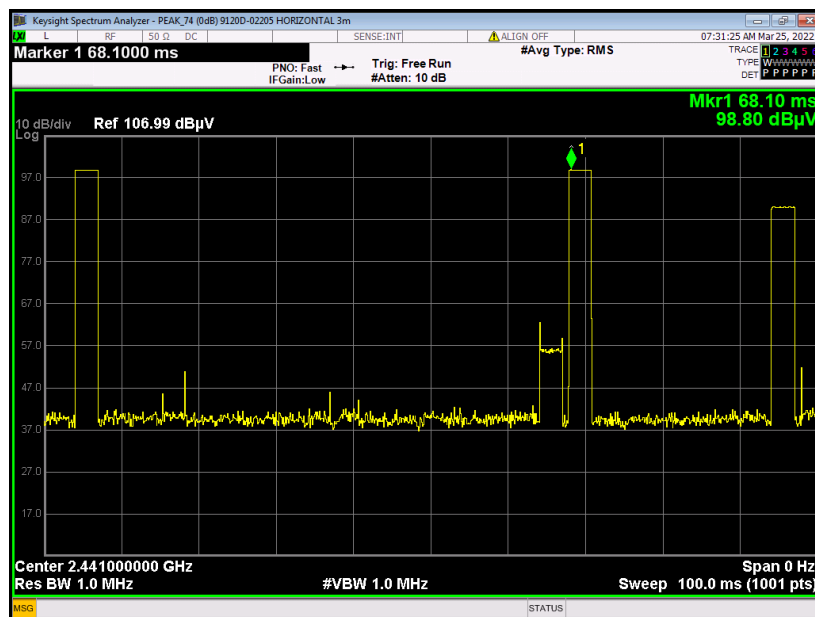

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.