

Part 1_Appendix B

Detailed Test Results

GSM850 for Head, Body, Hotspot
GSM1900 for Head, Body, Hotspot
WCDMA Band II for Head, Body, Hotspot
WCDMA Band IV for Head, Body, Hotspot
WCDMA Band V for Head, Body, Hotspot
LTE Band 2 for Head, Body, Hotspot
LTE Band 4 for Head, Body, Hotspot
LTE Band 5 for Head, Body
LTE Band 7 for Head, Body, Hotspot
LTE Band 12 for Head, Body, Hotspot
LTE Band 13 for Head, Body, Hotspot
LTE Band 26 for Head, Body, Hotspot
LTE Band 41 for Head, Body, Hotspot
LTE Band 66 for Head, Body, Hotspot
n2 for Head, Body, Hotspot
n5 for Head, Body, Hotspot
n7 for Head, Body, Hotspot
n26 for Head, Body, Hotspot
n38 for Body, Hotspot
n41 for Head, Body, Hotspot
n77 for Head, Body, Hotspot
n78 for Head, Body, Hotspot
WIFI 2.4G for Head, Body, Hotspot
WIFI 5G for Head, Body, Hotspot, Limbs
BT for Head, Body, Hotspot

Test Laboratory: SGS-SAR Lab

V2341 GSM850 GPRS 4TS 190CH Right cheek Ant11

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.07491

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 41.801$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn634; Calibrated: 2024/2/22
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.254 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.388 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.628 W/kg

SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.170 W/kg

Maximum value of SAR (measured) = 0.498 W/kg

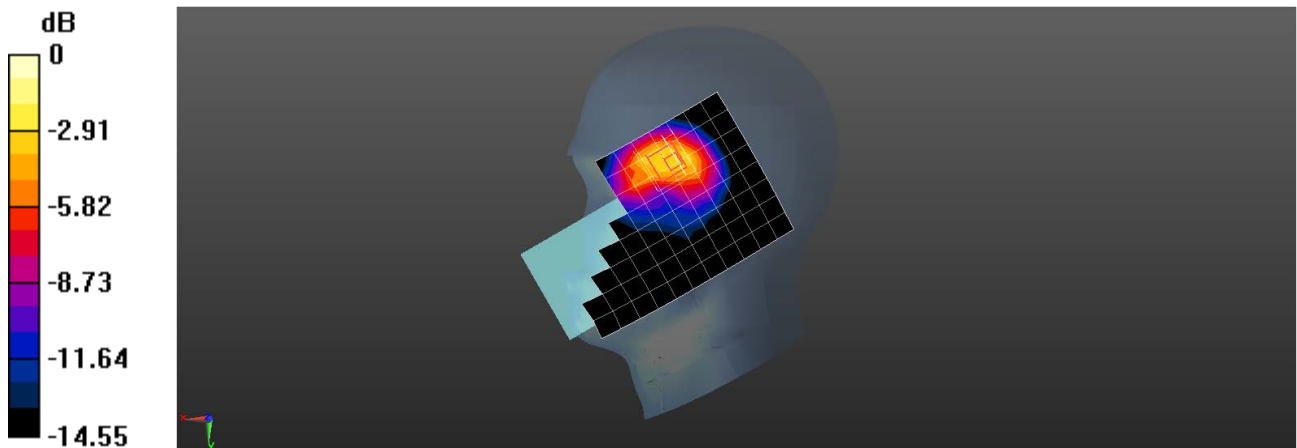

0 dB = 0.498 W/kg = -3.03 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 GSM850 GPRS 2TS 190CH Back side 15mm Ant11

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, GPRS/EGPRS Mode(2up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.14954

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 41.801$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn634; Calibrated: 2024/2/22
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.304 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.331 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.410 W/kg

SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.362 W/kg

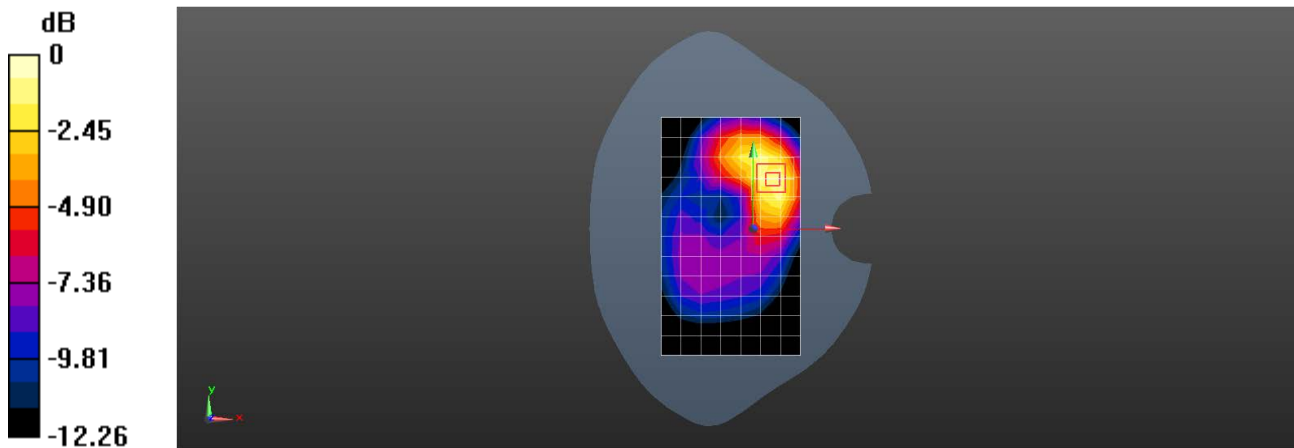

0 dB = 0.362 W/kg = -4.41 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 GSM850 GPRS 4TS 190CH Left side 10mm Ant11

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.07491

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 41.801$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn634; Calibrated: 2024/2/22
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.582 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.355 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.803 W/kg

SAR(1 g) = 0.462 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 0.689 W/kg

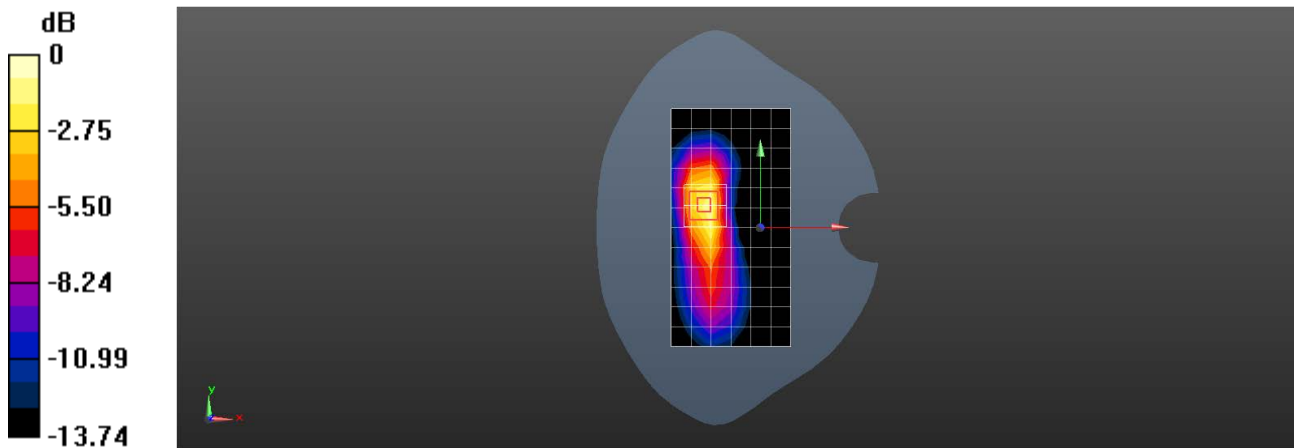

0 dB = 0.689 W/kg = -1.62 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 GSM1900 GPRS 4TS 661CH Right cheek Ant13

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:2.07491

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.367$ S/m; $\epsilon_r = 40.253$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.82, 7.76, 7.85); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn634; Calibrated: 2024/2/22
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.589 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.08 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.769 W/kg

SAR(1 g) = 0.392 W/kg; SAR(10 g) = 0.222 W/kg

Maximum value of SAR (measured) = 0.601 W/kg

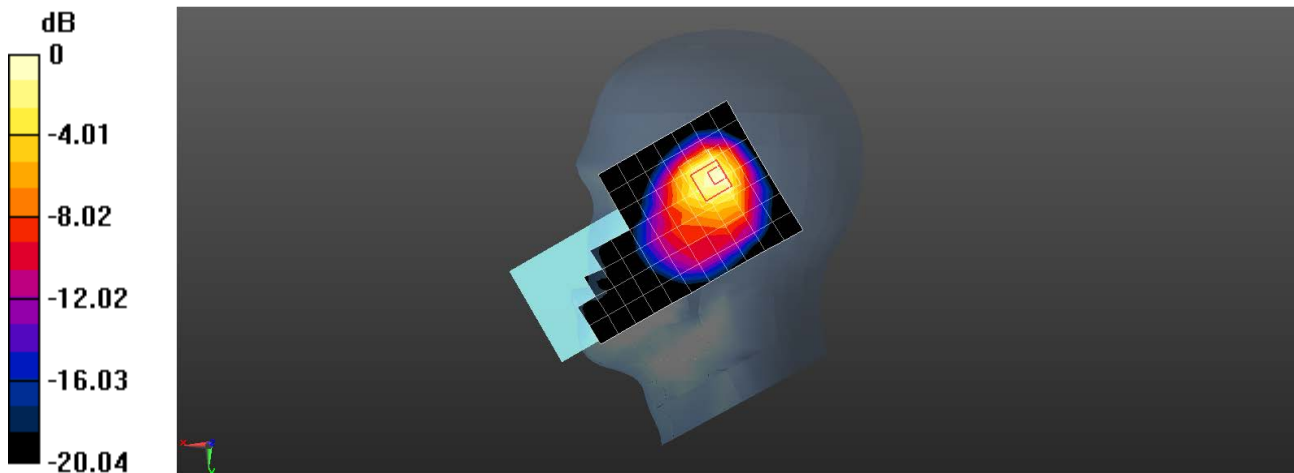

0 dB = 0.601 W/kg = -2.21 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 GSM1900 GPRS 2TS 661CH Back side 15mm Ant41

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, GPRS/EGPRS Mode(2up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.367$ S/m; $\epsilon_r = 40.253$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.82, 7.76, 7.85); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn634; Calibrated: 2024/2/22
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.191 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.373 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.228 W/kg

SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.097 W/kg

Maximum value of SAR (measured) = 0.202 W/kg

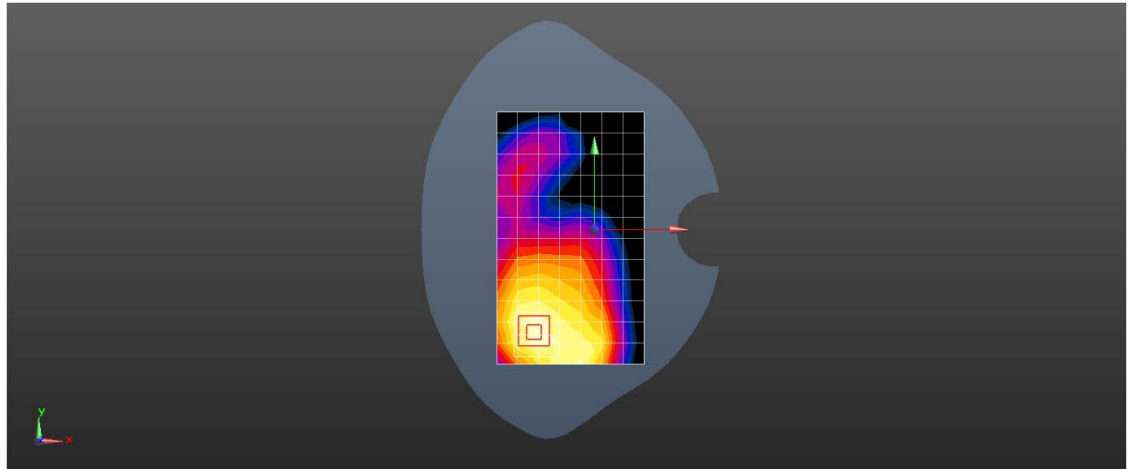

0 dB = 0.202 W/kg = -6.95 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 GSM1900 GPRS 4TS 661CH Bottom side 10mm Ant41

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:2.07491

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.367$ S/m; $\epsilon_r = 40.253$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.82, 7.76, 7.85); Calibrated: 2023/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn634; Calibrated: 2024/2/22
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.423 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.06 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.744 W/kg

SAR(1 g) = 0.422 W/kg; SAR(10 g) = 0.232 W/kg

Maximum value of SAR (measured) = 0.620 W/kg

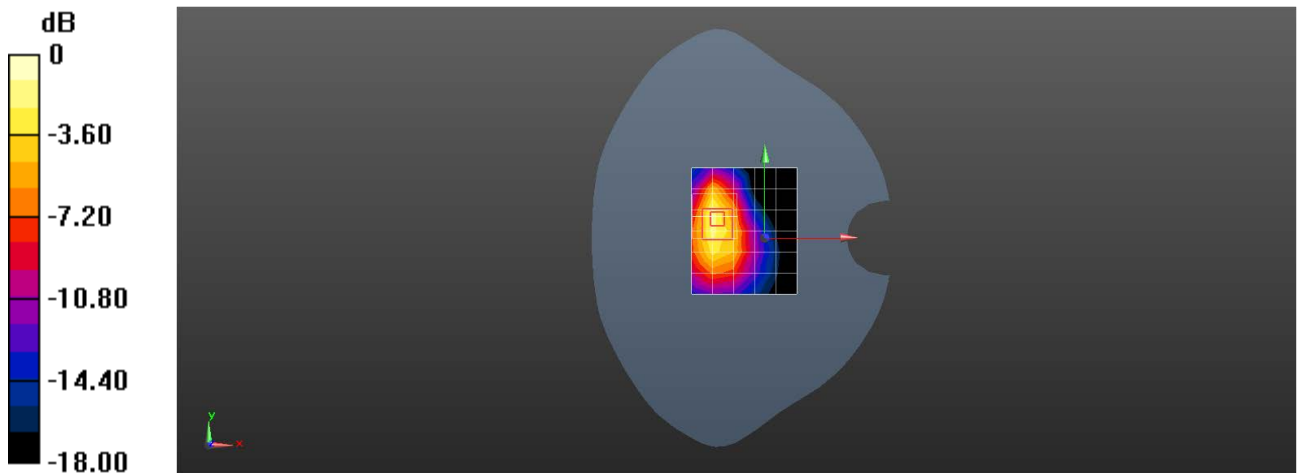

0 dB = 0.620 W/kg = -2.08 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 WCDMA Band II RMC 9400CH Right cheek Ant13

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.367$ S/m; $\epsilon_r = 40.253$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.82, 7.76, 7.85); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn634; Calibrated: 2024/2/22
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.693 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.17 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.974 W/kg

SAR(1 g) = 0.480 W/kg; SAR(10 g) = 0.269 W/kg

Maximum value of SAR (measured) = 0.768 W/kg

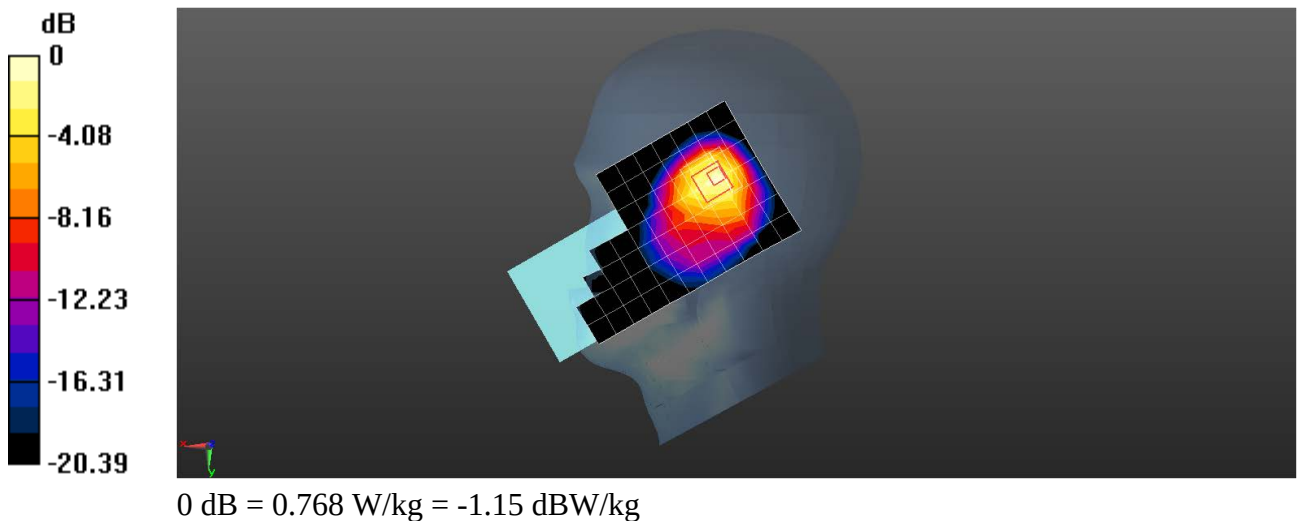

Test Laboratory: SGS-SAR Lab

V2341 WCDMA Band II RMC 9400CH Back side 15mm Ant41

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.367 \text{ S/m}$; $\epsilon_r = 40.253$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.82, 7.76, 7.85); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn634; Calibrated: 2024/2/22
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.397 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.821 V/m ; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.497 W/kg

SAR(1 g) = 0.311 W/kg ; SAR(10 g) = 0.193 W/kg

Maximum value of SAR (measured) = 0.431 W/kg

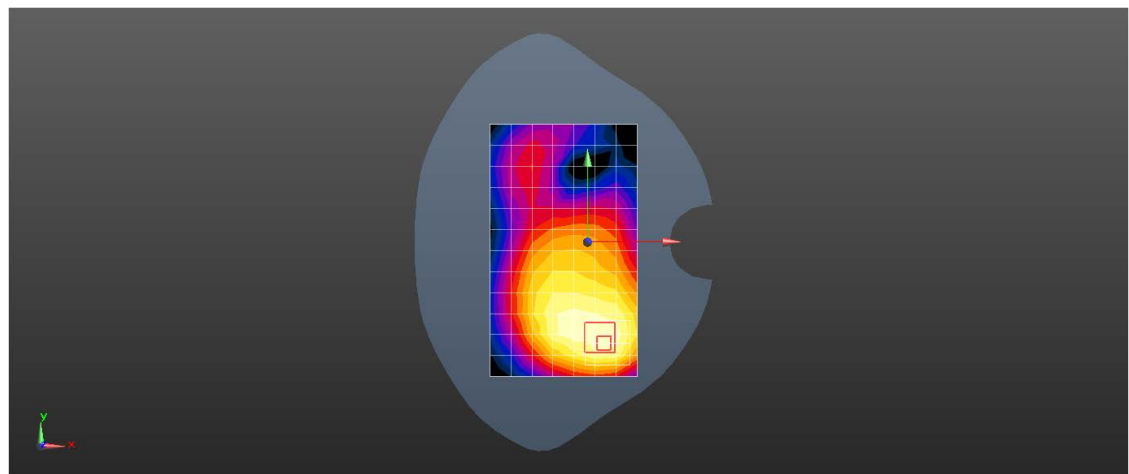

0 dB = 0.431 W/kg = -3.66 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 WCDMA Band II RMC 9400CH Bottom side 10mm Ant41

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.367$ S/m; $\epsilon_r = 40.253$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.82, 7.76, 7.85); Calibrated: 2023/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn634; Calibrated: 2024/2/22
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.372 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.23 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.613 W/kg

SAR(1 g) = 0.355 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 0.522 W/kg

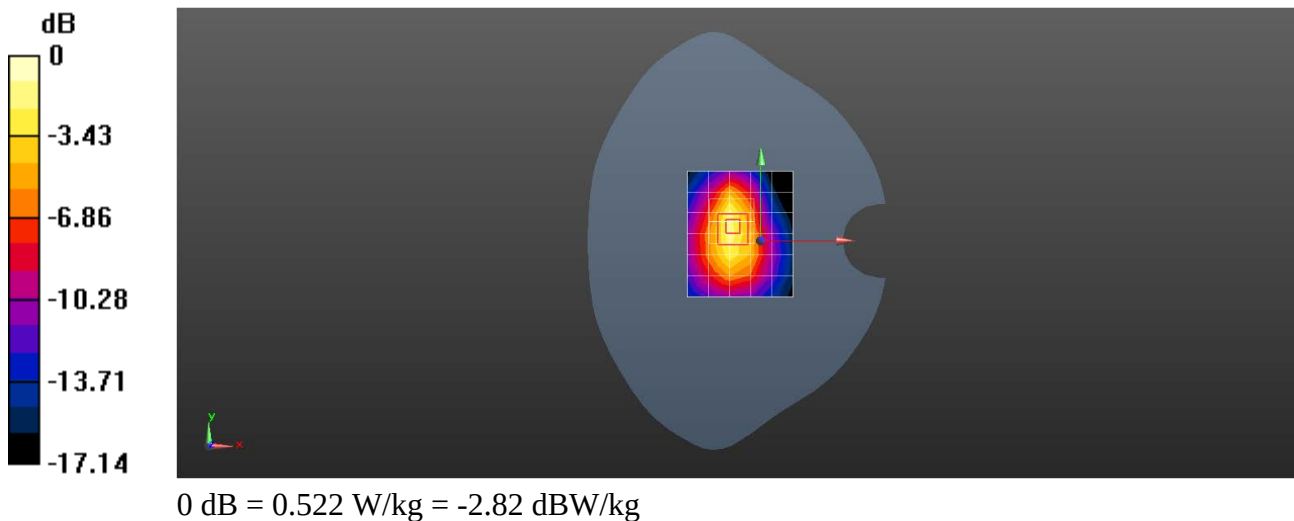

Test Laboratory: SGS-SAR Lab

V2341 WCDMA Band IV RMC 1412CH Right cheek Ant41

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.316$ S/m; $\epsilon_r = 40.476$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(8.11, 8.04, 8.17); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn634; Calibrated: 2024/2/22
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.760 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.07 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.548 W/kg; SAR(10 g) = 0.309 W/kg

Maximum value of SAR (measured) = 0.859 W/kg

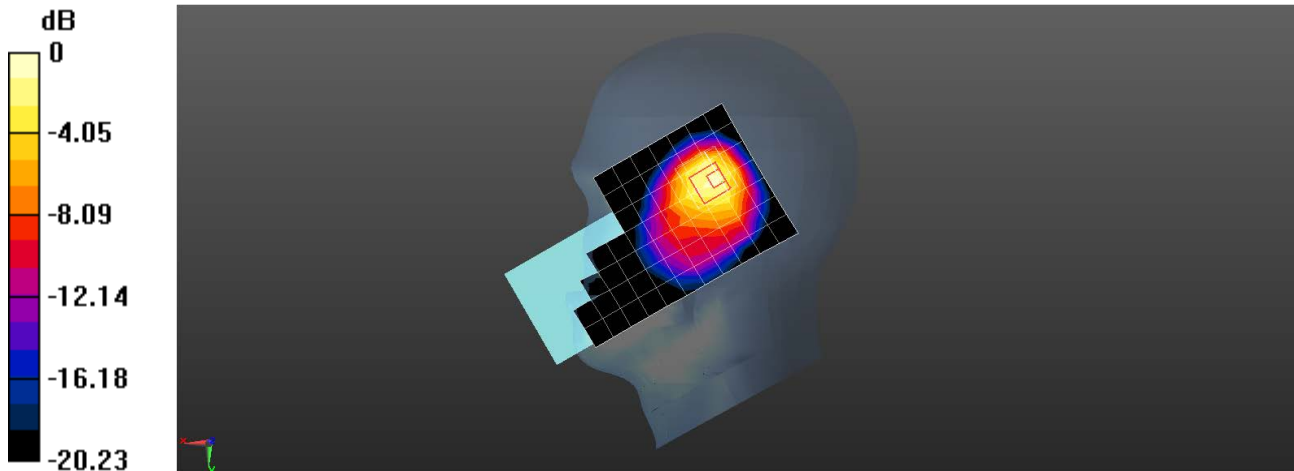

0 dB = 0.859 W/kg = -0.66 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 WCDMA Band IV RMC 1412CH Back side 15mm Ant13

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.316$ S/m; $\epsilon_r = 40.476$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(8.11, 8.04, 8.17); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn634; Calibrated: 2024/2/22
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.563 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.066 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.656 W/kg

SAR(1 g) = 0.435 W/kg; SAR(10 g) = 0.287 W/kg

Maximum value of SAR (measured) = 0.577 W/kg

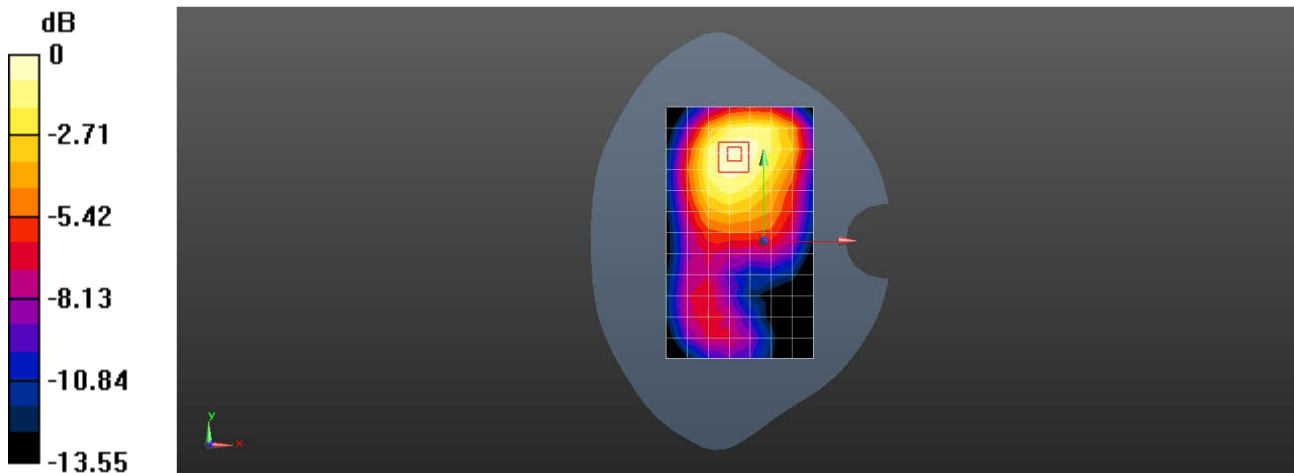

0 dB = 0.577 W/kg = -2.39 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 WCDMA Band IV RMC 1412CH Top side 10mm Ant13

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.316$ S/m; $\epsilon_r = 40.476$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(8.11, 8.04, 8.17); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn634; Calibrated: 2024/2/22
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.487 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.95 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.690 W/kg

SAR(1 g) = 0.406 W/kg; SAR(10 g) = 0.233 W/kg

Maximum value of SAR (measured) = 0.592 W/kg

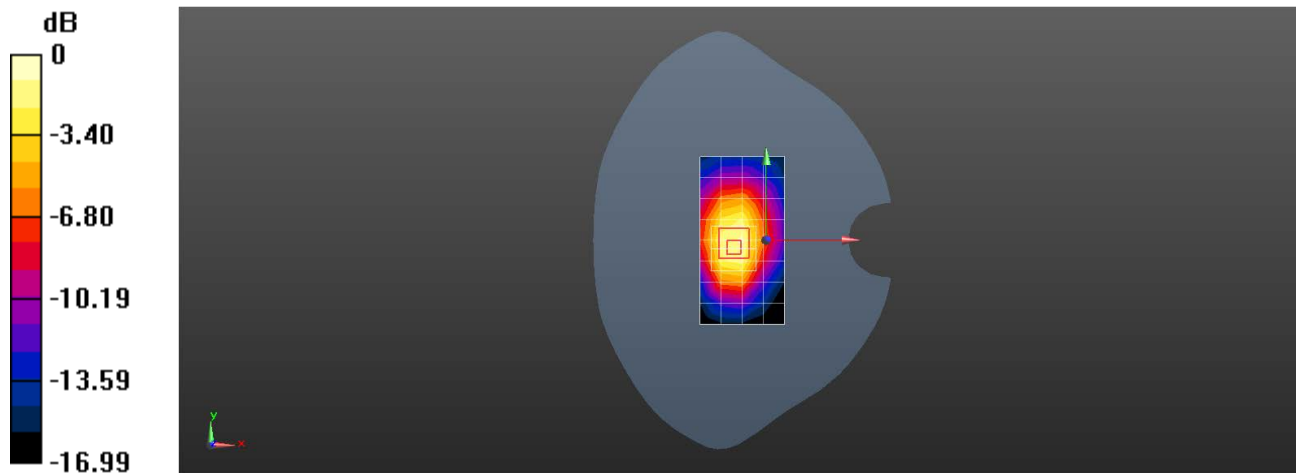

0 dB = 0.592 W/kg = -2.28 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 WCDMA Band V RMC 4182CH Right cheek Ant11

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 41.941$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn634; Calibrated: 2024/2/22
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.346 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.006 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.760 W/kg

SAR(1 g) = 0.378 W/kg; SAR(10 g) = 0.201 W/kg

Maximum value of SAR (measured) = 0.605 W/kg

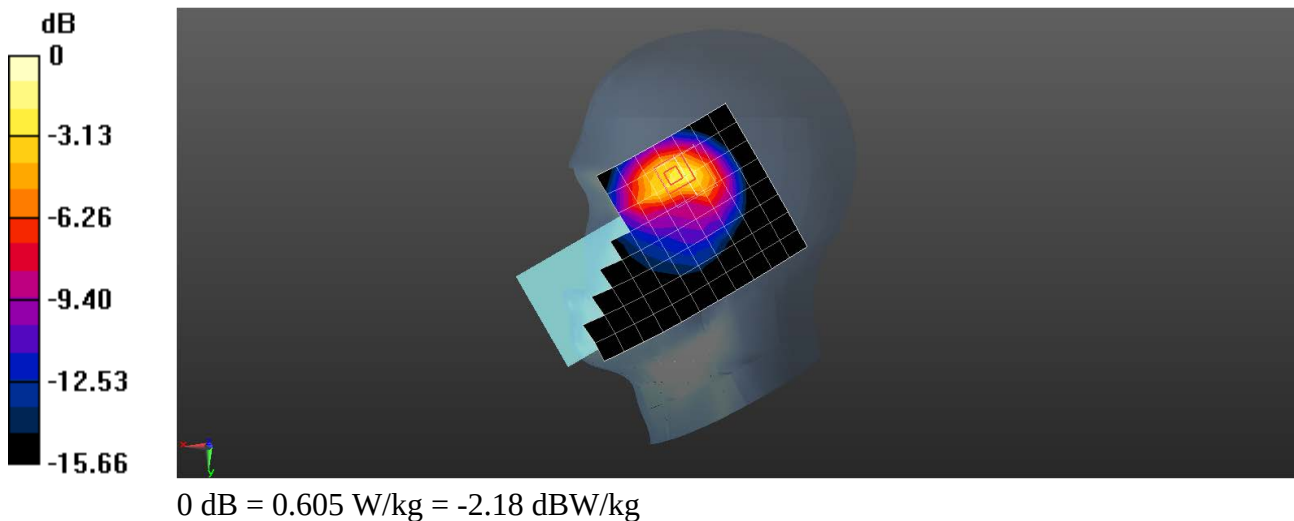

Test Laboratory: SGS-SAR Lab

V2341 WCDMA Band V RMC 4182CH Back side 15mm Ant11

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 41.941$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn634; Calibrated: 2024/2/22
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.317 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.289 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.364 W/kg

SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.148 W/kg

Maximum value of SAR (measured) = 0.323 W/kg

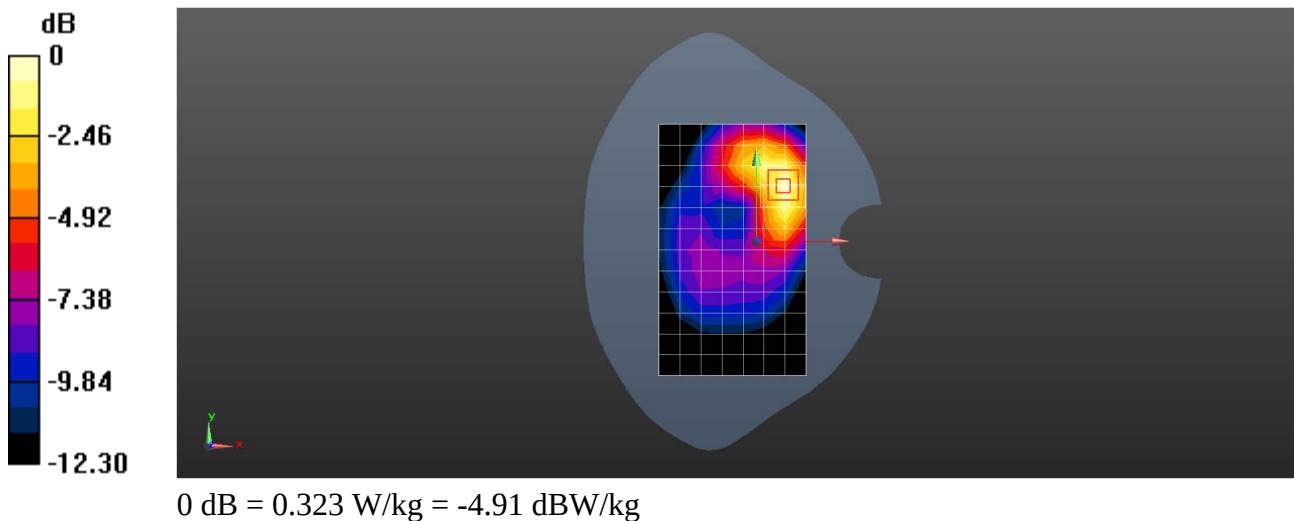

Test Laboratory: SGS-SAR Lab

V2341 WCDMA Band V RMC 4182CH Left side 10mm Ant11

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 41.941$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn634; Calibrated: 2024/2/22
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.781 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.55 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.953 W/kg

SAR(1 g) = 0.543 W/kg; SAR(10 g) = 0.307 W/kg

Maximum value of SAR (measured) = 0.811 W/kg

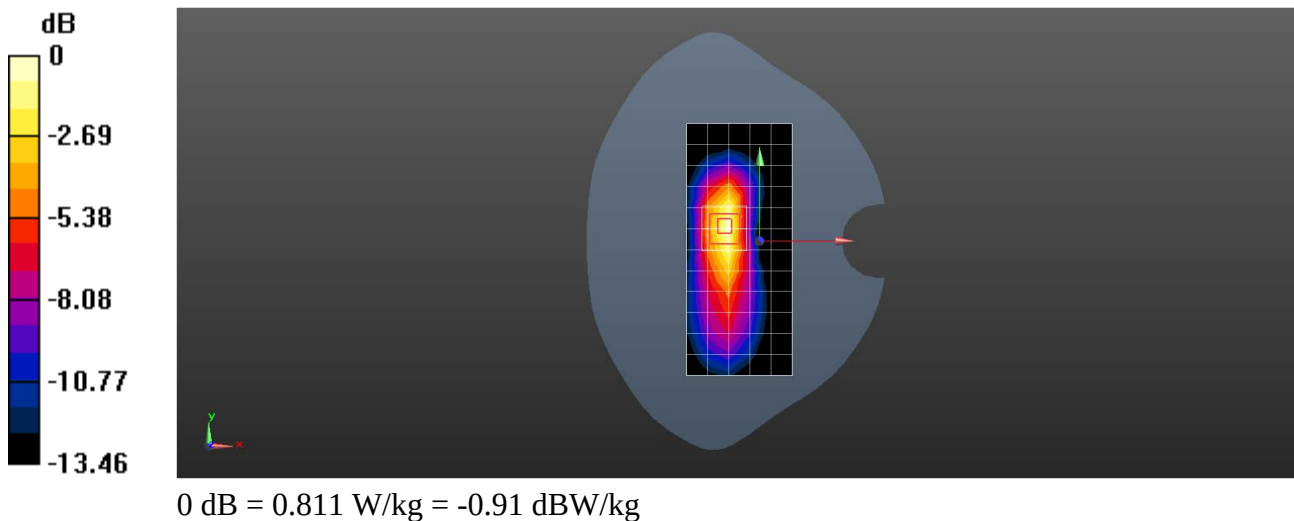

Test Laboratory: SGS-SAR Lab

V2341 CDMA BC0 RC3+SO55 384CH Right cheek Ant11

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, CDMA (0); Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.894 \text{ S/m}$; $\epsilon_r = 41.801$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn634; Calibrated: 2024/2/22
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.428 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.788 V/m ; Power Drift = 0.27 dB

Peak SAR (extrapolated) = 0.934 W/kg

SAR(1 g) = 0.475 W/kg ; SAR(10 g) = 0.263 W/kg

Maximum value of SAR (measured) = 0.735 W/kg

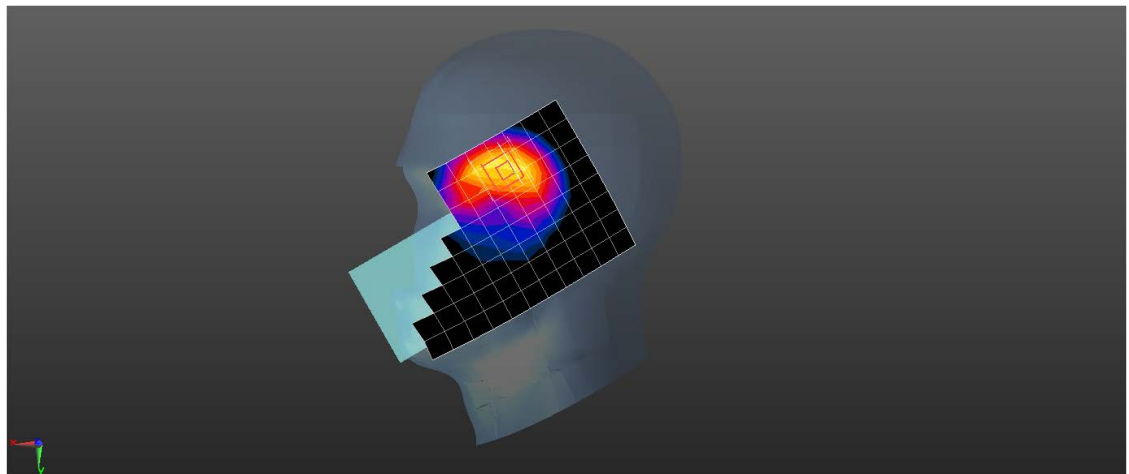

0 dB = 0.735 W/kg = -1.34 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 CDMN BC0 RC3+SO32 384CH Back side 15mm Ant11

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, CDMA (0); Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.894 \text{ S/m}$; $\epsilon_r = 41.801$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn634; Calibrated: 2024/2/22
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.396 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.359 V/m ; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.497 W/kg

SAR(1 g) = 0.320 W/kg ; SAR(10 g) = 0.201 W/kg

Maximum value of SAR (measured) = 0.437 W/kg

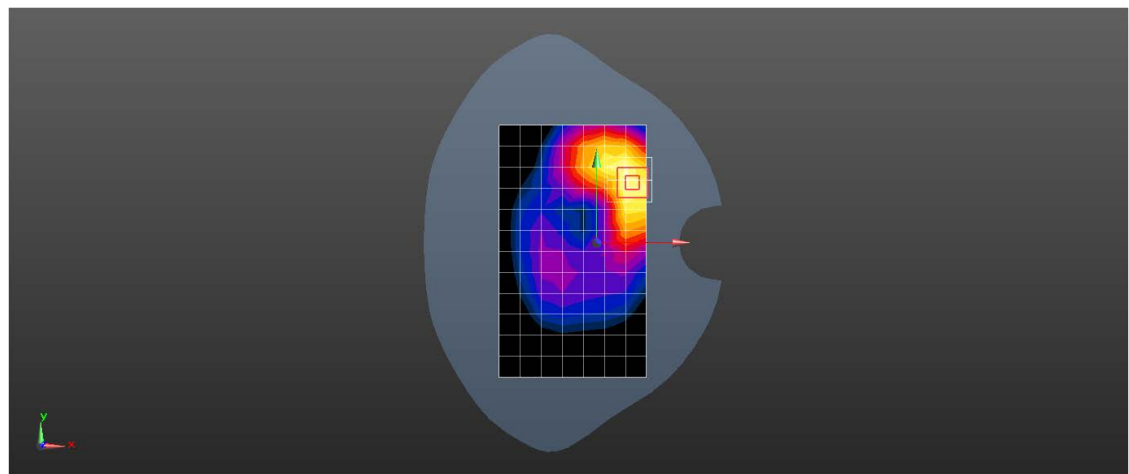

0 dB = 0.437 W/kg = -3.60 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 CDMN BC0 RC3+SO32 384CH Left side 10mm Ant11

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, CDMA (0); Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 41.801$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn634; Calibrated: 2024/2/22
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.669 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.20 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.839 W/kg

SAR(1 g) = 0.494 W/kg; SAR(10 g) = 0.282 W/kg

Maximum value of SAR (measured) = 0.723 W/kg

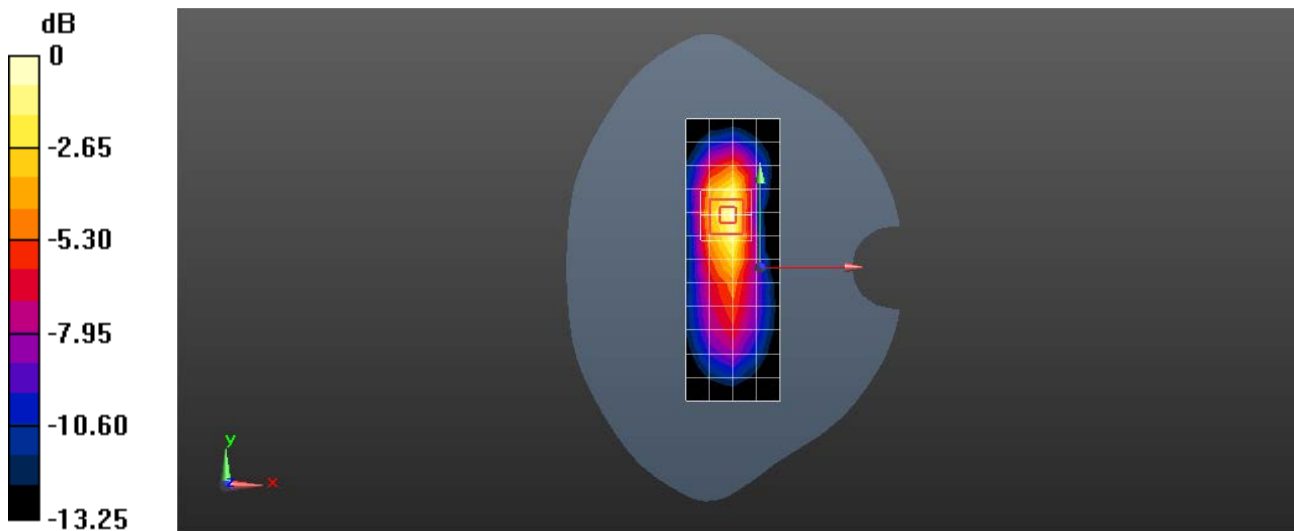

0 dB = 0.723 W/kg = -1.41 dBW/kg

V2341 LTE Band 2 20M QPSK 50RB0 18900CH Right cheek Ant13**V2341**

Communication System: Band 2; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.63, 8.63, 8.63); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1830; Calibrated: 2023-09-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2256
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.541 W/kg; SAR (10g) = 0.299 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 0.526 W/kg; SAR (10g) = 0.282 W/kg;

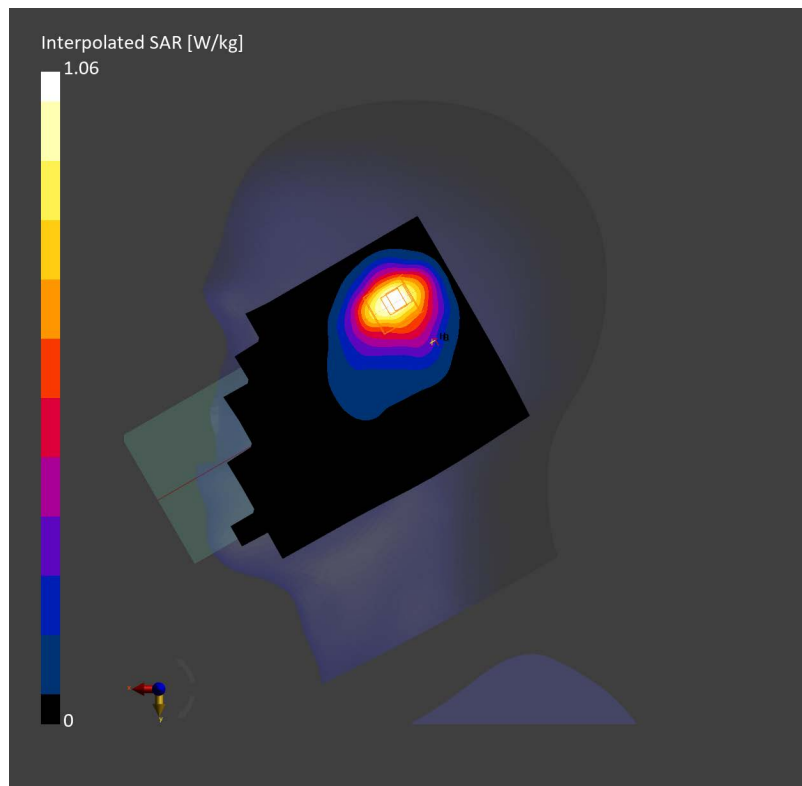

V2341 LTE Band 2 20M QPSK 1RB0 18900CH Back side 15mm Ant13**V2341**

Communication System: Band 2; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.63, 8.63, 8.63); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1830; Calibrated: 2023-09-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2256
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.215 W/kg; SAR (10g) = 0.131 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.05 dB

SAR (1g) = 0.228 W/kg; SAR (10g) = 0.138 W/kg;

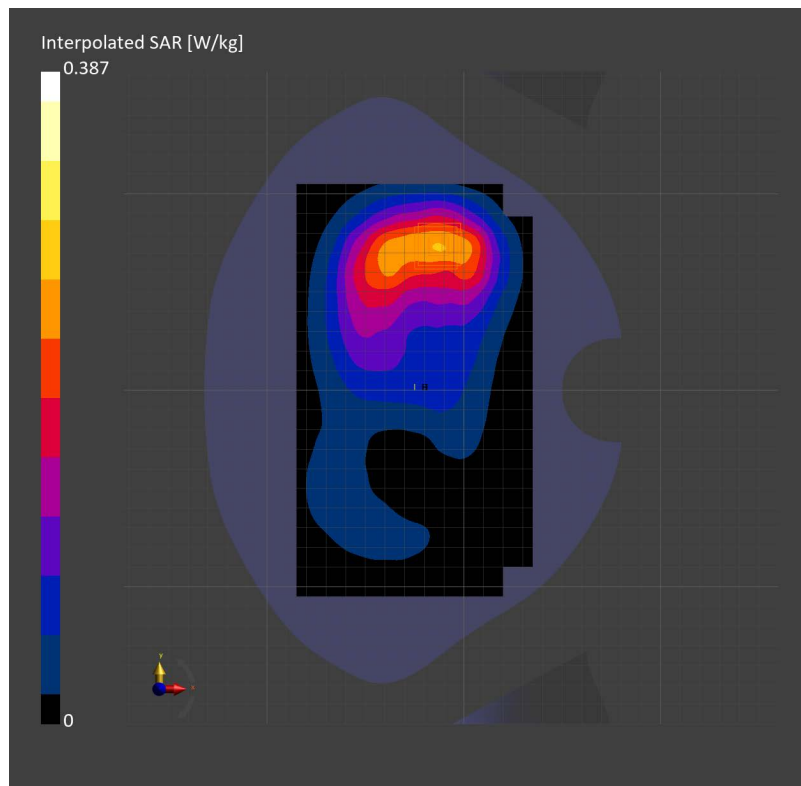

V2341 LTE Band 2 20M QPSK 50RB25 18900CH Bottom side 10mm Ant41**V2341**

Communication System: Band 2; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.63, 8.63, 8.63); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1830; Calibrated: 2023-09-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2256
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.436 W/kg; SAR (10g) = 0.241 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.07 dB

SAR (1g) = 0.445 W/kg; SAR (10g) = 0.248 W/kg;

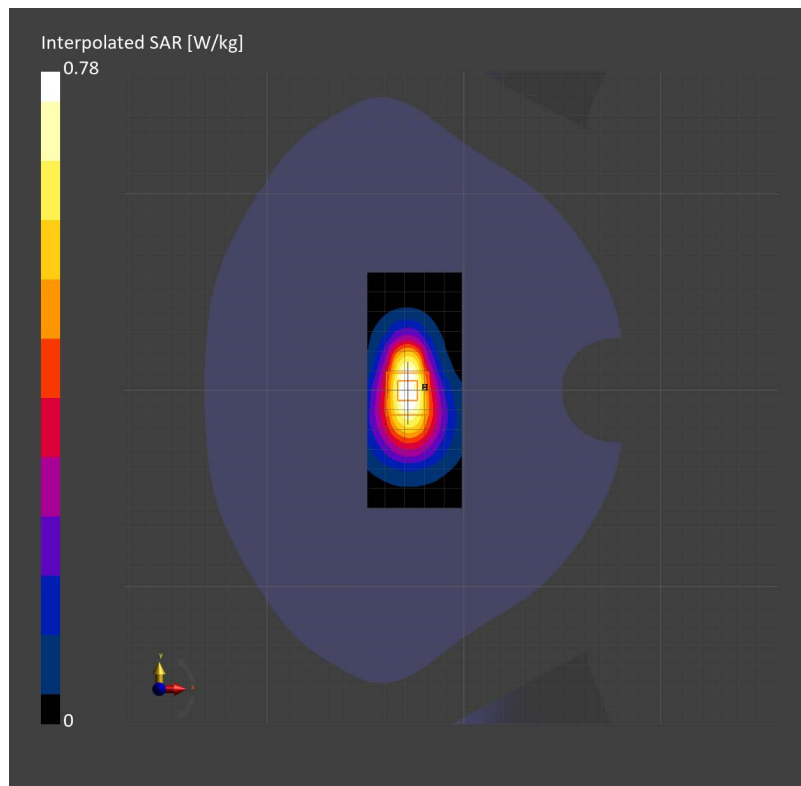

V2341 LTE Band 4 20M QPSK 50RB50 20050CH Right cheek Ant12**V2341**

Communication System: Band 4; Frequency: 1720.000

Medium: HSL. Medium parameters used: $f = 1720.000$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 40.5$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1830; Calibrated: 2023-09-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2256
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.358 W/kg; SAR (10g) = 0.190 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.02 dB

SAR (1g) = 0.359 W/kg; SAR (10g) = 0.169 W/kg;

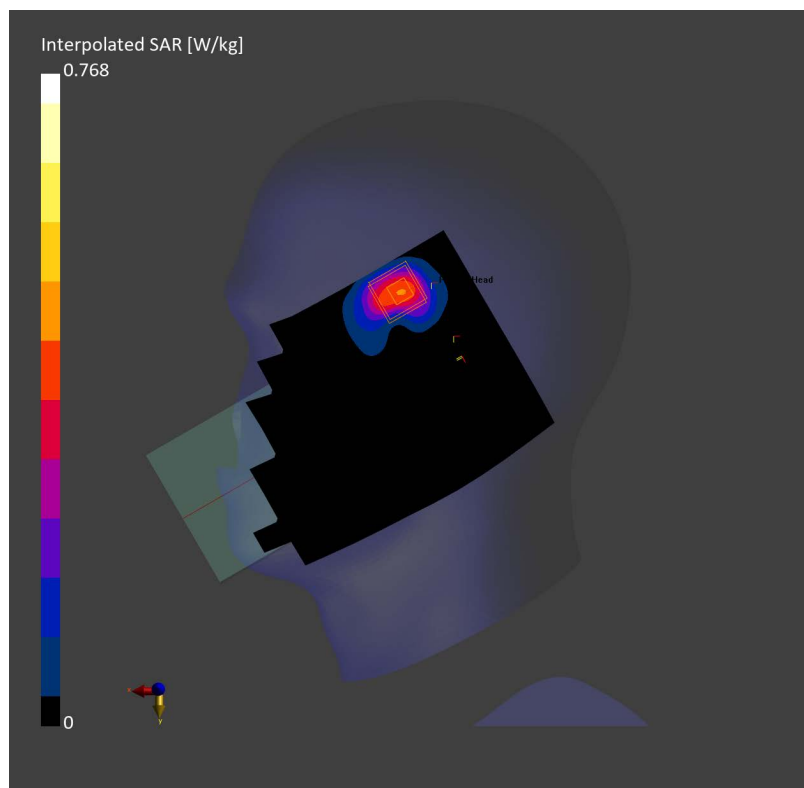

V2341 LTE Band 4 20M QPSK 50RB25 20050CH Back side 15mm Ant12**V2341**

Communication System: Band 4; Frequency: 1720.000

Medium: HSL. Medium parameters used: $f = 1720.000$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 40.5$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1830; Calibrated: 2023-09-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2256
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.106 W/kg; SAR (10g) = 0.060 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.03 dB

SAR (1g) = 0.115 W/kg; SAR (10g) = 0.063 W/kg;

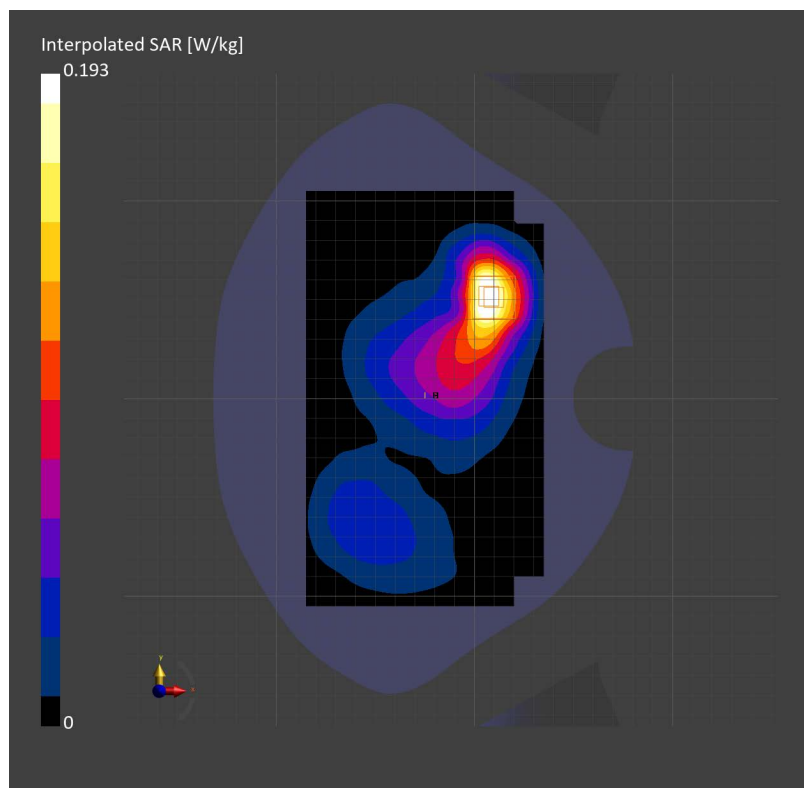

V2341 LTE Band 4 20M QPSK 50RB50 20050CH Left side 10mm Ant12**V2341**

Communication System: Band 4; Frequency: 1720.000

Medium: HSL. Medium parameters used: $f = 1720.000$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 40.5$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1830; Calibrated: 2023-09-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2256
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.201 W/kg; SAR (10g) = 0.098 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.02 dB

SAR (1g) = 0.206 W/kg; SAR (10g) = 0.10 W/kg;

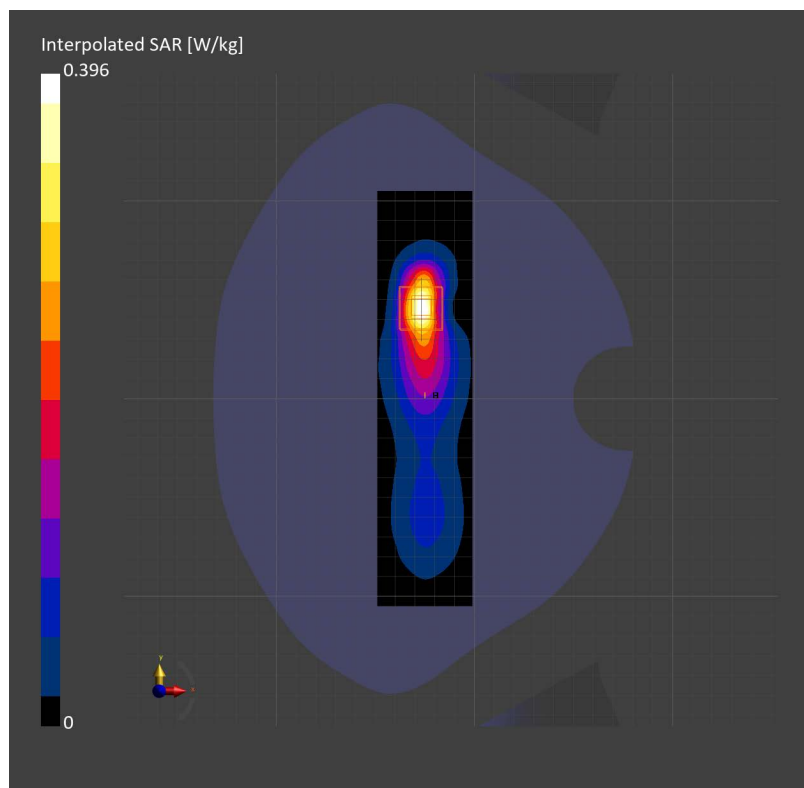

V2341 LTE Band 5 10M QPSK 1RB0 20525CH Left cheek Ant31**V2341**

Communication System: Band 5; Frequency: 836.500

Medium: HSL. Medium parameters used: $f = 836.500$ MHz; $\sigma = 0.940$ S/m; $\epsilon_r = 41.2$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(8.78, 9.28, 9.61); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.117 W/kg; SAR (10g) = 0.078 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.06 dB

SAR (1g) = 0.120 W/kg; SAR (10g) = 0.092 W/kg;

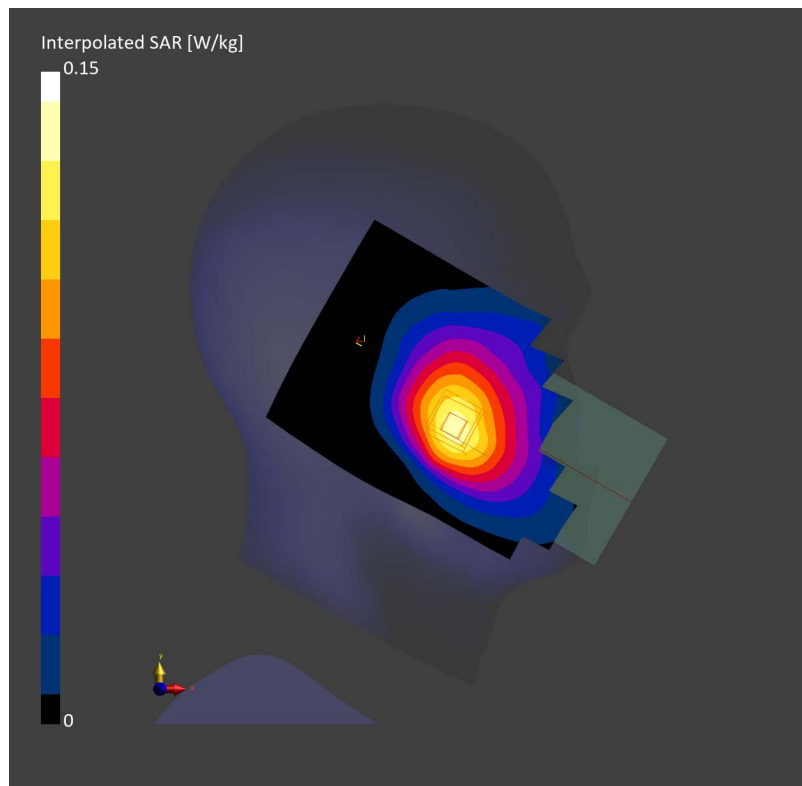

V2341 LTE Band 5 10M QPSK 1RB49 20525CH Back side 15mm Ant11


V2341

Communication System: Band 5; Frequency: 836.500
Medium: HSL. Medium parameters used: $f= 836.500$ MHz; $\sigma= 0.940$ S/m; $\epsilon_r = 41.2$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(8.78, 9.28, 9.61); Calibrated: 2023-07-17
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.326 W/kg; SAR (10g) = 0.213 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = -0.04 dB
SAR (1g) = 0.333 W/kg; SAR (10g) = 0.212 W/kg;

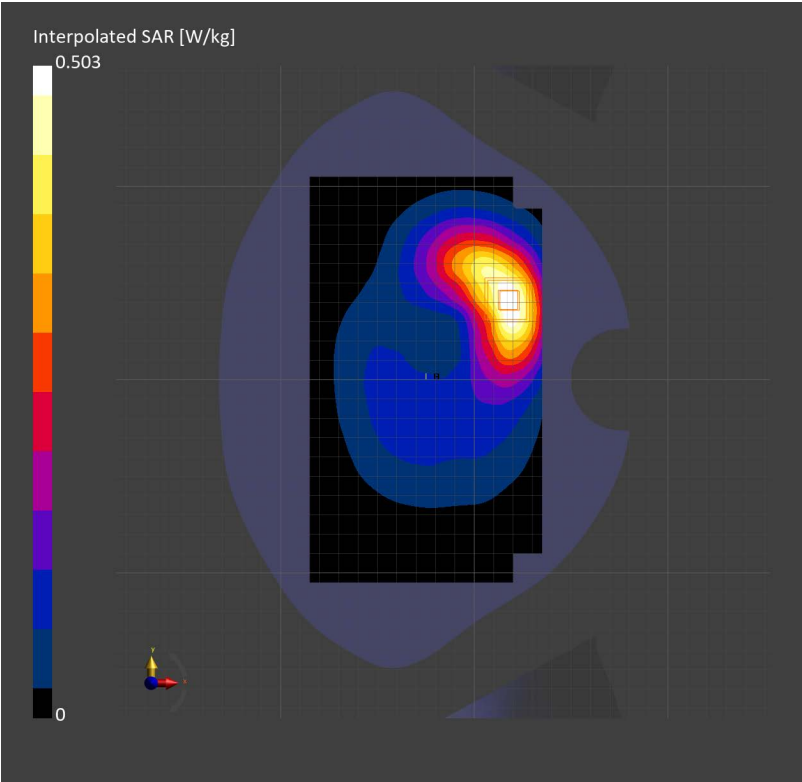

V2341 LTE Band 7 20M QPSK 50RB0 21100CH Right cheek Ant13**V2341**

Communication System: Band 7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 39.8$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.05, 8.05, 8.05); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1830; Calibrated: 2023-09-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2256
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.601 W/kg; SAR (10g) = 0.288 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.07 dB

SAR (1g) = 0.640 W/kg; SAR (10g) = 0.282 W/kg;

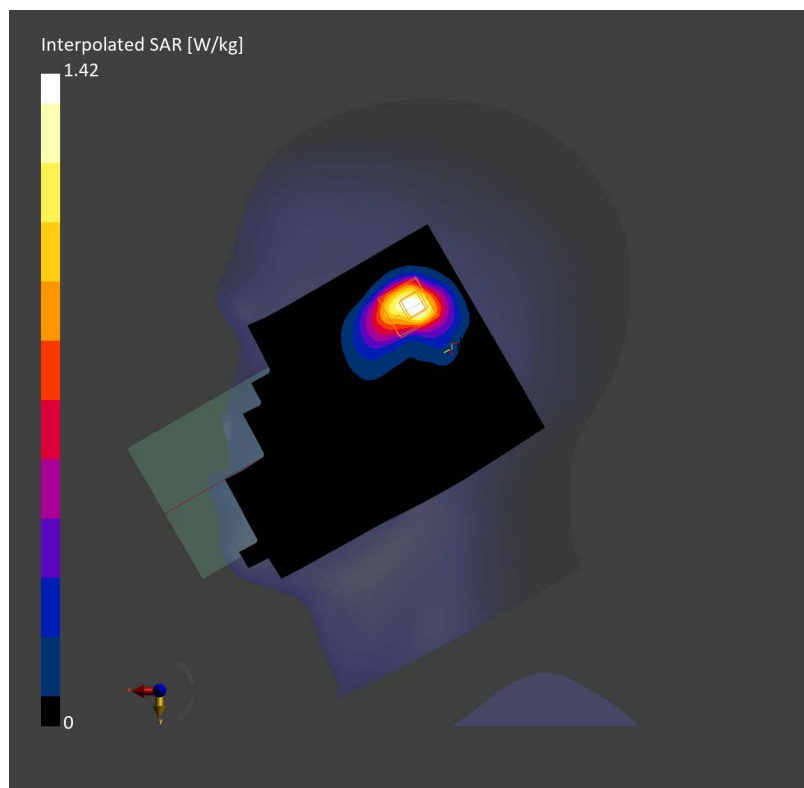

V2341 LTE Band 7 20M QPSK 50RB0 21100CH Back side 15mm Ant13**V2341**

Communication System: Band 7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 39.8$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.05, 8.05, 8.05); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1830; Calibrated: 2023-09-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2256
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.357 W/kg; SAR (10g) = 0.184 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.04 dB

SAR (1g) = 0.362 W/kg; SAR (10g) = 0.186 W/kg;

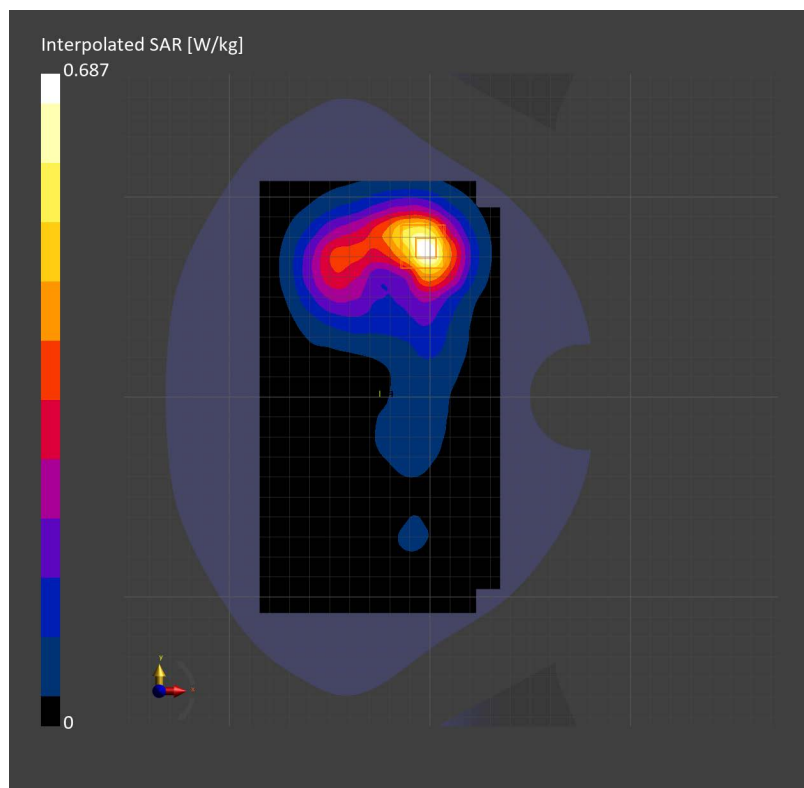

V2341 LTE Band 7 20M QPSK 1RB50 21100CH Bottom side 10mm Ant41**V2341**

Communication System: Band 7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 39.8$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.05, 8.05, 8.05); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1830; Calibrated: 2023-09-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2256
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.480 W/kg; SAR (10g) = 0.243 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.08 dB

SAR (1g) = 0.512 W/kg; SAR (10g) = 0.257 W/kg;

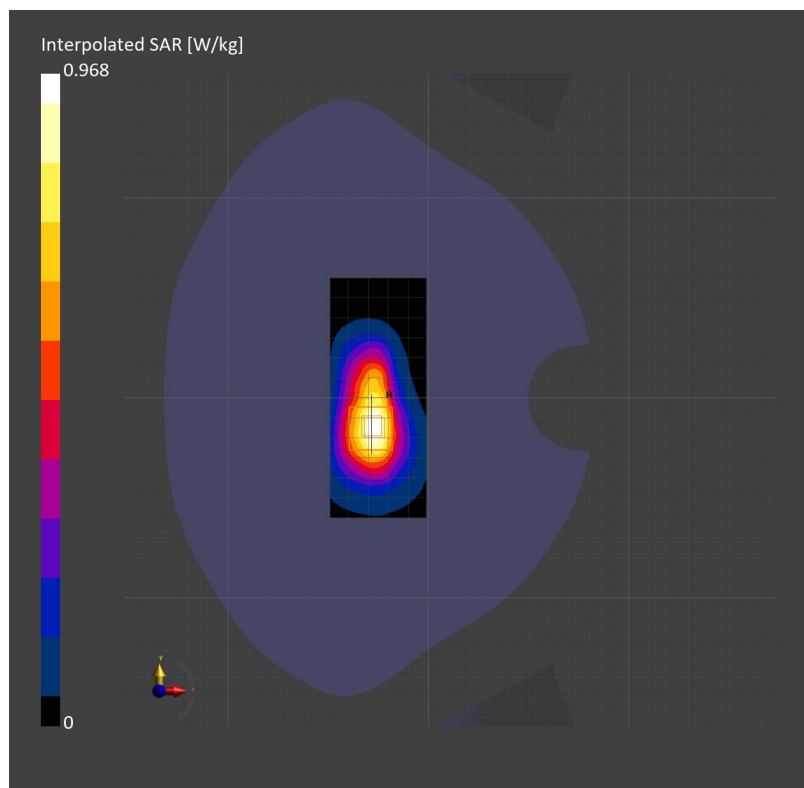

V2341 LTE Band 12 10M QPSK 1RB0 23060CH Right cheek Ant11**V2341**

Communication System: Band 12; Frequency: 704.000

Medium: HSL. Medium parameters used: $f = 704.000$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 41.8$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(9.08, 9.35, 9.65); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.158 W/kg; SAR (10g) = 0.097 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 0.158 W/kg; SAR (10g) = 0.083 W/kg;

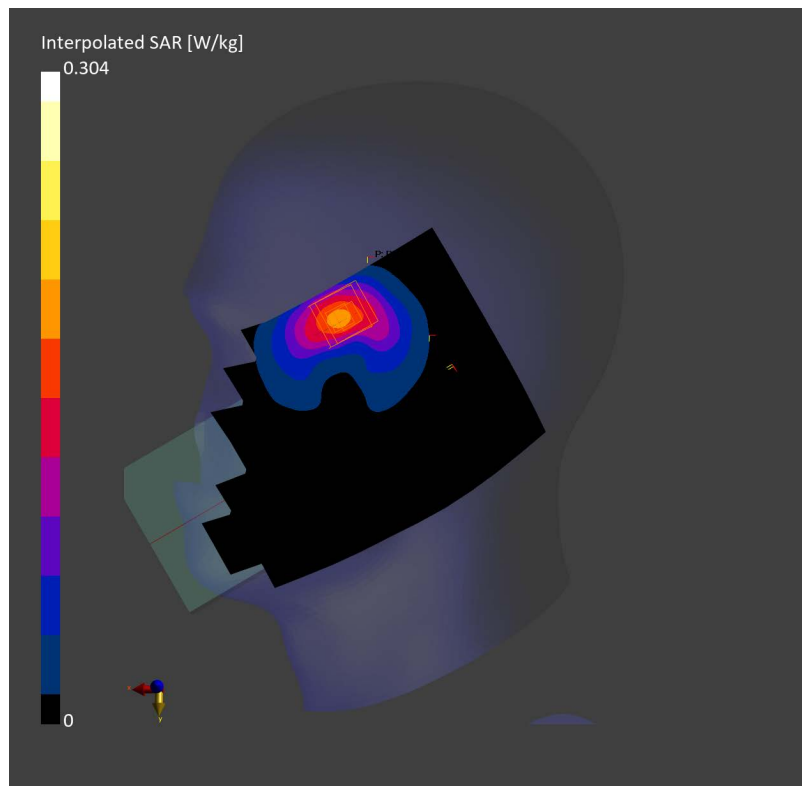

V2341 LTE Band 12 10M QPSK 1RB0 23095CH Back side 15mm Ant31**V2341**

Communication System: Band 12; Frequency: 707.500

Medium: HSL. Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 41.8$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(9.08, 9.35, 9.65); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.174 W/kg; SAR (10g) = 0.125 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 0.196 W/kg; SAR (10g) = 0.150 W/kg;

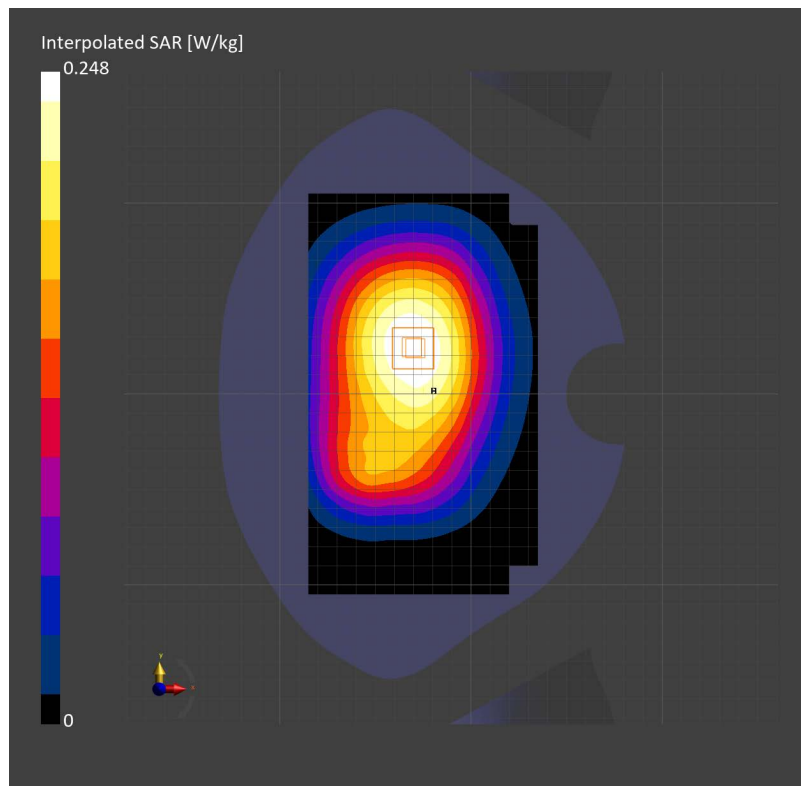

V2341 LTE Band 12 10M QPSK 1RB0 23095CH Right side 10mm Ant31


V2341

Communication System: Band 12; Frequency: 707.500
Medium: HSL. Medium parameters used: $f= 707.500$ MHz; $\sigma= 0.885$ S/m; $\epsilon_r = 41.8$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(9.08, 9.35, 9.65); Calibrated: 2023-07-17
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.2.4.2524

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.235 W/kg; SAR (10g) = 0.161 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = 0.08 dB
SAR (1g) = 0.241 W/kg; SAR (10g) = 0.168 W/kg;

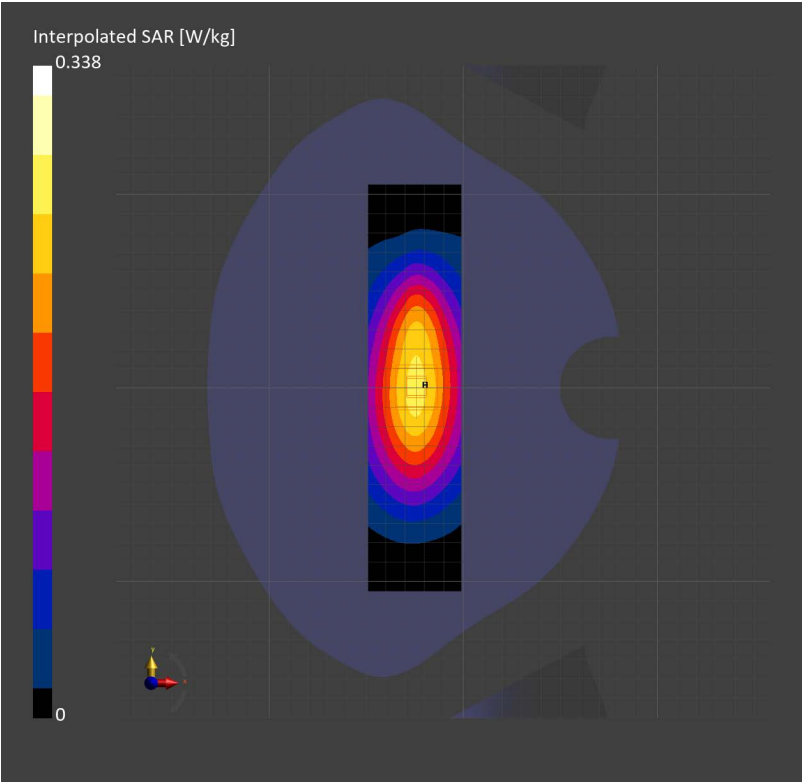

V2341 LTE Band 13 10M QPSK 1RB0 23230CH Right cheek 10mm Ant11**V2341**

Communication System: Band 13; Frequency: 782.000

Medium: HSL. Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 41.5$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(9.08, 9.35, 9.65); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.605 W/kg; SAR (10g) = 0.367 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.02 dB

SAR (1g) = 0.591 W/kg; SAR (10g) = 0.318 W/kg;

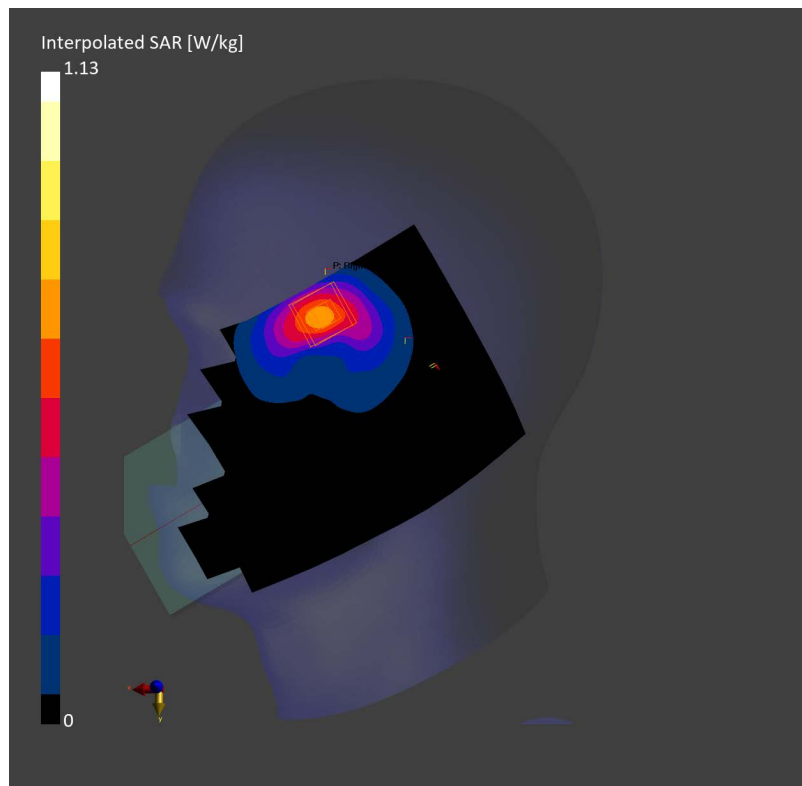

V2341 LTE Band 13 10M QPSK 1RB0 23230CH Back side 15mm Ant11**V2341**

Communication System: Band 13; Frequency: 782.000

Medium: HSL. Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 41.5$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(9.08, 9.35, 9.65); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.272 W/kg; SAR (10g) = 0.176 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.07 dB

SAR (1g) = 0.274 W/kg; SAR (10g) = 0.172 W/kg;

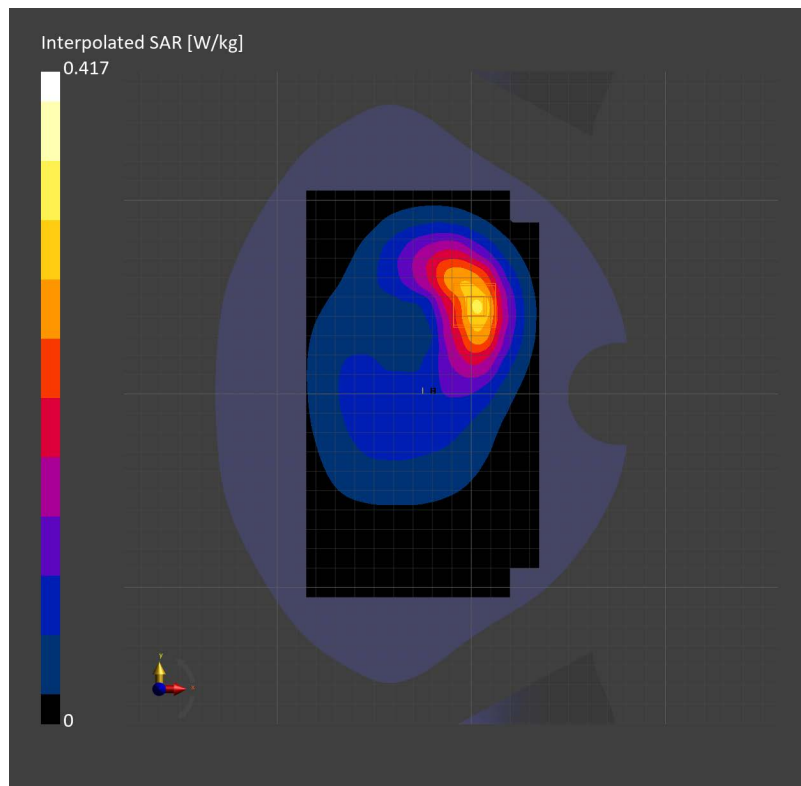

V2341 LTE Band 13 10M QPSK 1RB0 23230CH Left side 10mm Ant11


V2341

Communication System: Band 13; Frequency: 782.000
Medium: HSL. Medium parameters used: $f= 782.000$ MHz; $\sigma= 0.918$ S/m; $\epsilon_r = 41.5$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(9.08, 9.35, 9.65); Calibrated: 2023-07-17
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.2.4.2524

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.645 W/kg; SAR (10g) = 0.385 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = 0.02 dB
SAR (1g) = 0.669 W/kg; SAR (10g) = 0.384 W/kg;

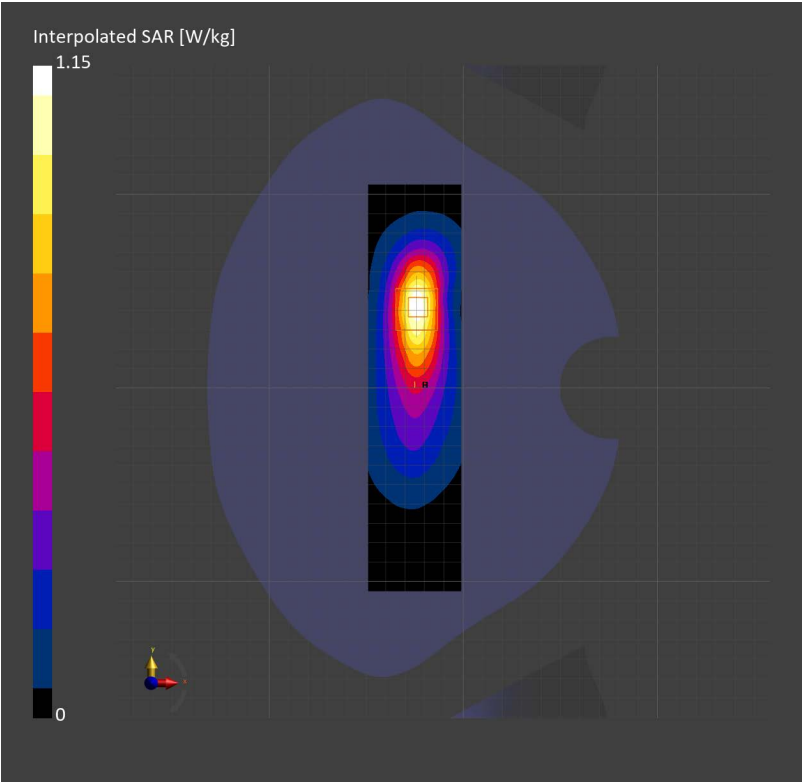

V2341 LTE Band 26 15M QPSK 36RB0 26765CH Right cheek Ant11**V2341**

Communication System: Band 26; Frequency: 821.500

Medium: HSL. Medium parameters used: $f = 821.500$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 41.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(8.78, 9.28, 9.61); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.330 W/kg; SAR (10g) = 0.198 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.02 dB

SAR (1g) = 0.346 W/kg; SAR (10g) = 0.185 W/kg;

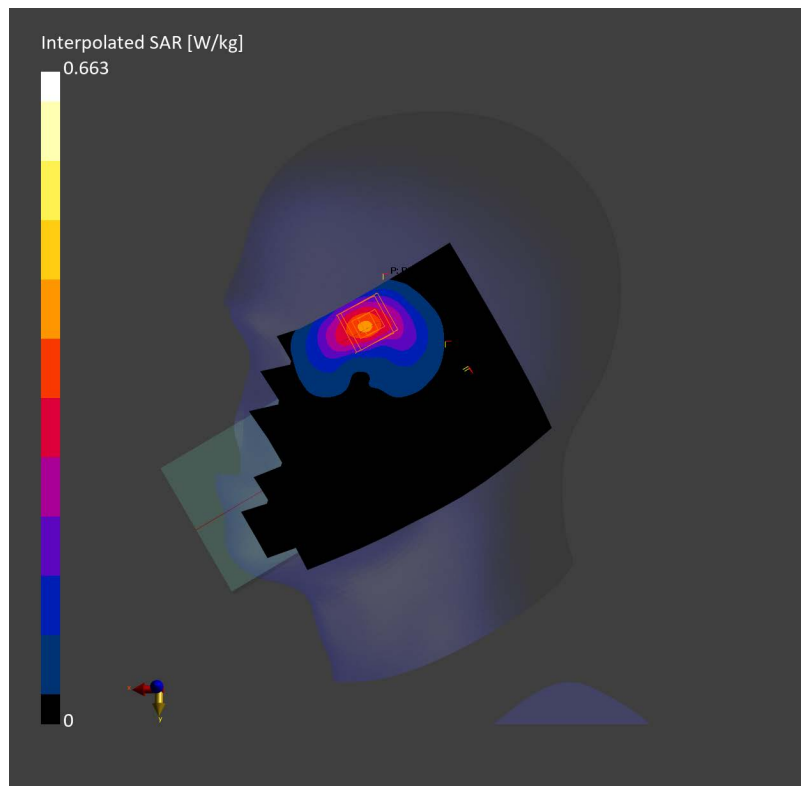

V2341 LTE Band 26 15M QPSK 1RB0 26765CH Back side 15mm Ant11**V2341**

Communication System: Band 26; Frequency: 821.500

Medium: HSL. Medium parameters used: $f = 821.500$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 41.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(8.78, 9.28, 9.61); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.250 W/kg; SAR (10g) = 0.162 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 0.262 W/kg; SAR (10g) = 0.163 W/kg;

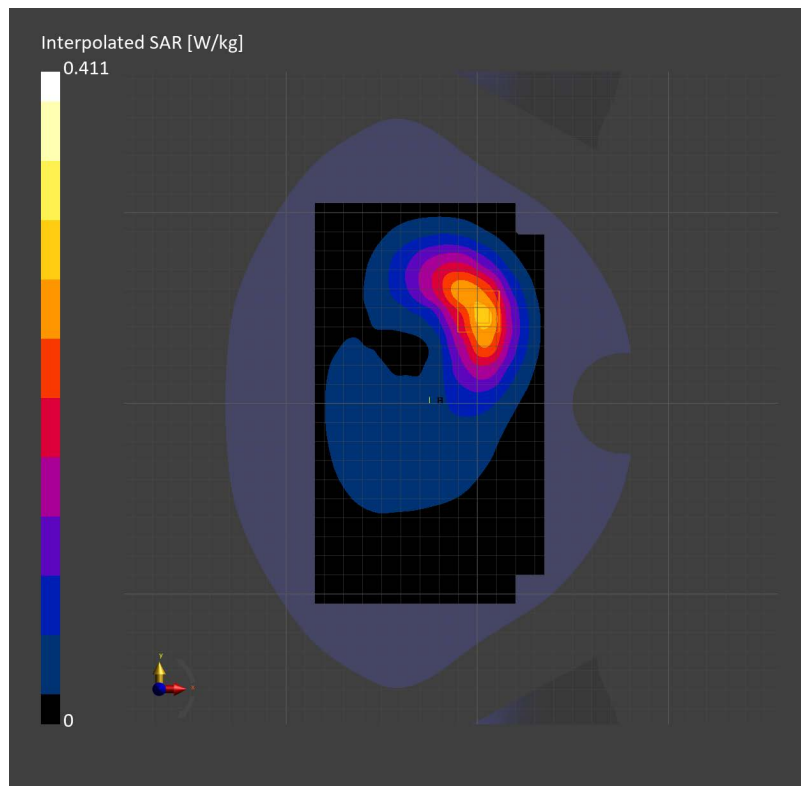

V2341 LTE Band 26 15M QPSK 36RB0 26765CH Left side 10mm Ant11**V2341**

Communication System: Band 26; Frequency: 821.500

Medium: HSL. Medium parameters used: $f = 821.500$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 41.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(8.78, 9.28, 9.61); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.446 W/kg; SAR (10g) = 0.264 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.04 dB

SAR (1g) = 0.443 W/kg; SAR (10g) = 0.249 W/kg;

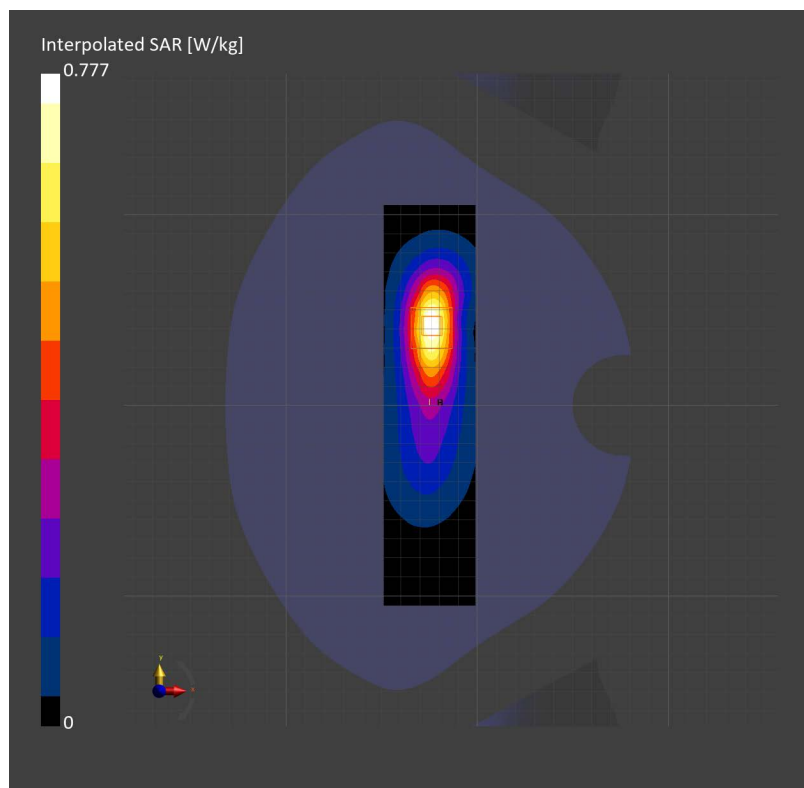

V2341 LTE Band 41 20M QPSK 50RB0 40620CH Right cheek Ant13**V2341**

Communication System: Band 41; Frequency: 2593.000

Medium: HSL. Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 38.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.85, 7.85, 7.85); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1830; Calibrated: 2023-09-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2256
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.604 W/kg; SAR (10g) = 0.290 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.01 dB

SAR (1g) = 0.629 W/kg; SAR (10g) = 0.280 W/kg;

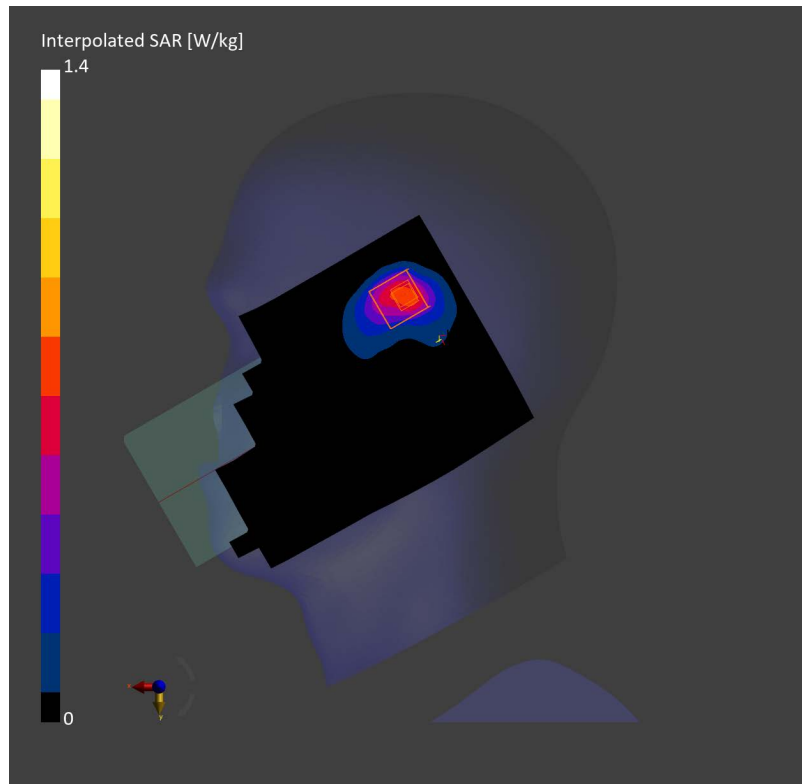

V2341 LTE Band 41 20M QPSK 1RB0 40620CH Back side 15mm Ant13**V2341**

Communication System: Band 41; Frequency: 2593.000

Medium: HSL. Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 38.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.85, 7.85, 7.85); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1830; Calibrated: 2023-09-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2256
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.339 W/kg; SAR (10g) = 0.176 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.04 dB

SAR (1g) = 0.345 W/kg; SAR (10g) = 0.178 W/kg;

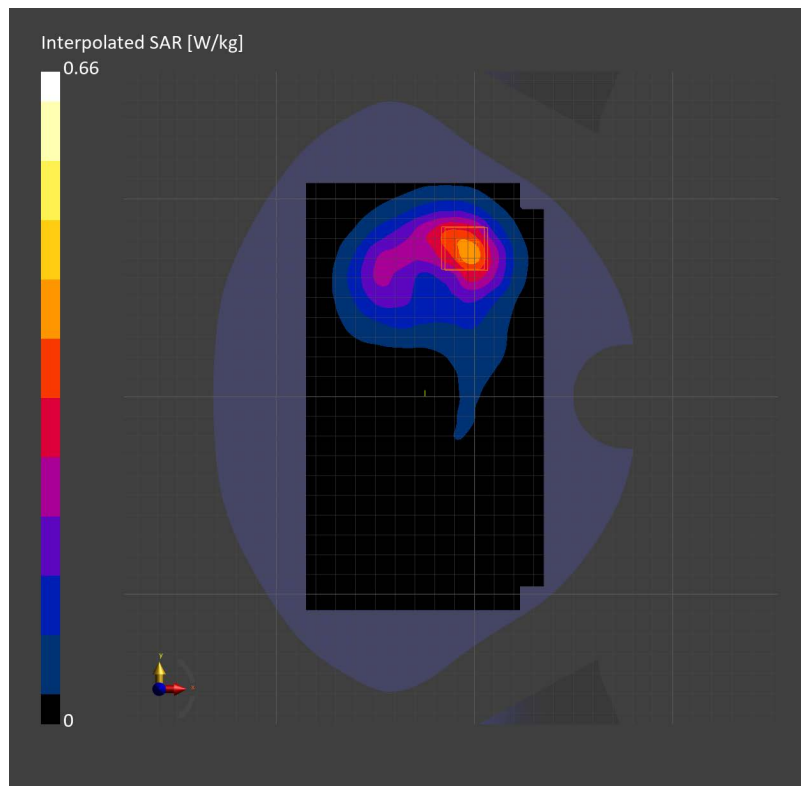

V2341 LTE Band 41 20M QPSK 1RB99 40620CH Bottom side 10mm Ant41


V2341

Communication System: Band 41; Frequency: 2593.000
Medium: HSL. Medium parameters used: $f= 2593.000$ MHz; $\sigma= 1.88$ S/m; $\epsilon_r = 38.3$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7636; ConvF(7.85, 7.85, 7.85); Calibrated: 2023-06-05
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2023-09-12
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2256
 - Measurement Software: cDASY8 V16.2.4.2524

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 12.0 mm
SAR (1g) = 0.456 W/kg; SAR (10g) = 0.228 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm
Power Drift = -0.08 dB
SAR (1g) = 0.489 W/kg; SAR (10g) = 0.243 W/kg;

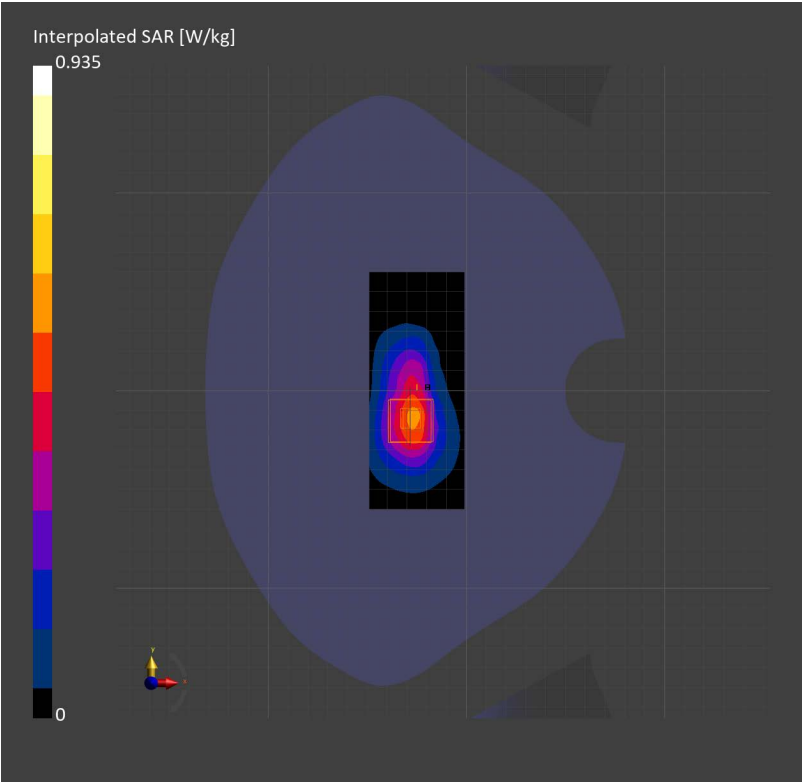

V2341 LTE Band 66 20M QPSK 50RB25 132572CH Right cheek Ant13**V2341**

Communication System: Band 66; Frequency: 1770.000

Medium: HSL. Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.5$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1830; Calibrated: 2023-09-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2256
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.557 W/kg; SAR (10g) = 0.324 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.11 dB

SAR (1g) = 0.550 W/kg; SAR (10g) = 0.307 W/kg;

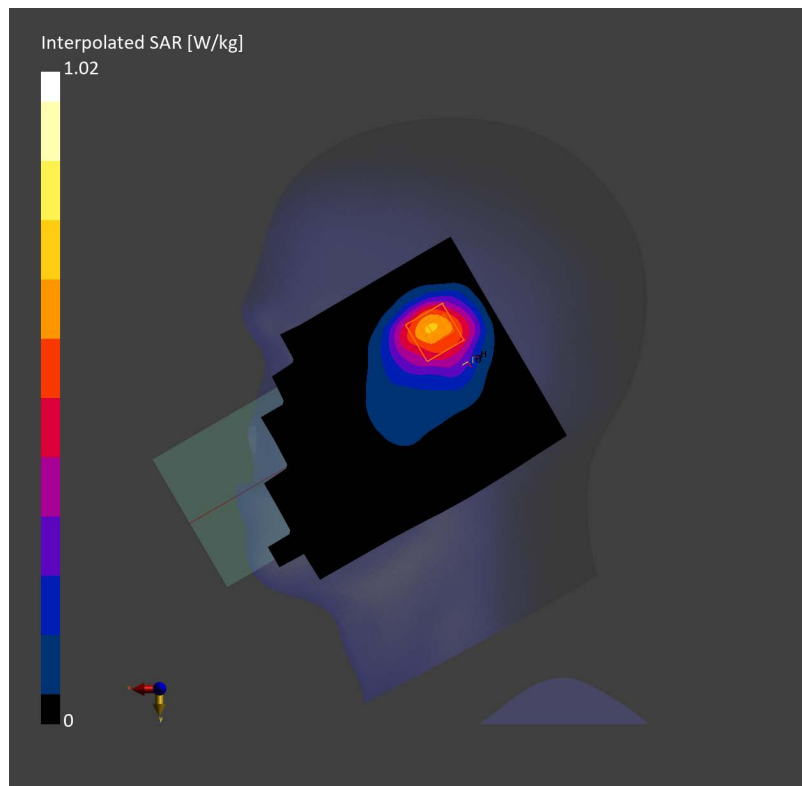

V2341 LTE Band 66 20M QPSK 1RB99 132322CH Back side 15mm Ant13**V2341**

Communication System: Band 66; Frequency: 1745.000

Medium: HSL. Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 40.5$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1830; Calibrated: 2023-09-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2256
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.391 W/kg; SAR (10g) = 0.244 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.09 dB

SAR (1g) = 0.412 W/kg; SAR (10g) = 0.265 W/kg;

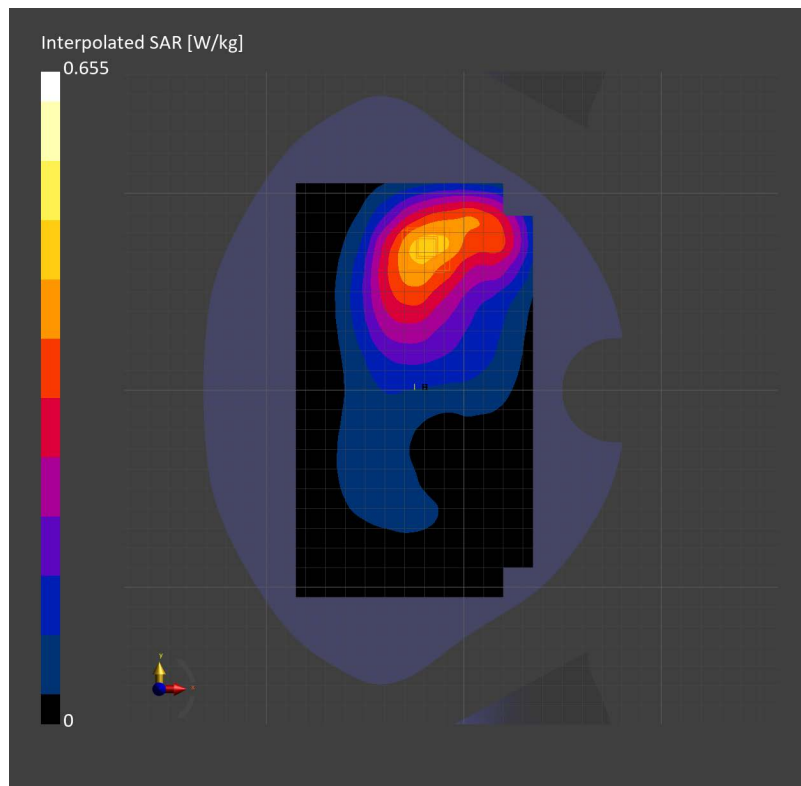

V2341 LTE Band 66 20M QPSK 50RB25 132572CH Top side 10mm Ant13


V2341

Communication System: Band 66; Frequency: 1770.000
Medium: HSL. Medium parameters used: $f= 1770.000$ MHz; $\sigma= 1.36$ S/m; $\epsilon_r = 40.5$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7636; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-06-05
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2023-09-12
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2256
 - Measurement Software: cDASY8 V16.2.4.2524

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.472 W/kg; SAR (10g) = 0.264 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = -0.02 dB
SAR (1g) = 0.483 W/kg; SAR (10g) = 0.271 W/kg;

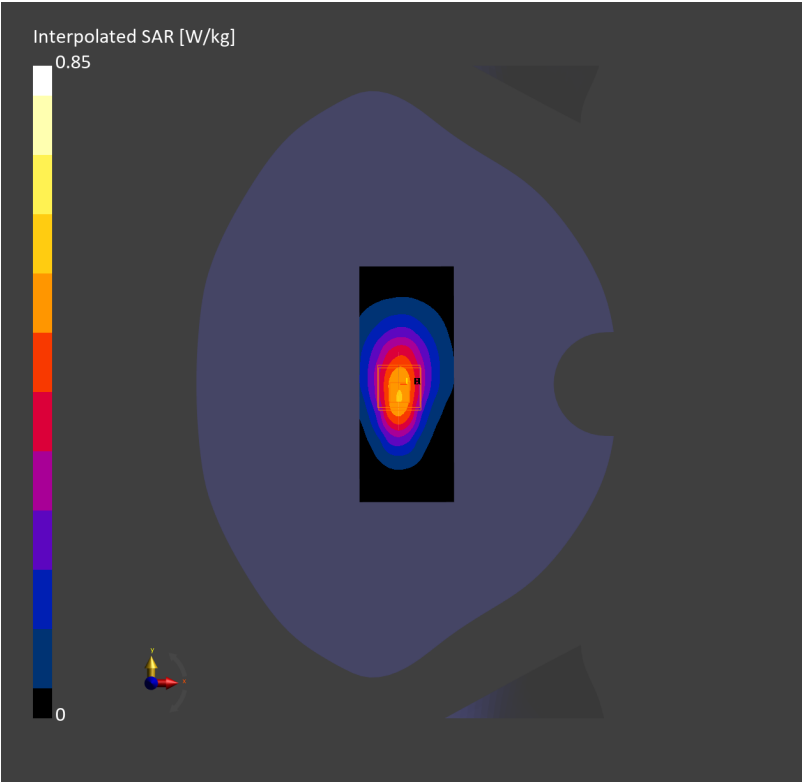

Test Laboratory: SGS-SAR Lab

V2341 5G NR N2 20M QPSK 1RB1 372000CH Right cheek Ant12

DUT: V2341; Type: Mobile Phone; Serial: 863223079997197

Communication System: UID 0, NR (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1860$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 38.727$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.63, 7.63, 7.63); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.670 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.264 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.517 W/kg; SAR(10 g) = 0.244 W/kg

Maximum value of SAR (measured) = 0.971 W/kg

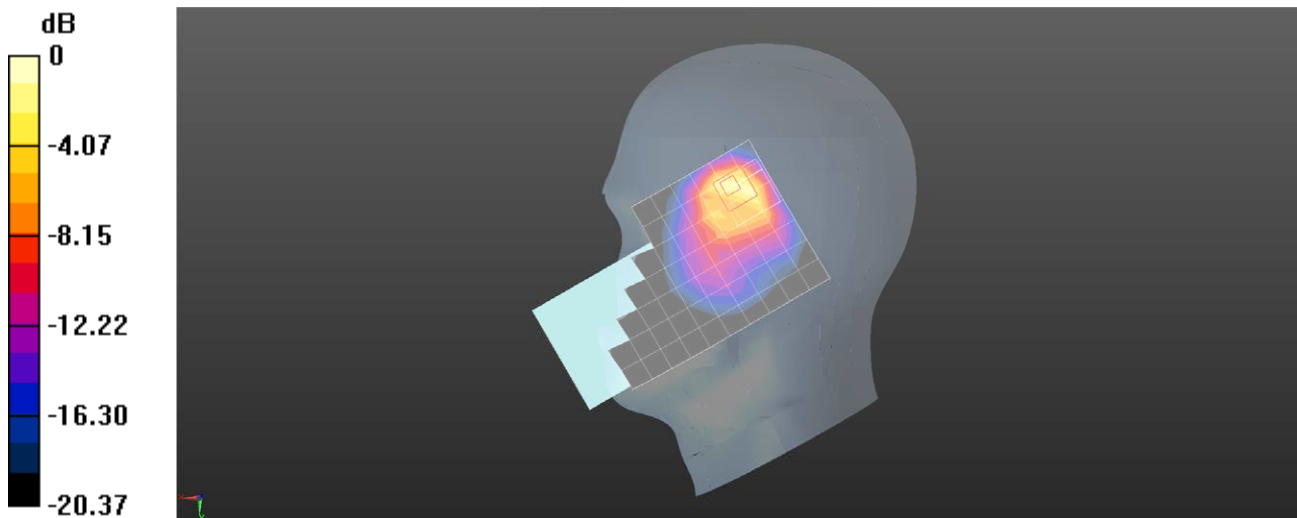

0 dB = 0.971 W/kg = -0.13 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 5G NR N2 20M QPSK 1RB53 380000CH Back side 15mm Ant13

DUT: V2341; Type: Mobile Phone; Serial: 863223079997197

Communication System: UID 0, NR (0); Frequency: 1900 MHz;Duty Cycle: 1:1

Medium: HSL1900;Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.451 \text{ S/m}$; $\epsilon_r = 38.564$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.63, 7.63, 7.63); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.505 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.74 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.572 W/kg

SAR(1 g) = 0.342 W/kg; SAR(10 g) = 0.206 W/kg

Maximum value of SAR (measured) = 0.474 W/kg

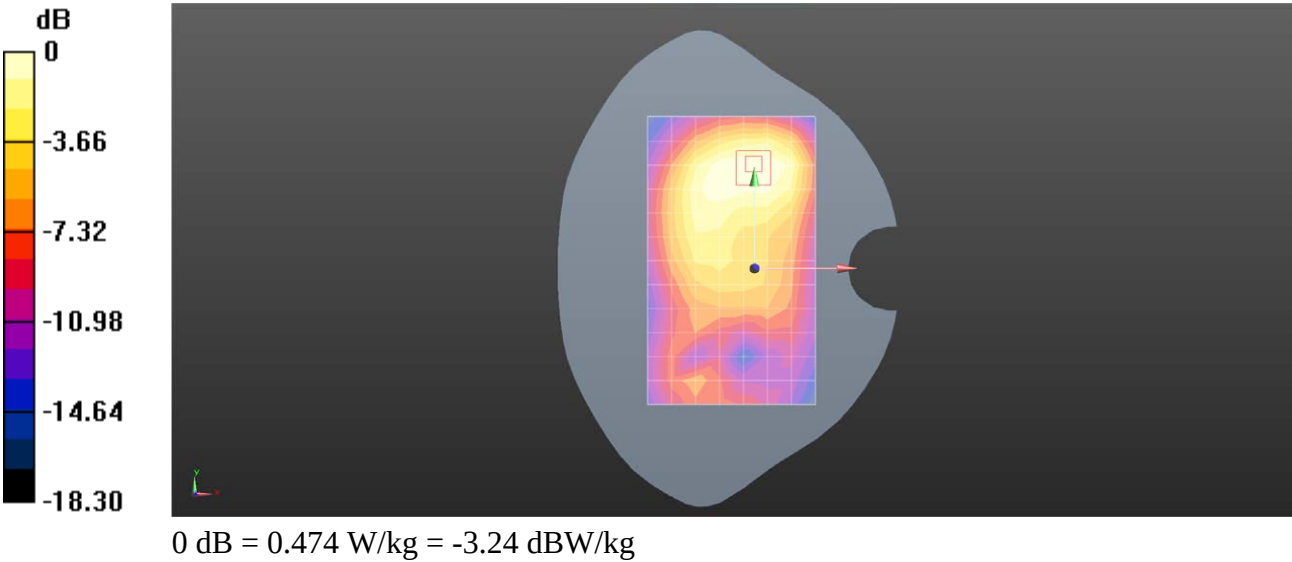

Test Laboratory: SGS-SAR Lab

V2341 5G NR N2 20M QPSK 50RB28 376000CH Bottom side 10mm Ant41

DUT: V2341; Type: Mobile Phone; Serial: 863223079997197

Communication System: UID 0, NR (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 38.647$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.63, 7.63, 7.63); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.592 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.95 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.834 W/kg

SAR(1 g) = 0.440 W/kg; SAR(10 g) = 0.240 W/kg

Maximum value of SAR (measured) = 0.679 W/kg

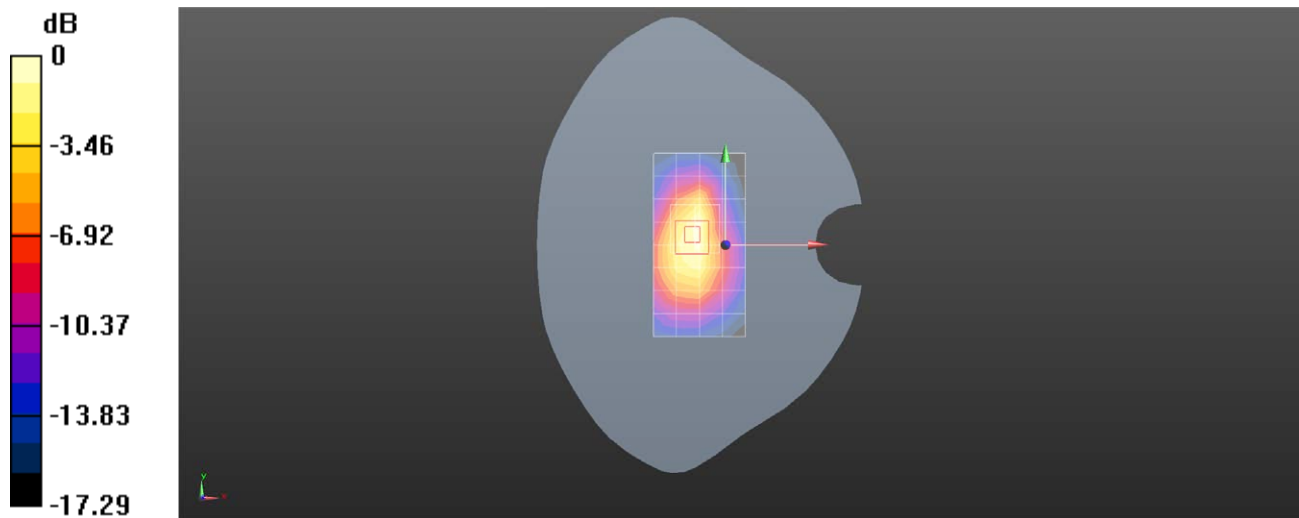

0 dB = 0.679 W/kg = -1.68 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 5G NR N5 20M QPSK 1RB1 167300CH Right cheek Ant11

DUT: V2341; Type: Mobile Phone; Serial: 863223079997197

Communication System: UID 0, NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 40.612$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(9.02, 9.02, 9.02); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.676 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.708 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.901 W/kg

SAR(1 g) = 0.417 W/kg; SAR(10 g) = 0.223 W/kg

Maximum value of SAR (measured) = 0.715 W/kg

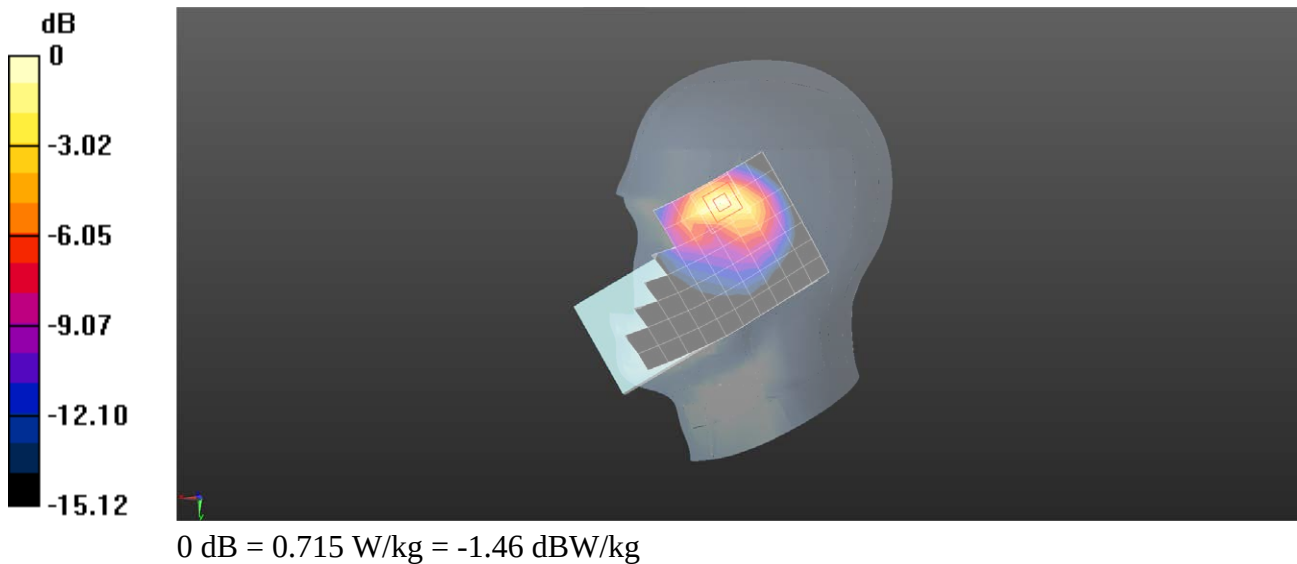

Test Laboratory: SGS-SAR Lab

V2341 5G NR N5 20M QPSK 1RB1 166800CH Back side 15mm Ant11

DUT: V2341; Type: Mobile Phone; Serial: 863223079997197

Communication System: UID 0, NR (0); Frequency: 834 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 834 \text{ MHz}$; $\sigma = 0.906 \text{ S/m}$; $\epsilon_r = 40.614$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(9.02, 9.02, 9.02); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.419 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.637 V/m ; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.586 W/kg

SAR(1 g) = 0.334 W/kg ; SAR(10 g) = 0.205 W/kg

Maximum value of SAR (measured) = 0.482 W/kg

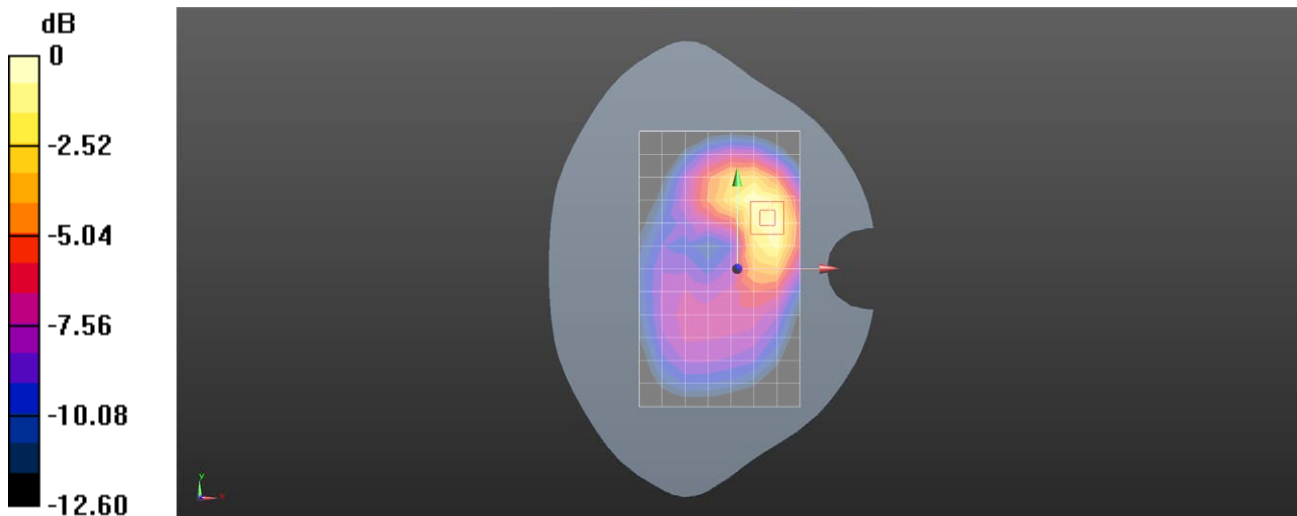

0 dB = 0.482 W/kg = -3.17 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 5G NR N5 20M QPSK 1RB1 166800CH Left side 10mm Ant11

DUT: V2341; Type: Mobile Phone; Serial: 863223079997197

Communication System: UID 0, NR (0); Frequency: 834 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 834 \text{ MHz}$; $\sigma = 0.906 \text{ S/m}$; $\epsilon_r = 40.614$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(9.02, 9.02, 9.02); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.877 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.21 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.676 W/kg ; SAR(10 g) = 0.369 W/kg

Maximum value of SAR (measured) = 1.09 W/kg

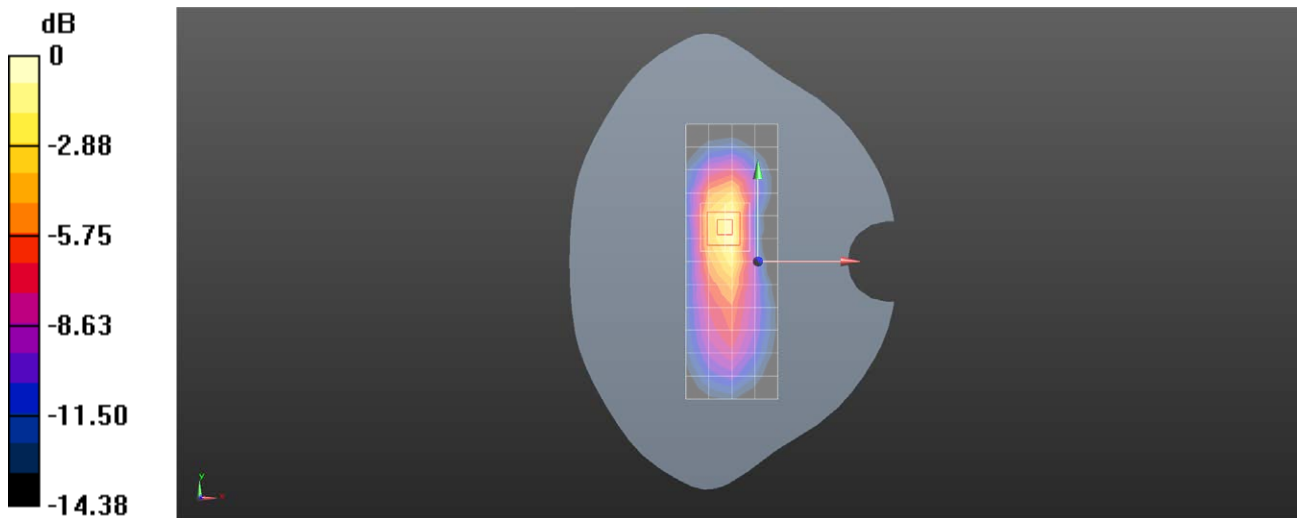

0 dB = 1.09 W/kg = 0.37 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 5G NR N7 40M QPSK 108RB54 507000CH Right tilted Ant13

DUT: V2341; Type: Mobile Phone; Serial: 863223079997197

Communication System: UID 0, NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.9$ S/m; $\epsilon_r = 39.146$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.1, 7.1, 7.1); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.870 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.35 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.459 W/kg; SAR(10 g) = 0.177 W/kg

Maximum value of SAR (measured) = 0.803 W/kg

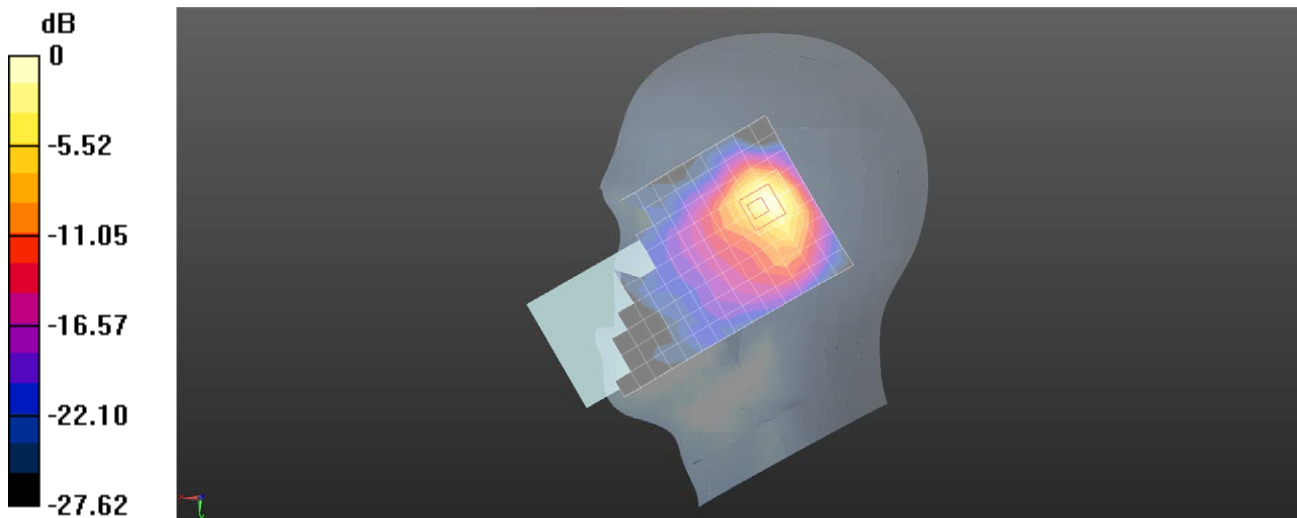

0 dB = 0.803 W/kg = -0.95 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 5G NR N7 40M QPSK 108RB54 505000CH Back side 15mm Ant13

DUT: V2341; Type: Mobile Phone; Serial: 863223079997197

Communication System: UID 0, NR (0); Frequency: 2525 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2525$ MHz; $\sigma = 1.886$ S/m; $\epsilon_r = 39.162$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.1, 7.1, 7.1); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.476 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.292 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.640 W/kg

SAR(1 g) = 0.322 W/kg; SAR(10 g) = 0.165 W/kg

Maximum value of SAR (measured) = 0.515 W/kg

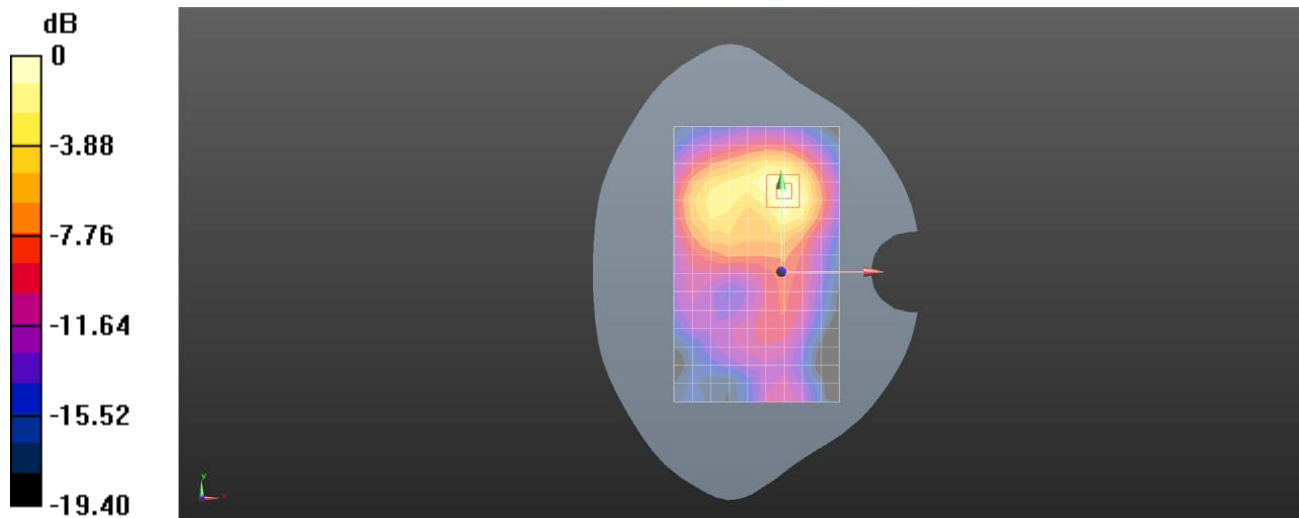

0 dB = 0.515 W/kg = -2.88 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 5G NR N7 40M QPSK 108RB54 505000CH Bottom side 10mm Ant41

DUT: V2341; Type: Mobile Phone; Serial: 863223079997197

Communication System: UID 0, NR (0); Frequency: 2525 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2525$ MHz; $\sigma = 1.886$ S/m; $\epsilon_r = 39.162$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.1, 7.1, 7.1); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.724 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.83 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.891 W/kg

SAR(1 g) = 0.447 W/kg; SAR(10 g) = 0.227 W/kg

Maximum value of SAR (measured) = 0.718 W/kg

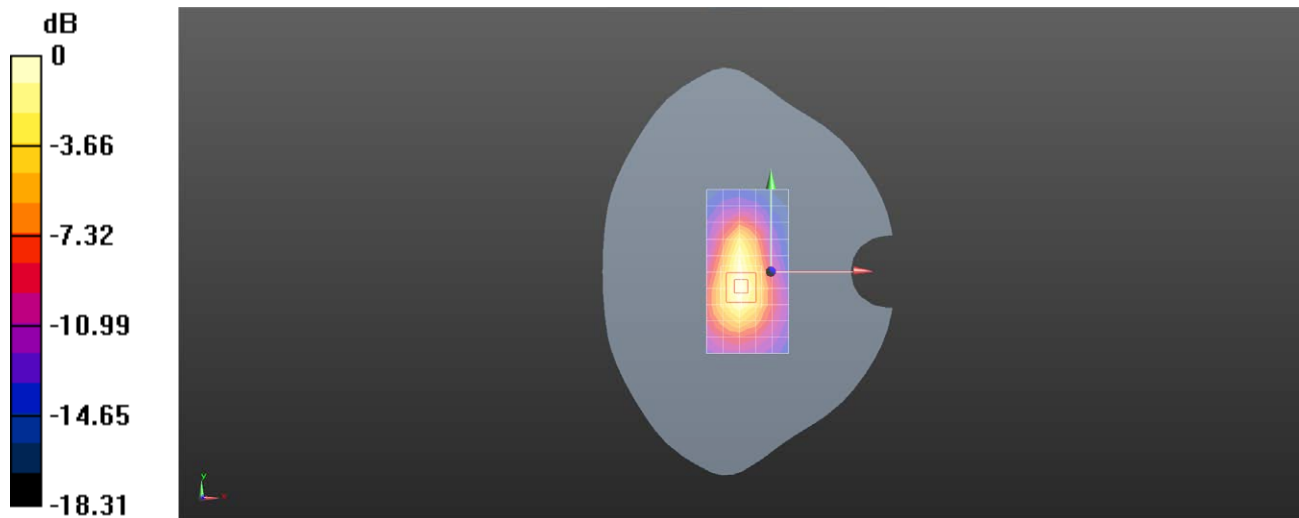

0 dB = 0.718 W/kg = -1.44 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 5G NR N26 20M QPSK 50RB28 167800CH Right cheek Ant11

DUT: V2341; Type: Mobile Phone; Serial: 863223079997197

Communication System: UID 0, NR (0); Frequency: 839 MHz;Duty Cycle: 1:1

Medium: HSL835;Medium parameters used: $f = 839 \text{ MHz}$; $\sigma = 0.911 \text{ S/m}$; $\epsilon_r = 42.608$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(9.02, 9.02, 9.02); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.620 W/kg


Configuration/Head/Zoom Scan (5x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.088 V/m ; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.430 W/kg ; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 0.734 W/kg

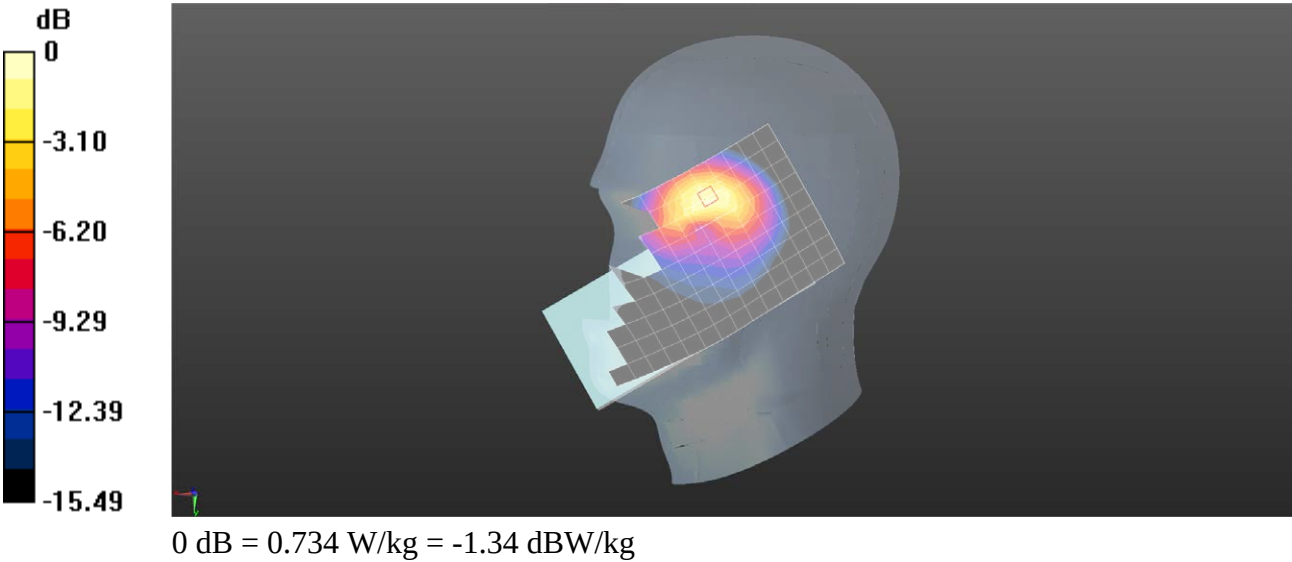

Test Laboratory: SGS-SAR Lab

V2341 5G NR N26 20M QPSK 50RB28 164800CH Back side 15mm Ant11

DUT: V2341; Type: Mobile Phone; Serial: 863223079997197

Communication System: UID 0, NR (0); Frequency: 824 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 824 \text{ MHz}$; $\sigma = 0.905 \text{ S/m}$; $\epsilon_r = 42.708$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(9.02, 9.02, 9.02); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.393 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.643 V/m ; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.512 W/kg

SAR(1 g) = 0.291 W/kg ; SAR(10 g) = 0.178 W/kg

Maximum value of SAR (measured) = 0.425 W/kg

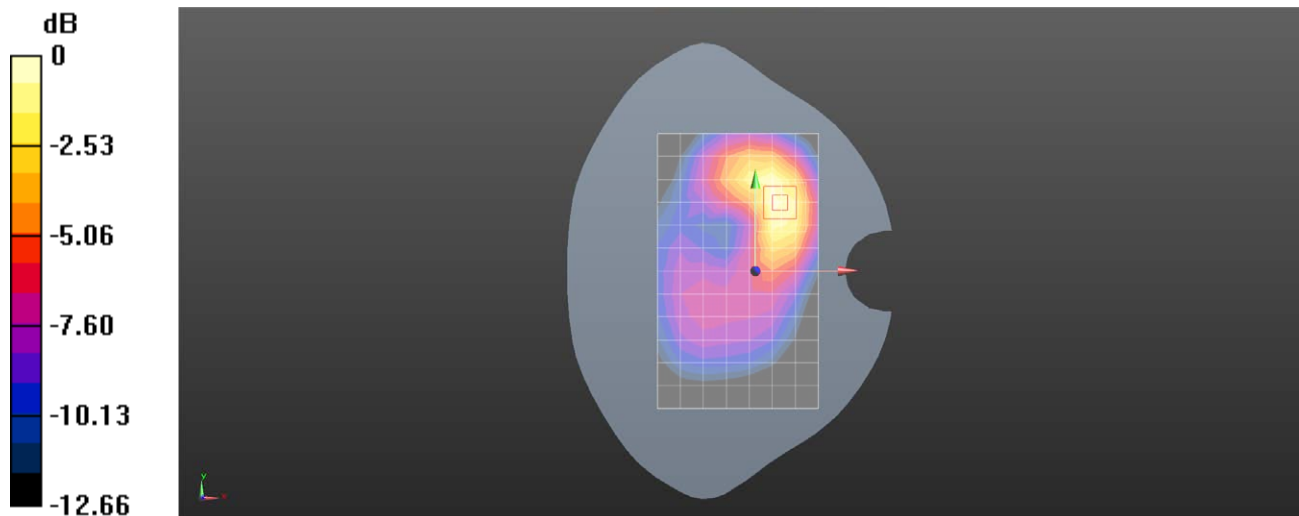

0 dB = 0.425 W/kg = -3.72 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 5G NR N26 20M QPSK 50RB28 167800CH Left side 10mm Ant11

DUT: V2341; Type: Mobile Phone; Serial: 863223079997197

Communication System: UID 0, NR (0); Frequency: 839 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 839 \text{ MHz}$; $\sigma = 0.911 \text{ S/m}$; $\epsilon_r = 42.608$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(9.02, 9.02, 9.02); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.839 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.36 V/m ; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.524 W/kg ; SAR(10 g) = 0.285 W/kg

Maximum value of SAR (measured) = 0.837 W/kg

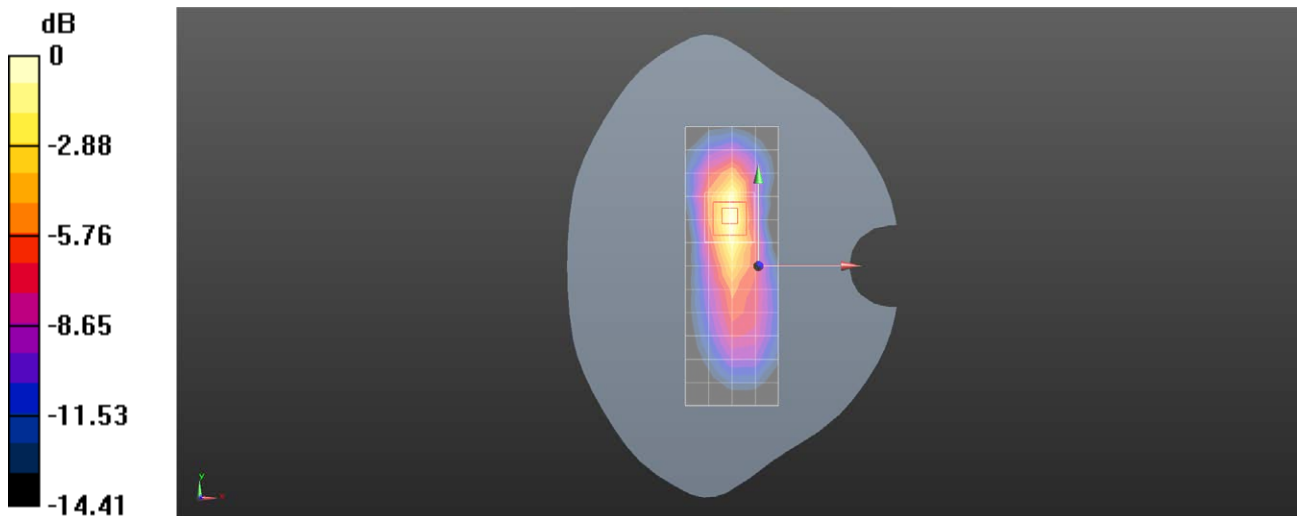

0 dB = 0.837 W/kg = -0.77 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 5G NR N38 40M QPSK 1RB1 519000CH Back side 15mm Ant41

DUT: V2341; Type: Mobile Phone; Serial: 863223079997197

Communication System: UID 0, NR (0); Frequency: 2595 MHz;Duty Cycle: 1:1


Medium: HSL2600;Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.964 \text{ S/m}$; $\epsilon_r = 38.917$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.1, 7.1, 7.1); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 0.328 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 3.708 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.427 W/kg
SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.123 W/kg
Maximum value of SAR (measured) = 0.344 W/kg

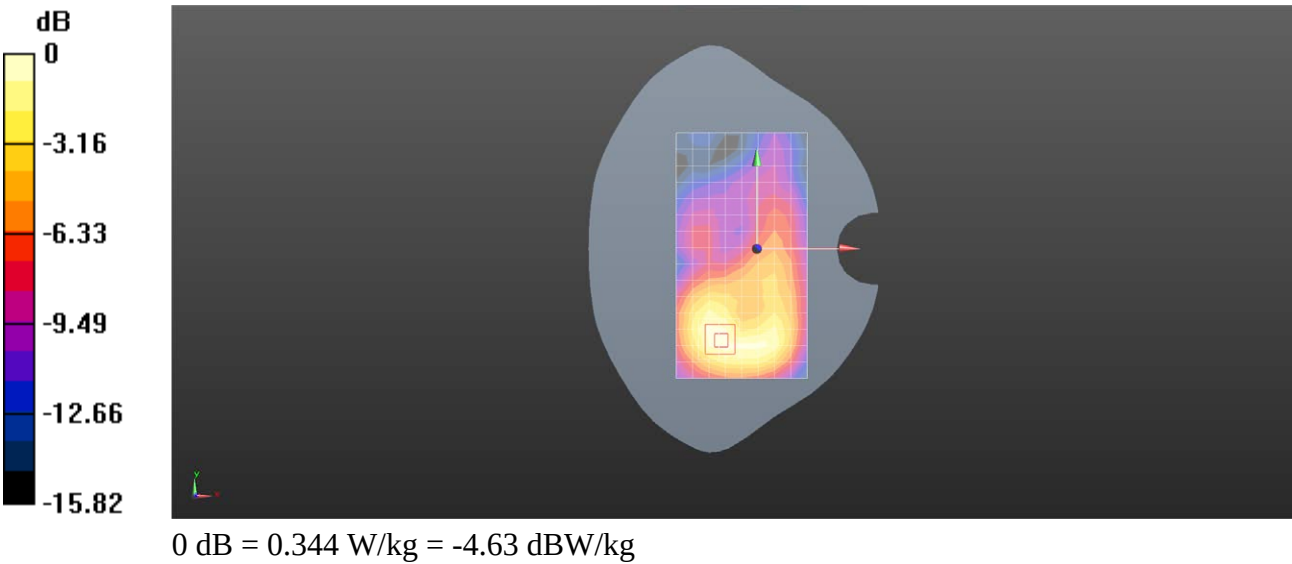

Test Laboratory: SGS-SAR Lab

V2341 5G NR N38 40M QPSK 50RB28 519000CH Bottom side 10mm Ant41

DUT: V2341; Type: Mobile Phone; Serial: 863223079997197

Communication System: UID 0, NR (0); Frequency: 2595 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2595$ MHz; $\sigma = 1.964$ S/m; $\epsilon_r = 38.917$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.1, 7.1, 7.1); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.889 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.58 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.551 W/kg; SAR(10 g) = 0.275 W/kg

Maximum value of SAR (measured) = 0.902 W/kg

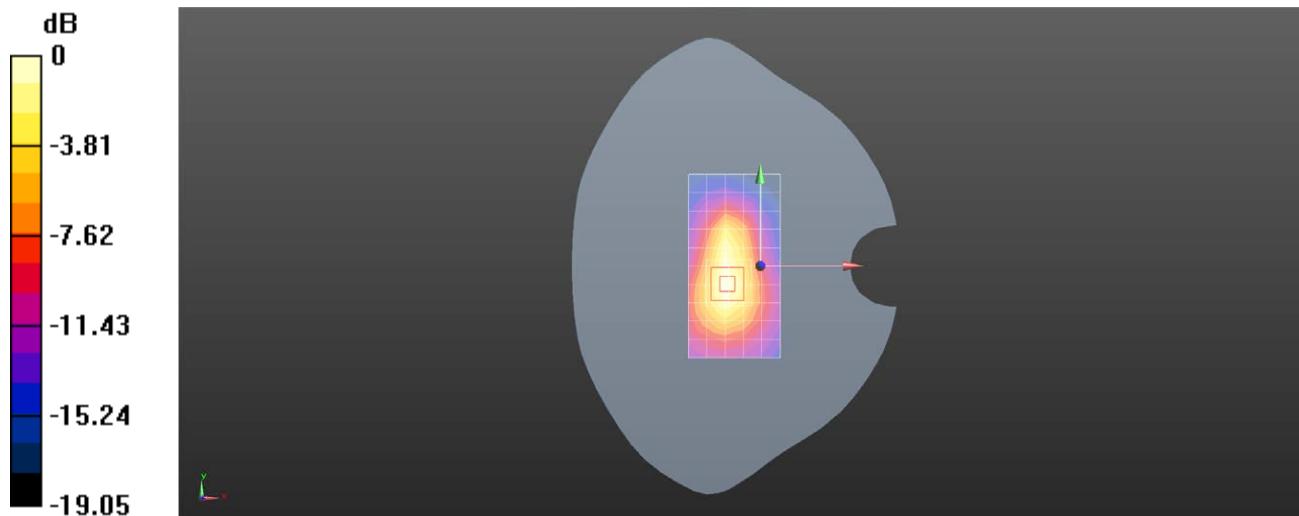

0 dB = 0.902 W/kg = -0.45 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 5G NR N41 100M QPSK 135RB69 509202CH Right cheek Ant13

DUT: V2341; Type: Mobile Phone; Serial: 863223079996959

Communication System: UID 0, NR (0); Frequency: 2546.01 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2546.01$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 38.378$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.22, 8.22, 8.22); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.02 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.04 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 0.782 W/kg; SAR(10 g) = 0.342 W/kg

Maximum value of SAR (measured) = 1.40 W/kg

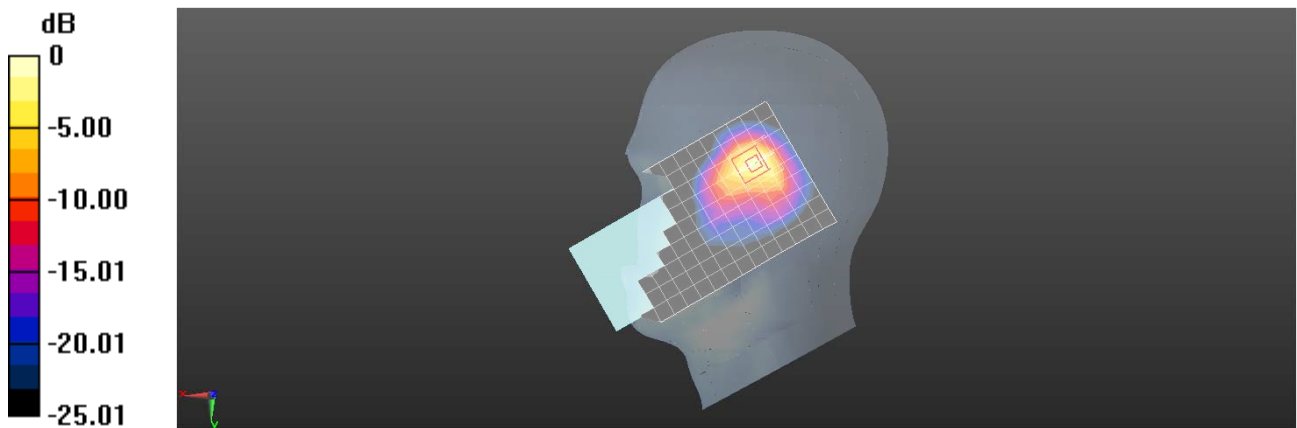

0 dB = 1.40 W/kg = 1.46 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 NR N41 100M QPSK 135RB69 528000CH Back side 15mm Ant13

DUT: V2341; Type: Mobile Phone; Serial: 863223079997197

Communication System: UID 0, NR (0); Frequency: 2640 MHz;Duty Cycle: 1:1


Medium: HSL2600;Medium parameters used: $f = 2640 \text{ MHz}$; $\sigma = 2.073 \text{ S/m}$; $\epsilon_r = 38.061$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.1, 7.1, 7.1); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 0.470 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 5.008 V/m ; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.611 W/kg
SAR(1 g) = 0.299 W/kg ; SAR(10 g) = 0.156 W/kg
Maximum value of SAR (measured) = 0.482 W/kg

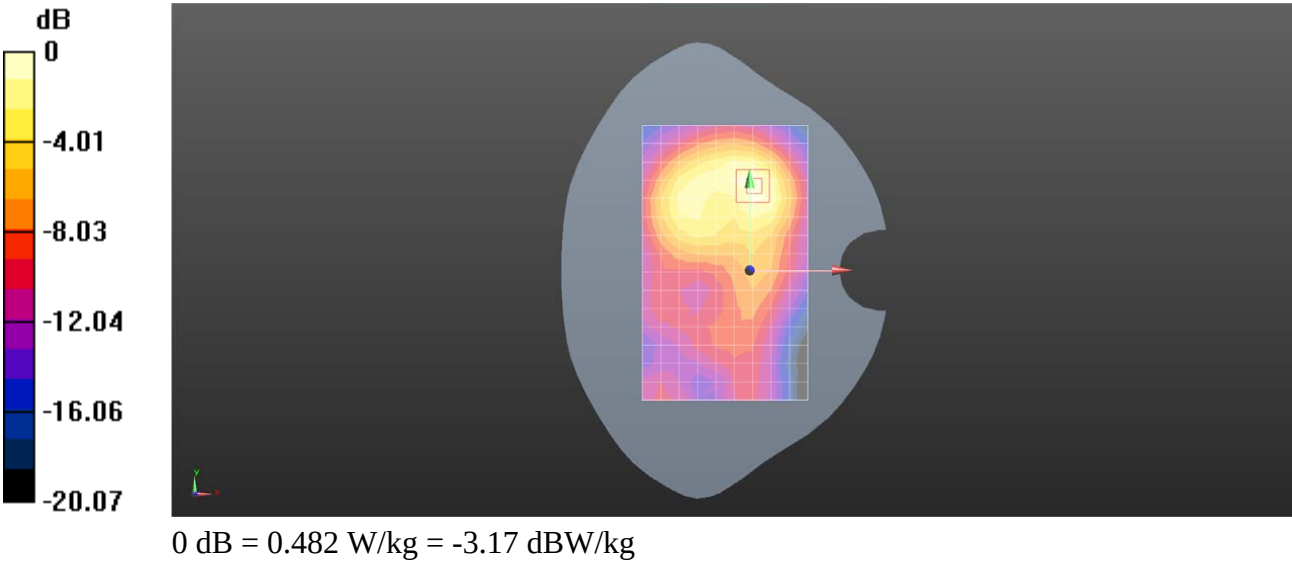

Test Laboratory: SGS-SAR Lab

V2341 5G NR N41 100M QPSK 1RB1 523302CH Left side 10mm Ant12

DUT: V2341; Type: Mobile Phone; Serial: 863223079997197

Communication System: UID 0, NR (0); Frequency: 2616.51 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2616.51$ MHz; $\sigma = 2.047$ S/m; $\epsilon_r = 38.139$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.02, 8.02, 8.02); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.742 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.247 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.530 W/kg; SAR(10 g) = 0.245 W/kg

Maximum value of SAR (measured) = 0.884 W/kg

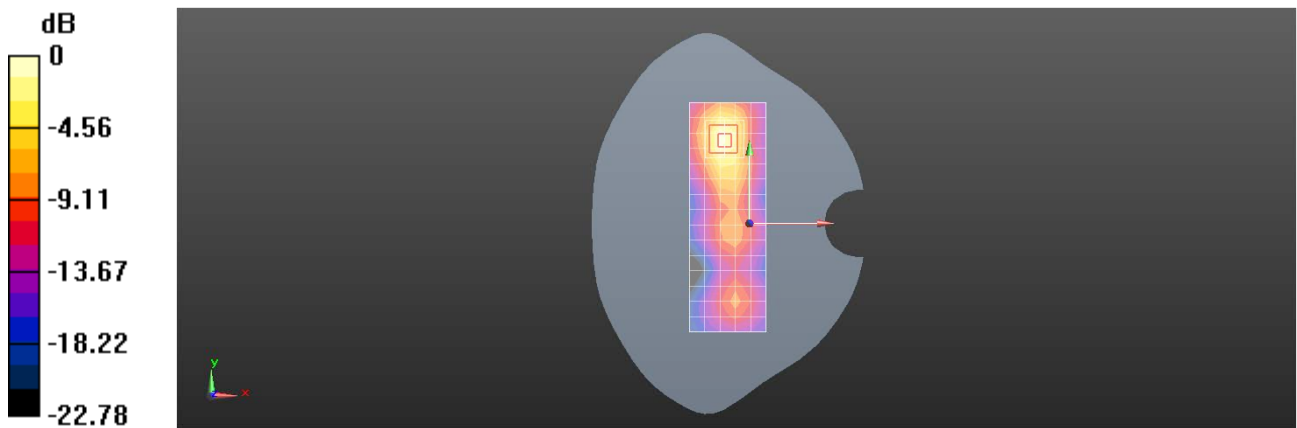

0 dB = 0.884 W/kg = -0.54 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 5G NR N66 40M QPSK 108RB54 349000CH Right cheek Ant13

DUT: V2341; Type: Mobile Phone; Serial: 863223079996959

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 39.188$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.96, 8.96, 8.96); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.953 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.48 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.589 W/kg; SAR(10 g) = 0.325 W/kg

Maximum value of SAR (measured) = 0.876 W/kg

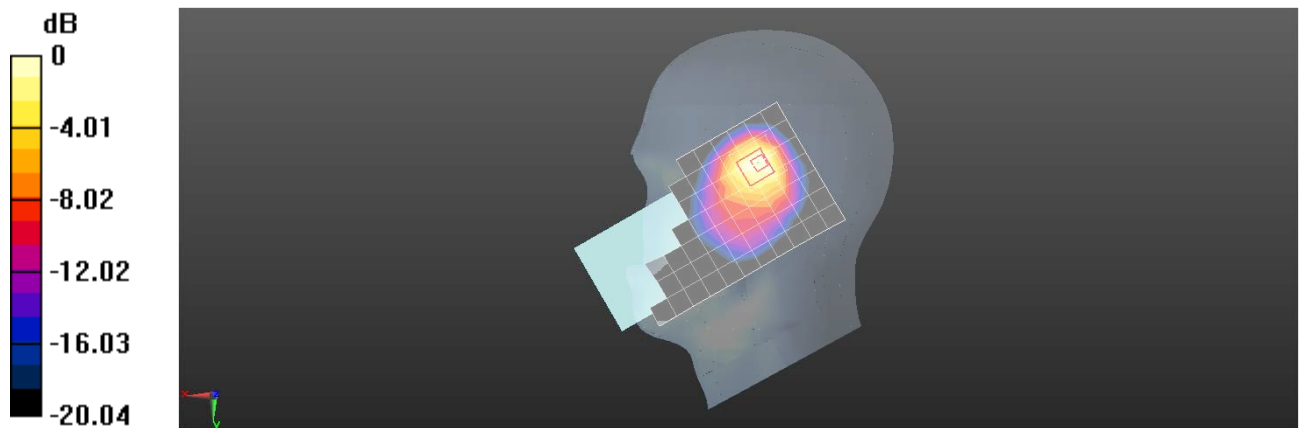

0 dB = 0.876 W/kg = -0.57 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 5G NR N66 40M QPSK 108RB54 349000CH Back side 15mm Ant13

DUT: V2341; Type: Mobile Phone; Serial: 863223079996959

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 39.188$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.96, 8.96, 8.96); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.539 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.84 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.625 W/kg

SAR(1 g) = 0.397 W/kg; SAR(10 g) = 0.249 W/kg

Maximum value of SAR (measured) = 0.538 W/kg

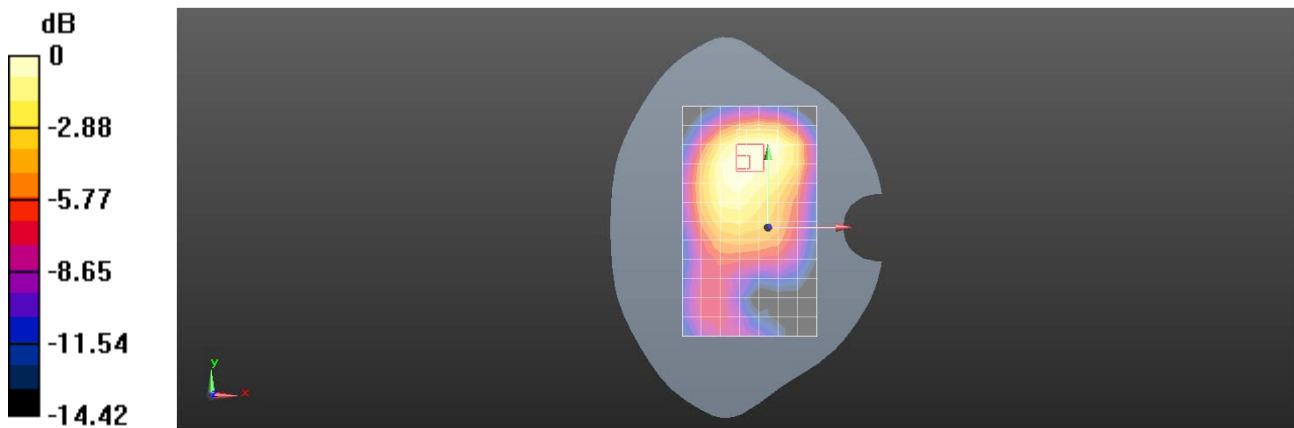

0 dB = 0.538 W/kg = -2.69 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 5G NR N66 40M QPSK 1RB1 346000CH Bottom side 10mm Ant41

DUT: V2341; Type: Mobile Phone; Serial: 863223079996959

Communication System: UID 0, NR (0); Frequency: 1730 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1730$ MHz; $\sigma = 1.348$ S/m; $\epsilon_r = 39.268$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.96, 8.96, 8.96); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.618 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.40 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.853 W/kg

SAR(1 g) = 0.466 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 0.706 W/kg

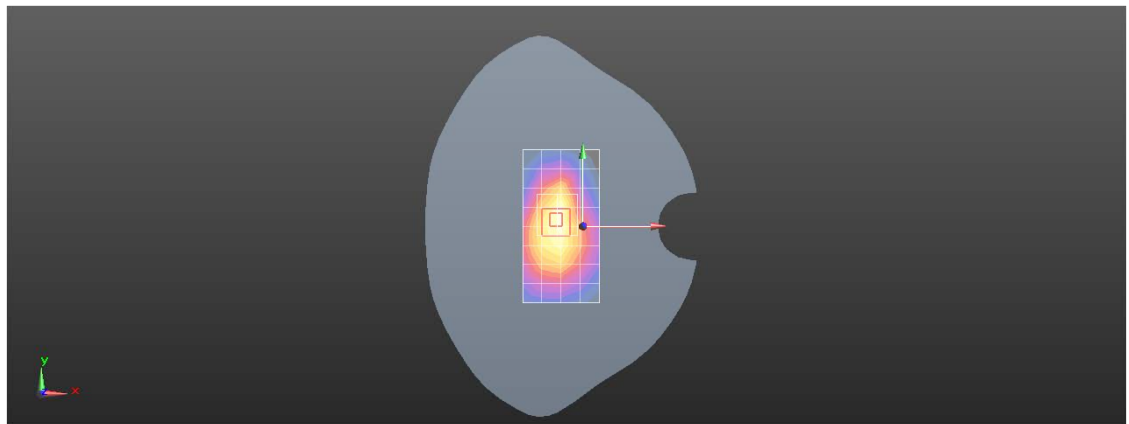

0 dB = 0.706 W/kg = -1.51 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 5G NR N77 100M QPSK 1RB137 633334CH Right cheek Ant13

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 2.998$ S/m; $\epsilon_r = 38.515$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.48, 6.48, 6.48); Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Head/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.978 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.769 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.591 W/kg; SAR(10 g) = 0.238 W/kg

Maximum value of SAR (measured) = 1.09 W/kg

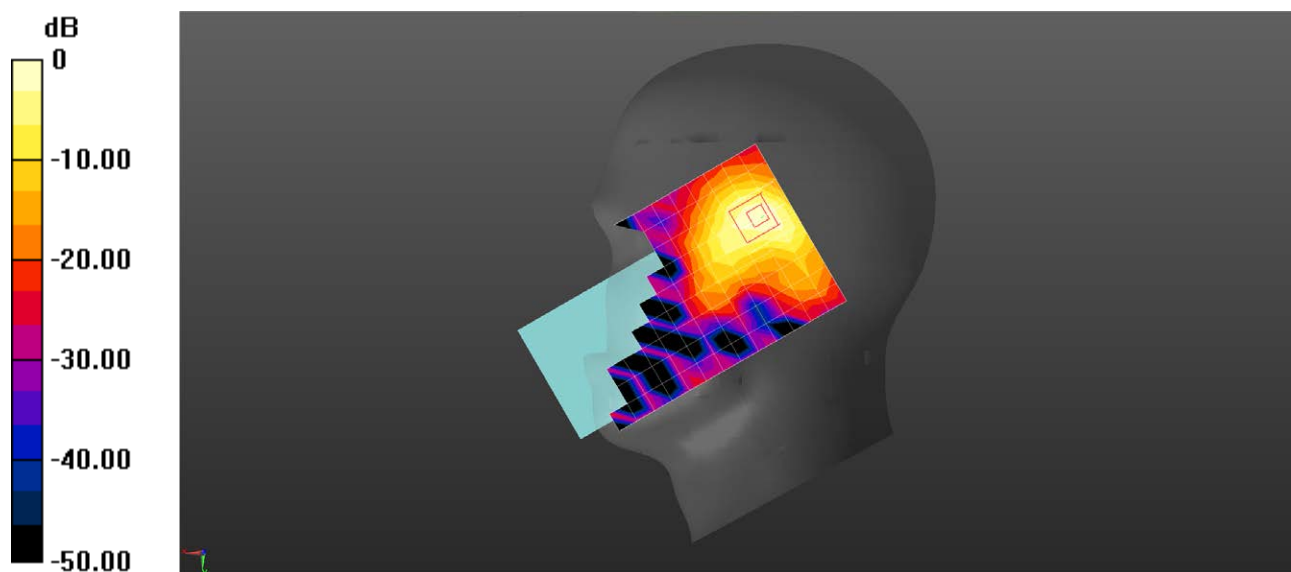

0 dB = 1.09 W/kg = 0.37 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 5G NR N77 100M QPSK 1RB137 633334CH Front side 15mm Ant13

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 2.998$ S/m; $\epsilon_r = 38.515$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.48, 6.48, 6.48); Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Head/Area Scan (12x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.555 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.675 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.740 W/kg

SAR(1 g) = 0.332 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 0.570 W/kg

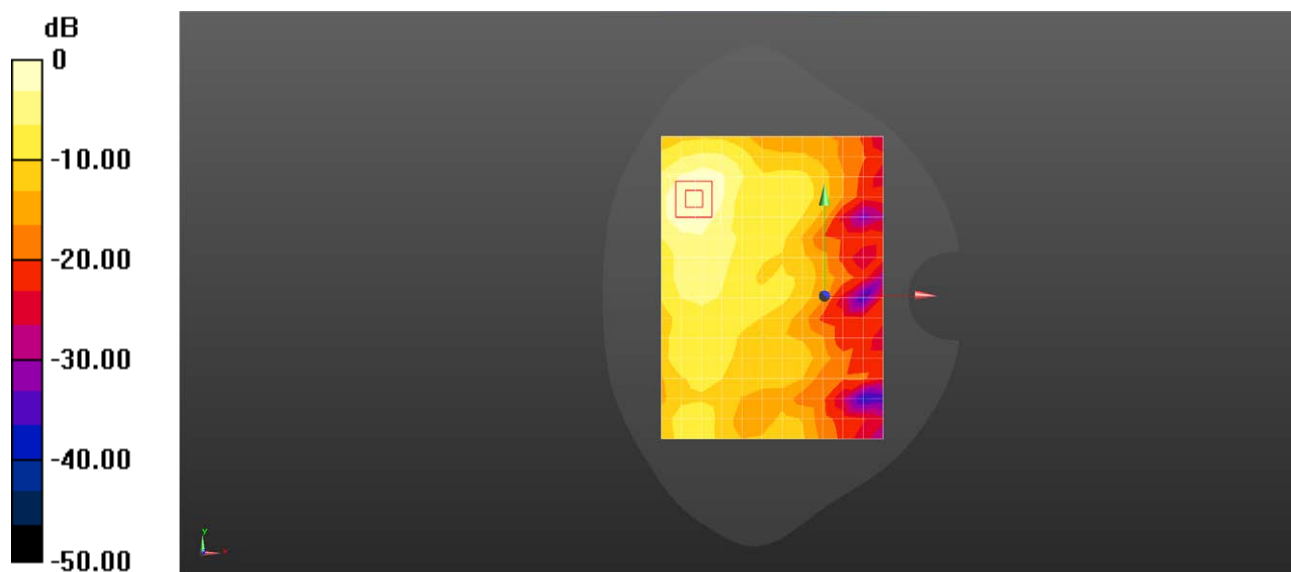

0 dB = 0.570 W/kg = -2.44 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 5G NR N77 100M QPSK 135RB69 633334CH Top side 10mm Ant13

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 2.998$ S/m; $\epsilon_r = 38.515$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.48, 6.48, 6.48); Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Head/Area Scan (6x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.448 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.228 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.633 W/kg

SAR(1 g) = 0.255 W/kg; SAR(10 g) = 0.105 W/kg

Maximum value of SAR (measured) = 0.474 W/kg

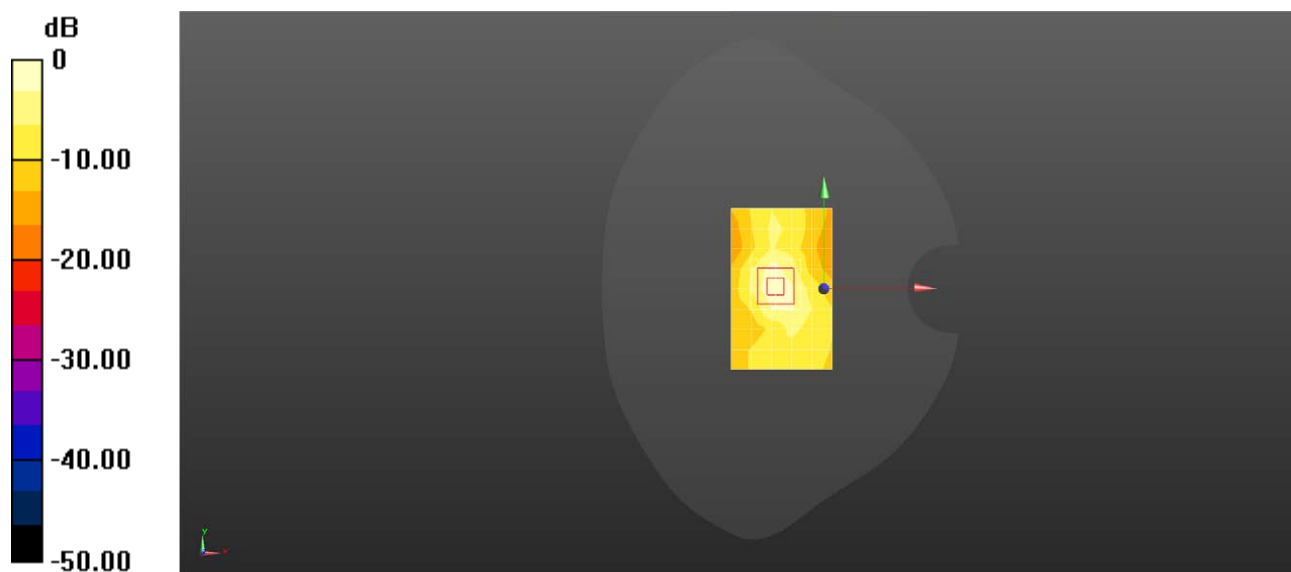

0 dB = 0.474 W/kg = -3.24 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 5G NR N78 100M QPSK 135RB69 633334CH Left cheek Ant23

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 3.002$ S/m; $\epsilon_r = 38.514$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.48, 6.48, 6.48) @ 3500 MHz; Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.884 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.764 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.555 W/kg; SAR(10 g) = 0.216 W/kg

Maximum value of SAR (measured) = 1.09 W/kg

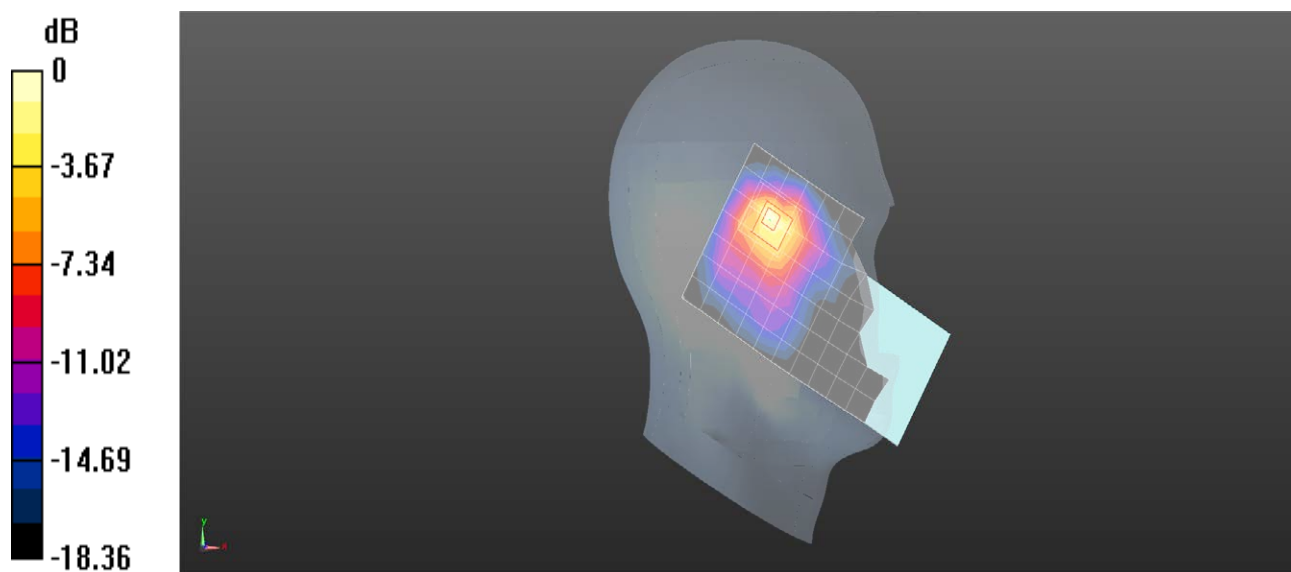

0 dB = 1.09 W/kg = 0.37 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 5G NR N78 100M QPSK 1RB137 633334CH Front side 15mm Ant13

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 3.002$ S/m; $\epsilon_r = 38.514$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.48, 6.48, 6.48) @ 3500 MHz; Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.584 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.005 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.745 W/kg

SAR(1 g) = 0.332 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 0.573 W/kg

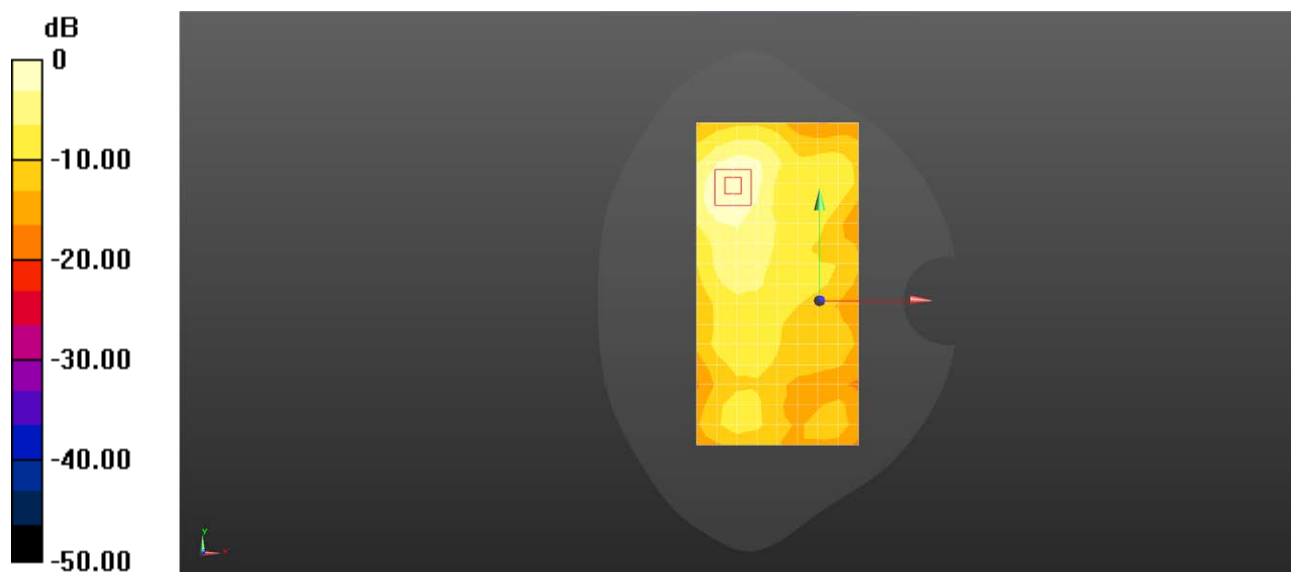

0 dB = 0.573 W/kg = -2.42 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 5G NR N78 100M QPSK 135RB69 650000CH Top side 10mm Ant13

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3750$ MHz; $\sigma = 3.292$ S/m; $\epsilon_r = 37.722$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.3, 6.3, 6.3); Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (6x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.750 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.831 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.507 W/kg; SAR(10 g) = 0.205 W/kg

Maximum value of SAR (measured) = 0.953 W/kg

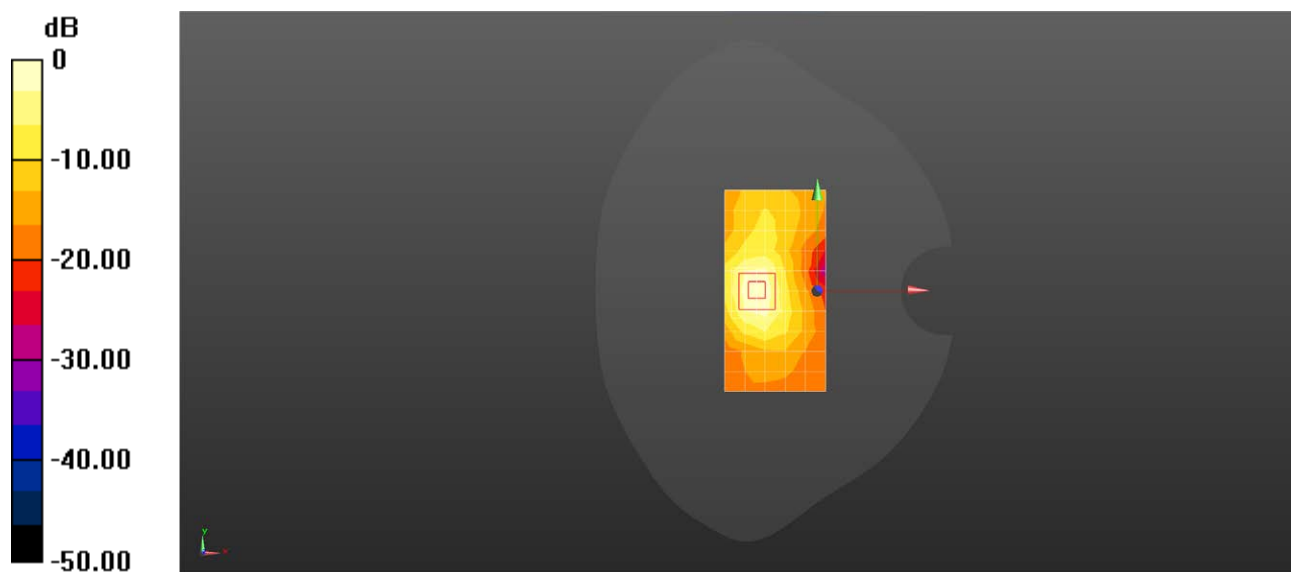

0 dB = 0.953 W/kg = -0.21 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 WIFI 2.4G 802.11b 6CH Left cheek Ant22

DUT: V2341; Type: Mobile Phone; Serial: 863223079996959

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: HSL2450;Medium parameters used: $f = 2437$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 38.163$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.22, 8.22, 8.22); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.590 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.464 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.831 W/kg

SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 0.659 W/kg

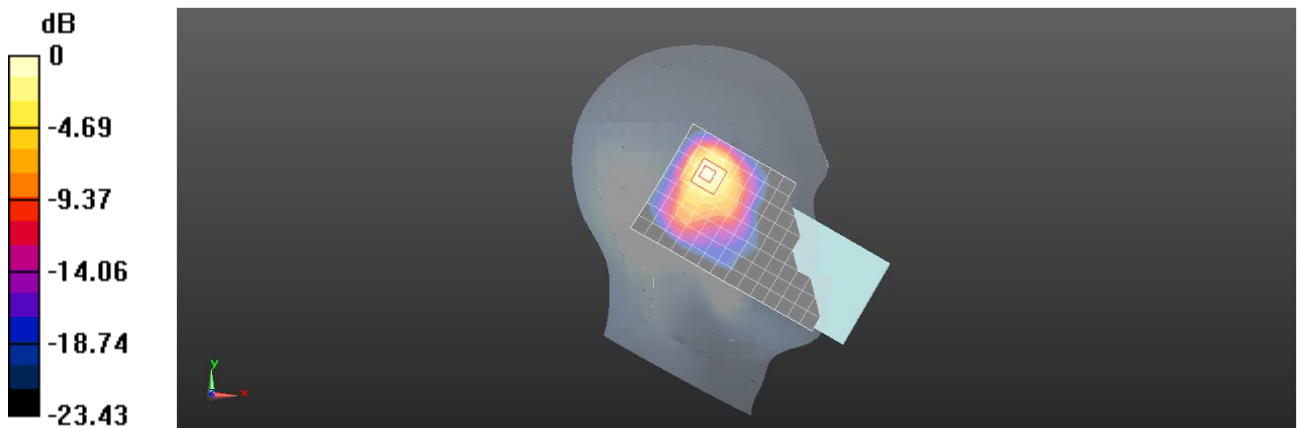

0 dB = 0.659 W/kg = -1.81 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 WIFI 2.4G 802.11b 6CH Back side 15mm Ant22

DUT: V2341; Type: Mobile Phone; Serial: 863223079996959

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium parameters used: $f = 2437$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 38.163$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.22, 8.22, 8.22); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.163 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.005 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.200 W/kg

SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.167 W/kg

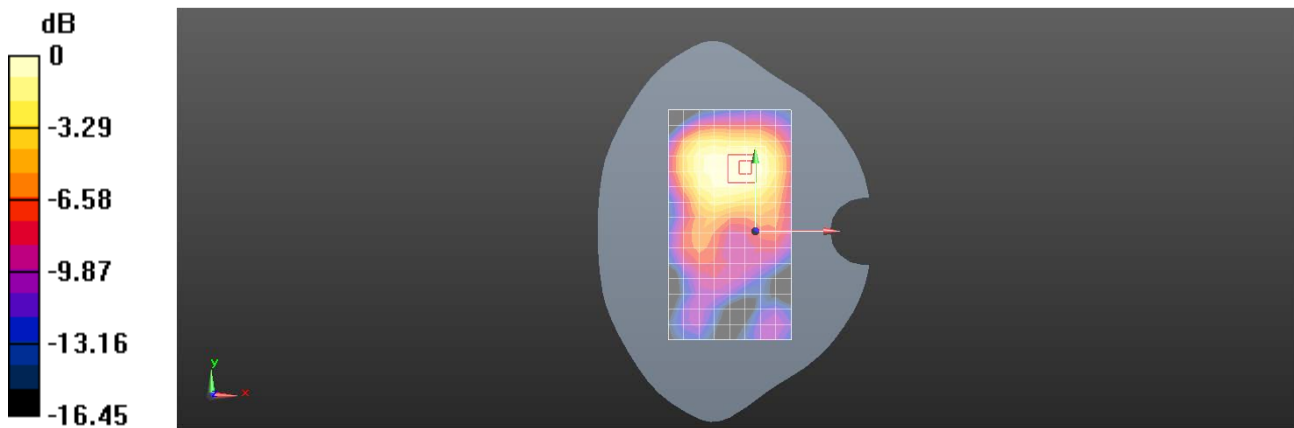

0 dB = 0.167 W/kg = -7.77 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 WIFI 2.4G 802.11b 6CH Back side 10mm Ant22

DUT: V2341; Type: Mobile Phone; Serial: 863223079996959

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium parameters used: $f = 2437$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 38.163$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.22, 8.22, 8.22); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.308 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.608 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.413 W/kg

SAR(1 g) = 0.217 W/kg; SAR(10 g) = 0.126 W/kg

Maximum value of SAR (measured) = 0.332 W/kg

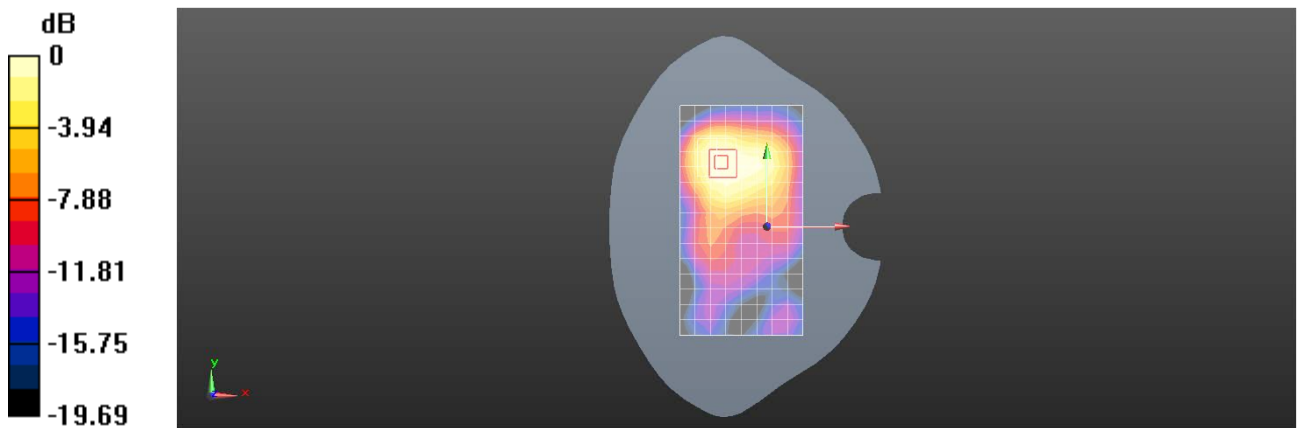

0 dB = 0.332 W/kg = -4.79 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341WIFI 5G 802.11 HT40 54CH Back side 15mm Ant23

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5270 MHz;Duty Cycle: 1:1

Medium: HSL5G;Medium parameters used: $f = 5270$ MHz; $\sigma = 4.69$ S/m; $\epsilon_r = 36.719$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(5.08, 5.08, 5.08) @ 5270 MHz; Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.354 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.6820 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.576 W/kg

SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.065 W/kg

Maximum value of SAR (measured) = 0.368 W/kg

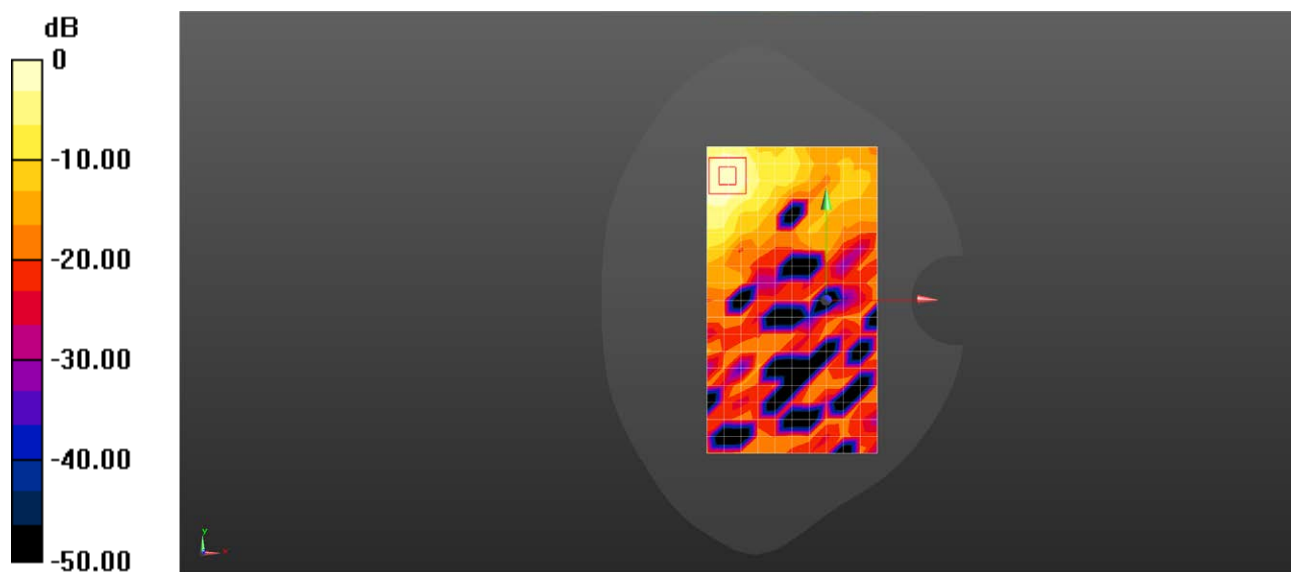

0 dB = 0.368 W/kg = -4.34 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341WIFI 5G 802.11 HT40 46CH Back side 10mm Ant23

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5230 MHz;Duty Cycle: 1:1

Medium: HSL5G;Medium parameters used: $f = 5230$ MHz; $\sigma = 4.652$ S/m; $\epsilon_r = 36.68$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(5.08, 5.08, 5.08) @ 5230 MHz; Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.619 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.3600 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.298 W/kg; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 0.673 W/kg

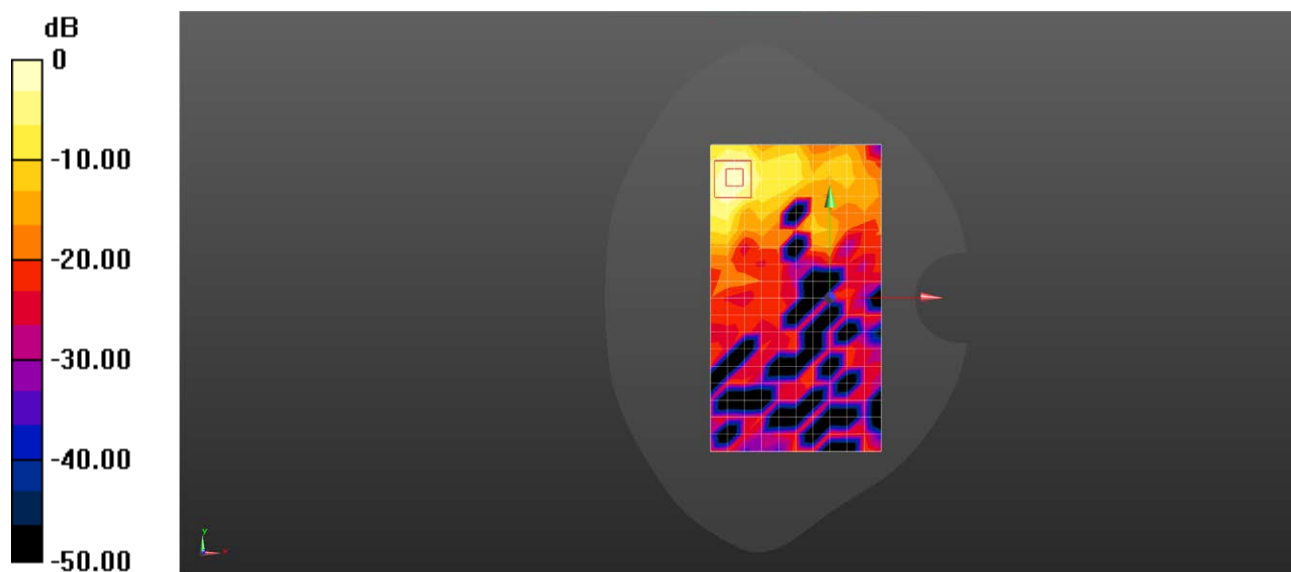

0 dB = 0.673 W/kg = -1.72 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341WIFI 5G 802.11 HT40 54CH Right side 0mm Ant23

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5270 MHz; Duty Cycle: 1:1

Medium: HSL5G; Medium parameters used: $f = 5270$ MHz; $\sigma = 4.69$ S/m; $\epsilon_r = 36.719$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(5.08, 5.08, 5.08) @ 5270 MHz; Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (7x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 9.06 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.182 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 20.9 W/kg

SAR(1 g) = 3.46 W/kg; SAR(10 g) = 0.869 W/kg

Maximum value of SAR (measured) = 11.3 W/kg

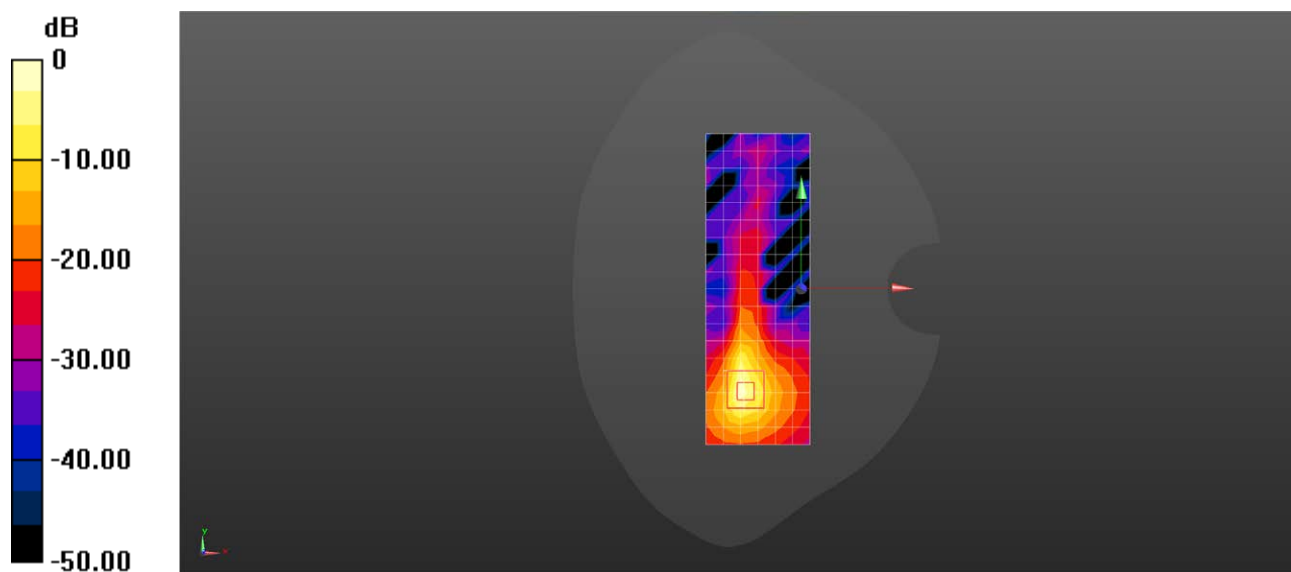

0 dB = 11.3 W/kg = 10.53 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341WIFI 5G 802.11 VTH80 155CH Left cheek Ant23

DUT: V2341; Type: Mobile Phone; Serial: 863223079996975

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5775 MHz;Duty Cycle: 1:1

Medium: HSL5G;Medium parameters used: $f = 5775$ MHz; $\sigma = 5.21$ S/m; $\epsilon_r = 35.426$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(4.61, 4.61, 4.61) @ 5775 MHz; Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.710 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.068 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 0.407 W/kg; SAR(10 g) = 0.120 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

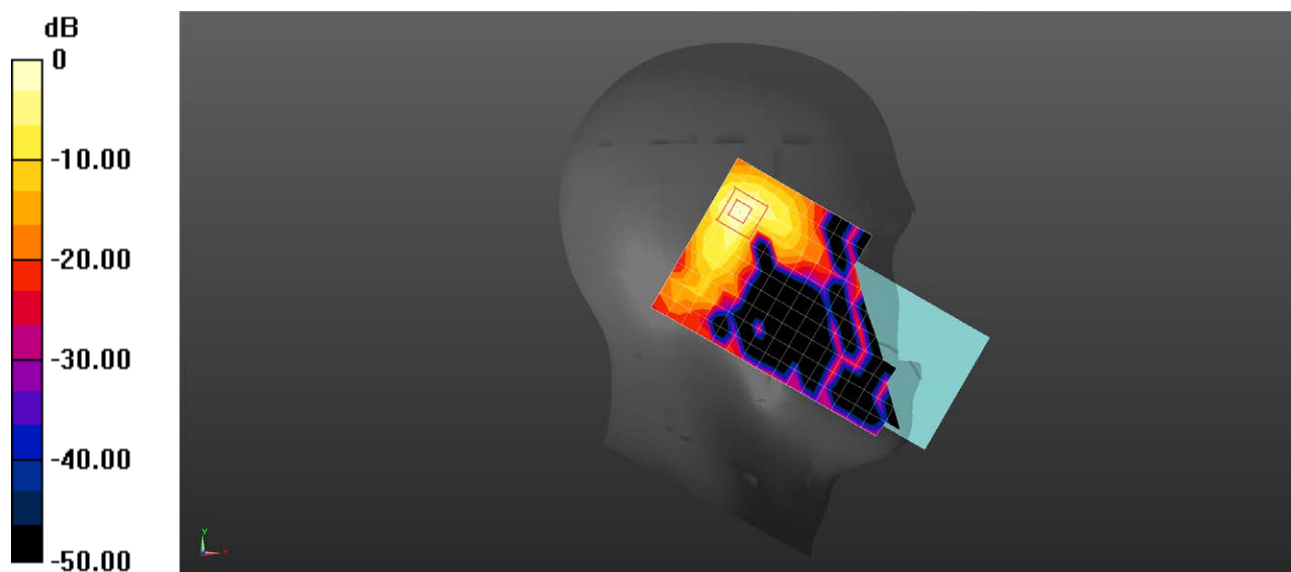

0 dB = 1.06 W/kg = 0.25 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 Bluetooth DH5 39CH Left cheek Ant22

DUT: V2341; Type: Mobile Phone; Serial: 863223079996959

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 38.127$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.22, 8.22, 8.22); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.458 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.585 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.715 W/kg

SAR(1 g) = 0.331 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 0.542 W/kg

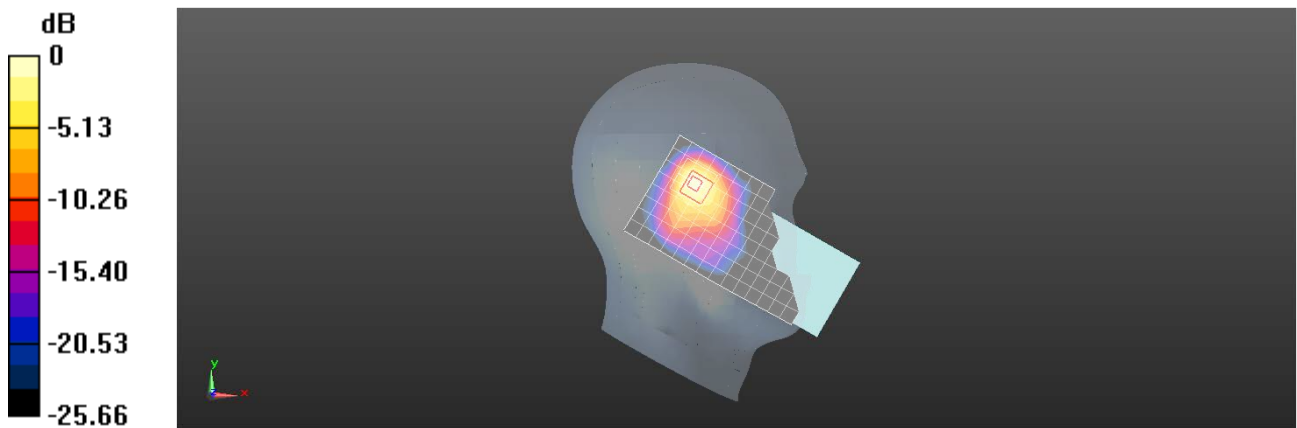

0 dB = 0.542 W/kg = -2.66 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 Bluetooth DH5 39CH Back side 15mm Ant22

DUT: V2341; Type: Mobile Phone; Serial: 863223079996959

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 38.127$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.22, 8.22, 8.22); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0444 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.016 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0540 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0449 W/kg

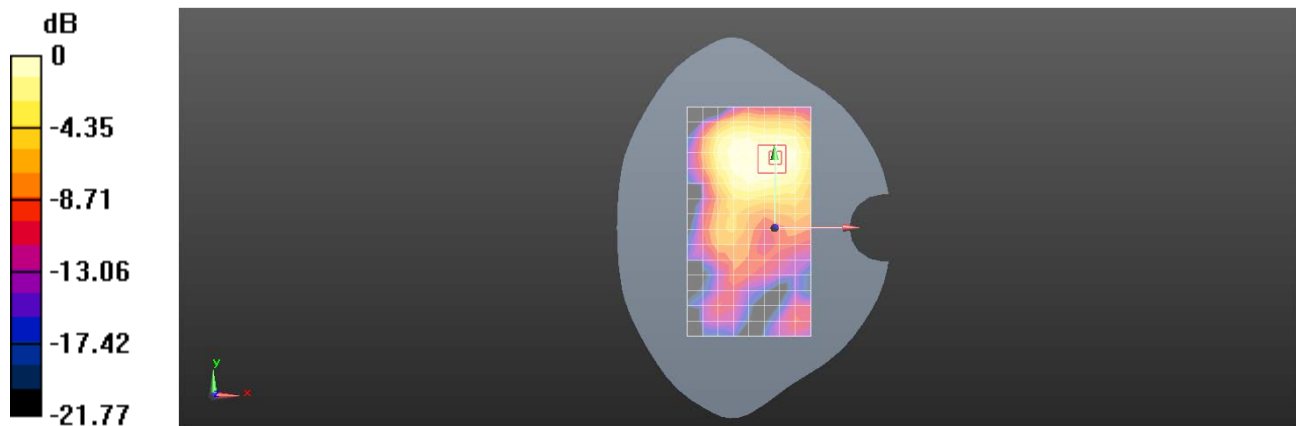

0 dB = 0.0449 W/kg = -13.48 dBW/kg

Test Laboratory: SGS-SAR Lab

V2341 Bluetooth DH5 39CH Back side 10mm Ant22

DUT: V2341; Type: Mobile Phone; Serial: 863223079996959

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 38.127$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.22, 8.22, 8.22); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.106 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.821 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.134 W/kg

SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.107 W/kg

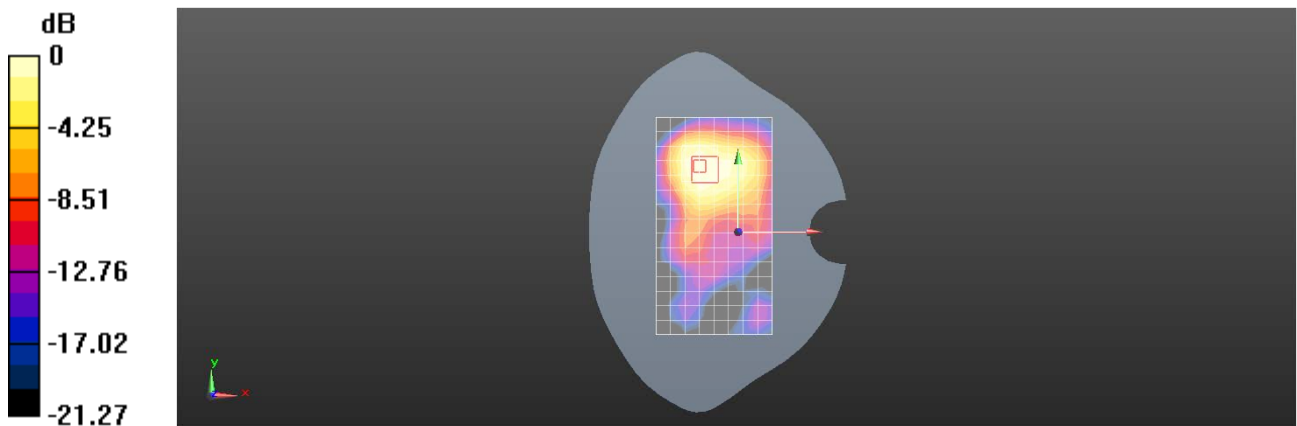

0 dB = 0.107 W/kg = -9.71 dBW/kg