

Part1_Appendix B

Detailed Test Results

GSM850 for Head, Body, Hotspot
GSM1900 for Head, Body, Hotspot
WCDMA Band II for Head, Body, Hotspot
WCDMA Band IV for Head, Body, Hotspot
WCDMA Band V for Head, Body, Hotspot
LTE Band 2 for Head, Body, Hotspot
LTE Band 4 for Head, Body, Hotspot
LTE Band 5 for Hotspot
LTE Band 7 for Head, Body, Hotspot
LTE Band 12 for Head, Body, Hotspot
LTE Band 13 for Head, Body, Hotspot
LTE Band 26 for Head, Body, Hotspot
LTE Band 38 for Hotspot
LTE Band 41 for Head, Body, Hotspot
LTE Band 66 for Head, Body, Hotspot
n2 for Head, Body, Hotspot
n5 for Head, Body, Hotspot
n7 for Head, Body, Hotspot
n26 for Head, Body, Hotspot
n38 for Head, Body, Hotspot
n41 for Head, Body, Hotspot
n66 for Head, Body, Hotspot
n77 for Head, Body, Hotspot, Limbs
n78 for Head, Body, Hotspot, Limbs
WIFI 2.4G for Head, Body, Hotspot
WIFI 5G for Head, Body, Hotspot, Limbs
BT for Head, Body, Hotspot
NFC for Limbs

Test Laboratory: SGS-SAR Lab

V2348 GSM850 GPRS 4TS 190CH Right cheek Ant11

DUT: V2348; Type: Mobile Phone; Serial: 861380079982884

Communication System: UID 0, GPRS/EGPRS Mode(2up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.14954

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 42.008$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.472 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.721 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.602 W/kg

SAR(1 g) = 0.334 W/kg; SAR(10 g) = 0.188 W/kg

Maximum value of SAR (measured) = 0.514 W/kg

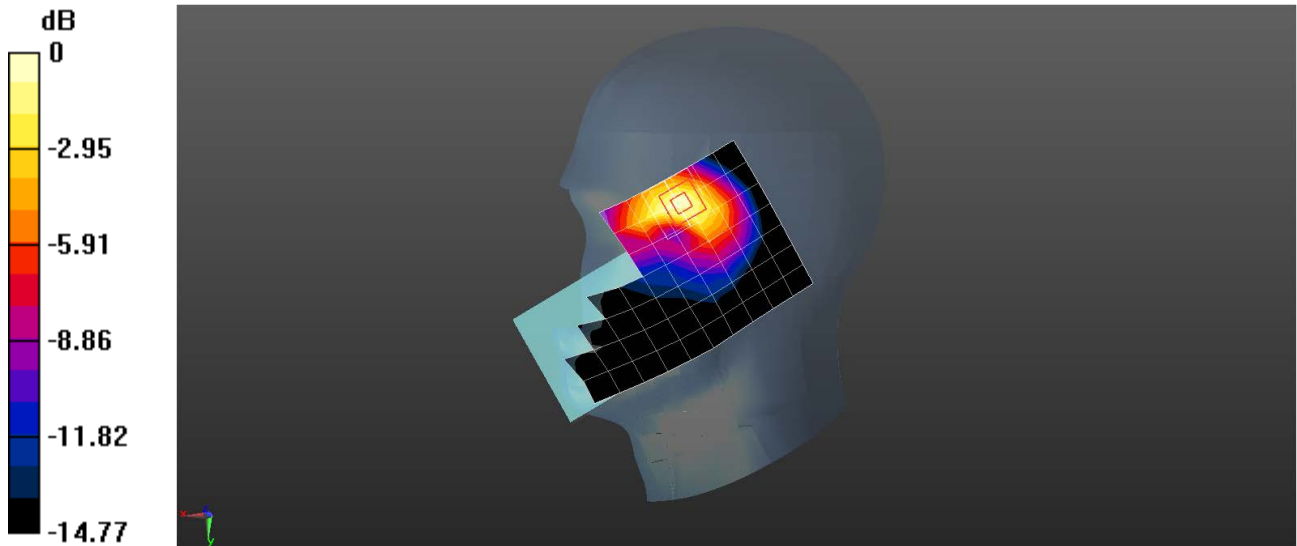

0 dB = 0.514 W/kg = -2.89 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 GSM850 GPRS 4TS 190CH Back side 15mm Ant11

DUT: V2348; Type: Mobile Phone; Serial: 861380079982884

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.07491

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 42.008$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.277 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.947 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.376 W/kg

SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.153 W/kg

Maximum value of SAR (measured) = 0.332 W/kg

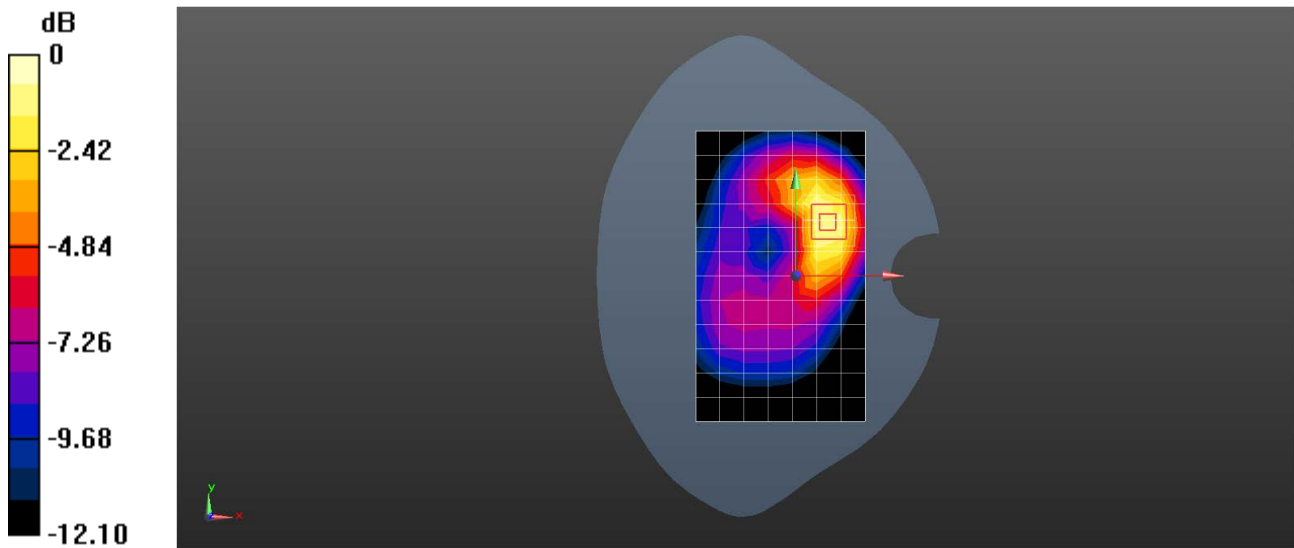

0 dB = 0.332 W/kg = -4.79 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 GSM850 GPRS 4TS 190CH Left side 10mm Ant11

DUT: V2348; Type: Mobile Phone; Serial: 861380079982884

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.07491

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 42.008$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.755 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.99 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.902 W/kg

SAR(1 g) = 0.513 W/kg; SAR(10 g) = 0.287 W/kg

Maximum value of SAR (measured) = 0.772 W/kg

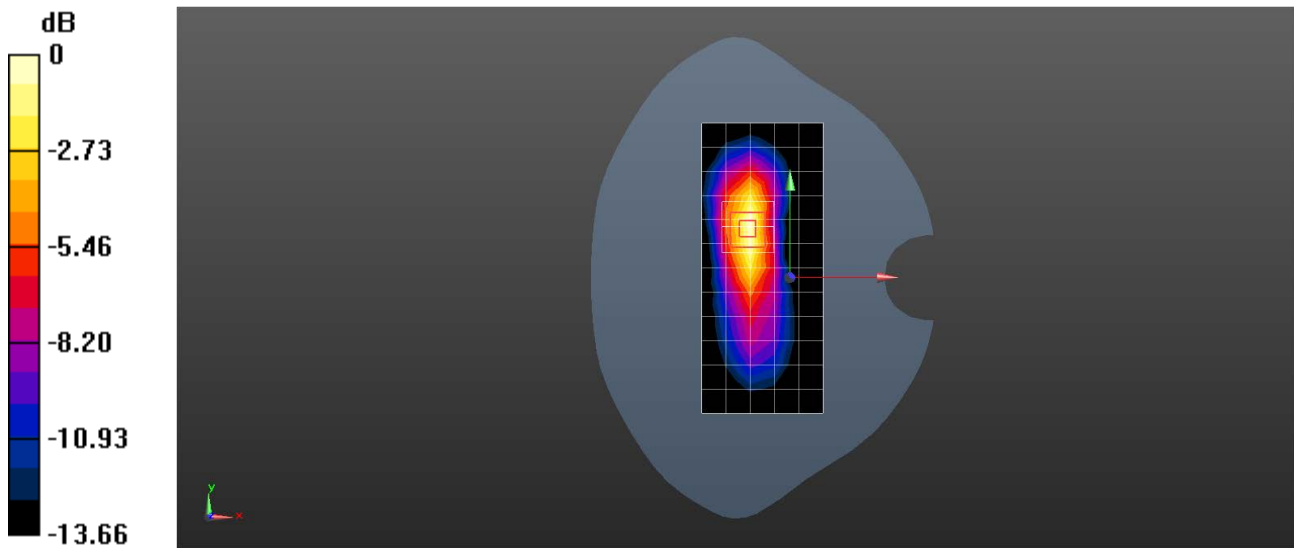

Test Laboratory: SGS-SAR Lab

V2348 GSM1900 GPRS 2TS 661CH Right cheek Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079999491

Communication System: UID 0, GPRS/EGPRS Mode(2up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 40.117$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.63, 7.63, 7.63); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.558 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.63 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.832 W/kg

SAR(1 g) = 0.396 W/kg; SAR(10 g) = 0.209 W/kg

Maximum value of SAR (measured) = 0.617 W/kg

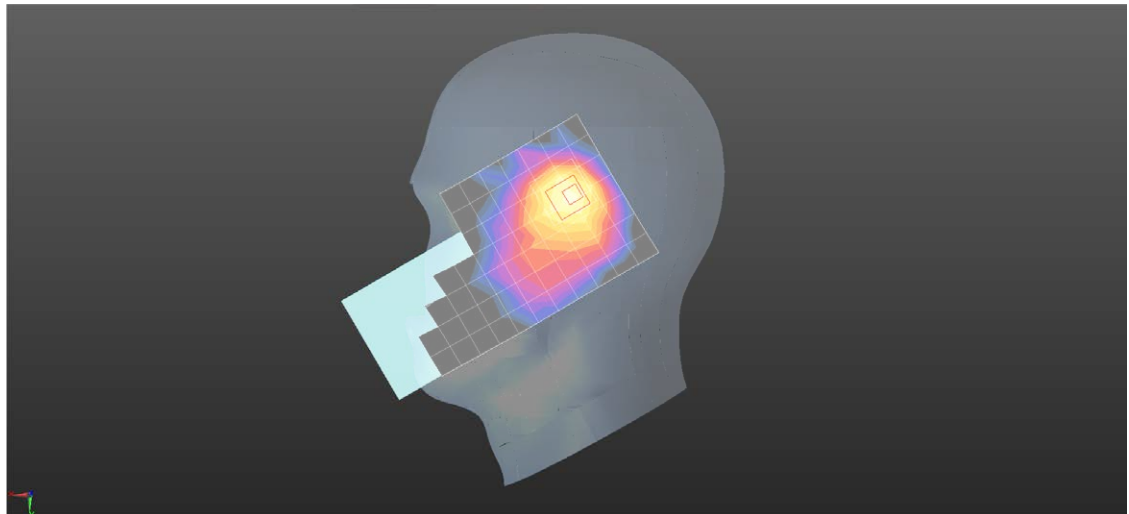

0 dB = 0.617 W/kg = -2.10 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 GSM1900 GPRS 2TS 661CH Back side 15mm Ant41

DUT: V2348; Type: Mobile Phone; Serial: 861380079999491

Communication System: UID 0, GPRS/EGPRS Mode(2up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 40.117$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.63, 7.63, 7.63); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Back/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.202 W/kg


Configuration/Back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.663 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.290 W/kg

SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.098 W/kg

Maximum value of SAR (measured) = 0.244 W/kg

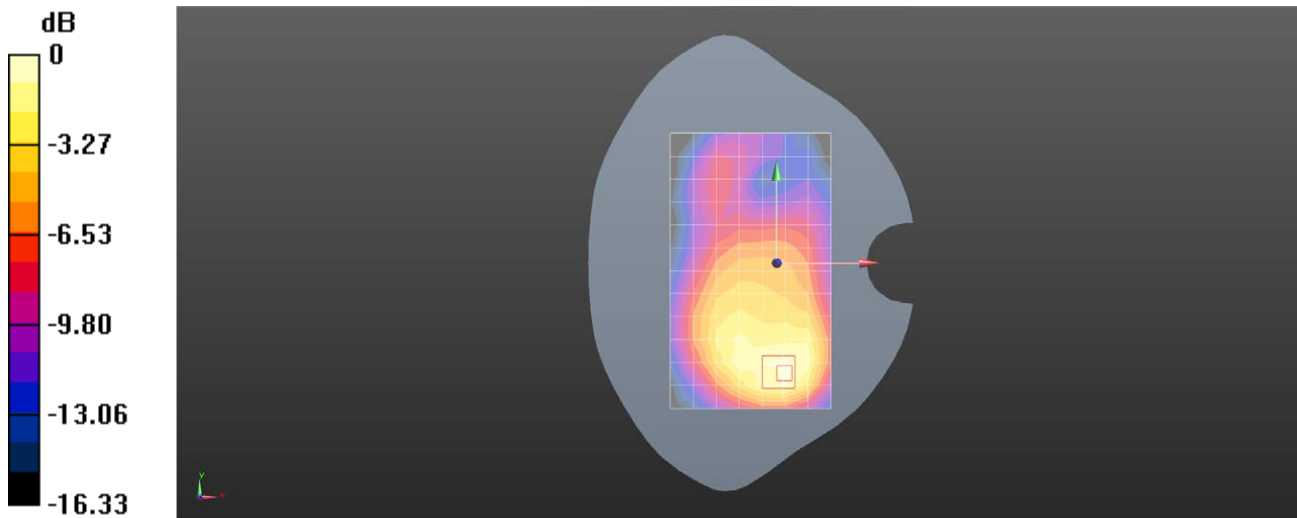

0 dB = 0.244 W/kg = -6.13 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 GSM1900 GPRS 2TS 661CH Top side 10mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079999491

Communication System: UID 0, GPRS/EGPRS Mode(2up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 40.117$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.63, 7.63, 7.63); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Back/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.420 W/kg


Configuration/Back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.07 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.569 W/kg

SAR(1 g) = 0.311 W/kg; SAR(10 g) = 0.174 W/kg

Maximum value of SAR (measured) = 0.472 W/kg

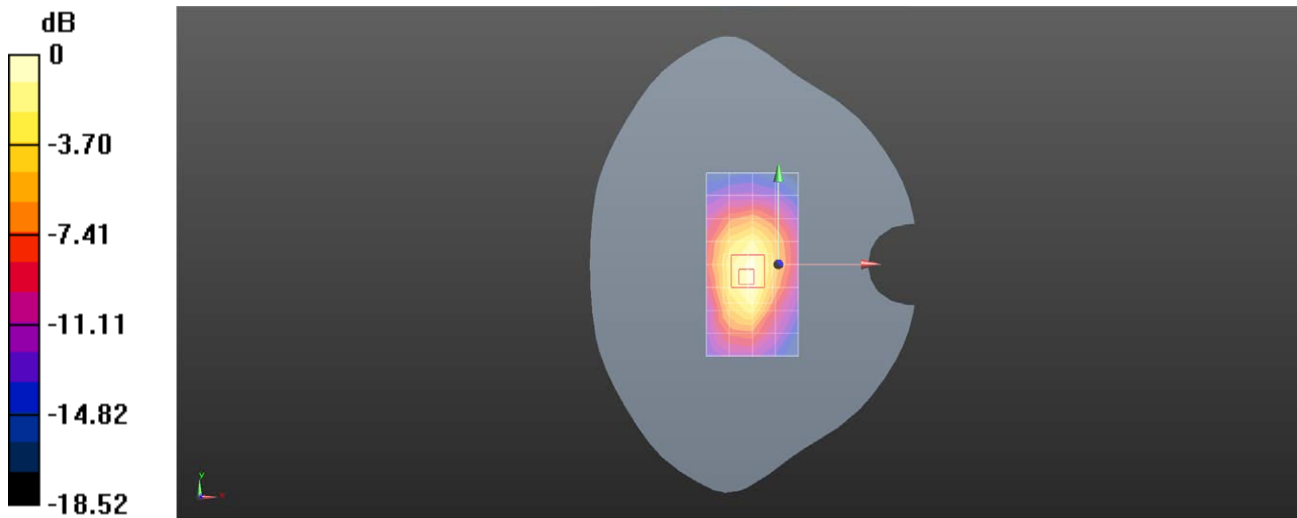

0 dB = 0.472 W/kg = -3.26 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 WCDMA Band II RMC 9400CH Right tilted Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983106

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 40.54$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.82, 7.76, 7.85); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.922 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.81 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.538 W/kg; SAR(10 g) = 0.254 W/kg

Maximum value of SAR (measured) = 0.928 W/kg

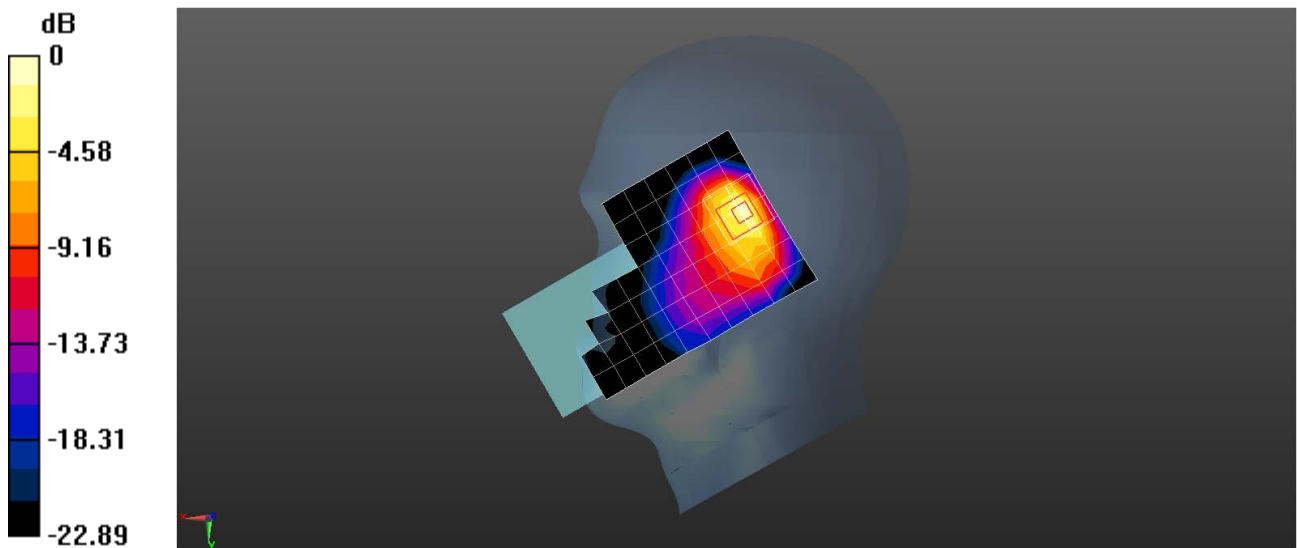

0 dB = 0.928 W/kg = -0.32 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 WCDMA Band II RMC 9400CH Back side 15mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983106

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 40.54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.82, 7.76, 7.85); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.238 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.801 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.323 W/kg

SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.107 W/kg

Maximum value of SAR (measured) = 0.270 W/kg

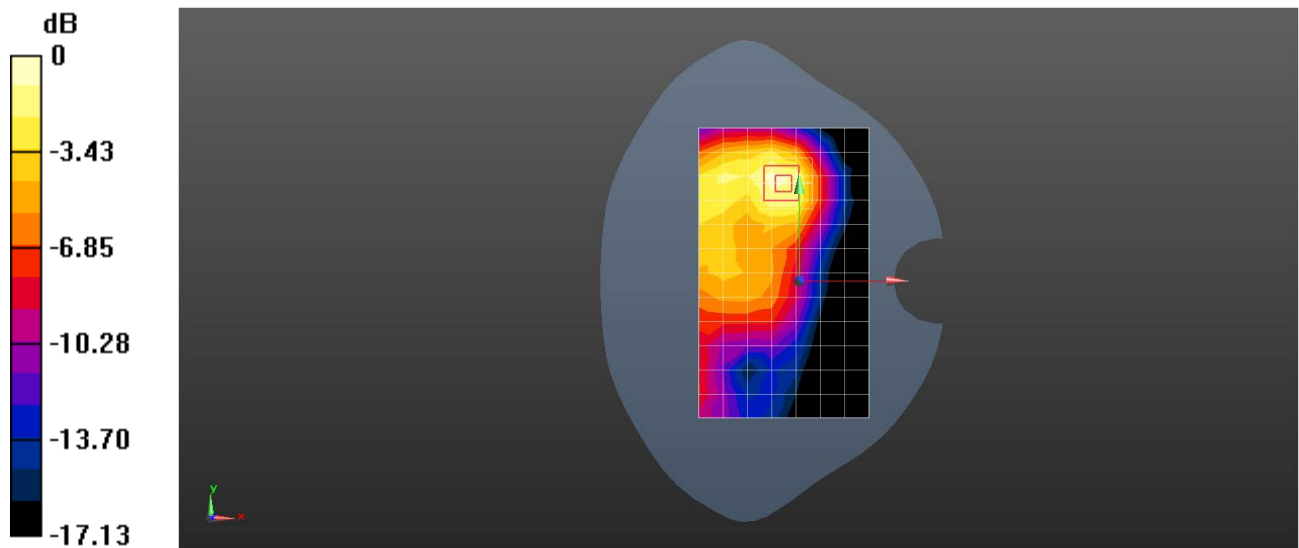

0 dB = 0.270 W/kg = -5.69 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 WCDMA Band II RMC 9400CH Back side 10mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983106

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.397 \text{ S/m}$; $\epsilon_r = 40.54$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.82, 7.76, 7.85); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.449 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.452 V/m ; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.592 W/kg

SAR(1 g) = 0.326 W/kg ; SAR(10 g) = 0.178 W/kg

Maximum value of SAR (measured) = 0.496 W/kg

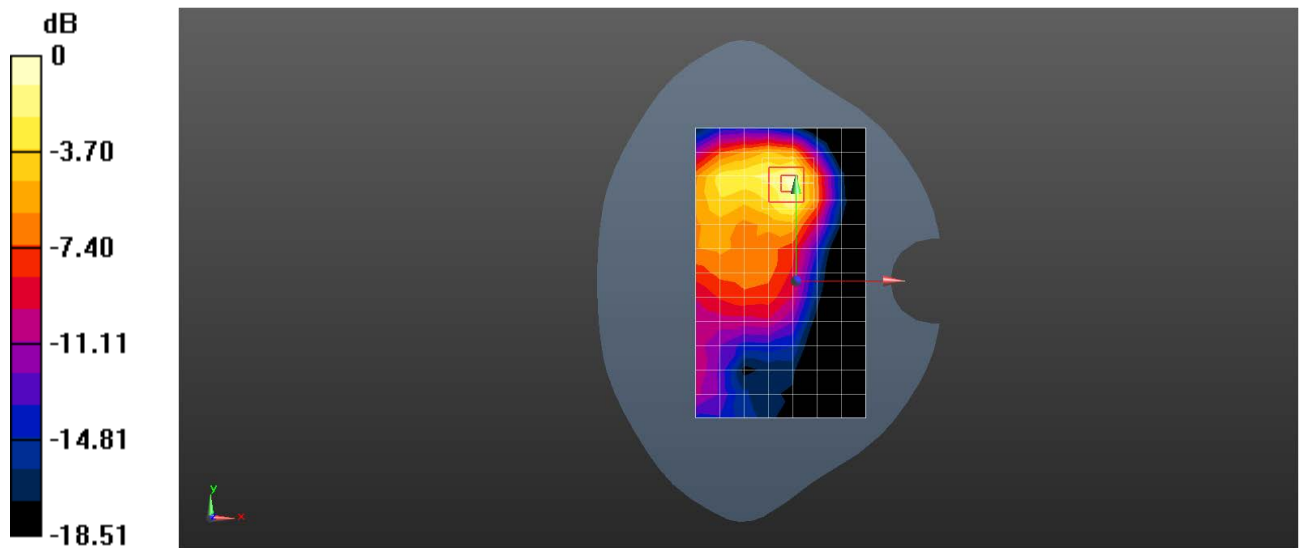

0 dB = 0.496 W/kg = -3.05 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 WCDMA Band IV RMC 1412CH Right tilted Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983106

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.338$ S/m; $\epsilon_r = 40.713$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(8.11, 8.04, 8.17); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.954 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.28 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.539 W/kg; SAR(10 g) = 0.266 W/kg

Maximum value of SAR (measured) = 0.869 W/kg

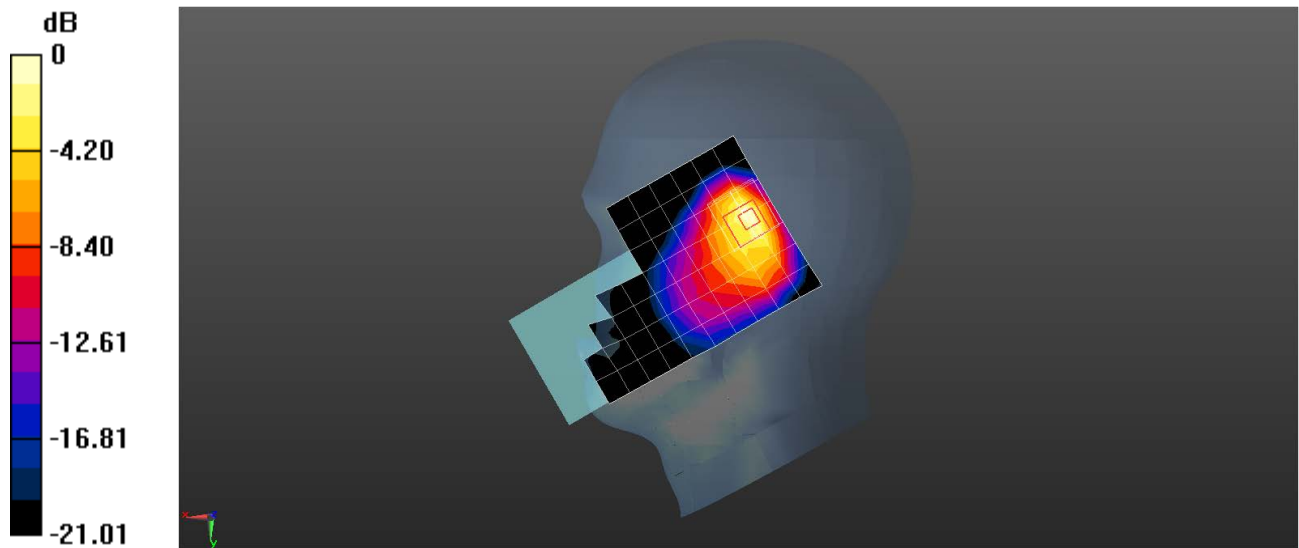

0 dB = 0.869 W/kg = -0.61 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 WCDMA Band IV RMC 1412CH Back side 15mm Ant14-

DUT: V2348; Type: Mobile Phone; Serial: 861380079983106

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.338$ S/m; $\epsilon_r = 40.713$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(8.11, 8.04, 8.17); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.392 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.12 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.481 W/kg

SAR(1 g) = 0.318 W/kg; SAR(10 g) = 0.207 W/kg

Maximum value of SAR (measured) = 0.422 W/kg

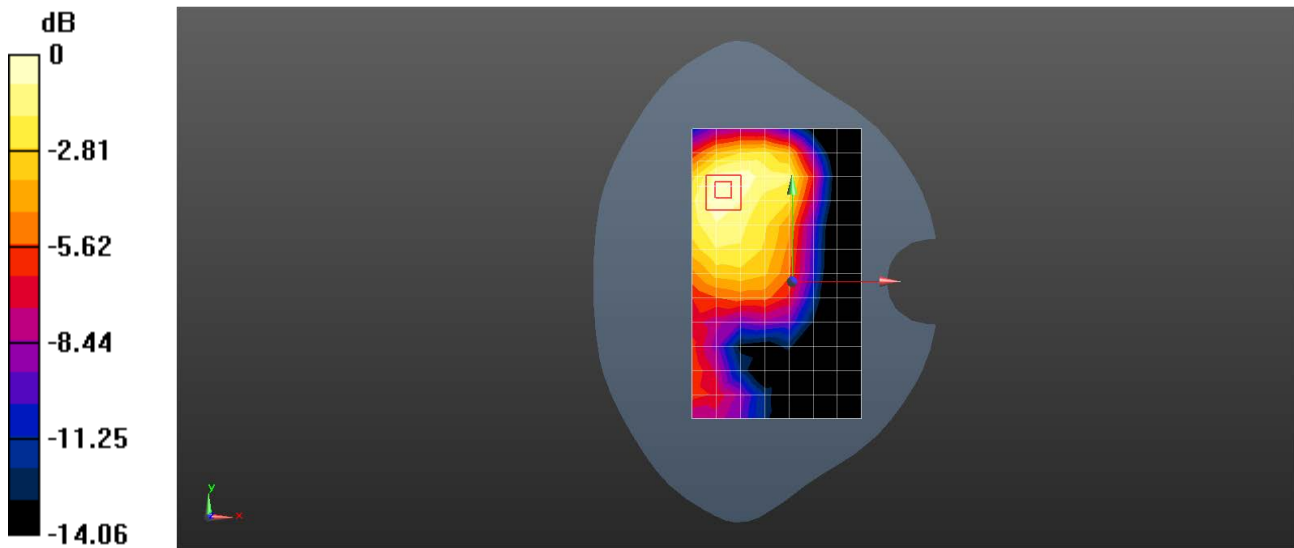

0 dB = 0.422 W/kg = -3.75 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 WCDMA Band IV RMC 1412CH Top side 10mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983106

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.338$ S/m; $\epsilon_r = 40.713$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(8.11, 8.04, 8.17); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.513 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.44 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.685 W/kg

SAR(1 g) = 0.401 W/kg; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 0.578 W/kg

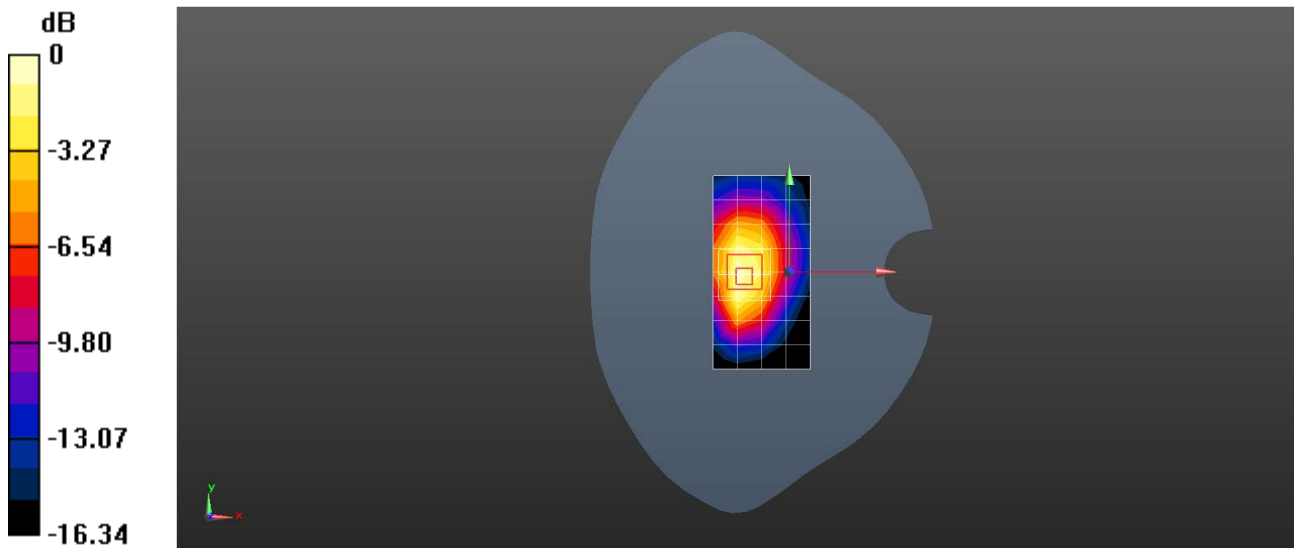

0 dB = 0.578 W/kg = -2.38 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 WCDMA Band V RMC 4182CH Right cheek Ant11

DUT: V2348; Type: Mobile Phone; Serial: 861380079983106

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 42.147$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.570 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.475 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.803 W/kg

SAR(1 g) = 0.438 W/kg; SAR(10 g) = 0.243 W/kg

Maximum value of SAR (measured) = 0.653 W/kg

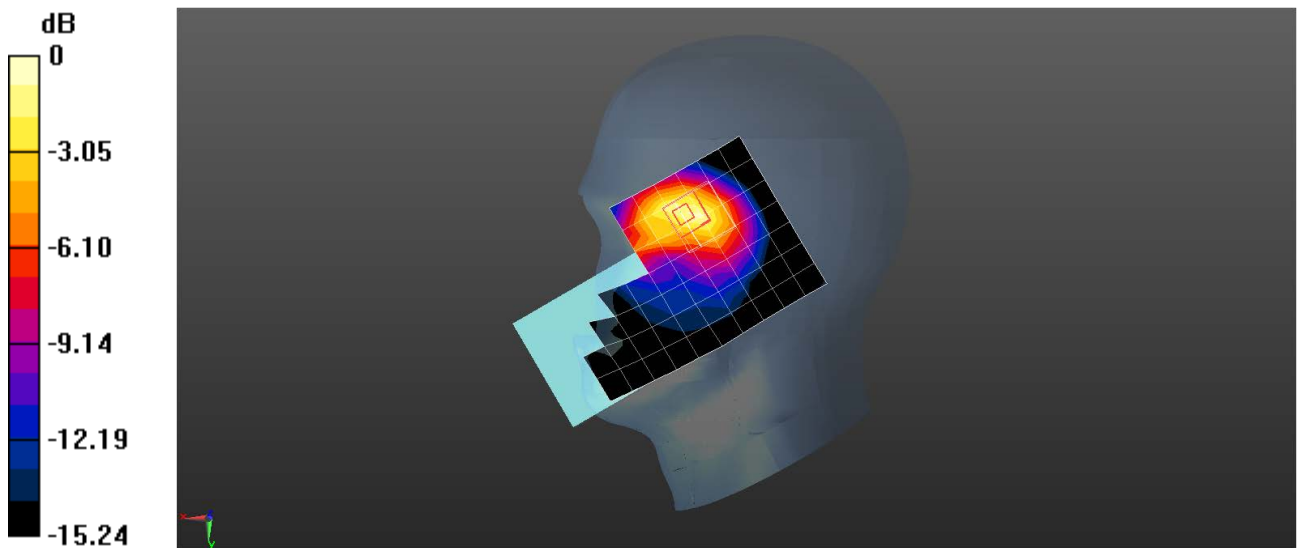

0 dB = 0.653 W/kg = -1.85 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 WCDMA Band V RMC 4182CH Back side 15mm Ant11

DUT: V2348; Type: Mobile Phone; Serial: 861380079983106

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 42.147$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.464 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.10 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.547 W/kg

SAR(1 g) = 0.353 W/kg; SAR(10 g) = 0.223 W/kg

Maximum value of SAR (measured) = 0.484 W/kg

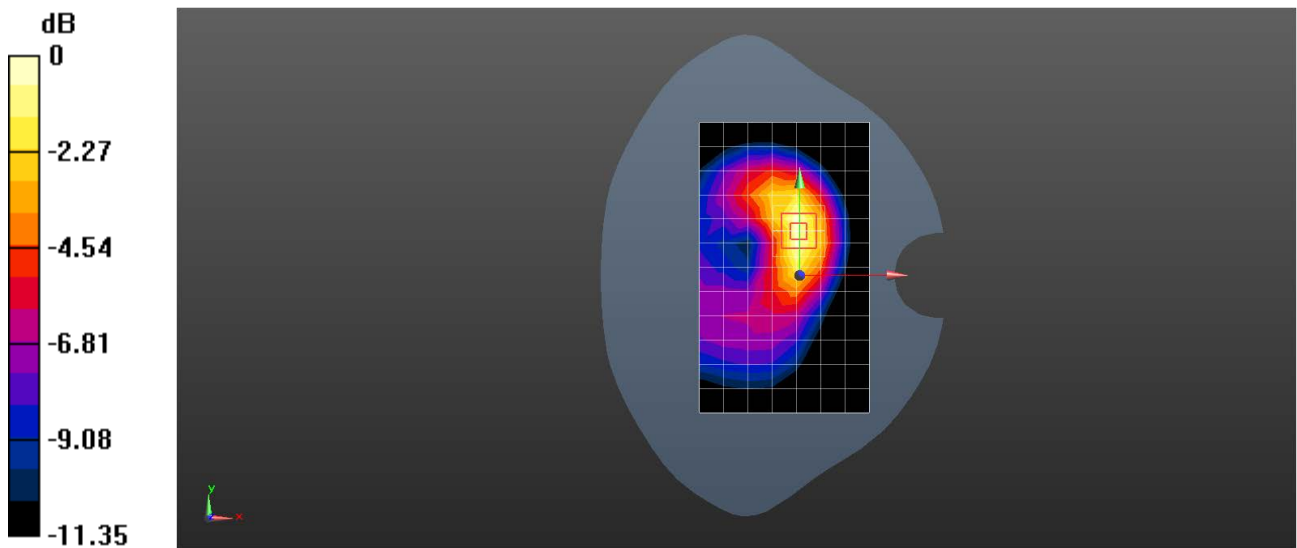

0 dB = 0.484 W/kg = -3.15 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 WCDMA Band V RMC 4182CH Left side 10mm Ant11

DUT: V2348; Type: Mobile Phone; Serial: 861380079983106

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 42.147$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.793 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.39 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.942 W/kg

SAR(1 g) = 0.534 W/kg; SAR(10 g) = 0.302 W/kg

Maximum value of SAR (measured) = 0.803 W/kg

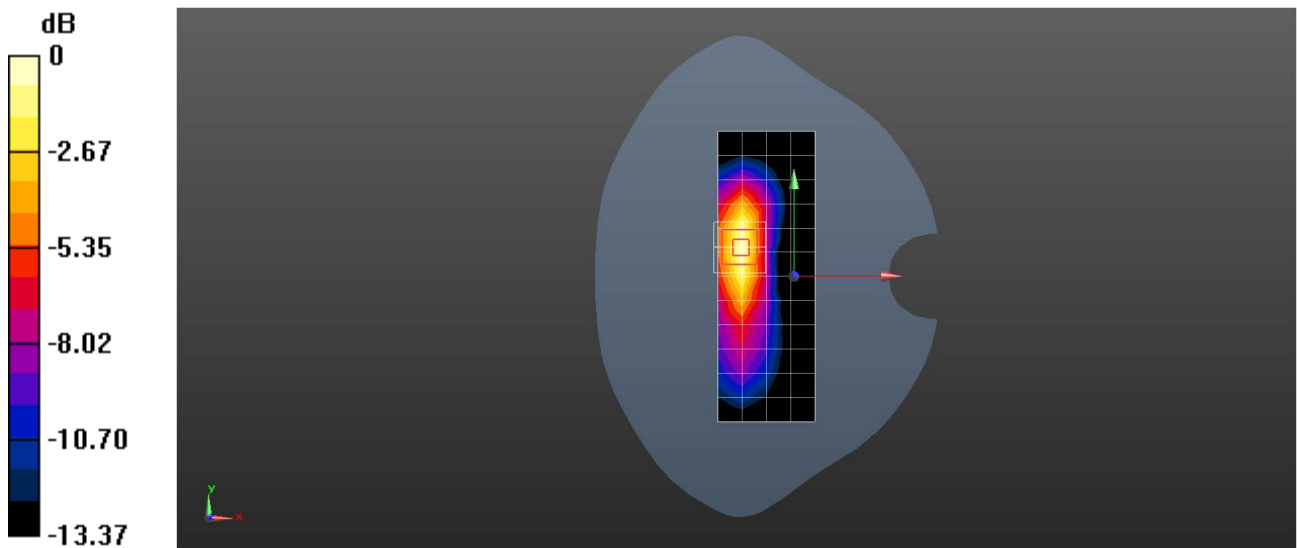

0 dB = 0.803 W/kg = -0.95 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 2 20M QPSK 1RB0 18700CH Right cheek Ant12

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1860 MHz;Duty Cycle: 1:1

Medium: HSL1900;Medium parameters used: $f = 1860 \text{ MHz}$; $\sigma = 1.406 \text{ S/m}$; $\epsilon_r = 38.57$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.63, 7.63, 7.63); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.772 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.700 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.552 W/kg; SAR(10 g) = 0.257 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

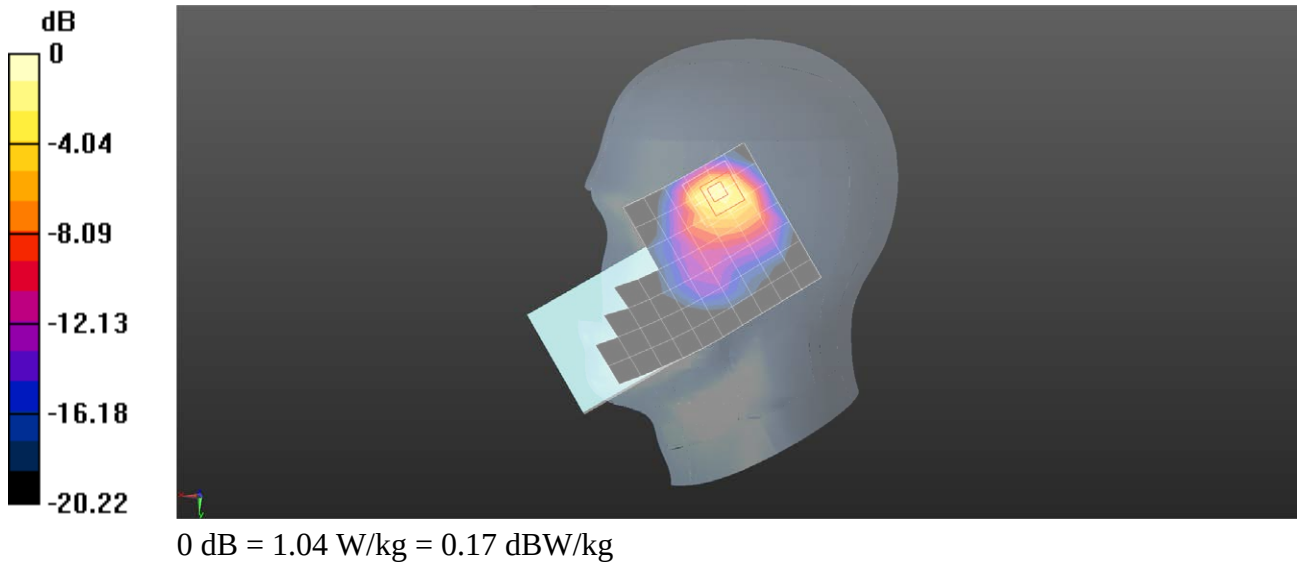

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 2 20M QPSK 50RB25 18900CH Back side 15mm Ant41

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.427$ S/m; $\epsilon_r = 38.502$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.63, 7.63, 7.63); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.303 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.619 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.393 W/kg

SAR(1 g) = 0.229 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.320 W/kg

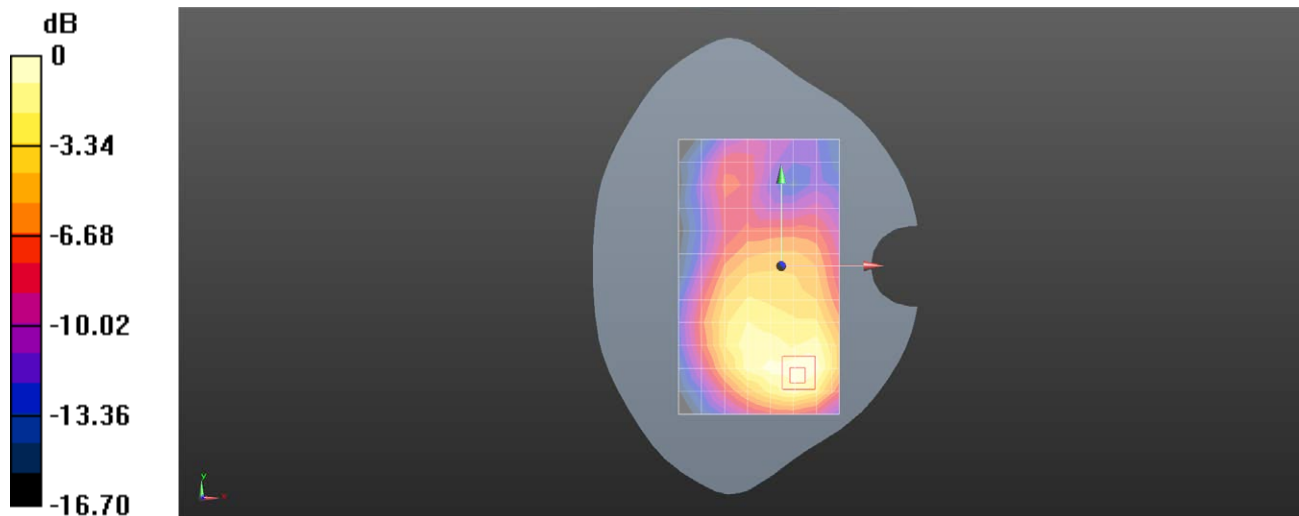

0 dB = 0.320 W/kg = -4.95 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 2 20M QPSK 50RB25 18900CH Bottom side 10mm Ant41

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.427$ S/m; $\epsilon_r = 38.502$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.63, 7.63, 7.63); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.560 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.52 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.907 W/kg

SAR(1 g) = 0.487 W/kg; SAR(10 g) = 0.265 W/kg

Maximum value of SAR (measured) = 0.741 W/kg

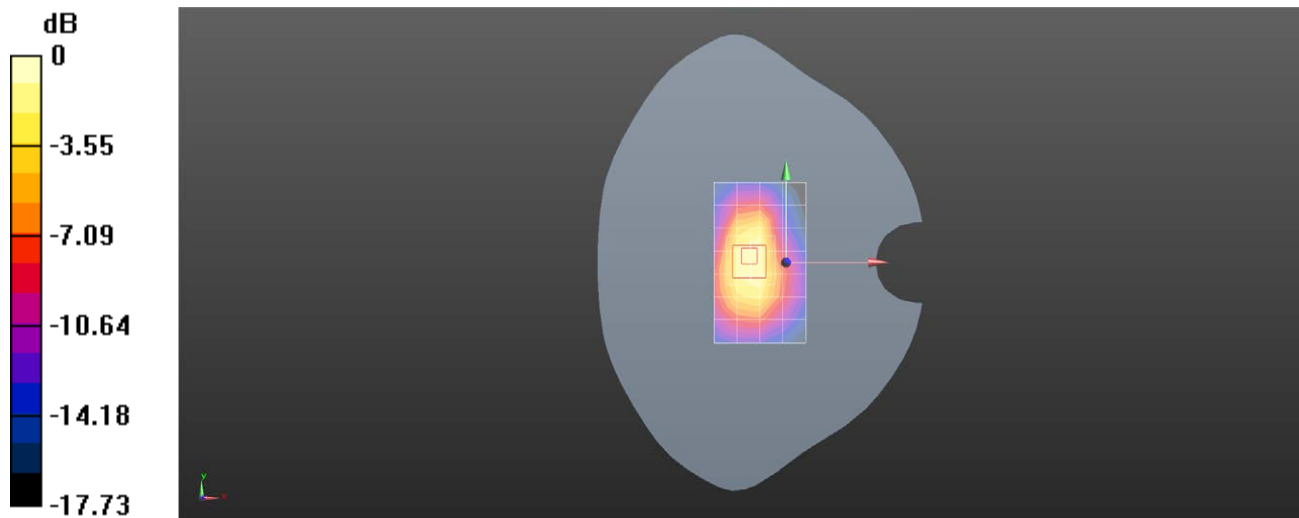

0 dB = 0.741 W/kg = -1.30 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 4 20M QPSK 50RB25 20175CH Right cheek Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.294$ S/m; $\epsilon_r = 39.07$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(8.01, 8.01, 8.01); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.836 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.94 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.591 W/kg; SAR(10 g) = 0.318 W/kg

Maximum value of SAR (measured) = 0.966 W/kg

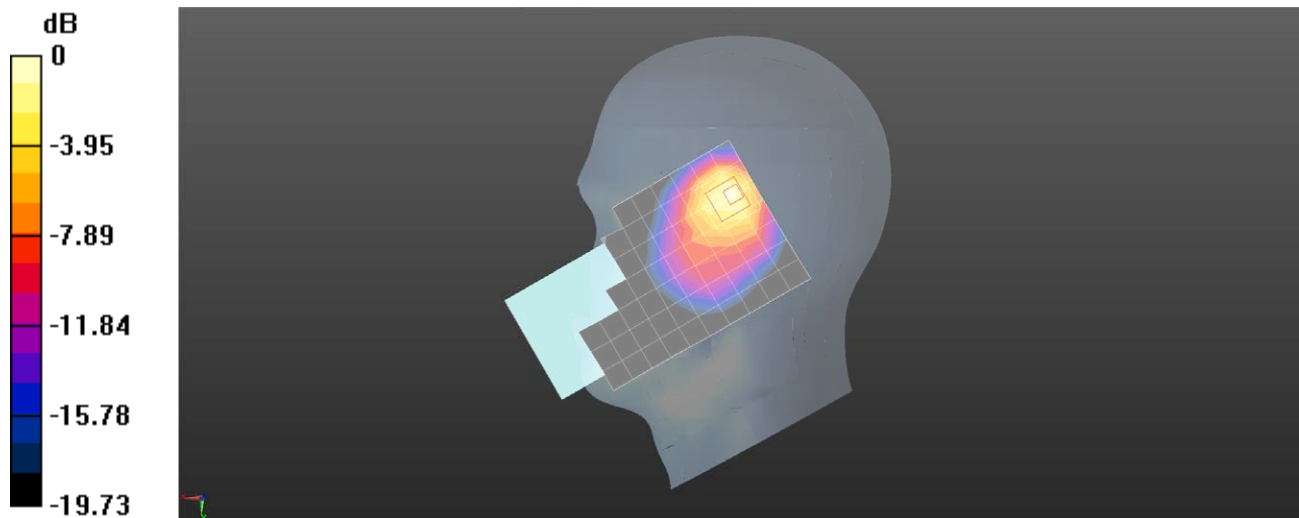

0 dB = 0.966 W/kg = -0.15 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 4 20M QPSK 50RB25 20175CH Back side 15mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.294$ S/m; $\epsilon_r = 39.07$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(8.01, 8.01, 8.01); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.397 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.02 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.460 W/kg

SAR(1 g) = 0.287 W/kg; SAR(10 g) = 0.183 W/kg

Maximum value of SAR (measured) = 0.391 W/kg

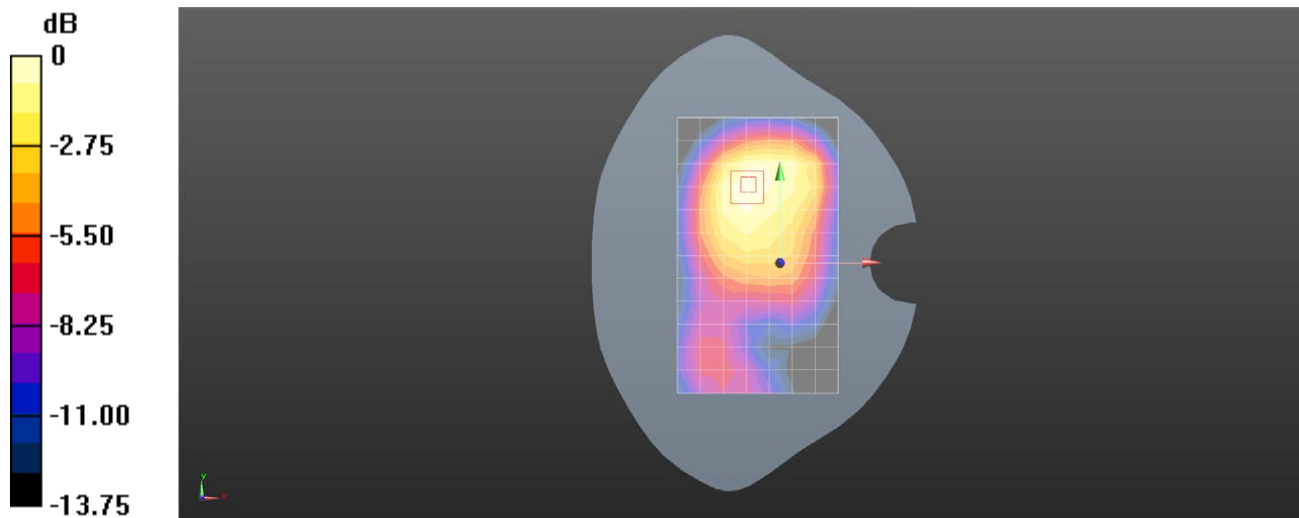

0 dB = 0.391 W/kg = -4.08 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 4 20M QPSK 50RB25 20175CH Back side 10mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.294$ S/m; $\epsilon_r = 39.07$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(8.01, 8.01, 8.01); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.350 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.803 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.432 W/kg

SAR(1 g) = 0.244 W/kg; SAR(10 g) = 0.150 W/kg

Maximum value of SAR (measured) = 0.352 W/kg

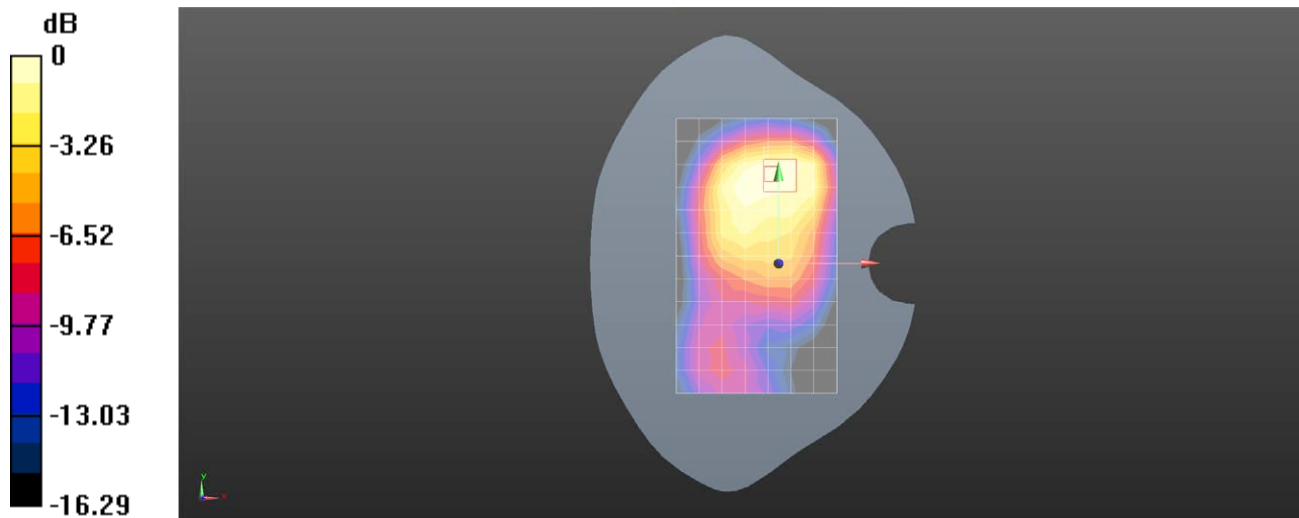

0 dB = 0.352 W/kg = -4.53 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 5 10M QPSK 1RB0 20525CH Back side 10mm Ant31

DUT: V2348; Type: Mobile Phone; Serial: 861380079982884

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 42.124$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.211 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.02 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.179 W/kg; SAR(10 g) = 0.121 W/kg

Maximum value of SAR (measured) = 0.229 W/kg

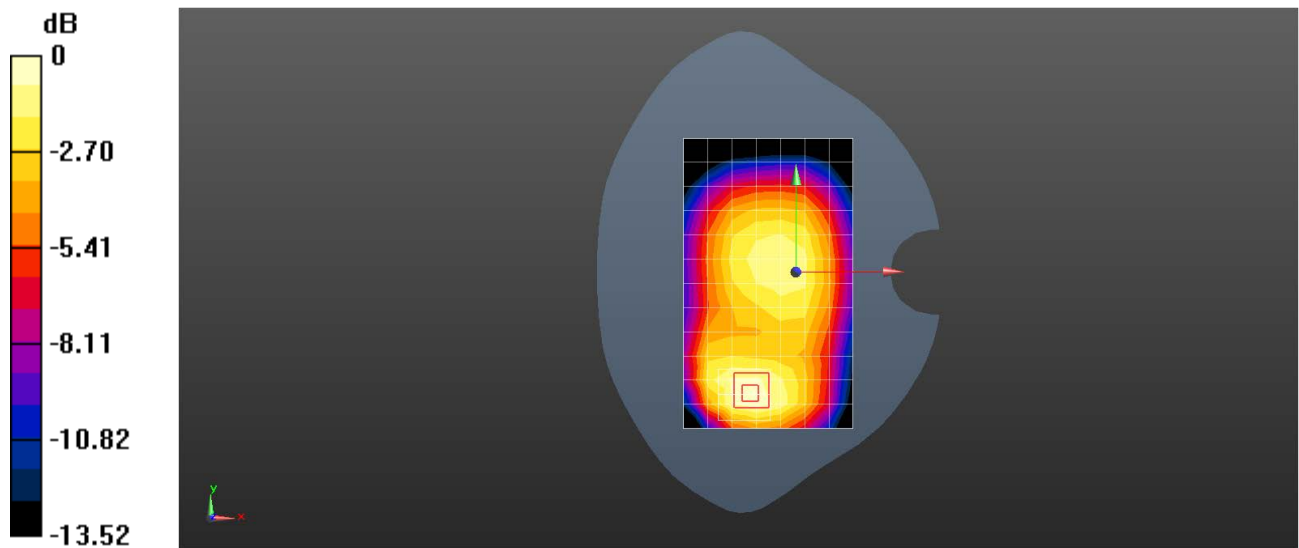

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 7 20M QPSK 50RB25 21100CH Right cheek Ant14

DUT: V2348; Type: Mobile Phone; Serial: 862303079999491

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 39.27$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.02, 8.02, 8.02); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.971 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.422 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.668 W/kg; SAR(10 g) = 0.301 W/kg

Maximum value of SAR (measured) = 1.11 W/kg

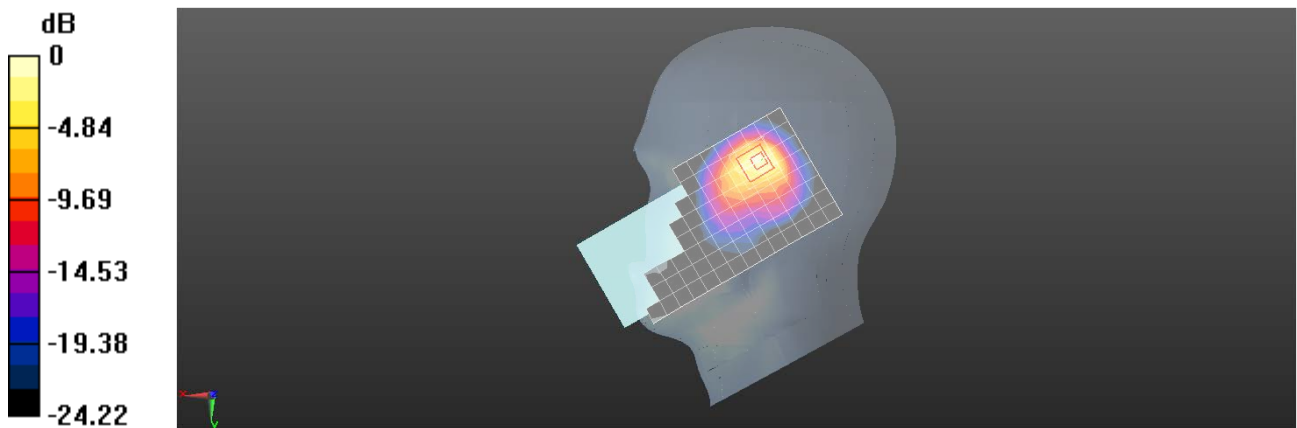

0 dB = 1.11 W/kg = 0.45 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 7 20M QPSK 50RB25 21100CH Back side 15mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 862303079999491

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 39.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.02, 8.02, 8.02); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.552 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.492 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.683 W/kg

SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.168 W/kg

Maximum value of SAR (measured) = 0.548 W/kg

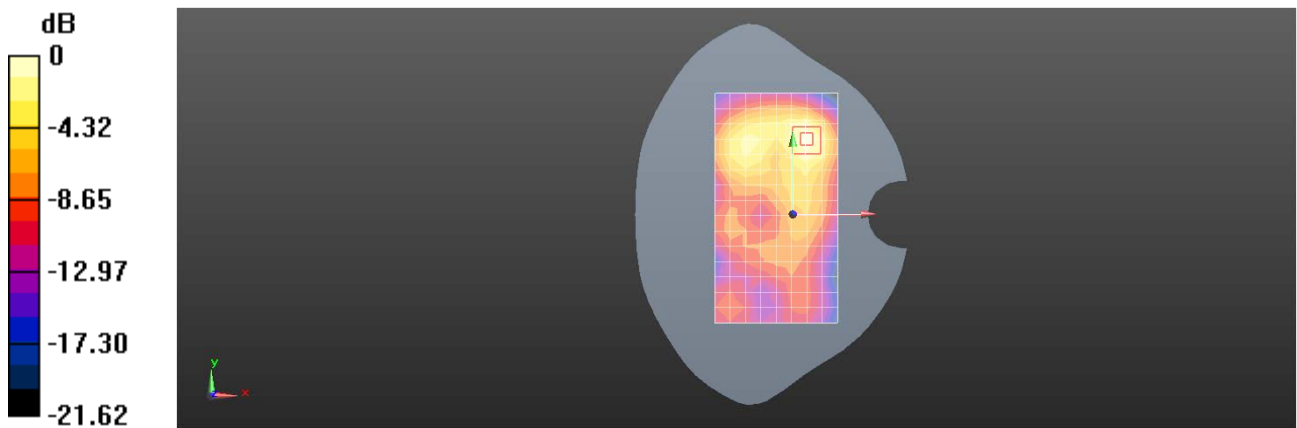

0 dB = 0.548 W/kg = -2.61 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 7 20M QPSK 50RB25 21100CH Back side 10mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 862303079999491

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 39.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.02, 8.02, 8.02); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.656 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.104 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.869 W/kg

SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.194 W/kg

Maximum value of SAR (measured) = 0.692 W/kg

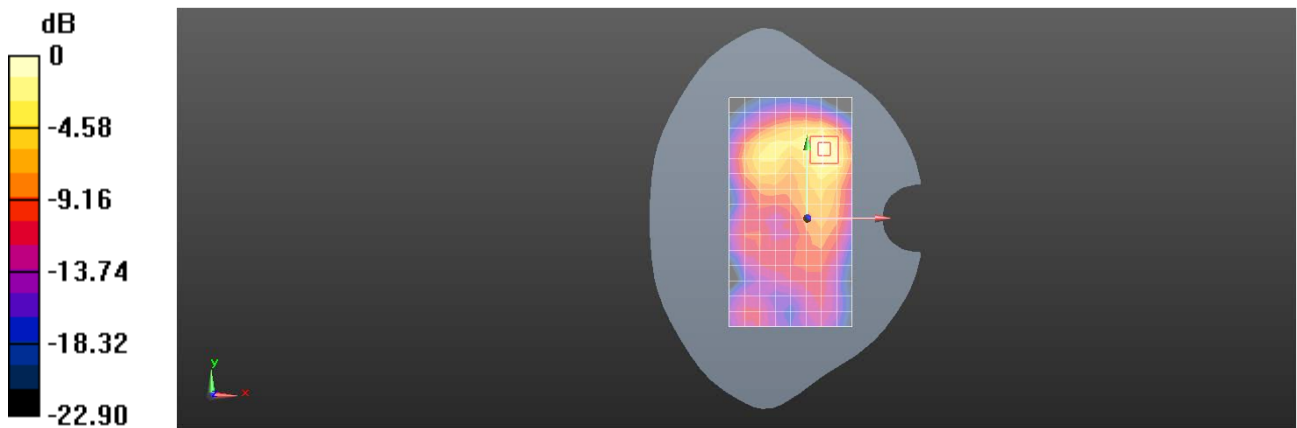

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 12 10M QPSK 1RB0 23095CH Right cheek Ant11

DUT: V2348; Type: Mobile Phone; Serial: 861380079983106

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.854$ S/m; $\epsilon_r = 44.089$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.75, 9.68, 9.67); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.576 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.424 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.829 W/kg

SAR(1 g) = 0.429 W/kg; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 0.696 W/kg

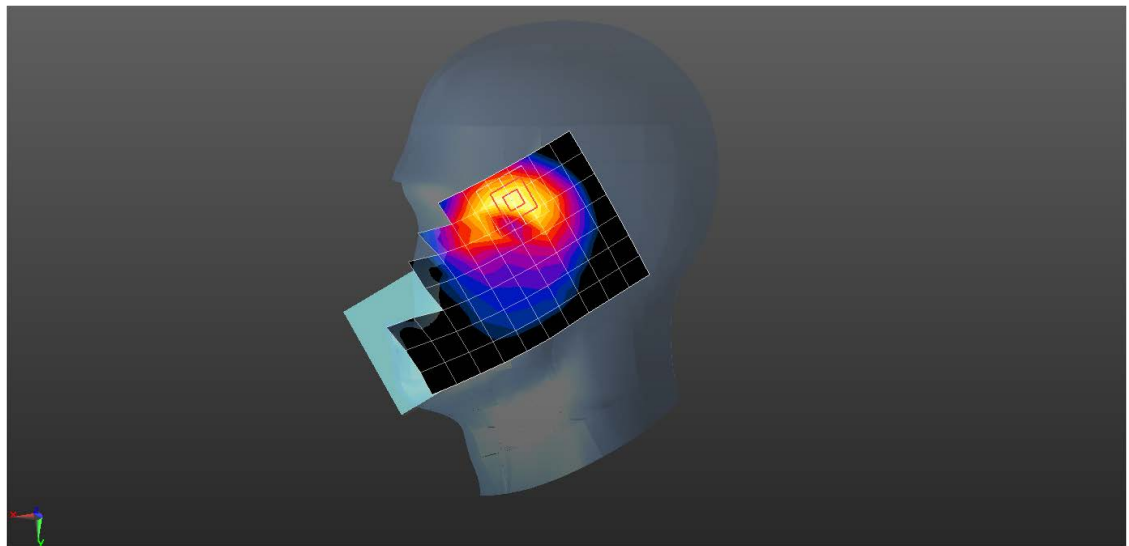

0 dB = 0.696 W/kg = -1.57 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 12 10M QPSK 1RB0 23095CH Back side 15mm Ant11

DUT: V2348; Type: Mobile Phone; Serial: 861380079982884

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.854$ S/m; $\epsilon_r = 44.089$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.75, 9.68, 9.67); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.310 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.90 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.360 W/kg

SAR(1 g) = 0.240 W/kg; SAR(10 g) = 0.154 W/kg

Maximum value of SAR (measured) = 0.320 W/kg

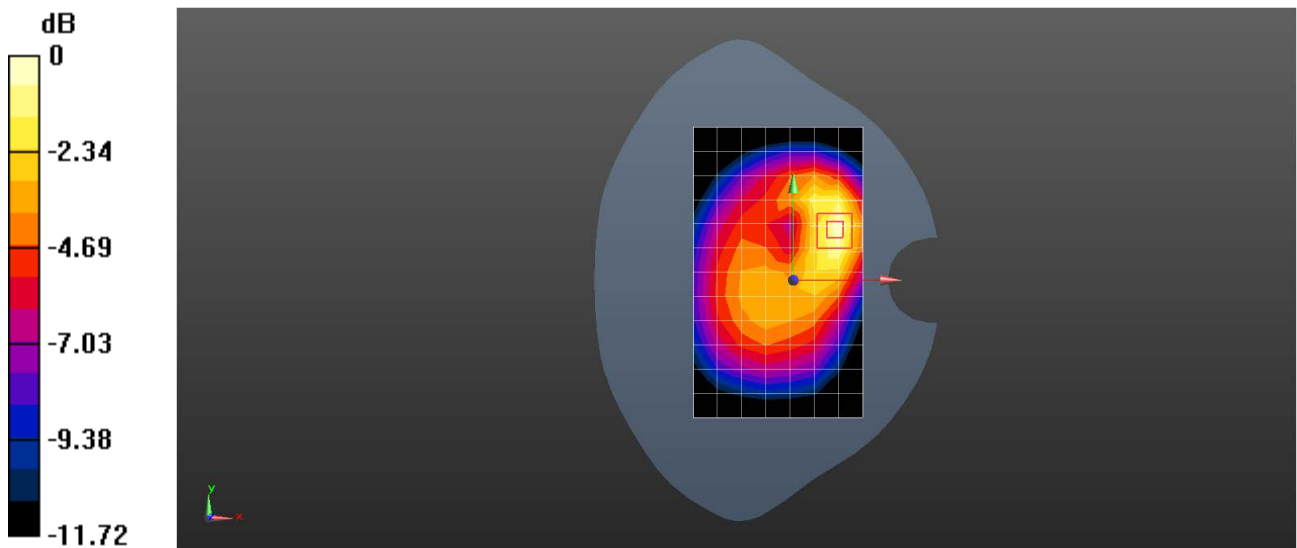

0 dB = 0.320 W/kg = -4.95 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 12 10M QPSK 1RB0 23095CH Left side 10mm Ant11

DUT: V2348; Type: Mobile Phone; Serial: 861380079982884

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.854$ S/m; $\epsilon_r = 44.089$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.75, 9.68, 9.67); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.611 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.463 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.763 W/kg

SAR(1 g) = 0.470 W/kg; SAR(10 g) = 0.285 W/kg

Maximum value of SAR (measured) = 0.654 W/kg

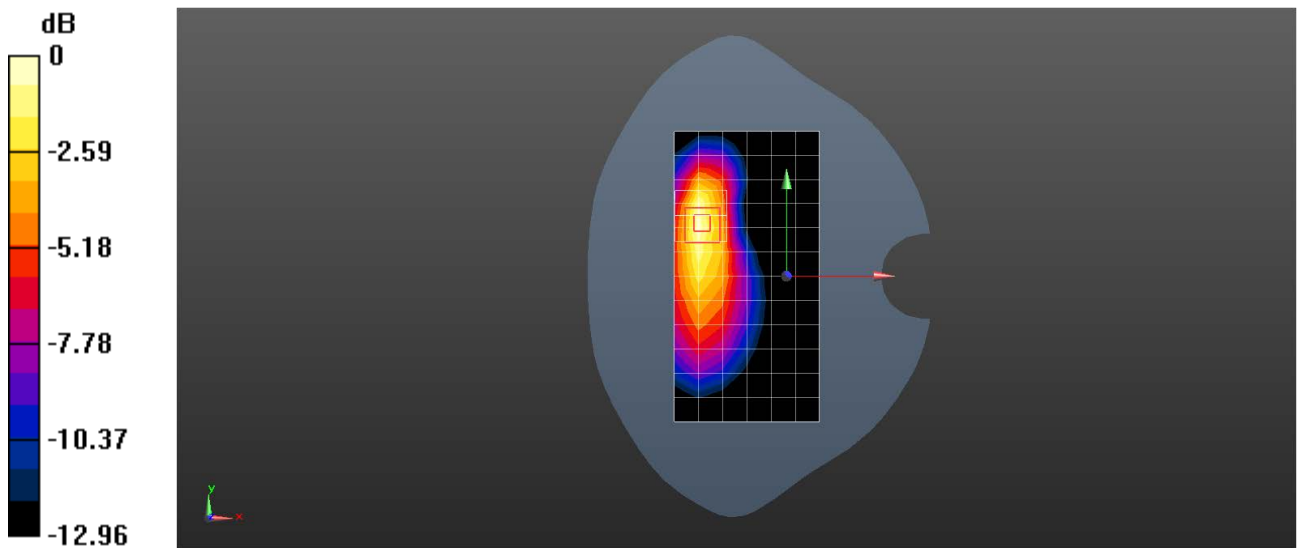

0 dB = 0.654 W/kg = -1.84 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 13 QPSK 10M 25R13 23230CH Right cheek Ant11

DUT: V2348; Type: Mobile Phone; Serial: 861380079983106

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.903 \text{ S/m}$; $\epsilon_r = 43.637$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.75, 9.68, 9.67); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.705 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.542 V/m ; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.969 W/kg

SAR(1 g) = 0.516 W/kg ; SAR(10 g) = 0.285 W/kg

Maximum value of SAR (measured) = 0.812 W/kg

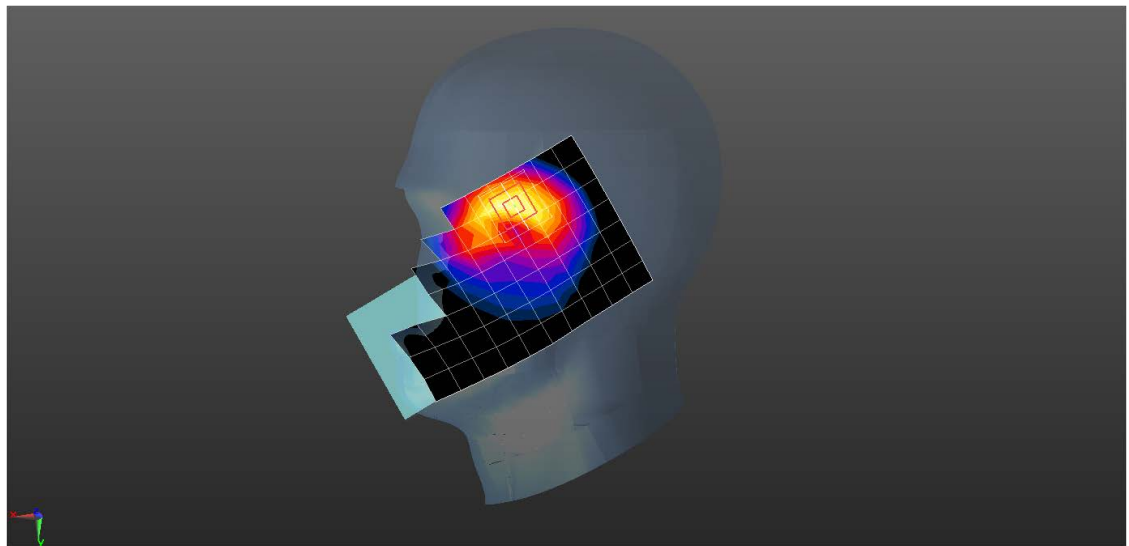

0 dB = 0.812 W/kg = -0.90 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 13 10M QPSK 1RB0 23230CH Back side 15mm Ant11

DUT: V2348; Type: Mobile Phone; Serial: 861380079983106

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.903 \text{ S/m}$; $\epsilon_r = 43.637$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.75, 9.68, 9.67); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.338 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.717 V/m ; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.458 W/kg

SAR(1 g) = 0.301 W/kg ; SAR(10 g) = 0.191 W/kg

Maximum value of SAR (measured) = 0.408 W/kg

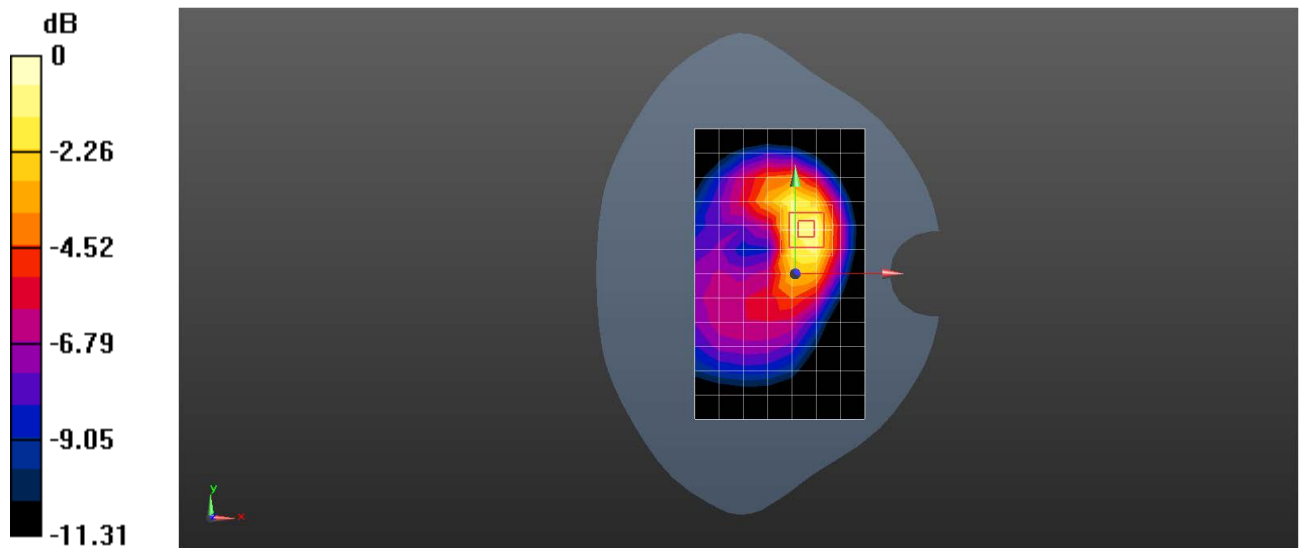

0 dB = 0.408 W/kg = -3.89 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 13 10M QPSK 1RB0 23230CH Left side 10mm Ant11

DUT: V2348; Type: Mobile Phone; Serial: 861380079983106

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.903 \text{ S/m}$; $\epsilon_r = 43.637$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.75, 9.68, 9.67); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.739 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.06 V/m ; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.922 W/kg

SAR(1 g) = 0.545 W/kg ; SAR(10 g) = 0.316 W/kg

Maximum value of SAR (measured) = 0.779 W/kg

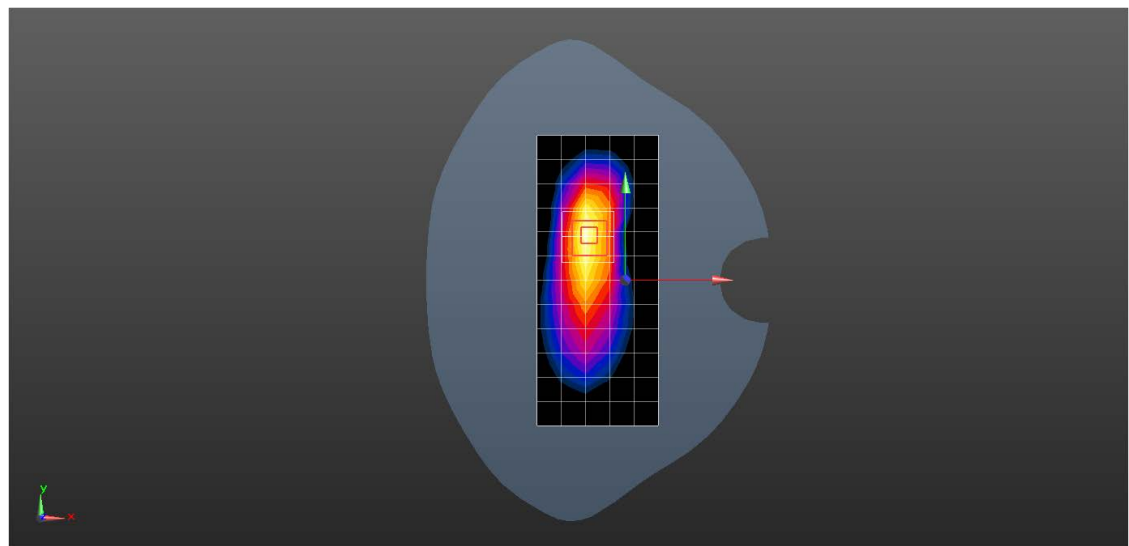

0 dB = 0.779 W/kg = -1.08 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 26 15M QPSK 1R0 26865CH Right cheek Ant11

DUT: V2348; Type: Mobile Phone; Serial: 861380079983106

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.942$ S/m; $\epsilon_r = 43.385$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.402 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.681 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.536 W/kg

SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.161 W/kg

Maximum value of SAR (measured) = 0.459 W/kg

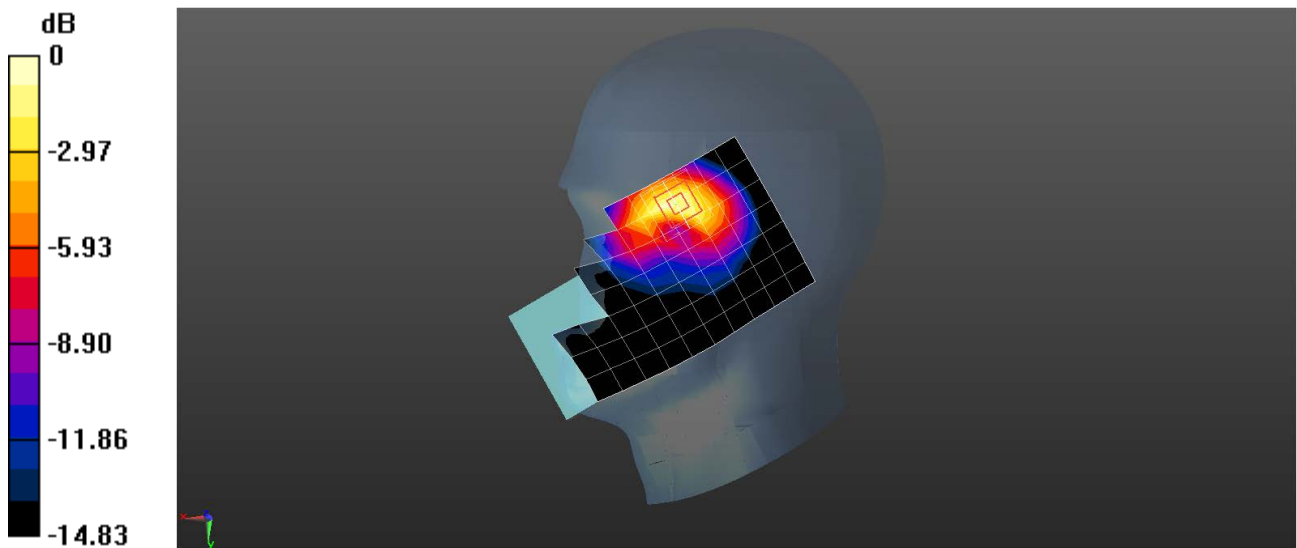

0 dB = 0.459 W/kg = -3.38 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 26 15M QPSK 36RB18 26865CH Back side 15mm Ant11

DUT: V2348; Type: Mobile Phone; Serial: 861380079983106

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.942$ S/m; $\epsilon_r = 43.385$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.156 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.337 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.218 W/kg

SAR(1 g) = 0.140 W/kg; SAR(10 g) = 0.088 W/kg

Maximum value of SAR (measured) = 0.192 W/kg

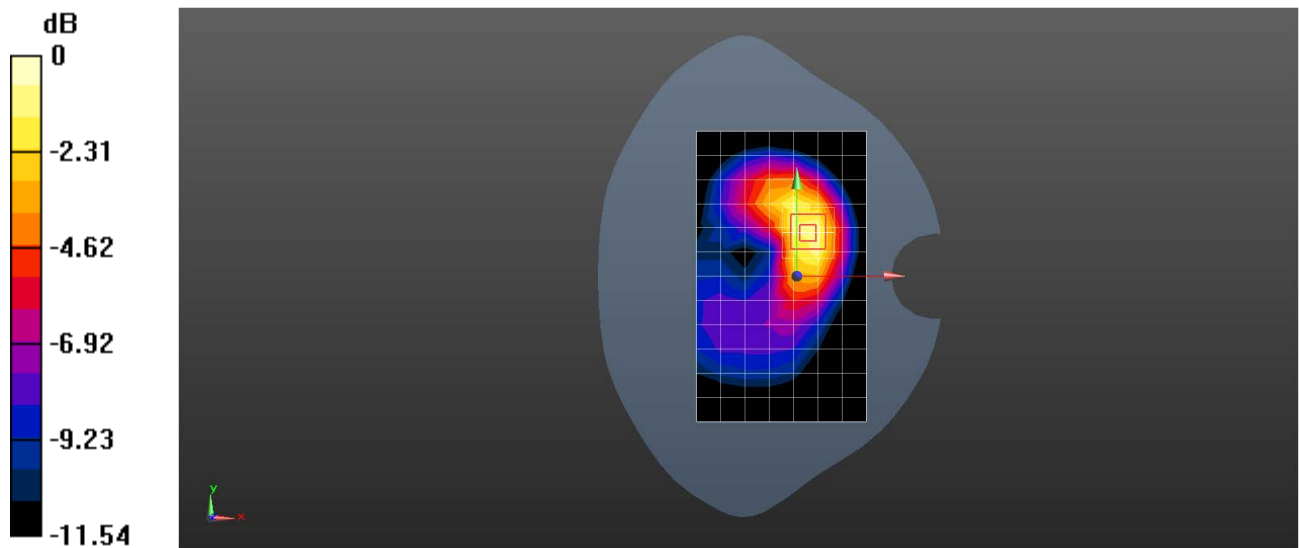

0 dB = 0.192 W/kg = -7.17 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 26 15M QPSK 36RB18 26865CH Left side 10mm Ant11

DUT: V2348; Type: Mobile Phone; Serial: 861380079983106

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.942$ S/m; $\epsilon_r = 43.385$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.348 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.08 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.440 W/kg

SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.370 W/kg

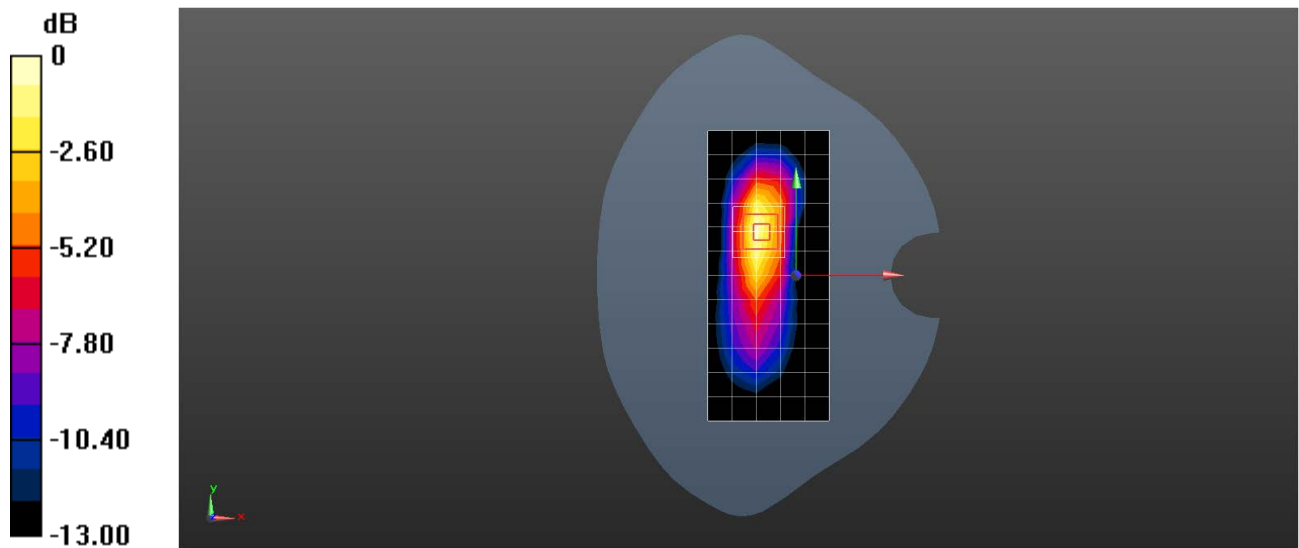

0 dB = 0.370 W/kg = -4.32 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 38 20M QPSK 50RB25 38000CH Bottom side 10mm Ant41

DUT: V2348; Type: Mobile Phone; Serial: 862303079999491

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58016

Medium: HSL2600; Medium parameters used: $f = 2595$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 40.18$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.02, 8.02, 8.02); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.788 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.11 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.988 W/kg

SAR(1 g) = 0.502 W/kg; SAR(10 g) = 0.250 W/kg

Maximum value of SAR (measured) = 0.805 W/kg

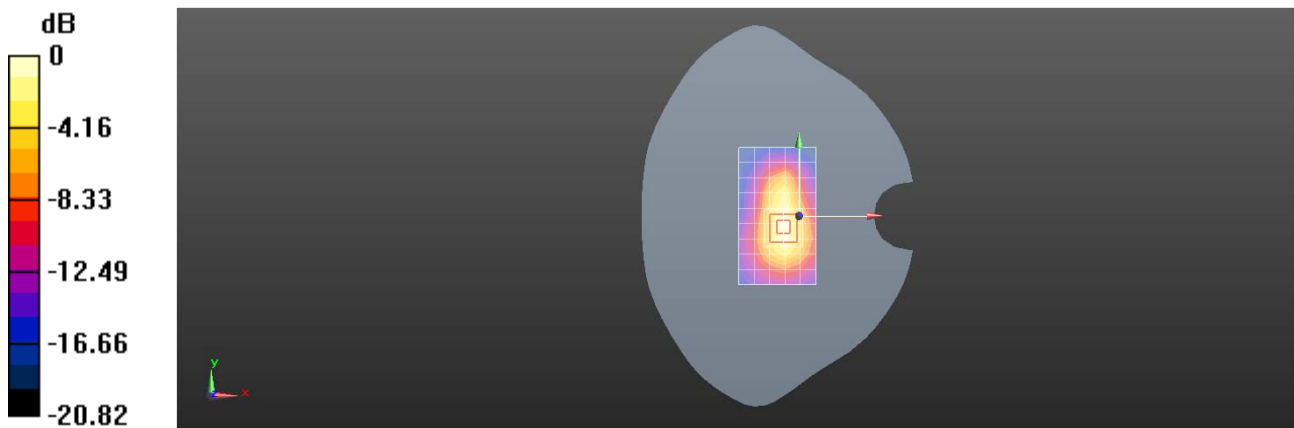

0 dB = 0.805 W/kg = -0.94 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 41 20M QPSK 1RB0 40620CH Right cheek Ant14

DUT: V2348; Type: Mobile Phone; Serial: 862303079999491

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58016

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 37.769$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.02, 8.02, 8.02); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.17 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.205 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.744 W/kg; SAR(10 g) = 0.341 W/kg

Maximum value of SAR (measured) = 1.22 W/kg

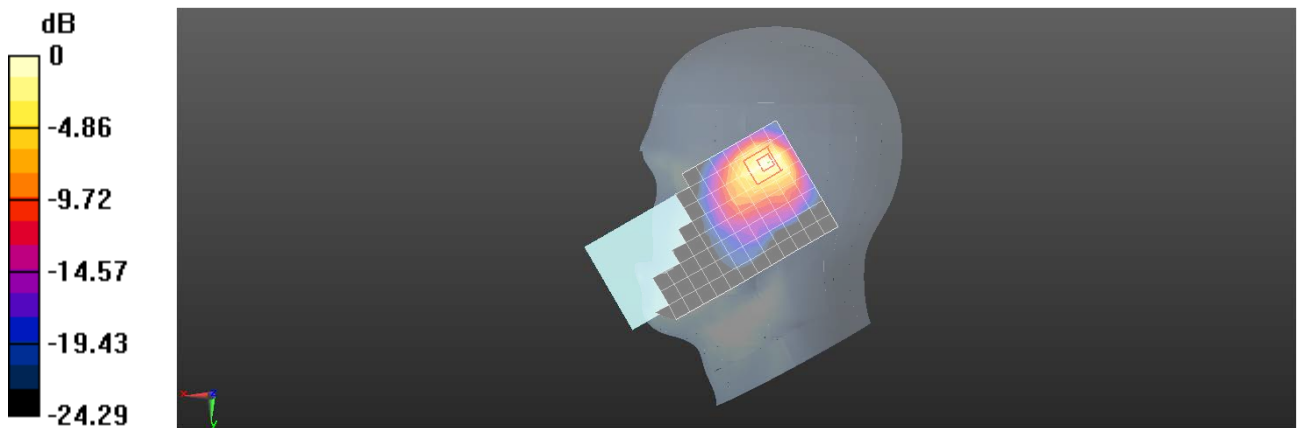

0 dB = 1.22 W/kg = 0.86 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 41 20M QPSK 1RB0 40620CH Back side 15mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 862303079999491

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58016

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 37.769$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.02, 8.02, 8.02); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.457 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.421 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.582 W/kg

SAR(1 g) = 0.292 W/kg; SAR(10 g) = 0.149 W/kg

Maximum value of SAR (measured) = 0.465 W/kg

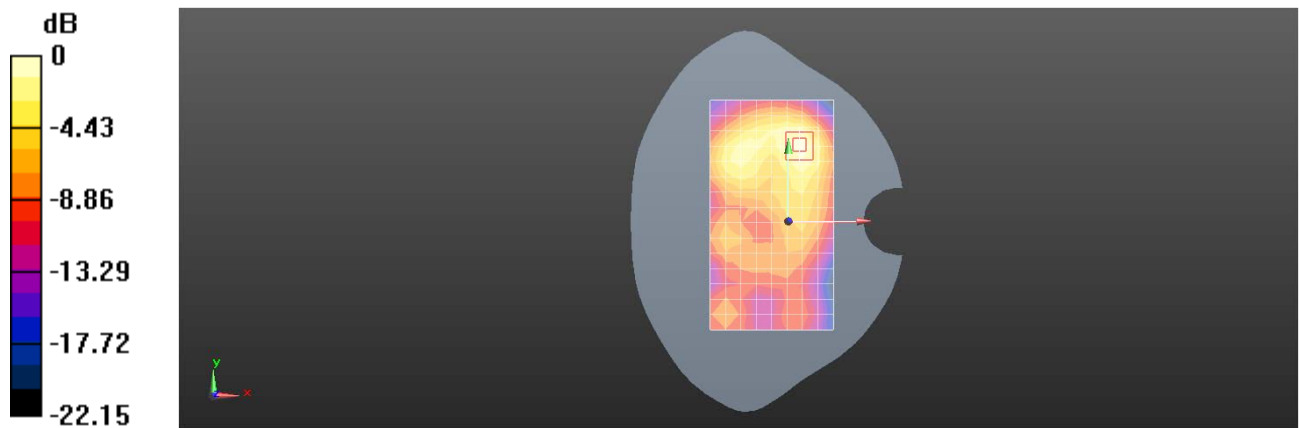

0 dB = 0.465 W/kg = -3.33 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 41 20M QPSK 1RB0 40620CH Back side 10mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 862303079999491

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58016

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 37.769$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.02, 8.02, 8.02); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.710 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.917 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.920 W/kg

SAR(1 g) = 0.441 W/kg; SAR(10 g) = 0.214 W/kg

Maximum value of SAR (measured) = 0.734 W/kg

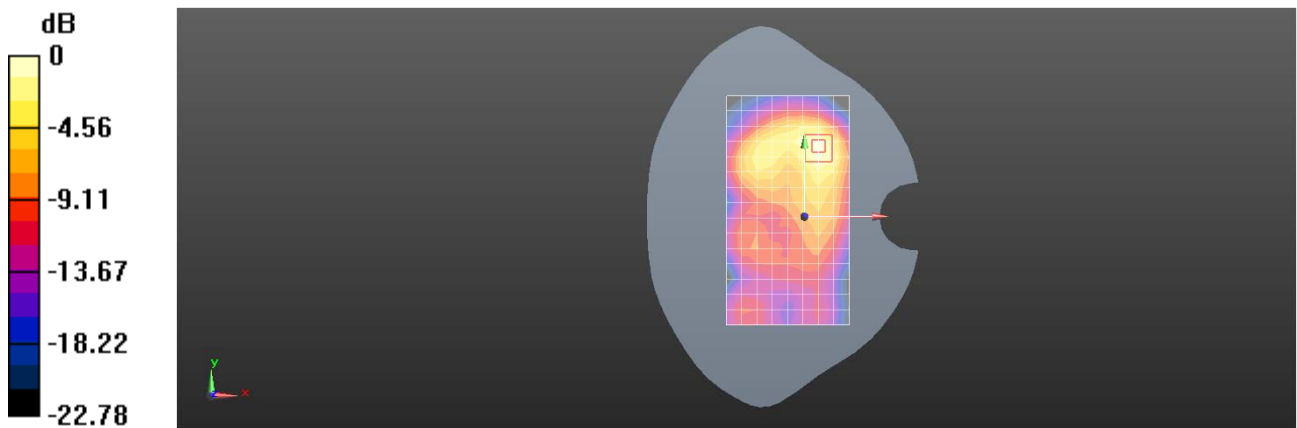

0 dB = 0.734 W/kg = -1.34 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 66 20M QPSK 50RB25 132322CH Right cheek Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz;Duty Cycle: 1:1

Medium: HSL1750;Medium parameters used: $f = 1745$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 38.907$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(8.01, 8.01, 8.01); Calibrated: 2023/8/7
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.801 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.47 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.562 W/kg; SAR(10 g) = 0.302 W/kg

Maximum value of SAR (measured) = 0.917 W/kg

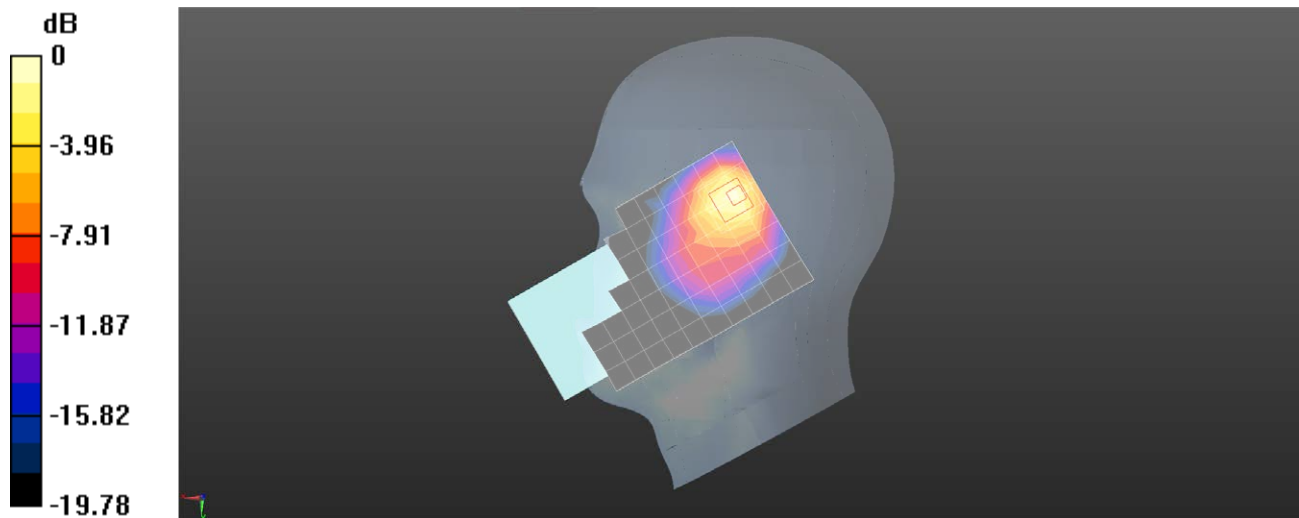

0 dB = 0.917 W/kg = -0.38 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 66 20M QPSK 50RB25 132322CH Back side 15mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 38.907$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(8.01, 8.01, 8.01); Calibrated: 2023/8/7
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.375 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.26 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.431 W/kg

SAR(1 g) = 0.271 W/kg; SAR(10 g) = 0.173 W/kg

Maximum value of SAR (measured) = 0.367 W/kg

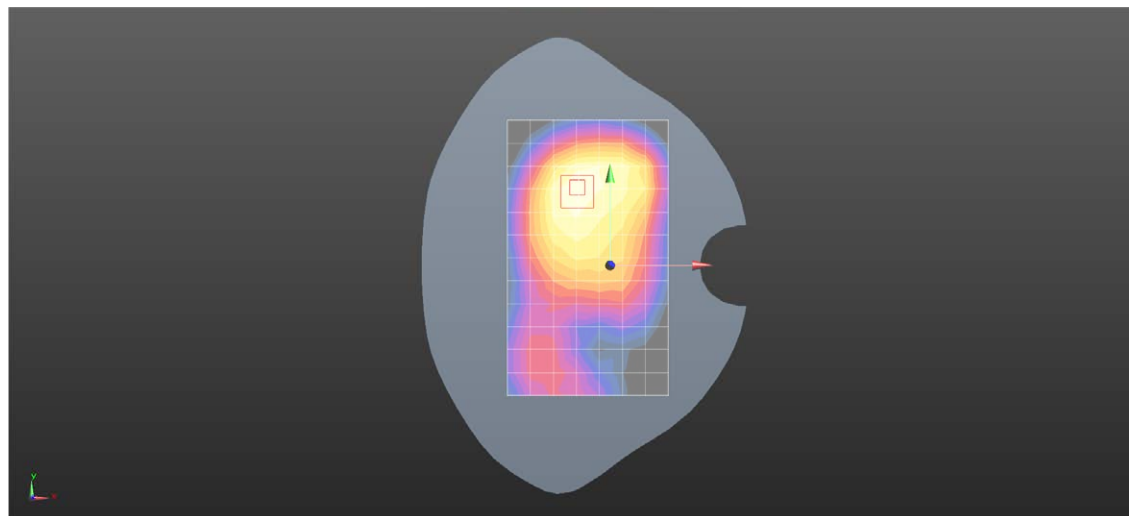

0 dB = 0.367 W/kg = -4.35 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 LTE Band 66 20M QPSK 50RB25 132322CH Bottom side 10mm Ant41

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz;Duty Cycle: 1:1

Medium: HSL1750;Medium parameters used: $f = 1745$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 38.907$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(8.01, 8.01, 8.01); Calibrated: 2023/8/7
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.483 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.54 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.774 W/kg

SAR(1 g) = 0.423 W/kg; SAR(10 g) = 0.234 W/kg

Maximum value of SAR (measured) = 0.633 W/kg

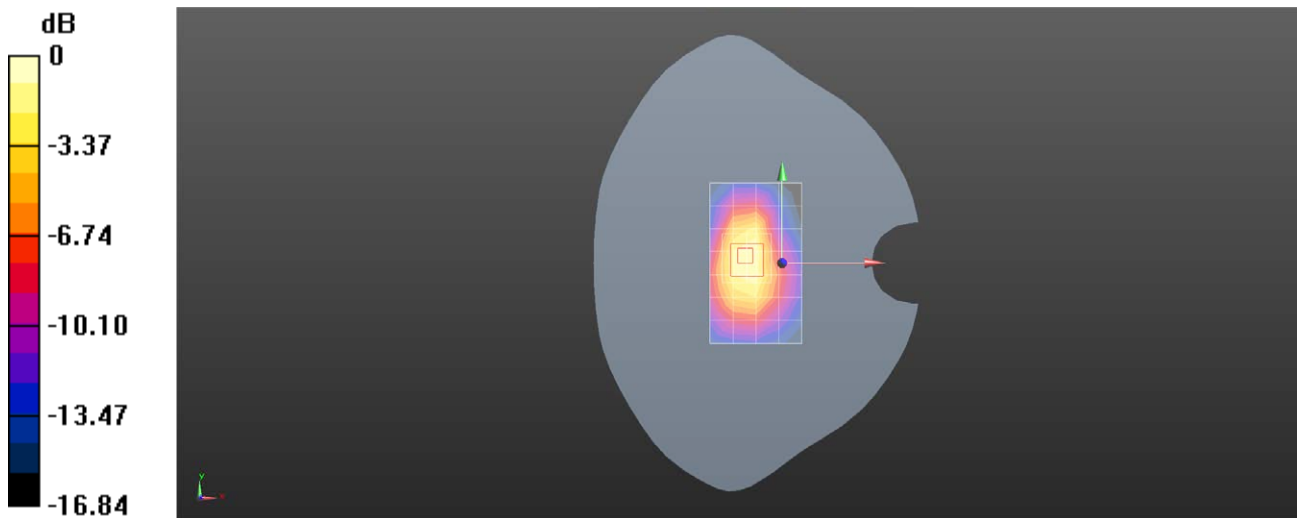

0 dB = 0.633 W/kg = -1.99 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N2 20M QPSK 1RB1 372000CH Right cheek Ant12

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz;Duty Cycle: 1:1


Medium: HSL1750;Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.247 \text{ S/m}$; $\epsilon_r = 40.619$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.63, 7.63, 7.63); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.976 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 4.486 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 1.22 W/kg
SAR(1 g) = 0.509 W/kg; SAR(10 g) = 0.231 W/kg
Maximum value of SAR (measured) = 0.889 W/kg

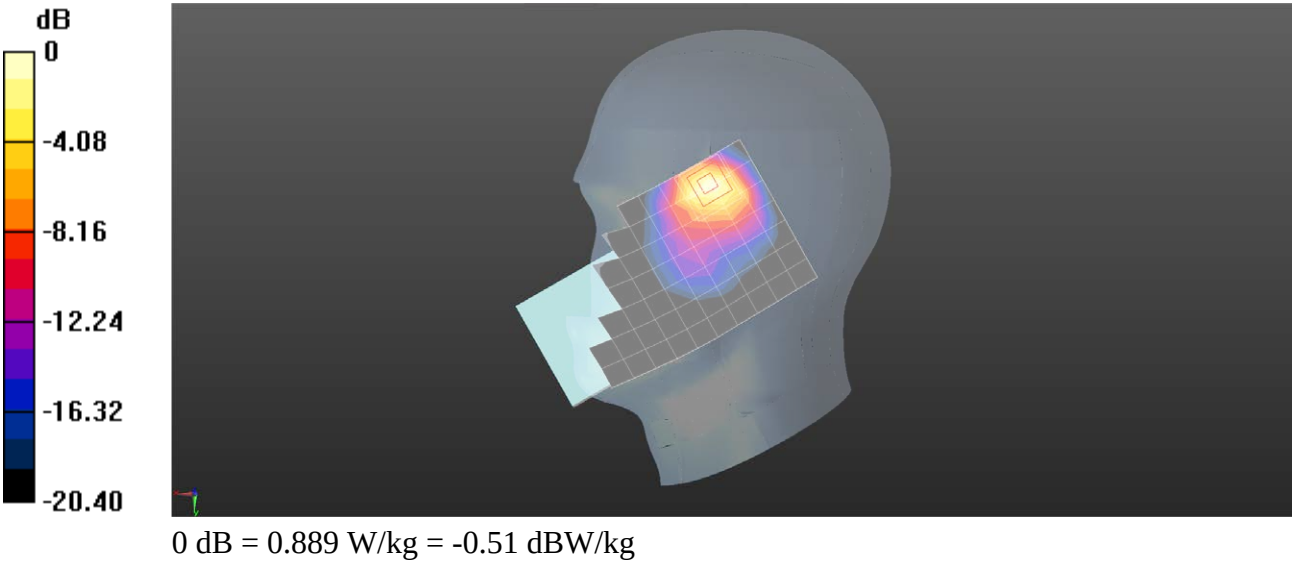

Test Laboratory: SGS-SAR Lab

V2348 5G NR N2 20M QPSK 1RB53 38000CH Back side 15mm Ant41

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, NR (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.367$ S/m; $\epsilon_r = 40.074$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.63, 7.63, 7.63); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.240 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.990 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.309 W/kg

SAR(1 g) = 0.179 W/kg; SAR(10 g) = 0.105 W/kg

Maximum value of SAR (measured) = 0.245 W/kg

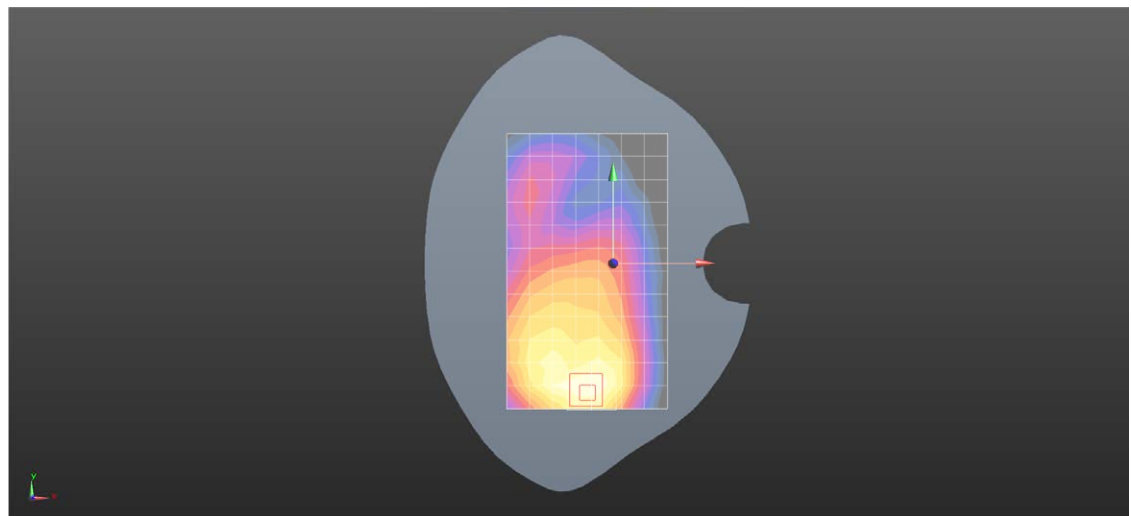

0 dB = 0.245 W/kg = -6.11 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N2 20M QPSK 1RB1 372000CH Left side 10mm Ant12

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, NR (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1860$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 40.166$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.63, 7.63, 7.63); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.727 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.18 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.934 W/kg

SAR(1 g) = 0.460 W/kg; SAR(10 g) = 0.221 W/kg

Maximum value of SAR (measured) = 0.772 W/kg

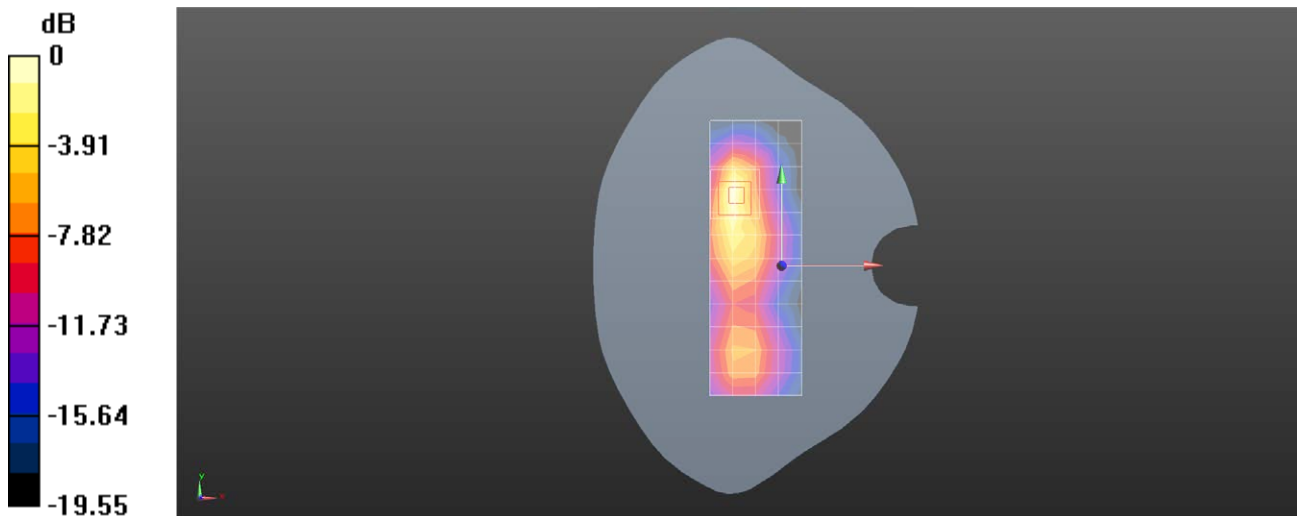

0 dB = 0.772 W/kg = -1.12 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N5 20M QPSK 50RB28 166800CH Right cheek Ant11

DUT: V2348; Type: Mobile Phone; Serial: 861380079983106

Communication System: UID 0, NR (0); Frequency: 834 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 834 \text{ MHz}$; $\sigma = 0.937 \text{ S/m}$; $\epsilon_r = 43.202$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.673 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.224 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.885 W/kg

SAR(1 g) = 0.471 W/kg ; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 0.754 W/kg

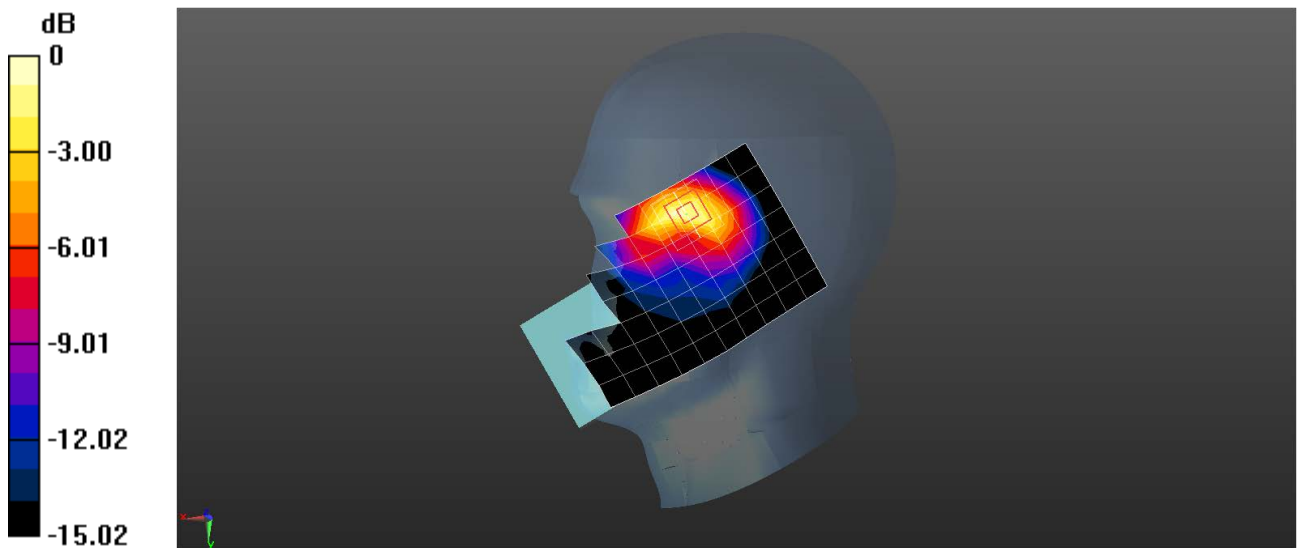

0 dB = 0.754 W/kg = -1.23 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N5 20M QPSK 50RB28 166800CH Back side 15mm Ant11

DUT: V2348; Type: Mobile Phone; Serial: 861380079983106

Communication System: UID 0, NR (0); Frequency: 834 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 834 \text{ MHz}$; $\sigma = 0.937 \text{ S/m}$; $\epsilon_r = 43.202$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.412 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.953 V/m ; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.543 W/kg

SAR(1 g) = 0.349 W/kg ; SAR(10 g) = 0.220 W/kg

Maximum value of SAR (measured) = 0.471 W/kg

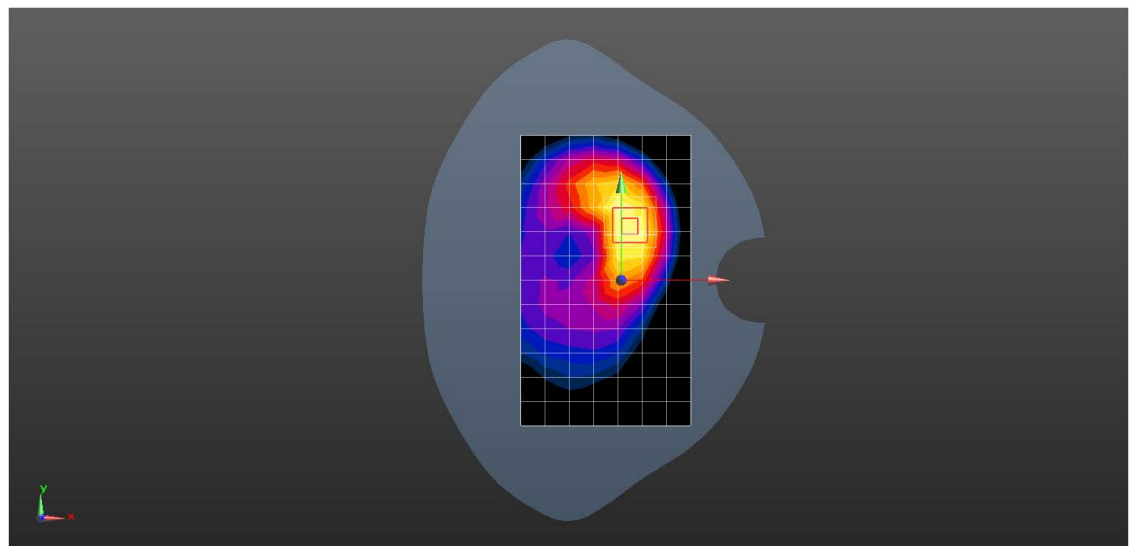

0 dB = 0.471 W/kg = -3.27 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N5 20M QPSK 1RB1 166800CH Left side 10mm Ant11

DUT: V2348; Type: Mobile Phone; Serial: 861380079983106

Communication System: UID 0, NR (0); Frequency: 834 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 834 \text{ MHz}$; $\sigma = 0.937 \text{ S/m}$; $\epsilon_r = 43.202$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.759 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.96 V/m ; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.915 W/kg

SAR(1 g) = 0.521 W/kg ; SAR(10 g) = 0.294 W/kg

Maximum value of SAR (measured) = 0.778 W/kg

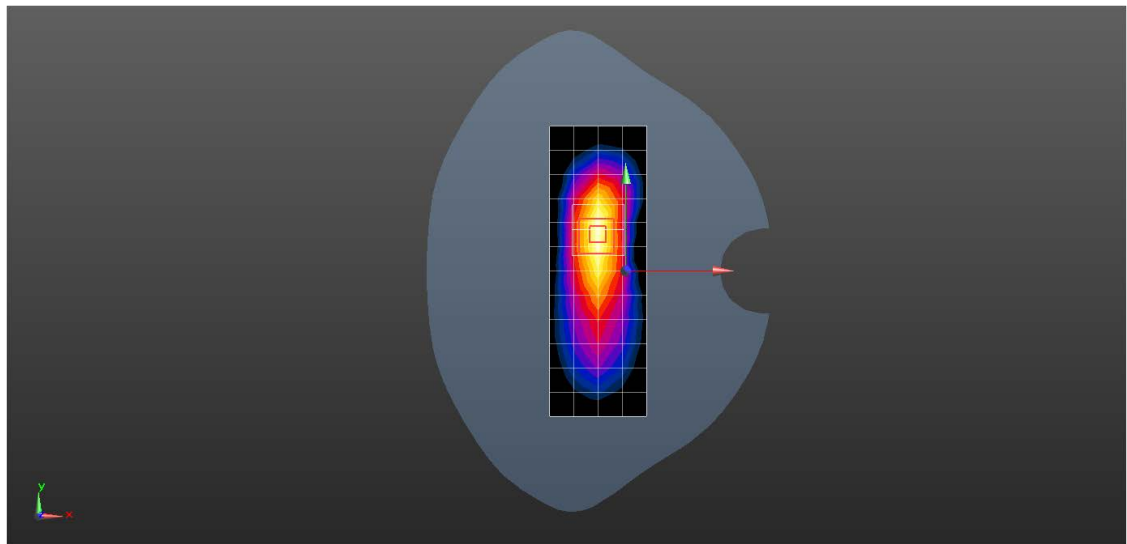

0 dB = 0.778 W/kg = -1.09 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N7 40M QPSK 108RB54 510000CH Right cheek Ant14

DUT: V2348; Type: Mobile Phone; Serial: 862303079999491

Communication System: UID 0, NR (0); Frequency: 2550 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2550$ MHz; $\sigma = 1.926$ S/m; $\epsilon_r = 39.536$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.02, 8.02, 8.02); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.715 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.058 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.545 W/kg; SAR(10 g) = 0.252 W/kg

Maximum value of SAR (measured) = 0.895 W/kg

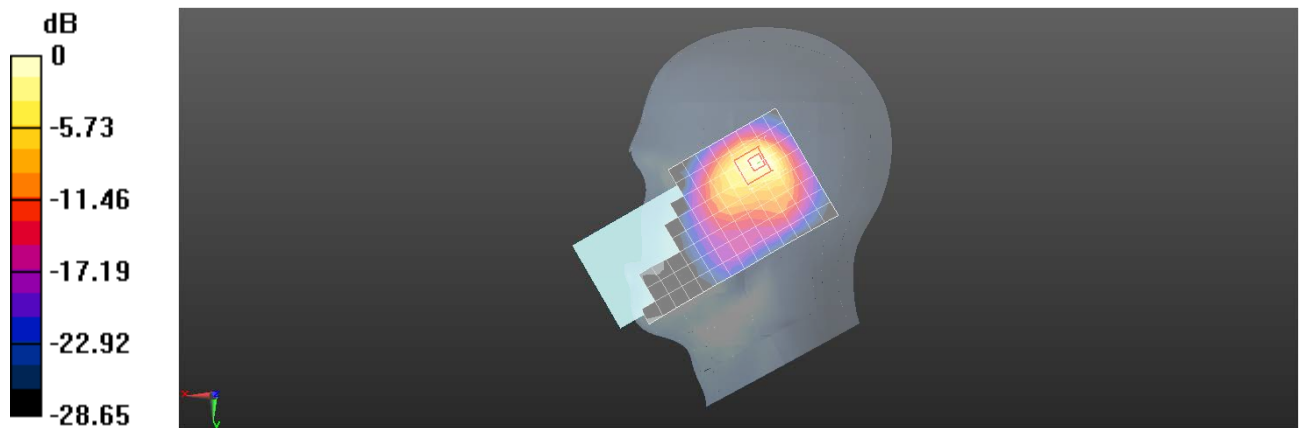

0 dB = 0.895 W/kg = -0.48 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N7 40M QPSK 108RB54 504000CH Back side 15mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, NR (0); Frequency: 2520 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2520$ MHz; $\sigma = 1.894$ S/m; $\epsilon_r = 39.667$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.02, 8.02, 8.02); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.592 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.033 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.712 W/kg

SAR(1 g) = 0.359 W/kg; SAR(10 g) = 0.182 W/kg

Maximum value of SAR (measured) = 0.574 W/kg

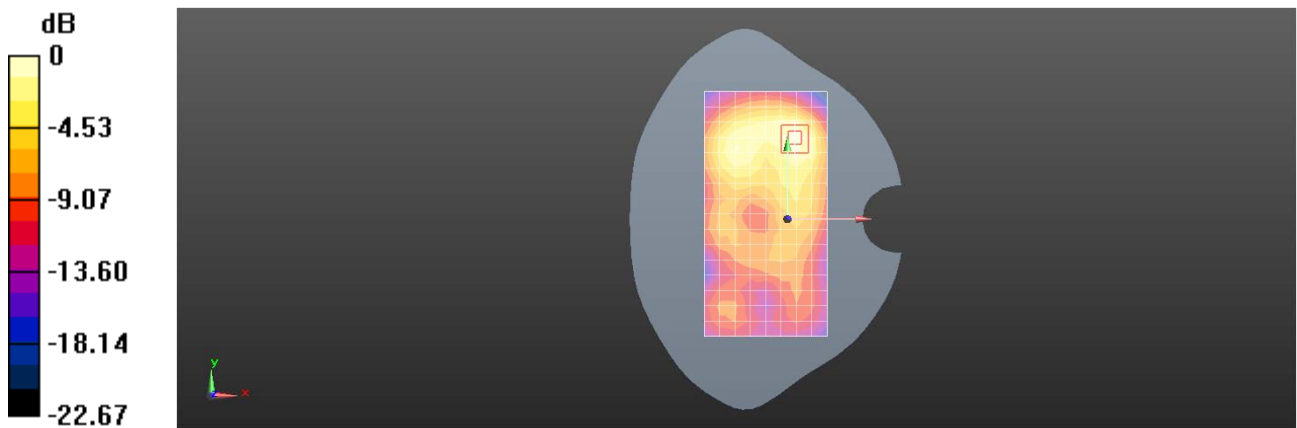

0 dB = 0.574 W/kg = -2.41 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N7 40M QPSK 108RB54 510000CH Right side 10mm Ant24

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, NR (0); Frequency: 2550 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2550$ MHz; $\sigma = 1.926$ S/m; $\epsilon_r = 39.536$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.02, 8.02, 8.02); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.497 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.9660 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.768 W/kg

SAR(1 g) = 0.354 W/kg; SAR(10 g) = 0.157 W/kg

Maximum value of SAR (measured) = 0.610 W/kg

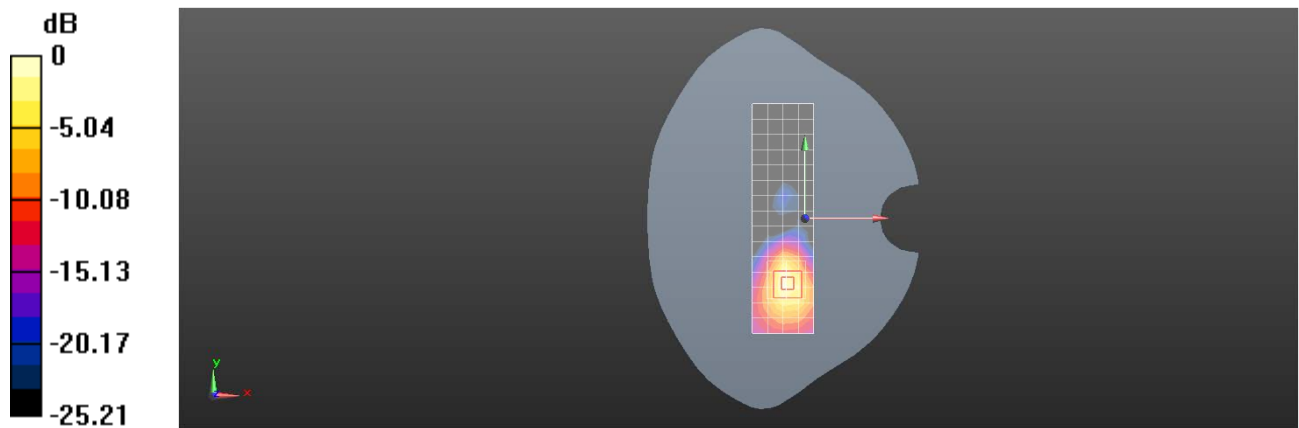

0 dB = 0.610 W/kg = -2.15 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N26 20M QPSK 1RB104 164800CH Right cheek Ant11

DUT: V2348; Type: Mobile Phone; Serial: 861380079983106

Communication System: UID 0, NR (0); Frequency: 824 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 824 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 43.266$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.450 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.411 V/m ; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.622 W/kg

SAR(1 g) = 0.332 W/kg ; SAR(10 g) = 0.183 W/kg

Maximum value of SAR (measured) = 0.529 W/kg

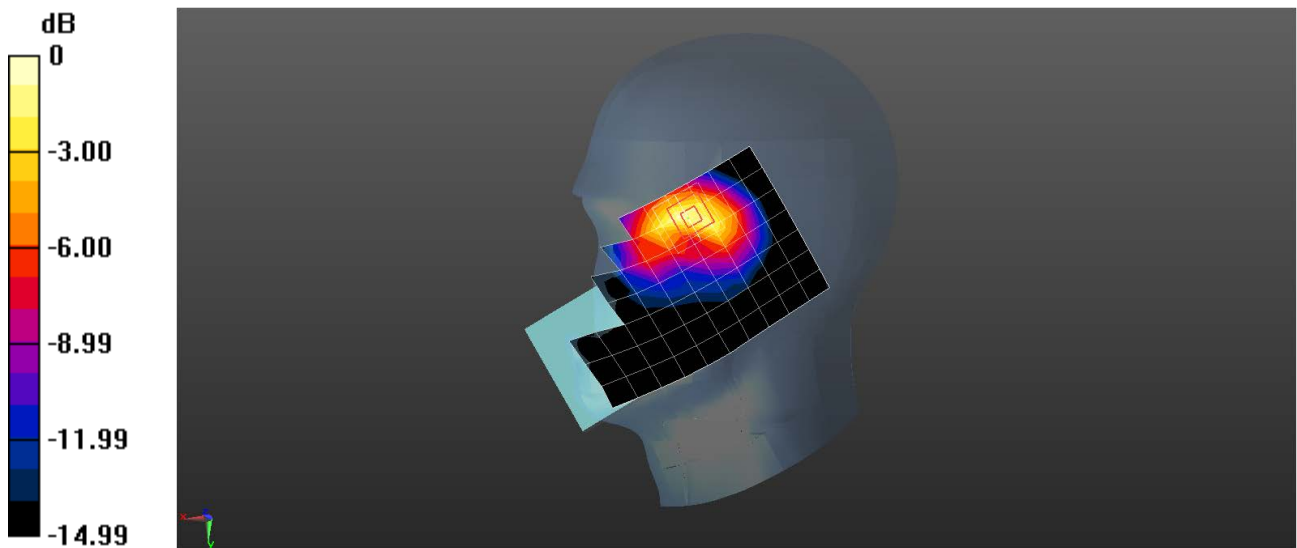

0 dB = 0.529 W/kg = -2.77 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N26 20M QPSK 1RB104 164800CH Back side 15mm Ant11

DUT: V2348; Type: Mobile Phone; Serial: 861380079983106

Communication System: UID 0, NR (0); Frequency: 824 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 824 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 43.266$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.207 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.513 V/m ; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.249 W/kg

SAR(1 g) = 0.166 W/kg ; SAR(10 g) = 0.105 W/kg

Maximum value of SAR (measured) = 0.223 W/kg

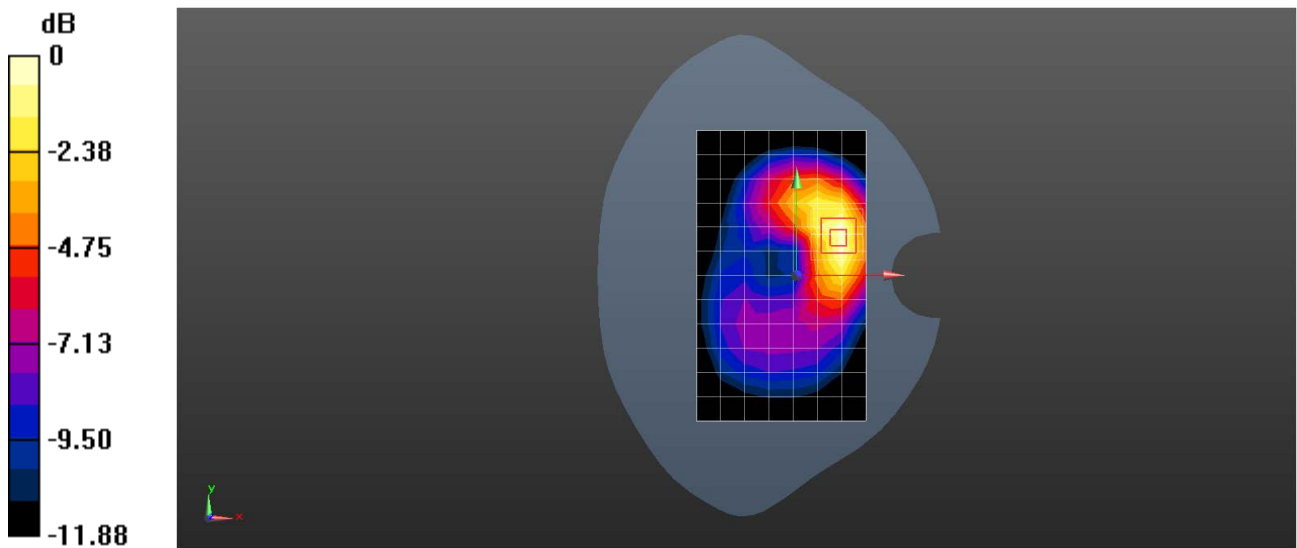

0 dB = 0.223 W/kg = -6.52 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N26 20M QPSK 1RB104 164800CH Left side 10mm Ant11

DUT: V2348; Type: Mobile Phone; Serial: 861380079983106

Communication System: UID 0, NR (0); Frequency: 824 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 824 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 43.266$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.765 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.56 V/m ; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.916 W/kg

SAR(1 g) = 0.518 W/kg ; SAR(10 g) = 0.289 W/kg

Maximum value of SAR (measured) = 0.781 W/kg

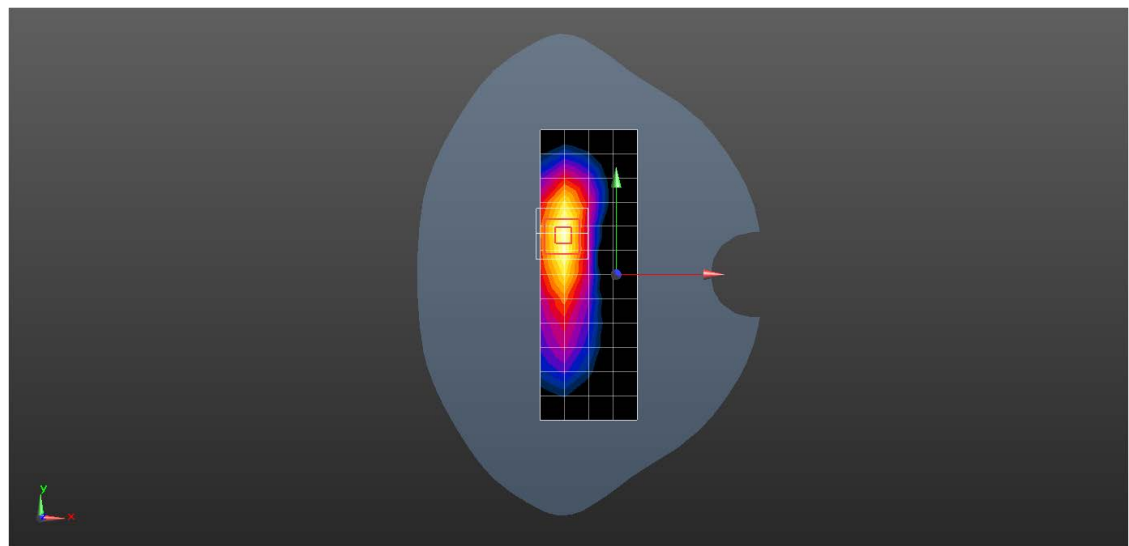

0 dB = 0.781 W/kg = -1.07 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N38 40M QPSK 50RB28 518000CH Left cheek Ant24

DUT: V2348; Type: Mobile Phone; Serial: 862303079999491

Communication System: UID 0, NR (0); Frequency: 2590 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2590$ MHz; $\sigma = 1.934$ S/m; $\epsilon_r = 40.198$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.02, 8.02, 8.02); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.806 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.301 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.563 W/kg; SAR(10 g) = 0.232 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

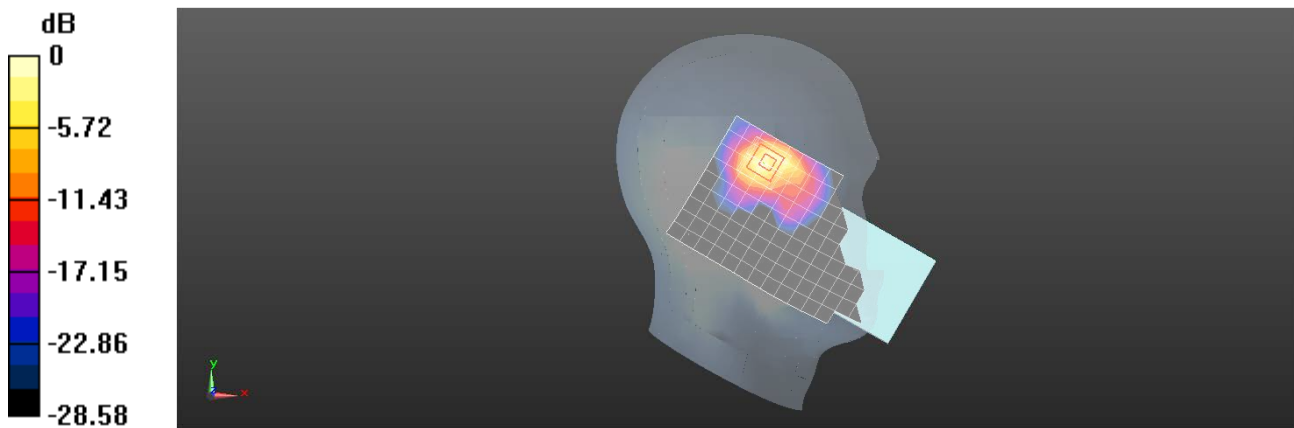

0 dB = 1.01 W/kg = 0.04 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N38 40M QPSK 1RB1 520000CH Back side 15mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, NR (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.945$ S/m; $\epsilon_r = 40.167$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.02, 8.02, 8.02); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.399 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.5030 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.572 W/kg

SAR(1 g) = 0.301 W/kg; SAR(10 g) = 0.150 W/kg

Maximum value of SAR (measured) = 0.471 W/kg

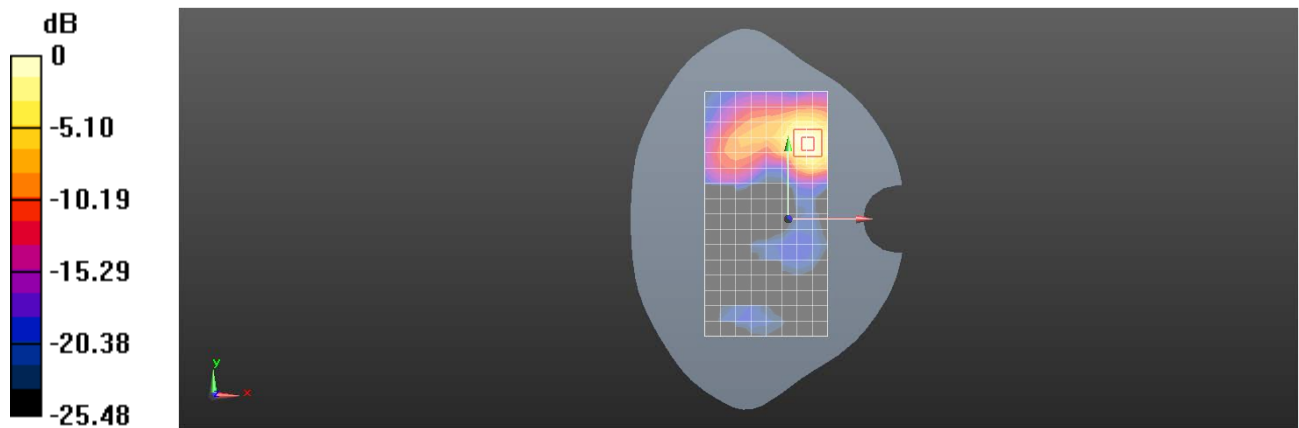

0 dB = 0.471 W/kg = -3.27 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N38 40M QPSK 1RB1 519000CH Top side 10mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, NR (0); Frequency: 2595 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2595$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 40.18$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.02, 8.02, 8.02); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.588 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.25 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.910 W/kg

SAR(1 g) = 0.445 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.737 W/kg

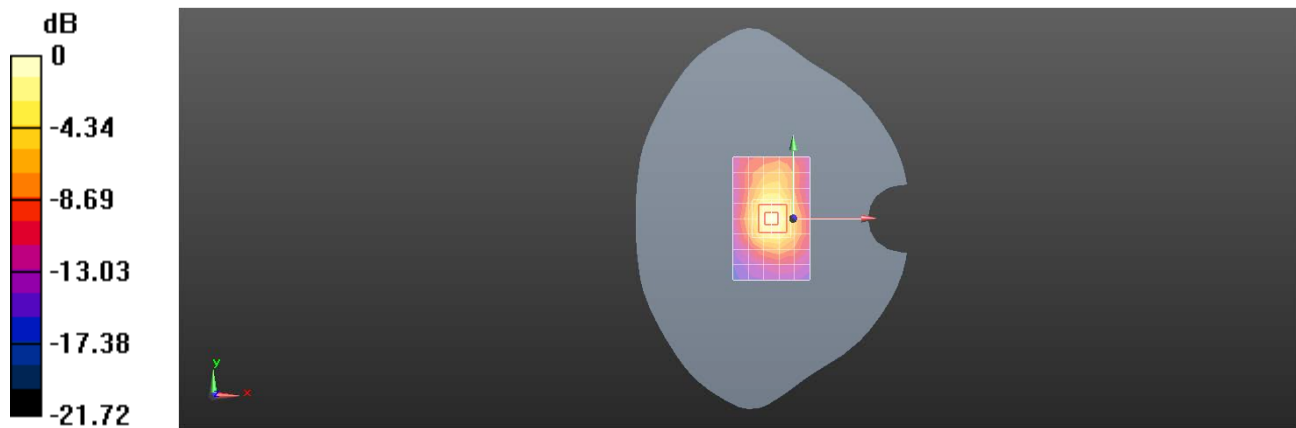

0 dB = 0.737 W/kg = -1.33 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N41 100M QPSK 1RB1 528000CH Right cheek Ant14

DUT: V2348; Type: Mobile Phone; Serial: 862303079999491

Communication System: UID 0, NR (0); Frequency: 2640 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2640$ MHz; $\sigma = 2.013$ S/m; $\epsilon_r = 39.768$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.02, 8.02, 8.02); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.747 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.654 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.550 W/kg; SAR(10 g) = 0.255 W/kg

Maximum value of SAR (measured) = 0.888 W/kg

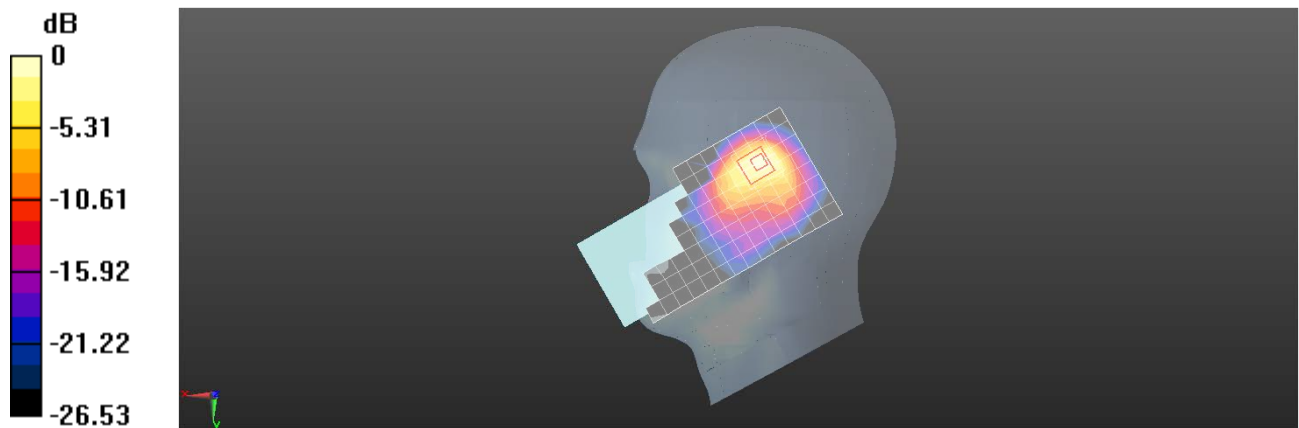

0 dB = 0.888 W/kg = -0.52 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N41 100M QPSK 135RB69 513900CH Back side 15mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 862303079999491

Communication System: UID 0, NR (0); Frequency: 2569.5 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2569.5$ MHz; $\sigma = 1.929$ S/m; $\epsilon_r = 39.993$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.02, 8.02, 8.02); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.430 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.374 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.590 W/kg

SAR(1 g) = 0.292 W/kg; SAR(10 g) = 0.148 W/kg

Maximum value of SAR (measured) = 0.473 W/kg

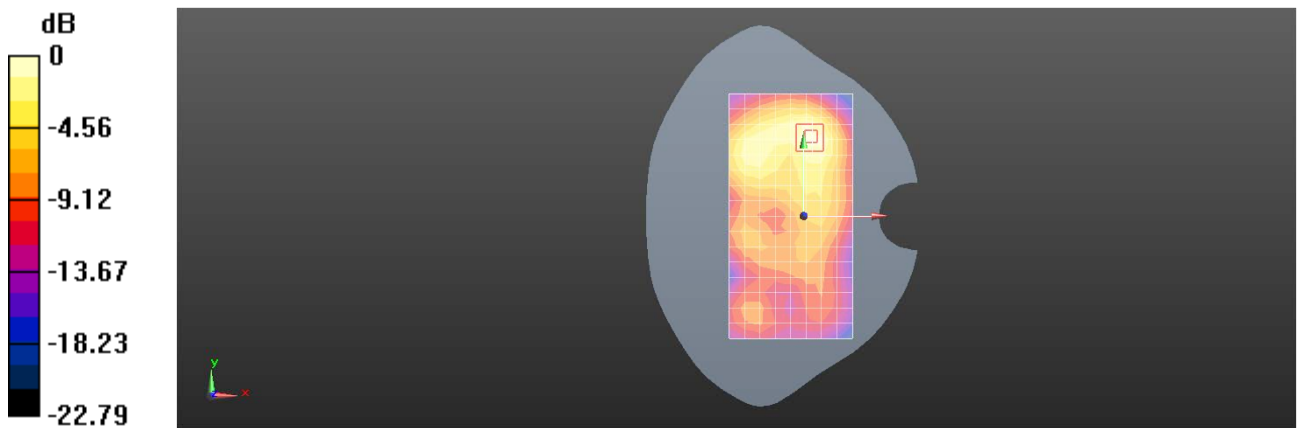

0 dB = 0.473 W/kg = -3.25 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N41 100M QPSK 135RB69 518598CH Back side 10mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 862303079999491

Communication System: UID 0, NR (0); Frequency: 2640 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2640$ MHz; $\sigma = 2.013$ S/m; $\epsilon_r = 39.768$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.02, 8.02, 8.02); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.864 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.751 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.538 W/kg; SAR(10 g) = 0.261 W/kg

Maximum value of SAR (measured) = 0.896 W/kg

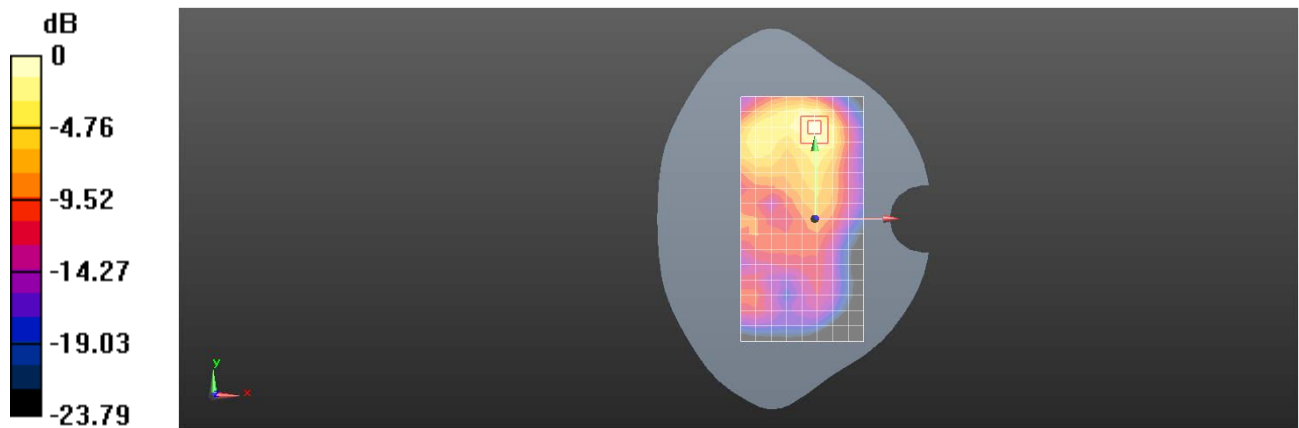

Test Laboratory: SGS-SAR Lab

V2348 5G NR N66 40M QPSK 1RB214 349000CH Right cheek Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.303$ S/m; $\epsilon_r = 39.04$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(8.01, 8.01, 8.01); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.764 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.37 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.558 W/kg; SAR(10 g) = 0.297 W/kg

Maximum value of SAR (measured) = 0.906 W/kg

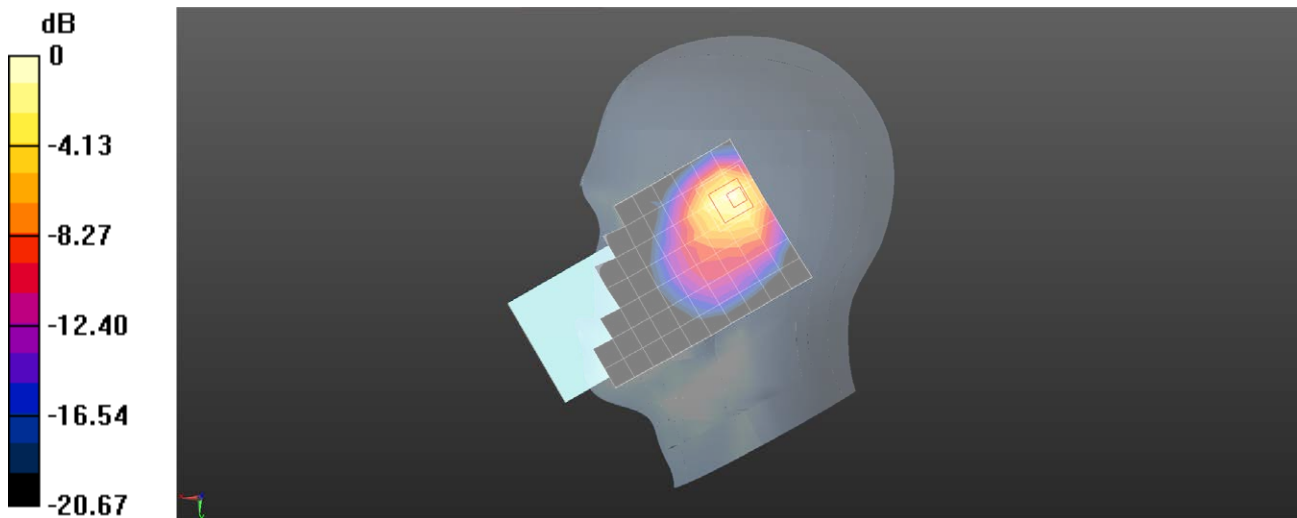

0 dB = 0.906 W/kg = -0.43 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N66 40M QPSK 108RB54 352000CH Back side 15mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, NR (0); Frequency: 1760 MHz;Duty Cycle: 1:1

Medium: HSL1750;Medium parameters used: $f = 1760 \text{ MHz}$; $\sigma = 1.319 \text{ S/m}$; $\epsilon_r = 38.963$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(8.01, 8.01, 8.01); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.445 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.490 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.574 W/kg

SAR(1 g) = 0.360 W/kg; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 0.494 W/kg

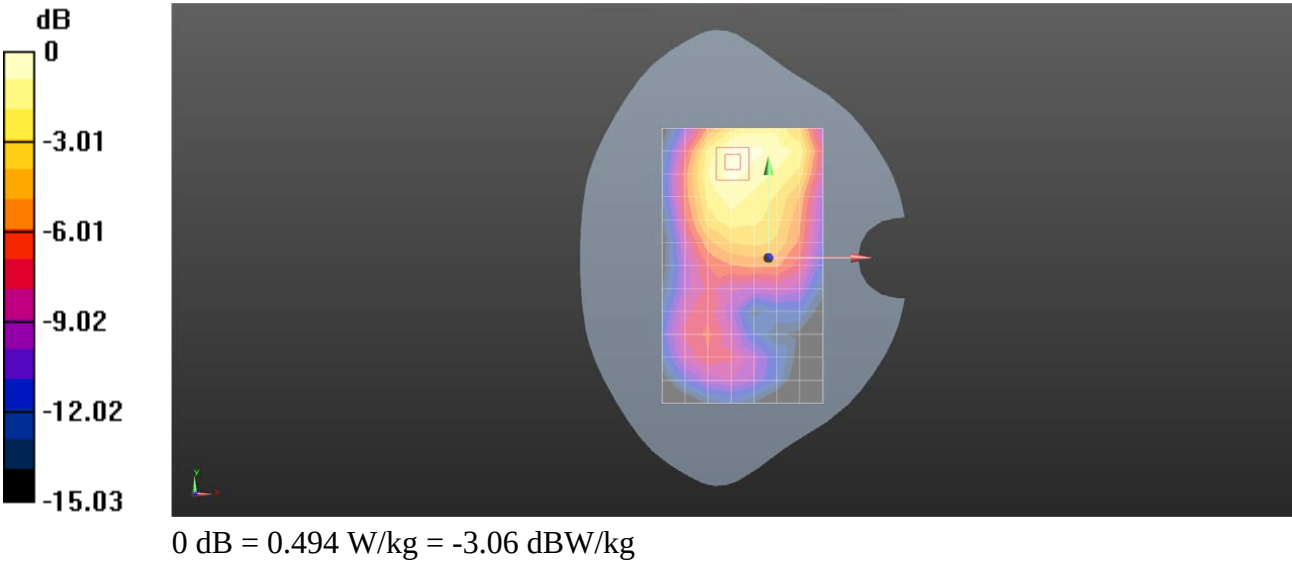

Test Laboratory: SGS-SAR Lab

V2348 5G NR N66 40M QPSK 1RB214 349000CH Top side 10mm Ant12

DUT: V2348; Type: Mobile Phone; Serial: 866897079999399

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.387$ S/m; $\epsilon_r = 40.568$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(8.01, 8.01, 8.01); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.463 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.85 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.732 W/kg

SAR(1 g) = 0.410 W/kg; SAR(10 g) = 0.233 W/kg

Maximum value of SAR (measured) = 0.611 W/kg

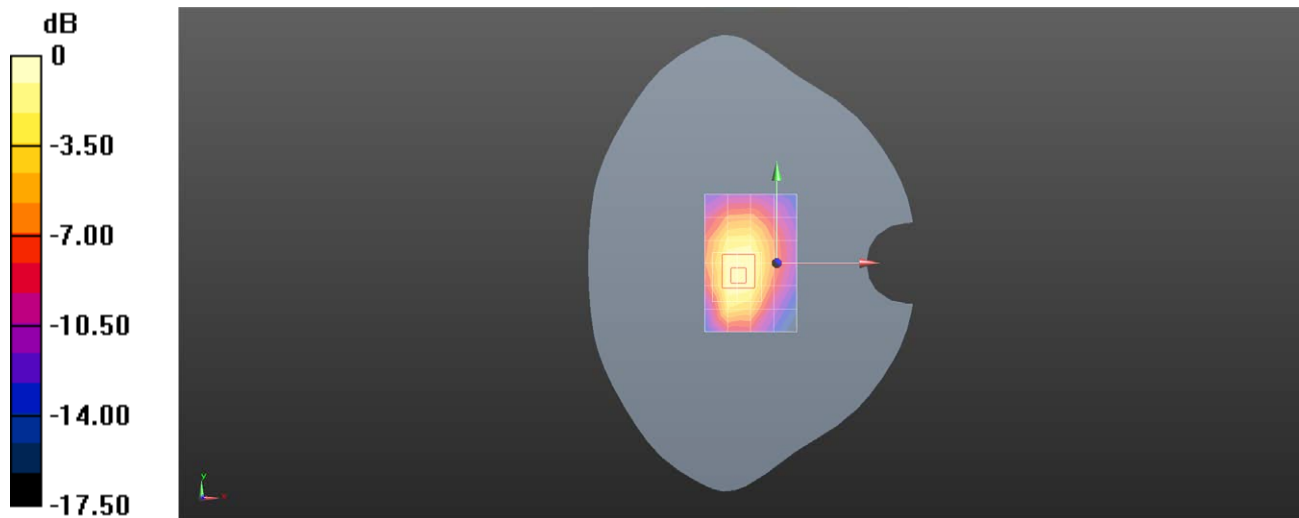

0 dB = 0.611 W/kg = -2.14 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N77 100M QPSK 1RB1 633334CH Left tilted Ant21

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 2.827$ S/m; $\epsilon_r = 37.731$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.48, 6.48, 6.48); Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Head/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.13 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.48 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.625 W/kg; SAR(10 g) = 0.265 W/kg

Maximum value of SAR (measured) = 1.15 W/kg

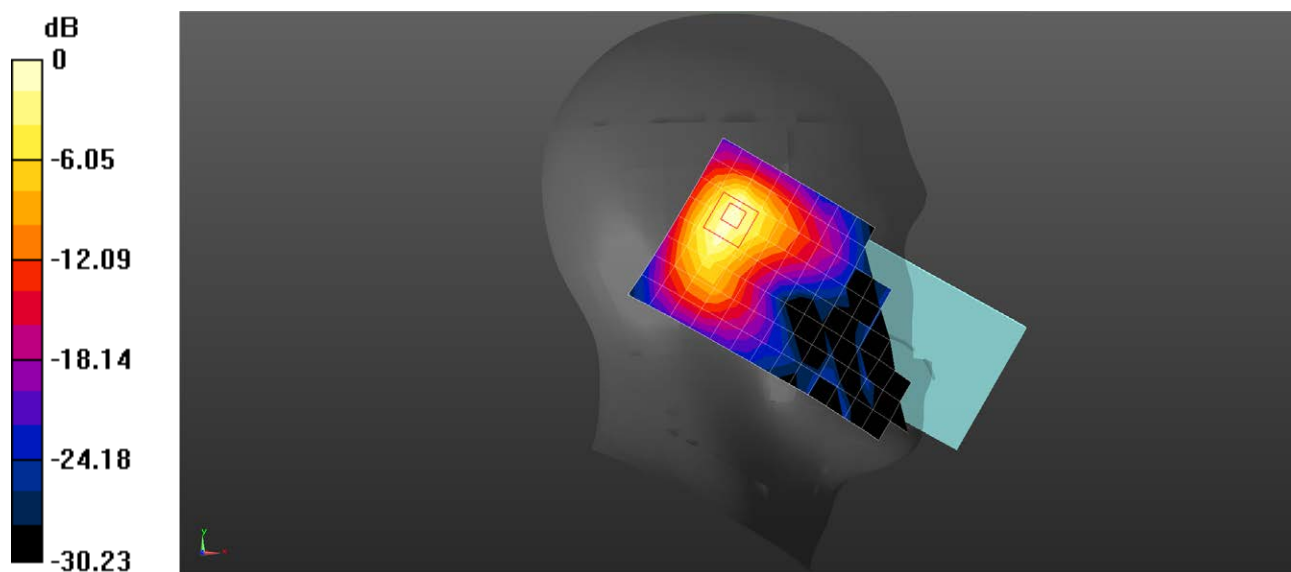

0 dB = 1.15 W/kg = 0.61 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N77 100M QPSK 1RB271 633334CH Back side 15mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 2.827$ S/m; $\epsilon_r = 37.731$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.48, 6.48, 6.48); Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.635 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.7830 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.903 W/kg

SAR(1 g) = 0.384 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 0.689 W/kg

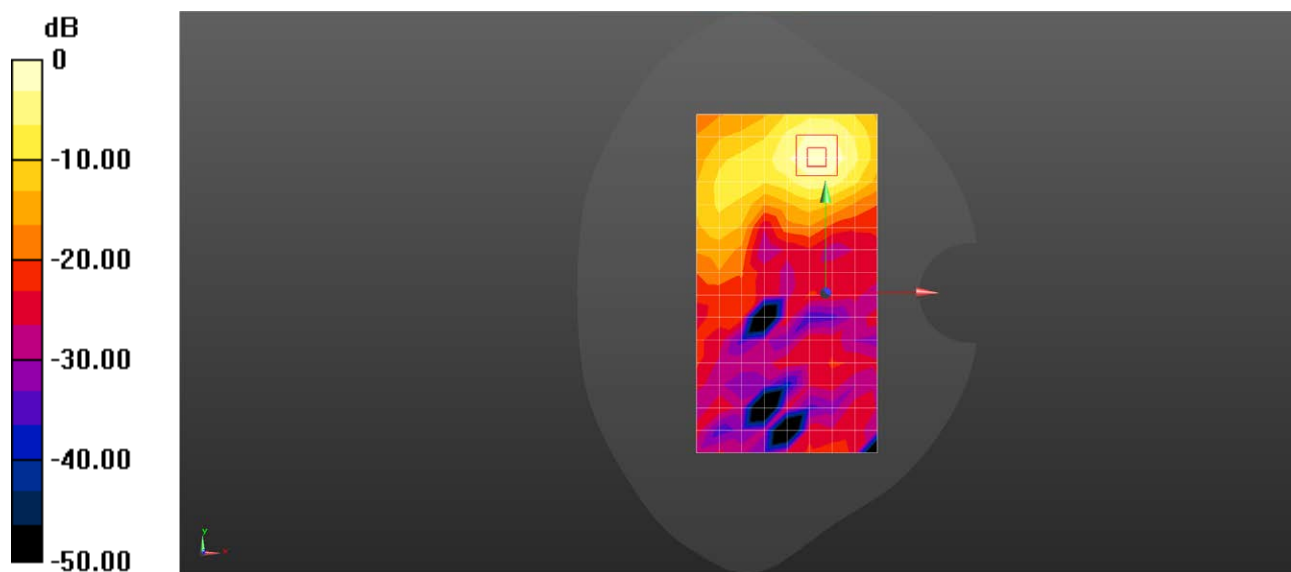

0 dB = 0.689 W/kg = -1.62 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N77 100M QPSK 1RB271 633334CH Top side 10mm Ant23

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 2.827$ S/m; $\epsilon_r = 37.731$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.48, 6.48, 6.48); Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (6x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.675 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.133 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.425 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 0.816 W/kg

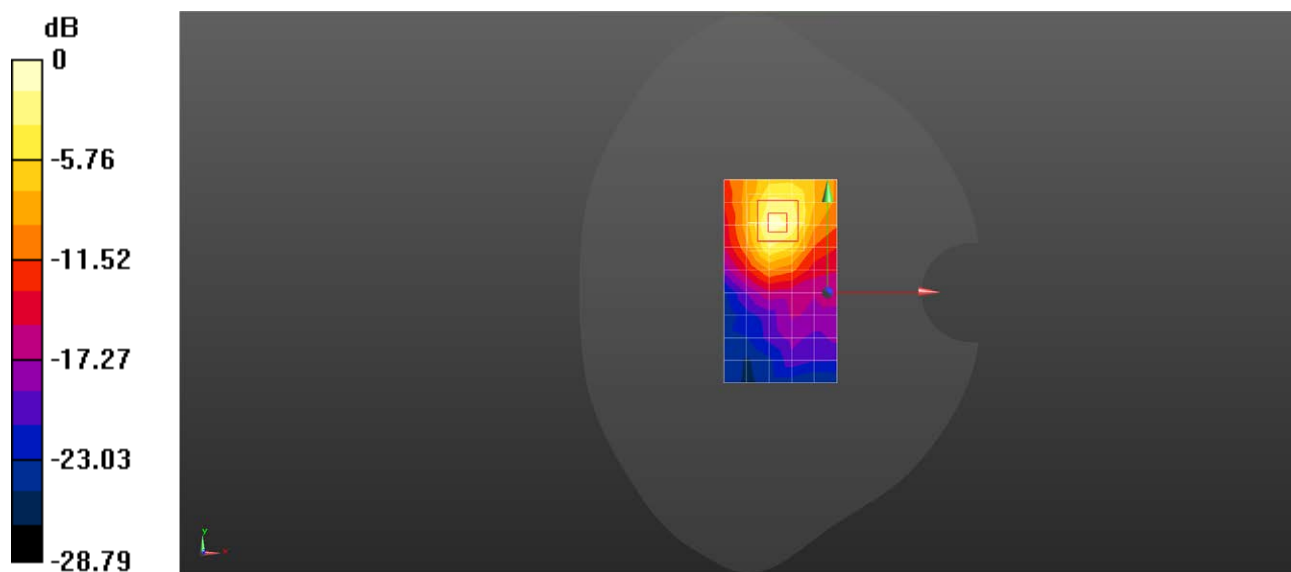

0 dB = 0.816 W/kg = -0.88 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N77 100M QPSK 1RB271 633334CH Top side 0mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 2.827$ S/m; $\epsilon_r = 37.731$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.48, 6.48, 6.48); Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (6x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 7.26 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.16 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 19.3 W/kg

SAR(1 g) = 5.08 W/kg; SAR(10 g) = 1.39 W/kg

Maximum value of SAR (measured) = 12.5 W/kg

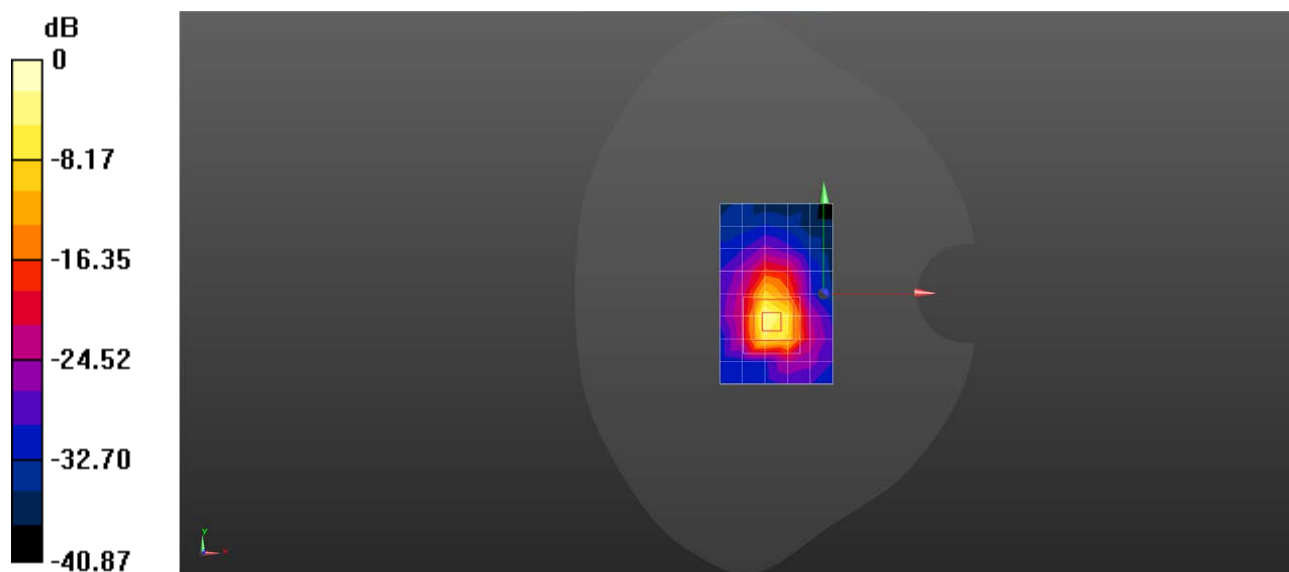

0 dB = 12.5 W/kg = 10.97 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N77 100M QPSK 1RB137 652400CH Right tilted Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, NR (0); Frequency: 3786 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3786$ MHz; $\sigma = 3.125$ S/m; $\epsilon_r = 36.618$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.3, 6.3, 6.3); Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Head/Area Scan (10x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.927 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.362 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 0.610 W/kg; SAR(10 g) = 0.194 W/kg

Maximum value of SAR (measured) = 1.30 W/kg

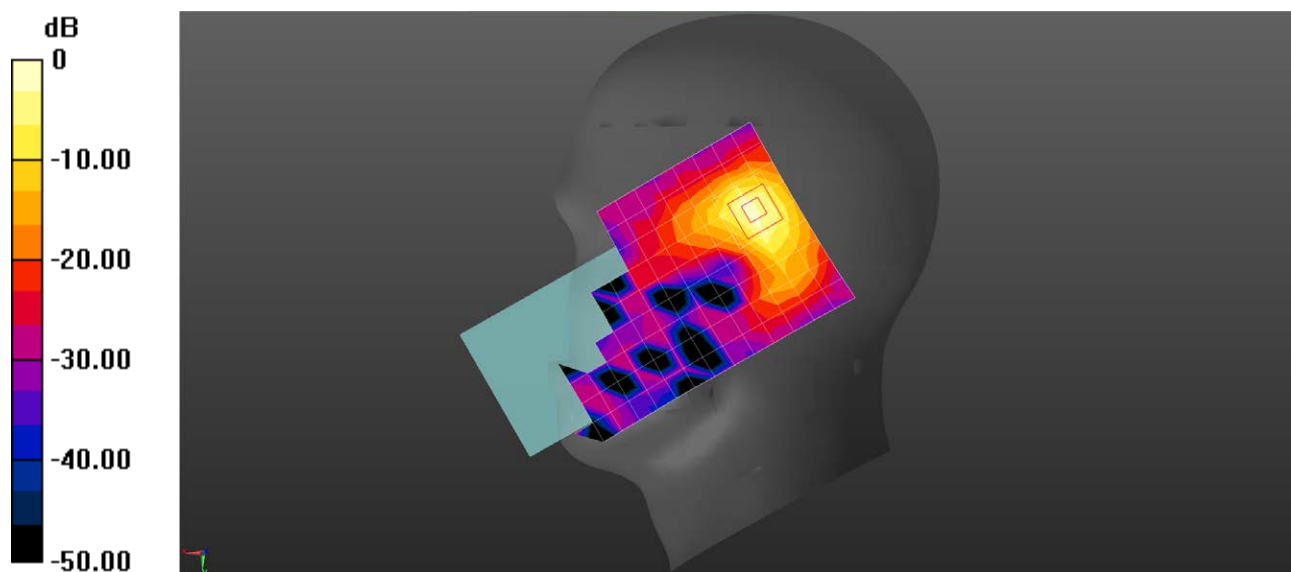

0 dB = 1.30 W/kg = 1.14 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N77 100M QPSK 135RB69 650000CH Back side 15mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3750$ MHz; $\sigma = 3.087$ S/m; $\epsilon_r = 36.746$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.3, 6.3, 6.3); Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Head/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.646 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.045 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.953 W/kg

SAR(1 g) = 0.392 W/kg; SAR(10 g) = 0.174 W/kg

Maximum value of SAR (measured) = 0.715 W/kg

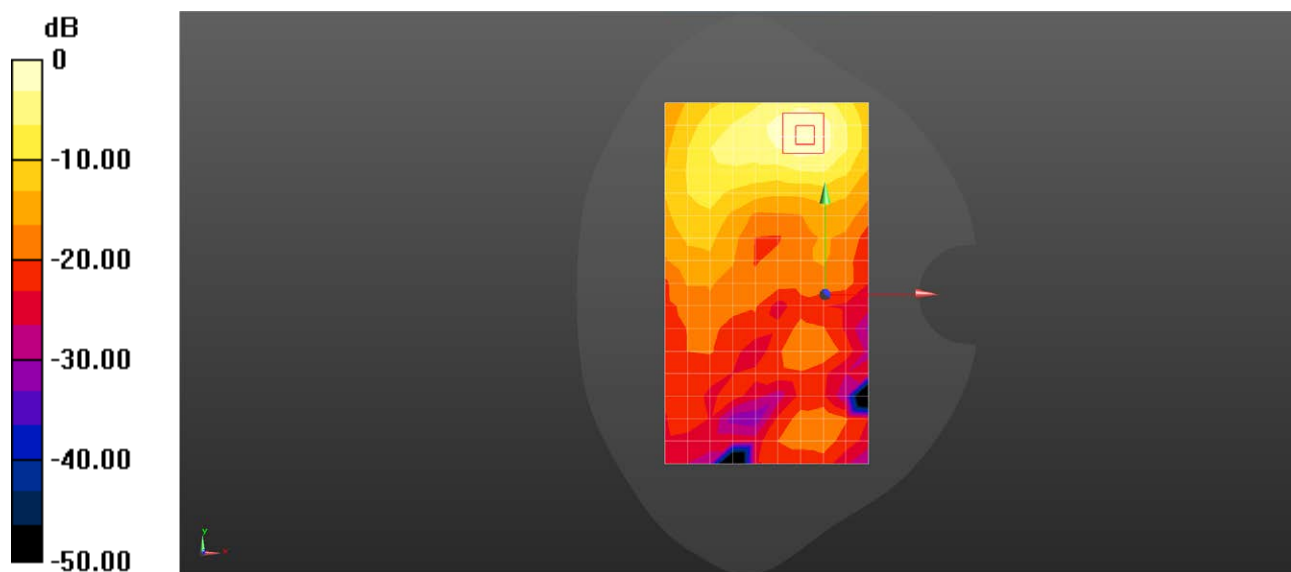

0 dB = 0.715 W/kg = -1.46 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N77 100M QPSK 135RB69 652400CH Top side 10mm Ant14**DUT: V2348; Type: Mobile Phone; Serial: 861380079983247**

Communication System: UID 0, NR (0); Frequency: 3786 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3786$ MHz; $\sigma = 3.125$ S/m; $\epsilon_r = 36.618$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.3, 6.3, 6.3); Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (6x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.08 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.660 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.557 W/kg; SAR(10 g) = 0.222 W/kg

Maximum value of SAR (measured) = 1.07 W/kg

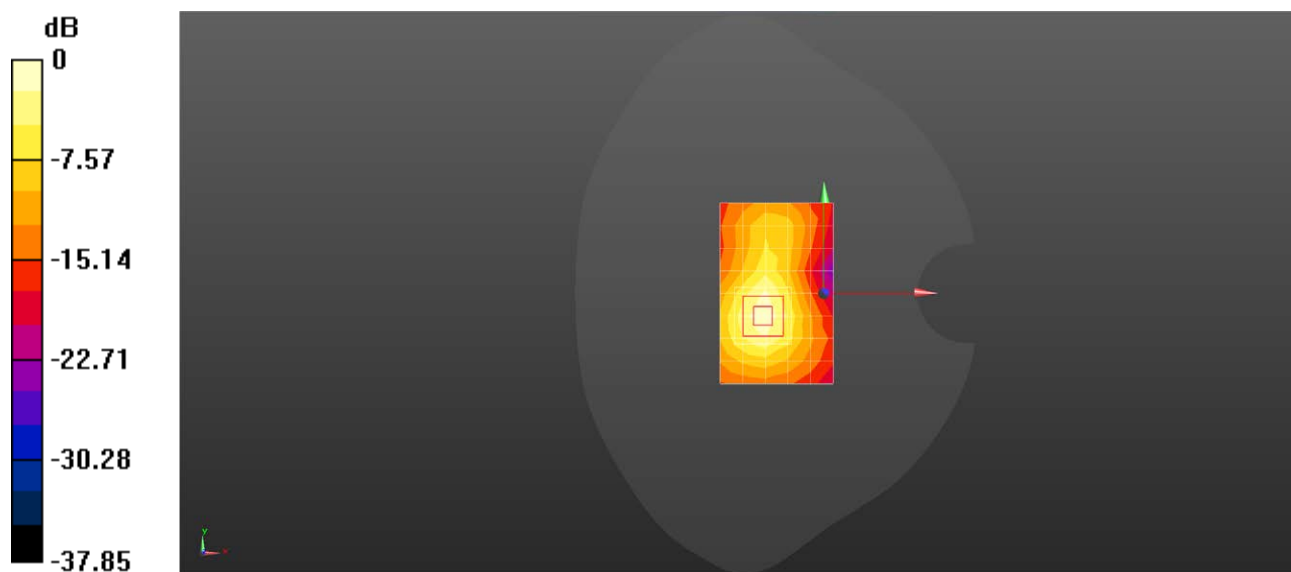

0 dB = 1.07 W/kg = 0.29 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N77 100M QPSK 135RB69 652400CH Top side 0mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, NR (0); Frequency: 3786 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3786$ MHz; $\sigma = 3.125$ S/m; $\epsilon_r = 36.618$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.3, 6.3, 6.3); Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (6x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 8.11 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.66 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 24.0 W/kg

SAR(1 g) = 5.79 W/kg; SAR(10 g) = 1.51 W/kg

Maximum value of SAR (measured) = 15.2 W/kg

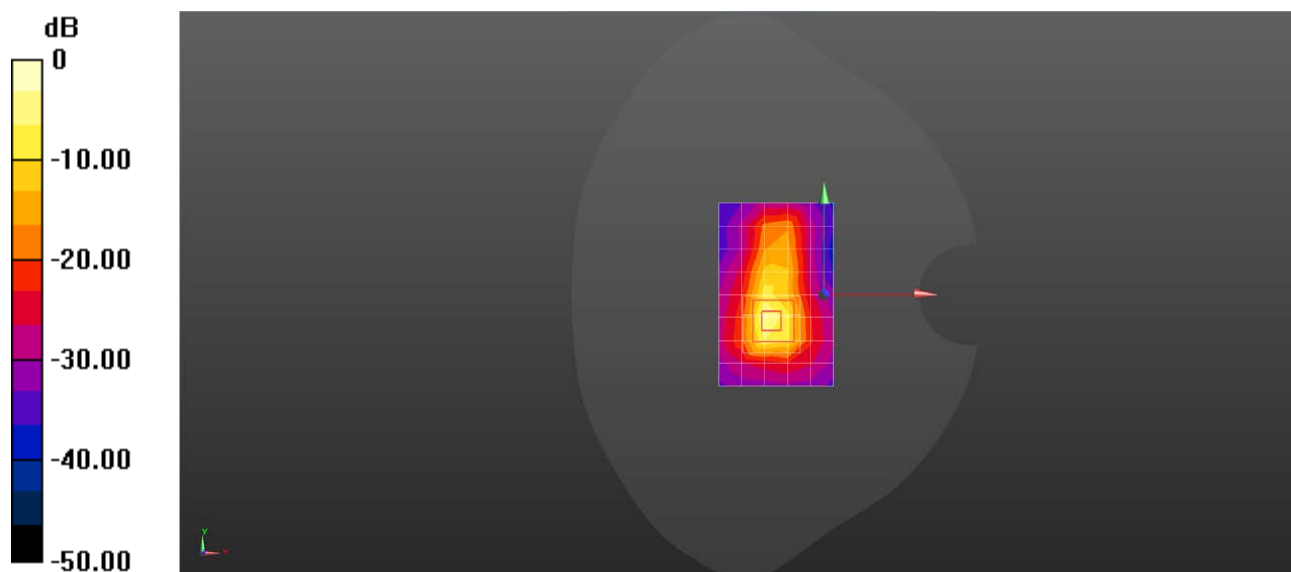

0 dB = 15.2 W/kg = 11.82 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N78 100M QPSK 1RB1 633334CH Left tilted Ant21

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 2.83$ S/m; $\epsilon_r = 37.749$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.48, 6.48, 6.48); Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Head/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.12 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.09 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.635 W/kg; SAR(10 g) = 0.272 W/kg

Maximum value of SAR (measured) = 1.15 W/kg

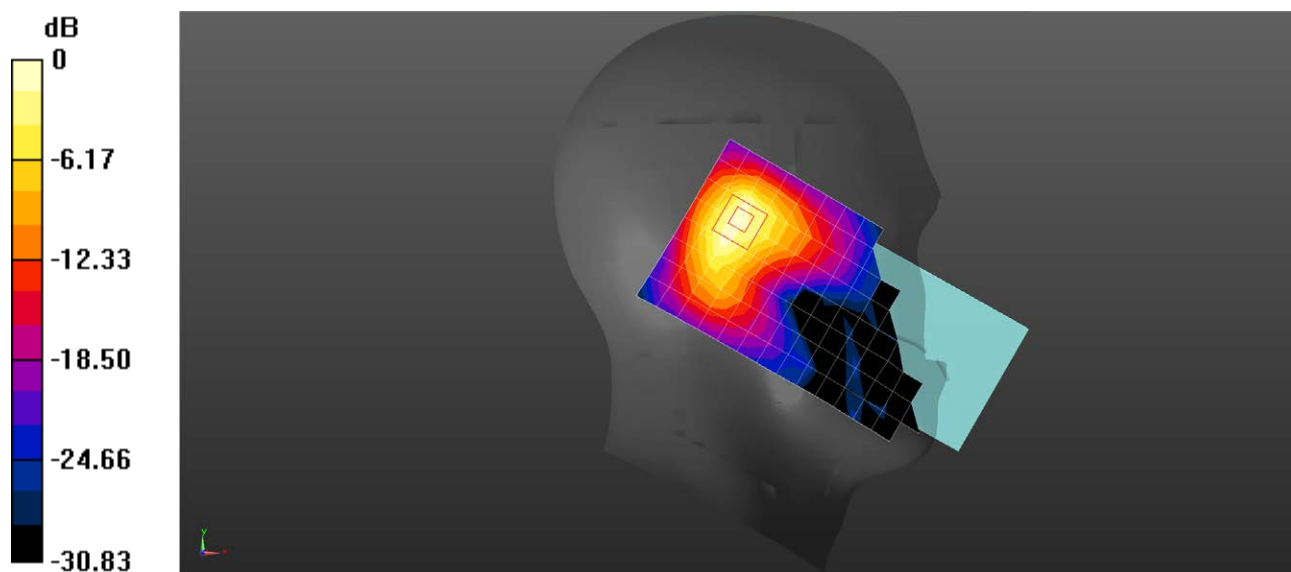

0 dB = 1.15 W/kg = 0.61 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N78 100M QPSK 135RB69 633334CH Back side 15mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 2.83$ S/m; $\epsilon_r = 37.749$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.48, 6.48, 6.48); Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.516 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.3910 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.730 W/kg

SAR(1 g) = 0.311 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.556 W/kg

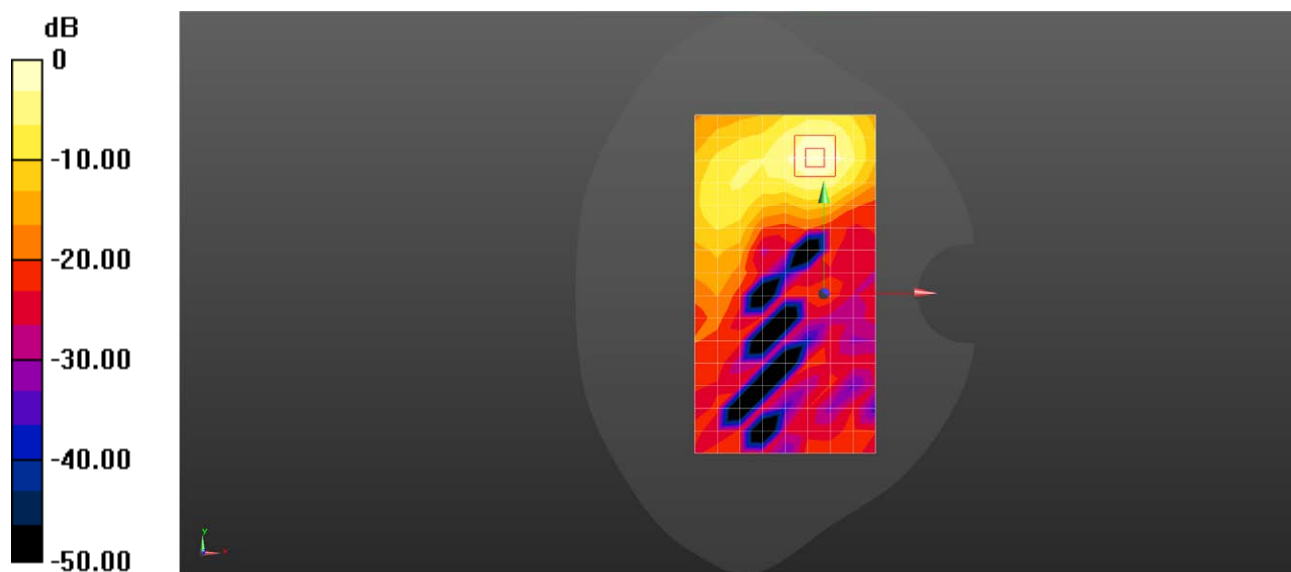

0 dB = 0.556 W/kg = -2.55 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N78 100M QPSK 135RB69 633334CH Top side 10mm Ant23

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 2.83$ S/m; $\epsilon_r = 37.749$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.48, 6.48, 6.48); Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (6x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.602 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.950 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.955 W/kg

SAR(1 g) = 0.366 W/kg; SAR(10 g) = 0.141 W/kg

Maximum value of SAR (measured) = 0.702 W/kg

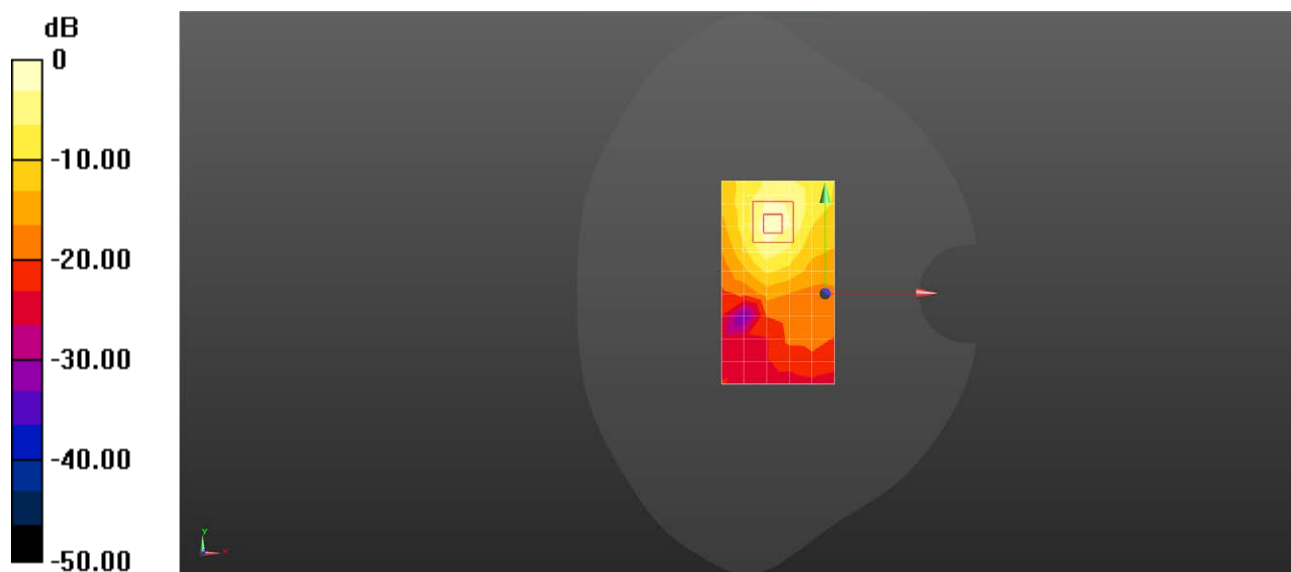

0 dB = 0.702 W/kg = -1.54 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N78 100M QPSK 135RB69 633334CH Top side 0mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 2.83$ S/m; $\epsilon_r = 37.749$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.48, 6.48, 6.48); Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (6x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 7.03 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.30 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 4.93 W/kg; SAR(10 g) = 1.35 W/kg

Maximum value of SAR (measured) = 12.4 W/kg

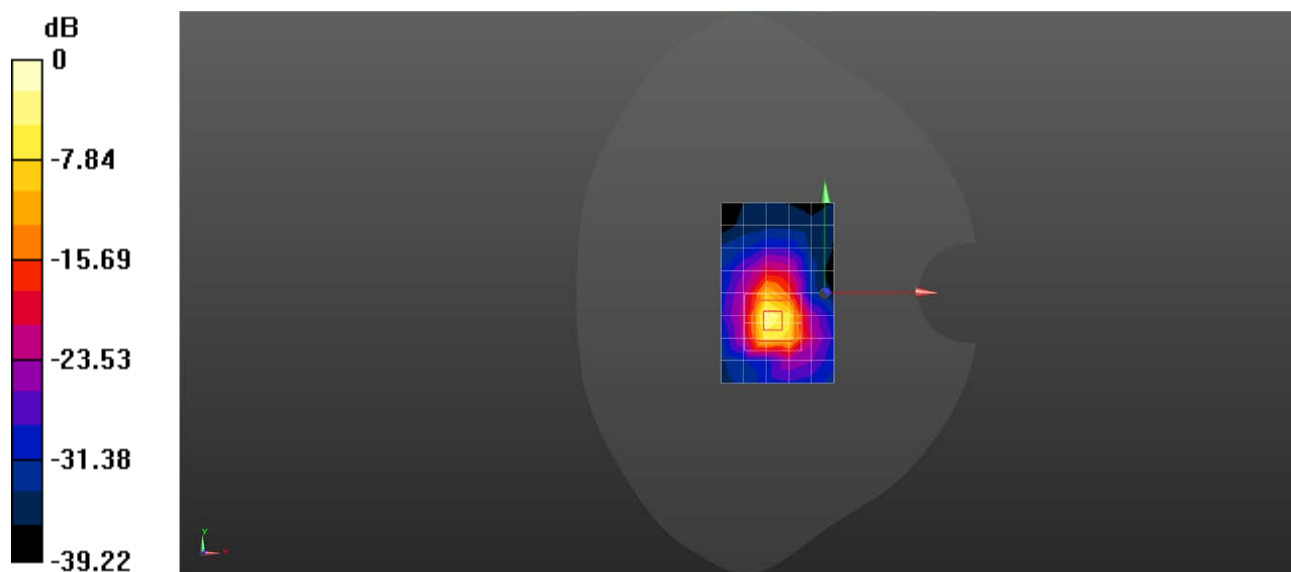

Test Laboratory: SGS-SAR Lab

V2348 5G NR N78 100M QPSK 1RB271 650000CH Right tilted Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3750$ MHz; $\sigma = 3.084$ S/m; $\epsilon_r = 36.727$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.3, 6.3, 6.3); Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Head/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.826 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.179 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.558 W/kg; SAR(10 g) = 0.178 W/kg

Maximum value of SAR (measured) = 1.18 W/kg

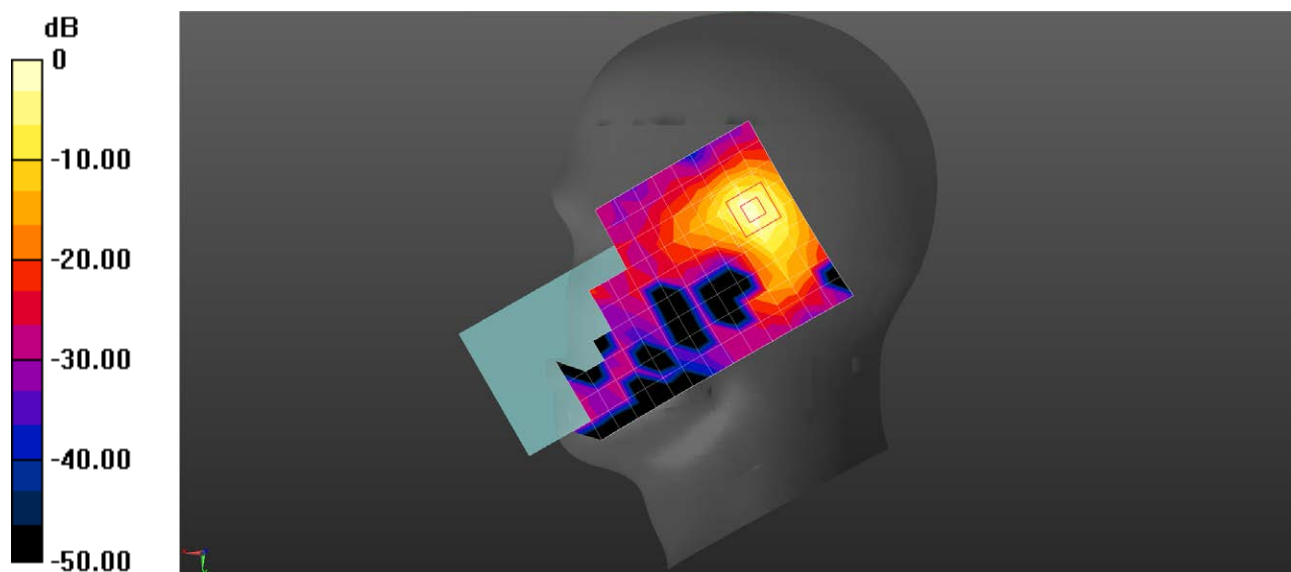

0 dB = 1.18 W/kg = 0.72 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N78 100M QPSK 1RB1 650000CH Back side 15mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3750$ MHz; $\sigma = 3.084$ S/m; $\epsilon_r = 36.727$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.3, 6.3, 6.3); Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.966 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.465 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.538 W/kg; SAR(10 g) = 0.236 W/kg

Maximum value of SAR (measured) = 0.970 W/kg

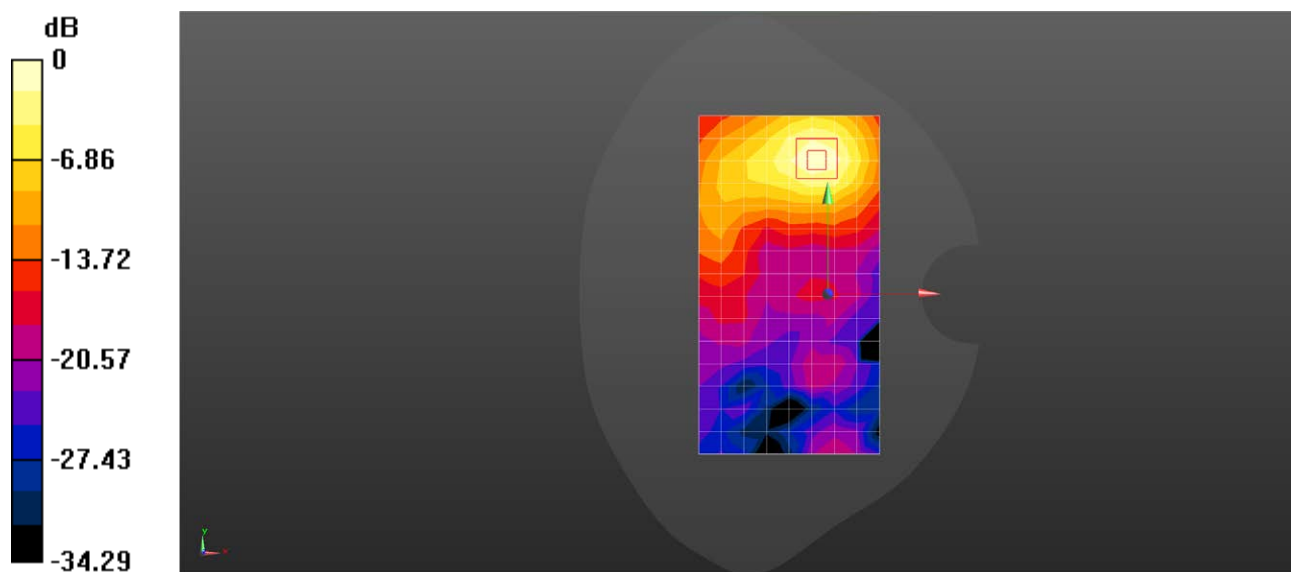

0 dB = 0.970 W/kg = -0.13 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N78 100M QPSK 135RB69 650000CH Back side 10mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3750$ MHz; $\sigma = 3.084$ S/m; $\epsilon_r = 36.727$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.3, 6.3, 6.3); Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.671 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.7660 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.933 W/kg

SAR(1 g) = 0.361 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.693 W/kg

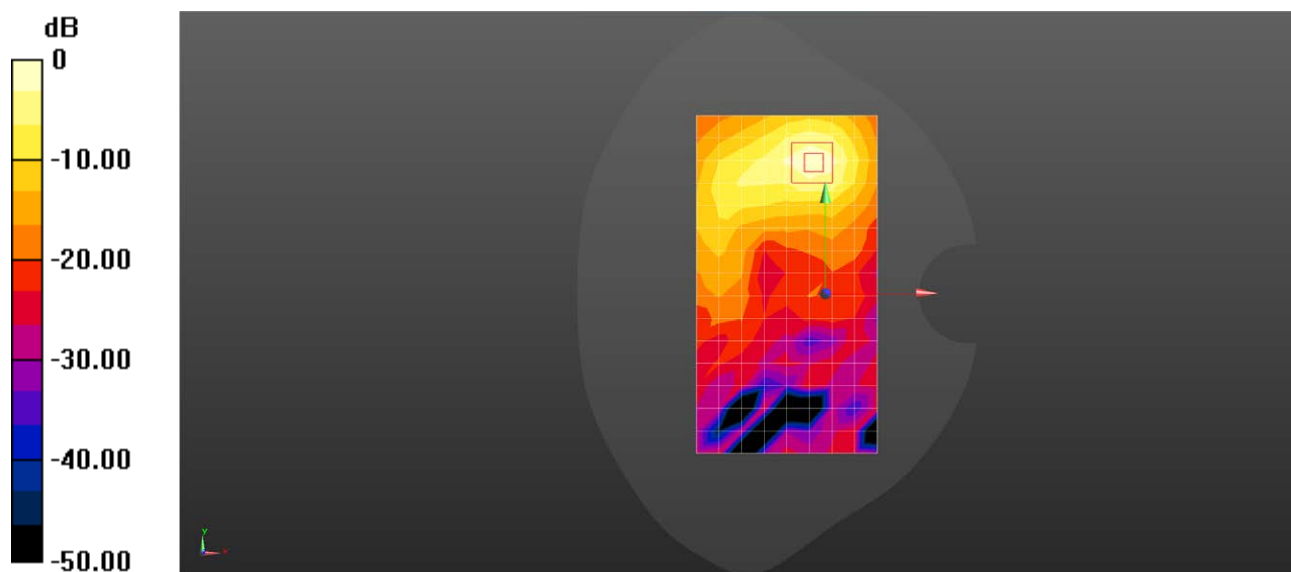

0 dB = 0.693 W/kg = -1.59 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 5G NR N78 100M QPSK 135RB69 650000CH Top side 0mm Ant14

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3750$ MHz; $\sigma = 3.084$ S/m; $\epsilon_r = 36.727$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.3, 6.3, 6.3); Calibrated: 2023-11-23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (6x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 12.9 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.46 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 24.2 W/kg

SAR(1 g) = 6.21 W/kg; SAR(10 g) = 1.63 W/kg

Maximum value of SAR (measured) = 15.9 W/kg

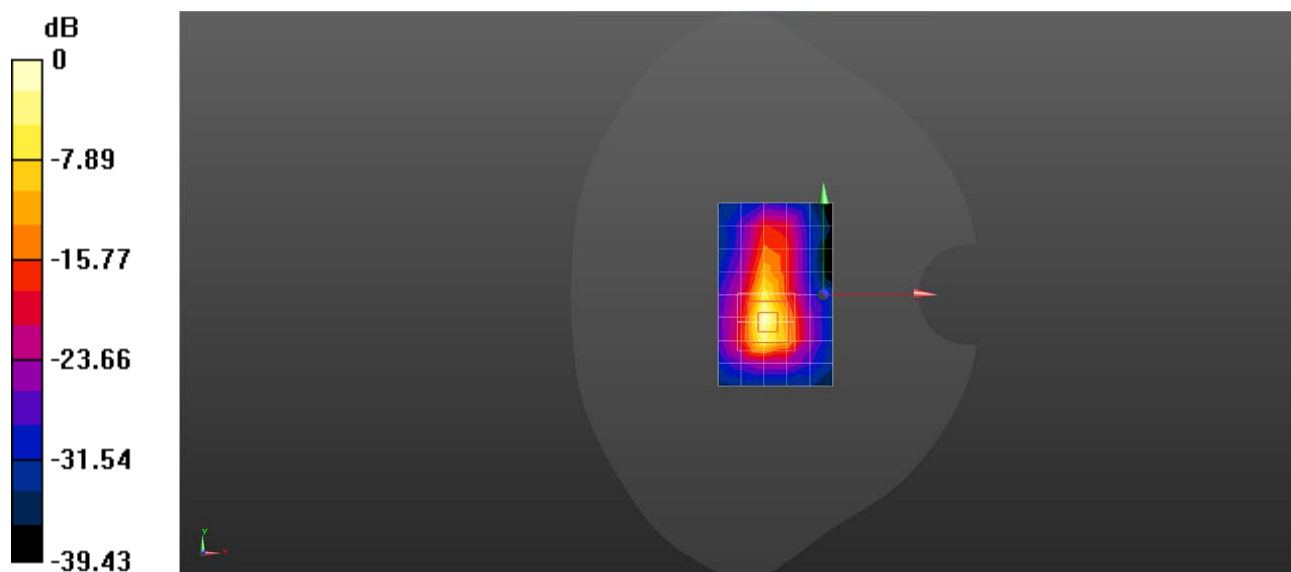

0 dB = 15.9 W/kg = 12.01 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 WIFI2.4G 802.11b 6CH Left cheek MIMO

DUT: V2348; Type: Mobile Phone; Serial: 862303079999491

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: HSL2450;Medium parameters used: $f = 2437$ MHz; $\sigma = 1.748$ S/m; $\epsilon_r = 39.364$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.22, 8.22, 8.22); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.824 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.712 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.516 W/kg; SAR(10 g) = 0.237 W/kg

Maximum value of SAR (measured) = 0.846 W/kg

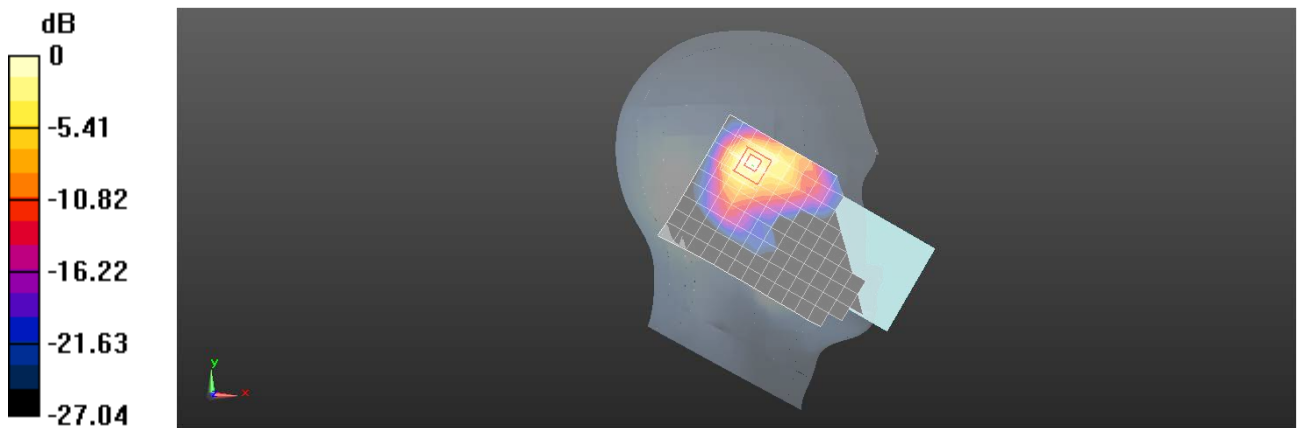

0 dB = 0.846 W/kg = -0.73 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 WIFI2.4G 802.11b 6CH Back side 15mm MIMO

DUT: V2348; Type: Mobile Phone; Serial: 862303079999491

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium parameters used: $f = 2437$ MHz; $\sigma = 1.748$ S/m; $\epsilon_r = 39.364$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.22, 8.22, 8.22); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.240 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.310 W/kg

SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.258 W/kg

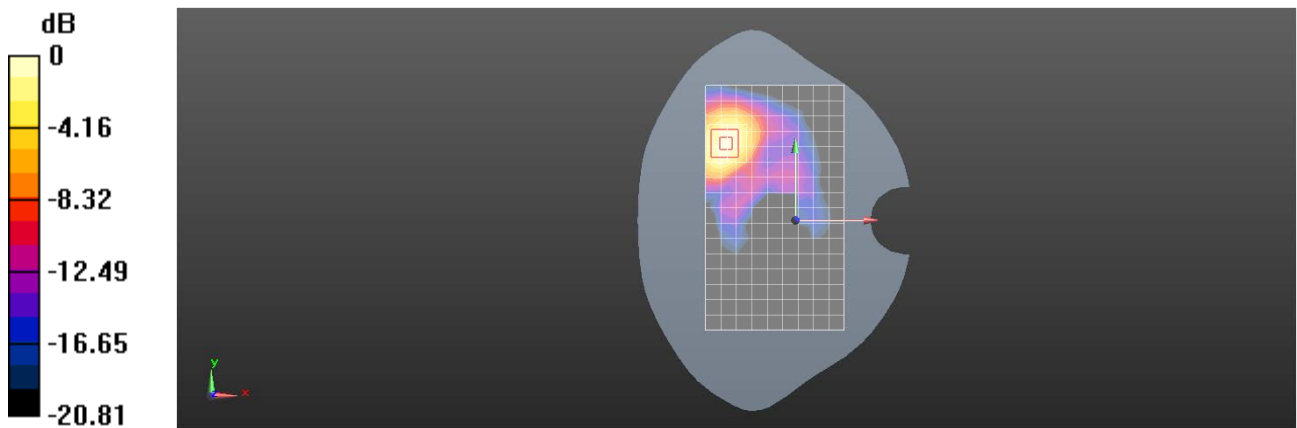

0 dB = 0.258 W/kg = -5.88 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 WIFI2.4G 802.11b 6CH Back side 10mm MIMO

DUT: V2348; Type: Mobile Phone; Serial: 862303079999491

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: HSL2450;Medium parameters used: $f = 2437$ MHz; $\sigma = 1.748$ S/m; $\epsilon_r = 39.364$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.22, 8.22, 8.22); Calibrated: 2023/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn702; Calibrated: 2023/11/17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.419 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.588 W/kg

SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.163 W/kg

Maximum value of SAR (measured) = 0.478 W/kg

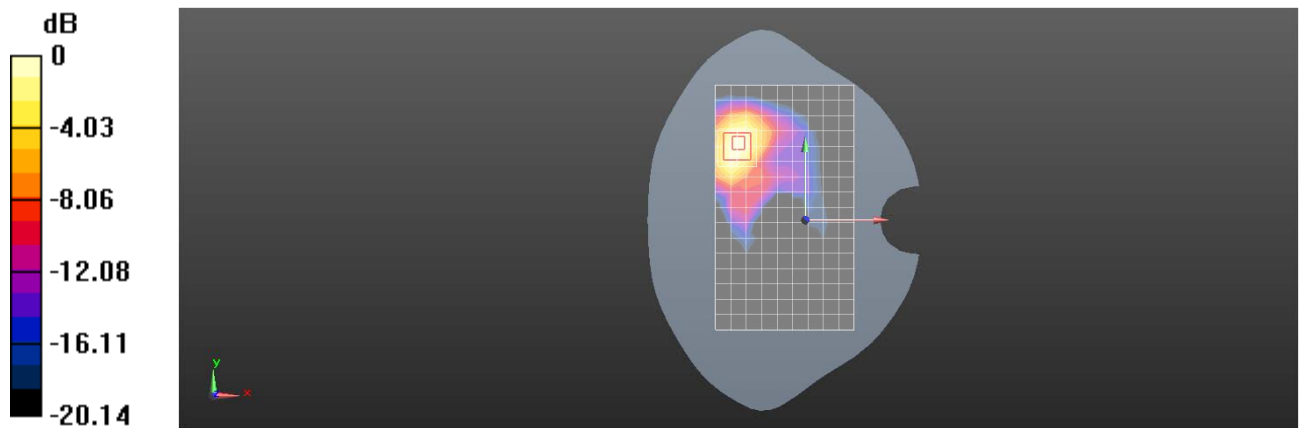

0 dB = 0.478 W/kg = -3.21 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 WIFI 5G 802.11ac 80M 155CH Right tilted MIMO

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5775 MHz;Duty Cycle: 1:1

Medium: HSL5G;Medium parameters used: $f = 5775 \text{ MHz}$; $\sigma = 5.355 \text{ S/m}$; $\epsilon_r = 35.285$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(4.82, 4.82, 4.82); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (11x20x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.15 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.712 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.02 W/kg

SAR(1 g) = 0.506 W/kg; SAR(10 g) = 0.153 W/kg

Maximum value of SAR (measured) = 1.24 W/kg

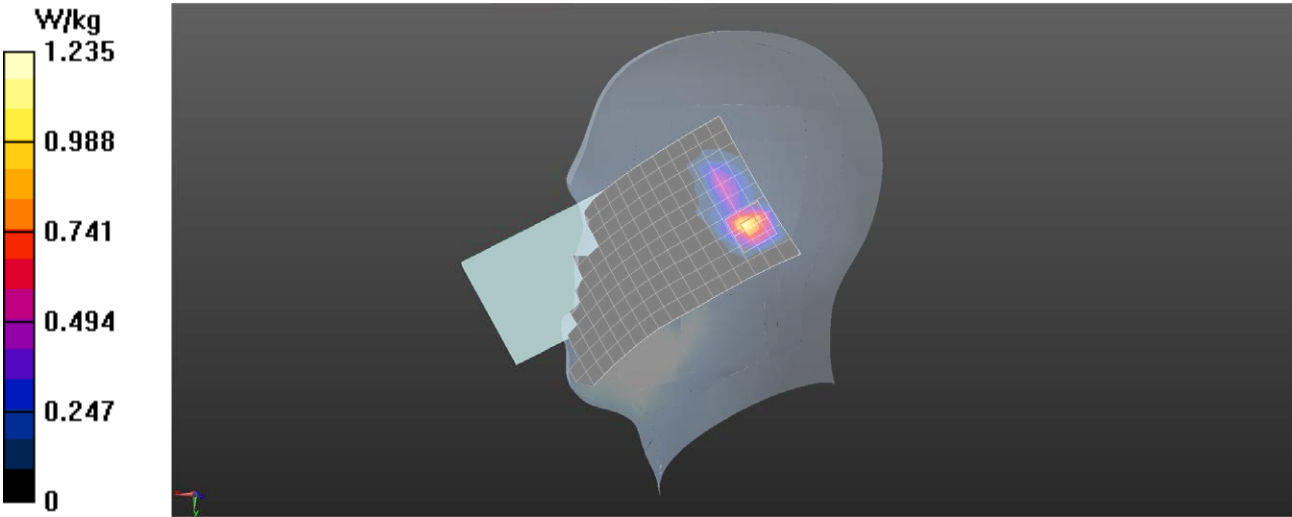

Test Laboratory: SGS-SAR Lab

V2348 WIFI 5G 802.11n HT40M 118CH Back side 15mm Ant23

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5590 MHz;Duty Cycle: 1:1


Medium: HSL5G;Medium parameters used: $f = 5590 \text{ MHz}$; $\sigma = 5.124 \text{ S/m}$; $\epsilon_r = 35.758$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(4.71, 4.71, 4.71); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x20x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 0.879 W/kg

Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 2.065 V/m ; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 1.48 W/kg
SAR(1 g) = 0.398 W/kg ; SAR(10 g) = 0.158 W/kg
Maximum value of SAR (measured) = 0.893 W/kg

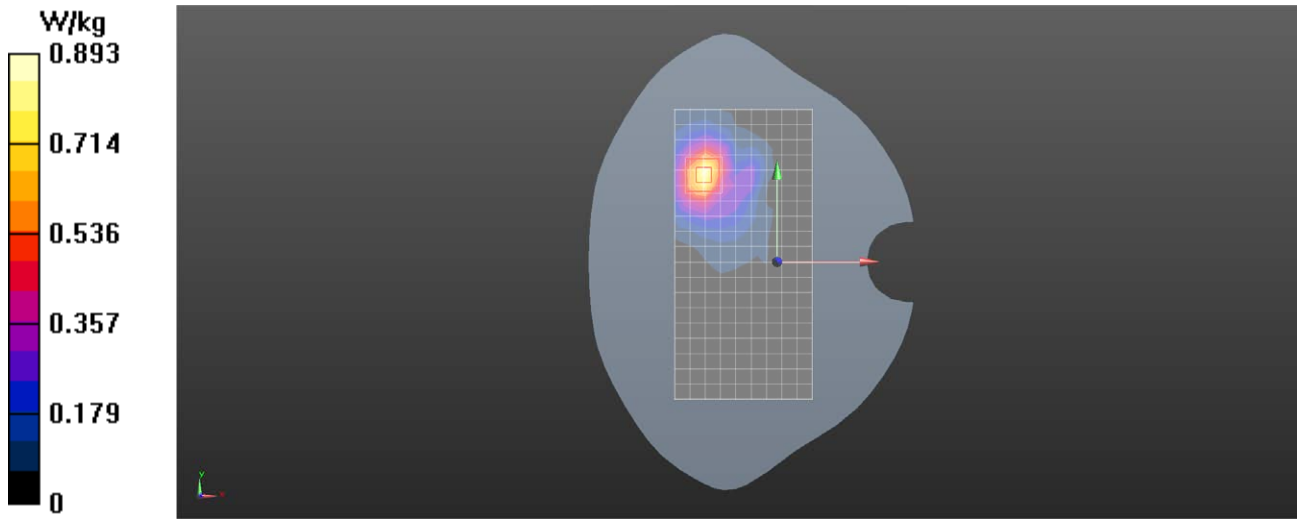

Test Laboratory: SGS-SAR Lab

V2348 WIFI 5G 802.11ac 80M 155CH Right side 10mm MIMO

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5775 MHz;Duty Cycle: 1:1

Medium: HSL5G;Medium parameters used: $f = 5775 \text{ MHz}$; $\sigma = 5.355 \text{ S/m}$; $\epsilon_r = 35.285$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(4.82, 4.82, 4.82); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.30 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.642 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.38 W/kg

SAR(1 g) = 0.581 W/kg; SAR(10 g) = 0.214 W/kg

Maximum value of SAR (measured) = 1.37 W/kg

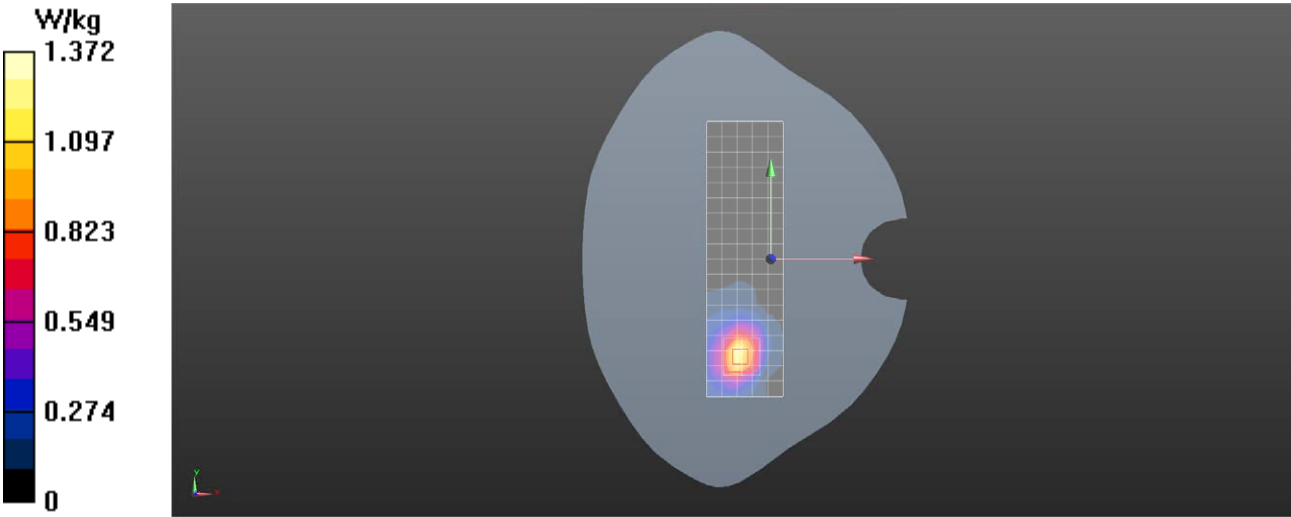

Test Laboratory: SGS-SAR Lab

V2348 WIFI 5G 802.11n HT40M 54CH Top side 0mm Ant21

DUT: V2348; Type: Mobile Phone; Serial: 861380079983247

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5270 MHz;Duty Cycle: 1:1

Medium: HSL5G;Medium parameters used: $f = 5270 \text{ MHz}$; $\sigma = 4.756 \text{ S/m}$; $\epsilon_r = 36.599$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(5.27, 5.27, 5.27); Calibrated: 2023/8/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2024/1/3
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x12x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 21.7 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 35.81 V/m ; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 49.6 W/kg

SAR(1 g) = 8.02 W/kg ; SAR(10 g) = 1.43 W/kg

Maximum value of SAR (measured) = 27.2 W/kg

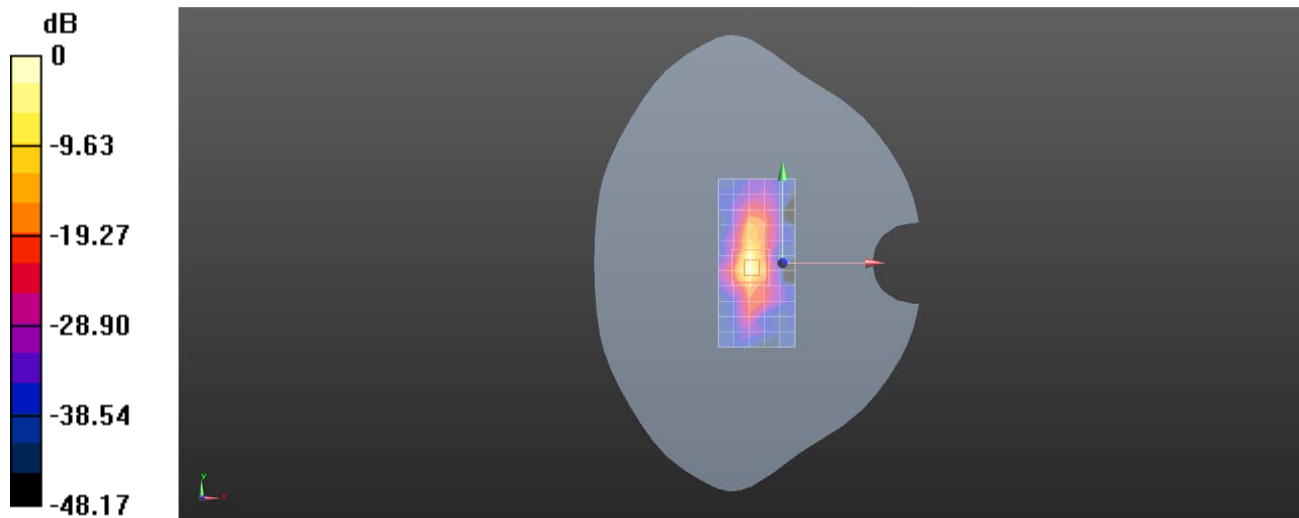

0 dB = 27.2 W/kg = 14.35 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 Bluetooth DH5 39CH Left cheek Ant25

DUT: V2348; Type: Mobile Phone; Serial: 861380079982884

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.809$ S/m; $\epsilon_r = 39.976$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.4, 7.32, 7.42); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.142 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.519 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.246 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.187 W/kg

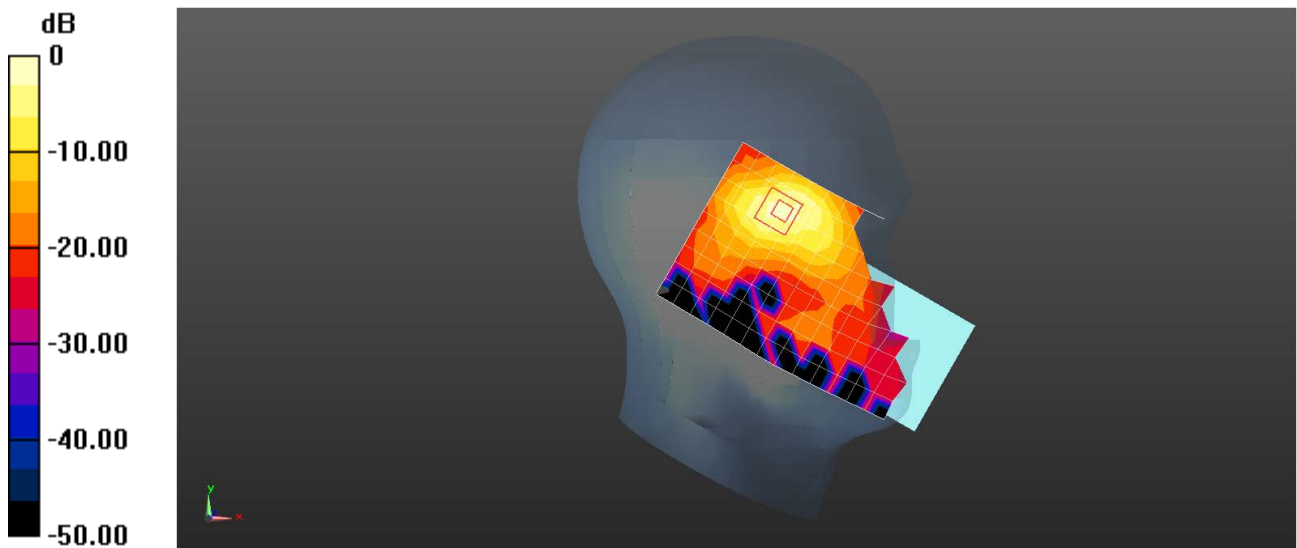

0 dB = 0.187 W/kg = -7.28 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 Bluetooth DH5 39CH Back side 15mm Ant25

DUT: V2348; Type: Mobile Phone; Serial: 861380079982884

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.809$ S/m; $\epsilon_r = 39.976$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.4, 7.32, 7.42); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0333 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.3130 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0420 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0341 W/kg

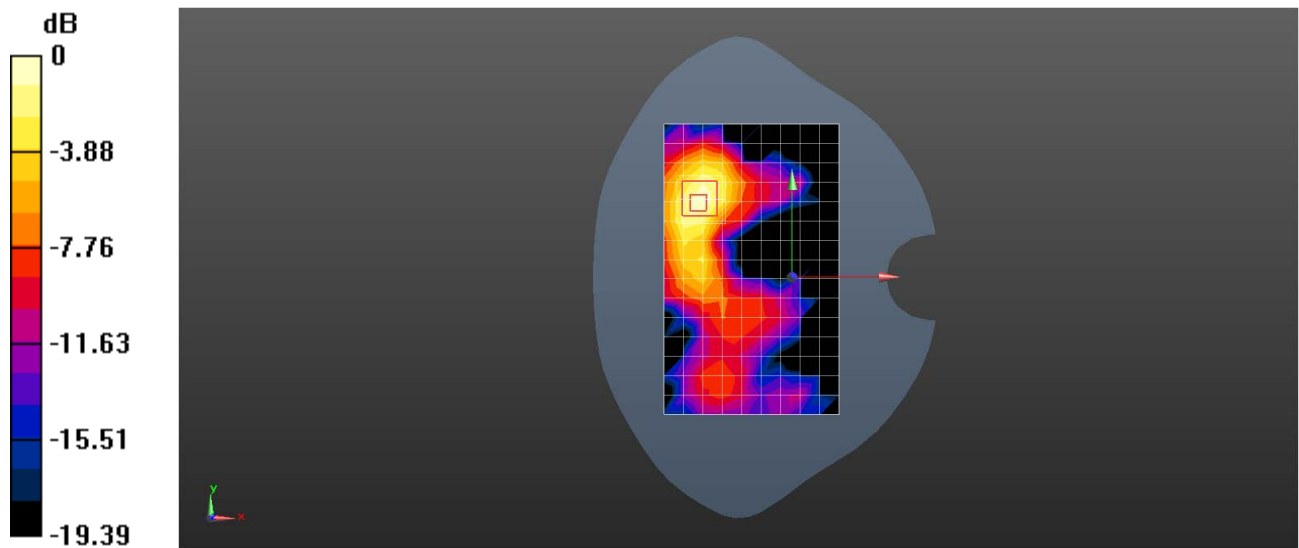

0 dB = 0.0341 W/kg = -14.67 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 Bluetooth DH5 39CH Right side 10mm Ant25

DUT: V2348; Type: Mobile Phone; Serial: 861380079982884

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.809$ S/m; $\epsilon_r = 39.976$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.4, 7.32, 7.42); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.104 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.149 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.128 W/kg

SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.102 W/kg

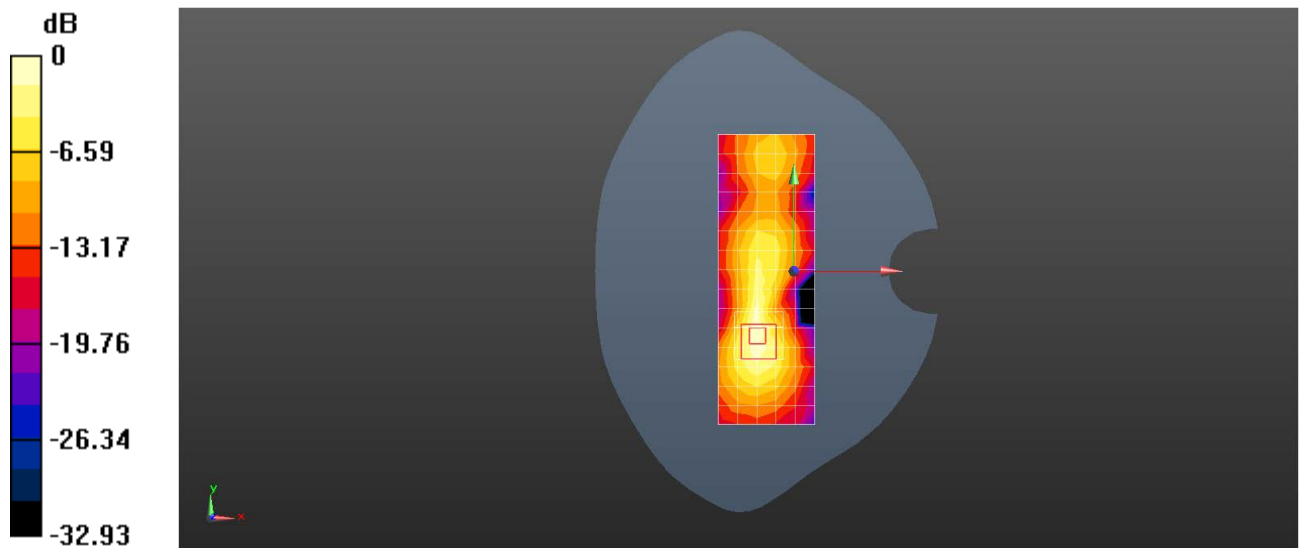

0 dB = 0.102 W/kg = -9.91 dBW/kg

Test Laboratory: SGS-SAR Lab

V2348 NFC 13.56MHz Back side 0mm

DUT: V2348; Type: Mobile Phone; Serial: 866897079997831

Communication System: UID 0, NFC (0); Frequency: 13.56 MHz; Duty Cycle: 1:1

Medium: HSL_13.56; Medium parameters used: $f = 14$ MHz; $\sigma = 0.745$ S/m; $\epsilon_r = 51.196$; $\rho = 1055$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7735; ConvF(13.44, 13.44, 13.44); Calibrated: 2023-12-19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAR 3; Type: EL4; Serial: TP:1143
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Ch/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.057 W/kg

Configuration/Ch/Zoom Scan (6x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.121 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.009 W/kg

Maximum value of SAR (measured) = 0.059 W/kg

