

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/19

System Check_H750_0719**DUT: Dipole 750 MHz D750V3;SN:1095;**


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750$ MHz; $\sigma = 0.875$ S/m; $\epsilon_r = 42.615$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.3 °C; Liquid Temperature : 22.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(9.15, 9.15, 9.15) @ 750 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (7x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 1.04 W/kg

Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 35.37 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 1.29 W/kg
SAR(1 g) = 0.826 W/kg; SAR(10 g) = 0.544 W/kg
Smallest distance from peaks to all points 3 dB below = 17.9 mm
Ratio of SAR at M2 to SAR at M1 = 64.1%
Maximum value of SAR (measured) = 1.13 W/kg

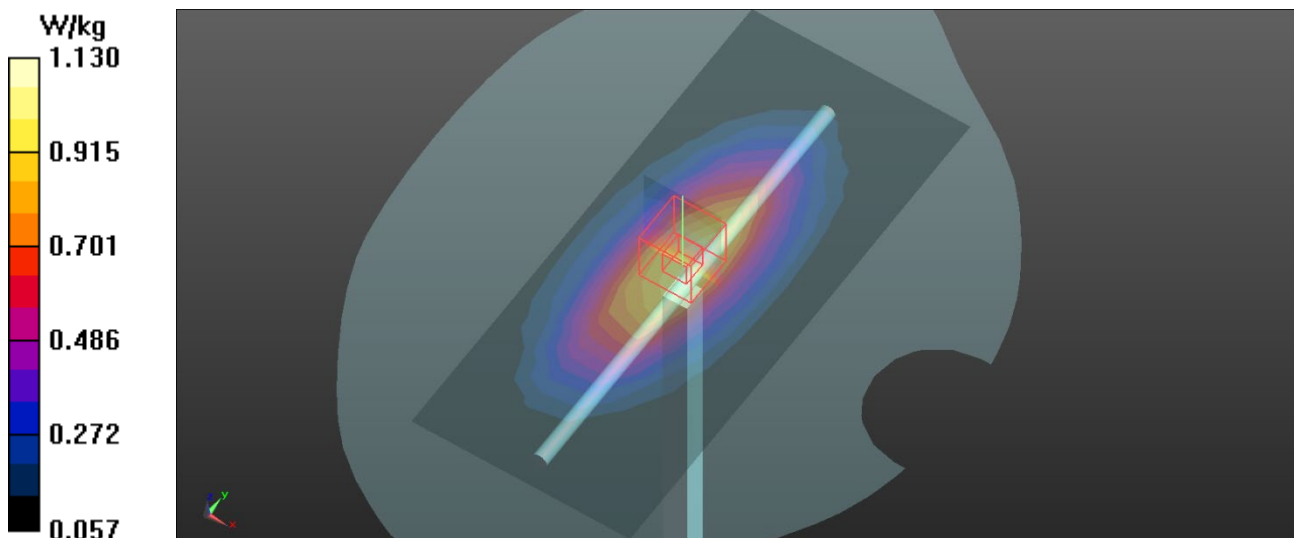

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/20

System Check_H750_0720**DUT: Dipole 750 MHz D750V3;SN:1095;**


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 42.612$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.5 °C; Liquid Temperature : 22.4 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(9.15, 9.15, 9.15) @ 750 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (7x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 1.03 W/kg

Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 35.18 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 1.26 W/kg
SAR(1 g) = 0.808 W/kg; SAR(10 g) = 0.533 W/kg
Smallest distance from peaks to all points 3 dB below = 17.9 mm
Ratio of SAR at M2 to SAR at M1 = 64.4%
Maximum value of SAR (measured) = 1.10 W/kg

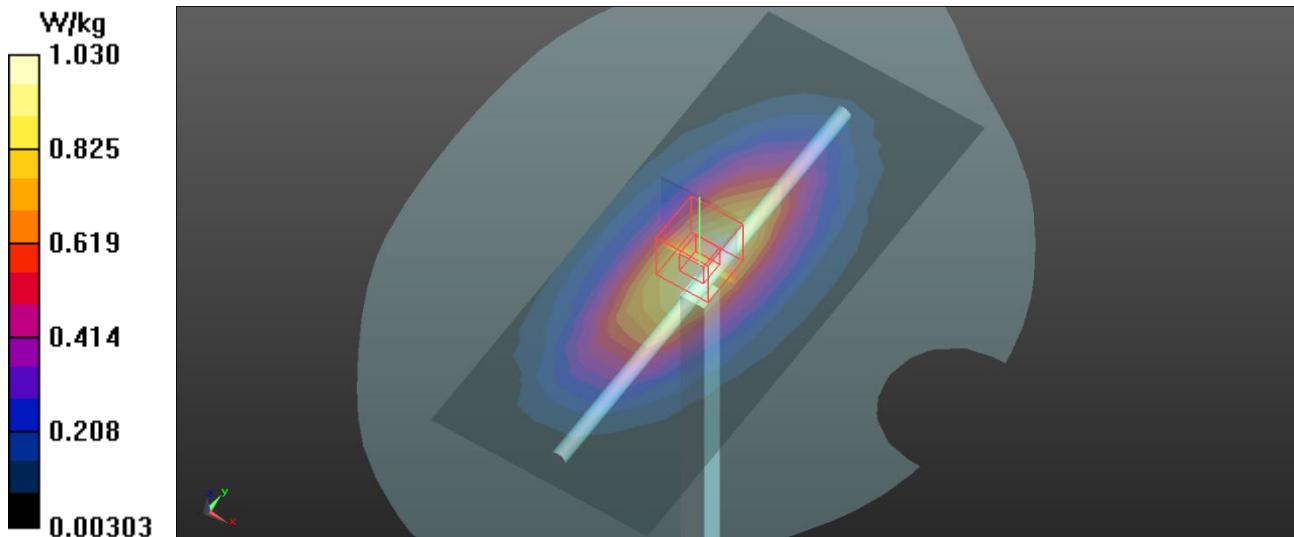

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/21

System Check_H750_0721**DUT: Dipole 750 MHz D750V3;SN:1095;**


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 42.607$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.5 °C; Liquid Temperature : 22.3 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(9.15, 9.15, 9.15) @ 750 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (7x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 1.06 W/kg

Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 35.71 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 1.31 W/kg
SAR(1 g) = 0.835 W/kg; SAR(10 g) = 0.550 W/kg
Smallest distance from peaks to all points 3 dB below = 17.9 mm
Ratio of SAR at M2 to SAR at M1 = 64.2%
Maximum value of SAR (measured) = 1.14 W/kg

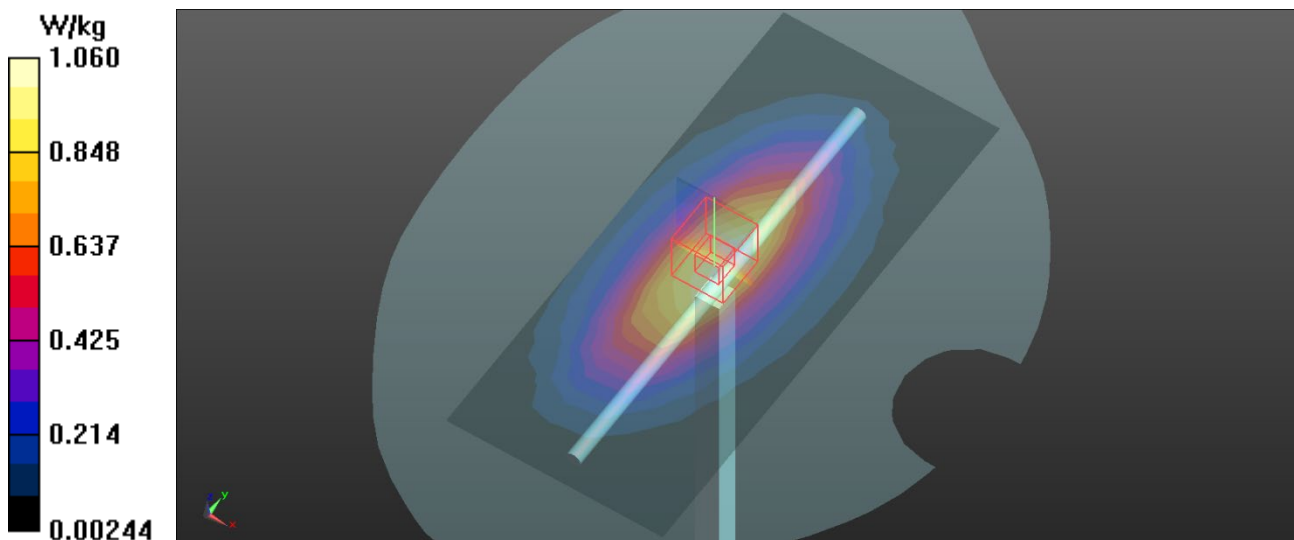

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/16

System Check_H835_0716

DUT: Dipole 835 MHz D835V2;SN:4d160;


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.926 \text{ S/m}$; $\epsilon_r = 42.176$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(9.15, 9.15, 9.15) @ 835 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (7x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 1.28 W/kg

Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 38.10 V/m ; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 1.50 W/kg
SAR(1 g) = 0.958 W/kg ; SAR(10 g) = 0.625 W/kg
Smallest distance from peaks to all points 3 dB below = 16 mm
Ratio of SAR at M2 to SAR at M1 = 64.2%
Maximum value of SAR (measured) = 1.30 W/kg

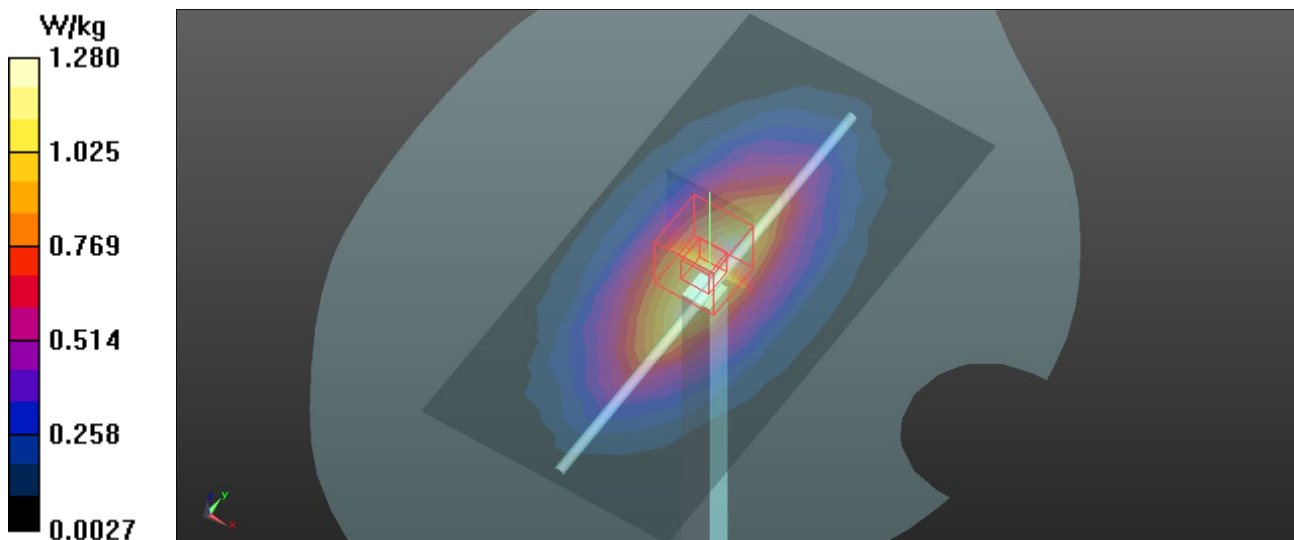

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/19

System Check_H835_0719

DUT: Dipole 835 MHz D835V2;SN:4d160;


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.926 \text{ S/m}$; $\epsilon_r = 42.179$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(9.15, 9.15, 9.15) @ 835 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (7x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 1.30 W/kg

Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 38.41 V/m ; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 1.51 W/kg
SAR(1 g) = 0.968 W/kg ; SAR(10 g) = 0.633 W/kg
Smallest distance from peaks to all points 3 dB below = 16 mm
Ratio of SAR at M2 to SAR at M1 = 64.2%
Maximum value of SAR (measured) = 1.32 W/kg

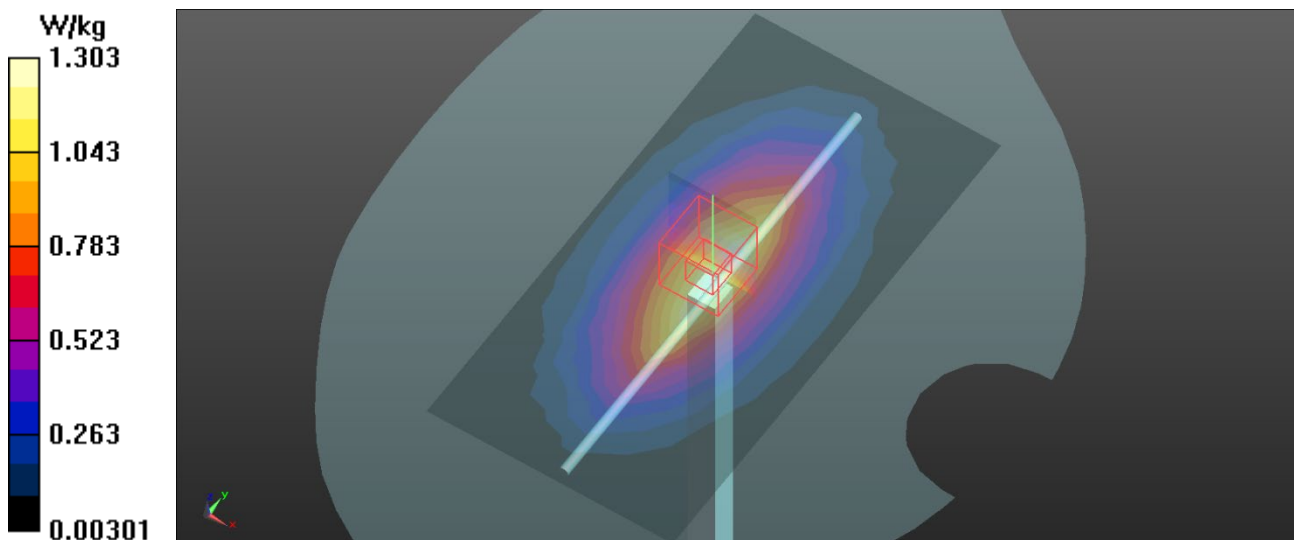

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/20

System Check_H835_0720**DUT: Dipole 835 MHz D835V2;SN:4d160;**


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 835$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 42.178$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.5 °C; Liquid Temperature : 22.4 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(9.15, 9.15, 9.15) @ 835 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (7x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 1.31 W/kg

Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 38.58 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 1.54 W/kg
SAR(1 g) = 0.984 W/kg; SAR(10 g) = 0.642 W/kg
Smallest distance from peaks to all points 3 dB below = 16 mm
Ratio of SAR at M2 to SAR at M1 = 64.1%
Maximum value of SAR (measured) = 1.34 W/kg

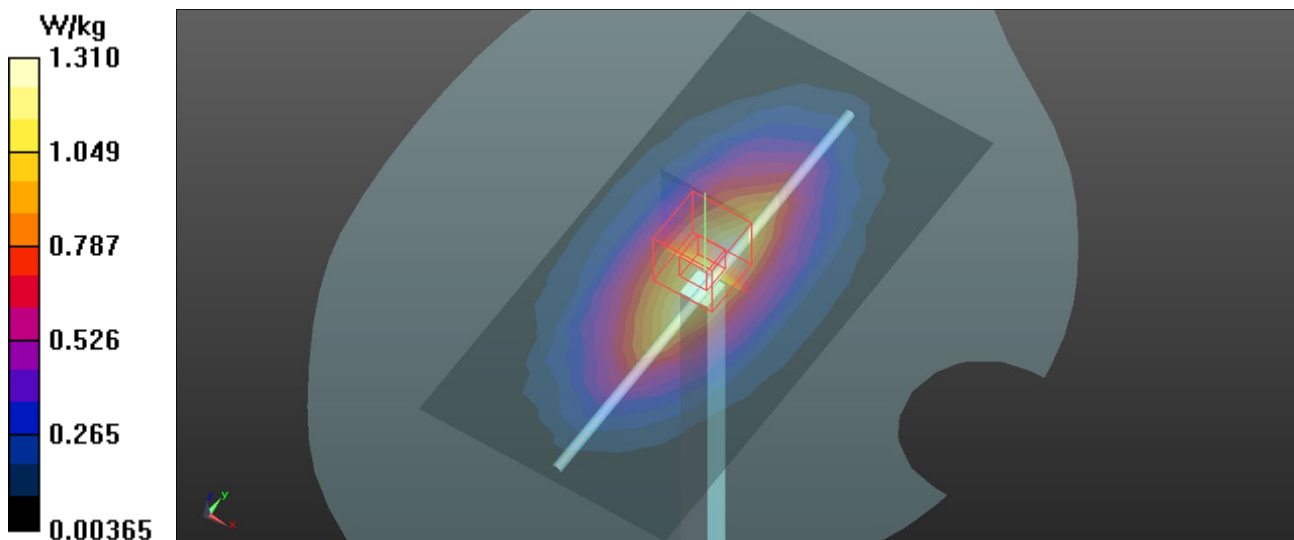

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/21

System Check_H835_0721**DUT: Dipole 835 MHz D835V2;SN:4d160;**


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 835$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 42.172$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.5 °C; Liquid Temperature : 22.3 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(9.15, 9.15, 9.15) @ 835 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (7x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 1.33 W/kg

Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 38.79 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 1.55 W/kg
SAR(1 g) = 0.992 W/kg; SAR(10 g) = 0.649 W/kg
Smallest distance from peaks to all points 3 dB below = 16 mm
Ratio of SAR at M2 to SAR at M1 = 64.4%
Maximum value of SAR (measured) = 1.35 W/kg

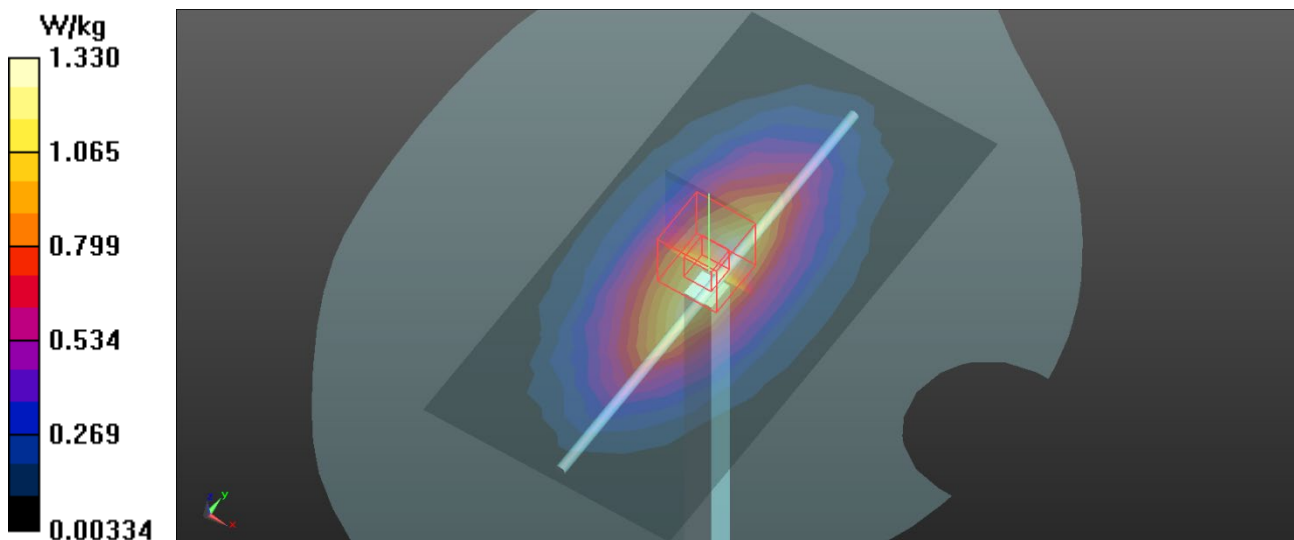

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/17

System Check_H1750_0717

DUT: Dipole 1750 MHz D1750V2;SN:1101;

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.325$ S/m; $\epsilon_r = 38.916$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.7 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(8.04, 8.04, 8.04) @ 1750 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (6x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 4.69 W/kg

Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 66.00 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 6.86 W/kg

SAR(1 g) = 3.72 W/kg; SAR(10 g) = 1.95 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.5%

Maximum value of SAR (measured) = 5.68 W/kg

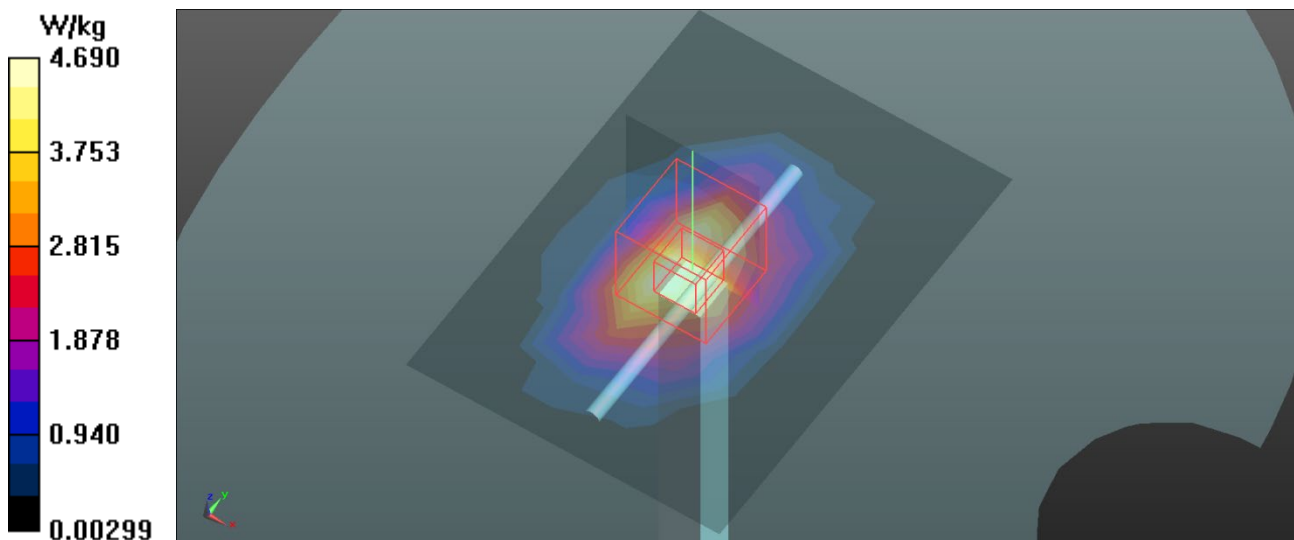

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/18

System Check_H1750_0718

DUT: Dipole 1750 MHz D1750V2;SN:1101;


Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1750$ MHz; $\sigma = 1.324$ S/m; $\epsilon_r = 39.02$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.9 °C; Liquid Temperature : 22.4 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(8.04, 8.04, 8.04) @ 1750 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (6x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 4.10 W/kg

Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 68.81 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 7.11 W/kg
SAR(1 g) = 3.8 W/kg; SAR(10 g) = 2 W/kg
Smallest distance from peaks to all points 3 dB below = 9.7 mm
Ratio of SAR at M2 to SAR at M1 = 54.1%
Maximum value of SAR (measured) = 5.91 W/kg

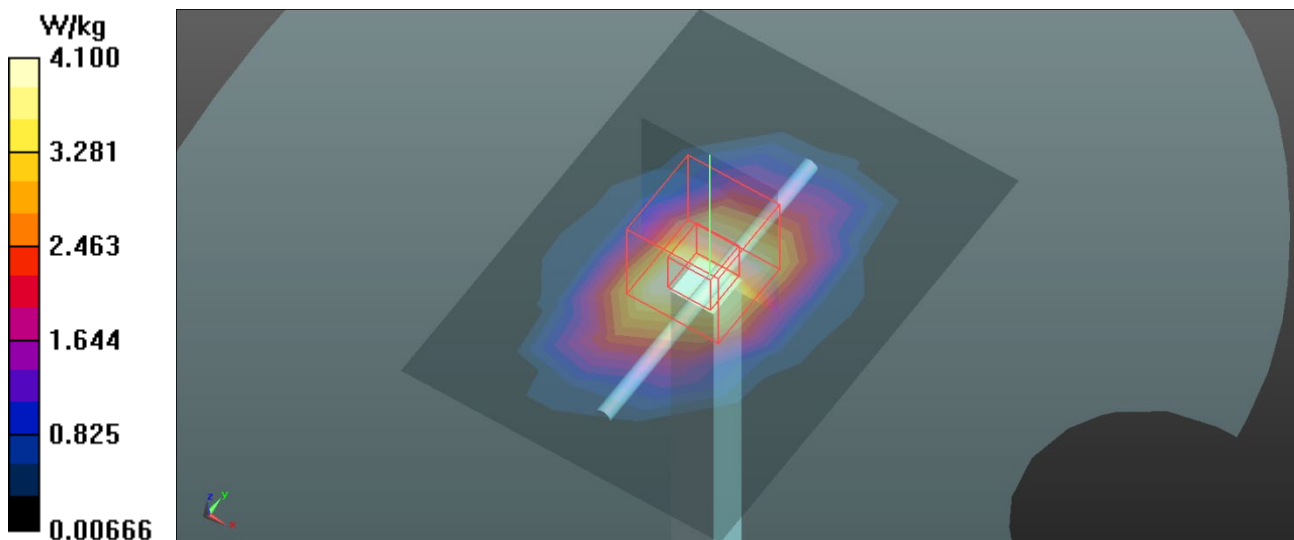

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/23

System Check_H1750_0723

DUT: Dipole 1750 MHz D1750V2;SN:1101;

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.326$ S/m; $\epsilon_r = 39.028$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C; Liquid Temperature : 22.4 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(8.04, 8.04, 8.04) @ 1750 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (6x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 4.01 W/kg

Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 67.90 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 6.93 W/kg

SAR(1 g) = 3.72 W/kg; SAR(10 g) = 1.96 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 54.2%

Maximum value of SAR (measured) = 5.77 W/kg

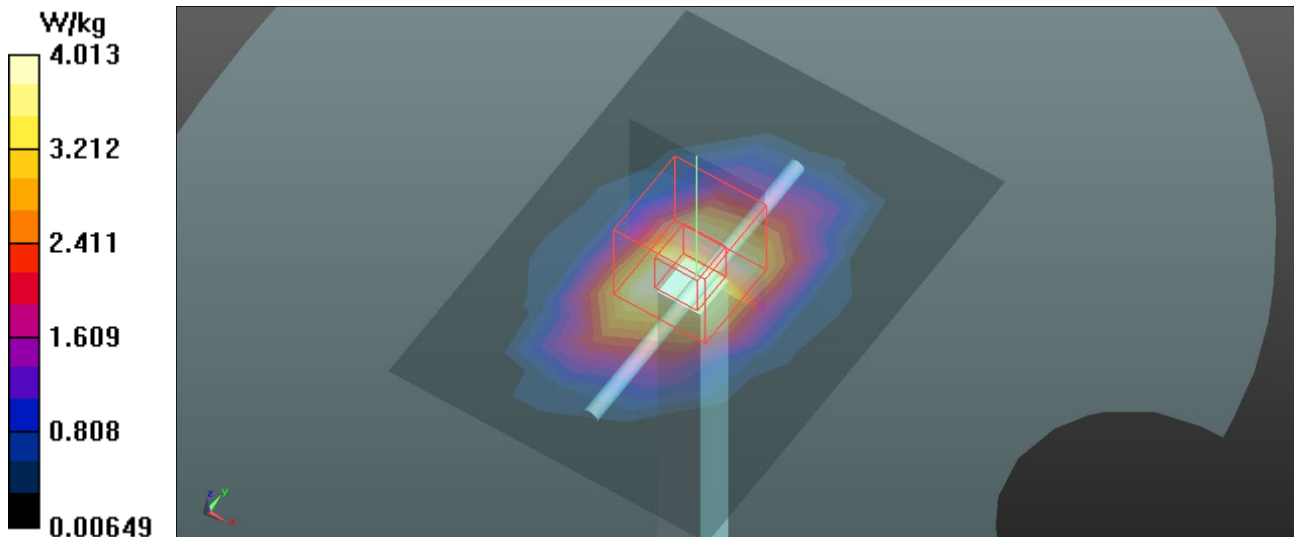

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/28

System Check_H1750_0728**DUT: Dipole 1750 MHz D1750V2;SN:1101;**

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.325$ S/m; $\epsilon_r = 39.019$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 22.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(8.04, 8.04, 8.04) @ 1750 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (6x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 4.08 W/kg

Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 68.28 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 6.98 W/kg

SAR(1 g) = 3.75 W/kg; SAR(10 g) = 1.98 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 54.2%

Maximum value of SAR (measured) = 5.81 W/kg

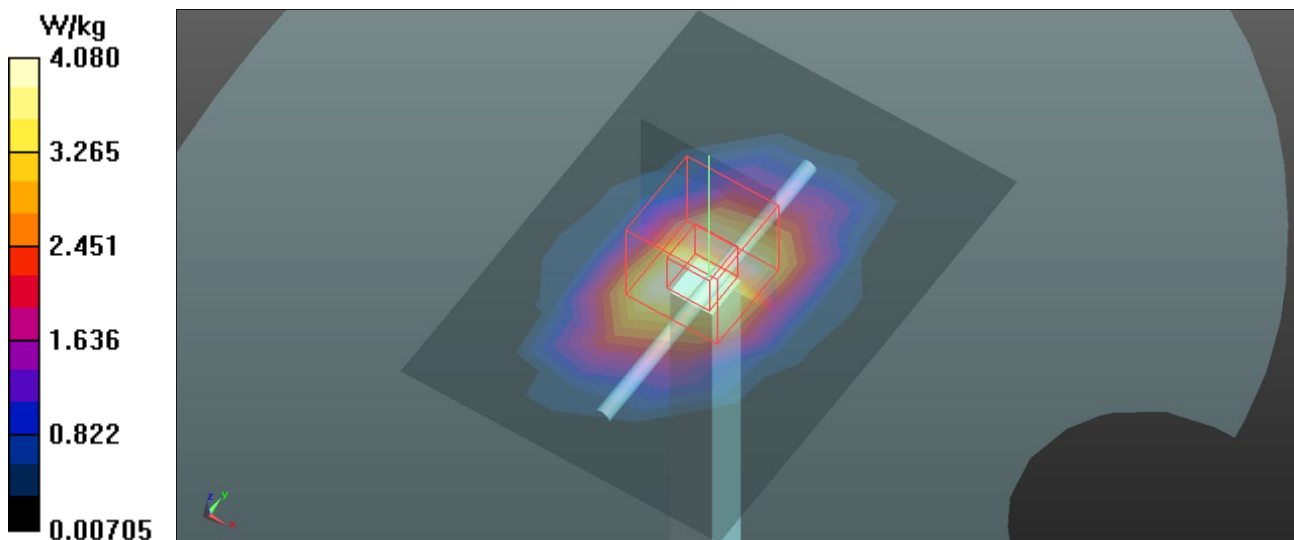

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/17

System Check_H1900_0717

DUT: Dipole 1900 MHz D1900V2;SN:5d179;


Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.356$ S/m; $\epsilon_r = 39.32$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.7 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(7.79, 7.79, 7.79) @ 1900 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (6x7x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 4.67 W/kg

Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 67.83 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 7.48 W/kg
SAR(1 g) = 3.89 W/kg; SAR(10 g) = 1.99 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 52.6%
Maximum value of SAR (measured) = 6.10 W/kg

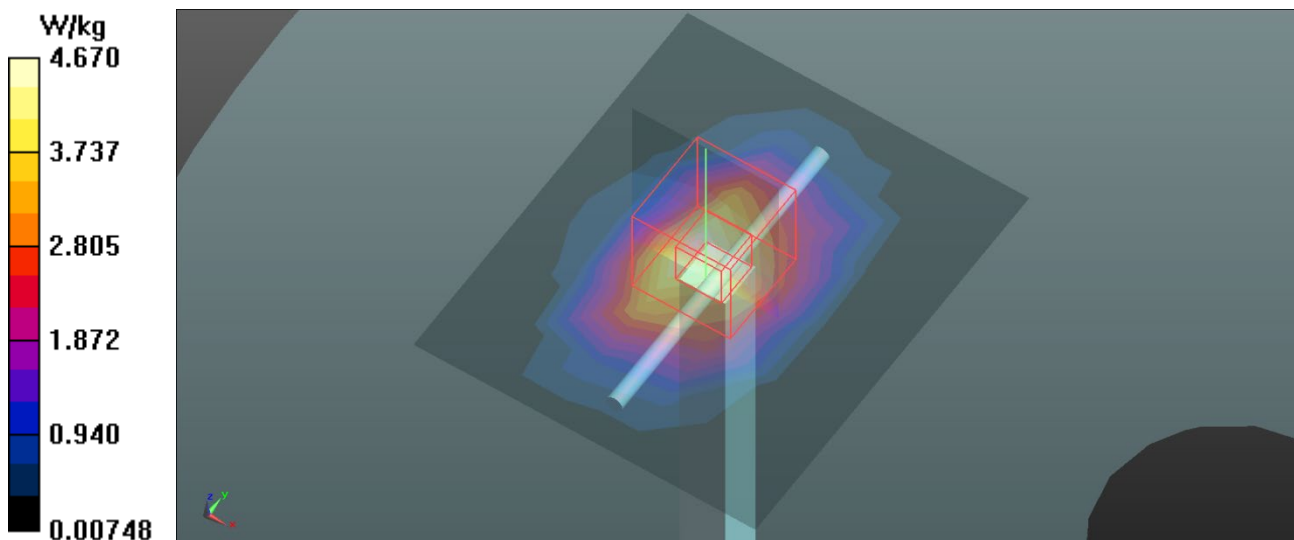

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/18

System Check_H1900_0718

DUT: Dipole 1900 MHz D1900V2;SN:5d179;

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.353 \text{ S/m}$; $\epsilon_r = 39.315$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $22.9 \text{ }^\circ\text{C}$; Liquid Temperature : $22.4 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(7.79, 7.79, 7.79) @ 1900 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (6x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Maximum value of SAR (measured) = 4.49 W/kg
Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 70.57 V/m ; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 7.71 W/kg
SAR(1 g) = 4.04 W/kg ; SAR(10 g) = 2.07 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 52.8%

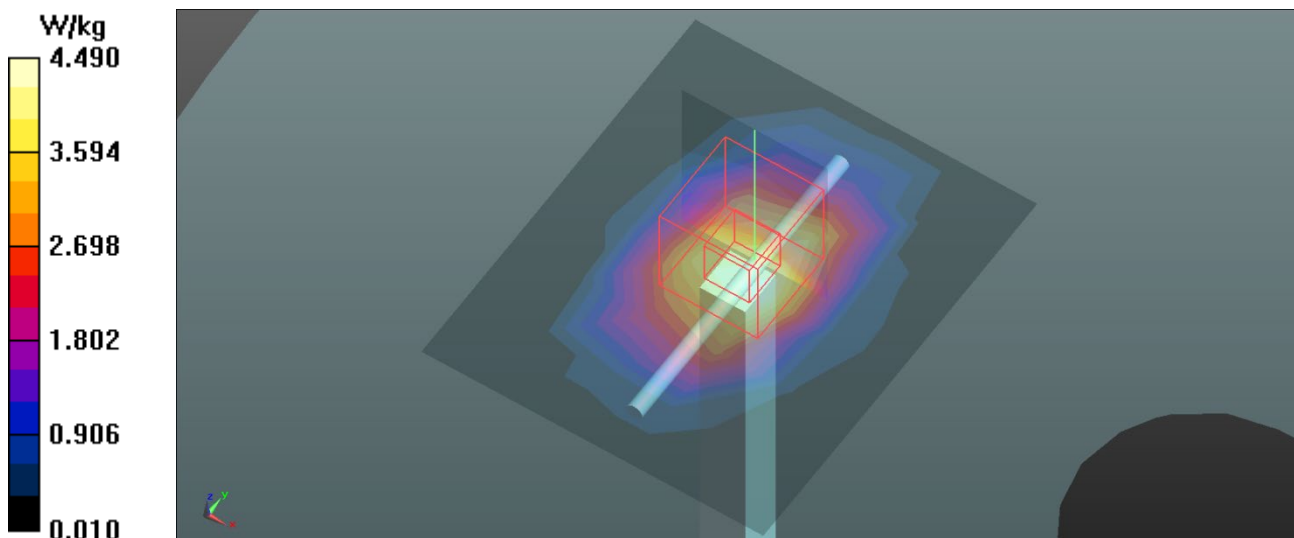Maximum value of SAR (measured) = 6.28 W/kg


Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/27

System Check_H1900_0727

DUT: Dipole 1900 MHz D1900V2;SN:5d179;

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.353 \text{ S/m}$; $\epsilon_r = 39.316$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $22.6 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(7.79, 7.79, 7.79) @ 1900 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (6x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Maximum value of SAR (measured) = 4.51 W/kg
Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 71.21 V/m ; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 7.77 W/kg
SAR(1 g) = 4.07 W/kg ; SAR(10 g) = 2.09 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 52.9%

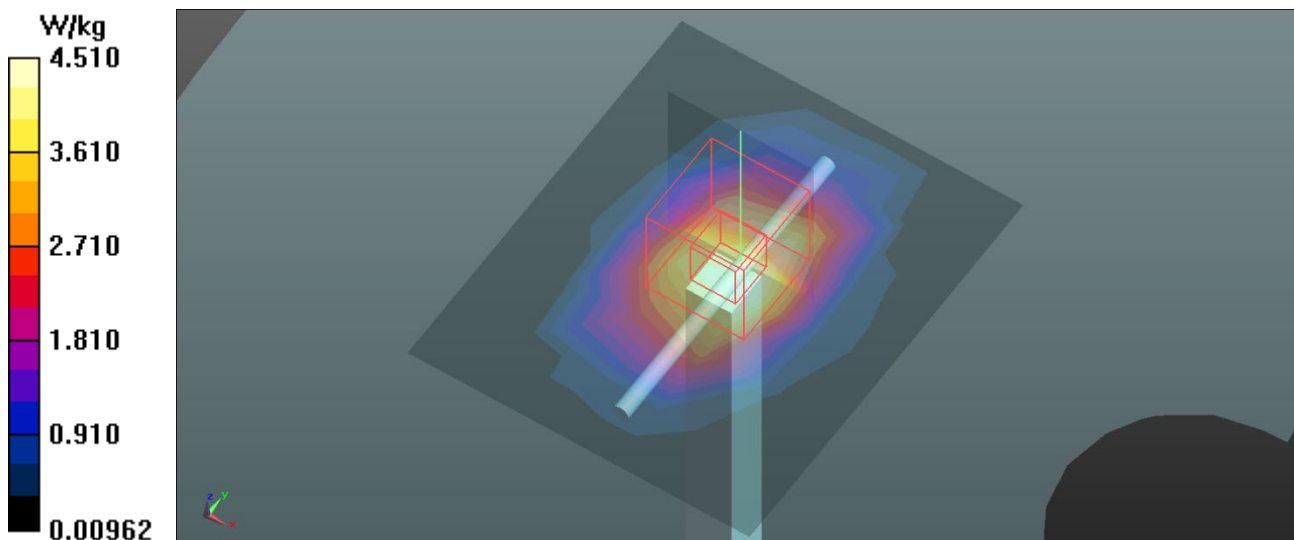Maximum value of SAR (measured) = 6.33 W/kg


Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/22

System Check_H2300_0722**DUT: Dipole 2300 MHz D2300V2;SN:1033;**

Communication System: UID 0, CW (0); Frequency: 2300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2300$ MHz; $\sigma = 1.718$ S/m; $\epsilon_r = 40.019$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(7.71, 7.71, 7.71) @ 2300 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (7x10x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 8.01 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 68.96 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 10.7 W/kg

SAR(1 g) = 5.25 W/kg; SAR(10 g) = 2.48 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 49.9%

Maximum value of SAR (measured) = 8.63 W/kg

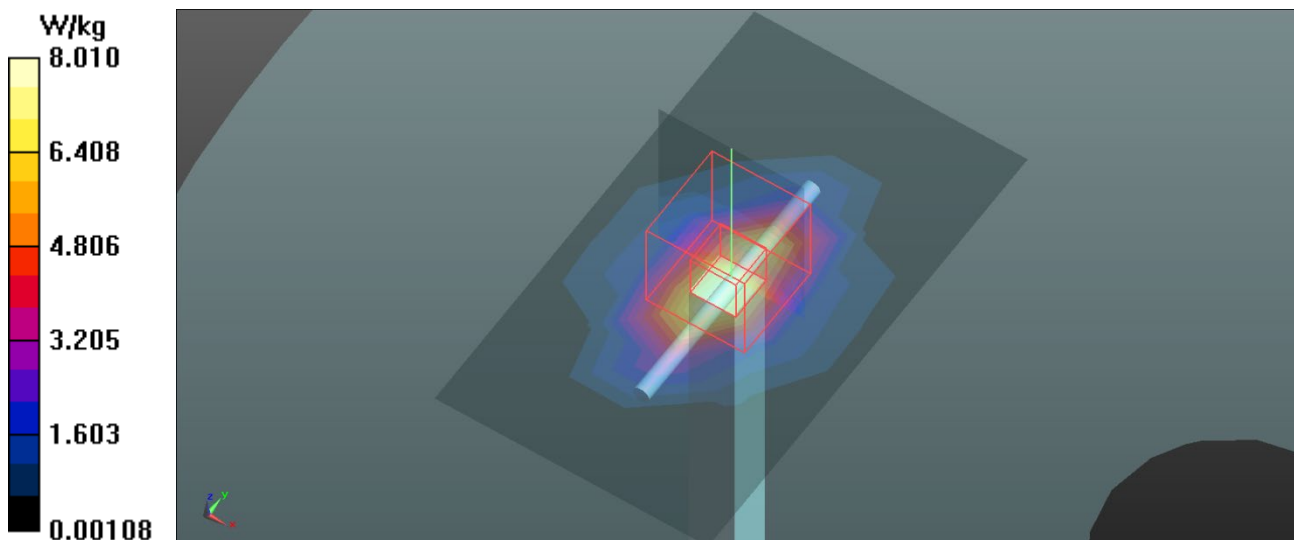

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/25

System Check_H2300_0725

DUT: Dipole 2300 MHz D2300V2;SN:1033;

Communication System: UID 0, CW (0); Frequency: 2300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2300$ MHz; $\sigma = 1.708$ S/m; $\epsilon_r = 39.017$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 22.2 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(7.71, 7.71, 7.71) @ 2300 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (7x10x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 7.96 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 68.96 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 10.6 W/kg

SAR(1 g) = 5.22 W/kg; SAR(10 g) = 2.47 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 49.9%

Maximum value of SAR (measured) = 8.58 W/kg

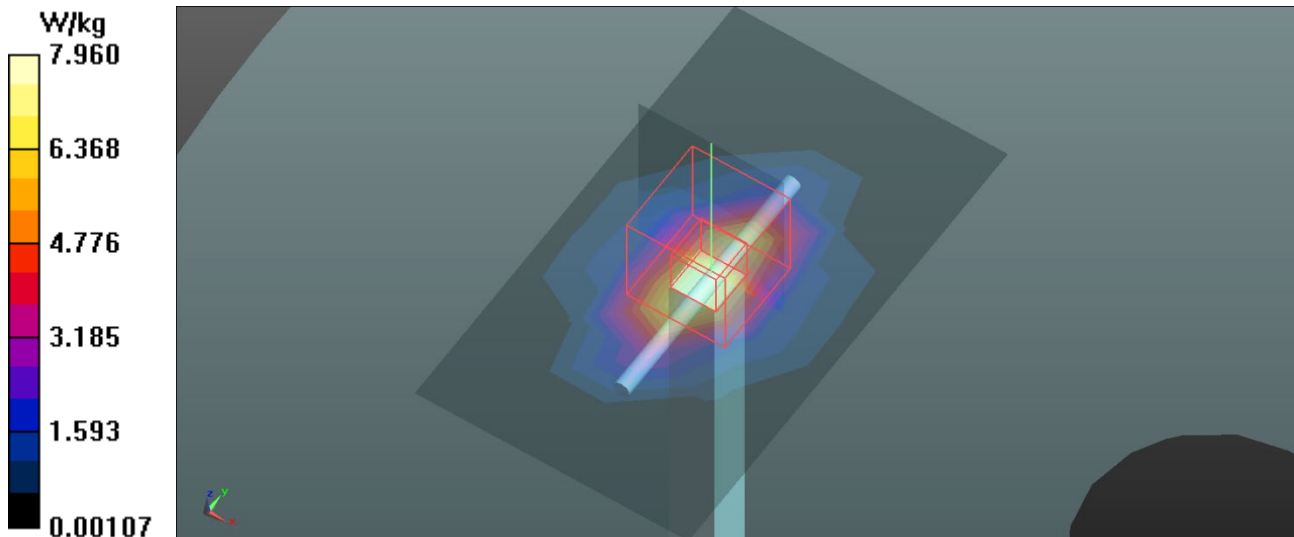

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/26

System Check_H2300_0726

DUT: Dipole 2300 MHz D2300V2;SN:1033;

Communication System: UID 0, CW (0); Frequency: 2300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2300$ MHz; $\sigma = 1.708$ S/m; $\epsilon_r = 39.029$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C; Liquid Temperature : 22.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(7.71, 7.71, 7.71) @ 2300 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (7x10x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 7.39 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 67.57 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 10.3 W/kg

SAR(1 g) = 5.12 W/kg; SAR(10 g) = 2.43 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 50.1%

Maximum value of SAR (measured) = 8.44 W/kg

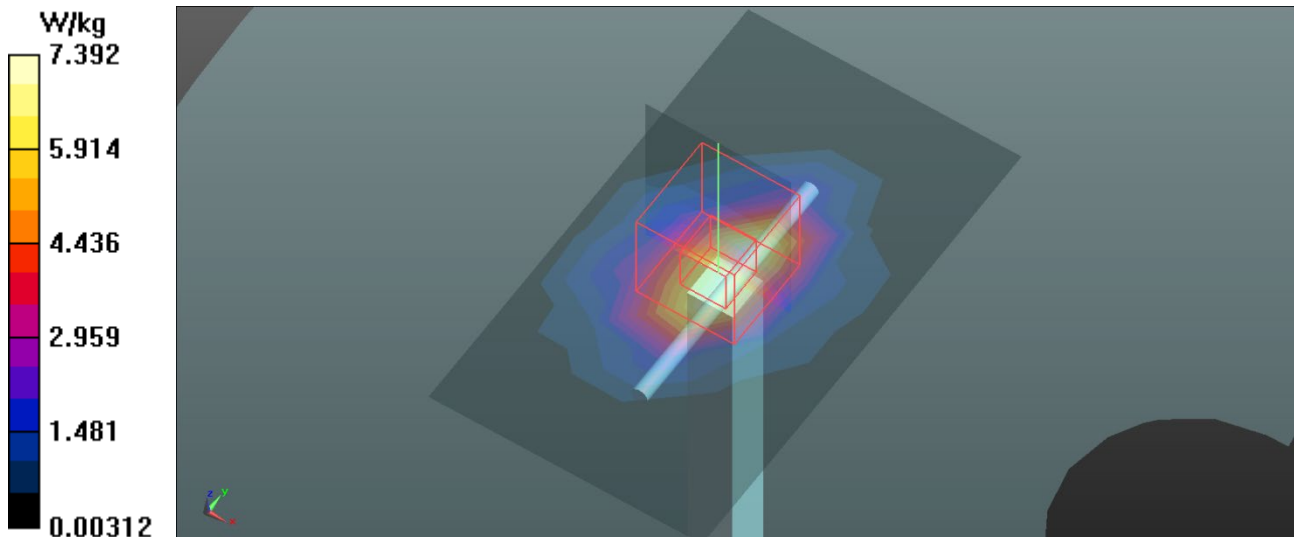

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/20

System Check_H2450_0720

DUT: Dipole 2450 MHz D2450V2;SN:919;

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.884$ S/m; $\epsilon_r = 39.539$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY Configuration:

- Probe:EX3DV4 - SN7693;ConvF(7.29,7.14,7.75) @ 2450 MHz;Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (8x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 6.00 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 69.97 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 9.89 W/kg

SAR(1 g) = 5.1 W/kg; SAR(10 g) = 2.41 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.4%

Maximum value of SAR (measured) = 8.17 W/kg

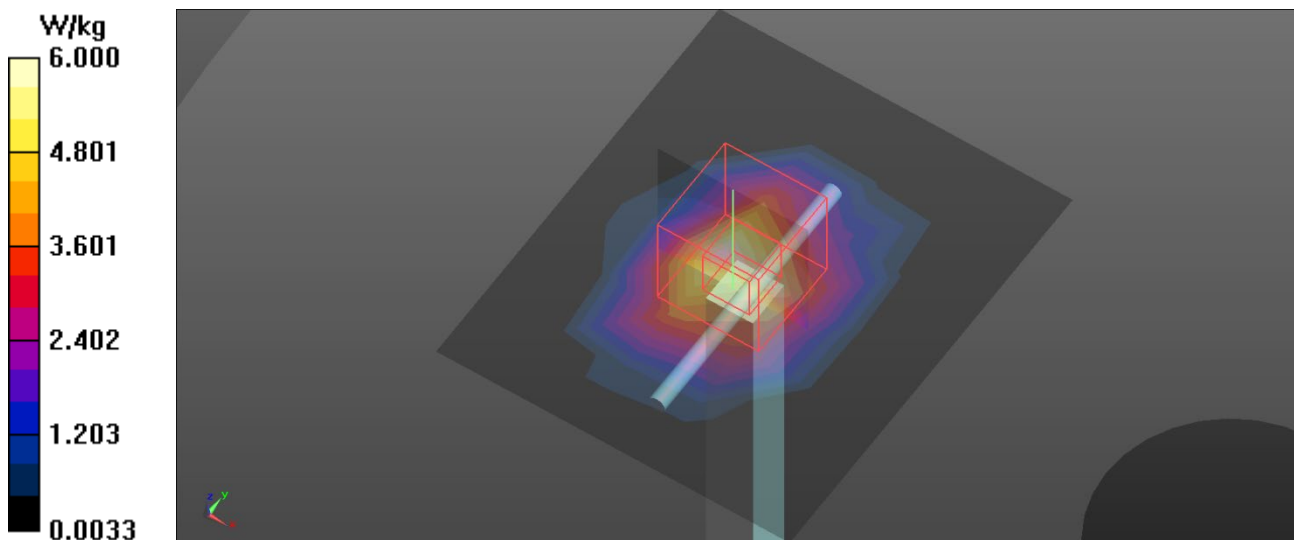

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/22

System Check_H2600_0722

DUT: Dipole 2600 MHz D2600V2;SN:1067;

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.055$ S/m; $\epsilon_r = 38.831$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(7.3, 7.3, 7.3) @ 2600 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (7x10x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 8.03 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 71.09 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 12.9 W/kg

SAR(1 g) = 5.93 W/kg; SAR(10 g) = 2.63 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 47%

Maximum value of SAR (measured) = 10.2 W/kg

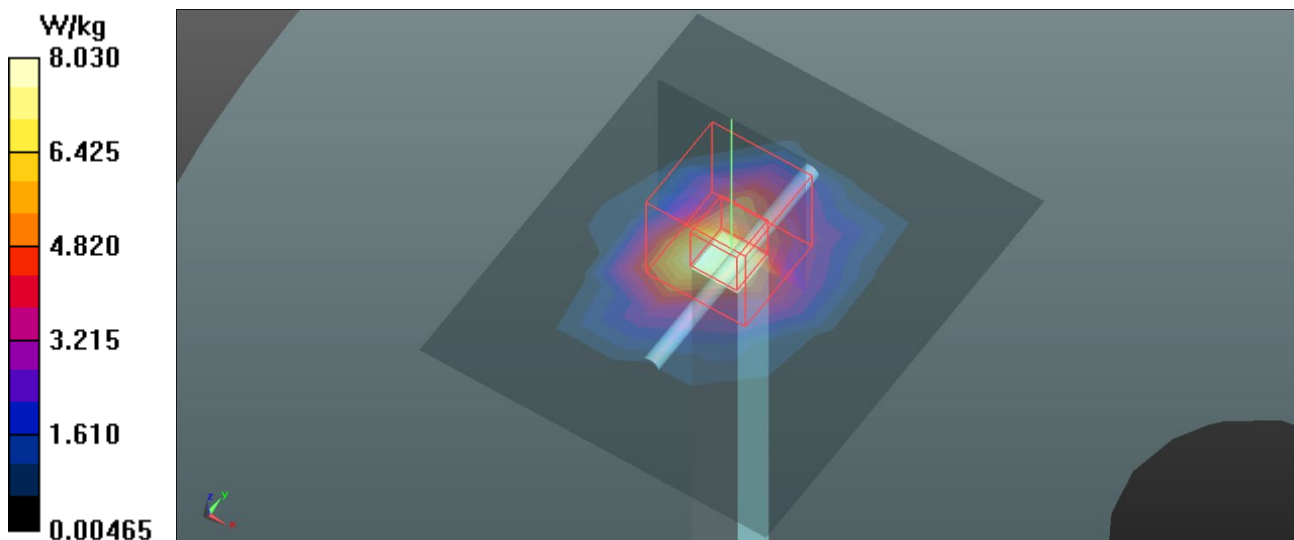

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/24

System Check_H2600_0724

DUT: Dipole 2600 MHz D2600V2;SN:1067;

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.043$ S/m; $\epsilon_r = 37.866$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.9 °C; Liquid Temperature : 22.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(7.3, 7.3, 7.3) @ 2600 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (7x10x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 6.32 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 72.29 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 12.3 W/kg

SAR(1 g) = 5.72 W/kg; SAR(10 g) = 2.55 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 47.2%

Maximum value of SAR (measured) = 9.83 W/kg

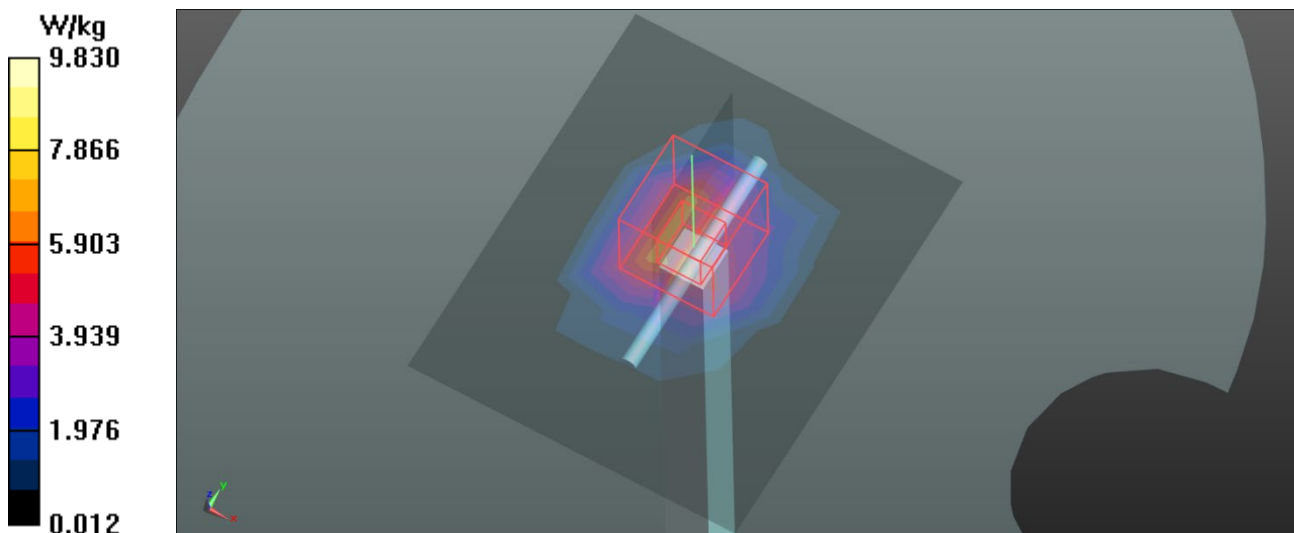

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/26

System Check_H2600_0726

DUT: Dipole 2600 MHz D2600V2;SN:1067;

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.045$ S/m; $\epsilon_r = 37.852$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C; Liquid Temperature : 22.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(7.3, 7.3, 7.3) @ 2600 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (7x10x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 6.08 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 69.87 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 11.8 W/kg

SAR(1 g) = 5.52 W/kg; SAR(10 g) = 2.46 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 47.3%

Maximum value of SAR (measured) = 9.44 W/kg

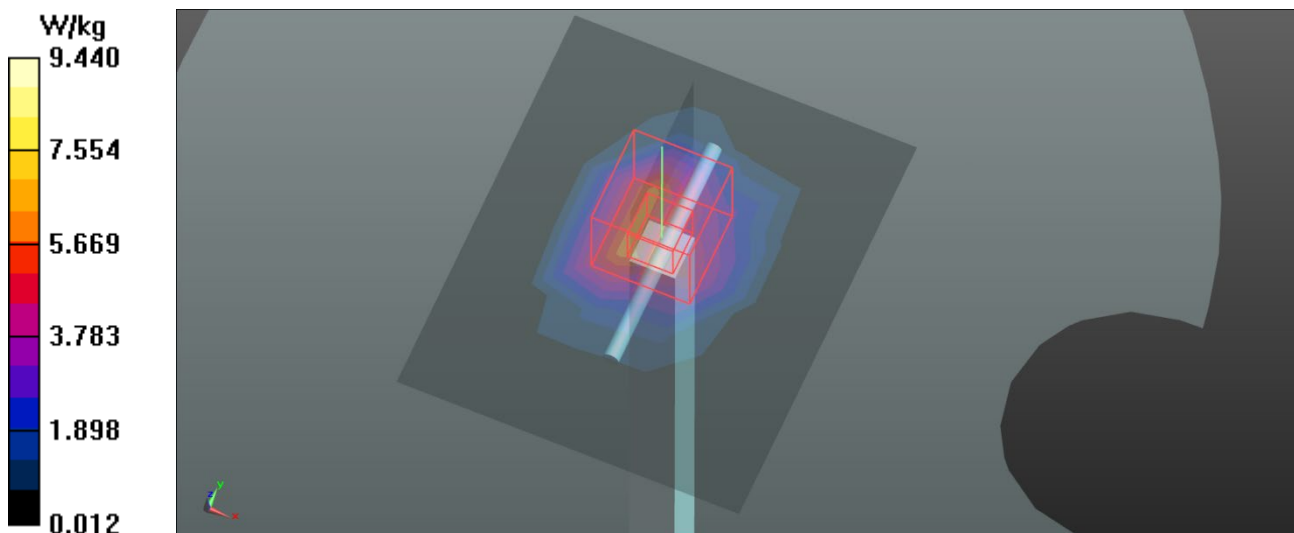

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/21

System Check_H5250_0721**DUT: Dipole D5GHzV2;SN:1160;**

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 5250$ MHz; $\sigma = 4.734$ S/m; $\epsilon_r = 36.219$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe:EX3DV4 - SN7693;ConvF(5.71,5.65, 6.1) @ 5250 MHz;Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (6x6x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 12.8 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 69.22 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 36.1 W/kg

SAR(1 g) = 8.15 W/kg; SAR(10 g) = 2.32 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 22%

Maximum value of SAR (measured) = 21.1 W/kg

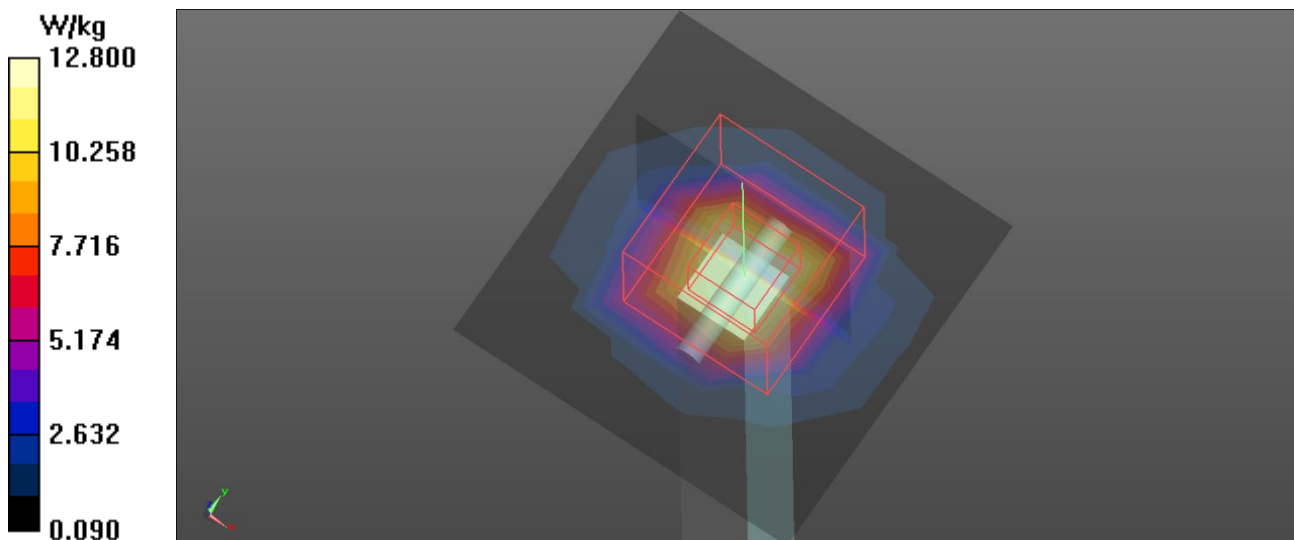

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/22

System Check_H5600_0722

DUT: Dipole D5GHzV2;SN;1160;

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = 5.141 \text{ S/m}$; $\epsilon_r = 35.386$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $22.8 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe:EX3DV4 - SN7693;ConvF(5.33,5.27,5.69) @ 5600 MHz;Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (6x6x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Maximum value of SAR (measured) = 13.5 W/kg
Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 67.17 V/m ; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 39.3 W/kg
SAR(1 g) = 8.11 W/kg ; SAR(10 g) = 2.29 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 19.3%

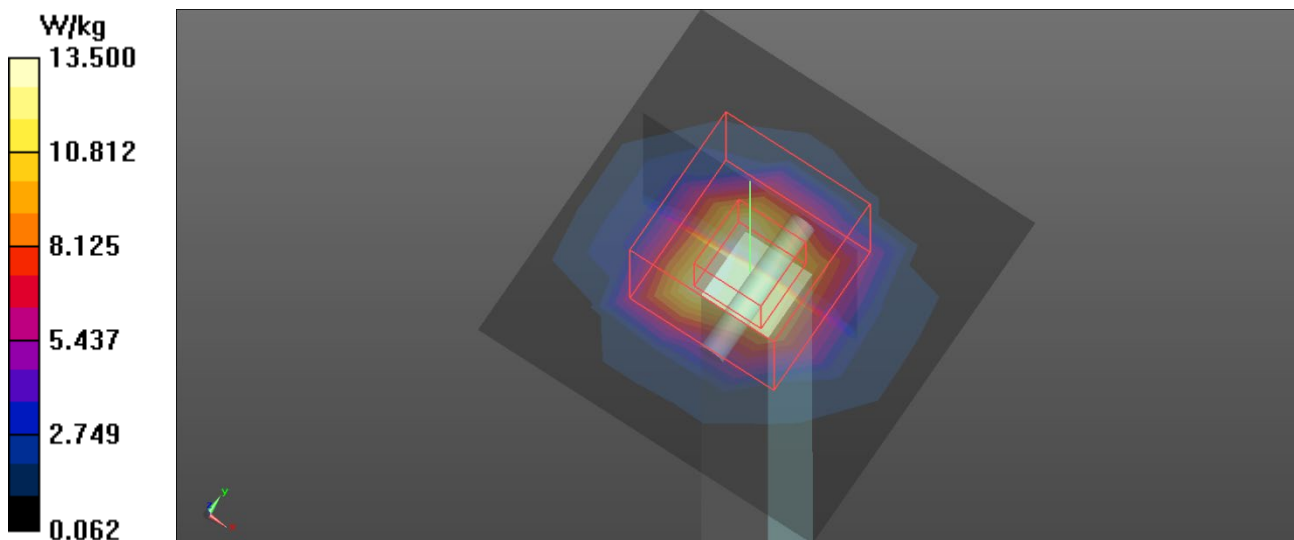Maximum value of SAR (measured) = 21.5 W/kg


Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/22

System Check_H5750_0722

DUT: Dipole D5GHzV2;SN:1160;

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.314$ S/m; $\epsilon_r = 35.068$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe:EX3DV4 - SN7693;ConvF(5.25,5.19,5.61) @ 5750 MHz;Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (6x6x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 13.9 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 66.85 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 39.8 W/kg

SAR(1 g) = 7.94 W/kg; SAR(10 g) = 2.24 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 18.3%

Maximum value of SAR (measured) = 21.1 W/kg

