





Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 38

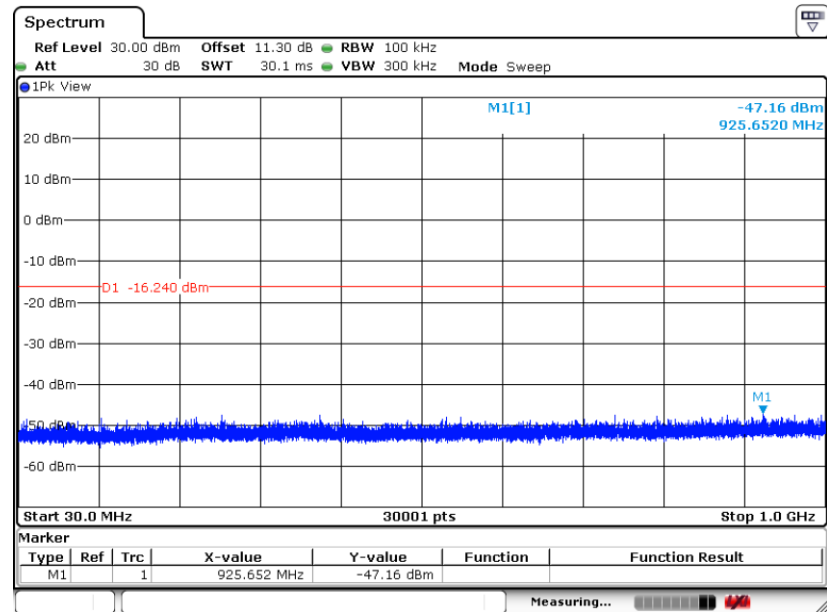

Date: 5 JAN 2026 10:40:10

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 38

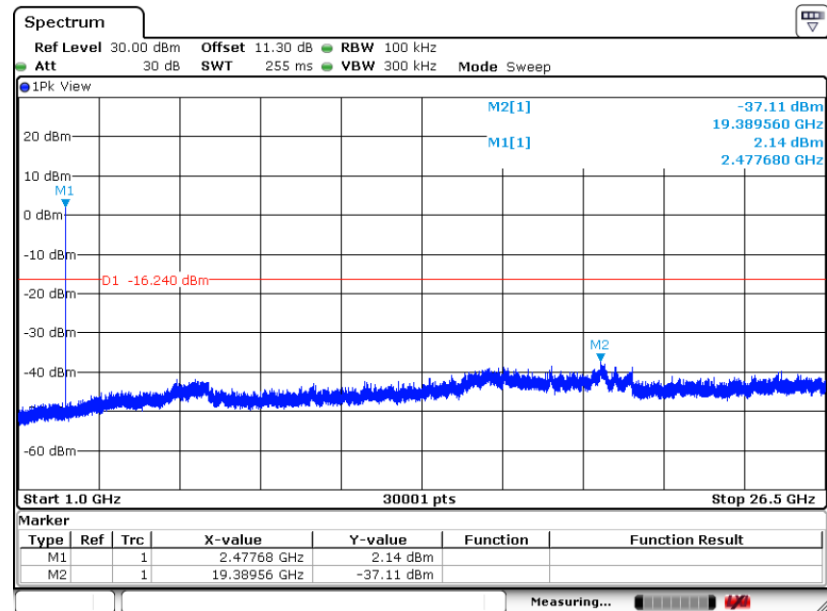

Date: 5 JAN 2026 10:42:42

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2020 clause 6.3, 6.5, 6.6, 11.11 and 11.12.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

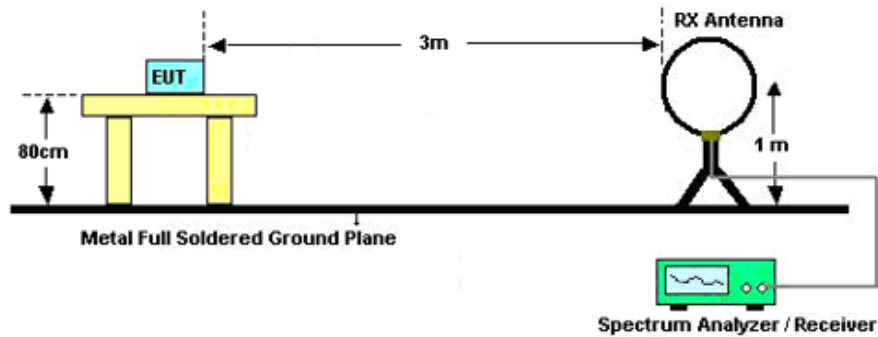

For radiated emissions from 30MHz to 1GHz

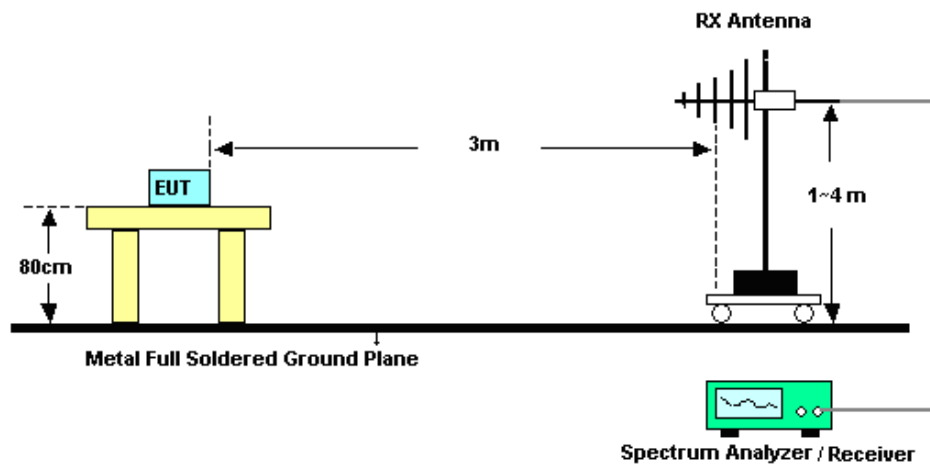

For radiated emissions above 1GHz

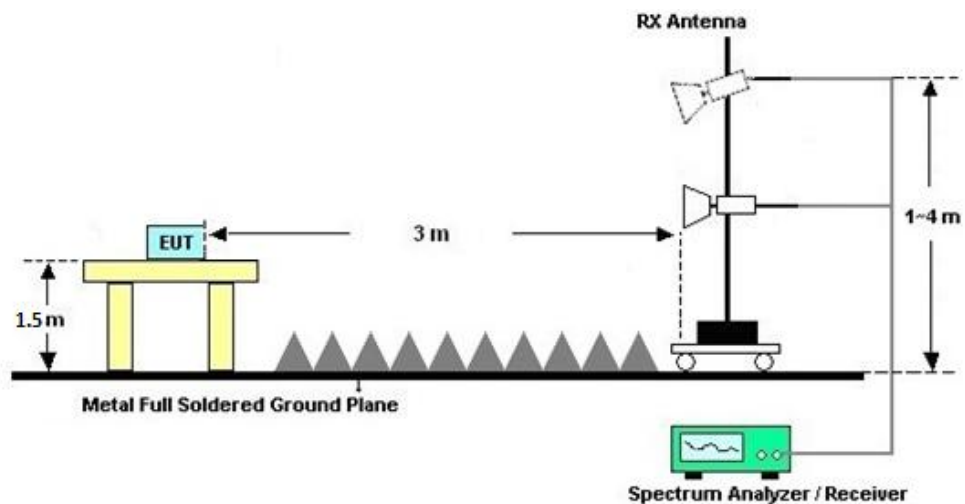

**3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

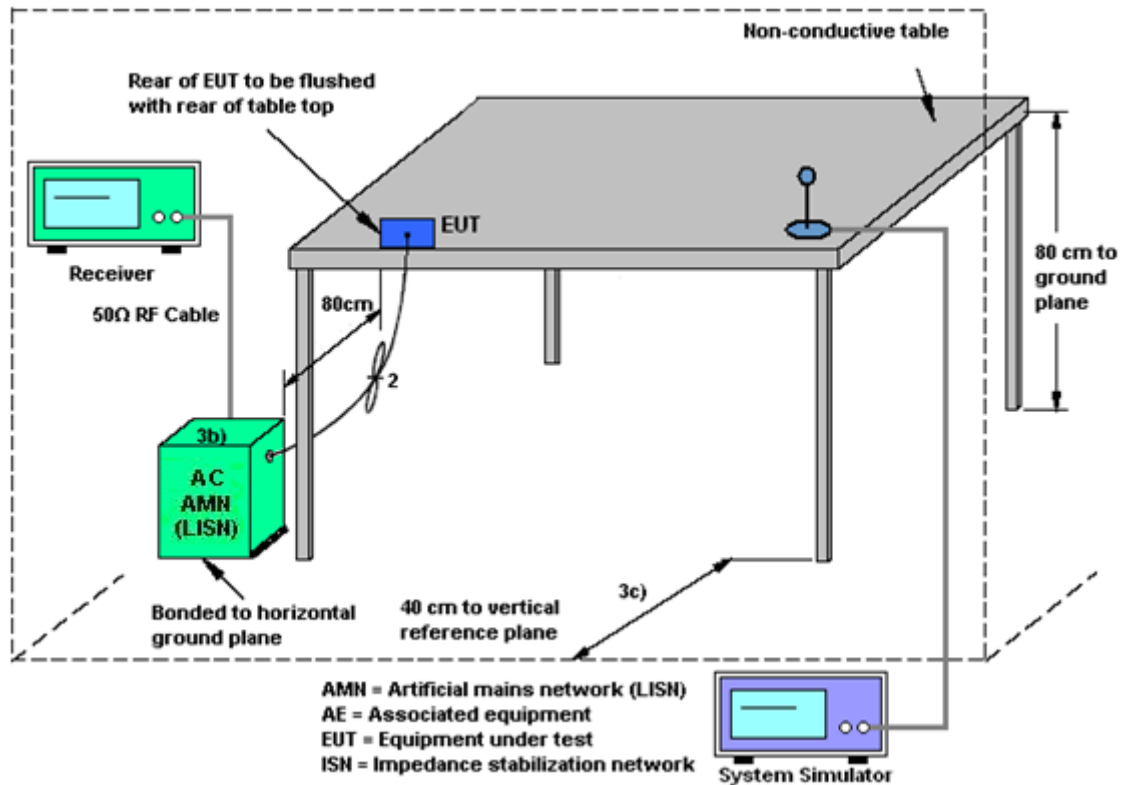

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 02, 2025	Dec. 26, 2025~Jan. 05, 2026	Apr. 01, 2026	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 25, 2025	Dec. 26, 2025~Jan. 05, 2026	Dec. 24, 2026	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Oct. 14, 2025	Dec. 26, 2025~Jan. 05, 2026	Oct. 13, 2026	Conducted (TH01-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2025	Dec. 21, 2025	Jul. 02, 2026	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2025	Dec. 21, 2025	Jul. 02, 2026	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec.25, 2024	Dec. 21, 2025	Dec. 24, 2025	Conduction (CO02-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 24, 2025	Dec. 30, 2025~Jan. 05, 2026	Dec. 23, 2026	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2025	Dec. 30, 2025~Jan. 05, 2026	Jul. 02, 2026	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 26, 2025	Dec. 30, 2025~Jan. 05, 2026	Dec. 25, 2026	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Dec. 23, 2025	Dec. 30, 2025~Jan. 05, 2026	Dec. 22, 2026	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 16, 2025	Dec. 30, 2025~Jan. 05, 2026	Jul. 15, 2026	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 03, 2025	Dec. 30, 2025~Jan. 05, 2026	Apr. 02, 2027	Radiation (03CH01-SZ)
LF Amplifier	EM Electronics	EM330	060788	20MHz~3GHz	Dec. 25, 2025	Dec. 30, 2025~Jan. 05, 2026	Dec. 24, 2026	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 13, 2025	Dec. 30, 2025~Jan. 05, 2026	Oct. 12, 2026	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 13, 2025	Dec. 30, 2025~Jan. 05, 2026	Oct. 12, 2026	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 02, 2025	Dec. 30, 2025~Jan. 05, 2026	Jul. 01, 2026	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Oct. 14, 2025	Dec. 30, 2025~Jan. 05, 2026	Oct. 13, 2026	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Dec. 30, 2025~Jan. 05, 2026	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Dec. 30, 2025~Jan. 05, 2026	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	HuangKaibiao	Temperature:	21~25	°C
Test Date:	2025/12/26~2026/1/5	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	125kbps	1	0	2402	1.057	0.698	0.50	Pass
BLE	125kbps	1	19	2440	1.059	0.704	0.50	Pass
BLE	125kbps	1	39	2480	1.059	0.704	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	125kbps	1	0	2402	5.58	Default	30.00	0.23	5.81	36.00	Pass
BLE	125kbps	1	19	2440	6.34	Default	30.00	0.23	6.57	36.00	Pass
BLE	125kbps	1	39	2480	5.89	Default	30.00	0.23	6.12	36.00	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	125kbps	1	0	2402	0.84	5.20	Default	30.00	0.23	5.43	36.00	Pass
BLE	125kbps	1	19	2440	0.84	5.90	Default	30.00	0.23	6.13	36.00	Pass
BLE	125kbps	1	39	2480	0.84	5.40	Default	30.00	0.23	5.63	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	125kbps	1	0	2402	1.22	-1.30	0.23	8.00	Pass
BLE	125kbps	1	19	2440	2.05	-0.49	0.23	8.00	Pass
BLE	125kbps	1	39	2480	1.62	-0.92	0.23	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	500kbps	1	0	2402	1.023	0.668	0.50	Pass
BLE	500kbps	1	19	2440	1.025	0.670	0.50	Pass
BLE	500kbps	1	39	2480	1.025	0.668	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	500kbps	1	0	2402	5.55	Default	30.00	0.23	5.78	36.00	Pass
BLE	500kbps	1	19	2440	6.30	Default	30.00	0.23	6.53	36.00	Pass
BLE	500kbps	1	39	2480	5.85	Default	30.00	0.23	6.08	36.00	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	500kbps	1	0	2402	2.47	5.10	Default	30.00	0.23	5.33	36.00	Pass
BLE	500kbps	1	19	2440	2.47	5.80	Default	30.00	0.23	6.03	36.00	Pass
BLE	500kbps	1	39	2480	2.47	5.30	Default	30.00	0.23	5.53	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	500kbps	1	0	2402	4.63	-1.48	0.23	8.00	Pass
BLE	500kbps	1	19	2440	5.46	-0.64	0.23	8.00	Pass
BLE	500kbps	1	39	2480	5.03	-1.05	0.23	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.033	0.688	0.50	Pass
BLE	1Mbps	1	19	2440	1.033	0.690	0.50	Pass
BLE	1Mbps	1	39	2480	1.035	0.700	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	5.54	Default	30.00	0.23	5.77	36.00	Pass
BLE	1Mbps	1	19	2440	6.32	Default	30.00	0.23	6.55	36.00	Pass
BLE	1Mbps	1	39	2480	5.84	Default	30.00	0.23	6.07	36.00	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	2.13	5.10	Default	30.00	0.23	5.33	36.00	Pass
BLE	1Mbps	1	19	2440	2.13	5.80	Default	30.00	0.23	6.03	36.00	Pass
BLE	1Mbps	1	39	2480	2.13	5.30	Default	30.00	0.23	5.53	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	4.13	-10.28	0.23	8.00	Pass
BLE	1Mbps	1	19	2440	4.94	-9.47	0.23	8.00	Pass
BLE	1Mbps	1	39	2480	4.49	-9.93	0.23	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	1	2404	2.054	1.184	0.50	Pass
BLE	2Mbps	1	19	2440	2.054	1.188	0.50	Pass
BLE	2Mbps	1	38	2478	2.058	1.188	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	1	2404	5.56	Default	30.00	0.23	5.79	36.00	Pass
BLE	2Mbps	1	19	2440	6.33	Default	30.00	0.23	6.56	36.00	Pass
BLE	2Mbps	1	38	2478	5.87	Default	30.00	0.23	6.10	36.00	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	1	2404	4.91	5.10	Default	30.00	0.23	5.33	36.00	Pass
BLE	2Mbps	1	19	2440	4.91	5.70	Default	30.00	0.23	5.93	36.00	Pass
BLE	2Mbps	1	38	2478	4.91	5.30	Default	30.00	0.23	5.53	36.00	Pass


TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	1	2404	3.58	-12.79	0.23	8.00	Pass
BLE	2Mbps	1	19	2440	4.76	-11.58	0.23	8.00	Pass
BLE	2Mbps	1	38	2478	3.76	-12.58	0.23	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.




Appendix B. AC Conducted Emission Test Results

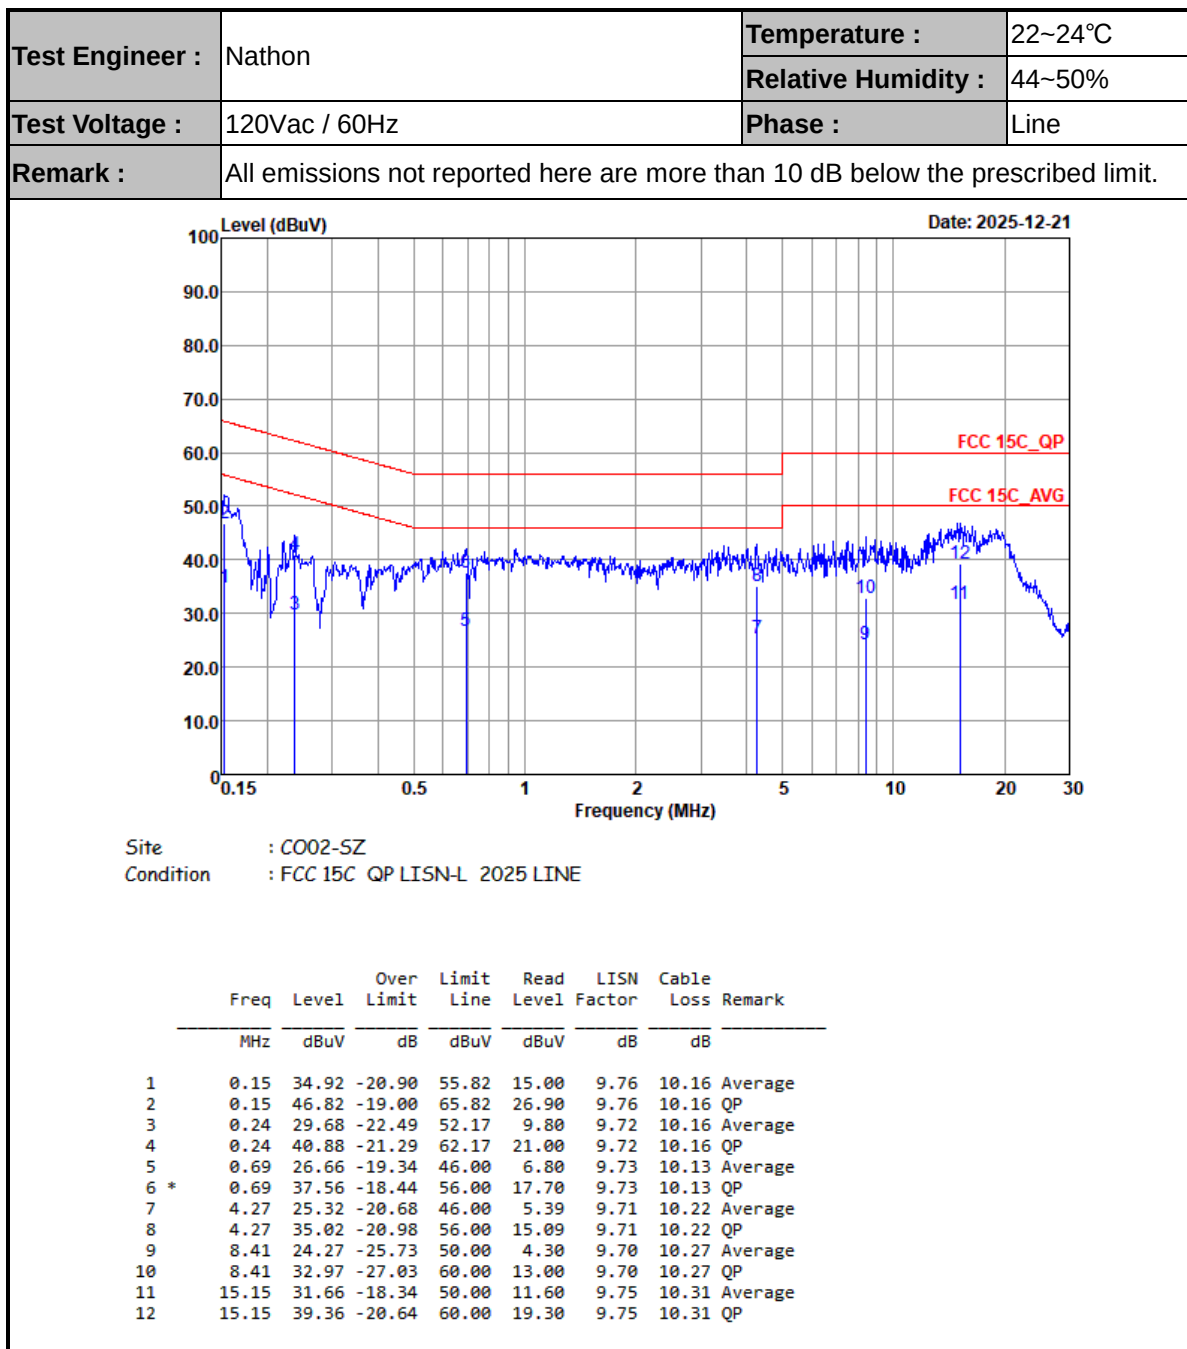



Test Engineer :	Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

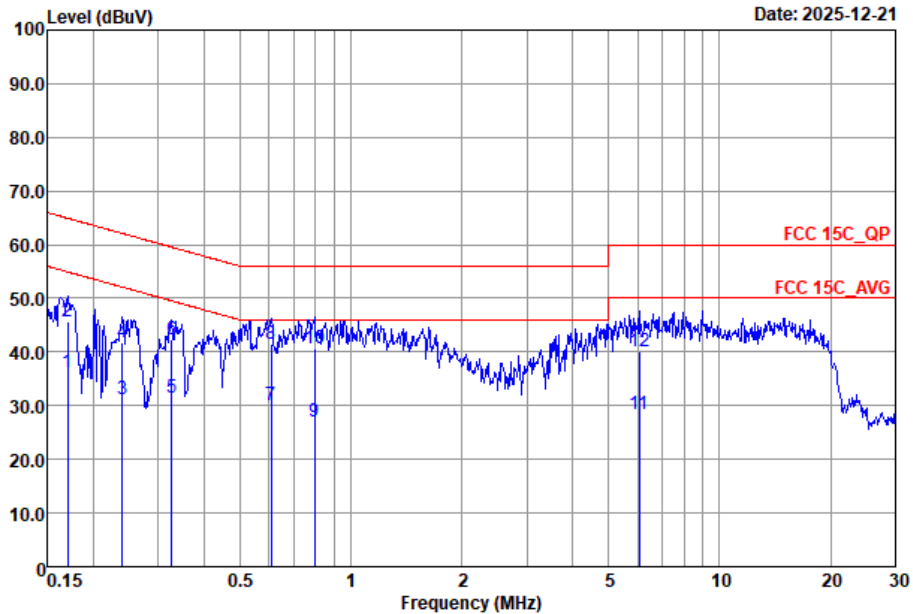

Site : C002-SZ
Condition : FCC 15C_QP LISN-N 2025 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.17	36.14	-18.80	54.94	16.20	9.78	10.16	Average
2	0.17	45.64	-19.30	64.94	25.70	9.78	10.16	QP
3	0.24	31.24	-20.84	52.08	11.30	9.78	10.16	Average
4	0.24	41.84	-20.24	62.08	21.90	9.78	10.16	QP
5	0.33	31.53	-18.00	49.53	11.60	9.78	10.15	Average
6	0.33	42.23	-17.30	59.53	22.30	9.78	10.15	QP
7	0.61	30.21	-15.79	46.00	10.30	9.78	10.13	Average
8 *	0.61	41.41	-14.59	56.00	21.50	9.78	10.13	QP
9	0.80	26.90	-19.10	46.00	7.00	9.77	10.13	Average
10	0.80	40.60	-15.40	56.00	20.70	9.77	10.13	QP
11	6.06	28.29	-21.71	50.00	8.30	9.75	10.24	Average
12	6.06	39.99	-20.01	60.00	20.00	9.75	10.24	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	HuaCong Liang	Relative Humidity :	48~49%
		Temperature :	24-25℃

Radiated Spurious Emission Test Modes





Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	22	Bluetooth-LE	00	2402	125Kbps	-	-
Mode 2	2400-2483.5	22	Bluetooth-LE	19	2440	125Kbps	-	-
Mode 3	2400-2483.5	22	Bluetooth-LE	39	2480	125Kbps	-	-
Mode 4	2400-2483.5	22	Bluetooth-LE	01	2404	2Mbps	-	-
Mode 5	2400-2483.5	22	Bluetooth-LE	19	2440	2Mbps	-	-
Mode 6	2400-2483.5	22	Bluetooth-LE	38	2478	2Mbps	-	-
Mode 7	2400-2483.5	22	Bluetooth-LE-LF	38	2478	2Mbps	-	LF

Note: For BLE 1Mbps & 125Kbps & 500Kbps mode, the RSE testing has assessed BLE 125Kbps mode by referring to the higher conducted power.





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE	00	2388.02	38.92	54.00	-15.08	H	AVERAGE	Pass	Band Edge
1	Bluetooth-LE	00	4804.00	44.28	74.00	-29.72	V	Peak	Pass	Harmonic
2	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
2	Bluetooth-LE	19	7320.00	46.38	74.00	-27.62	H	Peak	Pass	Harmonic
3	Bluetooth-LE	39	2483.82	39.72	54.00	-14.28	V	AVERAGE	Pass	Band Edge
3	Bluetooth-LE	39	7440.00	46.16	74.00	-27.84	V	Peak	Pass	Harmonic
4	Bluetooth-LE	01	2389.49	37.03	54.00	-16.97	V	AVERAGE	Pass	Band Edge
4	Bluetooth-LE	01	4808.00	44.33	74.00	-29.67	H	Peak	Pass	Harmonic
5	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
5	Bluetooth-LE	19	7320.00	46.01	74.00	-27.99	V	Peak	Pass	Harmonic
6	Bluetooth-LE	38	2491.71	39.88	54.00	-14.12	V	AVERAGE	Pass	Band Edge
6	Bluetooth-LE	38	7434.00	45.81	74.00	-28.19	H	Peak	Pass	Harmonic
7	Bluetooth-LE-LF	38	206.54	26.00	43.50	-17.50	H	Peak	Pass	LF

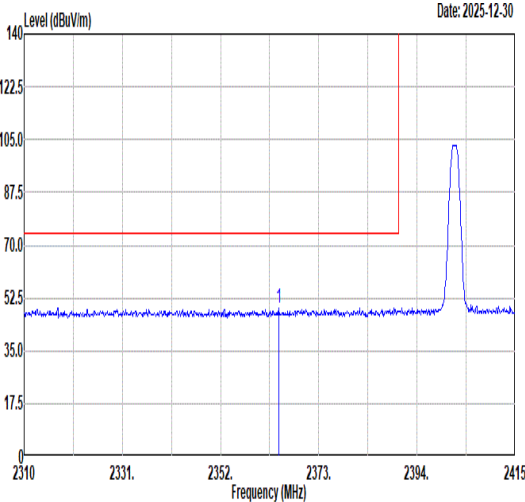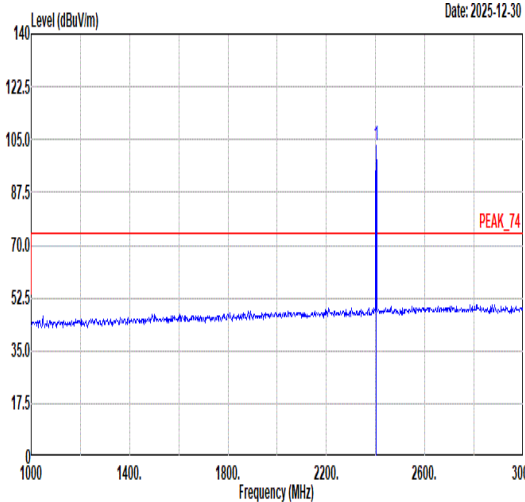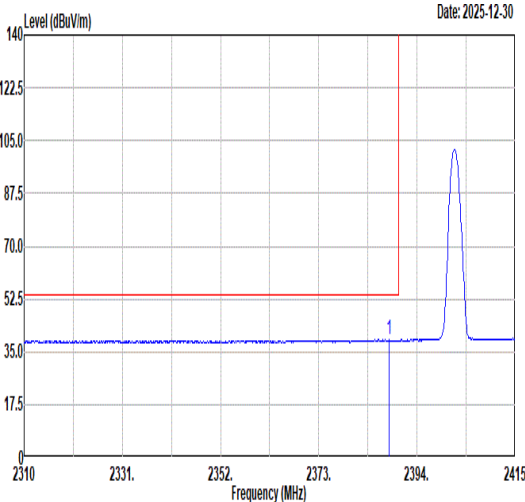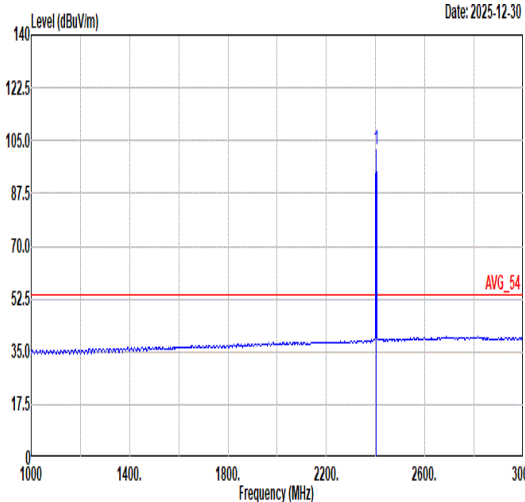

		1																																																																																							
Mode		Band Edge																																																																																							
		2400-2483.5 Bluetooth-LE_CH00_2402MHz																																																																																							
ANT		22																																																																																							
Pol.		Horizontal					Fundamental																																																																																		
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2384.39</td><td>49.10</td><td>74.00</td><td>-24.90</td><td>44.52</td><td>30.39</td><td>6.84</td><td>32.65</td><td>367 50 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2384.39	49.10	74.00	-24.90	44.52	30.39	6.84	32.65	367 50 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>103.20</td><td>-----</td><td>98.54</td><td>30.42</td><td>6.88</td><td>32.64</td><td>367</td><td>50 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	103.20	-----	98.54	30.42	6.88	32.64	367
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2384.39	49.10	74.00	-24.90	44.52	30.39	6.84	32.65	367 50 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2402.00	103.20	-----	98.54	30.42	6.88	32.64	367	50 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.02</td><td>38.92</td><td>54.00</td><td>-15.08</td><td>34.29</td><td>30.41</td><td>6.86</td><td>32.64</td><td>367 50 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.02	38.92	54.00	-15.08	34.29	30.41	6.86	32.64	367 50 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>102.12</td><td>-----</td><td>97.46</td><td>30.42</td><td>6.88</td><td>32.64</td><td>367</td><td>50 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	102.12	-----	97.46	30.42	6.88	32.64	367
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2388.02	38.92	54.00	-15.08	34.29	30.41	6.86	32.64	367 50 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2402.00	102.12	-----	97.46	30.42	6.88	32.64	367	50 AVERAGE																																																																																

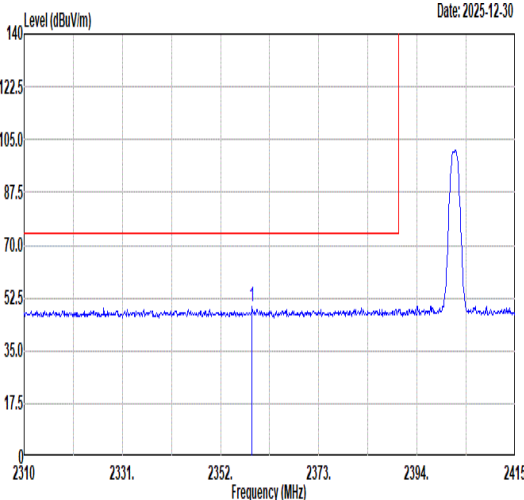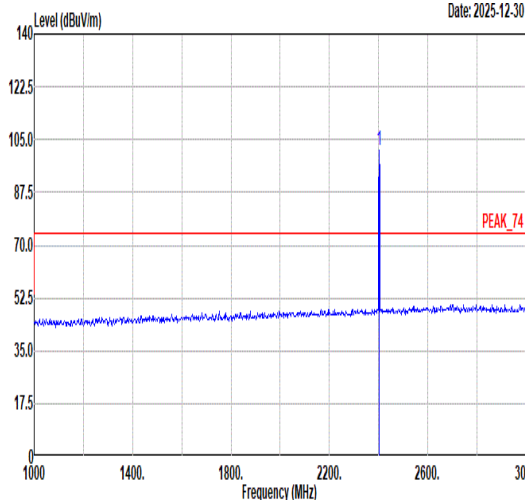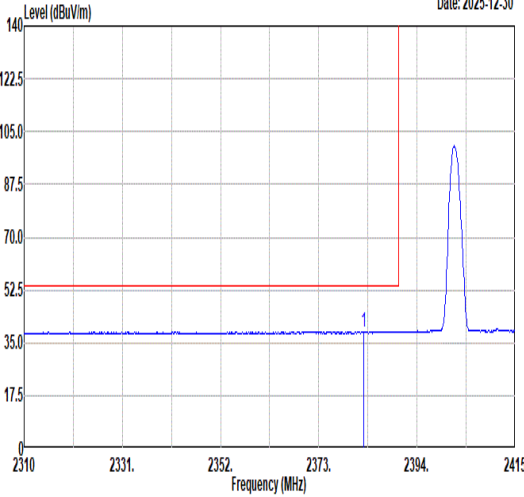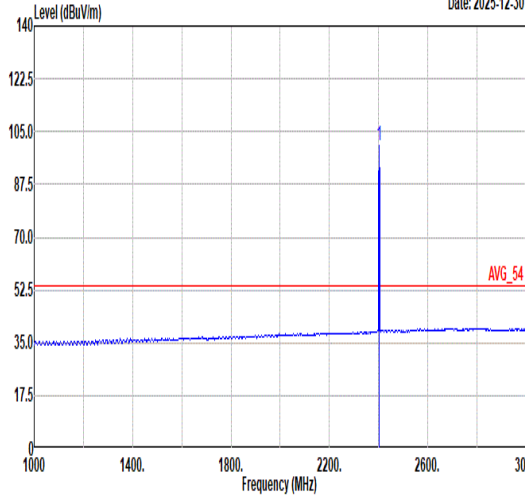

Mode	1																																																																																																																																																																		
	Band Edge																																																																																																																																																																		
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																																																																																																		
ANT	22																																																																																																																																																																		
Pol.	Vertical	Fundamental																																																																																																																																																																	
Peak	Level (dBuV/m) Date: 2025-12-30  <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2358.72</td><td>49.63</td><td>74.00</td><td>-24.37</td><td>45.07</td><td>30.39</td><td>6.83</td><td>32.66</td><td>168 90 PEAK</td></tr></tbody></table> Level (dBuV/m) Date: 2025-12-30  <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>101.58</td><td>-----</td><td>96.92</td><td>30.42</td><td>6.88</td><td>32.64</td><td>168</td><td>90 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2358.72	49.63	74.00	-24.37	45.07	30.39	6.83	32.66	168 90 PEAK		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	101.58	-----	96.92	30.42	6.88	32.64	168	90 PEAK	Avg	Level (dBuV/m) Date: 2025-12-30  <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2382.66</td><td>38.75</td><td>54.00</td><td>-15.25</td><td>34.13</td><td>30.41</td><td>6.86</td><td>32.65</td><td>168 90 AVERAGE</td></tr></tbody></table> Level (dBuV/m) Date: 2025-12-30  <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>100.22</td><td>-----</td><td>95.56</td><td>30.42</td><td>6.88</td><td>32.64</td><td>168</td><td>90 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2382.66	38.75	54.00	-15.25	34.13	30.41	6.86	32.65	168 90 AVERAGE		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	100.22	-----	95.56	30.42	6.88	32.64	168	90 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																										
1	2358.72	49.63	74.00	-24.37	45.07	30.39	6.83	32.66	168 90 PEAK																																																																																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																										
1	2402.00	101.58	-----	96.92	30.42	6.88	32.64	168	90 PEAK																																																																																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																										
1	2382.66	38.75	54.00	-15.25	34.13	30.41	6.86	32.65	168 90 AVERAGE																																																																																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																										
1	2402.00	100.22	-----	95.56	30.42	6.88	32.64	168	90 AVERAGE																																																																																																																																																										



Mode	1																																																																																											
	Harmonic																																																																																											
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																											
ANT	22																																																																																											
Pol.	Horizontal						Vertical																																																																																					
Peak Avg	Horizontal Polarization Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a blue signal line, a red limit line at 74.00 dBuV/m, and a red average line at 54.00 dBuV/m. A peak is marked at 4804.00 MHz.						Vertical Polarization Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a blue signal line, a red limit line at 74.00 dBuV/m, and a red average line at 54.00 dBuV/m. A peak is marked at 4804.00 MHz.																																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>43.81</td><td>74.00</td><td>-30.19</td><td>50.91</td><td>35.37</td><td>10.11</td><td>52.58</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4804.00	43.81	74.00	-30.19	50.91	35.37	10.11	52.58	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>44.28</td><td>74.00</td><td>-29.72</td><td>51.38</td><td>35.37</td><td>10.11</td><td>52.58</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4804.00	44.28	74.00	-29.72	51.38	35.37	10.11	52.58	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	4804.00	43.81	74.00	-30.19	50.91	35.37	10.11	52.58	---	---	Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	4804.00	44.28	74.00	-29.72	51.38	35.37	10.11	52.58	---	---	Peak																																																																																	







Mode	2																																																																					
	Harmonic																																																																					
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																					
ANT	22																																																																					
Pol.	Horizontal																																																																					
Peak Avg																																																																						
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>44.51</td><td>74.00</td><td>-29.49</td><td>51.32</td><td>35.54</td><td>10.28</td><td>52.63</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>46.38</td><td>74.00</td><td>-27.62</td><td>50.12</td><td>36.48</td><td>12.01</td><td>52.23</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4880.00	44.51	74.00	-29.49	51.32	35.54	10.28	52.63	---	---	Peak	2	7320.00	46.38	74.00	-27.62	50.12	36.48	12.01	52.23	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																												
1	4880.00	44.51	74.00	-29.49	51.32	35.54	10.28	52.63	---	---	Peak																																																											
2	7320.00	46.38	74.00	-27.62	50.12	36.48	12.01	52.23	---	---	Peak																																																											
<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>44.47</td><td>74.00</td><td>-29.53</td><td>51.28</td><td>35.54</td><td>10.28</td><td>52.63</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>45.20</td><td>74.00</td><td>-28.80</td><td>48.94</td><td>36.48</td><td>12.01</td><td>52.23</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4880.00	44.47	74.00	-29.53	51.28	35.54	10.28	52.63	---	---	Peak	2	7320.00	45.20	74.00	-28.80	48.94	36.48	12.01	52.23	---	---	Peak	
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																												
1	4880.00	44.47	74.00	-29.53	51.28	35.54	10.28	52.63	---	---	Peak																																																											
2	7320.00	45.20	74.00	-28.80	48.94	36.48	12.01	52.23	---	---	Peak																																																											



Mode	3																																																																															
	Band Edge																																																																															
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																															
ANT	22																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	Level (dBuV/m) Date: 2025-12-30 PEAK_BE_74 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2485.92</td><td>49.99</td><td>74.00</td><td>-24.01</td><td>45.13</td><td>30.49</td><td>6.98</td><td>32.61</td><td>135</td><td>32 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2485.92	49.99	74.00	-24.01	45.13	30.49	6.98	32.61	135	32 PEAK	Level (dBuV/m) Date: 2025-12-30 PEAK_74 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>103.26</td><td>-----</td><td>-----</td><td>98.42</td><td>30.48</td><td>6.97</td><td>32.61</td><td>135</td><td>32 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2480.00	103.26	-----	-----	98.42	30.48	6.97	32.61	135	32 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2485.92	49.99	74.00	-24.01	45.13	30.49	6.98	32.61	135	32 PEAK																																																																						
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2480.00	103.26	-----	-----	98.42	30.48	6.97	32.61	135	32 PEAK																																																																						
Avg	Level (dBuV/m) Date: 2025-12-30 AVG_BE_54 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.90</td><td>39.71</td><td>54.00</td><td>-14.29</td><td>34.85</td><td>30.49</td><td>6.98</td><td>32.61</td><td>135</td><td>32 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.90	39.71	54.00	-14.29	34.85	30.49	6.98	32.61	135	32 AVERAGE	Level (dBuV/m) Date: 2025-12-30 AVG_54 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>101.97</td><td>-----</td><td>-----</td><td>97.13</td><td>30.48</td><td>6.97</td><td>32.61</td><td>135</td><td>32 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2480.00	101.97	-----	-----	97.13	30.48	6.97	32.61	135	32 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2483.90	39.71	54.00	-14.29	34.85	30.49	6.98	32.61	135	32 AVERAGE																																																																						
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2480.00	101.97	-----	-----	97.13	30.48	6.97	32.61	135	32 AVERAGE																																																																						

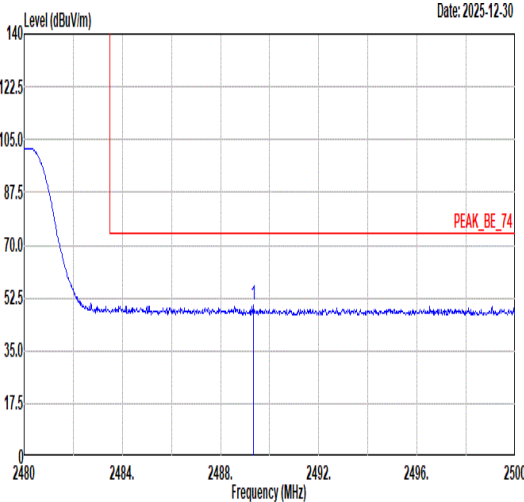
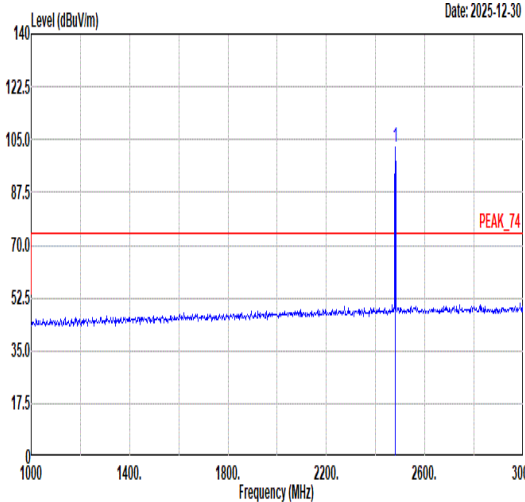
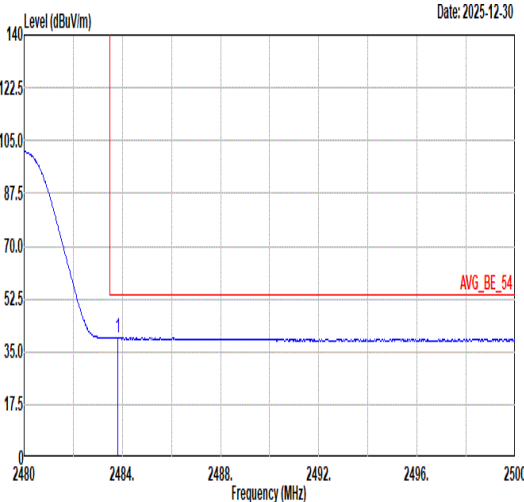
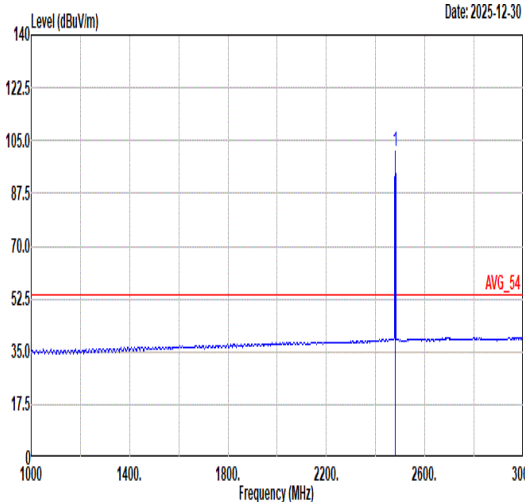


Mode	3																																																																																							
	Band Edge																																																																																							
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																							
ANT	22																																																																																							
Pol.	Vertical					Fundamental																																																																																		
Peak	 Date: 2025-12-30 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.34</td><td>49.96</td><td>74.00</td><td>-24.04</td><td>45.09</td><td>30.49</td><td>6.98</td><td>32.60</td><td>207</td><td>70 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.34	49.96	74.00	-24.04	45.09	30.49	6.98	32.60	207	70 PEAK	 Date: 2025-12-30 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>102.48</td><td>-----</td><td>-----</td><td>97.64</td><td>30.48</td><td>6.97</td><td>32.61</td><td>207</td><td>70 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2480.00	102.48	-----	-----	97.64	30.48	6.97	32.61	207	70 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2483.34	49.96	74.00	-24.04	45.09	30.49	6.98	32.60	207	70 PEAK																																																																														
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2480.00	102.48	-----	-----	97.64	30.48	6.97	32.61	207	70 PEAK																																																																														
Avg	 Date: 2025-12-30 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.82</td><td>39.72</td><td>54.00</td><td>-14.28</td><td>34.86</td><td>30.49</td><td>6.98</td><td>32.61</td><td>207</td><td>70 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.82	39.72	54.00	-14.28	34.86	30.49	6.98	32.61	207	70 AVERAGE	 Date: 2025-12-30 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>101.20</td><td>-----</td><td>-----</td><td>96.36</td><td>30.48</td><td>6.97</td><td>32.61</td><td>207</td><td>70 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2480.00	101.20	-----	-----	96.36	30.48	6.97	32.61	207	70 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2483.82	39.72	54.00	-14.28	34.86	30.49	6.98	32.61	207	70 AVERAGE																																																																														
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2480.00	101.20	-----	-----	96.36	30.48	6.97	32.61	207	70 AVERAGE																																																																														



Mode	3																																																																																																																											
	Harmonic																																																																																																																											
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																											
ANT	22																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																					
Peak Avg																																																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>45.48</td><td>74.00</td><td>-28.52</td><td>52.11</td><td>35.71</td><td>10.34</td><td>52.68</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>45.76</td><td>74.00</td><td>-28.24</td><td>49.41</td><td>36.63</td><td>12.00</td><td>52.28</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4960.00	45.48	74.00	-28.52	52.11	35.71	10.34	52.68	---	---	Peak	2	7440.00	45.76	74.00	-28.24	49.41	36.63	12.00	52.28	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>44.67</td><td>74.00</td><td>-29.33</td><td>51.30</td><td>35.71</td><td>10.34</td><td>52.68</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>46.16</td><td>74.00</td><td>-27.84</td><td>49.81</td><td>36.63</td><td>12.00</td><td>52.28</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4960.00	44.67	74.00	-29.33	51.30	35.71	10.34	52.68	---	---	Peak	2	7440.00	46.16	74.00	-27.84	49.81	36.63	12.00	52.28	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				Remark																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	4960.00	45.48	74.00	-28.52	52.11	35.71	10.34	52.68	---	---	Peak																																																																																																																	
2	7440.00	45.76	74.00	-28.24	49.41	36.63	12.00	52.28	---	---	Peak																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor				Remark																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	4960.00	44.67	74.00	-29.33	51.30	35.71	10.34	52.68	---	---	Peak																																																																																																																	
2	7440.00	46.16	74.00	-27.84	49.81	36.63	12.00	52.28	---	---	Peak																																																																																																																	

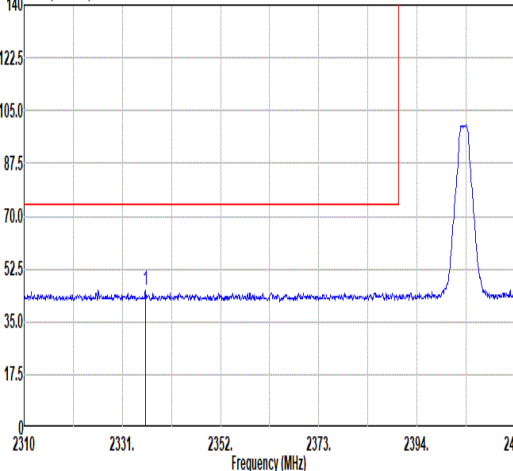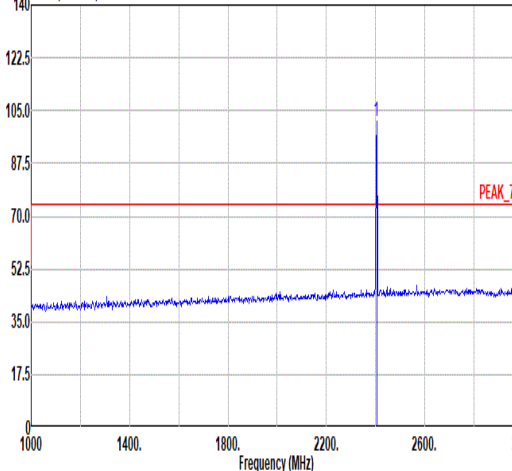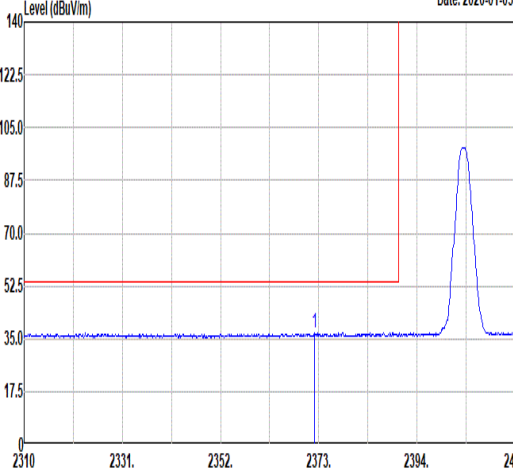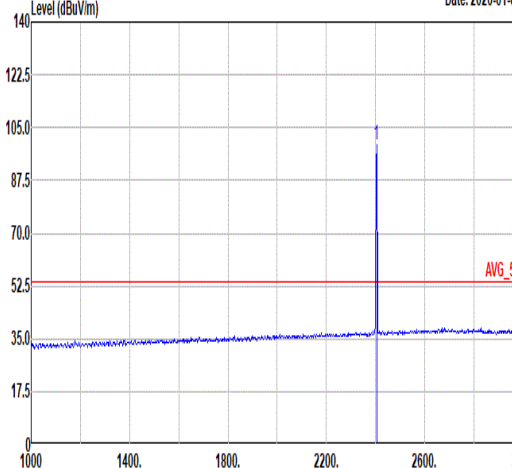

Mode	4																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_CH01_2404MHz																																																																																	
ANT	22																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2026-01-05  1 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2335.94</td><td>45.51</td><td>74.00</td><td>-28.49</td><td>41.00</td><td>30.37</td><td>6.81</td><td>32.67</td><td>367 37 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2335.94	45.51	74.00	-28.49	41.00	30.37	6.81	32.67	367 37 PEAK	Level (dBuV/m) Date: 2026-01-05  PEAK_74 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2404.00</td><td>101.31</td><td>-----</td><td>96.65</td><td>30.42</td><td>6.88</td><td>32.64</td><td>367</td><td>37 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	101.31	-----	96.65	30.42	6.88	32.64	367	37 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2335.94	45.51	74.00	-28.49	41.00	30.37	6.81	32.67	367 37 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2404.00	101.31	-----	96.65	30.42	6.88	32.64	367	37 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2026-01-05  1 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2372.16</td><td>37.02</td><td>54.00</td><td>-16.98</td><td>32.42</td><td>30.40</td><td>6.85</td><td>32.65</td><td>367 37 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2372.16	37.02	54.00	-16.98	32.42	30.40	6.85	32.65	367 37 AVERAGE	Level (dBuV/m) Date: 2026-01-05  AVG_54 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2404.00</td><td>99.43</td><td>-----</td><td>94.77</td><td>30.42</td><td>6.88</td><td>32.64</td><td>367</td><td>37 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	99.43	-----	94.77	30.42	6.88	32.64	367	37 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2372.16	37.02	54.00	-16.98	32.42	30.40	6.85	32.65	367 37 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2404.00	99.43	-----	94.77	30.42	6.88	32.64	367	37 AVERAGE																																																																									



Mode	4	
	Band Edge	
	2400-2483.5 Bluetooth-LE_CH01_2404MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	<	







Mode	4																																																																																											
	Harmonic																																																																																											
	2400-2483.5_Bluetooth-LE_CH01_2404MHz																																																																																											
ANT	22																																																																																											
Pol.	Horizontal						Vertical																																																																																					
Peak Avg	Horizontal Polarization Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a blue signal line, a red limit line at 74.00 dBuV/m, and a red average line at 54.00 dBuV/m. A peak is marked at 4808.00 MHz.						Vertical Polarization Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a blue signal line, a red limit line at 74.00 dBuV/m, and a red average line at 54.00 dBuV/m. A peak is marked at 4808.00 MHz.																																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4808.00</td><td>44.33</td><td>74.00</td><td>-29.67</td><td>51.41</td><td>35.38</td><td>10.12</td><td>52.58</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4808.00	44.33	74.00	-29.67	51.41	35.38	10.12	52.58	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4808.00</td><td>43.53</td><td>74.00</td><td>-30.47</td><td>50.61</td><td>35.38</td><td>10.12</td><td>52.58</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4808.00	43.53	74.00	-30.47	50.61	35.38	10.12	52.58	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	4808.00	44.33	74.00	-29.67	51.41	35.38	10.12	52.58	---	---	Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	4808.00	43.53	74.00	-30.47	50.61	35.38	10.12	52.58	---	---	Peak																																																																																	







Mode	5																																																																																																																																	
	Harmonic																																																																																																																																	
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																																	
ANT	22																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>44.19</td><td>74.00</td><td>-29.81</td><td>51.00</td><td>35.54</td><td>10.28</td><td>52.63</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>46.00</td><td>74.00</td><td>-28.00</td><td>49.74</td><td>36.48</td><td>12.01</td><td>52.23</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4880.00	44.19	74.00	-29.81	51.00	35.54	10.28	52.63	---	---	Peak	2	7320.00	46.00	74.00	-28.00	49.74	36.48	12.01	52.23	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>44.62</td><td>74.00</td><td>-29.38</td><td>51.43</td><td>35.54</td><td>10.28</td><td>52.63</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>46.01</td><td>74.00</td><td>-27.99</td><td>49.75</td><td>36.48</td><td>12.01</td><td>52.23</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4880.00	44.62	74.00	-29.38	51.43	35.54	10.28	52.63	---	---	Peak	2	7320.00	46.01	74.00	-27.99	49.75	36.48	12.01	52.23	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	4880.00	44.19	74.00	-29.81	51.00	35.54	10.28	52.63	---	---	Peak																																																																																																																							
2	7320.00	46.00	74.00	-28.00	49.74	36.48	12.01	52.23	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	4880.00	44.62	74.00	-29.38	51.43	35.54	10.28	52.63	---	---	Peak																																																																																																																							
2	7320.00	46.01	74.00	-27.99	49.75	36.48	12.01	52.23	---	---	Peak																																																																																																																							

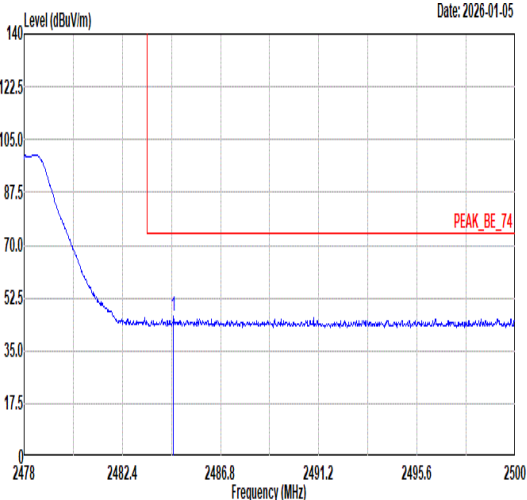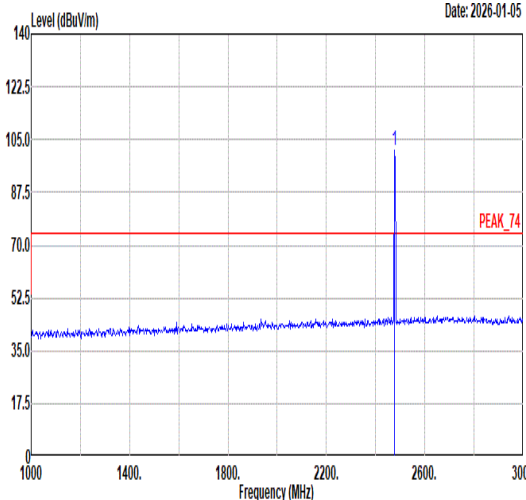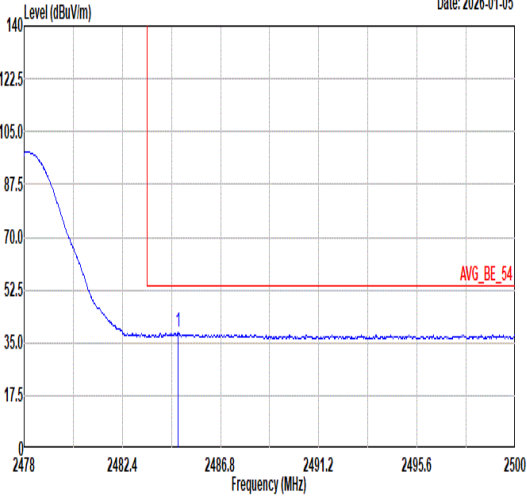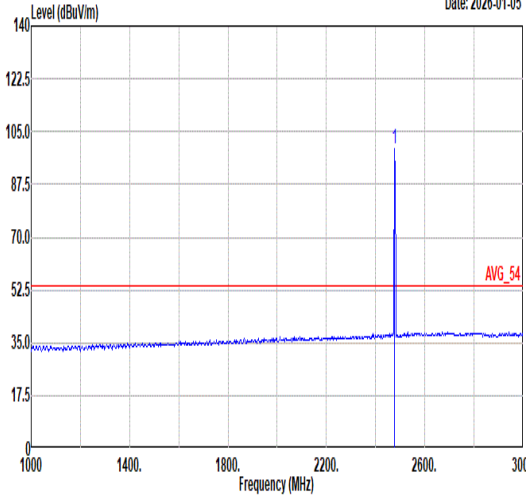

Mode	6																																																																																							
	Band Edge																																																																																							
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																							
ANT	22																																																																																							
Pol.	Horizontal					Fundamental																																																																																		
Peak	 Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a signal level starting at approximately 105 dBuV/m at 2478 MHz, dropping to about 40 dBuV/m by 2484 MHz, and then remaining relatively flat with some noise. A red line indicates the limit at 74.00 dBuV/m. A peak is marked at 2484.69 MHz with a level of 46.33 dBuV/m. The date is 2026-01-05. <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.69</td><td>46.33</td><td>74.00</td><td>-27.67</td><td>41.47</td><td>30.49</td><td>6.98</td><td>32.61</td><td>391</td><td>39 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2484.69	46.33	74.00	-27.67	41.47	30.49	6.98	32.61	391	39 PEAK	 Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal level starting at approximately 105 dBuV/m at 2478 MHz, dropping to about 40 dBuV/m by 2484 MHz, and then remaining relatively flat with some noise. A red line indicates the limit at 74.00 dBuV/m. A peak is marked at 2478.00 MHz with a level of 101.28 dBuV/m. The date is 2026-01-05. <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>101.28</td><td>-----</td><td>-----</td><td>96.44</td><td>30.48</td><td>6.97</td><td>32.61</td><td>391</td><td>39 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2478.00	101.28	-----	-----	96.44	30.48	6.97	32.61	391	39 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2484.69	46.33	74.00	-27.67	41.47	30.49	6.98	32.61	391	39 PEAK																																																																														
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2478.00	101.28	-----	-----	96.44	30.48	6.97	32.61	391	39 PEAK																																																																														
Avg	 Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a signal level starting at approximately 105 dBuV/m at 2478 MHz, dropping to about 40 dBuV/m by 2484 MHz, and then remaining relatively flat with some noise. A red line indicates the limit at 54.00 dBuV/m. An average is marked at 2484.89 MHz with a level of 38.42 dBuV/m. The date is 2026-01-05. <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.89</td><td>38.42</td><td>54.00</td><td>-15.58</td><td>33.56</td><td>30.49</td><td>6.98</td><td>32.61</td><td>391</td><td>39 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2484.89	38.42	54.00	-15.58	33.56	30.49	6.98	32.61	391	39 AVERAGE	 Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal level starting at approximately 105 dBuV/m at 2478 MHz, dropping to about 40 dBuV/m by 2484 MHz, and then remaining relatively flat with some noise. A red line indicates the limit at 54.00 dBuV/m. An average is marked at 2478.00 MHz with a level of 99.31 dBuV/m. The date is 2026-01-05. <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>99.31</td><td>-----</td><td>-----</td><td>94.47</td><td>30.48</td><td>6.97</td><td>32.61</td><td>391</td><td>39 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2478.00	99.31	-----	-----	94.47	30.48	6.97	32.61	391	39 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2484.89	38.42	54.00	-15.58	33.56	30.49	6.98	32.61	391	39 AVERAGE																																																																														
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2478.00	99.31	-----	-----	94.47	30.48	6.97	32.61	391	39 AVERAGE																																																																														

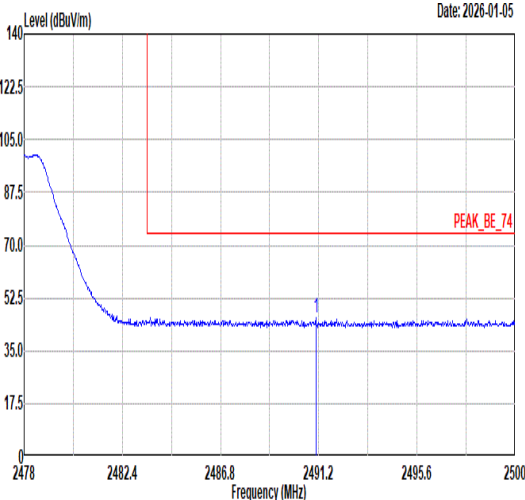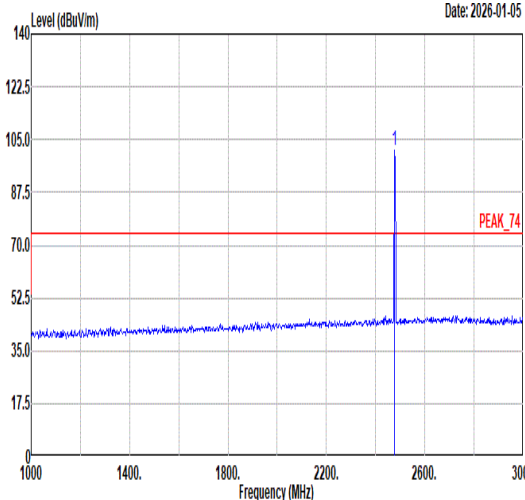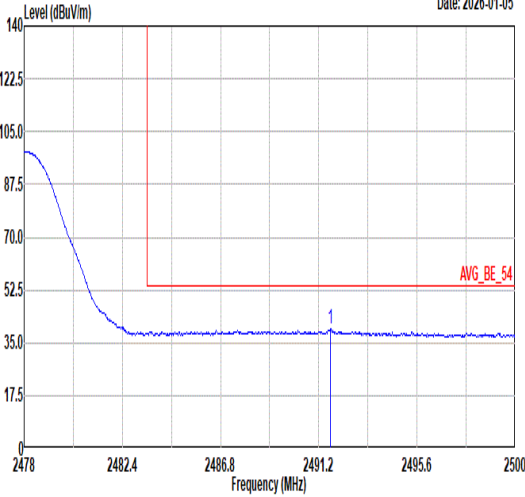
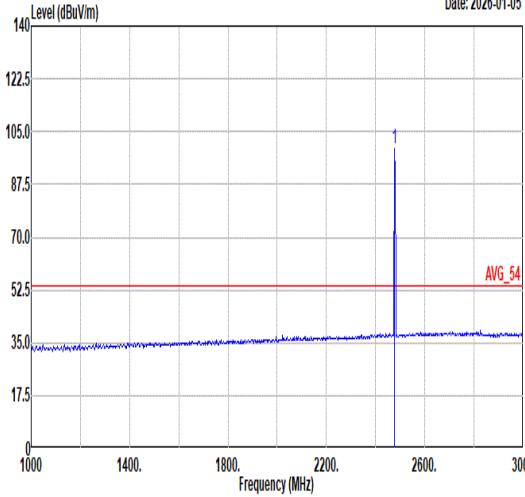


Mode	6																																																																																								
	Band Edge																																																																																								
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																								
ANT	22																																																																																								
Pol.	Vertical					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2491.07</td><td>46.12</td><td>74.00</td><td>-27.88</td><td>41.25</td><td>30.49</td><td>6.98</td><td>32.60</td><td>210 74 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2491.07	46.12	74.00	-27.88	41.25	30.49	6.98	32.60	210 74 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>101.19</td><td>-----</td><td>96.35</td><td>30.48</td><td>6.97</td><td>32.61</td><td>210</td><td>74 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	101.19	-----	96.35	30.48	6.97	32.61	210
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2491.07	46.12	74.00	-27.88	41.25	30.49	6.98	32.60	210 74 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2478.00	101.19	-----	96.35	30.48	6.97	32.61	210	74 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2491.71</td><td>39.88</td><td>54.00</td><td>-14.12</td><td>35.01</td><td>30.49</td><td>6.98</td><td>32.60</td><td>210 74 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2491.71	39.88	54.00	-14.12	35.01	30.49	6.98	32.60	210 74 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>99.27</td><td>-----</td><td>94.43</td><td>30.48</td><td>6.97</td><td>32.61</td><td>210</td><td>74 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	99.27	-----	94.43	30.48	6.97	32.61	210
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2491.71	39.88	54.00	-14.12	35.01	30.49	6.98	32.60	210 74 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2478.00	99.27	-----	94.43	30.48	6.97	32.61	210	74 AVERAGE																																																																																



Mode	6																																																																																																																						
	Harmonic																																																																																																																						
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																																																						
ANT	22																																																																																																																						
Pol.	Horizontal					Vertical																																																																																																																	
Peak Avg																																																																																																																							
	<table><thead><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4956.00</td><td>44.79</td><td>74.00</td><td>-29.21</td><td>51.43</td><td>35.70</td><td>10.33</td><td>52.67</td><td>---</td><td>--- Peak</td></tr><tr><td>2</td><td>7434.00</td><td>45.81</td><td>74.00</td><td>-28.19</td><td>49.46</td><td>36.62</td><td>12.00</td><td>52.27</td><td>---</td><td>--- Peak</td></tr></tbody></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	44.79	74.00	-29.21	51.43	35.70	10.33	52.67	---	--- Peak	2	7434.00	45.81	74.00	-28.19	49.46	36.62	12.00	52.27	---	--- Peak	<table><thead><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4956.00</td><td>43.78</td><td>74.00</td><td>-30.22</td><td>50.42</td><td>35.70</td><td>10.33</td><td>52.67</td><td>---</td><td>--- Peak</td></tr><tr><td>2</td><td>7434.00</td><td>45.70</td><td>74.00</td><td>-28.30</td><td>49.35</td><td>36.62</td><td>12.00</td><td>52.27</td><td>---</td><td>--- Peak</td></tr></tbody></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	43.78	74.00	-30.22	50.42	35.70	10.33	52.67	---	--- Peak	2	7434.00	45.70	74.00	-28.30	49.35	36.62	12.00	52.27	---
		Limit		Read		Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor			Remark																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	4956.00	44.79	74.00	-29.21	51.43	35.70	10.33	52.67	---	--- Peak																																																																																																													
2	7434.00	45.81	74.00	-28.19	49.46	36.62	12.00	52.27	---	--- Peak																																																																																																													
		Limit		Read		Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor			Remark																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	4956.00	43.78	74.00	-30.22	50.42	35.70	10.33	52.67	---	--- Peak																																																																																																													
2	7434.00	45.70	74.00	-28.30	49.35	36.62	12.00	52.27	---	--- Peak																																																																																																													

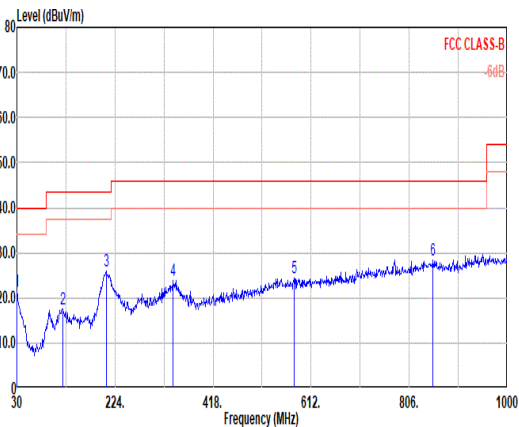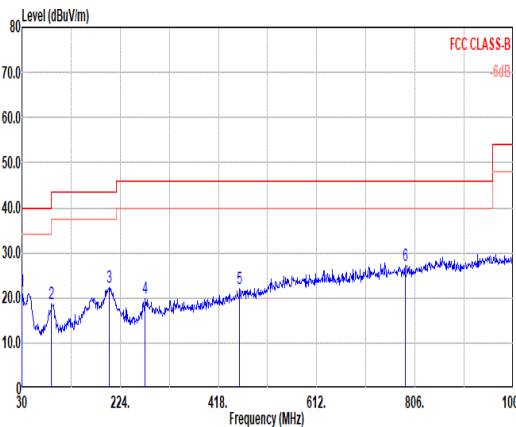


Mode	7																																																																																																																																																																																																																																																																												
	LF																																																																																																																																																																																																																																																																												
	2400-2483.5_Bluetooth-LE-LF_CH38_2478MHz																																																																																																																																																																																																																																																																												
ANT	22																																																																																																																																																																																																																																																																												
Pol.	Horizontal	Vertical																																																																																																																																																																																																																																																																											
Peak																																																																																																																																																																																																																																																																													
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="5"></th></tr><tr><td>1</td><td>30.00</td><td>21.49</td><td>40.00</td><td>-18.51</td><td>41.51</td><td>18.85</td><td>1.01</td><td>39.88</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>120.21</td><td>17.62</td><td>43.50</td><td>-25.88</td><td>38.60</td><td>17.08</td><td>1.99</td><td>40.05</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>206.54</td><td>26.00</td><td>43.50</td><td>-17.50</td><td>46.84</td><td>16.54</td><td>2.61</td><td>39.99</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>338.46</td><td>24.00</td><td>46.00</td><td>-22.00</td><td>39.81</td><td>20.75</td><td>3.31</td><td>39.87</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>579.02</td><td>24.56</td><td>46.00</td><td>-21.44</td><td>34.50</td><td>25.37</td><td>4.34</td><td>39.65</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>852.56</td><td>28.30</td><td>46.00</td><td>-17.70</td><td>33.87</td><td>28.62</td><td>5.24</td><td>39.43</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr></table>			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	30.00	21.49	40.00	-18.51	41.51	18.85	1.01	39.88	---	---	---	---	---	Peak	2	120.21	17.62	43.50	-25.88	38.60	17.08	1.99	40.05	---	---	---	---	---	Peak	3	206.54	26.00	43.50	-17.50	46.84	16.54	2.61	39.99	---	---	---	---	---	Peak	4	338.46	24.00	46.00	-22.00	39.81	20.75	3.31	39.87	---	---	---	---	---	Peak	5	579.02	24.56	46.00	-21.44	34.50	25.37	4.34	39.65	---	---	---	---	---	Peak	6	852.56	28.30	46.00	-17.70	33.87	28.62	5.24	39.43	---	---	---	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="5"></th></tr><tr><td>1</td><td>30.00</td><td>21.31</td><td>40.00</td><td>-18.69</td><td>41.33</td><td>18.85</td><td>1.01</td><td>39.88</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>88.20</td><td>18.70</td><td>43.50</td><td>-24.80</td><td>42.92</td><td>14.11</td><td>1.71</td><td>40.04</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>201.69</td><td>22.32</td><td>43.50</td><td>-21.18</td><td>43.30</td><td>16.43</td><td>2.58</td><td>39.99</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>273.47</td><td>19.93</td><td>46.00</td><td>-26.07</td><td>37.88</td><td>19.02</td><td>2.98</td><td>39.95</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>459.71</td><td>22.10</td><td>46.00</td><td>-23.90</td><td>34.64</td><td>23.32</td><td>3.86</td><td>39.72</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>786.60</td><td>27.25</td><td>46.00</td><td>-18.75</td><td>33.59</td><td>28.10</td><td>5.04</td><td>39.48</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr></table>			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor								MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	30.00	21.31	40.00	-18.69	41.33	18.85	1.01	39.88	---	---	---	---	---	Peak	2	88.20	18.70	43.50	-24.80	42.92	14.11	1.71	40.04	---	---	---	---	---	Peak	3	201.69	22.32	43.50	-21.18	43.30	16.43	2.58	39.99	---	---	---	---	---	Peak	4	273.47	19.93	46.00	-26.07	37.88	19.02	2.98	39.95	---	---	---	---	---	Peak	5	459.71	22.10	46.00	-23.90	34.64	23.32	3.86	39.72	---	---	---	---	---	Peak	6	786.60	27.25	46.00	-18.75	33.59	28.10	5.04	39.48	---	---	---	---	---	Peak
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																																																																				
1	30.00	21.49	40.00	-18.51	41.51	18.85	1.01	39.88	---	---	---	---	---	Peak																																																																																																																																																																																																																																																															
2	120.21	17.62	43.50	-25.88	38.60	17.08	1.99	40.05	---	---	---	---	---	Peak																																																																																																																																																																																																																																																															
3	206.54	26.00	43.50	-17.50	46.84	16.54	2.61	39.99	---	---	---	---	---	Peak																																																																																																																																																																																																																																																															
4	338.46	24.00	46.00	-22.00	39.81	20.75	3.31	39.87	---	---	---	---	---	Peak																																																																																																																																																																																																																																																															
5	579.02	24.56	46.00	-21.44	34.50	25.37	4.34	39.65	---	---	---	---	---	Peak																																																																																																																																																																																																																																																															
6	852.56	28.30	46.00	-17.70	33.87	28.62	5.24	39.43	---	---	---	---	---	Peak																																																																																																																																																																																																																																																															
		Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																																																																				
1	30.00	21.31	40.00	-18.69	41.33	18.85	1.01	39.88	---	---	---	---	---	Peak																																																																																																																																																																																																																																																															
2	88.20	18.70	43.50	-24.80	42.92	14.11	1.71	40.04	---	---	---	---	---	Peak																																																																																																																																																																																																																																																															
3	201.69	22.32	43.50	-21.18	43.30	16.43	2.58	39.99	---	---	---	---	---	Peak																																																																																																																																																																																																																																																															
4	273.47	19.93	46.00	-26.07	37.88	19.02	2.98	39.95	---	---	---	---	---	Peak																																																																																																																																																																																																																																																															
5	459.71	22.10	46.00	-23.90	34.64	23.32	3.86	39.72	---	---	---	---	---	Peak																																																																																																																																																																																																																																																															
6	786.60	27.25	46.00	-18.75	33.59	28.10	5.04	39.48	---	---	---	---	---	Peak																																																																																																																																																																																																																																																															



Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 125Kbps	82.4	3.09	0.324	1KHz
Bluetooth LE 2Mbps	32.26	0.2	5	10KHZ

Bluetooth – LE 125Kbps

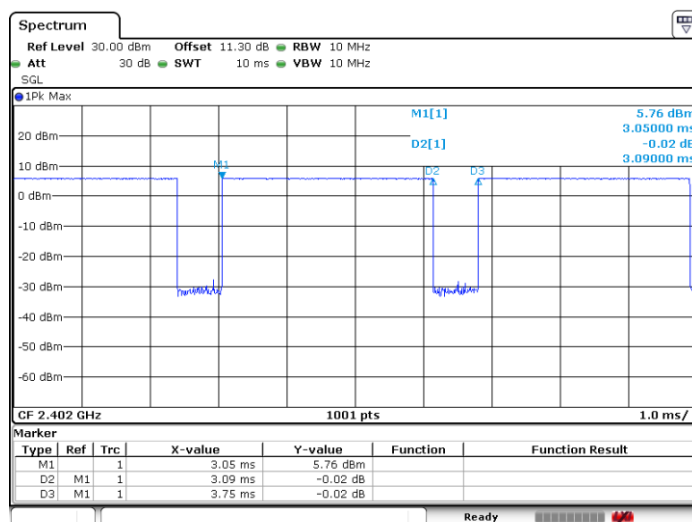

Bluetooth – LE 2Mbps

