

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/2

G31_GSM 850_GPRS 1 TX_CH251_Back Side_15mm_Ant 11

DUT: Test sample;


Communication System: UID 0, GPRS 1TX (0); Frequency: 848.8 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.923$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.7 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(9.75, 9.55, 10.36) @ 848.8 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.605 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 10.83 V/m ; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.686 W/kg
SAR(1 g) = 0.485 W/kg ; SAR(10 g) = 0.323 W/kg
Smallest distance from peaks to all points 3 dB below = 14.4 mm
Ratio of SAR at M2 to SAR at M1 = 71%
Maximum value of SAR (measured) = 0.624 W/kg

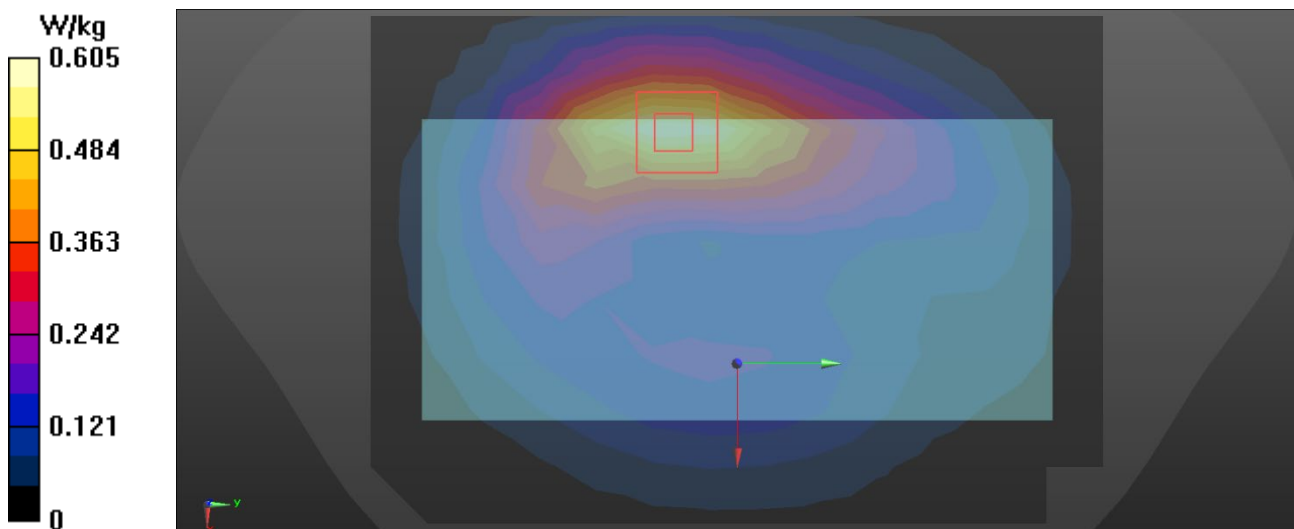

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/2

G36_GSM 850_GPRS 2 TX_CH251_Back Side_15mm_Ant 31**DUT: Test sample;**


Communication System: UID 0, GPRS 2TX (0); Frequency: 848.8 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 41.923$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.7 °C; Liquid Temperature : 22.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(9.75, 9.55, 10.36) @ 848.8 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.275 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 12.89 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.291 W/kg
SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.180 W/kg
Smallest distance from peaks to all points 3 dB below = 12.8 mm
Ratio of SAR at M2 to SAR at M1 = 79.3%
Maximum value of SAR (measured) = 0.273 W/kg

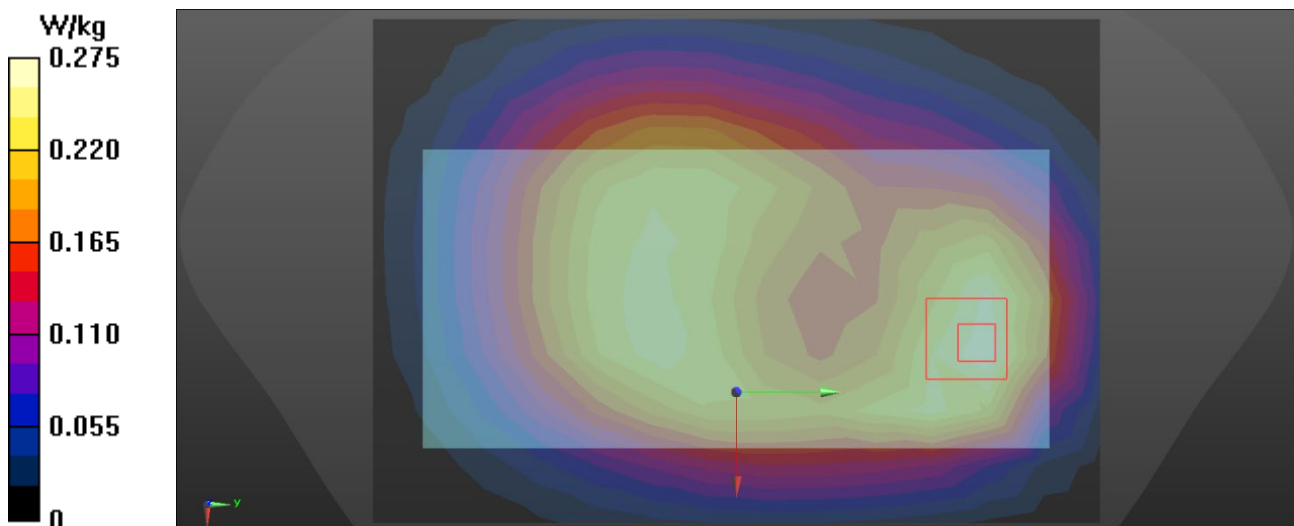

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/4

G39_GSM 1900_GPRS 2 TX_CH661_Back Side_15mm_Ant 14

DUT: Test sample;


Communication System: UID 0, GPRS 2TX (0); Frequency: 1880 MHz; Duty Cycle: 1:4.00037
Medium parameters used : $f = 1880 \text{ MHz}$; $\sigma = 1.319 \text{ S/m}$; $\epsilon_r = 39.134$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature: $23.2 \text{ }^\circ\text{C}$; Liquid Temperature: $22.6 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(7.89, 7.73, 8.39) @ 1880 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.278 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 10.28 V/m ; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 0.333 W/kg
SAR(1 g) = 0.205 W/kg ; SAR(10 g) = 0.122 W/kg
Smallest distance from peaks to all points 3 dB below = 15.8 mm
Ratio of SAR at M2 to SAR at M1 = 60.7%
Maximum value of SAR (measured) = 0.292 W/kg

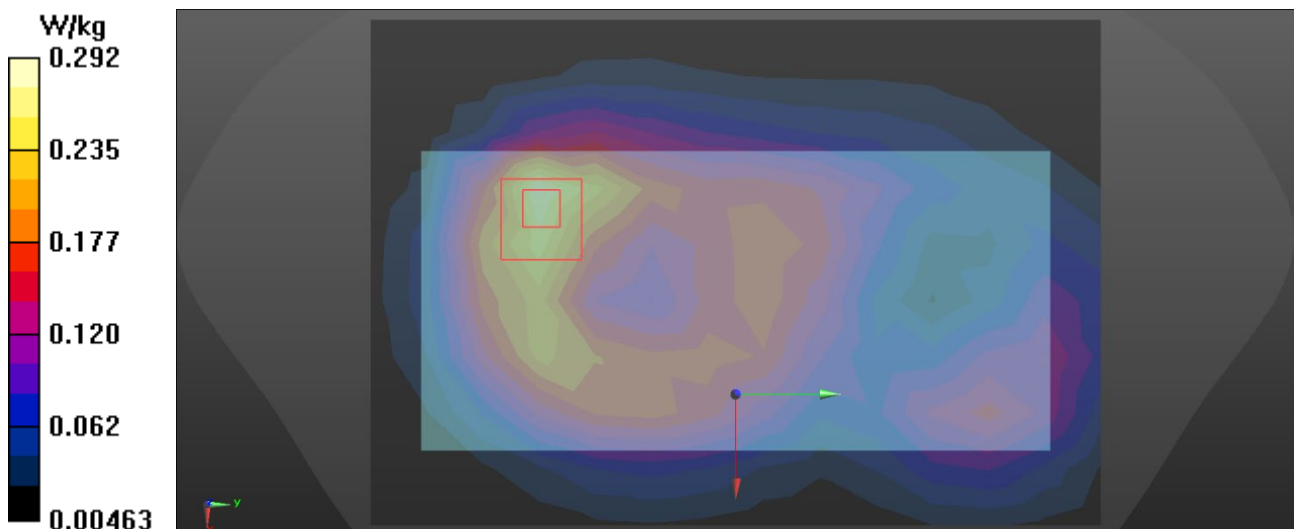

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/4

G45_GSM 1900_GPRS 2 TX_CH512_Back Side_15mm_Ant 41

DUT: Test sample;


Communication System: UID 0, GPRS 2TX (0); Frequency: 1850.2 MHz; Duty Cycle: 1:1
Medium parameters used : $f = 1850.2 \text{ MHz}$; $\sigma = 1.288 \text{ S/m}$; $\epsilon_r = 39.245$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(7.89, 7.73, 8.39) @ 1850.2 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.233 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 8.753 V/m ; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 0.276 W/kg
SAR(1 g) = 0.183 W/kg ; SAR(10 g) = 0.112 W/kg
Smallest distance from peaks to all points 3 dB below = 15.8 mm
Ratio of SAR at M2 to SAR at M1 = 64.5%
Maximum value of SAR (measured) = 0.244 W/kg

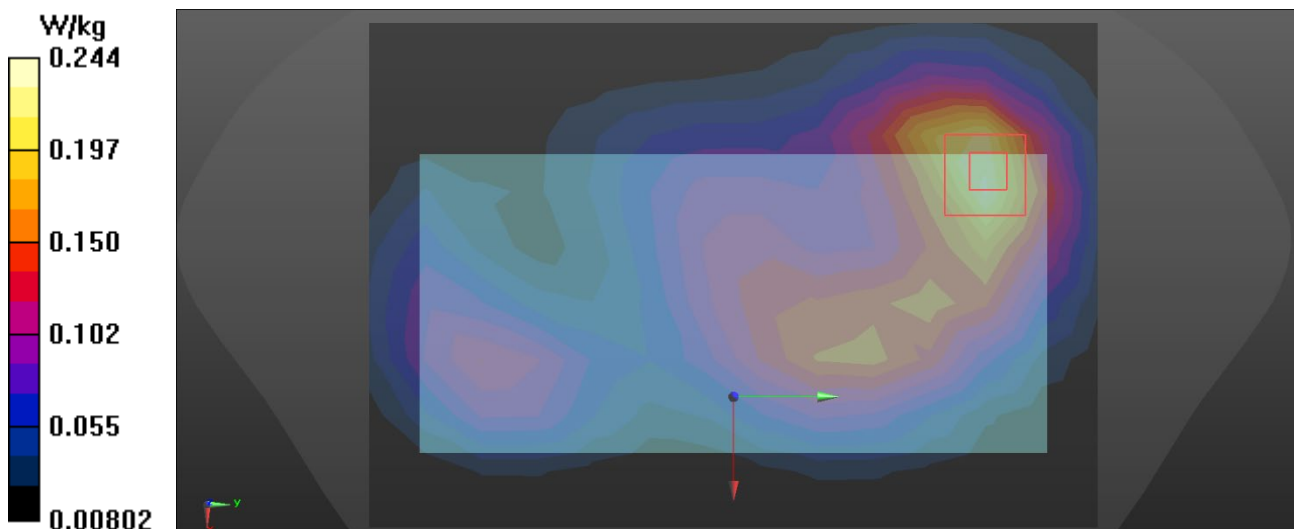

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/4

U44_UMTS B2_RMC12.2K_CH9262_Back Side_15mm_Ant 14

DUT: Test sample;


Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used : $f = 1852.4 \text{ MHz}$; $\sigma = 1.29 \text{ S/m}$; $\epsilon_r = 39.237$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(7.89, 7.73, 8.39) @ 1852.4 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.446 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 13.26 V/m ; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.605 W/kg
SAR(1 g) = 0.370 W/kg ; SAR(10 g) = 0.220 W/kg
Smallest distance from peaks to all points 3 dB below = 14.8 mm
Ratio of SAR at M2 to SAR at M1 = 60%
Maximum value of SAR (measured) = 0.528 W/kg

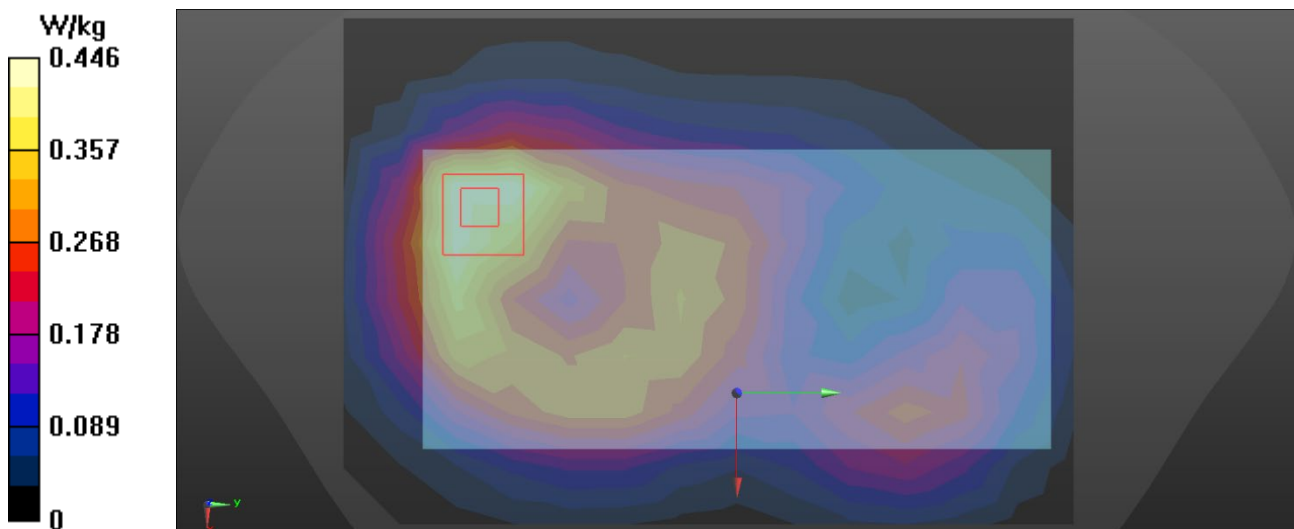

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/4

U48_UMTS B2_RMC12.2K_CH9400_Back Side_15mm_Ant 41

DUT: Test sample;


Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used : $f = 1880 \text{ MHz}$; $\sigma = 1.319 \text{ S/m}$; $\epsilon_r = 39.134$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(7.89, 7.73, 8.39) @ 1880 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.289 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 8.857 V/m ; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.373 W/kg
SAR(1 g) = 0.247 W/kg ; SAR(10 g) = 0.151 W/kg
Smallest distance from peaks to all points 3 dB below = 15.2 mm
Ratio of SAR at M2 to SAR at M1 = 65.7%
Maximum value of SAR (measured) = 0.335 W/kg

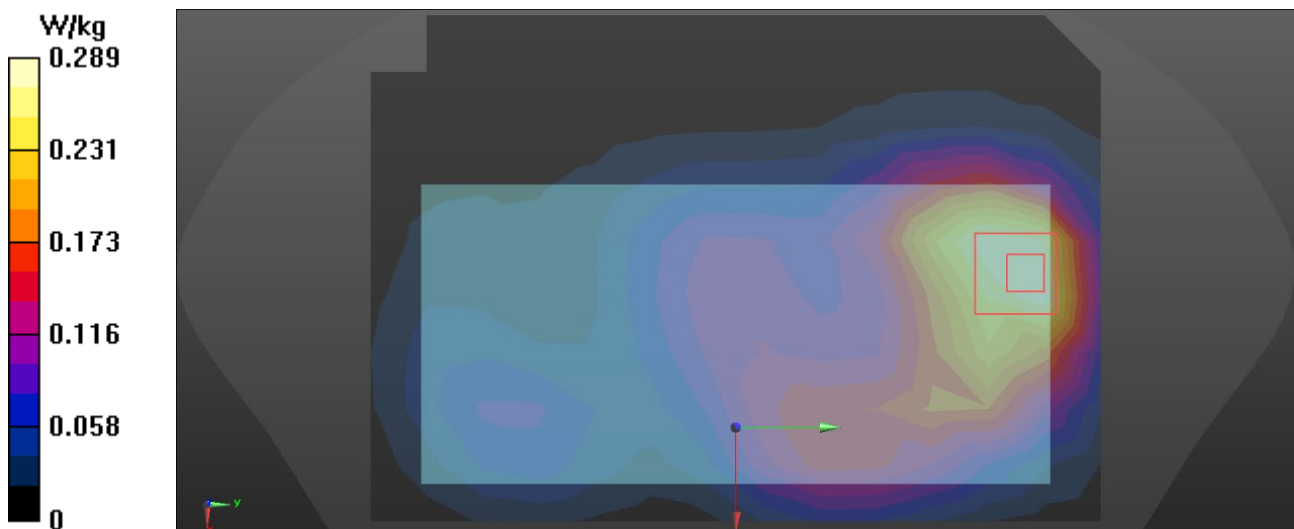

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/6

U55_UMTS B4_RMC12.2K_CH1513_Back Side_15mm_Ant 14

DUT: Test sample;


Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium parameters used : $f = 1752.6$ MHz; $\sigma = 1.339$ S/m; $\epsilon_r = 39.199$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C; Liquid Temperature : 22.6 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(8.21, 8.04, 8.72) @ 1752.6 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.562 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 14.83 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.652 W/kg
SAR(1 g) = 0.395 W/kg; SAR(10 g) = 0.241 W/kg
Smallest distance from peaks to all points 3 dB below = 16 mm
Ratio of SAR at M2 to SAR at M1 = 59.5%
Maximum value of SAR (measured) = 0.557 W/kg

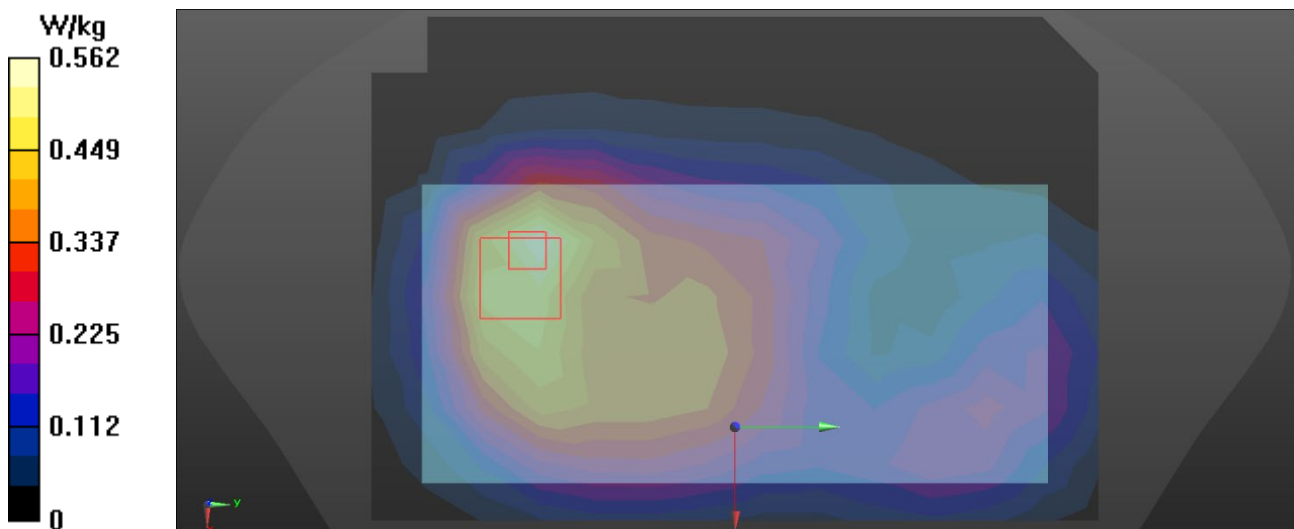

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/6

U60_UMTS B4_RMC12.2K_CH1513_Back Side_15mm_Ant 41

DUT: Test sample;


Communication System: UID 10460 - AAA, UMTS-FDD (WCDMA, AMR); Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium parameters used : $f = 1752.6 \text{ MHz}$; $\sigma = 1.339 \text{ S/m}$; $\epsilon_r = 39.199$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.1 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(8.21, 8.04, 8.72) @ 1752.6 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.258 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 7.563 V/m ; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.287 W/kg
SAR(1 g) = 0.191 W/kg ; SAR(10 g) = 0.115 W/kg
Smallest distance from peaks to all points 3 dB below = 14.4 mm
Ratio of SAR at M2 to SAR at M1 = 65.5%
Maximum value of SAR (measured) = 0.257 W/kg

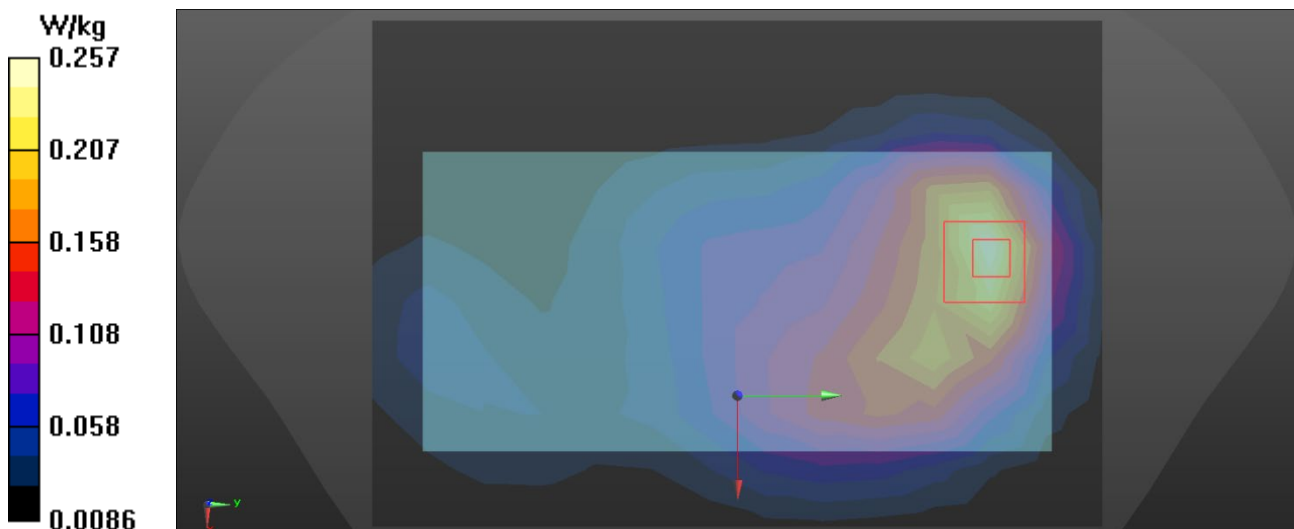

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/2

U65_UMTS B5_RMC12.2K_CH4233_Back Side_15mm_Ant 11

DUT: Test sample;


Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 846.6 \text{ MHz}$; $\sigma = 0.922 \text{ S/m}$; $\epsilon_r = 41.936$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.7 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(9.75, 9.55, 10.36) @ 846.6 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.612 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 9.067 V/m ; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.830 W/kg
SAR(1 g) = 0.510 W/kg ; SAR(10 g) = 0.304 W/kg
Smallest distance from peaks to all points 3 dB below = 4.5 mm
Ratio of SAR at M2 to SAR at M1 = 69%
Maximum value of SAR (measured) = 0.662 W/kg

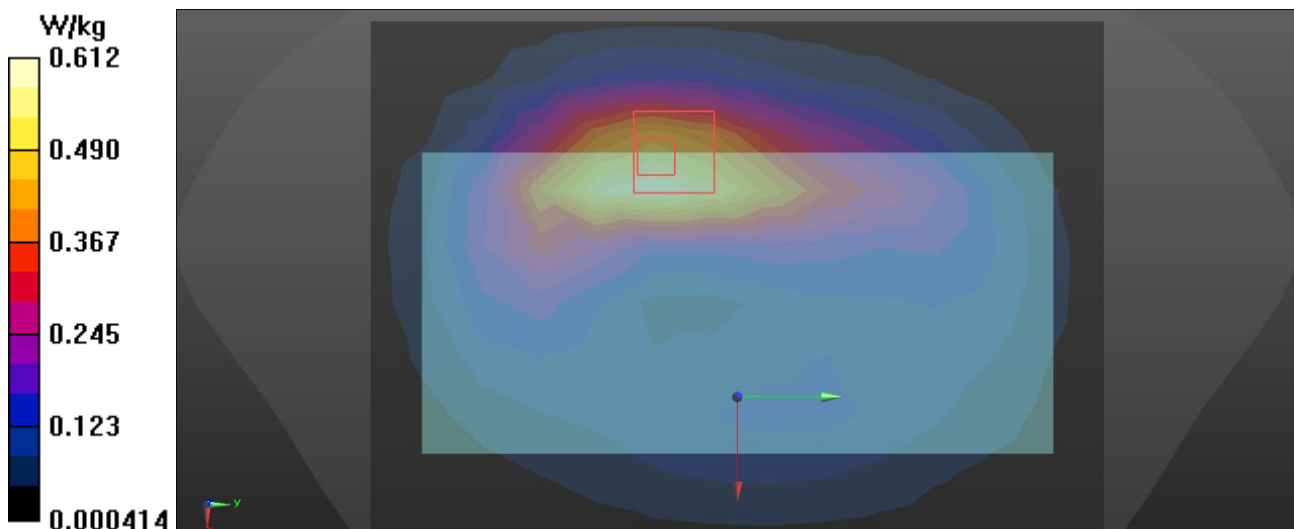

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/2

U67_UMTS B5_RMC12.2K_CH4182_Front Side_15mm_Ant 31

DUT: Test sample;


Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.916 \text{ S/m}$; $\epsilon_r = 42.004$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.7 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(9.75, 9.55, 10.36) @ 836.4 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.127 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 8.082 V/m ; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.146 W/kg
SAR(1 g) = 0.107 W/kg ; SAR(10 g) = 0.074 W/kg
Smallest distance from peaks to all points 3 dB below = 22.7 mm
Ratio of SAR at M2 to SAR at M1 = 72.9%
Maximum value of SAR (measured) = 0.134 W/kg

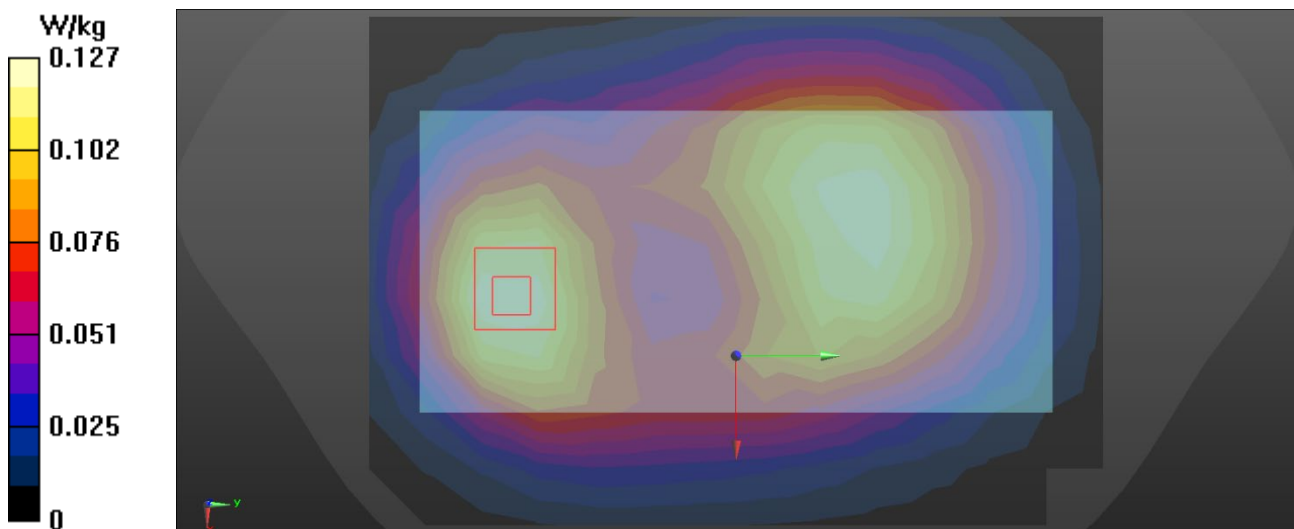

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/13

L234_LTE B2_QPSK20M_CH18900_1RB Offset 99_Back Side_15mm_Ant 14

DUT: Test sample;

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1880 MHz; Duty Cycle: 1:3.73852

Medium parameters used : $f = 1880$ MHz; $\sigma = 1.323$ S/m; $\epsilon_r = 39.917$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(7.89, 7.73,8.39)@1880MHz;Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.456 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.36 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.562 W/kg

SAR(1 g) = 0.345 W/kg; SAR(10 g) = 0.209 W/kg

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 60.2%

Maximum value of SAR (measured) = 0.485 W/kg

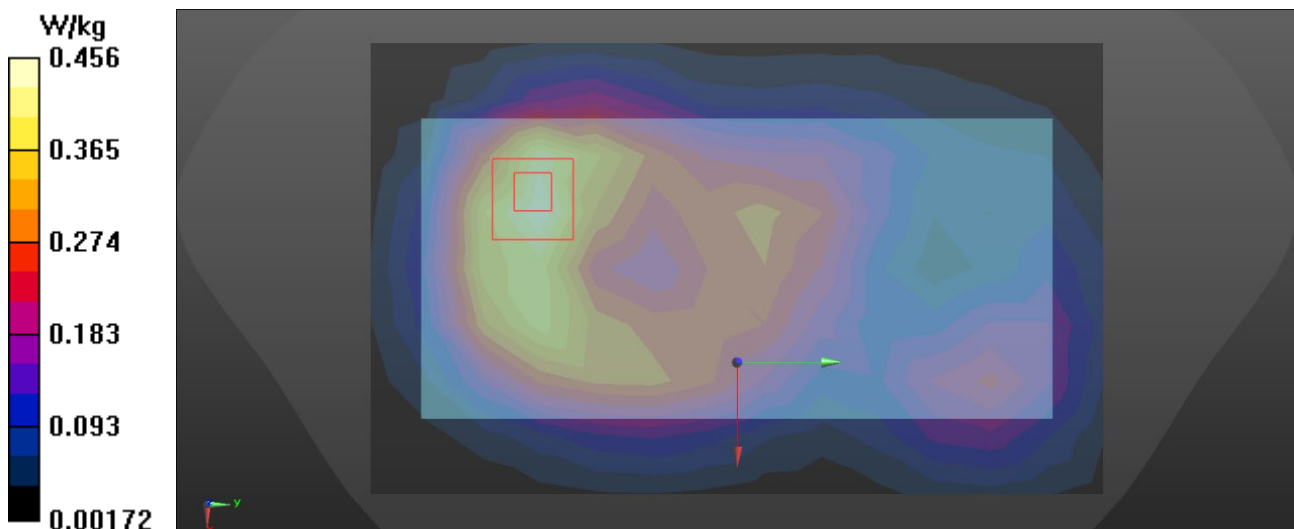

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/13

L241_LTE B2_QPSK20M_CH18900_50RB Offset 25_Back Side_15mm_Ant 41

DUT: Test sample;

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1880 MHz; Duty Cycle: 1:3.73852

Medium parameters used : $f = 1880$ MHz; $\sigma = 1.323$ S/m; $\epsilon_r = 39.917$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(7.89, 7.73,8.39)@1880MHz;Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.333 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.475 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.405 W/kg

SAR(1 g) = 0.263 W/kg; SAR(10 g) = 0.158 W/kg

Smallest distance from peaks to all points 3 dB below = 13.8 mm

Ratio of SAR at M2 to SAR at M1 = 64.2%

Maximum value of SAR (measured) = 0.345 W/kg

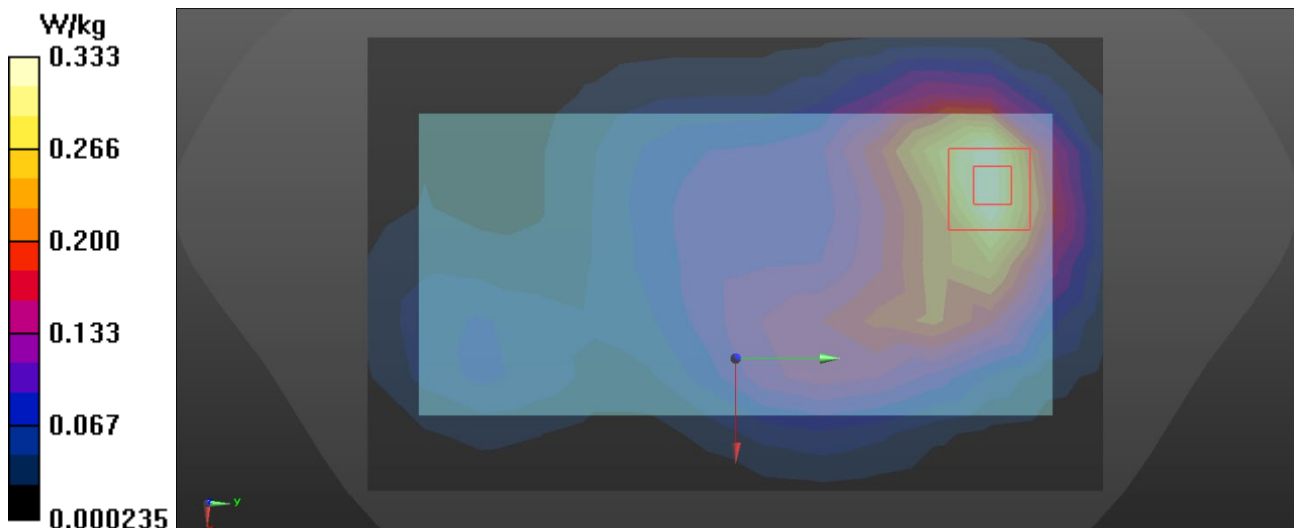

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/12

L249_LTE B4_QPSK20M_CH20300_1RB Offset 0_Back Side_15mm_Ant 14

DUT: Test sample;

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1745 MHz;
Duty Cycle: 1:3.73852

Medium parameters used : $f = 1745$ MHz; $\sigma = 1.336$ S/m; $\epsilon_r = 39.192$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(8.21, 8.04,8.72)@1745MHz;Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.471 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.74 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.508 W/kg

SAR(1 g) = 0.377 W/kg; SAR(10 g) = 0.253 W/kg

Smallest distance from peaks to all points 3 dB below = 19.3 mm

Ratio of SAR at M2 to SAR at M1 = 73.1%

Maximum value of SAR (measured) = 0.467 W/kg

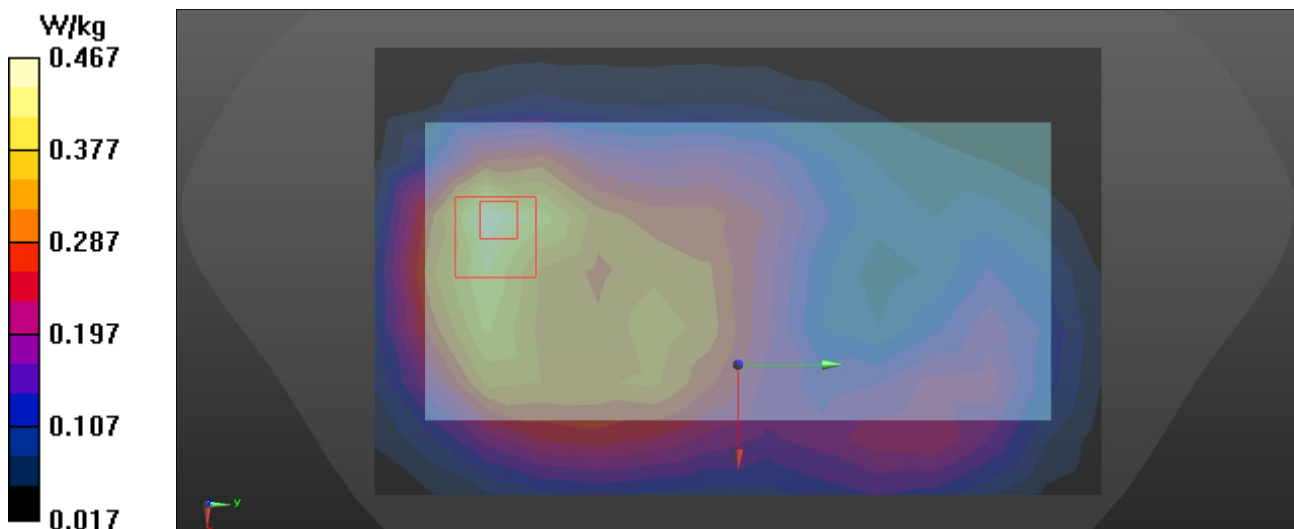

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/12

L252_LTE B4_QPSK20M_CH20175_1RB Offset 0_Back Side_15mm_Ant 41

DUT: Test sample;

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.325$ S/m; $\epsilon_r = 39.219$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(8.21, 8.04, 8.72) @ 1732.5 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (9x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.227 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.073 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 0.259 W/kg

SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.102 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 64.2%

Maximum value of SAR (measured) = 0.232 W/kg

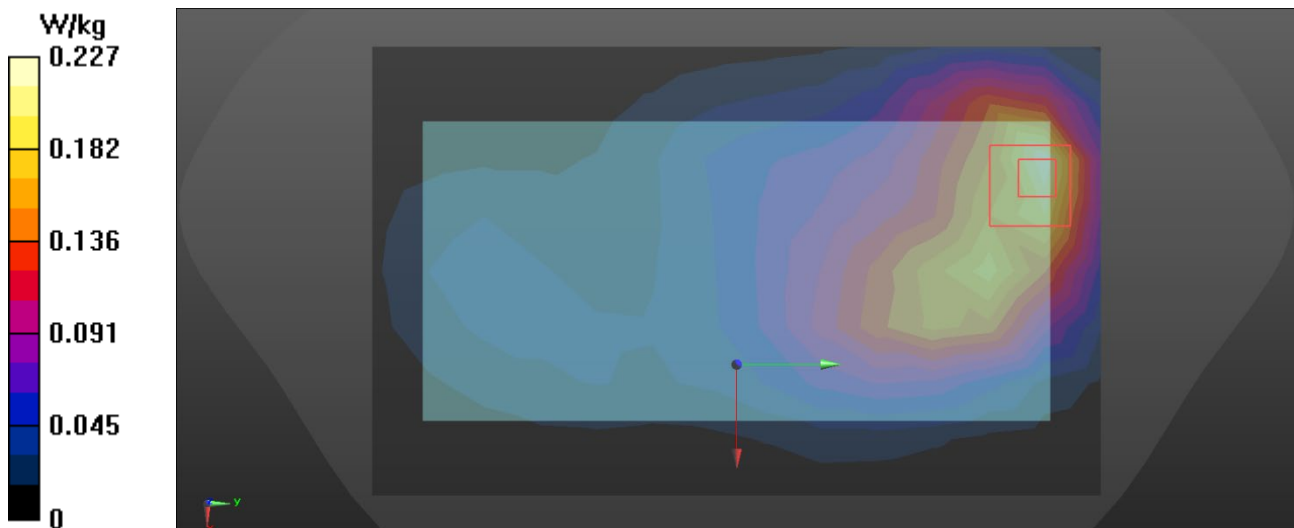

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/11

L261_LTE B5_QPSK10M_CH20600_25RB Offset 0_Back Side_15mm_Ant 11

DUT: Test sample;


Communication System: UID 0, LTE-FDD(1RB,10MHz,QPSK) (0); Frequency: 844 MHz; Duty Cycle: 1:1
Medium parameters used : $f = 844 \text{ MHz}$; $\sigma = 0.937 \text{ S/m}$; $\epsilon_r = 42.893$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(9.75, 9.55, 10.36) @ 844 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.693 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 11.15 V/m ; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.786 W/kg
SAR(1 g) = 0.548 W/kg ; SAR(10 g) = 0.360 W/kg
Smallest distance from peaks to all points 3 dB below = 14.3 mm
Ratio of SAR at M2 to SAR at M1 = 69.8%
Maximum value of SAR (measured) = 0.713 W/kg

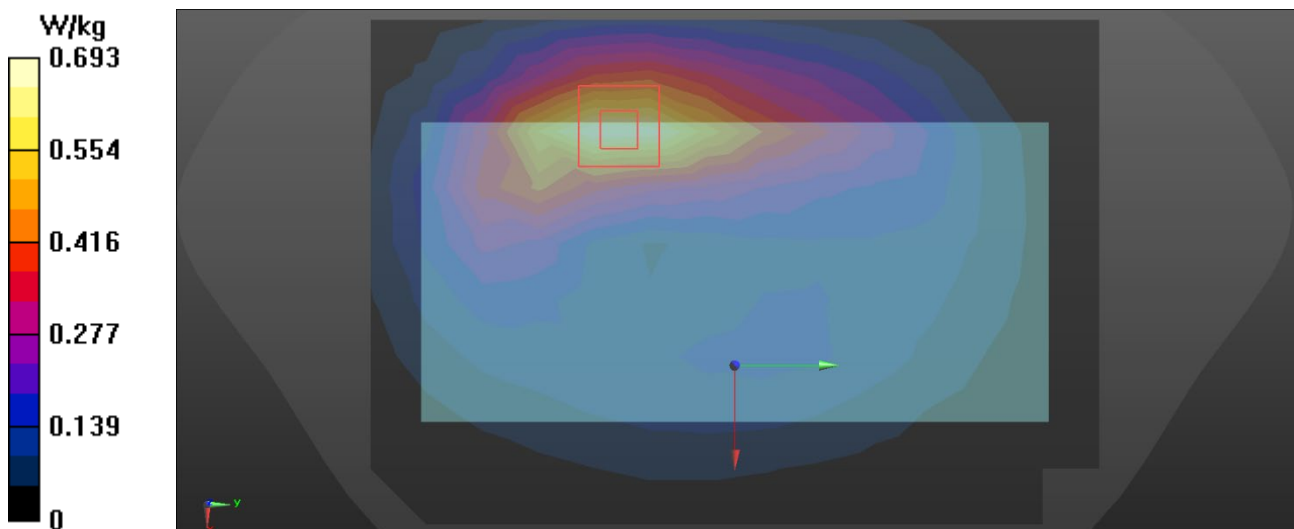

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/11

L270_LTE B5_QPSK10M_CH20600_1RB Offset 0_Back Side_15mm_Ant 31

DUT: Test sample;


Communication System: UID 0, LTE-FDD(1RB,10MHz,QPSK) (0); Frequency: 844 MHz; Duty Cycle: 1:1
Medium parameters used : $f = 844 \text{ MHz}$; $\sigma = 0.937 \text{ S/m}$; $\epsilon_r = 42.893$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(9.75, 9.55, 10.36) @ 844 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.262 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 11.25 V/m ; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.303 W/kg
SAR(1 g) = 0.223 W/kg ; SAR(10 g) = 0.156 W/kg
Smallest distance from peaks to all points 3 dB below = 25 mm
Ratio of SAR at M2 to SAR at M1 = 72.8%
Maximum value of SAR (measured) = 0.276 W/kg

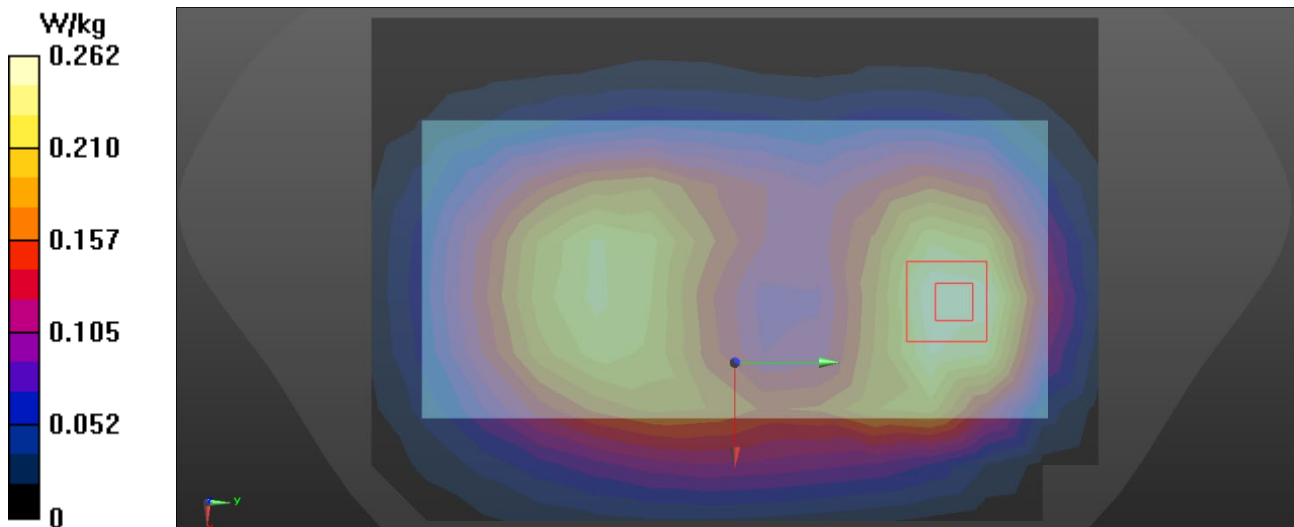

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/13

L273_LTE B7_QPSK20M_CH20850_1RB_offset 0_Back Side_15mm_Ant 14

DUT: Test sample;

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.891$ S/m; $\epsilon_r = 39.76$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(7.45, 7.45, 7.45) @ 2510 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (11x19x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.471 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.510 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.587 W/kg

SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.170 W/kg

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 51.9%

Maximum value of SAR (measured) = 0.472 W/kg

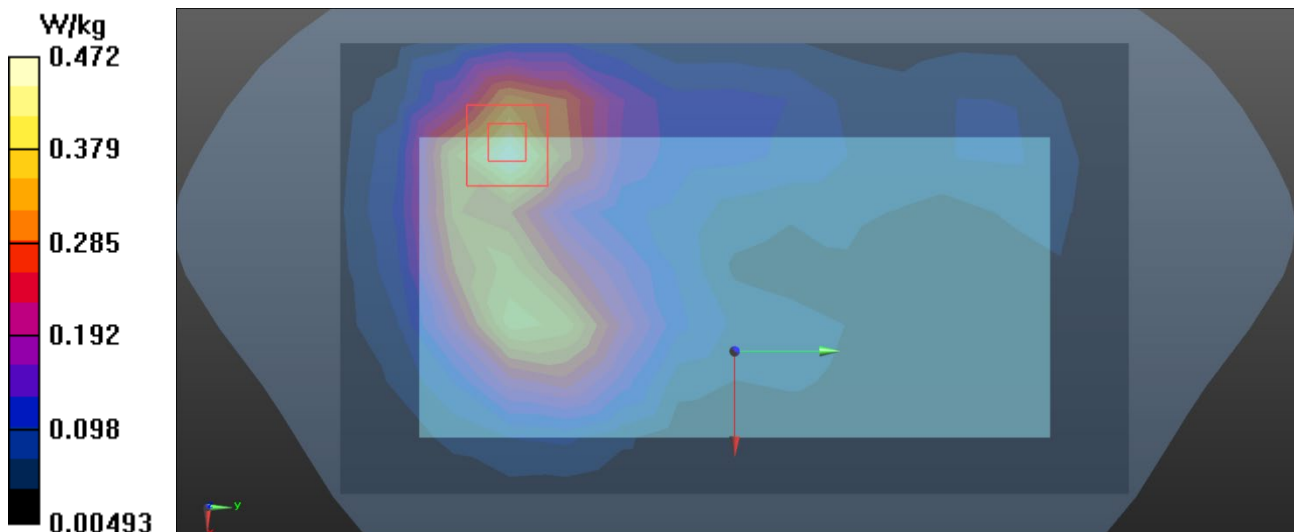

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/13

L282_LTE B7_QPSK20M_CH21350_50RB_offset 50_Back Side_15mm_Ant 41

DUT: Test sample;


Communication System: UID 0, LTE-FDD(1RB,20MHz,QPSK) (0); Frequency: 2510 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2510$ MHz; $\sigma = 1.891$ S/m; $\epsilon_r = 39.76$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(7.45, 7.45, 7.45) @ 2510 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (11x19x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.140 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 1.749 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 0.179 W/kg
SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.056 W/kg
Smallest distance from peaks to all points 3 dB below = 14.3 mm
Ratio of SAR at M2 to SAR at M1 = 54.9%
Maximum value of SAR (measured) = 0.149 W/kg

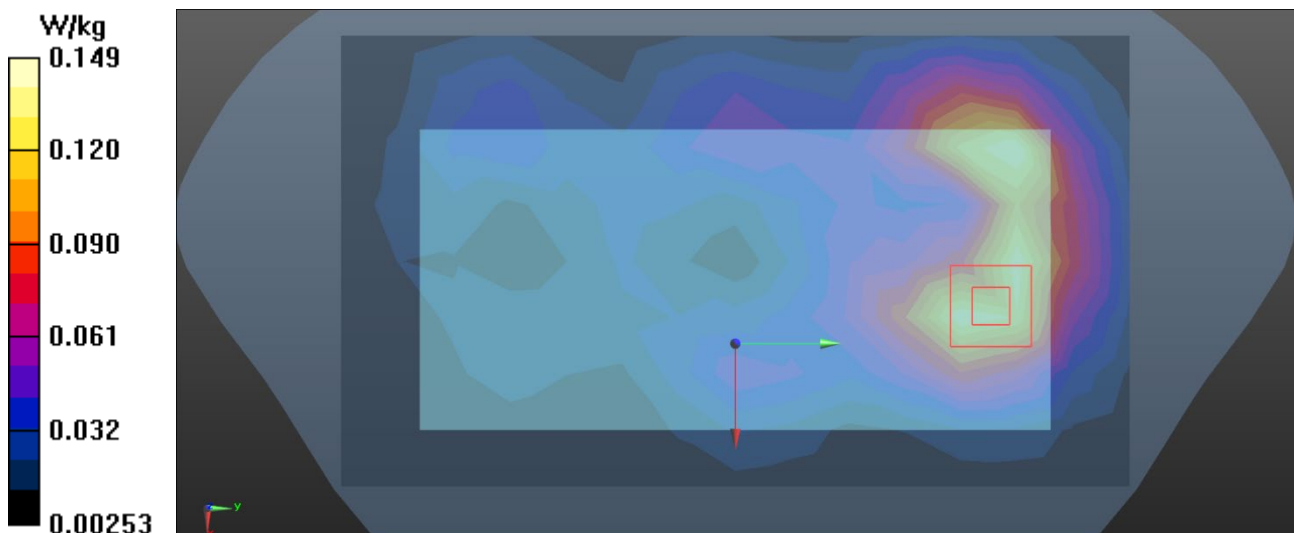

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/11

L287_LTE B13_QPSK10M_CH23230_1RB Offset 0_Back Side_15mm_Ant 11

DUT: Test sample;


Communication System: UID 0, LTE-FDD(1RB,10MHz,QPSK) (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.904 \text{ S/m}$; $\epsilon_r = 43.182$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(9.97, 9.77, 10.6) @ 782 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.228 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 9.513 V/m ; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.275 W/kg
SAR(1 g) = 0.198 W/kg ; SAR(10 g) = 0.135 W/kg
Smallest distance from peaks to all points 3 dB below = 16 mm
Ratio of SAR at M2 to SAR at M1 = 72.2%
Maximum value of SAR (measured) = 0.252 W/kg

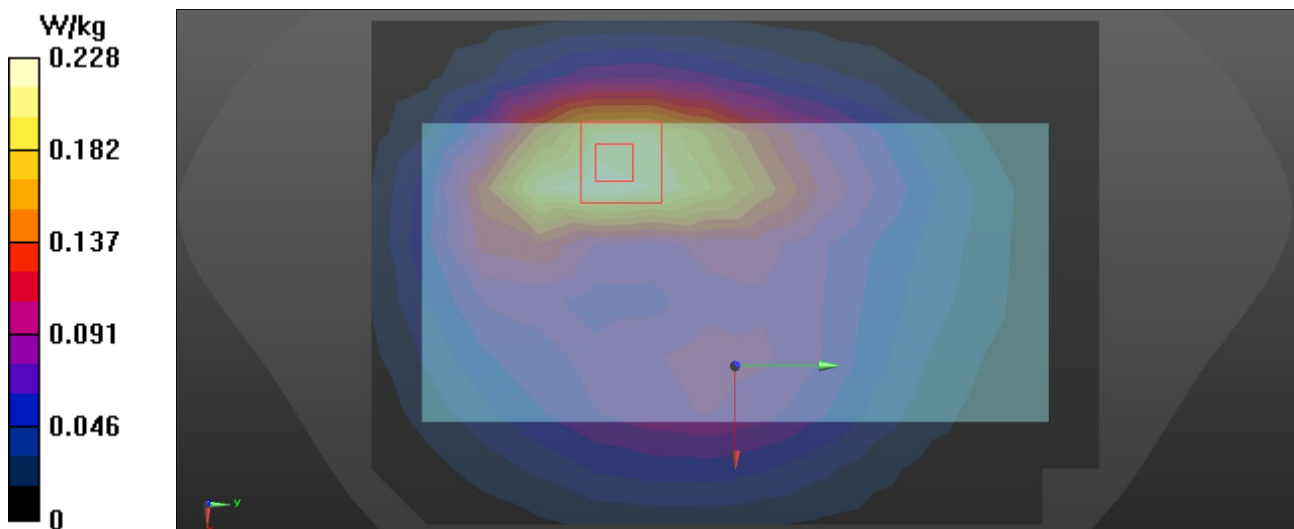

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/11

L292_LTE B13_QPSK10M_CH23230_1RB Offset 0_Back Side_15mm_Ant 31

DUT: Test sample;


Communication System: UID 0, LTE-FDD(1RB,10MHz,QPSK) (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used : $f = 782 \text{ MHz}$; $\sigma = 0.904 \text{ S/m}$; $\epsilon_r = 43.182$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(9.97, 9.77, 10.6) @ 782 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.213 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 13.99 V/m ; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.224 W/kg
SAR(1 g) = 0.186 W/kg ; SAR(10 g) = 0.146 W/kg
Smallest distance from peaks to all points 3 dB below = 15.4 mm
Ratio of SAR at M2 to SAR at M1 = 83%
Maximum value of SAR (measured) = 0.213 W/kg

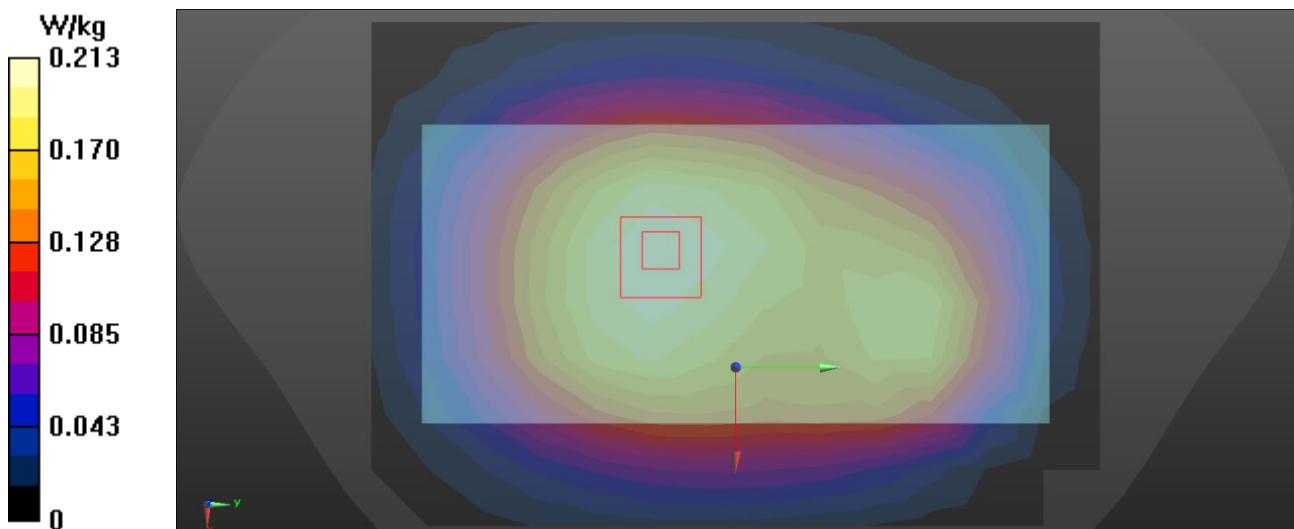

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/11

L301_LTE B26_QPSK15M_CH26965_1RB Offset 0_Back Side_15mm_Ant 11

DUT: Test sample;

Communication System: UID 0, LTE-FDD (SC-FDMA, 1RB, 15 MHz,QPSK (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 841.5$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 42.911$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(9.75, 9.55, 10.36) @ 841.5 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.558 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.64 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.704 W/kg

SAR(1 g) = 0.497 W/kg; SAR(10 g) = 0.328 W/kg

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 70.6%

Maximum value of SAR (measured) = 0.642 W/kg

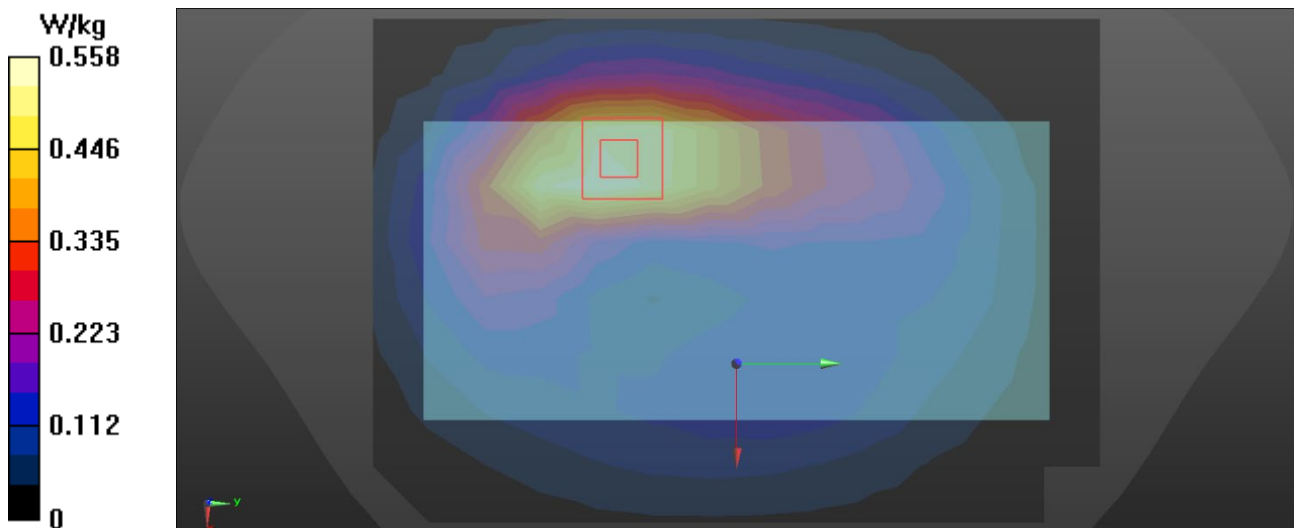

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/11

L304_LTE B26_QPSK15M_CH26965_1RB Offset 0_Back Side_15mm_Ant 31

DUT: Test sample;

Communication System: UID 0, LTE-FDD (SC-FDMA, 1RB, 15 MHz,QPSK (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 841.5$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 42.911$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(9.75, 9.55, 10.36) @ 841.5 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.221 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.99 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.257 W/kg

SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.132 W/kg

Smallest distance from peaks to all points 3 dB below = 24.9 mm

Ratio of SAR at M2 to SAR at M1 = 72.9%

Maximum value of SAR (measured) = 0.234 W/kg

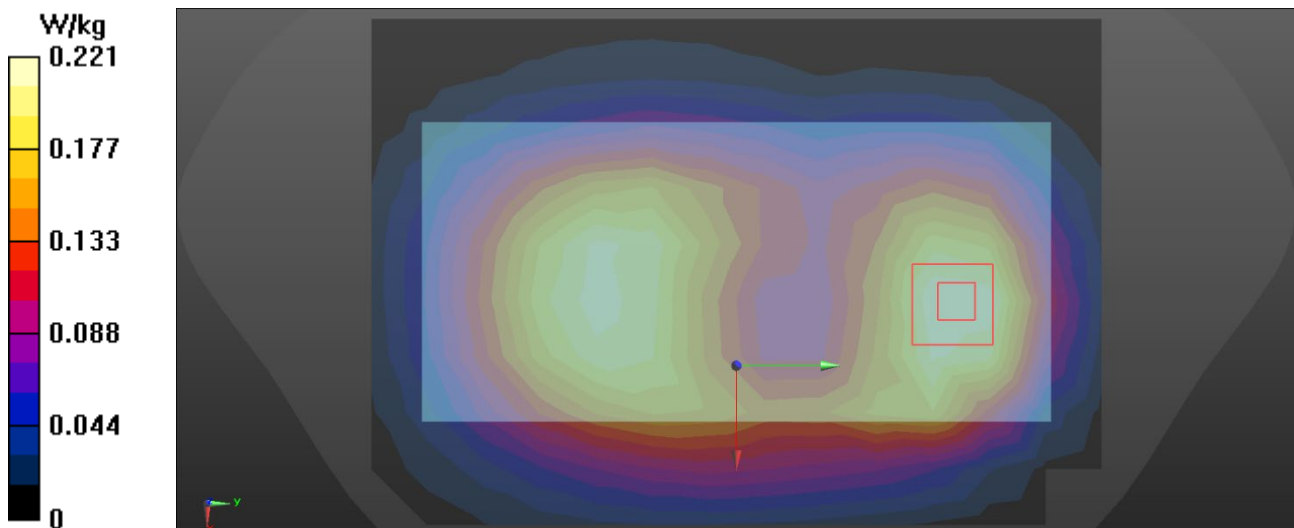

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/13

L314_LTE B38_QPSK20M_CH37850_1RB_offset 0_Back Side_15mm_Ant 14

DUT: Test sample;

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2580 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.971$ S/m; $\epsilon_r = 39.488$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(7.45, 7.45, 7.45) @ 2580 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (11x19x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.424 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.036 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.517 W/kg

SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.143 W/kg

Smallest distance from peaks to all points 3 dB below = 15.1 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%

Maximum value of SAR (measured) = 0.418 W/kg

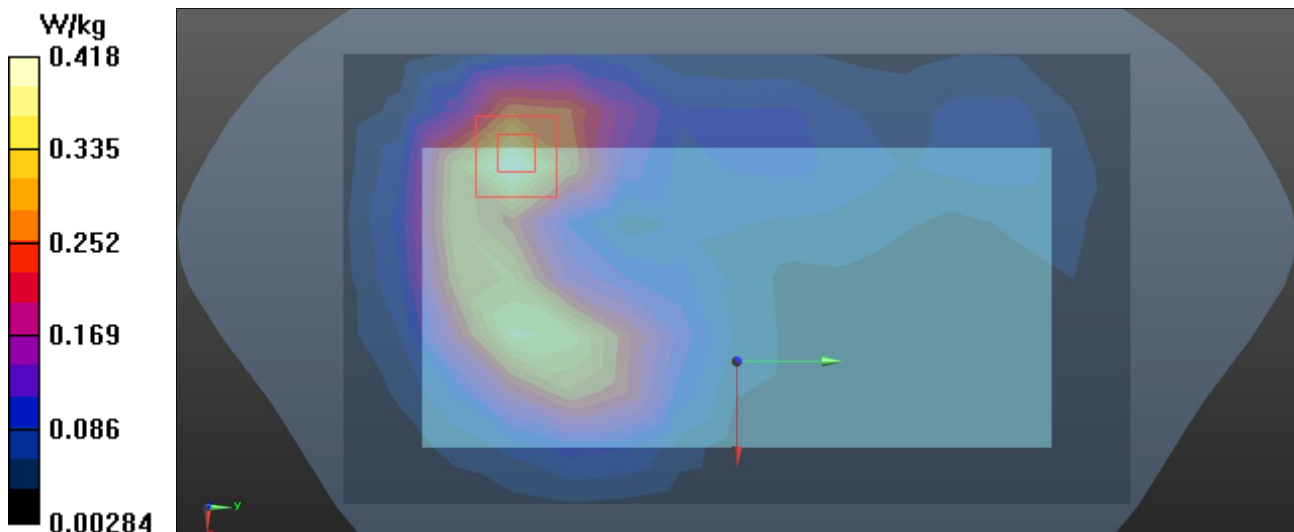

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/13

L318_LTE B38_QPSK20M_CH38000_1RB_offset 99_Back Side_15mm_Ant 41

DUT: Test sample;

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2595 MHz;
Duty Cycle: 1:1

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.988$ S/m; $\epsilon_r = 39.437$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(7.45, 7.45, 7.45) @ 2595 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (11x19x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.222 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.719 V/m; Power Drift = 0 dB


Peak SAR (extrapolated) = 0.289 W/kg

SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.081 W/kg

Smallest distance from peaks to all points 3 dB below = 12.5 mm

Ratio of SAR at M2 to SAR at M1 = 51.5%

Maximum value of SAR (measured) = 0.237 W/kg

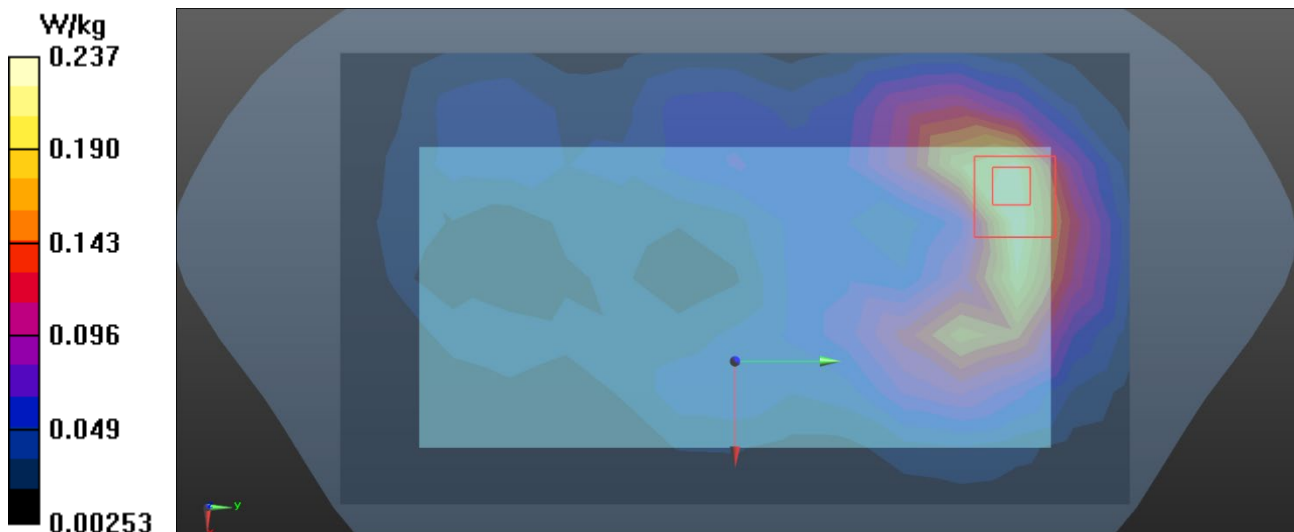

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/10

L325_LTE B41_QPSK20M_CH41490_1RB_offset 0_Back Side_15mm_Ant 14

DUT: Test sample;

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2680 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2680$ MHz; $\sigma = 2.085$ S/m; $\epsilon_r = 39.121$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(7.45, 7.45, 7.45) @ 2680 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (11x19x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.546 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.504 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.665 W/kg

SAR(1 g) = 0.343 W/kg; SAR(10 g) = 0.185 W/kg

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 49.5%

Maximum value of SAR (measured) = 0.532 W/kg

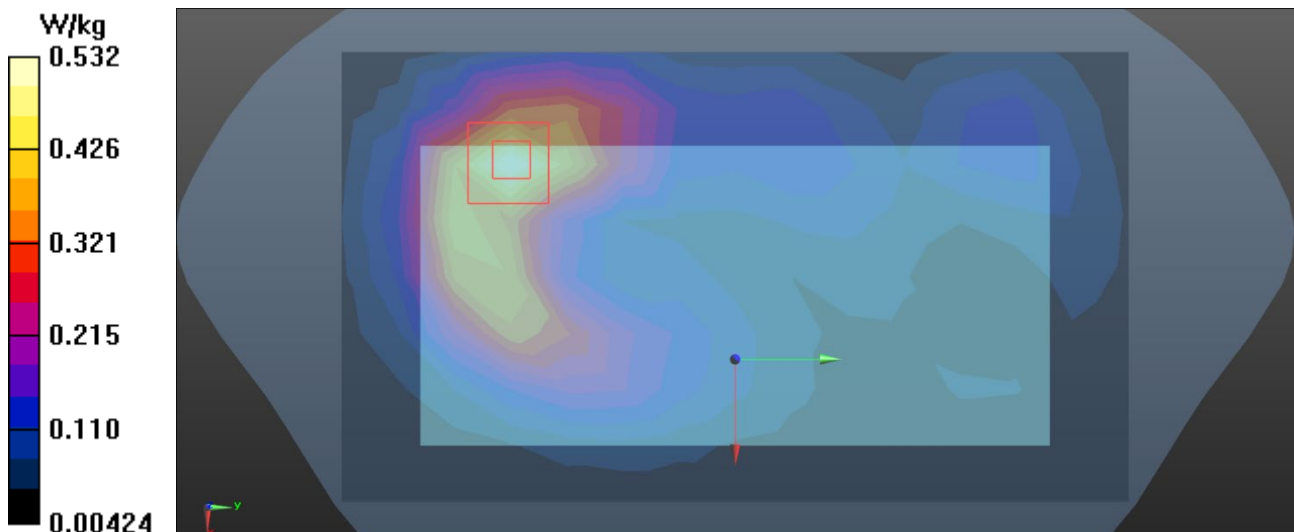

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/13

L334_LTE B41_QPSK20M_CH41490_1RB_offset 99_Back Side_15mm_Ant 41

DUT: Test sample;

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2680 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2680$ MHz; $\sigma = 2.085$ S/m; $\epsilon_r = 39.121$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(7.45, 7.45, 7.45) @ 2680 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (11x19x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.224 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.223 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.283 W/kg

SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.078 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.6%

Maximum value of SAR (measured) = 0.232 W/kg

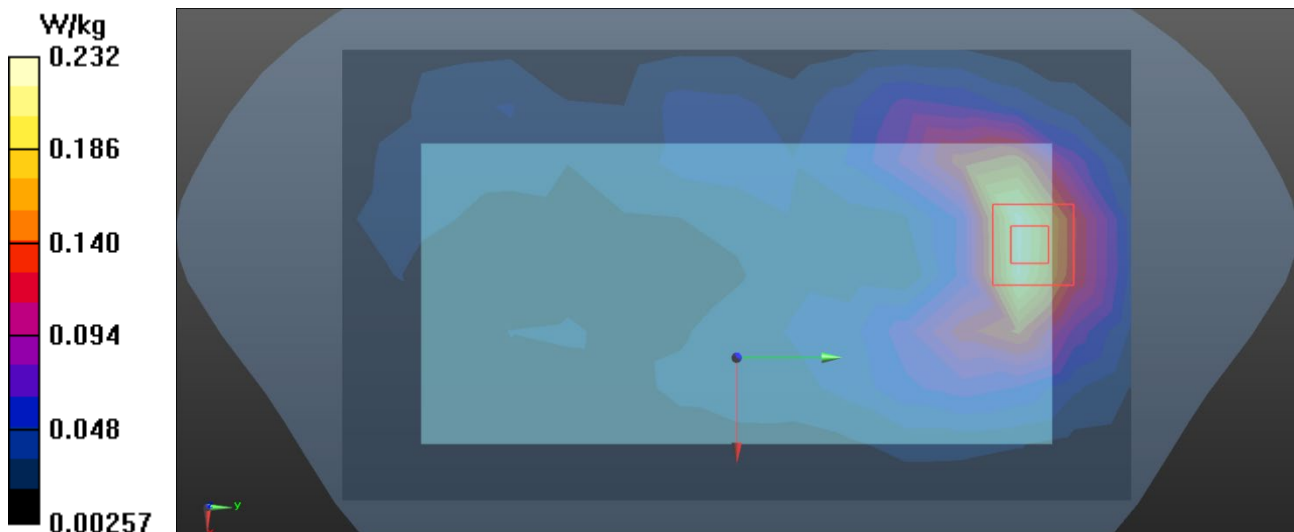

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/12

L347_LTE B66_QPSK20M_CH132572_1RB Offset 50_Back Side_15mm_Ant 14

DUT: Test sample;

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1770 MHz; Duty Cycle: 1:3.73852

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.357$ S/m; $\epsilon_r = 39.113$; $\rho = 10.00$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(8.21, 8.04, 8.72) @ 1770 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.485 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 14.80 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.619 W/kg

SAR(1 g) = 0.371 W/kg; SAR(10 g) = 0.223 W/kg

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 58.4%

Maximum value of SAR (measured) = 0.532 W/kg

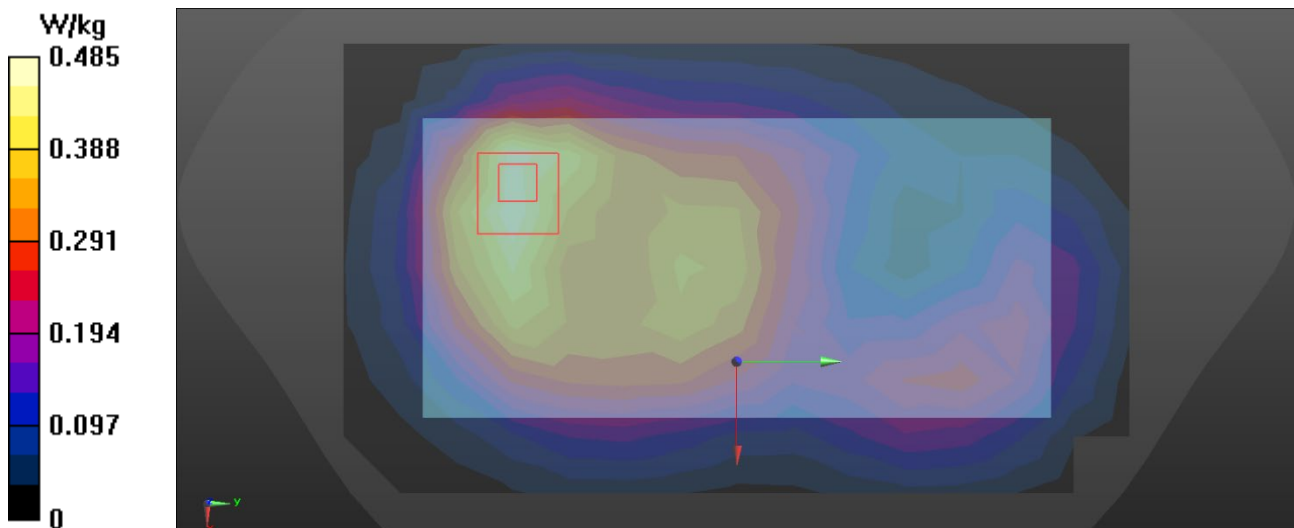

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/12

L354_LTE B66_QPSK20M_CH132572_50RB Offset 50_Back Side_15mm_Ant 41

DUT: Test sample;

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.357$ S/m; $\epsilon_r = 39.113$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(8.21, 8.04, 8.72) @ 1770 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.238 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.801 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.286 W/kg

SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.108 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 63.6%

Maximum value of SAR (measured) = 0.250 W/kg

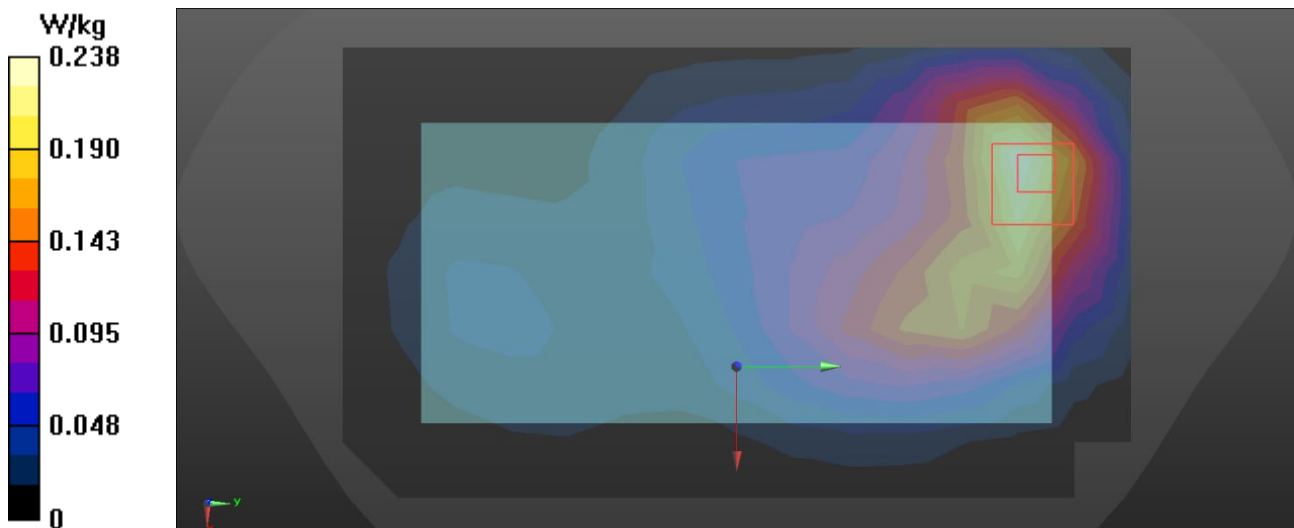

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/10

W38_WiFi 2.4G_802.11b_CH6_Back Side_15mm

DUT: Test sample;


Communication System: UID 10415 - AAA, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle);
Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used : $f = 2437 \text{ MHz}$; $\sigma = 1.834 \text{ S/m}$; $\epsilon_r = 37.5$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.8 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(7.63, 7.63, 7.63) @ 2437 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (11x19x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 0.228 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 2.837 V/m ; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.311 W/kg
SAR(1 g) = 0.162 W/kg ; SAR(10 g) = 0.087 W/kg
Smallest distance from peaks to all points 3 dB below = 14.8 mm
Ratio of SAR at M2 to SAR at M1 = 50.6%
Maximum value of SAR (measured) = 0.242 W/kg

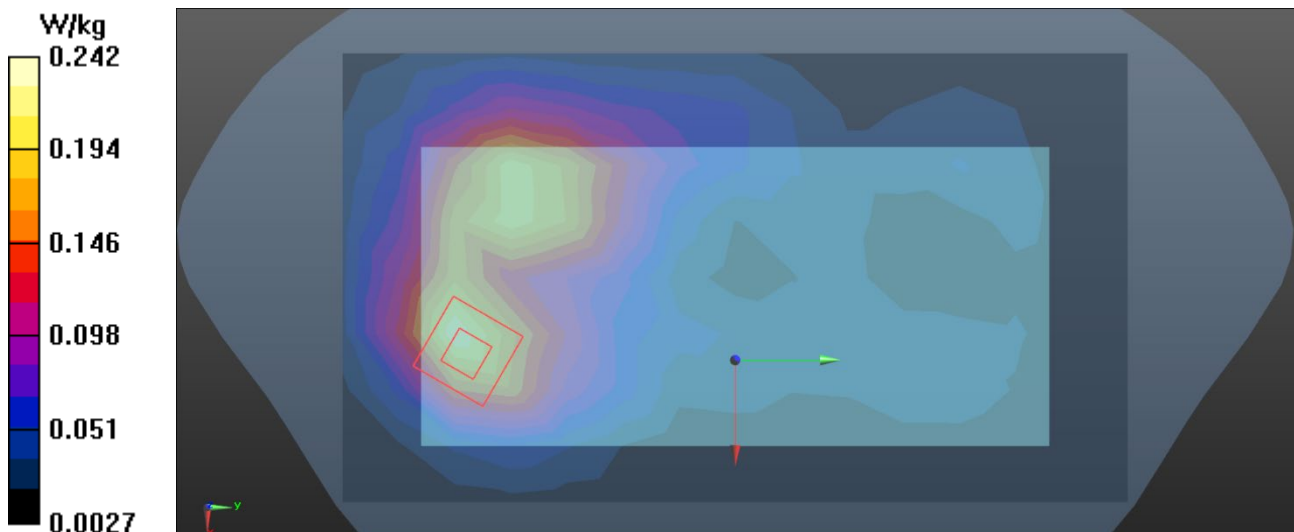

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/10

B10_BT_DH5_CH78_Back Side_15mm

DUT: Test sample;


Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2480 \text{ MHz}$; $\sigma = 1.881 \text{ S/m}$; $\epsilon_r = 37.321$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.8 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(7.63, 7.63, 7.63) @ 2480 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (11x19x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 0.0172 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 0.9600 V/m ; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.0210 W/kg
SAR(1 g) = 0.011 W/kg ; SAR(10 g) = 0.00646 W/kg
Smallest distance from peaks to all points 3 dB below = 14.8 mm
Ratio of SAR at M2 to SAR at M1 = 53.1%
Maximum value of SAR (measured) = 0.0168 W/kg

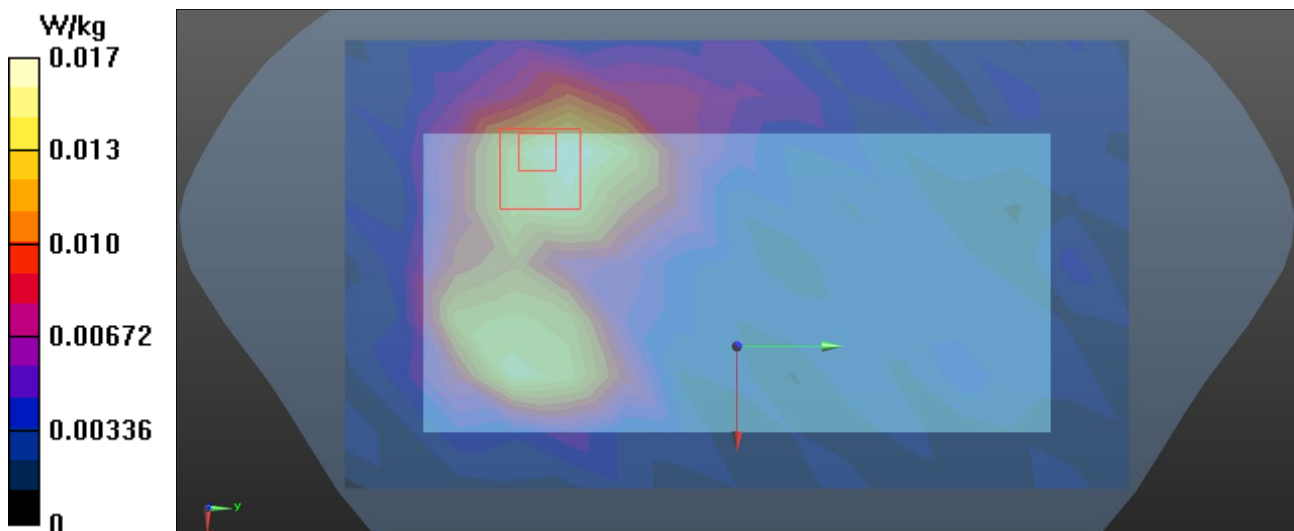

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/11

W42_WiFi 5.2G UNII_1_802.11a_CH36_Front Side_15mm

DUT: Test sample;


Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0); Frequency: 5180 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.626 \text{ S/m}$; $\epsilon_r = 35.682$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4-SN7544; ConvF(5.39,5.39, 5.39) @ 5180 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (14x23x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 0.341 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 1.869 V/m ; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.624 W/kg
SAR(1 g) = 0.196 W/kg ; SAR(10 g) = 0.079 W/kg
Smallest distance from peaks to all points 3 dB below = 12.5 mm
Ratio of SAR at M2 to SAR at M1 = 26.3%
Maximum value of SAR (measured) = 0.411 W/kg

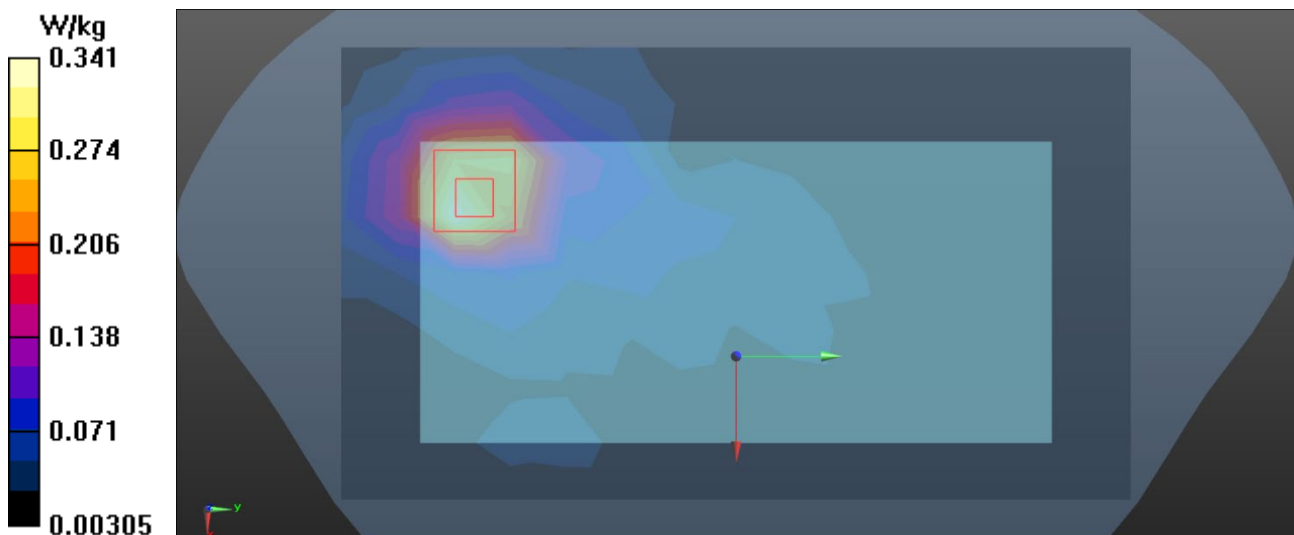

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/11

W44_WiFi 5.3G UNII_2A_802.11a_CH52_Front Side_15mm

DUT: Test sample;


Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0); Frequency: 5260 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 4.723 \text{ S/m}$; $\epsilon_r = 35.487$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4-SN7544;ConvF(5.39, 5.39, 5.39) @ 5260 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (14x23x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 0.408 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 1.444 V/m ; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.794 W/kg
SAR(1 g) = 0.244 W/kg ; SAR(10 g) = 0.098 W/kg
Smallest distance from peaks to all points 3 dB below = 12.8 mm
Ratio of SAR at M2 to SAR at M1 = 25.6%
Maximum value of SAR (measured) = 0.523 W/kg

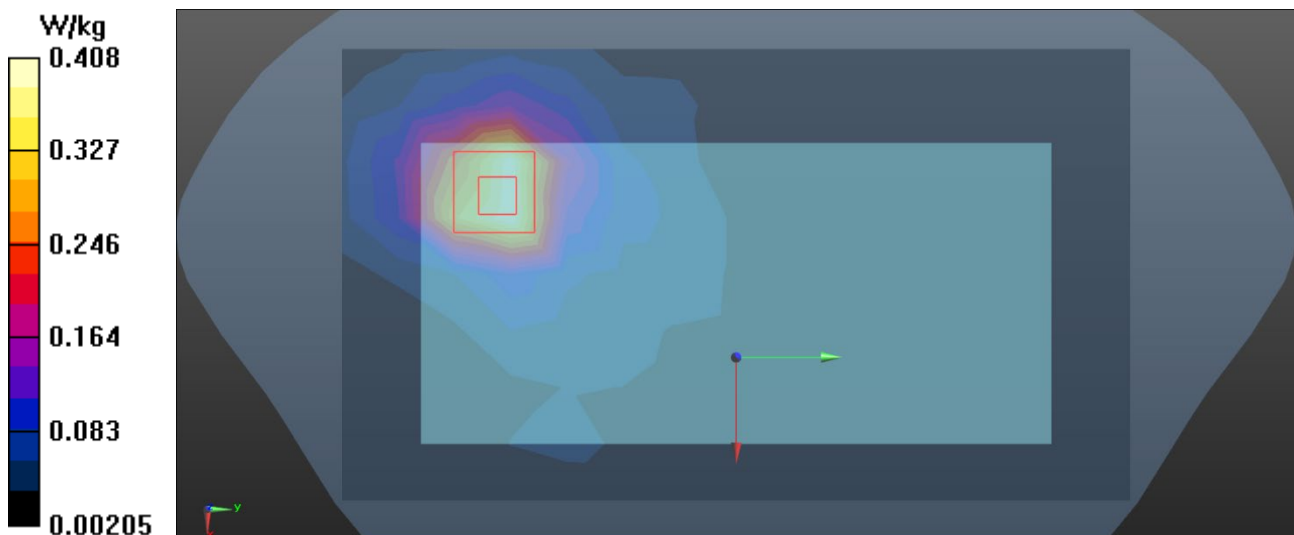

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/11

W49_WiFi 5.6G UNII_2C_802.11a_CH120_Back Side_15mm

DUT: Test sample;


Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 5.119$ S/m; $\epsilon_r = 34.692$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4-SN7544; ConvF(4.75,4.75, 4.75) @ 5600 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (14x23x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.273 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 1.294 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.493 W/kg
SAR(1 g) = 0.140 W/kg; SAR(10 g) = 0.053 W/kg
Smallest distance from peaks to all points 3 dB below = 12.8 mm
Ratio of SAR at M2 to SAR at M1 = 21.6%
Maximum value of SAR (measured) = 0.312 W/kg

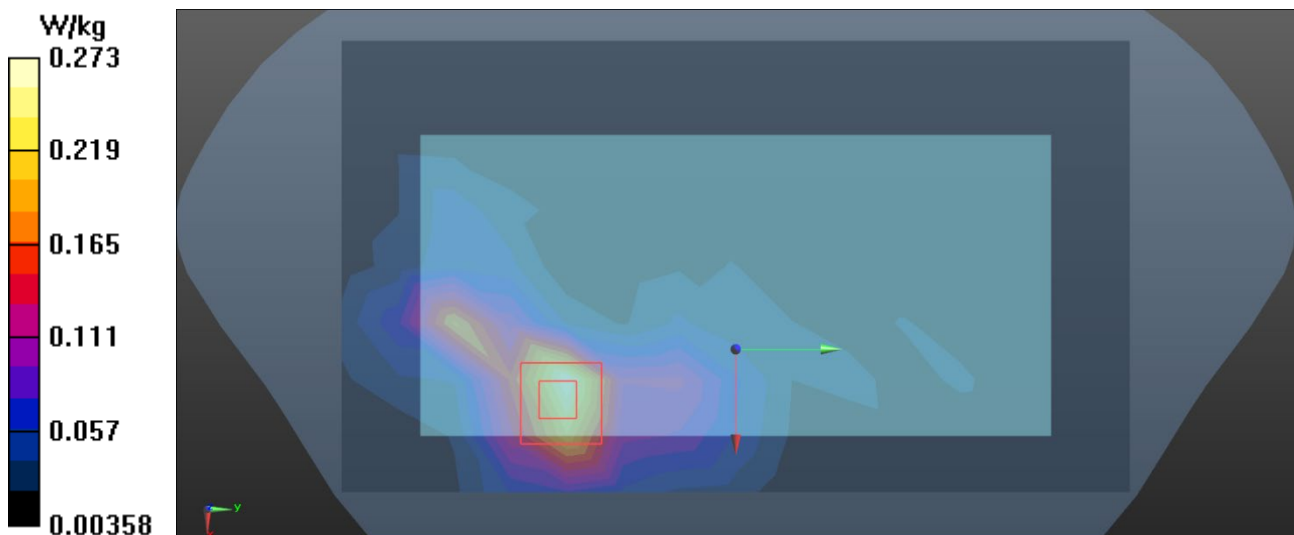

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/11

W55_WiFi 5.8G UNII_3_802.11a_CH157_Back Side_15mm

DUT: Test sample;

Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0); Frequency: 5785 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.339 \text{ S/m}$; $\epsilon_r = 34.277$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(4.9, 4.9, 4.9) @ 5785 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (14x23x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 0.246 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 1.079 V/m ; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.482 W/kg
SAR(1 g) = 0.131 W/kg ; SAR(10 g) = 0.053 W/kg
Smallest distance from peaks to all points 3 dB below = 12.8 mm
Ratio of SAR at M2 to SAR at M1 = 21.1%
Maximum value of SAR (measured) = 0.292 W/kg

