

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/3

## G01\_GSM 850\_GSM\_CH190\_Right Cheek\_Ant 11

### DUT: Test sample;

Communication System: UID 0, Generic GSM (0); Frequency: 848.6 MHz; Duty Cycle: 1:1

Medium parameters used :  $f = 848.6 \text{ MHz}$ ;  $\sigma = 0.947 \text{ S/m}$ ;  $\epsilon_r = 43.032$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature :  $22.9 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.4 \text{ }^\circ\text{C}$ 

### DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(9.75, 9.55, 10.36) @ 848.6 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (9x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 


Maximum value of SAR (measured) =  $1.36 \text{ W/kg}$ 
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value =  $9.186 \text{ V/m}$ ; Power Drift =  $-0.04 \text{ dB}$ 

Peak SAR (extrapolated) =  $1.47 \text{ W/kg}$ 
**SAR(1 g) =  $0.855 \text{ W/kg}$ ; SAR(10 g) =  $0.497 \text{ W/kg}$** 

Smallest distance from peaks to all points 3 dB below =  $9.1 \text{ mm}$ 

Ratio of SAR at M2 to SAR at M1 =  $55.8\%$ 

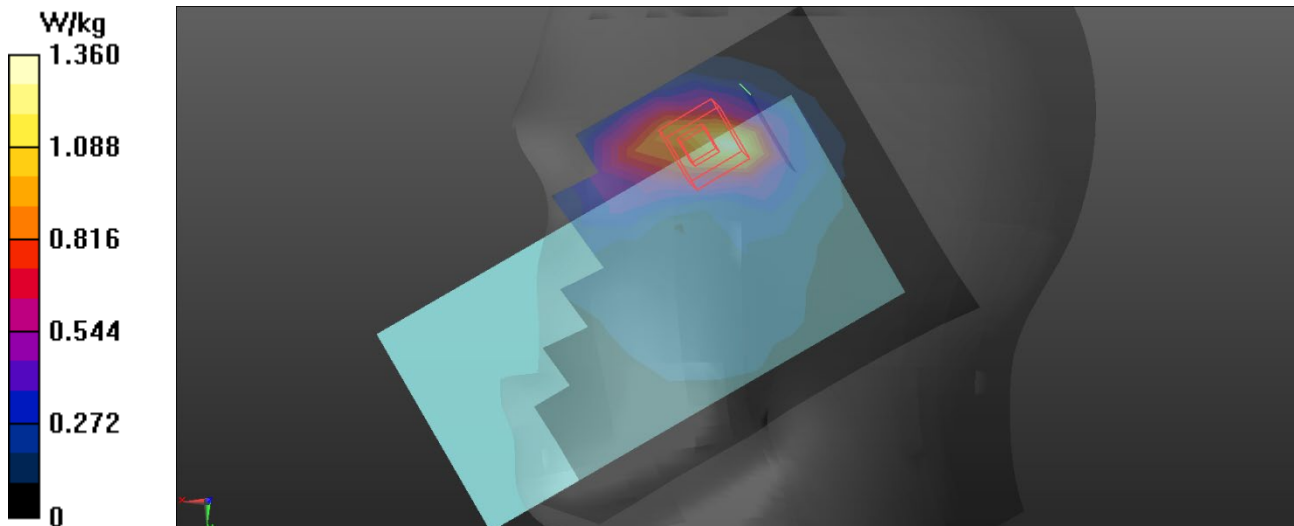Maximum value of SAR (measured) =  $1.25 \text{ W/kg}$ 


Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/3

**G13\_GSM 850\_GSM\_CH251\_Right Cheek\_Ant 31****DUT: Test sample;**

Communication System: UID 0, Generic GSM (0); Frequency: 848.6 MHz; Duty Cycle: 1:1

Medium parameters used :  $f = 848.6$  MHz;  $\sigma = 0.947$  S/m;  $\epsilon_r = 43.032$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.9 °C; Liquid Temperature : 22.4 °C

**DASY Configuration:**

- Probe: EX3DV4 - SN7693; ConvF(9.75, 9.55, 10.36) @ 848.6 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (9x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.269 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 2.967 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.301 W/kg

**SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.153 W/kg**

Smallest distance from peaks to all points 3 dB below = 15.6 mm

Ratio of SAR at M2 to SAR at M1 = 74.9%

Maximum value of SAR (measured) = 0.265 W/kg

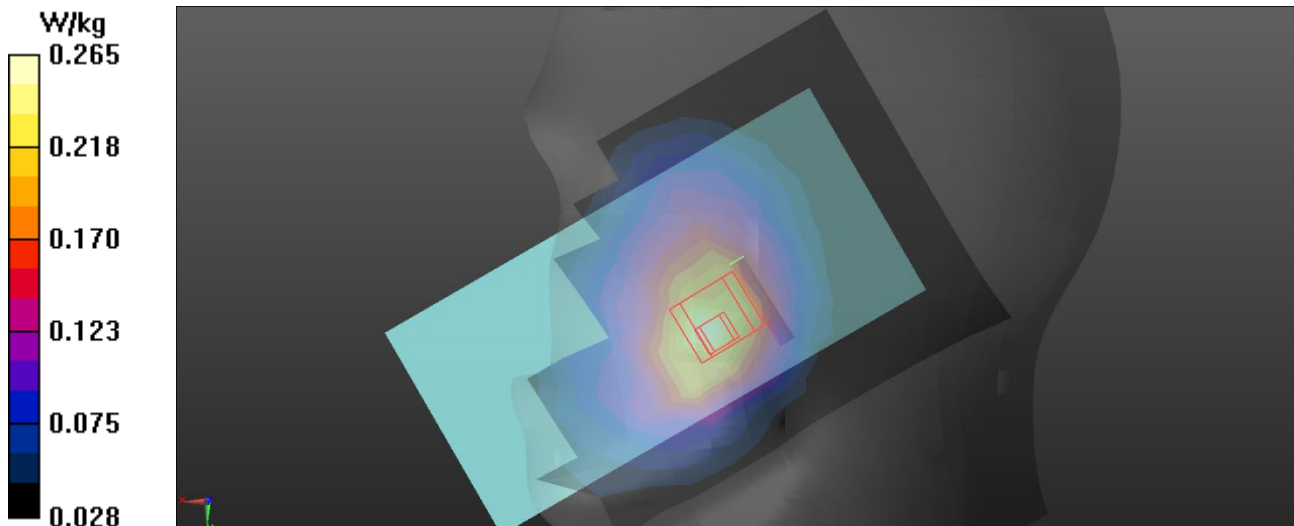

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/5

**G20\_GSM 1900\_GSM\_CH810\_Right Cheek\_Ant 14****DUT: Test sample;**

Communication System: UID 0, Generic GSM (0); Frequency: 1909.8 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.349$  S/m;  $\epsilon_r = 39.028$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

## DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(7.89, 7.73, 8.39) @ 1909.8 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (9x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.824 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 12.93 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.18 W/kg

**SAR(1 g) = 0.673 W/kg; SAR(10 g) = 0.364 W/kg**

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 57.8%

Maximum value of SAR (measured) = 0.967 W/kg

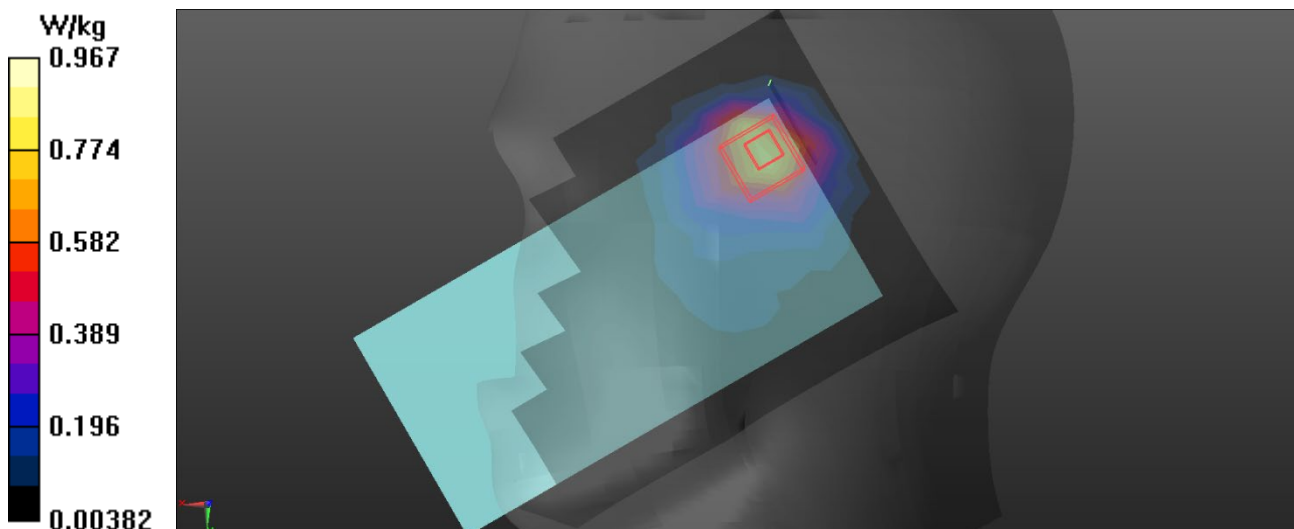

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/5

## G26\_GSM 1900\_GSM\_CH512\_Right Cheek\_Ant 41

### DUT: Test sample;

Communication System: UID 0, Generic GSM (0); Frequency: 1850.2 MHz; Duty Cycle: 1:1

Medium parameters used :  $f = 1850.2 \text{ MHz}$ ;  $\sigma = 1.288 \text{ S/m}$ ;  $\epsilon_r = 39.25$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature :  $23.4 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.7 \text{ }^\circ\text{C}$ 

### DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(7.89, 7.73, 8.39) @ 1850.2 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (9x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 


Maximum value of SAR (measured) =  $0.0729 \text{ W/kg}$ 
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value =  $1.203 \text{ V/m}$ ; Power Drift =  $0.05 \text{ dB}$ 

Peak SAR (extrapolated) =  $0.0830 \text{ W/kg}$ 
**SAR(1 g) =  $0.056 \text{ W/kg}$ ; SAR(10 g) =  $0.034 \text{ W/kg}$** 

Smallest distance from peaks to all points 3 dB below =  $10.3 \text{ mm}$ 

Ratio of SAR at M2 to SAR at M1 =  $72.9\%$ 

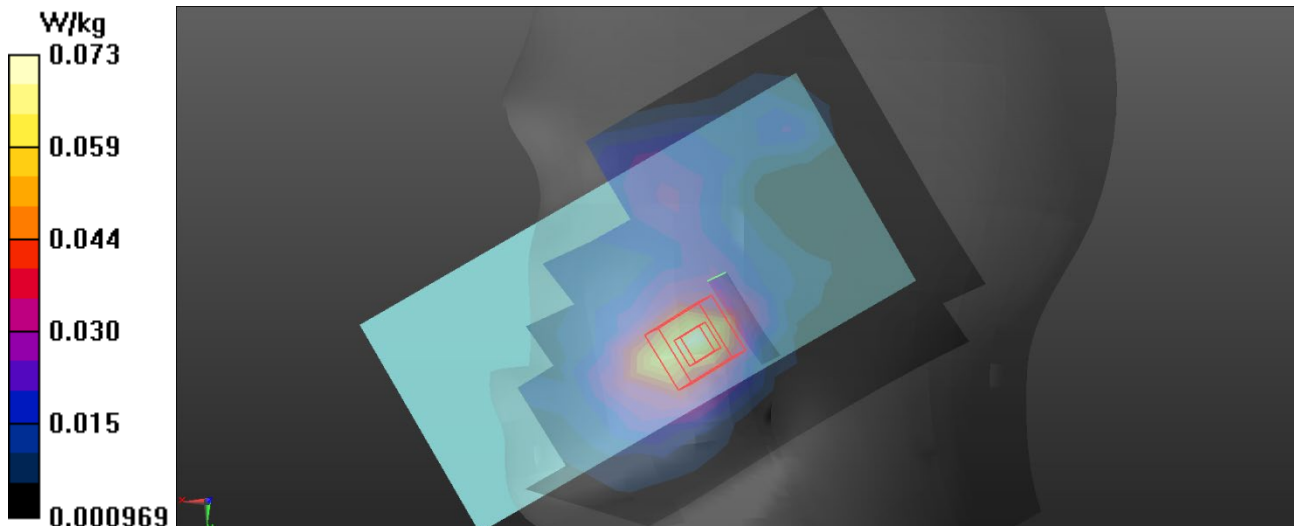Maximum value of SAR (measured) =  $0.0733 \text{ W/kg}$ 


Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/5

# U05\_UMTS B2\_RMC12.2K\_CH9262\_Right Cheek\_Ant 14

## DUT: Test sample;

Communication System: UID 10460 - AAA, UMTS-FDD (WCDMA, AMR); Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium parameters used :  $f = 1852.4$  MHz;  $\sigma = 1.29$  S/m;  $\epsilon_r = 39.241$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

## DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(7.89, 7.73, 8.39) @ 1852.4 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (9x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.647 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 11.28 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.865 W/kg

**SAR(1 g) = 0.494 W/kg; SAR(10 g) = 0.267 W/kg**

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 58.5%

Maximum value of SAR (measured) = 0.695 W/kg

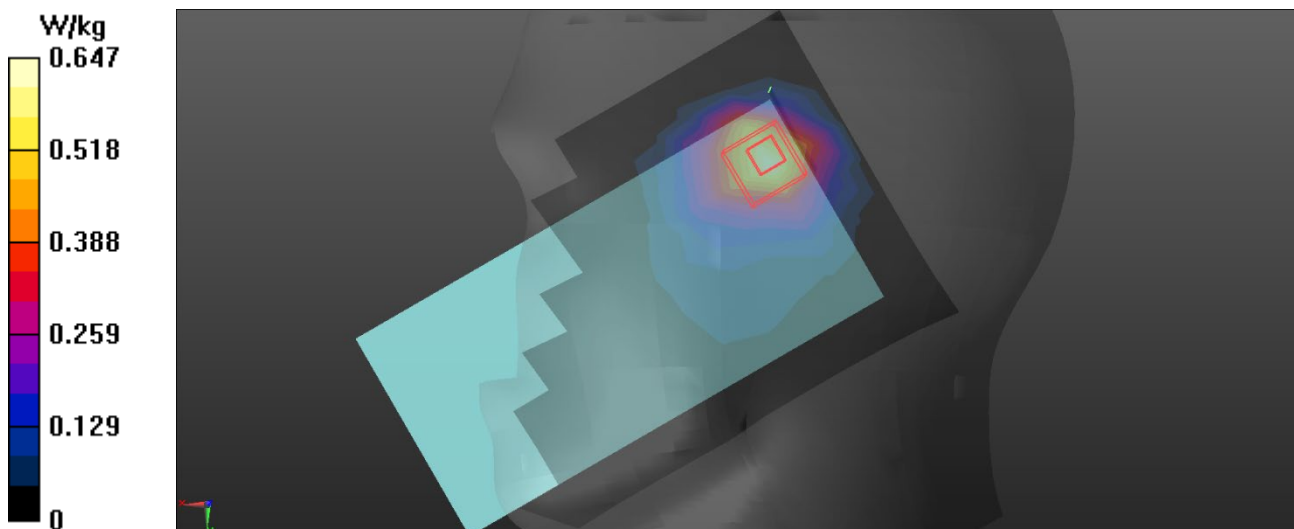

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/5

**U13\_UMTS B2\_RMC12.2K\_CH9538\_Left Cheek\_Ant 41****DUT: Test sample;**

Communication System: UID 10460 - AAA, UMTS-FDD (WCDMA, AMR); Frequency: 1907.6 MHz; Duty Cycle: 1:1  
Medium parameters used :  $f = 1907.6$  MHz;  $\sigma = 1.347$  S/m;  $\epsilon_r = 39.036$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

**DASY Configuration:**

- Probe: EX3DV4 - SN7693; ConvF(7.89, 7.73, 8.39) @ 1907.6 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (9x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.353 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 13.81 V/m; Power Drift = 0 dB


Peak SAR (extrapolated) = 0.386 W/kg

**SAR(1 g) = 0.233 W/kg; SAR(10 g) = 0.126 W/kg**

Smallest distance from peaks to all points 3 dB below = 21.5 mm

Ratio of SAR at M2 to SAR at M1 = 67.8%

Maximum value of SAR (measured) = 0.337 W/kg

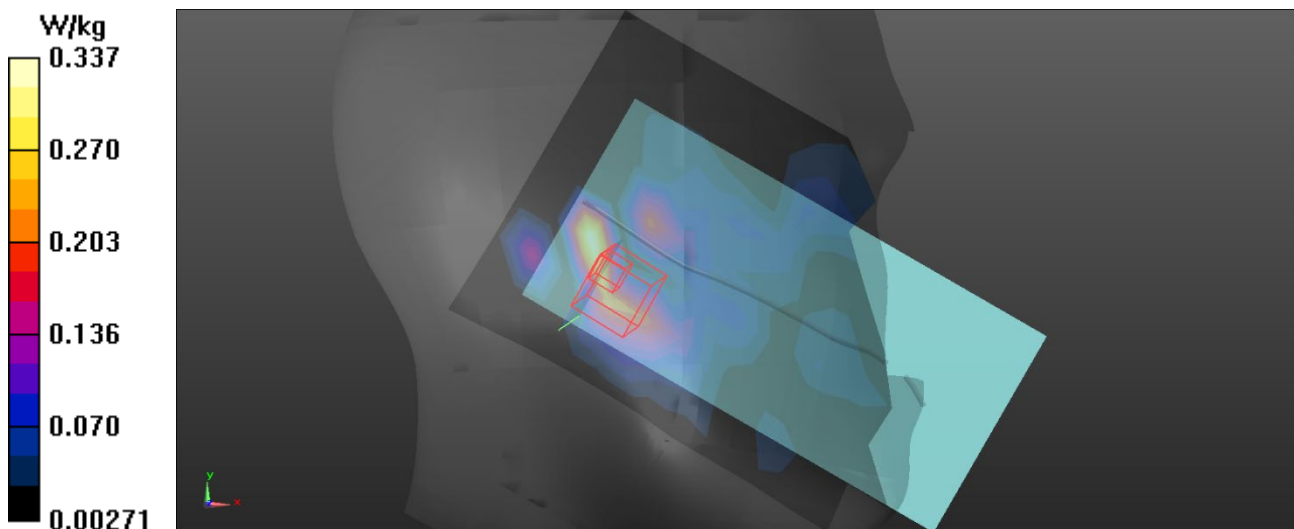

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/6

## U20\_UMTS B4\_RMC12.2K\_CH1513\_Right Cheek\_Ant 14

### DUT: Test sample;

Communication System: UID 10460 - AAA, UMTS-FDD (WCDMA, AMR); Frequency: 1752.6 MHz; Duty Cycle: 1:1  
Medium parameters used :  $f = 1752.6$  MHz;  $\sigma = 1.339$  S/m;  $\epsilon_r = 39.199$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.6 °C

### DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(8.21, 8.04, 8.72) @ 1752.6 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (9x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.648 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 11.78 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.877 W/kg

**SAR(1 g) = 0.497 W/kg; SAR(10 g) = 0.273 W/kg**

Smallest distance from peaks to all points 3 dB below = 13 mm

Ratio of SAR at M2 to SAR at M1 = 56.7%

Maximum value of SAR (measured) = 0.747 W/kg

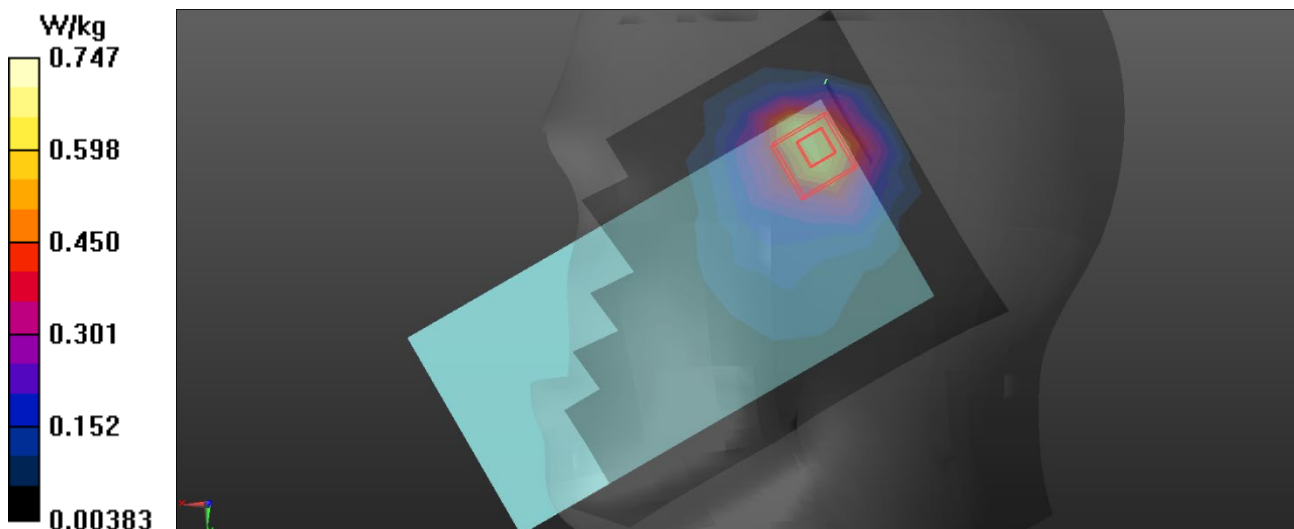

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/6

## U26\_UMTS B4\_RMC12.2K\_CH1312\_Right Cheek\_Ant 41

### DUT: Test sample;

Communication System: UID 10460 - AAA, UMTS-FDD (WCDMA, AMR); Frequency: 1712.4 MHz; Duty Cycle: 1:1  
Medium parameters used :  $f = 1712.4$  MHz;  $\sigma = 1.303$  S/m;  $\epsilon_r = 39.301$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.6 °C

### DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(8.21, 8.04, 8.72) @ 1712.4 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (9x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.161 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 1.577 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.187 W/kg

**SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.072 W/kg**

Smallest distance from peaks to all points 3 dB below = 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 66.9%

Maximum value of SAR (measured) = 0.165 W/kg

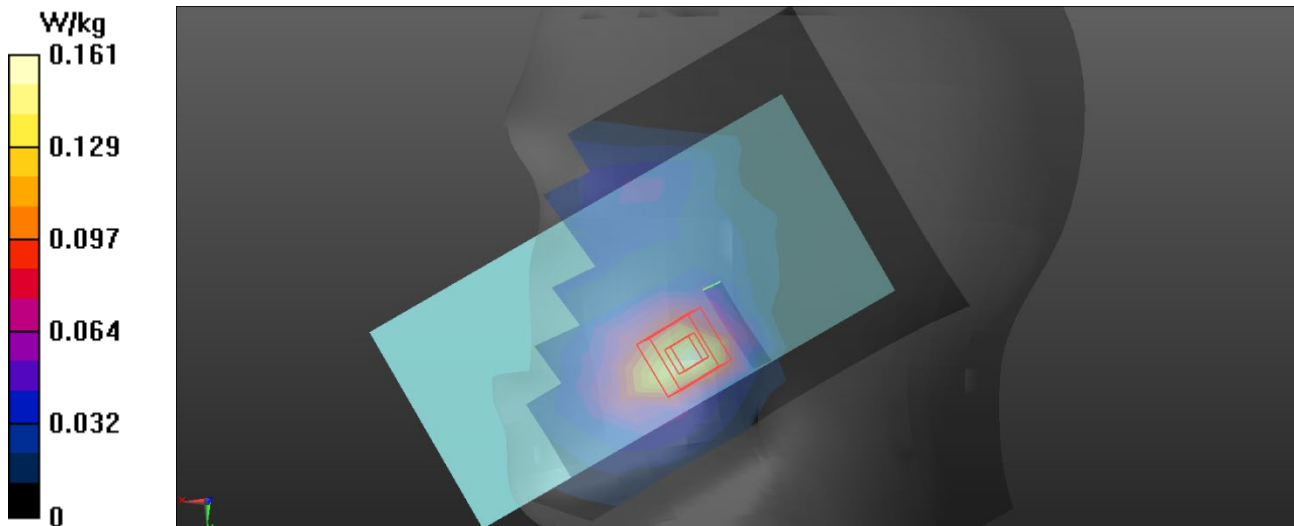

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/3

### U34\_UMTS B5\_RMC12.2K\_CH4233\_Right Cheek\_Ant 11

#### DUT: Test sample;

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 846.6 MHz; Duty Cycle: 1:1  
Medium parameters used :  $f = 846.6 \text{ MHz}$ ;  $\sigma = 0.946 \text{ S/m}$ ;  $\epsilon_r = 43.04$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $22.9 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.4 \text{ }^\circ\text{C}$

#### DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(9.75, 9.55, 10.36) @ 846.6 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (9x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $0.710 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $5.722 \text{ V/m}$ ; Power Drift =  $0.02 \text{ dB}$


Peak SAR (extrapolated) =  $0.942 \text{ W/kg}$

**SAR(1 g) =  $0.467 \text{ W/kg}$ ; SAR(10 g) =  $0.259 \text{ W/kg}$**

Smallest distance from peaks to all points 3 dB below =  $8.1 \text{ mm}$

Ratio of SAR at M2 to SAR at M1 =  $55.6\%$

Maximum value of SAR (measured) =  $0.753 \text{ W/kg}$

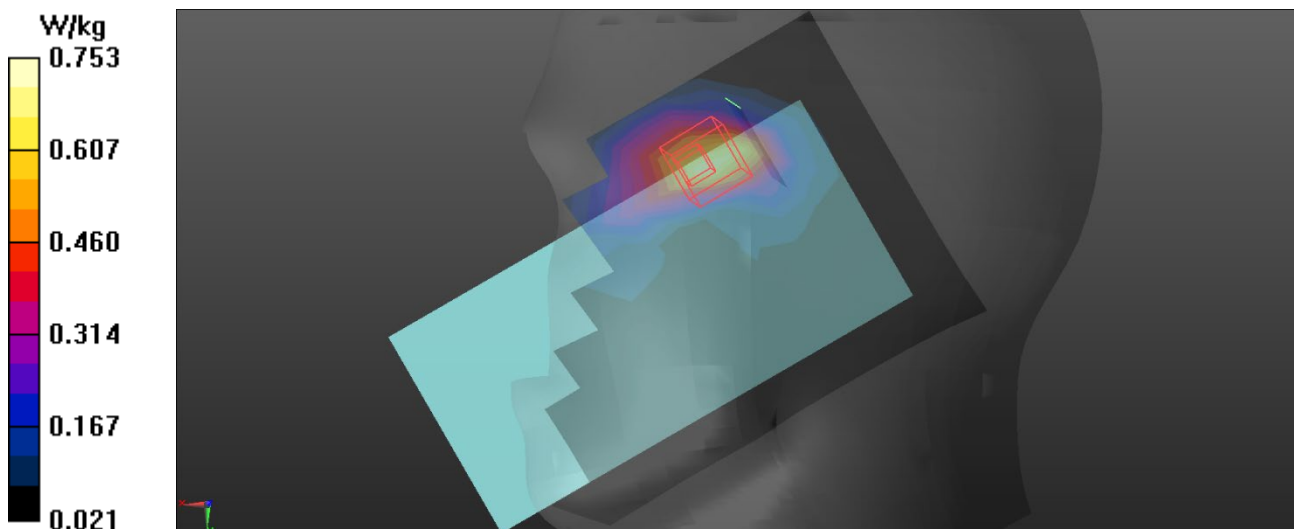

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/3

### U41\_UMTS B5\_RMC12.2K\_CH4233\_Right Cheek\_Ant 31

#### DUT: Test sample;

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 846.6 MHz; Duty Cycle: 1:1  
Medium parameters used :  $f = 846.6$  MHz;  $\sigma = 0.946$  S/m;  $\epsilon_r = 43.04$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.9 °C; Liquid Temperature : 22.4 °C

#### DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(9.75, 9.55, 10.36) @ 846.6 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (9x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.278 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 3.362 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.311 W/kg

**SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.163 W/kg**

Smallest distance from peaks to all points 3 dB below = 22.4 mm

Ratio of SAR at M2 to SAR at M1 = 72.9%

Maximum value of SAR (measured) = 0.283 W/kg

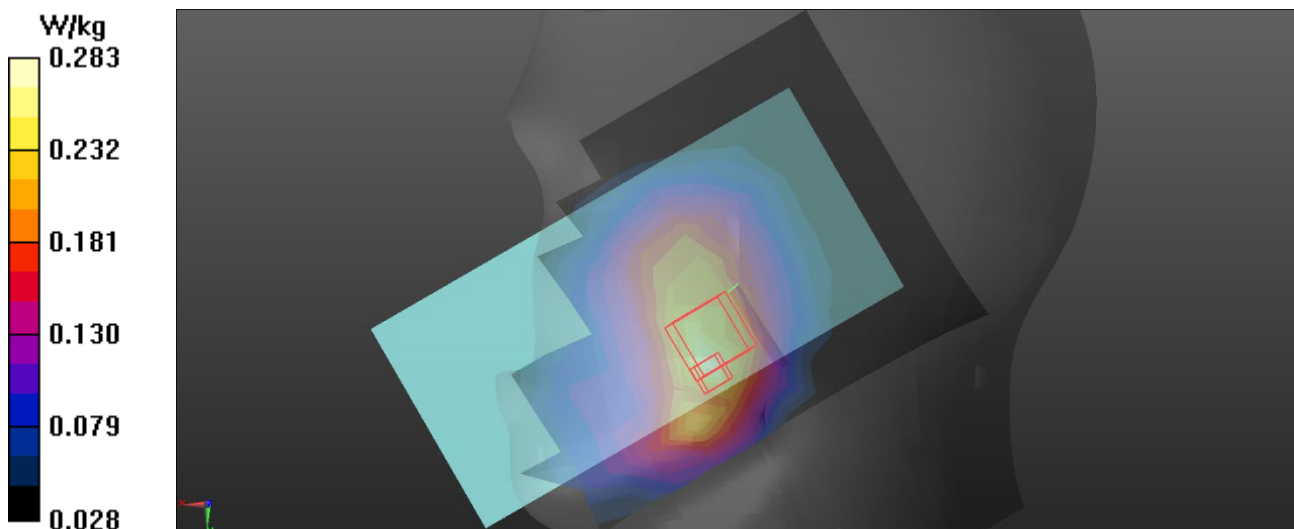

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/6

# L01\_LTE B2\_QPSK10M\_CH19100\_1 RB offset 0\_Right Cheek\_Ant 14

## DUT: Test sample;


Communication System: UID 0, LTE-FDD(1RB,20MHz,QPSK) (0); Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.332$  S/m;  $\epsilon_r = 39.589$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

## DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(8.25, 8.25, 8.25) @1900MHz;Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (9x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 0.951 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 15.54 V/m; Power Drift = 0.09 dB  
Peak SAR (extrapolated) = 1.23 W/kg  
**SAR(1 g) = 0.601 W/kg; SAR(10 g) = 0.316 W/kg**  
Smallest distance from peaks to all points 3 dB below = 9.3 mm  
Ratio of SAR at M2 to SAR at M1 = 51.5%  
Maximum value of SAR (measured) = 0.940 W/kg

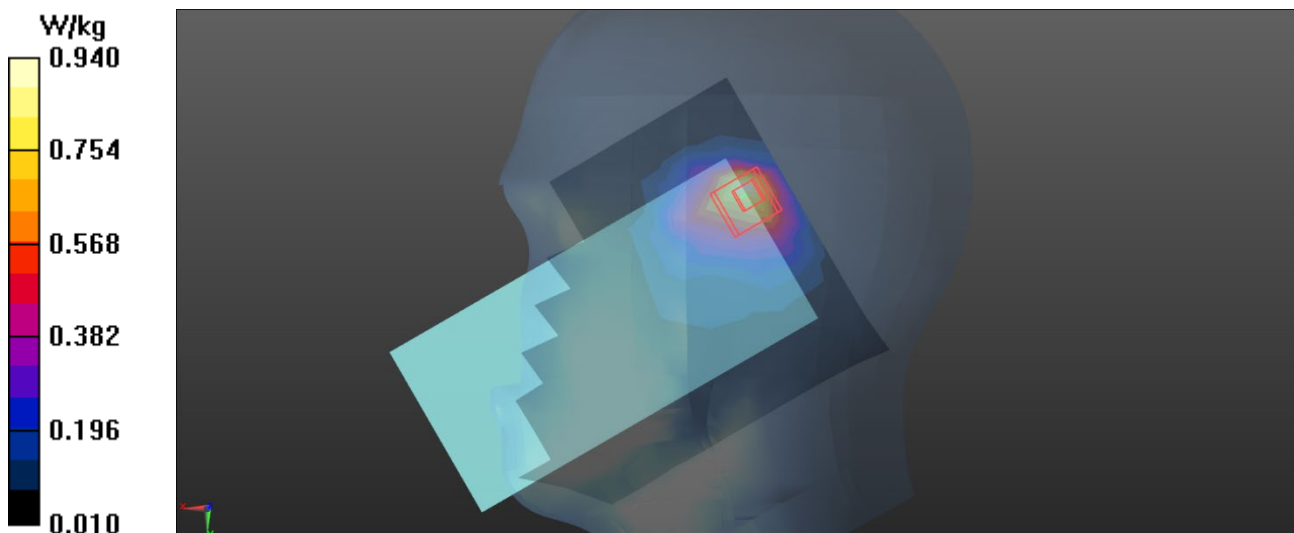

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/13

# L14\_LTE B2\_QPSK20M\_CH18700\_1RB Offset 99\_Right Cheek\_Ant 41

## DUT: Test sample;

Communication System: UID 0, LTE-FDD(1RB,20MHz,QPSK) (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1860 \text{ MHz}$ ;  $\sigma = 1.303 \text{ S/m}$ ;  $\epsilon_r = 39.976$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$ 

## DASY Configuration:

- Probe:EX3DV4-SN7693;ConvF(7.89, 7.73, 8.39)@1860 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (9x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 


Maximum value of SAR (measured) =  $0.131 \text{ W/kg}$ 
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value =  $2.413 \text{ V/m}$ ; Power Drift =  $0.10 \text{ dB}$ 

Peak SAR (extrapolated) =  $0.153 \text{ W/kg}$ 
**SAR(1 g) =  $0.111 \text{ W/kg}$ ; SAR(10 g) =  $0.075 \text{ W/kg}$** 

Smallest distance from peaks to all points 3 dB below =  $17.5 \text{ mm}$ 

Ratio of SAR at M2 to SAR at M1 =  $72.7\%$ 

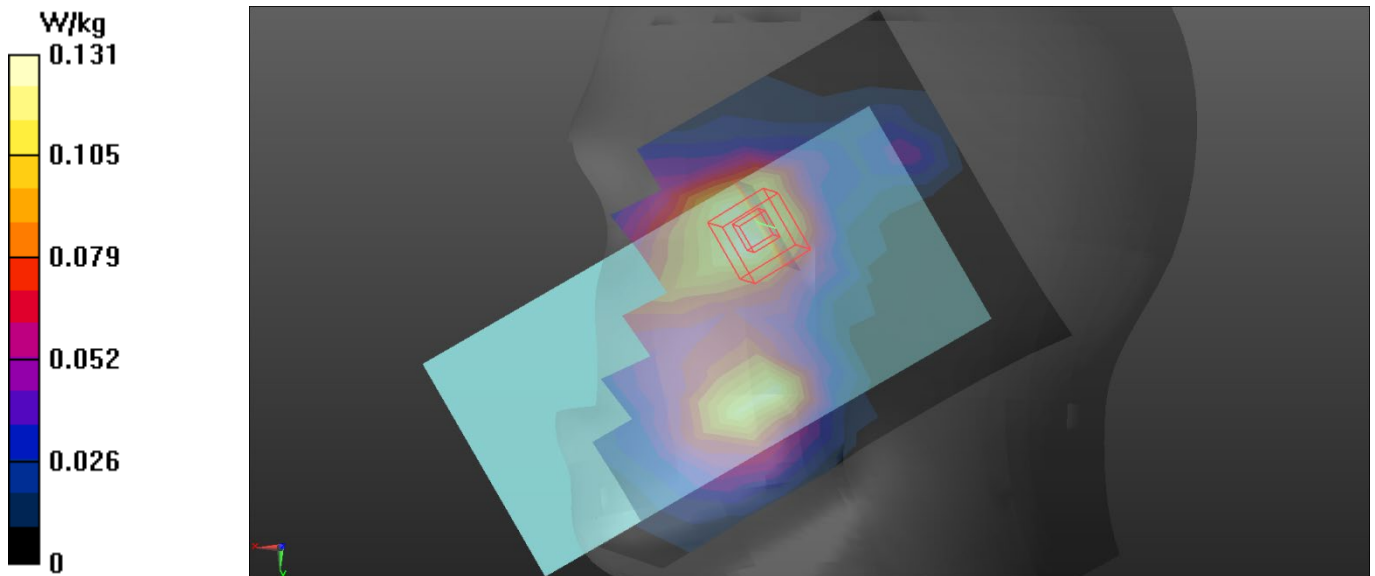Maximum value of SAR (measured) =  $0.138 \text{ W/kg}$ 


Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/7

### L35\_LTE B4\_QPSK20M\_CH20050\_1 RB Offset 99\_Right Cheek\_Ant 14

#### DUT: Test sample;

Communication System: UID 0, LTE-FDD(1RB,20MHz,QPSK) (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.296$  S/m;  $\epsilon_r = 39.26$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

#### DASY Configuration:

- Probe: EX3DV4-SN7693;ConvF(8.21, 8.04, 8.72)@1720 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (9x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.864 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 12.06 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.02 W/kg

**SAR(1 g) = 0.571 W/kg; SAR(10 g) = 0.310 W/kg**

Smallest distance from peaks to all points 3 dB below = 13 mm

Ratio of SAR at M2 to SAR at M1 = 56.3%

Maximum value of SAR (measured) = 0.868 W/kg

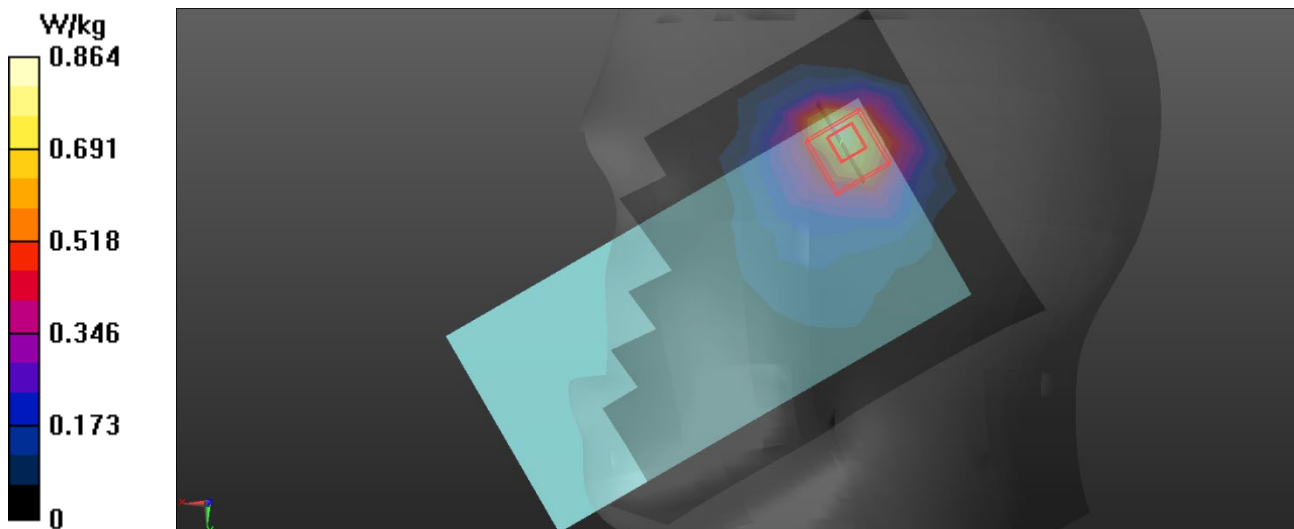

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/12

### L40\_LTE B4\_QPSK20M\_CH20050\_1RB Offset 0\_Right Cheek\_Ant 41

#### DUT: Test sample;

Communication System: UID 0, LTE-FDD(1RB,20MHz,QPSK) (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.314$  S/m;  $\epsilon_r = 39.247$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

#### DASY Configuration:

- Probe: EX3DV4-SN7693;ConvF(8.21,8.04,8.72) @ 1720 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (9x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.0936 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 0.9650 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.117 W/kg

**SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.048 W/kg**

Smallest distance from peaks to all points 3 dB below = 12.7 mm

Ratio of SAR at M2 to SAR at M1 = 72.5%

Maximum value of SAR (measured) = 0.104 W/kg

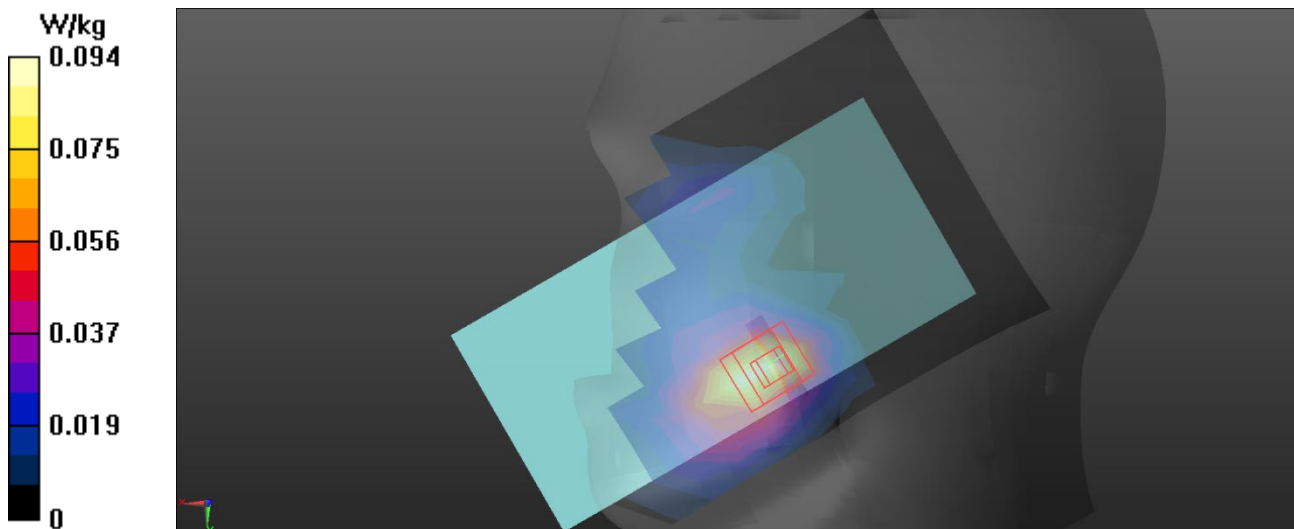

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/8

### L53\_LTE B5\_QPSK10M\_CH20600\_1 RB Offset 24\_Right Cheek\_Ant 11

#### DUT: Test sample;

Communication System: UID 0, LTE-FDD(1RB,10MHz,QPSK) (0); Frequency: 844 MHz; Duty Cycle: 1:1  
Medium parameters used :  $f = 844 \text{ MHz}$ ;  $\sigma = 0.916 \text{ S/m}$ ;  $\epsilon_r = 40.956$ ;  $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

#### DASY Configuration:

- Probe: EX3DV4 -SN7544;ConvF(10.19,10.19,10.19)@844MHz;Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (9x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (measured) =  $1.14 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $10.89 \text{ V/m}$ ; Power Drift =  $0.02 \text{ dB}$   
Peak SAR (extrapolated) =  $1.46 \text{ W/kg}$   
**SAR(1 g) =  $0.772 \text{ W/kg}$ ; SAR(10 g) =  $0.434 \text{ W/kg}$**   
Smallest distance from peaks to all points 3 dB below =  $9.6 \text{ mm}$   
Ratio of SAR at M2 to SAR at M1 =  $54.4\%$   
Maximum value of SAR (measured) =  $1.19 \text{ W/kg}$

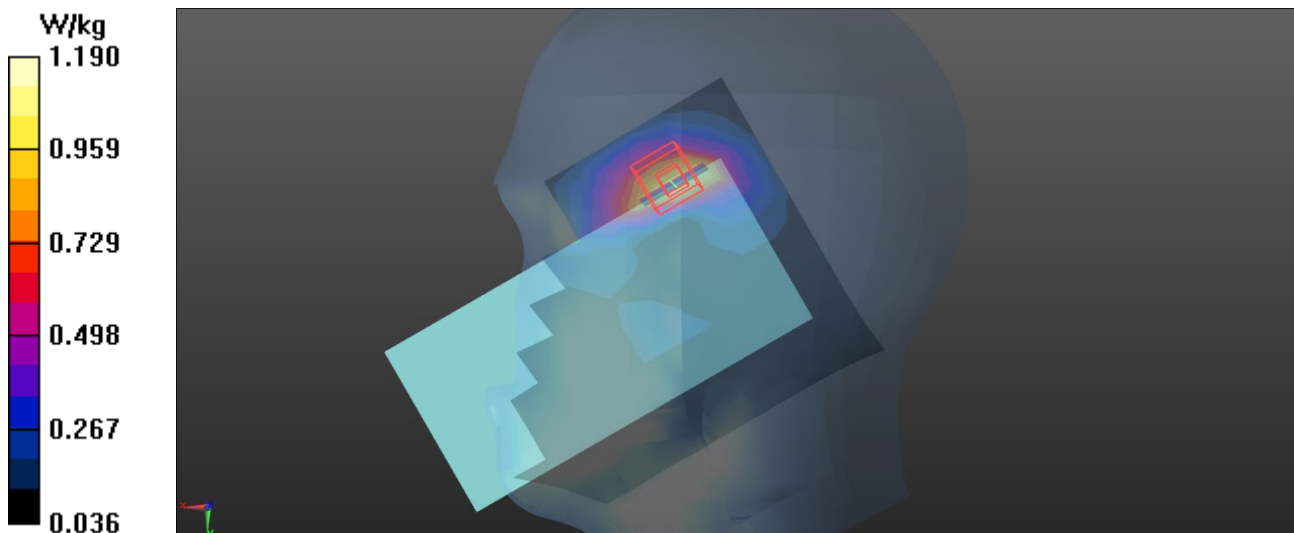

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/10

### L66\_LTE B5\_QPSK10M\_CH20600\_1RB Offset 0\_Right Cheek\_Ant 31

#### DUT: Test sample;

Communication System: UID 0, LTE-FDD(1RB,10MHz,QPSK) (0); Frequency: 844 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 844 \text{ MHz}$ ;  $\sigma = 0.928 \text{ S/m}$ ;  $\epsilon_r = 41.457$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $22.8 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.4 \text{ }^\circ\text{C}$

#### DASY Configuration:

- Probe: EX3DV4-SN7693;ConvF(9.75,9.55,10.36) @ 844 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (9x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (measured) =  $0.383 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $4.100 \text{ V/m}$ ; Power Drift =  $0.06 \text{ dB}$


Peak SAR (extrapolated) =  $0.418 \text{ W/kg}$

**SAR(1 g) =  $0.290 \text{ W/kg}$ ; SAR(10 g) =  $0.201 \text{ W/kg}$**

Smallest distance from peaks to all points 3 dB below =  $16 \text{ mm}$

Ratio of SAR at M2 to SAR at M1 =  $69.7\%$

Maximum value of SAR (measured) =  $0.380 \text{ W/kg}$

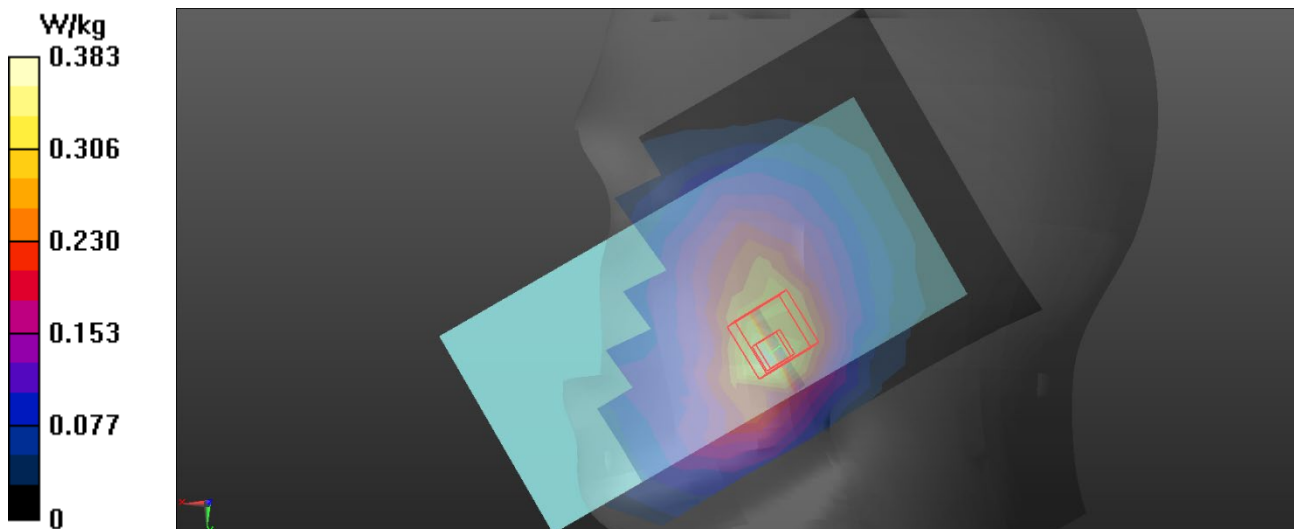

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/9

### L84\_LTE B7\_QPSK20M\_CH21350\_50RB Offset 0\_Right Cheek\_Ant 14

#### DUT: Test sample;

Communication System: UID 0, LTE-FDD(1RB,20MHz,QPSK) (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2560$  MHz;  $\sigma = 1.992$  S/m;  $\epsilon_r = 37.682$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

#### DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(7.45, 7.45, 7.45) @2560MHz;Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (11x16x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 1.22 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 10.55 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.69 W/kg

**SAR(1 g) = 0.711 W/kg; SAR(10 g) = 0.320 W/kg**

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 41.5%

Maximum value of SAR (measured) = 1.27 W/kg

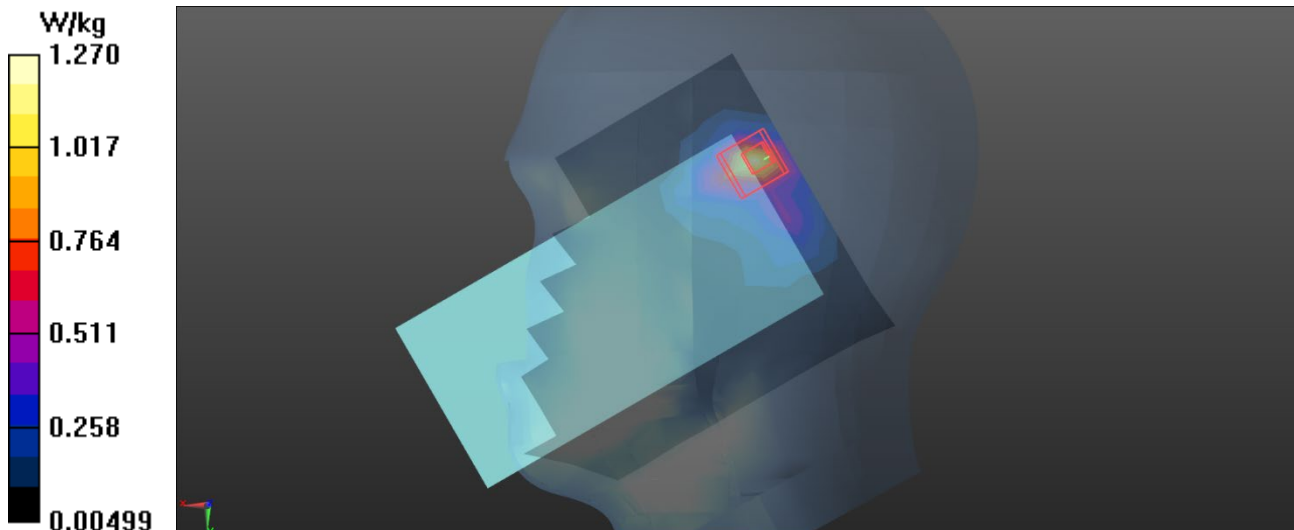

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/12

## L92\_LTE B7\_QPSK20M\_CH20850\_1RB Offset 0\_Right Cheek\_Ant 41

### DUT: Test sample;

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2510 MHz;  
Duty Cycle: 1:1

Medium parameters used:  $f = 2510$  MHz;  $\sigma = 1.911$  S/m;  $\epsilon_r = 39.559$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C; Liquid Temperature : 22.4 °C

### DASY Configuration:

- Probe: EX3DV4-SN7544; ConvF(7.45,7.45, 7.45) @ 2510 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (11x16x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 0.119 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 3.279 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.167 W/kg

**SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.049 W/kg**

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 60.4%

Maximum value of SAR (measured) = 0.140 W/kg

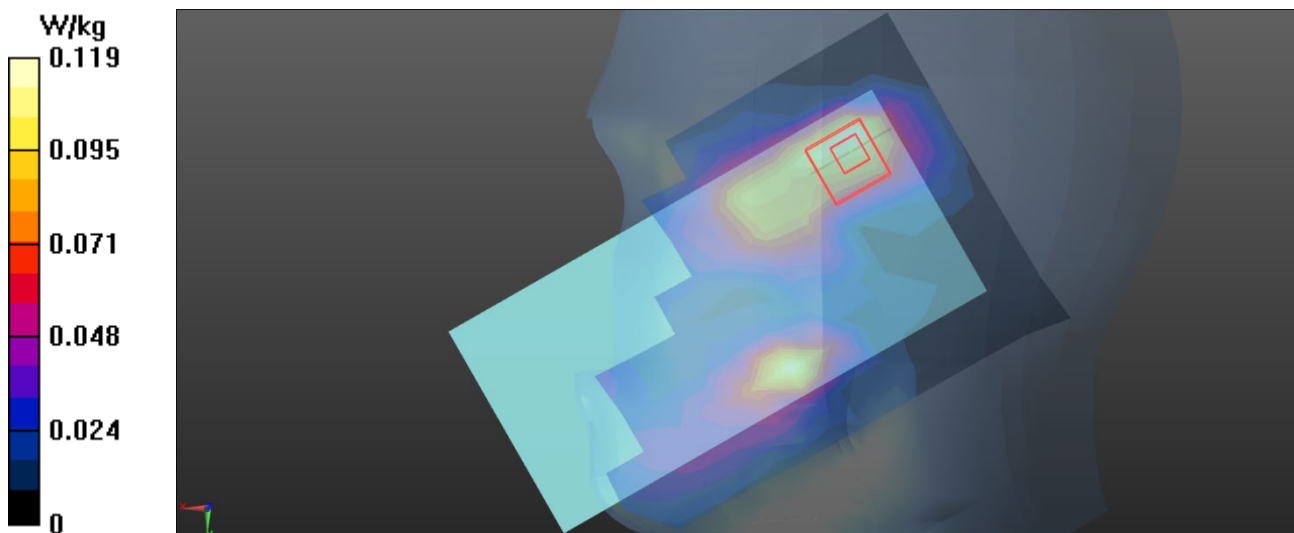

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/8

# L105\_LTE B13\_QPSK10M\_CH23230\_1 RB Offset 0\_Right Cheek\_Ant 11

## DUT: Test sample;

Communication System: UID 0, LTE-FDD(50% RB, 10MHz, QPSK) (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.905 \text{ S/m}$ ;  $\epsilon_r = 41.471$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

## DASY Configuration:

- Probe: EX3DV4 -SN7544;ConvF(10.59,10.59,10.59)@782MHz;Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (9x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.338 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 5.513 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.447 W/kg

**SAR(1 g) = 0.226 W/kg; SAR(10 g) = 0.127 W/kg**

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 51%

Maximum value of SAR (measured) = 0.361 W/kg

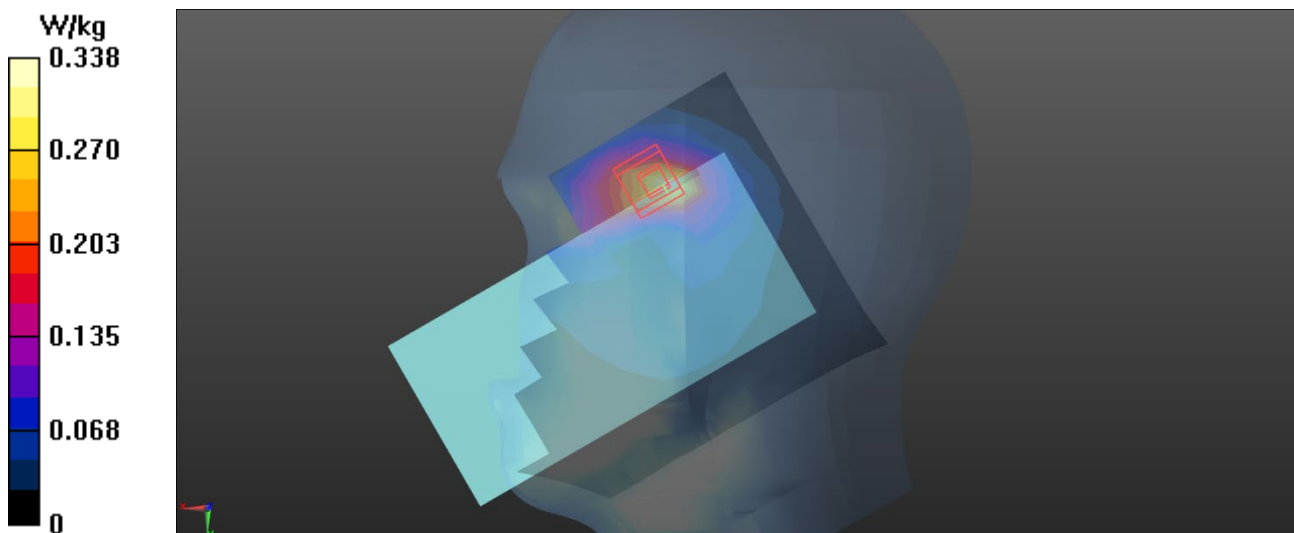

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/10

# L114\_LTE B13\_QPSK10M\_CH23230\_1RB Offset 0\_Right Cheek\_Ant 31

## DUT: Test sample;


Communication System: UID 0, LTE-FDD(1RB,10MHz,QPSK) (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.915 \text{ S/m}$ ;  $\epsilon_r = 41.971$ ;  $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature :  $22.8 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.4 \text{ }^\circ\text{C}$

## DASY Configuration:

- Probe: EX3DV4-SN7693; ConvF(9.97,9.77, 10.6) @ 782 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (9x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (measured) =  $0.197 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $3.456 \text{ V/m}$ ; Power Drift =  $0.05 \text{ dB}$   
Peak SAR (extrapolated) =  $0.212 \text{ W/kg}$   
**SAR(1 g) =  $0.159 \text{ W/kg}$ ; SAR(10 g) =  $0.117 \text{ W/kg}$**   
Smallest distance from peaks to all points 3 dB below =  $18.2 \text{ mm}$   
Ratio of SAR at M2 to SAR at M1 =  $74.8\%$   
Maximum value of SAR (measured) =  $0.194 \text{ W/kg}$

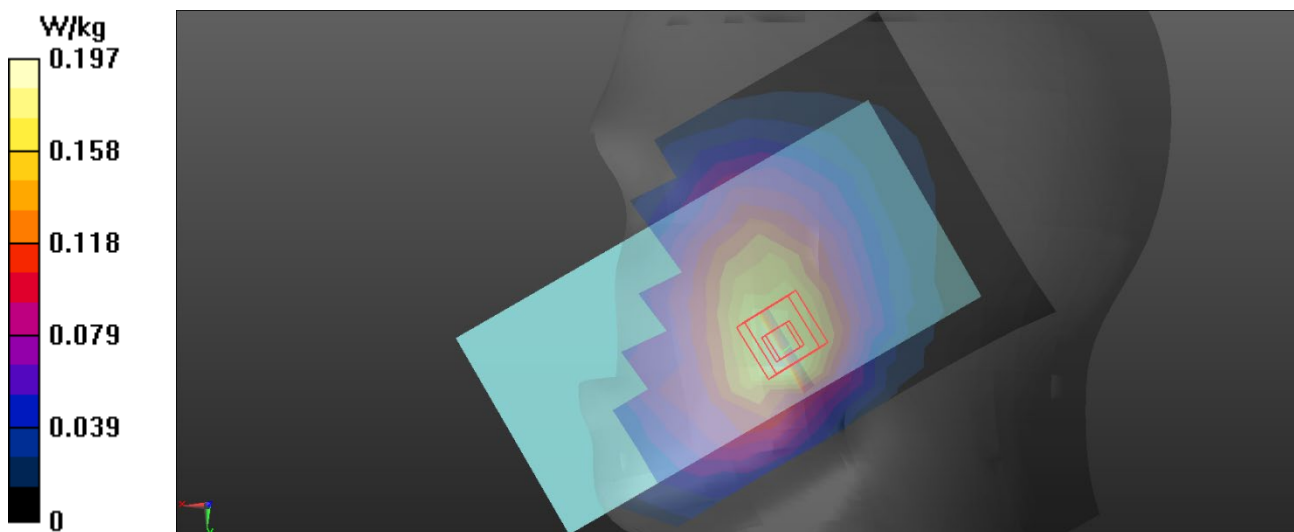

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/8

# L132\_LTE B26\_QPSK15M\_CH26965\_1 RB Offset 0\_Right Cheek\_Ant 11

## DUT: Test sample;

Communication System: UID 0, LTE-FDD (SC-FDMA, 1RB, 15 MHz,QPSK (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 841.5 \text{ MHz}$ ;  $\sigma = 0.915 \text{ S/m}$ ;  $\epsilon_r = 40.972$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

## DASY Configuration:

- Probe:EX3DV4-SN7544;ConvF(10.19,10.19,10.19)@841.5MHz;Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (9x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $1.13 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $10.77 \text{ V/m}$ ; Power Drift =  $-0.09 \text{ dB}$


Peak SAR (extrapolated) =  $1.35 \text{ W/kg}$

**SAR(1 g) =  $0.720 \text{ W/kg}$ ; SAR(10 g) =  $0.405 \text{ W/kg}$**

Smallest distance from peaks to all points 3 dB below =  $9.3 \text{ mm}$

Ratio of SAR at M2 to SAR at M1 =  $54.5\%$

Maximum value of SAR (measured) =  $1.11 \text{ W/kg}$

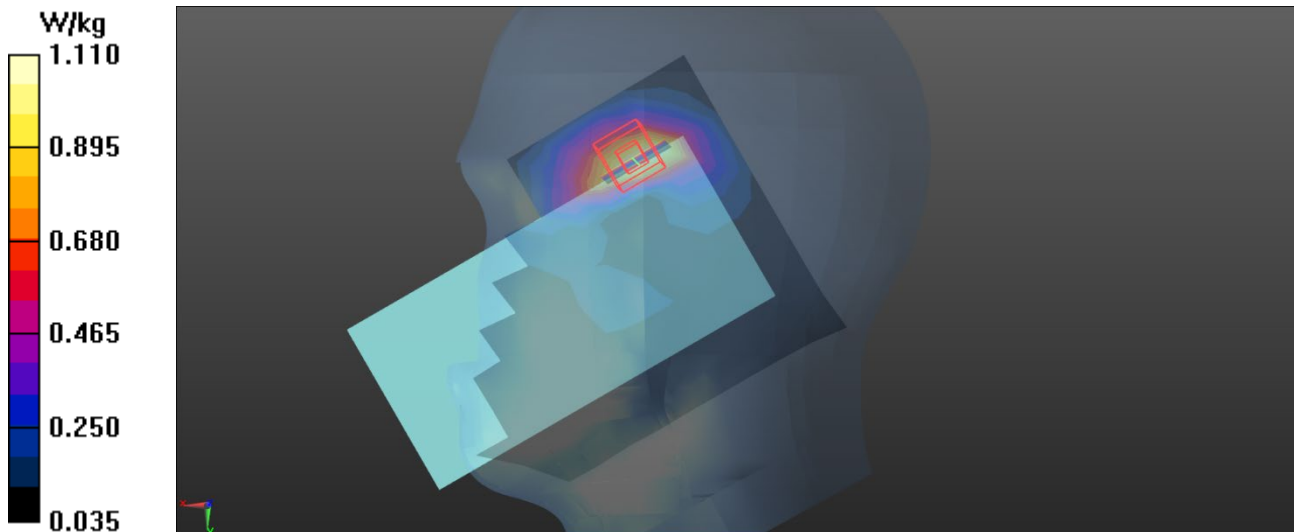

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/10

# L144\_LTE B26\_QPSK15M\_CH26865\_1RB Offset 74\_Right Cheek\_Ant 31

## DUT: Test sample;

Communication System: UID 0, LTE-FDD (SC-FDMA,1RB,15MHz,QPSK (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 831.5 \text{ MHz}$ ;  $\sigma = 0.921 \text{ S/m}$ ;  $\epsilon_r = 41.548$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $22.8 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.4 \text{ }^\circ\text{C}$

## DASY Configuration:

- Probe:EX3DV4-SN7693; ConvF(9.75,9.55,10.36)@831.5MHz;Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (9x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $0.372 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $4.171 \text{ V/m}$ ; Power Drift =  $0.06 \text{ dB}$


Peak SAR (extrapolated) =  $0.406 \text{ W/kg}$

**SAR(1 g) =  $0.285 \text{ W/kg}$ ; SAR(10 g) =  $0.197 \text{ W/kg}$**

Smallest distance from peaks to all points 3 dB below =  $16.4 \text{ mm}$

Ratio of SAR at M2 to SAR at M1 =  $70.3\%$

Maximum value of SAR (measured) =  $0.370 \text{ W/kg}$

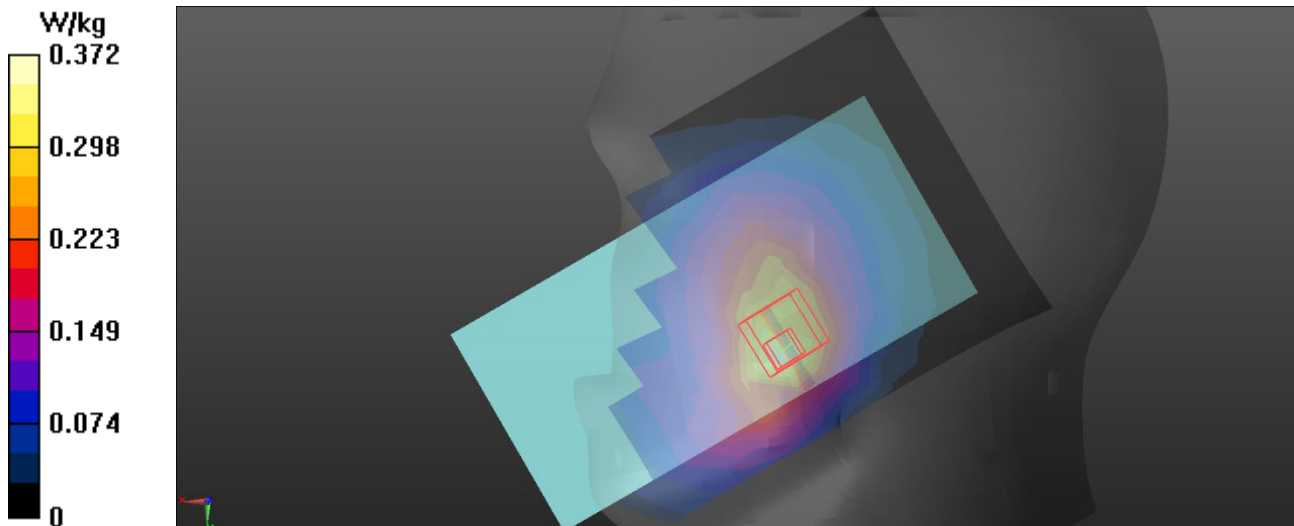

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/9

### L159\_LTE B38\_QPSK20M\_CH37850\_50 RB offset 0\_Right Tilted\_Ant 14

#### DUT: Test sample;

Communication System: UID 0, LTE-TDD (SC-FDMA, 1 RB, 20MHz, QPSK) (0); Frequency: 2580 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2580$  MHz;  $\sigma = 2.014$  S/m;  $\epsilon_r = 37.611$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

#### DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(7.45, 7.45, 7.45) @2580MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (11x16x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm  
Maximum value of SAR (measured) = 0.603 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 10.72 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 1.41 W/kg  
**SAR(1 g) = 0.591 W/kg; SAR(10 g) = 0.260 W/kg**  
Smallest distance from peaks to all points 3 dB below = 8.6 mm  
Ratio of SAR at M2 to SAR at M1 = 42.7%  
Maximum value of SAR (measured) = 1.09 W/kg

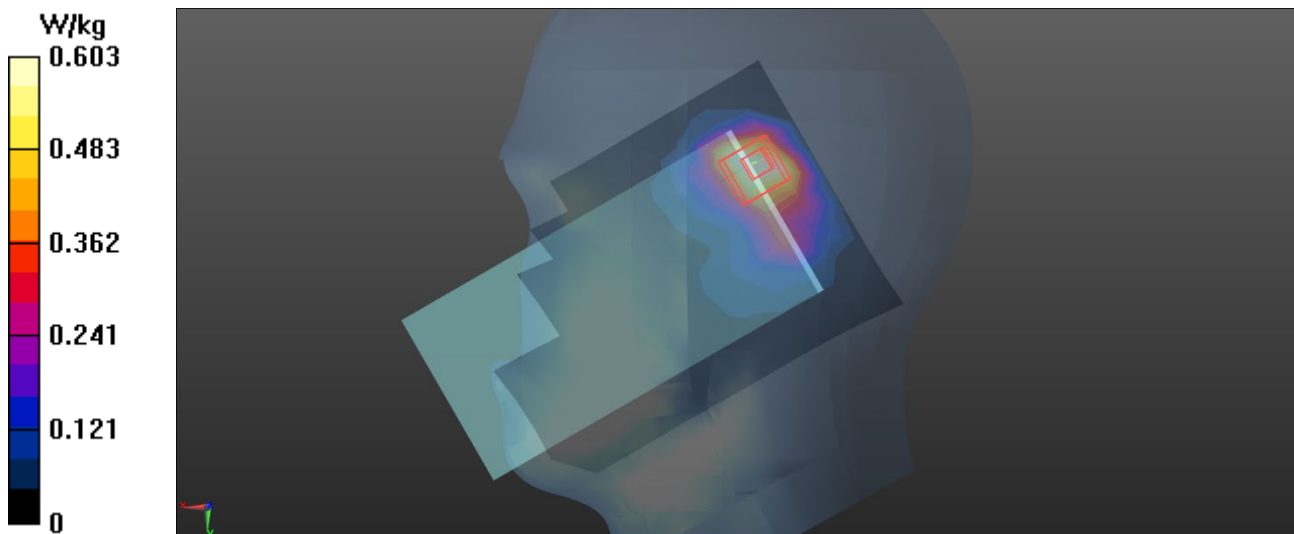

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/12

# L170\_LTE B38\_QPSK20M\_CH37850\_1RB Offset 99\_Left Cheek\_Ant 41

## DUT: Test sample;

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2580 MHz;  
Duty Cycle: 1:1

Medium parameters used:  $f = 2580$  MHz;  $\sigma = 1.986$  S/m;  $\epsilon_r = 39.33$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C; Liquid Temperature : 22.4 °C

## DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(7.45,7.45,7.45) @2580 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (11x16x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 0.145 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 2.799 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.181 W/kg

**SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.052 W/kg**

Smallest distance from peaks to all points 3 dB below = 10.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.1%

Maximum value of SAR (measured) = 0.146 W/kg

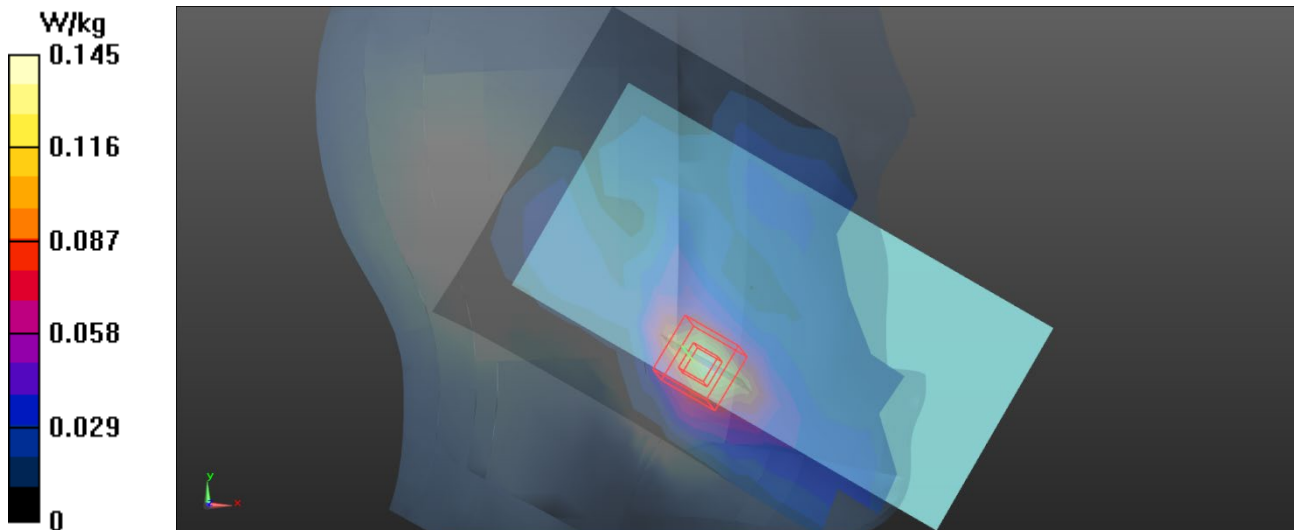

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/9

# L183\_LTE B41\_QPSK20M\_CH41490\_1RB offset 0\_Right Tilted\_Ant 14

## DUT: Test sample;

Communication System: UID 0, LTE-TDD (SC-FDMA, 1 RB,20MHz, QPSK) (0); Frequency: 2680 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2680$  MHz;  $\sigma = 2.127$  S/m;  $\epsilon_r = 37.236$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

## DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(7.45, 7.45, 7.45)@2680 MHz;Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (11x16x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 0.676 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 11.17 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.65 W/kg

**SAR(1 g) = 0.678 W/kg; SAR(10 g) = 0.291 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 41.4%

Maximum value of SAR (measured) = 1.29 W/kg

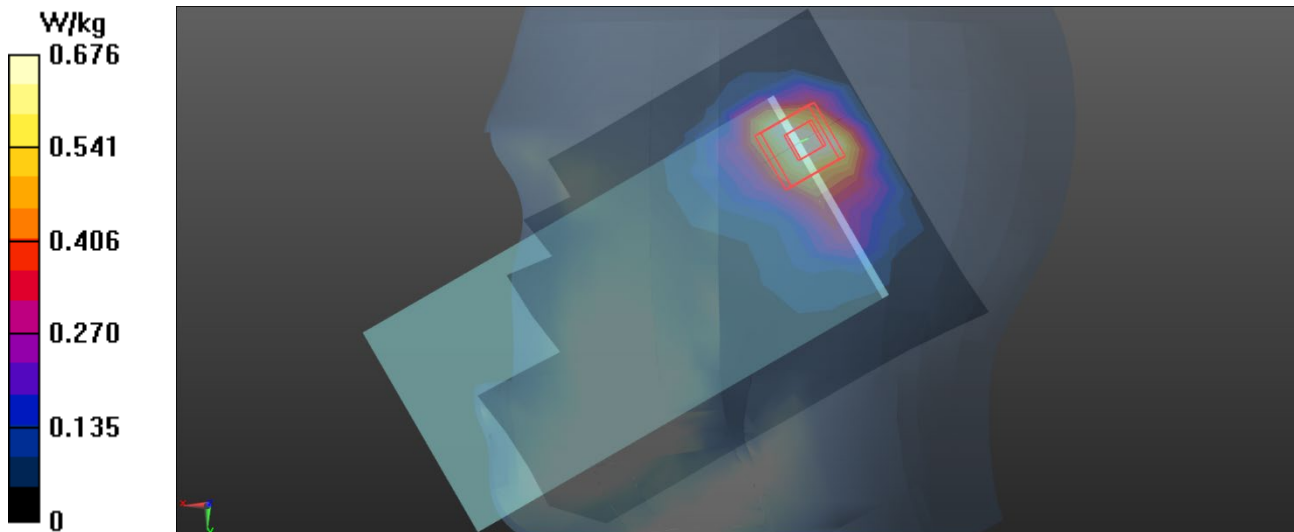

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/12

## L201\_LTE B41\_QPSK20M\_CH40620\_1RB Offset 99\_Left Cheek\_Ant 41

### DUT: Test sample;

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2593 MHz;  
Duty Cycle: 1:1

Medium parameters used:  $f = 2593 \text{ MHz}$ ;  $\sigma = 2 \text{ S/m}$ ;  $\epsilon_r = 39.285$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $22.8 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.4 \text{ }^\circ\text{C}$

### DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(7.45,7.45,7.45) @2593 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (11x16x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

Maximum value of SAR (measured) =  $0.141 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $2.639 \text{ V/m}$ ; Power Drift =  $0.08 \text{ dB}$


Peak SAR (extrapolated) =  $0.178 \text{ W/kg}$

**SAR(1 g) =  $0.099 \text{ W/kg}$ ; SAR(10 g) =  $0.051 \text{ W/kg}$**

Smallest distance from peaks to all points 3 dB below =  $10.5 \text{ mm}$

Ratio of SAR at M2 to SAR at M1 =  $56.9\%$

Maximum value of SAR (measured) =  $0.147 \text{ W/kg}$

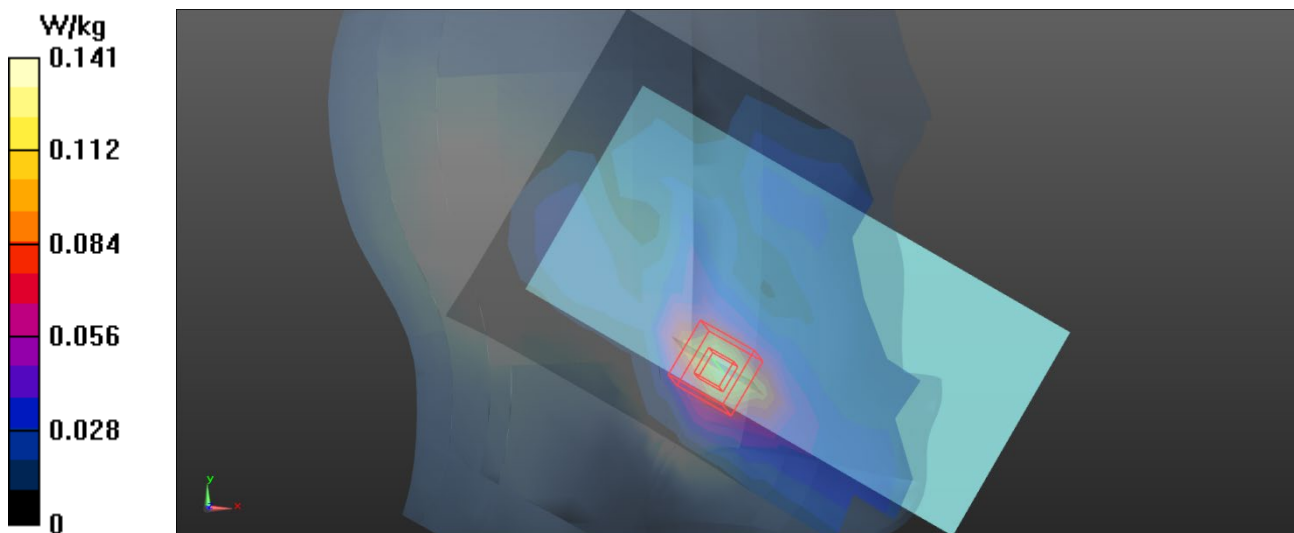

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/7

## L205\_LTE B66\_QPSK20M\_CH132572\_1 RB Offset 0\_Right Cheek\_Ant 14

### DUT: Test sample;

Communication System: UID 0, LTE-FDD(1RB,20MHz,QPSK) (0); Frequency: 1770 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1770$  MHz;  $\sigma = 1.329$  S/m;  $\epsilon_r = 39.077$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

### DASY Configuration:

- Probe: EX3DV4-SN7693;ConvF(8.21,8.04, 8.72)@ 1770 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (9x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 0.857 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 11.86 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.06 W/kg

**SAR(1 g) = 0.600 W/kg; SAR(10 g) = 0.328 W/kg**

Smallest distance from peaks to all points 3 dB below = 13 mm

Ratio of SAR at M2 to SAR at M1 = 56.9%

Maximum value of SAR (measured) = 0.902 W/kg

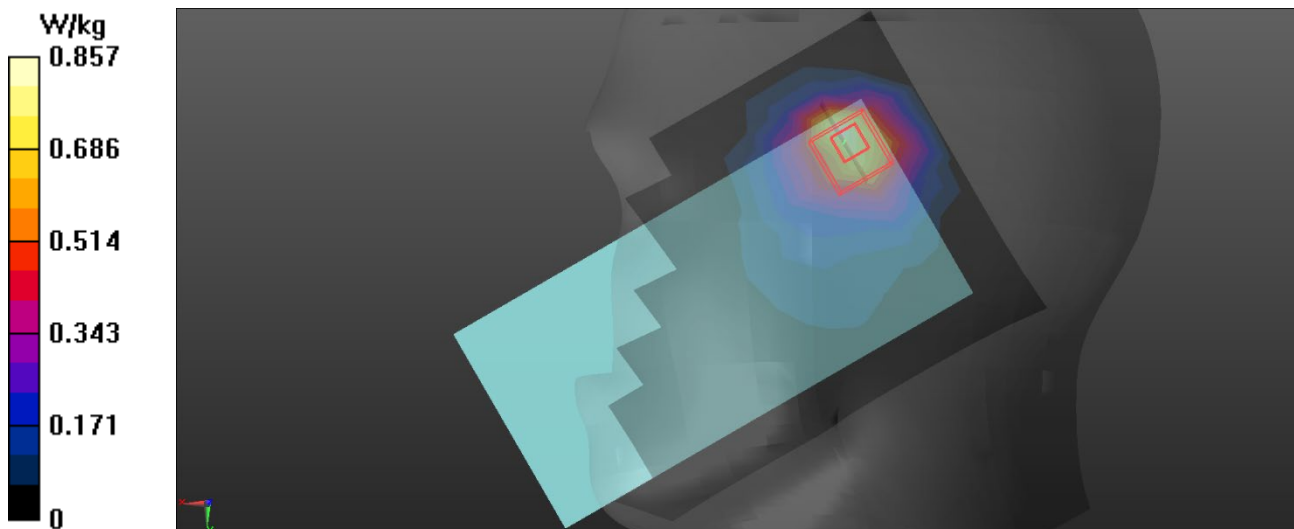

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/12

## L227\_LTE B66\_QPSK20M\_CH132572\_1RB Offset 0\_Right Cheek\_Ant 41

### DUT: Test sample;

Communication System: UID 0, LTE-FDD(1RB,20MHz,QPSK) (0); Frequency: 1770 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1770$  MHz;  $\sigma = 1.357$  S/m;  $\epsilon_r = 39.113$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

### DASY Configuration:

- Probe: EX3DV4-SN7693;ConvF(8.21,8.04,8.72) @ 1770 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (9x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 0.115 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 0.6140 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 0.141 W/kg  
**SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.055 W/kg**  
Smallest distance from peaks to all points 3 dB below = 11.6 mm  
Ratio of SAR at M2 to SAR at M1 = 69.8%  
Maximum value of SAR (measured) = 0.121 W/kg

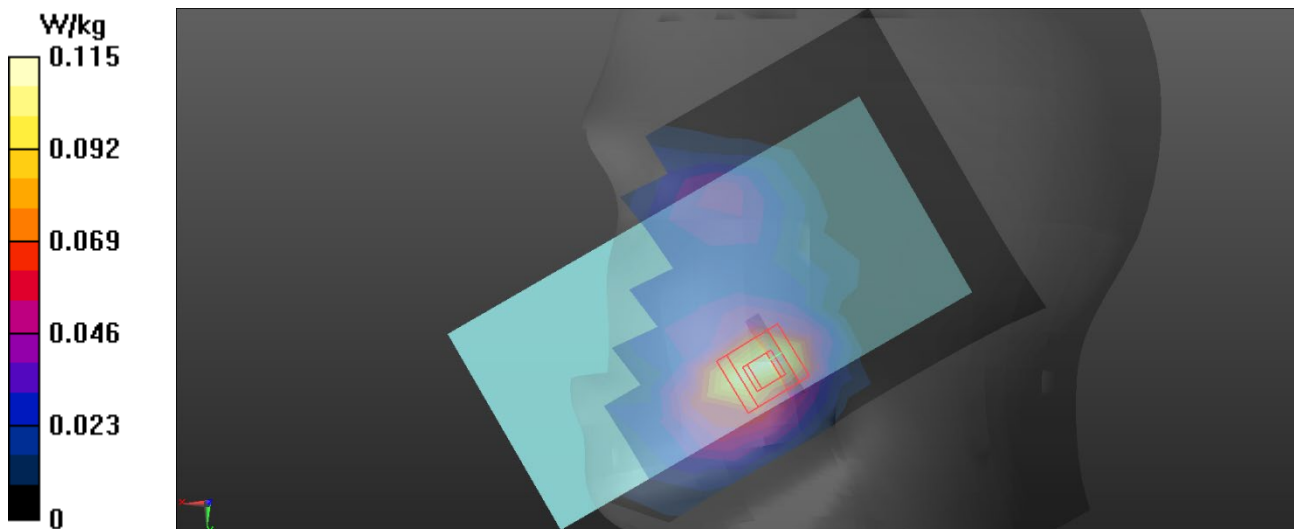

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/10

## W06\_WiFi 2.4G\_802.11b\_CH1\_Left Tilted

### DUT: Test sample;

Communication System: UID 10415 - AAA, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle);

Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used :  $f = 2412 \text{ MHz}$ ;  $\sigma = 1.807 \text{ S/m}$ ;  $\epsilon_r = 37.588$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $22.8 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.1 \text{ }^\circ\text{C}$

### DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(7.63, 7.63, 7.63) @ 2412 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (11x16x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

Maximum value of SAR (measured) =  $0.525 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $13.02 \text{ V/m}$ ; Power Drift =  $-0.04 \text{ dB}$


Peak SAR (extrapolated) =  $0.931 \text{ W/kg}$

**SAR(1 g) =  $0.422 \text{ W/kg}$ ; SAR(10 g) =  $0.192 \text{ W/kg}$**

Smallest distance from peaks to all points 3 dB below =  $7.2 \text{ mm}$

Ratio of SAR at M2 to SAR at M1 =  $42.5\%$

Maximum value of SAR (measured) =  $0.639 \text{ W/kg}$

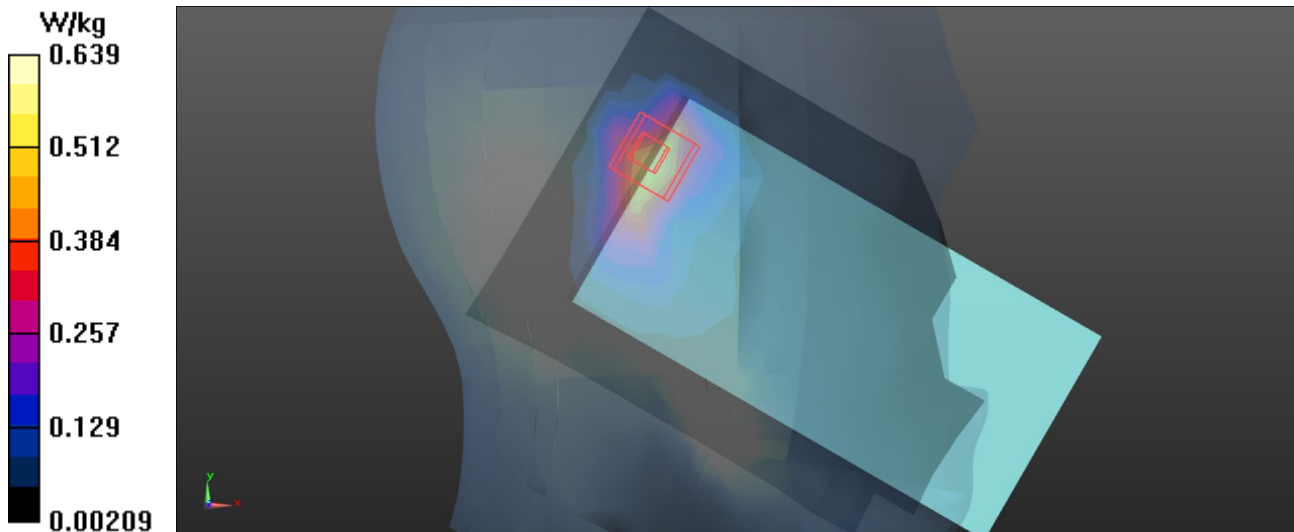

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/10

## B04\_BT\_DH5\_CH39\_Left Tilted

### DUT: Test sample;


Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1  
Medium parameters used :  $f = 2441$  MHz;  $\sigma = 1.838$  S/m;  $\epsilon_r = 37.483$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 22.8 °C; Liquid Temperature : 22.1 °C

### DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(7.63, 7.63, 7.63) @ 2441 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (11x16x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm  
Maximum value of SAR (measured) = 0.113 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 5.700 V/m; Power Drift = 0.15 dB  
Peak SAR (extrapolated) = 0.210 W/kg  
**SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.042 W/kg**  
Smallest distance from peaks to all points 3 dB below = 6.6 mm  
Ratio of SAR at M2 to SAR at M1 = 47.4%  
Maximum value of SAR (measured) = 0.153 W/kg

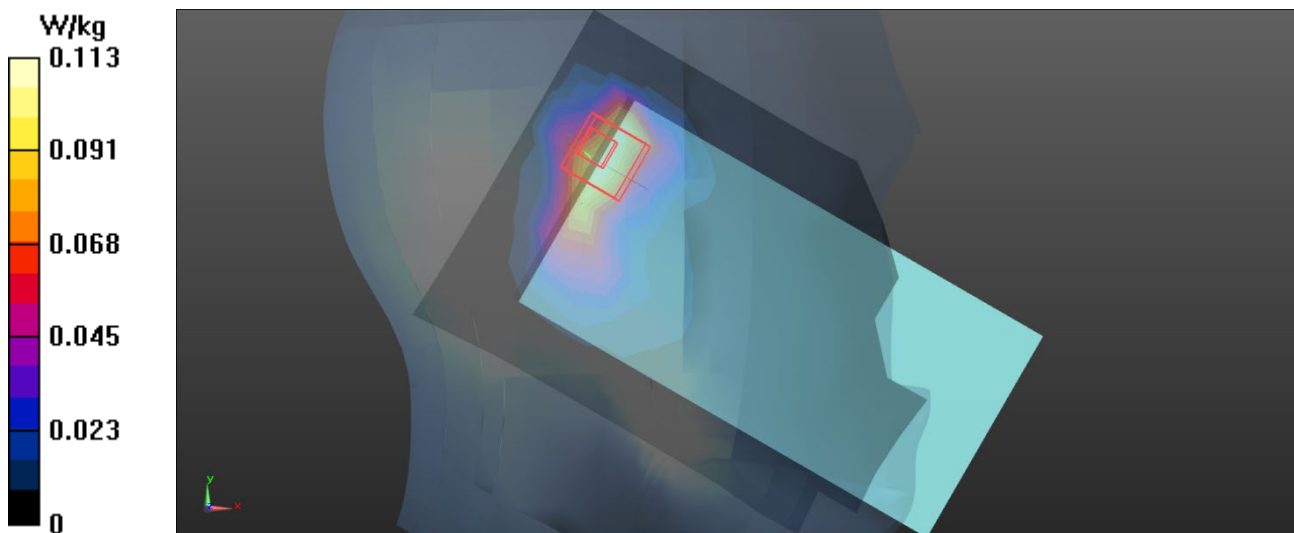

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/11

## W12\_WiFi 5.2G UNII\_1\_802.11a\_CH48\_Left Tilted

### DUT: Test sample;

Communication System: UID 10317 - AAC, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Frequency: 5240 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5240$  MHz;  $\sigma = 4.698$  S/m;  $\epsilon_r = 35.533$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

### DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(5.39, 5.39, 5.39) @ 5240 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (14x23x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.804 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 3.662 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.47 W/kg

**SAR(1 g) = 0.379 W/kg; SAR(10 g) = 0.124 W/kg**

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 23.7%

Maximum value of SAR (measured) = 0.924 W/kg

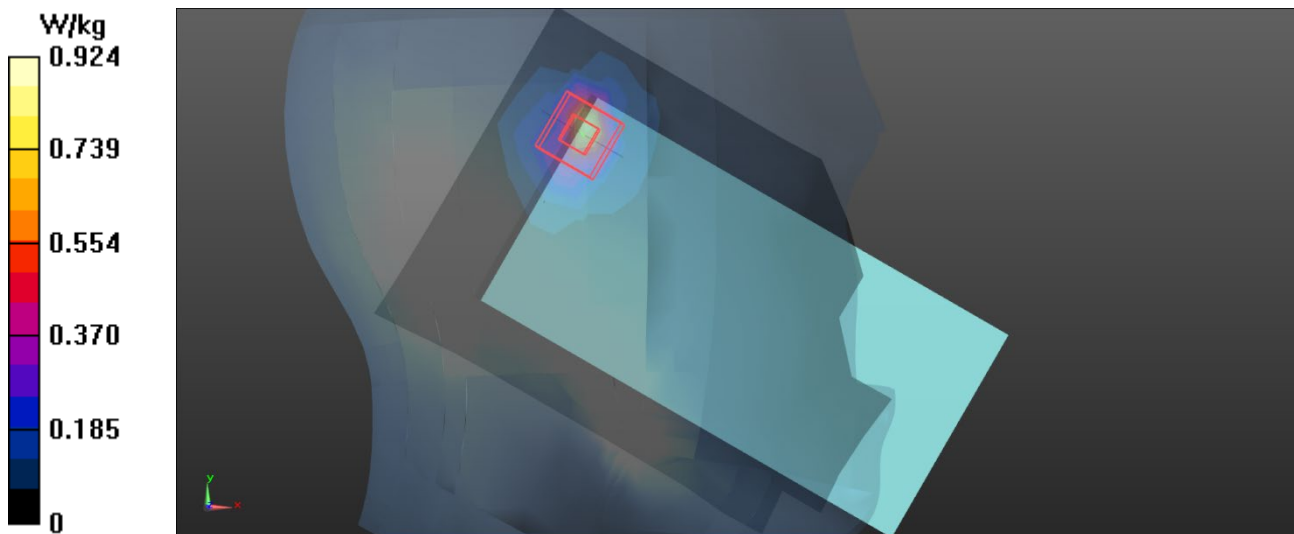

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/11

## W18\_WiFi 5.3G UNII\_2A\_802.11a\_CH64\_Left Tilted

### DUT: Test sample;

Communication System: UID 10317 - AAC, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Frequency: 5320 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5320$  MHz;  $\sigma = 4.792$  S/m;  $\epsilon_r = 35.343$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

### DASY Configuration:

- Probe: EX3DV4-SN7544; ConvF(5.39,5.39, 5.39) @ 5320 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 23.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (14x23x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.823 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 3.593 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.64 W/kg

**SAR(1 g) = 0.412 W/kg; SAR(10 g) = 0.129 W/kg**

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 22.9%

Maximum value of SAR (measured) = 0.988 W/kg

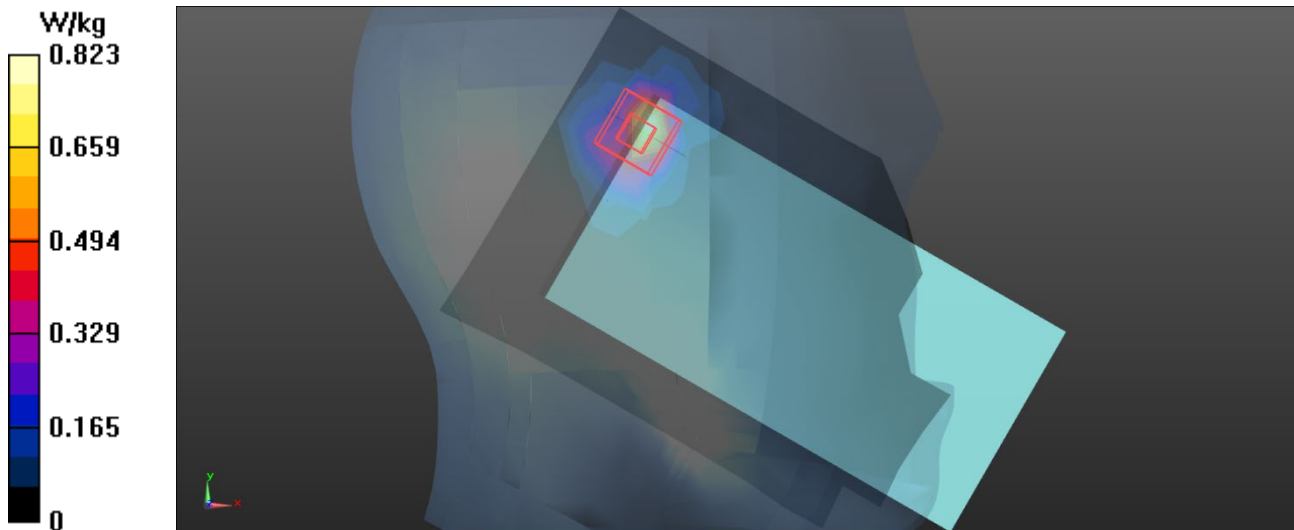

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/11

## W25\_WiFi 5.6G UNII\_2C\_802.11a\_CH100\_Left Tilted

### DUT: Test sample;

Communication System: UID 10317 - AAC, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5500 \text{ MHz}$ ;  $\sigma = 4.997 \text{ S/m}$ ;  $\epsilon_r = 34.926$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

### DASY Configuration:

- Probe: EX3DV4-SN7544; ConvF(4.75,4.75, 4.75) @ 5500 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 23.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (14x23x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) =  $0.621 \text{ W/kg}$

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value =  $2.659 \text{ V/m}$ ; Power Drift =  $0.06 \text{ dB}$


Peak SAR (extrapolated) =  $1.46 \text{ W/kg}$

**SAR(1 g) =  $0.367 \text{ W/kg}$ ; SAR(10 g) =  $0.117 \text{ W/kg}$**

Smallest distance from peaks to all points 3 dB below =  $6.8 \text{ mm}$

Ratio of SAR at M2 to SAR at M1 =  $22.8\%$

Maximum value of SAR (measured) =  $0.857 \text{ W/kg}$

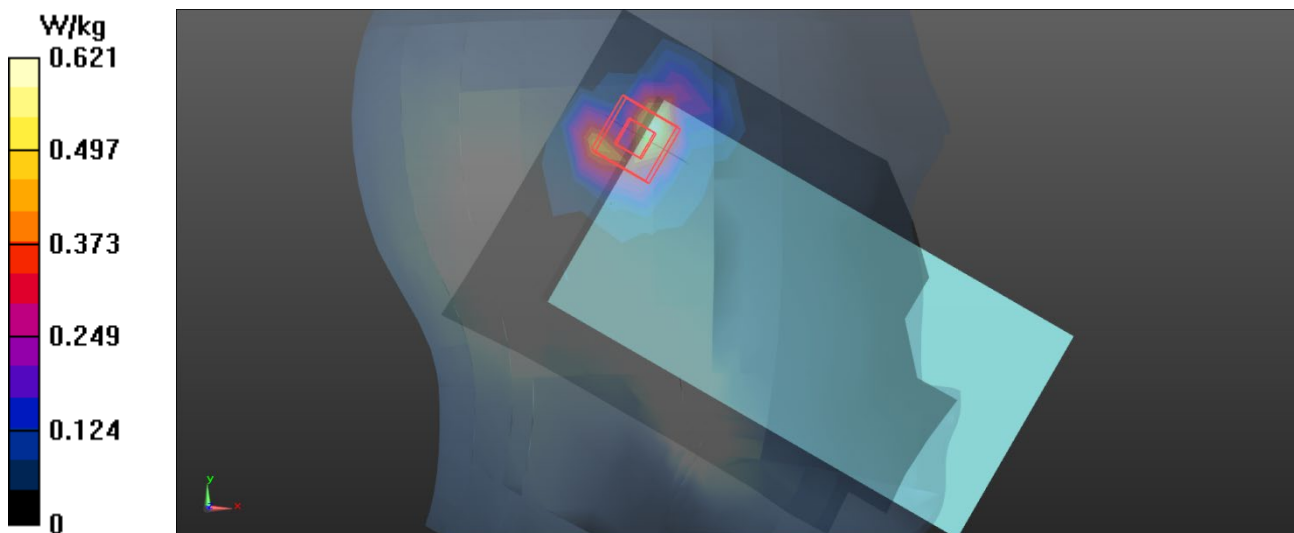

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/4/11

### W32\_WiFi 5.8G UNII\_3\_802.11a\_CH157\_Left Tilted

#### DUT: Test sample;

Communication System: UID 10317 - AAC, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 5.339 \text{ S/m}$ ;  $\epsilon_r = 34.277$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

#### DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(4.9, 4.9, 4.9) @ 5785 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 23.0$
- Electronics: DAE4 Sn1717; Calibrated: 2025/6/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Area Scan (14x23x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) =  $0.557 \text{ W/kg}$

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value =  $0.8870 \text{ V/m}$ ; Power Drift =  $-0.01 \text{ dB}$

Peak SAR (extrapolated) =  $1.54 \text{ W/kg}$

**SAR(1 g) =  $0.320 \text{ W/kg}$ ; SAR(10 g) =  $0.097 \text{ W/kg}$**

Smallest distance from peaks to all points 3 dB below =  $5.8 \text{ mm}$

Ratio of SAR at M2 to SAR at M1 =  $20.4\%$

Maximum value of SAR (measured) =  $0.879 \text{ W/kg}$

