

Test report

Number: T251-0384/19
Project file: C20182180
Date: 2019-05-06
Pages: 55

Product: Optical DO probe

Type reference: HI764113

Ratings: Uin: 6 Vdc (powered by the meter)
Operating frequency: 13.56 MHz
Protection class: III

Trademark: HANNA INSTRUMENTS

Applicant: HANNA INSTRUMENTS Inc.
Highland Industrial Park, 584 Park East Drive Woonsocket, RI 02895
USA

Manufacturer: SC HANNA INSTRUMENTS SRL
Hanna street number 1, RO-457260 Nusfalau, Judetul Salaj, Romania

Place of manufacture: See page 3.

Summary of testing

Testing method: 47 CFR Part 15, Subpart C

Testing location: SIQ Ljubljana, Mašera-Spasičeva ulica 10, SI-1000 Ljubljana, Slovenia

Remarks: Date of receipt of test items: 2018-08-02
Number of items tested: 1
Date of performance of tests: 2019-01-09 - 2019-04-04
The test results presented in this report relate only to the items tested.
The product complies with the requirements of the testing methods.

/

Tested by: Luka Cvajnar



Approved by: Marjan Mak



The report shall not be reproduced except in full.

CONTENTS	page
1 GENERAL	3
1.1 EQUIPMENT UNDER TEST	3
1.2 ANSI C63.4 SUBPART SELECTION	7
1.3 CLASS STATEMENT REQUIREMENTS	7
1.4 OCCUPIED BANDWIDTH MEASUREMENT	7
1.5 QUASI-PEAK DETECTOR	7
1.6 PEAK, RMS, AND AVERAGE DETECTORS	7
2 LIMITS FOR ALL SUBPARTS	8
2.1 SUBPART C: INTENTIONAL RADIATORS	8
3 ALL TEST EQUIPMENT AND THEIR DESCRIPTION	9
3.1 GENERAL INFORMATION	9
3.2 OTHER INSTRUMENT INFORMATION AND AUXILIARY EQUIPMENT	10
4 CONVERSION FACTORS AND ALL OTHER FORMULAS	30
5 GENERAL AND SPECIAL CONDITIONS DESCRIPTION	31
5.1 GENERAL CONDITION DESCRIPTION	31
5.2 SPECIAL CONDITION DESCRIPTION	34
6 TEST SUMMARY	35
6.1 OPERATING VOLTAGES/FREQUENCIES USED FOR TESTING	35
7 EMISSION TESTS	36
7.1 CONDUCTED EMISSION MEASUREMENT (15.207)	36
7.2 RADIATED EMISSION MEASUREMENT (15.209)	38
7.3 BANDWIDTH OF THE EMISSION (15.215)	48
7.4 SPECTRUM MASK (15.225)	52
7.5 FREQUENCY TOLERANCE OF THE CARRIER SIGNAL (15.225)	54

1 GENERAL

History sheet			
Date	Report No.	Change	Revision
2019-05-06	T251-0384/19	Initial Test Report issued.	--

Environmental conditions:

Ambient temperature: 15°C to 35°C

Relative humidity: 30% to 60%

Atmospheric pressure: 860 mbar to 1060 mbar

Places of manufacture:

1. HANNA INSTRUMENTS Inc.

Highland Industrial Park, 584 Park East Drive Woonsocket, RI 02895 USA

2. SC HANNA INSTRUMENTS SRL

Hanna street number 1, RO-457260 Nusfalau, Judetul Salaj, Romania


1.1 Equipment under test

Optical DO probe

Type: HI764113

Tested SIQ sample number: S20187559

Copy of markings:

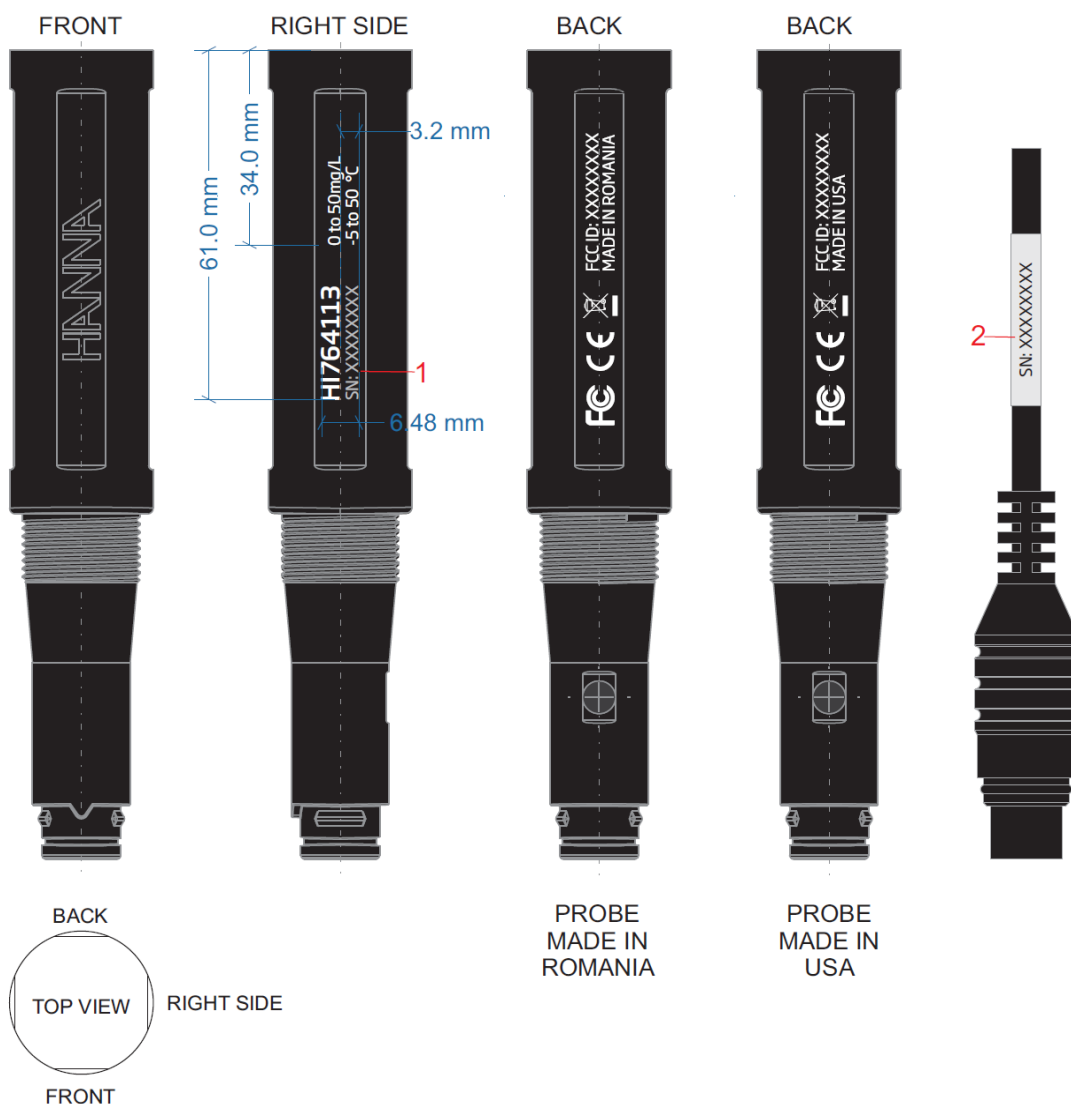

NOTE:

Serial Number can be:

- 1 - engraved on the probe body;
- 2 - or printed on the label near the probe connector;

1.1.1 General product information

The Hanna digital dissolved oxygen probe HI764113 is compatible with the HI98198 opdo™ meter.

The HI98198 opdo™ meter is a portable dedicated dissolved oxygen (DO) meter designed for fresh and saltwater measurements of dissolved oxygen. This professional, waterproof meter measures DO, barometric pressure, and temperature. The HI98198 is supplied with a HI764113 digital optical dissolved oxygen probe.

The opdo probe uses a smartcap platinum based luminescent compound coated sensor with a built-in RFID for transferring factory calibration coefficients and to monitor the time from first use in order to alert the user when to replace on a yearly basis

Software version:	/
Firmware version:	v1.01
SIQ tested number:	S20187559
Serial number:	11223344 (726CC990500104E0)
Dimensions of EUT (LxWxD) / mm:	174 x 25 x 25 (with guard)
Grounding:	/
Floor standing / table-top equipment or a combination:	Table-top
Electromagnetic environment:	Industrial electromagnetic environment

Highest Internal Frequency

Frequency	Description
32 MHz	16 MHz clock divided and multiplied to 32 MHz

Pictures of EUT:



1.1.2 Auxiliary equipment used during testing

Pictures of AE associated equipment:



AE associated equipment used during test

Use*	Product Type	Manufacturer	Model	Comments
AE	Optical Dissolved Oxygen meter	SC Hanna instruments SRL	HI98198	Firmware: v 1.03c02
Note: * Use EUT - Equipment Under Test AE - Auxiliary/Associated Equipment SIM - Simulator (Not Subjected to Test) *Note: Use abbreviations:				

1.2 ANSI C63.4 Subpart selection

Subpart C: Intentional Radiators

1.3 Class statement requirements

- The Class A statement cautions that operation of the device in a residential area is likely to cause harmful interference.
- The Class B statement offers several suggestions for minimizing interference to radio or TV receivers, including reorienting the receiving antenna and moving the Class B device farther away from the receiver.

1.4 Occupied bandwidth measurement

Fundamental frequency	Minimum resolution bandwidth
9 kHz to 30 MHz	1 kHz
30 to 1000 MHz	10 kHz
1000 MHz to 40 GHz	100 kHz

1.5 Quasi-peak detector

Frequency range	Bandwidth (-6dB)
10 Hz to 20 kHz	Full range (wideband)
10 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz
30 MHz to 1 GHz	120 kHz

1.6 Peak, rms, and average detectors

Frequency range	Bandwidth (-6dB)
10 Hz to 20 kHz	10, 100, 1000 Hz
10 kHz to 150 kHz	1 and 10 kHz
150 kHz to 30 MHz	1 and 10 kHz
30 MHz to 1 GHz	10 and 100 kHz
1 GHz to 40 GHz	0.1, 1.0 and 10 MHz

2 LIMITS FOR ALL SUBPARTS

2.1 Subpart C: Intentional Radiators

2.1.1 Section 15.207, Conducted emission limits:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.5	66 – 56*	56 – 46*
0.5 to 5.0	56	46
5.0 to 30.0	60	50

* Decreases with the logarithm of the frequency.

The shown limits in table shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

- For carrier current systems containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.
- For all other carrier current systems: 1000 µV within the frequency band 535-1705 kHz, as measured using a 50 µH/50 ohms LISN.
- Carrier current systems operating below 30 MHz are also subject to the radiated emission limits as appropriate.

2.1.2 Section 15.209, Radiated emission limits:

Limits:

Frequency Range (MHz)	Limits (dBµV/m)		Test distance (m)
	VERTICAL	HORIZONTAL	
0,009 to 0,490	$20 \cdot \log(2400/F(\text{kHz}))$	$20 \cdot \log(2400/F(\text{kHz}))$	300
0,490 to 1,705	$20 \cdot \log(24000/F(\text{kHz}))$	$20 \cdot \log(24000/F(\text{kHz}))$	30
1,705 to 30,0	30	30	30
30 to 88	40**	40**	3
88 to 216	43.5**	43.5**	3
216 to 960	46**	46**	3
Above 960	54	54	3

** Except as provided in paragraph below, fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz.

Perimeter protection systems may operate in the 54-72 MHz and 76-88 MHz bands under the provisions of this section. The use of such perimeter protection systems is limited to industrial, business and commercial applications.

Additional provisions to the general radiated emission limitations – Section 15.215: In no case shall the level of the unwanted emissions from an intentional radiator operating under these additional provisions exceed the field strength of the fundamental emission as per clause 15.209.

Intentional radiators operating under the alternative provisions to the general emission limits must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

3 ALL TEST EQUIPMENT AND THEIR DESCRIPTION

3.1 General information

Description	Model No.	SIQ No.	Last calibration	Calibrated until	Calibration period	Used
Rohde-Schwarz, RFI receiver	ESU8	105187	2017-12	2019-12	24 months	X
Rohde-Schwarz, RFI receiver	ESU26	100428	2018-10	2020-10	24 months	X
Rohde & Schwarz, Artificial main network	ESH2-Z5	106899	2017-06	2019-06	24 months	
Rohde & Schwarz, Artificial main network	ENV216	106765	2020-09	2020-09	24 months	
Comtest Engineering, Semi Anechoic Chamber SAC 1	SAC 3m	NPS001	2017-05	2019-05	24 months	X
Comtest Engineering, Semi Anechoic Chamber SAC 2	SAC 3m	NPS003	2017-05	2019-05	24 months	
Rohde & Schwarz, Horn Antenna	HF907 (SN 102508)	102508	2018-05	2020-05	24 months	
Rohde & Schwarz, Ultra Broadband Antenna	HL562E (SN 100842)	100842	2017-07	2019-07	24 months	X
Rohde & Schwarz, Horn Antenna	HF907 (SN 102494)	102494	2018-05	2020-05	24 months	
Rohde & Schwarz, Ultra Broadband Antenna	HL562E (SN 100843)	100843	2017-07	2019-07	24 months	
Maturo, Turn table (2 m diameter)	TT 2.0 SI	/	N/A	N/A	N/A	X
Maturo, Bore-sight antenna mast	BAM-4.0-P	/	N/A	N/A	N/A	X
Maturo, Multi-channel positioning equipment	Maturo NCD	/	N/A	N/A	N/A	X
Schwarzbeck, Biconical antenna	VHBB9124 (SN 9124-317)	105112	2018-11	2020-11	24 months	X
Rohde & Schwarz, Loop Antenna	FMZB 1519 B	/	2020-09	2020-09	24 months	X

3.2 Other instrument information and auxiliary equipment

Description	Model No.	Bandwidth	Detector functions	Antenna factors	Cable loss	Range
Rohde-Schwarz, AMN	ENV216	/	/	/	/	9 kHz – 30 MHz
Rohde & Schwarz, Artificial main network	ESH 2-Z5	/	/	/	/	9 kHz – 30 MHz
Rohde-Schwarz, RFI receiver	ESU8	200Hz, 9kHz, 120kHz, 1MHz	Peak, Q-peak, Average	/	/	20 Hz – 8 GHz
Rohde-Schwarz, RFI receiver	ESU26	200Hz, 9kHz, 120kHz, 1MHz	Peak, Q-peak, Average	/	/	20 Hz – 26.5 GHz
Hewlett Packard, RF Spectrum Analyzer	8593E	200Hz, 9kHz, 120kHz, 1MHz	Peak, Q-peak, Average	/	/	9 kHz – 26.5 GHz
Comtest Engineering, Semi Anechoic Chamber SAC 1	SAC 3m	/	/	/	/	30 MHz – 18 GHz
Comtest Engineering, Semi Anechoic Chamber SAC 2	SAC 3m	/	/	/	/	30 MHz – 18 GHz
Rohde & Schwarz, Horn Antenna	HF907 (SN 102508)	/	/	See section 3.2.2	/	0.8 GHz – 18 GHz
Rohde & Schwarz, Ultra Broadband Antenna	HL562E (SN 100842)	/	/	See section 3.2.2	/	30 MHz – 6 GHz
Rohde & Schwarz, Horn Antenna	HF907 (SN 102494)	/	/	See section 3.2.2	/	0.8 GHz – 18 GHz
Rohde & Schwarz, Ultra Broadband Antenna	HL562E (SN 100843)	/	/	See section 3.2.2	/	30 MHz – 6 GHz
Schwarzbeck, Biconical antenna	VHBB9124 (SN 9124-317)	/	/	See section 3.2.2	/	30 MHz – 300 MHz
Rohde & Schwarz, Loop Antenna	FMZB 1519 B	/	/	See section 3.2.2	/	9 kHz – 30 MHz

3.2.1 Cable loss and attenuation of radiated emission

3.2.1.1 Conducted emission cable (SIQ-K024)

Point	Frequency (9kHz-30MHz)	Cable length (meters)	Loss (dB)
1	190 kHz	1	0,4
2	530 kHz	1	0,26
3	2,53 MHz	1	0,16
4	5,19 MHz	1	0,07
5	11,05 MHz	1	0,03
6	22,01 MHz	1	0,06
7	24,03 MHz	1	0,04

3.2.1.2 Radiated emission attenuation

Point	Frequency (30 MHz – 26,5 GHz)	Attenuation (dB)
1	30 MHz	0,501
2	150 MHz	1,174
3	400 MHz	2,034
4	800 MHz	2,995
5	1 GHz	3,416
6	1,363	1,666667
7	2,686	3,583333
8	5,332	5,25
9	7,978	6,25
10	10,624	7,5
11	13,27	8,333333
12	15,916	9,166666
13	18,562	9,833333
14	21,208	10,66667
15	23,854	11,5
16	26,5	12,16667

3.2.2 Antenna factors

3.2.2.1 Antenna VHBB9124

Frequency (MHz)	Antenna factor VHBB9124 (SN 9124-317)
20	15,3
21	15,1
22	14,8
23	14,5
24	14,3
25	14,1
26	13,8
27	13,6
28	13,3
29	13,1
30	12,6
31	12,4
32	12,2
33	12,0
34	11,8
35	11,7
36	11,4
37	11,3
38	11,1
39	11,0
40	10,8
41	10,7
42	10,5
43	10,3
44	10,2
45	10,1
46	9,9
47	9,9
48	9,7
49	9,7
50	9,5
51	9,5
52	9,3
53	9,3
54	9,2
55	9,1
56	9,0
57	9,0
58	9,0
59	9,0
60	9,0
61	9,0
62	8,9
63	8,9
64	8,8
65	8,8
66	8,8
67	8,9
68	8,9

69	8,9
70	8,9
71	8,9
72	8,9
73	8,9
74	8,9
75	8,9
76	8,9
77	8,9
78	8,9
79	9,0
80	9,0
81	9,0
82	9,1
83	9,0
84	9,0
85	9,0
86	9,1
87	9,1
88	9,2
89	9,2
90	9,3
91	9,3
92	9,3
93	9,3
94	9,3
95	9,3
96	9,4
97	9,4
98	9,5
99	9,5
100	9,6
102	9,7
104	9,7
106	9,9
108	10,0
110	10,2
112	10,2
114	10,3
116	10,4
118	10,5
120	10,5
122	10,7
124	10,7
126	10,8
128	10,9
130	11,0
132	11,1
134	11,2
136	11,4
138	11,5
140	11,6
142	11,8
144	11,8
146	12,0
148	11,9
150	12,0

152	12,1
154	12,4
156	12,6
158	12,8
160	12,9
162	12,9
164	13,0
166	13,0
168	12,8
170	12,8
172	12,9
174	13,0
176	13,2
178	13,3
180	13,4
182	13,5
184	13,5
186	13,5
188	13,6
190	13,7
192	13,8
194	13,8
196	13,9
198	14,0
200	14,1
202	14,2
204	14,3
206	14,4
208	14,3
210	14,4
212	14,7
214	14,6
216	14,5
218	14,5
220	14,6
222	14,4
224	14,6
226	14,8
228	14,9
230	15,0
232	15,0
234	15,0
236	15,0
238	15,2
240	15,3
242	15,3
244	15,4
246	15,3
248	15,2
250	15,2
252	15,2
254	15,4
256	15,4
258	15,5
260	15,6
262	15,7
264	15,7

266	15,8
268	15,9
270	15,9
272	16,0
274	16,0
276	16,2
278	16,2
280	16,4
282	16,7
284	16,8
286	17,0
288	16,9
290	16,9
292	17,2
294	17,4
296	17,6
298	17,9
300	18,2

3.2.2.2 Antenna FMZB 1519 B

Frequency (MHz)	Antenna factor (dB)
0,009	-30,60
0,010	-30,80
0,020	-31,80
0,030	-32,00
0,040	-32,10
0,050	-32,20
0,060	-32,20
0,070	-32,20
0,080	-32,20
0,090	-32,30
0,100	-32,30
0,150	-32,30
0,200	-32,40
0,300	-32,40
0,400	-32,40
0,500	-32,40
0,600	-32,40
0,700	-32,50
0,800	-32,50
0,900	-32,50
1,000	-32,50
2,000	-32,50
3,000	-32,50
4,000	-32,50
5,000	-32,50
6,000	-32,50
7,000	-32,50
8,000	-32,50
9,000	-32,50
10,000	-32,50
11,000	-32,50
12,000	-32,50
13,000	-32,50
14,000	-32,40
15,000	-32,40
16,000	-32,40
17,000	-32,40
18,000	-32,30
19,000	-32,30
20,000	-32,20
21,000	-32,10
22,000	-32,10
23,000	-32,00
24,000	-31,90
25,000	-31,80
26,000	-31,70
27,000	-31,60
28,000	-31,50
29,000	-31,40
30,000	-31,30

3.2.2.3 Antenna HL562E

Frequency (MHz)	Antenna factor HL562E (SN 100842)	Antenna factor HL562E (SN 100843)
30	18.12	18.17
32	17.08	17.07
34	16.01	16
36	14.91	14.94
38	13.76	13.75
40	12.64	12.61
42	11.43	11.4
44	10.17	10.15
46	8.86	8.81
48	7.42	7.44
50	6.01	5.96
52	4.59	4.56
54	3.38	3.37
56	2.84	2.85
58	3.06	3.14
60	3.78	3.76
62	4.44	4.4
64	5.36	5.32
66	6.19	6.18
68	6.96	6.92
70	7.56	7.52
72	8.04	8.01
74	8.38	8.35
76	8.67	8.64
78	8.88	8.85
80	9.04	9.03
82	9.14	9.09
84	9.2	9.14
86	9.22	9.16
88	9.22	9.17
90	9.21	9.17
92	9.22	9.15
94	9.22	9.16
96	9.21	9.16
98	9.22	9.17
100	9.33	9.05
105	9.38	9.39
110	9.67	9.74
115	9.55	10.33
120	10.51	9.88
125	10.15	9.87
130	9.23	9.13
135	8.79	8.71
140	8.4	8.4
145	7.93	7.82
150	7.74	7.75
155	7.68	7.76
160	7.86	7.78
165	8.47	8.33
170	9.83	9.66
175	10.29	10.3
180	7.86	7.93



185	7.19	7.27
190	7.54	7.21
195	7.32	7.2
200	7.56	7.49
205	7.56	7.68
210	7.71	7.95
215	8.68	8.29
220	8.43	8.49
225	8.51	8.62
230	8.85	8.82
235	9.1	9.05
240	9.31	9.29
245	9.33	9.33
250	9.5	9.45
255	9.71	9.64
260	9.86	9.81
265	9.95	9.9
270	10	10.02
275	10.15	10.15
280	10.37	10.36
285	10.58	10.61
290	10.76	10.8
295	10.84	10.9
300	10.83	11.12
305	11.38	11.37
310	11.36	11.32
315	11.53	11.48
320	11.7	11.67
325	11.84	11.81
330	11.98	11.94
335	12.32	12.13
340	12.19	12.22
345	12.29	12.35
350	12.43	12.47
355	12.59	12.61
360	12.72	12.73
365	12.83	12.81
370	12.99	12.99
375	13.08	13.1
380	13.12	13.11
385	13.21	13.2
390	13.38	13.33
395	13.54	13.5
400	13.65	13.63
405	13.74	13.73
410	13.84	13.83
415	14.14	13.96
420	14.1	14
425	14.13	14.08
430	14.24	14.2
435	14.4	14.4
440	14.55	14.49
445	14.7	14.65
450	14.82	14.79
455	14.89	14.91
460	14.9	15.09
465	15.16	15.19

470	15.24	15.22
475	15.31	15.25
480	15.38	15.32
485	15.48	15.43
490	15.58	15.52
495	15.66	15.6
500	15.72	15.7
505	15.74	15.75
510	15.83	15.82
515	16.05	15.92
520	15.95	15.93
525	15.97	15.97
530	16.05	16.01
535	16.09	16.07
540	16.16	16.15
545	16.21	16.21
550	16.29	16.3
555	16.38	16.41
560	16.51	16.53
565	16.67	16.68
570	16.78	16.85
575	16.87	17.02
580	17.03	17.11
585	17.06	17.08
590	17.1	17.09
595	17.15	17.13
600	17.22	17.18
605	17.28	17.25
610	17.35	17.33
615	17.42	17.37
620	17.41	17.42
625	17.48	17.48
630	17.56	17.55
635	17.67	17.65
640	17.8	17.79
645	17.94	17.95
650	18.08	18.13
655	18.16	18.12
660	18.18	18.03
665	18.12	17.99
670	18.13	18.01
675	18.19	18.09
680	18.26	18.24
685	18.42	18.41
690	18.56	18.56
695	18.62	18.61
700	18.67	18.67
705	18.7	18.74
710	18.74	18.79
715	18.81	18.86
720	18.89	18.95
725	19.09	19.09
730	19.22	19.26
735	19.17	19.23
740	19.19	19.14
745	19.14	19.1
750	19.13	19.09



755	19.17	19.1
760	19.19	19.15
765	19.24	19.21
770	19.34	19.29
775	19.37	19.36
780	19.36	19.36
785	19.43	19.41
790	19.51	19.48
795	19.59	19.56
800	19.7	19.66
805	19.83	19.79
810	19.98	19.95
815	20.07	20.04
820	20.1	19.96
825	20.11	19.92
830	20.09	19.94
835	20.09	19.96
840	20.14	20.05
845	20.19	20.11
850	20.27	20.2
855	20.36	20.29
860	20.42	20.37
865	20.46	20.44
870	20.5	20.51
875	20.52	20.55
880	20.59	20.61
885	20.7	20.69
890	20.82	20.77
895	20.89	20.83
900	20.88	20.92
905	20.83	21.08
910	20.93	21.21
915	21.19	21.17
920	21.22	21.1
925	21.09	21.03
930	20.98	21
935	20.95	21
940	20.96	21.01
945	21	21.04
950	21.05	21.06
955	21.09	21.07
960	21.15	21.13
965	21.23	21.2
970	21.27	21.26
975	21.31	21.3
980	21.36	21.37
985	21.43	21.44
990	21.52	21.53
995	21.63	21.64
1000	21.73	21.73

3.2.2.4 Antenna HF907

Frequency (GHz)	Antenna factor HF907 (SN 102508)	Antenna factor HF907 (SN 102494)
1	24.36	24.36
1.01	24.34	24.38
1.02	24.53	24.55
1.03	24.6	24.63
1.04	24.46	24.51
1.05	24.35	24.41
1.06	24.48	24.49
1.07	24.51	24.56
1.08	24.32	24.37
1.09	24.26	24.29
1.1	24.33	24.35
1.11	24.38	24.44
1.12	24.23	24.25
1.13	24.18	24.19
1.14	24.23	24.24
1.15	24.35	24.38
1.16	24.3	24.3
1.17	24.23	24.26
1.18	24.37	24.4
1.19	24.56	24.57
1.2	24.52	24.55
1.21	24.39	24.42
1.22	24.51	24.52
1.23	24.66	24.7
1.24	24.64	24.68
1.25	24.51	24.54
1.26	24.53	24.55
1.27	24.69	24.72
1.28	24.65	24.65
1.29	24.46	24.47
1.3	24.48	24.52
1.31	24.66	24.68
1.32	24.64	24.65
1.33	24.49	24.5
1.34	24.53	24.53
1.35	24.75	24.75
1.36	24.73	24.76
1.37	24.62	24.65
1.38	24.74	24.76
1.39	24.96	24.99
1.4	25.02	25.05
1.41	24.94	24.95
1.42	25.02	25.03
1.43	25.31	25.37
1.44	25.39	25.43
1.45	25.27	25.29
1.46	25.37	25.42
1.47	25.7	25.7
1.48	25.77	25.76
1.49	25.66	25.67
1.5	25.76	25.77

1.51	26.04	26.03
1.52	26.12	26.12
1.53	26.01	26.03
1.54	26.06	26.03
1.55	26.29	26.29
1.56	26.35	26.36
1.57	26.25	26.25
1.58	26.27	26.27
1.59	26.41	26.45
1.6	26.51	26.5
1.61	26.37	26.36
1.62	26.33	26.33
1.63	26.48	26.52
1.64	26.58	26.57
1.65	26.42	26.44
1.66	26.35	26.37
1.67	26.51	26.53
1.68	26.64	26.59
1.69	26.46	26.47
1.7	26.36	26.34
1.71	26.52	26.5
1.72	26.7	26.7
1.73	26.54	26.53
1.74	26.4	26.38
1.75	26.62	26.64
1.76	26.85	26.83
1.77	26.72	26.73
1.78	26.59	26.57
1.79	26.75	26.8
1.8	27.08	27.07
1.81	26.92	26.92
1.82	26.77	26.76
1.83	27	27
1.84	27.26	27.23
1.85	27.09	27.06
1.86	26.92	26.88
1.87	27.17	27.14
1.88	27.4	27.35
1.89	27.27	27.22
1.9	27.14	27.12
1.91	27.43	27.38
1.92	27.72	27.71
1.93	27.59	27.56
1.94	27.55	27.52
1.95	27.9	27.9
1.96	28.25	28.24
1.97	28.13	28.1
1.98	28.06	28.04
1.99	28.43	28.44
2	28.67	28.63
2.01	28.5	28.45
2.02	28.37	28.39
2.03	28.67	28.63
2.04	28.76	28.76
2.05	28.48	28.46
2.06	28.37	28.36
2.07	28.49	28.48

2.08	28.52	28.51
2.09	28.31	28.29
2.1	28.16	28.14
2.11	28.24	28.23
2.12	28.28	28.27
2.13	28.15	28.13
2.14	28.01	28
2.15	28.1	28.09
2.16	28.22	28.21
2.17	28.14	28.1
2.18	28.02	28
2.19	28.11	28.08
2.2	28.29	28.28
2.21	28.24	28.21
2.22	28.11	28.08
2.23	28.21	28.18
2.24	28.37	28.36
2.25	28.31	28.28
2.26	28.16	28.13
2.27	28.21	28.19
2.28	28.4	28.38
2.29	28.37	28.35
2.3	28.21	28.19
2.31	28.28	28.25
2.32	28.46	28.43
2.33	28.47	28.44
2.34	28.35	28.33
2.35	28.41	28.38
2.36	28.56	28.54
2.37	28.62	28.59
2.38	28.54	28.49
2.39	28.56	28.55
2.4	28.73	28.71
2.41	28.77	28.74
2.42	28.72	28.69
2.43	28.74	28.72
2.44	28.86	28.85
2.45	28.9	28.89
2.46	28.86	28.84
2.47	28.89	28.88
2.48	29.02	29.01
2.49	29.08	29.07
2.5	29.05	29.03
2.51	29.1	29.09
2.52	29.3	29.29
2.53	29.39	29.39
2.54	29.38	29.35
2.55	29.39	29.38
2.56	29.58	29.57
2.57	29.74	29.73
2.58	29.65	29.62
2.59	29.54	29.52
2.6	29.71	29.68
2.61	29.9	29.87
2.62	29.71	29.68
2.63	29.53	29.5
2.64	29.67	29.65

2.65	29.87	29.84
2.66	29.72	29.66
2.67	29.5	29.48
2.68	29.6	29.58
2.69	29.82	29.79
2.7	29.71	29.69
2.71	29.51	29.48
2.72	29.59	29.55
2.73	29.77	29.76
2.74	29.72	29.68
2.75	29.56	29.51
2.76	29.59	29.56
2.77	29.74	29.71
2.78	29.69	29.63
2.79	29.53	29.48
2.8	29.54	29.51
2.81	29.65	29.61
2.82	29.6	29.55
2.83	29.44	29.42
2.84	29.49	29.47
2.85	29.63	29.6
2.86	29.6	29.56
2.87	29.49	29.47
2.88	29.59	29.57
2.89	29.79	29.78
2.9	29.79	29.77
2.91	29.73	29.71
2.92	29.88	29.86
2.93	30.1	30.09
2.94	30.16	30.14
2.95	30.08	30.06
2.96	30.23	30.21
2.97	30.54	30.52
2.98	30.57	30.55
2.99	30.46	30.43
3	30.58	30.56
3.05	31.17	31.18
3.1	31.68	31.64
3.15	31.58	31.55
3.2	31.75	31.72
3.25	31.89	31.85
3.3	31.71	31.68
3.35	31.64	31.6
3.4	31.7	31.67
3.45	31.84	31.83
3.5	31.95	31.91
3.55	32.01	31.96
3.6	32.09	32.07
3.65	32.32	32.29
3.7	32.52	32.48
3.75	32.62	32.57
3.8	32.85	32.8
3.85	32.93	32.89
3.9	32.94	32.91
3.95	33.02	32.98
4	32.97	32.91
4.05	33.07	33.01

4.1	33.21	33.17
4.15	33.33	33.31
4.2	33.48	33.43
4.25	33.71	33.66
4.3	33.87	33.83
4.35	34.02	33.99
4.4	33.83	33.82
4.45	33.57	33.53
4.5	33.61	33.58
4.55	33.61	33.59
4.6	33.51	33.49
4.65	33.44	33.39
4.7	33.6	33.58
4.75	33.93	33.92
4.8	34.06	34.05
4.85	34.13	34.13
4.9	34.27	34.25
4.95	34.38	34.36
5	34.38	34.34
5.05	34.19	34.17
5.1	33.99	33.97
5.15	33.93	33.93
5.2	33.97	33.96
5.25	33.92	33.91
5.3	33.93	33.93
5.35	34.17	34.18
5.4	34.37	34.38
5.45	34.43	34.44
5.5	34.38	34.38
5.55	34.42	34.42
5.6	34.45	34.45
5.65	34.28	34.28
5.7	34.05	34.04
5.75	34.04	34.05
5.8	34.2	34.2
5.85	34.31	34.31
5.9	34.35	34.35
5.95	34.47	34.49
6	34.69	34.7
6.05	34.87	34.86
6.1	34.82	34.82
6.15	34.75	34.75
6.2	34.78	34.79
6.25	34.77	34.79
6.3	34.68	34.69
6.35	34.66	34.68
6.4	34.84	34.87
6.45	35.03	35.07
6.5	35.13	35.14
6.55	35.13	35.13
6.6	35.26	35.26
6.65	35.36	35.36
6.7	35.29	35.29
6.75	35.17	35.16
6.8	35.16	35.15
6.85	35.26	35.28
6.9	35.37	35.38

6.95	35.35	35.36
7	35.44	35.45
7.05	35.59	35.61
7.1	35.74	35.76
7.15	35.73	35.74
7.2	35.61	35.63
7.25	35.65	35.66
7.3	35.65	35.67
7.35	35.64	35.64
7.4	35.63	35.64
7.45	35.71	35.74
7.5	35.89	35.9
7.55	35.99	36.01
7.6	36.09	36.1
7.65	36.18	36.21
7.7	36.23	36.25
7.75	36.26	36.29
7.8	36.21	36.22
7.85	36.2	36.2
7.9	36.14	36.16
7.95	36.16	36.17
8	36.14	36.15
8.05	36.19	36.19
8.1	36.3	36.32
8.15	36.46	36.47
8.2	36.5	36.5
8.25	36.51	36.53
8.3	36.51	36.5
8.35	36.48	36.48
8.4	36.46	36.45
8.45	36.4	36.39
8.5	36.41	36.4
8.55	36.45	36.45
8.6	36.56	36.58
8.65	36.7	36.71
8.7	36.71	36.7
8.75	36.79	36.83
8.8	36.85	36.88
8.85	36.88	36.85
8.9	36.79	36.75
8.95	36.79	36.81
9	36.87	36.84
9.05	36.82	36.75
9.1	36.85	36.81
9.15	36.9	36.88
9.2	36.89	36.9
9.25	36.92	36.91
9.3	36.97	36.97
9.35	37.07	37.07
9.4	37.11	37.11
9.45	37.14	37.16
9.5	37.2	37.19
9.55	37.1	37.08
9.6	37.06	37.03
9.65	37.04	37.05
9.7	36.96	36.97
9.75	36.93	36.93

9.8	37	37
9.85	37.15	37.16
9.9	37.23	37.24
9.95	37.25	37.22
10	37.31	37.3
10.05	37.31	37.3
10.1	37.23	37.2
10.15	37.15	37.13
10.2	37.11	37.13
10.25	37.11	37.15
10.3	37.11	37.13
10.35	37.15	37.19
10.4	37.21	37.24
10.45	37.25	37.27
10.5	37.27	37.28
10.55	37.24	37.24
10.6	37.18	37.18
10.65	37.17	37.19
10.7	37.19	37.19
10.75	37.16	37.17
10.8	37.16	37.18
10.85	37.26	37.26
10.9	37.32	37.32
10.95	37.33	37.32
11	37.36	37.35
11.05	37.34	37.33
11.1	37.34	37.36
11.15	37.35	37.34
11.2	37.34	37.33
11.25	37.29	37.29
11.3	37.28	37.29
11.35	37.34	37.31
11.4	37.31	37.3
11.45	37.32	37.33
11.5	37.38	37.39
11.55	37.41	37.42
11.6	37.44	37.43
11.65	37.44	37.42
11.7	37.43	37.42
11.75	37.48	37.48
11.8	37.39	37.38
11.85	37.4	37.38
11.9	37.45	37.39
11.95	37.45	37.43
12	37.48	37.47
12.05	37.51	37.5
12.1	37.54	37.51
12.15	37.58	37.58
12.2	37.59	37.6
12.25	37.62	37.6
12.3	37.62	37.6
12.35	37.61	37.62
12.4	37.61	37.65
12.45	37.65	37.63
12.5	37.67	37.66
12.55	37.71	37.71
12.6	37.8	37.76

12.65	37.86	37.82
12.7	37.89	37.86
12.75	37.92	37.9
12.8	38	37.98
12.85	38.05	38.02
12.9	38.06	38.02
12.95	38.09	38.05
13	38.14	38.1
13.05	38.21	38.19
13.1	38.29	38.24
13.15	38.36	38.35
13.2	38.44	38.47
13.25	38.57	38.55
13.3	38.63	38.59
13.35	38.68	38.67
13.4	38.77	38.73
13.45	38.84	38.77
13.5	38.9	38.8
13.55	38.92	38.88
13.6	39.03	39
13.65	39.15	39.11
13.7	39.3	39.23
13.75	39.42	39.33
13.8	39.53	39.49
13.85	39.66	39.59
13.9	39.74	39.65
13.95	39.81	39.7
14	39.89	39.83
14.05	39.96	39.92
14.1	40.02	39.96
14.15	40.08	40.04
14.2	40.16	40.11
14.25	40.25	40.18
14.3	40.33	40.27
14.35	40.37	40.28
14.4	40.44	40.32
14.45	40.5	40.4
14.5	40.62	40.56
14.55	40.7	40.61
14.6	40.77	40.64
14.65	40.83	40.71
14.7	40.86	40.77
14.75	40.83	40.72
14.8	40.79	40.65
14.85	40.76	40.65
14.9	40.84	40.76
14.95	40.87	40.77
15	40.89	40.79
15.05	40.95	40.85
15.1	41.03	40.94
15.15	41.08	40.96
15.2	41.02	40.93
15.25	40.99	40.88
15.3	41.01	40.91
15.35	41.04	40.88
15.4	41.08	40.92
15.45	41.12	40.96

15.5	41.15	40.97
15.55	41.18	41
15.6	41.14	41.01
15.65	41.05	40.99
15.7	40.99	40.95
15.75	40.99	40.92
15.8	41.03	41
15.85	41.14	41.11
15.9	41.18	41.15
15.95	41.27	41.22
16	41.34	41.33
16.05	41.4	41.36
16.1	41.39	41.34
16.15	41.33	41.32
16.2	41.31	41.31
16.25	41.4	41.37
16.3	41.47	41.43
16.35	41.53	41.52
16.4	41.66	41.66
16.45	41.77	41.75
16.5	41.82	41.77
16.55	41.84	41.87
16.6	41.83	41.95
16.65	41.85	41.94
16.7	41.91	42
16.75	42.09	42.2
16.8	42.23	42.35
16.85	42.36	42.39
16.9	42.5	42.49
16.95	42.61	42.59
17	42.63	42.6
17.05	42.63	42.57
17.1	42.64	42.54
17.15	42.76	42.58
17.2	42.82	42.63
17.25	42.86	42.75
17.3	43.02	42.9
17.35	43.15	42.98
17.4	43.28	43.1
17.45	43.3	43.17
17.5	43.32	43.16
17.55	43.37	43.19
17.6	43.39	43.23
17.65	43.5	43.35
17.7	43.52	43.41
17.75	43.62	43.49
17.8	43.74	43.6
17.85	43.89	43.69
17.9	43.92	43.81
17.95	44.02	43.89
18	44.18	43.98

4 CONVERSION FACTORS AND ALL OTHER FORMULAS

Unit	Conversion unit	Formula of conversion
$\text{dB}\mu\text{V}$	$\text{dB}\mu\text{V}/\text{m}$	$\text{dB}\mu\text{V}/\text{m} = \text{dB}\mu\text{V} + \text{AF}$
$\mu\text{V}/\text{m}$	$\text{dB}\mu\text{V}/\text{m}$	$\text{dB}\mu\text{V}/\text{m} = 20\log(X(\mu\text{V}/\text{m})/1\mu\text{V})$

	Test distance stated in standard	Test distance of measurement	Conversion factor
Class B	3 m	3 m	/
Class A	10 m	3 m	20dB/decade

5 GENERAL AND SPECIAL CONDITIONS DESCRIPTION

5.1 General condition description

Interconnect and power cabling (or wiring)

5.1.1 Test arrangement for conducted emissions

Interconnecting cables that hang closer than 40 cm to the ground-plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground-plane.

All other equipment powered from additional LISN(s).

Multiple outlet strip can be used for multiple power cords of non-EUT equipment.

LISN at least 80 cm from nearest part of EUT chassis.

Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.

Non-EUT components of EUT system being tested.

Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.

Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground-plane.

5.1.2 Test arrangement for conducted emissions- floor-standing equipment

Excess I/O cables shall be bundled in the center. If bundling is not possible, the cables shall be arranged in serpentine fashion. Bundling shall not exceed 40 cm in length.

Excess power cords shall be bundled in the center or shortened to appropriate length.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. If bundling is not possible, the cable shall be arranged in serpentine fashion.

EUT and all cables shall be insulated, if required, from the ground-plane by up to 12 mm of insulating material.

EUT connected to one LISN. LISN can be placed on top of, or immediately beneath, the ground-plane.

All other equipment powered from a second LISN or additional LISN(s).

Multiple outlet strip can be used for multiple power cords of non-EUT equipment.



5.1.3 Test arrangement for radiated emissions tabletop equipment

Interconnecting cables that hang closer than 40 cm to the ground-plane shall be folded back and forth in the center, forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated if required using the correct terminating impedance. The total length shall not exceed 1 m.

If LISNs are kept in the test setup for radiated emissions, it is preferred that they be installed under the ground-plane with the receptacle flush with the ground-plane.

Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.

Non-EUT components of EUT system being tested.

Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.

No vertical conducting plane used.

Power cords drape to the floor and are routed over to receptacle.

5.1.4 Test arrangement for radiated emissions floor-standing equipment

Excess I/O cables shall be bundled in center. If bundling is not possible, the cables shall be arranged in serpentine fashion. Bundling not to exceed 40 cm in length.

Excess power cords shall be bundled in the center or shortened to appropriate length.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. If bundling is not possible, the cable shall be arranged in a serpentine fashion.

EUT and all cables shall be insulated, if required, from the ground-plane by up to 12 mm of insulating material.

If LISNs are kept in the test setup for radiated emissions, it is preferred that they be installed under the ground-plane with the receptacle flush with the ground plane.

Overhead cable trays and suspended ceilings

5.1.5 Test arrangement for floor-standing equipment

Only one vertical riser may be used where typical of system under test.

Excess power cord shall be bundled in the center or shortened to appropriate length.

EUT and cables shall be insulated from ground-plane by up to 12 mm. Where the manual has specified or there exists a code of practice for installation of the EUT, the test arrangement shall allow the use of this practice for the tests.

Power cords being measured connected to one LISN. All other system power cords powered through other LISN(s). A multiple receptacle strip may be used for other power cords.

For *conducted* tests, the LISNs may be placed on top of or immediately beneath and bonded directly to the ground-plane. For *radiated* tests, the LISN(s), if used, should be installed under, with the receptacle flush with the ground-plane.

5.1.6 Placement and manipulation of interconnect cabling (or wiring) of tabletop equipment

LISN(s) may have to be positioned to the side of the table to meet the criterion that the LISN receptacle shall be 80 cm away from the EUT. LISN(s) may be above ground-plane only for conducted emission measurements.

Accessories, such as ac power adapter, if typically table-mounted, shall occupy peripheral positions as is applicable.

Accessories, which are typically floor-mounted, shall occupy a floor position directly below the portion of the EUT to which they are typically connected. T

Table length may be extended beyond 1.5 m with peripherals aligned with the back edge. The table depth may be extended beyond 1 m. The 40 cm distance to the vertical conducting plane shall be maintained for conducted emission testing.



Placement of wall-mounted equipment

5.1.7 Test configuration/arrangement for combination floor-standing and tabletop equipment

Interconnecting cables that hang closer than 40 cm to the ground-plane shall be folded back and forth in the center, forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated if required using the correct terminating impedance.

If LISNs are kept in the test setup for radiated emissions, it is preferred that they be installed under the ground-plane with the receptacle flush with the ground-plane.

Cables of hand-operated devices, such as keyboards, mice, etc., have to be placed as for normal use.

Non-EUT components of EUT system being tested.

I/O cable to floor-standing unit drapes to the ground-plane and shortened or excess bundled. Cables not reaching the metal ground-plane are draped to the height of the connector or 40 cm, whichever is lower.

Power cords and signal cables shall drape to the floor. No extension cords shall be used to the power receptacles.

The floor-standing unit can be placed under the table if its height permits.

5.2 Special condition description

If for some reason the above measurement conditions can't be met, the description below should be used as an appropriate measurement condition and placement.

(Description is written additionally as the measurements differ – all is within test procedure)

6 TEST SUMMARY

STANDARDS (details on first page)	Tested		Sample	
	yes	no	pass	not pass
47 CFR Part 15, Subpart C ANSI C63.10-2013;	☒	☐	☒	☐

Test	47 CFR Part 15 section	Section within the report	Conclusion
Conducted emission	15.207	7.1	N/A
Radiated emission	15.209	7.2	PASS
Bandwidth of the emission	15.215	7.3	PASS
Spectrum mask	15.225	7.4	PASS
Frequency tolerance of the carrier signal	15.225	7.5	PASS

6.1 Operating voltages/frequencies used for testing

Section	Test	Operating conditions
7.1	Conducted emission	/
7.2	Radiated emission	6 Vdc
7.3.	Bandwidth of the emission	6 Vdc
7.4	Spectrum mask	6 Vdc
7.5	Frequency tolerance of the carrier signal	6 Vdc

7 EMISSION TESTS

7.1 Conducted emission measurement (15.207)


7.1.1 Test instruments

Description	Model No.	SIQ No.	Last calibration	Calibrated until	Calibration period	Used
Rohde-Schwarz, RFI receiver	ESU26	100428	2018-10	2020-10	24 months	/
Rohde & Schwarz, Artificial main network	ESH2-Z5	106899	2017-06	2019-06	24 months	/

7.1.2 Test procedure

- The EUT is placed on a non-conductive 0.8 meters high table, 0.4 meters from the vertical conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). LISN provide 50 Ohm / 50 μ H + 5 Ohm of coupling impedance for the measuring instrument.
- Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.
- AC power lines of EUT are checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz is searched using PEAK, QUASI-PEAK and AVERAGE function of the receiver. Bandwidth is set to 9 kHz.
- If applicable functions are changed (data transfer speed, clock speed,...) it should be noted in the test report.

7.1.3 Test setup

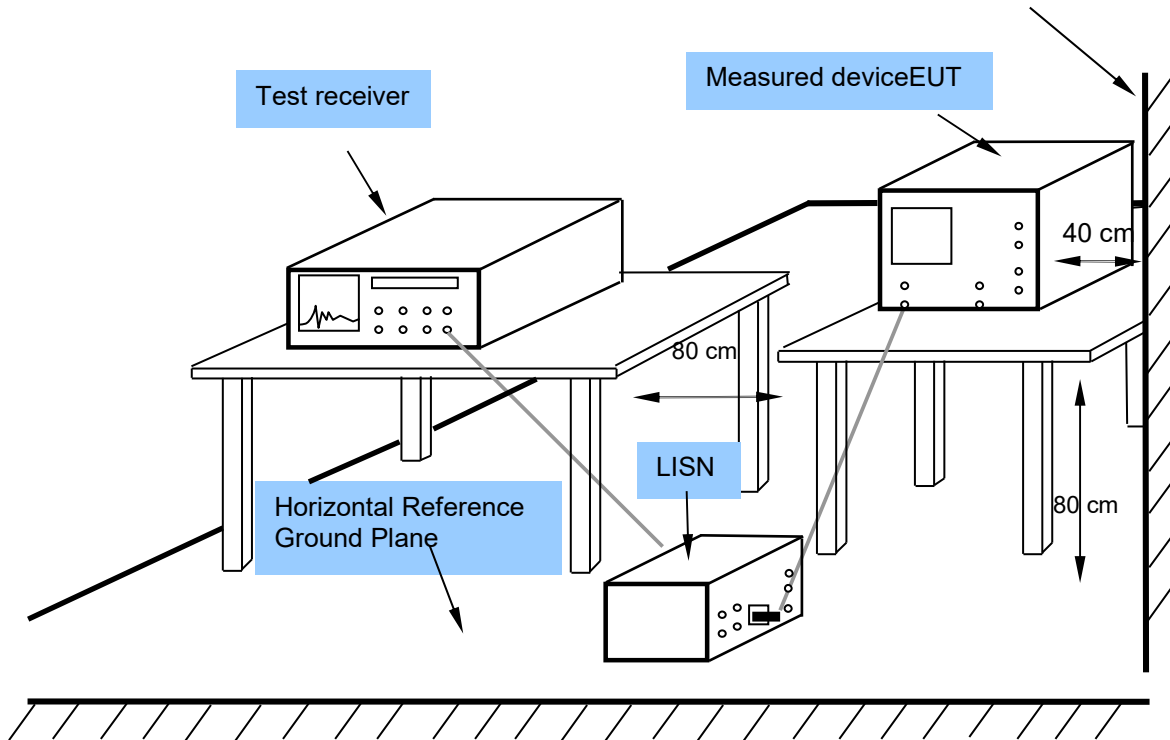

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.1.4 Test results

Device passed the requirements stated in FCC part 15, Subpart C, Section 15.207.

Test is not applicable due to no external cables for power supply.

7.2 Radiated emission measurement (15.209)

7.2.1 Test instruments

Description	Model No.	SIQ No.	Last calibration	Calibrated until	Calibration period	Used
Rohde-Schwarz, RFI receiver	ESU8	105187	2017-12	2019-12	24 months	
Rohde-Schwarz, RFI receiver	ESU26	100428	2018-10	2020-10	24 months	X
Comtest Engineering, Semi Anechoic Chamber SAC 1	SAC 3m	NPS001	2017-05	2019-05	24 months	X
Comtest Engineering, Semi Anechoic Chamber SAC 2	SAC 3m	NPS003	2017-05	2019-05	24 months	
Rohde & Schwarz, Horn Antenna	HF907 (SN 102508)	102508	2018-05	2020-05	24 months	
Rohde & Schwarz, Ultra Broadband Antenna	HL562E (SN 100842)	102842	2017-07	2019-07	24 months	X
Rohde & Schwarz, Horn Antenna	HF907 (SN 102494)	102494	2018-05	2020-05	24 months	
Rohde & Schwarz, Ultra Broadband Antenna	HL562E (SN 100843)	102843	2017-07	2019-07	24 months	
Maturo, Turn table (2 m diameter)	TT 2.0 SI	/	N/A	N/A	N/A	X
Maturo, Bore-sight antenna mast	BAM-4.0-P	/	N/A	N/A	N/A	X
Maturo, Multi-channel positioning equipment	Maturo NCD	/	N/A	N/A	N/A	X
Schwarzbeck, Biconical antenna	VHBB9124 (SN 9124-317)	105112	2018-11	2020-11	24 months	X
Schwarzbeck, Loop Antenna	FMZB 1519 B	/	2018-09	2020-09	24 months	X


7.2.2 Test procedure for measurements from 9 kHz to 30 MHz

1. Radiated emission in the frequency range 9 kHz to 30 MHz are measured Active loop Antenna.
2. The EUT was placed on the top of a rotating table 0.8 meters above the ground in an Anechoic Chamber. The table and antenna was rotated 360 degrees to determine the position of the highest radiation.
3. Final measurements were done at a distance of 10 m at Open Area Test Site due to low emissions measured during preliminary measurements acc. to the clauses from Part 15, Sections 15.31(d) and 15.31(f)(2). Test results were extrapolated by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

7.2.3 Test procedure for measurements from 30 MHz to 1 GHz

4. The EUT was placed on the top of a rotating table 0.8 meters above the ground in an Anechoic Chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
5. The EUT was set 3 m away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.
6. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
7. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
8. The test-receiver system was set to PEAK and QUAS-PEAK Detect Function and Specified Bandwidth with Maximum Hold Mode.
9. The highest points would be re-tested one by one using the quasi-peak method.

7.2.4 Test setup

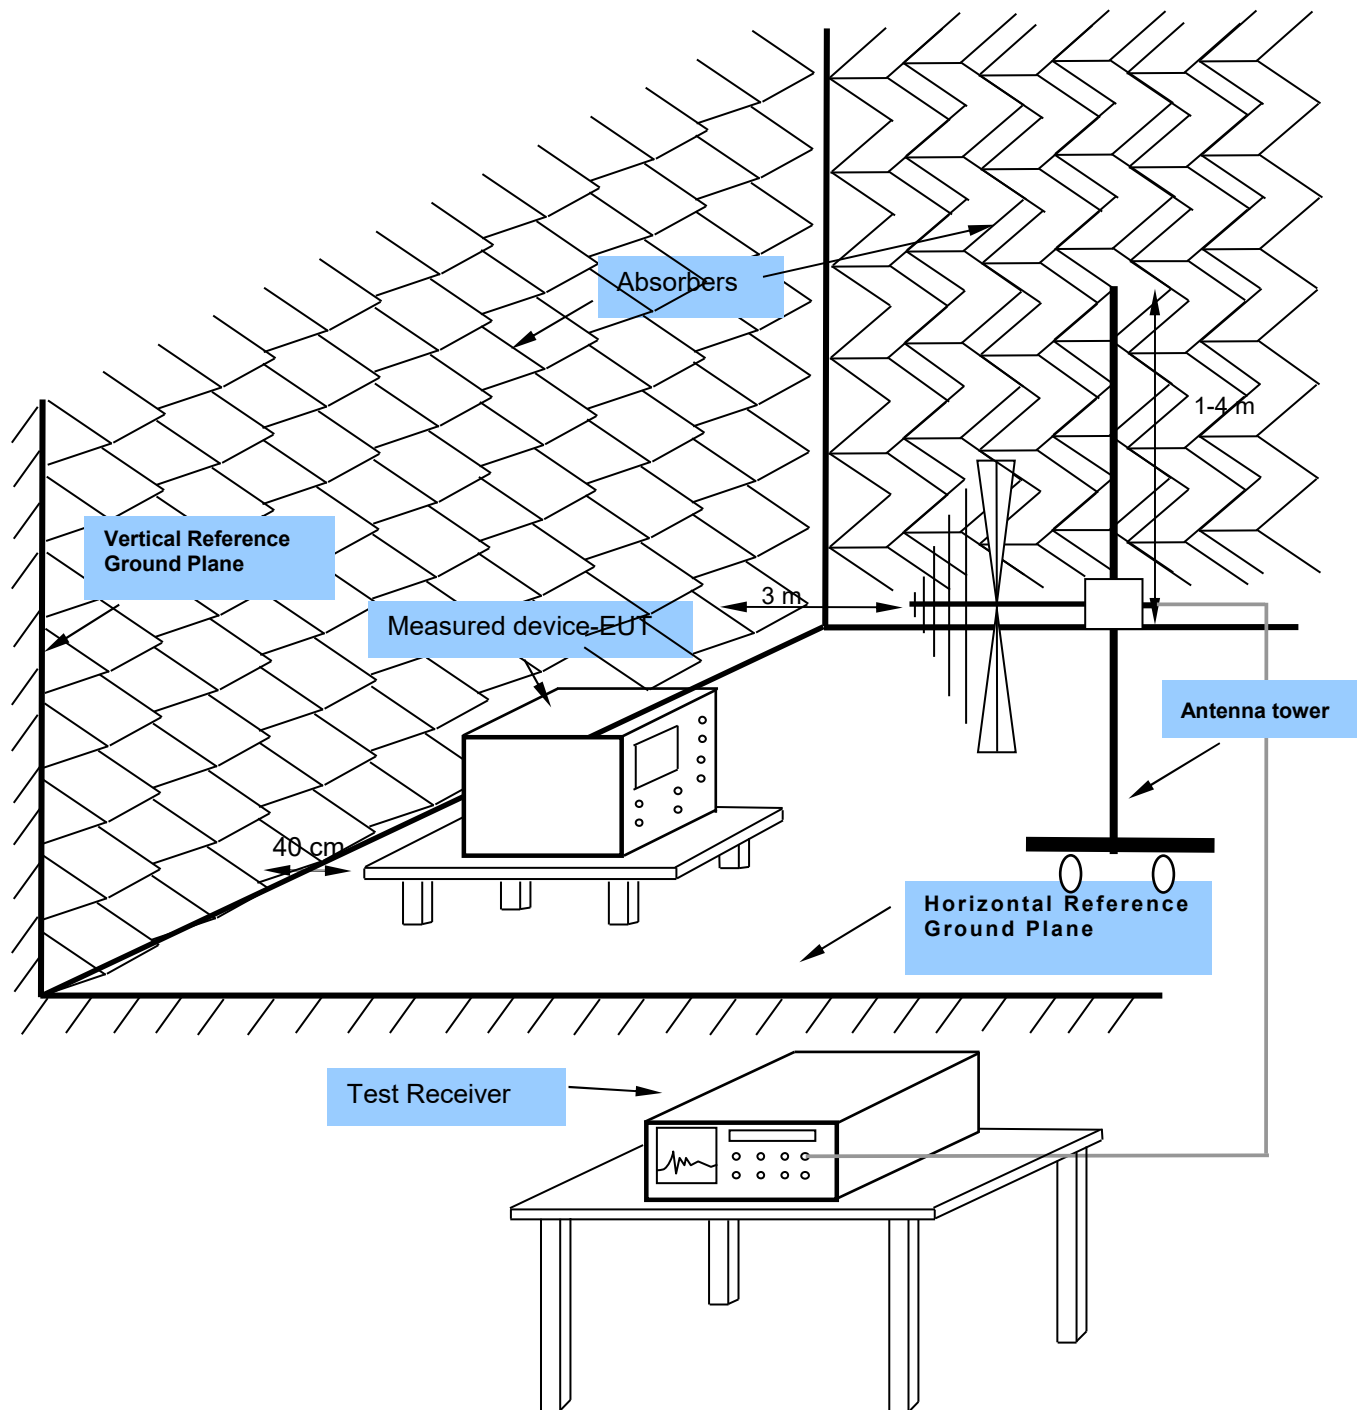

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



7.2.5 Test result

Device passed the requirements stated in FCC Part 15, Subpart C, Section 15.209

26.Mar 19 15:11


Meas Type RADIATED EMISSION
Equipment under Test Optical DO probe - HI 764113
OP Condition TX

Test Spec
Antenna: 0 deg, Sample: 40 deg

Time Domain Scan (4 Ranges)

Scan Start: 9 kHz
Scan Stop: 30 MHz
Detector: Trace 1: MAX PEAK
Transducer: 1519B_V

Start Frequency	Stop Frequency	Step Size	Res BW	Meas Time	RF Atten	Preamp	Input
9.000000 kHz	149.950000 kHz	50.00 Hz	200.00 Hz	30 ms	Auto	20 dB	INPUT2
150.000000 kHz	12.999750 MHz	2.25 kHz	9.00 kHz	30 ms	Auto	20 dB	INPUT2
13.000000 MHz	13.999000 MHz	2.25 kHz	9.00 kHz	1 s	Auto	20 dB	INPUT2
14.000000 MHz	30.000000 MHz	2.25 kHz	9.00 kHz	30 ms	Auto	20 dB	INPUT2

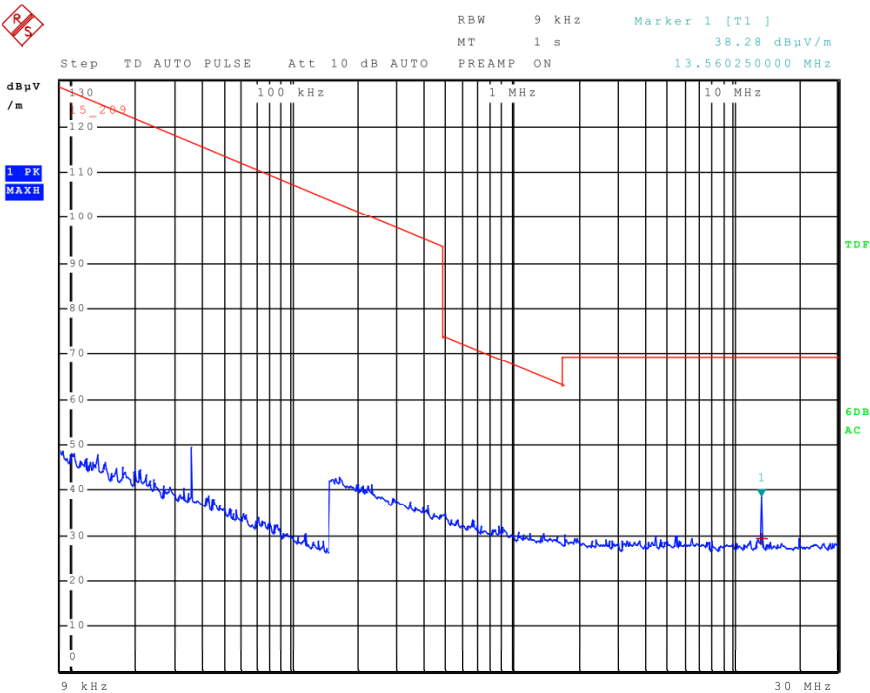



26.Mar 19 15:11

Meas Type RADIATED EMISSION
Equipment under Test Optical DO probe - HI 764113
OP Condition TX

Test Spec

Antenna: 0 deg, Sample: 40 deg

Final Measurement

Meas Time: 1 s
Margin: 6 dB
Peaks: 1

Trace	Frequency	Level (dB μ V/m)	Detector	Delta Limit/dB
1	13.560250000 MHz	29.12	Quasi Peak	-40.38

Final measurement at 10 m in OATS

Results with measuring distance of 10 m				
Mode	Frequency (MHz)	Measured value (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
Probe operating	13.56	/	/	/

Calculated value from 10 m to 30 m						
Mode	Frequency (MHz)	Measured value at 10 m (dB μ V/m)	Correction factor from 10 m to 30 m (dB)	Calculated value at 30 m (dB μ V/m)	Limit at 30 m (dB μ V/m)	Margin (dB)
Probe operating	13.56	/	/	/	/	/

NOTE: Measurements at 10 m in OATS were not performed due to too low disturbances at 3 m in Anechoic chamber.

Radiated emission

EUT Information


EUT

Optical DO probe - HI764113

Operating condition:

TX

Full Spectrum

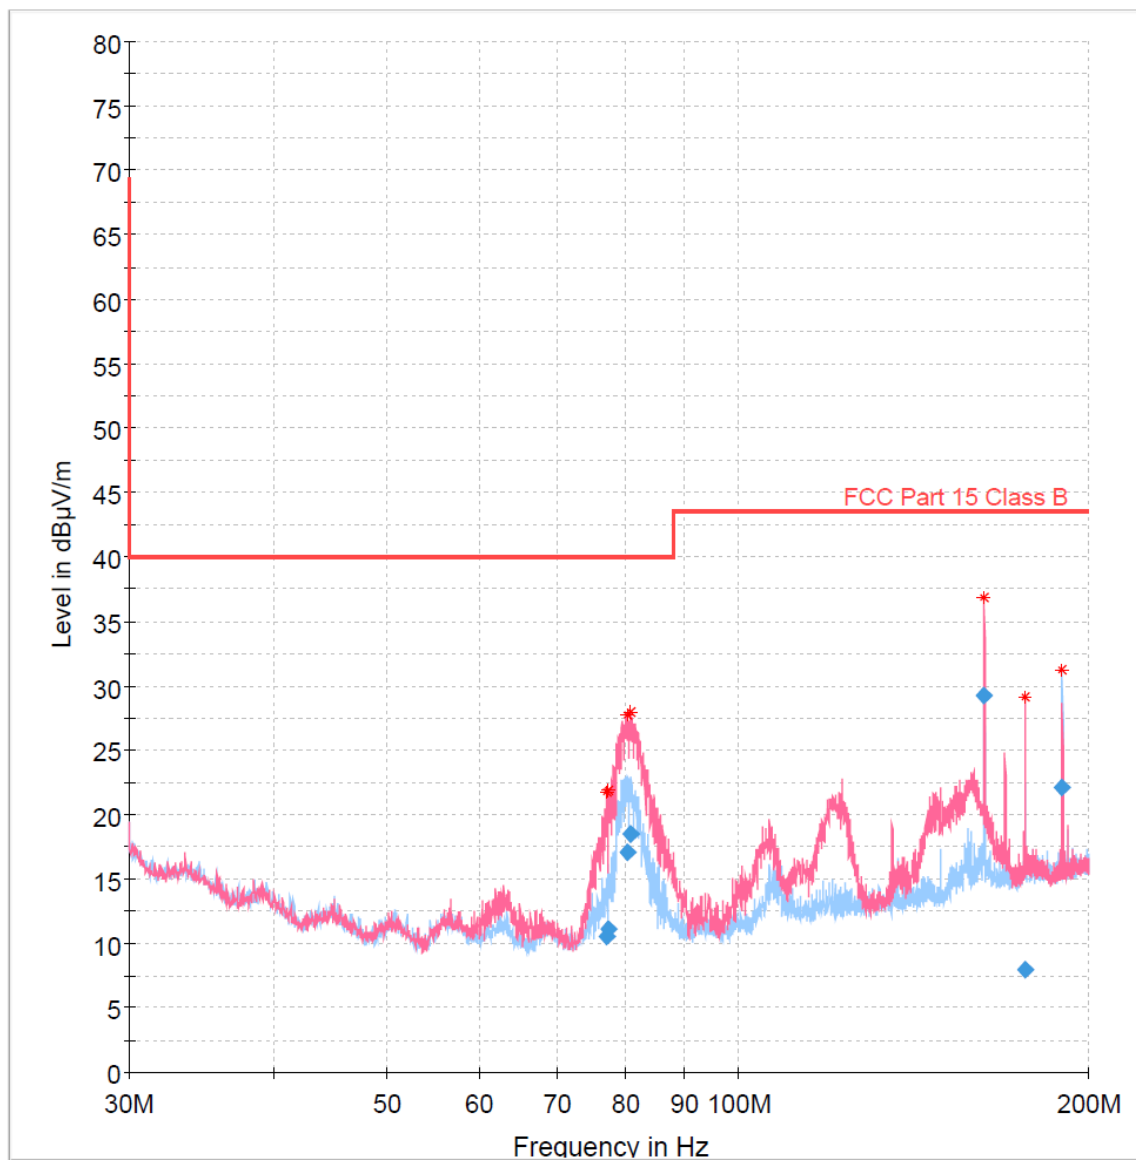

Preview Result 1H-PK+
Critical_Freqs PK+
Final_Result QPK

Preview Result 1V-PK+
FCC Part 15 Class B

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
77.150000	10.53	40.00	29.47	100.0	V	215.0
77.450000	11.14	40.00	28.86	100.0	V	215.0
80.210000	17.12	40.00	22.88	100.0	V	238.0
80.900000	18.51	40.00	21.49	100.0	V	266.0
162.710000	29.24	43.50	14.26	100.0	V	139.0
176.270000	7.90	43.50	35.60	100.0	V	133.0
189.830000	22.13	43.50	21.37	100.0	H	95.0

Radiated emission

EUT Information


EUT

Optical DO probe - HI764113

Operating condition:

TX

Full Spectrum

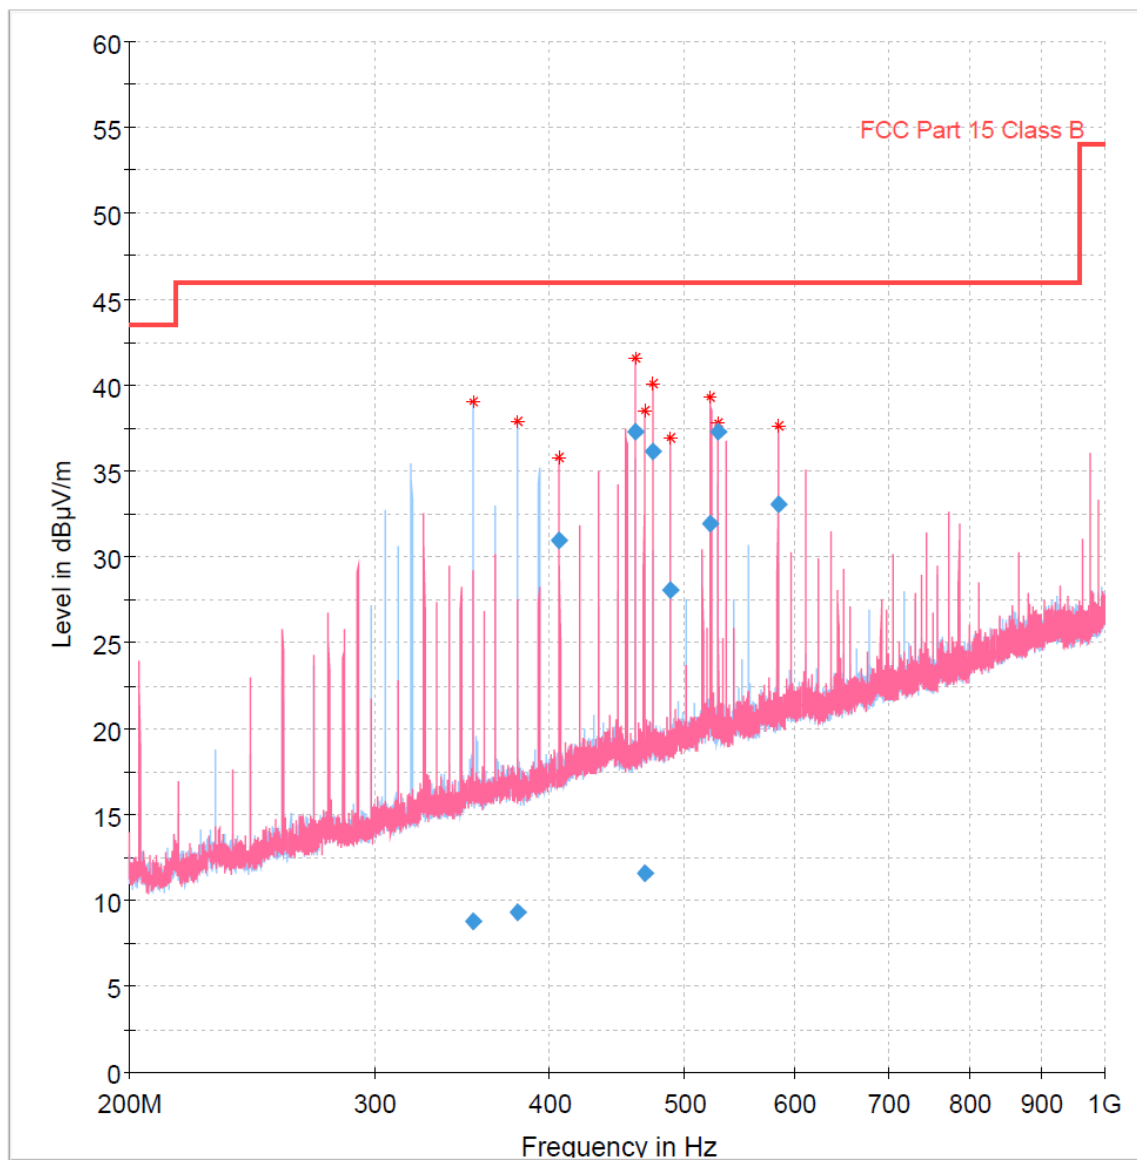

— Preview Result 1H-PK+
* Critical_Freqs PK+
◆ Final Result QPK
— Preview Result 1V-PK+
— FCC Part 15 Class B

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
461.040000	37.32	46.00	8.68	103.0	V	269.0
528.840000	37.27	46.00	8.73	250.0	V	247.0
474.600000	36.12	46.00	9.88	103.0	V	269.0
583.080000	33.10	46.00	12.90	100.0	V	179.0
522.060000	31.91	46.00	14.09	100.0	V	179.0
406.800000	30.92	46.00	15.08	350.0	V	54.0
488.160000	28.08	46.00	17.92	295.0	V	247.0
467.820000	11.61	46.00	34.39	293.0	V	247.0
379.680000	9.31	46.00	36.69	106.0	H	209.0
352.560000	8.75	46.00	37.25	103.0	H	209.0

7.3 Bandwidth of the emission (15.215)

Section 15.215 Additional provisions to the general radiated emission limitations

7.3.1 Test instruments

Description	Model No.	SIQ No.	Last calibration	Calibrated until	Calibration period	Used
Rohde-Schwarz, RFI receiver	ESU8	105187	2017-12	2019-12	24 months	X
Rohde-Schwarz, RFI receiver	ESU26	100428	2018-10	2020-10	24 months	
Comtest Engineering, Semi Anechoic Chamber SAC 1	SAC 3m	NPS001	2017-05	2019-05	24 months	X
Comtest Engineering, Semi Anechoic Chamber SAC 2	SAC 3m	NPS003	2017-05	2019-05	24 months	
Rohde & Schwarz, Horn Antenna	HF907 (SN 102508)	102508	2018-05	2020-05	24 months	
Rohde & Schwarz, Ultra Broadband Antenna	HL562E (SN 100842)	102842	2017-07	2019-07	24 months	
Rohde & Schwarz, Horn Antenna	HF907 (SN 102494)	102494	2018-05	2020-05	24 months	
Rohde & Schwarz, Ultra Broadband Antenna	HL562E (SN 100843)	102843	2017-07	2019-07	24 months	
Maturo, Turn table (2 m diameter)	TT 2.0 SI	/	N/A	N/A	N/A	X
Maturo, Bore-sight antenna mast	BAM-4.0-P	/	N/A	N/A	N/A	
Maturo, Multi-channel positioning equipment	Maturo NCD	/	N/A	N/A	N/A	X
Schwarzbeck, Biconical antenna	VHBB9124 (SN 9124-317)	105112	2018-11	2020-11	24 months	
Schwarzbeck, Loop Antenna	FMZB 1519 B	/	2018-09	2020-09	24 months	X

7.3.2 Test procedure

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground in an Anechoic Chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Resolution bandwidth is set to a value greater than 5% of the allowed bandwidth. If no bandwidth specifications are given, the guidelines in Section 1.4 are used

7.3.3 Test results


Device passed the requirements stated in FCC Part 15, Subpart C, Section 15.215

26.Mar 19 15:30

Meas Type OCCUPIED BANDWIDTH
Equipment under Test Optical DO probe - HI 764113
OP Condition TX
Test Spec
Antenna: 0 deg, Sample: 40 deg

Sweep Settings Screen A

Center Frequency	13.560000 MHz	Ref Level	87.000 dBuV/m
Frequency Offset	0.000000 Hz	Ref Level Offset	0.000 dB
Span	8.000000 kHz	Ref Position	100.000 %
Start Frequency	13.556000 MHz	Level Range	100.000 dB
Stop Frequency	13.564000 MHz	RF Att	10.000 dB
RBW	1.000000 kHz		
VBW	3.000000 kHz	X-Axis	LIN
Sweep Time	20.00 ms	Y-Axis	LOG

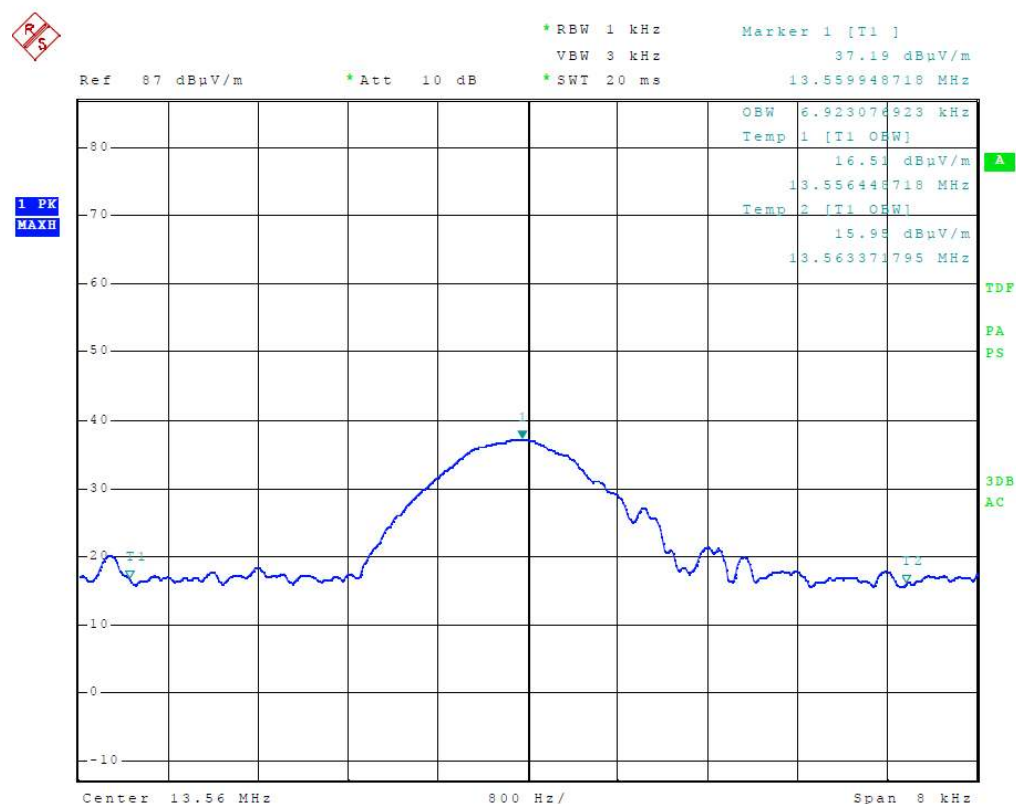

26.Mar 19 15:27


Meas Type OCCUPIED BANDWIDTH
 Equipment under Test Optical DO probe - HI 764113
 OP Condition TX

Test Spec

Antenna: 0 deg, Sample: 40 deg

Sweep Settings Screen A

Center Frequency	13.560000 MHz	Ref Level	87.000 dBμV/m
Frequency Offset	0.000000 Hz	Ref Level Offset	0.000 dB
Span	8.000000 kHz	Ref Position	100.000 %
Start Frequency	13.556000 MHz	Level Range	100.000 dB
Stop Frequency	13.564000 MHz	RF Att	10.000 dB
RBW	1.000000 kHz		
VBW	3.000000 kHz	X-Axis	LIN
Sweep Time	20.00 ms	Y-Axis	LOG

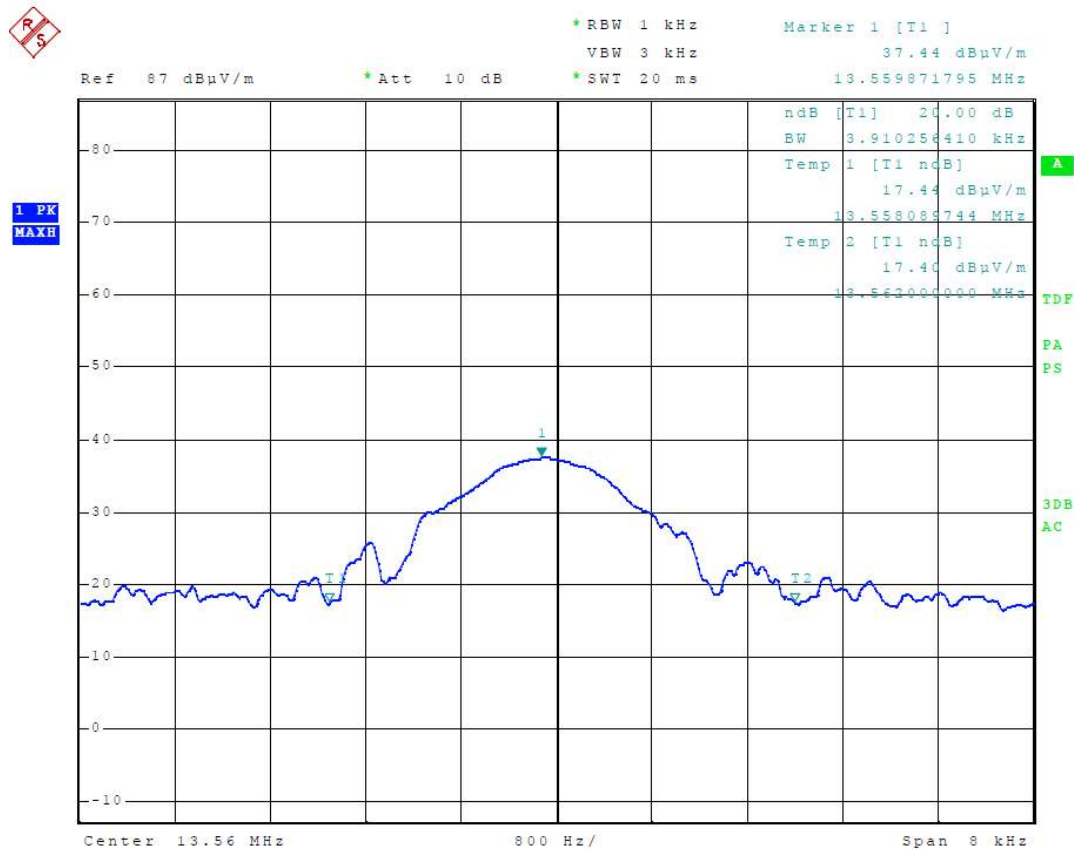

Frequency (MHz)	Permitted frequency band (MHz)	20 dB bandwidth (kHz)	PASS/FAIL
13.56	13.110 – 14.010	3.91	PASS

7.4 Spectrum mask (15.225)

Section 15.225 Operation within the band 13.110 – 14.010 MHz – clause a – clause d

7.4.1 Test instruments

Description	Model No.	SIQ No.	Last calibration	Calibrated until	Calibration period	Used
Rohde-Schwarz, RFI receiver	ESU8	105187	2017-12	2019-12	24 months	X
Rohde-Schwarz, RFI receiver	ESU26	100428	2018-10	2020-10	24 months	
Comtest Engineering, Semi Anechoic Chamber SAC 1	SAC 3m	NPS001	2017-05	2019-05	24 months	X
Comtest Engineering, Semi Anechoic Chamber SAC 2	SAC 3m	NPS002	2017-05	2019-05	24 months	
Rohde & Schwarz, Horn Antenna	HF907 (SN 102508)	102508	2018-05	2020-05	24 months	
Rohde & Schwarz, Ultra Broadband Antenna	HL562E (SN 100842)	102842	2017-07	2019-07	24 months	
Rohde & Schwarz, Horn Antenna	HF907 (SN 102494)	102494	2018-05	2020-05	24 months	
Rohde & Schwarz, Ultra Broadband Antenna	HL562E (SN 100843)	102843	2017-07	2019-07	24 months	
Maturo, Turn table (2 m diameter)	TT 2.0 SI	/	N/A	N/A	N/A	X
Maturo, Bore-sight antenna mast	BAM-4.0-P	/	N/A	N/A	N/A	
Maturo, Multi-channel positioning equipment	Maturo NCD	/	N/A	N/A	N/A	X
Schwarzbeck, Biconical antenna	VHBB9124 (SN 9124-317)	105112	2018-11	2020-11	24 months	
Schwarzbeck, Loop Antenna	FMZB 1519 B	/	2020-09	2020-09	24 months	X

7.4.2 Test procedure

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground in an Anechoic Chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.



7.4.3 Test results


Device passed the requirements stated in FCC Part 15, Subpart C, Section 15.225

26.Mar 19 15:41

Meas Type SPECTRUM MASK
Equipment under Test Optical DO probe - HI 764113
OP Condition TX
Test Spec
Antenna: 0 deg, Sample: 40 deg

Sweep Settings Screen A

Center Frequency	13.560000 MHz	Ref Level	97.000 dBuV/m
Frequency Offset	0.000000 Hz	Ref Level Offset	0.000 dB
Span	80.000000 kHz	Ref Position	100.000 %
Start Frequency	13.520000 MHz	Level Range	100.000 dB
Stop Frequency	13.600000 MHz	RF Att	10.000 dB
RBW	1.000000 kHz		
VBW	3.000000 kHz	X-Axis	LIN
Sweep Time	20.00 ms	Y-Axis	LOG

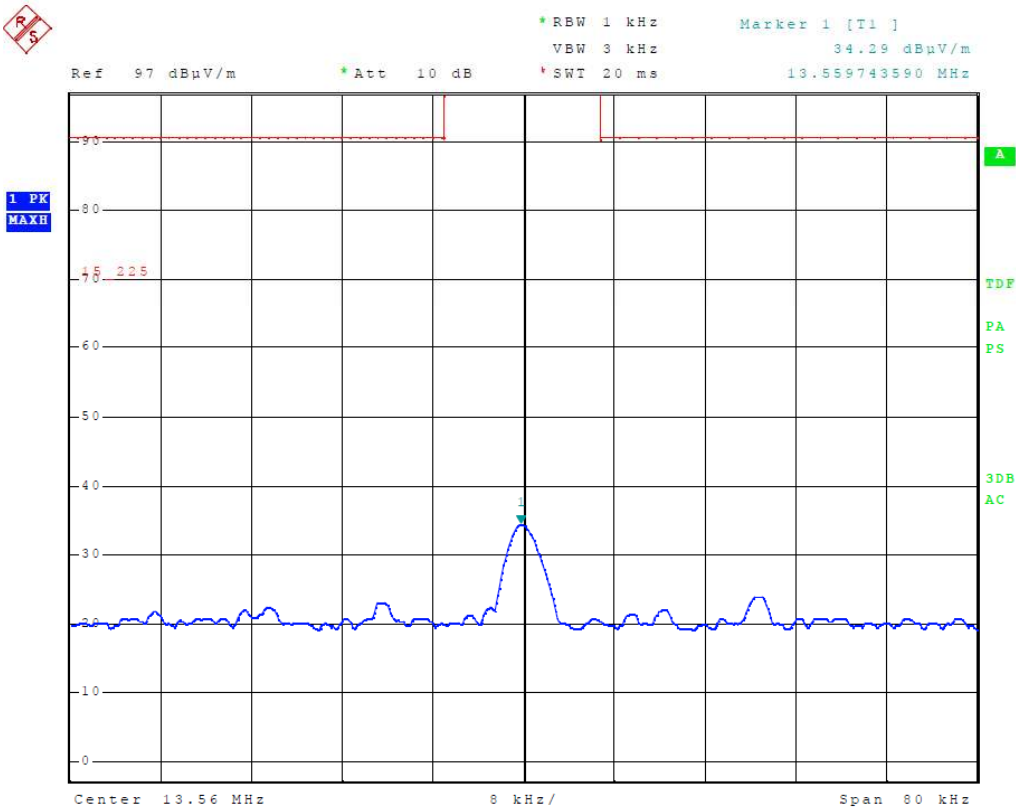

7.5 Frequency tolerance of the carrier signal (15.225)

Section 15.225 Operation within the band 13.110 – 14.010 MHz

7.5.1 Test instruments:

Description & Manufacturer	Model No.	SIQ No.	Last calibration	Calibrated until	Calibration period	Used
Rohde-Schwarz, RFI receiver	ESU8	105187	2017-12	2019-12	24 months	X
Rohde & Schwarz, Loop Antenna	FMZB 1519 B	/	2018-09	2020-09	24 months	X
Kambič, Temperature chamber	I-190 CK	107298	N/A	N/A	/	X

7.5.2 Test requirements:

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

7.5.3 Test results

Device passed the requirements stated in FCC Part 15, Subpart C, Section 15.225

OPTICAL DO Probe HI 764113						
FREQUENCY STABILITY						
Temperature	Supply voltage (V)	Minutes after switch on	Measured Frequency (MHz)	Allowed tolerance	Measured tolerance	RESULT
50	6,00	0	13,559743590	Fref±1.356 kHz	-0,192	PASS
	6,00	2	13,559799679	Fref±1.356 kHz	-0,136	PASS
	6,00	5	13,559687500	Fref±1.356 kHz	-0,248	PASS
	6,00	10	13,559711538	Fref±1.356 kHz	-0,224	PASS
40	6,00	0	13,559831731	Fref±1.356 kHz	-0,104	PASS
	6,00	2	13,559815705	Fref±1.356 kHz	-0,120	PASS
	6,00	5	13,559735577	Fref±1.356 kHz	-0,200	PASS
	6,00	10	13,559727564	Fref±1.356 kHz	-0,208	PASS
30	6,00	0	13,559903846	Fref±1.356 kHz	-0,032	PASS
	6,00	2	13,559895833	Fref±1.356 kHz	-0,040	PASS
	6,00	5	13,559927885	Fref±1.356 kHz	-0,008	PASS
	6,00	10	13,559887821	Fref±1.356 kHz	-0,048	PASS
20	6,00	0	13,559879808	Fref±1.356 kHz	-0,056	PASS
	6,00	2	13,559831731	Fref±1.356 kHz	-0,104	PASS
	6,00	5	13,559823718	Fref±1.356 kHz	-0,112	PASS
	6,00	10	13,559935897	Fref	0,000	PASS
10	6,00	0	13,559961538	Fref±1.356 kHz	0,026	PASS
	6,00	2	13,560041667	Fref±1.356 kHz	0,106	PASS
	6,00	5	13,560033654	Fref±1.356 kHz	0,098	PASS
	6,00	10	13,559913462	Fref±1.356 kHz	-0,022	PASS
0	6,00	0	13,560073718	Fref±1.356 kHz	0,138	PASS
	6,00	2	13,559977564	Fref±1.356 kHz	0,042	PASS
	6,00	5	13,560057692	Fref±1.356 kHz	0,122	PASS
	6,00	10	13,560057692	Fref±1.356 kHz	0,122	PASS
-10	6,00	0	13,560009615	Fref±1.356 kHz	0,074	PASS
	6,00	2	13,559929487	Fref±1.356 kHz	-0,006	PASS
	6,00	5	13,560137821	Fref±1.356 kHz	0,202	PASS
	6,00	10	13,559961538	Fref±1.356 kHz	0,026	PASS
-20	6,00	0	13,560089744	Fref±1.356 kHz	0,154	PASS
	6,00	2	13,560017628	Fref±1.356 kHz	0,082	PASS
	6,00	5	13,559985577	Fref±1.356 kHz	0,050	PASS
	6,00	10	13,560049679	Fref±1.356 kHz	0,114	PASS

Note: The tests were performed with new batteries.