

TEST REPORT

Applicant: ARTIKA FOR LIVING INC

Address: 1756 50th avenue, Lachine, Quebec, Canada, H8T 2V5

Product Name: LED ceiling light

FCC ID: 2AUHG-CLBRRT1

Standard(s): FCC PART 15B
ANSI C63.4-2014

Report Number: 2502S25825E-00

Report Date: 2025/5/16

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).

Joe Li

Reviewed By: Joe Li

Title: Project Engineer

Dylan Zhang

Approved By: Dylan Zhang

Title: EMC Supervisor

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

CONTENTS

DOCUMENT REVISION HISTORY	3
1. GENERAL INFORMATION	4
1.1 GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST	4
1.2 ACCESSORY INFORMATION.....	4
1.3 EQUIPMENT MODIFICATIONS	4
2. SUMMARY OF TEST RESULTS	5
3. DESCRIPTION OF TEST CONFIGURATION	6
3.1 DESCRIPTION OF TEST CONFIGURATION	6
3.2 EUT EXERCISE SOFTWARE.....	6
3.3 SUPPORT EQUIPMENT LIST AND DETAILS	6
3.4 SUPPORT CABLE LIST AND DETAILS.....	6
3.5 BLOCK DIAGRAM OF TEST SETUP.....	7
3.6 TEST FACILITY	8
3.7 MEASUREMENT UNCERTAINTY	8
4. REQUIREMENTS AND TEST PROCEDURES.....	9
4.1 CONDUCTED EMISSIONS	9
4.1.1 Applicable Standard	9
4.1.2 EUT Setup.....	9
4.1.3 EMI Test Receiver Setup	10
4.1.4 Test Procedure.....	10
4.1.5 Corrected Amplitude & Margin Calculation.....	10
4.1.6 Test Data and Result	11
4.2 RADIATION EMISSIONS	20
4.2.1 Applicable Standard	20
4.2.2 Test System Setup	20
4.2.3 EMI Test Receiver Setup	21
4.2.4 Test Procedure.....	21
4.2.5 Corrected Result & Margin Calculation.....	21
4.2.6 Test Data and Result	22
EXHIBIT A - EUT PHOTOGRAPHS	31
EXHIBIT B - TEST SETUP PHOTOGRAPHS.....	32

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2502S25825E-00	Original Report	2025/5/16

1. GENERAL INFORMATION

1.1 General Description Of Equipment under Test

EUT Name:	LED ceiling light
EUT Model:	CL-BRRT-C
Highest Operation Frequency [▲] :	<108MHz
Rated Input Voltage:	100-240V~50Hz/60Hz,29W
Serial Number:	30XN-1
EUT Received Date:	2025/4/6
EUT Received Status:	Good

1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
remote control	ZHEJIANG TWINSEL ELECTRONIC TECHNOLOGY CO.,LTD	CLU02-4532R-01	/

1.3 Equipment Modifications

No modifications are made to the EUT during all test items.

2. SUMMARY OF TEST RESULTS

Standard Clause	Description of Test	Test Result
FCC§15.107	Conducted emissions	Compliant
FCC§15.109	Radiated emissions	Compliant

3. DESCRIPTION OF TEST CONFIGURATION

3.1 Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user). The following summary table is showing all test modes to demonstrate in compliance with the standard:

Test Items	Test Modes
Radiated Emission:	M1: Maximum light& White temperature M2: Minimum light& White temperature M3: Cool temperature &worst mode M1-M2 M 4:Warm temperature &worst mode M1-M2
Conducted Emission:	M1: Maximum light& White temperature M2: Minimum light& White temperature M3: Cool temperature &worst mode M1-M2 M 4:Warm temperature &worst mode M1-M2

3.2 EUT Exercise Software

No software was used in test.

3.3 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

3.4 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
AC Cable	NO	NO	1	EUT	LISN

3.5 Block Diagram of Test Setup

CE:



RE:

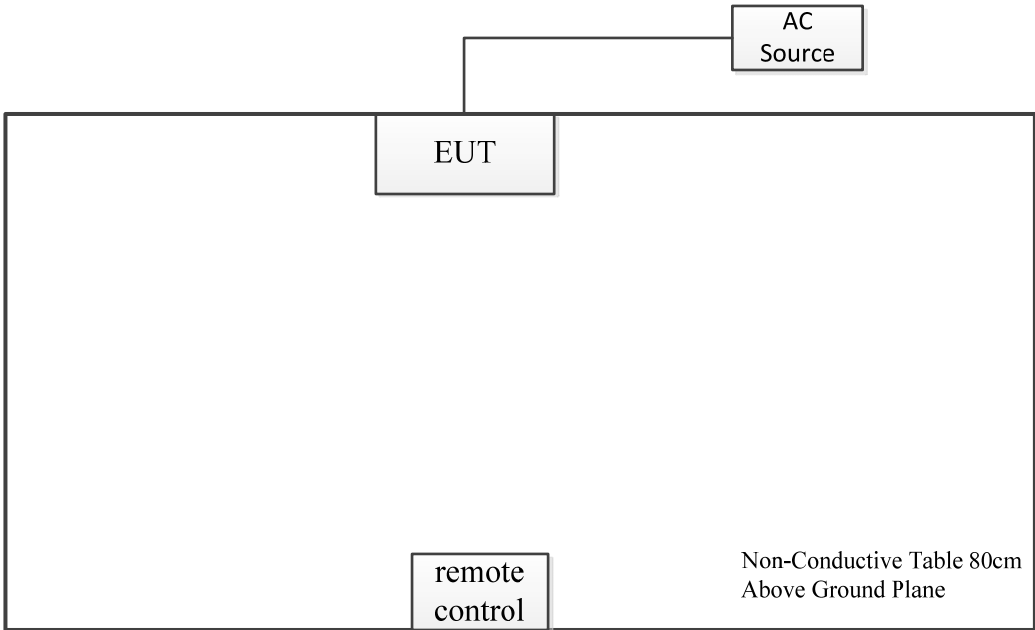

3.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

3.7 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Unwanted Emissions, radiated	9kHz~30MHz: 3.3dB, 30MHz~200MHz: 4.55 dB, 200MHz~1GHz: 5.92 dB, 1GHz~6GHz: 4.98 dB, 6GHz~18GHz: 5.89 dB, 18GHz~26.5GHz:5.47 dB, 26.5GHz~40GHz:5.63 dB
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5\%$
AC Power Lines Conducted Emission	3.11 dB (150 kHz to 30 MHz)

4. REQUIREMENTS AND TEST PROCEDURES

4.1 Conducted Emissions

4.1.1 Applicable Standard


FCC§15.107

(a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

*Decreases with the logarithm of the frequency.

4.1.2 EUT Setup

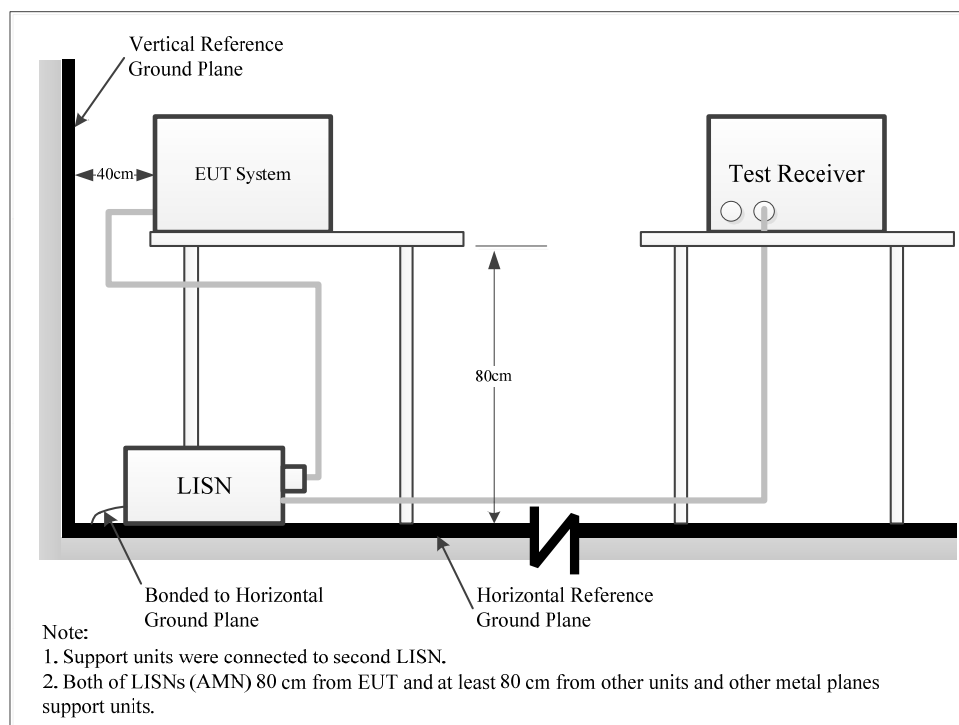

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

4.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

4.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

4.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.1.6 Test Data and Result

Serial Number:	30XN-1	Test Date:	2025/05/07
Test Site:	CE	Test Mode:	M1~M4
Tester:	Yukin Qiu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.5	Relative Humidity: (%)	70	ATM Pressure: (kPa)	100.8
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101614	2024/9/5	2025/9/4
MICRO-COAX	Coaxial Cable	C-NJNJ-50	C-0200-01	2024/9/5	2025/9/4
R&S	EMI Test Receiver	ESCI	101121	2024/9/5	2025/9/4
Audix	Test Software	E3	191218 V9	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Project No.: 2502S25825E-EM
 Port: Line
 Test Mode: M1
 Note: IF B/W 9KHz PK/AV

Serial No.: 30XN-1
 Tester: Yukin Qiu

Date: 2025-05-07

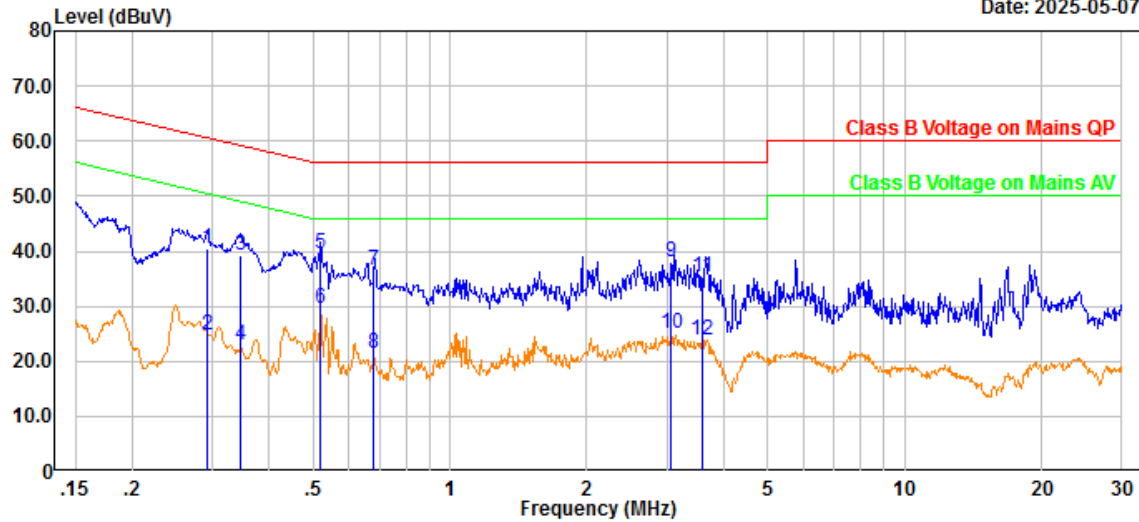


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Measurement
1	0.293	29.75	10.82	40.57	60.43	19.86	QP
2	0.293	13.94	10.82	24.76	50.43	25.67	Average
3	0.346	28.52	10.83	39.35	59.06	19.71	QP
4	0.346	12.02	10.83	22.85	49.06	26.21	Average
5	0.520	28.84	10.84	39.68	56.00	16.32	QP
6	0.520	18.80	10.84	29.64	46.00	16.36	Average
7	0.679	25.70	10.85	36.55	56.00	19.45	QP
8	0.679	10.72	10.85	21.57	46.00	24.43	Average
9	3.069	27.16	10.79	37.95	56.00	18.05	QP
10	3.069	14.40	10.79	25.19	46.00	20.81	Average
11	3.575	24.49	10.77	35.26	56.00	20.74	QP
12	3.575	13.22	10.77	23.99	46.00	22.01	Average

Project No.: 2502S25825E-EM
 Port: neutral
 Test Mode: M1
 Note: IF B/W 9KHz PK/AV

Serial No.: 30XN-1
 Tester: Yukin Qiu

Date: 2025-05-07

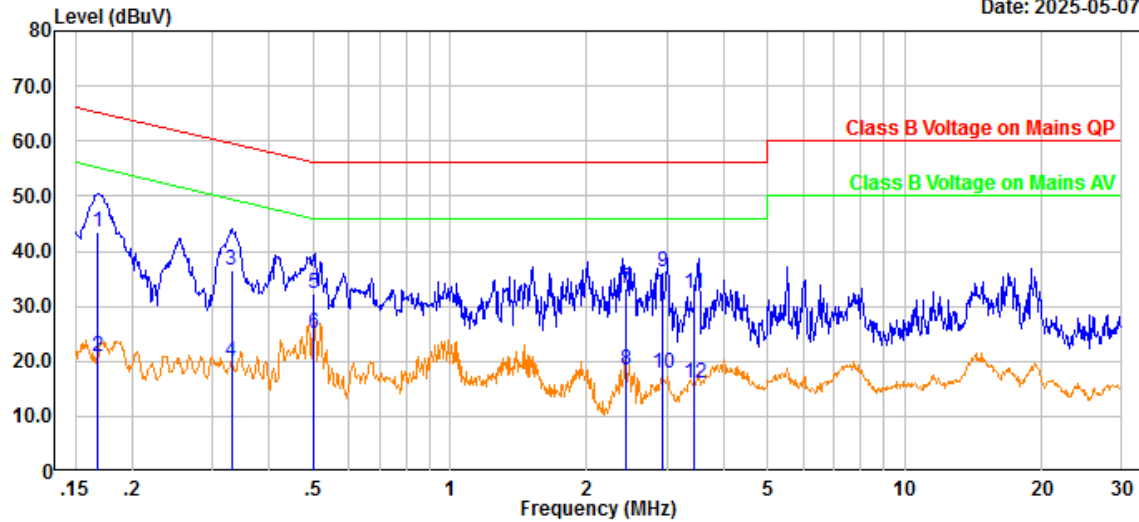


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Measurement
1	0.168	32.72	10.85	43.57	65.04	21.47	QP
2	0.168	9.86	10.85	20.71	55.04	34.33	Average
3	0.331	25.60	10.79	36.39	59.44	23.05	QP
4	0.331	9.00	10.79	19.79	49.44	29.65	Average
5	0.501	21.67	10.74	32.41	56.00	23.59	QP
6	0.501	14.36	10.74	25.10	46.00	20.90	Average
7	2.439	22.44	10.91	33.35	56.00	22.65	QP
8	2.439	7.56	10.91	18.47	46.00	27.53	Average
9	2.927	25.31	10.89	36.20	56.00	19.80	QP
10	2.927	6.93	10.89	17.82	46.00	28.18	Average
11	3.429	21.43	10.88	32.31	56.00	23.69	QP
12	3.429	5.27	10.88	16.15	46.00	29.85	Average

Project No.: 2502S25825E-EM
Port: Line
Test Mode: M2
Note: IF B/W 9KHz PK/AV

Serial No.: 30XN-1
Tester: Yukin Qiu

Date: 2025-05-07

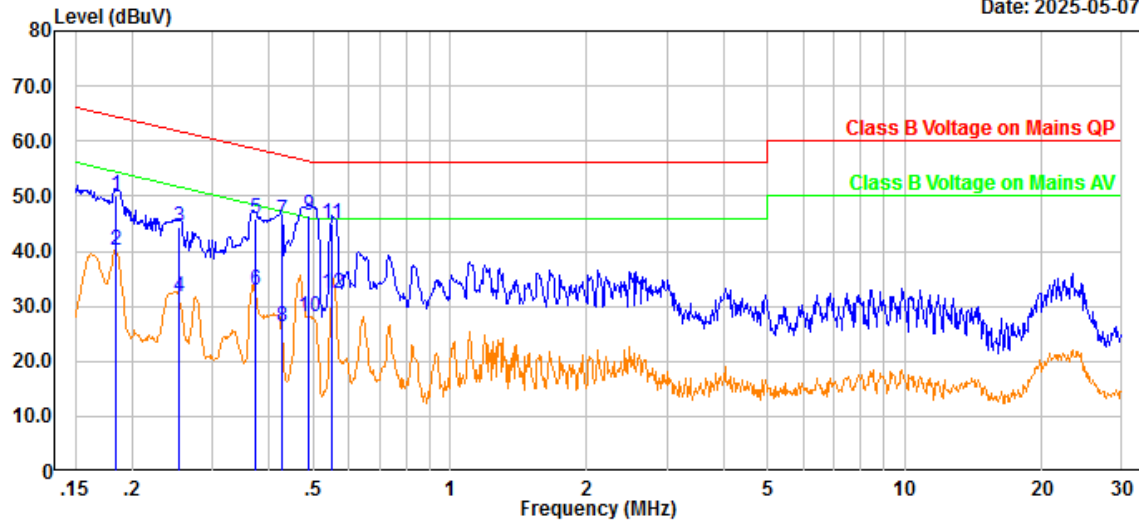


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Measurement
1	0.184	39.38	10.82	50.20	64.32	14.12	QP
2	0.184	29.25	10.82	40.07	54.32	14.25	Average
3	0.253	33.53	10.83	44.36	61.65	17.29	QP
4	0.253	20.94	10.83	31.77	51.65	19.88	Average
5	0.372	35.15	10.83	45.98	58.46	12.48	QP
6	0.372	22.02	10.83	32.85	48.46	15.61	Average
7	0.426	34.85	10.84	45.69	57.33	11.64	QP
8	0.426	15.39	10.84	26.23	47.33	21.10	Average
9	0.490	35.56	10.84	46.40	56.17	9.77	QP
10	0.490	17.25	10.84	28.09	46.17	18.08	Average
11	0.549	34.27	10.83	45.10	56.00	10.90	QP
12	0.549	21.40	10.83	32.23	46.00	13.77	Average

Project No.: 2502S25825E-EM
Port: neutral
Test Mode: M2
Note: IF B/W 9KHz PK/AV

Serial No.: 30XN-1
Tester: Yukin Qiu

Date: 2025-05-07

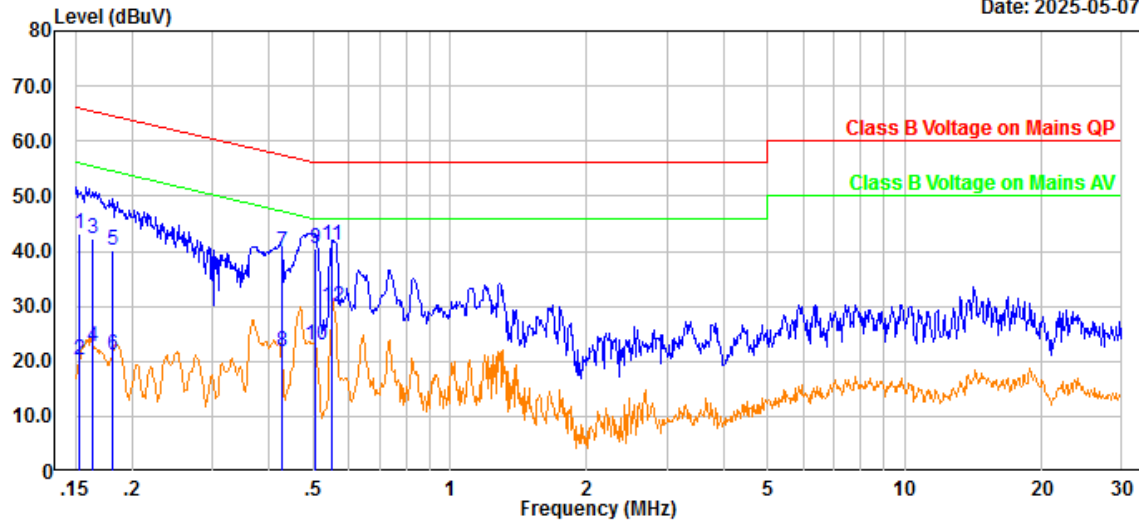


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Measurement
1	0.154	32.34	10.85	43.19	65.81	22.62	QP
2	0.154	9.29	10.85	20.14	55.81	35.67	Average
3	0.164	31.28	10.85	42.13	65.25	23.12	QP
4	0.164	11.76	10.85	22.61	55.25	32.64	Average
5	0.181	29.19	10.85	40.04	64.45	24.41	QP
6	0.181	10.33	10.85	21.18	54.45	33.27	Average
7	0.426	29.02	10.76	39.78	57.33	17.55	QP
8	0.426	11.13	10.76	21.89	47.33	25.44	Average
9	0.505	29.80	10.74	40.54	56.00	15.46	QP
10	0.505	12.35	10.74	23.09	46.00	22.91	Average
11	0.550	30.29	10.73	41.02	56.00	14.98	QP
12	0.550	19.20	10.73	29.93	46.00	16.07	Average

Project No.: 2502S25825E-EM
 Port: Line
 Test Mode: M3
 Note: IF B/W 9KHz PK/AV

Serial No.: 30XN-1
 Tester: Yukin Qiu

Date: 2025-05-07

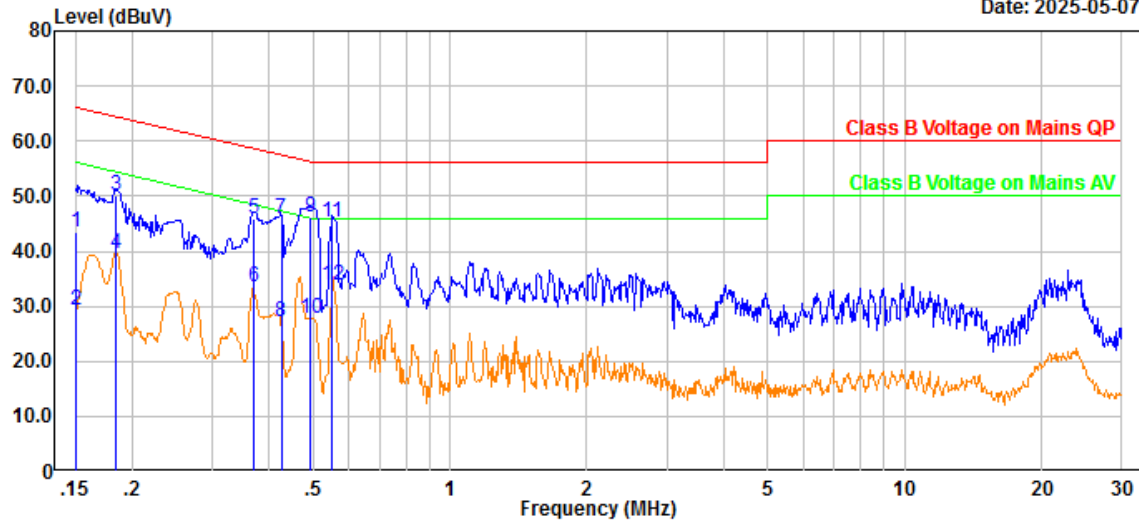


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Measurement
1	0.151	32.69	10.75	43.44	65.94	22.50	QP
2	0.151	18.52	10.75	29.27	55.94	26.67	Average
3	0.184	39.23	10.82	50.05	64.28	14.23	QP
4	0.184	28.72	10.82	39.54	54.28	14.74	Average
5	0.369	35.01	10.83	45.84	58.51	12.67	QP
6	0.369	22.67	10.83	33.50	48.51	15.01	Average
7	0.425	34.93	10.84	45.77	57.34	11.57	QP
8	0.425	16.39	10.84	27.23	47.34	20.11	Average
9	0.493	35.22	10.84	46.06	56.12	10.06	QP
10	0.493	16.96	10.84	27.80	46.12	18.32	Average
11	0.550	34.38	10.83	45.21	56.00	10.79	QP
12	0.550	23.06	10.83	33.89	46.00	12.11	Average

Project No.: 2502S25825E-EM
 Port: neutral
 Test Mode: M3
 Note: IF B/W 9KHz PK/AV

Serial No.: 30XN-1
 Tester: Yukin Qiu

Date: 2025-05-07

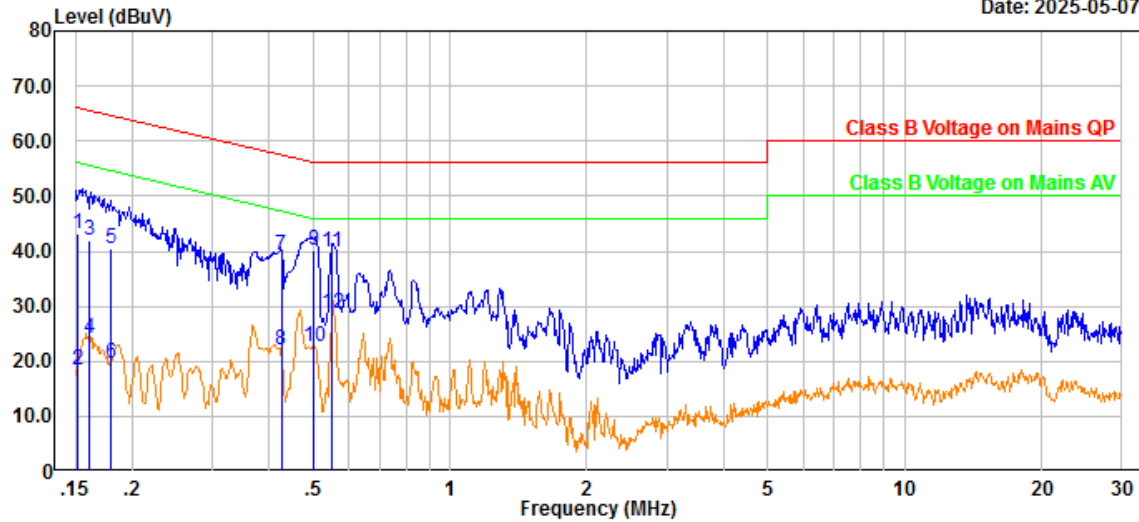


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Measurement
1	0.151	32.43	10.85	43.28	65.93	22.65	QP
2	0.151	7.70	10.85	18.55	55.93	37.38	Average
3	0.161	31.00	10.85	41.85	65.40	23.55	QP
4	0.161	13.16	10.85	24.01	55.40	31.39	Average
5	0.179	29.51	10.85	40.36	64.52	24.16	QP
6	0.179	8.72	10.85	19.57	54.52	34.95	Average
7	0.425	28.45	10.76	39.21	57.34	18.13	QP
8	0.425	11.23	10.76	21.99	47.34	25.35	Average
9	0.503	29.45	10.74	40.19	56.00	15.81	QP
10	0.503	11.82	10.74	22.56	46.00	23.44	Average
11	0.550	29.26	10.73	39.99	56.00	16.01	QP
12	0.550	18.10	10.73	28.83	46.00	17.17	Average

Project No.: 2502S25825E-EM
 Port: Line
 Test Mode: M4
 Note: IF B/W 9KHz PK/AV

Serial No.: 30XN-1
 Tester: Yukin Qiu

Date: 2025-05-07

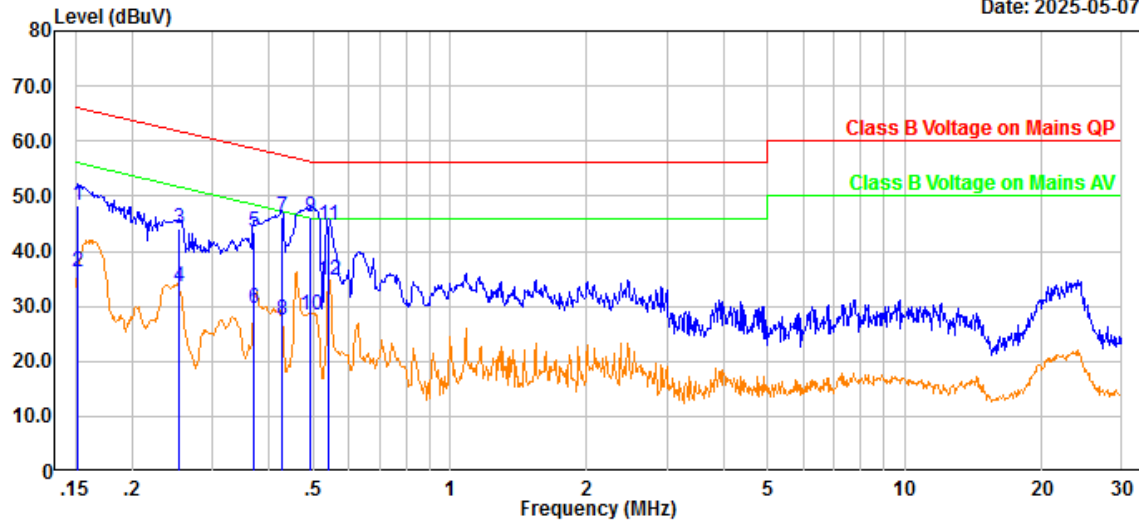


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Measurement
1	0.152	37.50	10.75	48.25	65.89	17.64	QP
2	0.152	25.53	10.75	36.28	55.89	19.61	Average
3	0.253	33.28	10.83	44.11	61.67	17.56	QP
4	0.253	22.80	10.83	33.63	51.67	18.04	Average
5	0.371	32.79	10.83	43.62	58.48	14.86	QP
6	0.371	18.66	10.83	29.49	48.48	18.99	Average
7	0.428	35.24	10.84	46.08	57.30	11.22	QP
8	0.428	16.77	10.84	27.61	47.30	19.69	Average
9	0.491	35.26	10.84	46.10	56.15	10.05	QP
10	0.491	17.63	10.84	28.47	46.15	17.68	Average
11	0.541	33.72	10.83	44.55	56.00	11.45	QP
12	0.541	23.79	10.83	34.62	46.00	11.38	Average

Project No.: 2502S25825E-EM
 Port: neutral
 Test Mode: M4
 Note: IF B/W 9KHz PK/AV

Serial No.: 30XN-1
 Tester: Yukin Qiu

Date: 2025-05-07

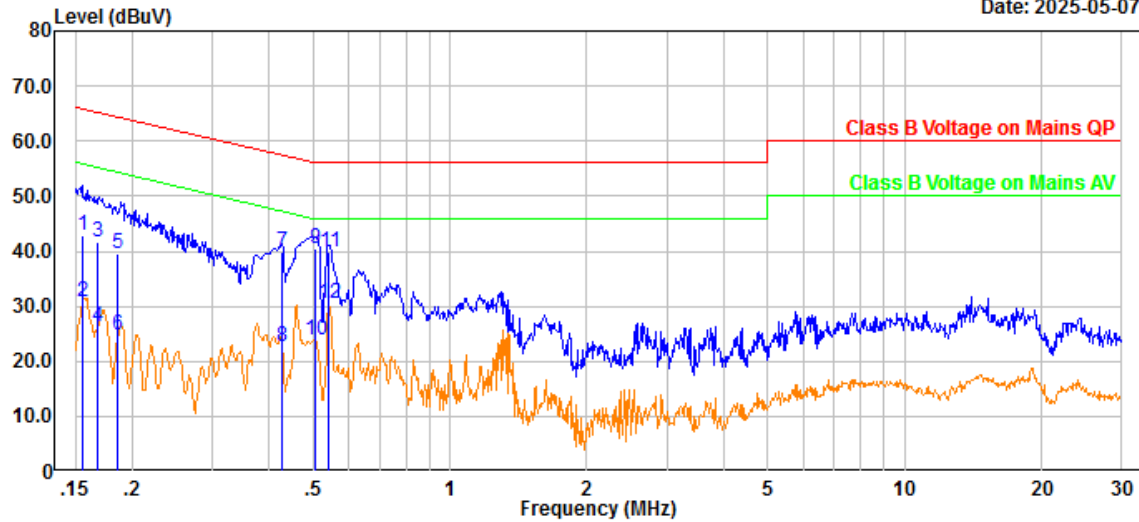

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Measurement
1	0.156	31.98	10.85	42.83	65.68	22.85	QP
2	0.156	19.93	10.85	30.78	55.68	24.90	Average
3	0.168	30.71	10.85	41.56	65.03	23.47	QP
4	0.168	15.38	10.85	26.23	55.03	28.80	Average
5	0.186	28.71	10.85	39.56	64.20	24.64	QP
6	0.186	13.80	10.85	24.65	54.20	29.55	Average
7	0.428	29.04	10.76	39.80	57.30	17.50	QP
8	0.428	11.96	10.76	22.72	47.30	24.58	Average
9	0.504	29.66	10.74	40.40	56.00	15.60	QP
10	0.504	12.97	10.74	23.71	46.00	22.29	Average
11	0.542	29.17	10.73	39.90	56.00	16.10	QP
12	0.542	19.90	10.73	30.63	46.00	15.37	Average

4.2 Radiation Emissions

4.2.1 Applicable Standard


FCC§15.109

(a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	100
88-216	150
216-960	200
Above 960	500

4.2.2 Test System Setup

Below 1GHz:

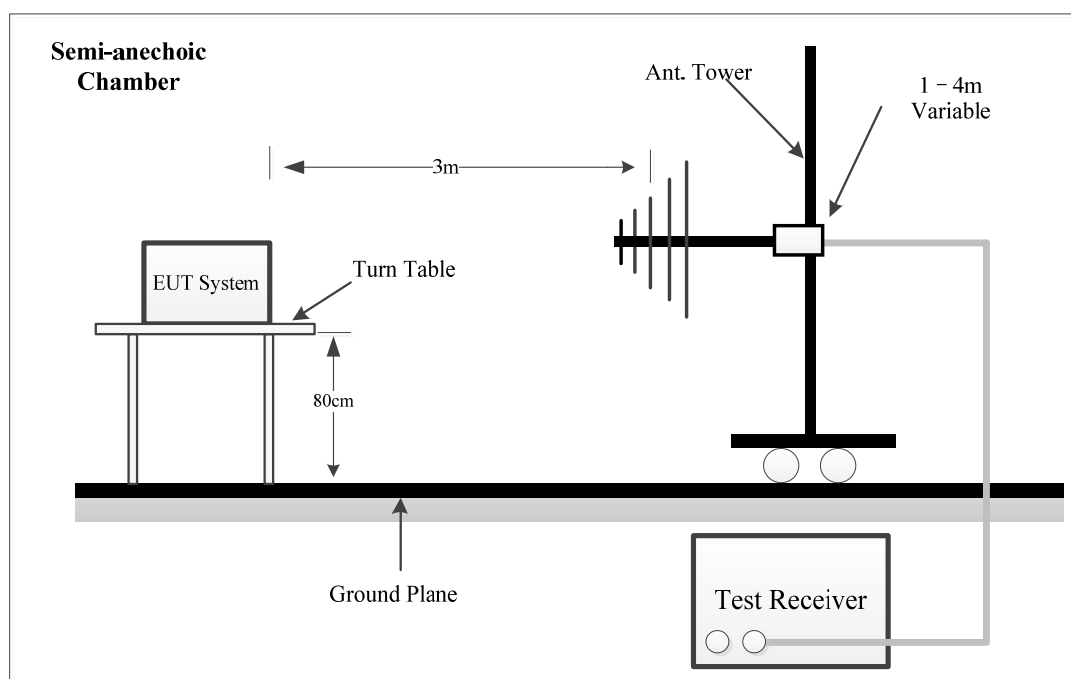

The radiated emission tests were performed at the 3 meters distance, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15B Class B limits.

4.2.3 EMI Test Receiver Setup

The system was investigated from 30 MHz to 1 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30MHz – 1000 MHz	100 kHz	300 kHz	/	Peak
	/	/	120kHz	QP

4.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz.

If the maximized peak measured value complies with under the QP limit more than 6dB, then it is unnecessary to perform an QP measurement.

4.2.5 Corrected Result & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.2.6 Test Data and Result

Serial Number:	30XN-1	Test Date:	2025/5/15
Test Site:	Chamber10m	Test Mode:	M1~M4
Tester:	Willem Qiu	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	25.9	Relative Humidity: (%)	51	ATM Pressure: (kPa)	101.1

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Hybrid Antenna	JB3	A060611-1	2023/9/6	2026/9/5
Narda	Coaxial Attenuator	779-6dB	04269	2023/9/6	2026/9/5
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-04	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2024/7/1	2025/6/30
Sonoma	Amplifier	310N	185914	2024/8/26	2025/8/25
R&S	EMI Test Receiver	ESCI	100224	2024/8/26	2025/8/25
Audix	Test Software	E3	191218 V9	N/A	N/A


** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

1) 30MHz-1GHz:

Project No.: 2502S25825E-EM
Polarization: Horizontal
Test Mode: M1
Note:
RBW:100kHz VBW:300kHz

Serial No.: 30XN-1
Tester: Willem Qiu

Date: 2025-05-15

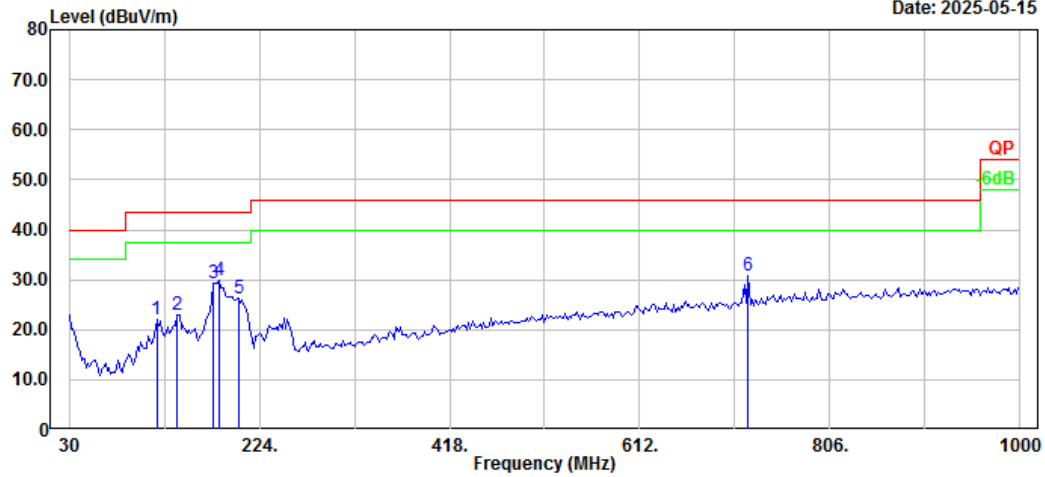

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	119.24	32.12	-10.05	22.07	43.50	21.43	Peak
2	140.58	33.50	-10.49	23.01	43.50	20.49	Peak
3	177.44	41.54	-12.21	29.33	43.50	14.17	Peak
4	183.26	42.10	-12.29	29.81	43.50	13.69	Peak
5	202.66	38.02	-11.80	26.22	43.50	17.28	Peak
6	722.58	31.62	-0.85	30.77	46.00	15.23	Peak

Project No.: 2502S25825E-EM

Serial No.: 30XN-1


Polarization: Vertical

Tester: Willem Qiu

Test Mode: M1

Note:


RBW:100kHz VBW:300kHz

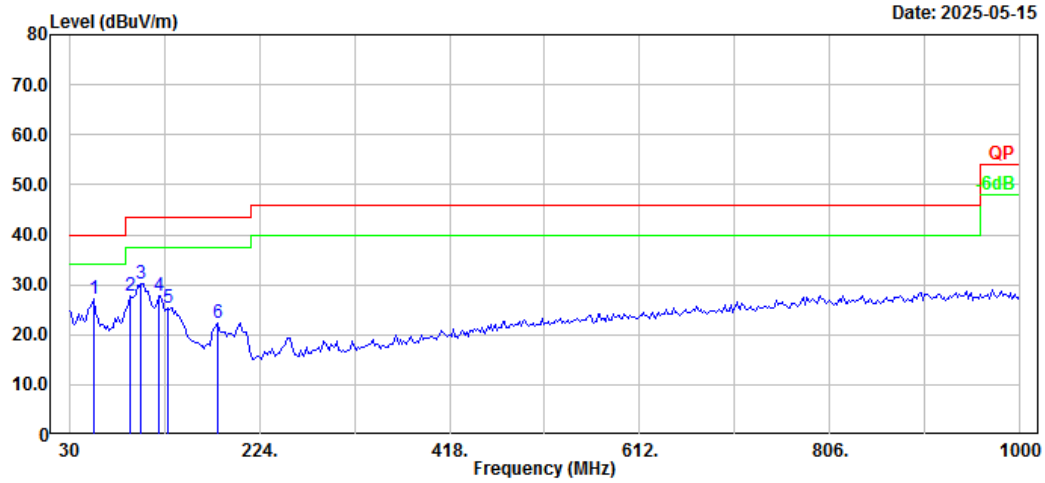

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	55.22	43.83	-16.55	27.28	40.00	12.72	Peak
2	92.08	43.91	-16.08	27.83	43.50	15.67	Peak
3	103.72	43.60	-13.27	30.33	43.50	13.17	Peak
4	121.18	37.84	-9.94	27.90	43.50	15.60	Peak
5	130.88	35.38	-9.91	25.47	43.50	18.03	Peak
6	181.32	34.73	-12.33	22.40	43.50	21.10	Peak

Project No.: 2502S25825E-EM
Polarization: Horizontal
Test Mode: M2
Note:
RBW:100kHz VBW:300kHz

Serial No.: 30XN-1
Tester: Willem Qiu

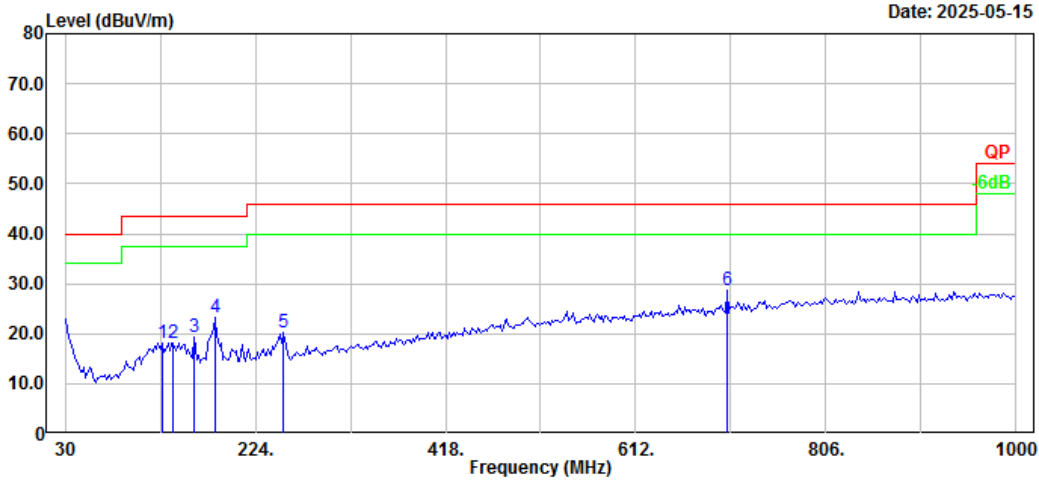


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	128.94	27.87	-9.86	18.01	43.50	25.49	Peak
2	140.58	28.74	-10.49	18.25	43.50	25.25	Peak
3	161.92	30.50	-11.27	19.23	43.50	24.27	Peak
4	183.26	35.48	-12.29	23.19	43.50	20.31	Peak
5	253.10	31.45	-11.34	20.11	46.00	25.89	Peak
6	705.12	30.00	-1.19	28.81	46.00	17.19	Peak

Project No.: 2502S25825E-EM
Polarization: Vertical
Test Mode: M2
Note:

Serial No.: 30XN-1
Tester: Willem Qiu

RBW:100kHz VBW:300kHz

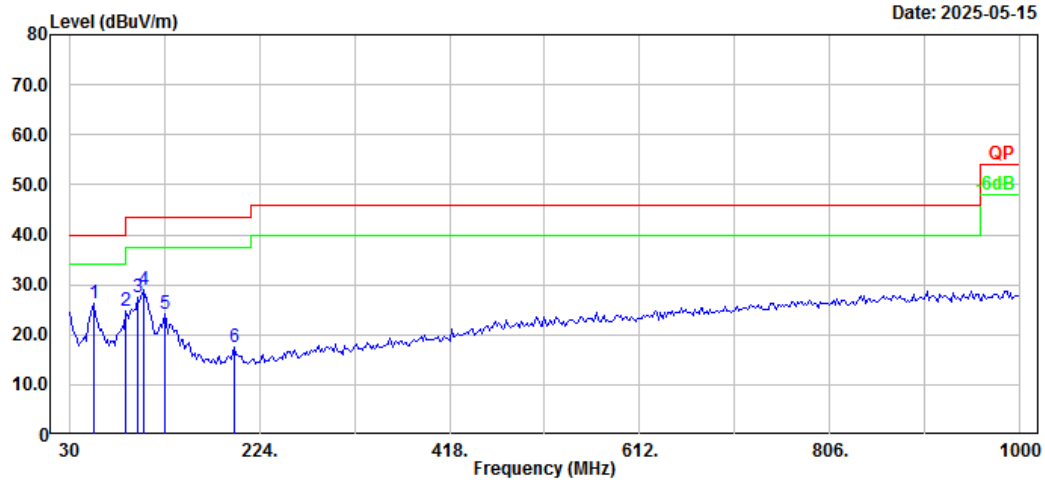


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	55.22	42.96	-16.55	26.41	40.00	13.59	Peak
2	88.20	41.40	-16.58	24.82	43.50	18.68	Peak
3	99.84	42.00	-14.43	27.57	43.50	15.93	Peak
4	105.66	41.59	-12.68	28.91	43.50	14.59	Peak
5	127.00	33.89	-9.89	24.00	43.50	19.50	Peak
6	198.78	29.07	-11.60	17.47	43.50	26.03	Peak

Project No.: 2502S25825E-EM
Polarization: Horizontal
Test Mode: M3
Note: Maximum light
RBW:100kHz VBW:300kHz

Serial No.: 30XN-1
Tester: Willem Qiu


Date: 2025-05-15

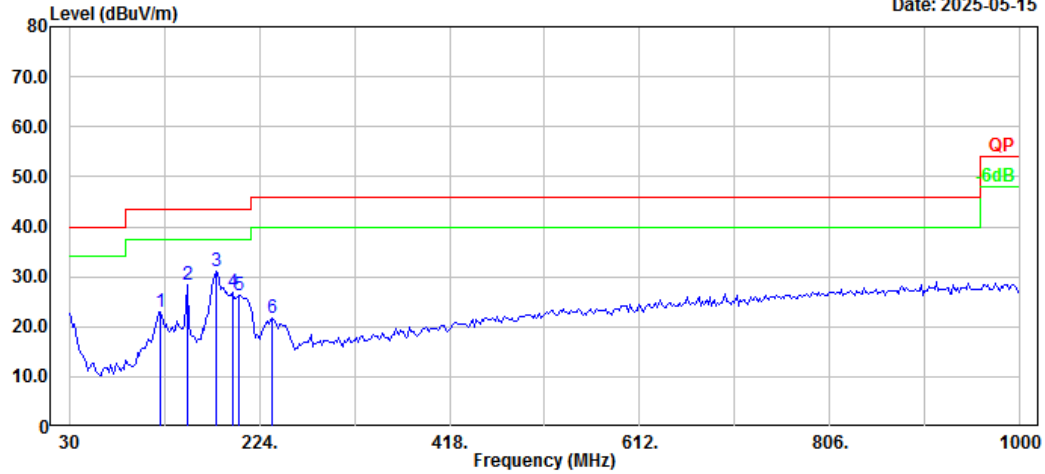

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	123.12	32.82	-9.92	22.90	43.50	20.60	Peak
2	150.28	39.41	-11.06	28.35	43.50	15.15	Peak
3	179.38	43.35	-12.32	31.03	43.50	12.47	Peak
4	196.84	38.54	-11.72	26.82	43.50	16.68	Peak
5	202.66	38.14	-11.80	26.34	43.50	17.16	Peak
6	237.58	33.63	-11.86	21.77	46.00	24.23	Peak


Project No.: 2502S25825E-EM
Polarization: Vertical
Test Mode: M3
Note: Maximum light
RBW:100kHz VBW:300kHz

Serial No.: 30XN-1
Tester: Willem Qiu

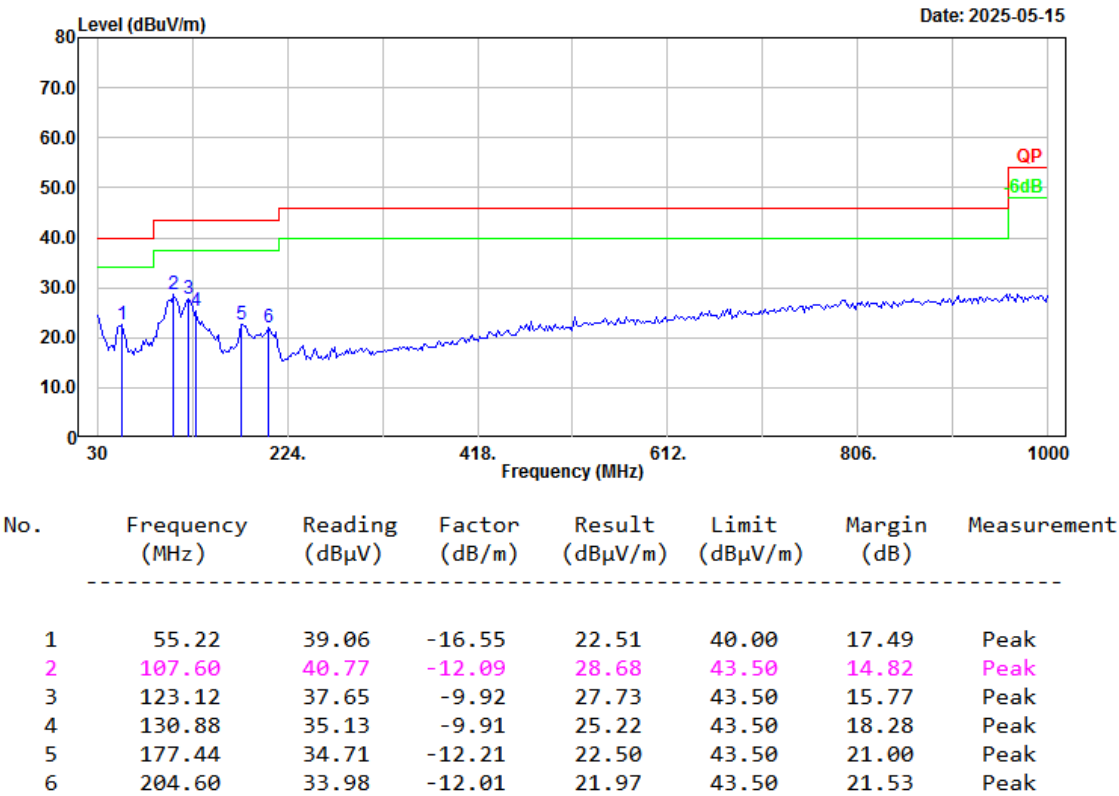

Project No.: 2502S25825E-EM
Polarization: Horizontal
Test Mode: M4
Note: Maximum light
RBW:100kHz VBW:300kHz

Serial No.: 30XN-1
Tester: Willem Qiu

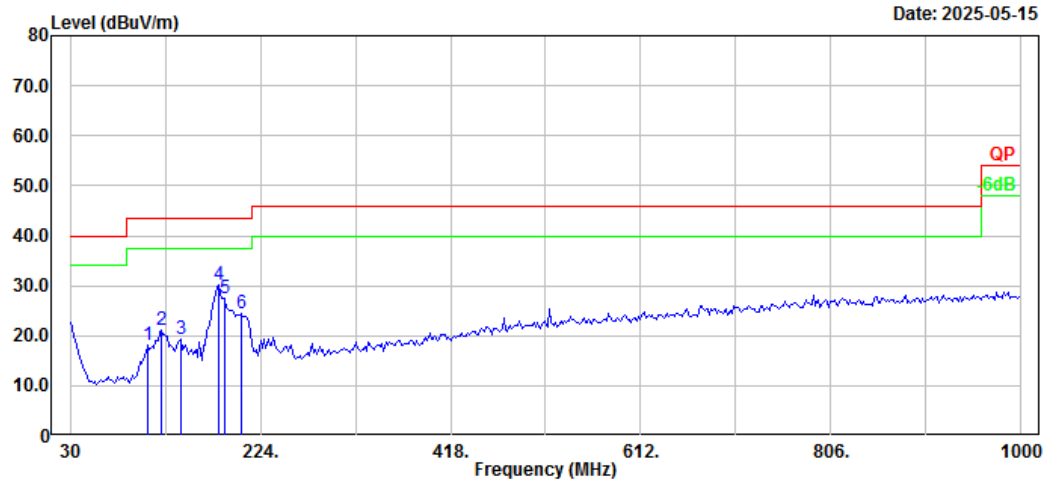


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	109.54	29.55	-11.49	18.06	43.50	25.44	Peak
2	123.12	31.02	-9.92	21.10	43.50	22.40	Peak
3	142.52	29.89	-10.61	19.28	43.50	24.22	Peak
4	181.32	42.46	-12.33	30.13	43.50	13.37	Peak
5	187.14	39.72	-12.19	27.53	43.50	15.97	Peak
6	204.60	36.40	-12.01	24.39	43.50	19.11	Peak

Project No.: 2502S25825E-EM
Polarization: Vertical
Test Mode: M4
Note: Maximum light
RBW:100kHz VBW:300kHz

Serial No.: 30XN-1
Tester: Willem Qiu

Date: 2025-05-15

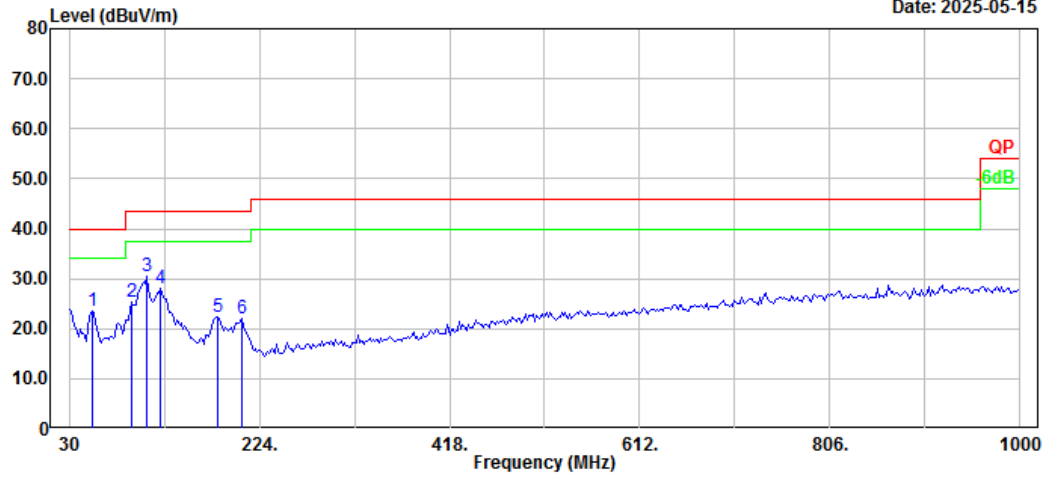

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	53.28	40.01	-16.52	23.49	40.00	16.51	Peak
2	94.02	40.97	-15.64	25.33	43.50	18.17	Peak
3	109.54	41.89	-11.49	30.40	43.50	13.10	Peak
4	123.12	37.99	-9.92	28.07	43.50	15.43	Peak
5	181.32	34.76	-12.33	22.43	43.50	21.07	Peak
6	206.54	34.27	-12.21	22.06	43.50	21.44	Peak

EXHIBIT A - EUT PHOTOGRAPHS

Please refer to the attachment 2502S25825E-EXP EUT external photographs and 2502S25825E-INP EUT internal photographs.

EXHIBIT B - TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2502S25825E-00-TSP TEST SETUP PHOTOGRAPHS.

*******END OF REPORT*******