

# PARAMETER

| Model                      | Power | Power of single LED | CCT   | Luminous flux of single LED | Luminous flux of whole lamp | LED type | Working Temperature | Lamp holder (PCS) | CRI | Adapter input   | Adapter output |
|----------------------------|-------|---------------------|-------|-----------------------------|-----------------------------|----------|---------------------|-------------------|-----|-----------------|----------------|
| SC-DCFL-12V-8W-IP65-01E-4  | 8W    | 2W                  | 2700K | 100lm                       | 400lm                       | 2835/LED | -20°C ~ 45°C        | 4packs            | >80 | AC100-120V/0.3A | DC12V/1.25A    |
| SC-DCFL-12V-8W-IP65-01W-4  |       |                     | 3000K | 1021lm                      | 410lm                       |          |                     |                   |     |                 |                |
| SC-DCFL-12V-8W-IP65-01B-4  |       |                     | 3500K | 1041lm                      | 420lm                       |          |                     |                   |     |                 |                |
| SC-DCFL-12V-8W-IP65-01N-4  |       |                     | 4000K | 110lm                       | 441lm                       |          |                     |                   |     |                 |                |
| SC-DCFL-12V-8W-IP65-01C-4  |       |                     | 5000K | 113lm                       | 452lm                       |          |                     |                   |     |                 |                |
| SC-DCFL-12V-12W-IP65-01E-6 | 12W   | 2W                  | 2700K | 100lm                       | 600lm                       | 2835/LED | -20°C ~ 45°C        | 6packs            | >80 | AC100-120V/0.3A | DC12V/1.25A    |
| SC-DCFL-12V-12W-IP65-01W-6 |       |                     | 3000K | 102lm                       | 615lm                       |          |                     |                   |     |                 |                |
| SC-DCFL-12V-12W-IP65-01B-6 |       |                     | 3500K | 104lm                       | 630lm                       |          |                     |                   |     |                 |                |
| SC-DCFL-12V-12W-IP65-01N-6 |       |                     | 4000K | 110lm                       | 661lm                       |          |                     |                   |     |                 |                |
| SC-DCFL-12V-12W-IP65-01C-6 |       |                     | 5000K | 113lm                       | 678lm                       |          |                     |                   |     |                 |                |

# PACKAGING

| Model                 | Specification       | Size (inch)     | Net weight (kg) | Inner packing size (inch) | Carton size (inch)  | Packing quantity of inner box (pcs / box) | Packing quantity of carton (pcs / carton) | Inner package weight (kg) | Carton weight (kg) | Gross weight (kg) |
|-----------------------|---------------------|-----------------|-----------------|---------------------------|---------------------|-------------------------------------------|-------------------------------------------|---------------------------|--------------------|-------------------|
| SC-DCFL-12V-8W-IP65-4 | DC Landscape Lights | 2.24*2.24*10.24 | 0.9             | L11.81*W6.3*H3.93         | L13.58*W12.8*H20.87 | 1PCS                                      | 10PCS                                     | 0.1                       | 1                  | 11                |
| SC-DCFL-12-12W-IP65-6 | DC Landscape Lights | 2.24*2.24*10.24 | 1.3             | L11.81*W6.3*H5.71         | L13.58*W12.8*H24.02 | 1PCS                                      | 8PCS                                      | 0.15                      | 1                  | 12.6              |


# NOTICE

- 1 The product is only suitable for outdoor use, avoid long time work in humid environment;
- 2 Do not soak the product in water or other liquids;
- 3 When installing, the screws need to be locked firmly and not loose;
- 4 Do not install the product in a high temperature environment;
- 5 The adapter needs to be connected in place, and there must be no looseness or poor contact;
- 6 Do not disassemble and install the lamp.

# DC STAKE LIGHTS




## DIMENSIONS (unit: inch)

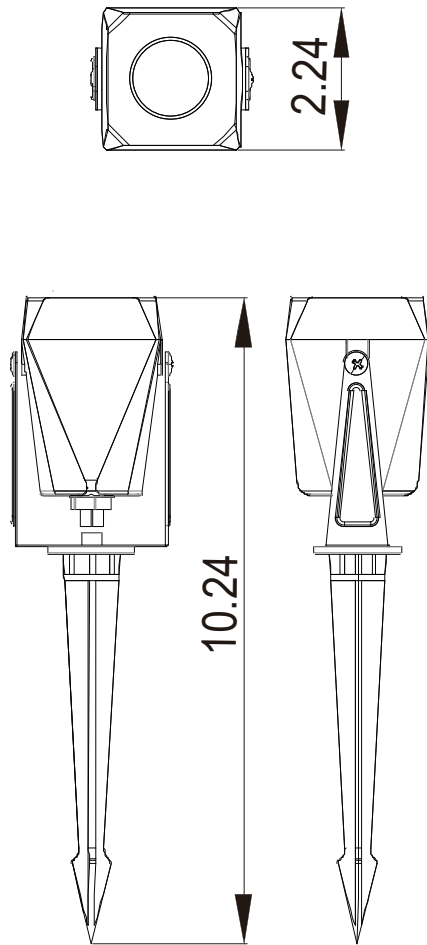


## INSTALLATION METHOD

### 4 packs one set

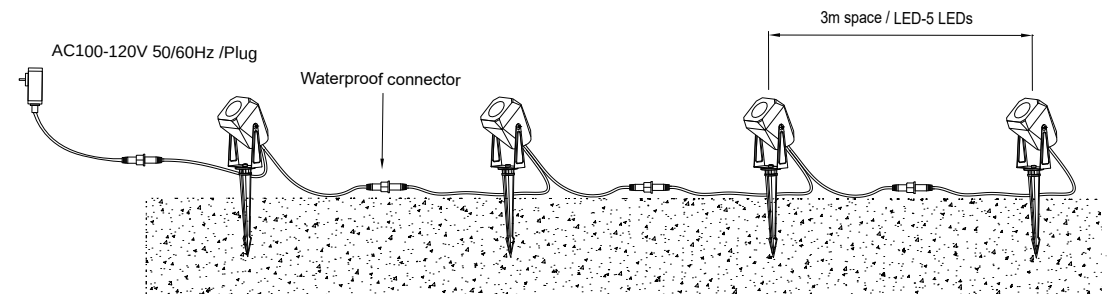

### 6 packs one set

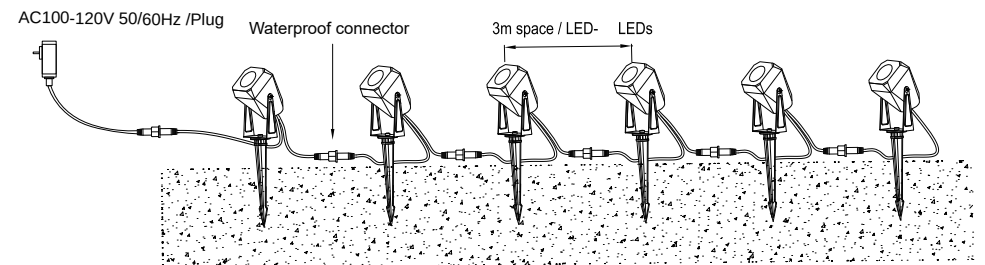

#### FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- ? Reorient or relocate the receiving antenna.
- ? Increase the separation between the equipment and receiver.
- ? Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- ? Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.