

TEST REPORT

Reference No...... : WTX26X06179821W003
FCC ID..... : 2AUI4-UFACE87
Applicant..... : Universal Ubiquitous AI Co., Ltd.
Address..... : Floor 24-26 Building 3, Fashion Vantone City, Cangqian Street, Yuhang District, Hangzhou, Zhejiang, China
Manufacturer..... : The same as Applicant
Address..... : The same as Applicant
Product Name..... : Face Recognition Terminal
Model No...... : Uface 8 SE
Standards..... : FCC Part 15.225
Date of Receipt sample..... : 2026-06-22
Date of Test..... : 2026-07-01 to 2026-07-28
Date of Issue..... : 2026-07-31
Test Report Form No...... : WTX_Part 15_225W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.


Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

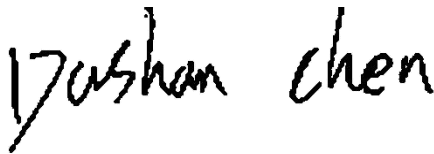

Dashan Chen/Project Engineer

Approved by:



Jason Su/Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	12
3. ANTENNA REQUIREMENT	13
3.1 STANDARD APPLICABLE	13
3.2 TEST RESULT	13
4. RADIATED EMISSIONS	14
4.1 STANDARD APPLICABLE	14
4.2 TEST PROCEDURE	14
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	16
4.4 SUMMARY OF TEST RESULTS/PLOTS	17
5. OUT OF BAND EMISSIONS	20
5.1 STANDARD APPLICABLE	20
5.2 TEST PROCEDURE	20
5.3 SUMMARY OF TEST RESULTS/PLOTS	20
6. FREQUENCY STABILITY	22
6.1 STANDARD APPLICABLE	22
6.2 TEST PROCEDURE	22
6.3 SUMMARY OF TEST RESULTS/PLOTS	22
7. EMISSION BANDWIDTH	23
7.1 APPLICABLE STANDARD	23
7.2 TEST PROCEDURE	23
7.3 SUMMARY OF TEST RESULTS/PLOTS	23
8. CONDUCTED EMISSIONS	25
8.1 TEST PROCEDURE	25
8.2 BASIC TEST SETUP BLOCK DIAGRAM	25
8.3 TEST RECEIVER SETUP	25
8.4 SUMMARY OF TEST RESULTS/PLOTS	25
APPENDIX PHOTOGRAPHS	28

Report version

Version No.	Date of issue	Description
Rev.00	2026-07-31	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Face Recognition Terminal
Trade Name	/
Model No.:	Uface 8 SE
Adding Model(s):	Uface 8T SE , Uface 7T SE, Uface 7 SE
Rated Voltage:	DC12V
Power Adapter:	/
<i>Note: The sample information is provided by the customer. The reported models Uface 8T SE , Uface 7T SE, Uface 7 SE and the main test models Uface 8 SE differ only in their naming, the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	NFC
Frequency Range:	13.56MHz
Max. Field Strength:	44.72dBuV/m (at 3m)
Antenna Type:	PCB Antenna
Antenna Gain	0dBi
<i>Note: 1: The Antenna Gain is provided by the customer and can affect the validity of results. 2: The data provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.225: Operation within the band 13.110-14.010MHz.

ANSI C63.10-2020: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.5 EUT Setup and Test Mode

The EUT was operated in the continuous transmitting mode that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Transmitting	13.56MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC Cable	0.25	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
Network Cable	1.0	Unshielded	Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Adapter	GangQi	GQ48-240200	/
Router	Xiaomi	R4A	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Frequency Deviation	2.3%	5%
Conducted Emission 1#	Conducted	@9kHz to 150kHz: $\pm 3.74\text{dB}$
		@150kHz to 30MHz: $\pm 3.34\text{dB}$
Conducted Emission 2#	Conducted	@9kHz to 150kHz: $\pm 3.74\text{dB}$
		@150kHz to 30MHz: $\pm 3.34\text{dB}$
Transmitter Spurious Emissions chamber A	Radiated	@9kHz to 30MHz: $\pm 3.0\text{dB}$
		@30MHz to 1GHz: $\pm 5.70\text{dB}$
		@1GHz to 6GHz: $\pm 5.88\text{dB}$
		@6GHz to 18GHz: $\pm 5.96\text{dB}$
		@18GHz to 40GHz: $\pm 6.12\text{dB}$
Transmitter Spurious Emissions chamber B	Radiated	@30MHz to 1GHz: $\pm 5.36\text{dB}$
Transmitter Spurious Emissions chamber C	Radiated	@9kHz to 30MHz: $\pm 3.0\text{dB}$
		@30MHz to 1GHz: $\pm 5.28\text{dB}$
		@1GHz to 6GHz: $\pm 5.56\text{dB}$
		@6GHz to 18GHz: $\pm 5.72\text{dB}$
		@18GHz to 40GHz: $\pm 6.12\text{dB}$

1.7 Test Equipment List and Details

Internal No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1005A 1005	MXA Signal Analyzer	Agilent	N9020A	US471401 02	2026-03-25	2027-03-24
WTXE1084A 1001	MXA Signal Analyzer	KEYSIGHT	N9020A	MY543205 48	2026-02-06	2027-02-05
WTXE1005A 1006	Spectrum Analyzer	Rohde & Schwarz	FSP40	1164.4391 K38Ser. 100368	2026-04-29	2027-04-28
WTXW1105A 1136	RF ATTENUATOR	FEIYANG	N-JK	/	2026-02-06	2027-02-05
WTXE1003A 1-005	Coaxial Cable	/	0M4RFC	/	2026-02-23	2027-02-22
☐ Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2026-02-05	2027-02-04
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2026-02-05	2027-02-04
WTXE1007A 1002	Amplifier	HP	8447F	2805A034 75	2026-02-05	2027-02-04
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2026-02-05	2027-02-04
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2026-03-11	2029-03-10
WTXE1104A 1032-1	Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
WTXE1104A 1032-2	Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
WTXE1104A 1032-3	Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
☐ Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2026-02-05	2027-02-04
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2026-02-05	2027-02-04
WTXE1065A 1001	Amplifier	C&D	PAP-1.0G18	14918	2026-02-05	2027-02-04
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2026-02-05	2027-02-04
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2026-02-10	2027-02-09

WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2026-02-05	2027-02-04
WTXE1104A 1033-1	Coaxial Cable	/	C16-07-07	/	2026-02-23	2027-02-22
WTXE1104A 1033-2	Coaxial Cable	/	C16-07-07	/	2026-02-23	2027-02-22
WTXE1104A 1033-3	Coaxial Cable	/	C16-07-07	/	2026-02-23	2027-02-22
☐ Chamber B:Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A104 57	2026-02-05	2027-02-04
WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2026-02-05	2027-02-04
WTXE1104A 1031-1	Coaxial Cable	/	1.5MRFC-LWB3	/	2026-02-23	2027-02-22
WTXE1104A 1031-2	Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22
WTXE1104A 1031-3	Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22
☒ Chamber C:Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2026-02-05	2027-02-04
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2024-04-18	2027-04-17
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2026-02-05	2027-02-04
WTXE1007A 1003	Amplifier	HP	8447F	2944A038 69	2026-02-05	2027-02-04
WTXE1104A 1034-1	Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
WTXE1104A 1034-2	Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
WTXE1104A 1034-3	Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
☒ Chamber C: Above 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2026-02-05	2027-02-04
WTXE1103A	Horn Antenna	POAM	RTF-118A	1820	2025-06-13	2027-06-12

1005						
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2026-02-05	2027-02-04
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2026-02-10	2027-02-09
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2026-02-05	2027-02-04
WTXE1104A 1035-1	Coaxial Cable	/	RC-18G-N-M	/	2026-02-23	2027-02-22
WTXE1104A 1035-2	Coaxial Cable	/	RC-18G-N-M	/	2026-02-23	2027-02-22
WTXE1104A 1035-3	Coaxial Cable	/	RC-18G-N-M	/	2026-02-23	2027-02-22
☐ Conducted Room 1#						
WTXE1104A 1029	EMI Test Receiver	Rohde & Schwarz	ESCI	100525	2025-11-25	2026-11-24
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2026-02-05	2027-02-04
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-279	2026-02-05	2027-02-04
WTXE1104A 1036	Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22
WTXE1104A 1038	Coaxial Cable	/	6MRFC-DP	/	2026-02-23	2027-02-22
☒ Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2026-02-05	2027-02-04
WTXE1003A 1003	LISN	Rohde & Schwarz	ENV 216	100097	2026-02-05	2027-02-04
WTXE1104A 1037	Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22

Software List			
Description	Manufacturer	Model	Version
EMI Test Software/EZ-EMC (Radiated Emission A)	Farad	RA-03A1	1.1.4.2
EMI Test Software/EZ-EMC (Radiated Emission B)	Farad	RA-03A1	1.1.4.2
EMI Test Software/EZ-EMC (Radiated Emission C)	Farad	RA-03A1-2	1.1.4.2
EMI Test Software/EZ-EMC (Conducted Emission Room 1#)	Farad	3A1*CE-RE	1.1.4.3
EMI Test Software/EZ-EMC (Conducted Emission Room 2#)	Farad	3A1*CE-RE	1.1.4.3

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.209	Radiated Emission	Compliant
§15.225(a)	Field Strength	Compliant
§15.225(b)(c)	Out of Band Emission	Compliant
§15.225(e)	Frequency Stability	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.215(c)	Emission Bandwidth	Compliant

N/A: not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a FPC antenna, fulfill the requirement of this section.

4. Radiated Emissions

4.1 Standard Applicable

According to §15.225(a), the field strength of any emissions within the band 13.553–13.567MHz shall not exceed 15,848 microvolts/meter at 30 meters.


According to §15.225(d), the field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in §15.209.

Note: Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.205 15.225(d) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm. The test setup for emission measurement below 30MHz.

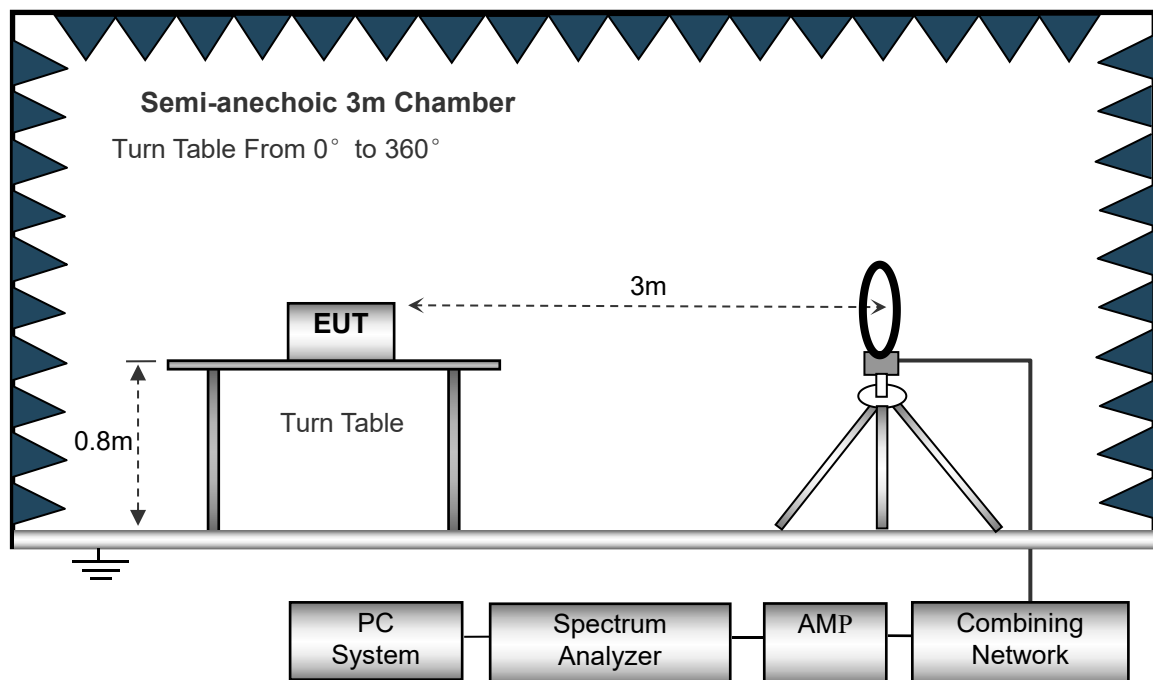

The test setup for emission measurement from 30MHz to 1GHz.

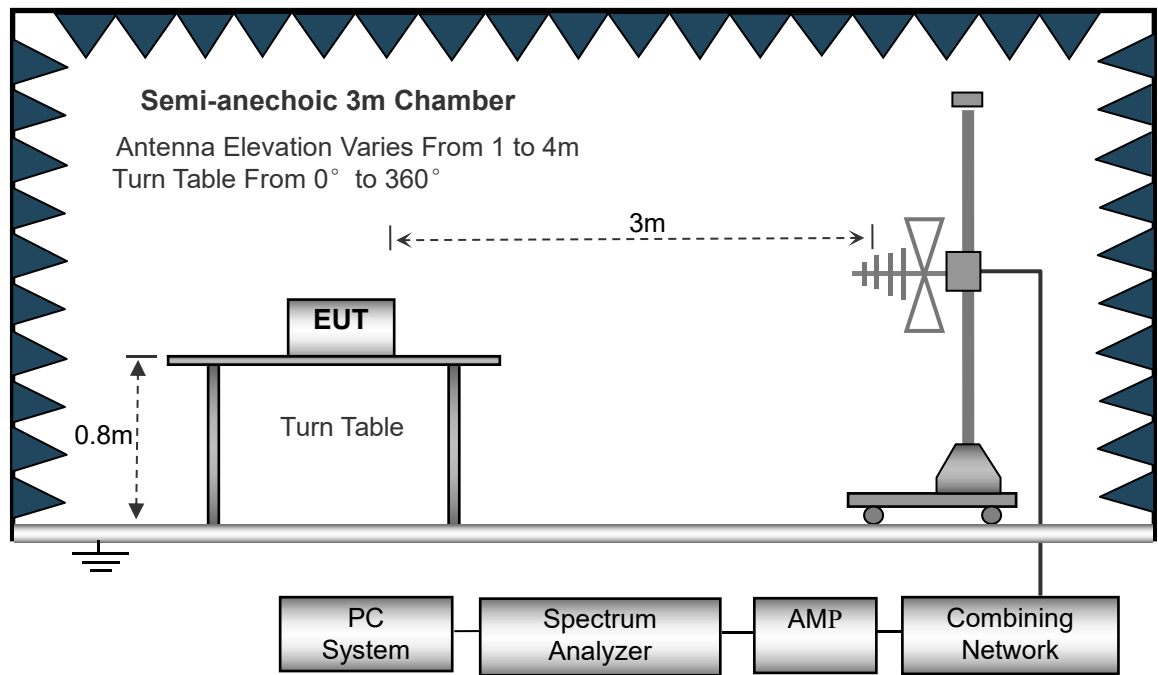

The test setup for emission measurement above 1GHz.

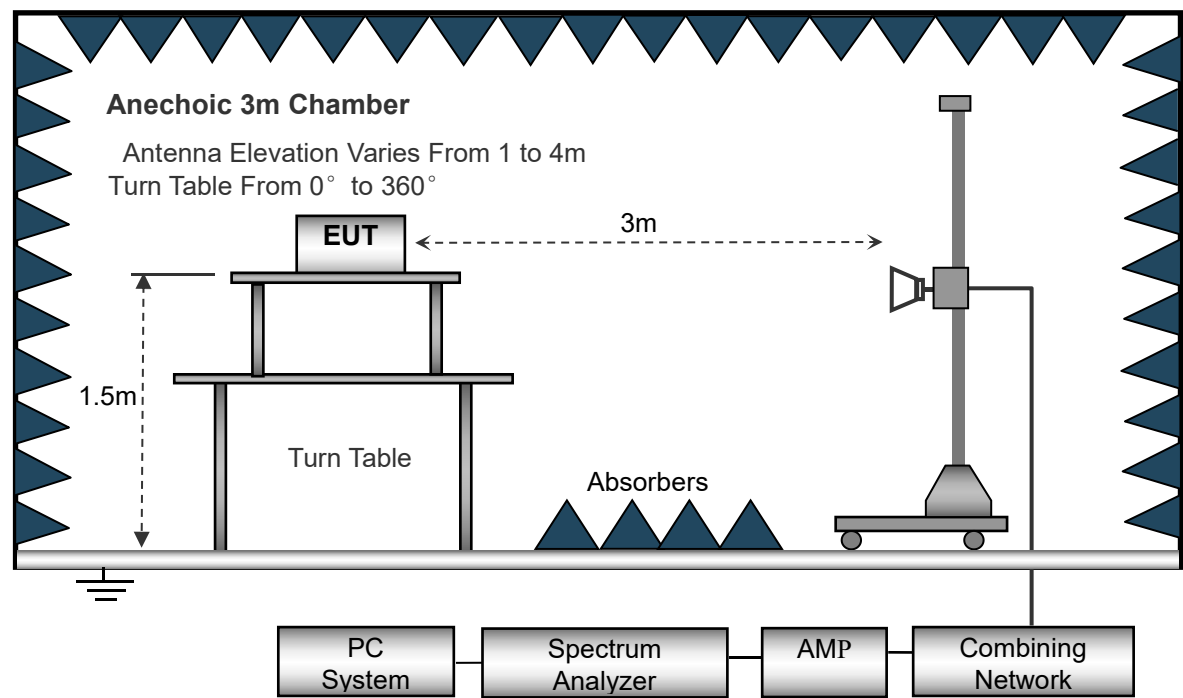

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10kHz,	RBW=120kHz,	RBW=1MHz,
VBW =30kHz	VBW=300kHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

4.4 Summary of Test Results/Plots


Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

➤ Below 30MHz

Frequency	Reading	Correction Factor	Result	Limit	Margin	Polar	Detector
MHz	dBuV/m	dB/m	dBuV/m	dBuV/m	dB	X/Y/Z	
13.56	43.29	-2.08	41.21	124.0	-82.79	X	Peak
27.12	38.67	-2.27	36.40	69.5	-33.10	X	Peak
13.56	42.85	-2.08	40.77	124.0	-83.23	Y	Peak
27.12	38.16	-2.27	35.89	69.5	-33.61	Y	Peak
13.56	42.62	-2.08	40.54	124.0	-83.46	Z	Peak
27.12	38.10	-2.27	35.83	69.5	-33.67	Z	Peak


➤ Above 30MHz

Test Mode	TM1	Polarity:	Horizontal
-----------	-----	-----------	------------

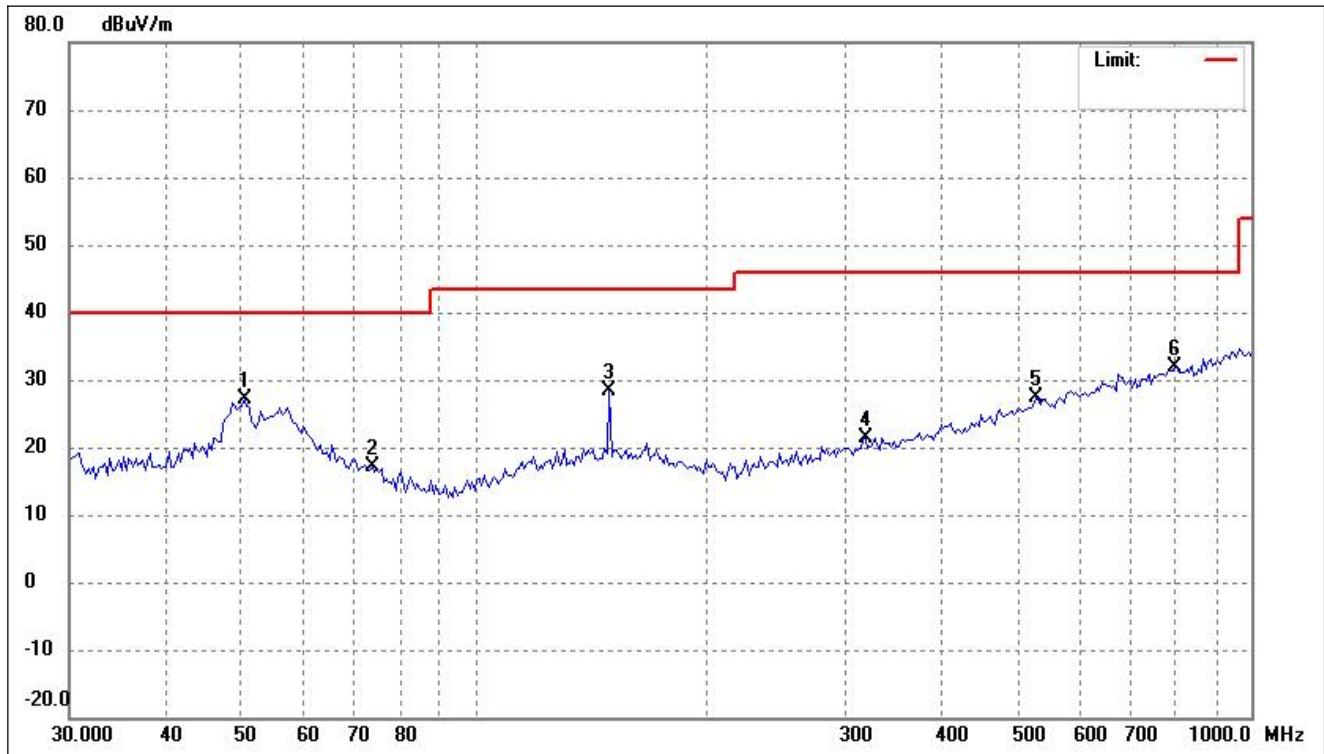

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	50.4613	35.46	-8.26	27.20	40.00	-12.80	-	-	peak
2	73.7495	28.15	-11.09	17.06	40.00	-22.94	-	-	peak
3	148.9173	37.03	-8.54	28.49	43.50	-15.01	-	-	peak
4	318.0875	29.24	-7.79	21.45	46.00	-24.55	-	-	peak
5	527.5706	30.34	-2.87	27.47	46.00	-18.53	-	-	peak
6	798.6204	30.17	1.71	31.88	46.00	-14.12	-	-	peak

Test Mode	TM1	Polarity:	Vertical
-----------	-----	-----------	----------

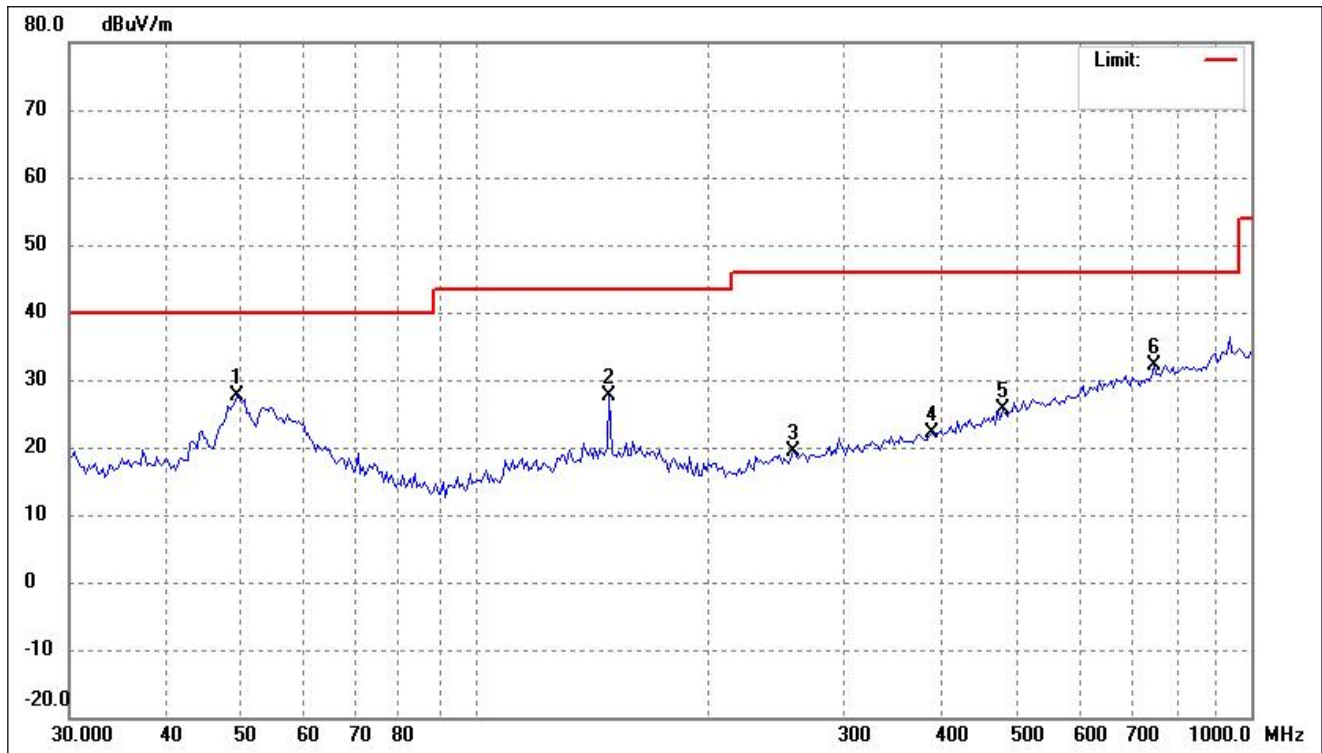

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	49.4086	35.82	-8.27	27.55	40.00	-12.45	-	-	peak
2	148.9173	36.27	-8.54	27.73	43.50	-15.77	-	-	peak
3	257.6266	29.24	-9.74	19.50	46.00	-26.50	-	-	peak
4	387.2565	28.75	-6.55	22.20	46.00	-23.80	-	-	peak
5	478.1394	29.70	-4.17	25.53	46.00	-20.47	-	-	peak
6	749.6761	31.10	1.15	32.25	46.00	-13.75	-	-	peak

Remark: '-' Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics.

5. OUT OF BAND EMISSIONS

5.1 Standard Applicable

According to FCC 15.225 (b), within the bands 13.410–13.553MHz and 13.567–13.710MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters. (c) Within the bands 13.110–13.410MHz and 13.710–14.010MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.


5.2 Test Procedure

As the radiation test, set the RBW=10kHz VBW=30kHz, observed the outside band of 13.11MHz to 14.01MHz, than mark the higher-level emission for comparing with the FCC rules.

5.3 Summary of Test Results/Plots

Note: *this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

Test Mode	TM1	Polarity:	/
-----------	-----	-----------	---

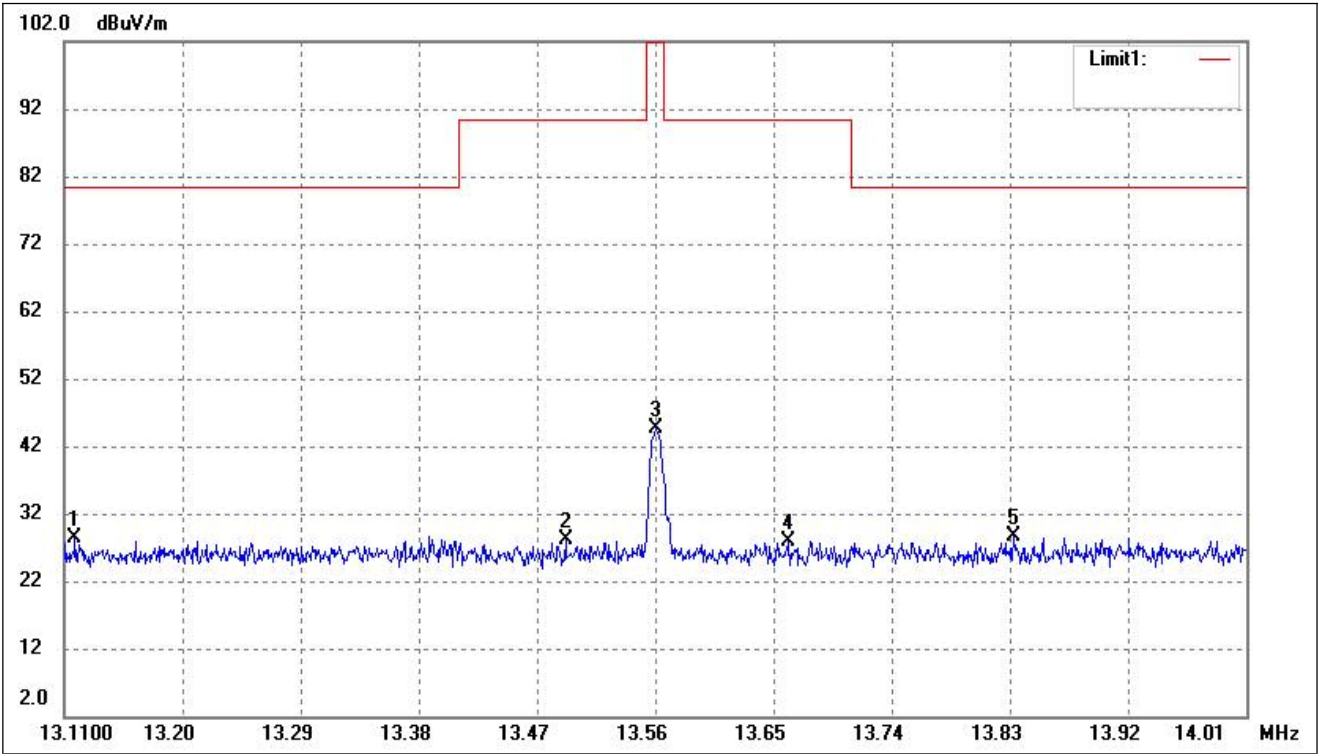

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	13.1181	36.30	-7.83	28.47	80.50	-52.03	-	-	peak
2	13.4916	35.86	-7.82	28.04	90.50	-62.46	-	-	peak
3	13.5609	52.53	-7.81	44.72	124.00	-79.28	-	-	peak
4	13.6617	35.61	-7.81	27.80	90.50	-62.70	-	-	peak
5	13.8327	36.34	-7.79	28.55	80.50	-51.95	-	-	peak

Remark: '-'Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

6. Frequency Stability

6.1 Standard Applicable

According to 15.225(e), the frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

6.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure.

6.3 Summary of Test Results/Plots

Reference Frequency: 13.56MHz, Limit: 100ppm				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation(ppm)
100%	12	-30	385	28.39
100%		-20	367	27.06
100%		-10	234	17.26
100%		0	275	20.28
100%		+10	225	16.59
100%		+20	130	9.59
100%		+30	282	20.80
100%		+40	363	26.77
100%		+50	354	26.11
Low	9.6	+20	312	23.01
High	14.4	+20	473	34.88

7. EMISSION BANDWIDTH

7.1 Applicable Standard

According to 15.215(c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

7.2 Test Procedure

According to the ANSI 63.10-2020, the emission bandwidth test method as follows.

Set span = $1 \sim 5 * \text{EBW}$, centered on a transmitting channel

RBW = $1\% \sim 5\% * \text{EBW}$, VBW = $3 * \text{RBW}$

Sweep = auto

Detector function = peak

Trace = max hold


All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down of the emission.

7.3 Summary of Test Results/Plots

Tx Frequency	20dB Emission bandwidth(kHz)
13.56MHz	0.092

Reference No.: WTX26X06179821W003

Please refer to the test plots as below:

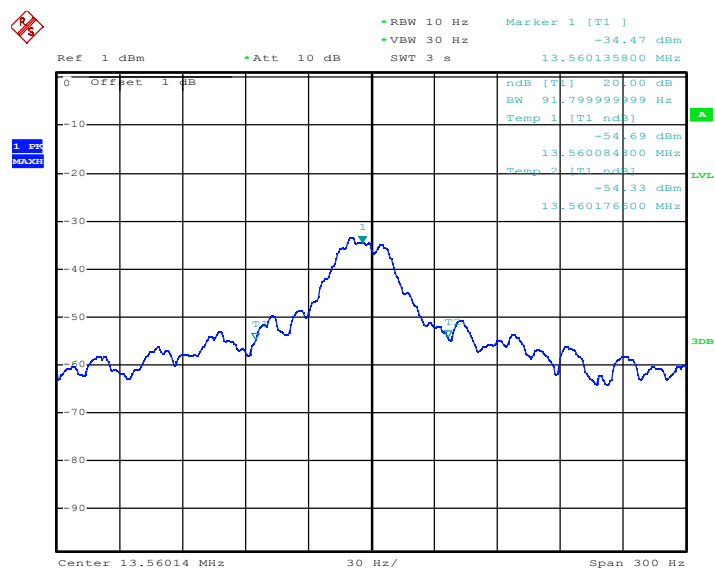

Date: 28.JUL.2026 14:12:16

Note: The RBW of the analyzer measuring Bandwidth cannot be adjusted to 1%-5% 20dB Bandwidth, the RBW of the test setting is the closest value.


8. Conducted Emissions

8.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

8.2 Basic Test Setup Block Diagram

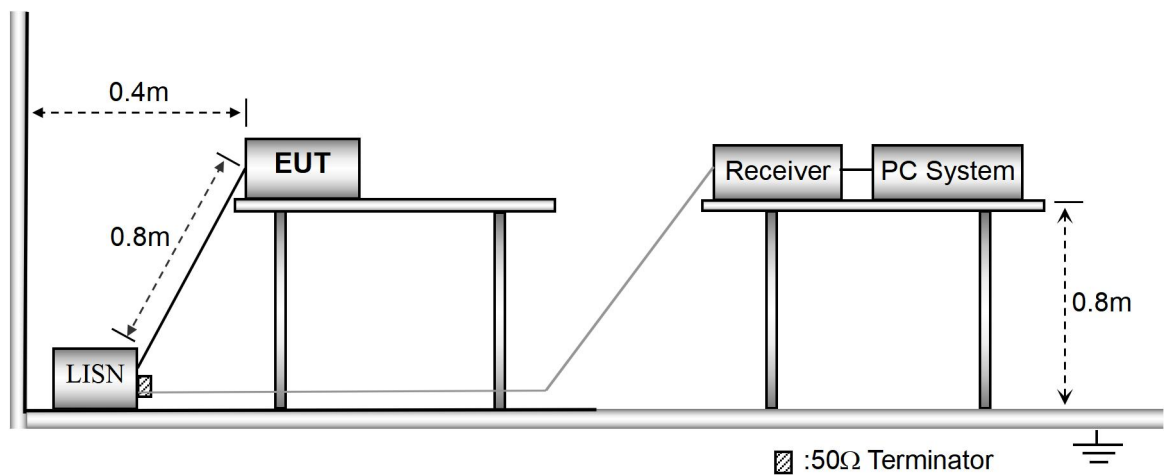


8.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency.....	150kHz
Stop Frequency.....	30MHz
Sweep Speed.....	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth.....	9kHz
Quasi-Peak Adapter Mode.....	Normal


8.4 Summary of Test Results/Plots

Test Mode	TM1(AC120V 60Hz)	Polarity:	Neutral
-----------	------------------	-----------	---------

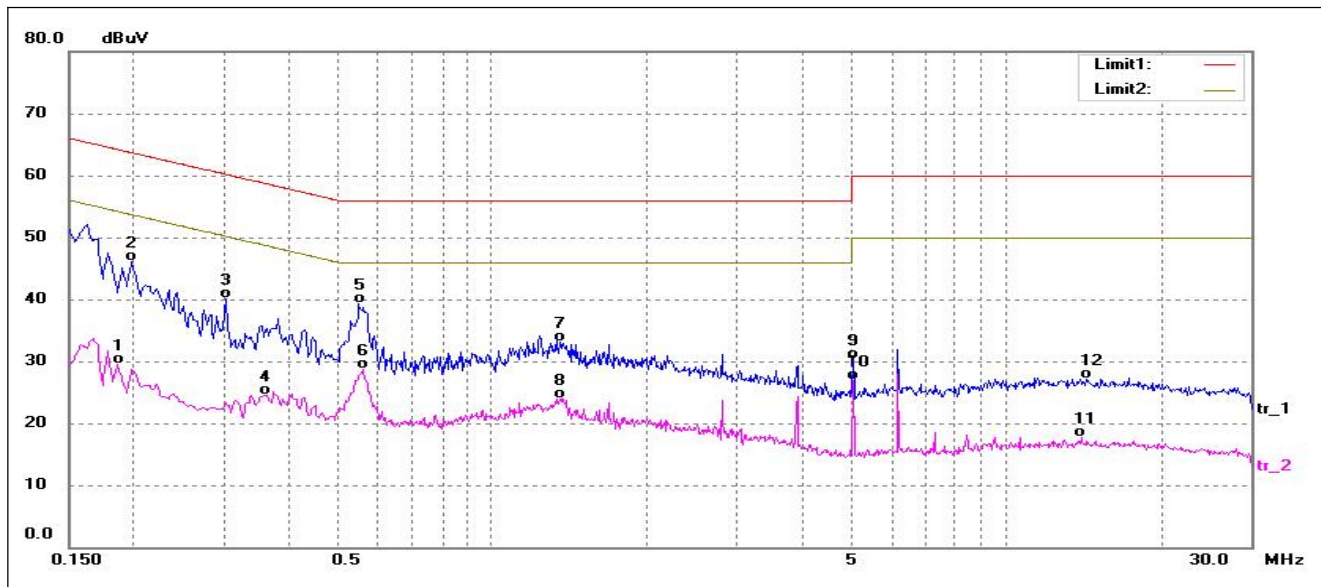

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1860	19.15	10.26	29.41	54.21	-24.80	AVG
2	0.1980	35.87	10.26	46.13	63.69	-17.56	QP
3	0.3020	29.93	10.24	40.17	60.19	-20.02	QP
4	0.3580	14.39	10.20	24.59	48.77	-24.18	AVG
5*	0.5500	29.15	10.20	39.35	56.00	-16.65	QP
6	0.5580	18.55	10.20	28.75	46.00	-17.25	AVG
7	1.3540	22.77	10.28	33.05	56.00	-22.95	QP
8	1.3619	13.67	10.28	23.95	46.00	-22.05	AVG
9	5.0460	20.31	10.03	30.34	60.00	-29.66	QP
10	5.0460	16.84	10.03	26.87	50.00	-23.13	AVG
11	14.0220	7.85	9.89	17.74	50.00	-32.26	AVG
12	14.3660	17.30	9.88	27.18	60.00	-32.82	QP

Test Mode	TM1(AC120V 60Hz)	Polarity:	Line
-----------	------------------	-----------	------

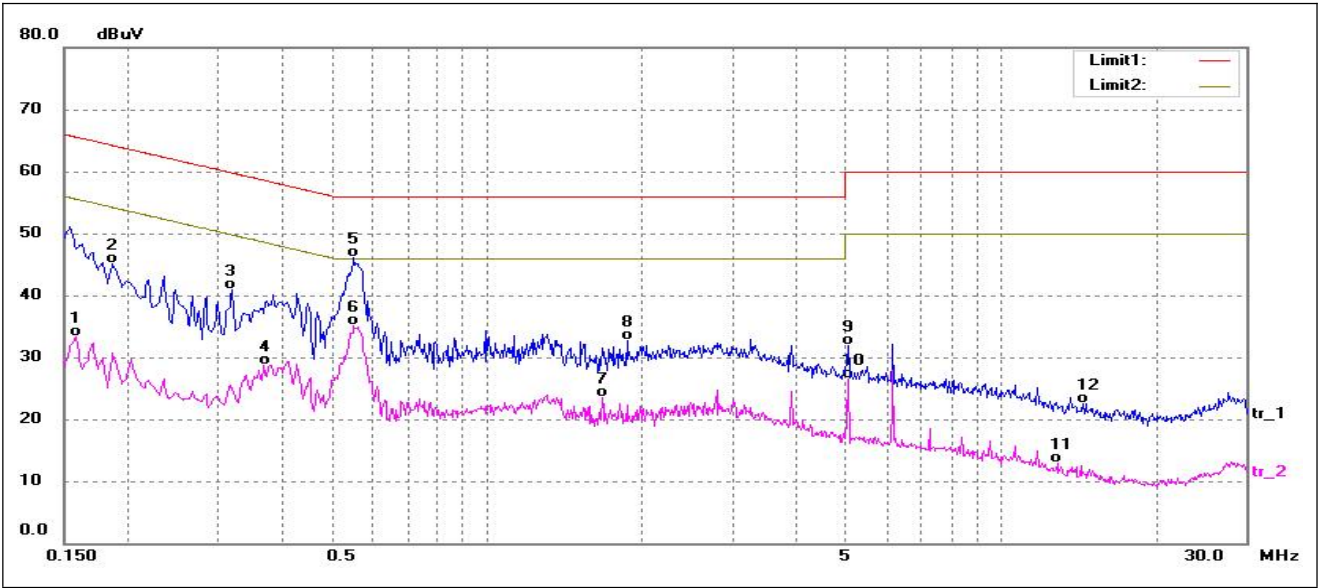

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	22.97	10.27	33.24	55.56	-22.32	AVG
2	0.1860	34.94	10.26	45.20	64.21	-19.01	QP
3	0.3180	30.63	10.23	40.86	59.76	-18.90	QP
4	0.3660	18.49	10.19	28.68	48.59	-19.91	AVG
5*	0.5500	35.89	10.20	46.09	56.00	-9.91	QP
6	0.5500	24.86	10.20	35.06	46.00	-10.94	AVG
7	1.6780	13.28	10.27	23.55	46.00	-22.45	AVG
8	1.8740	22.46	10.25	32.71	56.00	-23.29	QP
9	5.0340	21.86	10.03	31.89	60.00	-28.11	QP
10	5.0340	16.53	10.03	26.56	50.00	-23.44	AVG
11	12.8740	3.00	9.88	12.88	50.00	-37.12	AVG
12	14.6260	12.65	9.88	22.53	60.00	-37.47	QP

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****