

RF Test Report

For

Applicant name: Shenzhen Evview GPS Technology
Address: Rm 201, building 1-A, Nankechuang Yuangu, Dalang, Longhua District, Shenzhen, China
EUT name: Safety RF Button
Brand name: N/A
Model number: EV-W204-US
Series model number: N/A
FCC ID: 2AUMJEV-W204US

Issued By

Company name: BTF Testing Lab (Shenzhen) Co., Ltd.
Address: 101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

Report number: BTF251013R00801
Test standards: 47 CFR Part 15.249
Test conclusion: Pass

Date of sample receipt: 2025-10-13
Test date: 2025-10-13 to 2026-01-19
Date of issue: 2026-01-19

Prepared by:

Chris Liu

Chris Liu / Project engineer



Ryan.CJ / EMC Manager

Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue Date	Revisions Content
R_V0	2026-01-19	Original
Note: <i>Once the revision has been made, then previous versions reports are invalid.</i>		

Table of Contents

1 Introduction	4
1.1 Laboratory Location	4
1.2 Laboratory Facility.....	4
1.3 Announcement.....	4
2 Product Information	5
2.1 Application Information	5
2.2 Manufacturer Information.....	5
2.3 Factory Information	5
2.4 General Description of Equipment under Test (EUT)	5
2.5 Technical Information	6
3 Summary of Test Results	6
3.1 Test Standards	6
3.2 Uncertainty of Test	6
3.3 Summary of Test Result.....	6
3.4 Additions to, deviations, or exclusions from the method	7
4 Test Configuration	8
4.1 Test Equipment List.....	8
4.2 Test Auxiliary Equipment.....	8
4.3 Test Modes.....	9
4.4 Test software	9
5 Evaluation Results (Evaluation)	10
5.1 Antenna requirement	10
5.1.1 Conclusion	10
6 Radio Spectrum Matter Test Results (RF)	11
6.1 Conducted Emission at AC power line.....	11
6.1.1 Test Data	12
6.2 99% bandwidth &20dB Bandwidth.....	14
6.2.1 Test Data	15
6.3 Field Strength of Fundamental	16
6.3.1 Test Data	17
6.4 Emissions in frequency bands (below 1GHz)	17
6.4.1 Test Data	19
6.5 Emissions in frequency bands (above 1GHz).....	21
6.5.1 Test Data	23
6.6 Emissions in Band Edge	24
6.6.1 Test Data	25
7 Test Setup Photos	26
8 EUT Constructional Details (EUT Photos).....	26

1 Introduction

1.1 Laboratory Location

Test location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China
Phone number:	+86-0755-23146130
Fax number:	+86-0755-23146130

1.2 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1409**
BTF Testing Lab (Shenzhen) Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The test firm Registration No. is 695374.
- **CNAS - Registration No.: CNAS L17568**
BTF Testing Lab (Shenzhen) Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L17568.
- **A2LA - Registration No.: 6660.01**
BTF Testing Lab (Shenzhen) Co., Ltd. is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.
- **VCCI - Registration No.: C-20122, G-20157, R-20166**
EMC LAB: Certificated by VCCI, Japan
Registration No.: C-20122, G-20157, R-20166
Date of Registration: June 20, 2025
This Certificate is valid until June 19, 2028

1.3 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.
- (7) All entrusted information in this report is provided by the client and has been confirmed through consultation with the client; The testing items for this report have been discussed and confirmed with the client, and our company is only responsible for the content reflected in the report.

2 Product Information

2.1 Application Information

Company name:	Shenzhen Eview GPS Technology
Address:	Rm 201, building 1-A, Nankechuang Yuangu, Dalang, Longhua District, Shenzhen, China

2.2 Manufacturer Information

Company name:	Shenzhen Eview GPS Technology
Address:	Rm 201, building 1-A, Nankechuang Yuangu, Dalang, Longhua District, Shenzhen, China

2.3 Factory Information

Company name:	Shenzhen Eview GPS Technology
Address:	Rm 201, building 1-A, Nankechuang Yuangu, Dalang, Longhua District, Shenzhen, China

2.4 General Description of Equipment under Test (EUT)

EUT name:	Safety RF Button
Under test model name:	EV-W204-EU
Series model name:	N/A
Description of model name differentiation:	N/A
Hardware version:	N/A
Software version:	N/A
Rating:	Input: DC 5V from type C Battery:DC 3.85V 200mAh 0.77Wh

2.5 Technical Information

Operation Frequency:	906MHz
Channel numbers:	1
Modulation technology:	FSK
Antenna type:	Internal Antenna
Antenna gain:	-11.09dBi

3 Summary of Test Results

3.1 Test Standards

The tests were performed according to following standards:

47 CFR Part 15.249: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz.

3.2 Uncertainty of Test

Measurement	Value
Occupied Channel Bandwidth	±5 %
Unwanted Emissions, conducted	±3.0 dB
Supply voltages	±3 %
Time	±5 %
Conducted Emission for LISN (9kHz ~ 150kHz)	±2.97 dB
Conducted Emission for LISN (150kHz ~ 30MHz)	±2.45 dB
Radiated Emission (30MHz ~ 1000MHz)	±4.80 dB
Radiated Emission (1GHz ~ 18GHz)	±4.82 dB

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.3 Summary of Test Result

Item	Standard	Requirement	Result
Antenna requirement	47 CFR Part 15.249	15.203	Pass
Conducted Emission at AC power line	47 CFR Part 15.249	15.207(a)	Pass
99% bandwidth & 20dB Bandwidth	47 CFR Part 15.249	15.215	Pass
Fundamental & Radiated Spurious Emission Measurement	47 CFR Part 15.249	15.205(a), 15.209(a) 15.249(a), 15.249(c)	Pass
Emissions in non-restricted frequency bands	47 CFR Part 15.249	15.205(a), 15.209(a) 15.249(a), 15.249(c)	Pass
Band edge emissions (Radiated)	47 CFR Part 15.249	15.205(a), 15.209(a) 15.249(a), 15.249(c)	Pass

Remark:

1. Pass: Meet the requirements.
2. N/A: not applicable.

3.4 Additions to, deviations, or exclusions from the method

None

4 Test Configuration

4.1 Test Equipment List

Conducted Emission at AC power line					
Test Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EMI Receiver	Rohde & Schwarz	ESCI3	101422	2024-10-25	2025-10-24
V-LISN	Schwarzbeck	NSLK 8127	01073	2024-10-25	2025-10-24
Coaxial Switcher	Schwarzbeck	CX210	CX210	/	/
Pulse Limiter	Schwarzbeck	VTSD 9561-F	00953	/	/
Test Software	Frad	EZ_EMCC	Version: EMC-CON 3A1.1+	/	/

Conducted Method Test					
Test Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	Keysight	N9020A	MY50410020	2024-10-25	2025-10-24
ESG Vector Signal Generator	Agilent	E4438C	MY45094854	2024-10-25	2025-10-24
MXG Vector Signal Generator	Agilent	N5182A	MY46240163	2024-10-25	2025-10-24
Wideband Radio Communication Tester	Rohde&Schwarz	CMW500	161997	2024-10-25	2025-10-24
Temperature Humidity Chamber	ZZCKONG	ZZ-K02A	20210928007	2024-10-25	2025-10-24
DC Power Supply	Tongmen	etm-6050c	20211026123	2024-10-25	2025-10-24
RF Control Unit	Techy	TR1029-1	/	2024-10-25	2025-10-24
RF Sensor Unit	Techy	TR1029-2	/	2024-10-25	2025-10-24
Test Software	TST Pass	/	Version: 2.0	/	/

Radiated Method Test					
Test Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EMI Receiver	Rohde & Schwarz	ESCI7	101032	2024-10-25	2025-10-24
Signal Analyzer	Rohde & Schwarz	FSQ40	100010	2024-10-25	2025-10-24
Log periodic antenna	Schwarzbeck	VULB 9168	01328	2024-10-28	2025-10-27
Preamplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9744	00246	2025-10-18	2026-10-17
Horn Antenna	Schwarzbeck	BBHA9120D	2597	2024-10-30	2025-10-29
Preamplifier (1GHz ~ 18GHz)	Schwarzbeck	BBV9718D	00008	2025-10-18	2026-10-17
Test Software	Frad	EZ_EMCC	Version: FA-03A2 RE+	/	/

4.2 Test Auxiliary Equipment

The EUT has been tested as an independent unit.

4.3 Test Modes

No.	Test Modes
TM1	TX mode

4.4 Test software

Test software:	Version:	Power Class:
Press and hold the button to transmit	/	Default

5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
Operating Environment:	
Temperature:	23.5 °C
Humidity:	50.8 %
Atmospheric Pressure:	1010 mbar
Test voltage:	DC 3.85V From Battery

5.1.1 Conclusion

The antenna is an Internal antenna which permanently attached, and the best case gain of the antenna is - 11.09dBi. See product internal photos for details.
--


6 Radio Spectrum Matter Test Results (RF)

6.1 Conducted Emission at AC power line

Test Requirement:	Refer to 47 CFR 15.207(a), Except as shown in paragraphs (b)and (c)of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN).		
Test Method:	ANSI C63.10-2020 section 6.2		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dBμV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
*Decreases with the logarithm of the frequency.			
Procedure:	Refer to ANSI C63.10-2020 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		
Test Setup:			

6.1.1 Test Data


Test phase: L phase

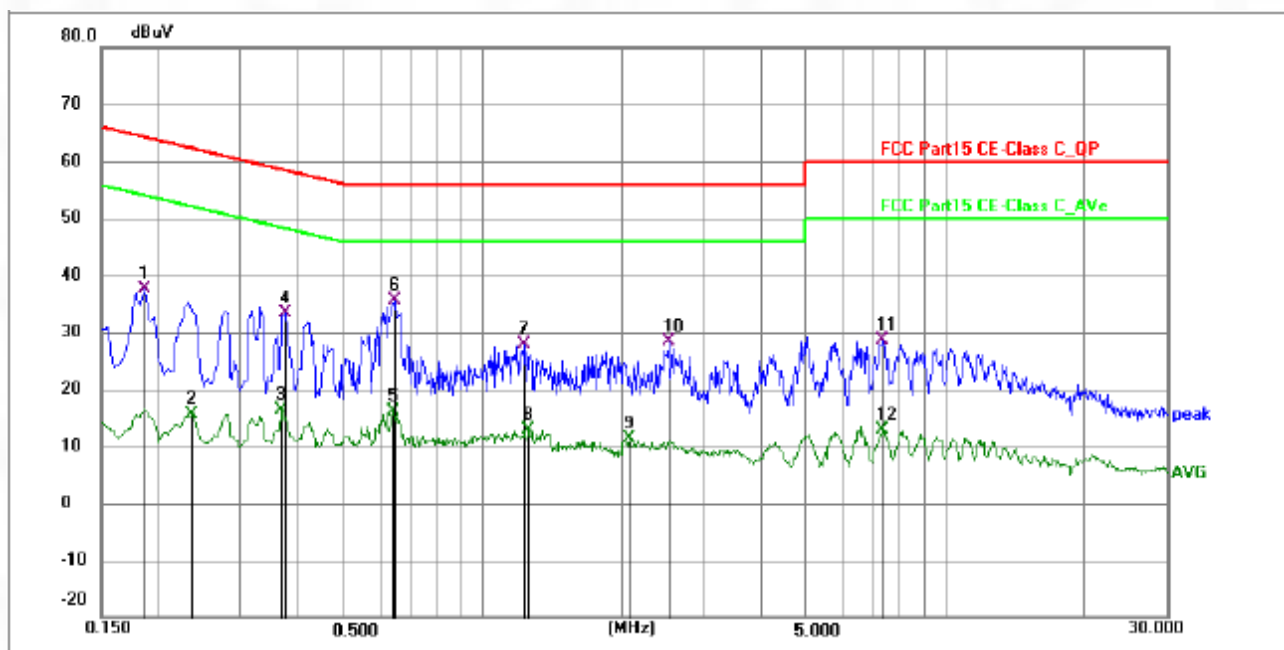

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1860	27.51	10.18	37.69	64.21	-26.52	QP	P	
2	0.2353	5.45	10.08	15.53	52.26	-36.73	AVG	P	
3	0.3660	6.25	10.11	16.36	48.59	-32.23	AVG	P	
4	0.3750	23.32	10.10	33.42	58.39	-24.97	QP	P	
5	0.6402	6.03	10.17	16.20	46.00	-29.80	AVG	P	
6 *	0.6450	25.35	10.17	35.52	56.00	-20.48	QP	P	
7	1.2255	17.83	10.17	28.00	56.00	-28.00	QP	P	
8	1.2615	2.80	10.18	12.98	46.00	-33.02	AVG	P	
9	2.0714	1.04	10.26	11.30	46.00	-34.70	AVG	P	
10	2.5215	18.19	10.22	28.41	56.00	-27.59	QP	P	
11	7.3185	18.31	10.39	28.70	60.00	-31.30	QP	P	
12	7.3185	2.59	10.39	12.98	50.00	-37.02	AVG	P	

Note:Margin=Level-Limit=Reading+factor-Limit

Test phase: N phase

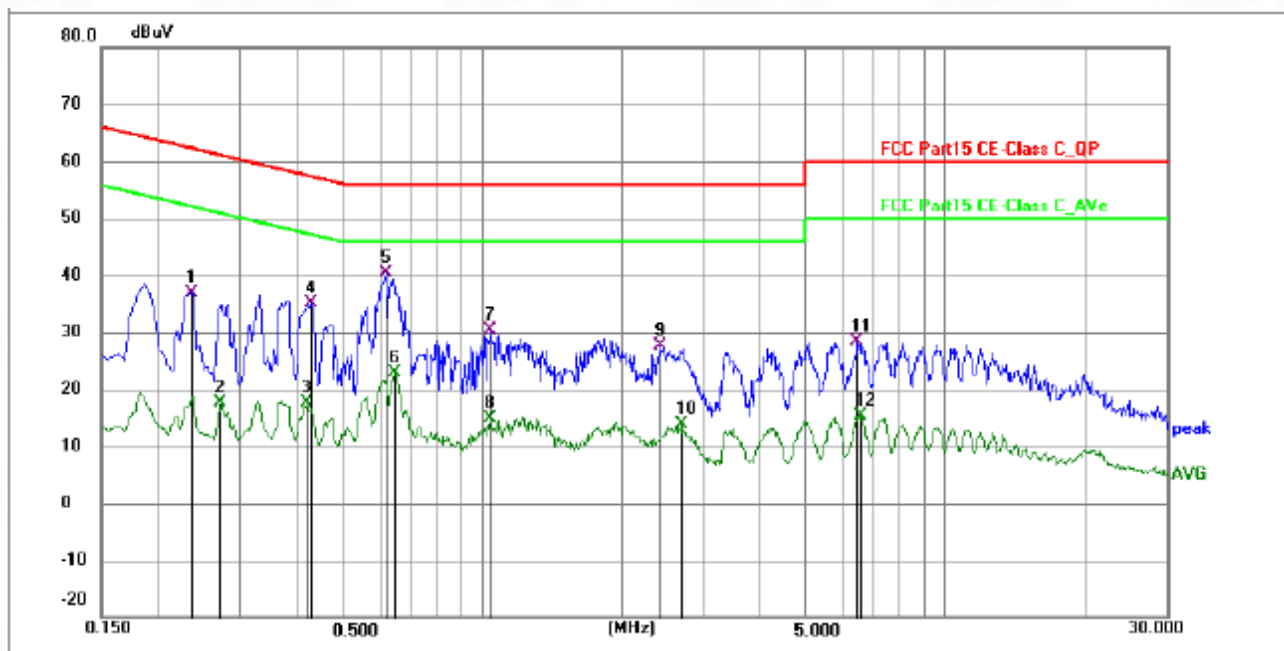

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2353	26.86	10.11	36.97	62.26	-25.29	QP	P	
2	0.2714	7.39	10.12	17.51	51.07	-33.56	AVG	P	
3	0.4153	7.52	10.13	17.65	47.54	-29.89	AVG	P	
4	0.4243	24.92	10.13	35.05	57.36	-22.31	QP	P	
5 *	0.6180	30.12	10.15	40.27	56.00	-15.73	QP	P	
6	0.6450	12.64	10.15	22.79	46.00	-23.21	AVG	P	
7	1.0410	20.10	10.17	30.27	56.00	-25.73	QP	P	
8	1.0410	4.73	10.17	14.90	46.00	-31.10	AVG	P	
9	2.4180	17.33	10.22	27.55	56.00	-28.45	QP	P	
10	2.6970	3.59	10.24	13.83	46.00	-32.17	AVG	P	
11	6.4500	18.04	10.38	28.42	60.00	-31.58	QP	P	
12	6.5445	5.08	10.38	15.46	50.00	-34.54	AVG	P	


6.2 99% bandwidth & 20dB Bandwidth

Test Requirement:	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
Test Method:	Occupied bandwidth—relative measurement procedure
Test Limit:	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
Procedure:	a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW. b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement. c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2. d) Steps a) through c) might require iteration to adjust within the specified tolerances. e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value. f) Set detection mode to peak and trace mode to max hold. g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value). h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - xx]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument. i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j). j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth. k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to


Appendix I Test Setup Photos	
Operating Environment:	
Temperature:	22.5°C
Humidity:	46%RH
Atmospheric Pressure:	1010 hpa
Test voltage:	DC 3.85V From Battery

6.2.1 Test Data

Frequency (MHz)	99% Occupied Bandwidth (kHz)	20dB Bandwidth (kHz)
	Result	Result
906	176.99	207.7

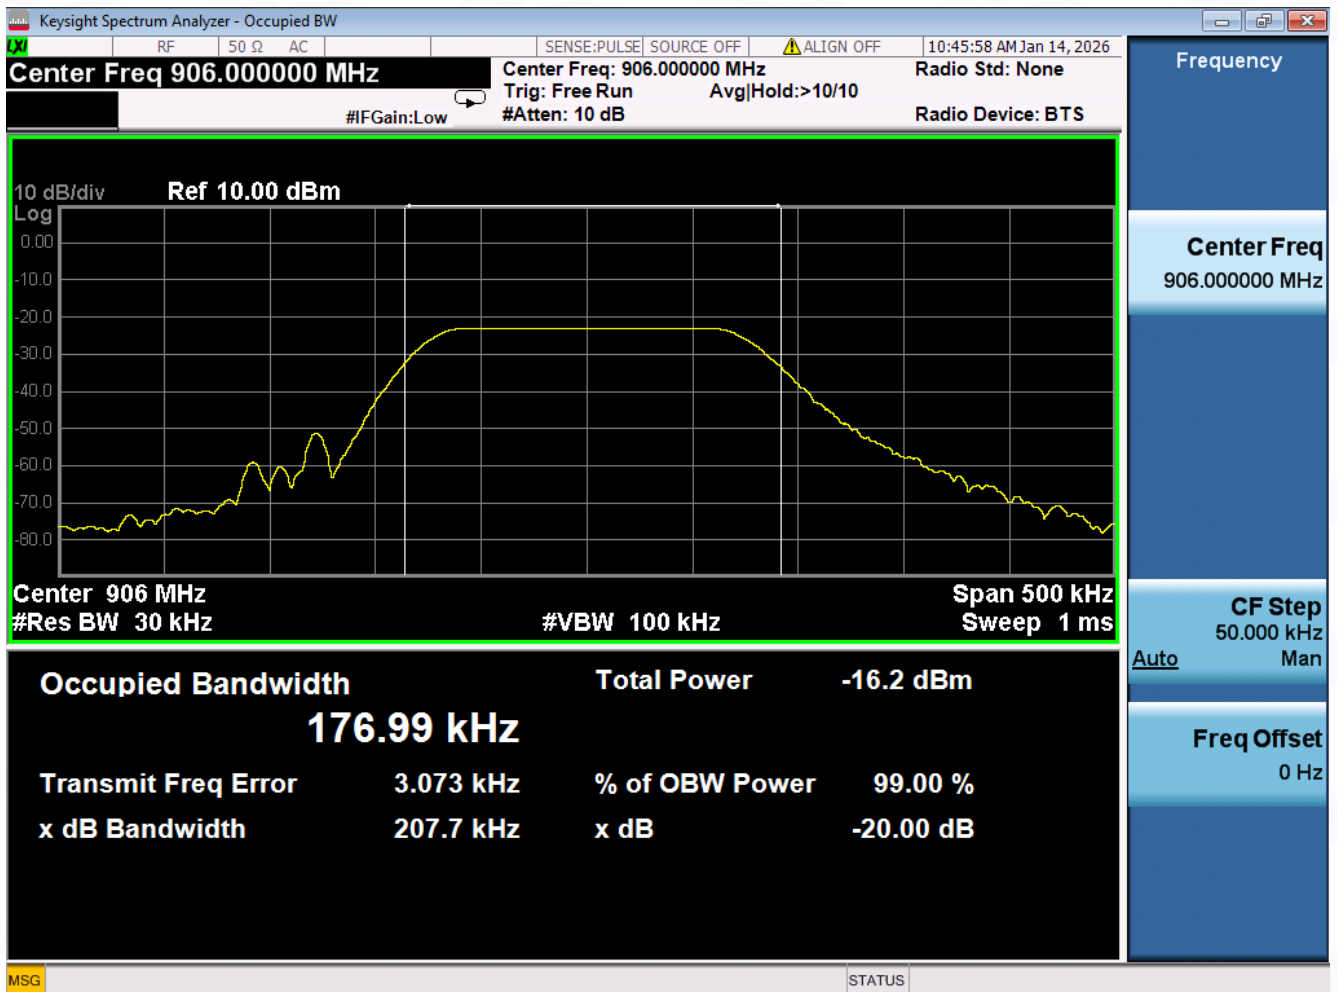

6.3 Field Strength of Fundamental

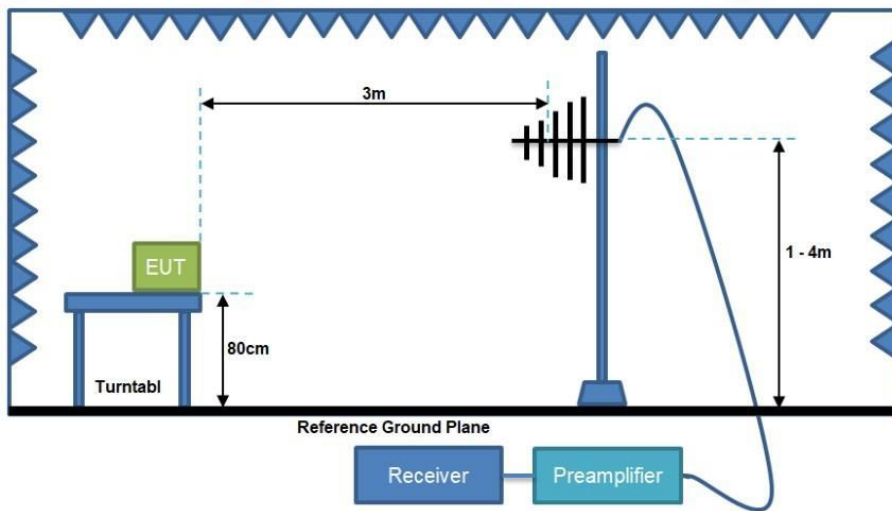Test Requirement:	47 CFR 15.249 (a)		
Test Method:	ANSI C63.10-2020 section 6.5 6.6		
Test Limit:	Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
	902-928 MHz	50	500
	2400-2483.5 MHz	50	500
	5725-5875 MHz	50	500
	24.0-24.25 GHz	250	2500
Procedure:	a) The EUT was setup and tested according to ANSI C63.10 requirements. b) The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. c) 3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters. d) The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 on radiated measurement.		
Test Setup:			
Operating Environment:			
Temperature:	22.4 °C		
Humidity:	48.2 %		
Atmospheric Pressure:	1010 mbar		
Test voltage:	DC 3.85V		

6.3.1 Test Data

Test Channel: 906MHz								
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Polarization:	Result
906.0126	101.62	-16.18	85.44	94.00	-8.56	QP	H	Pass
906.0126	100.35	-16.18	84.17	94.00	-9.83	QP	V	Pass


Note:Margin=Level-Limit=Reading+factor-Limit

Factor= Antenna factor+ cable loss -amplifier gain

6.4 Emissions in frequency bands (below 1GHz)


Test Requirement:	Refer to 47 CFR 15.249(a), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Method:	ANSI C63.10-2020 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Test Limit:	Part 15.209 Radiated emission limits; general requirements:		
	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. Part 15.249(a): Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:		

	Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
	902-928 MHz	50	500
	2400-2483.5 MHz	50	500
	5725-5875 MHz	50	500
	24.0-24.25 GHz	250	2500

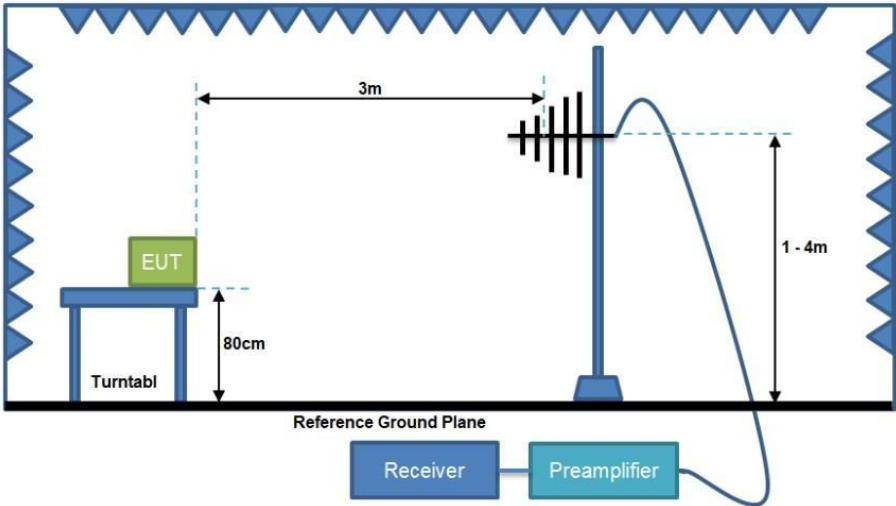Procedure:	ANSI C63.10-2020 section 6.6.4
Test Setup:	 The diagram illustrates the test setup within an anechoic chamber. An Equipment Under Test (EUT) is placed on a turntable at a height of 80cm. A reference ground plane is positioned below the turntable. A receiver and preamplifier are connected to the setup. The distance between the EUT and the receiver is 3m. The receiver is positioned at a height of 1-4m. The chamber walls are lined with absorbers.
Operating Environment:	
Temperature:	25.7 °C
Humidity:	53.5 %
Atmospheric Pressure:	1010 mbar
Test voltage:	DC 3.85V


6.4.1 Test Data

TM1 / Polarization: Horizontal / Band: 906 MHz

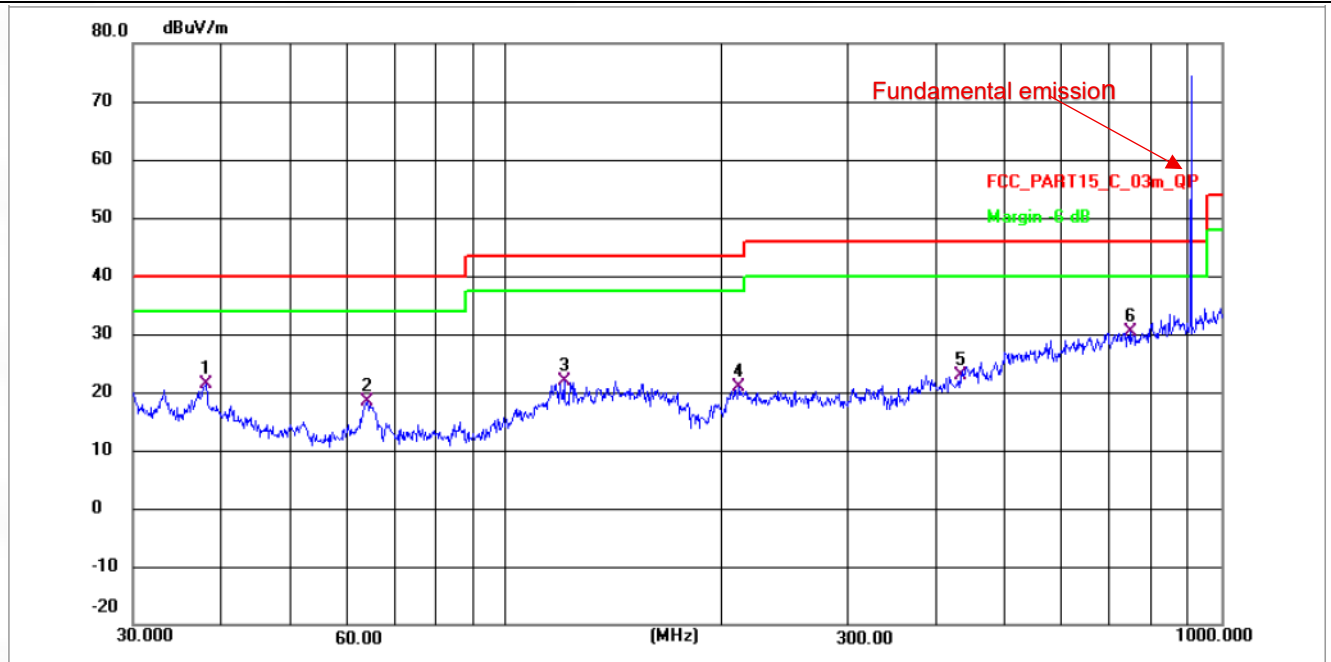

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	38.0114	31.08	-9.65	21.43	40.00	-18.57	QP	P
2	63.9827	27.69	-9.42	18.27	40.00	-21.73	QP	P
3	120.4876	44.08	-22.28	21.80	43.50	-21.70	QP	P
4	212.2692	42.23	-21.41	20.82	43.50	-22.68	QP	P
5	431.7880	42.54	-19.56	22.98	46.00	-23.02	QP	P
6 *	747.4823	48.11	-17.74	30.37	46.00	-15.63	QP	P

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: M

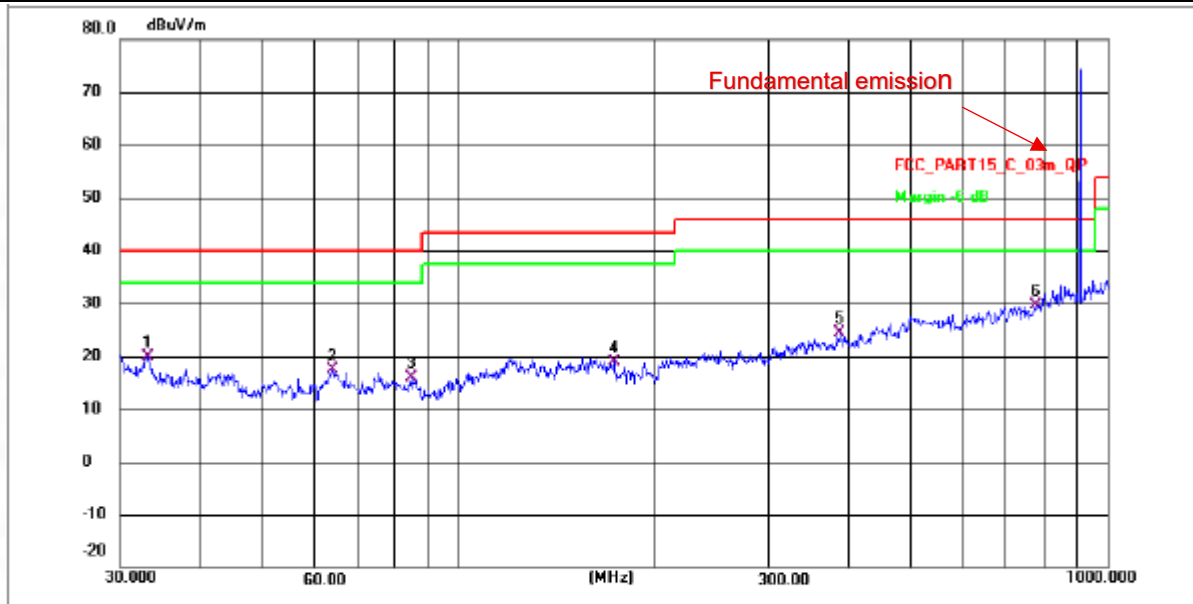


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	33.2693	29.66	-9.68	19.98	40.00	-20.02	QP	P
2	63.9827	26.69	-9.42	17.27	40.00	-22.73	QP	P
3	84.5532	38.49	-22.71	15.78	40.00	-24.22	QP	P
4	173.2050	40.68	-21.79	18.89	43.50	-24.61	QP	P
5	387.3122	44.37	-19.93	24.44	46.00	-21.56	QP	P
6 *	775.5170	47.52	-17.81	29.71	46.00	-16.29	QP	P

Note: Margin = Level - Limit = Reading + factor - Limit
Factor = Antenna factor + cable loss - amplifier gain

6.5 Emissions in frequency bands (above 1GHz)

Test Requirement:	Refer to 47 CFR 15.249(a), in addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Method:	ANSI C63.10-2020 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Test Limit:	Part 15.209 Radiated emission limits; general requirements:		
	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. Part 15.249(a): Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:		
	Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
	902-928 MHz	50	500
	2400-2483.5 MHz	50	500
	5725-5875 MHz	50	500
	24.0-24.25 GHz	250	2500
Procedure:	ANSI C63.10-2020 section 6.6.4		

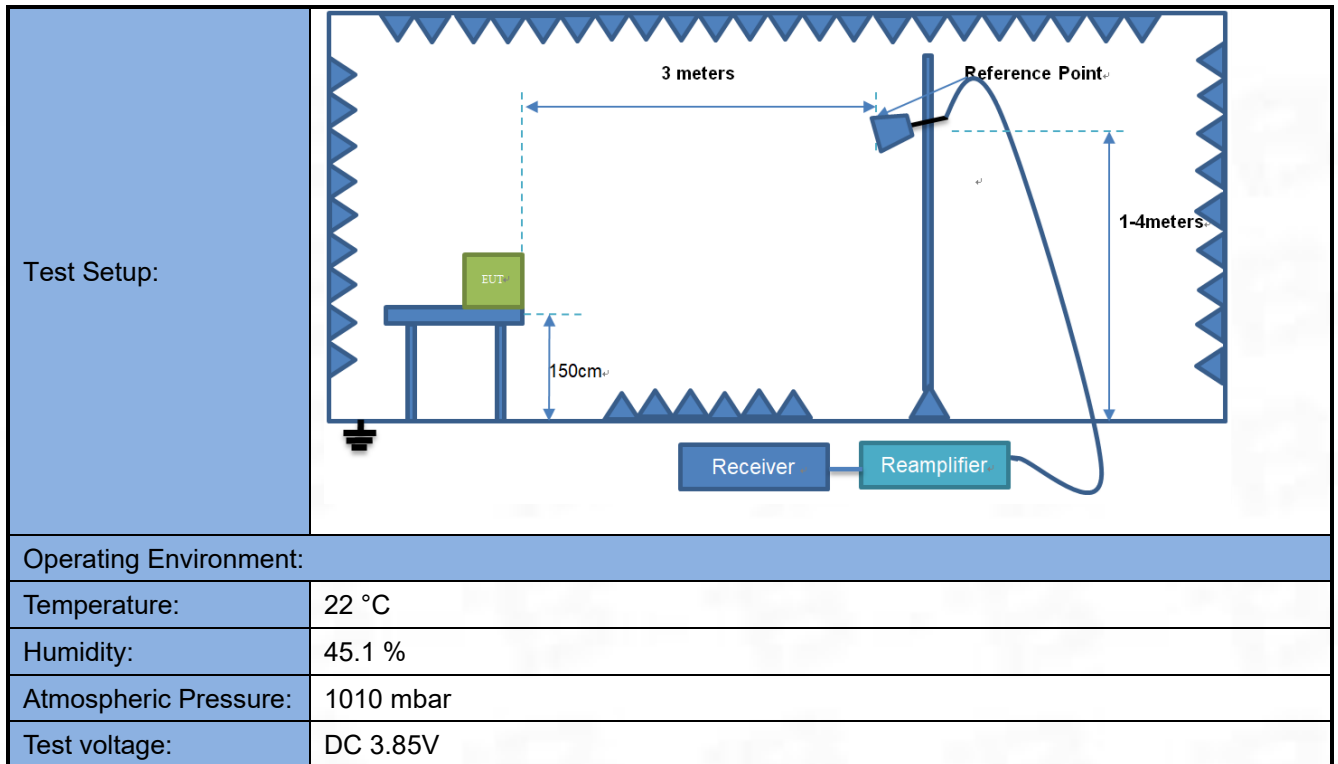


6.5.1 Test Data

Remark: The report only reflects the test data of worst mode.

Test Channel: 906MHz, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
1812.00	87.74	-40.83	46.91	74.00	-27.09	Peak	Pass
1812.00	86.31	-48.83	37.48	54.00	-16.52	AVG	Pass
2718.00	86.31	-41.88	44.43	74.00	-29.57	Peak	Pass
2718.00	86.31	-46.88	39.43	54.00	-14.57	AVG	Pass
Test Channel: 906MHz, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
1812.00	88.94	-40.83	48.11	74.00	-25.89	Peak	Pass
1812.00	87.41	-48.83	38.58	54.00	-15.42	AVG	Pass
2718.00	87.41	-41.88	45.53	74.00	-28.47	Peak	Pass
2718.00	90.04	-46.88	43.16	54.00	-10.84	AVG	Pass

Note:Margin=Level-Limit=Reading+factor-Limit
Factor= Antenna factor+ cable loss -amplifier gain

6.6 Emissions in Band Edge

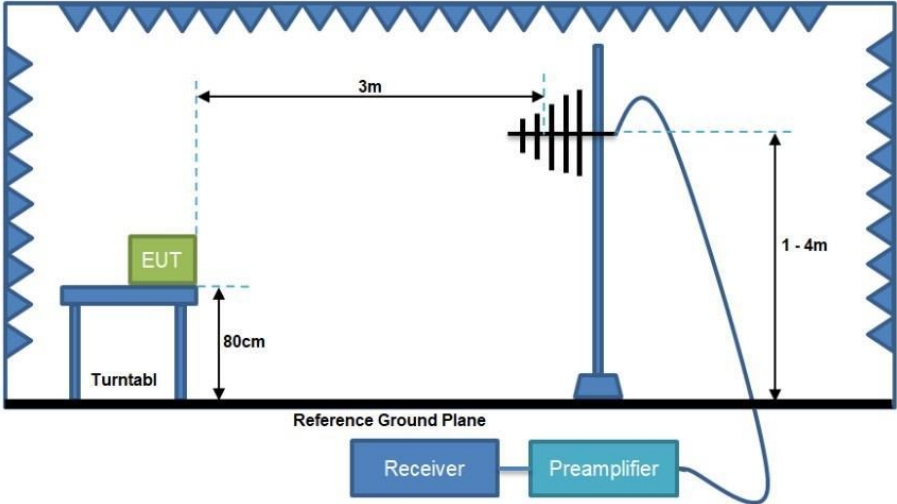Test Requirement:	Refer to 47 CFR 15.249(a), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Method:	ANSI C63.10-2020 section 6.10		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
Procedure:	Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products that fall outside of the authorized band of operation. 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.6.2. 3) Attenuation: Auto (at least 10 dB preferred). 4) Sweep time: No faster than coupled (auto) time. 5) Resolution bandwidth: 100 kHz. 6) Video bandwidth: 300 kHz. 7) Detector: Peak. 8) Trace: Max-hold.		
Test Setup:			
Operating Environment:			
Temperature:	25.7 °C		
Humidity:	53.5 %		
Atmospheric Pressure:	1010 mbar		
Test voltage:	DC 3.85V		

6.6.1 Test Data

Remark: The report only reflects the test data of worst mode.

Test Channel: 906MHz, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
896.6900	48.21	-16.27	31.94	46.00	-14.06	QP	Pass
902.0000	47.99	-16.21	31.78	46.00	-14.22	QP	Pass
928.0000	47.90	-16.04	31.86	46.00	-14.14	QP	Pass
935.2500	48.44	-16.00	32.44	46.00	-13.56	QP	Pass
Test Channel: 906MHz, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
902.0000	47.99	-16.21	31.78	46.00	-14.22	QP	Pass
928.0000	47.90	-16.04	31.86	46.00	-14.14	QP	Pass
886.6300	48.16	-16.44	31.72	46.00	-14.28	QP	Pass
932.6800	49.09	-16.01	33.08	46.00	-12.92	QP	Pass

Note:Margin=Level-Limit=Reading+factor-Limit
Factor= Antenna factor+ cable loss -amplifier gain

7 Test Setup Photos

Please refer to the Appendix I Test Setup Photos

8 EUT Constructional Details (EUT Photos)

Please refer to the Appendix II External Photos & Appendix III External Photos



BTF Testing Lab (Shenzhen) Co., Ltd.

101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

www.btf-lab.com

-- END OF REPORT --