# TEST REPORT

| | | |
|---|---|---|
| **Product** | : | headsup |
| **Trade mark** | : | Revsmart |
| **Model/Type reference** | : | R01, RXY ( the first "X" can be a number from 0 to 9, and the second "Y" can be a number from 0 to 9 ) |
| **Serial Number** | : | N/A |
| **Report Number** | : | EED32L00236702 |
| **FCC ID** | : | 2AUNPHEADSUP-R01 |
| **Date of Issue** | : | Sep. 29, 2019 |
| **Test Standards** | : | 47 CFR Part 15Subpart C |
| **Test result** | : | PASS |

Prepared for:

**REVSMART WEARABLE HK CO LTD**
**22/F., 3 Lockhart Road, Wanchai, Hongkong**

Prepared by:

**Centre Testing International Group Co., Ltd.**
**Hongwei Industrial Zone, Bao'an 70 District,**
**Shenzhen, Guangdong, China**
**TEL: +86-755-3368 3668**
**FAX: +86-755-3368 3385**

| | | | |
|---|---|---|---|
| Tested By: | mark. chen. | Compiled by: | sunlight sun |
| | Mark Chen | | Sunlight Sun |
| Reviewed by: | Ware Xin | Approved by: | Kevin Yang |
| | Ware Xin | | Kevin Yang |
| Date: | Sep. 29, 2019 | | Check No.:3096309266 |

CENTRE TESTING INTERNATIONAL GROUP CO.,LTD. CTI Report Seal

# 2 Version

| Version No. | Date | Description |
|---|---|---|
| 00 | Sep. 29, 2019 | Original |
| | | |
| | | |

# 3 Test Summary

| Test Item | Test Requirement | Test method | Result |
|---|---|---|---|
| **Antenna Requirement** | 47 CFR Part 15Subpart C Section 15.203/15.247 (c) | ANSI C63.10-2013 | PASS |
| **AC Power Line Conducted Emission** | 47 CFR Part 15Subpart C Section 15.207 | ANSI C63.10-2013 | PASS |
| **Conducted Peak Output Power** | 47 CFR Part 15Subpart C Section 15.247 (b)(3) | ANSI C63.10-2013 | PASS |
| **6dB Occupied Bandwidth** | 47 CFR Part 15Subpart C Section 15.247 (a)(2) | ANSI C63.10-2013 | PASS |
| **Power Spectral Density** | 47 CFR Part 15Subpart C Section 15.247 (e) | ANSI C63.10-2013 | PASS |
| **Band-edge for RF Conducted Emissions** | 47 CFR Part 15Subpart C Section 15.247(d) | ANSI C63.10-2013 | PASS |
| **RF Conducted Spurious Emissions** | 47 CFR Part 15Subpart C Section 15.247(d) | ANSI C63.10-2013 | PASS |
| **Radiated Spurious Emissions** | 47 CFR Part 15Subpart C Section 15.205/15.209 | ANSI C63.10-2013 | PASS |
| **Restricted bands around fundamental frequency (Radiated Emission)** | 47 CFR Part 15Subpart C Section 15.205/15.209 | ANSI C63.10-2013 | PASS |

Remark:
Test according to ANSI C63.4-2014 & ANSI C63.10-2013.
The tested sample(s) and the sample information are provided by the client.
Model No.: R01, RXY
( the first "X" can be a number from 0 to 9, and the second "Y" can be a number from 0 to 9 )
Only the model R01 was tested, The main difference is only the type of microphone and the appearance of product, some models are uses the ECM microphone, while the others model are uses the microphone of MEMS. Other aspects such as Bluetooth chip, power amplifier, RF circuit, power management circuit are the same, and also share the same PCB.

# 4 Content

**1 COVER PAGE** 1

**2 VERSION** 2

**3 TEST SUMMARY** 3

**4 CONTENT** 4

**5 TEST REQUIREMENT** 5

5.1 TEST SETUP 5
5.1.1 For Conducted test setup 5
5.1.2 For Radiated Emissions test setup 5
5.1.3 For Conducted Emissions test setup 6
5.2 TEST ENVIRONMENT 6
5.3 TEST CONDITION 6

**6 GENERAL INFORMATION** 7

6.1 CLIENT INFORMATION 7
6.2 GENERAL DESCRIPTION OF EUT 7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD 8
6.4 DESCRIPTION OF SUPPORT UNITS 9
THE EUT HAS BEEN TESTED INDEPENDENTLY 9
6.5 TEST LOCATION 9
6.6 DEVIATION FROM STANDARDS 9
6.7 ABNORMALITIES FROM STANDARD CONDITIONS 9
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER 9
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2) 9

**7 EQUIPMENT LIST** 10

**8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION** 14

**EUT DUTY CYCLE** 15

Appendix A): 6dB Occupied Bandwidth 16
Appendix B): Conducted Peak Output Power 20
Appendix C): Band-edge for RF Conducted Emissions 22
Appendix D): RF Conducted Spurious Emissions 24
Appendix E): Power Spectral Density 28
Appendix F): Antenna Requirement 30
Appendix G): AC Power Line Conducted Emission 31
Appendix H): Restricted bands around fundamental frequency (Radiated) 34
Appendix I) Radiated Spurious Emissions 43

**PHOTOGRAPHS OF TEST SETUP** 48

PHOTOGRAPHS OF EUT Constructional Details 51

# 5 Test Requirement

## 5.1 Test setup

### 5.1.1 For Conducted test setup

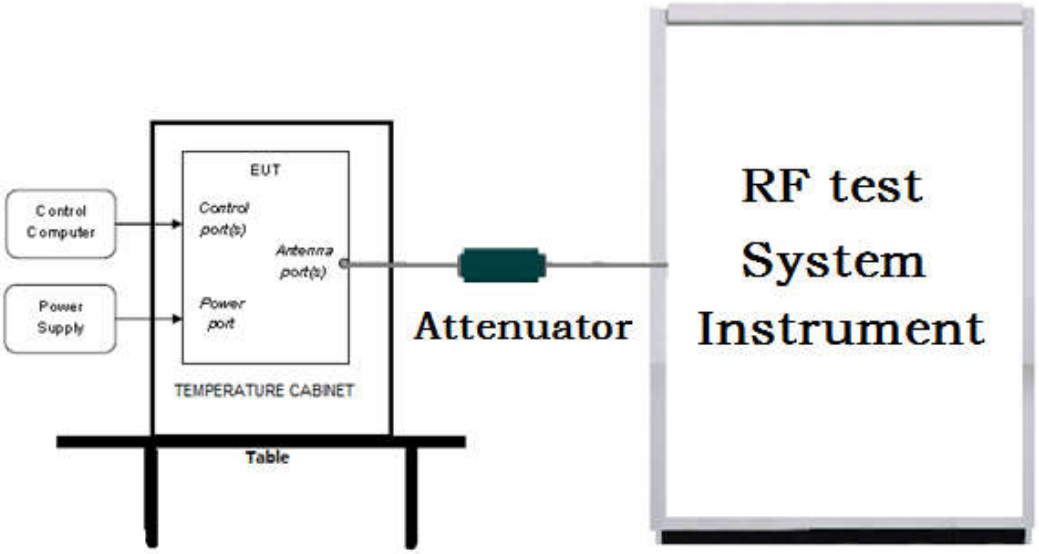


### 5.1.2 For Radiated Emissions test setup

**Radiated Emissions setup:**

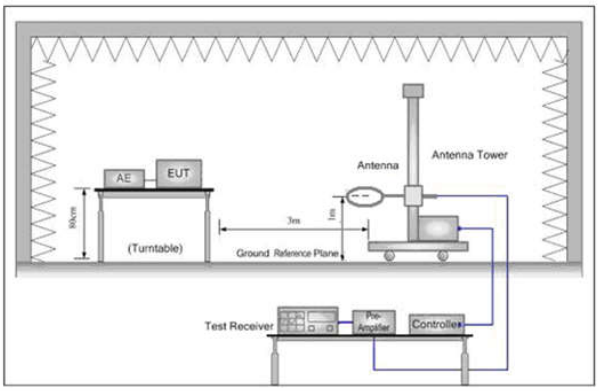


Figure 1. Below 30MHz

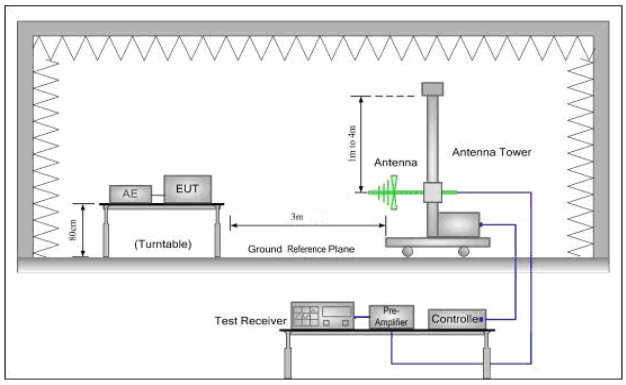


Figure 2. 30MHz to 1GHz

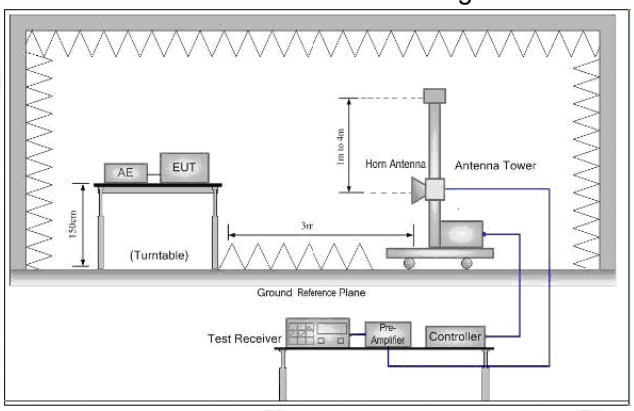


Figure 3. Above 1GHz

### 5.1.3 For Conducted Emissions test setup

**Conducted Emissions setup**

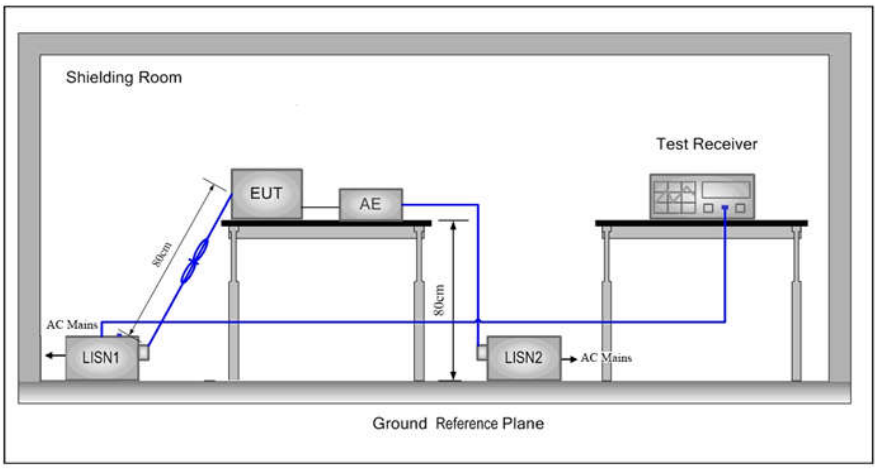


## 5.2 Test Environment

| **Operating Environment:** | |
|---|---|
| Temperature: | 23.0 °C |
| Humidity: | 54 % RH |
| Atmospheric Pressure: | 1010mbar |

## 5.3 Test Condition

Test channel:

| Test Mode | Tx/Rx | RF Channel | | |
|---|---|---|---|---|
| | | Low(L) | Middle(M) | High(H) |
| GFSK | 2402MHz ~2480 MHz | Channel 1 | Channel 20 | Channel 40 |
| | | 2402MHz | 2440MHz | 2480MHz |
| Transmitting mode: | Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate. | | | |

# 6 General Information

## 6.1 Client Information

| | |
|---|---|
| Applicant: | REVSMART WEARABLE HK CO LTD |
| Address of Applicant: | 22/F., 3 Lockhart Road, Wanchai, Hongkong |
| Manufacturer: | REVSMART WEARABLE HK CO LTD |
| Address of Manufacturer: | 22/F., 3 Lockhart Road, Wanchai, Hongkong |
| Factory: | Dongguan YouHong Electronics Co.,Ltd |
| Address of Factory: | No 152, Xin Yuan 1st Road, Song Bo Lang Industrial Park, Dalang Town, Dongguan City, Guangdong Province, P.R.C |

## 6.2 General Description of EUT

| | | |
|---|---|---|
| Product Name: | headsup | |
| Model No.(EUT): | R01, RXY ( the first "X" can be a number from 0 to 9, and the second "Y" can be a number from 0 to 9 ) | |
| Test Model No: | R01 | |
| Trade mark: | Revsmart | |
| EUT Supports Radios application: | BT 5.0 Dual mode 2402MHz to 2480MHz | |
| Power Supply: | Battery | 420 mAh 3.7V. |
| Sample Received Date: | Aug. 26, 2019 | |
| Sample tested Date: | Aug. 26, 2019 to Sep. 27, 2019 | |

## 6.3 Product Specification subjective to this standard

| | |
|---|---|
| Operation Frequency: | 2402MHz~2480MHz |
| Bluetooth Version: | 5.0 |
| Modulation Technique: | DSSS |
| Modulation Type: | GFSK |
| Number of Channel: | 40 |
| Test Power Grade: | Default |
| Test Software of EUT: | BlueTest3 |
| Antenna Type and Gain: | PCB antenna |
| Test Voltage: | -0.76 dBi |

Operation Frequency each of channel

| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---|---|---|---|---|---|---|---|
| 1 | 2402MHz | 11 | 2422MHz | 21 | 2442MHz | 31 | 2462MHz |
| 2 | 2404MHz | 12 | 2424MHz | 22 | 2444MHz | 32 | 2464MHz |
| 3 | 2406MHz | 13 | 2426MHz | 23 | 2446MHz | 33 | 2466MHz |
| 4 | 2408MHz | 14 | 2428MHz | 24 | 2448MHz | 34 | 2468MHz |
| 5 | 2410MHz | 15 | 2430MHz | 25 | 2450MHz | 35 | 2470MHz |
| 6 | 2412MHz | 16 | 2432MHz | 26 | 2452MHz | 36 | 2472MHz |
| 7 | 2414MHz | 17 | 2434MHz | 27 | 2454MHz | 37 | 2474MHz |
| 8 | 2416MHz | 18 | 2436MHz | 28 | 2456MHz | 38 | 2476MHz |
| 9 | 2418MHz | 19 | 2438MHz | 29 | 2458MHz | 39 | 2478MHz |
| 10 | 2420MHz | 20 | 2440MHz | 30 | 2460MHz | 40 | 2480MHz |

## 6.4 Description of Support Units

The EUT has been tested independently

## 6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd
Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China
Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385
No tests were sub-contracted.
FCC Designation No.: CN1164

## 6.6 Deviation from Standards

None.

## 6.7 Abnormalities from Standard Conditions

None.

## 6.8 Other Information Requested by the Customer

None.

## 6.9 Measurement Uncertainty (95% confidence levels, k=2)

| No. | Item | Measurement Uncertainty |
|---|---|---|
| 1 | Radio Frequency | $7.9 \times 10^{-8}$ |
| 2 | RF power, conducted | 0.46dB (30MHz-1GHz) |
| | | 0.55dB (1GHz-18GHz) |
| 3 | Radiated Spurious emission test | 4.3dB (30MHz-1GHz) |
| | | 4.5dB (1GHz-12.75GHz) |
| 4 | Conduction emission | 3.5dB (9kHz to 150kHz) |
| | | 3.1dB (150kHz to 30MHz) |
| 5 | Temperature test | 0.64°C |
| 6 | Humidity test | 3.8% |
| 7 | DC power voltages | 0.026% |

# 7 Equipment List

| RF test system | | | | | |
|---|---|---|---|---|---|
| **Equipment** | **Manufacturer** | **Model No.** | **Serial Number** | **Cal. Date (mm-dd-yyyy)** | **Cal. Due date (mm-dd-yyyy)** |
| Signal Generator | Keysight | E8257D | MY53401106 | 03-01-2019 | 02-29-2020 |
| Spectrum Analyzer | Keysight | N9010A | MY54510339 | 03-01-2019 | 02-29-2020 |
| Signal Generator | Keysight | N5182B | MY53051549 | 03-01-2019 | 02-29-2020 |
| High-pass filter | Sinoscite | FL3CX03WG18NM12-0398-002 | --- | 01-09-2019 | 01-08-2020 |
| High-pass filter | MICRO-TRONICS | SPA-F-63029-4 | --- | 01-09-2019 | 01-08-2020 |
| DC Power | Keysight | E3642A | MY54426035 | 03-01-2019 | 02-29-2020 |
| PC-1 | Lenovo | R4960d | --- | 03-01-2019 | 02-29-2020 |
| BT&WI-FI Automatic control | R&S | OSP120 | 101374 | 03-01-2019 | 02-29-2020 |
| RF control unit | JS Tonscend | JS0806-2 | 15860006 | 03-01-2019 | 02-29-2020 |
| RF control unit | JS Tonscend | JS0806-1 | 15860004 | 03-01-2019 | 02-29-2020 |
| RF control unit | JS Tonscend | JS0806-4 | 158060007 | 03-01-2019 | 02-29-2020 |
| BT&WI-FI Automatic test software | JS Tonscend | JS1120-2 | --- | 03-01-2019 | 02-29-2020 |
| Temperature/ Humidity Indicator | biaozhi | HM10 | 1804186 | 10-12-2018 | 10-11-2019 |

| Conducted disturbance Test | | | | | |
|---|---|---|---|---|---|
| **Equipment** | **Manufacturer** | **Model No.** | **Serial Number** | **Cal. date (mm-dd-yyyy)** | **Cal. Due date (mm-dd-yyyy)** |
| Receiver | R&S | ESCI | 100435 | 05-20-2019 | 05-19-2020 |
| Temperature/ Humidity Indicator | Defu | TH128 | / | 06-14-2019 | 06-13-2020 |
| Communication test set | Agilent | E5515C | GB47050 534 | 03-01-2019 | 02-28-2022 |
| Communication test set | R&S | CMW500 | 152394 | 03-01-2019 | 02-29-2020 |
| LISN | R&S | ENV216 | 100098 | 05-08-2019 | 05-07-2020 |
| LISN | schwarzbeck | NNLK8121 | 8121-529 | 05-08-2019 | 05-07-2020 |
| Voltage Probe | R&S | ESH2-Z3 0299.7810.5 6 | 100042 | 06-13-2017 | 06-12-2020 |
| Current Probe | R&S | EZ-17 816.2063.03 | 100106 | 05-20-2019 | 05-19-2020 |
| ISN | TESEQ | ISN T800 | 30297 | 01-16-2019 | 01-15-2020 |
| Barometer | changchun | DYM3 | 1188 | 06-20-2019 | 06-19-2020 |

| 3M Semi/full-anechoic Chamber | | | | | |
|---|---|---|---|---|---|
| **Equipment** | **Manufacturer** | **Model No.** | **Serial Number** | **Cal. date (mm-dd-yyyy)** | **Cal. Due date (mm-dd-yyyy)** |
| 3M Chamber & Accessory Equipment | TDK | SAC-3 | --- | 05-24-2019 | 05-23-2022 |
| TRILOG Broadband Antenna | Schwarzbeck | VULB9163 | 9163-401 | 12-21-2018 | 12-20-2019 |
| TRILOG Broadband Antenna | Schwarzbeck | VULB9163 | 9163-618 | 07-26-2019 | 07-25-2020 |
| Microwave Preamplifier | Agilent | 8449B | 3008A02425 | 07-12-2019 | 07-11-2020 |
| Microwave Preamplifier | Tonscend | EMC051845SE | 980380 | 01-16-2019 | 01-15-2020 |
| Horn Antenna | Schwarzbeck | BBHA 9120D | 9120D-1869 | 04-25-2018 | 04-24-2021 |
| Horn Antenna | ETS-LINDGREN | 3117 | 00057410 | 06-05-2018 | 06-04-2021 |
| Double ridge horn antenna | A.H.SYSTEMS | SAS-574 | 374 | 06-05-2018 | 06-04-2021 |
| Pre-amplifier | A.H.SYSTEMS | PAP-1840-60 | 6041.6042 | 07-26-2019 | 07-25-2020 |
| Loop Antenna | Schwarzbeck | FMZB 1519B | 1519B-076 | 04-25-2018 | 04-24-2021 |
| Spectrum Analyzer | R&S | FSP40 | 100416 | 04-28-2019 | 04-27-2020 |
| Receiver | R&S | ESCI | 100435 | 05-20-2019 | 05-19-2020 |
| Receiver | R&S | ESCI7 | 100938-003 | 11-23-2018 | 11-22-2019 |
| -Multi device Controller | maturo | NCD/070/10711112 | --- | 01-09-2019 | 01-08-2020 |
| LISN | Schwarzbeck | NNBM8125 | 81251547 | 05-08-2019 | 05-07-2020 |
| LISN | Schwarzbeck | NNBM8125 | 81251548 | 05-08-2019 | 05-07-2020 |
| Signal Generator | Agilent | E4438C | MY45095744 | 03-01-2019 | 02-29-2020 |
| Signal Generator | Keysight | E8257D | MY53401106 | 03-01-2019 | 02-29-2020 |
| Temperature/ Humidity Indicator | Shanghai qixiang | HM10 | 1804298 | 10-12-2018 | 10-11-2019 |
| Communication test set | Agilent | E5515C | GB47050534 | 03-01-2019 | 02-28-2022 |
| Cable line | Fulai(7M) | SF106 | 5219/6A | 01-09-2019 | 01-08-2020 |
| Cable line | Fulai(6M) | SF106 | 5220/6A | 01-09-2019 | 01-08-2020 |
| Cable line | Fulai(3M) | SF106 | 5216/6A | 01-09-2019 | 01-08-2020 |
| Cable line | Fulai(3M) | SF106 | 5217/6A | 01-09-2019 | 01-08-2020 |
| Communication test set | R&S | CMW500 | 104466 | 01-18-2019 | 01-17-2020 |
| High-pass filter | Sinoscite | FL3CX03WG18NM12-0398-002 | --- | 01-09-2019 | 01-08-2020 |
| High-pass filter | MICRO-TRONICS | SPA-F-63029-4 | --- | 01-09-2019 | 01-08-2020 |
| band rejection filter | Sinoscite | FL5CX01CA09CL12-0395-001 | --- | 01-09-2019 | 01-08-2020 |
| band rejection filter | Sinoscite | FL5CX01CA08CL12-0393-001 | --- | 01-09-2019 | 01-08-2020 |
| band rejection filter | Sinoscite | FL5CX02CA04CL12-0396-002 | --- | 01-09-2019 | 01-08-2020 |
| band rejection filter | Sinoscite | FL5CX02CA03CL12-0394-001 | --- | 01-09-2019 | 01-08-2020 |

| 3M full-anechoic Chamber | | | | | |
|---|---|---|---|---|---|
| **Equipment** | **Manufacturer** | **Model No.** | **Serial Number** | **Cal. date (mm-dd-yyyy)** | **Cal. Due date (mm-dd-yyyy)** |
| RSE Automatic test software | JS Tonscend | JS36-RSE | 10166 | 06-19-2019 | 06-18-2020 |
| Receiver | Keysight | N9038A | MY57290136 | 03-27-2019 | 03-26-2020 |
| Spectrum Analyzer | Keysight | N9020B | MY57111112 | 03-27-2019 | 03-26-2020 |
| Spectrum Analyzer | Keysight | N9030B | MY57140871 | 03-27-2019 | 03-26-2020 |
| Loop Antenna | Schwarzbeck | FMZB 1519B | 1519B-075 | 04-25-2018 | 04-24-2021 |
| Loop Antenna | Schwarzbeck | FMZB 1519B | 1519B-076 | 04-25-2018 | 04-24-2021 |
| TRILOG Broadband Antenna | Schwarzbeck | VULB 9163 | 9163-1148 | 04-25-2018 | 04-24-2021 |
| Horn Antenna | Schwarzbeck | BBHA 9170 | 9170-832 | 04-25-2018 | 04-24-2021 |
| Horn Antenna | Schwarzbeck | BBHA 9170 | 9170-829 | 04-25-2018 | 04-24-2021 |
| Communication Antenna | Schwarzbeck | CLSA 0110L | 1014 | 02-14-2019 | 02-13-2020 |
| Biconical antenna | Schwarzbeck | VUBA 9117 | 9117-381 | 04-25-2018 | 04-24-2021 |
| Horn Antenna | ETS-LINDGREN | 3117 | 00057407 | 07-10-2018 | 07-09-2021 |
| Preamplifier | EMCI | EMC184055SE | 980596 | 05-22-2019 | 5-21-2020 |
| Communication test set | R&S | CMW500 | 102898 | 01-18-2019 | 01-17-2020 |
| Preamplifier | EMCI | EMC001330 | 980563 | 05-08-2019 | 05-07-2020 |
| Preamplifier | Agilent | 8449B | 3008A02425 | 07-12-2019 | 07-11-2020 |
| Temperature/ Humidity Indicator | biaozhi | GM1360 | EE1186631 | 04-30-2019 | 04-29-2020 |
| Signal Generator | KEYSIGHT | E8257D | MY53401106 | 03-01-2019 | 02-29-2020 |
| Fully Anechoic Chamber | TDK | FAC-3 | --- | 01-17-2018 | 01-16-2021 |
| Filter bank | JS Tonscend | JS0806-F | 188060094 | 04-10-2018 | 04-09-2021 |
| Cable line | Times | SFT205-NMSM-2.50M | 394812-0001 | 01-09-2019 | 01-08-2020 |
| Cable line | Times | SFT205-NMSM-2.50M | 394812-0002 | 01-09-2019 | 01-08-2020 |
| Cable line | Times | SFT205-NMSM-2.50M | 394812-0003 | 01-09-2019 | 01-08-2020 |
| Cable line | Times | SFT205-NMSM-2.50M | 393495-0001 | 01-09-2019 | 01-08-2020 |
| Cable line | Times | EMC104-NMNM-1000 | SN160710 | 01-09-2019 | 01-08-2020 |
| Cable line | Times | SFT205-NMSM-3.00M | 394813-0001 | 01-09-2019 | 01-08-2020 |
| Cable line | Times | SFT205-NMNM-1.50M | 381964-0001 | 01-09-2019 | 01-08-2020 |
| Cable line | Times | SFT205-NMSM-7.00M | 394815-0001 | 01-09-2019 | 01-08-2020 |
| Cable line | Times | HF160-KMKM-3.00M | 393493-0001 | 01-09-2019 | 01-08-2020 |

# 8 Radio Technical Requirements Specification

**Reference documents for testing:**

| No. | Identity | Document Title |
|---|---|---|
| 1 | FCC Part15C | Subpart C-Intentional Radiators |
| 2 | ANSI C63.10-2013 | American National Standard for Testing Unlicesed Wireless Devices |

**Test Results List:**

| Test Requirement | Test method | Test item | Verdict | Note |
|---|---|---|---|---|
| Part15C Section 15.247 (a)(2) | ANSI C63.10 | 6dB Occupied Bandwidth | PASS | Appendix A) |
| Part15C Section 15.247 (b)(3) | ANSI C63.10 | Conducted Peak Output Power | PASS | Appendix B) |
| Part15C Section 15.247(d) | ANSI C63.10 | Band-edge for RF Conducted Emissions | PASS | Appendix C) |
| Part15C Section 15.247(d) | ANSI C63.10 | RF Conducted Spurious Emissions | PASS | Appendix D) |
| Part15C Section 15.247 (e) | ANSI C63.10 | Power Spectral Density | PASS | Appendix E) |
| Part15C Section 15.203/15.247 (c) | ANSI C63.10 | Antenna Requirement | PASS | Appendix F) |
| Part15C Section 15.207 | ANSI C63.10 | AC Power Line Conducted Emission | PASS | Appendix G) |
| Part15C Section 15.205/15.209 | ANSI C63.10 | Restricted bands around fundamental frequency (Radiated Emission) | PASS | Appendix H) |
| Part15C Section 15.205/15.209 | ANSI C63.10 | Radiated Spurious Emissions | PASS | Appendix I) |

## EUT Duty Cycle

| Duty Cycle | | | |
|---|---|---|---|
| Configuration | TX ON(ms) | TX ALL(ms) | Duty Cycle(%) |
| BLE | 0.4208 | 0.6487 | 64.87% |

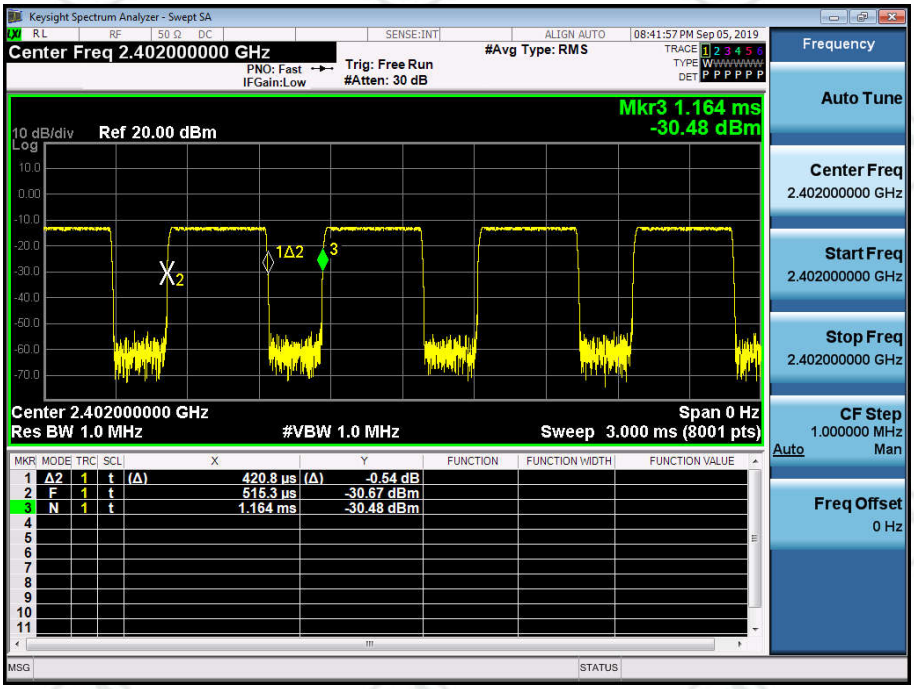

# Appendix A): 6dB Occupied Bandwidth

**Test Limit**

According to §15.247(a)(2) and RSS-247 section 5.2(a)

**6 dB Bandwidth** :

| | |
|---|---|
| Limit | Shall be at least 500kHz |

**Occupied Bandwidth(99%)** : For reporting purposes only.

**Test Procedure**

Test method Refer as KDB 558074 D01 v04, section 8.1 and ANSI 63.10:2013 clause 6.9.2 & 6.9.3.

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 100kHz, VBW = 300kHz and Detector = Peak, to measurement 6 dB Bandwidth and 99% Bandwidth.
4. Measure and record the result of 6 dB Bandwidth and 99% Bandwidth. in the test report.

**Test Setup**

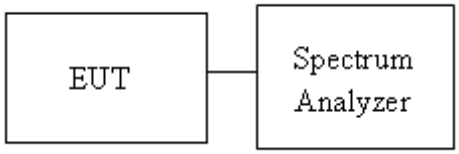

**Test Result**

| Mode | Channel | 6dB Bandwidth [MHz] | 99% OBW[MHz] | Verdict |
|---|---|---|---|---|
| BLE | LCH | 0.6859 | 1.0472 | PASS |
| BLE | MCH | 0.7002 | 1.0477 | PASS |
| BLE | HCH | 0.6912 | 1.0477 | PASS |
| BLE | LCH | 0.5789 | 1.0254 | PASS |
| BLE | MCH | 0.5740 | 1.0254 | PASS |
| BLE | HCH | 0.5740 | 1.0264 | PASS |

## Test Graphs

| Graphs | | | |
|---|---|---|---|
| LCH | | 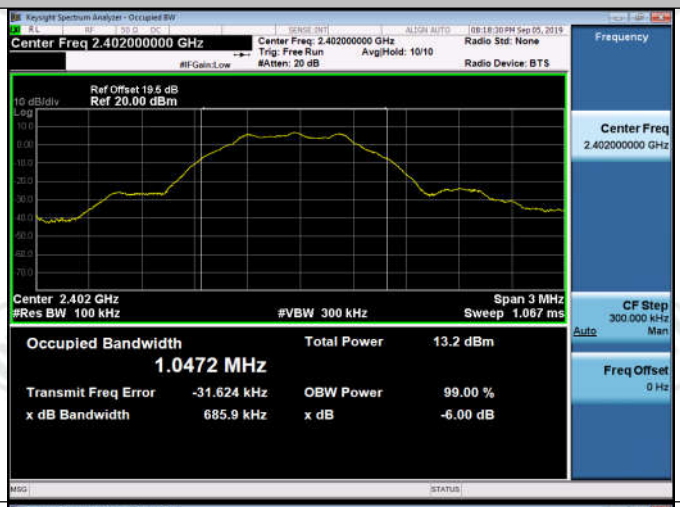 | |
| MCH | | | |
| HCH | | | |

| Graphs | | | |
|---|---|---|---|
| LCH | | 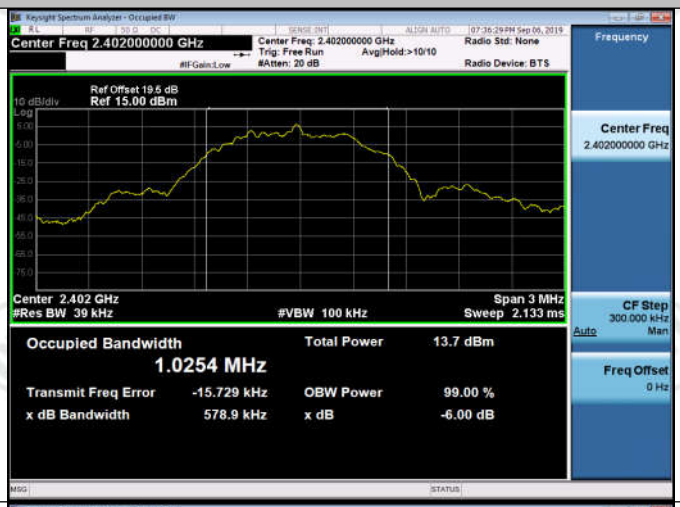 | |
| MCH | | | |
| HCH | | | |

# Appendix B): Conducted Peak Output Power

**Test Limit**

According to §15.247(b) and RSS-247 section 5.4(d)

**Peak output power** :

For systems using digital modulation in the 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt(30 dBm), base on the use of antennas with directional gain not exceed 6 dBi If transmitting antennas of directional gain greater than 6dBi are used the peak output power the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

| | |
|---|---|
| Limit | ☒ Antenna not exceed 6 dBi：30dBm<br>☐ Antenna with DG greater than 6 dBi<br>[ Limit = 30 – (DG – 6) ]<br>☐ Point-to-point operation |

**Test Procedure**

Test method Refer as KDB 558074 D01 v04, section 9.1.2.

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

**Test Setup**

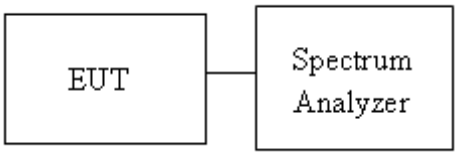

## Test Result

| Mode | Channel | Conduct Peak Power[dBm] | Verdict |
|---|---|---|---|
| BLE | LCH | 6.894 | PASS |
| BLE | MCH | 7.37 | PASS |
| BLE | HCH | 7.26 | PASS |

## Test Graphs

| Graphs | | | |
|---|---|---|---|
| LCH | | 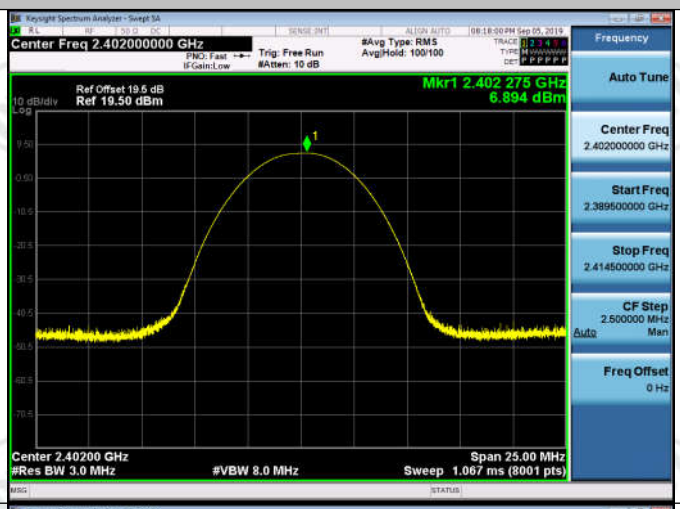  | |
| MCH | | 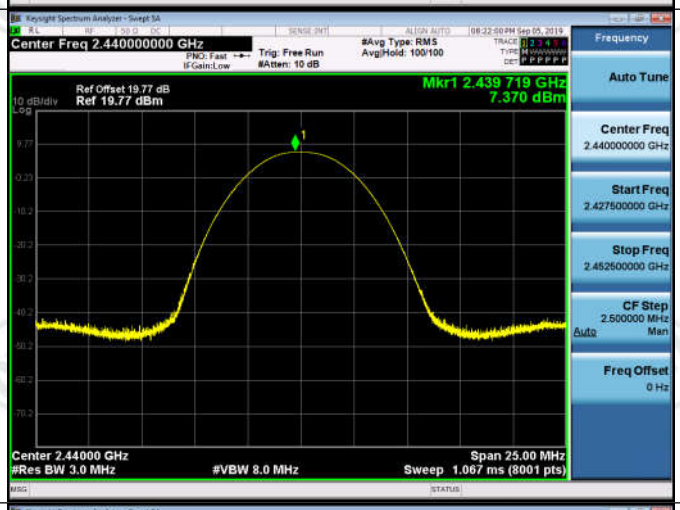  | |
| HCH | | 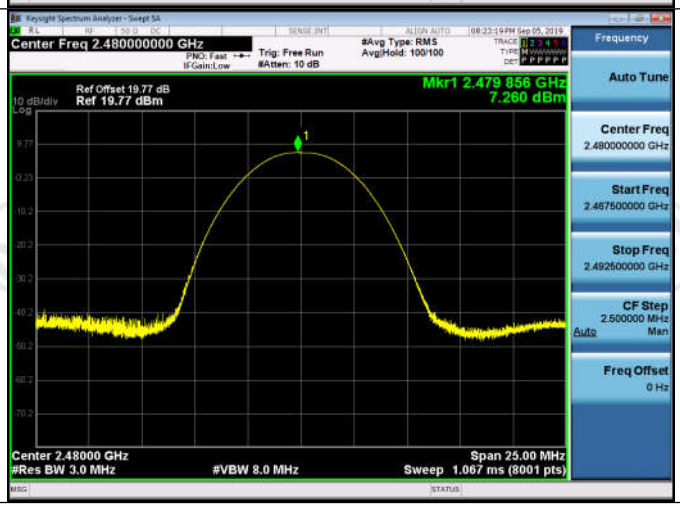  | |

# Appendix C): Band-edge for RF Conducted Emissions

**Test Limit**

According to §15.247(d) and RSS-247 section 5.5

In any 100 kHz bandwidth outside the authorized frequency band,

Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

**Test Procedure**

Test method Refer as KDB 558074 D01 v04, Section 11.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.

2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.

3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

**Test Setup**

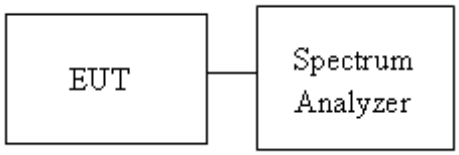

## Result Table

| Mode | Channel | Carrier Power[dBm] | Max.Spurious Level [dBm] | Limit [dBm] | Verdict |
|---|---|---|---|---|---|
| BLE | LCH | 6.807 | -55.863 | -13.19 | PASS |
| BLE | HCH | 7.227 | -48.833 | -12.77 | PASS |

## Test Graphs

| Graphs | | |
|---|---|---|
| LCH | | |
| HCH | | |

# Appendix D): RF Conducted Spurious Emissions

**Test Limit**

According to §15.247(d) and RSS-247 section 5.5

In any 100 kHz bandwidth outside the authorized frequency band,

Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

**Test Procedure**

Test method Refer as KDB 558074 D01 v04, Section 11.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.

2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.

3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

**Test Setup**

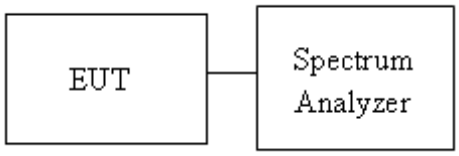

## Result Table

| Mode | Channel | Pref [dBm] | Puw[dBm] | Verdict |
|---|---|---|---|---|
| BLE | LCH | 6.636 | <Limit | PASS |
| BLE | MCH | 7.123 | <Limit | PASS |
| BLE | HCH | 7.042 | <Limit | PASS |

## Test Graphs

| BLE_LCH_Graphs | | | |
|---|---|---|---|
| Pref/BLE/LCH | | | |
| Puw/BLE/LCH | | 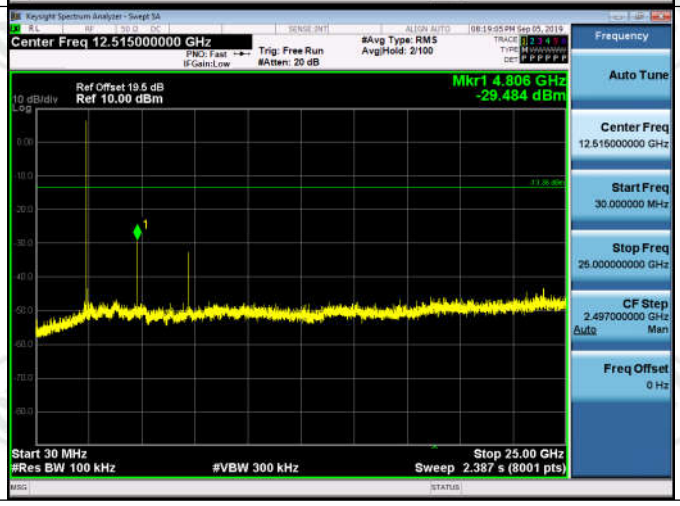  | |

| BLE_MCH_Graphs | | | |
|---|---|---|---|
| Pref/BLE/MCH | | | |
| Puw/BLE/MCH | | 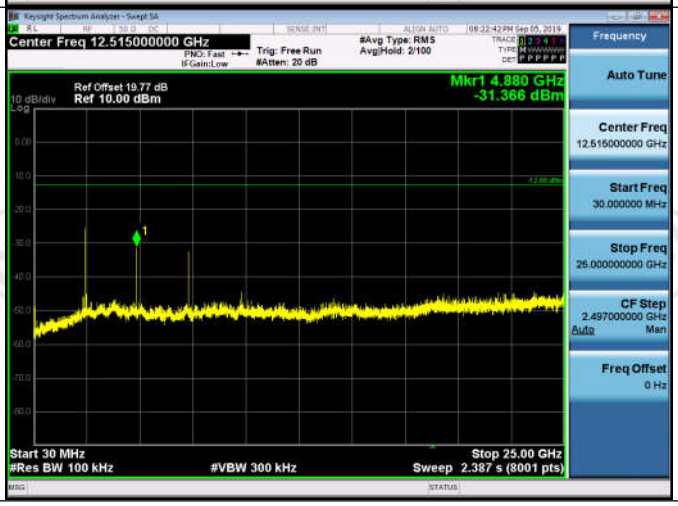 | |

| BLE_HCH_Graphs | | | |
|---|---|---|---|
| Pref/BLE/HCH | | | |
| Puw/BLE/HCH | | 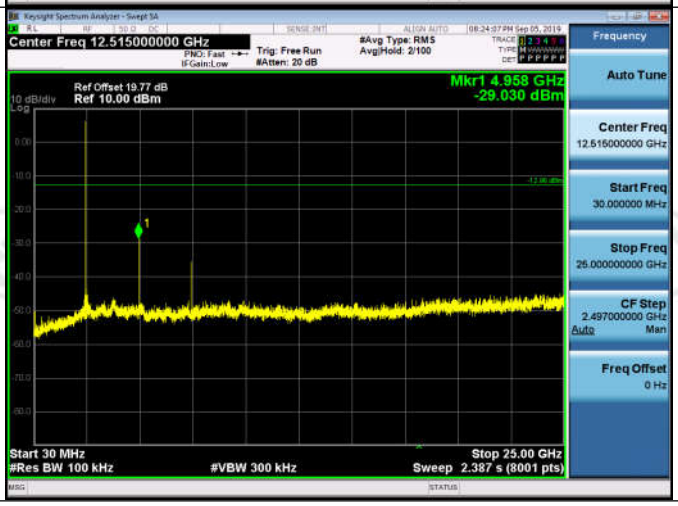 | |

# Appendix E): Power Spectral Density

**Test Limit**

According to §15.247(e) and RSS-247 section 5.2(b)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

| | |
|---|---|
| Limit | ☒ Antenna not exceed 6 dBi：8dBm<br>☐ Antenna with DG greater than 6 dBi<br>[ Limit = 8 – (DG – 6) ]<br>☐ Point-to-point operation： |

**Test Procedure**

Test method Refer as KDB 558074 D01 v04, Section 10.2

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 3kHz, VBW = 30kHz, Span = 1.5 times DTS Bandwidth (6 dB BW), Detector = Peak, Sweep Time = Auto and Trace = Max hold.
4. The path loss and Duty Factor were compensated to the results for each measurement by SA.
5. Mark the maximum level.

Measure and record the result of power spectral density. in the test report.

**Test Setup**

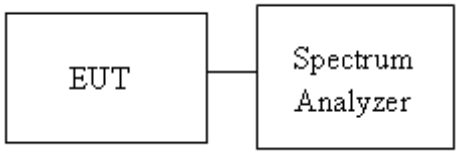

## Result Table

| Mode | Channel | PSD [dBm] | Verdict |
|---|---|---|---|
| BLE | LCH | -8.812 | PASS |
| BLE | MCH | -8.290 | PASS |
| BLE | HCH | -8.259 | PASS |

## Test Graphs

| Graphs | | | |
|---|---|---|---|
| LCH | | | |
| MCH | | | |
| HCH | | 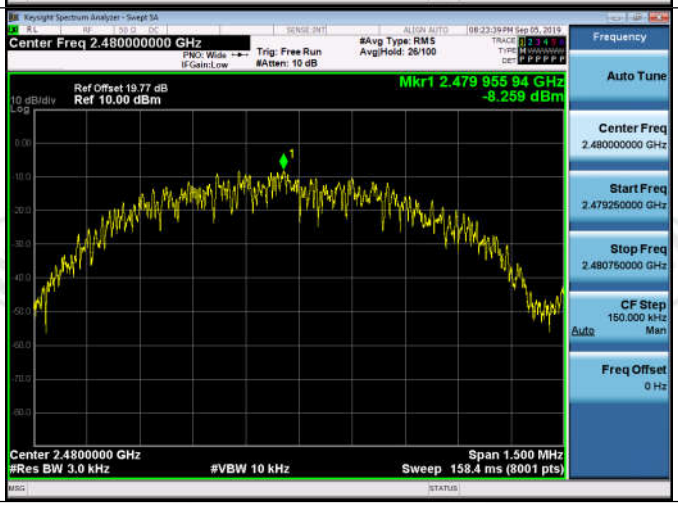  | |

# Appendix F): Antenna Requirement

**15.203 requirement:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**EUT Antenna:**

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -0.76 dBi.

# Appendix G): AC Power Line Conducted Emission

<table>
<tr><td>Test Procedure:</td><td>Test frequency range :150KHz-30MHz<br>1)The mains terminal disturbance voltage test was conducted in a shielded room.<br>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.<br>3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,<br>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.<br>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</td></tr>
<tr><td>Limit:</td><td>
<table>
<tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr>
<tr><th>Quasi-peak</th><th>Average</th></tr>
<tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr>
<tr><td>0.5-5</td><td>56</td><td>46</td></tr>
<tr><td>5-30</td><td>60</td><td>50</td></tr>
</table>
* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.<br>NOTE : The lower limit is applicable at the transition frequency</td></tr>
</table>

**Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.
Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

| | | | | | |
|---|---|---|---|---|---|
| **Product** | : | headsup | **Model/Type reference** | : | R01 |
| **Temperature** | : | 24°C | **Humidity** | : | 54% |

Live line:

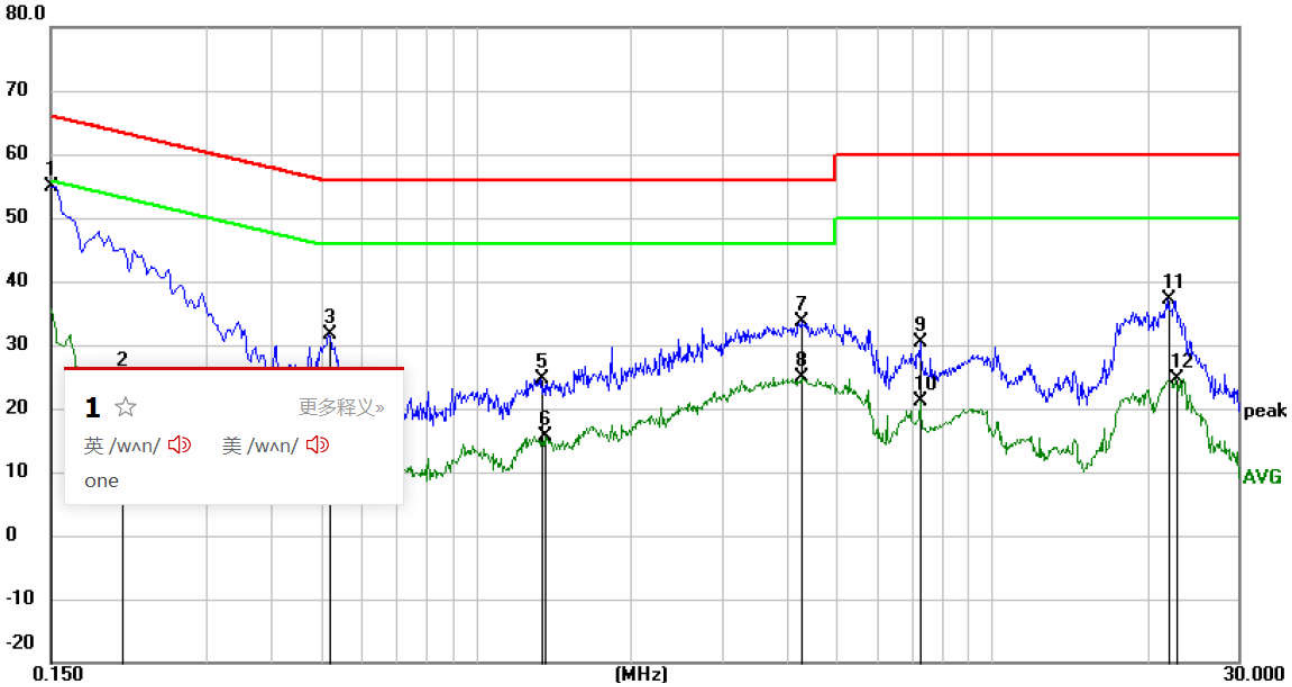


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV | dBuV | dB | Detector | Comment |
| 1 | * | 0.1500 | 44.96 | 9.97 | 54.93 | 66.00 | -11.07 | peak | |
| 2 | | 0.2061 | 14.94 | 10.02 | 24.96 | 53.36 | -28.40 | AVG | |
| 3 | | 0.5190 | 21.73 | 10.02 | 31.75 | 56.00 | -24.25 | peak | |
| 4 | | 0.5190 | 12.46 | 10.02 | 22.48 | 46.00 | -23.52 | AVG | |
| 5 | | 1.3380 | 14.72 | 9.88 | 24.60 | 56.00 | -31.40 | peak | |
| 6 | | 1.3605 | 5.66 | 9.88 | 15.54 | 46.00 | -30.46 | AVG | |
| 7 | | 4.2855 | 23.75 | 9.83 | 33.58 | 56.00 | -22.42 | peak | |
| 8 | | 4.2855 | 15.17 | 9.83 | 25.00 | 46.00 | -21.00 | AVG | |
| 9 | | 7.2870 | 20.57 | 9.86 | 30.43 | 60.00 | -29.57 | peak | |
| 10 | | 7.2870 | 11.18 | 9.86 | 21.04 | 50.00 | -28.96 | AVG | |
| 11 | | 22.0515 | 27.24 | 9.94 | 37.18 | 60.00 | -22.82 | peak | |
| 12 | | 22.6725 | 14.80 | 9.94 | 24.74 | 50.00 | -25.26 | AVG | |

Neutral line:

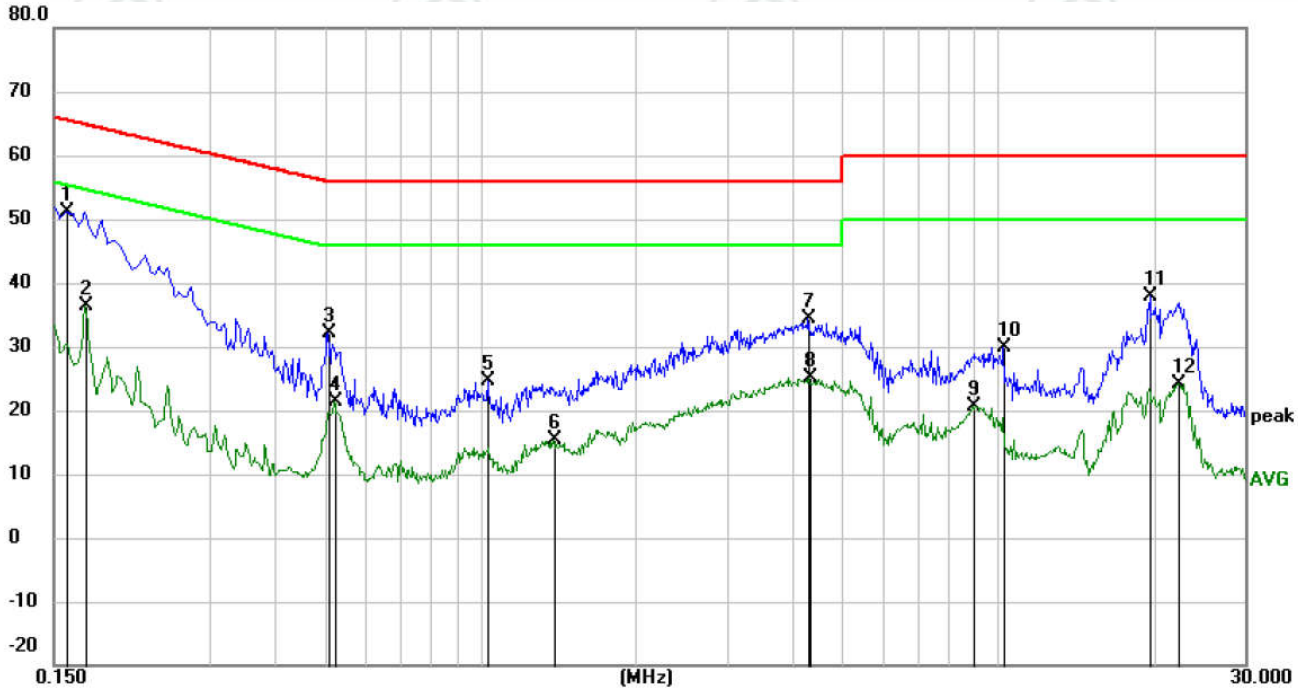


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV | dBuV | dB | Detector | Comment |
| 1 | * | 0.1590 | 41.19 | 9.98 | 51.17 | 65.52 | -14.35 | peak | |
| 2 | | 0.1725 | 26.41 | 10.00 | 36.41 | 54.84 | -18.43 | AVG | |
| 3 | | 0.5100 | 22.15 | 10.01 | 32.16 | 56.00 | -23.84 | peak | |
| 4 | | 0.5235 | 11.23 | 10.03 | 21.26 | 46.00 | -24.74 | AVG | |
| 5 | | 1.0365 | 14.82 | 9.91 | 24.73 | 56.00 | -31.27 | peak | |
| 6 | | 1.3875 | 5.49 | 9.88 | 15.37 | 46.00 | -30.63 | AVG | |
| 7 | | 4.3080 | 24.61 | 9.83 | 34.44 | 56.00 | -21.56 | peak | |
| 8 | | 4.3170 | 15.41 | 9.83 | 25.24 | 46.00 | -20.76 | AVG | |
| 9 | | 8.9520 | 10.72 | 9.92 | 20.64 | 50.00 | -29.36 | AVG | |
| 10 | | 10.2345 | 20.02 | 9.96 | 29.98 | 60.00 | -30.02 | peak | |
| 11 | | 19.6755 | 27.93 | 9.93 | 37.86 | 60.00 | -22.14 | peak | |
| 12 | | 22.2585 | 14.25 | 9.94 | 24.19 | 50.00 | -25.81 | AVG | |

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

# Appendix H): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:

| Frequency | Detector | RBW | VBW | Remark |
|---|---|---|---|---|
| 30MHz-1GHz | Quasi-peak | 120kHz | 300kHz | Quasi-peak |
| Above 1GHz | Peak | 1MHz | 3MHz | Peak |
| | Peak | 1MHz | 10Hz | Average |

Test Procedure:

**Below 1GHz test procedure as below:**

Test method Refer as KDB 558074 D01 v04, Section 12.1

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.
e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel

**Above 1GHz test procedure as below:**

g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
h. . Test the EUT in the lowest channel , the Highest channel
i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.
j. Repeat above procedures until all frequencies measured was complete.

Limit:

| Frequency | Limit (dBμV/m @3m) | Remark |
|---|---|---|
| 30MHz-88MHz | 40.0 | Quasi-peak Value |
| 88MHz-216MHz | 43.5 | Quasi-peak Value |
| 216MHz-960MHz | 46.0 | Quasi-peak Value |
| 960MHz-1GHz | 54.0 | Quasi-peak Value |
| Above 1GHz | 54.0 | Average Value |
| | 74.0 | Peak Value |

**Test plot as follows:**

| Mode: | BLE GFSK Transmitting | Channel: | 2402 |
|---|---|---|---|
| Remark: | PK | | |

**Test Graph**

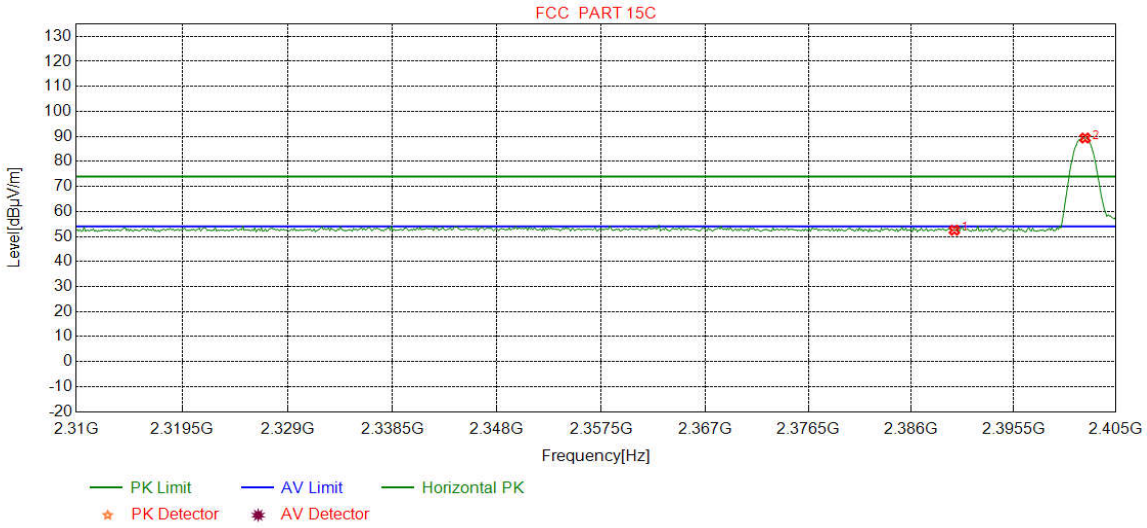


| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity |
|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 2390.0000 | 32.25 | 13.37 | -42.44 | 49.35 | 52.53 | 74.00 | 21.47 | Pass | Horizontal |
| 2 | 2402.1464 | 32.26 | 13.31 | -42.43 | 86.21 | 89.35 | 74.00 | -15.35 | Pass | Horizontal |

| Mode: | BLE GFSK Transmitting | Channel: | 2402 |
|---|---|---|---|
| Remark: | PK | | |

**Test Graph**

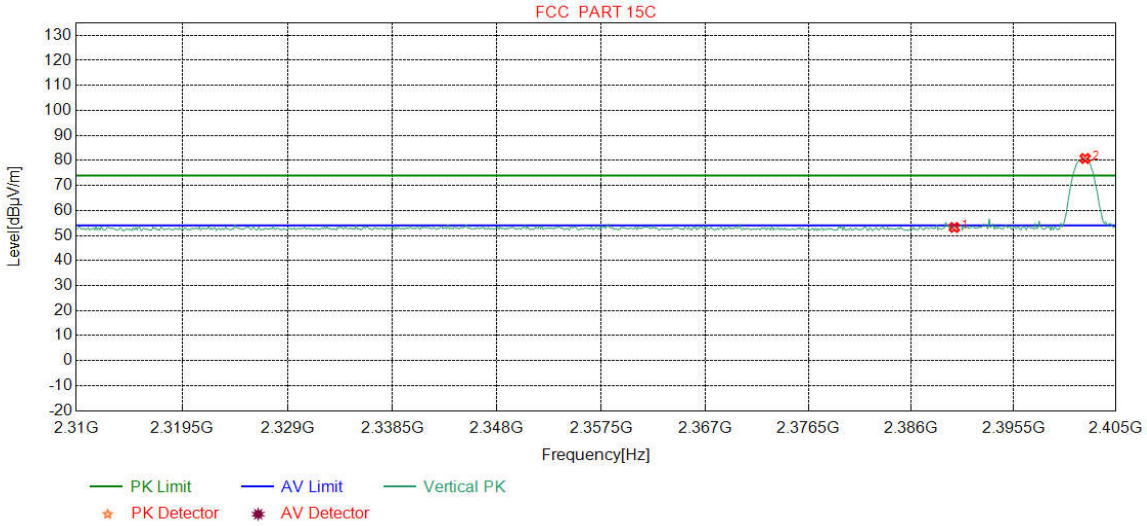


| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity |
|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 2390.0000 | 32.25 | 13.37 | -42.44 | 50.04 | 53.22 | 74.00 | 20.78 | Pass | Vertical |
| 2 | 2402.1464 | 32.26 | 13.31 | -42.43 | 77.64 | 80.78 | 74.00 | -6.78 | Pass | Vertical |

| Mode: | BLE GFSK Transmitting | Channel: | 2402 |
|---|---|---|---|
| Remark: | AV | | |

**Test Graph**

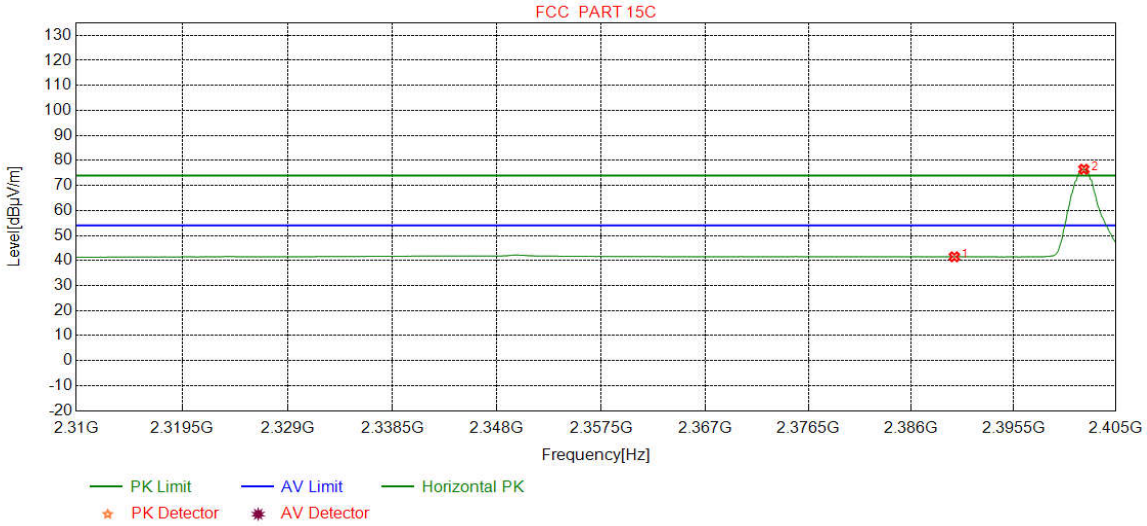


| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity |
|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 2390.0000 | 32.25 | 13.37 | -42.44 | 38.31 | 41.49 | 54.00 | 12.51 | Pass | Horizontal |
| 2 | 2402.0275 | 32.26 | 13.31 | -42.43 | 73.35 | 76.49 | 54.00 | -22.49 | Pass | Horizontal |

| Mode: | BLE GFSK Transmitting | Channel: | 2402 |
|---|---|---|---|
| Remark: | AV | | |

**Test Graph**

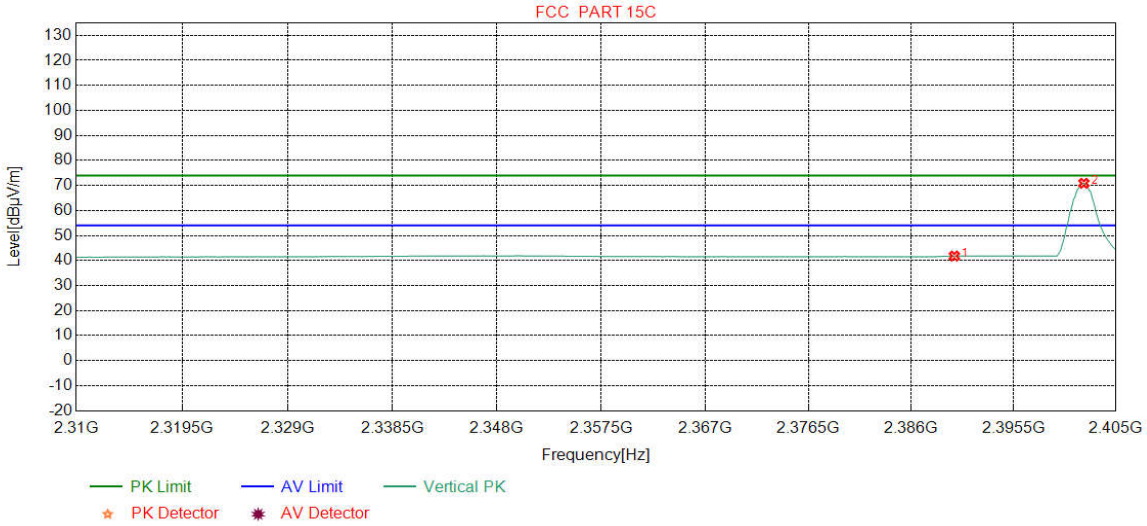


| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity |
|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 2390.0000 | 32.25 | 13.37 | -42.44 | 38.61 | 41.79 | 54.00 | 12.21 | Pass | Vertical |
| 2 | 2402.0275 | 32.26 | 13.31 | -42.43 | 67.74 | 70.88 | 54.00 | -16.88 | Pass | Vertical |

| Mode: | BLE GFSK Transmitting | Channel: | 2480 |
|---|---|---|---|
| Remark: | PK | | |

**Test Graph**

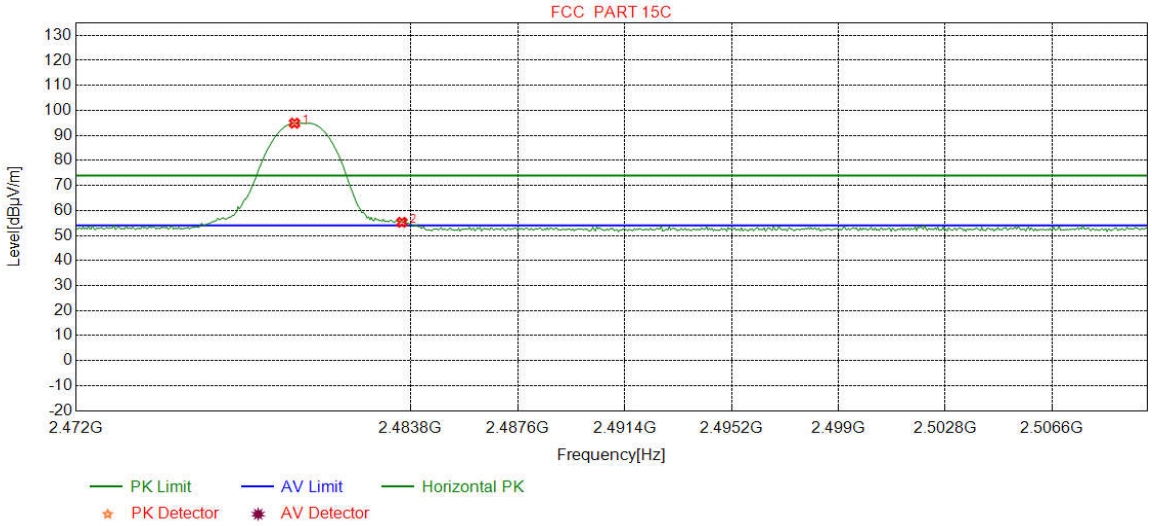


| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity |
|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 2479.7046 | 32.37 | 13.39 | -42.39 | 91.52 | 94.89 | 74.00 | -20.89 | Pass | Horizontal |
| 2 | 2483.5000 | 32.38 | 13.38 | -42.40 | 51.93 | 55.29 | 74.00 | 18.71 | Pass | Horizontal |

| Mode: | BLE GFSK Transmitting | Channel: | 2480 |
|---|---|---|---|
| Remark: | PK | | |

**Test Graph**

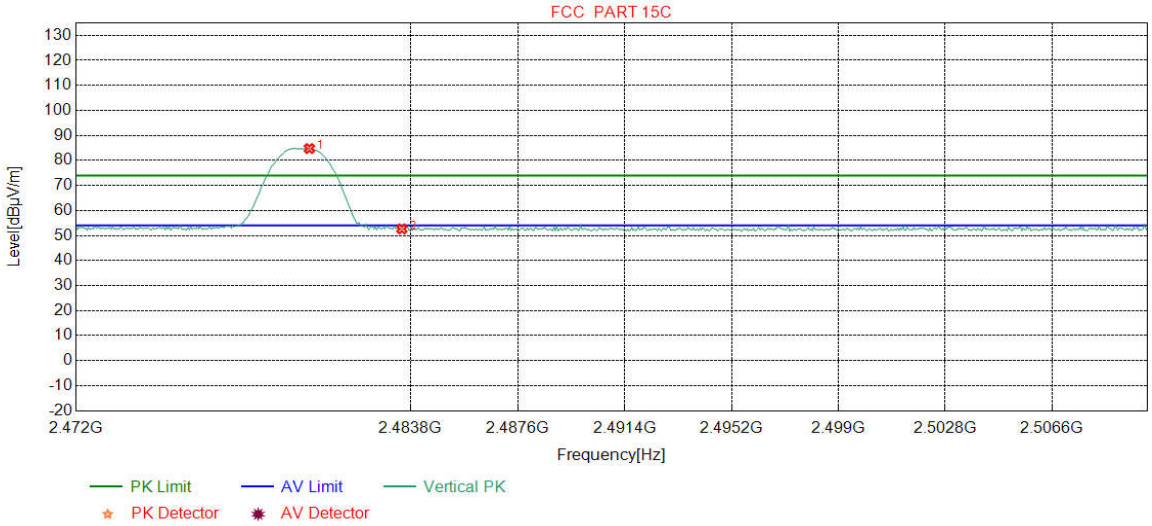


| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity |
|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 2480.2278 | 32.37 | 13.39 | -42.40 | 81.40 | 84.76 | 74.00 | -10.76 | Pass | Vertical |
| 2 | 2483.5000 | 32.38 | 13.38 | -42.40 | 49.27 | 52.63 | 74.00 | 21.37 | Pass | Vertical |

| Mode: | BLE GFSK Transmitting | Channel: | 2480 |
|---|---|---|---|
| Remark: | AV | | |

**Test Graph**

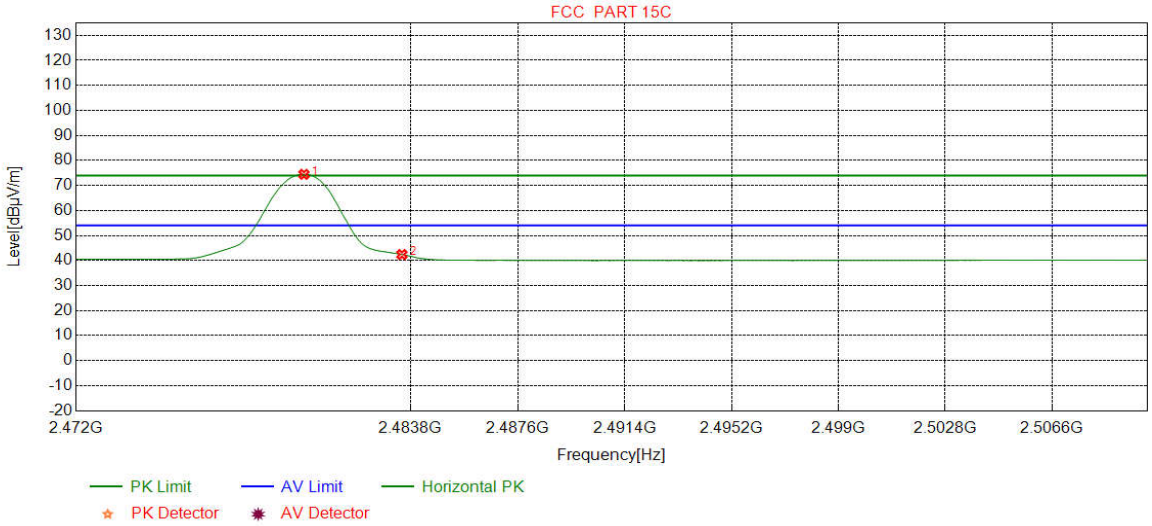


| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity |
|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 2480.0375 | 32.37 | 13.39 | -42.39 | 71.07 | 74.44 | 54.00 | -20.44 | Pass | Horizontal |
| 2 | 2483.5000 | 32.38 | 13.38 | -42.40 | 39.05 | 42.41 | 54.00 | 11.59 | Pass | Horizontal |

| Mode: | BLE GFSK Transmitting | Channel: | 2480 |
|---|---|---|---|
| Remark: | AV | | |

**Test Graph**

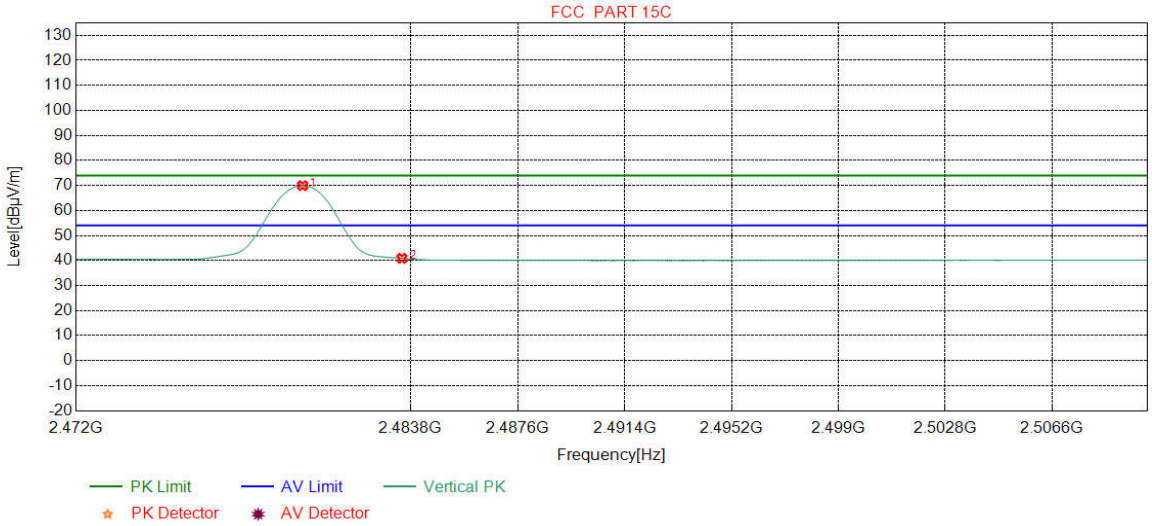


| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity |
|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 2479.9900 | 32.37 | 13.39 | -42.39 | 66.57 | 69.94 | 54.00 | -15.94 | Pass | Vertical |
| 2 | 2483.5000 | 32.38 | 13.38 | -42.40 | 37.52 | 40.88 | 54.00 | 13.12 | Pass | Vertical |

Note:

1) Through Pre-scan Non-hopping transmitting mode and charge+transmitter mode with all kind of data type, find the DH5 of data type is the worse case ofGFSK modulation type in charge + transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading -Correct Factor

Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

# Appendix I) Radiated Spurious Emissions

**Receiver Setup:**

| Frequency | Detector | RBW | VBW | Remark |
|---|---|---|---|---|
| 0.009MHz-0.090MHz | Peak | 10kHz | 30kHz | Peak |
| 0.009MHz-0.090MHz | Average | 10kHz | 30kHz | Average |
| 0.090MHz-0.110MHz | Quasi-peak | 10kHz | 30kHz | Quasi-peak |
| 0.110MHz-0.490MHz | Peak | 10kHz | 30kHz | Peak |
| 0.110MHz-0.490MHz | Average | 10kHz | 30kHz | Average |
| 0.490MHz -30MHz | Quasi-peak | 10kHz | 30kHz | Quasi-peak |
| 30MHz-1GHz | Quasi-peak | 120kHz | 300kHz | Quasi-peak |
| Above 1GHz | Peak | 1MHz | 3MHz | Peak |
| | Peak | 1MHz | 10Hz | Average |

**Test Procedure:**

**Below 1GHz test procedure as below:**

Test method Refer as KDB 558074 D01 v04, Section 12.1

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
b. The EUT was set 3 meters away from the interference-receiving antenna, whichwas mounted on the top of a variable-height antenna tower.
c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.
e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Above 1GHz test procedure as below:**

g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.
j. Repeat above procedures until all frequencies measured was complete.

Limit:

| Frequency | Field strength (microvolt/meter) | Limit (dBμV/m) | Remark | Measurement distance (m) |
|---|---|---|---|---|
| 0.009MHz-0.490MHz | 2400/F(kHz) | - | - | 300 |
| 0.490MHz-1.705MHz | 24000/F(kHz) | - | - | 30 |
| 1.705MHz-30MHz | 30 | - | - | 30 |
| 30MHz-88MHz | 100 | 40.0 | Quasi-peak | 3 |
| 88MHz-216MHz | 150 | 43.5 | Quasi-peak | 3 |
| 216MHz-960MHz | 200 | 46.0 | Quasi-peak | 3 |
| 960MHz-1GHz | 500 | 54.0 | Quasi-peak | 3 |
| Above 1GHz | 500 | 54.0 | Average | 3 |

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

# Radiated Spurious Emissions test Data:

## Radiated Emission below 1GHz

| Mode: | | | BLE GFSK Transmitting | | | | | Channel: | | 2402 | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1 | 39.4099 | 12.11 | 0.71 | -32.11 | 52.92 | 33.63 | 40.00 | 6.37 | Pass | H | PK |
| 2 | 95.9666 | 10.35 | 1.13 | -32.07 | 46.73 | 26.14 | 43.50 | 17.36 | Pass | H | PK |
| 3 | 131.9572 | 7.60 | 1.34 | -32.01 | 54.41 | 31.34 | 43.50 | 12.16 | Pass | H | PK |
| 4 | 208.8859 | 11.13 | 1.71 | -31.94 | 49.56 | 30.46 | 43.50 | 13.04 | Pass | H | PK |
| 5 | 334.8045 | 13.97 | 2.18 | -31.80 | 41.62 | 25.97 | 46.00 | 20.03 | Pass | H | PK |
| 6 | 908.0348 | 22.15 | 3.60 | -31.50 | 44.78 | 39.03 | 46.00 | 6.97 | Pass | H | PK |
| 7 | 39.5070 | 12.14 | 0.71 | -32.11 | 54.42 | 35.16 | 40.00 | 4.84 | Pass | V | PK |
| 8 | 95.9666 | 10.35 | 1.13 | -32.07 | 57.25 | 36.66 | 43.50 | 6.84 | Pass | V | PK |
| 9 | 150.3890 | 7.56 | 1.45 | -32.00 | 59.97 | 36.98 | 43.50 | 6.52 | Pass | V | PK |
| 10 | 224.0194 | 11.52 | 1.78 | -31.93 | 51.98 | 33.35 | 46.00 | 12.65 | Pass | V | PK |
| 11 | 571.9932 | 18.44 | 2.82 | -32.02 | 42.55 | 31.79 | 46.00 | 14.21 | Pass | V | PK |
| 12 | 875.0515 | 21.80 | 3.55 | -31.70 | 33.46 | 27.11 | 46.00 | 18.89 | Pass | V | PK |

| Mode: | | | BLE GFSK Transmitting | | | | | Channel: | | 2441 | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1 | 39.5070 | 12.14 | 0.71 | -32.11 | 54.57 | 35.31 | 40.00 | 4.69 | Pass | H | PK |
| 2 | 58.6179 | 11.82 | 0.88 | -32.05 | 44.39 | 25.04 | 40.00 | 14.96 | Pass | H | PK |
| 3 | 127.9798 | 8.00 | 1.32 | -32.02 | 47.62 | 24.92 | 43.50 | 18.58 | Pass | H | PK |
| 4 | 208.8859 | 11.13 | 1.71 | -31.94 | 49.57 | 30.47 | 43.50 | 13.03 | Pass | H | PK |
| 5 | 334.8045 | 13.97 | 2.18 | -31.80 | 42.63 | 26.98 | 46.00 | 19.02 | Pass | H | PK |
| 6 | 879.7080 | 21.86 | 3.55 | -31.66 | 34.67 | 28.42 | 46.00 | 17.58 | Pass | H | PK |
| 7 | 39.4099 | 12.11 | 0.71 | -32.11 | 56.77 | 37.48 | 40.00 | 2.52 | Pass | V | PK |
| 8 | 126.9127 | 8.16 | 1.32 | -32.03 | 56.71 | 34.16 | 43.50 | 9.34 | Pass | V | PK |
| 9 | 146.1206 | 7.41 | 1.43 | -32.00 | 58.16 | 35.00 | 43.50 | 8.50 | Pass | V | PK |
| 10 | 224.0194 | 11.52 | 1.78 | -31.93 | 51.41 | 32.78 | 46.00 | 13.22 | Pass | V | PK |
| 11 | 536.0026 | 17.72 | 2.78 | -31.94 | 42.05 | 30.61 | 46.00 | 15.39 | Pass | V | PK |
| 12 | 875.0515 | 21.80 | 3.55 | -31.70 | 35.07 | 28.72 | 46.00 | 17.28 | Pass | V | PK |

| Mode: | | | BLE GFSK Transmitting | | | | | Channel: | | 2480 | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1 | 44.8425 | 13.17 | 0.75 | -32.11 | 51.13 | 32.94 | 40.00 | 7.06 | Pass | H | PK |
| 2 | 95.9666 | 10.35 | 1.13 | -32.07 | 48.79 | 28.20 | 43.50 | 15.30 | Pass | H | PK |
| 3 | 163.9704 | 8.12 | 1.49 | -31.97 | 53.87 | 31.51 | 43.50 | 11.99 | Pass | H | PK |
| 4 | 208.8859 | 11.13 | 1.71 | -31.94 | 49.46 | 30.36 | 43.50 | 13.14 | Pass | H | PK |
| 5 | 600.0290 | 19.00 | 2.96 | -31.99 | 35.88 | 25.85 | 46.00 | 20.15 | Pass | H | PK |
| 6 | 879.7080 | 21.86 | 3.55 | -31.66 | 35.65 | 29.40 | 46.00 | 16.60 | Pass | H | PK |
| 7 | 45.1335 | 13.20 | 0.75 | -32.11 | 55.56 | 37.40 | 40.00 | 2.60 | Pass | V | PK |
| 8 | 75.6916 | 7.92 | 1.01 | -32.06 | 60.47 | 37.34 | 40.00 | 2.66 | Pass | V | PK |
| 9 | 96.0636 | 10.37 | 1.13 | -32.07 | 58.68 | 38.11 | 43.50 | 5.39 | Pass | V | PK |
| 10 | 167.9478 | 8.34 | 1.52 | -31.97 | 60.01 | 37.90 | 43.50 | 5.60 | Pass | V | PK |
| 11 | 227.9968 | 11.63 | 1.79 | -31.92 | 55.13 | 36.63 | 46.00 | 9.37 | Pass | V | PK |
| 12 | 906.3856 | 22.14 | 3.60 | -31.52 | 34.07 | 28.29 | 46.00 | 17.71 | Pass | V | PK |

**Transmitter Emission above 1GHz**

| Mode: | | | BLE GFSK Transmitting | | | | | Channel: | | 2402 | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1 | 1795.6796 | 30.35 | 3.31 | -42.70 | 58.84 | 49.80 | 74.00 | 24.20 | Pass | H | PK |
| 2 | 4804.0000 | 34.50 | 4.55 | -40.66 | 42.31 | 40.70 | 74.00 | 33.30 | Pass | H | PK |
| 3 | 7206.0000 | 36.31 | 5.81 | -41.02 | 52.31 | 53.41 | 74.00 | 20.59 | Pass | H | PK |
| 4 | 9608.0000 | 37.64 | 6.63 | -40.76 | 45.33 | 48.84 | 74.00 | 25.16 | Pass | H | PK |
| 5 | 12010.000 | 39.31 | 7.60 | -41.21 | 42.99 | 48.69 | 74.00 | 25.31 | Pass | H | PK |
| 6 | 16214.881 | 42.07 | 10.08 | -43.49 | 44.73 | 53.39 | 74.00 | 20.61 | Pass | H | PK |
| 7 | 1396.2396 | 28.30 | 2.89 | -42.68 | 56.88 | 45.39 | 74.00 | 28.61 | Pass | V | PK |
| 8 | 4804.0000 | 34.50 | 4.55 | -40.66 | 54.90 | 53.29 | 74.00 | 20.71 | Pass | V | PK |
| 9 | 7206.0000 | 36.31 | 5.81 | -41.02 | 52.14 | 53.24 | 74.00 | 20.76 | Pass | V | PK |
| 10 | 9608.0000 | 37.64 | 6.63 | -40.76 | 46.20 | 49.71 | 74.00 | 24.29 | Pass | V | PK |
| 11 | 12010.000 | 39.31 | 7.60 | -41.21 | 41.99 | 47.69 | 74.00 | 26.31 | Pass | V | PK |
| 12 | 16222.881 | 42.08 | 10.12 | -43.49 | 45.06 | 53.77 | 74.00 | 20.23 | Pass | V | PK |

| Mode: | | | BLE GFSK Transmitting | | | | | Channel: | | 2441 | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1 | 1796.0796 | 30.35 | 3.31 | -42.70 | 56.89 | 47.85 | 74.00 | 26.15 | Pass | H | PK |
| 2 | 4880.0000 | 34.50 | 4.80 | -40.60 | 41.92 | 40.62 | 74.00 | 33.38 | Pass | H | PK |
| 3 | 7206.2804 | 36.31 | 5.81 | -41.02 | 52.82 | 53.92 | 74.00 | 20.08 | Pass | H | PK |
| 4 | 9760.0000 | 37.70 | 6.73 | -40.62 | 40.74 | 44.55 | 74.00 | 29.45 | Pass | H | PK |
| 5 | 12200.000 | 39.42 | 7.67 | -41.17 | 43.12 | 49.04 | 74.00 | 24.96 | Pass | H | PK |
| 6 | 15913.860 | 41.73 | 10.17 | -43.30 | 45.28 | 53.88 | 74.00 | 20.12 | Pass | H | PK |
| 7 | 1399.2399 | 28.30 | 2.90 | -42.68 | 55.88 | 44.40 | 74.00 | 29.60 | Pass | V | PK |
| 8 | 4804.1203 | 34.50 | 4.55 | -40.66 | 54.09 | 52.48 | 74.00 | 21.52 | Pass | V | PK |
| 9 | 7206.2804 | 36.31 | 5.81 | -41.02 | 52.46 | 53.56 | 74.00 | 20.44 | Pass | V | PK |
| 10 | 9760.0000 | 37.70 | 6.73 | -40.62 | 41.09 | 44.90 | 74.00 | 29.10 | Pass | V | PK |
| 11 | 12200.000 | 39.42 | 7.67 | -41.17 | 42.51 | 48.43 | 74.00 | 25.57 | Pass | V | PK |
| 12 | 16286.885 | 42.13 | 10.07 | -43.53 | 44.72 | 53.39 | 74.00 | 20.61 | Pass | V | PK |

| Mode: | | | BLE GFSK Transmitting | | | | | Channel: | | 2480 | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1 | 1794.6795 | 30.34 | 3.31 | -42.70 | 57.57 | 48.52 | 74.00 | 25.48 | Pass | H | PK |
| 2 | 4960.0000 | 34.50 | 4.82 | -40.53 | 43.50 | 42.29 | 74.00 | 31.71 | Pass | H | PK |
| 3 | 7440.0000 | 36.54 | 5.85 | -40.82 | 43.24 | 44.81 | 74.00 | 29.19 | Pass | H | PK |
| 4 | 9920.0000 | 37.77 | 6.79 | -40.48 | 41.38 | 45.46 | 74.00 | 28.54 | Pass | H | PK |
| 5 | 12400.000 | 39.54 | 7.86 | -41.12 | 42.62 | 48.90 | 74.00 | 25.10 | Pass | H | PK |
| 6 | 16199.880 | 42.06 | 10.00 | -43.48 | 45.33 | 53.91 | 74.00 | 20.09 | Pass | H | PK |
| 7 | 1395.4395 | 28.30 | 2.89 | -42.69 | 56.82 | 45.32 | 74.00 | 28.68 | Pass | V | PK |
| 8 | 4960.0000 | 34.50 | 4.82 | -40.53 | 43.01 | 41.80 | 74.00 | 32.20 | Pass | V | PK |
| 9 | 7440.0000 | 36.54 | 5.85 | -40.82 | 42.43 | 44.00 | 74.00 | 30.00 | Pass | V | PK |
| 10 | 9920.0000 | 37.77 | 6.79 | -40.48 | 41.35 | 45.43 | 74.00 | 28.57 | Pass | V | PK |
| 11 | 12400.000 | 39.54 | 7.86 | -41.12 | 42.44 | 48.72 | 74.00 | 25.28 | Pass | V | PK |
| 12 | 15751.850 | 41.40 | 9.76 | -43.18 | 44.65 | 52.63 | 74.00 | 21.37 | Pass | V | PK |

Note:

1) Through Pre-scan Non-hopping transmitting mode and charge+transmitter mode with all kind of data type, find the DH5 of data type is the worse case of GFSK modulation type in charge + transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading -Correct Factor

Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

3) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

# PHOTOGRAPHS OF TEST SETUP

Test mode No:R01

**Radiated spurious emission Test Setup-2 (Below 30M)**

**Radiated spurious emission Test Setup-1 (Below 1GHz)**

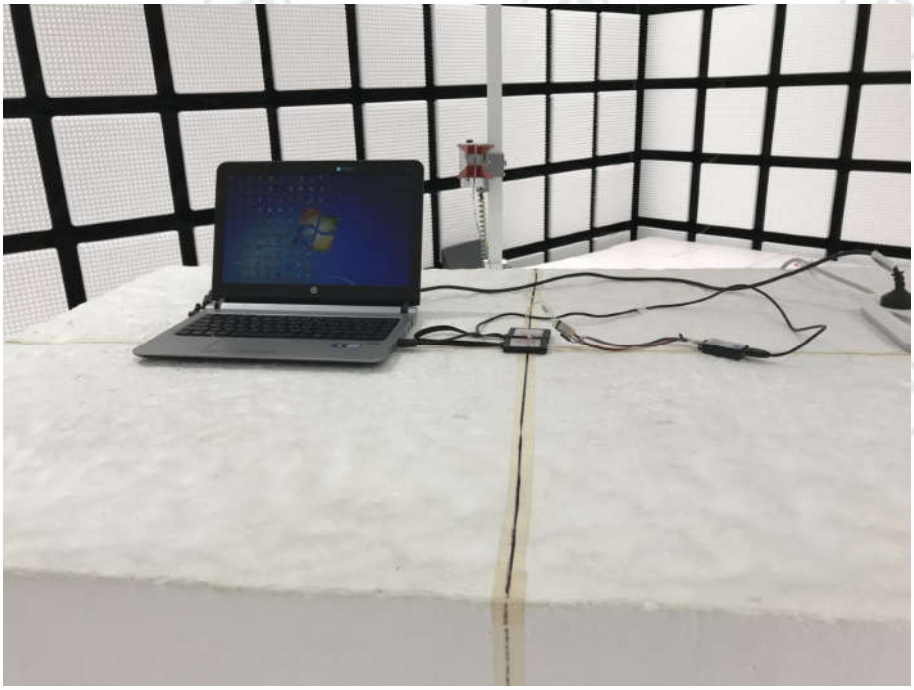

**Radiated spurious emission Test Setup-3（Above 1GHz)**

**Radiated spurious emission Test Setup-4(Above 1GHz)**
**There is absorber on the ground floor**

**AC Conducted Emissions Test Setup**

# PHOTOGRAPHS OF EUT Constructional Details

Refer to Report No. EED32L00236701 for EUT external and internal photos.

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.