



REPORT No.: SZ25100415S01

Annex D Plots of Maximum SAR Test Results

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/15

WCDMA Band II_RMC 12.2Kbps_Right Tilt_Ch9262_Ant4

Communication System: UID 0, UMTS-FDD (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium: HSL_1800 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 40.126$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.09, 5.09, 5.09) @ 1852.4 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch9262/Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.19 W/kg

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.01 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 0.980 W/kg; SAR(10 g) = 0.505 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 57.9%

Maximum value of SAR (measured) = 1.10 W/kg

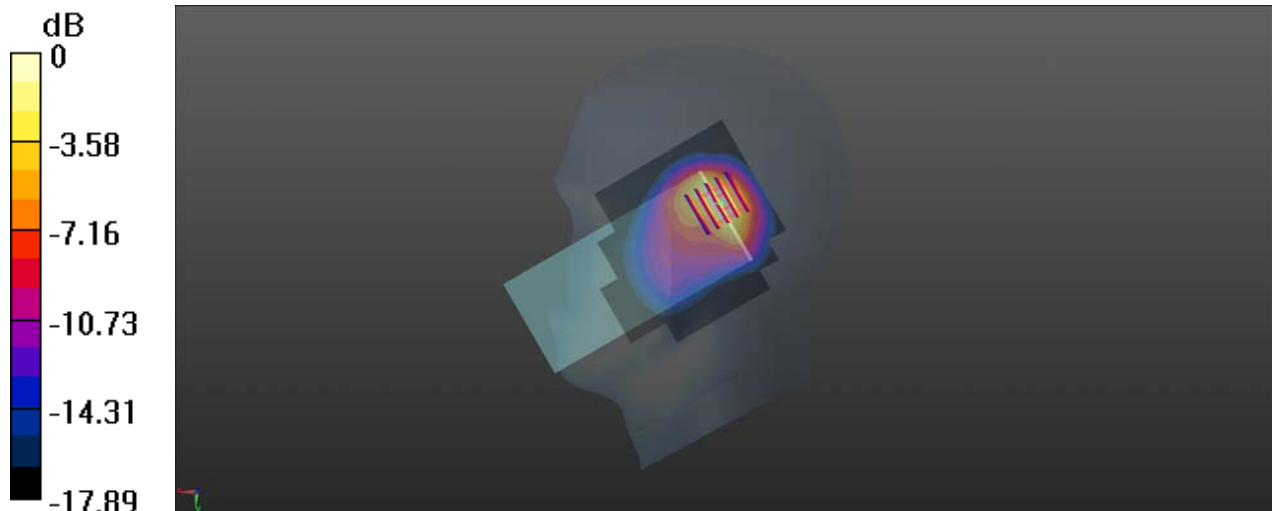

0 dB = 1.10 W/kg = 0.41 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/15

WCDMA Band IV_RMC 12.2Kbps_Right Cheek_Ch1513_Ant4

Communication System: UID 0, UMTS-FDD (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium: HSL_1800 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.358$ S/m; $\epsilon_r = 40.525$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.42, 5.42, 5.42) @ 1752.6 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1513/Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.56 W/kg

Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.25 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.923 W/kg; SAR(10 g) = 0.537 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 59.5%

Maximum value of SAR (measured) = 1.21 W/kg

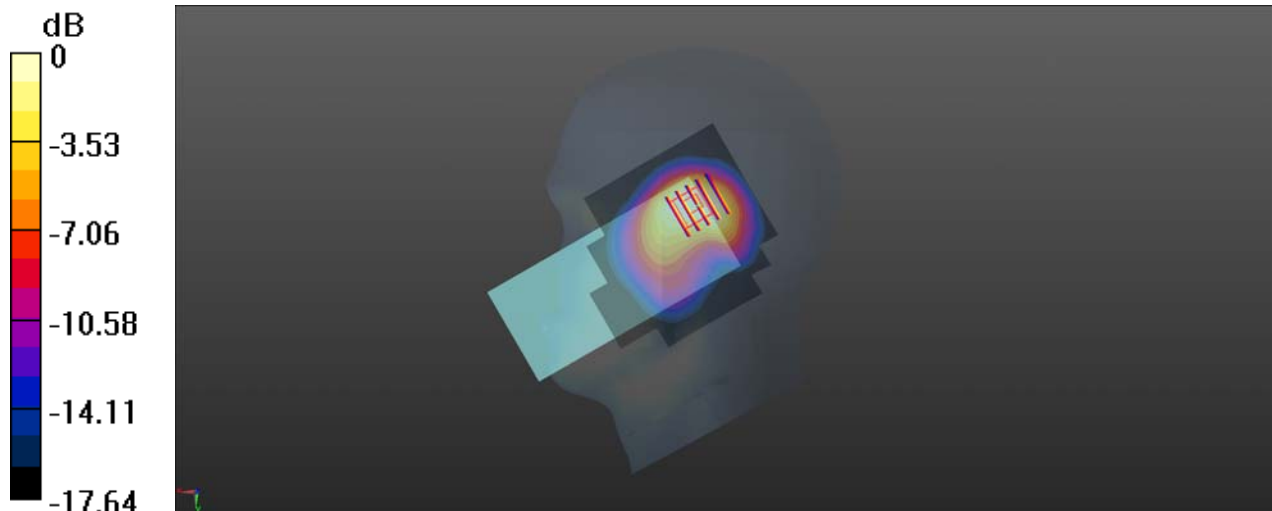

0 dB = 1.21 W/kg = 0.83 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/13

WCDMA Band V_RMC 12.2Kbps_Left Cheek_Ch4182_Ant1

Communication System: UID 0, UMTS-FDD (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: HSL_900 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.951$ S/m; $\epsilon_r = 41.138$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(6.25, 6.25, 6.25) @ 836.4 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch4182/Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.644 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.125 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.592 W/kg; SAR(10 g) = 0.370 W/kg

Smallest distance from peaks to all points 3 dB below = 12.1 mm

Ratio of SAR at M2 to SAR at M1 = 65.5%

Maximum value of SAR (measured) = 0.607 W/kg

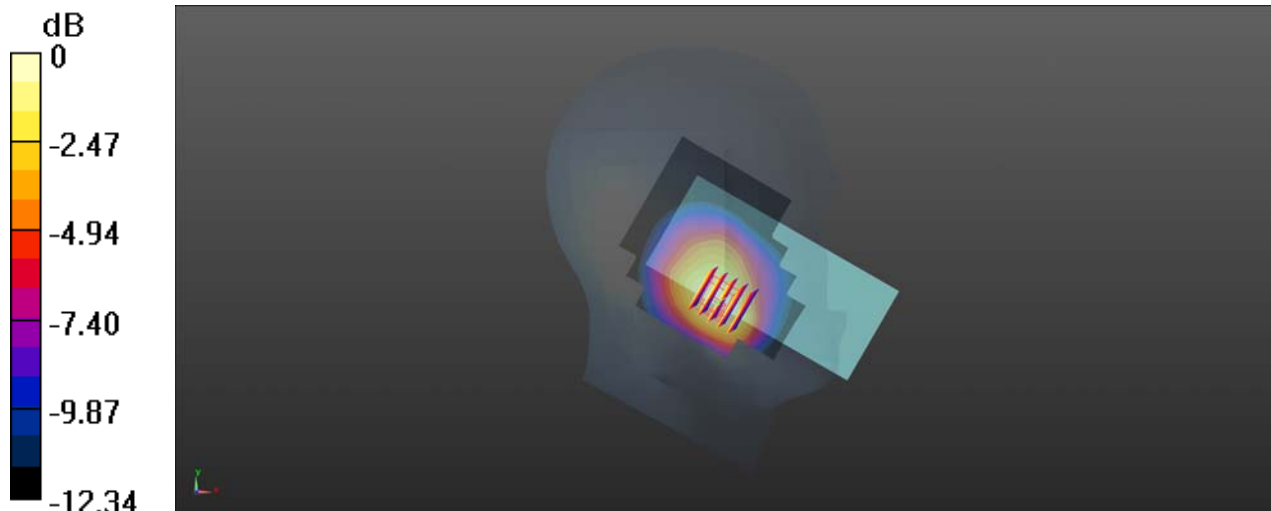

0 dB = 0.607 W/kg = -2.17 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/21

LTE Band 7_20MHz_QPSK_1RB_0Offset_Left Cheek_Ch21100_Ant5

Communication System: UID 0, LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: HSL_2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.9$ S/m; $\epsilon_r = 38.769$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.54, 4.54, 4.54) @ 2535 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch21100/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.916 W/kg

Ch21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.673 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 0.875 W/kg; SAR(10 g) = 0.434 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 44.3%

Maximum value of SAR (measured) = 0.952 W/kg

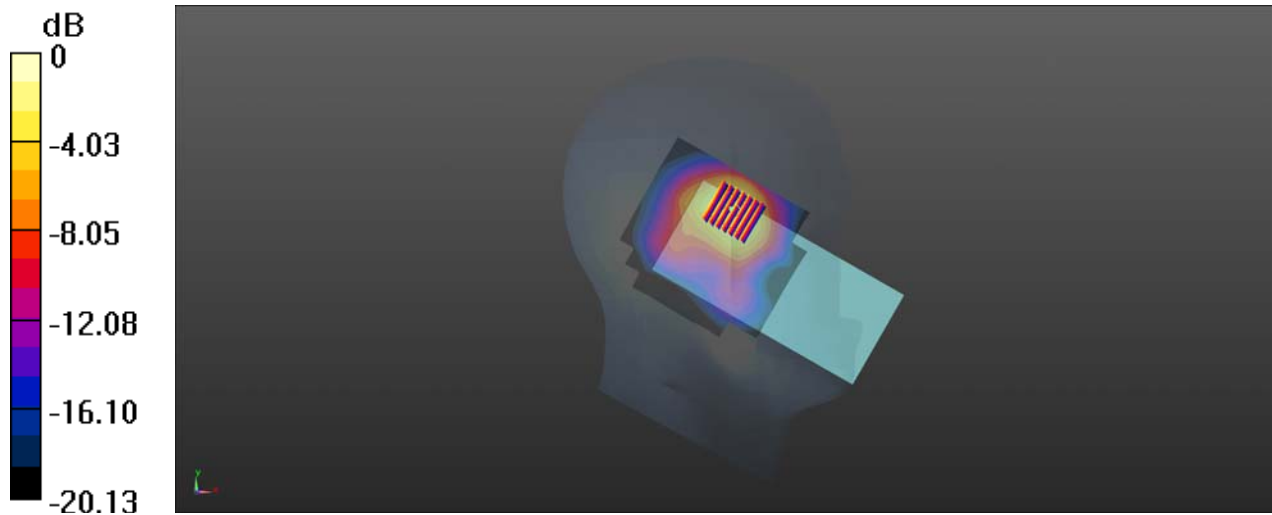

0 dB = 0.952 W/kg = -0.21 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/10

LTE Band 12_10MHz_QPSK_1RB_0Offset_Left Cheek_Ch23095_Ant1

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 41.166$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(6.54, 6.54, 6.54) @ 707.5 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23095/Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.434 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.061 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.811 W/kg

SAR(1 g) = 0.393 W/kg; SAR(10 g) = 0.231 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.7%

Maximum value of SAR (measured) = 0.448 W/kg

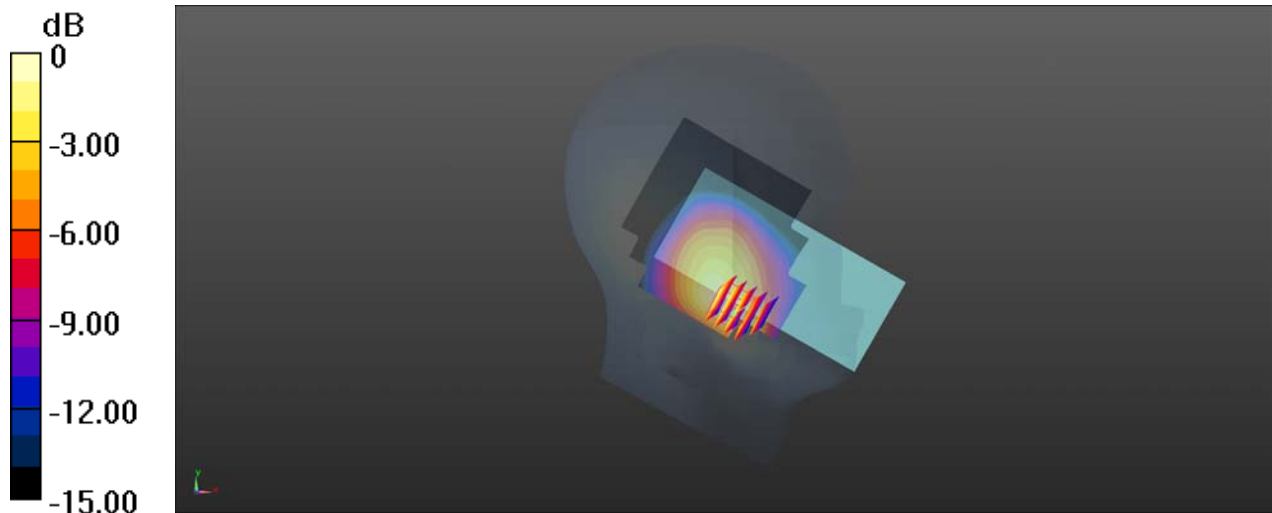

0 dB = 0.448 W/kg = -3.49 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/10

LTE Band 13_10MHz_QPSK_1RB_0Offset_Left Cheek_Ch23230_Ant1

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.926 \text{ S/m}$; $\epsilon_r = 41.254$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(6.54, 6.54, 6.54) @ 782 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23230/Area Scan (81x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.492 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.429 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.982 W/kg

SAR(1 g) = 0.478 W/kg; SAR(10 g) = n.a.

Smallest distance from peaks to all points 3 dB below = 2.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.5%

Maximum value of SAR (measured) = 0.543 W/kg

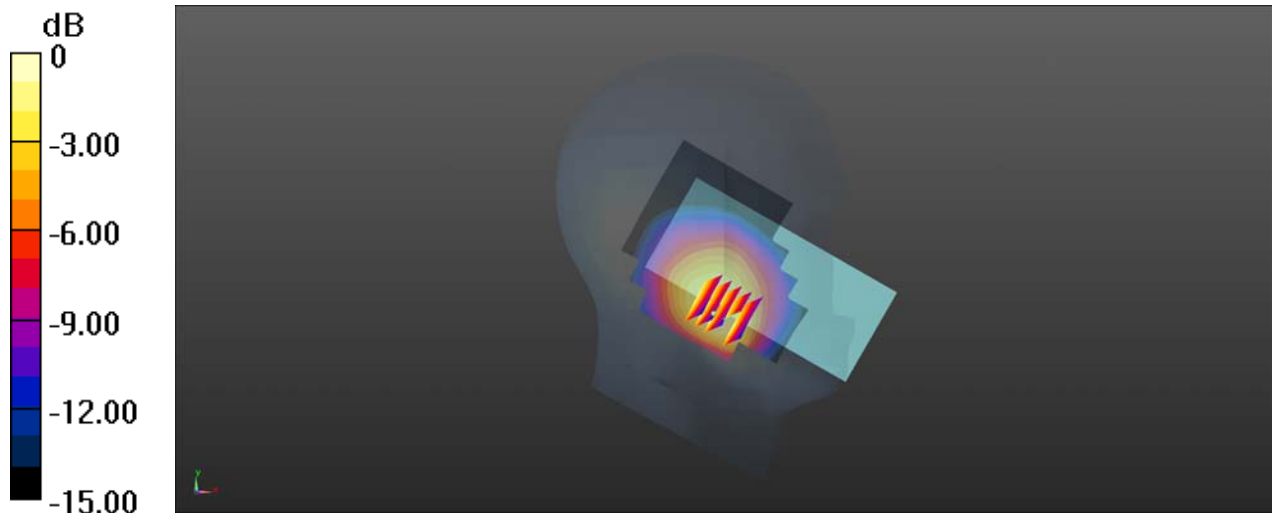

0 dB = 0.543 W/kg = -2.65 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/10

LTE Band 14_10MHz_QPSK_1RB_0Offset_Left Cheek_Ch23330_Ant1

Communication System: UID 0, LTE (0); Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 793 \text{ MHz}$; $\sigma = 0.931 \text{ S/m}$; $\epsilon_r = 41.331$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(6.54, 6.54, 6.54) @ 793 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23330/Area Scan (81x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.450 W/kg

Ch23330/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.199 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.834 W/kg

SAR(1 g) = 0.456 W/kg; SAR(10 g) = 0.280 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 58.2%

Maximum value of SAR (measured) = 0.479 W/kg

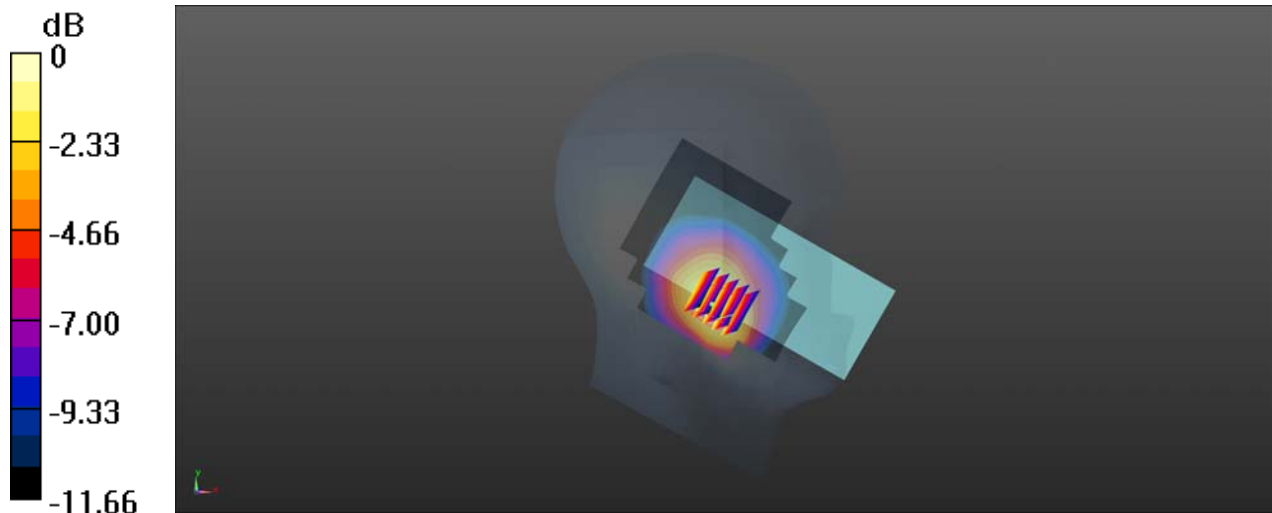

0 dB = 0.479 W/kg = -3.20 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/15

LTE Band 25_20MHz_QPSK_1RB_0Offset_Right Tilt_Ch26365_Ant4


Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium: HSL_1800 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 40.003$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.09, 5.09, 5.09) @ 1882.5 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch26365/Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.19 W/kg

Ch26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 23.82 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 1.82 W/kg
SAR(1 g) = 0.999 W/kg; SAR(10 g) = 0.514 W/kg
Smallest distance from peaks to all points 3 dB below = 10.8 mm
Ratio of SAR at M2 to SAR at M1 = 57.5%
Maximum value of SAR (measured) = 1.13 W/kg

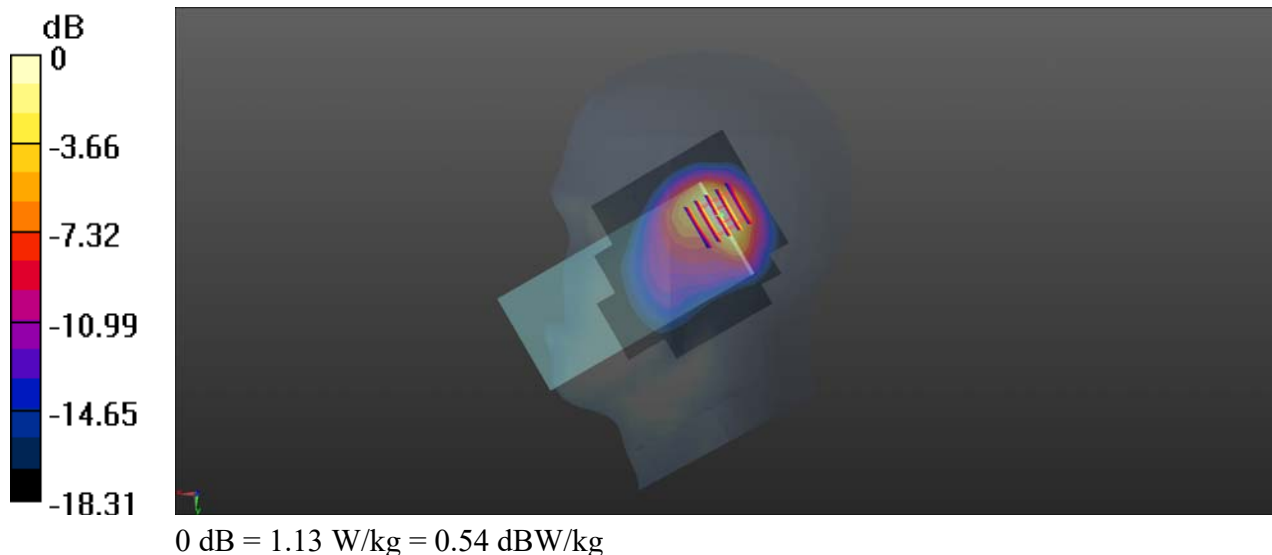

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/13

LTE Band 26_15MHz_QPSK_1RB_0Offset_Left Cheek_Ch26865_Ant1

Communication System: UID 0, LTE (0); Frequency: 830 MHz; Duty Cycle: 1:1

Medium: HSL_900 Medium parameters used: $f = 830$ MHz; $\sigma = 0.948$ S/m; $\epsilon_r = 41.117$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(6.25, 6.25, 6.25) @ 830 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch26865/Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.569 W/kg

Ch26865/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.152 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.948 W/kg

SAR(1 g) = 0.547 W/kg; SAR(10 g) = 0.342 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 68.6%

Maximum value of SAR (measured) = 0.573 W/kg

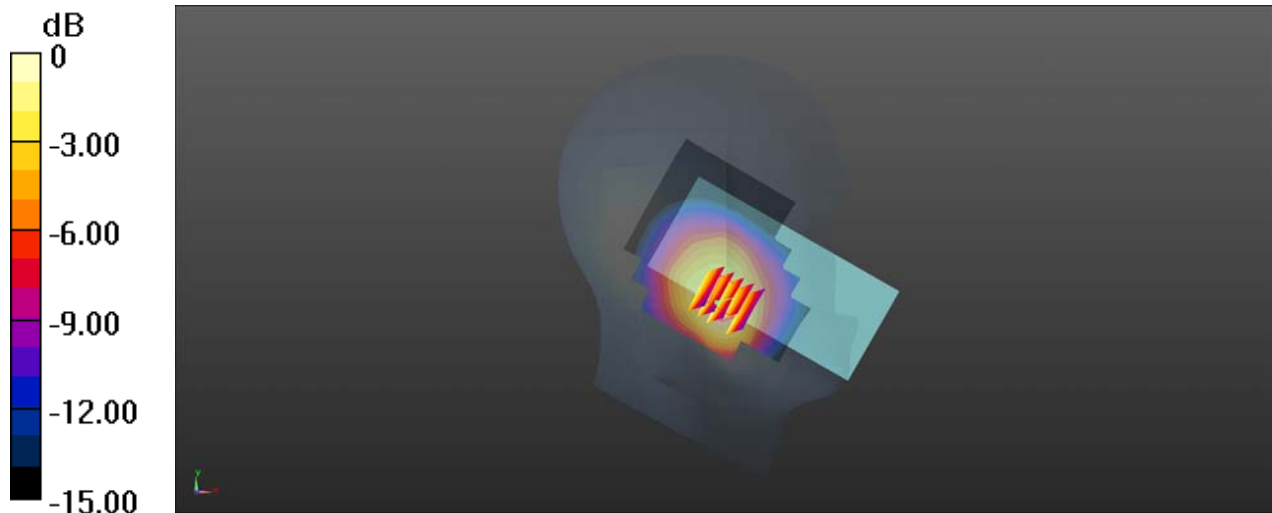

0 dB = 0.573 W/kg = -2.42 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/19

LTE Band 30_10MHz_QPSK_1RB_0Offset_Left Cheek_Ch27710_Ant5

Communication System: UID 0, LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL_2300 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.684$ S/m; $\epsilon_r = 39.364$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.91, 4.91, 4.91) @ 2310 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch27710/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.907 W/kg

Ch27710/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.33 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.840 W/kg; SAR(10 g) = 0.462 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 58.1%

Maximum value of SAR (measured) = 0.906 W/kg

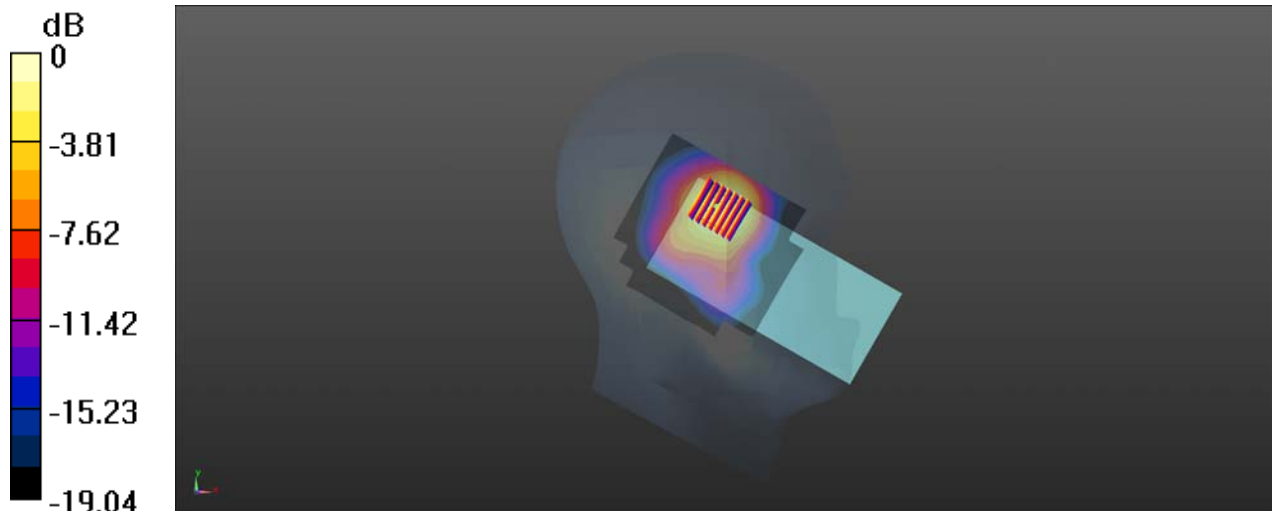

0 dB = 0.906 W/kg = -0.43 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/21

LTE Band 41_20MHz_QPSK_1RB_0Offset_Left Cheek_Ch41490_Ant5

Communication System: UID 0, LTE (0); Frequency: 2680 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600 Medium parameters used: $f = 2680$ MHz; $\sigma = 2.053$ S/m; $\epsilon_r = 38.003$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.54, 4.54, 4.54) @ 2680 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch41490/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.865 W/kg

Ch41490/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.377 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.89 W/kg

SAR(1 g) = 0.797 W/kg; SAR(10 g) = 0.379 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 44.3%

Maximum value of SAR (measured) = 0.866 W/kg

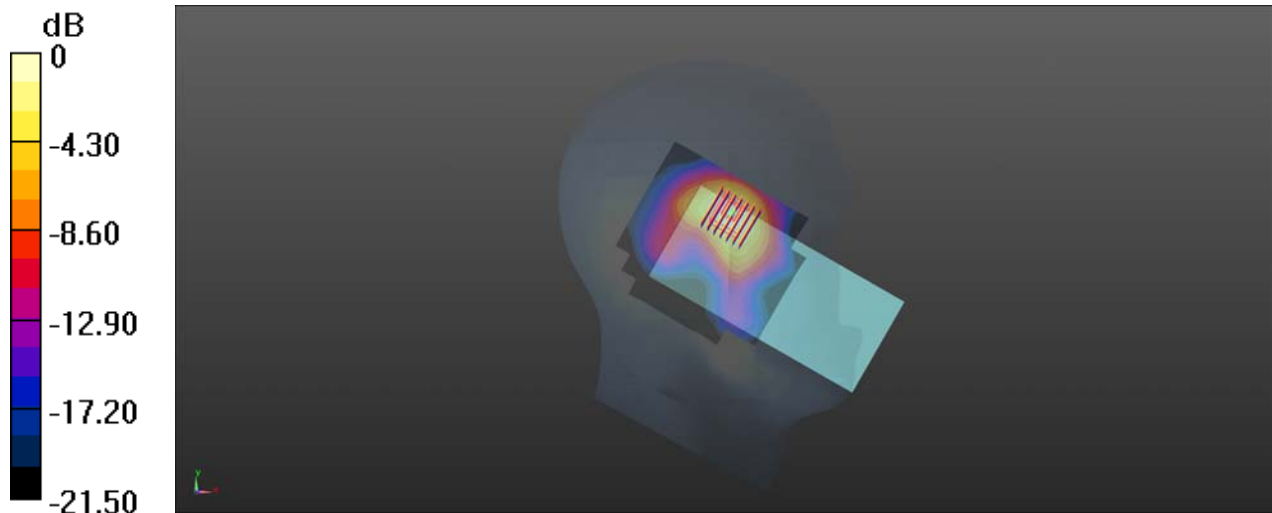

0 dB = 0.866 W/kg = -0.62 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/24

LTE Band 48_20MHz_QPSK_1RB_0Offset_Right Cheek_Ch55340_Ant6

Communication System: UID 0, LTE (0); Frequency: 3560 MHz; Duty Cycle: 1:1.59

Medium: HSL_3500 Medium parameters used: $f = 3560$ MHz; $\sigma = 2.892$ S/m; $\epsilon_r = 37.093$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(6.46, 6.46, 6.46) @ 3560 MHz; Calibrated: 2026/1/7
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2026/1/7
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch55340/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.67 W/kg

Ch55340/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.129 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 2.11 W/kg

SAR(1 g) = 0.936 W/kg; SAR(10 g) = 0.414 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 42%

Maximum value of SAR (measured) = 1.46 W/kg

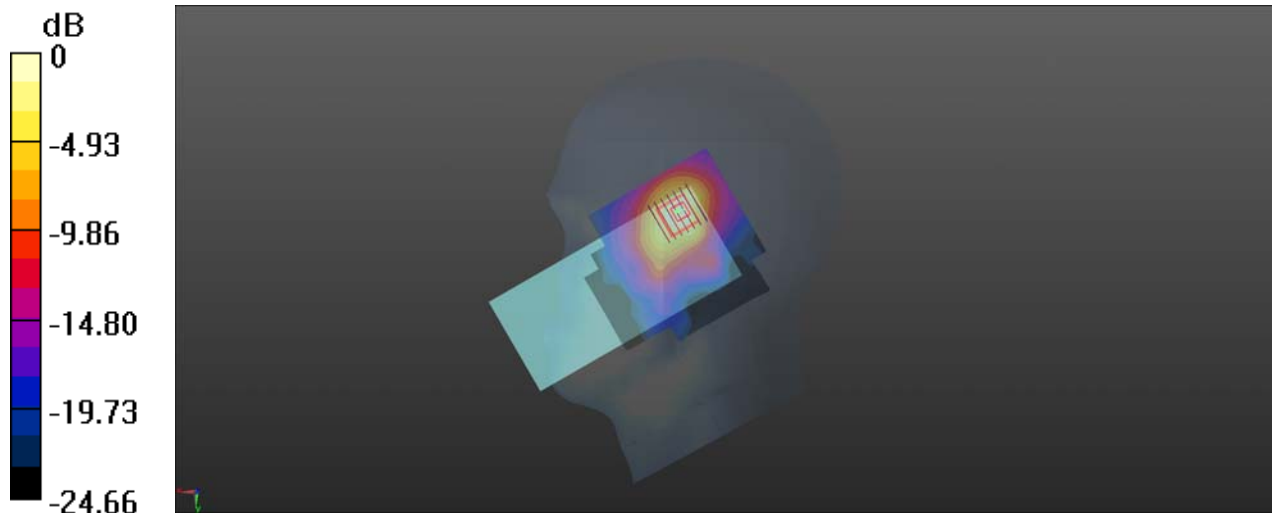

0 dB = 1.46 W/kg = 1.64 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/15

LTE Band 66_20MHz_QPSK_1RB_0Offset_Right Cheek_Ch132572_Ant4

Communication System: UID 0, LTE (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: HSL_1800 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.469$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.42, 5.42, 5.42) @ 1770 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch132572/Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.48 W/kg

Ch132572/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.55 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.901 W/kg; SAR(10 g) = 0.520 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 59%

Maximum value of SAR (measured) = 1.19 W/kg

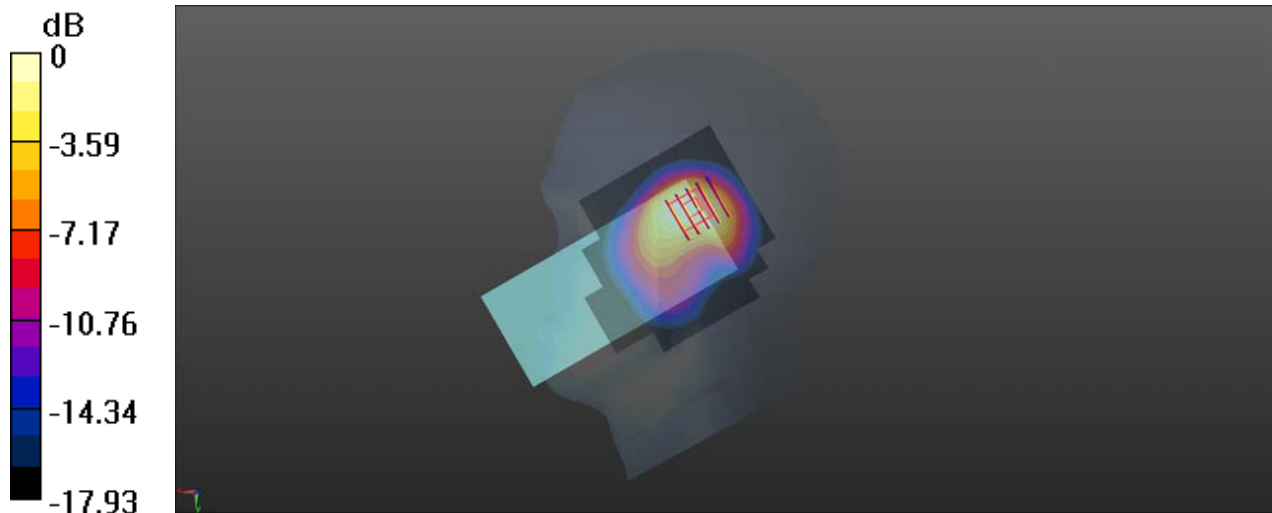

0 dB = 1.19 W/kg = 0.76 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/10

LTE Band 71_20MHz_QPSK_1RB_0Offset_Left Cheek_Ch133322_Ant1

Communication System: UID 0, LTE (0); Frequency: 683 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 683 \text{ MHz}$; $\sigma = 0.811 \text{ S/m}$; $\epsilon_r = 39.895$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(6.54, 6.54, 6.54) @ 683 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch133322/Area Scan (81x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.290 W/kg

Ch133322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.599 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.692 W/kg

SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.177 W/kg

Smallest distance from peaks to all points 3 dB below = 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 55.8%

Maximum value of SAR (measured) = 0.340 W/kg

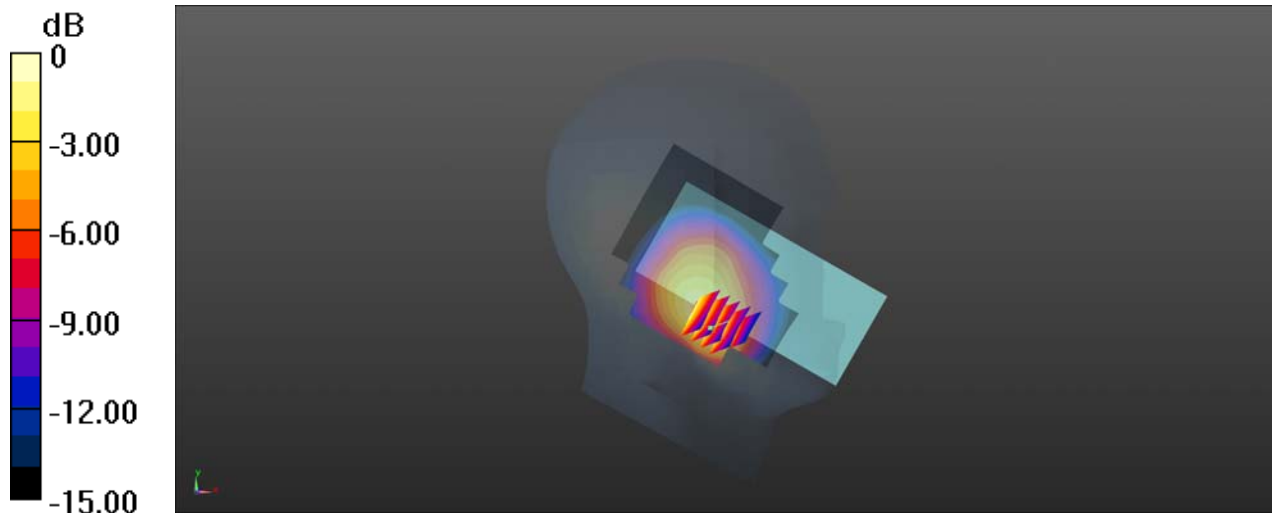

0 dB = 0.340 W/kg = -4.69 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/13

5G NR n5_20MHz_DFT-S-QPSK_QPSK_1RB_1Offset_Right Cheek_Ch166800_Ant1


Communication System: UID 0, 5G NR (0); Frequency: 834 MHz; Duty Cycle: 1:1
Medium: HSL_900 Medium parameters used: $f = 834$ MHz; $\sigma = 0.95$ S/m; $\epsilon_r = 41.151$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(6.25, 6.25, 6.25) @ 834 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch166800/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.532 W/kg

Ch166800/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.13 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.747 W/kg
SAR(1 g) = 0.478 W/kg; SAR(10 g) = 0.306 W/kg
Smallest distance from peaks to all points 3 dB below = 17 mm
Ratio of SAR at M2 to SAR at M1 = 65.5%
Maximum value of SAR (measured) = 0.522 W/kg

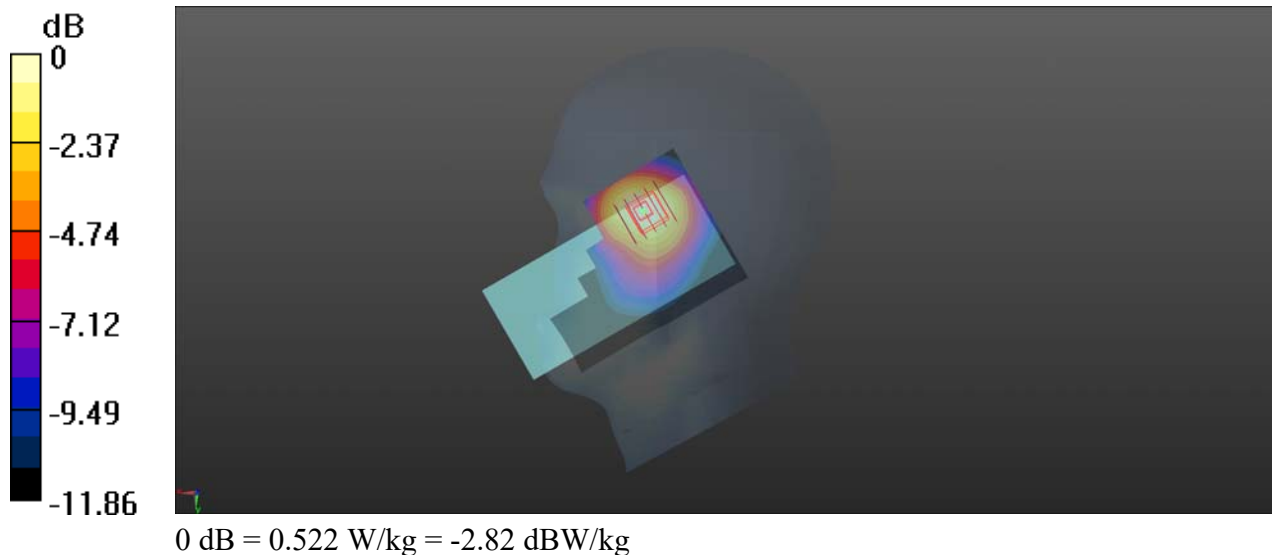

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/21

5G NR n7_20MHz_DFT-S-QPSK_QPSK_1RB_53Offset_Left Cheek_Ch507000_Ant5

Communication System: UID 0, 5G NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: HSL_2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.9$ S/m; $\epsilon_r = 38.769$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.54, 4.54, 4.54) @ 2535 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch507000/Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.08 W/kg

Ch507000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.719 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g) = 0.948 W/kg; SAR(10 g) = 0.487 W/kg

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 44.5%

Maximum value of SAR (measured) = 1.01 W/kg

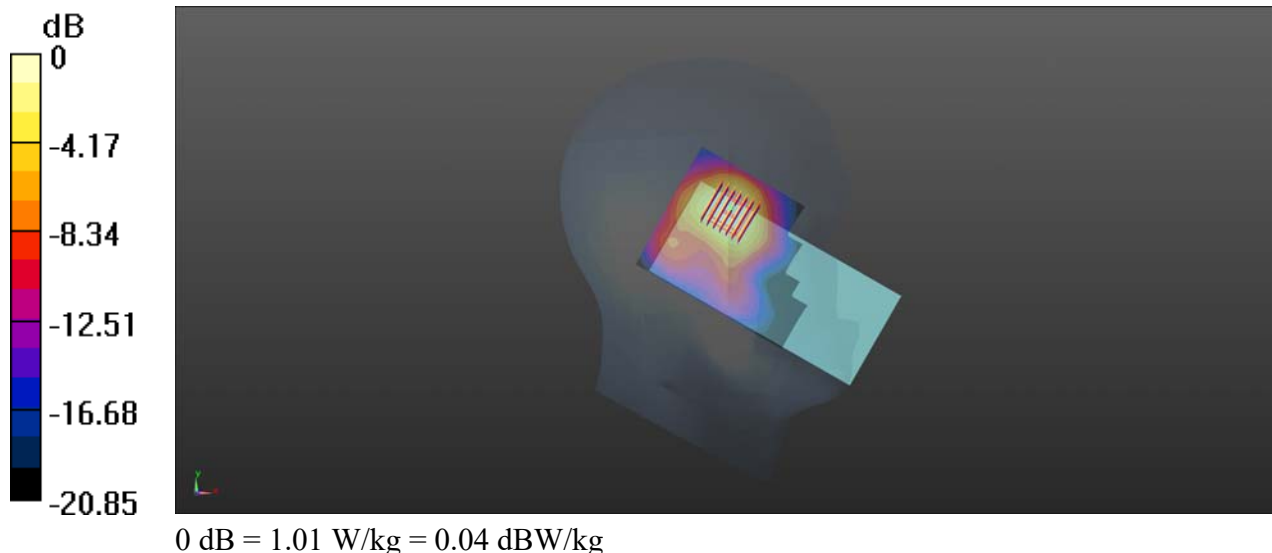

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/15

5G NR n25_20MHz_DFT-S-QPSK_QPSK_1RB_104Offset_Right Tilt_Ch372000_Ant4


Communication System: UID 0, 5G NR (0); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium: HSL_1800 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 40.058$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.42, 5.42, 5.42) @ 1860 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch372000/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.34 W/kg

Ch372000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 23.51 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 1.84 W/kg
SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.519 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 56.3%
Maximum value of SAR (measured) = 1.43 W/kg

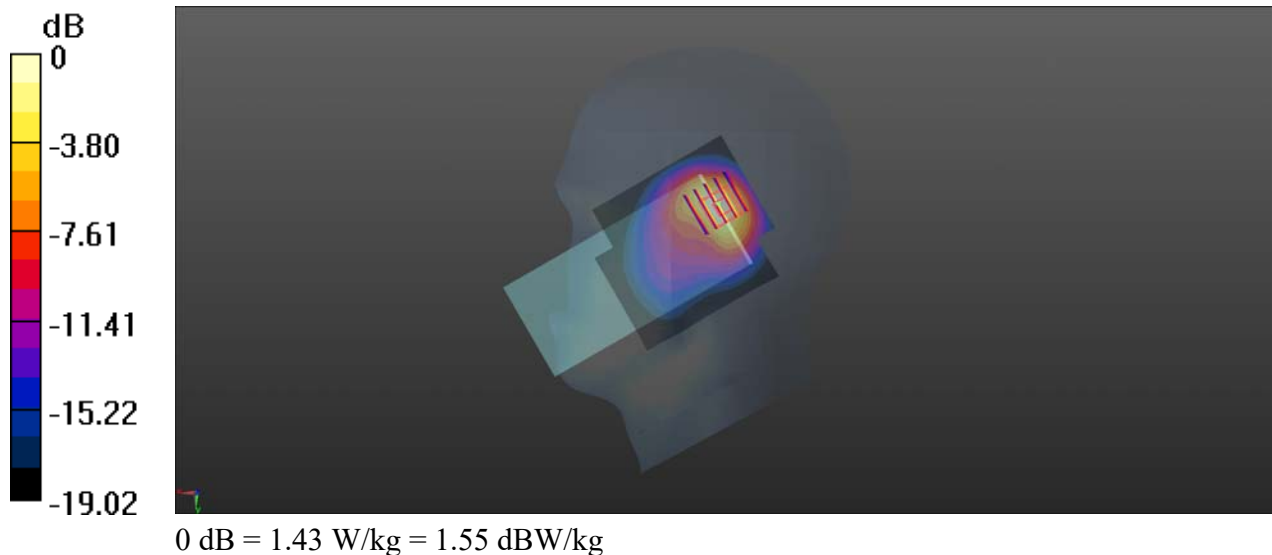

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/5/9

5G NR n26_15MHz_DFT-S-QPSK_36RB_18Offset_Left Cheek_Ch167300_ANT1


Communication System: UID 0, 5G NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: HSL_900 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 41.352$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(9.43, 9.43, 9.43) @ 836.5 MHz; Calibrated: 2026/1/7
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2026/1/7
- Phantom: SAM 1; Type: QD000P40CD; Serial: 1811
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch167300/Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.574 W/kg

Ch167300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.947 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 0.699 W/kg
SAR(1 g) = 0.394 W/kg; SAR(10 g) = 0.259 W/kg
Smallest distance from peaks to all points 3 dB below = 14.1 mm
Ratio of SAR at M2 to SAR at M1 = 55.8%
Maximum value of SAR (measured) = 0.501 W/kg

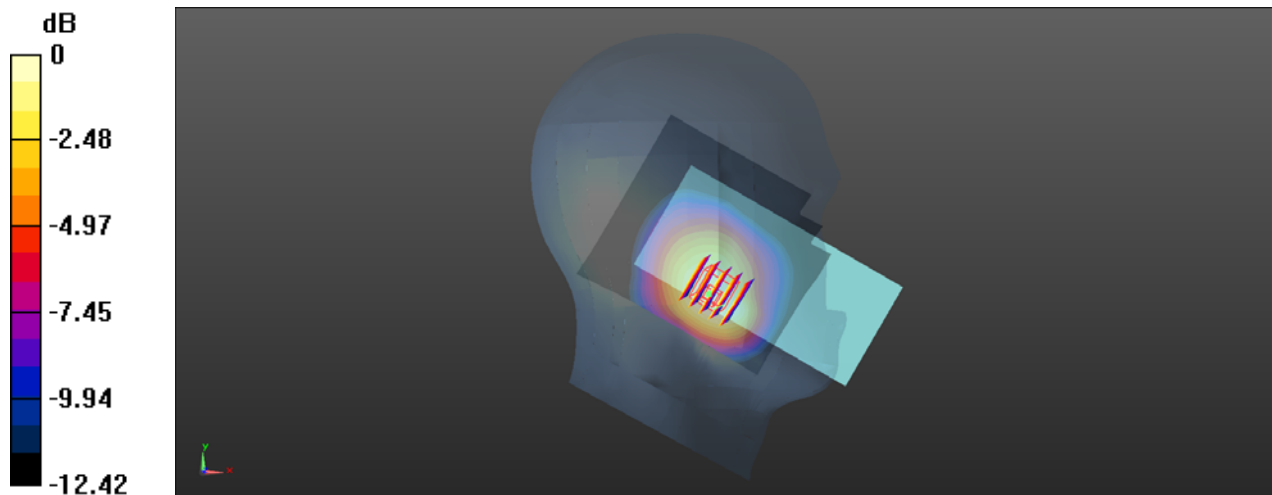

0 dB = 0.501 W/kg = -3.00 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/5/10

5G NR n30_10MHz_DFT-S-QPSK_1RB_1Offset_Left Cheek_Ch462000_ANT5

Communication System: UID 0, 5G NR (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL_2300 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.663$ S/m; $\epsilon_r = 39.574$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.4, 7.4, 7.4) @ 2310 MHz; Calibrated: 2026/1/7
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2026/1/7
- Phantom: SAM 1; Type: QD000P40CD; Serial: 1811
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch462000/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.38 W/kg

Ch462000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.39 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 0.895 W/kg; SAR(10 g) = 0.508 W/kg

Smallest distance from peaks to all points 3 dB below = 12.5 mm

Ratio of SAR at M2 to SAR at M1 = 47.1%

Maximum value of SAR (measured) = 1.31 W/kg

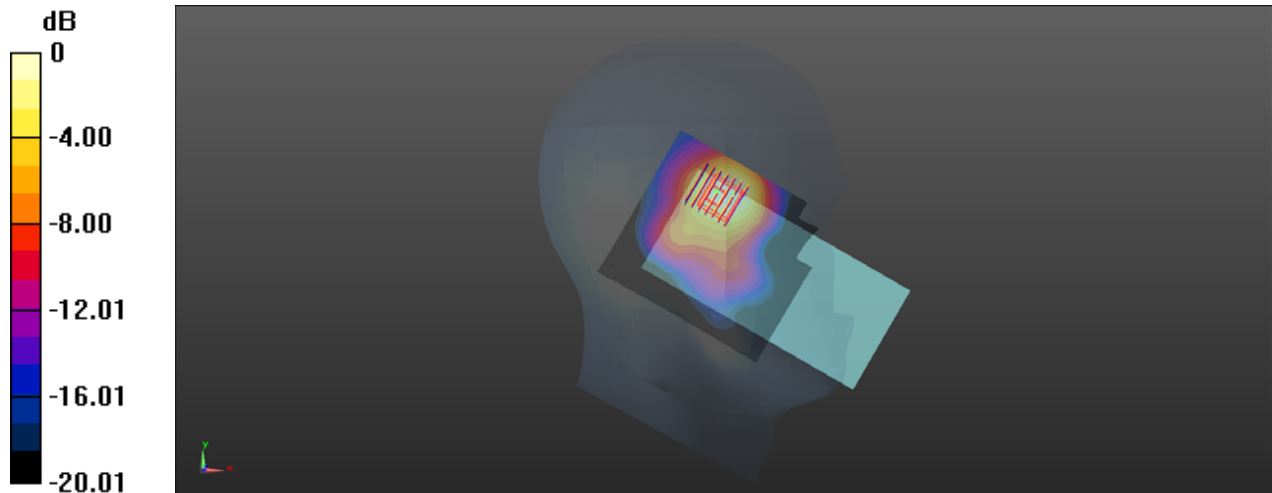

0 dB = 1.31 W/kg = 1.17 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/21

5G NR n41_100MHz_DFT-S-QPSK_QPSK_1RB_136Offset_Left Cheek_Ch518598_Ant5

Communication System: UID 0, 5G NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1
Medium: HSL_2600 Medium parameters used: $f = 2593$ MHz; $\sigma = 1.961$ S/m; $\epsilon_r = 38.494$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.54, 4.54, 4.54) @ 2592.99 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch518598/Area Scan (81x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.961 W/kg

Ch518598/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.752 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 2.05 W/kg

SAR(1 g) = 0.868 W/kg; SAR(10 g) = 0.430 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 44.5%

Maximum value of SAR (measured) = 0.955 W/kg

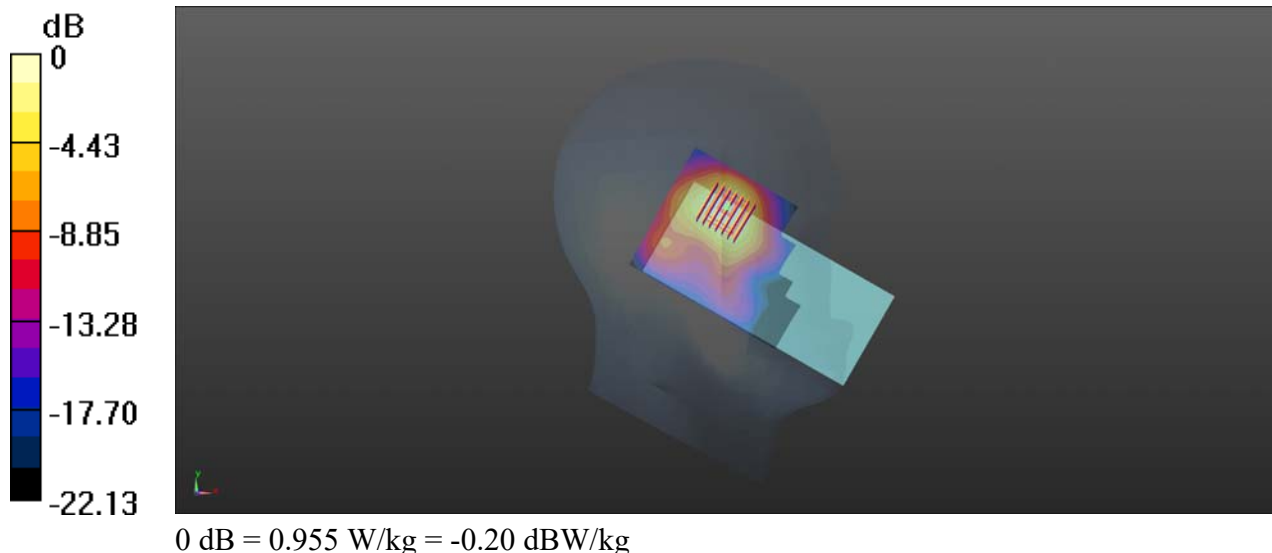

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/24

5G NR n48_40MHz_DFT-S-QPSK_1RB_1Offset_Right Cheek_Ch639834_Ant6

Communication System: UID 0, 5G NR (0); Frequency: 3597.51 MHz; Duty Cycle: 1:1
Medium: HSL_3500 Medium parameters used: $f = 3598$ MHz; $\sigma = 2.929$ S/m; $\epsilon_r = 36.854$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(6.46, 6.46, 6.46) @ 3597.51 MHz; Calibrated: 2026/1/7
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2026/1/7
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch639834/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.49 W/kg

Ch639834/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.400 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 0.849 W/kg; SAR(10 g) = 0.368 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 42.6%

Maximum value of SAR (measured) = 1.30 W/kg

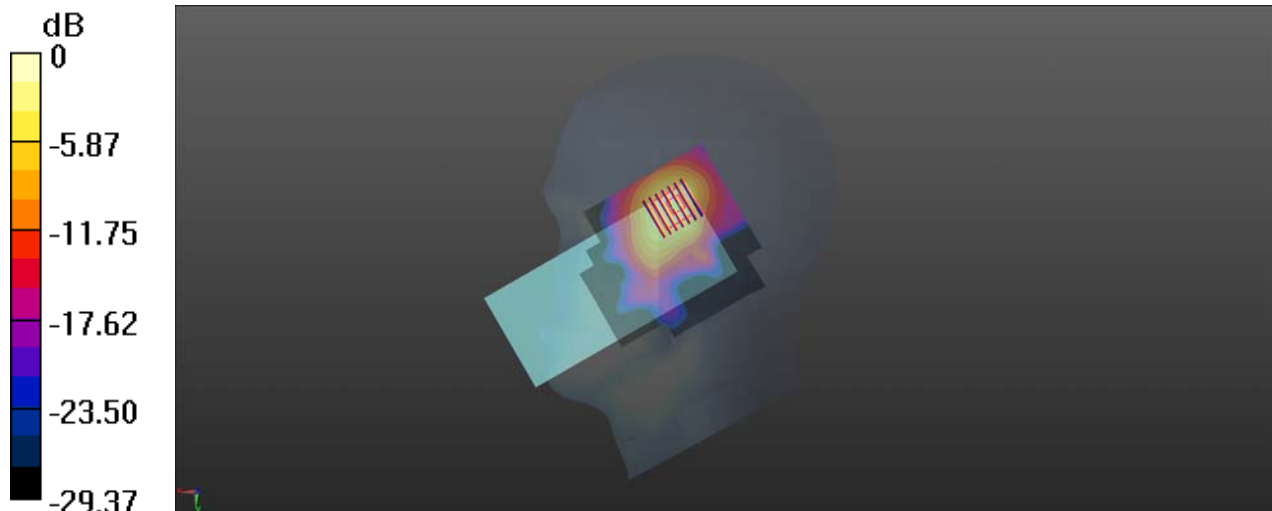

0 dB = 1.30 W/kg = 1.14 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/15

5G NR n66_20MHz_DFT-S-QPSK_QPSK_1RB_1Offset_Right Cheek_Ch344000_Ant4

Communication System: UID 0, 5G NR (0); Frequency: 1720 MHz; Duty Cycle: 1:1
Medium: HSL_1800 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.323$ S/m; $\epsilon_r = 40.667$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.42, 5.42, 5.42) @ 1720 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch344000/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.56 W/kg

Ch344000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.45 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.953 W/kg; SAR(10 g) = 0.605 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 55.2%

Maximum value of SAR (measured) = 1.25 W/kg

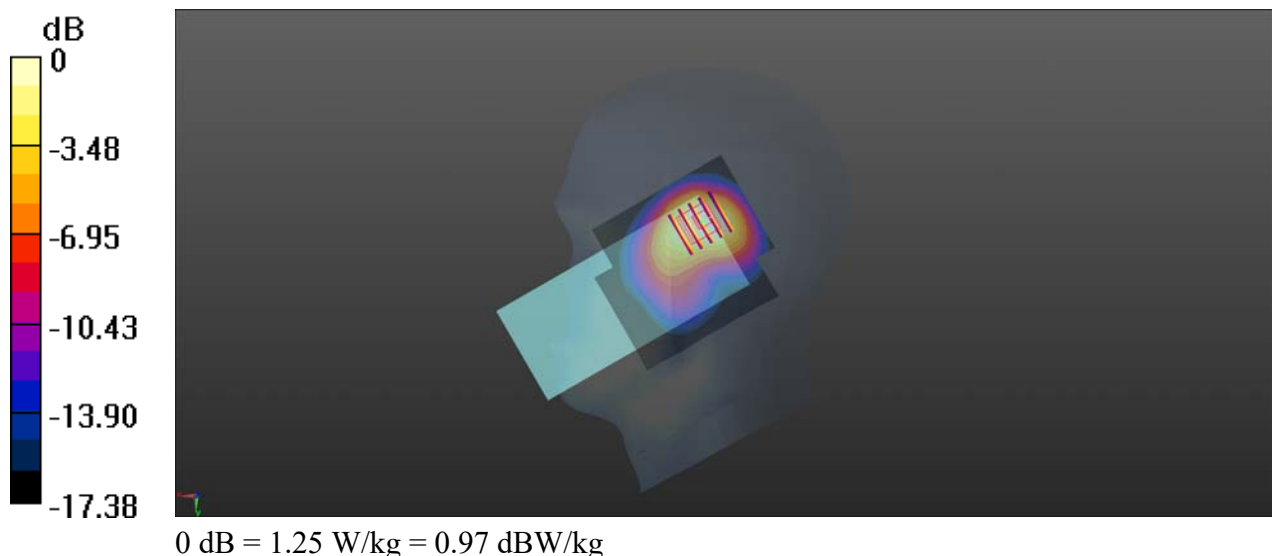

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/10

5G NR n71_20MHz_DFT-S-QPSK_QPSK_1RB_53Offset_Right Cheek_Ch136100_Ant1


Communication System: UID 0, 5G NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium: HSL_750 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.811$ S/m; $\epsilon_r = 39.906$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(6.54, 6.54, 6.54) @ 680.5 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch136100/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.392 W/kg

Ch136100/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.243 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 0.557 W/kg
SAR(1 g) = 0.360 W/kg; SAR(10 g) = 0.232 W/kg
Smallest distance from peaks to all points 3 dB below = 17.3 mm
Ratio of SAR at M2 to SAR at M1 = 66.9%
Maximum value of SAR (measured) = 0.390 W/kg

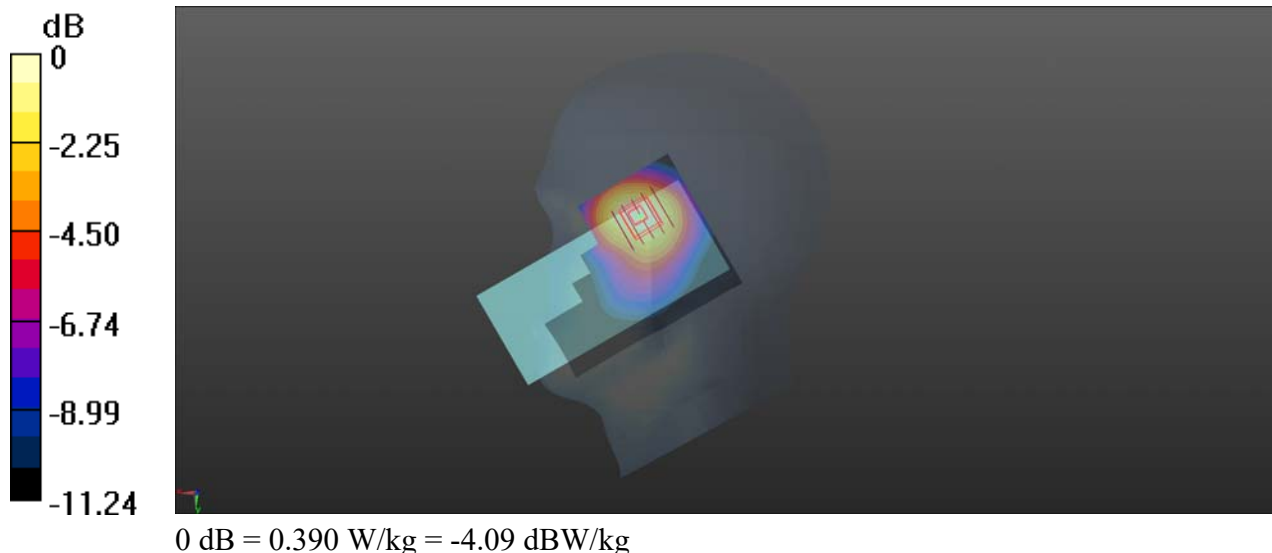

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/26

5G NR n77_100MHz_DFT-S-QPSK_1RB_136Offset_Right Cheek_Ch662000_Ant6


Communication System: UID 0, 5G NR (0); Frequency: 3930 MHz; Duty Cycle: 1:1
Medium: HSL_3900 Medium parameters used: $f = 3930$ MHz; $\sigma = 3.287$ S/m; $\epsilon_r = 35.148$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(6.22, 6.22, 6.22) @ 3930 MHz; Calibrated: 2026/1/7
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2026/1/7
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch662000/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.58 W/kg

Ch662000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.572 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 2.07 W/kg
SAR(1 g) = 0.918 W/kg; SAR(10 g) = 0.424 W/kg
Smallest distance from peaks to all points 3 dB below = 8.5 mm
Ratio of SAR at M2 to SAR at M1 = 40.8%
Maximum value of SAR (measured) = 1.44 W/kg

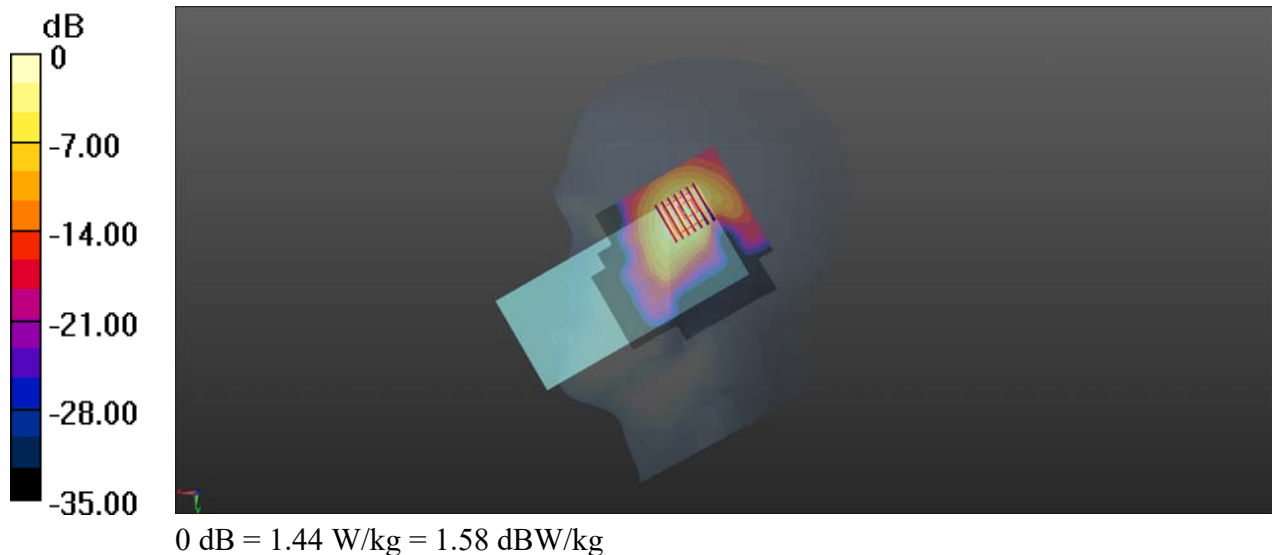

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/20

WLAN 2.4GHz_802.11b 1Mbps_Left Cheek_Ch11_Ant9

Communication System: UID 0, WLAN 2.4GHz 802.11b (0); Frequency: 2462 MHz; Duty Cycle: 1:1.016

Medium: HSL_2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.815$ S/m; $\epsilon_r = 39.086$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.7, 4.7, 4.7) @ 2462 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch11/Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.685 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.208 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.700 W/kg

SAR(1 g) = 0.330 W/kg; SAR(10 g) = 0.160 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 48.4%

Maximum value of SAR (measured) = 0.496 W/kg

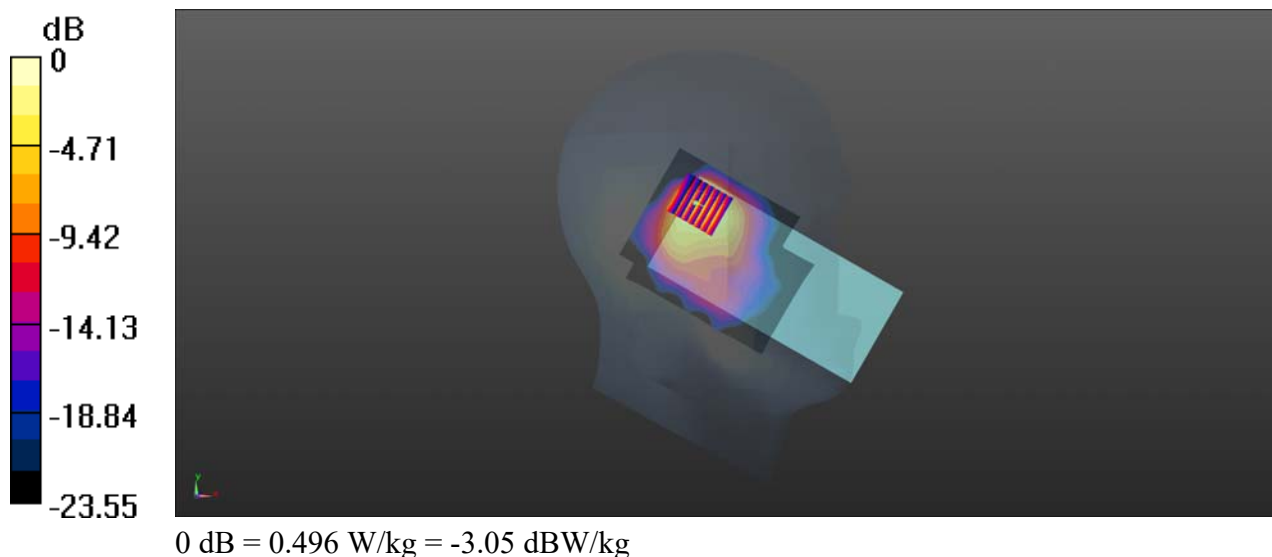

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/28

WLAN 5.8GHz_802.11a 6Mbps_Left Tilt_Ch165_Ant9

Communication System: UID 0, WLAN 5GHz (0); Frequency: 5825 MHz; Duty Cycle: 1:1.028
Medium: HSL_5750 Medium parameters used: $f = 5825$ MHz; $\sigma = 5.113$ S/m; $\epsilon_r = 33.533$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(4.52, 4.52, 4.52) @ 5825 MHz; Calibrated: 2026/1/7
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2026/1/7
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch165/Area Scan (101x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.05 W/kg

Ch165/Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 2.37 W/kg

SAR(1 g) = 0.504 W/kg; SAR(10 g) = 0.124 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 52.3%

Maximum value of SAR (measured) = 1.09 W/kg

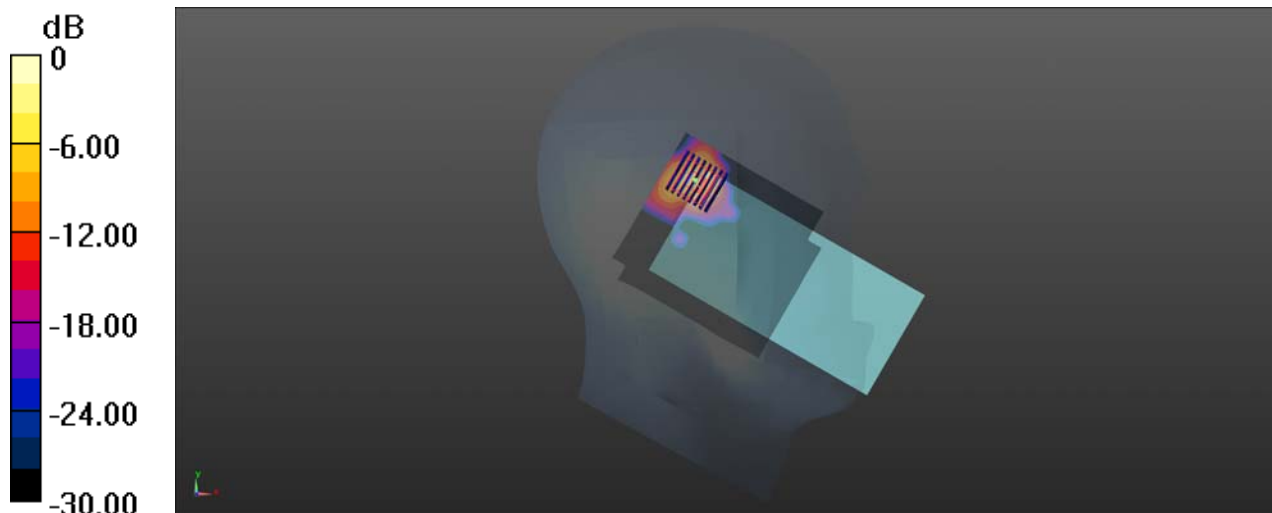

0 dB = 1.09 W/kg = 0.37 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/20

Bluetooth_DH5_Left Cheek_Ch78_Ant9

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1.081
Medium: HSL_2450 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.828$ S/m; $\epsilon_r = 38.955$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.7, 4.7, 4.7) @ 2480 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch78/Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.249 W/kg

Ch78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.022 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.478 W/kg

SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.029 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 0%

Maximum value of SAR (measured) = 0.188 W/kg

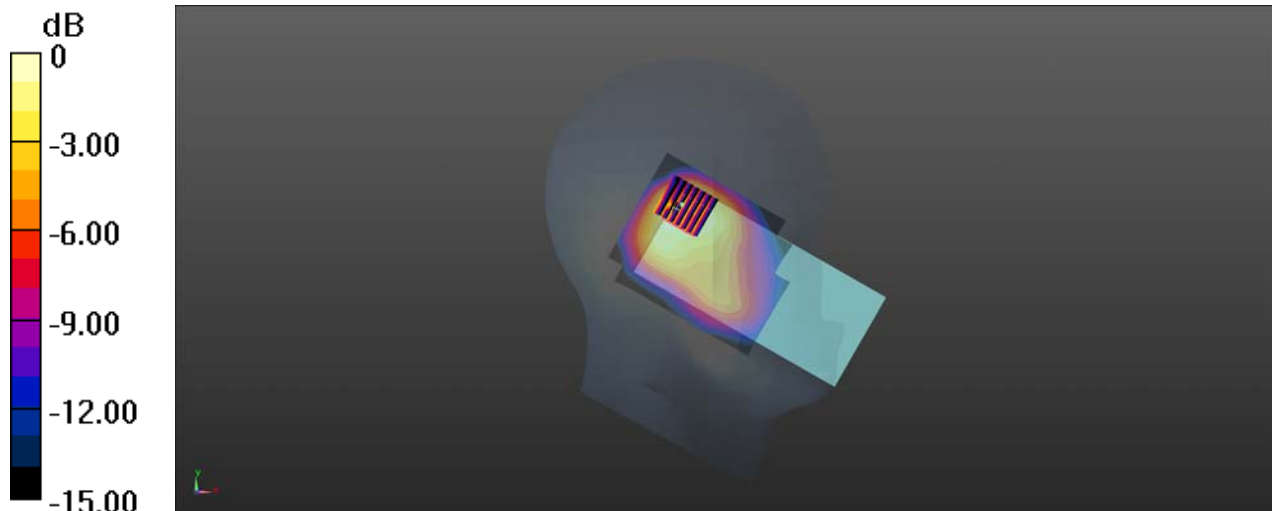

0 dB = 0.188 W/kg = -7.26 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/15

WCDMA Band II_RMC 12.2Kbps_Back Side_10mm_Ch9400_Ant4

Communication System: UID 0, UMTS-FDD (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL_1800 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 40.029$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.42, 5.42, 5.42) @ 1880 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch9400/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.759 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.698 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 0.868 W/kg

SAR(1 g) = 0.518 W/kg; SAR(10 g) = 0.285 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 60.5%

Maximum value of SAR (measured) = 0.715 W/kg

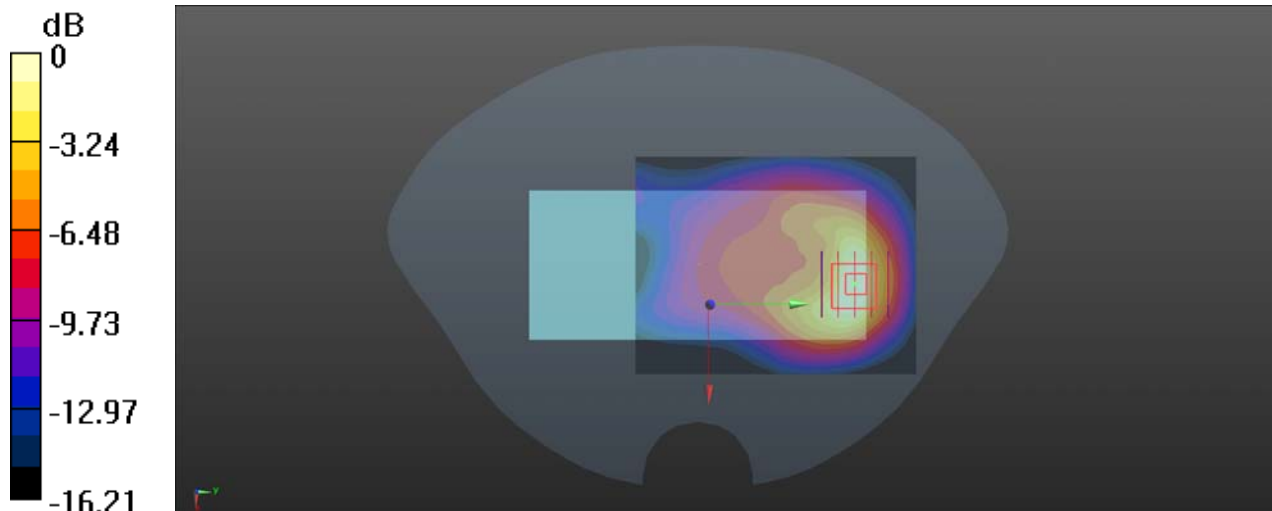

0 dB = 0.715 W/kg = -1.46 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/17

WCDMA Band IV_RMC 12.2Kbps_Back Side_10mm_Ch1413_Ant4

Communication System: UID 0, UMTS-FDD (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium: HSL_1800 Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.336$ S/m; $\epsilon_r = 40.614$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.42, 5.42, 5.42) @ 1732.6 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1413/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.592 W/kg

Ch1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.261 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 0.838 W/kg

SAR(1 g) = 0.500 W/kg; SAR(10 g) = 0.281 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 61%

Maximum value of SAR (measured) = 0.559 W/kg

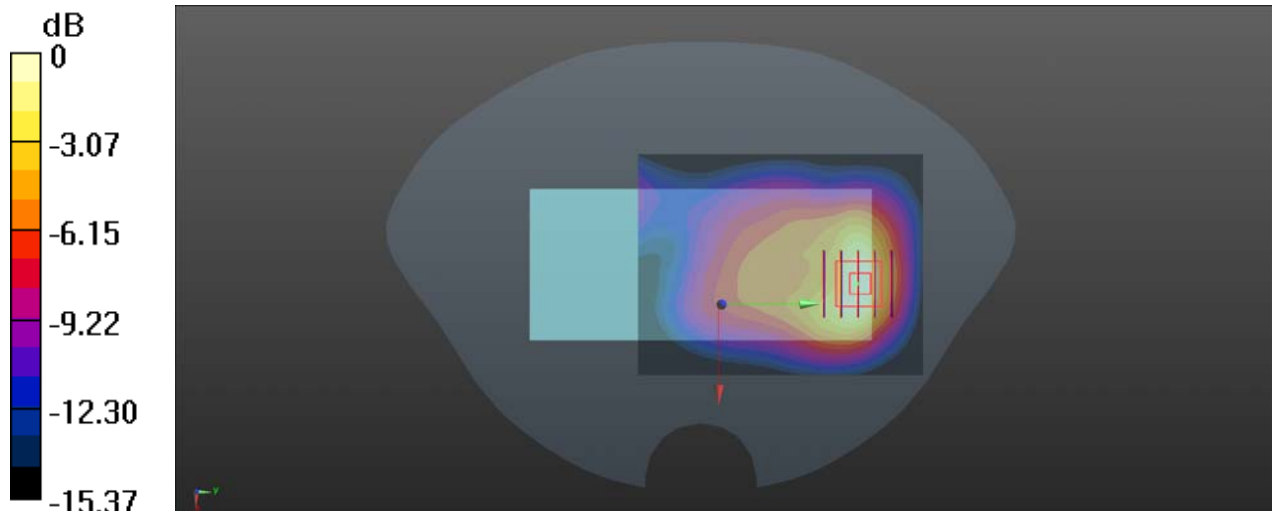

0 dB = 0.559 W/kg = -2.53 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/13

WCDMA Band V_RMC 12.2Kbps_Back Side_10mm_Ch4182_Ant1

Communication System: UID 0, UMTS-FDD (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: HSL_900 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 41.138$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(6.25, 6.25, 6.25) @ 836.4 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch4182/Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.11 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.40 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.977 W/kg; SAR(10 g) = 0.586 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 61.3%

Maximum value of SAR (measured) = 1.07 W/kg

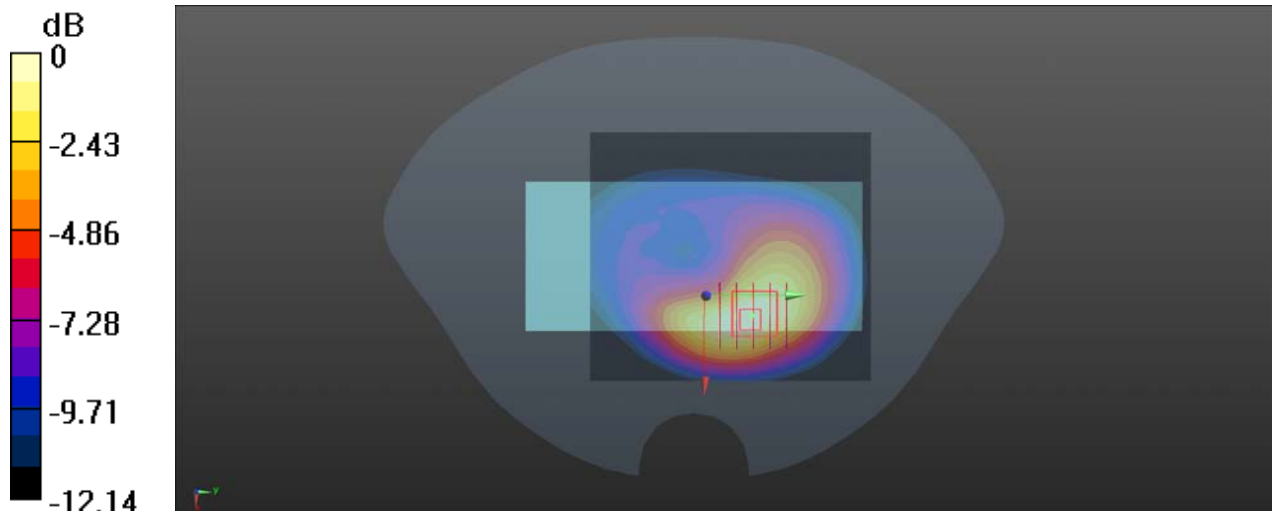

0 dB = 1.07 W/kg = 0.29 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/21

LTE Band 7_20MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch21350_Ant5

Communication System: UID 0, LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 38.563$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.54, 4.54, 4.54) @ 2560 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch21350/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.996 W/kg

Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.857 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.885 W/kg; SAR(10 g) = 0.447 W/kg

Smallest distance from peaks to all points 3 dB below = 13 mm

Ratio of SAR at M2 to SAR at M1 = 52.2%

Maximum value of SAR (measured) = 0.985 W/kg

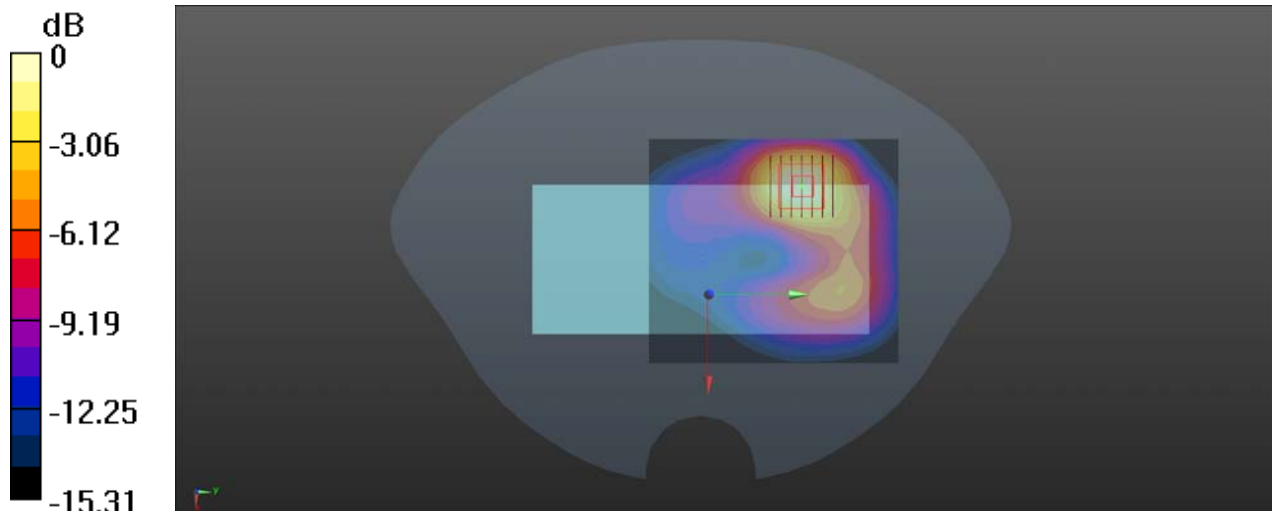

0 dB = 0.985 W/kg = -0.07 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/10

LTE Band 12_10MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch23095_Ant1

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 41.166$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(6.54, 6.54, 6.54) @ 707.5 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23095/Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.529 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.60 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.838 W/kg

SAR(1 g) = 0.489 W/kg; SAR(10 g) = 0.295 W/kg

Smallest distance from peaks to all points 3 dB below = 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 61.6%

Maximum value of SAR (measured) = 0.536 W/kg

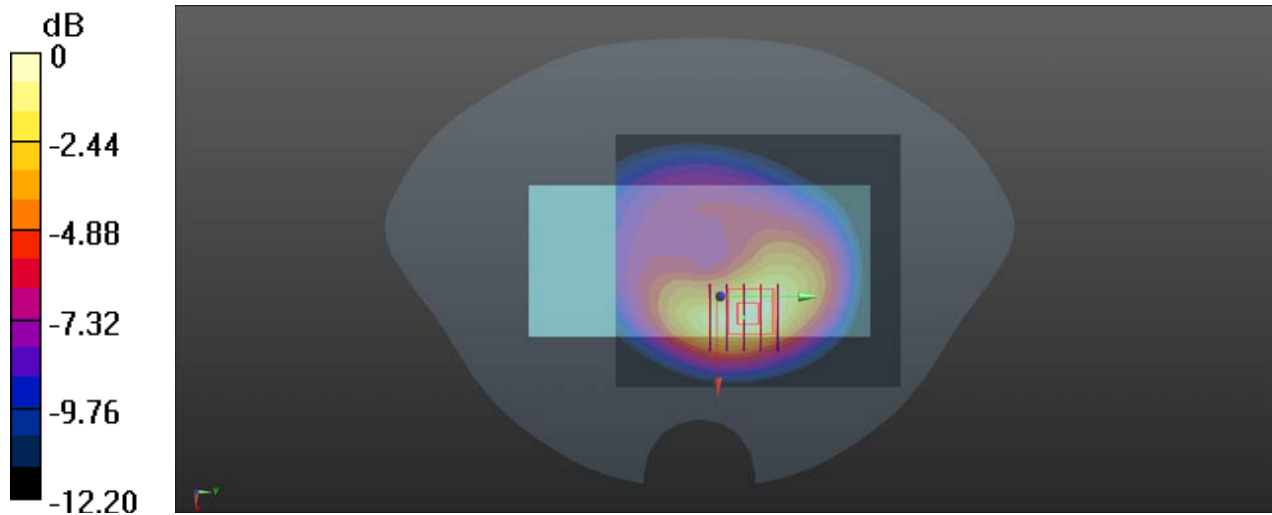

0 dB = 0.536 W/kg = -2.71 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/10

LTE Band 13_10MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch23230_Ant1

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.926 \text{ S/m}$; $\epsilon_r = 41.254$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(6.54, 6.54, 6.54) @ 782 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23230/Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.776 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.61 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.710 W/kg; SAR(10 g) = 0.421 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 61.8%

Maximum value of SAR (measured) = 0.771 W/kg

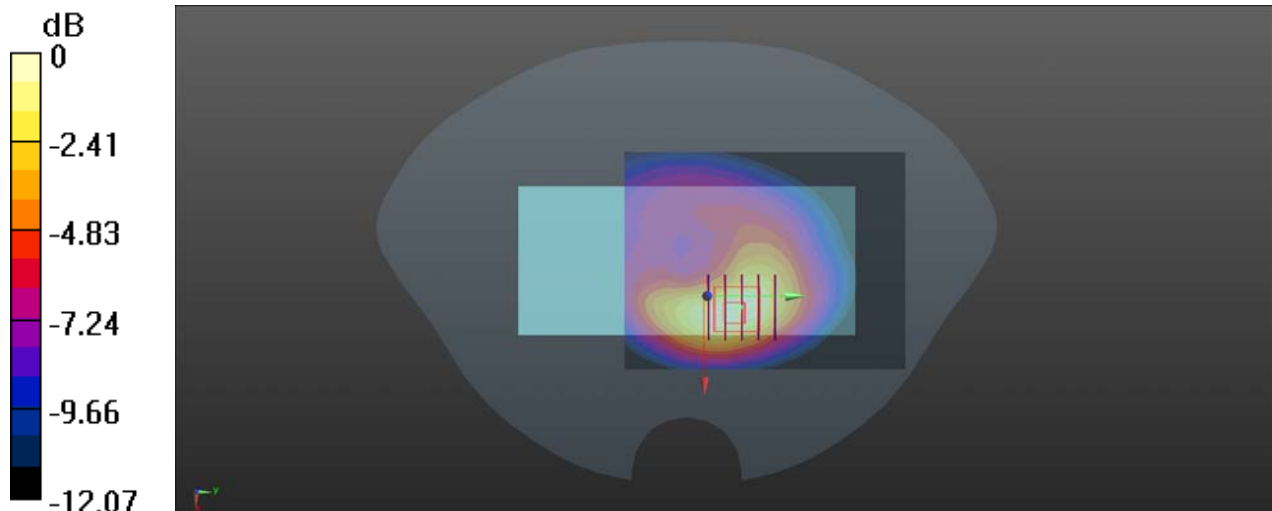

0 dB = 0.771 W/kg = -1.13 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/10

LTE Band 14_10MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch23330_Ant1

Communication System: UID 0, LTE (0); Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 793 \text{ MHz}$; $\sigma = 0.931 \text{ S/m}$; $\epsilon_r = 41.331$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(6.54, 6.54, 6.54) @ 793 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23330/Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.783 W/kg

Ch23330/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.64 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.764 W/kg; SAR(10 g) = 0.483 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 61.8%

Maximum value of SAR (measured) = 0.779 W/kg

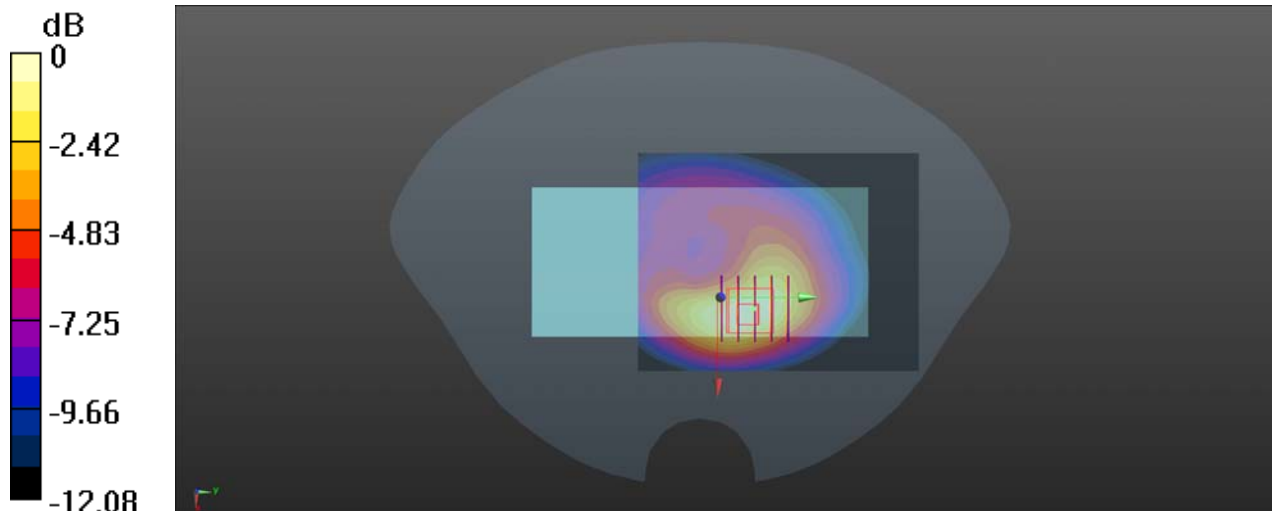

0 dB = 0.779 W/kg = -1.08 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/15

LTE Band 25_20MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch26365_Ant4


Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium: HSL_1800 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 40.003$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.09, 5.09, 5.09) @ 1882.5 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch26365/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.647 W/kg

Ch26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.487 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.996 W/kg
SAR(1 g) = 0.581 W/kg; SAR(10 g) = 0.319 W/kg
Smallest distance from peaks to all points 3 dB below = 11.2 mm
Ratio of SAR at M2 to SAR at M1 = 59.9%
Maximum value of SAR (measured) = 0.634 W/kg

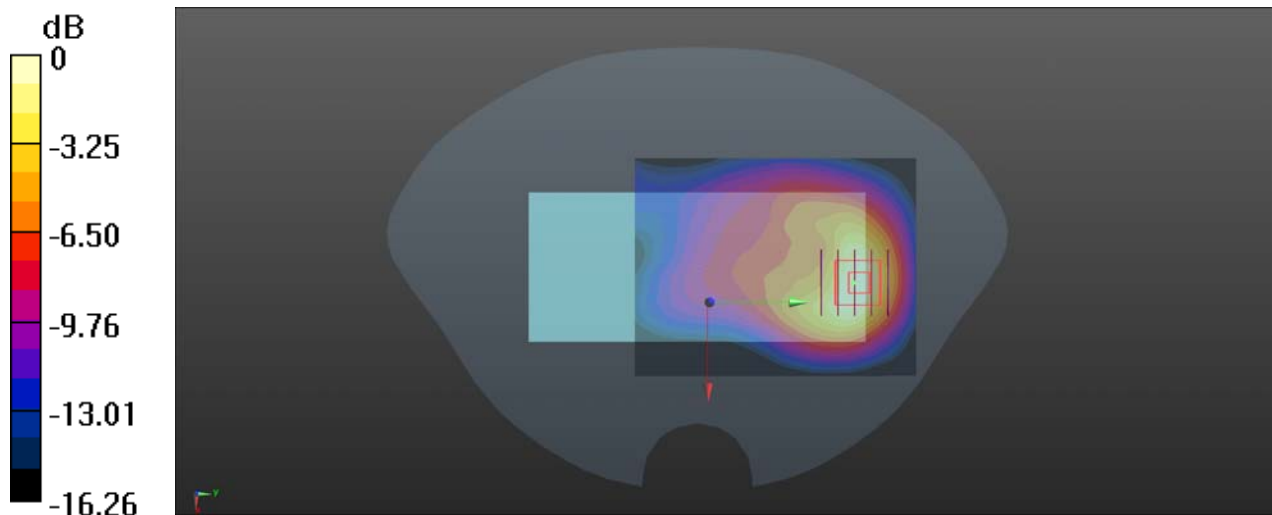

0 dB = 0.634 W/kg = -1.98 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/13

LTE Band 26_15MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch26865_Ant1

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL_900 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.949$ S/m; $\epsilon_r = 41.156$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(6.25, 6.25, 6.25) @ 831.5 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch26865/Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.765 W/kg

Ch26865/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.517 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.667 W/kg; SAR(10 g) = 0.400 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 61.5%

Maximum value of SAR (measured) = 0.730 W/kg

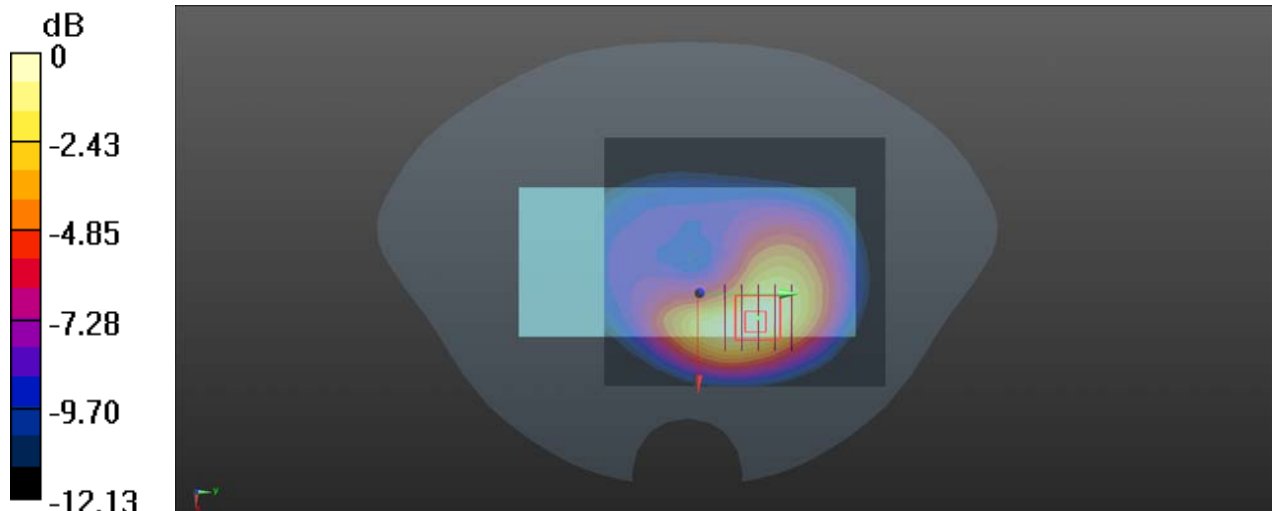

0 dB = 0.730 W/kg = -1.37 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/19

LTE Band 30_10MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch27710_Ant5

Communication System: UID 0, LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL_2300 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.684$ S/m; $\epsilon_r = 39.364$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.91, 4.91, 4.91) @ 2310 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch27710/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.817 W/kg

Ch27710/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.572 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.699 W/kg; SAR(10 g) = 0.347 W/kg

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 53.3%

Maximum value of SAR (measured) = 0.794 W/kg

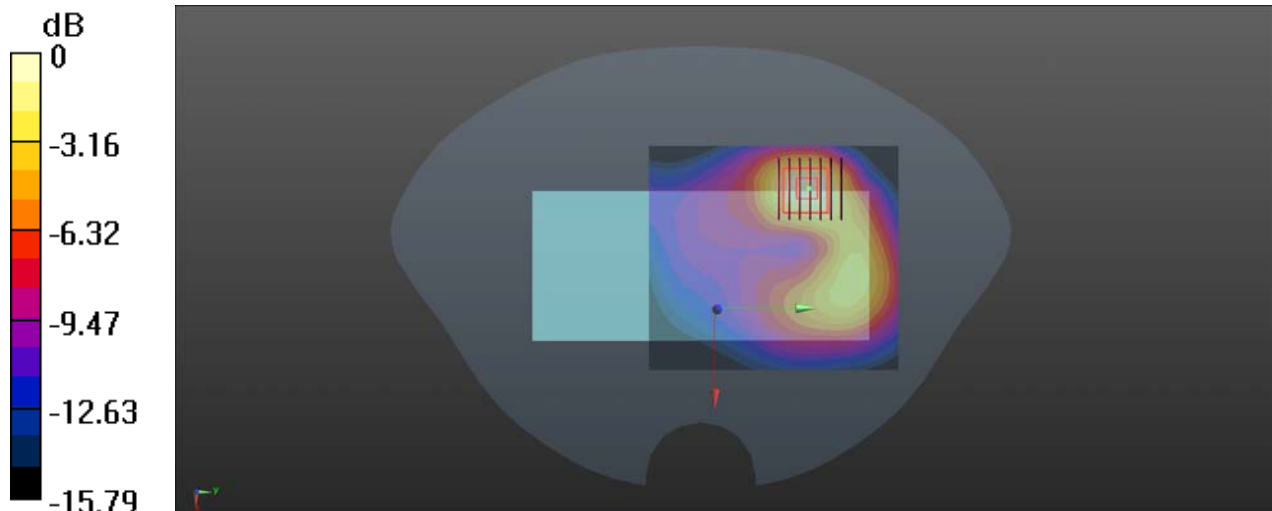

0 dB = 0.794 W/kg = -1.00 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/21

LTE Band 41_20MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch40620_Ant5

Communication System: UID 0, LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600 Medium parameters used: $f = 2593$ MHz; $\sigma = 1.961$ S/m; $\epsilon_r = 38.494$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.54, 4.54, 4.54) @ 2593 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch40620/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.79 W/kg

Ch40620/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.528 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 3.07 W/kg

SAR(1 g) = 0.648 W/kg; SAR(10 g) = 0.327 W/kg

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 53.6%

Maximum value of SAR (measured) = 1.75 W/kg

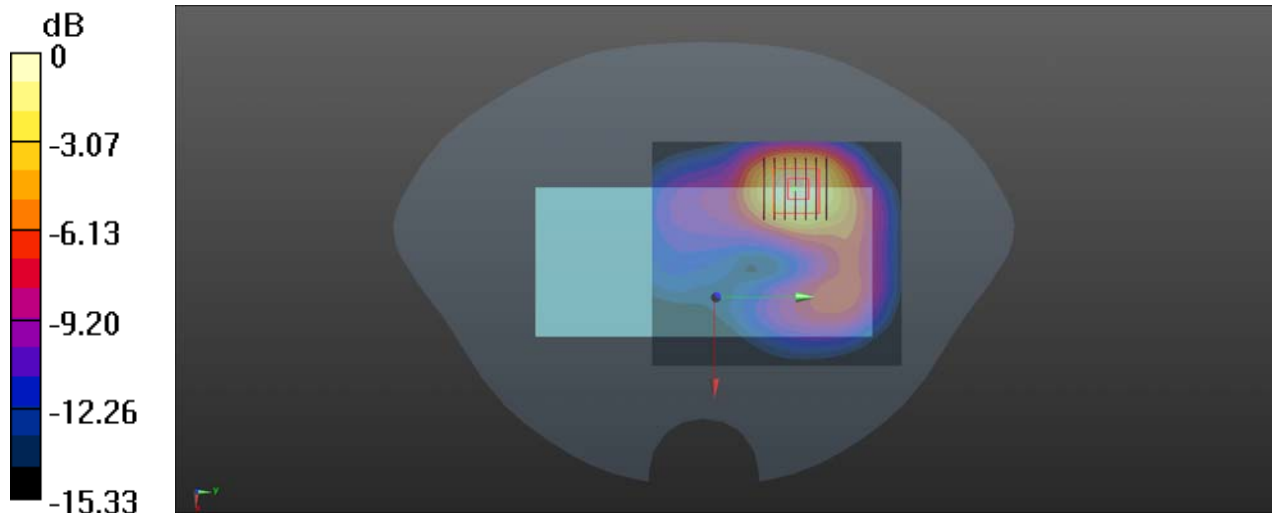

0 dB = 1.75 W/kg = 2.43 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/24

LTE Band 48_20MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch55990_Ant6

Communication System: UID 0, LTE (0); Frequency: 3625 MHz; Duty Cycle: 1:1.59

Medium: HSL_3500 Medium parameters used: $f = 3625$ MHz; $\sigma = 2.947$ S/m; $\epsilon_r = 37.037$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(6.31, 6.31, 6.31) @ 3625 MHz; Calibrated: 2026/1/7
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2026/1/7
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch55990/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.352 W/kg

Ch55990/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.174 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.472 W/kg

SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.098 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 40.1%

Maximum value of SAR (measured) = 0.326 W/kg

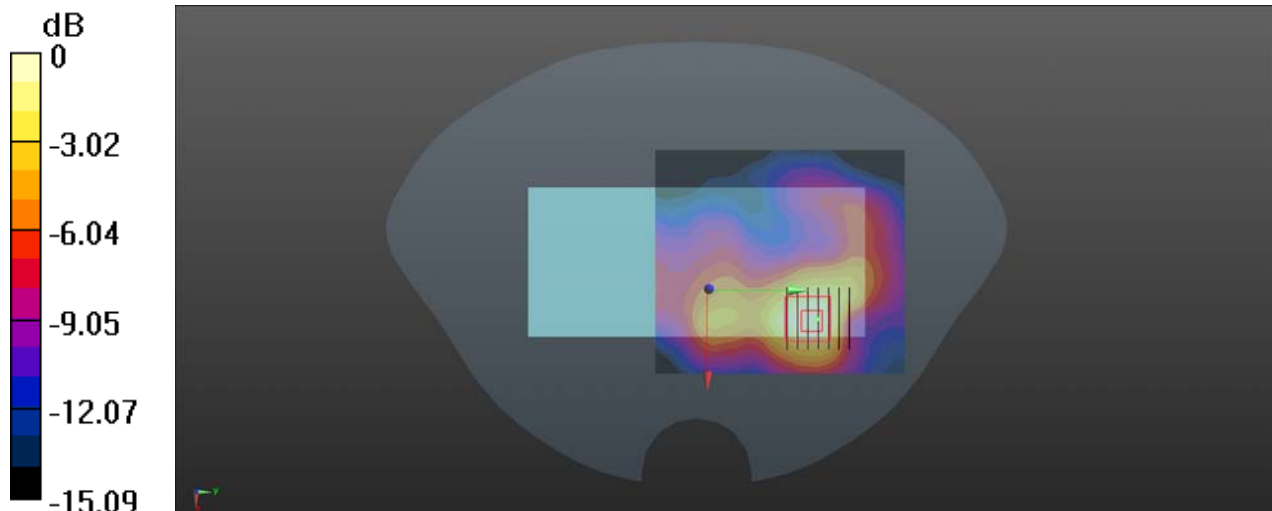

0 dB = 0.326 W/kg = -4.87 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/15

LTE Band 66_20MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch132322_Ant4

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL_1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.348$ S/m; $\epsilon_r = 40.575$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.42, 5.42, 5.42) @ 1745 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch132322/Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.546 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.832 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.827 W/kg

SAR(1 g) = 0.492 W/kg; SAR(10 g) = 0.276 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 60.6%

Maximum value of SAR (measured) = 0.543 W/kg

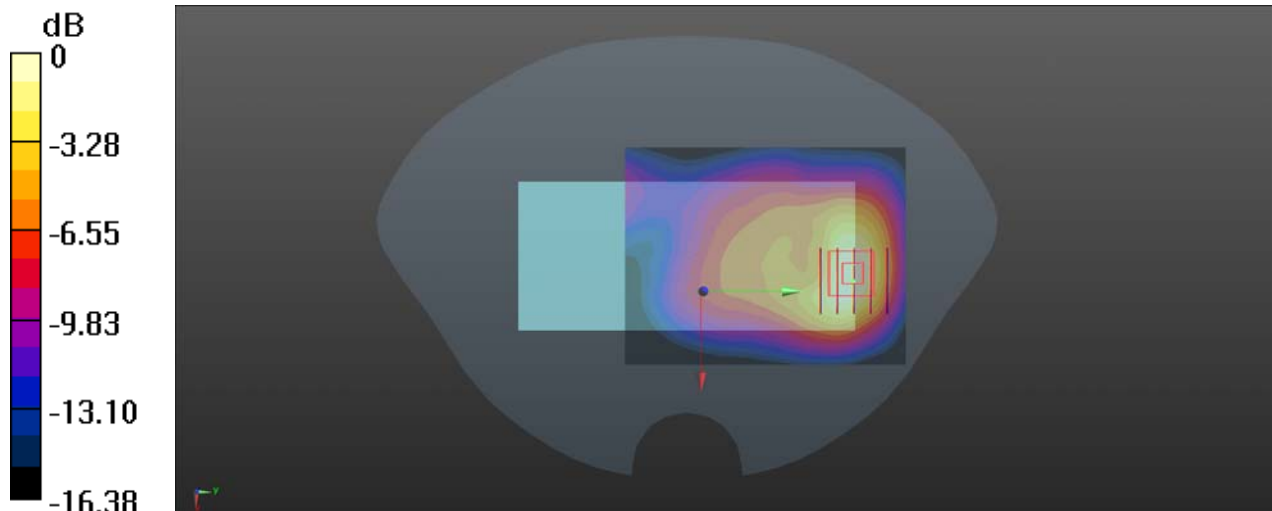

0 dB = 0.543 W/kg = -2.65 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/10

LTE Band 71_20MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch133322_Ant1

Communication System: UID 0, LTE (0); Frequency: 683 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 683 \text{ MHz}$; $\sigma = 0.811 \text{ S/m}$; $\epsilon_r = 39.895$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(6.54, 6.54, 6.54) @ 683 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch133322/Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.430 W/kg

Ch133322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.71 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 0.688 W/kg

SAR(1 g) = 0.394 W/kg; SAR(10 g) = 0.234 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 60.6%

Maximum value of SAR (measured) = 0.434 W/kg

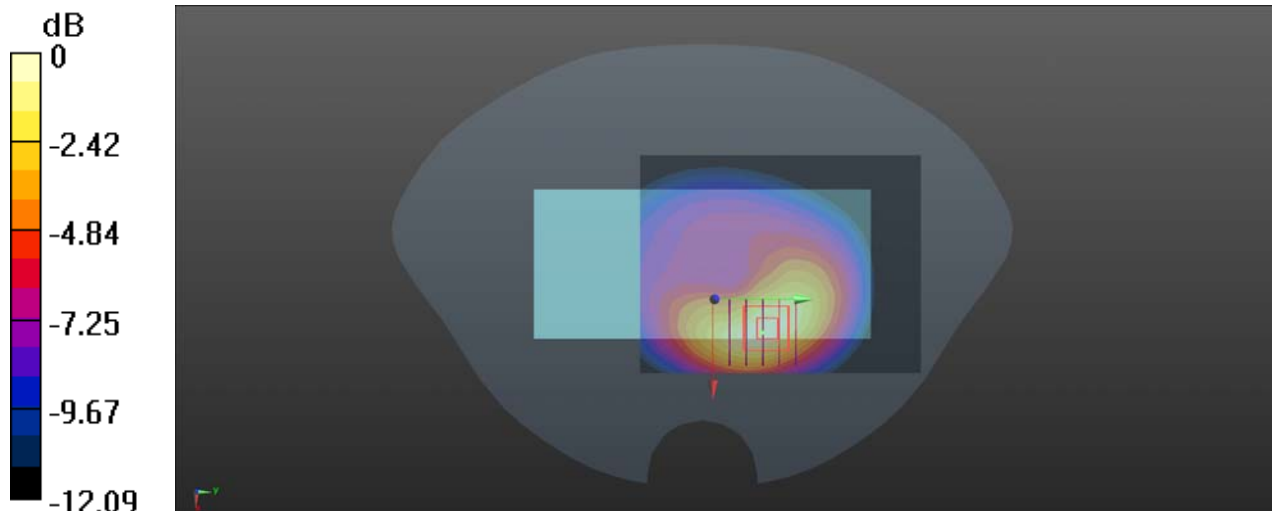

0 dB = 0.434 W/kg = -3.63 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/13

5G NR n5_20MHz_DFT-S-QPSK_QPSK_1RB_1Offset_Back Side_10mm_Ch167800_Ant1


Communication System: UID 0, 5G NR (0); Frequency: 839 MHz; Duty Cycle: 1:1
Medium: HSL_900 Medium parameters used: $f = 839$ MHz; $\sigma = 0.952$ S/m; $\epsilon_r = 41.147$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(6.25, 6.25, 6.25) @ 839 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch167800/Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.920 W/kg

Ch167800/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.26 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 1.35 W/kg
SAR(1 g) = 0.787 W/kg; SAR(10 g) = 0.475 W/kg
Smallest distance from peaks to all points 3 dB below = 13.7 mm
Ratio of SAR at M2 to SAR at M1 = 61.6%
Maximum value of SAR (measured) = 0.864 W/kg

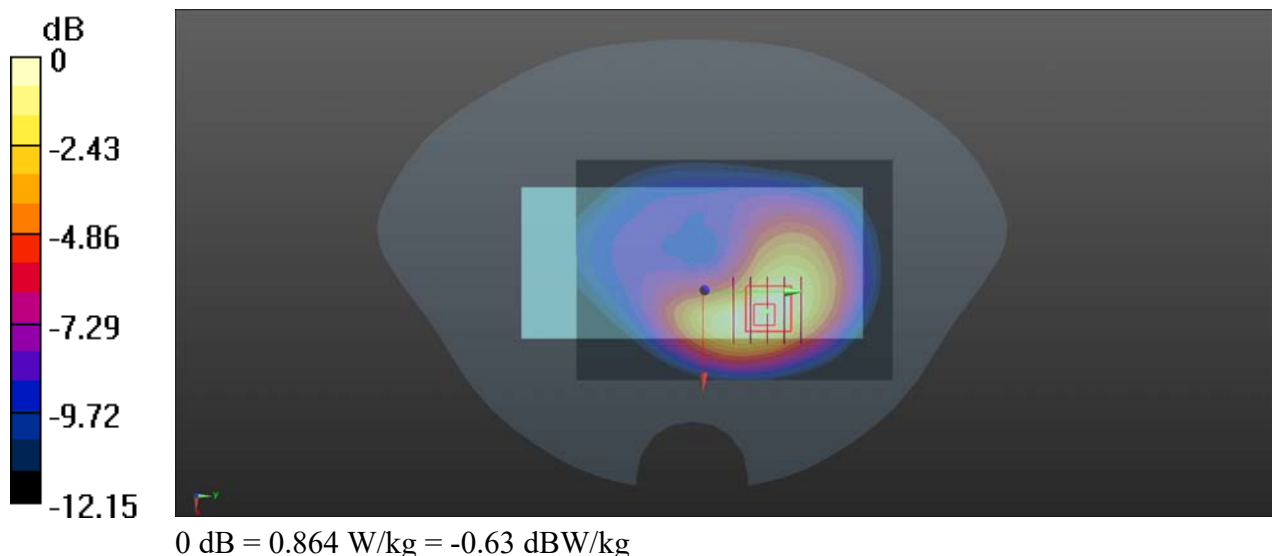

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/21

5G NR n7_20MHz_DFT-S-QPSK_QPSK_1RB_53Offset_Back Side_10mm_Ch507000_Ant5


Communication System: UID 0, 5G NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: HSL_2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.9$ S/m; $\epsilon_r = 38.769$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.54, 4.54, 4.54) @ 2535 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch507000/Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.977 W/kg

Ch507000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.322 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 1.71 W/kg
SAR(1 g) = 0.857 W/kg; SAR(10 g) = 0.427 W/kg
Smallest distance from peaks to all points 3 dB below = 12.4 mm
Ratio of SAR at M2 to SAR at M1 = 51.4%
Maximum value of SAR (measured) = 0.959 W/kg

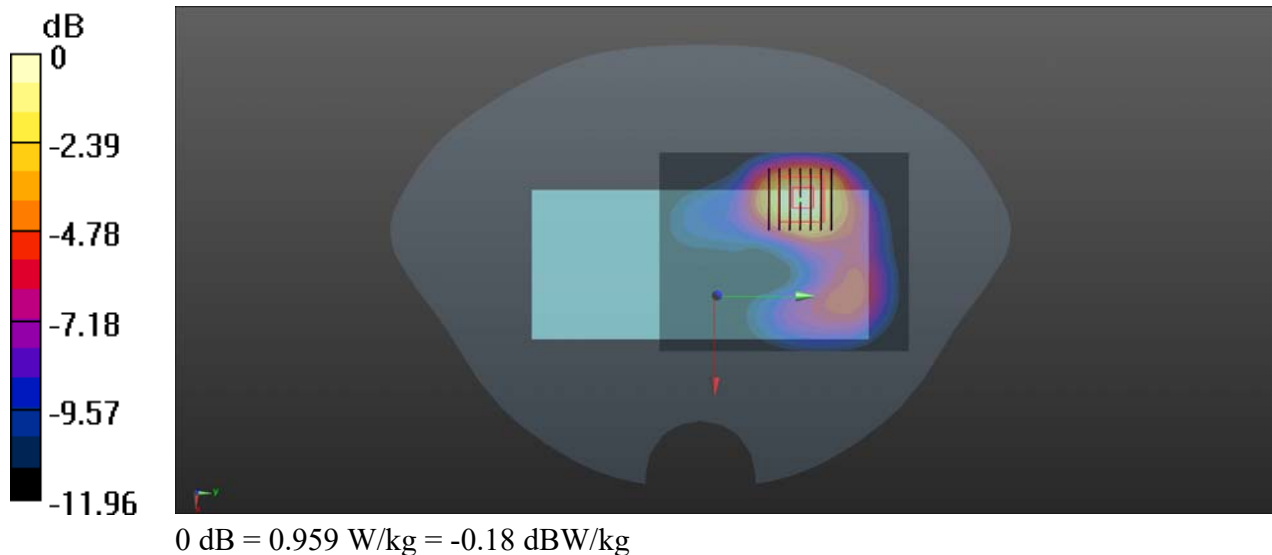

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/15

5G NR n25_20MHz_DFT-S-QPSK_QPSK_1RB_104Offset_Back Side_10mm_Ch372000_Ant4


Communication System: UID 0, 5G NR (0); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium: HSL_1800 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.354$ S/m; $\epsilon_r = 40.097$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.42, 5.42, 5.42) @ 1860 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch372000/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.793 W/kg

Ch372000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.014 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.998 W/kg
SAR(1 g) = 0.587 W/kg; SAR(10 g) = 0.319 W/kg
Smallest distance from peaks to all points 3 dB below = 10.7 mm
Ratio of SAR at M2 to SAR at M1 = 60.2%
Maximum value of SAR (measured) = 0.815 W/kg

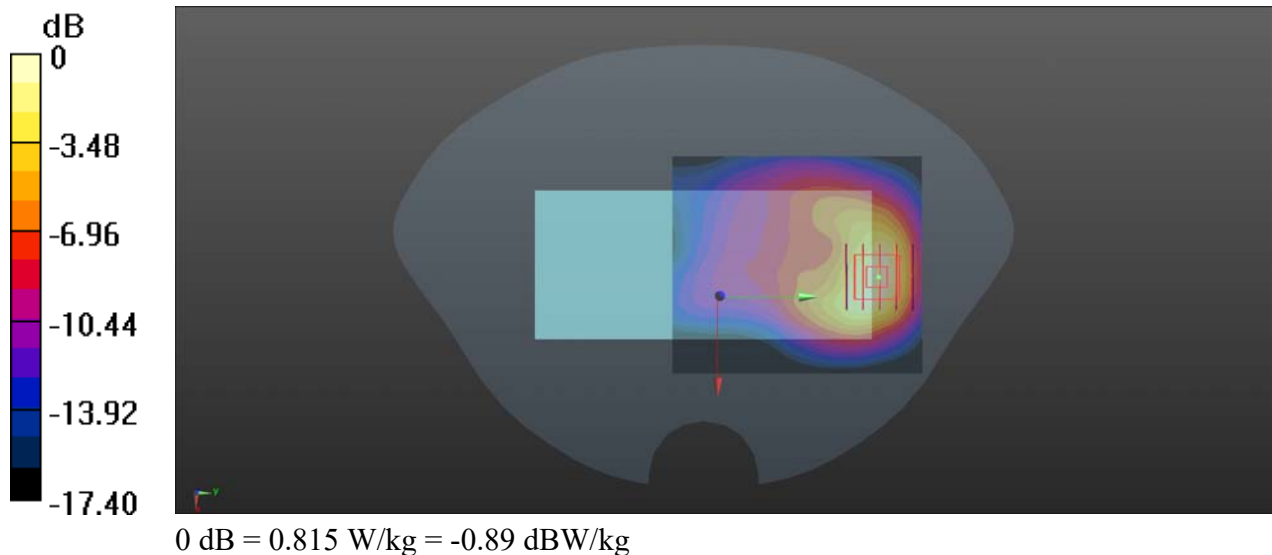

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/5/9

5G NR n26_15MHz_DFT-S-QPSK_36RB_18Offset_Back Side_10mm_Ch168300_ANT2


Communication System: UID 0, 5G NR (0); Frequency: 841.5 MHz; Duty Cycle: 1:1
Medium: HSL_900 Medium parameters used: $f = 841.5$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 41.325$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(9.43, 9.43, 9.43) @ 841.5 MHz; Calibrated: 2026/1/7
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2026/1/7
- Phantom: SAM 1; Type: QD000P40CD; Serial: 1811
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch168300/Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.15 W/kg

Ch168300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.850 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.33 W/kg
SAR(1 g) = 0.751 W/kg; SAR(10 g) = 0.445 W/kg
Smallest distance from peaks to all points 3 dB below = 12.2 mm
Ratio of SAR at M2 to SAR at M1 = 57.7%
Maximum value of SAR (measured) = 1.04 W/kg

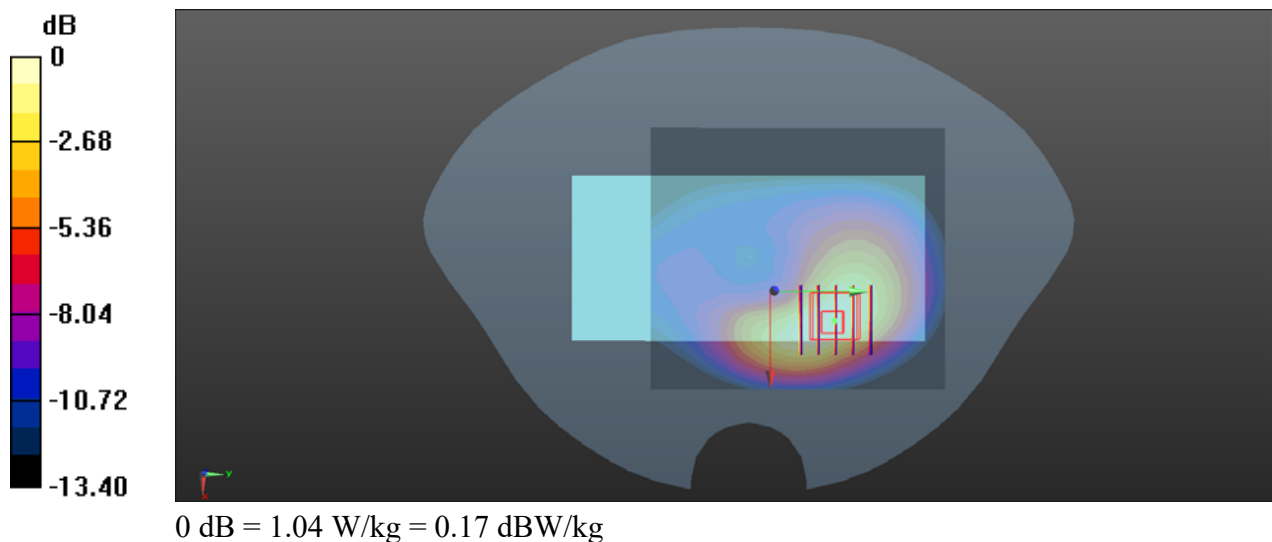

5G NR n30_10MHz_DFT-S-QPSK_1RB_1Offset_Back Side_10mm_Ch462000_ANT5

Communication System: UID 0, 5G NR (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL_2300 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.663$ S/m; $\epsilon_r = 39.574$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.4, 7.4, 7.4) @ 2310 MHz; Calibrated: 2026/1/7
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2026/1/7
- Phantom: SAM 1; Type: QD000P40CD; Serial: 1811
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch462000/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.15 W/kg

Ch462000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.626 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.732 W/kg; SAR(10 g) = 0.364 W/kg

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 54.2%

Maximum value of SAR (measured) = 1.08 W/kg

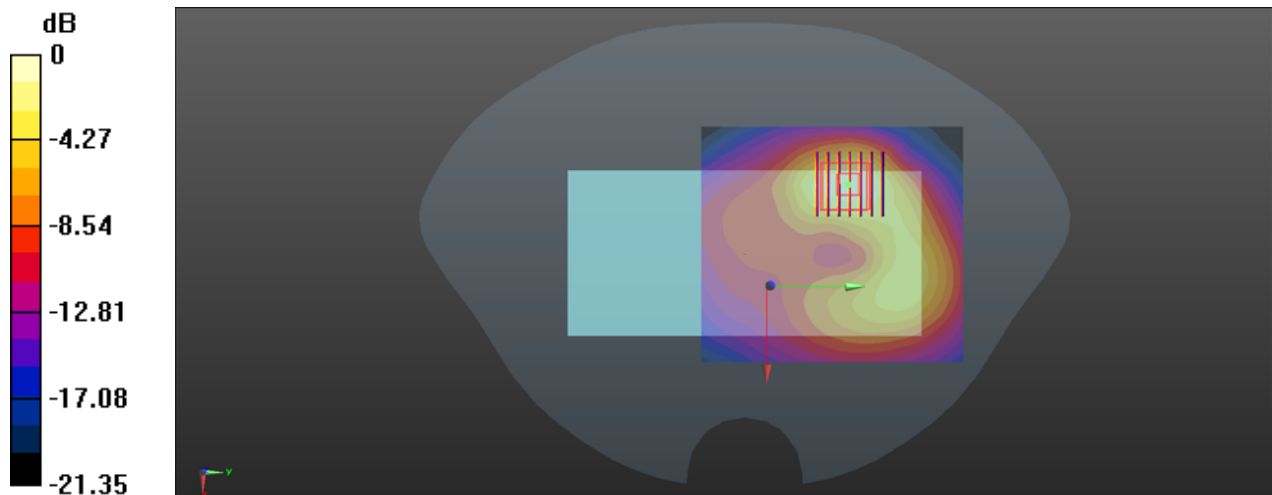

0 dB = 1.08 W/kg = 0.33 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/21

5G NR n41_100MHz_DFT-S-QPSK_QPSK_1RB_136Offset_Back Side_10mm_Ch518598_Ant5

Communication System: UID 0, 5G NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1
Medium: HSL_2600 Medium parameters used: $f = 2593$ MHz; $\sigma = 1.961$ S/m; $\epsilon_r = 38.494$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.54, 4.54, 4.54) @ 2592.99 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch518598/Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.01 W/kg

Ch518598/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.095 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.512 W/kg; SAR(10 g) = 0.266 W/kg

Smallest distance from peaks to all points 3 dB below = 12.4 mm

Ratio of SAR at M2 to SAR at M1 = 52%

Maximum value of SAR (measured) = 0.982 W/kg

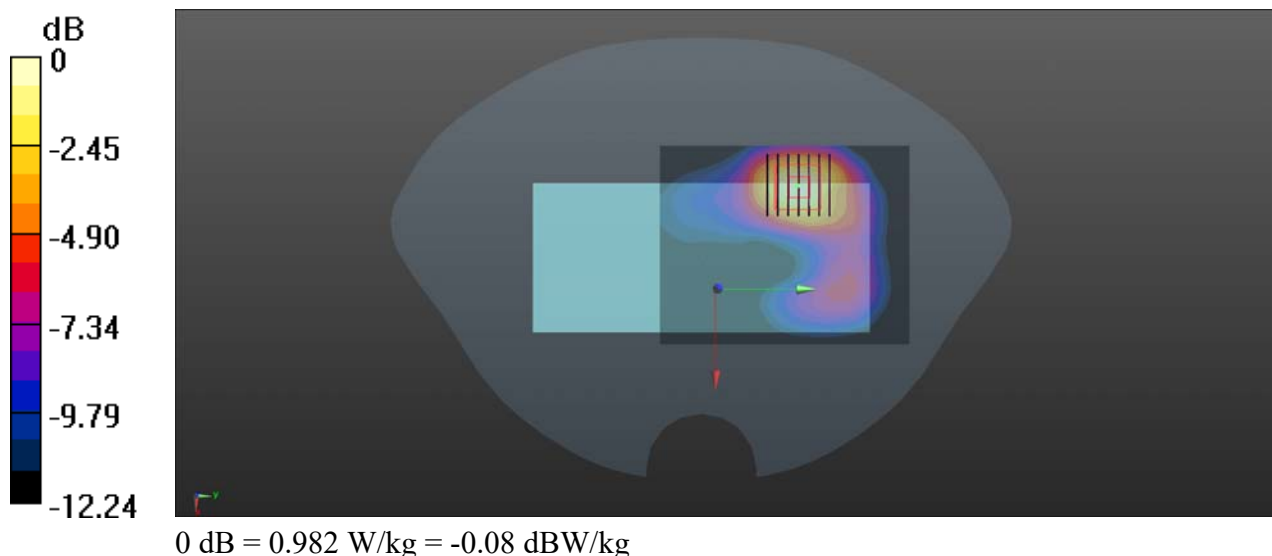

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/24

5G NR n48_40MHz_DFT-S-QPSK_1RB_1Offset_Front Side_10mm_Ch638000_Ant6

Communication System: UID 0, 5G NR (0); Frequency: 3570 MHz; Duty Cycle: 1:1

Medium: HSL_3500 Medium parameters used: $f = 3570$ MHz; $\sigma = 2.884$ S/m; $\epsilon_r = 37.036$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(6.46, 6.46, 6.46) @ 3570 MHz; Calibrated: 2026/1/7
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2026/1/7
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch638000/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.41 W/kg

Ch638000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.938 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.850 W/kg; SAR(10 g) = 0.422 W/kg

Smallest distance from peaks to all points 3 dB below = 12.6 mm

Ratio of SAR at M2 to SAR at M1 = 43.8%

Maximum value of SAR (measured) = 1.28 W/kg

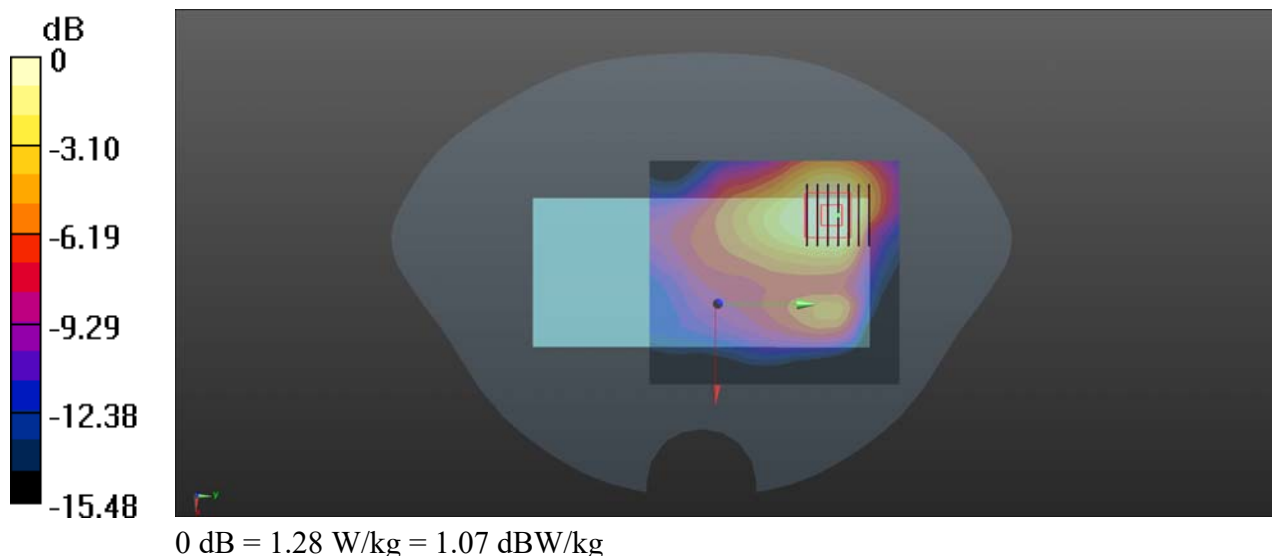

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/15

5G NR n66_20MHz_DFT-S-QPSK_QPSK_1RB_1Offset_Back Side_10mm_Ch344000_Ant4

Communication System: UID 0, 5G NR (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: HSL_1800 Medium parameters used: $f = 1800$ MHz; $\sigma = 1.343$ S/m; $\epsilon_r = 40.199$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(5.42, 5.42, 5.42) @ 1720 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch344000/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.687 W/kg

Ch344000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.900 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.832 W/kg

SAR(1 g) = 0.500 W/kg; SAR(10 g) = 0.278 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 60.8%

Maximum value of SAR (measured) = 0.671 W/kg

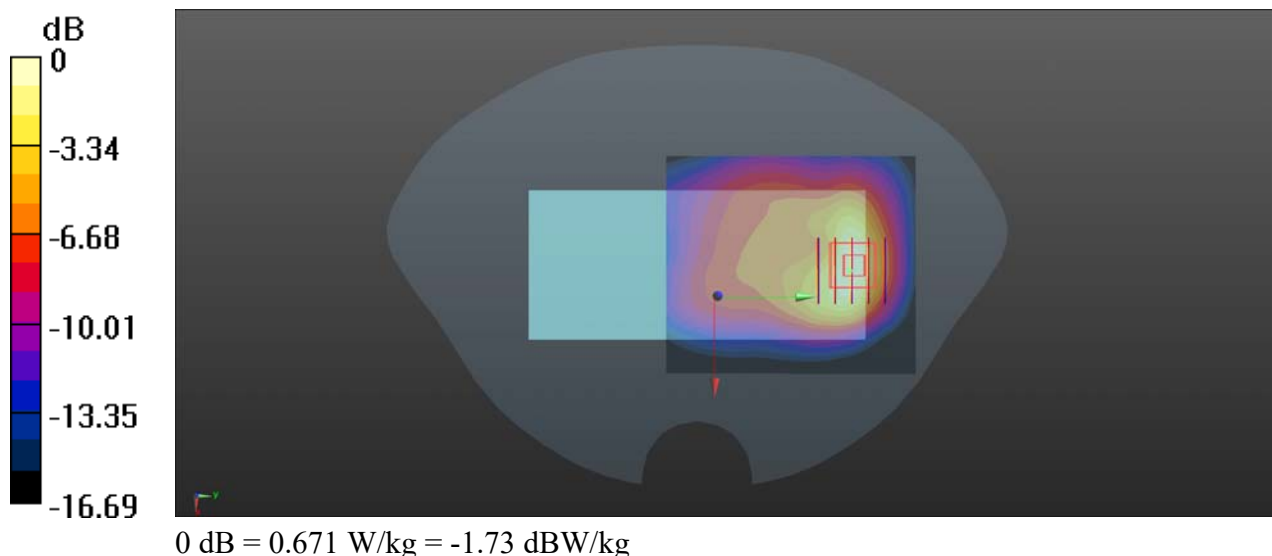

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/10

5G NR n71_20MHz_DFT-S-QPSK_QPSK_1RB_53Offset_Back Side_10mm_Ch136100_Ant1

Communication System: UID 0, 5G NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.811$ S/m; $\epsilon_r = 39.906$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(6.54, 6.54, 6.54) @ 680.5 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch136100/Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.507 W/kg

Ch136100/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.34 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.801 W/kg

SAR(1 g) = 0.459 W/kg; SAR(10 g) = 0.274 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 60.7%

Maximum value of SAR (measured) = 0.504 W/kg

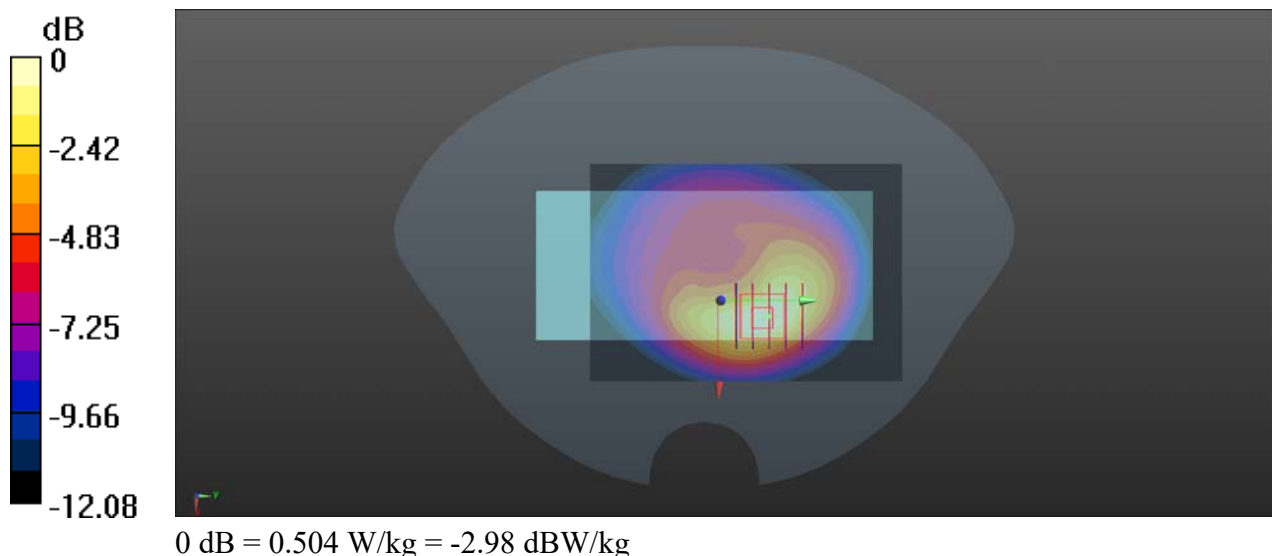

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/26

5G NR n77_100MHz_DFT-S-QPSK_1RB_136Offset_Front Side_10mm_Ch650000_Ant6

Communication System: UID 0, 5G NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: HSL_3900 Medium parameters used: $f = 3750$ MHz; $\sigma = 3.092$ S/m; $\epsilon_r = 35.813$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(6.31, 6.31, 6.31) @ 3750 MHz; Calibrated: 2026/1/7
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2026/1/7
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch650000/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.57 W/kg

Ch650000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.09 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 2.21 W/kg

SAR(1 g) = 0.950 W/kg; SAR(10 g) = 0.447 W/kg

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 39.3%

Maximum value of SAR (measured) = 1.49 W/kg

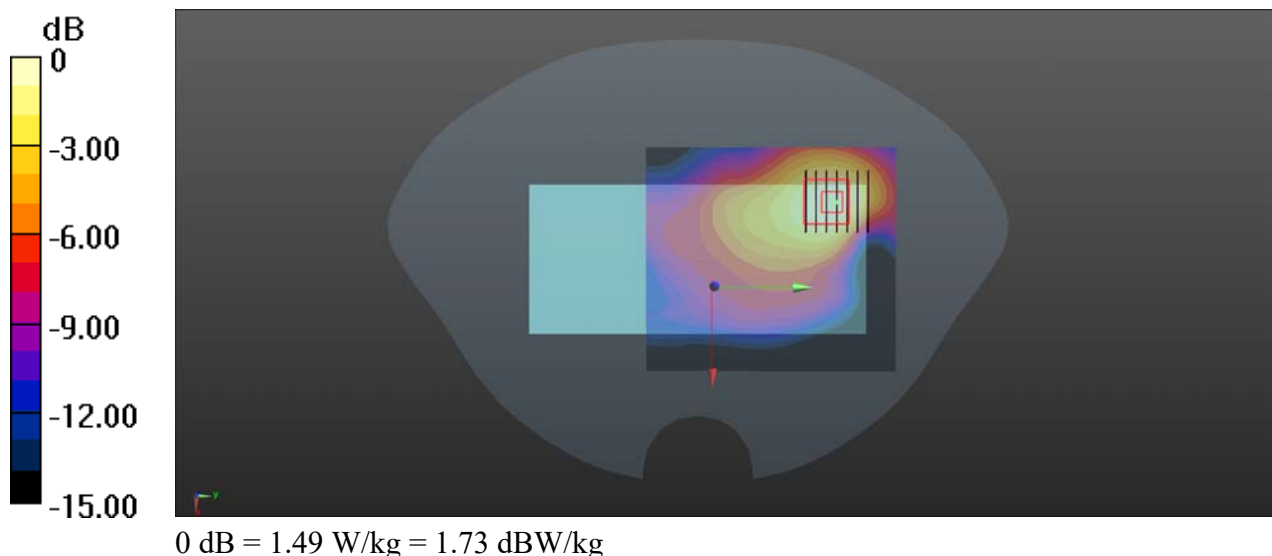

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/20

WLAN 2.4GHz_802.11b 1Mbps_Back Side_10mm_Ch11_Ant9

Communication System: UID 0, WLAN 2.4GHz 802.11b (0); Frequency: 2462 MHz; Duty Cycle: 1:1.016

Medium: HSL_2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.815$ S/m; $\epsilon_r = 39.086$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.7, 4.7, 4.7) @ 2462 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch11/Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.195 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.907 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.292 W/kg

SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.066 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 46.5%

Maximum value of SAR (measured) = 0.210 W/kg

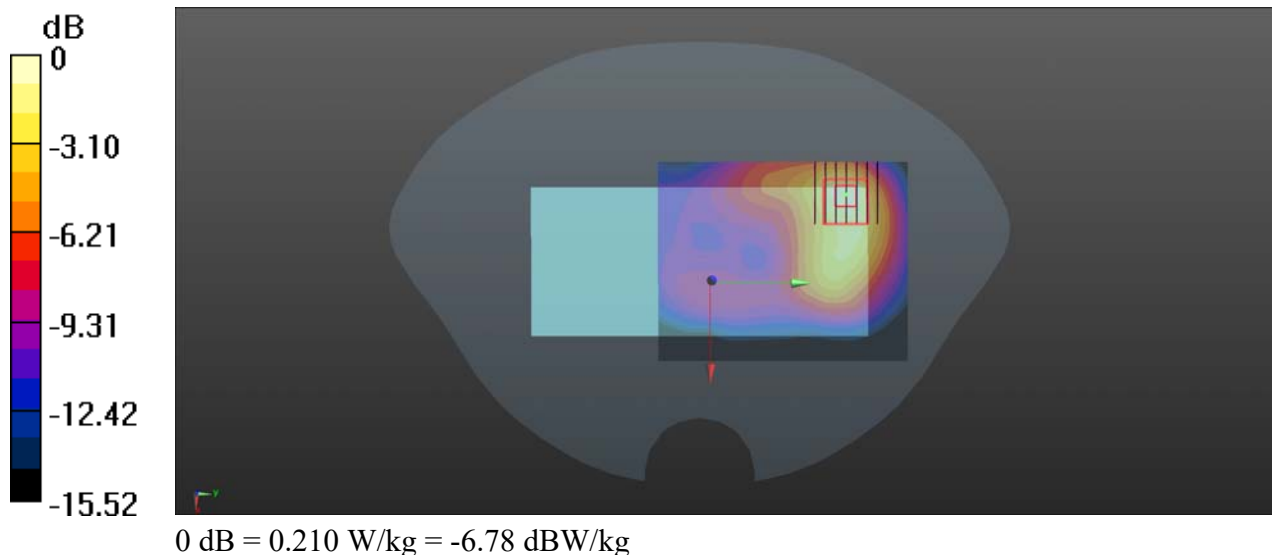

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/28

WLAN 5.8GHz_802.11a 6Mbps_Back Side_10mm_Ch165_Ant9

Communication System: UID 0, WLAN 5GHz (0); Frequency: 5825 MHz; Duty Cycle: 1:1.028
Medium: HSL_5750 Medium parameters used: $f = 5825$ MHz; $\sigma = 5.113$ S/m; $\epsilon_r = 33.533$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(4.52, 4.52, 4.52) @ 5825 MHz; Calibrated: 2026/1/7
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2026/1/7
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch165/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.338 W/kg

Ch165/Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.557 W/kg

SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.068 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 59.2%

Maximum value of SAR (measured) = 0.326 W/kg

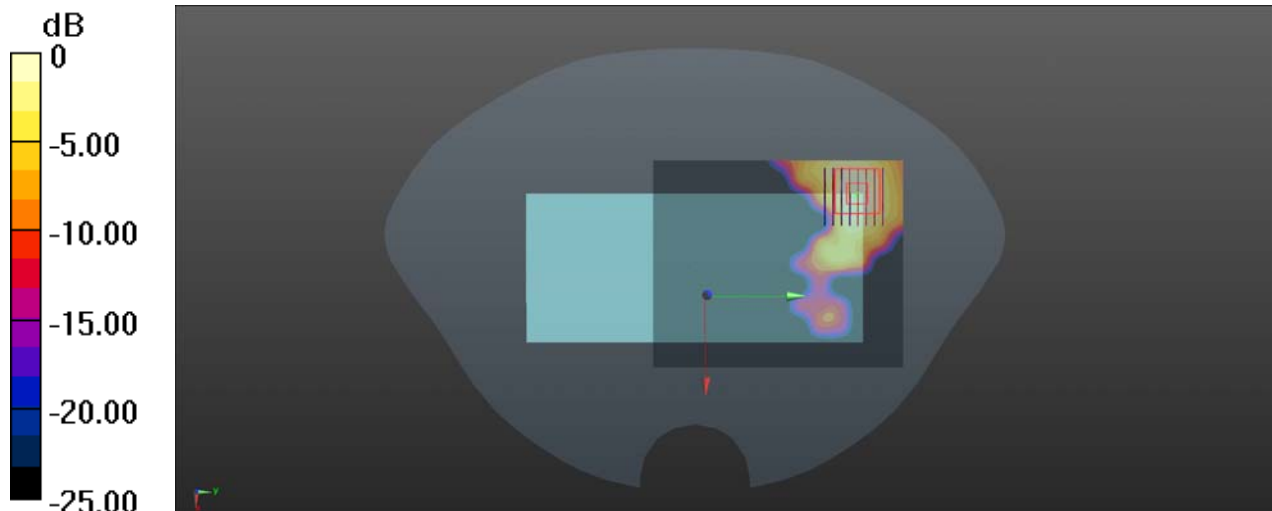

0 dB = 0.326 W/kg = -4.87 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/28

WLAN 5.8GHz_802.11a 6Mbps_Top Side_10mm_Ch165_Ant9

Communication System: UID 0, WLAN 5GHz (0); Frequency: 5825 MHz; Duty Cycle: 1:1.028
Medium: HSL_5750 Medium parameters used: $f = 5825$ MHz; $\sigma = 5.113$ S/m; $\epsilon_r = 33.533$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(4.52, 4.52, 4.52) @ 5825 MHz; Calibrated: 2026/1/7
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2026/1/7
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch165/Area Scan (51x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.521 W/kg

Ch165/Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.050 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.870 W/kg

SAR(1 g) = 0.270 W/kg; SAR(10 g) = 0.099 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 59.5%

Maximum value of SAR (measured) = 0.486 W/kg

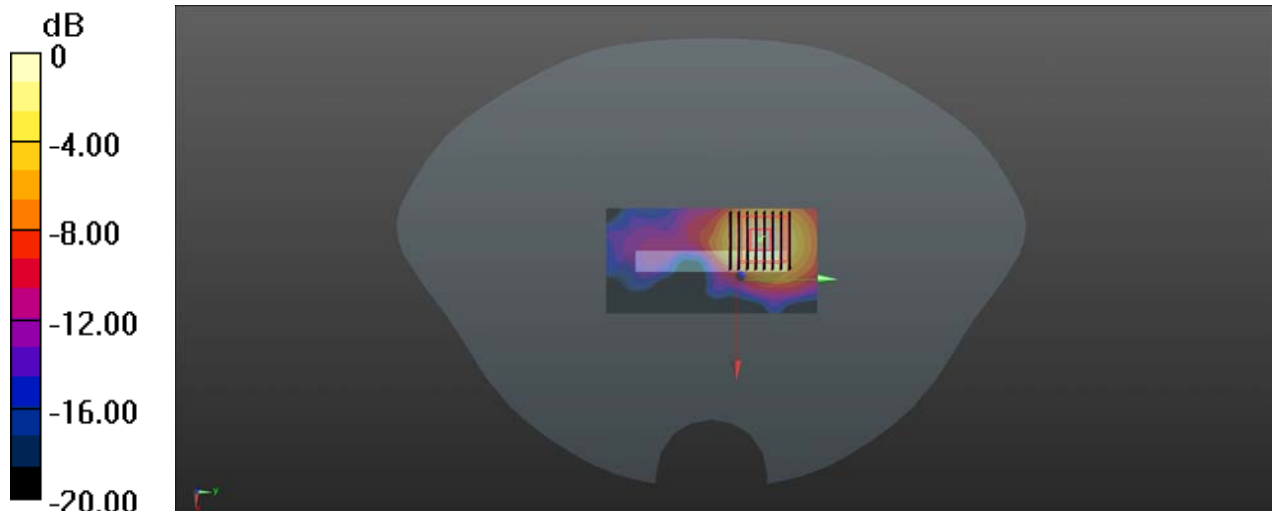

0 dB = 0.486 W/kg = -3.13 dBW/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2026/4/20

Bluetooth_DH5_Back Side_10mm_Ch78_Ant9


Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1.081
Medium: HSL_2450 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.828$ S/m; $\epsilon_r = 38.955$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.7, 4.7, 4.7) @ 2480 MHz; Calibrated: 2025/8/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2025/8/15
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch78/Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.155 W/kg

Ch78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.567 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.230 W/kg
SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.054 W/kg
Smallest distance from peaks to all points 3 dB below = 12 mm
Ratio of SAR at M2 to SAR at M1 = 48%
Maximum value of SAR (measured) = 0.165 W/kg

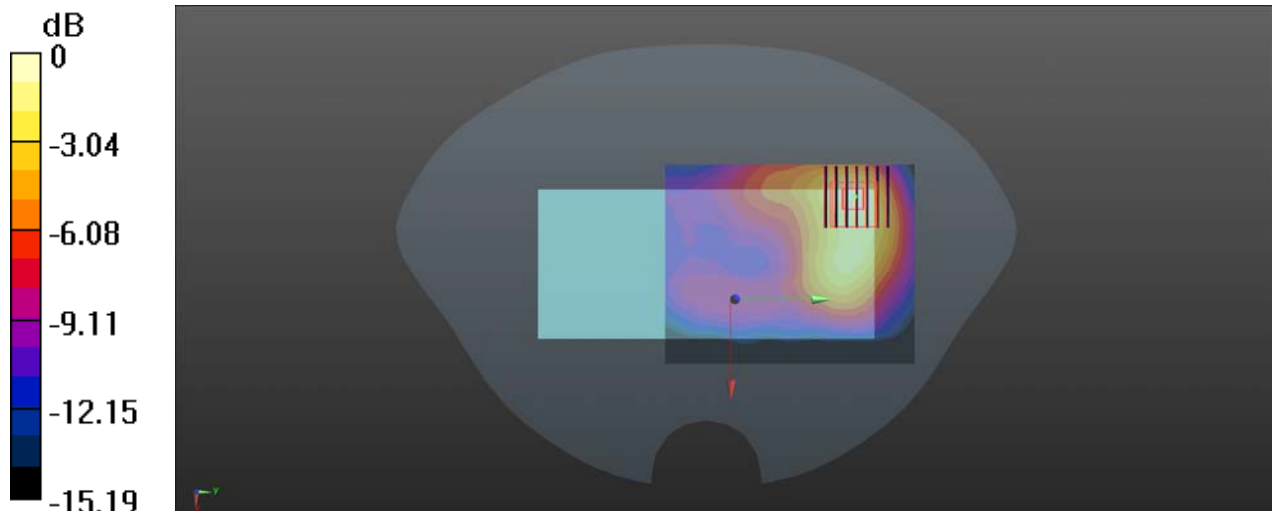

0 dB = 0.165 W/kg = -7.83 dBW/kg