TEST REPORT

APPLICANT	:	Rhino Mobility LLC
PRODUCT NAME	:	Smartphone
MODEL NAME	:	C65R
BRAND NAME	:	RHINO
FCC ID	:	2AUOUC65R
STANDARD(S)	:	47 CFR Part 15 Subpart C
RECEIPT DATE	:	2026-04-13
TEST DATE	:	2026-04-15 to 2026-04-23
ISSUE DATE	:	2026-05-28

Edited by: Zeng Xiaoying (Rapporteur)

Approved by: Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn

DIRECTORY

1. Summary of Test Result ····· 4
1.1. Testing Applied Standards ····· 5
1.2. Test Equipment List ····· 6
1.3. Measurement Uncertainty ····· 8
1.4. Testing Laboratory ····· 8
2. General Description ····· 9
2.1. Information of Applicant and Manufacturer ····· 9
2.2. Information of EUT ····· 9
2.3. Channel List of EUT ····· 11
2.4. Test Configuration of EUT ····· 12
2.5. Test Conditions ····· 12
2.6. Test Setup Layout Diagram ····· 12
3. Test Results ····· 15
3.1. Antenna Requirement ····· 15
3.2. Duty Cycle of Test Signal ····· 16
3.3. Maximum Peak Conducted Output Power ····· 17
3.4. Maximum Average Conducted Output Power ····· 18
3.5. 6 dB Bandwidth ····· 19
3.6. Conducted Spurious Emissions and Band Edge ····· 20
3.7. Power Spectral Density ····· 21
3.8. Conducted Emission ····· 22
3.9. Restricted Frequency Bands ····· 23
3.10. Radiated Emission ····· 24
Annex A Test Data and Result ····· 26
Notes ····· 78

Change History		
Version	**Date**	**Reason for change**
1.0	2026-05-28	First edition

1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS$_{Note3}$	/
2	N/A	Duty Cycle of Test Signal	Jan. 09, 2026	Lin Haoyang	PASS$_{Note3}$	/
3	15.247(b)	Maximum Peak Conducted Output Power	Jan. 09, 2026	Lin Haoyang	PASS$_{Note3}$	/
4	15.247(b)	Maximum Average Conducted Output Power	Jan. 09, 2026	Lin Haoyang	PASS$_{Note3}$	/
5	15.247(a)	Bandwidth	Jan. 09, 2026	Lin Haoyang	PASS$_{Note3}$	/
6	15.247(d)	Conducted Spurious Emission and Band Edge	Jan. 09, 2026	Lin Haoyang	PASS$_{Note3}$	/
7	15.247(e)	Power Spectral Density	Jan. 09, 2026	Lin Haoyang	PASS$_{Note3}$	/
8	15.207	Conducted Emission	Apr. 15, 2026	Wang Yapeng	PASS	/
9	15.247(d)	Restricted Frequency Bands	Apr. 20, 2026	Xiong Xianhong	PASS	/
10	15.209, 15.247(d)	Radiated Emission	Apr. 03 to 07, 2026	Xiong Xianhong	PASS	/

Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2020 and KDB 558074 D01 v05r02.

Note 2: Any additions, deviation, or exclusions from the method shall be noted in the “Remark”.

Note 3: The test results of these test items in this report refer to the test report (Report No.: SZ25100415W01).

1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

• 47 CFR Part 15 Subpart C Radio Frequency Devices

1.2. Test Equipment List

1.2.1 Conducted Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analzyer	MY53470836	N9010A	Agilent	2025.12.24	2026.12.23
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 Conducted Emission Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	101052	ESPI	R&S	2025.05.15	2026.05.14
LISN	103131	ENV 216	R&S	2026.03.18	2027.03.17
INTELLIGENT PURE SINE-WAVE POWER SUPPLY	1008004	TPS 500B	EVERFINE	2025.09.11	2026.09.10
RF Coaxial Cable (DC-100MHz)	EMC-CE-00514	N/A	N/A	2025.05.06	2026.05.05

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
JS32-RE	Tonscend	5.0.0
TS+ -[JS32-CE]	Tonscend	2.5.0.0

1.2.4 Radiated Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Signal Analyzer	MY56060145	N9020A	Agilent	2025.05.13	2026.05.12
Test Antenna - Bi-Log	9163-274	VULB 9163	Schwarzbeck	2025.06.28	2026.06.27
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2025.05.16	2026.05.15
Test Antenna – Horn	9120D-963	BBHA 9120D	Schwarzbeck	2025.05.16	2026.05.15
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2025.06.20	2026.06.19
Preamplifier (10MHz-6GHz)	46732	S10M100L3802	LUCIX CORP.	2025.05.13	2026.05.12
Preamplifier (2GHz-18GHz)	61171/61172	S020180L3203	LUCIX CORP.	2025.05.13	2026.05.12
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-KK-0.5	Qualwave	2025.09.03	2026.09.02
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-KKF-2	Qualwave	2025.09.03	2026.09.02
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-NN-5	Qualwave	2025.09.03	2026.09.02
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2025.06.21	2028.06.20
Anechoic Chamber	N/A	9m*6m*6m	CRT	2025.04.19	2028.04.18

1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	±2.22dB	Confidence levels of 95%
Power Spectral Density	±2.22dB	Confidence levels of 95%
Bandwidth	±5%	Confidence levels of 95%
Conducted Spurious Emission	±2.77dB	Confidence levels of 95%
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525
FCC Designation Number:	CN1192
FCC Test Firm Registration Number:	226174

2. General Description

2.1. Information of Applicant and Manufacturer

Applicant:	Rhino Mobility LLC
Applicant Address:	8 The Green, Suite A, Dover, Delaware, 19901, USA
Manufacturer:	Rhino Mobility LLC
Manufacturer Address:	8 The Green, Suite A, Dover, Delaware, 19901, USA

2.2. Information of EUT

Product Name:	Smartphone	
Sample No.:	3#, 7#, 10#	
Hardware Version:	Q6011_MB_V1.0	
Software Version:	C65(001)_20260411_16	
Equipment Type:	Bluetooth LE	
Bluetooth Version:	5.1	
Modulation Type:	GFSK	
Data Rate:	1Mbps, 2Mbps	
Operating Frequency Range:	2402MHz-2480MHz	
Antenna Type:	PIFA Antenna	
Antenna Gain:	1.73dBi	
Accessory Information:	Battery	
	Brand Name:	RHINO
	Model No.:	BPC65R
	Serial No.:	N/A
	Capacity:	4000mAh
	Rated Voltage:	3.85V
	Charge Limit:	4.4V
	Manufacturer:	Phenix New Energy (Huizhou) Co., Ltd.

Accessory Information:	AC Adapter	
	Brand Name:	RHINO
	Model No.:	PS20C120K1670UC
	Serial No.:	N/A
	Rated Output:	5V⎓3A or 9V⎓2.22A or 12V⎓1.67A
	Rated Input:	100-240V～50/60Hz, 0.6A
	Manufacturer:	Shenzhen Flypower Technology Co., Ltd.
	USB cable 1	
	Model No.:	USB TYPE C to C 2.0 Cable (2.0m)
	Manufacturer:	HUIZHOU WASHIN ELECTRONICS CO.,LTD
	USB cable 2	
	Model No.:	USB TYPE C to C 2.0 Cable (1.0m)
	Manufacturer:	HUIZHOU WASHIN ELECTRONICS CO.,LTD

Note 1: The EUT description presented in the report are provided by applicant and/or manufacturer, and the test laboratory is not responsible for the accuracy of the information. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

Note 2: This is a variant report of original report (Report No.: SZ25100415W01, FCC ID: 2AUOUC65). Based on the similarity between before, only changing the antenna design and battery. No other changes. The changes only affect the radiated test results in this report.

2.3. Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	**2402**	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	**19**	**2440**	29	2460	**39**	**2480**

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT

The EUT is controlled by dedicated software to transmit at the default maximum power level.

2.5. Test Conditions

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106

2.6. Test Setup Layout Diagram

2.6.1.Conducted Measurement

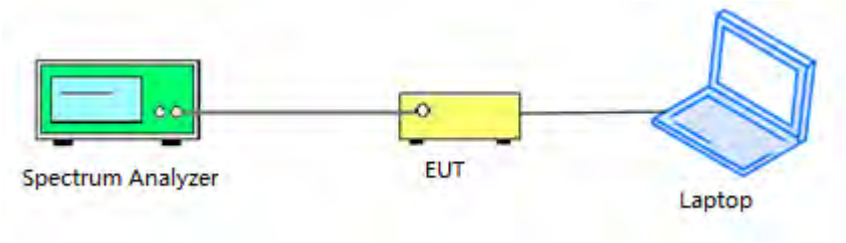

2.6.2.Conducted Emission Measurement

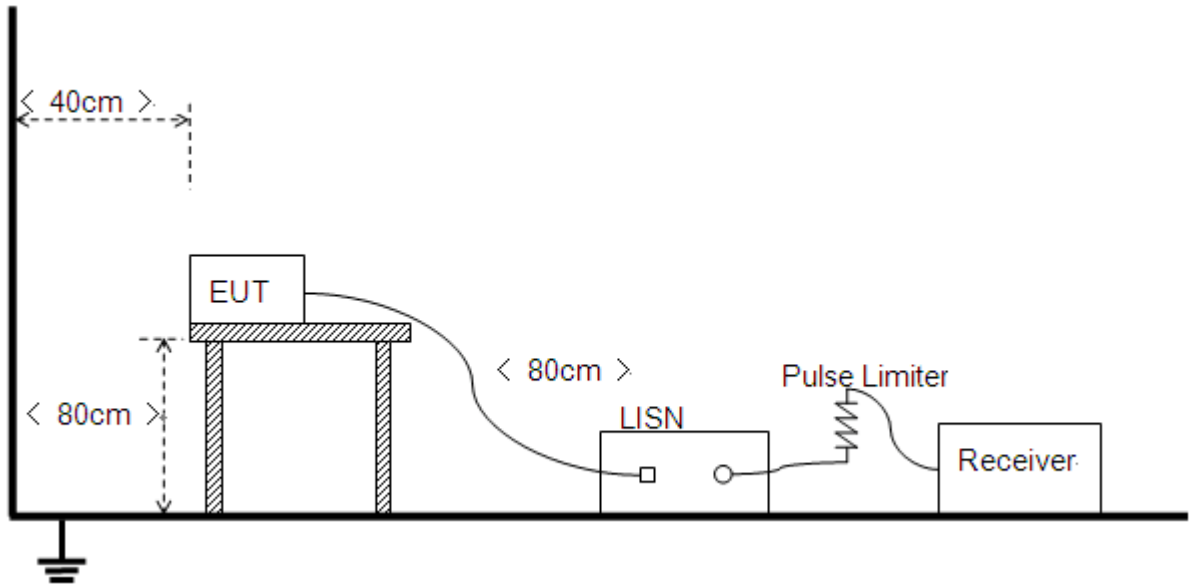

2.6.3.Radiation Measurement

1) For radiated emissions from 9kHz to 30MHz

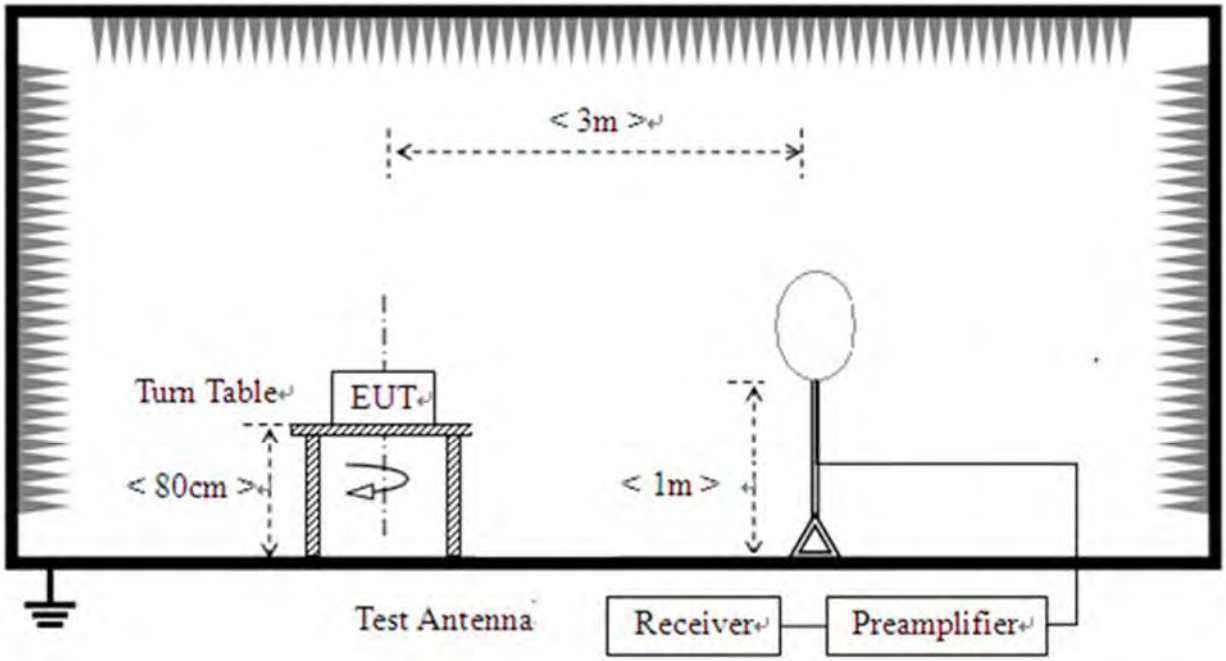

2) For radiated emissions from 30MHz to1GHz

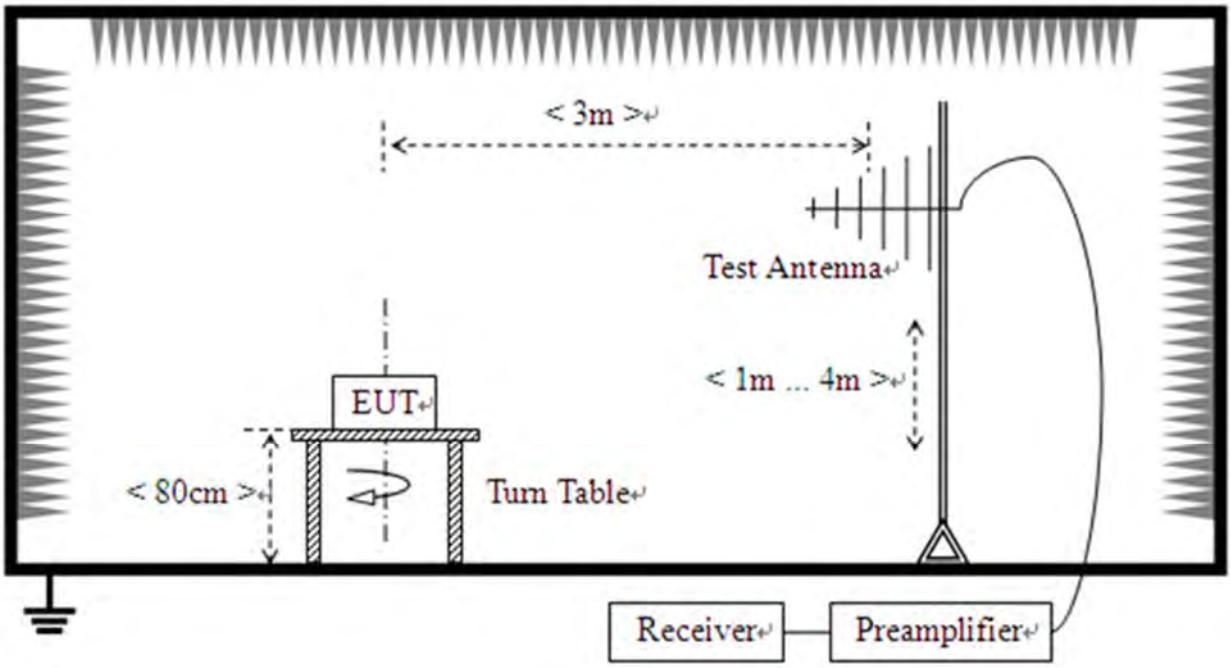

3) For radiated emissions above 1GHz

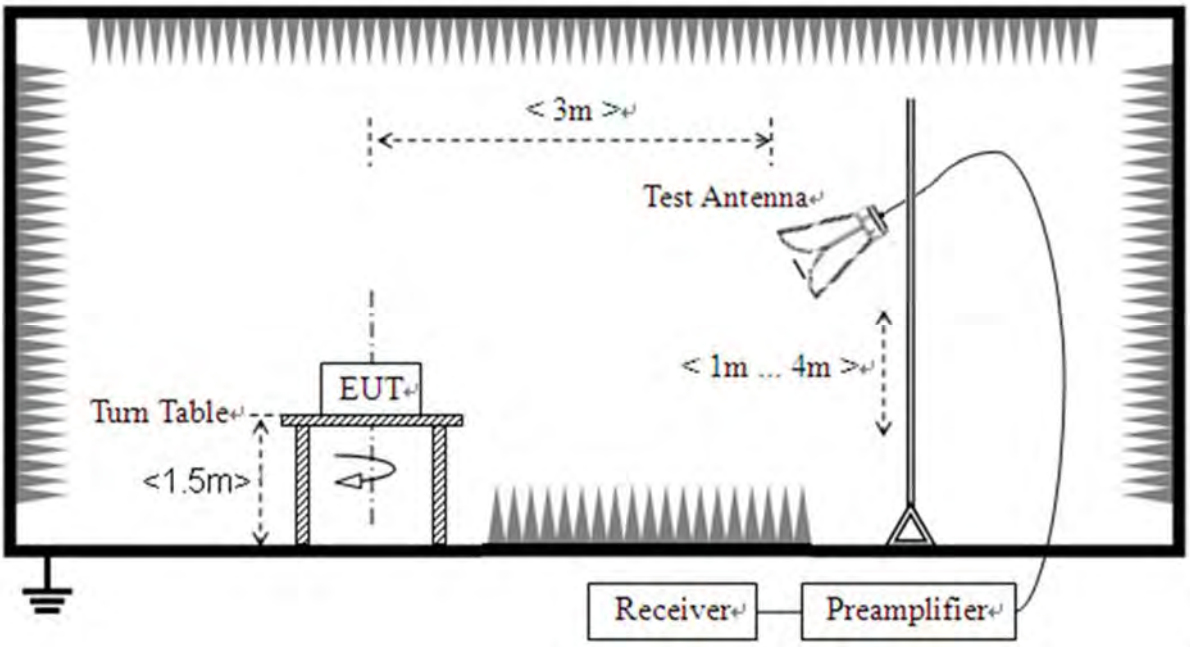

3. Test Results

3.1. Antenna Requirement

3.1.1.Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2.Test Result

Antenna location	Antenna Type	Coupling Method
☒Internal ☐External	☐FPC Antenna ☐Spring Antenna ☐Ceramic Antenna ☐Integrated Antenna ☐Dipole Antenna ☐PCB Antenna ☒PIFA Antenna	☐I-PEX Connector ☐SMA Connector ☐RP-SMA Connector ☒Metal Shrapnel ☐Layout

3.2. Duty Cycle of Test Signal

3.2.1.Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e.,no transmitter OFF-time is to be considered).
When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than ±2%; otherwise, the duty cycle is considered to be non constant.

3.2.2.Test Result

Refer to Annex A.1 in this report.

3.3. Maximum Peak Conducted Output Power

3.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

3.3.2. Test Procedures

KDB 558074 Section 8.3.1 was used in order to prove compliance.

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.2 in this report.

3.4. Maximum Average Conducted Output Power

3.4.1. Requirement

According to FCC section 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

3.4.2. Test Procedures

KDB 558074 Section 8.3.2 was used in order to prove compliance.

3.4.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.4. Test Result

Refer to Annex A.3 in this report.

3.5.6 dB Bandwidth

3.5.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

3.5.1.Test Procedures

The steps for the first option are as follows:
a) Set analyzer center frequency to channel center frequency
b) Set RBW to100kHz
c) Set VBW to 300kHz
d) Detector = peak.
e) Trace mode = max hold
f) Sweep time = auto couple
g) Allow the trace to fully stabilize
h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by6 dB relative to the maximum level measured in the fundamental emission
The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW ≥ 3 ×RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥6 dB.

3.5.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.3.Test Result

Refer to Annex A.4 in this report.

3.6. Conducted Spurious Emissions and Band Edge

3.6.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.6.2. Test Procedures

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

3.6.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4. Test Result

Refer to Annex A.5 and A.6 in this report.

3.7. Power Spectral Density

3.7.1.Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.7.2.Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:
a) Set analyzer center frequency to channel center frequency
b) Set span to1.5 times DTS
c) Set RBW to 3kHz
d) Set VBW to 10kHz
e) Detector = peak
f) Sweep time = auto couple
g) Trace mode = max hold
h) Allow trace to fully stabilize
i) Use the peak marker function to determine the maximum amplitude level within the RBW

3.7.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.7.4.Test Result

Refer to Annex A.7 in this report.

3.8. Conducted Emission

3.8.1.Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μH/50Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dBμV)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

(a) The lower limit shall apply at the band edges.

(b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.8.2.Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10.

3.8.3.Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.8.4.Test Result

Refer to Annex A.8 in this report.

3.9. Restricted Frequency Bands

3.9.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.9.2.Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.
For the Test Antenna:
Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
Span = wide enough to fully capture the emission being measured
RBW = 1 MHz for f ≥ 1GHz, 100 kHz for f < 1GHz
VBW = 3 MHz
Sweep = auto
Detector function = peak/average
Trace = max hold
Allow the trace to stabilize

3.9.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4.Test Result

Refer to Annex A.9 in this report.

3.10. Radiated Emission

3.10.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
Note2: For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).

3.10.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz.The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.10.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.10.4.Test Result

Refer to Annex A.10 in this report.

Annex A Test Data and Result

A.1. Duty Cycle of Test Signal

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	62.88	2.01	2.54
NVNT	BLE 1M	2440	Ant1	62.88	2.01	2.54
NVNT	BLE 1M	2480	Ant1	62.96	2.01	2.54
NVNT	BLE 2M	2402	Ant1	33.28	4.78	4.81
NVNT	BLE 2M	2440	Ant1	33.28	4.78	4.81
NVNT	BLE 2M	2480	Ant1	33.33	4.77	4.8

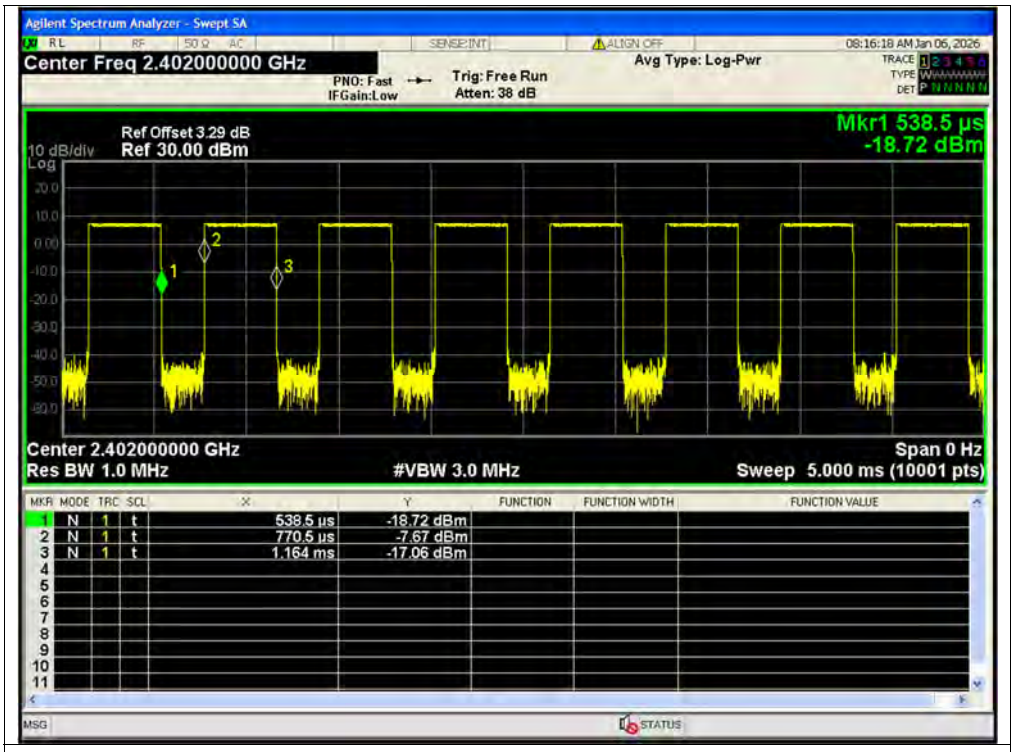

Duty Cycle NVNT BLE 1M 2402MHz Ant1

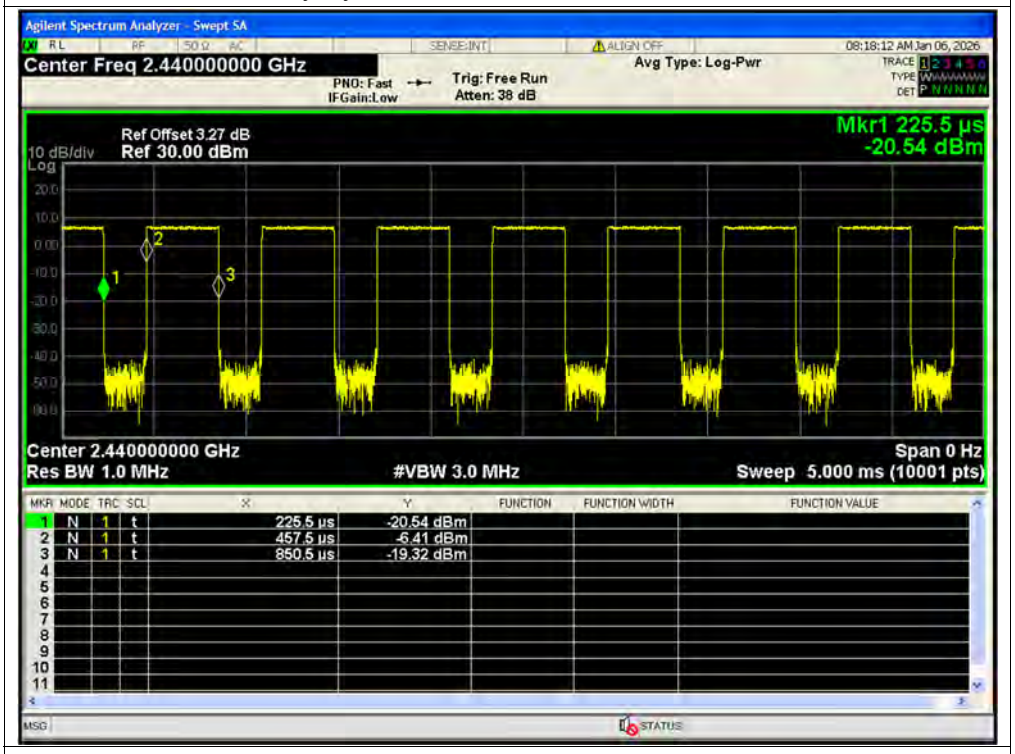

Duty Cycle NVNT BLE 1M 2440MHz Ant1

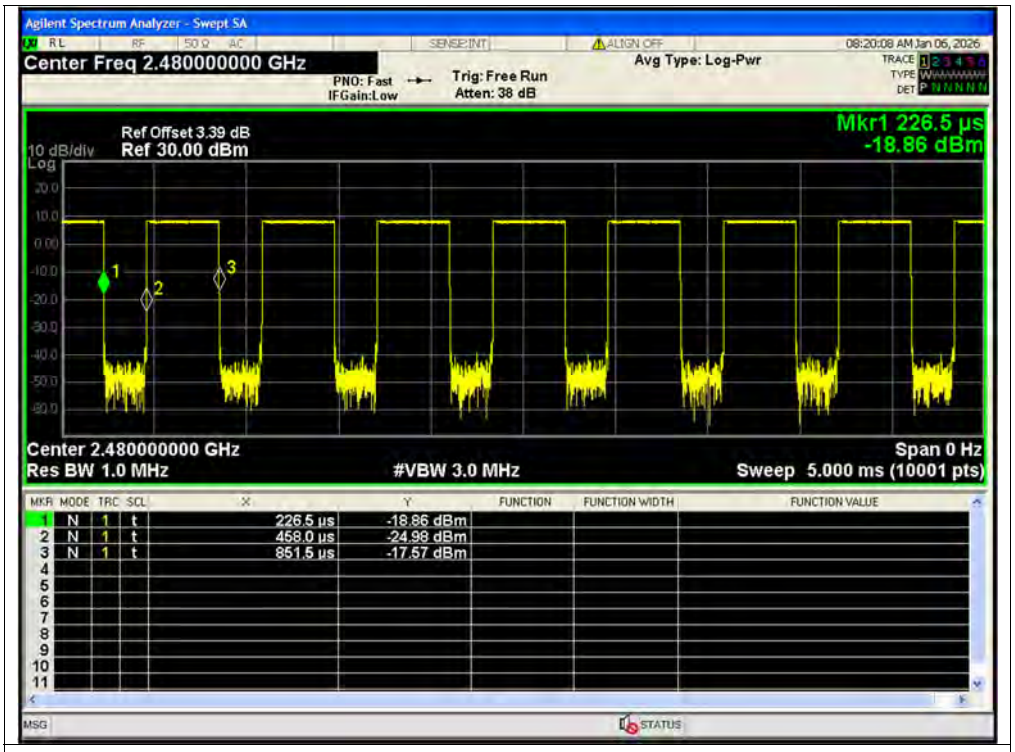

Duty Cycle NVNT BLE 1M 2480MHz Ant1

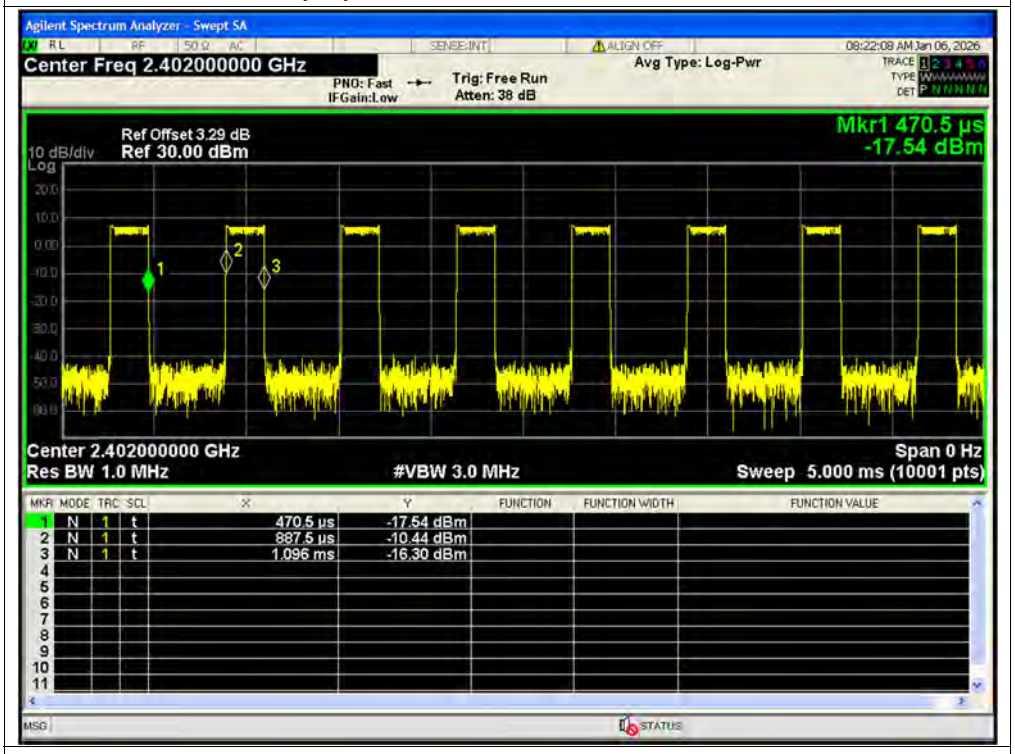

Duty Cycle NVNT BLE 2M 2402MHz Ant1

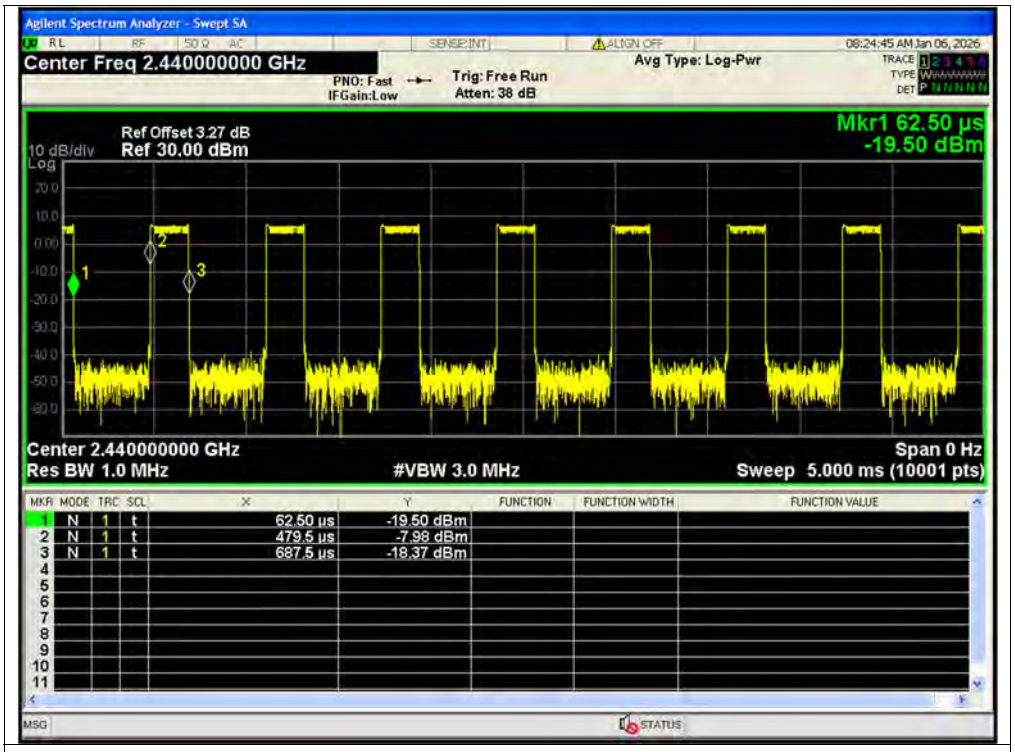

Duty Cycle NVNT BLE 2M 2440MHz Ant1

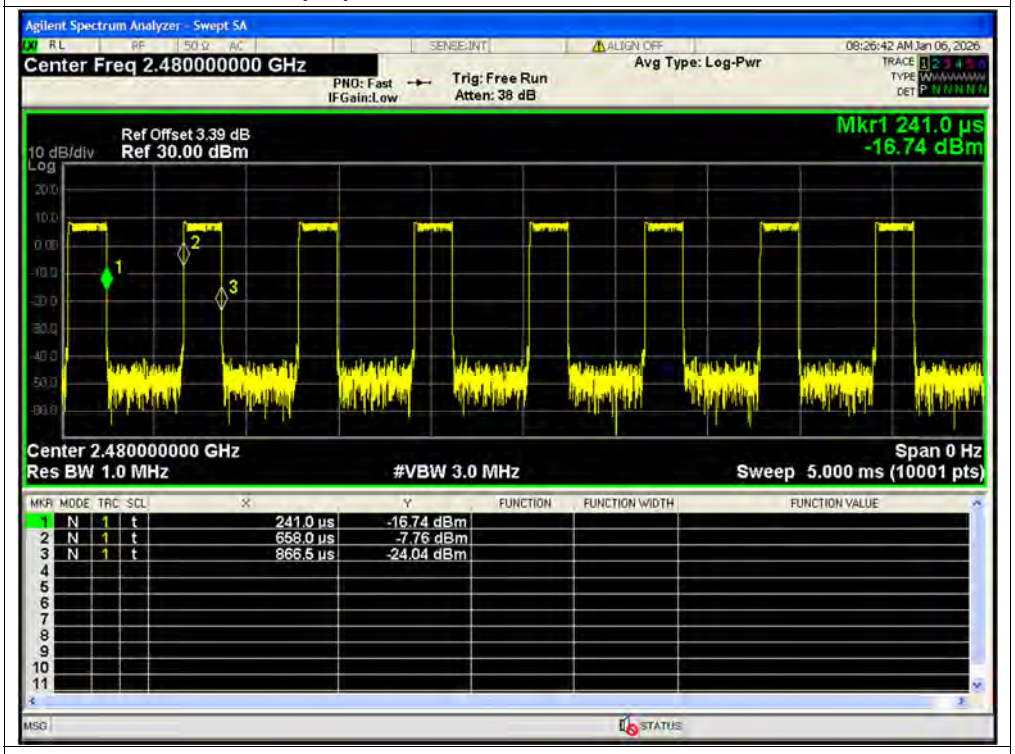

Duty Cycle NVNT BLE 2M 2480MHz Ant1

A.2. Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	7.59	0	7.59	0.00574	30	Pass
NVNT	BLE 1M	2440	Ant1	7.13	0	7.13	0.00516	30	Pass
NVNT	BLE 1M	2480	Ant1	8.63	0	8.63	0.00729	30	Pass
NVNT	BLE 2M	2402	Ant1	7.57	0	7.57	0.00571	30	Pass
NVNT	BLE 2M	2440	Ant1	7.2	0	7.2	0.00525	30	Pass
NVNT	BLE 2M	2480	Ant1	8.74	0	8.74	0.00748	30	Pass

Peak Power NVNT BLE 1M 2402MHz Ant1

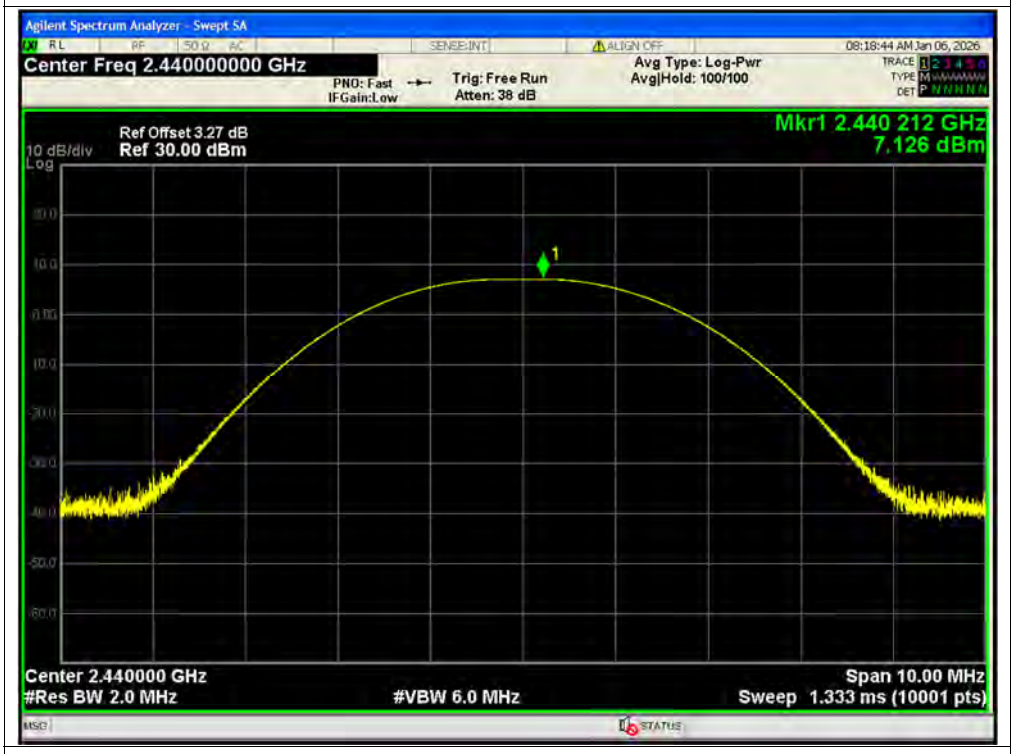

Peak Power NVNT BLE 1M 2440MHz Ant1

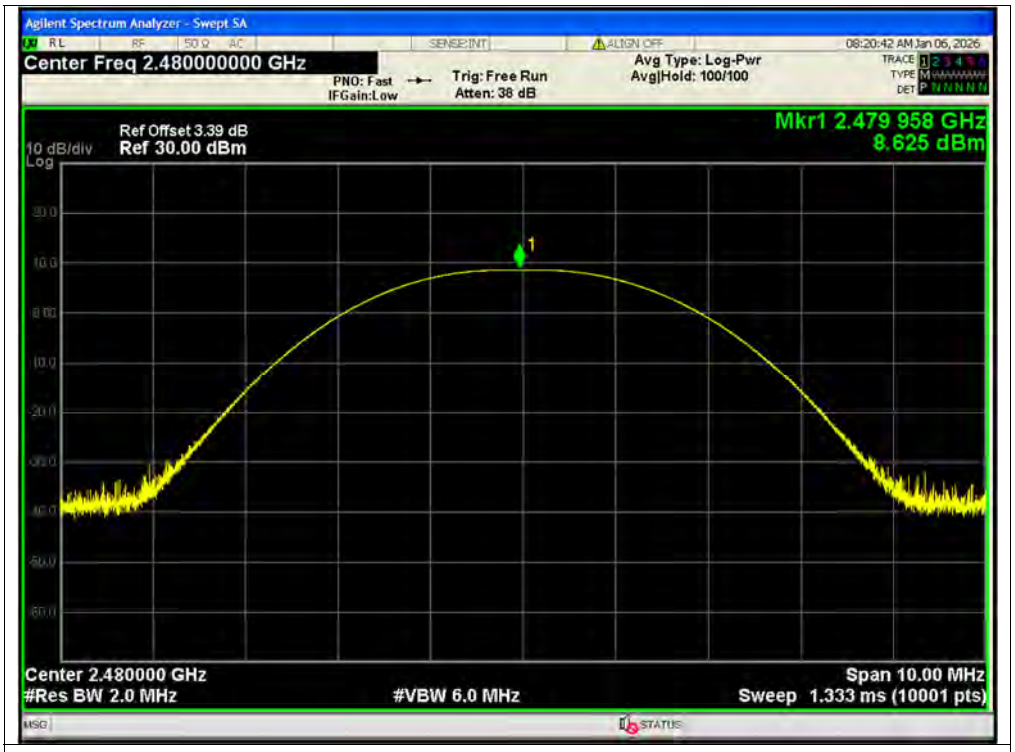

Peak Power NVNT BLE 1M 2480MHz Ant1

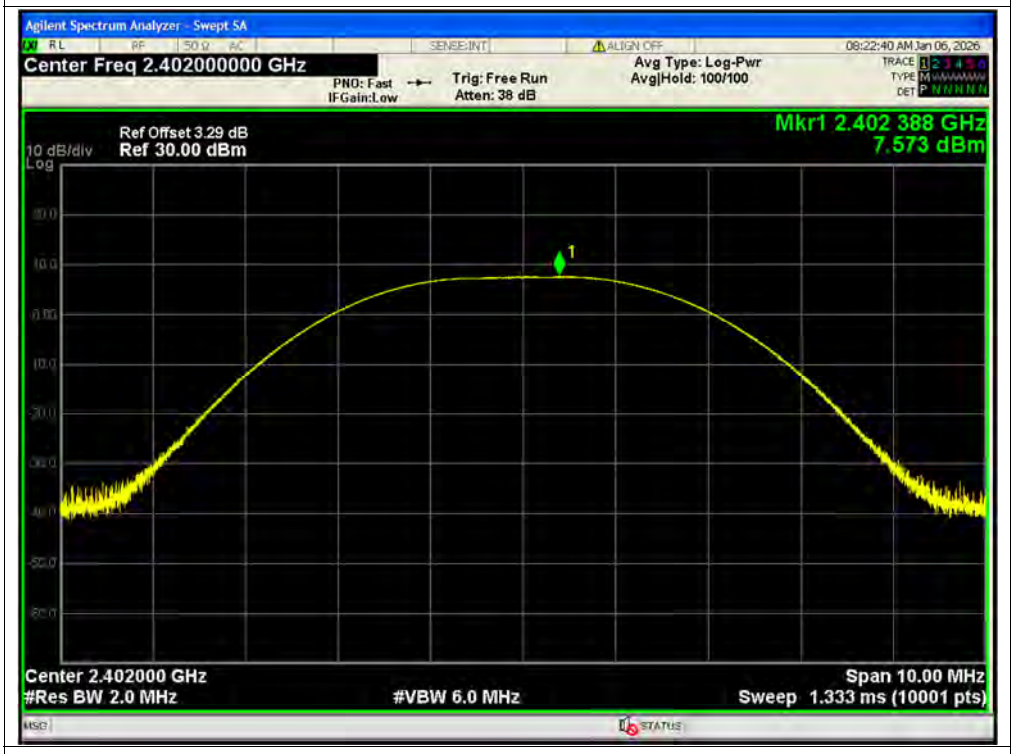

Peak Power NVNT BLE 2M 2402MHz Ant1

Peak Power NVNT BLE 2M 2440MHz Ant1

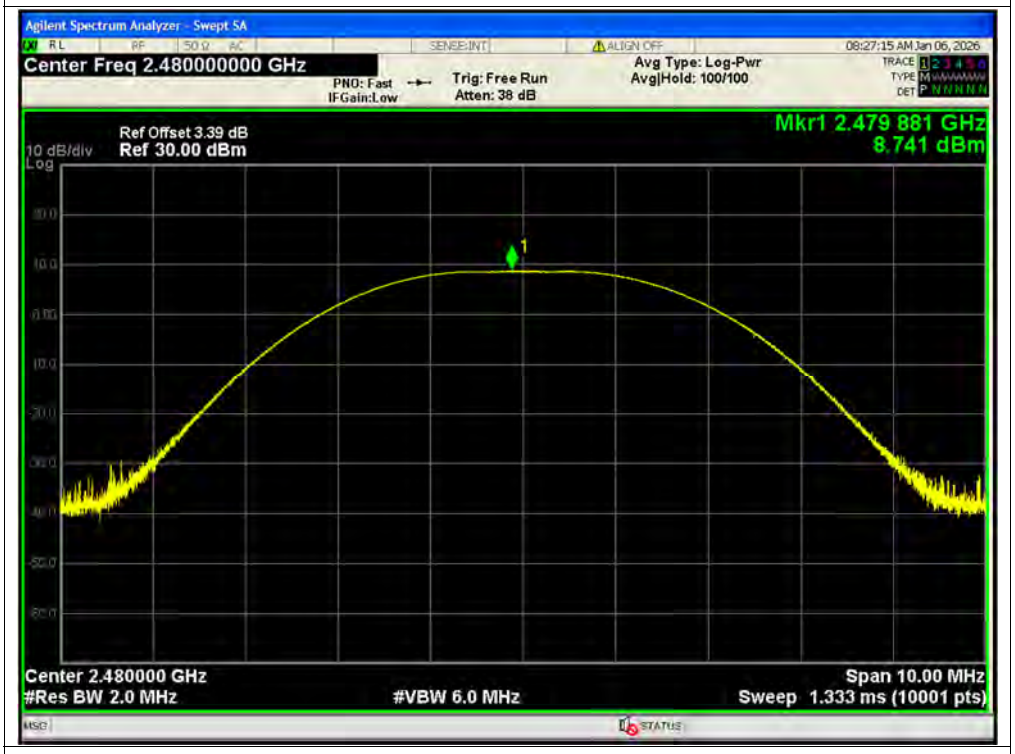

Peak Power NVNT BLE 2M 2480MHz Ant1

A.3. Maximum Average Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	5.27	2.01	7.28	0.00535	30	Pass
NVNT	BLE 1M	2440	Ant1	4.91	2.01	6.92	0.00492	30	Pass
NVNT	BLE 1M	2480	Ant1	6.35	2.01	8.36	0.00685	30	Pass
NVNT	BLE 2M	2402	Ant1	2.43	4.78	7.21	0.00526	30	Pass
NVNT	BLE 2M	2440	Ant1	2.15	4.78	6.93	0.00493	30	Pass
NVNT	BLE 2M	2480	Ant1	3.57	4.77	8.34	0.00682	30	Pass

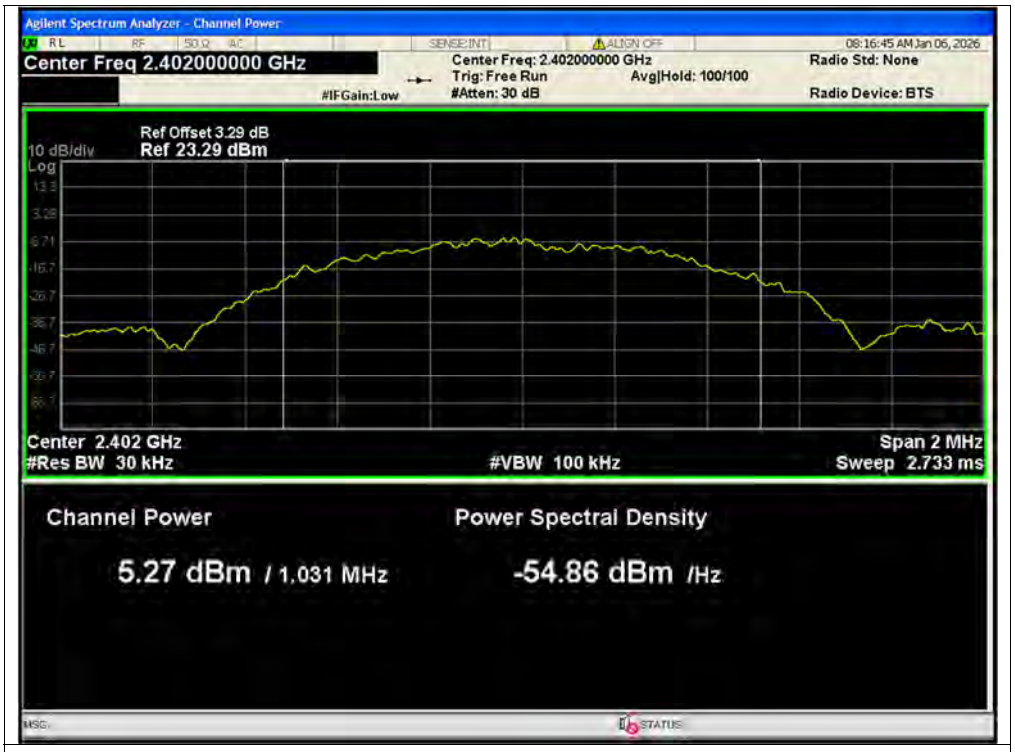

Average Power NVNT BLE 1M 2402MHz Ant1

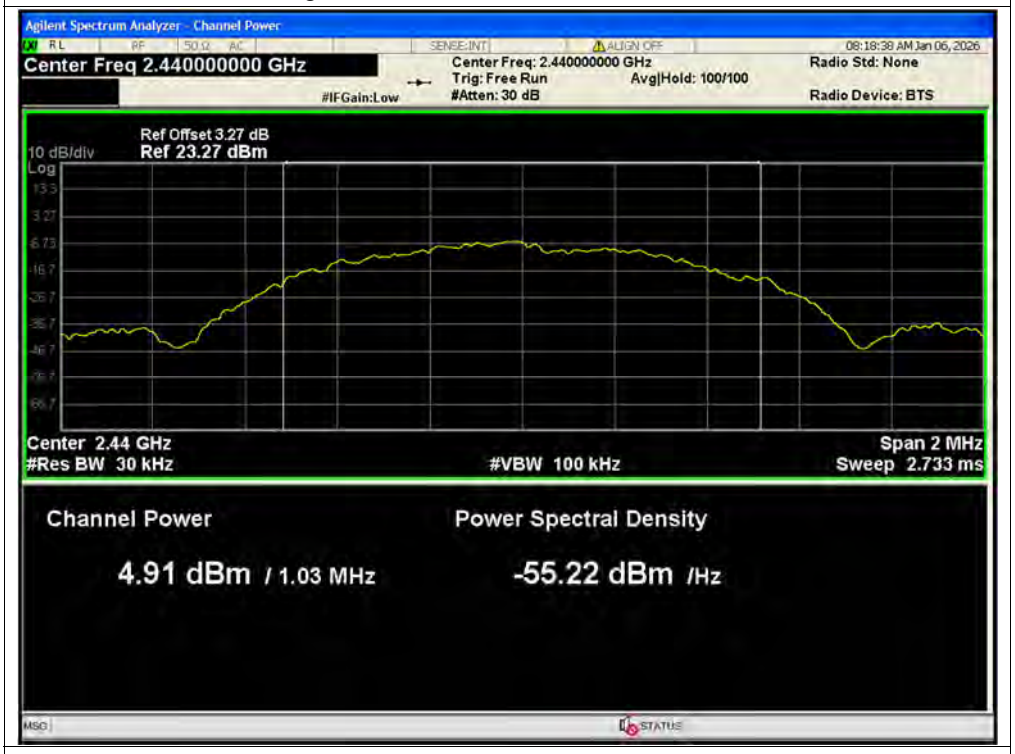

Average Power NVNT BLE 1M 2440MHz Ant1

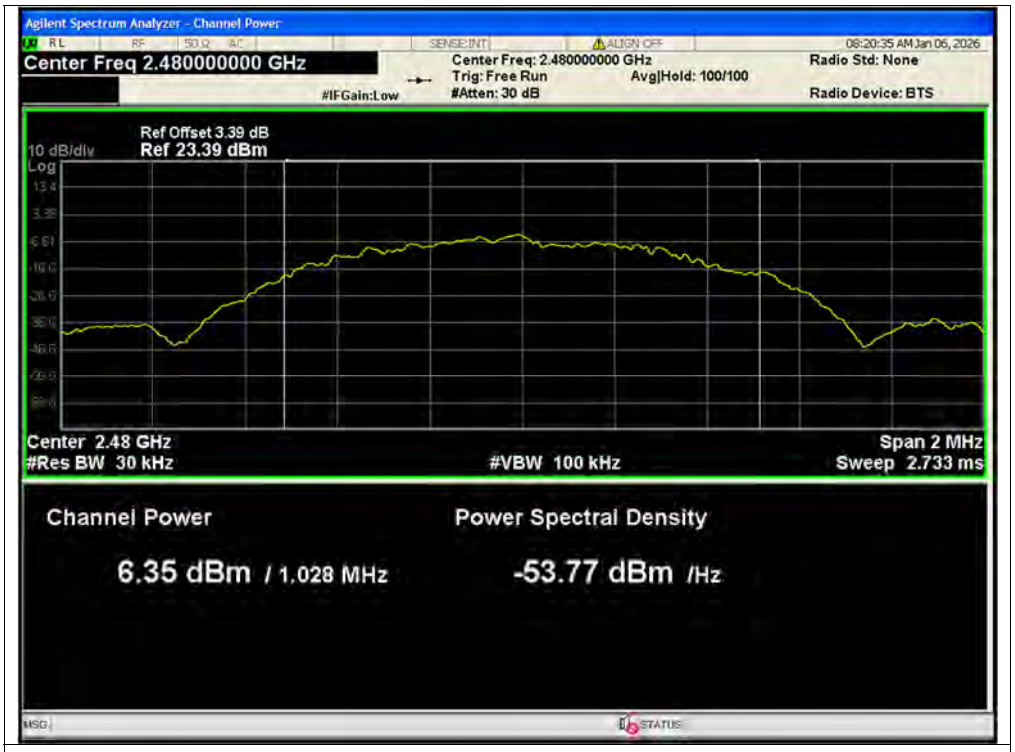

Average Power NVNT BLE 1M 2480MHz Ant1

Average Power NVNT BLE 2M 2402MHz Ant1

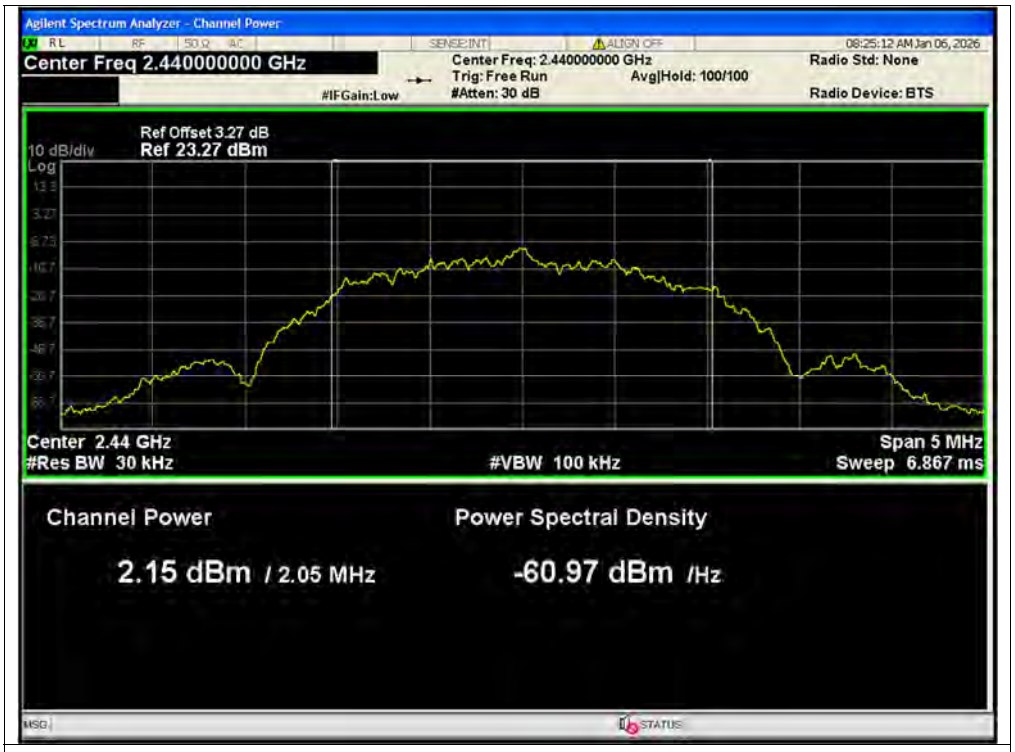

Average Power NVNT BLE 2M 2440MHz Ant1

Average Power NVNT BLE 2M 2480MHz Ant1

A.4. 6 dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.6558	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.6644	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.6581	0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.122	0.5	Pass
NVNT	BLE 2M	2440	Ant1	1.117	0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.098	0.5	Pass

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1

-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

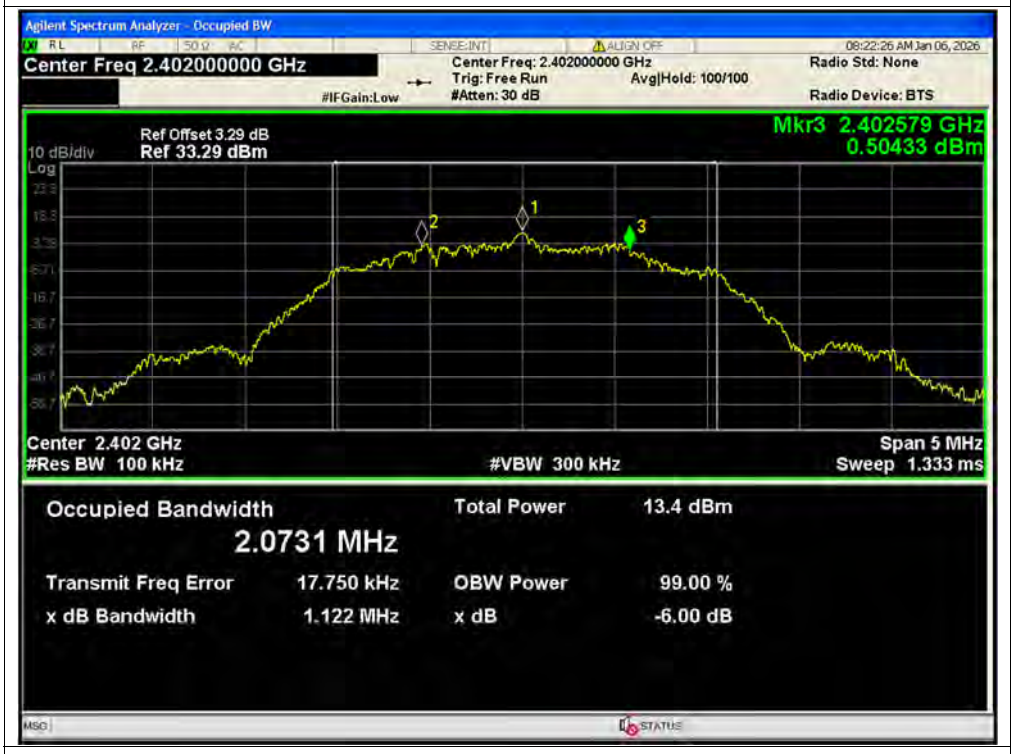

-6dB Bandwidth NVNT BLE 2M 2402MHz Ant1

-6dB Bandwidth NVNT BLE 2M 2440MHz Ant1

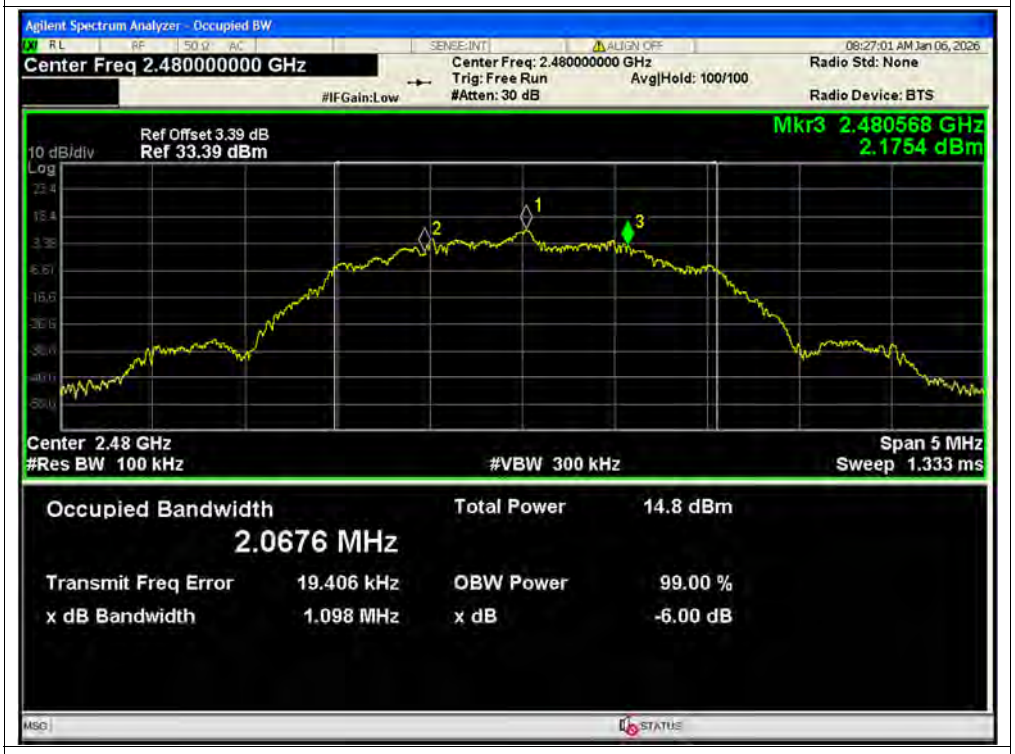

-6dB Bandwidth NVNT BLE 2M 2480MHz Ant1

A.5. Conducted Spurious Emissions

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-46.61	-20	Pass
NVNT	BLE 1M	2440	Ant1	-46.16	-20	Pass
NVNT	BLE 1M	2480	Ant1	-47.8	-20	Pass
NVNT	BLE 2M	2402	Ant1	-46.32	-20	Pass
NVNT	BLE 2M	2440	Ant1	-45.7	-20	Pass
NVNT	BLE 2M	2480	Ant1	-47.1	-20	Pass

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

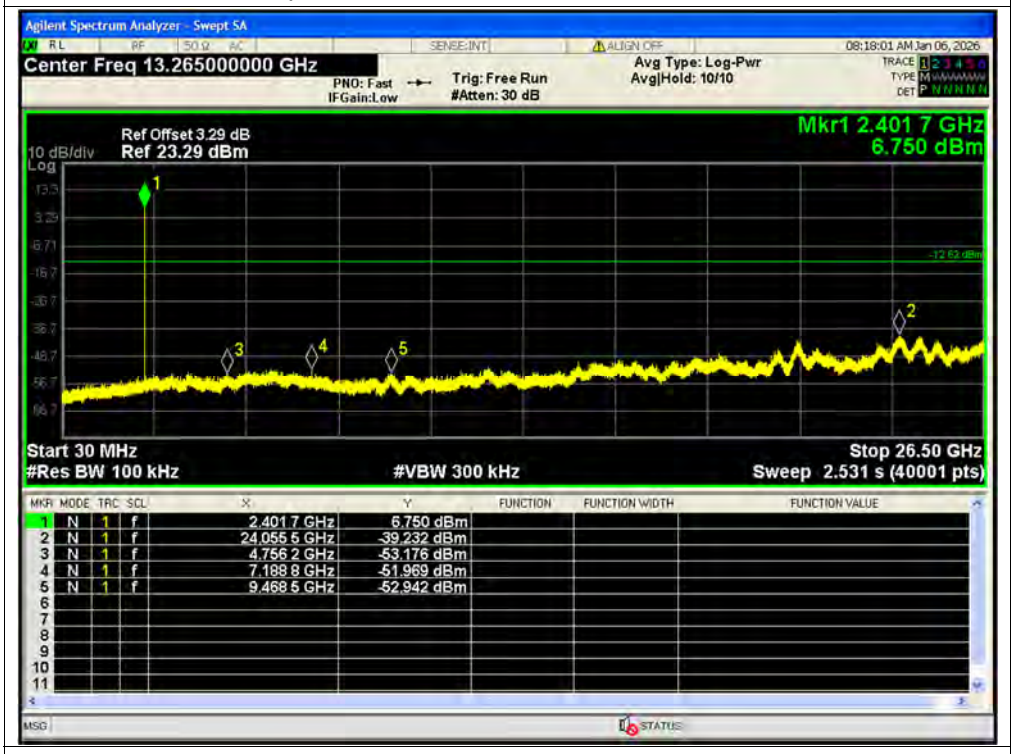

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Ref

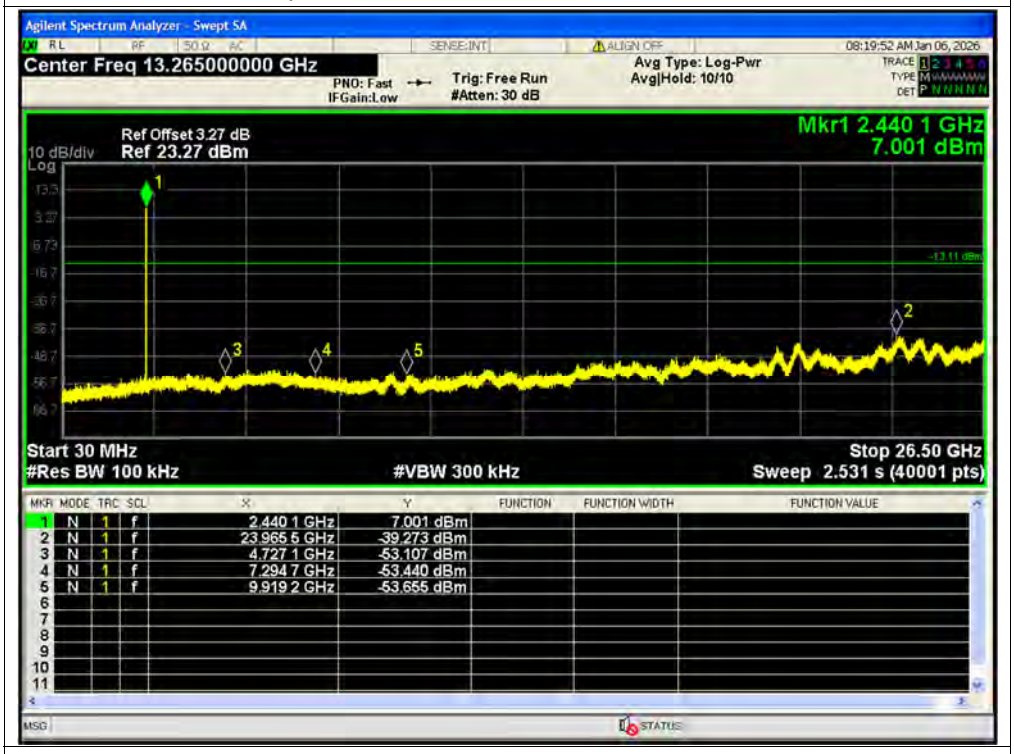

Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Emission

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

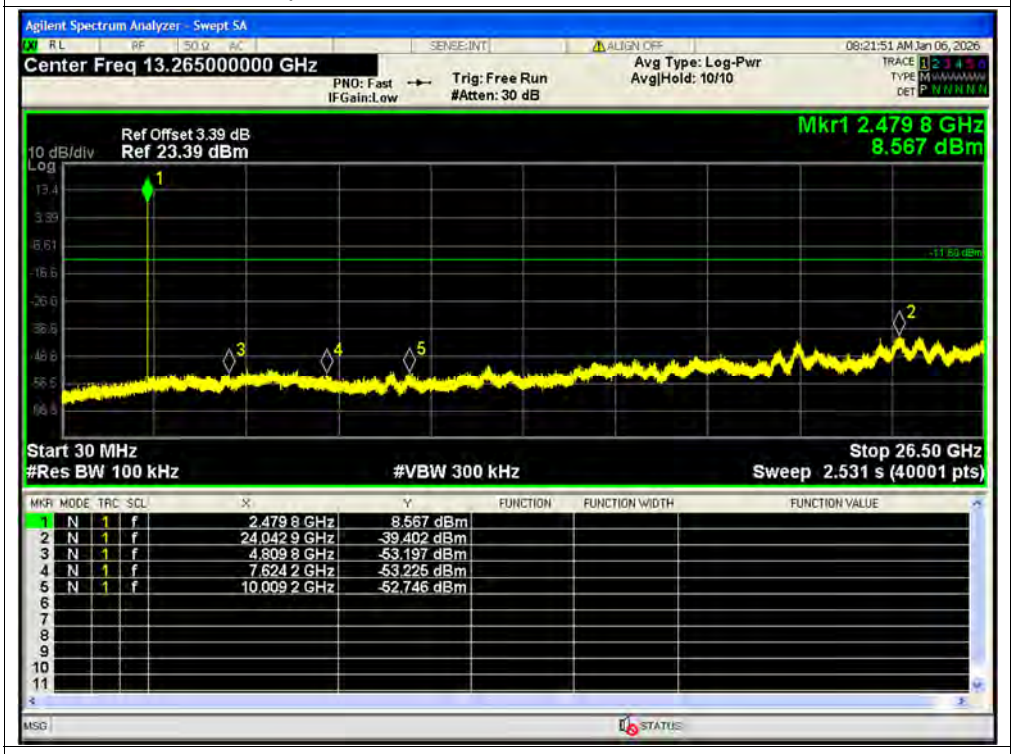

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Ref

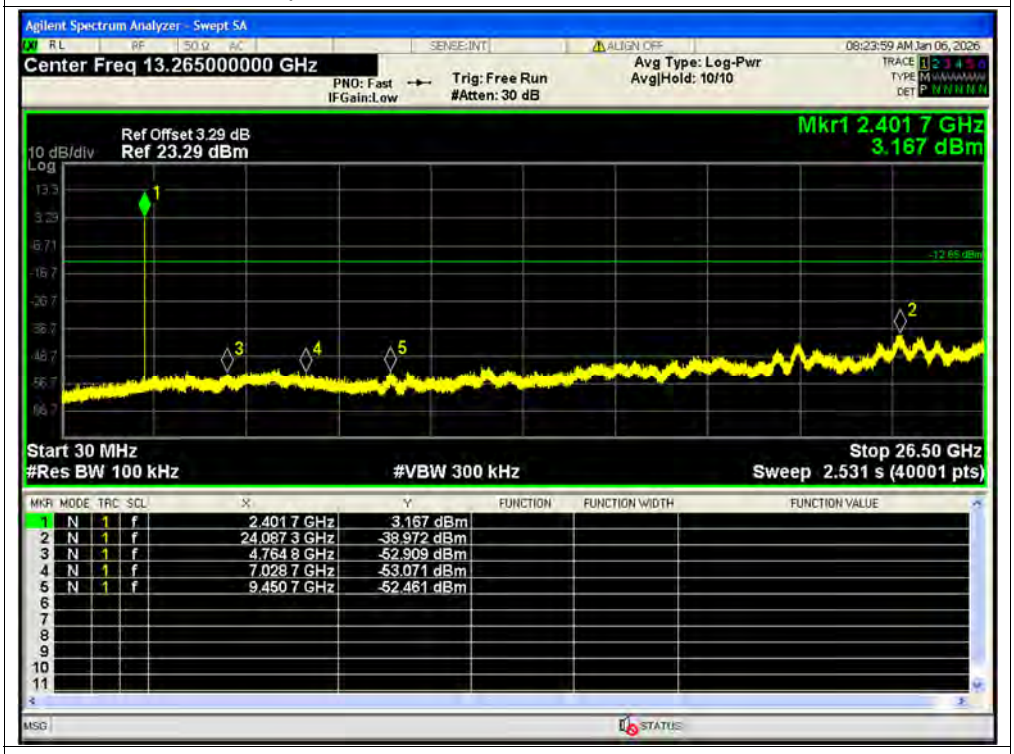

Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Emission

Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Ref

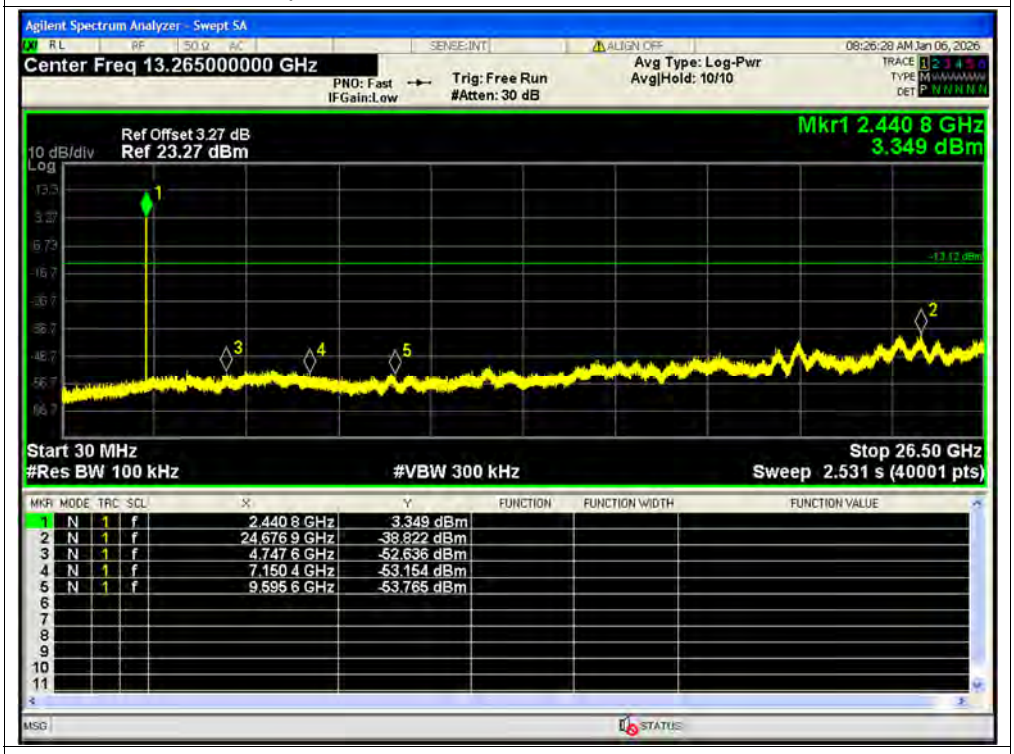

Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Emission

Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Ref

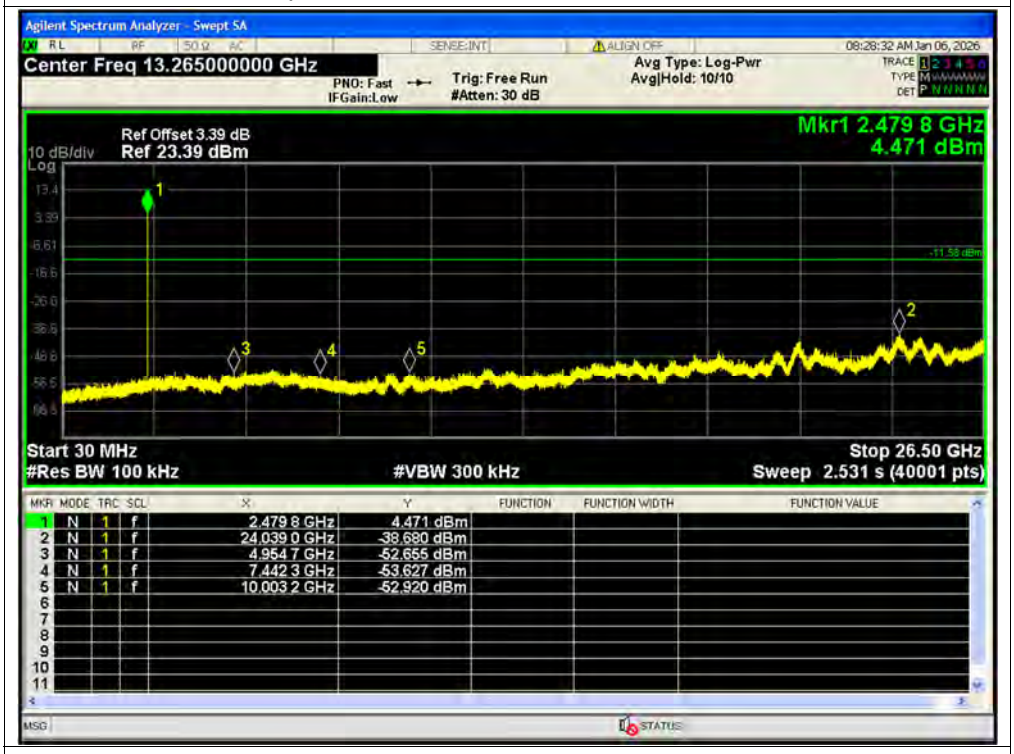

Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Emission

A.6. Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-58.33	-20	Pass
NVNT	BLE 1M	2480	Ant1	-62.83	-20	Pass
NVNT	BLE 2M	2402	Ant1	-45.75	-20	Pass
NVNT	BLE 2M	2480	Ant1	-61.14	-20	Pass

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

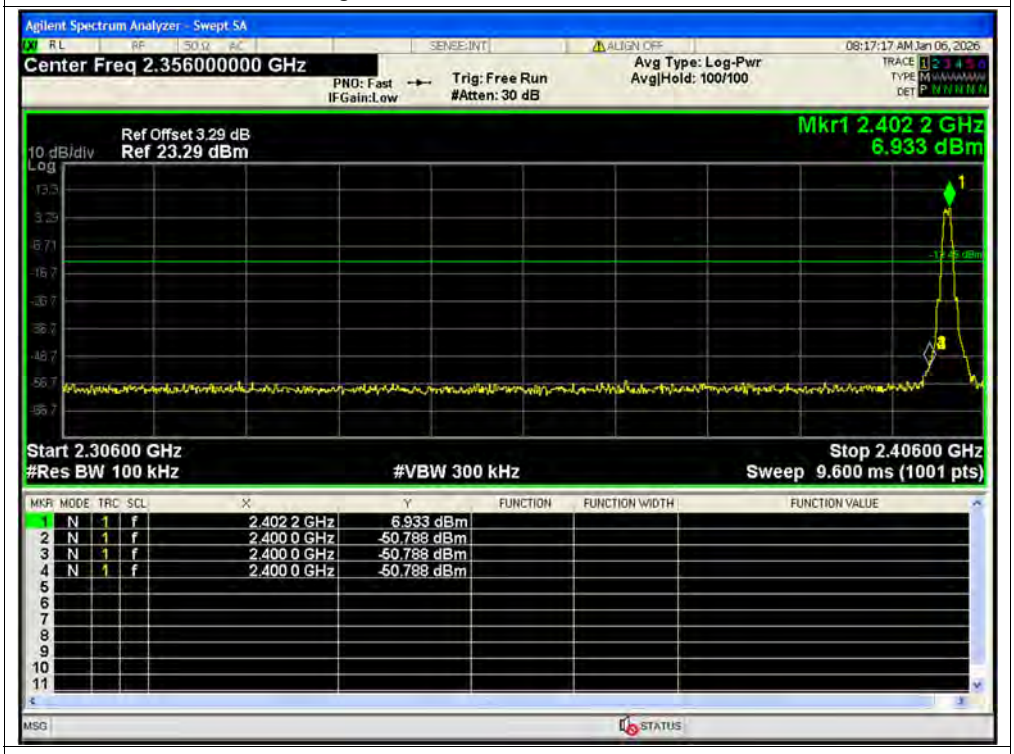

Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

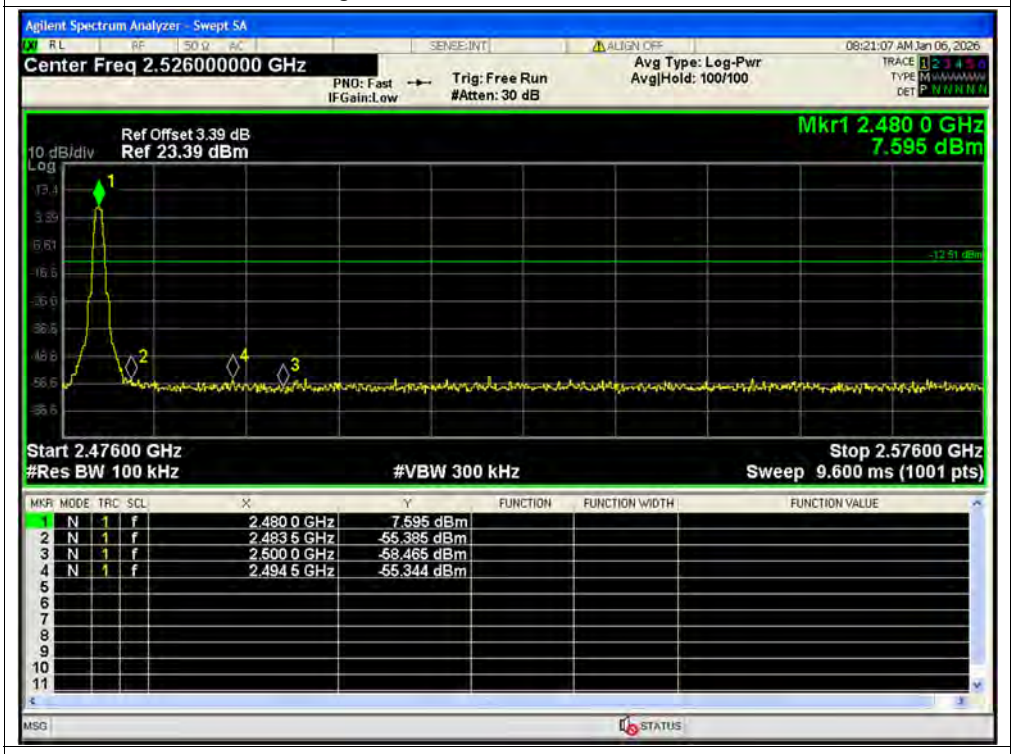

Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

Band Edge NVNT BLE 2M 2402MHz Ant1 Ref

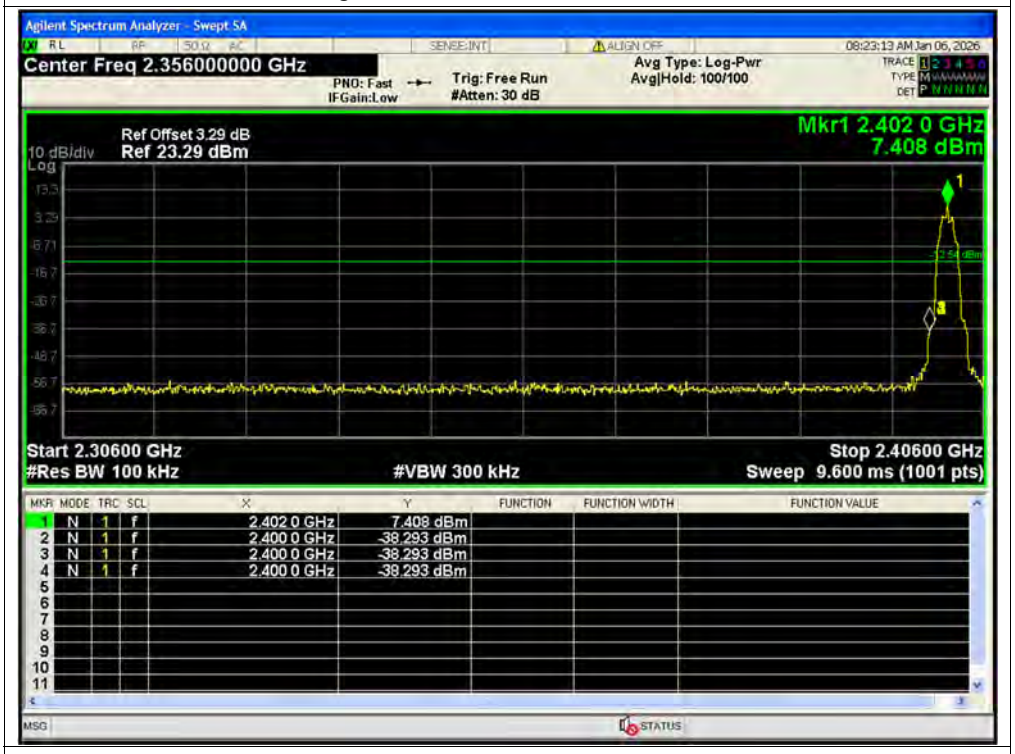

Band Edge NVNT BLE 2M 2402MHz Ant1 Emission

Band Edge NVNT BLE 2M 2480MHz Ant1 Ref

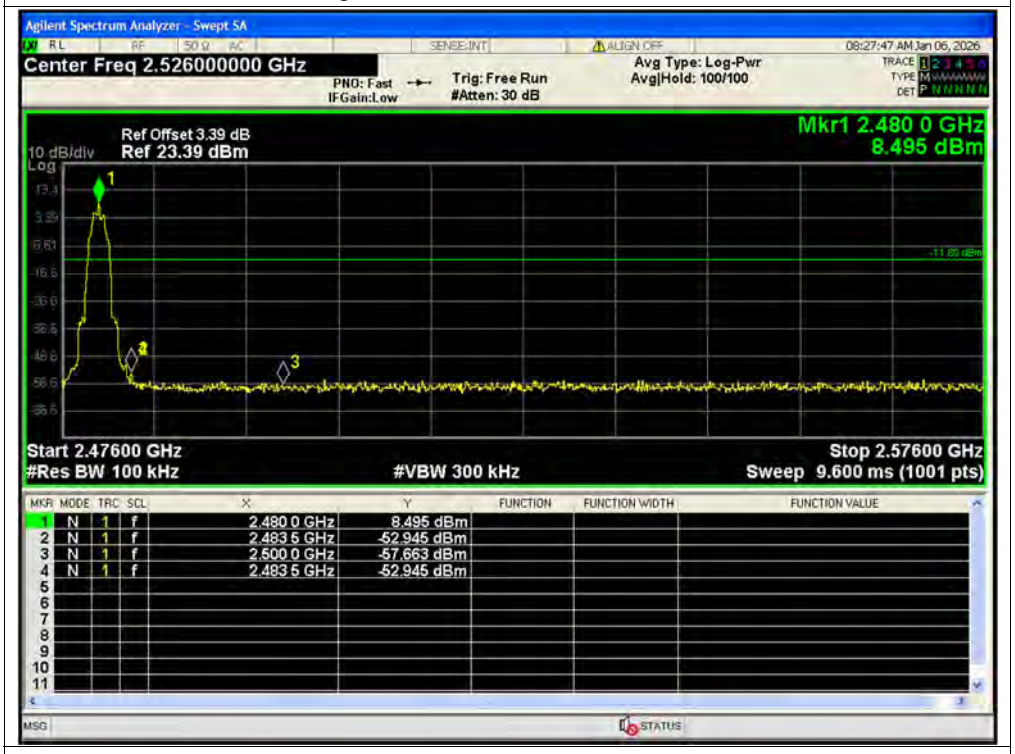

Band Edge NVNT BLE 2M 2480MHz Ant1 Emission

A.7. Power Spectral Density

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-7.26	0	-7.26	8	Pass
NVNT	BLE 1M	2440	Ant1	-7.76	0	-7.76	8	Pass
NVNT	BLE 1M	2480	Ant1	-6.24	0	-6.24	8	Pass
NVNT	BLE 2M	2402	Ant1	-10.85	0	-10.85	8	Pass
NVNT	BLE 2M	2440	Ant1	-11.19	0	-11.19	8	Pass
NVNT	BLE 2M	2480	Ant1	-9.76	0	-9.76	8	Pass

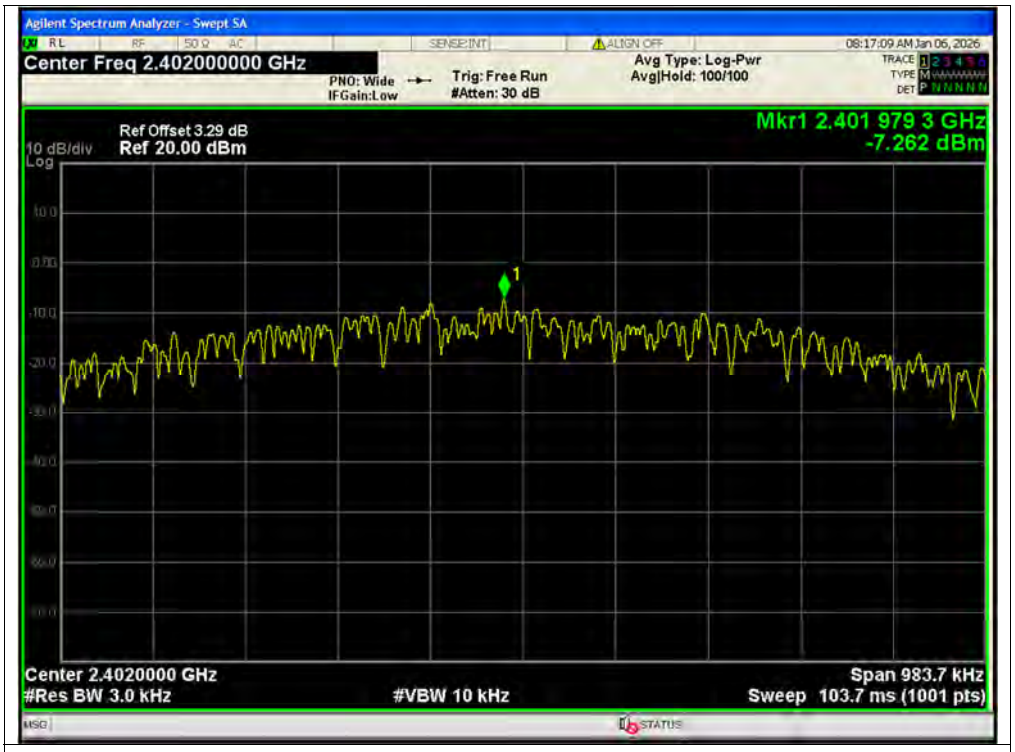

PSD NVNT BLE 1M 2402MHz Ant1

PSD NVNT BLE 1M 2440MHz Ant1

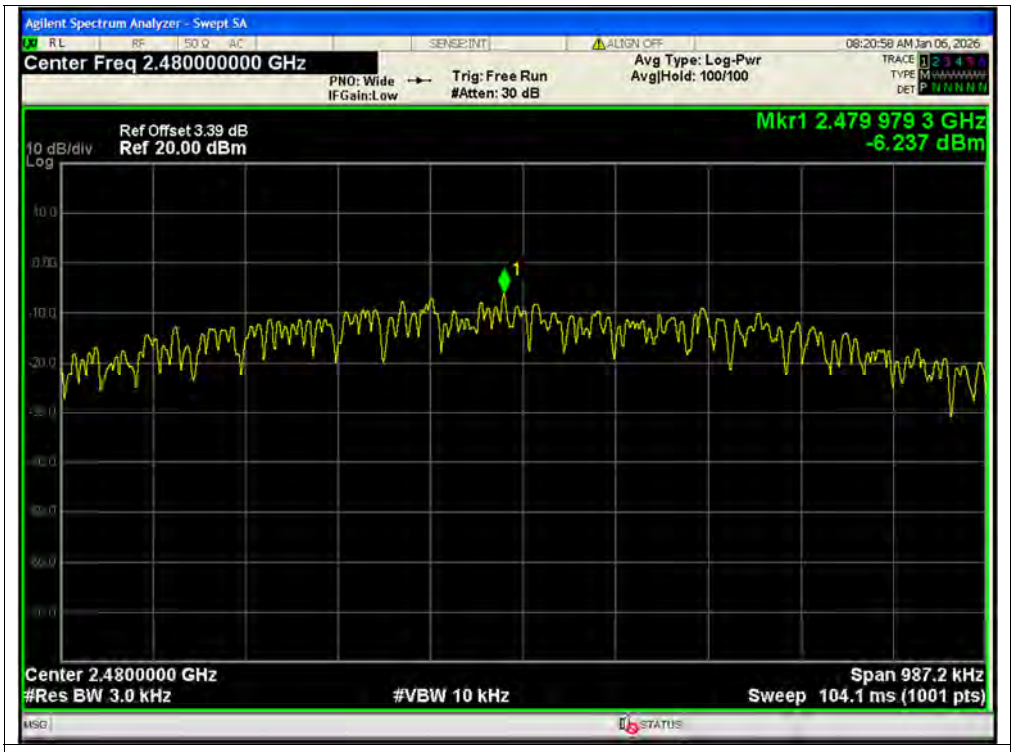

PSD NVNT BLE 1M 2480MHz Ant1

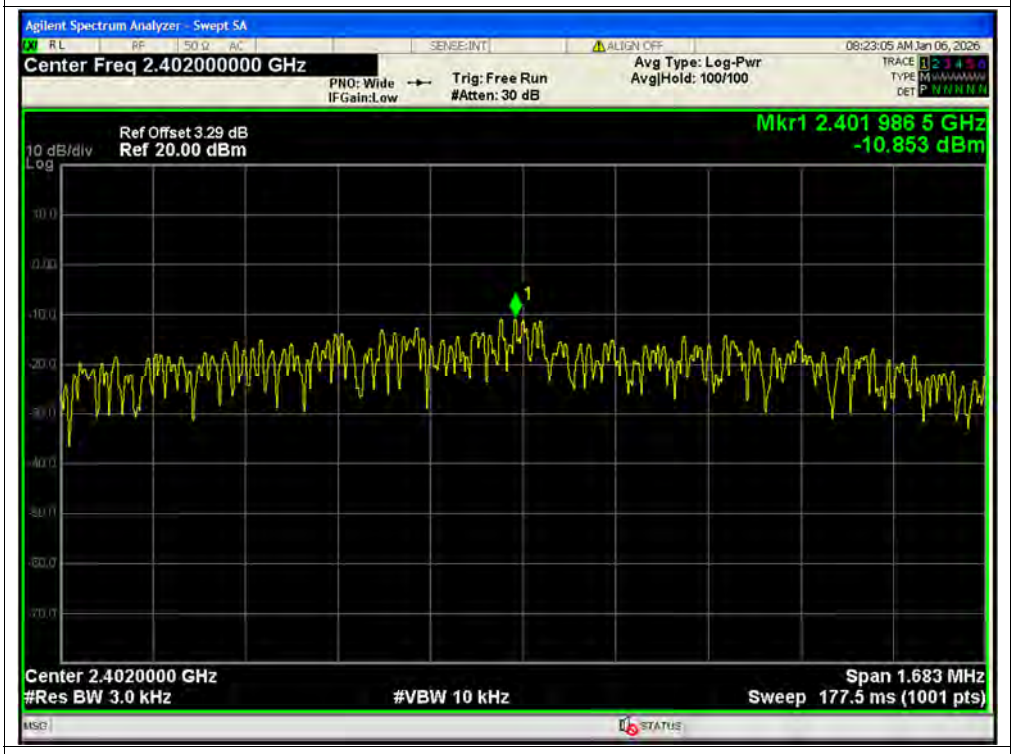

PSD NVNT BLE 2M 2402MHz Ant1

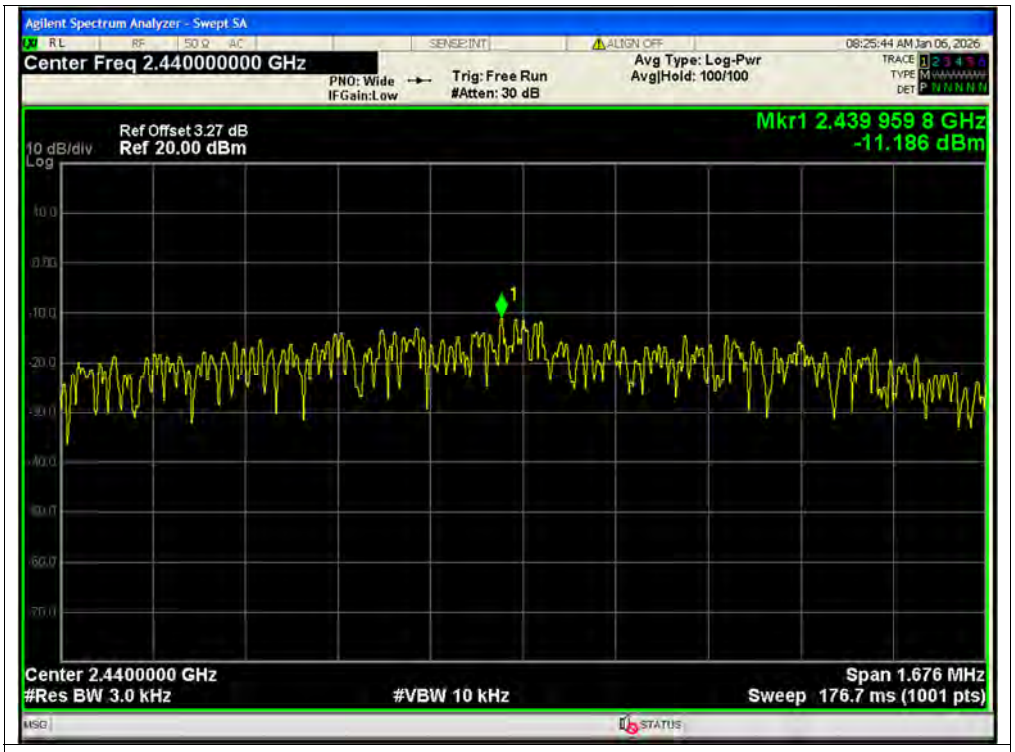

PSD NVNT BLE 2M 2440MHz Ant1

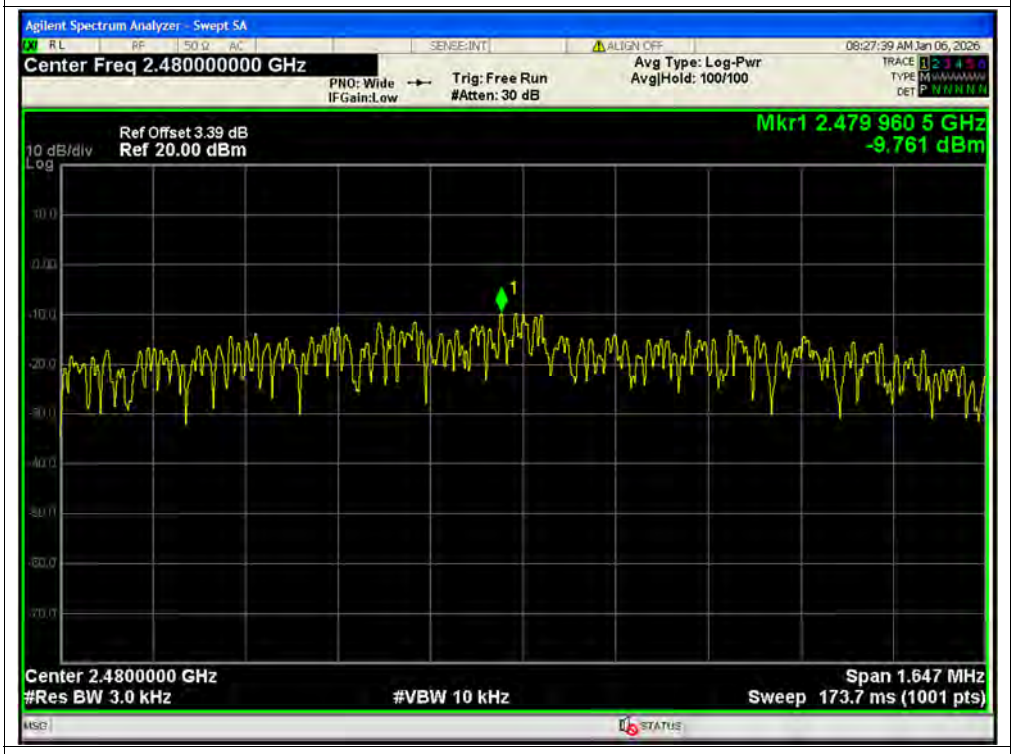

PSD NVNT BLE 2M 2480MHz Ant1

A.8. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT+Notebook+Notebook adapter+USB cable+Earphone+BLE TX

Test voltage: AC 120V/60Hz

The measurement results are obtained as below:

$E\ [dB\mu V] = U_R + L_{Cable\ loss}\ [dB] + A_{Factor}$

U_R: Receiver Reading

A_{Factor}: Voltage division factor of LISN

B. Test Plot:

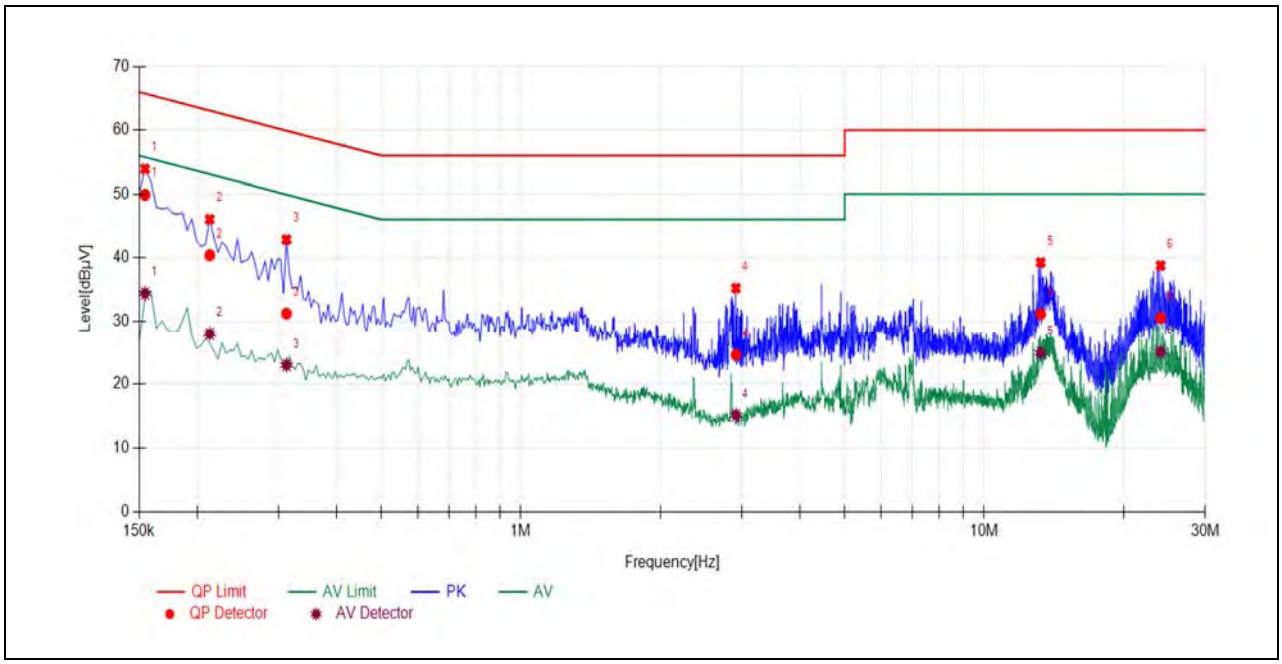

(L Phase)

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1545	49.89	34.39	65.75	55.75	Line	PASS
2	0.2130	40.41	27.94	63.09	53.09		PASS
3	0.3120	31.19	22.97	59.92	49.92		PASS
4	2.9132	24.59	15.10	56.00	46.00		PASS
5	13.2418	31.09	24.92	60.00	50.00		PASS
6	24.0356	30.51	25.07	60.00	50.00		PASS

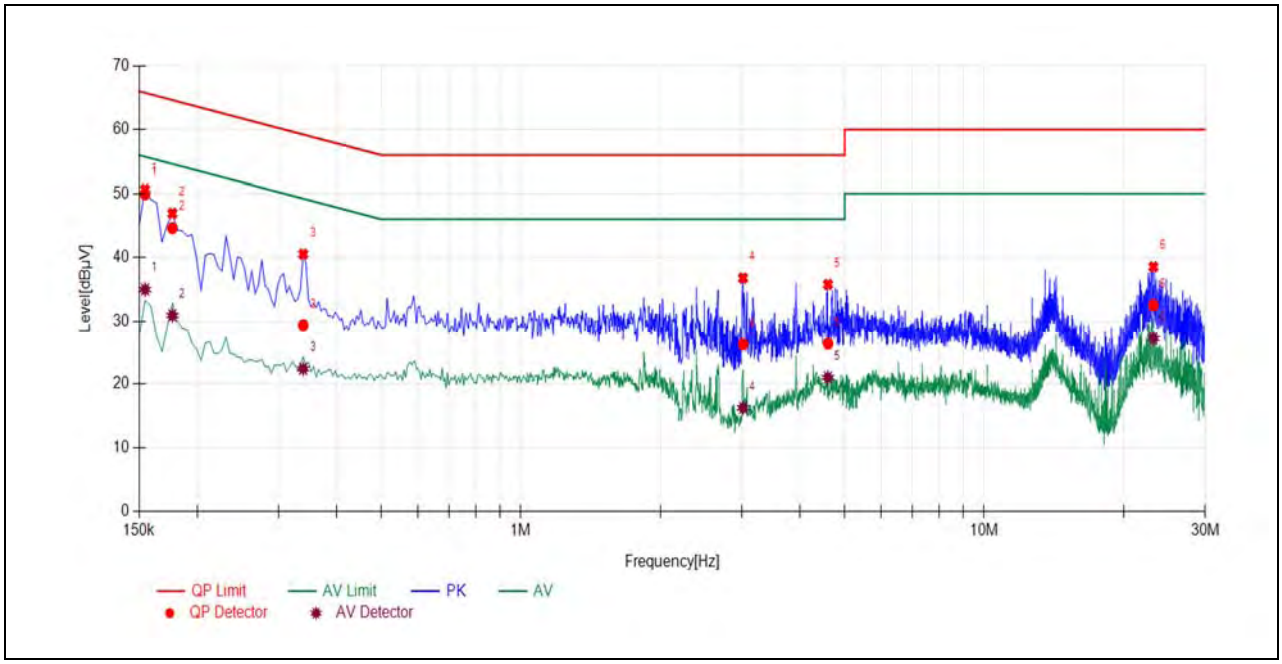

(N Phase)

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1545	49.94	34.99	65.76	55.76	Neutral	PASS
2	0.1770	44.63	30.91	64.63	54.63		PASS
3	0.3390	29.37	22.36	59.23	49.23		PASS
4	3.0168	26.26	16.22	56.00	46.00		PASS
5	4.6009	26.35	21.00	56.00	46.00		PASS
6	23.1895	32.52	27.17	60.00	50.00		PASS

A.9. Restricted Frequency Bands

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition was recorded in this test report.

1Mbps

Plot for Channel 0

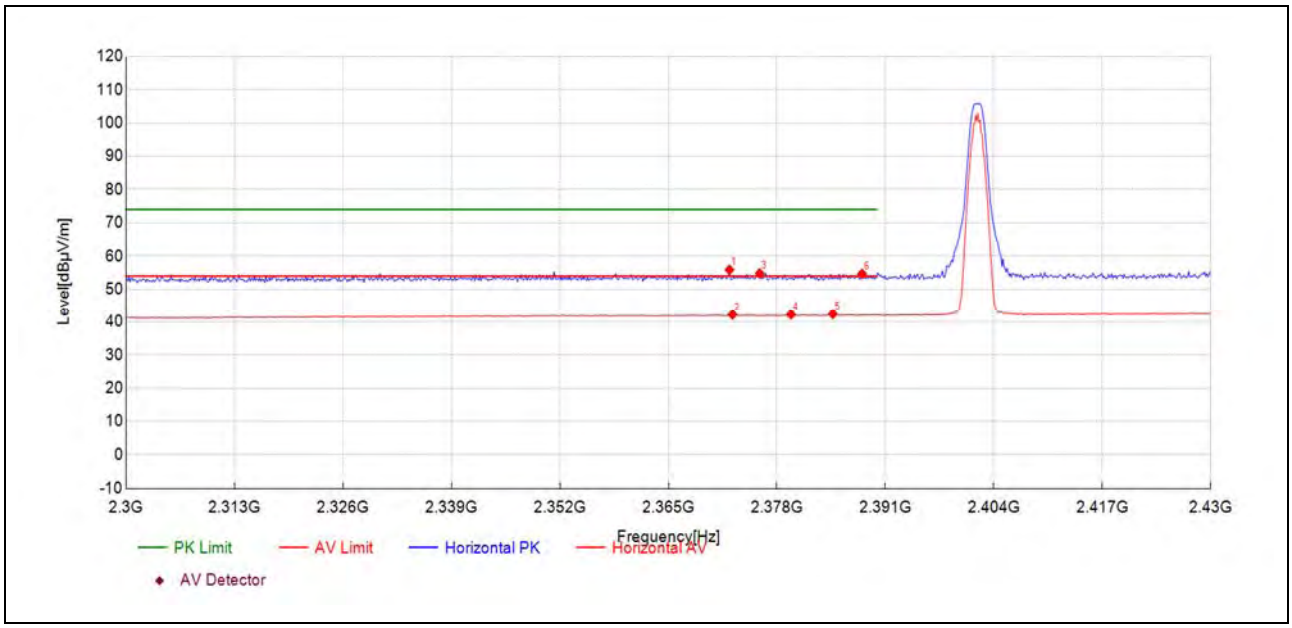

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Polarity	Verdict
2372.32	23.4	55.89	32.480	74.00	18.11	161	PK	Horizontal	PASS
2372.69	9.7	42.17	32.490	54.00	11.83	11	AV	Horizontal	PASS
2375.95	22.3	54.82	32.490	74.00	19.18	312	PK	Horizontal	PASS
2379.70	9.7	42.22	32.510	54.00	11.78	11	AV	Horizontal	PASS
2384.71	9.8	42.35	32.530	54.00	11.65	349	AV	Horizontal	PASS
2388.21	22.1	54.68	32.540	74.00	19.32	0	PK	Horizontal	PASS

Plot for Channel 39

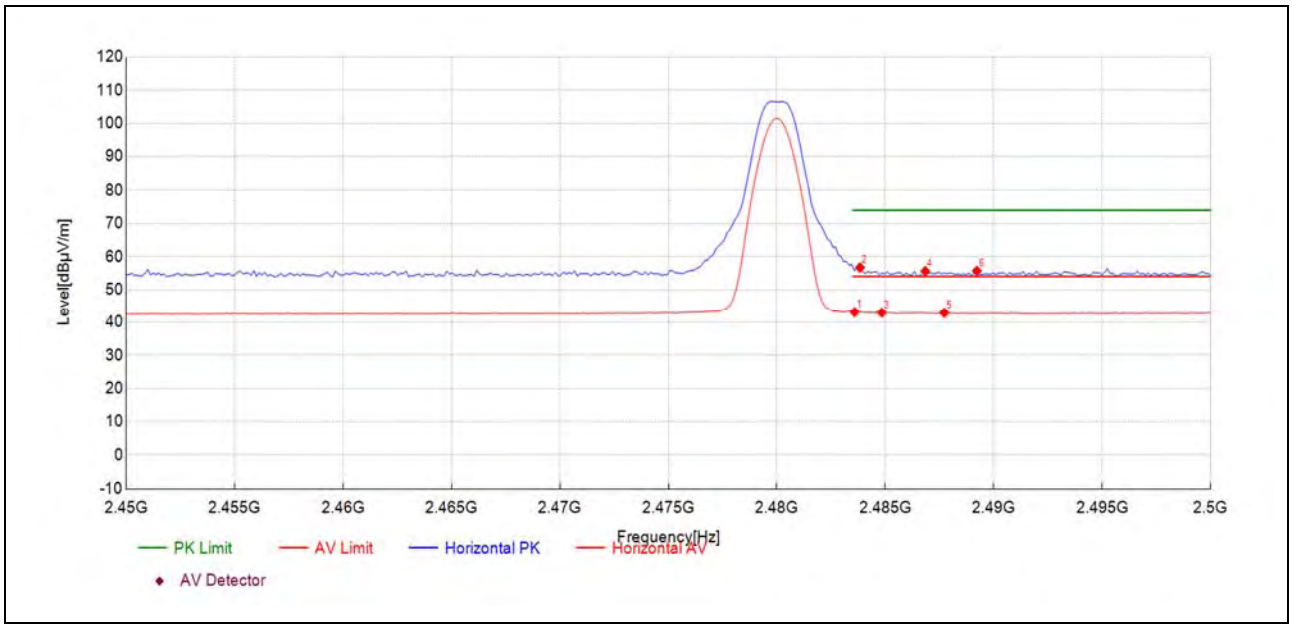

Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Polarity	Verdict
2483.58	10.1	43.09	33.030	54.00	10.91	136	AV	Horizontal	PASS
2483.83	23.7	56.68	33.030	74.00	17.32	108	PK	Horizontal	PASS
2484.84	9.9	42.91	33.030	54.00	11.09	136	AV	Horizontal	PASS
2486.84	22.6	55.61	33.030	74.00	18.39	37	PK	Horizontal	PASS
2487.72	9.9	42.89	33.020	54.00	11.11	37	AV	Horizontal	PASS
2489.22	22.7	55.69	33.020	74.00	18.31	255	PK	Horizontal	PASS

2Mbps

Plot for Channel 0

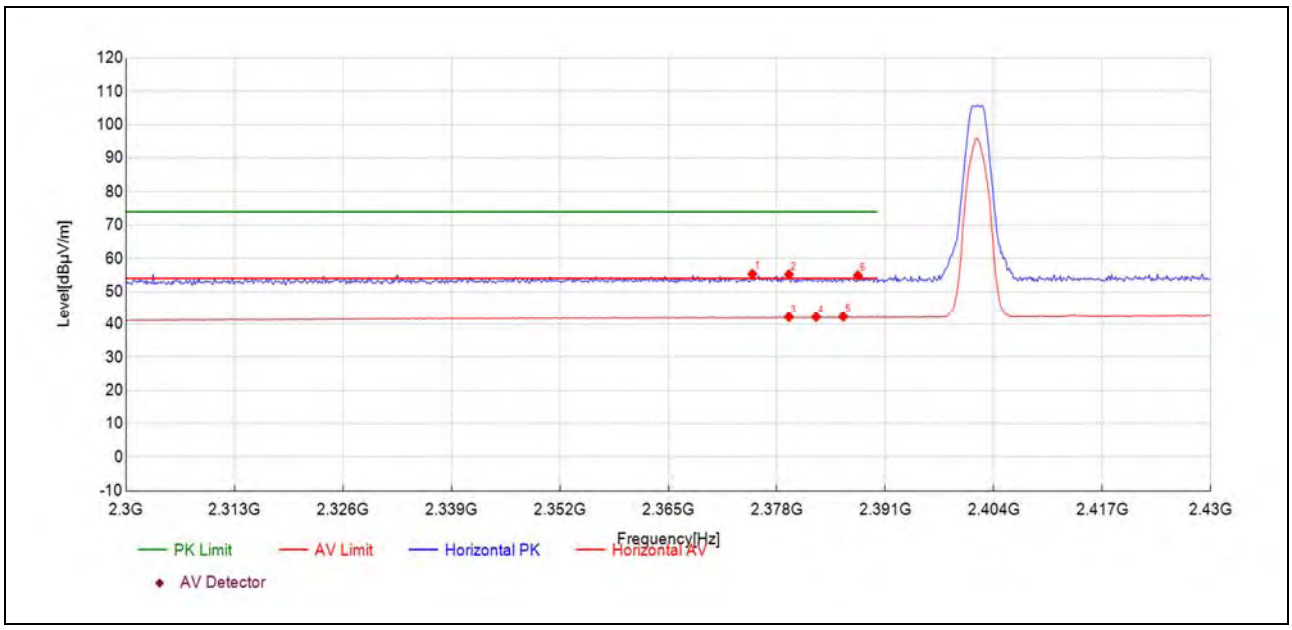

Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Polarity	Verdict
2375.07	22.8	55.28	32.490	74.00	18.72	48	PK	Horizontal	PASS
2379.45	22.7	55.18	32.510	74.00	18.82	360	PK	Horizontal	PASS
2379.45	9.6	42.15	32.510	54.00	11.85	163	AV	Horizontal	PASS
2382.70	9.6	42.16	32.520	54.00	11.84	359	AV	Horizontal	PASS
2385.96	9.7	42.24	32.530	54.00	11.76	10	AV	Horizontal	PASS
2387.71	22.3	54.84	32.540	74.00	19.16	336	PK	Horizontal	PASS

Plot for Channel 39

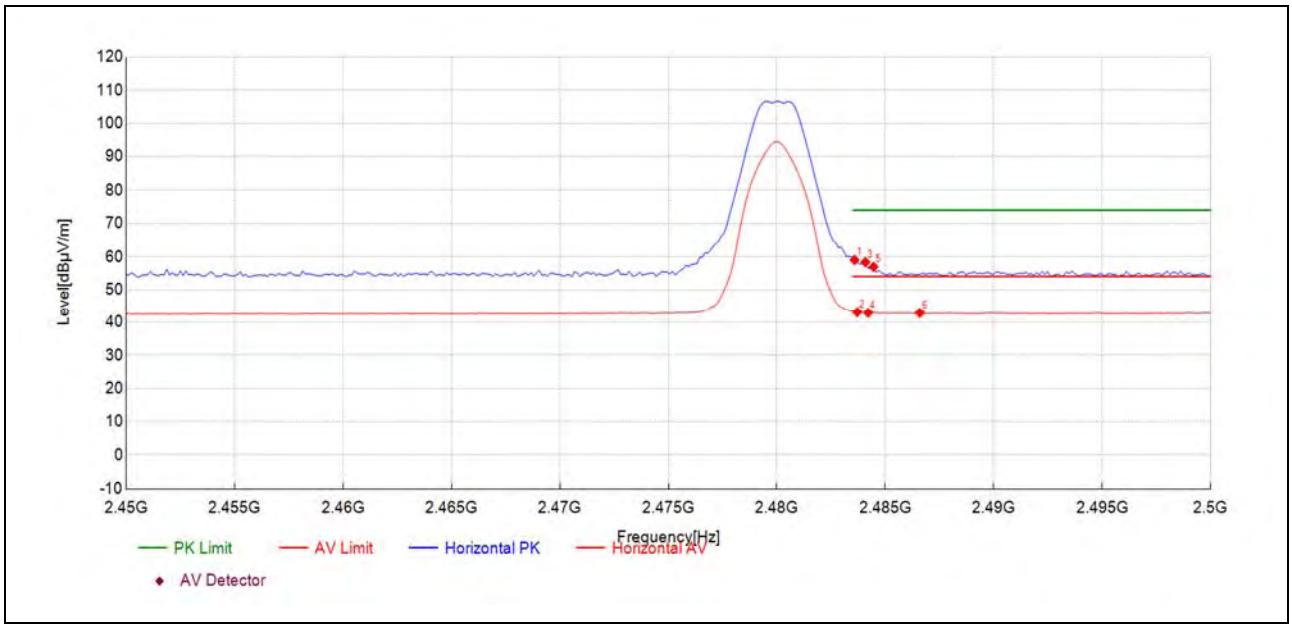

Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Polarity	Verdict
2483.58	26.0	59.00	33.030	74.00	15.00	130	PK	Horizontal	PASS
2483.71	10.1	43.08	33.030	54.00	10.92	102	AV	Horizontal	PASS
2484.09	25.3	58.35	33.030	74.00	15.65	130	PK	Horizontal	PASS
2484.21	9.9	42.88	33.030	54.00	11.12	2	AV	Horizontal	PASS
2484.46	23.9	56.91	33.030	74.00	17.09	102	PK	Horizontal	PASS
2486.59	9.8	42.86	33.030	54.00	11.14	138	AV	Horizontal	PASS

A.10. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

E [dBμV/m] $=U_R + A_T + A_{Factor}$ [dB]; $A_T = L_{Cable\ loss}$ [dB]$-G_{preamp}$ [dB]

A_T: Total correction Factor except Antenna

U_R: Receiver Reading

G_{preamp}: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note4: All test modes were considered and evaluated respectively by performing full test, only the worst data were recorded.

1Mbps

Plot for Channel 0

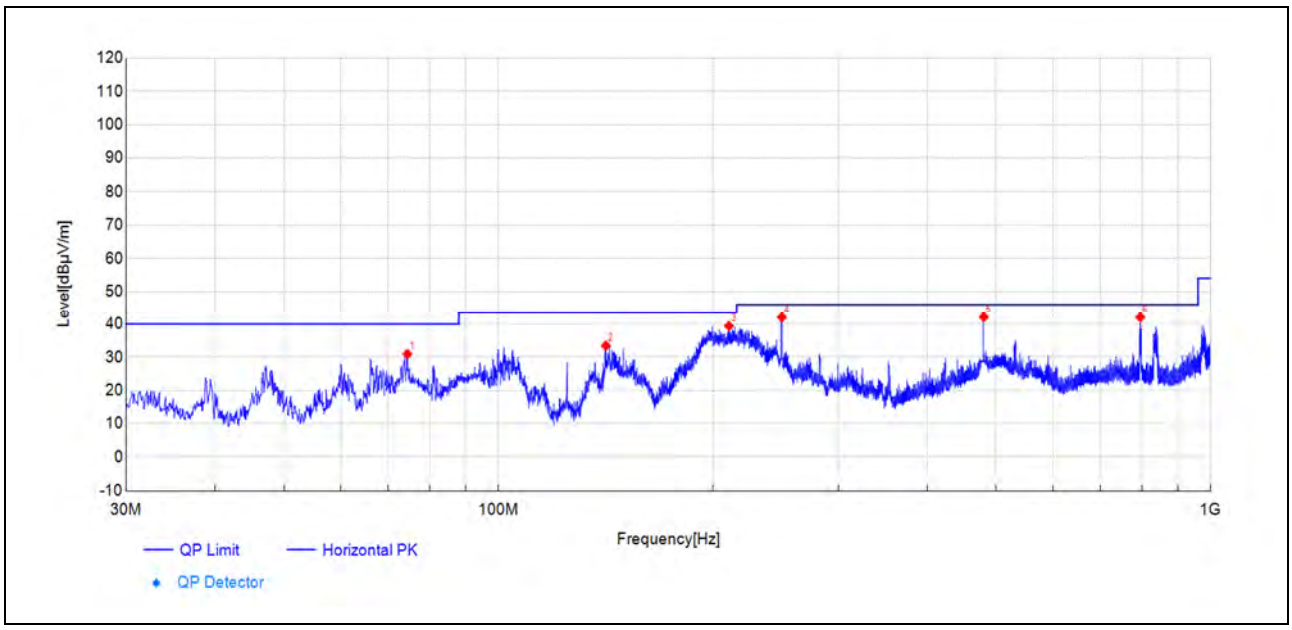

(Antenna Horizontal, 30MHz to 1GHz)

Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Polarity	Verdict
74.51	66.1	30.97	-35.100	40.00	9.03	87	PK	Horizontal	PASS
141.53	67.0	33.46	-33.570	43.50	10.04	74	PK	Horizontal	PASS
210.72	69.2	39.40	-29.780	43.50	4.10	87	PK	Horizontal	PASS
250.00	70.2	42.08	-28.120	46.00	3.92	49	PK	Horizontal	PASS
480.17	64.5	42.16	-22.330	46.00	3.84	136	PK	Horizontal	PASS
796.52	58.7	42.09	-16.600	46.00	3.91	150	PK	Horizontal	PASS

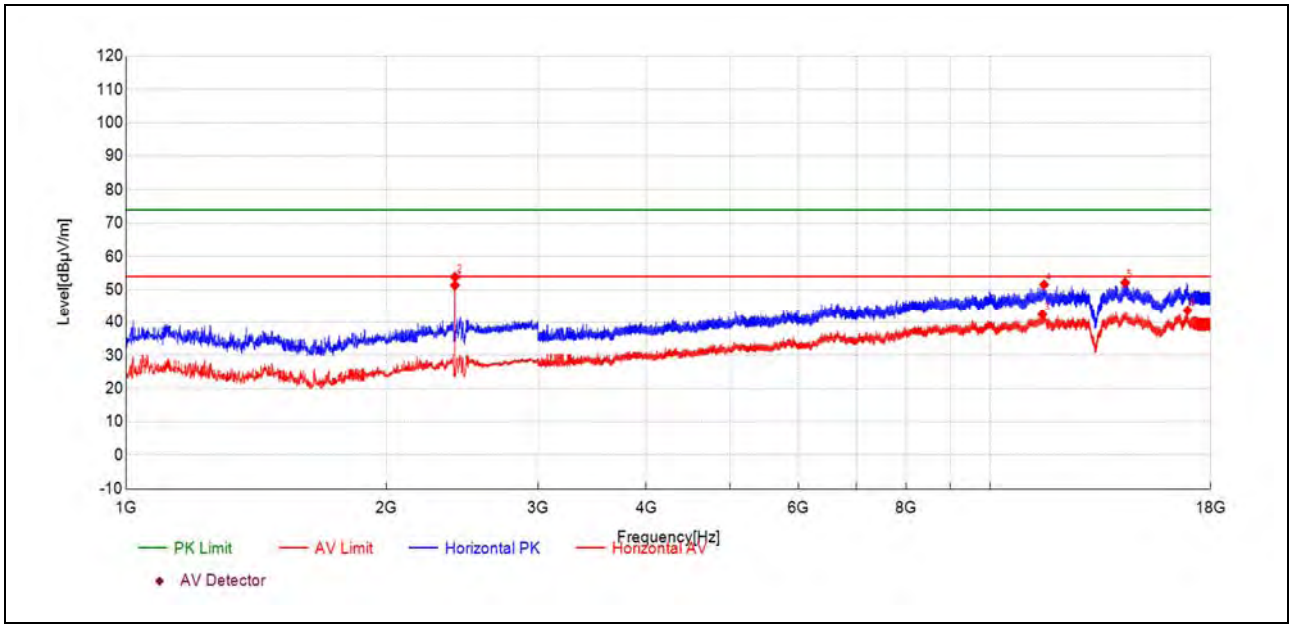

(Antenna Horizontal, 1GHz to 18GHz)

Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Polarity	Verdict
2402.20	50.6	51.34	0.750	-	-	117	AV	Horizontal	NA
2402.20	53.1	53.83	0.750	-	-	117	PK	Horizontal	NA
11494.53	39.7	42.37	2.660	54.00	11.63	212	AV	Horizontal	PASS
11546.82	48.8	51.52	2.750	74.00	22.48	314	PK	Horizontal	PASS
14332.61	47.3	52.15	4.880	74.00	21.85	360	PK	Horizontal	PASS
16922.97	36.8	43.63	6.790	54.00	10.37	359	AV	Horizontal	PASS

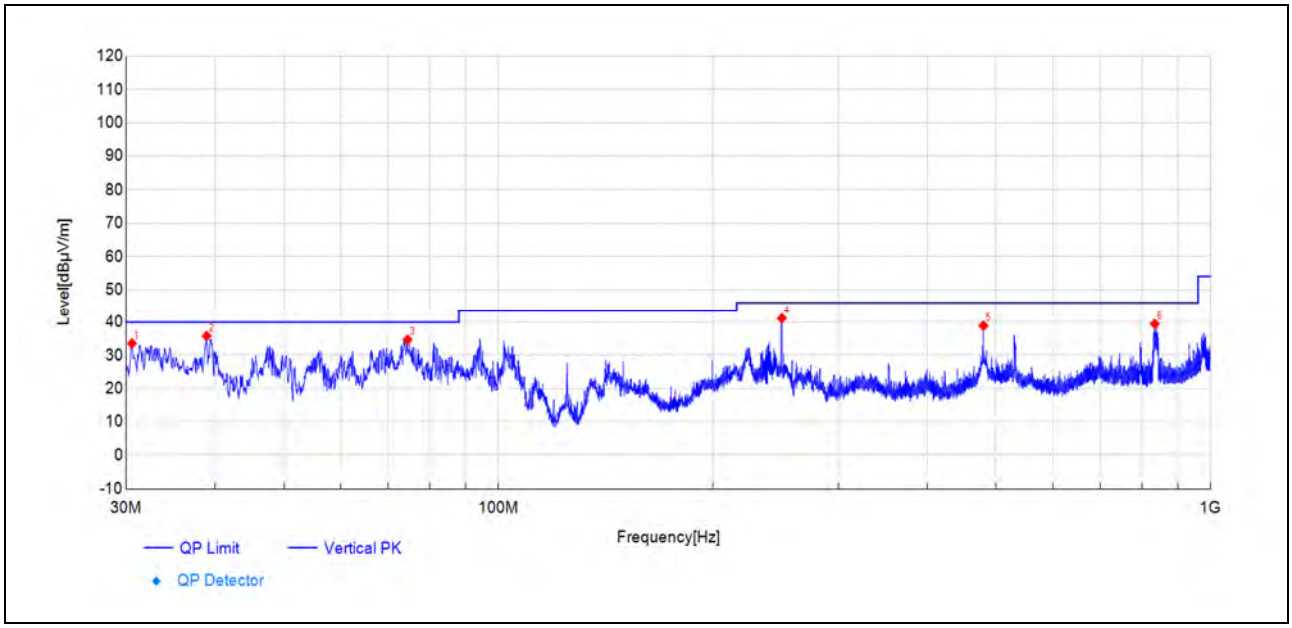

(Antenna Vertical, 30MHz to 1GHz)

Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Polarity	Verdict
30.59	66.5	33.57	-32.970	40.00	6.43	74	PK	Vertical	PASS
38.94	65.3	35.82	-29.430	40.00	4.18	149	PK	Vertical	PASS
74.56	69.8	34.70	-35.110	40.00	5.30	185	PK	Vertical	PASS
250.00	69.3	41.17	-28.120	46.00	4.83	11	PK	Vertical	PASS
479.70	61.3	38.92	-22.340	46.00	7.08	11	PK	Vertical	PASS
834.44	55.4	39.44	-15.910	46.00	6.56	112	PK	Vertical	PASS

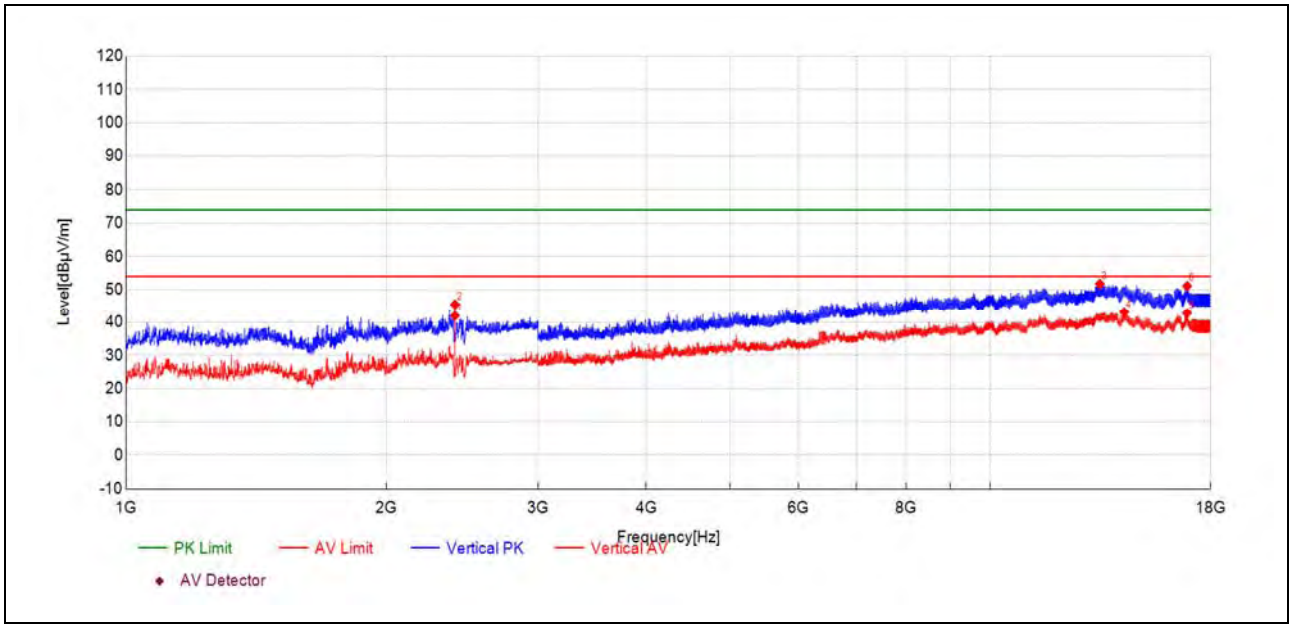

(Antenna Vertical, 1GHz to 18GHz)

Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Polarity	Verdict
2402.20	41.2	41.95	0.750	-	-	9	AV	Vertical	NA
2402.69	44.7	45.43	0.760	-	-	9	PK	Vertical	NA
13397.87	47.0	51.71	4.760	74.00	22.29	355	PK	Vertical	PASS
14294.47	38.3	43.10	4.790	54.00	10.90	355	AV	Vertical	PASS
16902.40	35.5	42.77	7.240	54.00	11.23	360	AV	Vertical	PASS
16902.40	43.8	51.07	7.240	74.00	22.93	41	PK	Vertical	PASS

Plot for Channel 19

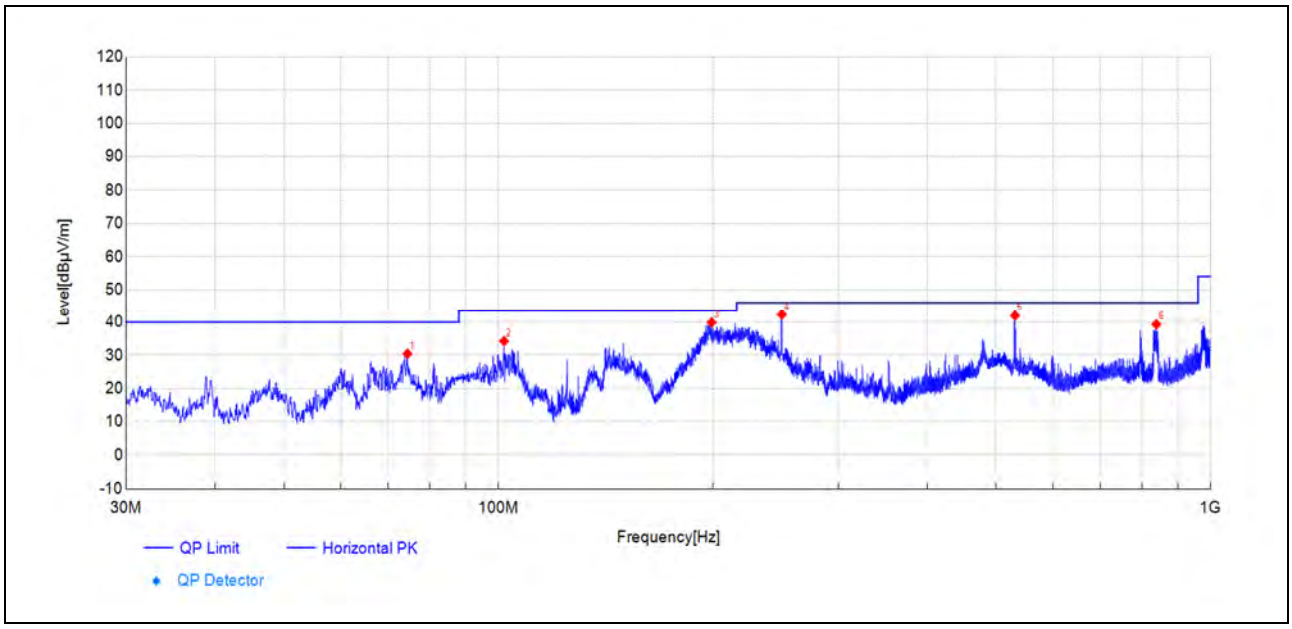

(Antenna Horizontal, 30MHz to 1GHz)

Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Polarity	Verdict
74.51	65.6	30.46	-35.100	40.00	9.54	75	PK	Horizontal	PASS
101.84	64.6	34.26	-30.310	43.50	9.24	250	PK	Horizontal	PASS
199.20	70.0	39.89	-30.070	43.50	3.61	138	PK	Horizontal	PASS
250.00	70.4	42.31	-28.120	46.00	3.69	52	PK	Horizontal	PASS
531.08	63.4	41.99	-21.400	46.00	4.01	138	PK	Horizontal	PASS
839.03	55.2	39.34	-15.830	46.00	6.66	138	PK	Horizontal	PASS

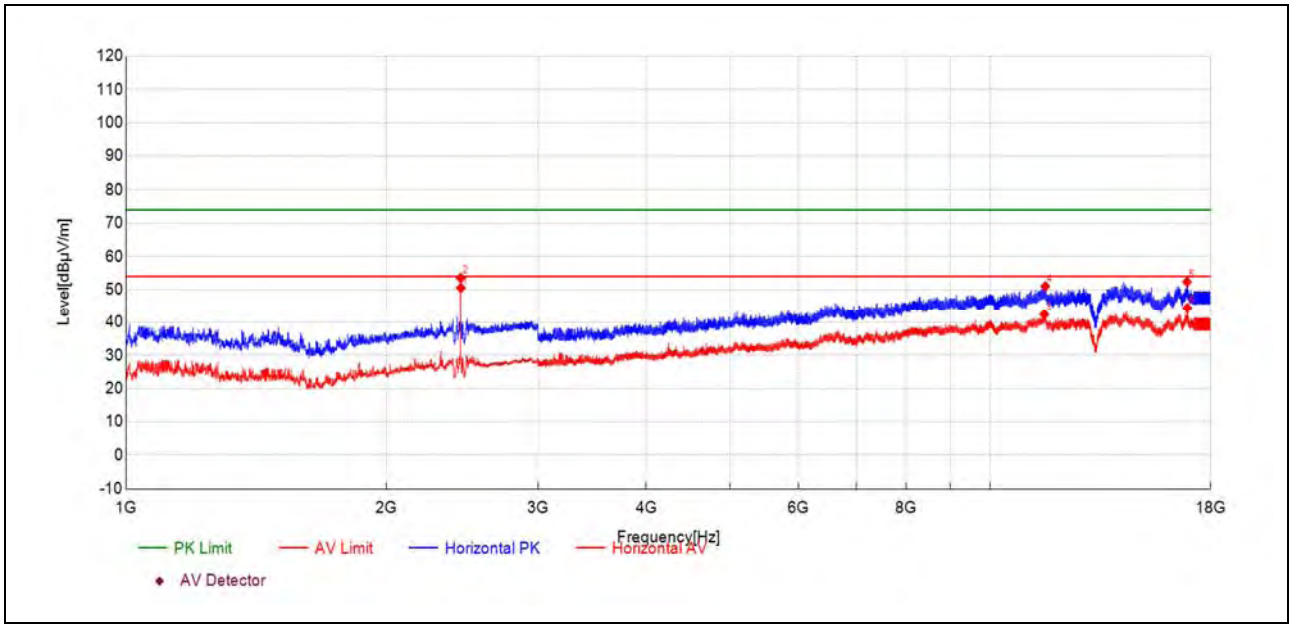

(Antenna Horizontal, 1GHz to 18GHz)

Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Polarity	Verdict
2440.29	49.5	50.52	1.010	-	-	118	AV	Horizontal	NA
2440.29	52.5	53.53	1.010	-	-	118	PK	Horizontal	NA
11551.10	39.6	42.37	2.770	54.00	11.63	88	AV	Horizontal	PASS
11583.67	48.2	51.01	2.840	74.00	22.99	360	PK	Horizontal	PASS
16901.11	45.1	52.34	7.270	74.00	21.66	164	PK	Horizontal	PASS
16908.83	37.3	44.39	7.100	54.00	9.61	264	AV	Horizontal	PASS

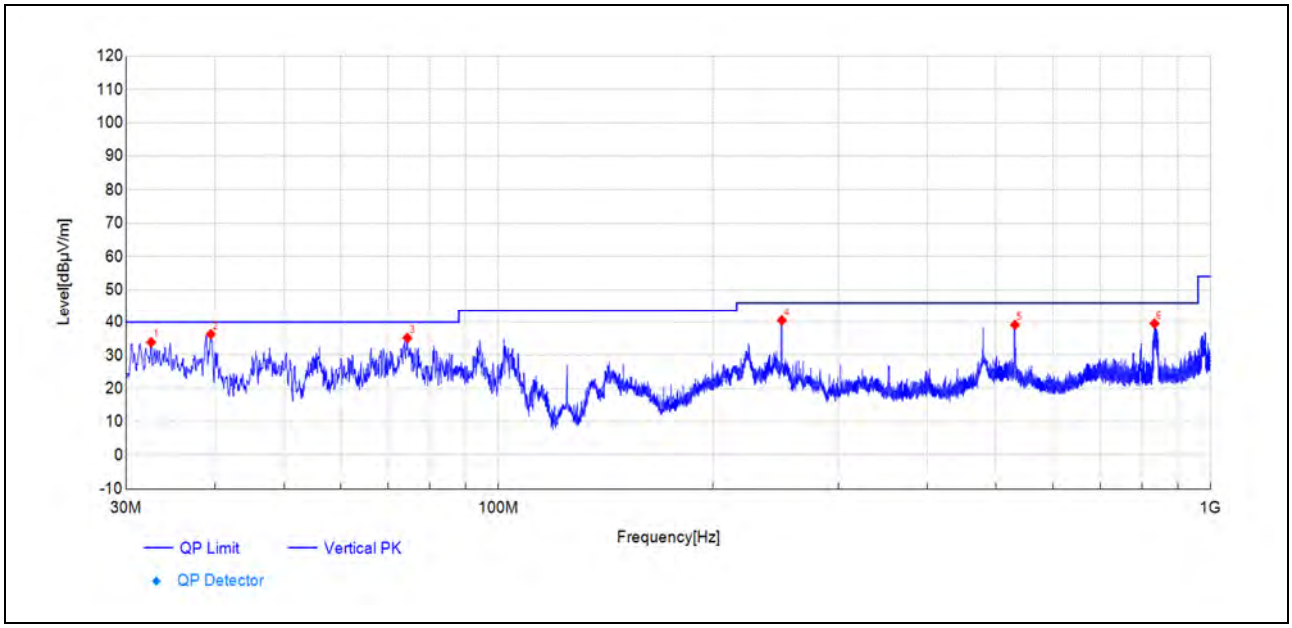

(Antenna Vertical, 30MHz to 1GHz)

Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Polarity	Verdict
32.53	66.1	33.89	-32.240	40.00	6.11	185	PK	Vertical	PASS
39.47	65.6	36.33	-29.270	40.00	3.67	97	PK	Vertical	PASS
74.51	70.3	35.22	-35.100	40.00	4.78	37	PK	Vertical	PASS
250.00	68.6	40.50	-28.120	46.00	5.50	11	PK	Vertical	PASS
531.02	60.6	39.15	-21.400	46.00	6.85	249	PK	Vertical	PASS
833.86	55.5	39.54	-15.920	46.00	6.46	111	PK	Vertical	PASS

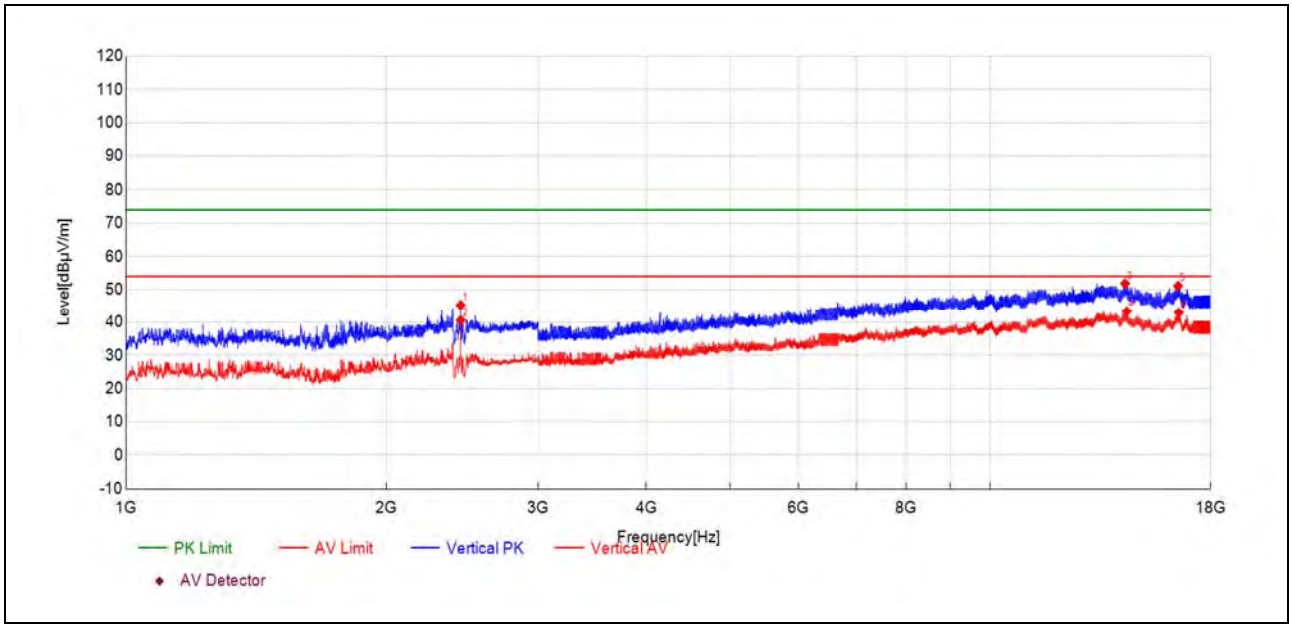

(Antenna Vertical, 1GHz to 18GHz)

Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Polarity	Verdict
2439.80	44.3	45.26	1.010	-	-	19	PK	Vertical	NA
2440.29	39.6	40.63	1.010	-	-	40	AV	Vertical	NA
14327.47	47.0	51.84	4.880	74.00	22.16	62	PK	Vertical	PASS
14392.18	38.4	43.35	4.930	54.00	10.65	140	AV	Vertical	PASS
16501.24	45.3	51.09	5.800	74.00	22.91	240	PK	Vertical	PASS
16532.10	37.1	42.96	5.910	54.00	11.04	344	AV	Vertical	PASS

Plot for Channel 39

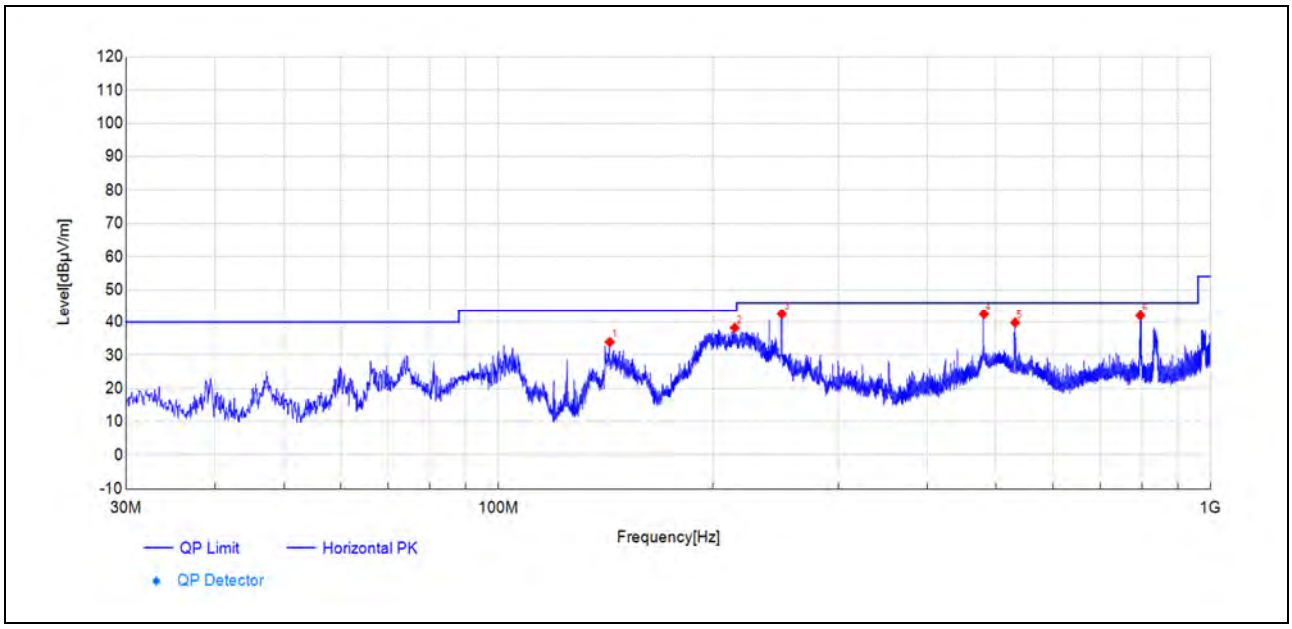

(Antenna Horizontal, 30MHz to 1GHz)

Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Polarity	Verdict
143.29	67.5	33.97	-33.550	43.50	9.53	77	PK	Horizontal	PASS
214.66	67.8	38.26	-29.580	43.50	5.24	99	PK	Horizontal	PASS
250.00	70.6	42.47	-28.120	46.00	3.53	53	PK	Horizontal	PASS
480.46	64.8	42.43	-22.320	46.00	3.57	99	PK	Horizontal	PASS
531.31	61.2	39.84	-21.400	46.00	6.16	150	PK	Horizontal	PASS
796.58	58.6	41.99	-16.600	46.00	4.01	187	PK	Horizontal	PASS

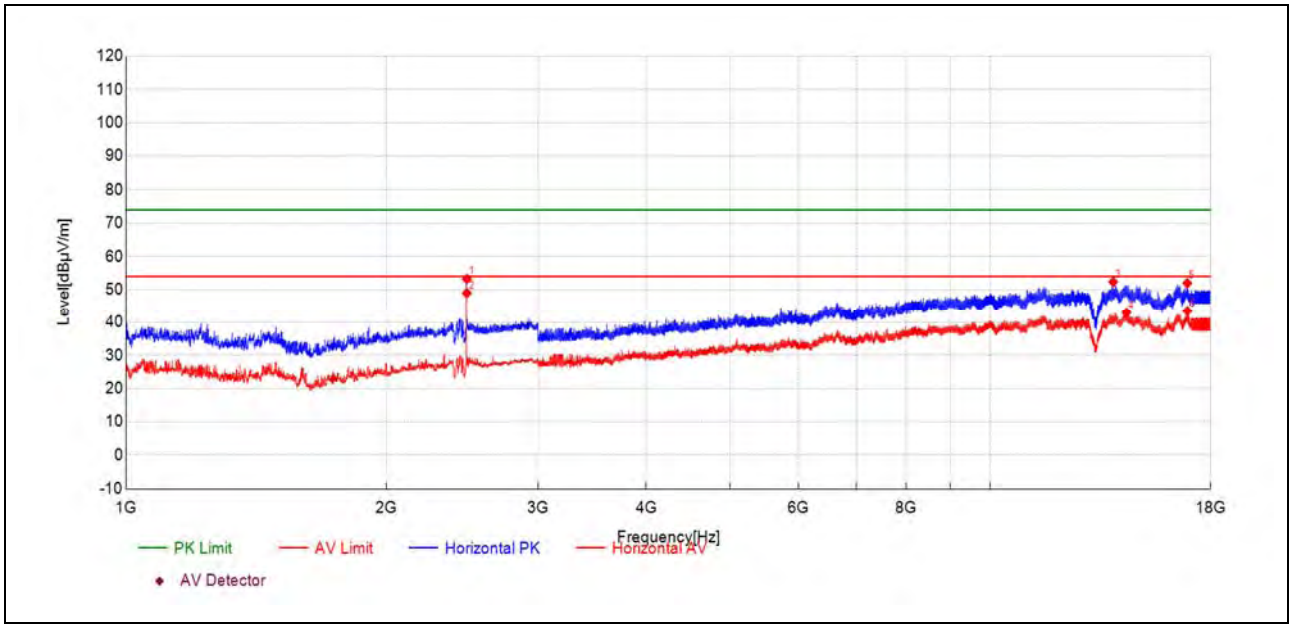

(Antenna Horizontal, 1GHz to 18GHz)

Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Polarity	Verdict
2479.85	52.3	53.22	0.920	-	-	140	PK	Horizontal	NA
2479.85	48.0	48.96	0.920	-	-	116	AV	Horizontal	NA
13883.45	47.6	52.36	4.720	74.00	21.64	261	PK	Horizontal	PASS
14383.61	38.1	42.98	4.920	54.00	11.02	359	AV	Horizontal	PASS
16908.40	44.9	51.96	7.110	74.00	22.04	342	PK	Horizontal	PASS
16913.97	36.5	43.45	6.990	54.00	10.55	342	AV	Horizontal	PASS

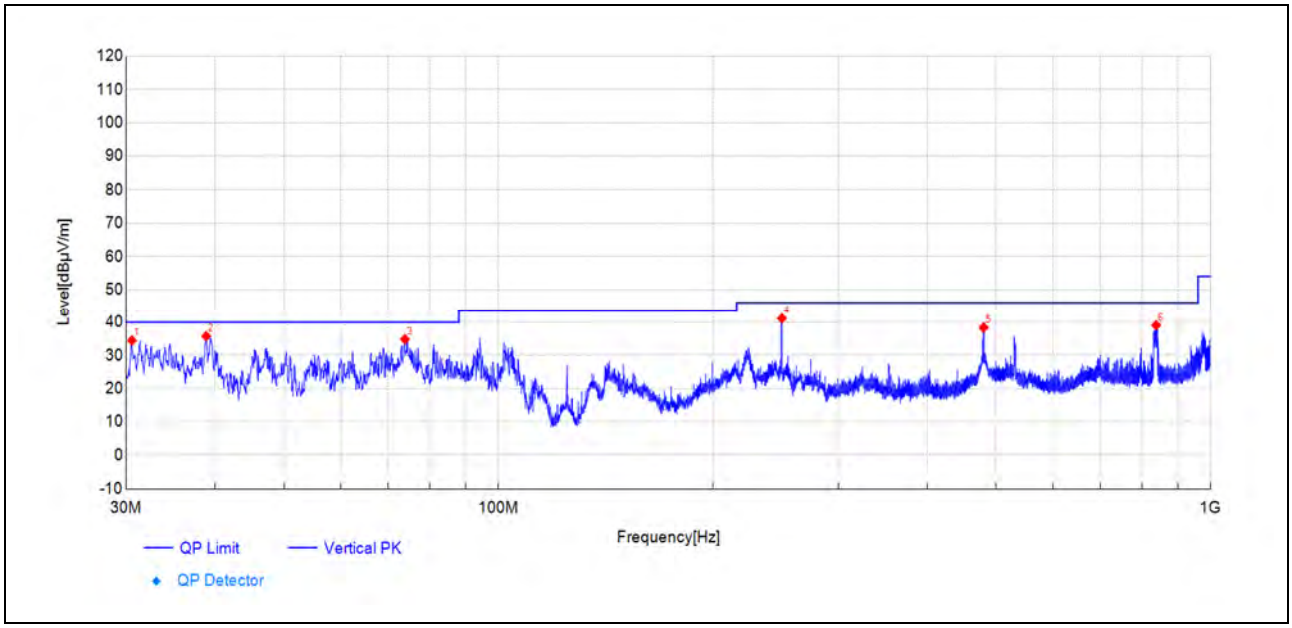

(Antenna Vertical, 30MHz to 1GHz)

Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Polarity	Verdict
30.59	67.5	34.49	-32.970	40.00	5.51	99	PK	Vertical	PASS
38.88	65.2	35.77	-29.460	40.00	4.23	99	PK	Vertical	PASS
73.92	69.9	34.83	-35.040	40.00	5.17	173	PK	Vertical	PASS
250.00	69.3	41.17	-28.120	46.00	4.83	24	PK	Vertical	PASS
479.93	60.7	38.36	-22.330	46.00	7.64	161	PK	Vertical	PASS
838.26	54.9	39.07	-15.840	46.00	6.93	86	PK	Vertical	PASS

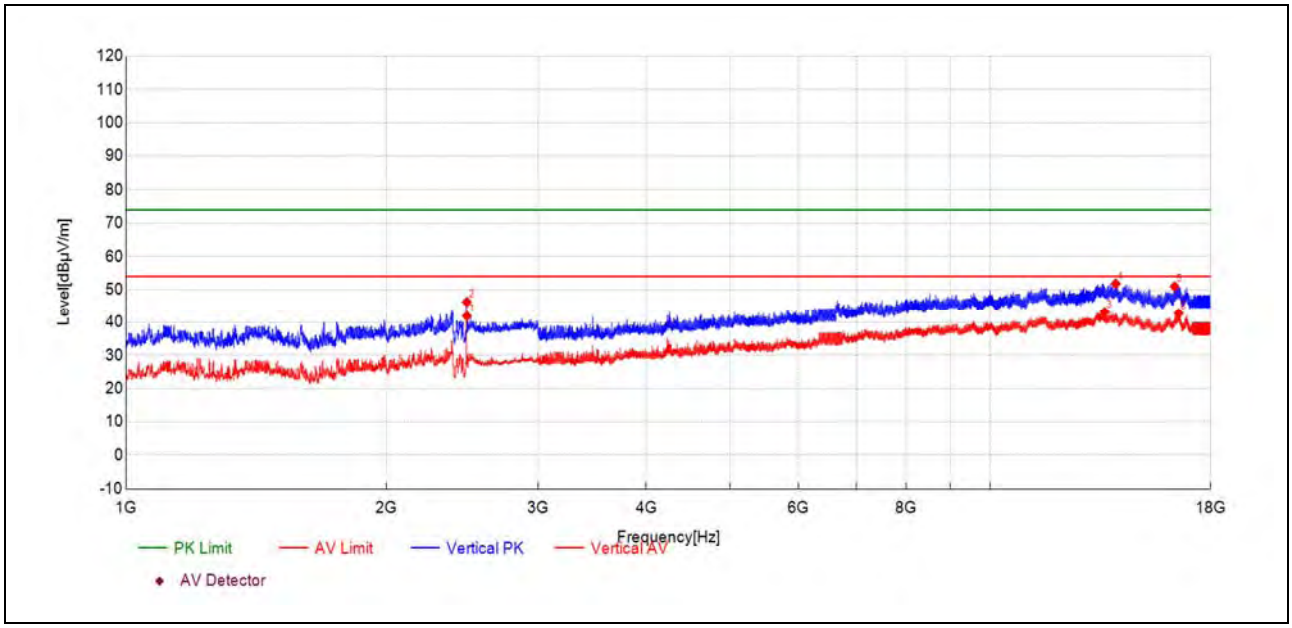

(Antenna Vertical, 1GHz to 18GHz)

Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Polarity	Verdict
2479.85	41.0	41.89	0.920	-	-	42	AV	Vertical	NA
2479.85	45.3	46.21	0.920	-	-	42	PK	Vertical	NA
13569.73	38.4	43.15	4.790	54.00	10.85	110	AV	Vertical	PASS
13976.89	46.5	51.81	5.280	74.00	22.19	238	PK	Vertical	PASS
16349.52	46.3	50.95	4.670	74.00	23.05	359	PK	Vertical	PASS
16529.96	36.8	42.72	5.900	54.00	11.28	188	AV	Vertical	PASS

Notes

1. The report shall have report stamp or our company stamp.
2. The report shall be invalid without all the signatures of the editor and approver.
3. The report shall not be changed.
4. Any objections must be raised to Morlab within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.
5.Conformity declaration:

☑ Morlab issues a statement of conformity based on the corresponding standards (default)

☐ Morlab issues a statement of conformity based on the applicant requirement

6.Use of uncertainty of measurement for decisions on conformity (decision rule):
No decision rule is specified by the testing standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty (“simple acceptance” decision rule).

——— END OF REPORT ———