

TEST REPORT

Product Name: Tablet

Trade Mark:



or RHINO

Model No.: T8

HVIN: T8-1

Report Number: 220618101RFC-1

FCC 47 CFR Part 15 Subpart C

Test Standards: RSS-210 Issue 10

RSS-Gen Issue 5

FCC ID: 2AUOUT8

IC: 27356-1T8

Test Result: PASS

Date of Issue: August 12, 2022

Prepared for:

Rhino Mobility LLC

8 The Green, Suite A, Dover, Delaware, 19901, USA


Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and
technology park, Longhua district, Shenzhen, China

TEL: +86-755-2823 0888

FAX: +86-755-2823 0886

Prepared by:



Kieron Luo
Project Engineer

Reviewed by:



Henry Lu
Team Leader

Approved by:



Kevin Liang
Assistant Manager

Date:

August 12, 2022

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS210-V1.1

Version

Version No.	Date	Description
V1.0	August 12, 2022	Original

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com<http://www.uttlab.com>UTTR-RF-RSS210-V1.1

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	4
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
1.4 OTHER INFORMATION	5
1.5 DESCRIPTION OF SUPPORT UNITS	6
1.6 TEST LOCATION	6
1.7 TEST FACILITY	6
1.8 DEVIATION FROM STANDARDS	6
1.9 ABNORMALITIES FROM STANDARD CONDITIONS	6
1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
1.11 MEASUREMENT UNCERTAINTY	7
2. TEST SUMMARY	8
3. EQUIPMENT LIST	9
4. TEST CONFIGURATION	10
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	10
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	10
4.1.2 RECORD OF NORMAL ENVIRONMENT	10
4.2 TEST CHANNELS	10
4.3 EUT TEST STATUS	10
4.4 PRE-SCAN	11
4.4.1 USED FOR TESTING OF WORST-CASE DATA RATES	11
4.5 TEST SETUP	12
4.5.1 FOR RADIATED EMISSIONS TEST SETUP	12
4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP	13
4.5.3 FOR CONDUCTED RF TEST SETUP	13
4.6 SYSTEM TEST CONFIGURATION	15
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	16
5.1 REFERENCE DOCUMENTS FOR TESTING	16
5.2 ANTENNA REQUIREMENT	16
5.3 20DB BANDWIDTH & OCCUPIED BANDWIDTH	16
5.4 THE FIELD STRENGTH OF ANY EMISSIONS APPEARING OUTSIDE OF THE 13.110-14.010 MHz BAND	18
5.5 FUNDAMENTAL FIELD STRENGTH AND EMISSION MASK 13.110 MHz TO 14.010 MHz	22
5.6 FREQUENCY TOLERANCE	24
5.7 CONDUCTED EMISSION	25
APPENDIX 1 PHOTOS OF TEST SETUP	28
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	28

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	Rhino Mobility LLC
Address of Applicant:	8 The Green, Suite A, Dover, Delaware, 19901, USA
Manufacturer:	Rhino Mobility LLC
Address of Manufacturer:	8 The Green, Suite A, Dover, Delaware, 19901, USA

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	Tablet		
Model No.:	T8		
HVIN:	T8-1		
Trade Mark:	 or RHINO		
DUT Stage:	Production Unit		
EUT Supports Function: (Provided by the customer)	GSM Bands:	GSM850/1900	
	UTRA Bands:	Band II/ Band IV/ Band V	
	E-UTRA Bands:	FDD Band 2/ Band 4/ Band 5/ Band 7/ Band 12/ Band 17/Band 25/ Band 26/ Band 30/Band 66/ Band 71	
		TDD Band 41	
	2.4 GHz ISM Band:	IEEE 802.11b/g/n	
		Bluetooth 5.0	
	5 GHz U-NII Bands:	5 150 MHz to 5 250 MHz	IEEE 802.11a/n
		5 250 MHz to 5 350 MHz	IEEE 802.11a/n
		5 470 MHz to 5 725 MHz	IEEE 802.11a/n
		5 725 MHz to 5 850 MHz	IEEE 802.11a/n
RNSS Bands:	1559 MHz to 1610 MHz	GPS/GLONASS	
NFC:	13.553 MHz to 13.567 MHz		
Sample Received Date:	June 17, 2022		
Sample Tested Date:	July 8, 2022 to July 9, 2022		

Remark: The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description.

1.2.2 Description of Accessories

Adapter	
Model No.:	XY-PQ018U1
Input:	100-240 V~50/60 Hz 0.5A
Output:	3.6-6.0V == 3.0A /6.0-9.0V == 2.0A /9.0-12.0V == 1.5A

Battery	
Model No.:	BPT8
Battery Type:	Lithium-ion Rechargeable Battery
Rated Voltage:	3.8 Vdc
Limited Charge Voltage:	4.35 Vdc
Rated Capacity:	5100 mAh

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS210-V1.1

Cable(1)	
Description:	USB Type-C Plug Cable
Cable Type:	Unshielded without ferrite
Length:	2.0 Meter

Cable(2)	
Description:	USB Type-C Plug Cable
Cable Type:	Unshielded without ferrite
Length:	1.0 Meter

Others	
1x Foldable stand, 1x Protective case	

Remark: The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description.

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Frequency Range:	13.110 MHz to 14.010 MHz
Nominal Operating Frequency:	13.56 MHz
Work in Modes:	☐ Card Emulation
	☒ Reader/Writer
	☐ Peer-to-Peer
NFC Type:	☒ NFC A Type
	☒ NFC B Type
	☒ NFC F Type
Max. Data Rates:	424 Kbps
Type of Modulation:	ASK
Number of Channels:	1
Antenna Type:	FPCB Antenna
Maximum Field Strength:	57.09 dBμV/m at 3 meter
Normal Test Voltage:	3.8 Vdc
Extreme Test Voltage:	3.5 to 4.2 Vdc
Extreme Test Temperature:	-20 °C to +55 °C

1.4 OTHER INFORMATION

None

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Notebook	Lenovo	E450	SL10G10780	UnionTrust

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.3 Meter	UnionTrust

1.6 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.8 DEVIATION FROM STANDARDS

None.

1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS210-V1.1

1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9kHz-150kHz	±3.2 dB
2	Conducted emission 150kHz-30MHz	±2.7 dB
3	Radiated emission 9kHz-30MHz	± 4.7 dB
4	Radiated emission 30MHz-1GHz	± 4.6 dB
5	Radiated emission 1GHz-18GHz	± 4.4 dB
6	Radiated emission 18GHz-26GHz	± 4.6 dB
7	Radiated emission 26GHz-40GHz	± 4.6 dB
8	RF Power, Conducted	± 0.9 dB
9	Transmission Time	± 0.19 %
10	Occupied Bandwidth	± 1.86 %
11	Power Spectral Density, conducted	± 0.6 dB
12	Radio Frequency	± 6.5 × 10 ⁻⁸
13	Conducted out of band emission	± 2.7 dB

2. TEST SUMMARY

Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203 RSS-Gen Issue 5, Section 6.8	N/A	PASS
Conducted Emission	FCC 47 CFR Part 15 Subpart C Section 15.207 RSS-Gen Issue 5, Section 8.8	ANSI C63.10-2013	PASS
The field strength of any emissions appearing outside of the 13.110-14.010 MHz band	FCC 47 CFR Part 15 Subpart C Section 15.225(d) /15.209 RSS-210 Issue 10, Annex B.6 RSS-Gen Issue 5, section 8.9	ANSI C63.10-2013	PASS
Fundamental Field Strength and Emission Mask 13.110 MHz to 14.010 MHz	FCC 47 CFR Part 15 Subpart C Section 15.227(a) (b) (c) /15.205 RSS-210 Issue 10, Annex B.6 RSS-Gen Issue 5, section 8.9	ANSI C63.10-2013	PASS
20DB Bandwidth& Occupied Bandwidth	FCC 47 CFR Part 15 Subpart C Section 15.215(c) RSS-Gen Issue 5, section 6.7	ANSI C63.10-2013	Pass
Frequency Tolerance	FCC 47 CFR Part 15 Subpart C Section 15.225(e) RSS-210 Issue 10, Annex B.6	ANSI C63.10-2013	Pass

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS210-V1.1

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	3m SAC	ETS-LINDGREN	3m	Euroshiedpn-C T001270-1317	Jan. 22, 2021	Jan. 21, 2024
☒	Receiver	R&S	ESIB26	100114	Nov. 05, 2021	Nov. 04, 2022
☒	Loop Antenna	ETS-LINDGREN	6502	00202525	Nov. 11, 2021	Nov. 10, 2023
☒	Broadband Antenna	ETS-LINDGREN	3142E	00201566	Nov. 11, 2021	Nov. 10, 2023
☒	6dB Attenuator	Talent	RA6A5-N-18	18103001	Nov. 11, 2021	Nov. 10, 2023
☒	Preamplifier	HP	8447F	2805A02960	Nov. 05, 2021	Nov. 04, 2022
☐	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201541	Apr. 30, 2021	Apr. 29, 2023
☐	Pre-amplifier	ETS-Lindgren	00118385	00201874	Nov. 06, 2021	Nov. 05, 2022
☐	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	Nov. 14, 2020	Nov. 13, 2023
☐	Pre-amplifier	ETS-Lindgren	00118384	00202652	Nov. 17, 2020	Nov. 16, 2022
☒	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	Receiver	R&S	ESR7	1316.3003K07-101181-K3	Nov. 05, 2021	Nov. 04, 2022
☒	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	Nov. 05, 2021	Nov. 04, 2022
☒	LISN	R&S	ESH2-Z5	860014/024	Nov. 05, 2021	Nov. 04, 2022
☐	LISN	ETS-Lindgren	3816/2SH	00201088	Nov. 05, 2021	Nov. 04, 2022
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted RF test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	Spectrum Analyzer	R&S	FSV40-N	101653	Apr. 15, 2022	Apr. 14, 2023
☒	DC Source	KIKUSUI	PWR400L	LK003024	N/A	N/A
☒	Digital multimeter	FLUKE	15B+	30701460WS15	Nov. 12, 2021	Nov. 11, 2022
☒	Temp & Humidity chamber	Votisch	VT4002	58566133290020	Apr. 15, 2022	Apr. 14, 2023

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS210-V1.1

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Test Environment	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
TN/VN	+15 to +35	3.8	20 to 75
TL/VL	-20	3.5	20 to 75
TH/VL	+55	3.5	20 to 75
TL/VH	-20	4.2	20 to 75
TH/VH	+55	4.2	20 to 75
Remark: 1) The EUT just work in such extreme temperature of -20 °C to +55 °C and the extreme voltage of 3.5 V to 4.2 V, so here the EUT is tested in the temperature of -20 °C to +55 °C and the voltage of 3.5 V to 4.2 V. 2) VN: Normal Voltage; TN: Normal Temperature; TL: Low Extreme Test Temperature; TH: High Extreme Test Temperature; VL: Low Extreme Test Voltage; VH: High Extreme Test Voltage.			

4.1.2 Record of Normal Environment

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (kPa)	Tested by
Conducted Emission	24.5	45	101.1	David Zhang
The field strength of any emissions appearing outside of the 13.110-14.010 MHz band	23.1	51	100.2	Andy Lin
Fundamental Field Strength and Emission Mask 13.110 MHz to 14.010 MHz	23.1	51	100.2	Andy Lin
20DB Bandwidth	23.1	51	100.2	Andy Lin

4.2 TEST CHANNELS

Frequency	Test RF Channel
13.56 MHz	Channel 1
	13.56 MHz

4.3 EUT TEST STATUS

Frequency	Tx Function	Description
13.56 MHz	1Tx	1. Keep the EUT in continuously transmitting during the test.

4.4 PRE-SCAN

4.4.1 Used for testing of worst-case data rates

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, work in modes and data rates. Selected for the final test as listed below.

Frequency	Work in Modes	Type	Data Rate (Kbps)
13.56 MHz	☒ Reader/Writer	☒ B	☐ 106 ☐ 212 ☒ 424
Remark: ☐ The mark " ☒ " means is chosen for testing; The mark " ☐ " means is not chosen for testing.			

4.5 TEST SETUP

4.5.1 For Radiated Emissions test setup

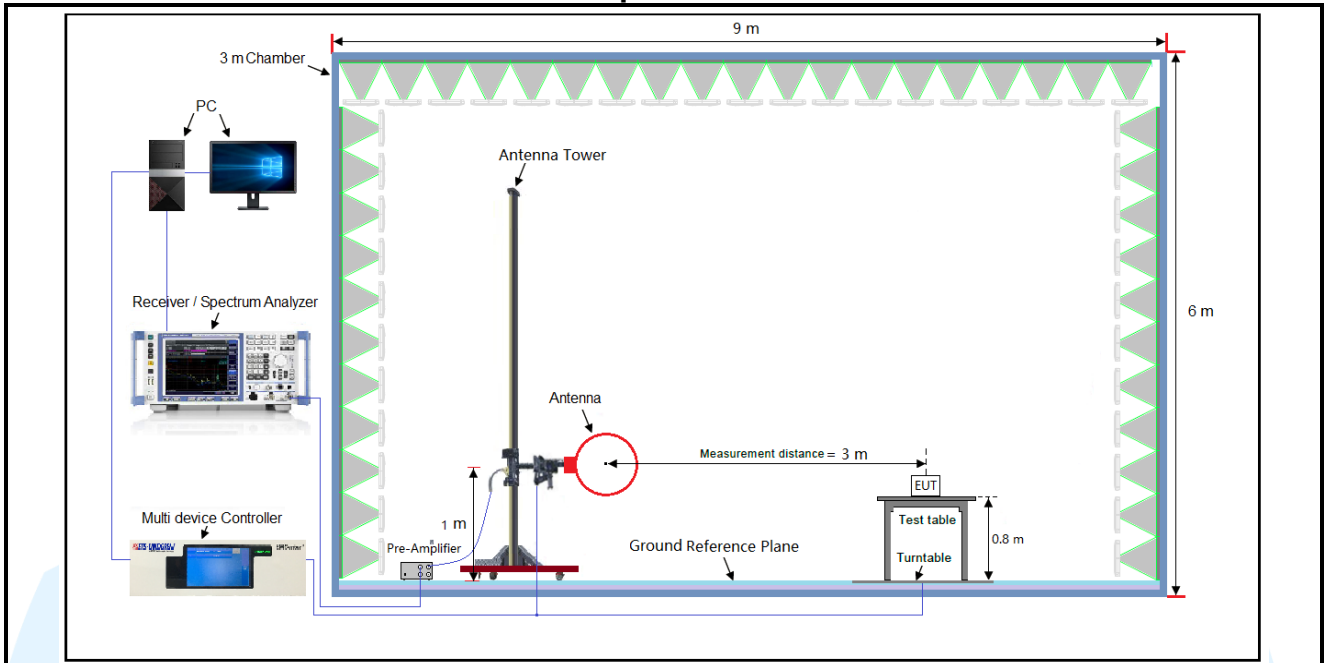


Figure 1. Below 30MHz


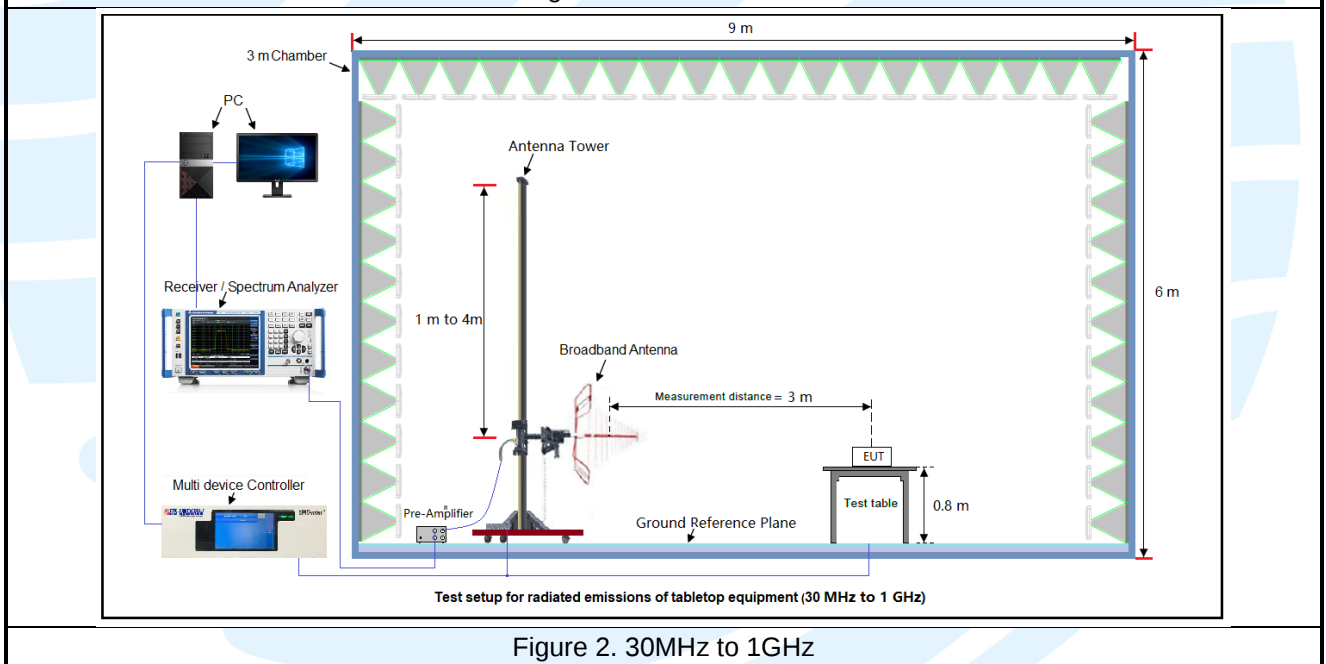


Figure 2. 30MHz to 1GHz

The diagram illustrates the experimental setup within a Shielding Room. On the left, a measurement system is placed on a table, consisting of a PC, a Receiver, and a Pulse Limiter. A Ground Reference Plane is indicated below this setup. Two LISN (Line Impedance Stabilization Network) units, LISN 1 and LISN 2, are connected to the AC Mains. LISN 1 is connected to the Receiver, and LISN 2 is connected to the Pulse Limiter. The test setup is on a Test table, which is elevated 40 cm from the floor by an Insulation layer (thickness ≤ 0.15 m). Two EUT/AE (Equipment Under Test/Accessory Equipment) units are placed on the Test table, separated by 10 cm. A PSU (Power Supply Unit) is connected to the EUT/AE units. The distance from the AC Mains to the EUT/AE units is 80 cm. The distance from the Receiver to the EUT/AE units is 10 cm. The distance from the Pulse Limiter to the EUT/AE units is 10 cm. The distance from the AC Mains to the LISN units is 80 cm.

The diagram illustrates a Shielding Chamber setup. A Spectrum analyzer is connected to an EUT (Equipment Under Test) via a cable. Both are placed on a Non-Conducted Table. The entire setup is enclosed within a Shielding Chamber, which is situated in a Normal Environment.

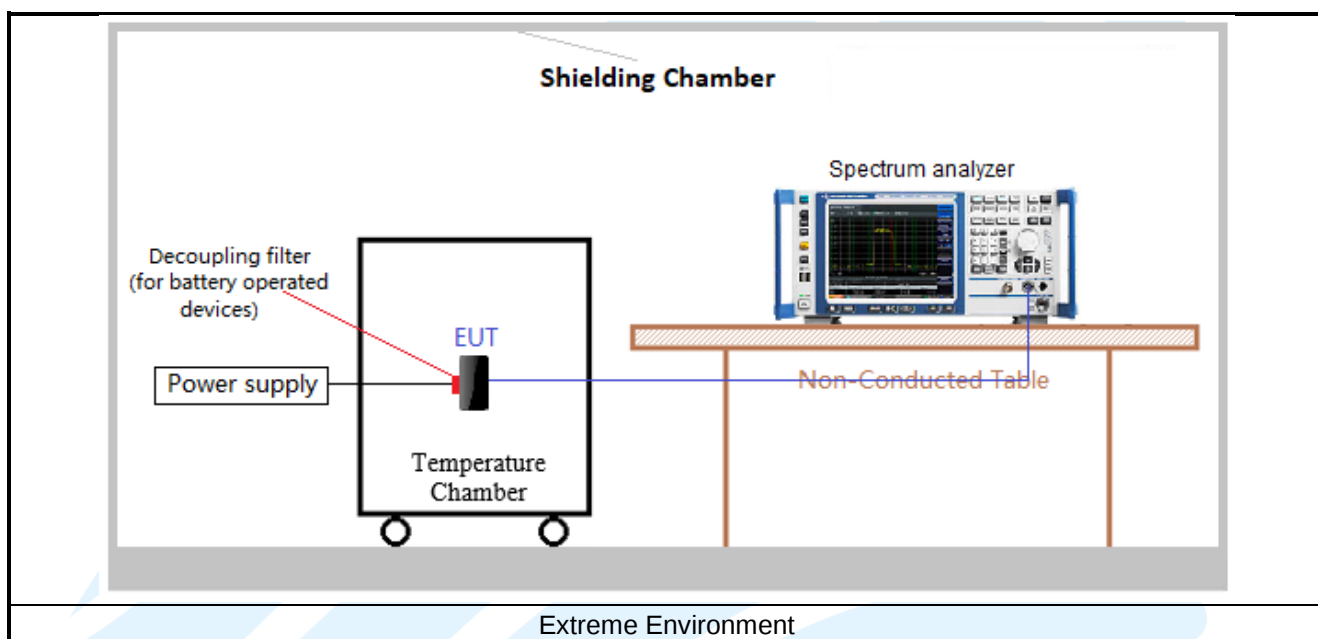

4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.8Vdc battery. Only the worst case data were recorded in this test report.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 15	Radio Frequency Devices
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus
4	RSS-210 Issue 10	Licence-Exempt Radio Apparatus: Category I Equipment

5.2 ANTENNA REQUIREMENT

Standard Requirement
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. RSS-Gen Issue 5, Section 6.8 requirement: According to RSS-Gen Issue 5, Section 6.8, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. EUT Antenna: This product has a permanent antenna, fulfill the requirement of this section.

5.3 20DB BANDWIDTH & OCCUPIED BANDWIDTH

Test Requirement:	FCC 47 CFR Part 15 Subpart C Section 15.215 (c) RSS-Gen Issue 5, section 6.7
Test Method:	ANSI C63.10-2013
Limit:	Operation within the band 13.110 MHz to 14.010 MHz
Requirement :	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equip compliance with the 20dB attenuation specification may base on measurement at the intentional radiator's antenna output terminal unless the intentional radiator uses a permanently attached antenna, in which case compliance shall be. Demonstrated by measuring the radiated emissions.
Test Procedure:	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings: - The spectrum analyzer center frequency is set to the nominal EUT channel center frequency - Span = approximately 2 to 5 times the OBW - RBW = 1% to 5% of the OBW - VBW $\geq 3 \times$ RBW - Sweep = auto; - Detector function = peak - Trace = max hold - All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS210-V1.1

Test Setup: Refer to section 4.5.3 for details.
Instruments Used: Refer to section 3 for details
Test Mode: Transmitter mode
Test Results: Pass
Test Data:

Frequency (MHz)	20 dB Bandwidth (kHz)	99 % Bandwidth (kHz)	Limit	Pass / Fail
13.56 MHz	24.58	20.88	Operation within the band 13.110 MHz to 14.010 MHz	Pass

The test plot as follows:



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS210-V1.1

5.4 THE FIELD STRENGTH OF ANY EMISSIONS APPEARING OUTSIDE OF THE 13.110-14.010 MHZ BAND

FCC 47 CFR Part 15 Subpart C Section 15.225(d) /15.209

Test Requirement: RSS-210 Issue 10, Annex B.6
RSS-Gen Issue 5, section 8.9

Test Method: ANSI C63.10-2013 Section 6.6.4.3

Receiver Setup:

Frequency	RBW
0.009 MHz-0.150 MHz	200/300 kHz
0.150 MHz -30 MHz	9/10 kHz
30 MHz-1 GHz	100/120 kHz
Above 1 GHz	1 MHz

Limits:

The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

Spurious Emissions

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009 MHz-0.490 MHz	2400/F(kHz)	--	--	300
0.490 MHz-1.705 MHz	24000/F(kHz)	--	--	30
1.705 MHz-30 MHz	30	--	--	30
30 MHz-88 MHz	100	40.0	Quasi-peak	3
88 MHz-216 MHz	150	43.5	Quasi-peak	3
216 MHz-960 MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1 GHz	500	54.0	Average	3

Remark:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBμV/m) = 20 log Emission level (μV/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.
- For Below 30MHz, the measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

Field strength limit for 13.56MHz = 15848 μV/m at 30m
= 84 dBμV/m at 30m
= 84 dBμV/m + 40log(30/3) dB at 3m
= 124 dBμV/m at 3m

Test Setup: Refer to section 4.5.1 for details.

Test Procedures:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS210-V1.1

heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.


- 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- 7) The radiation measurements are performed in X, Y, Z axis positioning. And found the Z axis positioning which it is worse case, only the test worst case mode is recorded in the report.(for portable and mobile devices)

Equipment Used: Refer to section 3 for details.


Test Result: Pass

Radiated Emission Test Data (9 KHz ~ 30MHz):

Horizontal

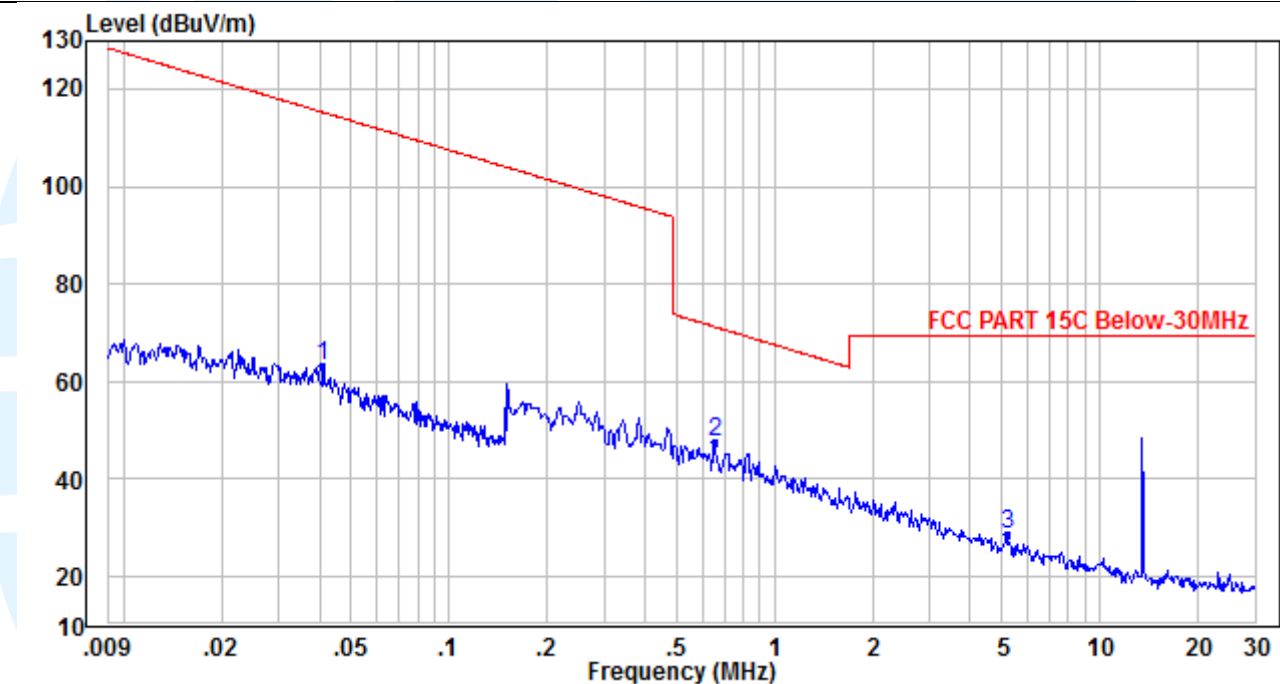

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.041	77.27	-14.07	63.20	115.33	-52.13	Peak
2	0.656	64.21	-16.83	47.38	71.25	-23.87	Peak
3	5.203	45.29	-16.85	28.44	79.50	-51.06	Peak

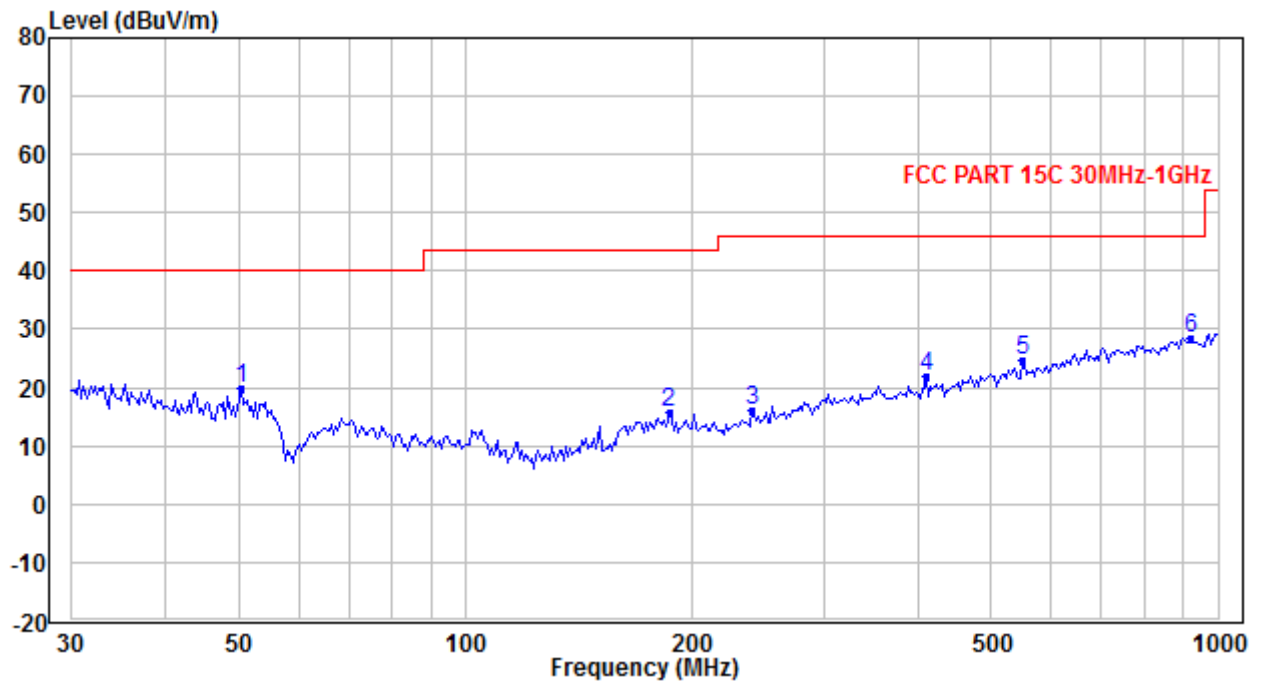Radiated Emission Test Data (30 MHz ~ 1GHz):
Horizontal


No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	50.461	34.67	-14.97	19.70	40.00	-20.30	Peak
2	186.468	26.05	-10.44	15.61	43.50	-27.89	Peak
3	240.144	25.51	-9.29	16.22	46.00	-29.78	Peak
4	409.651	26.53	-4.48	22.05	46.00	-23.95	Peak
6	550.290	26.73	-2.00	24.73	46.00	-21.27	Peak
7	919.132	24.24	4.24	28.48	46.00	-17.52	Peak

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS210-V1.1

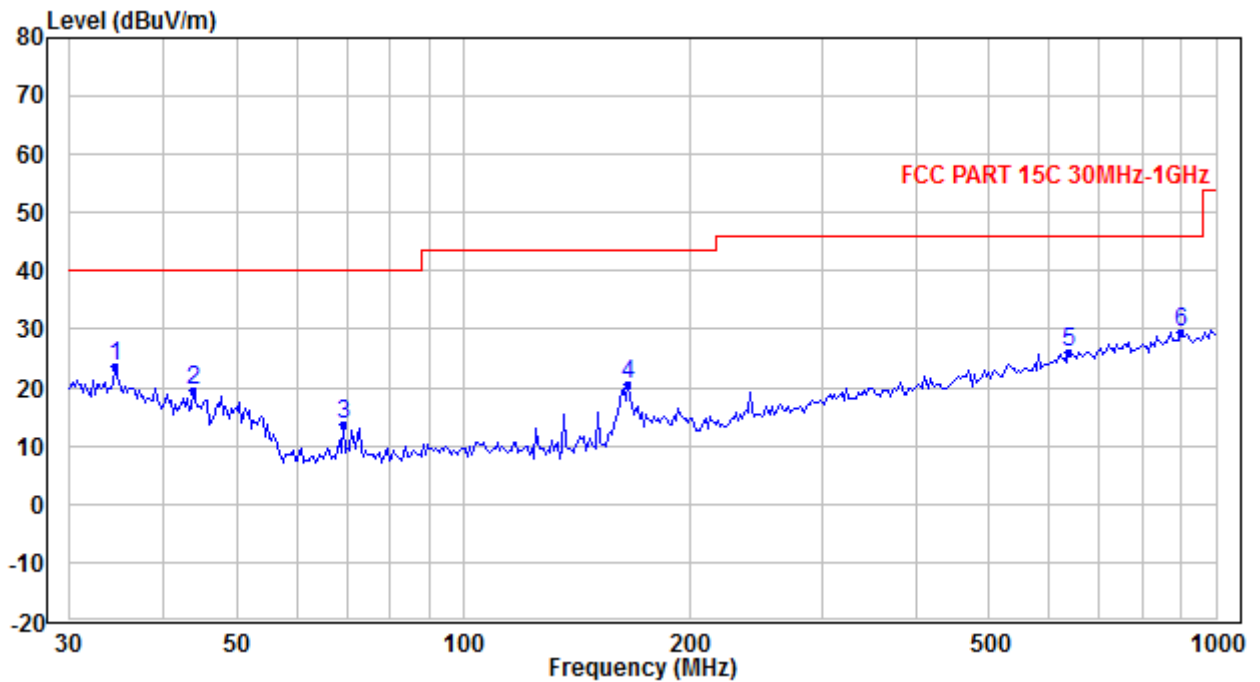Radiated Emission Test Data (30 MHz ~ 1GHz):
Vertical


No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	34.527	28.54	-4.98	23.56	40.00	-16.44	Peak
2	43.845	29.93	-10.52	19.41	40.00	-20.59	Peak
3	69.230	30.96	-17.32	13.64	40.00	-26.36	Peak
4	165.472	33.05	-12.42	20.63	43.50	-22.87	Peak
5	637.795	26.00	-0.10	25.90	46.00	-20.10	Peak
6	899.958	25.39	4.19	29.58	46.00	-16.42	Peak

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit
4. All the above radiation data, the fundamental frequency is not marked, it may exceed the limit, please ignore it.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS210-V1.1

5.5 FUNDAMENTAL FIELD STRENGTH AND EMISSION MASK 13.110 MHZ TO 14.010 MHZ

FCC 47 CFR Part 15 Subpart C Section 15.227(a) (b) (c) /15.205

Test Requirement: RSS-210 Issue 10, Annex B.6
RSS-Gen Issue 5, section 8.9

Test Method: ANSI C63.10-2013

Limits:

- (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

Remark:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB μ V/m) = 20 log Emission level (μ V/m).
3. For Below 30MHz, the measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

Field strength limit for 13.56MHz	=	15848 μ V/m	at 30m
	=	84 dB μ V/m	at 30m
	=	84 dB μ V/m + 40log(30/3) dB	at 3m
	=	124 dB μ V/m	at 3m

Test Setup: Refer to section 4.5.1 for details.

Test Procedures:

As the radiation test, set the RBW=10kHz VBW=30kHz, observed the outside band of 13.110 MHz to 14.010 MHz, than mark the higher-level emission for comparing with the FCC rules.

Equipment Used: Refer to section 3 for details.


Test Result: Pass

Maximum Field Strength:

Fundamental frequency	Detector	Result at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
13.56 MHz	Peak	57.09	124	66.91

Emission Mask:

The worst case test plots as below.

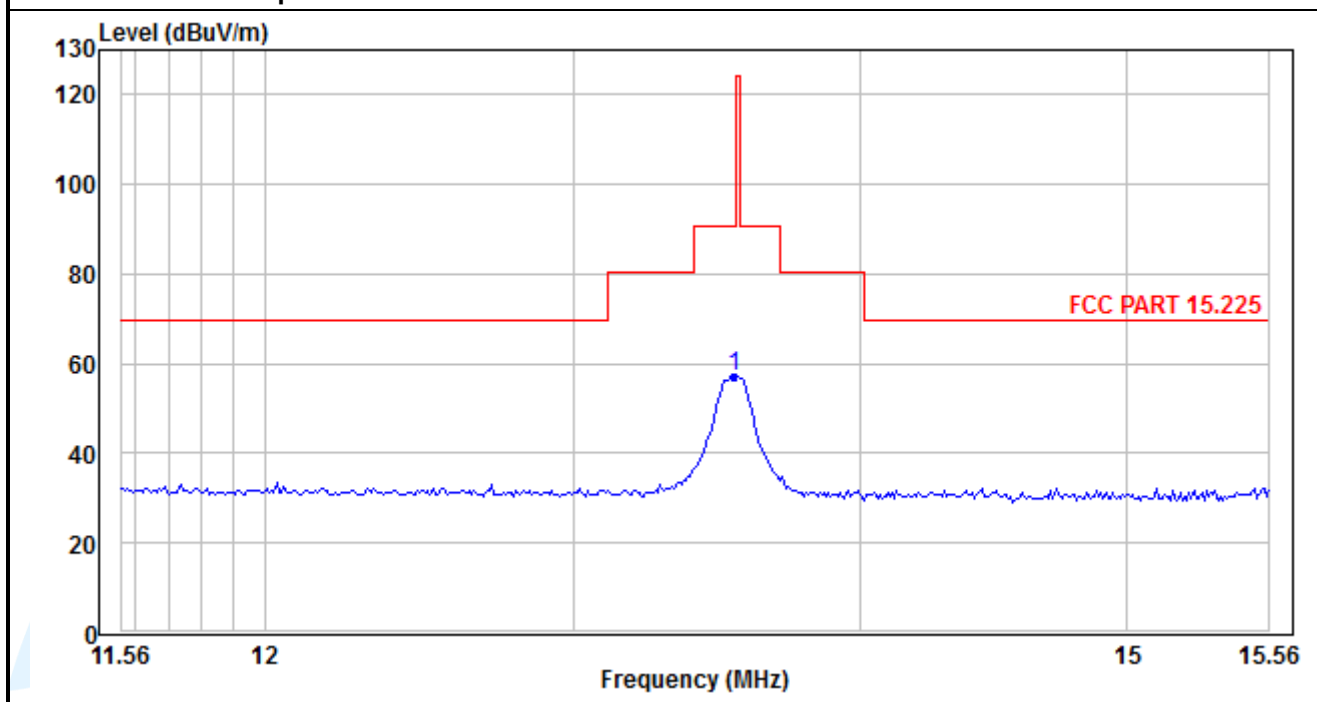

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS210-V1.1

5.6 FREQUENCY TOLERANCE

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.225(e)
RSS-210 Issue 10, Annex B.6

Test Method: ANSI C63.10-2013

Limits:

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test Setup: Refer to section 4.5.3 for details.

Test Procedures:

- 1) The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- 2) Turn the EUT on and couple its output to a spectrum analyzer.
- 3) Turn the EUT off and set the chamber to the highest temperature specified.
- 4) Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- 5) Repeat step c) and d) with the temperature chamber set to the lowest temperature.
- 6) The test chamber was allowed to stabilize at $+20$ degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

Equipment Used: Refer to section 3 for details.

Test Result: Pass

Frequency Tolerance VS Temperature and Voltage									
Temp.(°C)	Voltage	Test time (minutes)							
		0	2	5	10	0	2	5	10
		Measured Frequency (MHz)				Frequency Drift (%)			
50	VN	13.56015	13.5603	13.56026	13.56034	0.0011	0.0022	0.0019	0.0025
40	VN	13.56023	13.56061	13.56036	13.56014	0.0017	0.0045	0.0027	0.0010
30	VN	13.56026	13.56042	13.56043	13.56063	0.0019	0.0031	0.0032	0.0046
20	VN	13.56041	13.56035	13.56022	13.56018	0.0030	0.0026	0.0016	0.0013
	VL	13.56042	13.56032	13.56035	13.56044	0.0031	0.0024	0.0026	0.0032
	VH	13.56023	13.56002	13.56032	13.56042	0.0017	0.0001	0.0024	0.0031
10	VN	13.56004	13.56004	13.56022	13.56014	0.0003	0.0003	0.0016	0.0010
0	VN	13.56034	13.56002	13.56032	13.56063	0.0025	0.0001	0.0024	0.0046
-10	VN	13.56012	13.56053	13.56002	13.56038	0.0009	0.0039	0.0001	0.0028
-20	VN	13.56027	13.56061	13.56008	13.56019	0.0020	0.0045	0.0006	0.0014
Limit: $\pm 0.01\%$									

5.7 CONDUCTED EMISSION

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.207
RSS-Gen Issue 5, Section 8.8

Test Method: ANSI C63.10-2013 Section 6.2

Limits:

Frequency range (MHz)	Limits (dB(μV))	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

Remark:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

Test Setup: Refer to section 4.5.2 for details.

Test Procedures:

Test frequency range :150KHz-30MHz

- 7) The mains terminal disturbance voltage test was conducted in a shielded room.
- 8) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 9) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 10) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 11) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Equipment Used: Refer to section 3 for details.


Test Result: Pass

The measurement data as follows:

Quasi Peak and Average:


Mode: NFC Link

Live Line

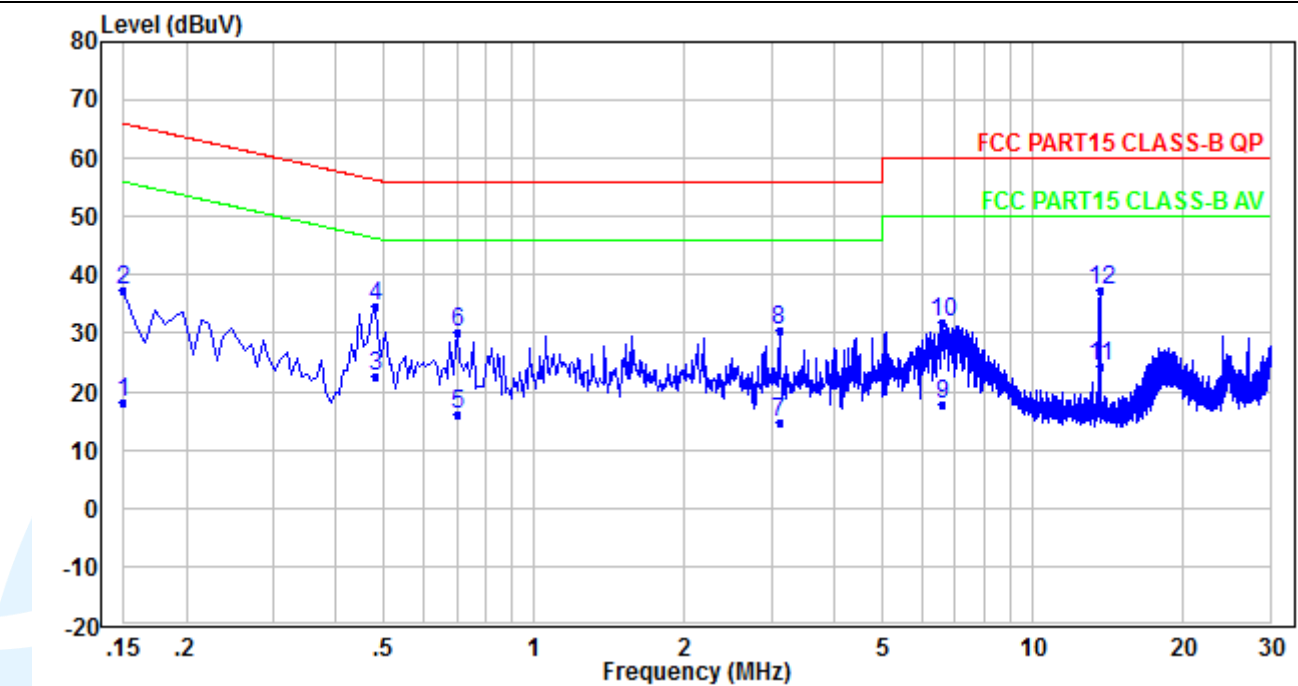

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.150	8.15	10.12	18.27	56.00	-37.73	Average
2	0.150	27.15	10.12	37.27	66.00	-28.73	QP
3	0.478	12.60	10.15	22.75	46.37	-23.62	Average
4	0.478	24.60	10.15	34.75	56.37	-21.62	QP
5	0.702	6.07	10.17	16.24	46.00	-29.76	Average
6	0.702	20.07	10.17	30.24	56.00	-25.76	QP
7	3.101	4.39	10.27	14.66	46.00	-31.34	Average
8	3.101	20.39	10.27	30.66	56.00	-25.34	QP
9	6.613	7.34	10.43	17.77	50.00	-32.23	Average
10	6.613	21.34	10.43	31.77	60.00	-28.23	QP
11	13.659	13.48	10.81	24.29	50.00	-25.71	Average
12	13.659	26.48	10.81	37.29	60.00	-22.71	QP

Neutral Line

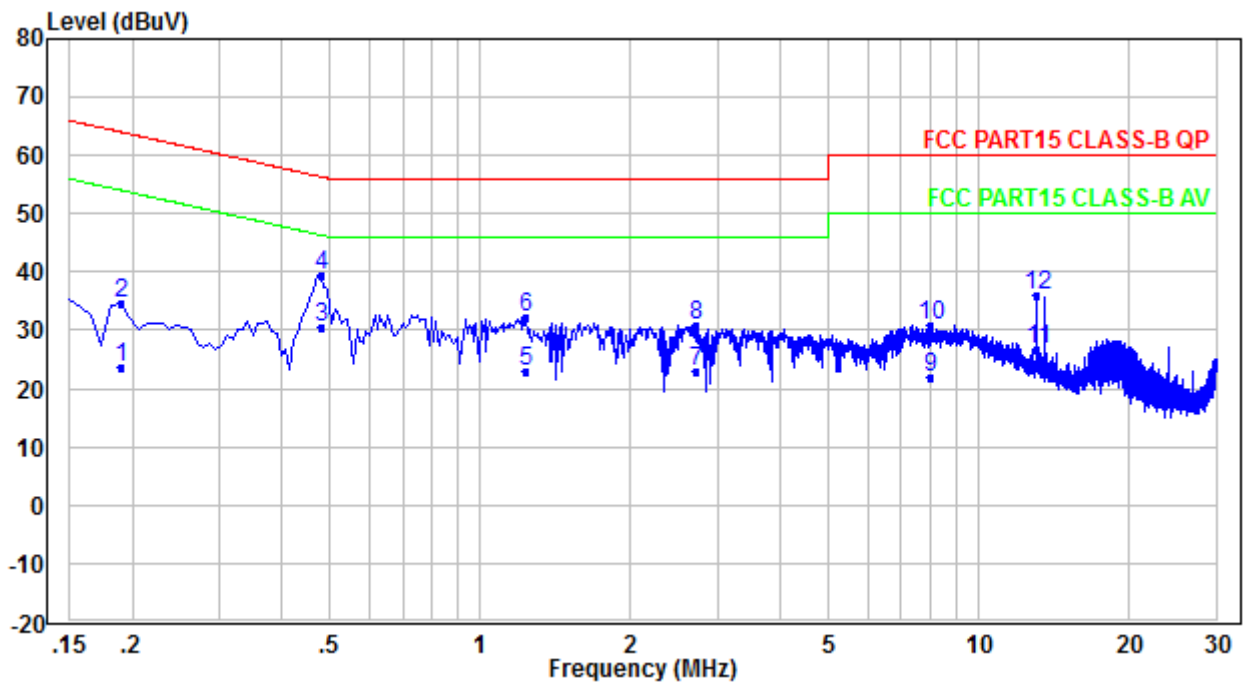

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.190	13.42	10.11	23.53	54.04	-30.51	Average
2	0.190	24.42	10.11	34.53	64.04	-29.51	QP
3	0.478	20.22	10.13	30.35	46.37	-16.02	Average
4	0.478	29.22	10.13	39.35	56.37	-17.02	QP
5	1.238	12.90	10.17	23.07	46.00	-22.93	Average
6	1.238	21.90	10.17	32.07	56.00	-23.93	QP
7	2.701	12.73	10.25	22.98	46.00	-23.02	Average
8	2.701	20.73	10.25	30.98	56.00	-25.02	QP
9	8.020	11.44	10.52	21.96	50.00	-28.04	Average
10	8.020	20.44	10.52	30.96	60.00	-29.04	QP
11	13.115	16.11	10.75	26.86	50.00	-23.14	Average
12	13.115	25.11	10.75	35.86	60.00	-24.14	QP

Remark:

1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit
4. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.
5. All possible modes of operation were investigated, and testing at two nominal voltages of 240V/50Hz and 120V/60Hz, only the worst case emissions reported.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS210-V1.1

APPENDIX 1 PHOTOS OF TEST SETUP

See test photos attached in Appendix 1 for the actual connections between Product and support equipment.

APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photos.

*** End of Report ***

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.
