

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)
Report No.: RFBEIU-WTW-P26030388-2
FCC ID: 2AUS4-NFA1DUX
Product: Neat Pad
Brand: neat.
Model No.: A1
Received Date: 2026/3/14
Test Date: 2026/3/31 ~ 2026/4/10
Issued Date: 2026/5/1
Applicant: Neatframe Limited
Address: 24 Cornhill, London EC3V 3ND, United Kingdom
Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories
Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
Test Location: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
FCC Registration / 198487 / TW2021
Designation Number:

Approved by: _____

Jeremy Lin

Jeremy Lin / Project Engineer

, Date: _____

2026/5/1

This test report consists of 59 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Jessica Cheng / Senior Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description.....	7
3.2 Antenna Description of EUT.....	8
3.3 Channel List.....	8
3.4 Test Mode Applicability and Tested Channel Detail.....	9
3.5 Duty Cycle of Test Signal.....	10
3.6 Test Program Used and Operation Descriptions	11
3.7 Connection Diagram of EUT and Peripheral Devices	11
3.8 Configuration of Peripheral Devices and Cable Connections	11
4 Test Instruments	12
4.1 RF Output Power.....	12
4.2 Power Spectral Density	12
4.3 6 dB Bandwidth	12
4.4 Conducted Out of Band Emissions	12
4.5 AC Power Conducted Emissions	13
4.6 Unwanted Emissions below 1 GHz	14
4.7 Unwanted Emissions above 1 GHz.....	15
5 Limits of Test Items.....	16
5.1 RF Output Power.....	16
5.2 Power Spectral Density	16
5.3 6 dB Bandwidth	16
5.4 Conducted Out of Band Emissions	16
5.5 AC Power Conducted Emissions	16
5.6 Unwanted Emissions below 1 GHz	16
5.7 Unwanted Emissions above 1 GHz.....	17
6 Test Arrangements.....	18
6.1 RF Output Power.....	18
6.1.1 Test Setup	18
6.1.2 Test Procedure.....	18
6.2 Power Spectral Density	18
6.2.1 Test Setup	18
6.2.2 Test Procedure.....	18
6.3 6 dB Bandwidth	19
6.3.1 Test Setup	19
6.3.2 Test Procedure.....	19
6.4 Conducted Out of Band Emissions	20
6.4.1 Test Setup	20
6.4.2 Test Procedure.....	20
6.5 AC Power Conducted Emissions	21
6.5.1 Test Setup	21
6.5.2 Test Procedure.....	21
6.6 Unwanted Emissions below 1 GHz	22
6.6.1 Test Setup	22
6.6.2 Test Procedure.....	23
6.7 Unwanted Emissions above 1 GHz.....	24
6.7.1 Test Setup	24
6.7.2 Test Procedure.....	24
7 Test Results of Test Item	25

7.1	RF Output Power.....	25
7.2	Power Spectral Density	28
7.3	6 dB Bandwidth	30
7.4	Conducted Out of Band Emissions	32
7.5	AC Power Conducted Emissions	38
7.6	Unwanted Emissions below 1 GHz	40
7.7	Unwanted Emissions above 1 GHz.....	42
8	Pictures of Test Arrangements	58
9	Information of the Testing Laboratories	59

Release Control Record

Issue No.	Description	Date Issued
RFBEIU-WTW-P26030388-2	Original release.	2026/5/1

1 Certificate

Product: Neat Pad

Brand: neat.

Test Model: A1

Sample Status: Engineering sample

Applicant: Neatframe Limited

Test Date: 2026/3/31 ~ 2026/4/10

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)

Measurement ANSI C63.10-2020

procedure: KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Standard / Clause	Test Item	Result	Remark
15.247(b)	RF Output Power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
15.247(d)	Conducted Out of Band Emissions	Pass	Meet the requirement of limit.
15.207	AC Power Conducted Emissions	Pass	Minimum passing margin is -8.49 dB at 0.15225 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -2.8 dB at 925.01 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -0.5 dB at 2483.50 MHz
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Specification	Expanded Uncertainty (k=2) (±)
RF Output Power	-	1.1 dB
Power Spectral Density	-	1.3 dB
6 dB Bandwidth	-	960 Hz
Conducted Out of Band Emissions	9 kHz ~ 40 GHz	2.7 dB
AC Power Conducted Emissions	9 kHz ~ 30 MHz	2.78 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	2.55 dB
	30 MHz ~ 1 GHz	5.77 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 6 GHz	4.71 dB
	6 GHz ~ 18 GHz	5.3 dB
	18 GHz ~ 40 GHz	4.98 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description

Product	Neat Pad
Brand	neat.
Test Model	A1
Status of EUT	Engineering sample
Power Supply Rating	From PoE Injector
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 1024QAM for OFDMA in 11ax mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	Up to 286 Mbps
Operating Frequency	2.412 GHz ~ 2.462 GHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20), 802.11ax (HE20):11
Output Power	467.355 mW (26.7 dBm)

Note:

1. The EUT uses following accessories.

Item	Specification
RJ45 Cable	Shielded without core, 3m
PoE Injector	AC Input : 100-240Vac, 0.8A, 50-60Hz, 32-44VA DC Output : 56Vdc, 0.275A, 15.4W

2. There are Bluetooth and WLAN (2.4 GHz & 5 GHz) technology used for the EUT.

3. Bluetooth and WLAN (2.4 GHz & 5 GHz) technologies cannot transmit at same time.

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna NO.	RF Chain NO.	Antenna Net Gain(dBi)	Frequency range	Antenna Type	Connector Type	Cable Length
1 (WiFi+BT)	0	4.5	2.4~2.4835GHz	PIFA	ipex(MHF)	55mm
1 (WiFi)		4.5	5.15~5.85GHz			
2 (WiFi)	1	4.5	2.4~2.4835GHz	PIFA	ipex(MHF)	118mm
		4.5	5.15~5.85GHz			

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a MIMO function:

2.4 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11b	2TX	2RX
802.11g	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11ax (HE20)	2TX	2RX

Note: The modulation and bandwidth are similar for 802.11n mode for 20 MHz, 802.11ax mode for 20 MHz. Therefore the investigated worst case is the representative mode in test report.

3.3 Channel List

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. The antenna can be used in the following ways: X / Y / Z axis. Pre-scan in these ways and find the worst case as a representative test condition.
Worst Case:	1. The antenna the worst case was found when positioned on (X / Y / Z axis): X axis

Following channel(s) was (were) selected for the final test as listed below:


Test Item	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter
RF Output Power	802.11b	CDD	1, 6, 11	DBPSK	1Mb/s
	802.11g	CDD	1, 6, 11	BPSK	6Mb/s
	802.11n (HT20)	CDD	1, 6, 11	BPSK	MCS0
	802.11ax (HE20)	CDD	1, 6, 11	BPSK	MCS0
Power Spectral Density	802.11b	CDD	1, 6, 11	DBPSK	1Mb/s
	802.11g	CDD	1, 6, 11	BPSK	6Mb/s
	802.11ax (HE20)	CDD	1, 6, 11	BPSK	MCS0
6 dB Bandwidth / Conducted Out of Band Emissions	802.11b	CDD	1, 6, 11	DBPSK	1Mb/s
	802.11g	CDD	1, 6, 11	BPSK	6Mb/s
	802.11ax (HE20)	CDD	1, 6, 11	BPSK	MCS0
AC Power Conducted Emissions	802.11ax (HE20)	CDD	6	BPSK	MCS0
Unwanted Emissions below 1 GHz	802.11ax (HE20)	CDD	6	BPSK	MCS0
Unwanted Emissions above 1 GHz	802.11b	CDD	1, 6, 11	DBPSK	1Mb/s
	802.11g	CDD	1, 6, 11	BPSK	6Mb/s
	802.11ax (HE20)	CDD	1, 6, 11	BPSK	MCS0

3.5 Duty Cycle of Test Signal


802.11b: Duty cycle = 100 ms / 100 ms x 100% = 100.0%

802.11g: Duty cycle = 4.065 ms / 4.082 ms x 100% = 99.6%


802.11ax (HE20): Duty cycle = 3.815 ms / 3.831 ms x 100% = 99.6%

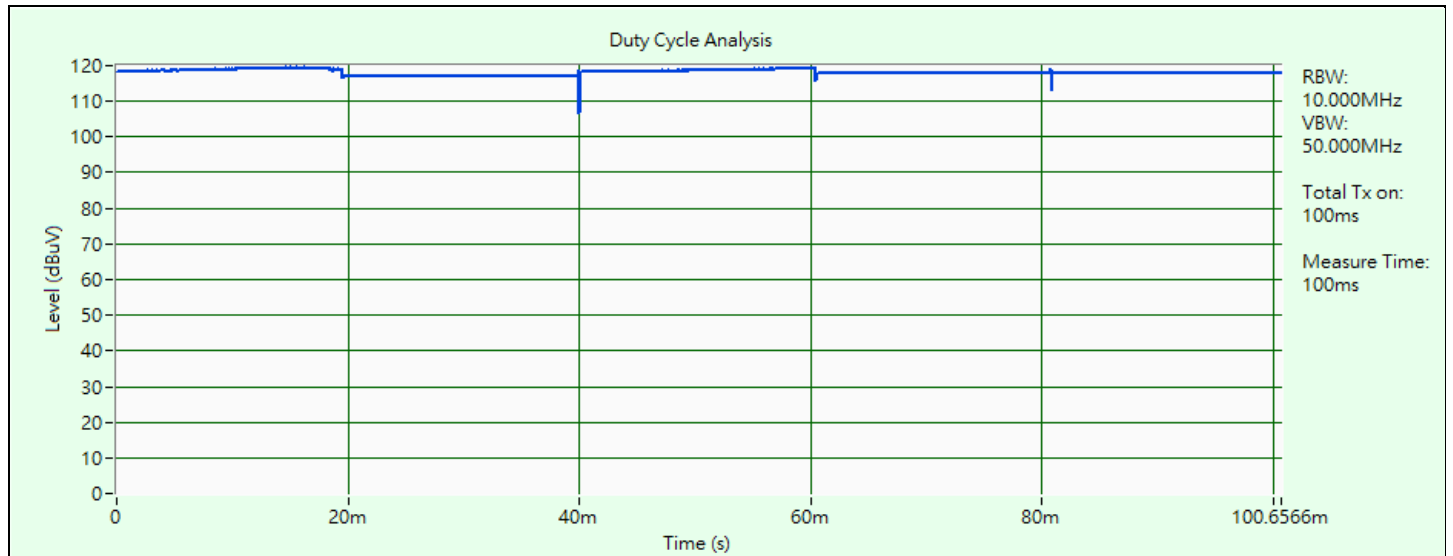

802.11b

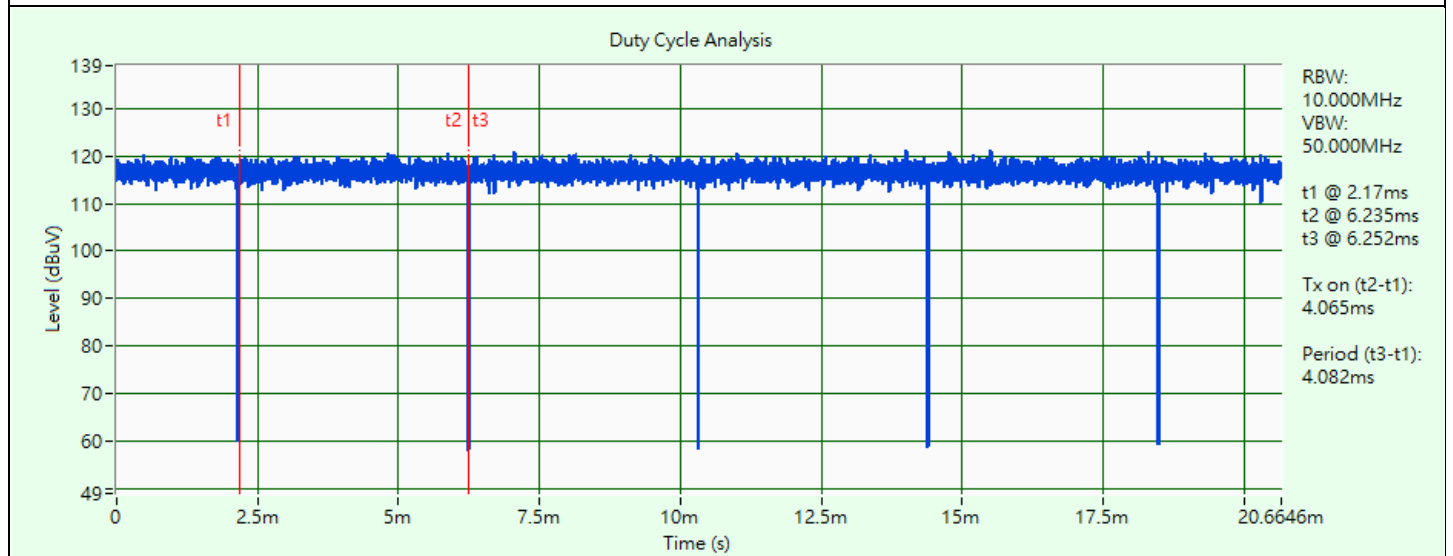

802.11g

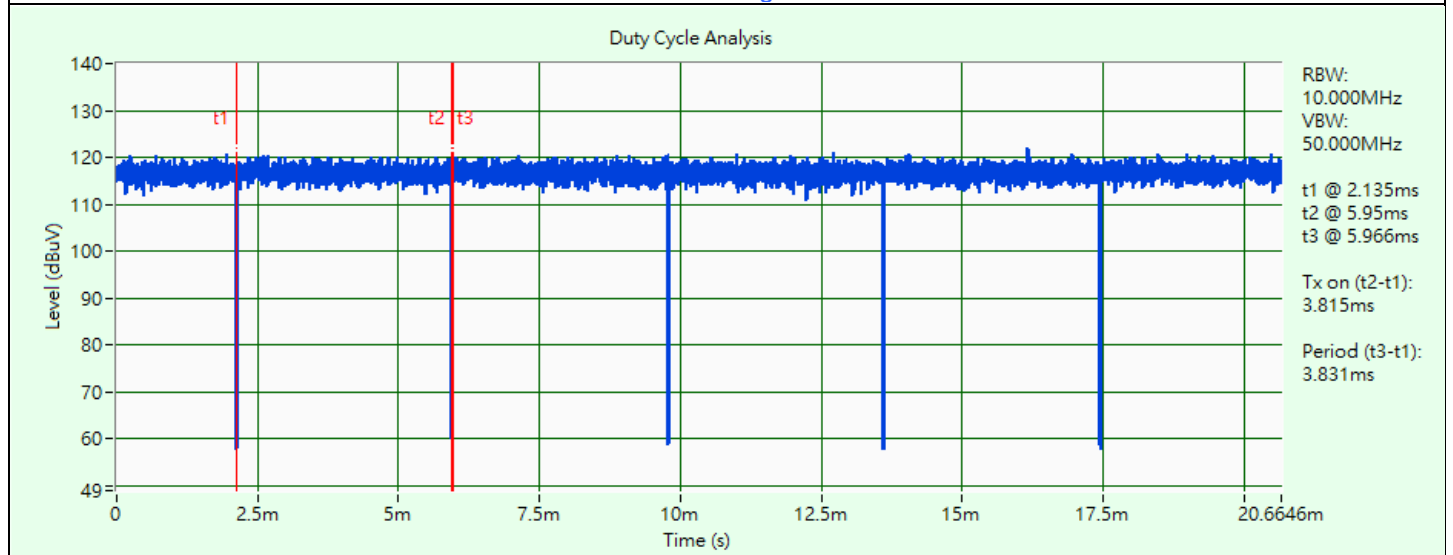


802.11ax (HE20)

3.6 Test Program Used and Operation Descriptions

Controlling software (ADB v1.0.41 v31.0.3-7562133) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

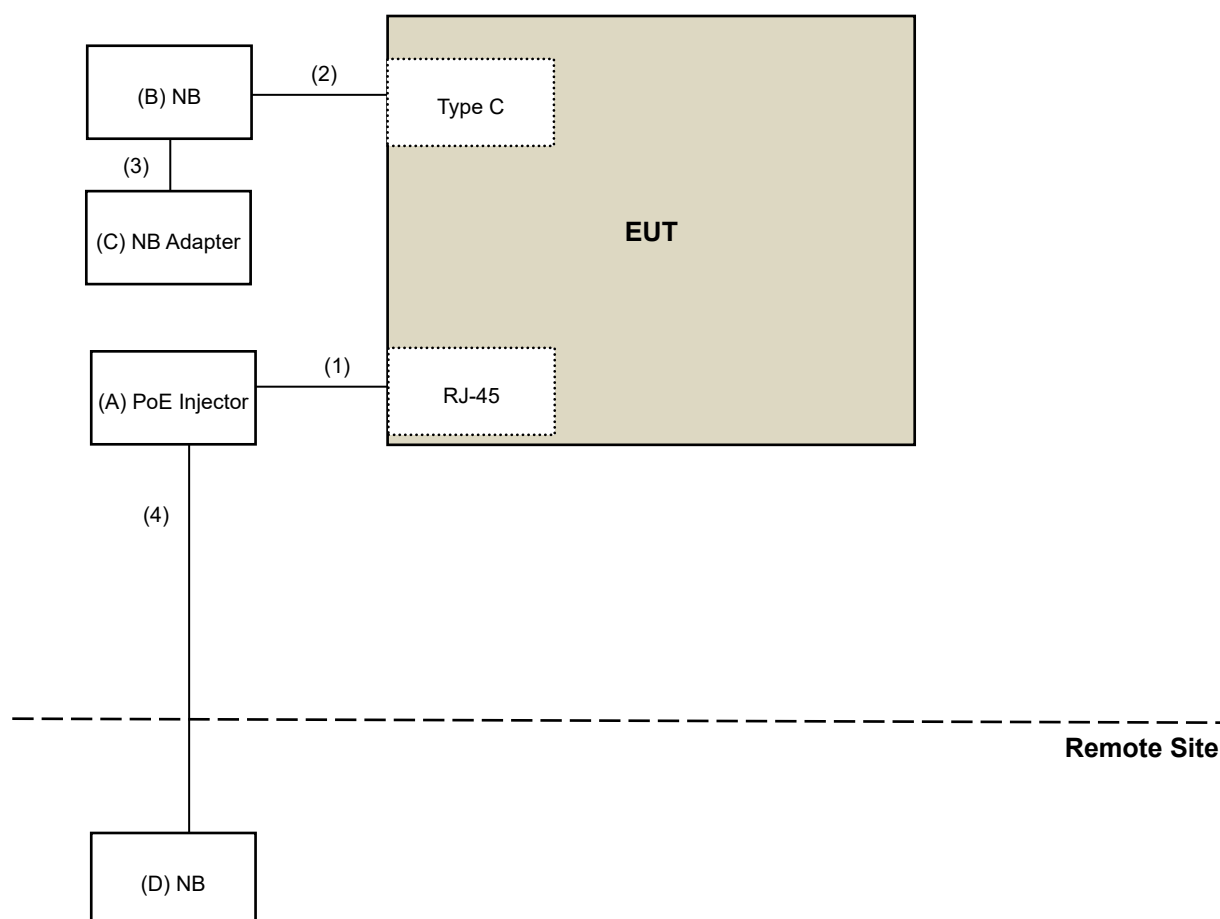

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	PoE Injector	PHIHONG	POE16R-1AFG6	N/A	N/A	Supplied by applicant
B	NB	Lenovo	IdeaPad 5 15ITL05	N/A	N/A	Provided by Lab
C	NB adapter	Lenovo	ADLX65LGC2A	N/A	N/A	Provided by Lab
D	NB	Dell	P90F	N/A	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	RJ45 Cable	1	3	Y	0	Supplied by applicant
2	USB A to C cable	1	1.8	Y	0	Provided by Lab
3	DC Cable	1	1.9	N	0	Provided by Lab
4	RJ45 Cable	1	10	N	0	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Woken	00800A1K01A-20	00800A1K01A-20-02	2025/5/23	2026/5/22
Pulse Power Sensor Anritsu	MA2411B	1339443	2025/5/28	2026/5/27
RF Power Meter Anritsu	ML2495A	1529002	2025/6/3	2026/6/2
Wideband Power Sensor Keysight	N1923A	MY58020002	2026/1/26	2027/1/25

Notes:

1. The test was performed in LK - Oven (Linkou).
2. Tested Date: 2026/4/2

4.2 Power Spectral Density

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Woken	00800A1K01A-20	00800A1K01A-20-02	2025/5/23	2026/5/22
PXA Signal Analyzer Keysight	N9030A	MY54490260	2025/7/24	2026/7/23
Signal Analyzer R&S	FSV40	101544	2025/7/1	2026/6/30
Software	BVADT_RF_Test_Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in LK - Oven (Linkou).
2. Tested Date: 2026/4/2

4.3 6 dB Bandwidth

Refer to section 4.2 to get the tested date and information of the instruments.

4.4 Conducted Out of Band Emissions

Refer to section 4.2 to get the tested date and information of the instruments.

4.5 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance LYNICS	0900510	E1-01-298	2026/1/15	2027/1/14
		E1-011484	2025/8/12	2026/8/11
DC LISN R&S	ESH3-Z6	100219	2025/7/10	2026/7/9
		844950/018	2025/7/10	2026/7/9
Diode Pulse Limiter Schwarzbeck	VTSD 9561 F-N	01622	2025/5/2	2026/5/1
EMI Test Receiver R&S	EPL 1000	101064	2025/4/17	2026/4/16
		101065	2025/4/22	2026/4/21
	ESR3	102412	2025/12/23	2026/12/22
High Pass Filter EMCI	150HPF-ME	114005	2025/5/2	2026/5/1
		114006	2025/5/2	2026/5/1
	150HPF-MF	113009	2025/5/2	2026/5/1
LISN R&S	ENV216	101195	2025/7/18	2026/7/17
		101196	2026/3/3	2027/3/2
		101197	2025/7/4	2026/7/3
LISN Schwarzbeck	NNLK 8121	8121-731	2025/6/10	2026/6/9
		8121-00759	2025/8/12	2026/8/11
		8121-808	2025/4/23	2026/4/22
	NNLK 8129	00624	2025/10/9	2026/10/8
		8129229	2025/10/14	2026/10/13
RF Coaxial Cable PEWC	5D-FB	Cable-CO10-01	2026/2/4	2027/2/3
Software BVADT	Cond_V7.4.1.0	N/A	N/A	N/A

Notes:

1. The test was performed in Linkou Conduction 10.
2. Tested Date: 2026/4/10

4.6 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Bi_Log Antenna Schwarzbeck	VULB 9168	137	2025/9/17	2026/9/16
Coupling / Decoupling Network Schwarzbeck	CDNE-M2	00097	2025/5/28	2026/5/27
	CDNE-M3	00091	2026/3/17	2027/3/16
MXE EMI Receiver Agilent	N9038A	MY51210114	2026/2/3	2027/2/2
Preamplifier Agilent	8447D	2944A11064	2026/2/13	2027/2/12
Radiating Loop Antenna TESEQ	RLA 6120-20	80002	2025/7/29	2026/7/28
RF Coaxial Cable Pacific	8D-FB	Cable-CH6-02	2025/6/24	2026/6/23
Signal Analyzer R&S	FSV40	101544	2025/7/1	2026/6/30
Software BVADT	Radiated_V7.7.1.1.1	N/A	N/A	N/A
Tower ADT	AT100	0306	N/A	N/A
Turn Table ADT	TT100	0306	N/A	N/A

Notes:

1. The test was performed in LK - 966 Chamber 6 (CH 6) (Linkou).
2. Tested Date: 2026/4/10

4.7 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Boresight antenna tower fixture BV	BAF-02	6	N/A	N/A
High Pass Filter Wainwright	WHK 3.1/18G-10SS	SN 8	2025/5/22	2026/5/21
Horn Antenna EMCO	3115	00028257	2025/11/9	2026/11/8
Horn Antenna ETS-Lindgren	3117-PA	00215857	2025/11/9	2026/11/8
Horn Antenna Schwarzbeck	BBHA 9170	212	2025/10/28	2026/10/27
		BBHA9170190	2025/11/9	2026/11/8
MXE EMI Receiver Agilent	N9038A	MY51210114	2026/2/3	2027/2/2
Notch Filter Micro-Tronics	BRC50703-01	010	2025/5/22	2026/5/21
	BRM17690	005	2025/5/22	2026/5/21
Preamplifier EMCI	EMC0126545	980076	2026/2/13	2027/2/12
	EMC184045B	980175	2025/8/23	2026/8/22
		980235	2026/2/13	2027/2/12
Preamplifier HP	8449B	3008A01201	2026/2/13	2027/2/12
RF Coaxial Cable EMCI	EMC104	190801	2025/7/4	2026/7/3
		190804	2025/7/4	2026/7/3
RF Coaxial Cable EMEC	EM102-KMKM-100	02	2025/7/4	2026/7/3
RF Coaxial Cable HUBER+SUHNER	SF-104	Cable-CH6-01	2025/7/4	2026/7/3
Signal Analyzer R&S	FSV40	101042	2025/9/19	2026/9/18
		101544	2025/7/1	2026/6/30
Software BVADT	Radiated_V7.7.1.1.1	N/A	N/A	N/A
Tower ADT	AT100	0306	N/A	N/A
Turn Table ADT	TT100	0306	N/A	N/A

Notes:

1. The test was performed in LK - 966 Chamber 6 (CH 6) (Linkou).
2. Tested Date: 2026/3/31 ~ 2026/4/10

5 Limits of Test Items

5.1 RF Output Power

For systems using digital modulation in the 2400-2483.5 MHz bands: 1 Watt (30 dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

5.2 Power Spectral Density

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz.

5.3 6 dB Bandwidth

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

5.4 Conducted Out of Band Emissions

Below 20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

5.5 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.6 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	$2400/F(\text{kHz})$	300
0.490 ~ 1.705	$24000/F(\text{kHz})$	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 \log$ Emission level (uV/m).

5.7 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3


Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup



6.1.2 Test Procedure

Peak Power:

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.


The power meter video bandwidth is greater than or equal to the DTS bandwidth and use a fast responding diode detector.

Average Power:

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

6.2 Power Spectral Density

6.2.1 Test Setup




6.2.2 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span > 1.5 times the DTS bandwidth.
- Set the RBW to: 3 kHz.
- Set the VBW $\geq 3 \times$ RBW.
- Detector = peak.
- Sweep time = No faster than coupled (auto) time.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

6.3 6 dB Bandwidth

6.3.1 Test Setup




6.3.2 Test Procedure

- Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Trace mode = max-hold.
- Sweep = No faster than coupled (auto) time.
- Allow the trace to stabilize.
- Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value.

6.4 Conducted Out of Band Emissions

6.4.1 Test Setup



6.4.2 Test Procedure

MEASUREMENT PROCEDURE REF


- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 times the DTS bandwidth.
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Sweep time = No faster than coupled (auto) time.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

MEASUREMENT PROCEDURE OOBE

- Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution.
- Set RBW = 100 kHz.
- Set VBW ≥ 300 kHz.
- Detector = peak.
- Sweep = No faster than coupled (auto) time.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

6.5 AC Power Conducted Emissions

6.5.1 Test Setup

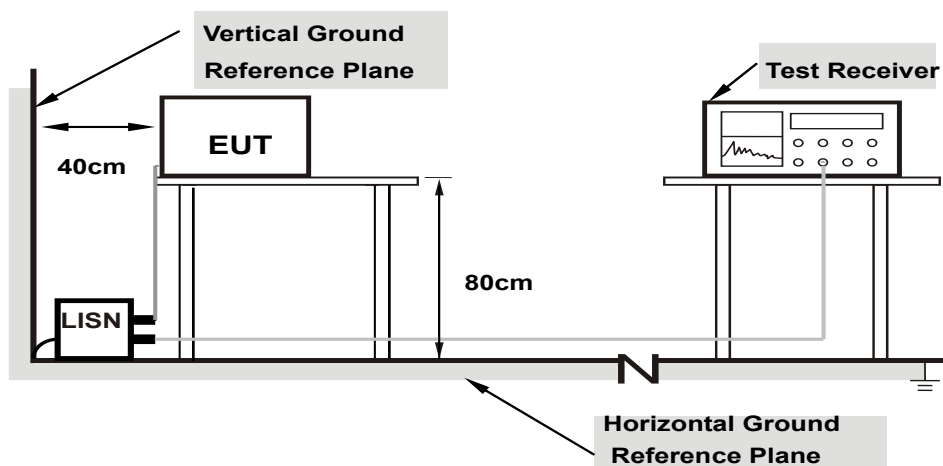

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.5.2 Test Procedure


- Exploratory ac power-line conducted emission measurements: The EUT shall be operated on the mid channel and in the mode with highest output power unless the fundamental operates in the AC power-line emission test range then the EUT shall be operated in the range of typical modes of operation.
- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.6 Unwanted Emissions below 1 GHz

6.6.1 Test Setup

For Radiated emission below 30 MHz

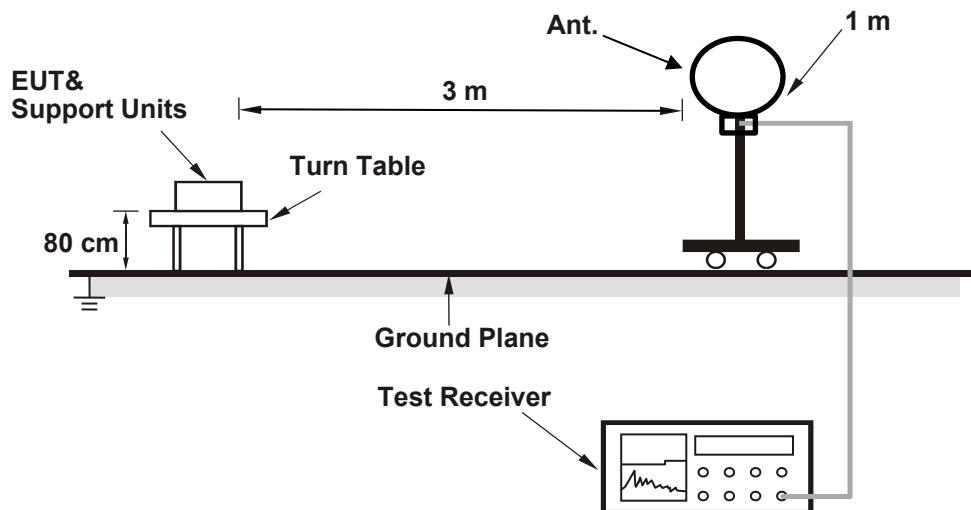

For Radiated emission above 30 MHz

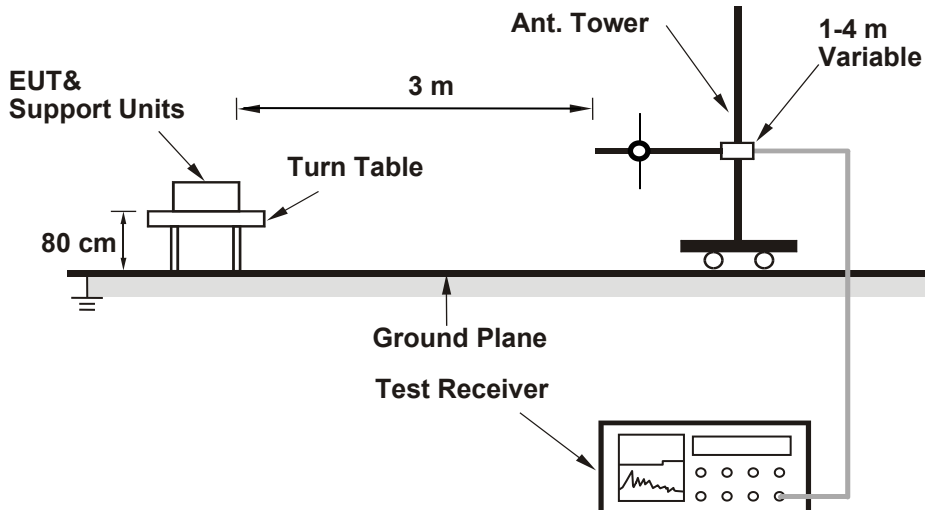

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.6.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode (however, peak detector measurements may be used to determine compliance with QP requirements), except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-peak(QP) detect function, Average(AV) detect function, Peak(PK) detect function and specified bandwidth with maximum hold mode when the test frequencies less than or equal to 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz (however, peak detector measurements may be used to determine compliance with QP requirements).
2. All modes of operation were investigated and the worst-case emissions are reported.

6.7 Unwanted Emissions above 1 GHz

6.7.1 Test Setup

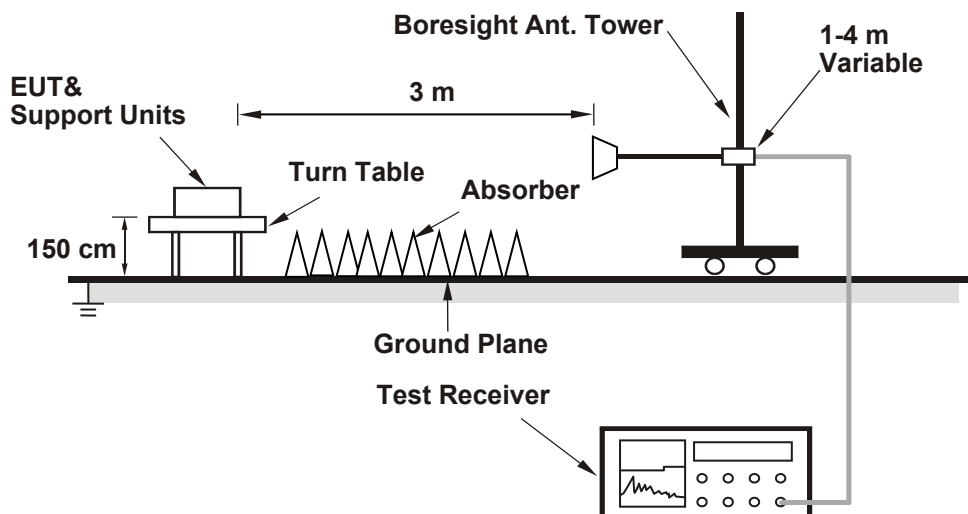

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Ian Chang
--------------	----------------	---------------------------	--------------	------------	-----------

For Peak Power

802.11b

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	19.29	17.81	145.313	21.62	30	Pass
6	2437	19.61	18.21	157.633	21.98	30	Pass
11	2462	19.55	18.11	154.871	21.90	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 4.5 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11g

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	23.24	22.16	375.3	25.74	30	Pass
6	2437	23.85	22.90	437.645	26.41	30	Pass
11	2462	23.67	22.45	408.601	26.11	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 4.5 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11n (HT20)

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	23.38	21.98	375.532	25.75	30	Pass
6	2437	24.20	22.82	454.452	26.57	30	Pass
11	2462	23.92	22.50	424.432	26.28	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 4.5 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	23.53	22.09	387.232	25.88	30	Pass
6	2437	24.33	22.93	467.355	26.70	30	Pass
11	2462	24.04	22.61	435.902	26.39	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 4.5 dBi <= 6 dBi, so the output power limit shall not be reduced.

For Average Power

802.11b

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Average Power (mW)	Total Average Power (dBm)
		Chain 0	Chain 1		
1	2412	16.70	15.17	79.659	19.01
6	2437	17.03	15.55	86.358	19.36
11	2462	16.96	15.46	84.815	19.28

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Average Power (mW)	Total Average Power (dBm)
		Chain 0	Chain 1		
1	2412	15.13	13.85	56.85	17.55
6	2437	16.60	15.45	80.784	19.07
11	2462	16.41	15.58	79.893	19.03

802.11n (HT20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Average Power (mW)	Total Average Power (dBm)
		Chain 0	Chain 1		
1	2412	14.59	13.31	50.203	17.01
6	2437	16.05	14.73	69.988	18.45
11	2462	15.68	14.36	64.273	18.08

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Average Power (mW)	Total Average Power (dBm)
		Chain 0	Chain 1		
1	2412	14.72	13.46	51.83	17.15
6	2437	16.18	14.86	72.115	18.58
11	2462	15.80	14.51	66.268	18.21

7.2 Power Spectral Density

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Ian Chang
--------------	----------------	---------------------------	--------------	------------	-----------

802.11b

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
		Chain 0	Chain 1			
1	2412	-7.27	-8.42	-4.80	6.49	Pass
6	2437	-7.69	-8.57	-5.10	6.49	Pass
11	2462	-7.19	-8.84	-4.93	6.49	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. The directional gain is 7.51 dBi > 6 dBi, so the power density limit shall be reduced to $8-(7.51-6) = 6.49$ dBm/3kHz.

802.11g

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
		Chain 0	Chain 1			
1	2412	-11.26	-11.64	-8.44	6.49	Pass
6	2437	-9.74	-11.60	-7.56	6.49	Pass
11	2462	-10.23	-10.46	-7.33	6.49	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. The directional gain is 7.51 dBi > 6 dBi, so the power density limit shall be reduced to $8-(7.51-6) = 6.49$ dBm/3kHz.


802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
		Chain 0	Chain 1			
1	2412	-12.13	-13.43	-9.72	6.49	Pass
6	2437	-11.41	-12.76	-9.02	6.49	Pass
11	2462	-11.07	-12.38	-8.67	6.49	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. The directional gain is 7.51 dBi > 6 dBi, so the power density limit shall be reduced to $8-(7.51-6) = 6.49$ dBm/3kHz.

Spectrum Plot of Maximum Value

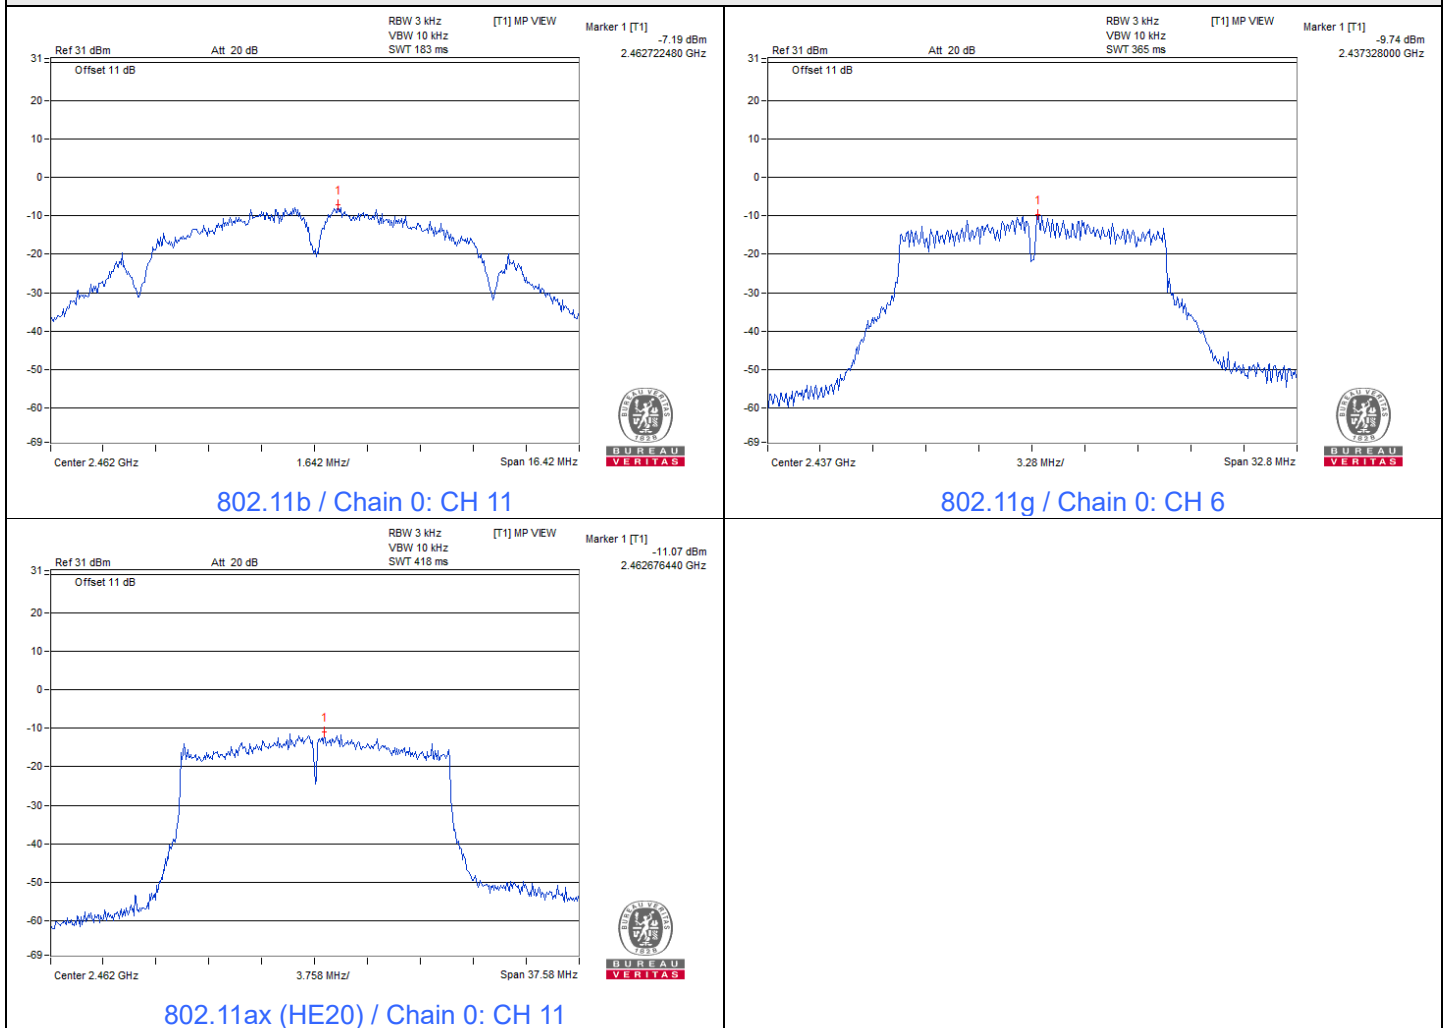

7.3 6 dB Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Ian Chang
--------------	----------------	---------------------------	--------------	------------	-----------

802.11b

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	2412	8.21	8.21	0.5	Pass
6	2437	8.21	8.20	0.5	Pass
11	2462	8.21	8.20	0.5	Pass




802.11g

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	2412	16.32	16.44	0.5	Pass
6	2437	16.40	16.45	0.5	Pass
11	2462	16.36	16.46	0.5	Pass

802.11ax (HE20)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	2412	17.95	16.29	0.5	Pass
6	2437	18.77	18.67	0.5	Pass
11	2462	18.79	18.71	0.5	Pass


Spectrum Plot of Minimum Value

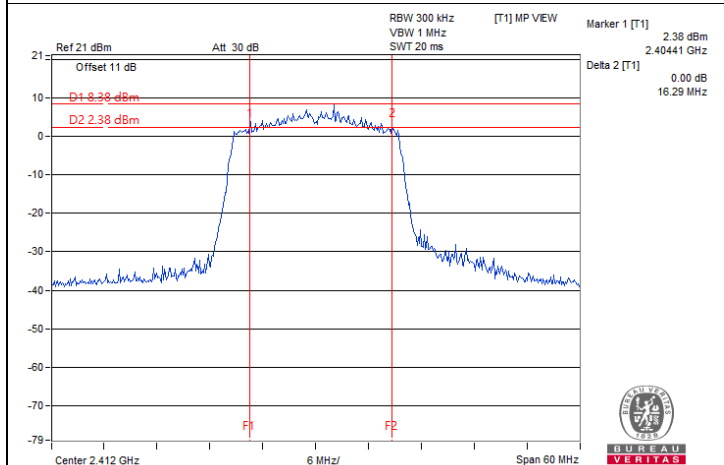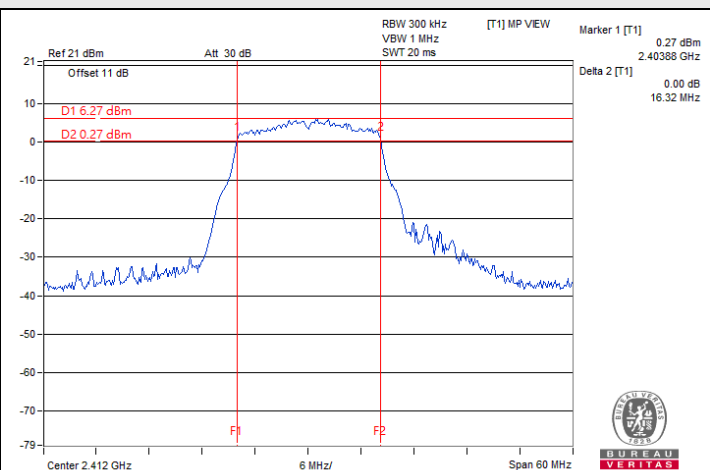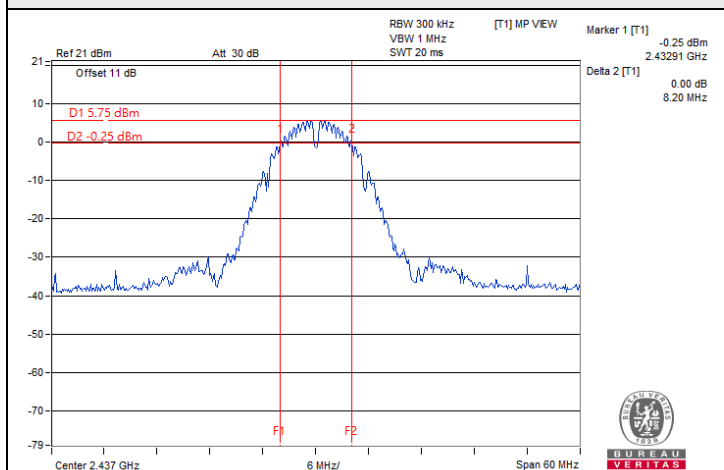

7.4 Conducted Out of Band Emissions









Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Ian Chang
--------------	----------------	---------------------------	--------------	------------	-----------

802.11b

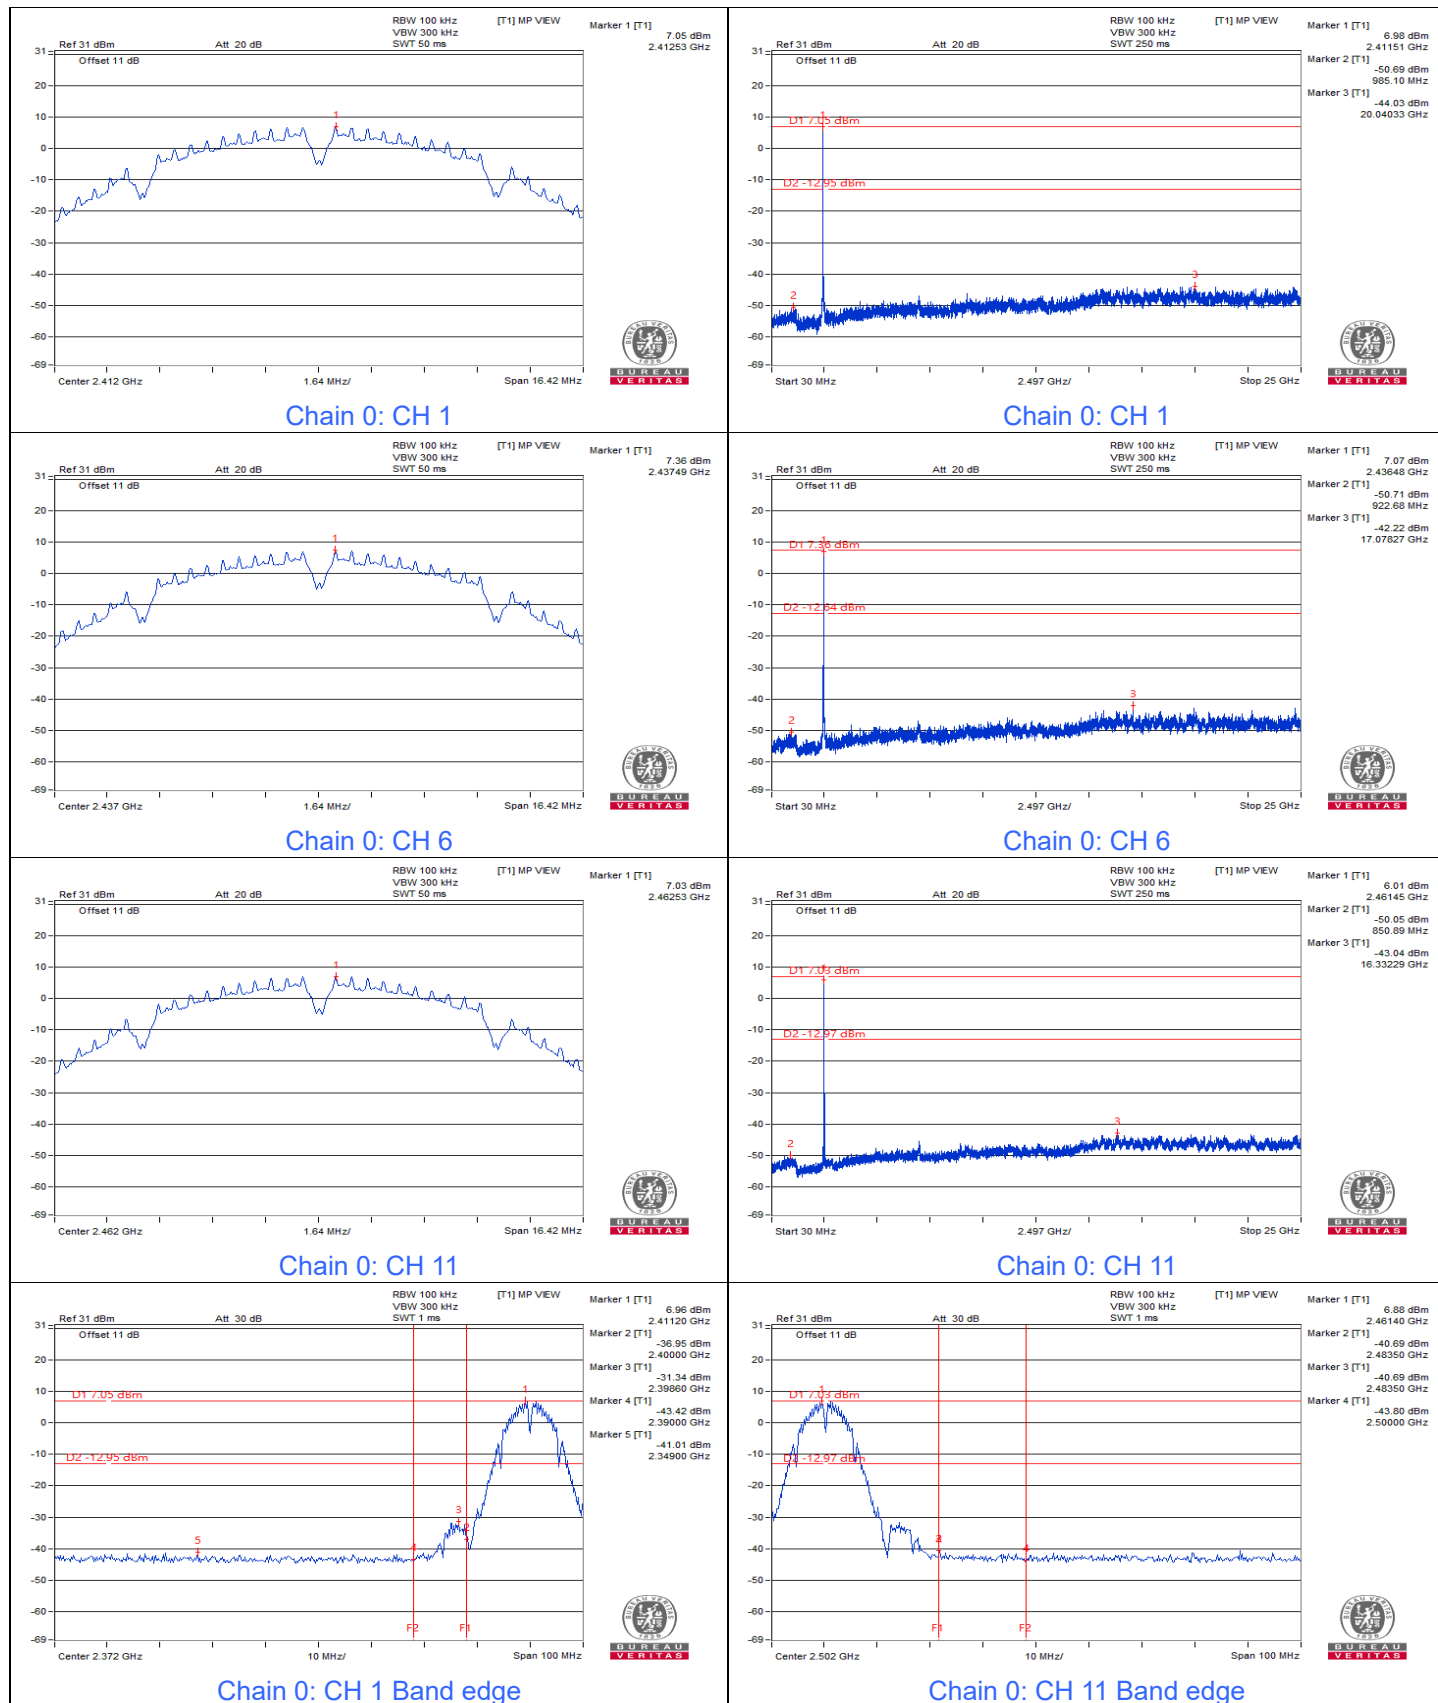












BUREAU
VERITAS

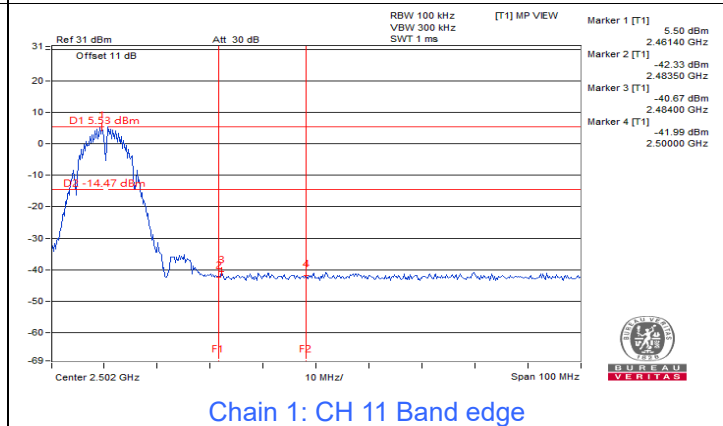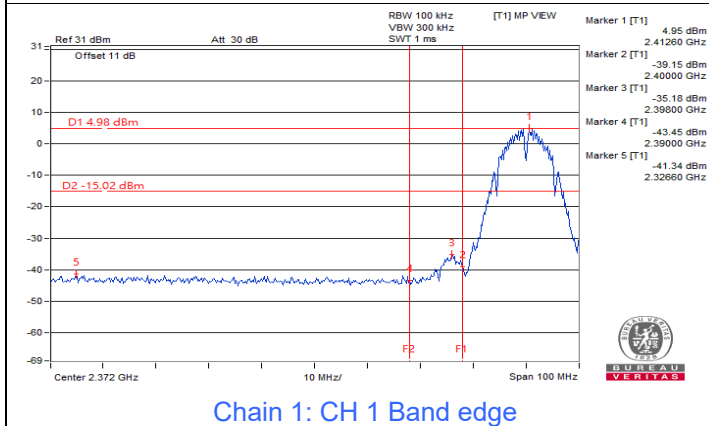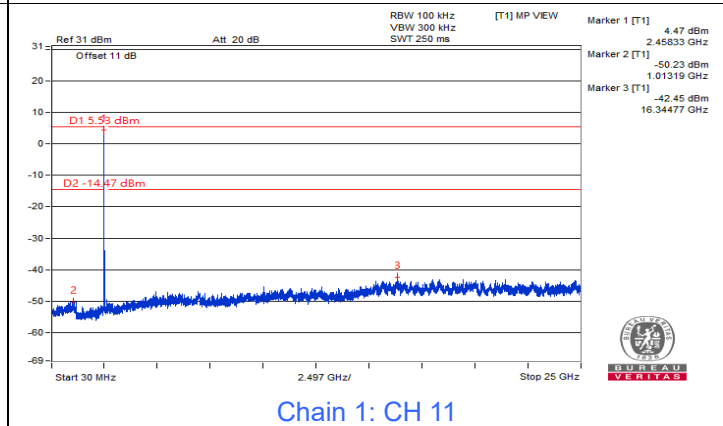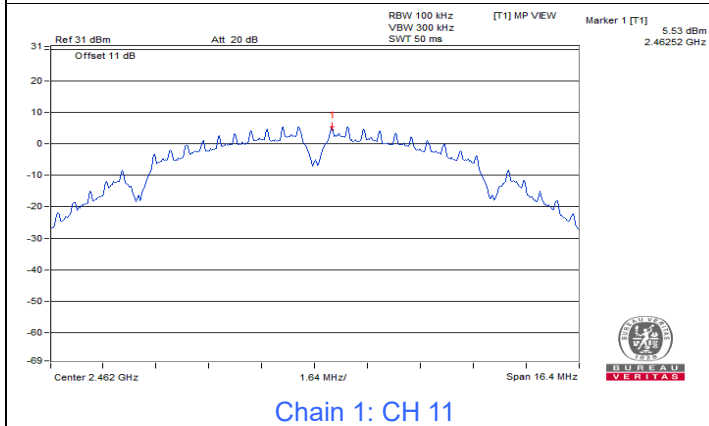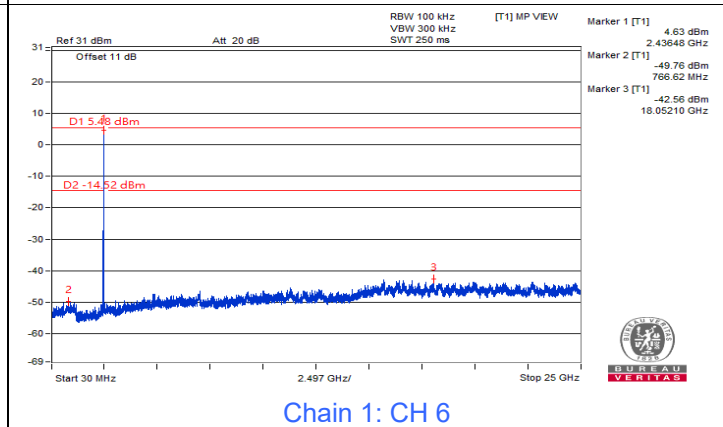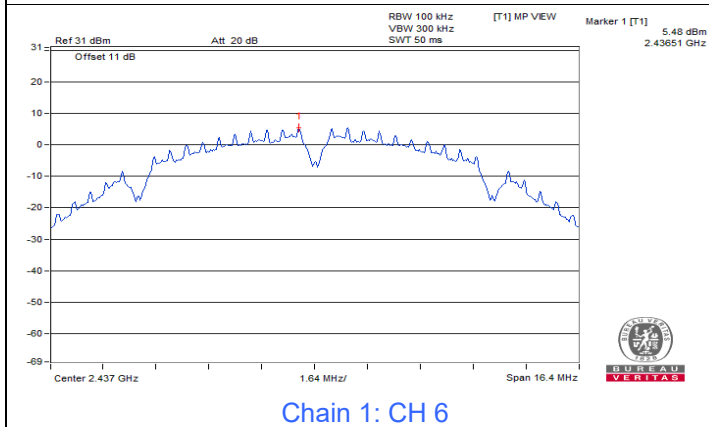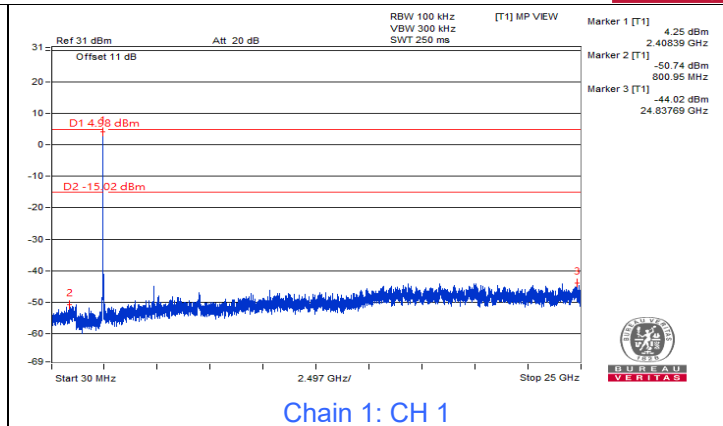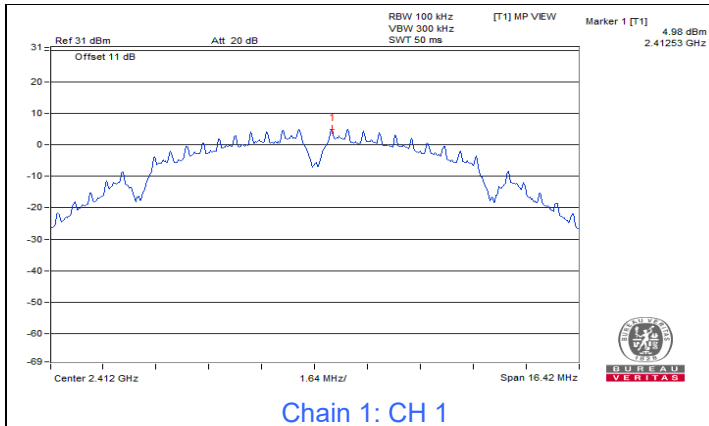










802.11g

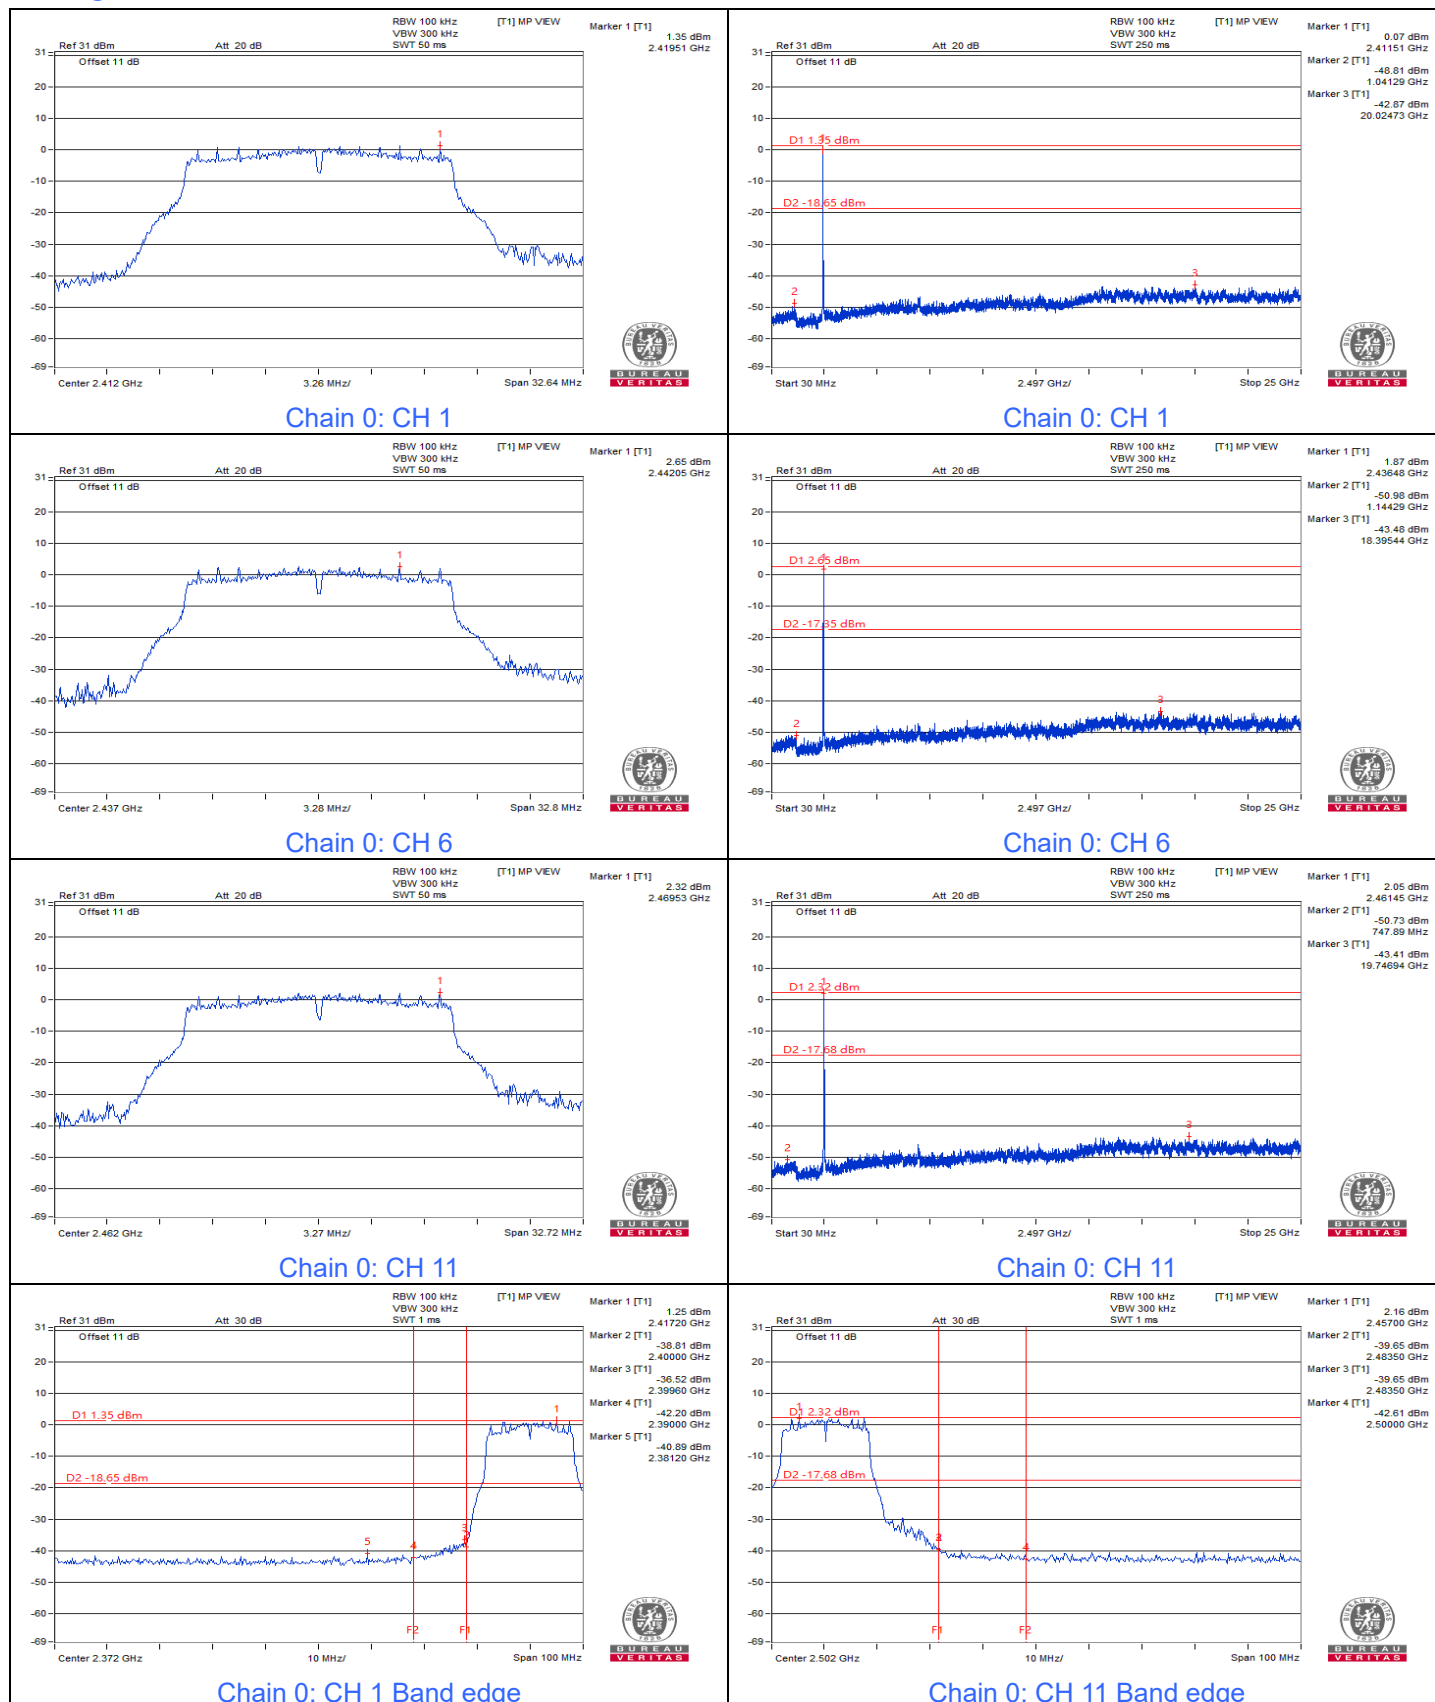

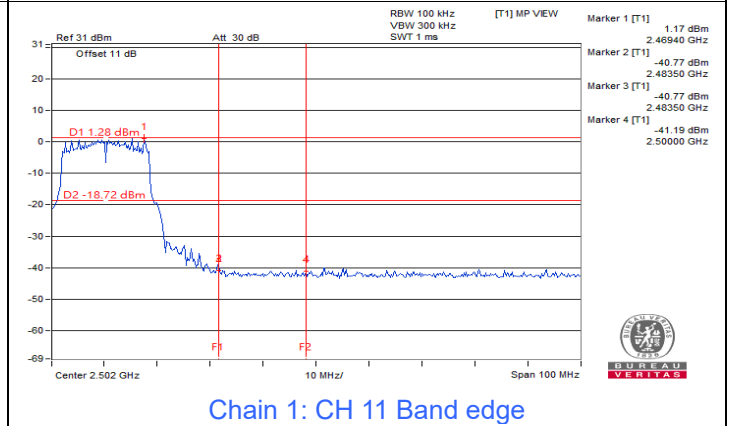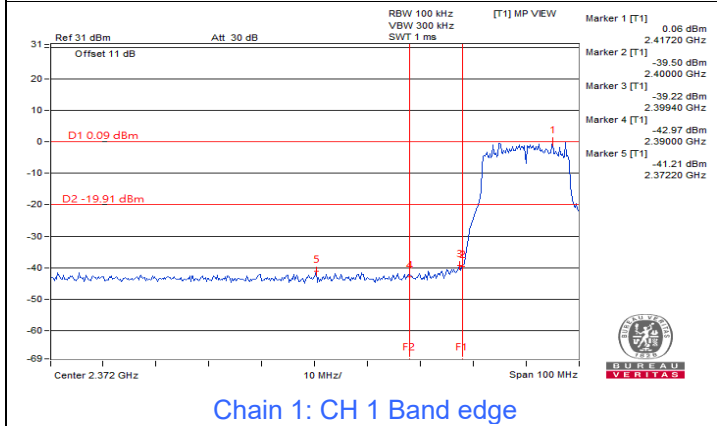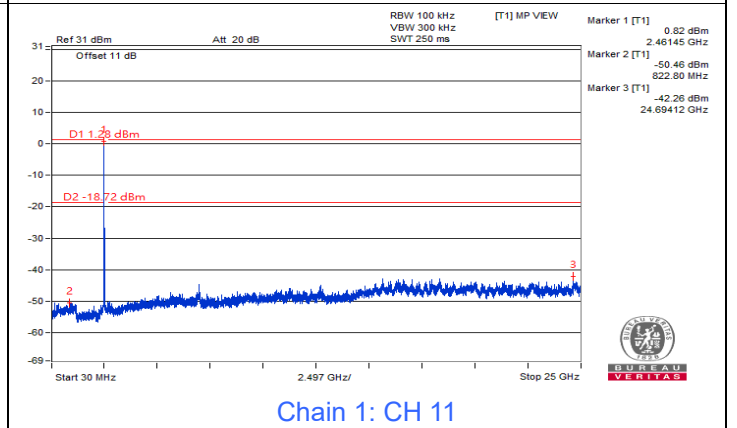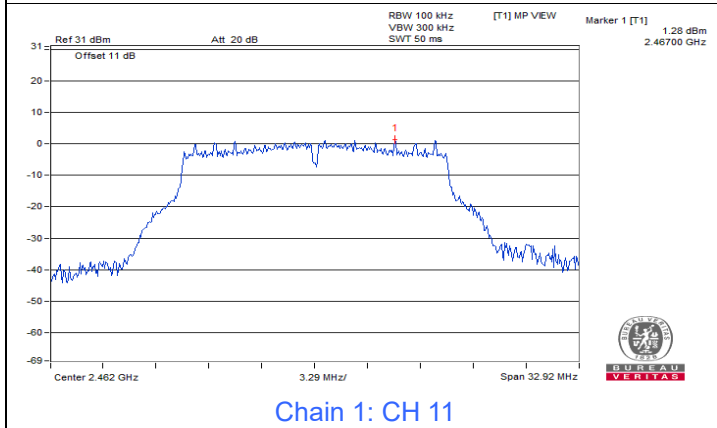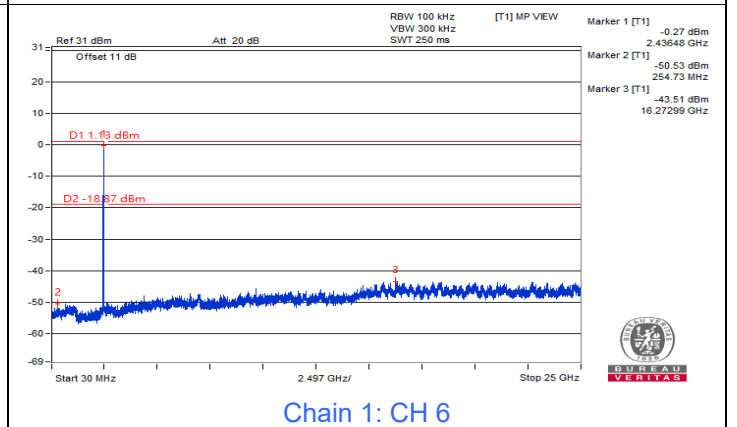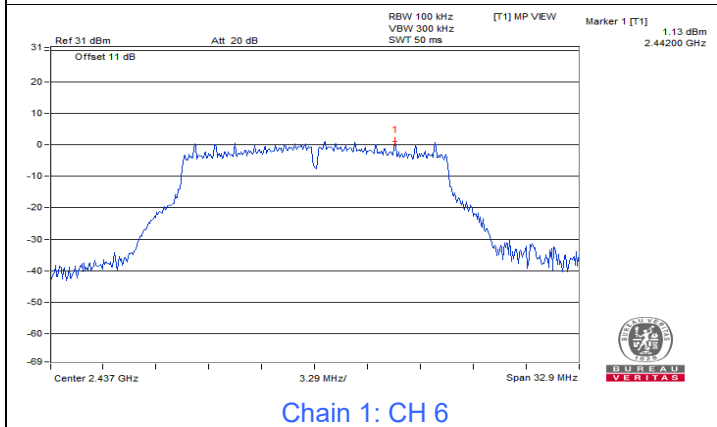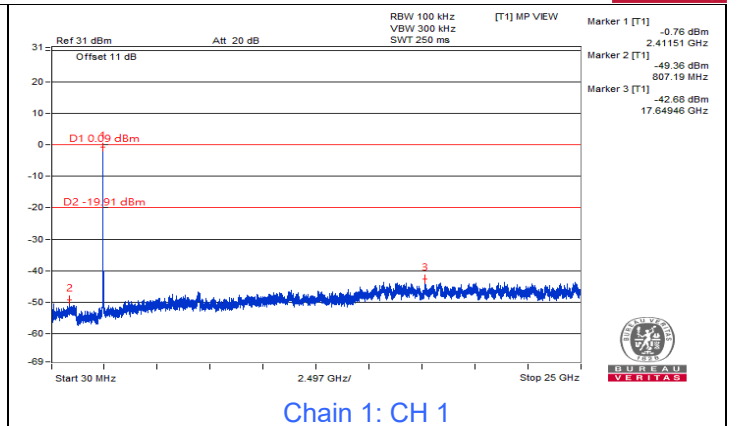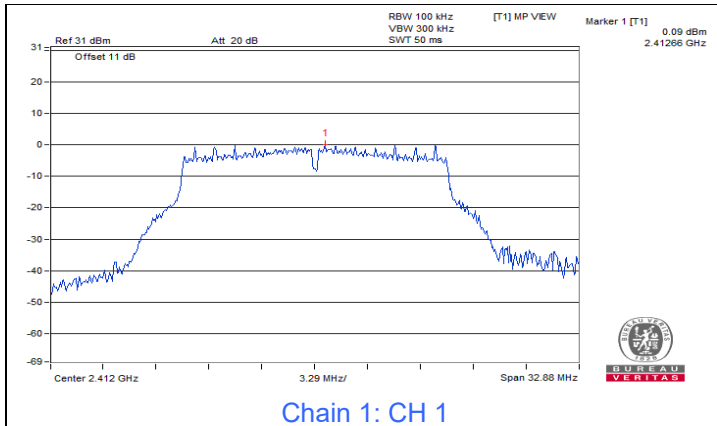

802.11ax (HE20)

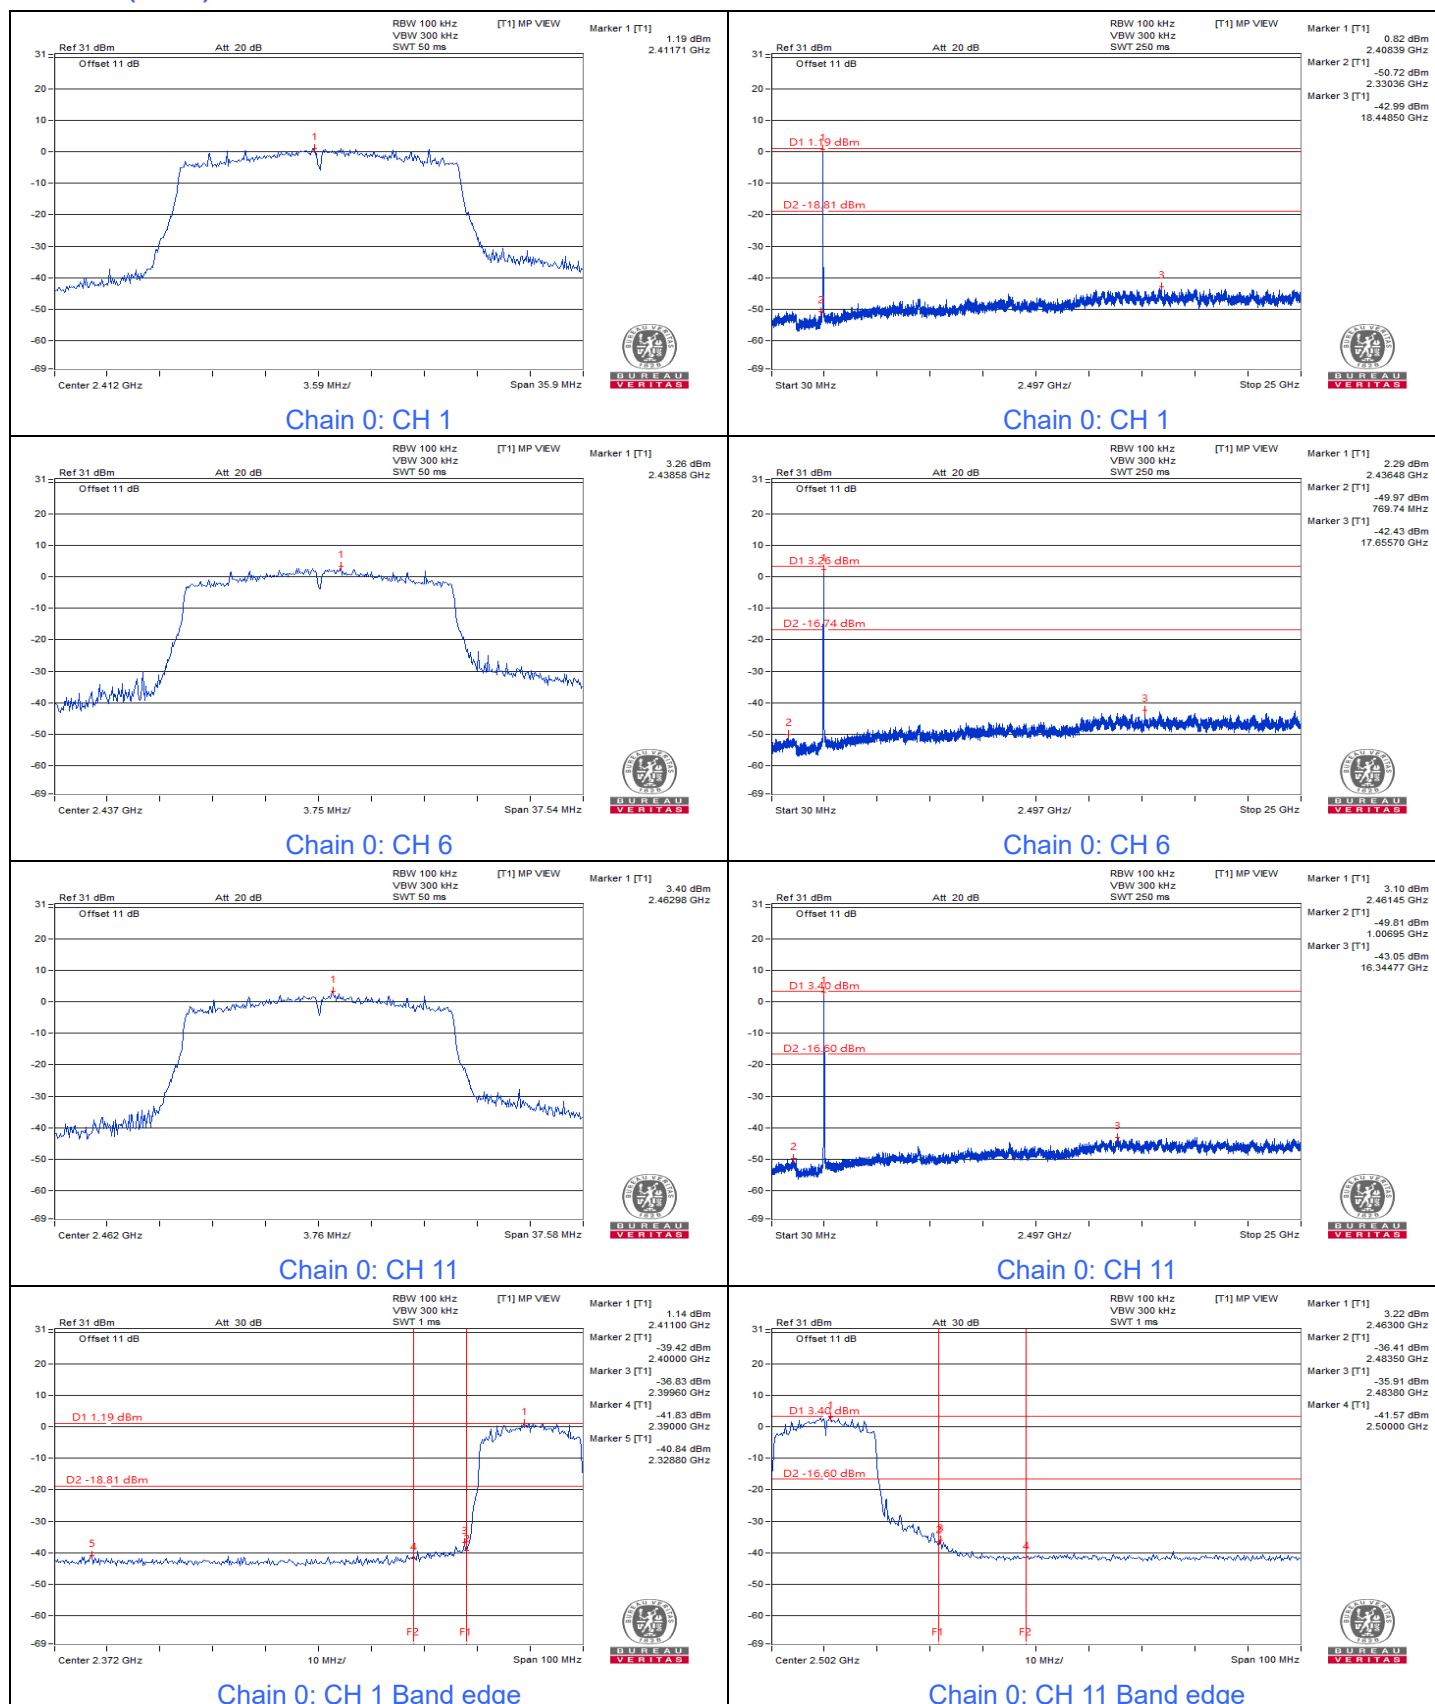

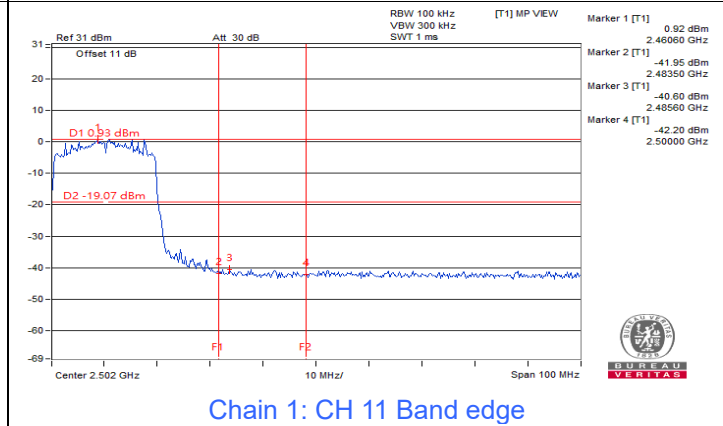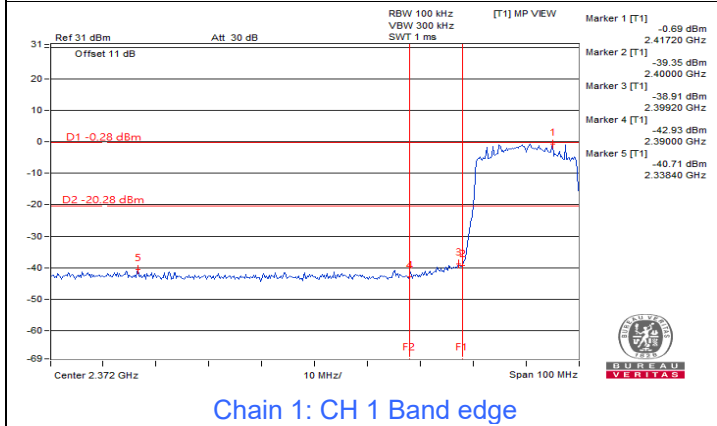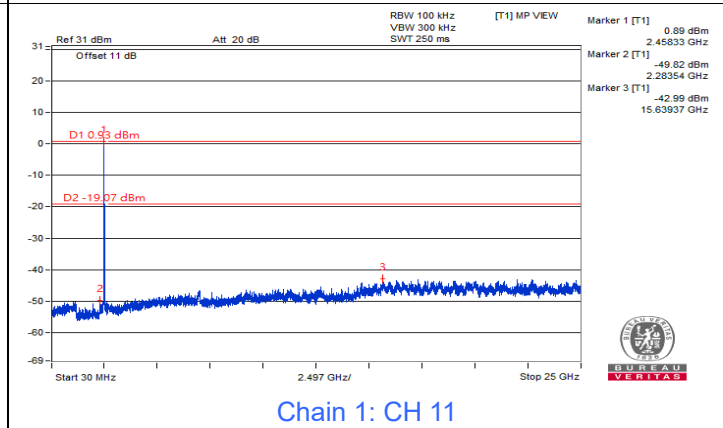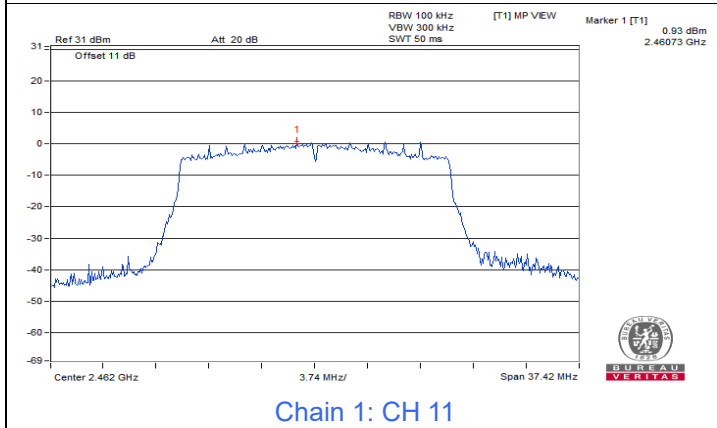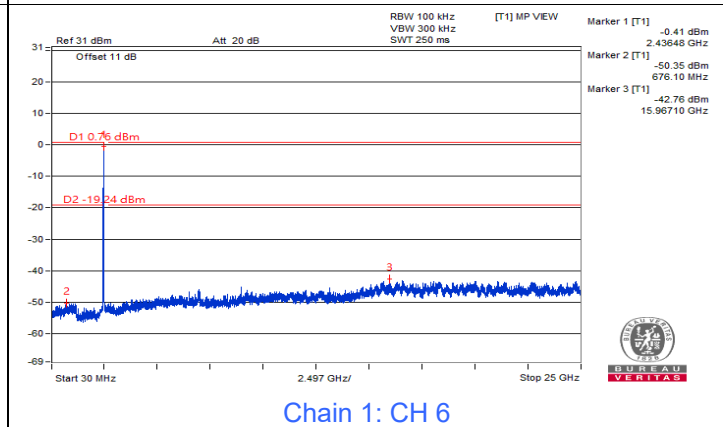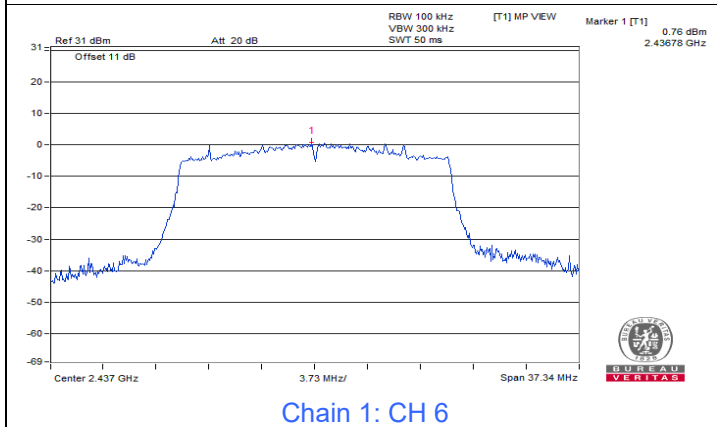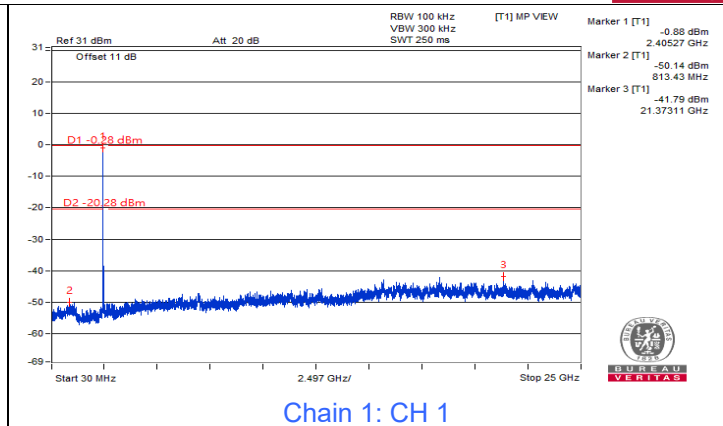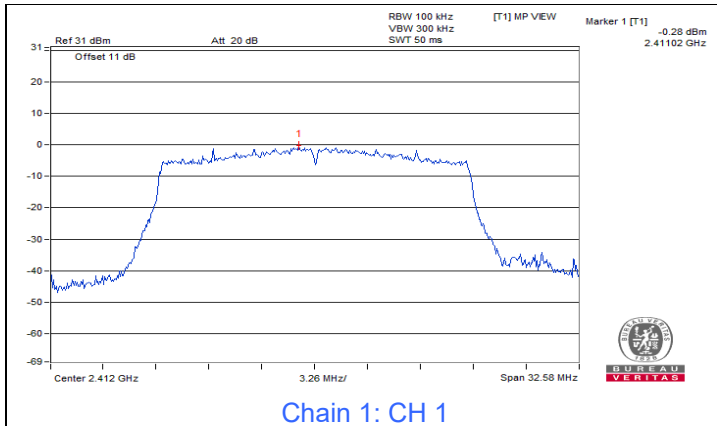


7.5 AC Power Conducted Emissions

RF Mode	802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Jed Wu		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16093	9.85	46.59	31.40	56.44	41.25	65.42	55.42	-8.98	-14.17
2	0.25800	9.85	37.42	30.75	47.27	40.60	61.50	51.50	-14.23	-10.90
3	0.41855	9.88	34.35	24.23	44.23	34.11	57.48	47.48	-13.25	-13.37
4	0.98985	9.94	33.31	24.78	43.25	34.72	56.00	46.00	-12.75	-11.28
5	10.11650	10.25	35.30	27.89	45.55	38.14	60.00	50.00	-14.45	-11.86
6	20.46875	10.33	27.32	21.79	37.65	32.12	60.00	50.00	-22.35	-17.88

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

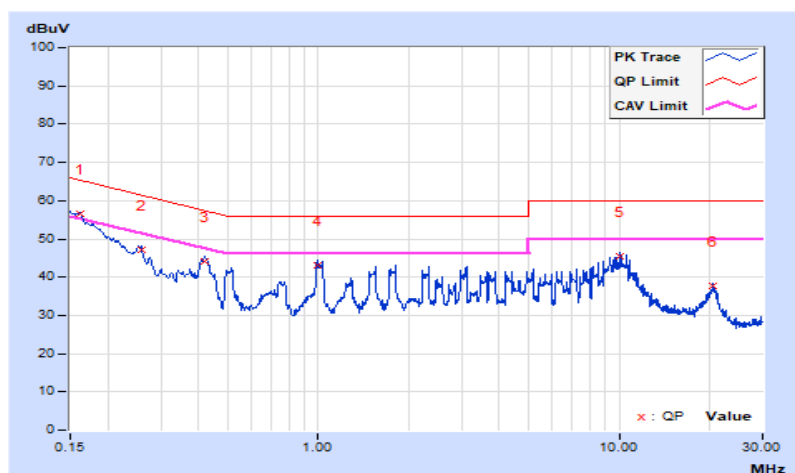


RF Mode	802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Jed Wu		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15225	9.79	47.60	31.92	57.39	41.71	65.88	55.88	-8.49	-14.17
2	0.24675	9.80	38.77	31.33	48.57	41.13	61.87	51.87	-13.30	-10.74
3	0.41965	9.82	32.86	25.84	42.68	35.66	57.46	47.46	-14.78	-11.80
4	1.03325	9.88	33.61	24.82	43.49	34.70	56.00	46.00	-12.51	-11.30
5	10.11650	10.28	35.15	27.83	45.43	38.11	60.00	50.00	-14.57	-11.89
6	20.44175	10.60	28.08	23.25	38.68	33.85	60.00	50.00	-21.32	-16.15

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

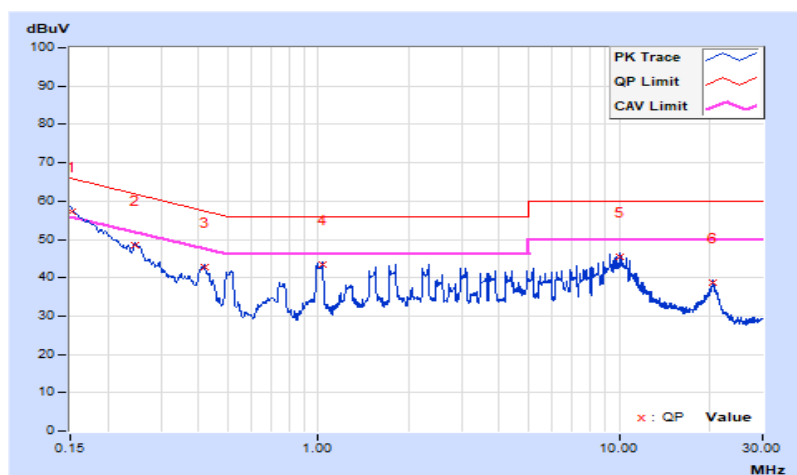


7.6 Unwanted Emissions below 1 GHz

RF Mode	802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.8 °C, 74.8% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	34.85	24.0 QP	40.0	-16.0	1.89 H	281	34.0	-10.0
2	145.25	28.9 QP	43.5	-14.6	1.24 H	164	37.1	-8.2
3	474.98	42.5 QP	46.0	-3.5	1.73 H	118	44.1	-1.6
4	874.95	41.4 QP	46.0	-4.6	1.14 H	202	34.8	6.6
5	925.01	43.2 QP	46.0	-2.8	1.96 H	198	35.1	8.1
6	974.97	42.8 QP	54.0	-11.2	1.58 H	192	33.9	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

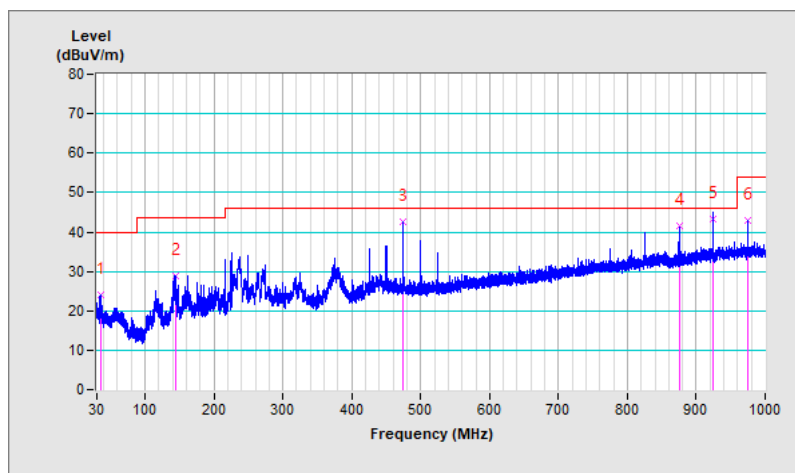


RF Mode	802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24.8 °C, 74.8% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.78	33.9 QP	40.0	-6.1	1.05 V	162	44.5	-10.6
2	102.66	35.5 QP	43.5	-8.0	1.34 V	2	48.2	-12.7
3	180.85	38.2 QP	43.5	-5.3	1.47 V	2	47.3	-9.1
4	474.98	36.9 QP	46.0	-9.1	1.28 V	243	38.5	-1.6
5	874.95	39.5 QP	46.0	-6.5	1.83 V	180	32.9	6.6
6	925.01	41.7 QP	46.0	-4.3	1.94 V	169	33.6	8.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

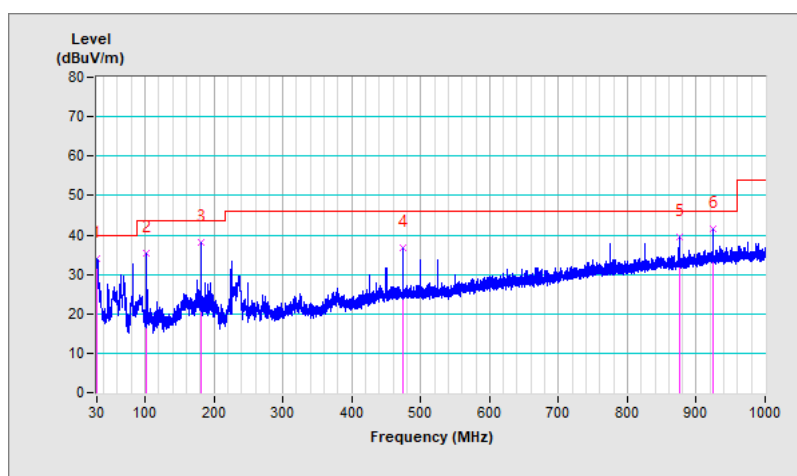

7.7 Unwanted Emissions above 1 GHz

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25.2 °C, 74.3% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2377.30	70.0 PK	74.0	-4.0	1.29 H	180	70.3	-0.3
2	2390.00	47.7 AV	54.0	-6.3	1.29 H	180	48.0	-0.3
3	*2412.00	107.7 PK			1.29 H	180	108.0	-0.3
4	*2412.00	104.7 AV			1.29 H	180	105.0	-0.3
5	4824.00	52.0 PK	74.0	-22.0	1.00 H	158	44.4	7.6
6	4824.00	47.1 AV	54.0	-6.9	1.00 H	158	39.5	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2377.30	65.4 PK	74.0	-8.6	1.78 V	147	65.7	-0.3
2	2390.00	44.4 AV	54.0	-9.6	1.78 V	147	44.7	-0.3
3	*2412.00	104.8 PK			1.78 V	147	105.1	-0.3
4	*2412.00	102.6 AV			1.78 V	147	102.9	-0.3
5	4824.00	50.5 PK	74.0	-23.5	1.58 V	119	42.9	7.6
6	4824.00	44.4 AV	54.0	-9.6	1.58 V	119	36.8	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25.2 °C, 74.3% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	110.2 PK			3.69 H	199	110.3	-0.1
2	*2437.00	106.9 AV			3.69 H	199	107.0	-0.1
3	4874.00	54.5 PK	74.0	-19.5	3.40 H	177	46.7	7.8
4	4874.00	49.6 AV	54.0	-4.4	3.40 H	177	41.8	7.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	107.3 PK			4.00 V	166	107.4	-0.1
2	*2437.00	105.1 AV			4.00 V	166	105.2	-0.1
3	4874.00	53.0 PK	74.0	-21.0	3.80 V	138	45.2	7.8
4	4874.00	46.9 AV	54.0	-7.1	3.80 V	138	39.1	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25.2 °C, 74.3% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.0 PK			1.64 H	170	109.0	0.0
2	*2462.00	106.0 AV			1.64 H	170	106.0	0.0
3	2483.50	51.5 AV	54.0	-2.5	1.64 H	170	51.3	0.2
4	2489.70	69.9 PK	74.0	-4.1	1.64 H	170	69.6	0.3
5	4924.00	53.3 PK	74.0	-20.7	1.35 H	148	45.4	7.9
6	4924.00	48.4 AV	54.0	-5.6	1.35 H	148	40.5	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.1 PK			2.13 V	137	106.1	0.0
2	*2462.00	103.9 AV			2.13 V	137	103.9	0.0
3	2483.50	49.6 AV	54.0	-4.4	2.13 V	137	49.4	0.2
4	2489.70	68.8 PK	74.0	-5.2	2.13 V	137	68.5	0.3
5	4924.00	51.8 PK	74.0	-22.2	1.93 V	109	43.9	7.9
6	4924.00	45.7 AV	54.0	-8.3	1.93 V	109	37.8	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25.2 °C, 74.3% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.0 PK	74.0	-3.0	1.26 H	172	71.3	-0.3
2	2390.00	52.8 AV	54.0	-1.2	1.26 H	172	53.1	-0.3
3	*2412.00	110.3 PK			1.26 H	172	110.6	-0.3
4	*2412.00	102.4 AV			1.26 H	172	102.7	-0.3
5	4824.00	54.6 PK	74.0	-19.4	1.03 H	150	47.0	7.6
6	4824.00	44.8 AV	54.0	-9.2	1.03 H	150	37.2	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.9 PK	74.0	-5.1	1.75 V	139	69.2	-0.3
2	2390.00	51.1 AV	54.0	-2.9	1.75 V	139	51.4	-0.3
3	*2412.00	107.4 PK			1.75 V	139	107.7	-0.3
4	*2412.00	100.3 AV			1.75 V	139	100.6	-0.3
5	4824.00	53.1 PK	74.0	-20.9	1.53 V	111	45.5	7.6
6	4824.00	42.1 AV	54.0	-11.9	1.53 V	111	34.5	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25.2 °C, 74.3% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	110.9 PK			2.13 H	176	111.0	-0.1
2	*2437.00	103.0 AV			2.13 H	176	103.1	-0.1
3	4874.00	55.2 PK	74.0	-18.8	1.90 H	154	47.4	7.8
4	4874.00	45.4 AV	54.0	-8.6	1.90 H	154	37.6	7.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	108.0 PK			2.62 V	143	108.1	-0.1
2	*2437.00	100.9 AV			2.62 V	143	101.0	-0.1
3	4874.00	53.7 PK	74.0	-20.3	2.40 V	115	45.9	7.8
4	4874.00	42.7 AV	54.0	-11.3	2.40 V	115	34.9	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25.2 °C, 74.3% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.5 PK			1.23 H	175	110.5	0.0
2	*2462.00	102.6 AV			1.23 H	175	102.6	0.0
3	2483.50	72.4 PK	74.0	-1.6	1.23 H	175	72.2	0.2
4	2483.50	53.5 AV	54.0	-0.5	1.23 H	175	53.3	0.2
5	4924.00	54.8 PK	74.0	-19.2	1.00 H	153	46.9	7.9
6	4924.00	45.0 AV	54.0	-9.0	1.00 H	153	37.1	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.6 PK			1.72 V	142	107.6	0.0
2	*2462.00	100.5 AV			1.72 V	142	100.5	0.0
3	2483.50	66.5 PK	74.0	-7.5	1.72 V	142	66.3	0.2
4	2483.50	50.7 AV	54.0	-3.3	1.72 V	142	50.5	0.2
5	4924.00	53.3 PK	74.0	-20.7	1.50 V	114	45.4	7.9
6	4924.00	42.3 AV	54.0	-11.7	1.50 V	114	34.4	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25.2 °C, 74.3% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.6 PK	74.0	-3.4	1.48 H	169	70.9	-0.3
2	2390.00	53.1 AV	54.0	-0.9	1.48 H	169	53.4	-0.3
3	*2412.00	111.8 PK			1.48 H	169	112.1	-0.3
4	*2412.00	100.1 AV			1.48 H	169	100.4	-0.3
5	4824.00	56.1 PK	74.0	-17.9	1.25 H	147	48.5	7.6
6	4824.00	42.5 AV	54.0	-11.5	1.25 H	147	34.9	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.9 PK	74.0	-5.1	1.97 V	136	69.2	-0.3
2	2390.00	50.4 AV	54.0	-3.6	1.97 V	136	50.7	-0.3
3	*2412.00	108.9 PK			1.97 V	136	109.2	-0.3
4	*2412.00	98.0 AV			1.97 V	136	98.3	-0.3
5	4824.00	54.6 PK	74.0	-19.4	1.75 V	108	47.0	7.6
6	4824.00	39.8 AV	54.0	-14.2	1.75 V	108	32.2	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25.2 °C, 74.3% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	113.7 PK			1.44 H	170	113.8	-0.1
2	*2437.00	102.0 AV			1.44 H	170	102.1	-0.1
3	4874.00	58.0 PK	74.0	-16.0	1.21 H	148	50.2	7.8
4	4874.00	44.4 AV	54.0	-9.6	1.21 H	148	36.6	7.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	110.8 PK			1.93 V	137	110.9	-0.1
2	*2437.00	99.9 AV			1.93 V	137	100.0	-0.1
3	4874.00	56.5 PK	74.0	-17.5	1.71 V	109	48.7	7.8
4	4874.00	41.7 AV	54.0	-12.3	1.71 V	109	33.9	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25.2 °C, 74.3% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.2 PK			1.21 H	174	113.2	0.0
2	*2462.00	101.5 AV			1.21 H	174	101.5	0.0
3	2483.50	71.5 PK	74.0	-2.5	1.21 H	174	71.3	0.2
4	2483.50	53.0 AV	54.0	-1.0	1.21 H	174	52.8	0.2
5	4924.00	57.5 PK	74.0	-16.5	1.44 H	152	49.6	7.9
6	4924.00	43.9 AV	54.0	-10.1	1.44 H	152	36.0	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.3 PK			1.70 V	141	110.3	0.0
2	*2462.00	99.4 AV			1.70 V	141	99.4	0.0
3	2483.50	70.2 PK	74.0	-3.8	1.70 V	141	70.0	0.2
4	2483.50	52.2 AV	54.0	-1.8	1.70 V	141	52.0	0.2
5	4924.00	56.0 PK	74.0	-18.0	1.48 V	113	48.1	7.9
6	4924.00	41.2 AV	54.0	-12.8	1.48 V	113	33.3	7.9


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.


Plot of Band Edge

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11b Channel 1

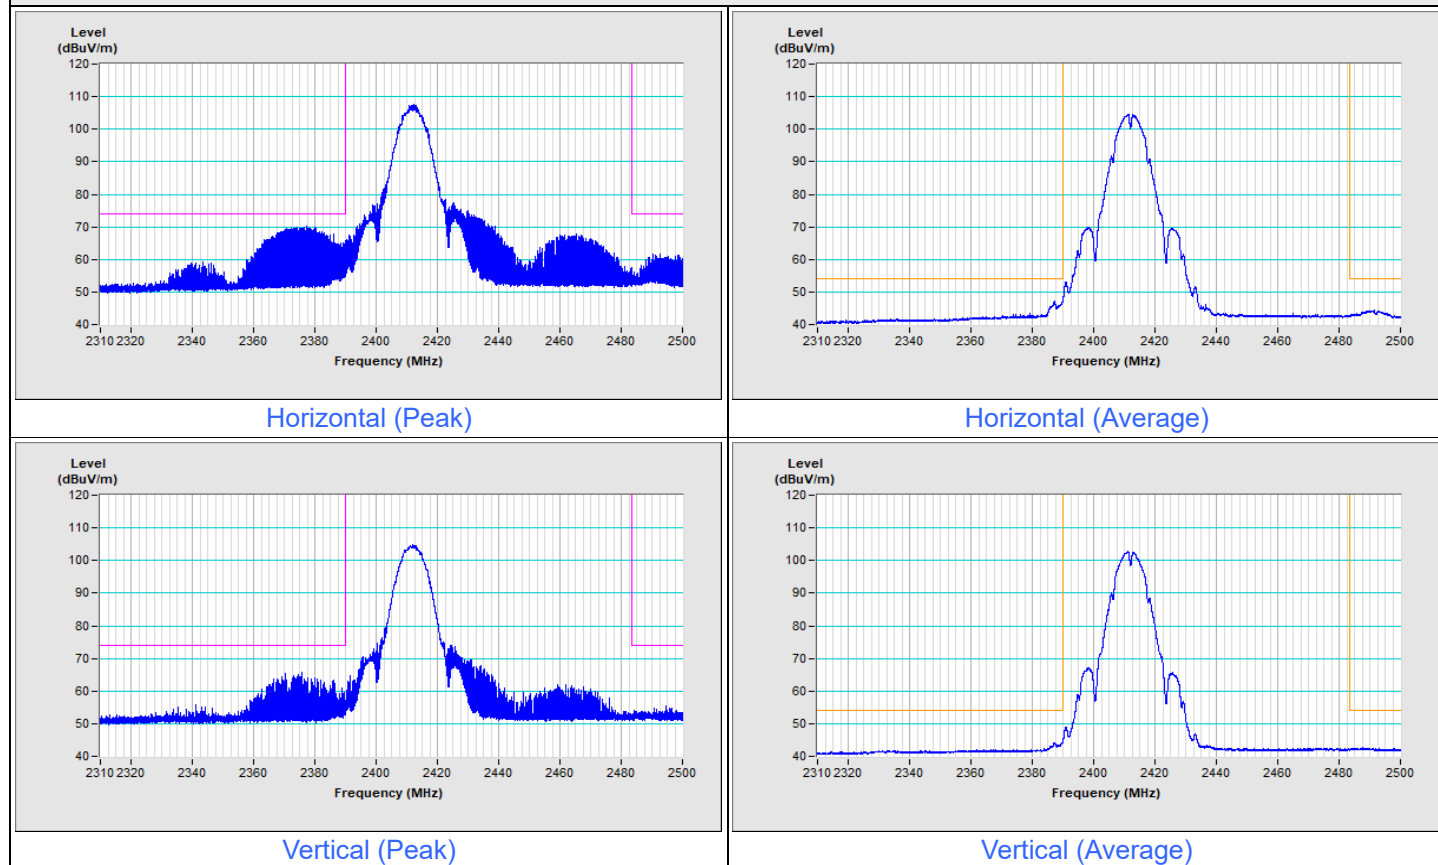


802.11b Channel 11

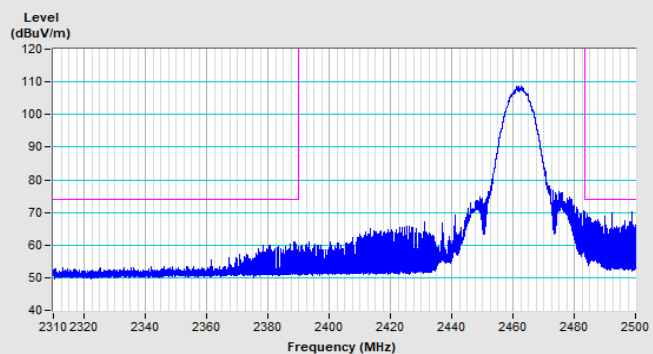


Horizontal (Peak)

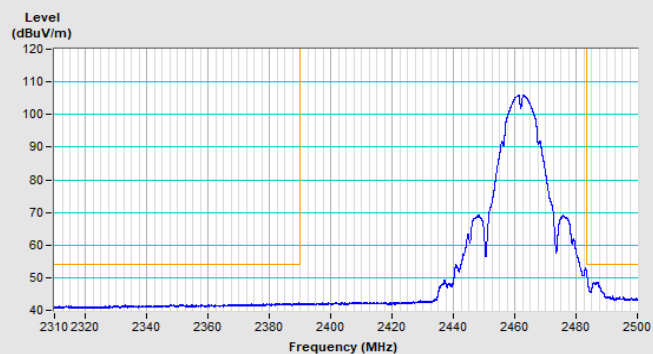

Horizontal (Average)

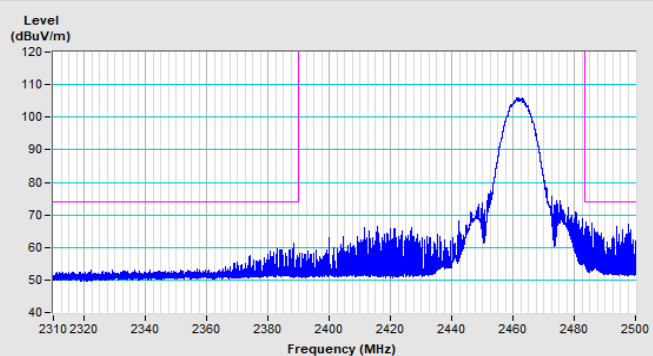


Vertical (Peak)

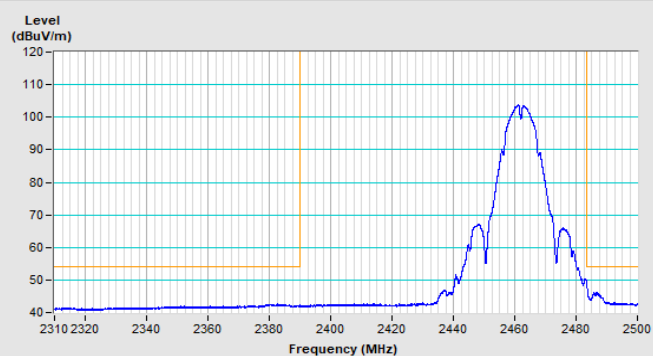


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11g Channel 1

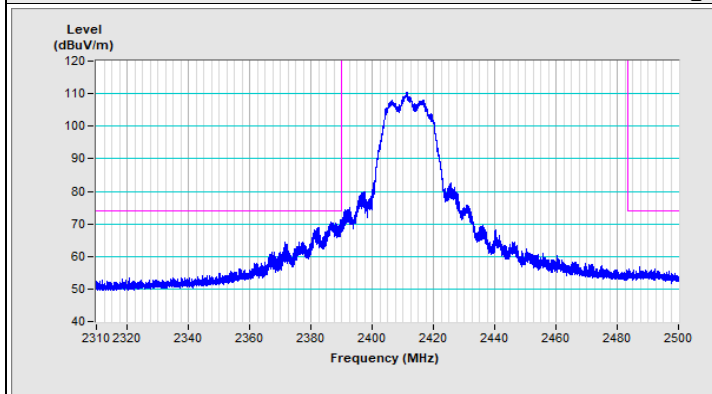


Horizontal (Peak)

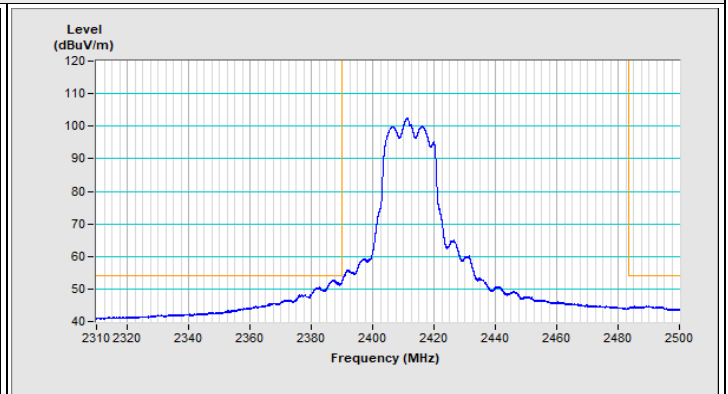

Horizontal (Average)

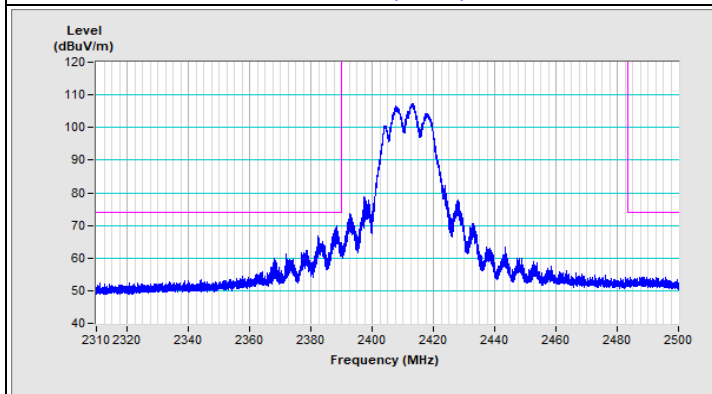


Vertical (Peak)

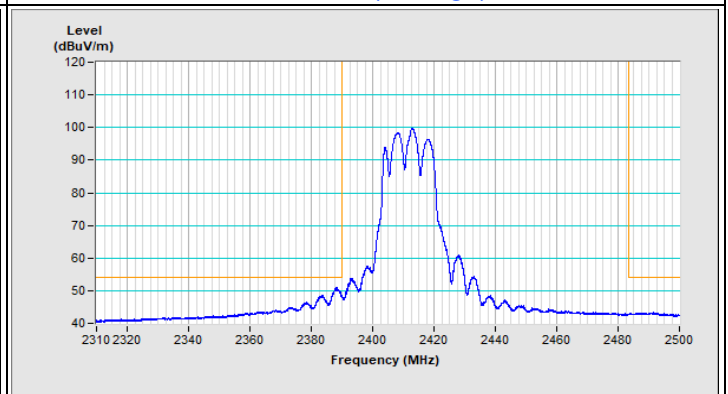


Vertical (Average)


802.11g Channel 11

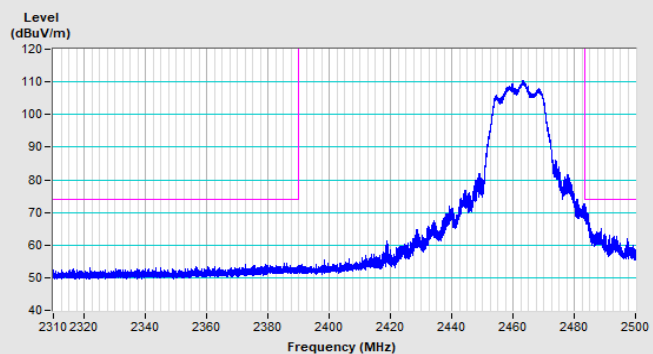


Horizontal (Peak)

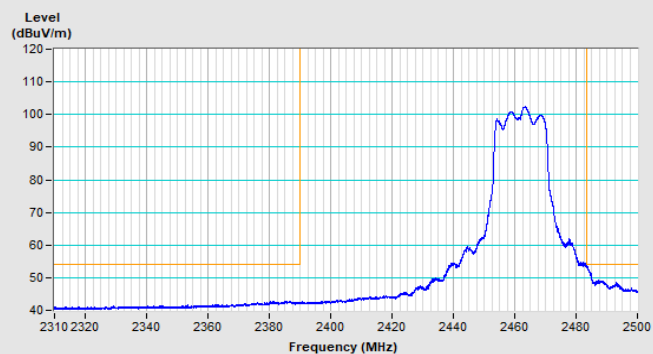

Horizontal (Average)

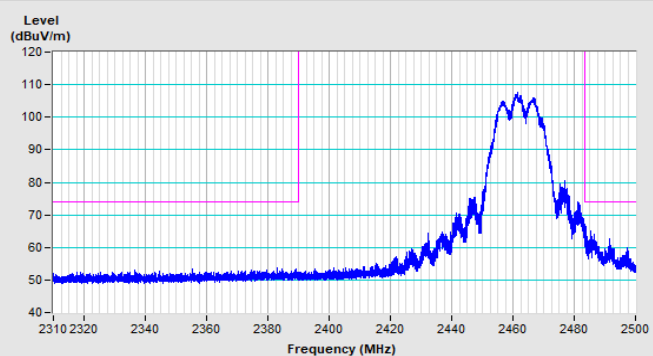


Vertical (Peak)

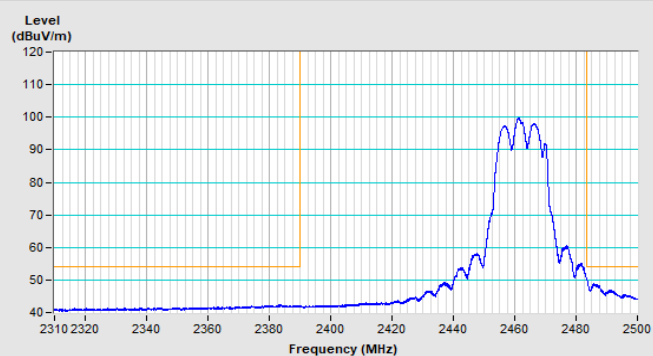


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11ax (HE20) Channel 1

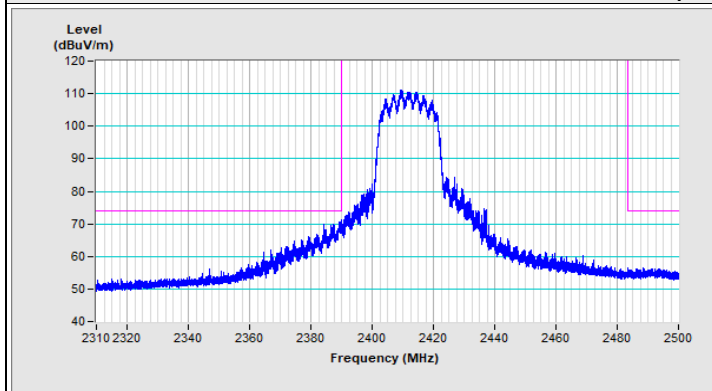


Horizontal (Peak)

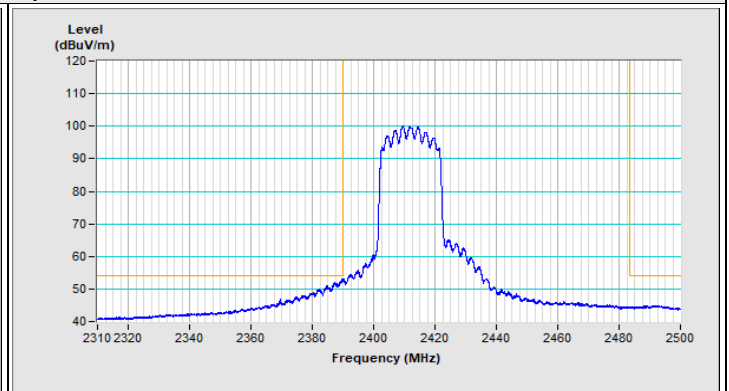

Horizontal (Average)

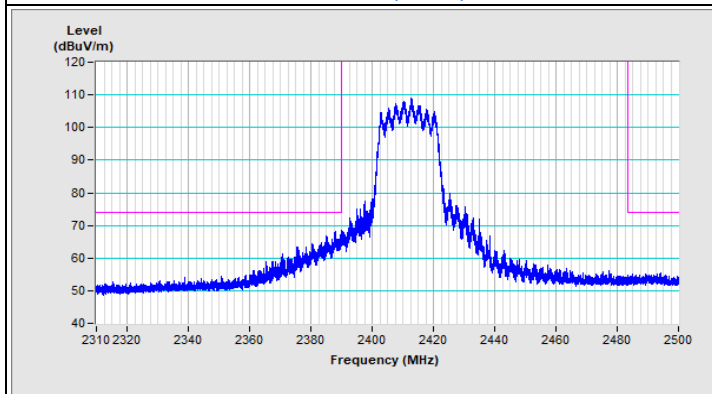


Vertical (Peak)

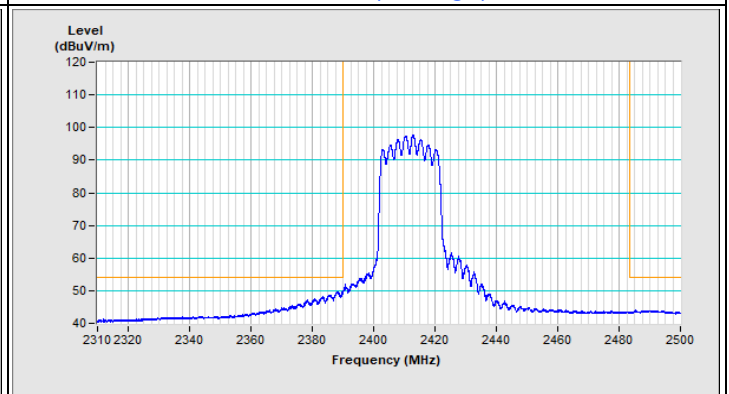


Vertical (Average)


802.11ax (HE20) Channel 11

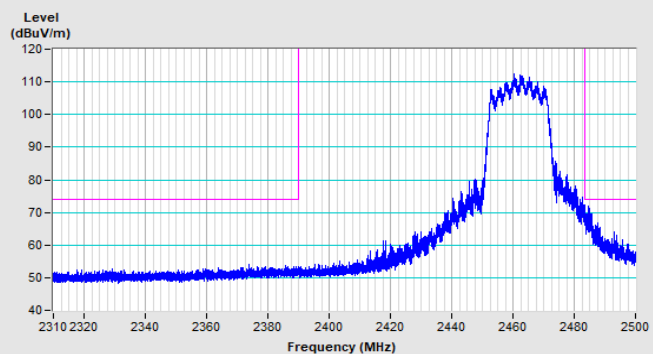


Horizontal (Peak)

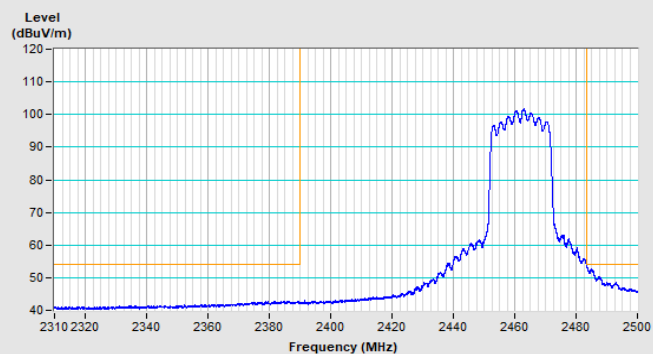

Horizontal (Average)

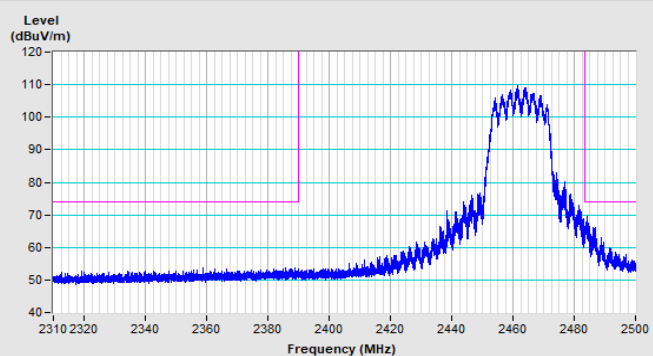

Vertical (Peak)

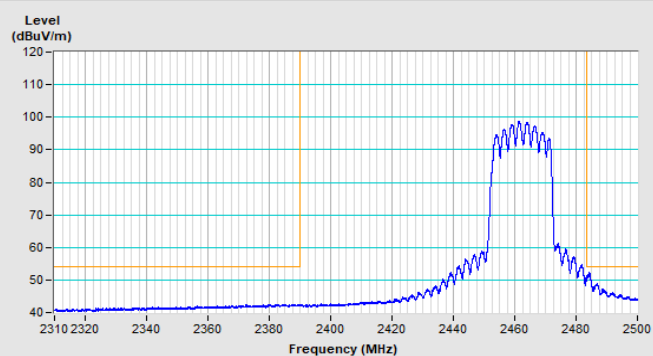


Vertical (Average)

Plot of Other Emission

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------	-------------------------------	--

802.11g Channel 11

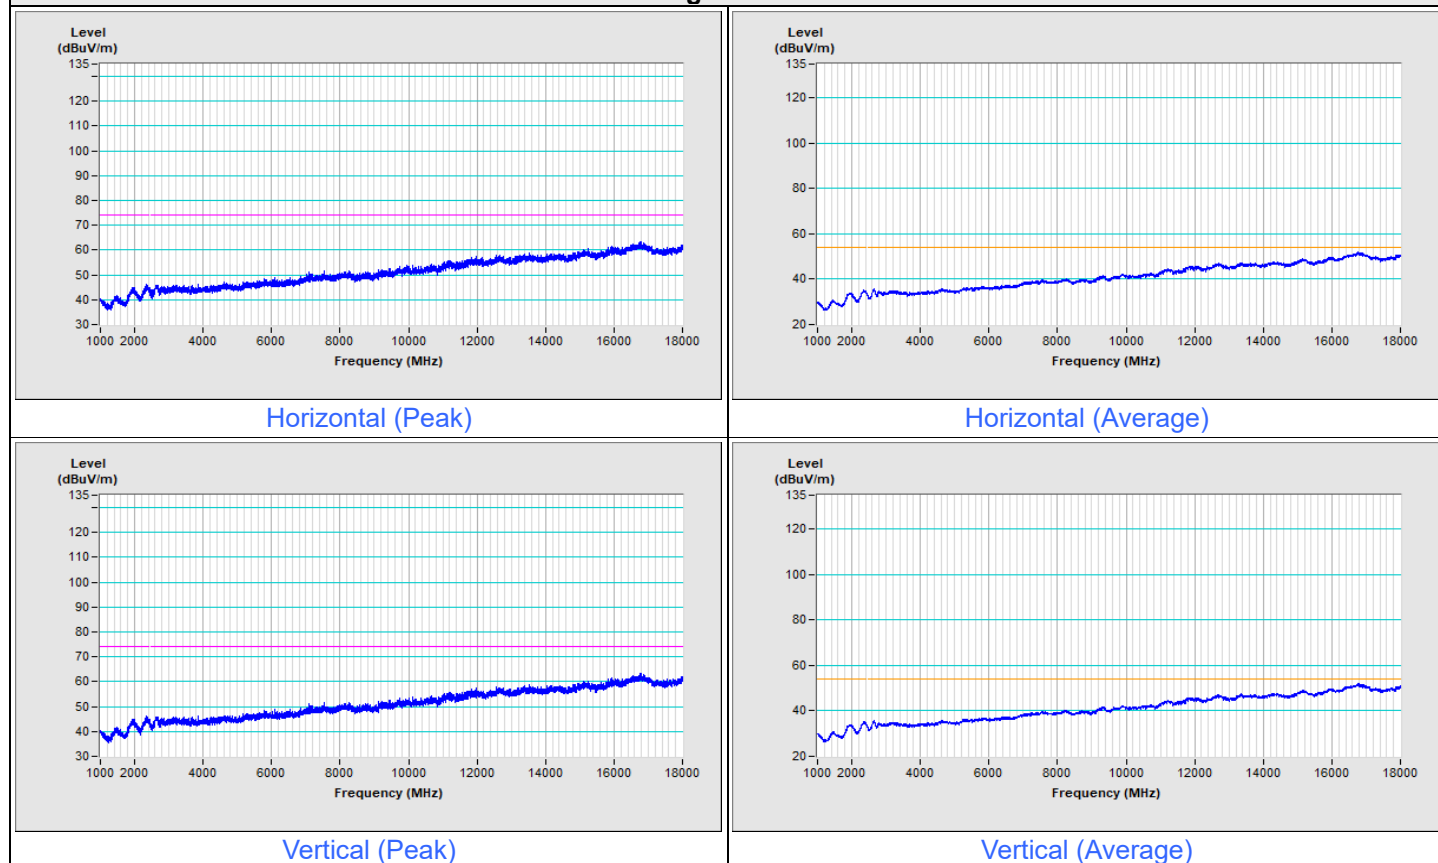

Notes:

- For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
- The frequency range 18 GHz ~ 25 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---