



EXHIBIT 3 - EUT INTERNAL PHOTOGRAPHS

Battery model:453054-2S


**EUT Housing and
Board View 1**

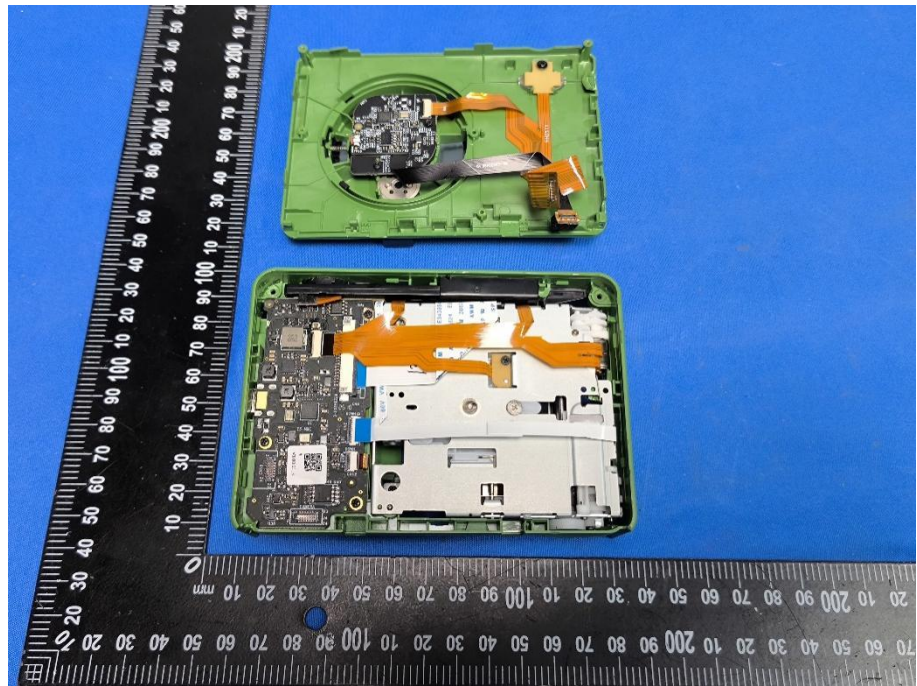


**Solder
Board-Component
View 1**

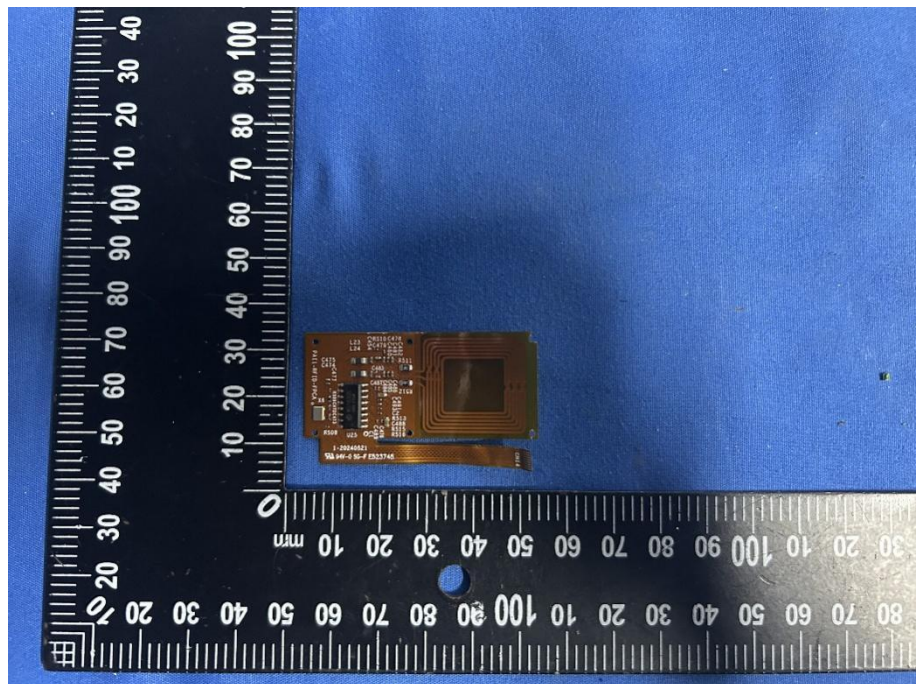


**Solder
Board-Component
View 2**

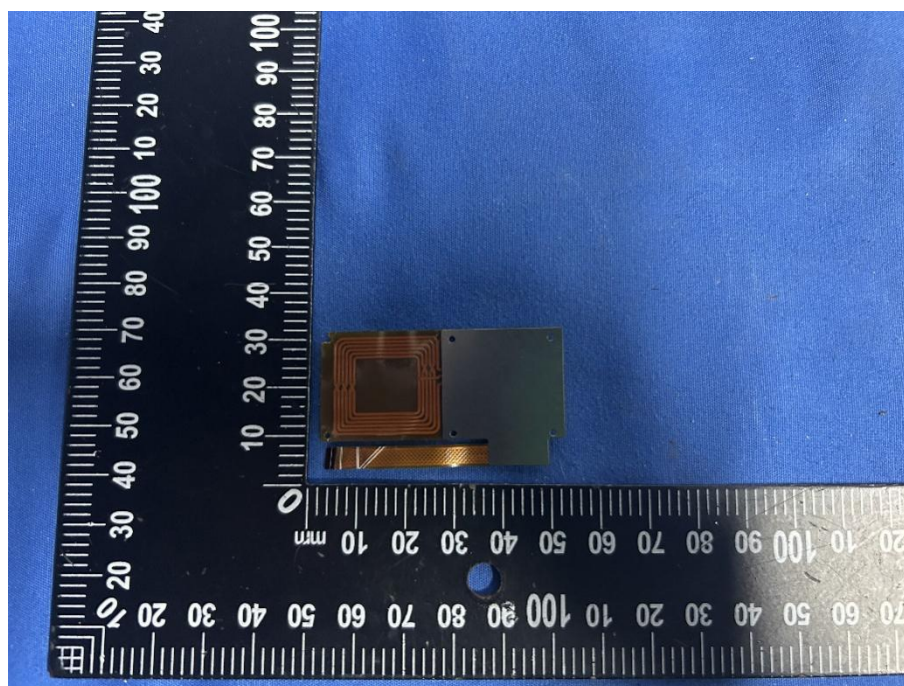


**Solder
Board-Component
View 3**

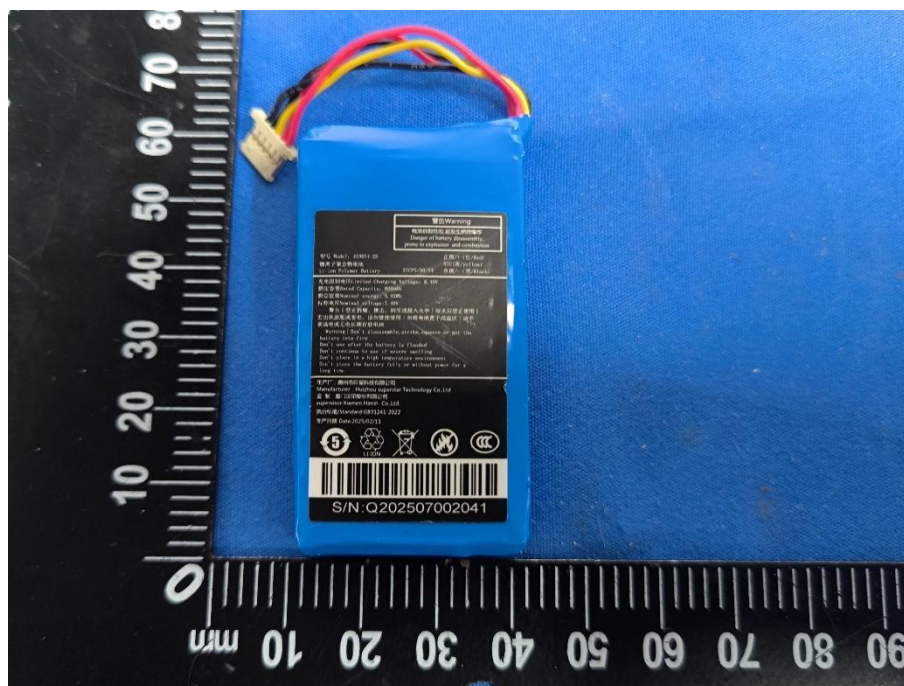


Solder
Board-Component
View 4

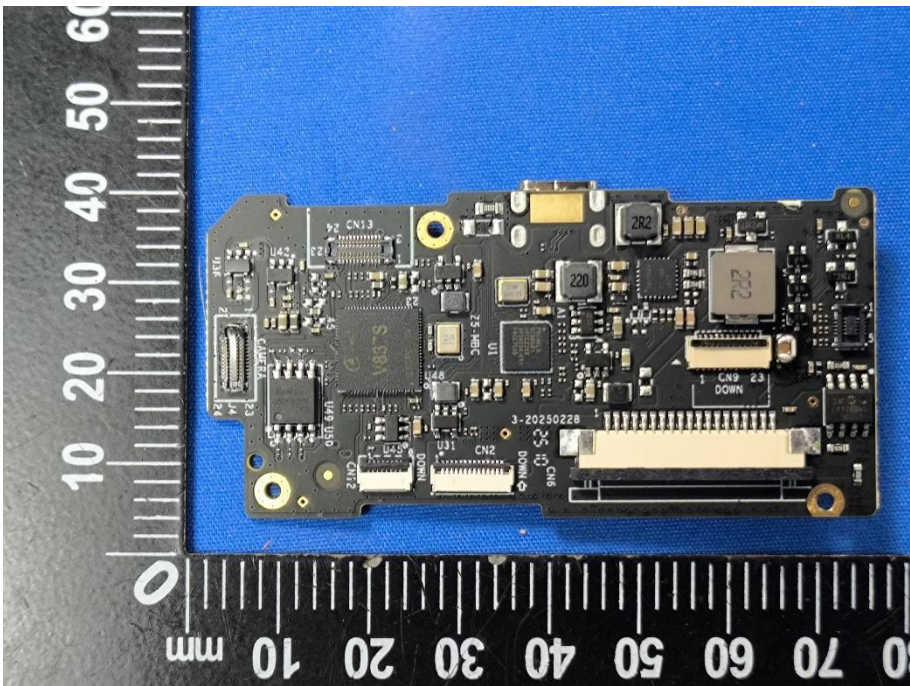


Solder
Board-Component
View 5

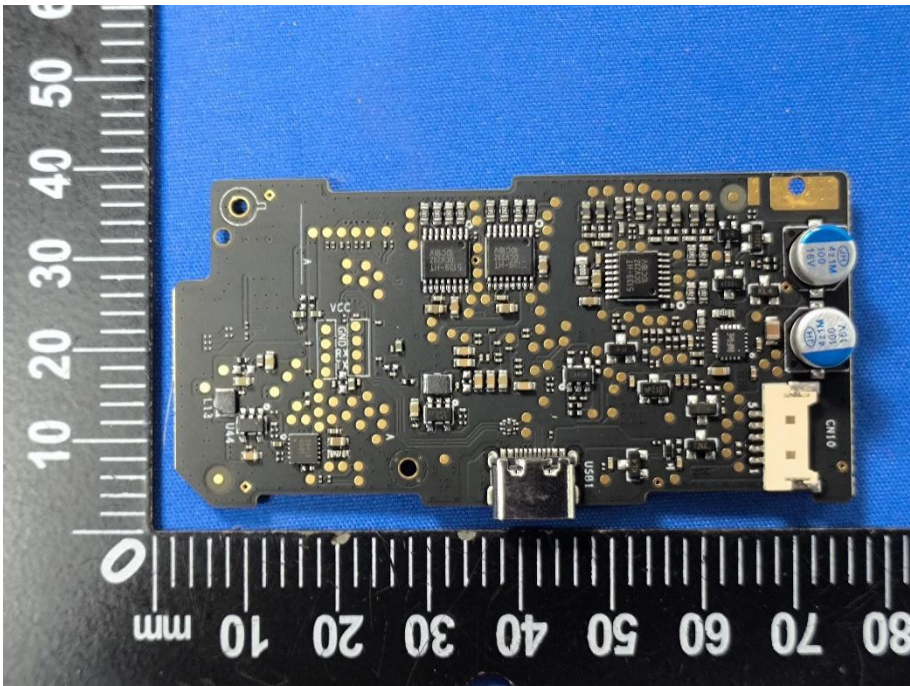


**Solder
Board-Component
View 6**

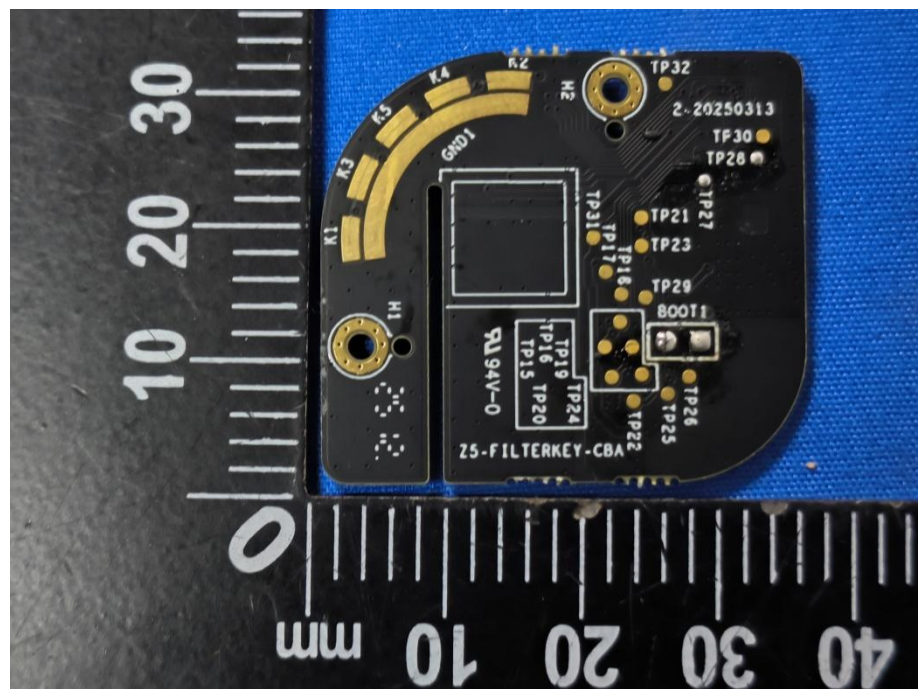


**Solder
Board-Component
View 7**

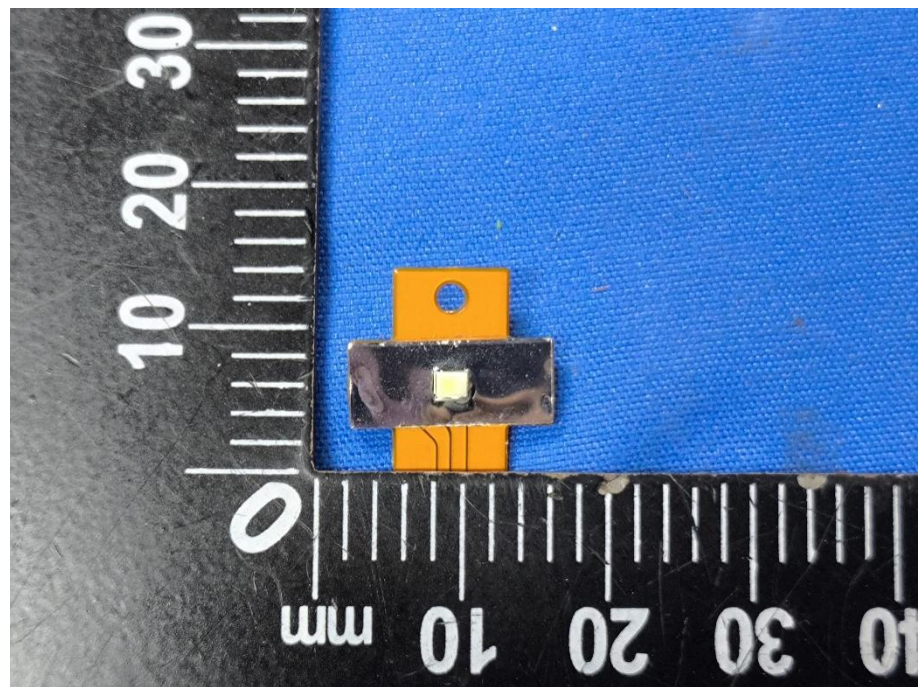


**Solder
Board-Component
View 8**


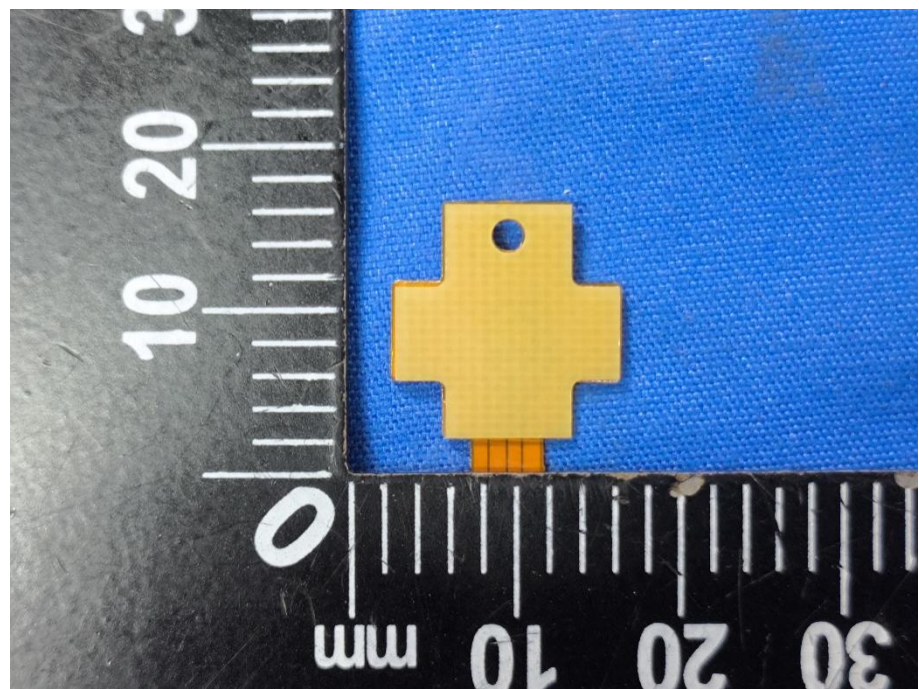


Antenna View 1

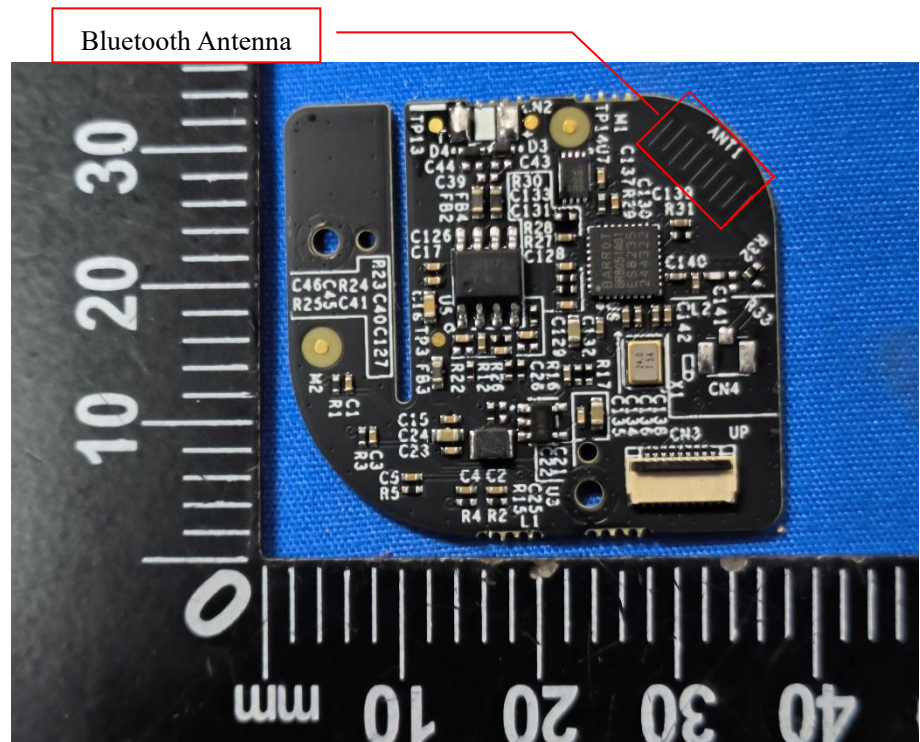


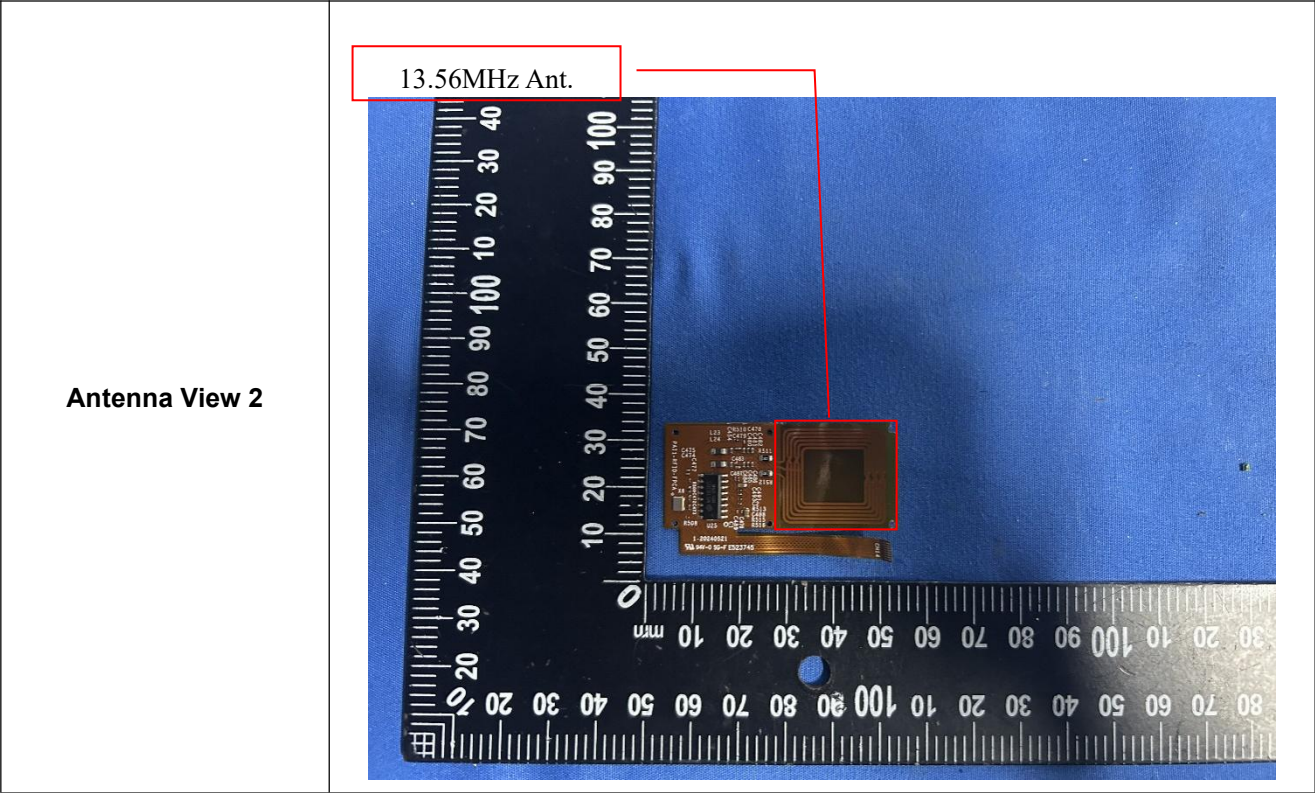


Battery model:U383155P-2S1P

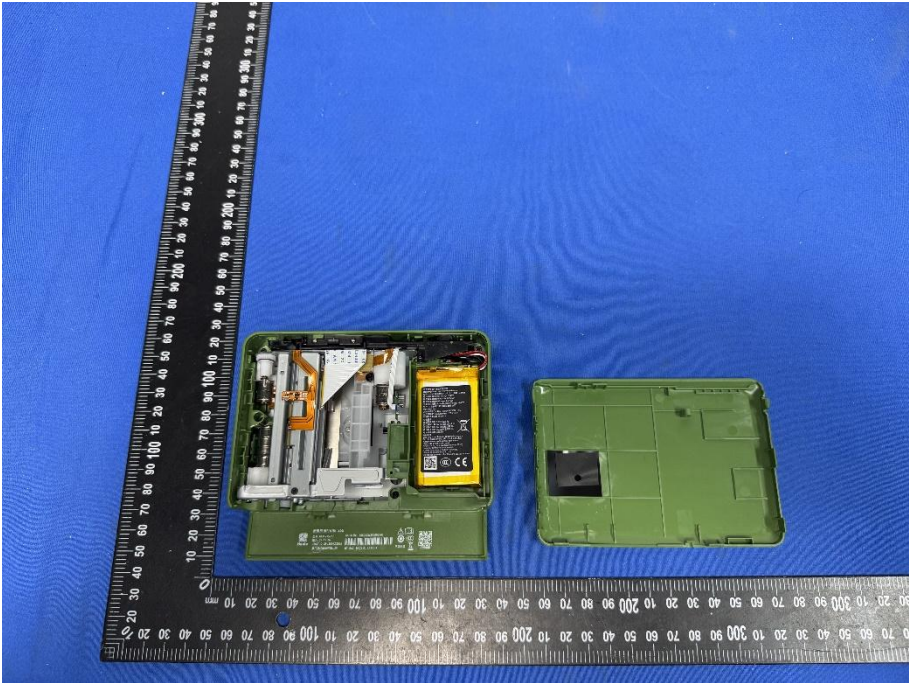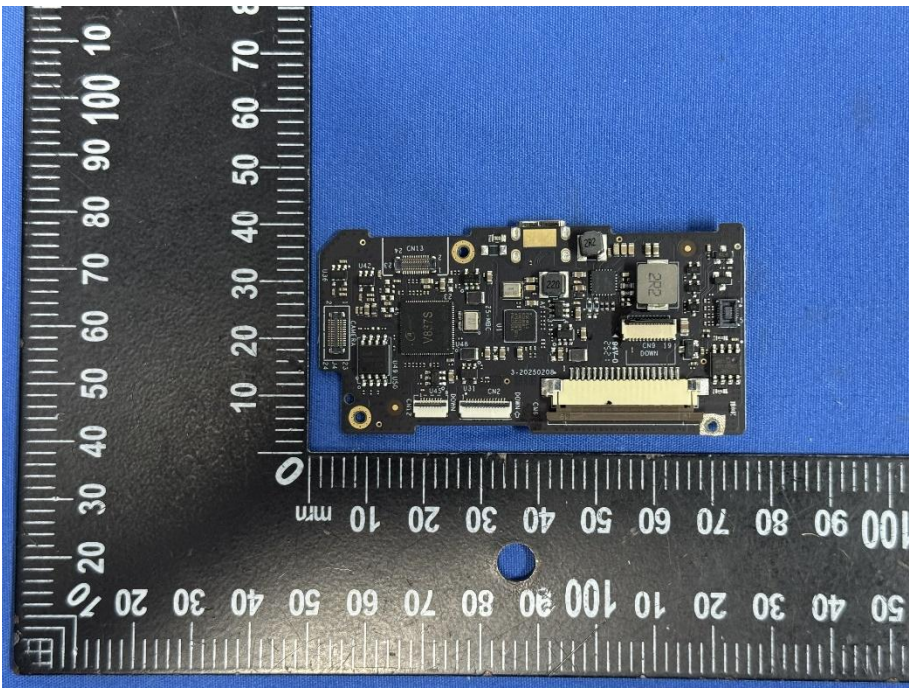EUT Housing and Board View 1	 A photograph showing the EUT housing and board assembly. The green plastic housing is open, revealing the internal components, including a yellow battery and various electronic components. A ruler is placed horizontally below the assembly for scale.
Solder Board-Component View 1	 A photograph showing the solder board-component assembly. The black printed circuit board (PCB) is populated with various electronic components, including a large integrated circuit (IC) and several capacitors. A ruler is placed horizontally below the assembly for scale.


**Solder
Board-Component
View 2**

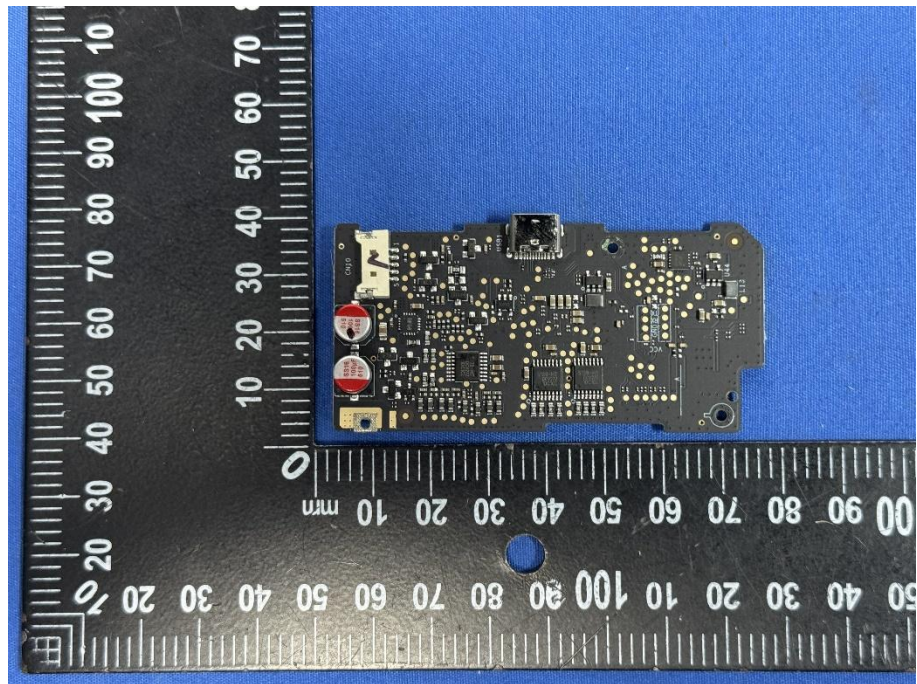


**Solder
Board-Component
View 3**


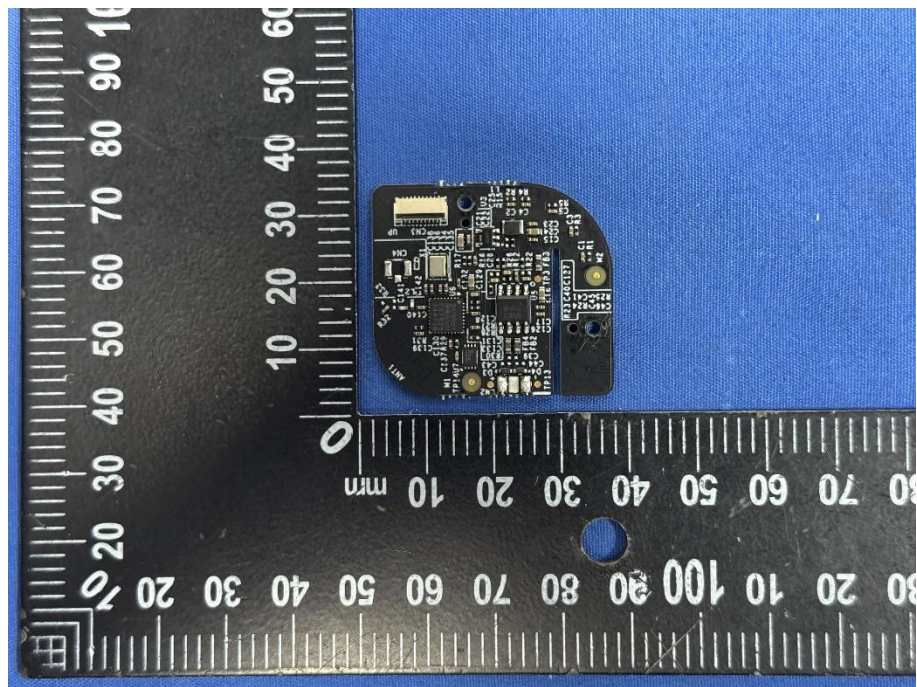




**Solder
Board-Component
View 4**

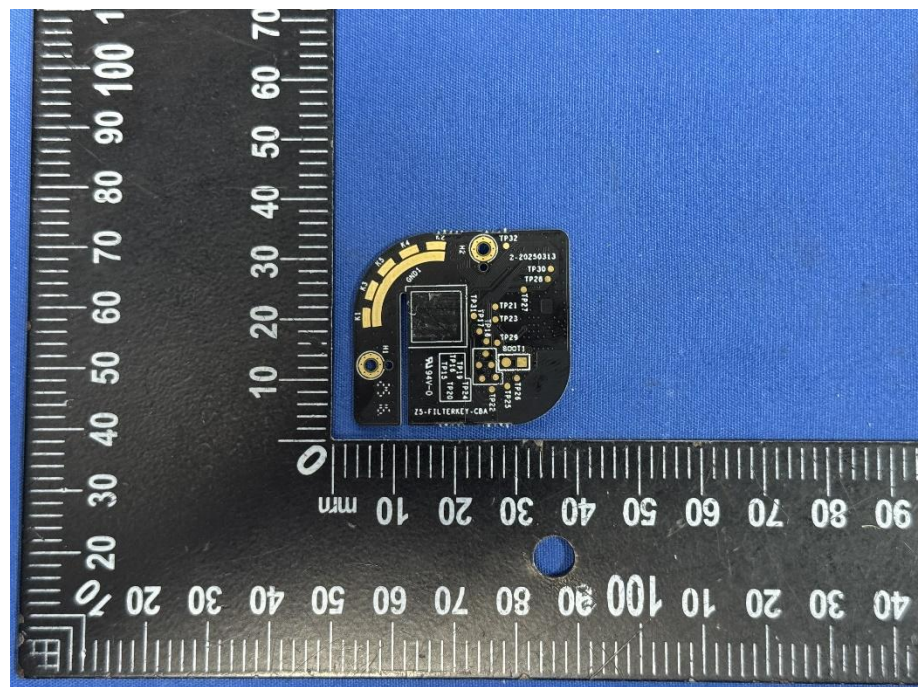

**Solder
Board-Component
View 5**

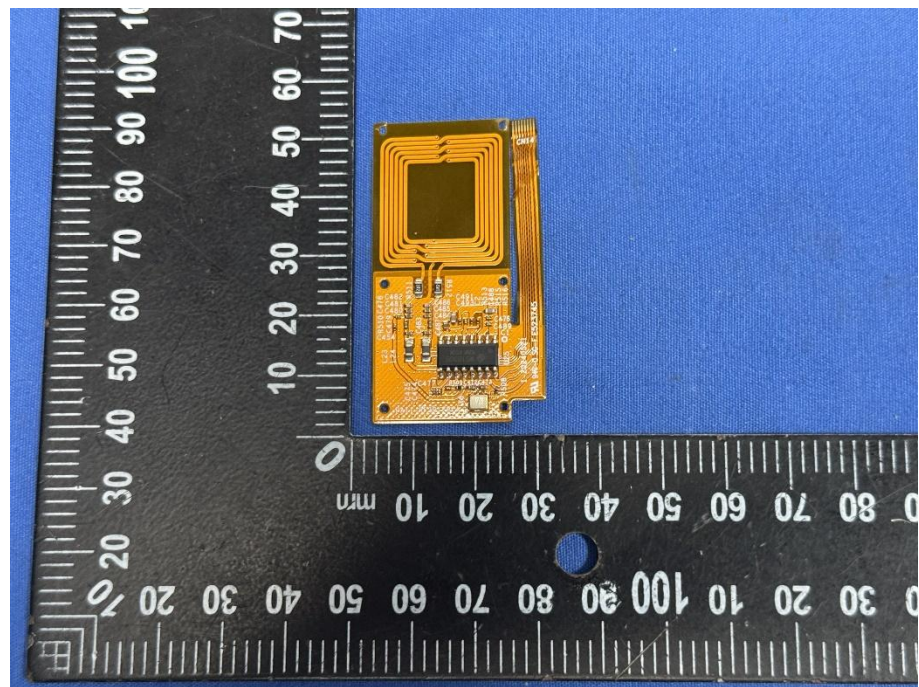

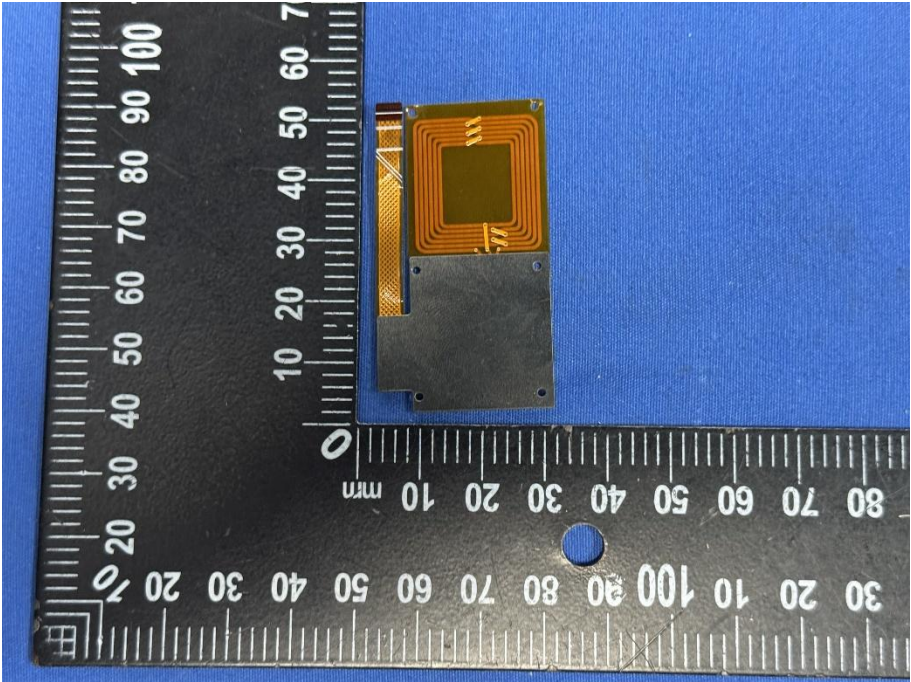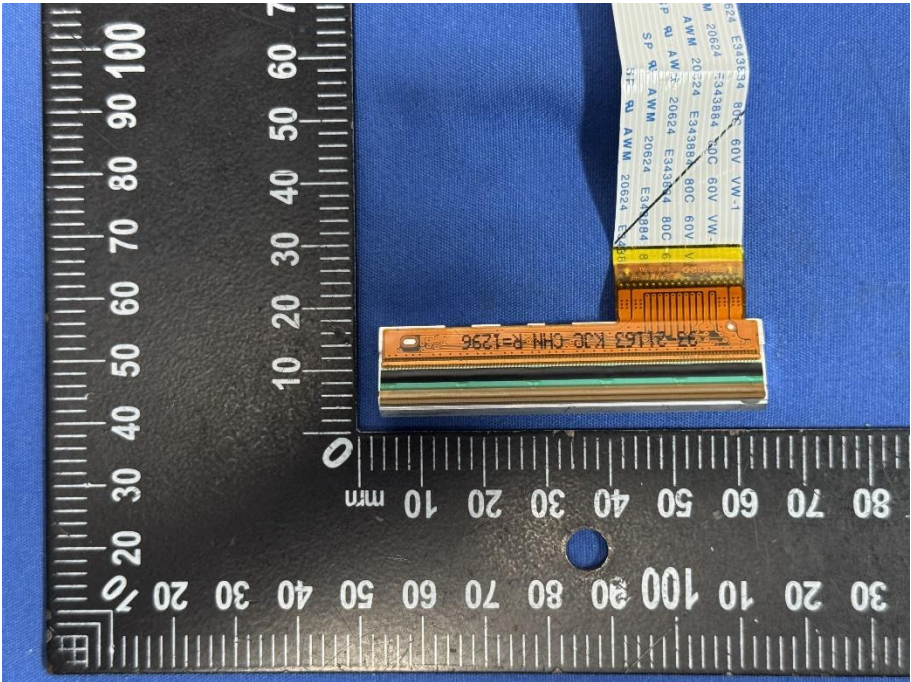Solder Board-Component View 6	 A photograph of a small electronic component, likely a sensor or microcontroller, mounted on a blue solder mask. The component is rectangular with a central square area and several small pads. It is positioned next to a black ruler with white markings in millimeters. The ruler shows measurements from 0 to 100 mm. The component is approximately 10 mm wide and 15 mm high.
Solder Board-Component View 7	 A photograph of a flexible printed circuit (FPC) component, likely a sensor or microcontroller, mounted on a blue solder mask. The component is rectangular with a central square area and several small pads. It is positioned next to a black ruler with white markings in millimeters. The ruler shows measurements from 0 to 100 mm. The component is approximately 10 mm wide and 15 mm high. The component is labeled with "K30 CHN R=1296" and "AWM 20324 E34384 80C 60V VW-1".

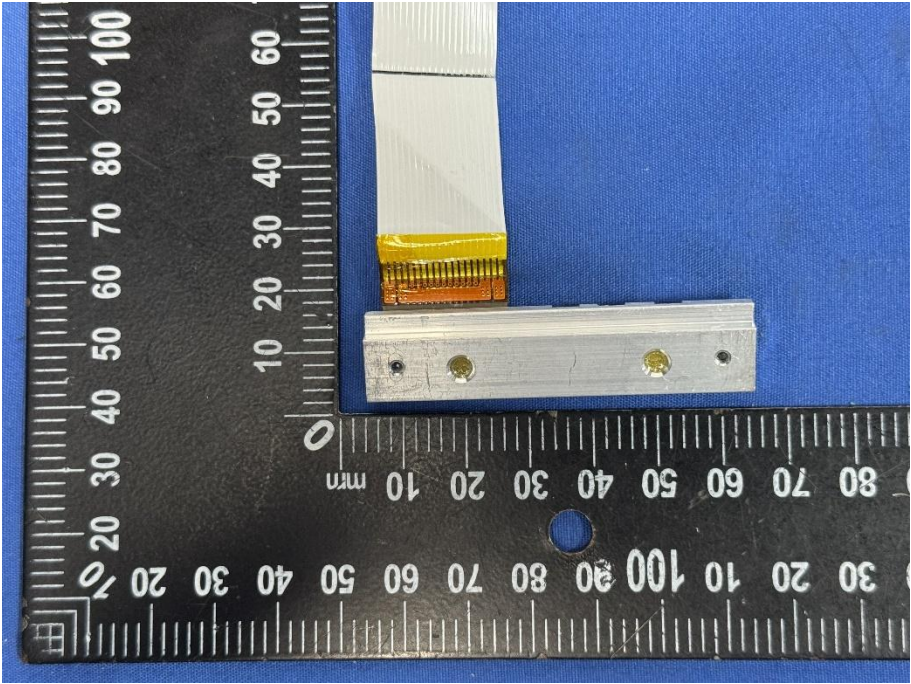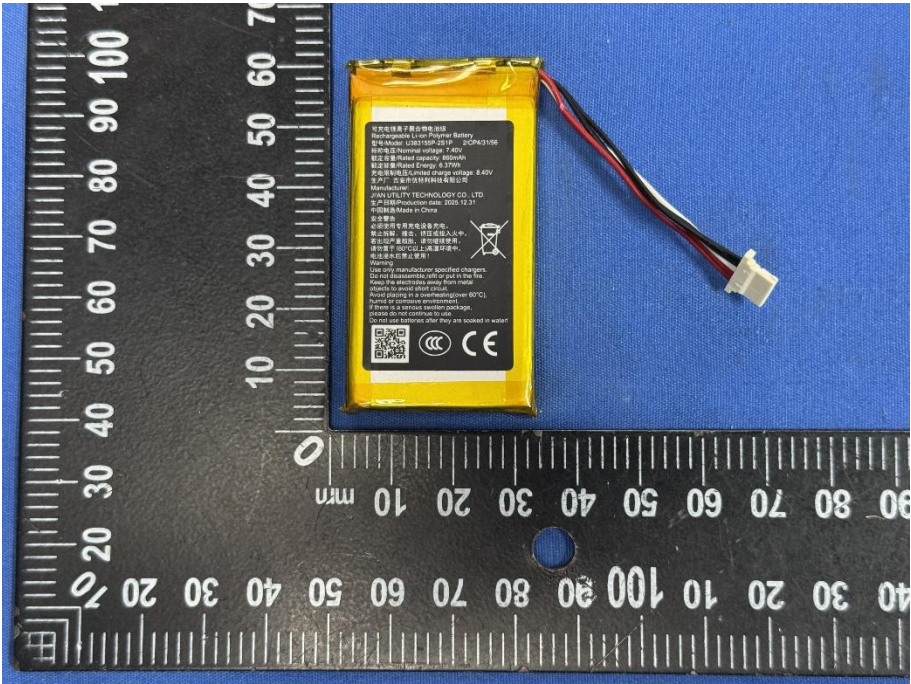Solder Board-Component View 8	 A photograph showing a soldered component on a blue background. A black ruler with white markings is placed horizontally below the component. The component is a small, rectangular, silver-colored metal piece with two gold-colored solder joints. A white ribbon cable is attached to the top of the component. The ruler shows measurements in millimeters (0 to 100) and centimeters (0 to 10).
Solder Board-Component View 9	 A photograph showing a yellow rectangular battery component on a blue background. A black ruler with white markings is placed horizontally below the component. The battery has a black label with text in Chinese and English, including "Rechargeable Lithium Polymer Battery", "Model: WTX25X12350156", "Nominal voltage: 7.4V", "Rated capacity: 600mAh", "Rated energy: 4.38Wh", "Max. charge voltage: 8.40V", and "Manufacturer: WATTEK TECHNOLOGY CO., LTD.". A white connector cable is attached to the right side of the battery. The ruler shows measurements in millimeters (0 to 100) and centimeters (0 to 10).