

802.11ac20 5600


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1070.125	58.98	-18.26	40.72	74.00	-33.28	peak
V	1070.125	51.56	-18.26	33.30	54.00	-20.70	AVG
V	2094.800	54.46	-12.52	41.94	68.20	-26.26	peak
V	3040.000	53.68	-9.58	44.10	68.20	-24.10	peak
V	3969.900	45.15	-8.00	37.15	74.00	-36.85	peak
V	3969.900	37.33	-8.00	29.33	54.00	-24.67	AVG
V	5969.100	49.23	-4.75	44.48	68.20	-23.72	peak
V	12050.000	44.10	5.03	49.13	74.00	-24.87	peak
V	12050.000	35.88	5.03	40.91	54.00	-13.09	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

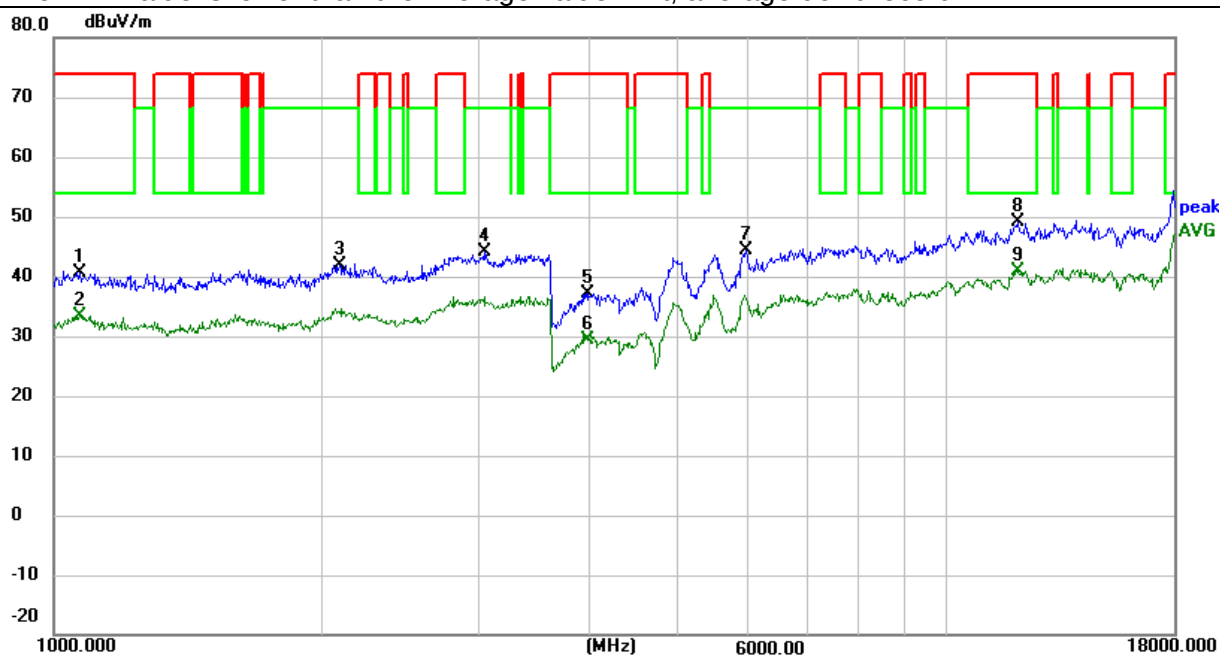


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1087.975	58.90	-18.09	40.81	74.00	-33.19	peak
H	1087.975	51.12	-18.09	33.03	54.00	-20.97	AVG
H	2106.275	55.38	-12.51	42.87	68.20	-25.33	peak
H	2928.650	53.71	-10.04	43.67	68.20	-24.53	peak
H	4026.425	45.51	-8.23	37.28	74.00	-36.72	peak
H	4026.425	38.22	-8.23	29.99	54.00	-24.01	AVG
H	6822.075	48.00	-3.38	44.62	68.20	-23.58	peak
H	12013.875	43.79	5.21	49.00	74.00	-25.00	peak
H	12013.875	36.08	5.21	41.29	54.00	-12.71	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

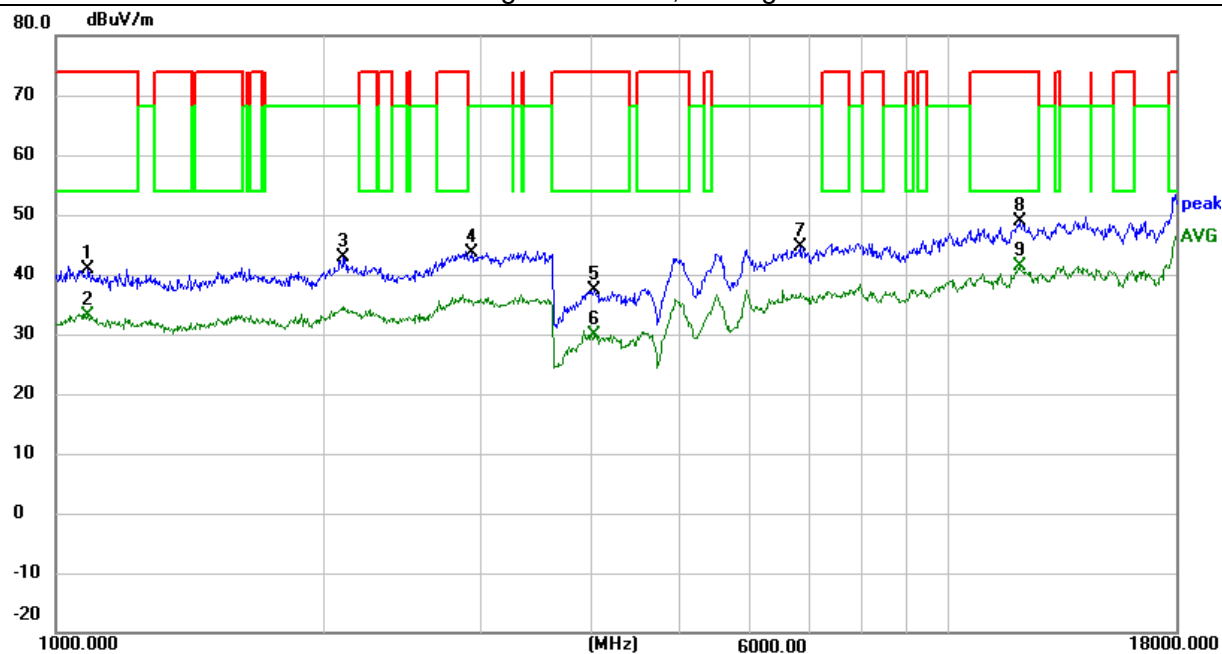

802.11ac20 5700


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1089.675	58.55	-18.05	40.50	74.00	-33.50	peak
V	1089.675	51.05	-18.05	33.00	54.00	-21.00	AVG
V	2089.275	54.44	-12.56	41.88	68.20	-26.32	peak
V	2966.900	53.38	-9.87	43.51	68.20	-24.69	peak
V	3908.700	46.08	-8.32	37.76	74.00	-36.24	peak
V	3908.700	37.67	-8.32	29.35	54.00	-24.65	AVG
V	6693.725	48.09	-2.93	45.16	68.20	-23.04	peak
V	11999.000	43.50	5.28	48.78	74.00	-25.22	peak
V	11999.000	35.66	5.28	40.94	54.00	-13.06	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

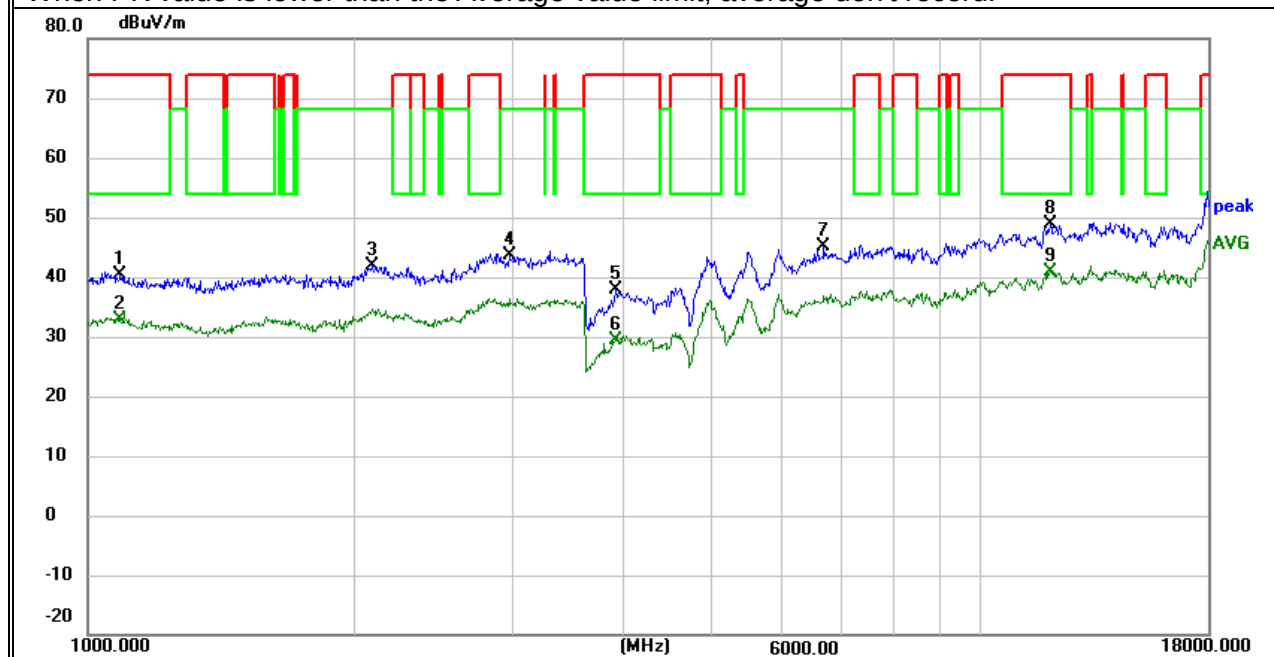


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1090.100	59.47	-18.05	41.42	74.00	-32.58	peak
H	1090.100	50.78	-18.05	32.73	54.00	-21.27	AVG
H	2078.650	54.45	-12.66	41.79	68.20	-26.41	peak
H	2992.400	53.42	-9.57	43.85	68.20	-24.35	peak
H	3963.950	47.56	-8.00	39.56	74.00	-34.44	peak
H	3963.950	38.30	-8.00	30.30	54.00	-23.70	AVG
H	6607.025	47.83	-3.31	44.52	68.20	-23.68	peak
H	12104.825	43.85	4.77	48.62	74.00	-25.38	peak
H	12104.825	35.76	4.77	40.53	54.00	-13.47	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

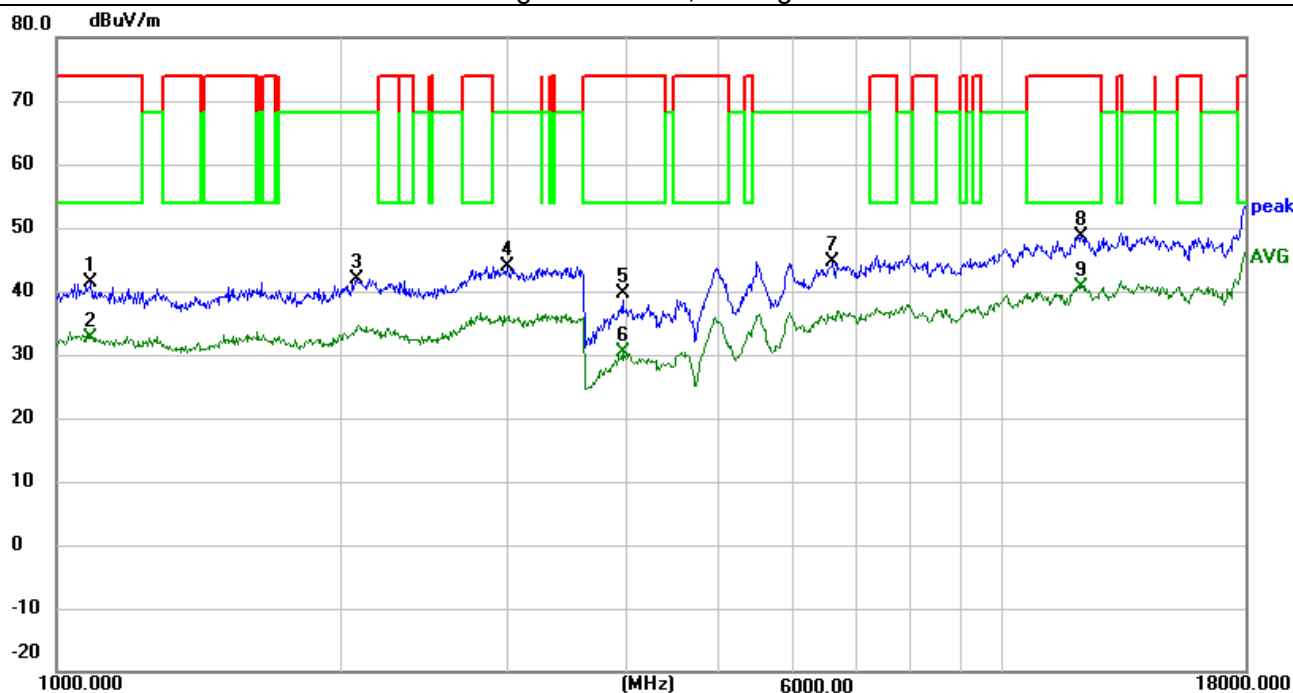

802.11ac40 5510


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1097.750	59.10	-17.97	41.13	74.00	-32.87	peak
V	1097.750	50.87	-17.97	32.90	54.00	-21.10	AVG
V	2089.700	54.43	-12.56	41.87	68.20	-26.33	peak
V	2945.650	53.14	-10.07	43.07	68.20	-25.13	peak
V	4143.725	46.53	-8.62	37.91	74.00	-36.09	peak
V	4143.725	38.30	-8.62	29.68	54.00	-24.32	AVG
V	5953.375	48.24	-4.45	43.79	68.20	-24.41	peak
V	12027.900	43.61	5.14	48.75	74.00	-25.25	peak
V	12027.900	36.02	5.14	41.16	54.00	-12.84	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

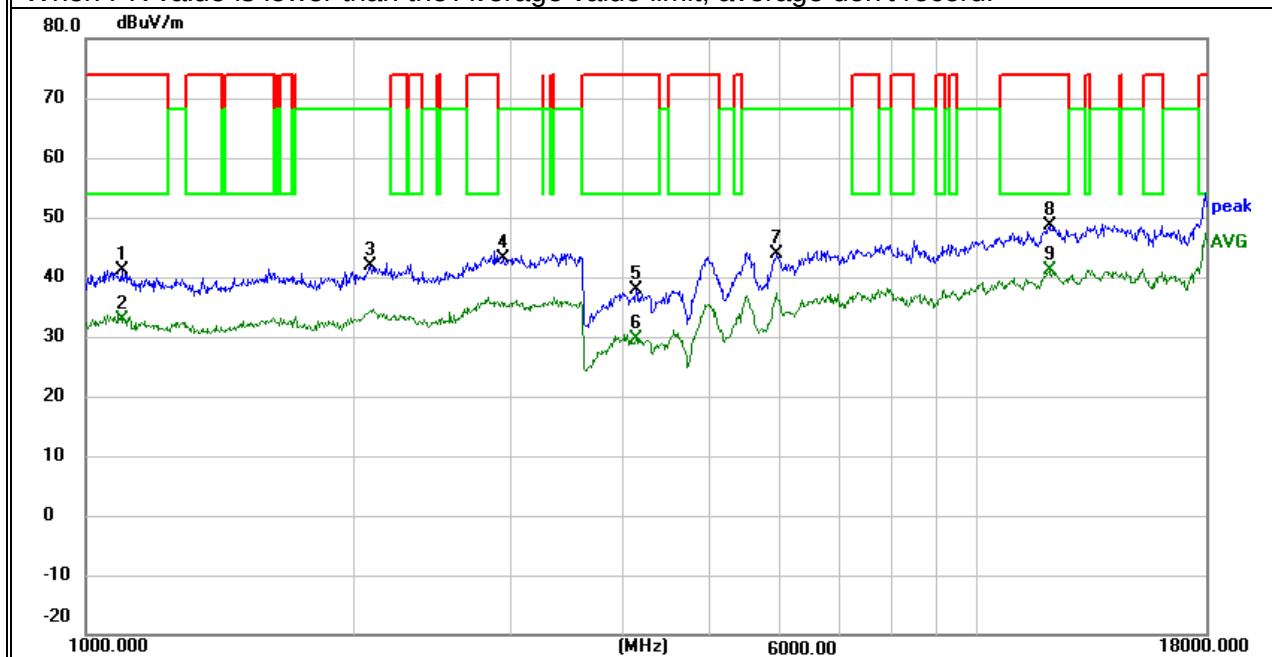


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1068.000	58.90	-18.29	40.61	74.00	-33.39	peak
H	1068.000	51.06	-18.29	32.77	54.00	-21.23	AVG
H	2078.650	55.71	-12.66	43.05	68.20	-25.15	peak
H	3010.675	53.68	-9.50	44.18	68.20	-24.02	peak
H	3977.550	45.34	-7.99	37.35	74.00	-36.65	peak
H	3977.550	37.50	-7.99	29.51	54.00	-24.49	AVG
H	5937.650	48.74	-4.49	44.25	68.20	-23.95	peak
H	11839.625	44.15	4.78	48.93	74.00	-25.07	peak
H	11839.625	35.28	4.78	40.06	54.00	-13.94	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

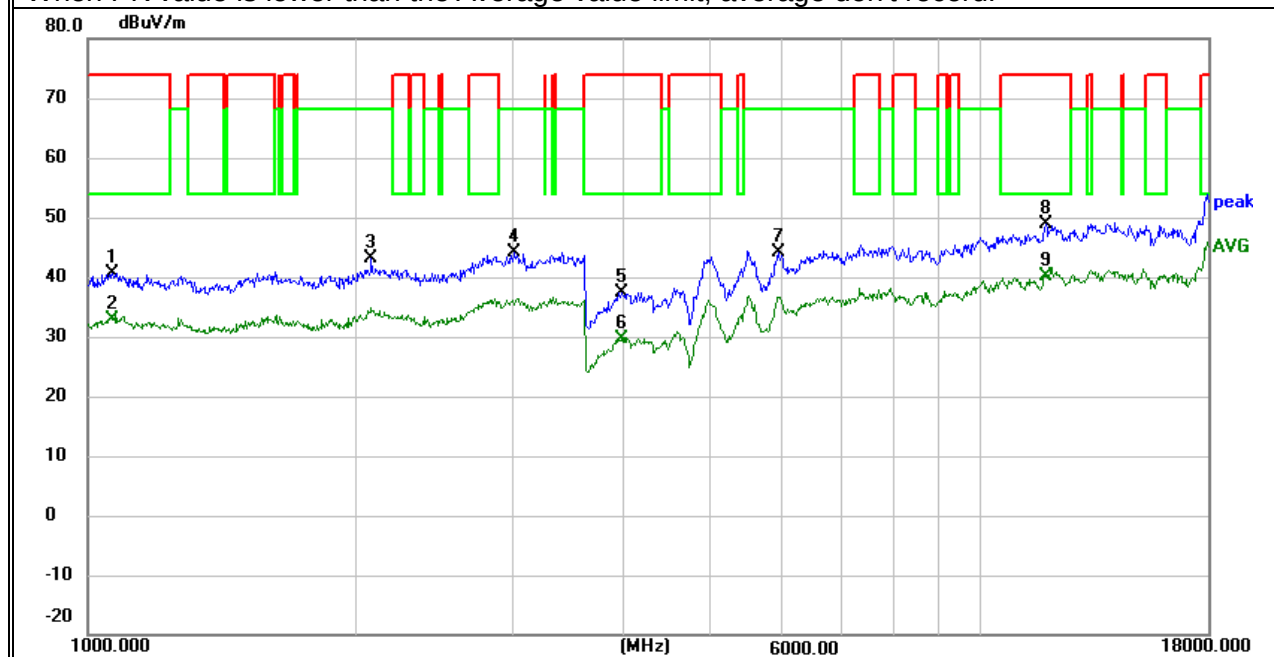

802.11ac40 5590


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1155.125	60.31	-18.87	41.44	74.00	-32.56	peak
V	1155.125	52.04	-18.87	33.17	54.00	-20.83	AVG
V	2081.200	54.99	-12.62	42.37	68.20	-25.83	peak
V	2938.850	53.52	-10.07	43.45	68.20	-24.75	peak
V	4005.600	47.48	-8.03	39.45	74.00	-34.55	peak
V	4005.600	37.83	-8.03	29.80	54.00	-24.20	AVG
V	5958.050	49.21	-4.54	44.67	68.20	-23.53	peak
V	12016.000	43.45	5.20	48.65	74.00	-25.35	peak
V	12016.000	35.82	5.20	41.02	54.00	-12.98	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

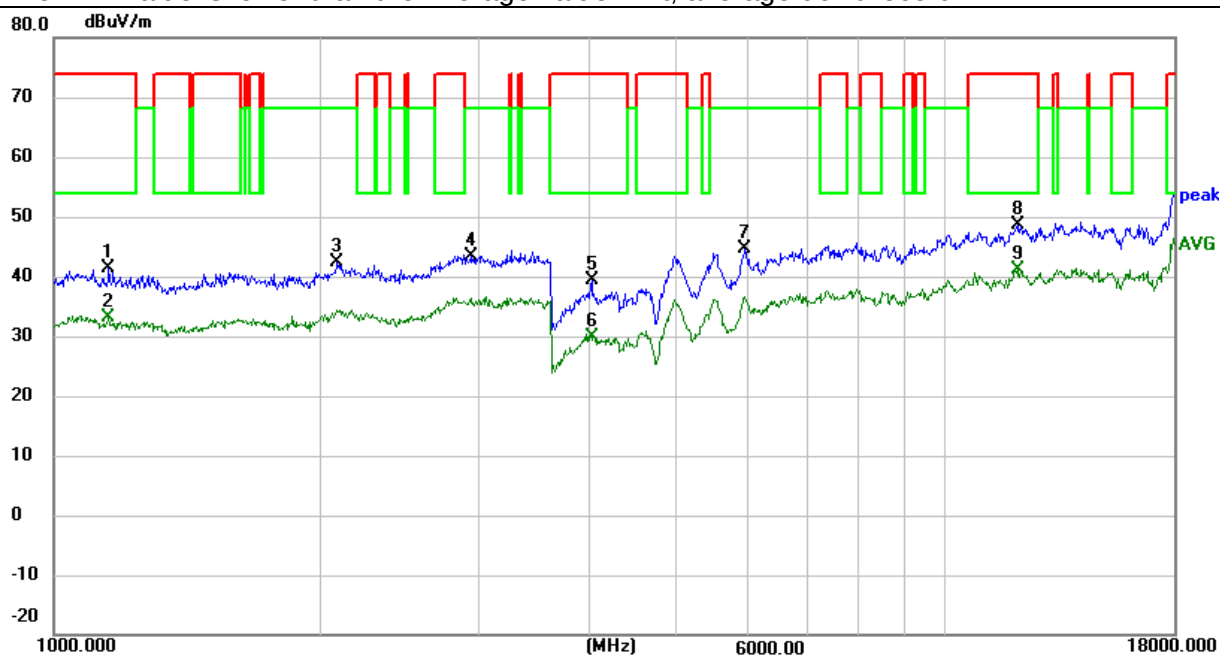


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1069.700	60.29	-18.26	42.03	74.00	-31.97	peak
H	1069.700	51.89	-18.26	33.63	54.00	-20.37	AVG
H	2117.325	54.46	-12.58	41.88	68.20	-26.32	peak
H	3028.950	53.30	-9.55	43.75	68.20	-24.45	peak
H	4031.950	47.04	-8.29	38.75	74.00	-35.25	peak
H	4031.950	38.38	-8.29	30.09	54.00	-23.91	AVG
H	5966.125	49.71	-4.69	45.02	68.20	-23.18	peak
H	11925.900	44.37	5.19	49.56	74.00	-24.44	peak
H	11925.900	34.93	5.19	40.12	54.00	-13.88	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

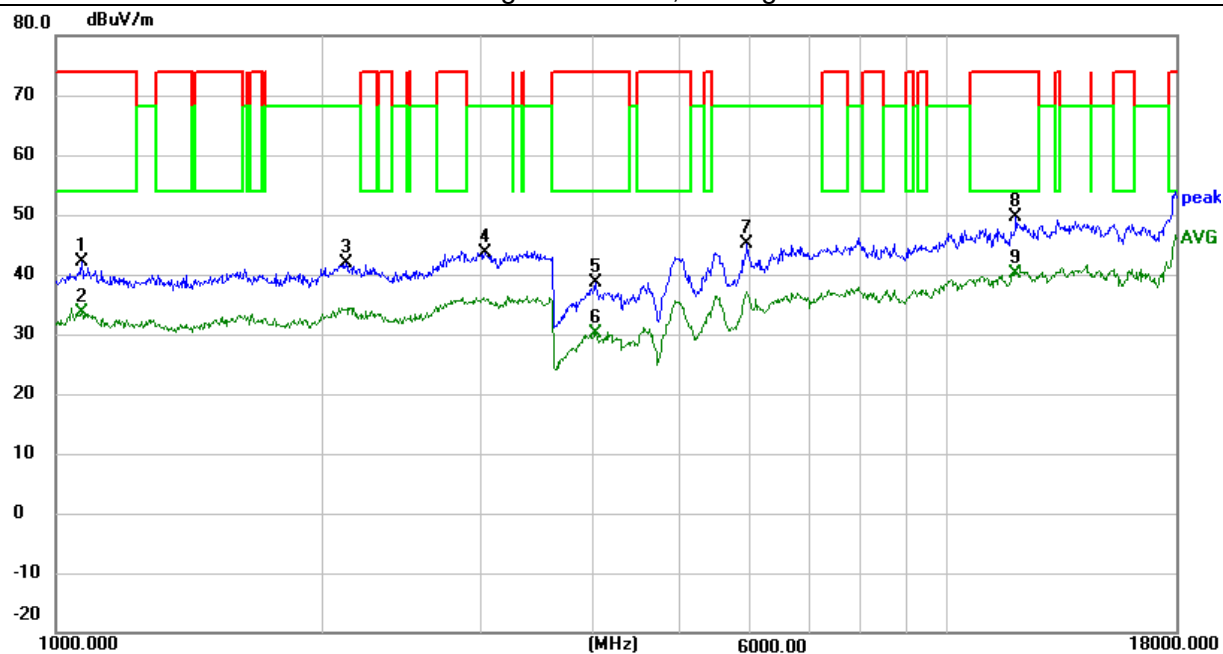

802.11ac40 5670


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1097.325	58.77	-17.98	40.79	74.00	-33.21	peak
V	1097.325	50.30	-17.98	32.32	54.00	-21.68	AVG
V	2109.675	54.96	-12.54	42.42	68.20	-25.78	peak
V	3049.350	53.98	-9.60	44.38	68.20	-23.82	peak
V	4002.625	45.79	-7.99	37.80	74.00	-36.20	peak
V	4002.625	37.52	-7.99	29.53	54.00	-24.47	AVG
V	5957.625	49.75	-4.53	45.22	68.20	-22.98	peak
V	11968.400	43.70	5.24	48.94	74.00	-25.06	peak
V	11968.400	35.81	5.24	41.05	54.00	-12.95	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

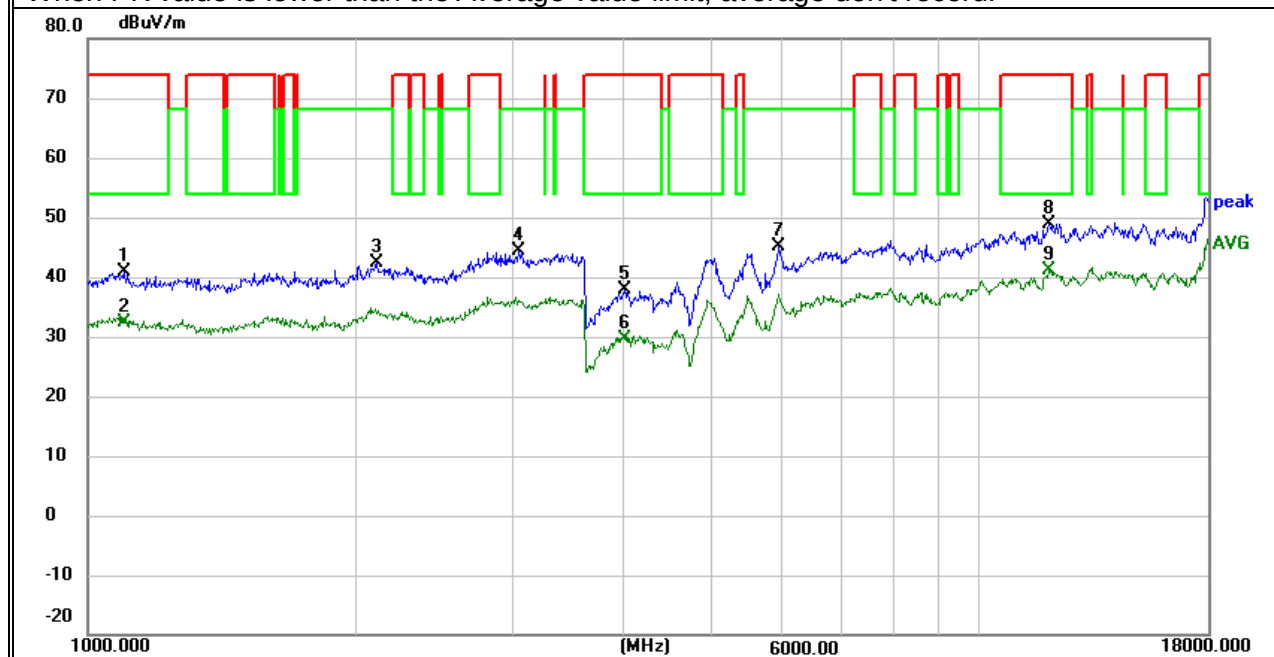


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1079.050	59.22	-18.17	41.05	74.00	-32.95	peak
H	1079.050	51.62	-18.17	33.45	54.00	-20.55	AVG
H	2099.050	54.79	-12.49	42.30	68.20	-25.90	peak
H	3057.850	53.41	-9.59	43.82	68.20	-24.38	peak
H	4039.600	46.60	-8.38	38.22	74.00	-35.78	peak
H	4039.600	38.07	-8.38	29.69	54.00	-24.31	AVG
H	5962.300	49.30	-4.63	44.67	68.20	-23.53	peak
H	12109.925	43.69	4.76	48.45	74.00	-25.55	peak
H	12109.925	35.97	4.76	40.73	54.00	-13.27	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

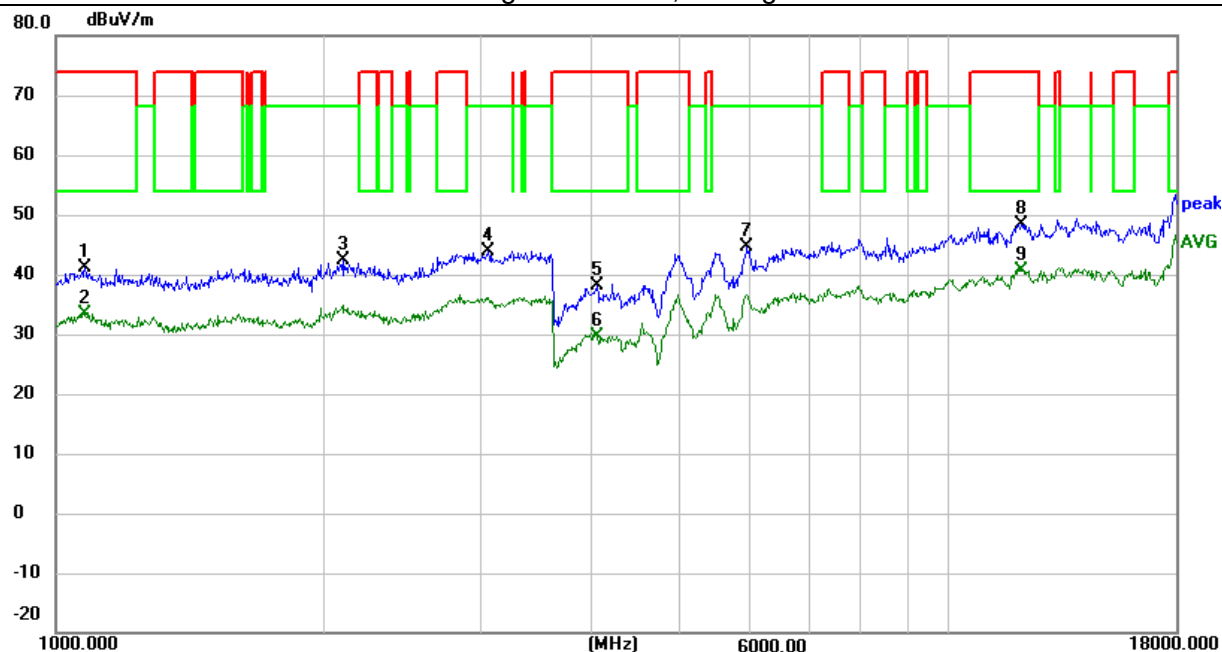

802.11ac80 5530


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1078.625	59.27	-18.17	41.10	74.00	-32.90	peak
V	1078.625	51.47	-18.17	33.30	54.00	-20.70	AVG
V	2099.900	55.54	-12.48	43.06	68.20	-25.14	peak
V	3019.175	53.37	-9.52	43.85	68.20	-24.35	peak
V	4028.975	46.65	-8.26	38.39	74.00	-35.61	peak
V	4028.975	37.82	-8.26	29.56	54.00	-24.44	AVG
V	5975.475	49.47	-4.88	44.59	68.20	-23.61	peak
V	12165.175	44.69	4.58	49.27	74.00	-24.73	peak
V	12165.175	35.73	4.58	40.31	54.00	-13.69	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

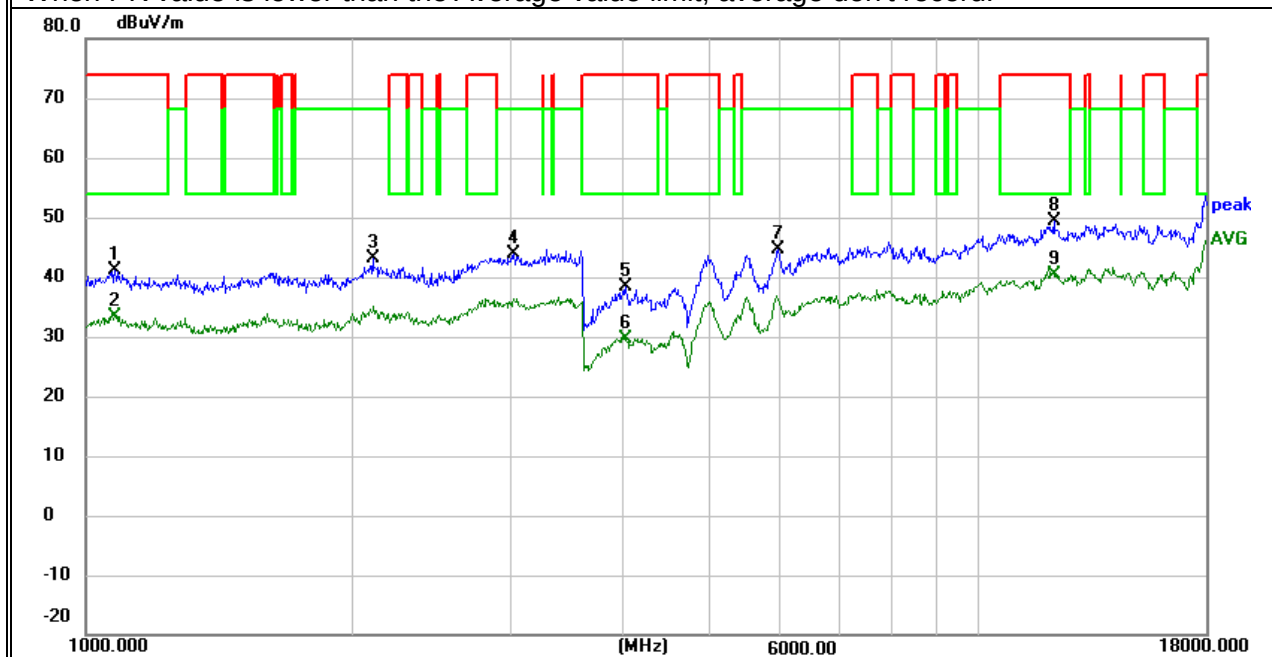


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1107.950	59.14	-18.11	41.03	74.00	-32.97	peak
H	1107.950	50.28	-18.11	32.17	54.00	-21.83	AVG
H	2023.825	55.00	-13.26	41.74	68.20	-26.46	peak
H	2954.150	54.31	-10.03	44.28	68.20	-23.92	peak
H	3994.975	45.61	-7.96	37.65	74.00	-36.35	peak
H	3994.975	37.51	-7.96	29.55	54.00	-24.45	AVG
H	5948.275	48.95	-4.39	44.56	68.20	-23.64	peak
H	12027.050	43.81	5.14	48.95	74.00	-25.05	peak
H	12027.050	35.73	5.14	40.87	54.00	-13.13	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

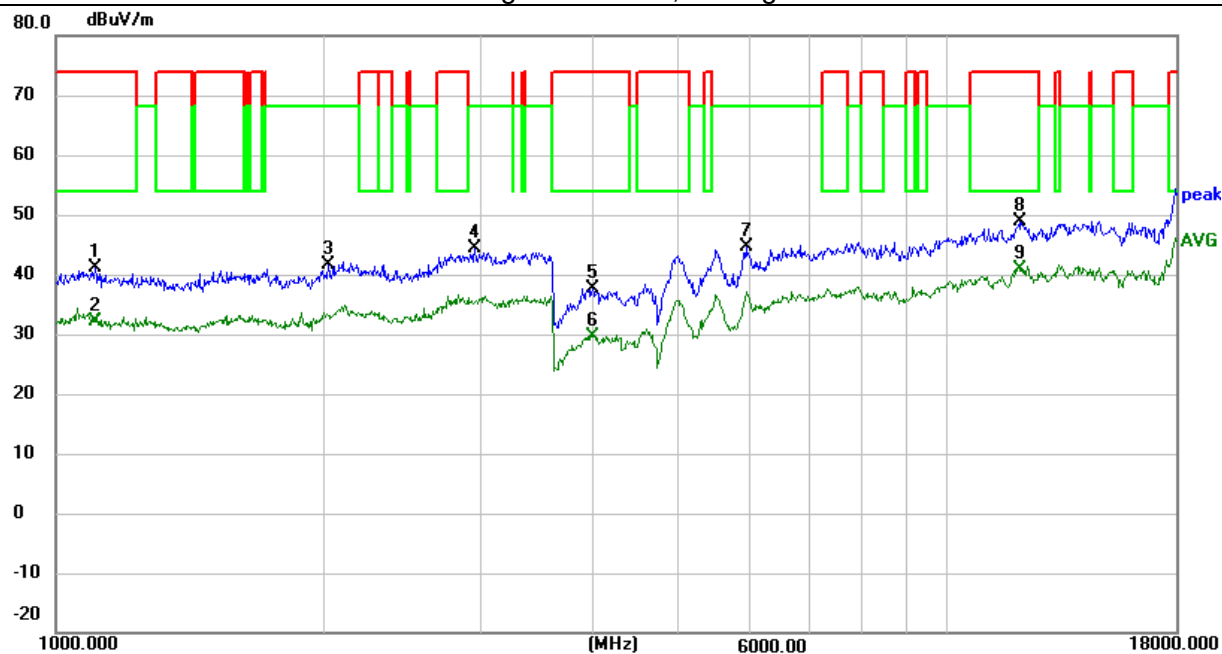

802.11ac80 5610


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1055.675	59.28	-18.41	40.87	74.00	-33.13	peak
V	1055.675	51.13	-18.41	32.72	54.00	-21.28	AVG
V	2102.875	54.13	-12.49	41.64	68.20	-26.56	peak
V	3055.725	53.51	-9.60	43.91	68.20	-24.29	peak
V	3953.325	45.41	-8.01	37.40	74.00	-36.60	peak
V	3953.325	38.23	-8.01	30.22	54.00	-23.78	AVG
V	5947.000	48.29	-4.40	43.89	68.20	-24.31	peak
V	12013.025	43.50	5.21	48.71	74.00	-25.29	peak
V	12013.025	35.85	5.21	41.06	54.00	-12.94	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

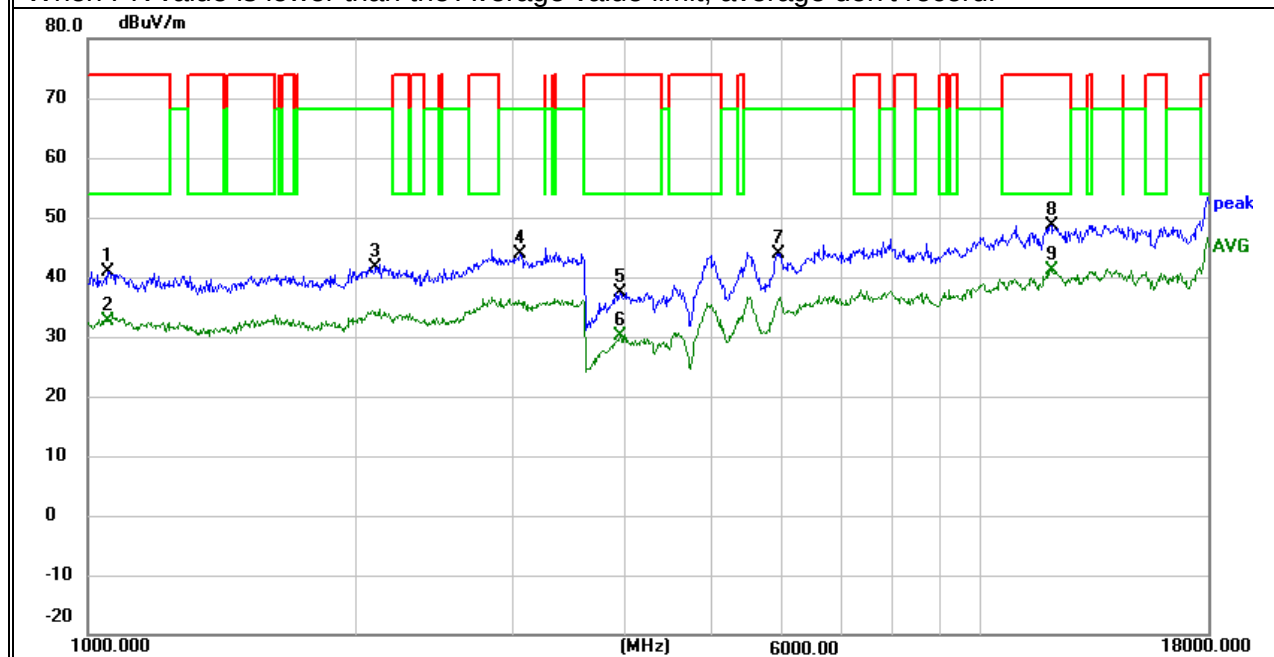


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1177.225	59.85	-18.64	41.21	74.00	-32.79	peak
H	1177.225	50.62	-18.64	31.98	54.00	-22.02	AVG
H	2132.625	54.48	-12.67	41.81	68.20	-26.39	peak
H	3019.600	53.45	-9.52	43.93	68.20	-24.27	peak
H	4025.150	46.16	-8.22	37.94	74.00	-36.06	peak
H	4025.150	37.90	-8.22	29.68	54.00	-24.32	AVG
H	5928.300	48.24	-4.59	43.65	68.20	-24.55	peak
H	12072.950	43.81	4.92	48.73	74.00	-25.27	peak
H	12072.950	35.95	4.92	40.87	54.00	-13.13	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

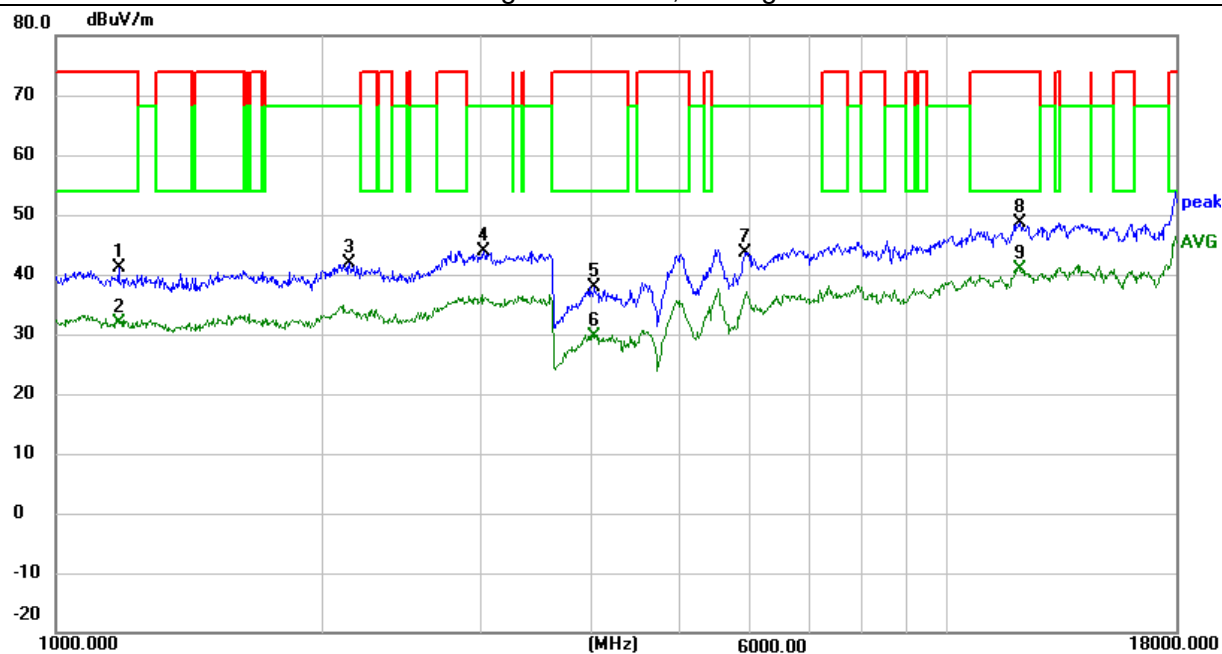

802.11ax20 5500


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1093.925	59.09	-18.01	41.08	74.00	-32.92	peak
V	1093.925	50.67	-18.01	32.66	54.00	-21.34	AVG
V	2079.925	55.41	-12.65	42.76	68.20	-25.44	peak
V	3019.600	53.92	-9.52	44.40	68.20	-23.80	peak
V	4016.225	46.41	-8.12	38.29	74.00	-35.71	peak
V	4016.225	37.91	-8.12	29.79	54.00	-24.21	AVG
V	5945.725	48.54	-4.41	44.13	68.20	-24.07	peak
V	12164.750	44.78	4.59	49.37	74.00	-24.63	peak
V	12164.750	35.90	4.59	40.49	54.00	-13.51	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

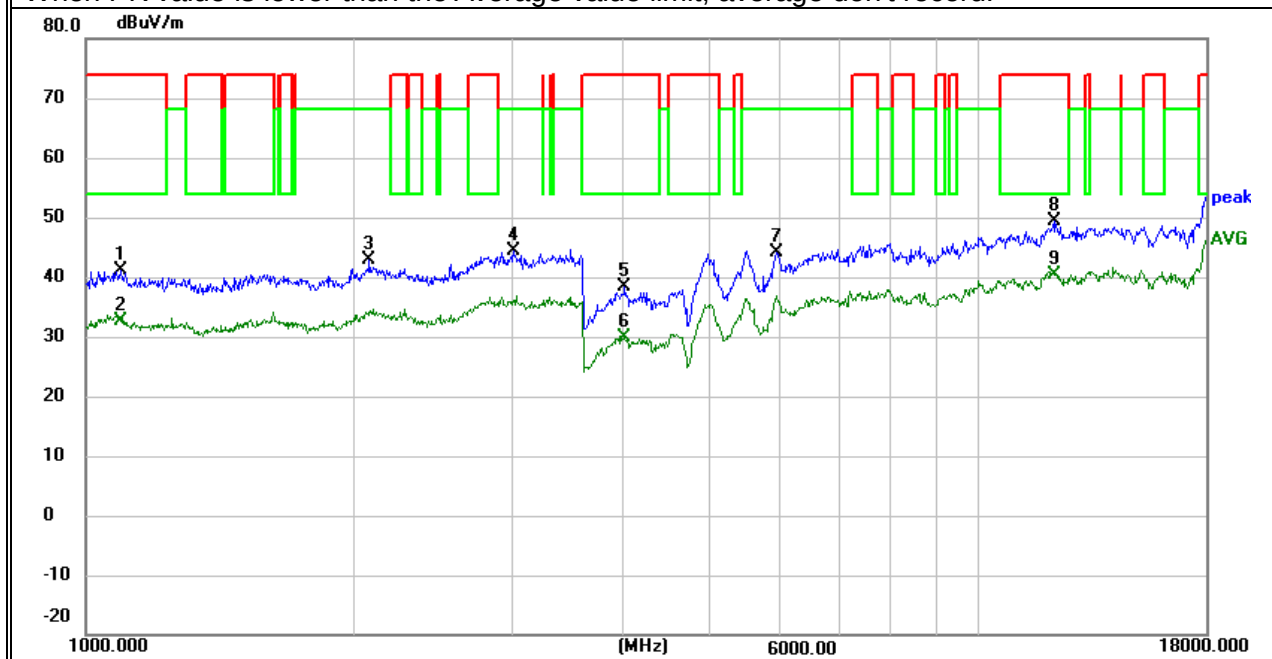


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBUV)	(dB)	(dBUV/m)	(dBUV/m)	(dB)	
H	1169.575	59.13	-18.71	40.42	74.00	-33.58	peak
H	1169.575	50.93	-18.71	32.22	54.00	-21.78	AVG
H	2028.500	54.44	-13.19	41.25	68.20	-26.95	peak
H	3320.500	54.64	-9.38	45.26	68.20	-22.94	peak
H	4176.025	46.11	-8.26	37.85	74.00	-36.15	peak
H	4176.025	37.07	-8.26	28.81	54.00	-25.19	AVG
H	6629.125	47.69	-3.47	44.22	68.20	-23.98	peak
H	12149.875	43.97	4.64	48.61	74.00	-25.39	peak
H	12149.875	36.08	4.64	40.72	54.00	-13.28	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

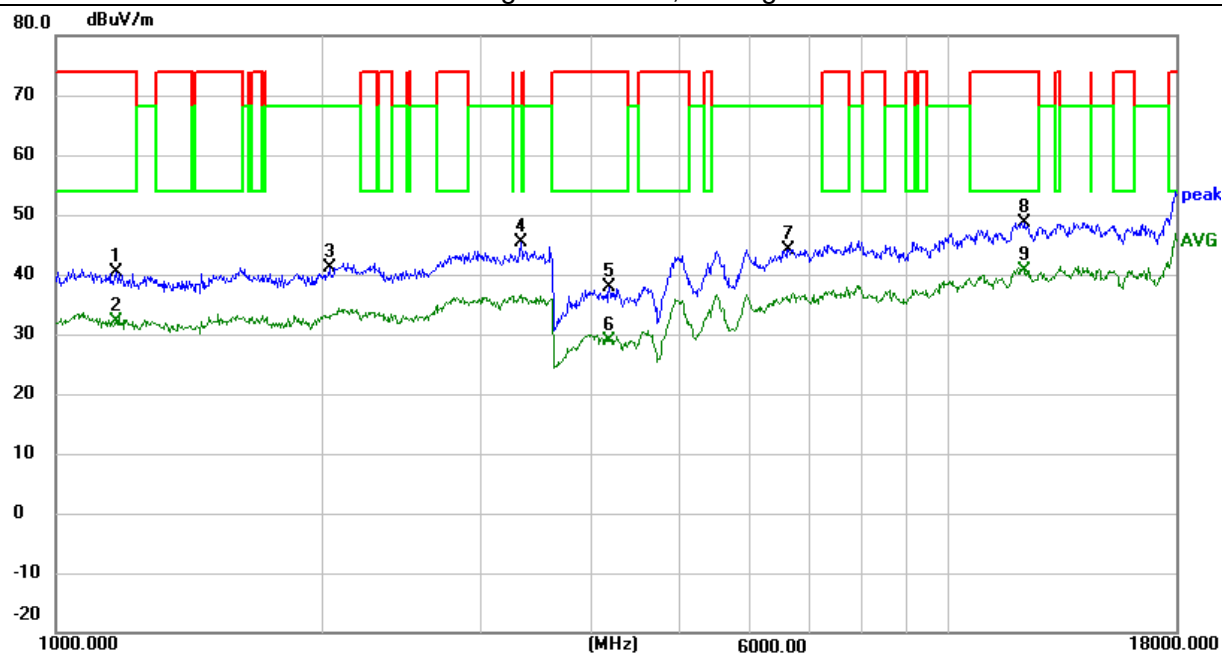

802.11ax20 5600


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1068.850	60.24	-18.28	41.96	74.00	-32.04	peak
V	1068.850	51.33	-18.28	33.05	54.00	-20.95	AVG
V	2090.550	54.56	-12.56	42.00	68.20	-26.20	peak
V	3081.225	53.55	-9.57	43.98	68.20	-24.22	peak
V	4040.025	45.88	-8.38	37.50	74.00	-36.50	peak
V	4040.025	38.17	-8.38	29.79	54.00	-24.21	AVG
V	5943.175	49.20	-4.44	44.76	68.20	-23.44	peak
V	12045.750	43.81	5.06	48.87	74.00	-25.13	peak
V	12045.750	35.32	5.06	40.38	54.00	-13.62	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

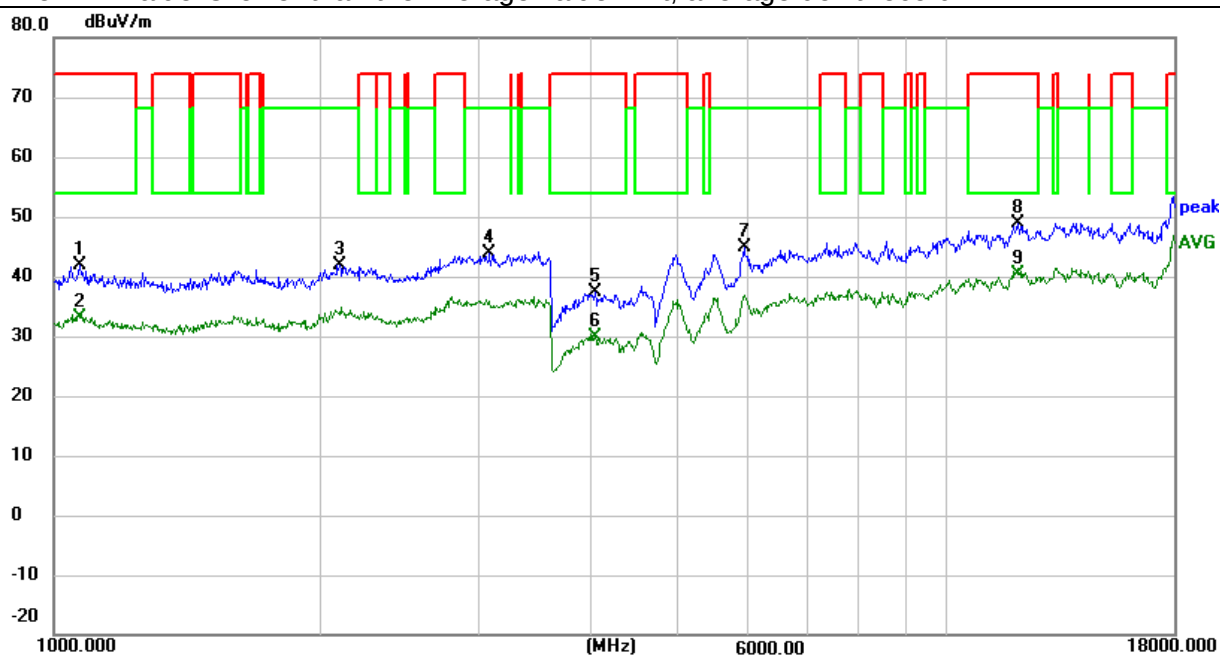


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1079.050	57.15	-18.17	38.98	74.00	-35.02	peak
H	1079.050	51.51	-18.17	33.34	54.00	-20.66	AVG
H	2080.775	54.88	-12.63	42.25	68.20	-25.95	peak
H	3039.575	53.35	-9.58	43.77	68.20	-24.43	peak
H	4229.575	45.41	-7.82	37.59	74.00	-36.41	peak
H	4229.575	36.88	-7.82	29.06	54.00	-24.94	AVG
H	5953.375	48.59	-4.45	44.14	68.20	-24.06	peak
H	12001.550	43.60	5.27	48.87	74.00	-25.13	peak
H	12001.550	35.77	5.27	41.04	54.00	-12.96	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

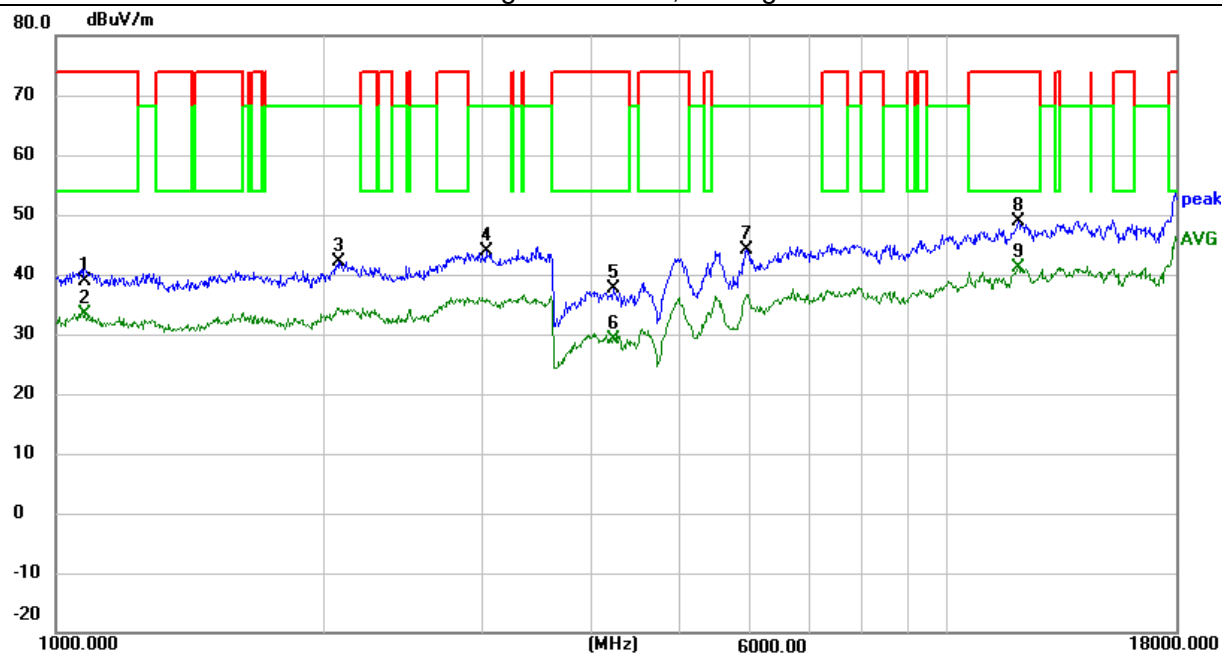

802.11ax20 5700


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1098.600	58.45	-17.96	40.49	74.00	-33.51	peak
V	1098.600	50.60	-17.96	32.64	54.00	-21.36	AVG
V	2108.825	54.98	-12.53	42.45	68.20	-25.75	peak
V	3020.875	53.28	-9.52	43.76	68.20	-24.44	peak
V	3892.975	46.56	-8.41	38.15	74.00	-35.85	peak
V	3892.975	37.30	-8.41	28.89	54.00	-25.11	AVG
V	5951.675	49.72	-4.41	45.31	68.20	-22.89	peak
V	12018.125	43.33	5.19	48.52	74.00	-25.48	peak
V	12018.125	35.38	5.19	40.57	54.00	-13.43	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

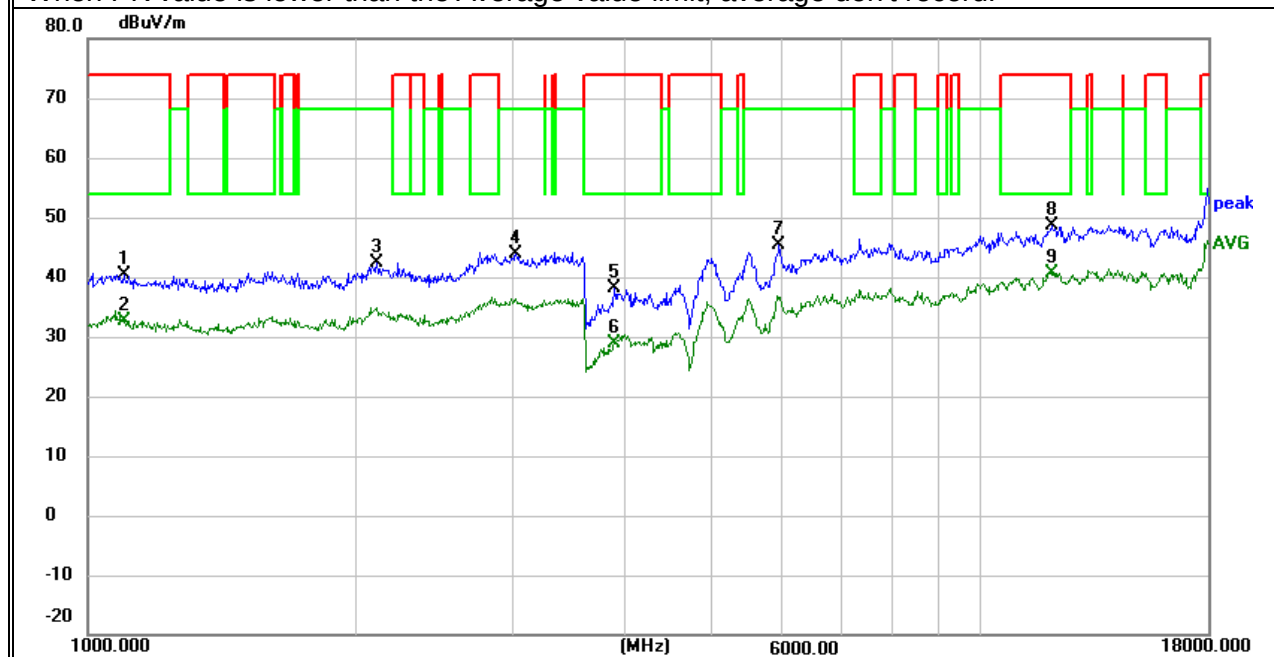


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1081.175	59.22	-18.15	41.07	74.00	-32.93	peak
H	1081.175	50.77	-18.15	32.62	54.00	-21.38	AVG
H	2134.750	54.29	-12.67	41.62	68.20	-26.58	peak
H	3081.650	52.85	-9.57	43.28	68.20	-24.92	peak
H	4217.675	46.38	-7.87	38.51	74.00	-35.49	peak
H	4217.675	37.18	-7.87	29.31	54.00	-24.69	AVG
H	5935.100	49.50	-4.52	44.98	68.20	-23.22	peak
H	11005.775	44.32	3.62	47.94	74.00	-26.06	peak
H	11005.775	35.87	3.62	39.49	54.00	-14.51	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

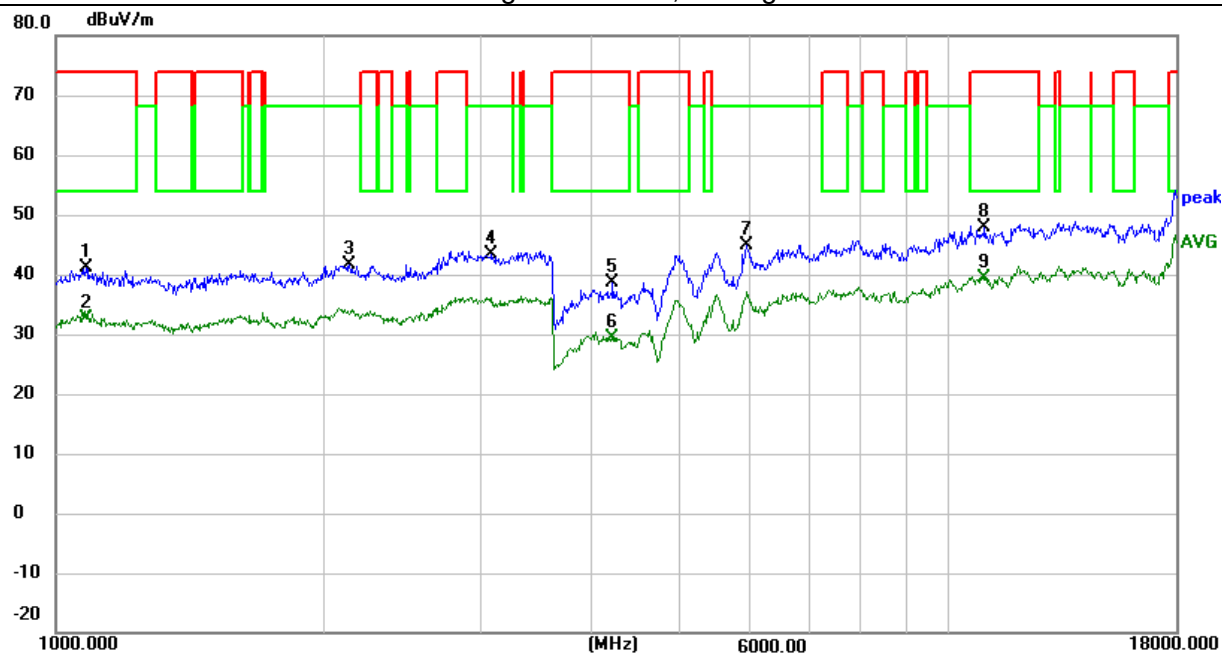

802.11ax40 5510


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1076.500	59.21	-18.20	41.01	74.00	-32.99	peak
V	1076.500	51.31	-18.20	33.11	54.00	-20.89	AVG
V	2024.250	54.52	-13.26	41.26	68.20	-26.94	peak
V	3089.300	53.82	-9.56	44.26	68.20	-23.94	peak
V	4026.425	45.92	-8.23	37.69	74.00	-36.31	peak
V	4026.425	37.80	-8.23	29.57	54.00	-24.43	AVG
V	5941.050	48.64	-4.46	44.18	68.20	-24.02	peak
V	12265.050	44.37	4.95	49.32	74.00	-24.68	peak
V	12265.050	35.49	4.95	40.44	54.00	-13.56	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

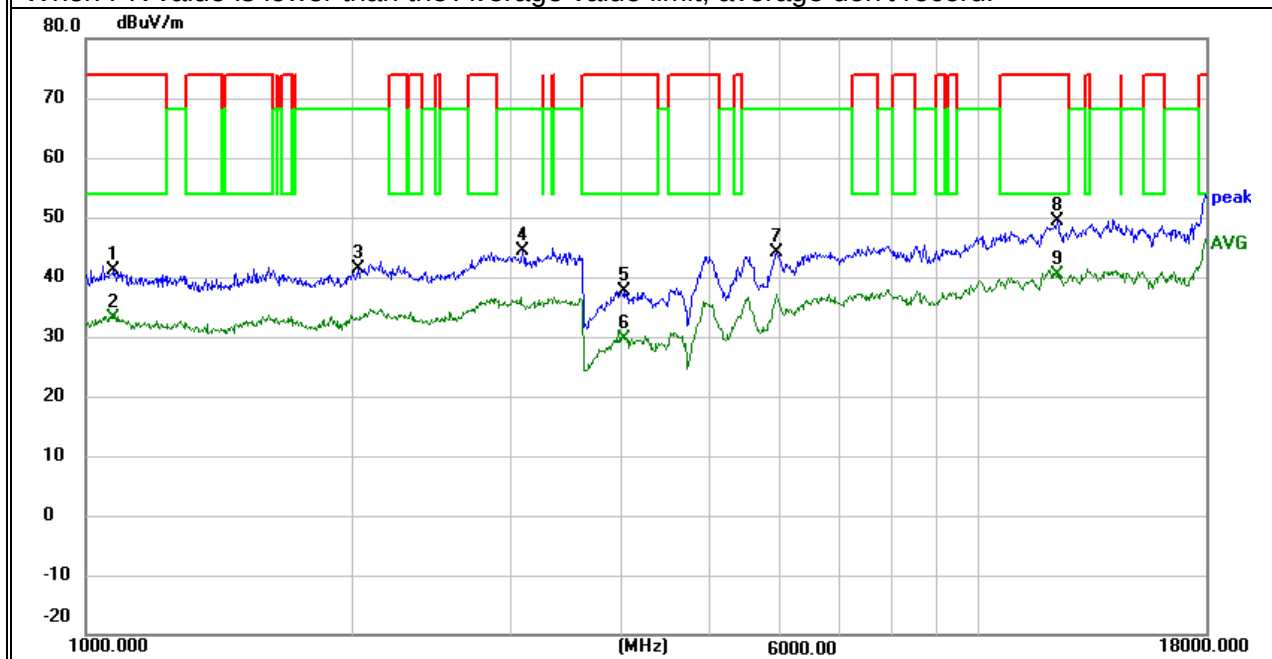


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1181.900	60.61	-18.60	42.01	74.00	-31.99	peak
H	1181.900	50.80	-18.60	32.20	54.00	-21.80	AVG
H	2054.425	54.31	-12.85	41.46	68.20	-26.74	peak
H	3018.325	53.68	-9.52	44.16	68.20	-24.04	peak
H	3936.750	45.64	-8.12	37.52	74.00	-36.48	peak
H	3936.750	38.17	-8.12	30.05	54.00	-23.95	AVG
H	6607.450	47.71	-3.31	44.40	68.20	-23.80	peak
H	12249.750	43.97	4.84	48.81	74.00	-25.19	peak
H	12249.750	35.79	4.84	40.63	54.00	-13.37	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

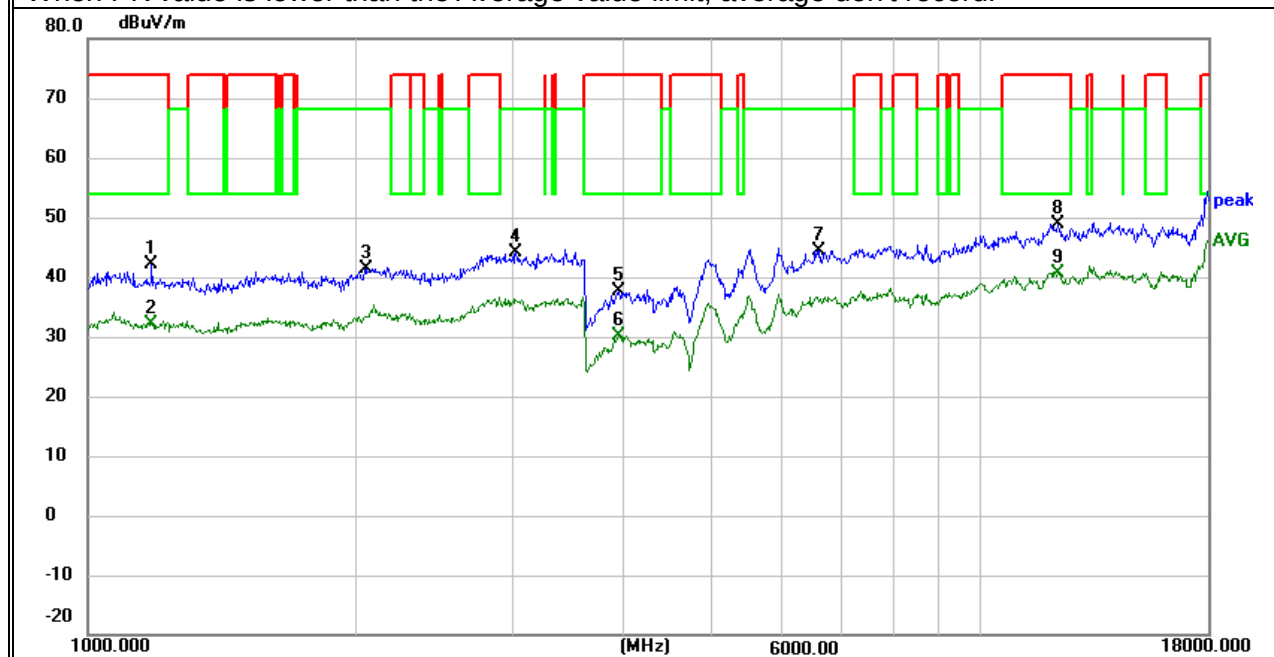

802.11ax40 5590


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1072.675	60.08	-18.24	41.84	74.00	-32.16	peak
V	1072.675	51.18	-18.24	32.94	54.00	-21.06	AVG
V	2083.325	55.46	-12.61	42.85	68.20	-25.35	peak
V	3059.975	53.66	-9.60	44.06	68.20	-24.14	peak
V	4028.125	46.61	-8.25	38.36	74.00	-35.64	peak
V	4028.125	37.71	-8.25	29.46	54.00	-24.54	AVG
V	5951.675	48.61	-4.41	44.20	68.20	-24.00	peak
V	12711.300	42.86	4.30	47.16	68.20	-21.04	peak
V	12711.300	35.96	4.30	40.26	68.20	-27.94	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

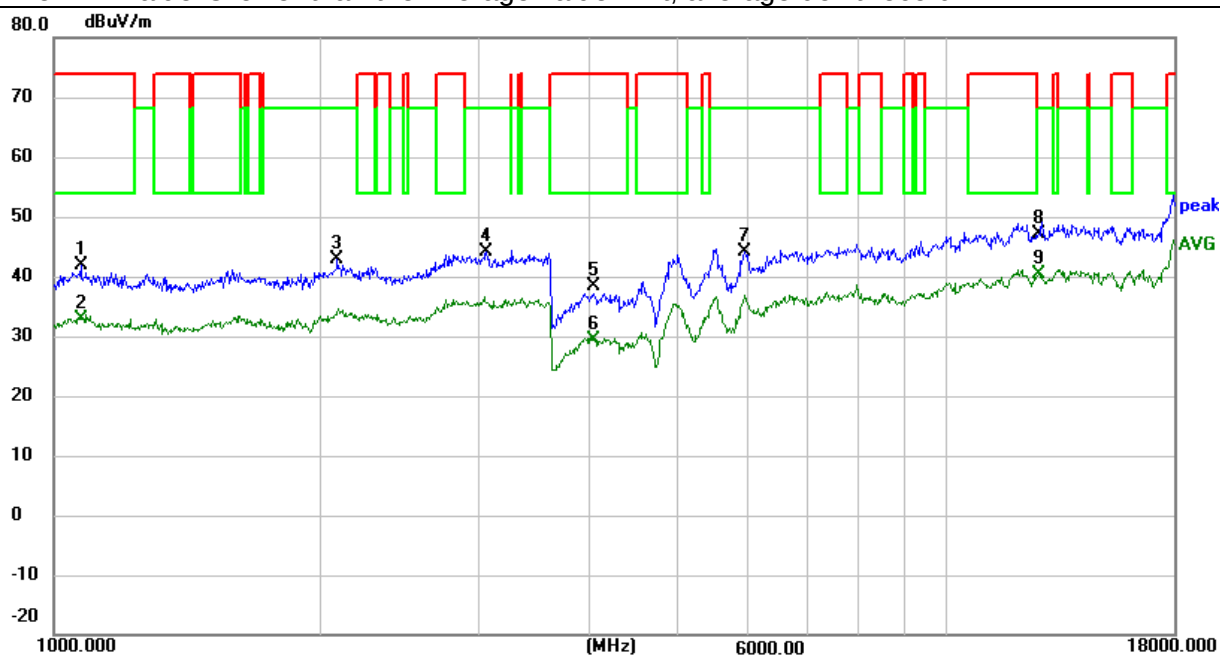


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1087.125	59.78	-18.09	41.69	74.00	-32.31	peak
H	1087.125	51.53	-18.09	33.44	54.00	-20.56	AVG
H	3944.825	45.85	-8.06	37.79	74.00	-36.21	peak
H	3944.825	37.34	-8.06	29.28	54.00	-24.72	AVG
H	12027.475	43.41	5.14	48.55	74.00	-25.45	peak
H	12027.475	36.90	5.14	42.04	54.00	-11.96	AVG
H	2115.625	54.68	-12.57	42.11	68.20	-26.09	peak
H	3026.400	53.42	-9.54	43.88	68.20	-24.32	peak
H	6592.150	47.83	-3.27	44.56	68.20	-23.64	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

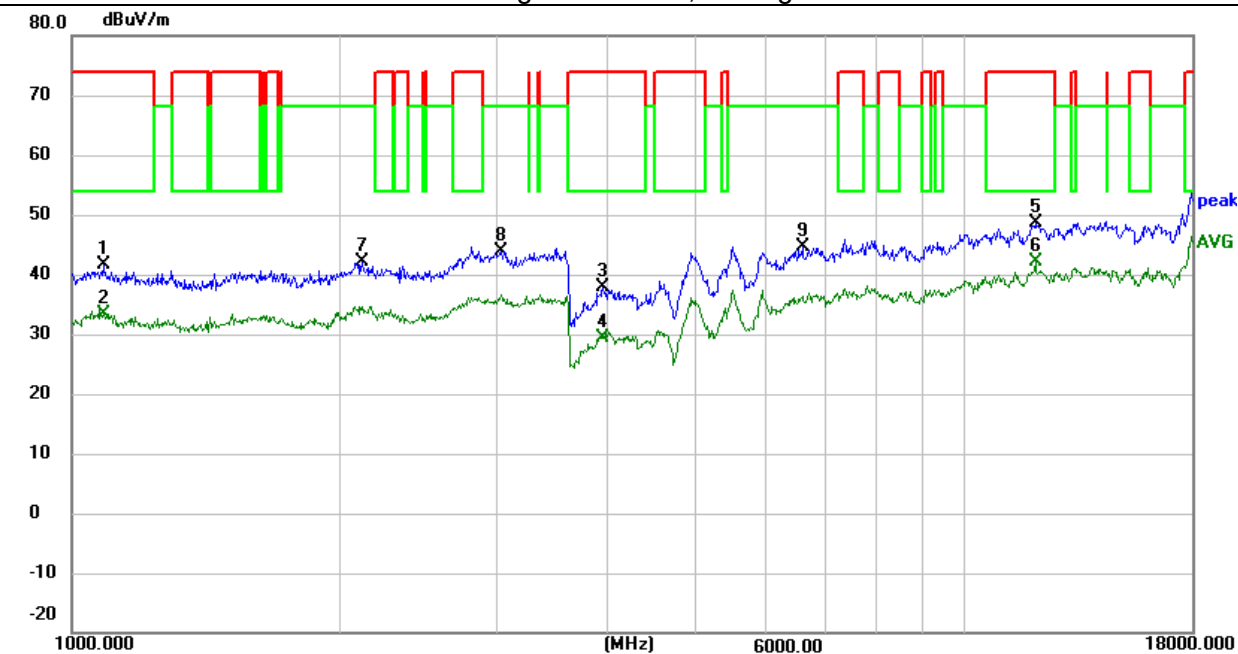

802.11ax40 5670


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1115.600	59.24	-18.25	40.99	74.00	-33.01	peak
V	1115.600	50.20	-18.25	31.95	54.00	-22.05	AVG
V	2148.775	55.91	-12.76	43.15	68.20	-25.05	peak
V	3053.600	52.98	-9.60	43.38	68.20	-24.82	peak
V	4007.725	46.30	-8.05	38.25	74.00	-35.75	peak
V	4007.725	37.72	-8.05	29.67	54.00	-24.33	AVG
V	5952.950	48.82	-4.44	44.38	68.20	-23.82	peak
V	11990.500	43.17	5.26	48.43	74.00	-25.57	peak
V	11990.500	35.48	5.26	40.74	54.00	-13.26	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

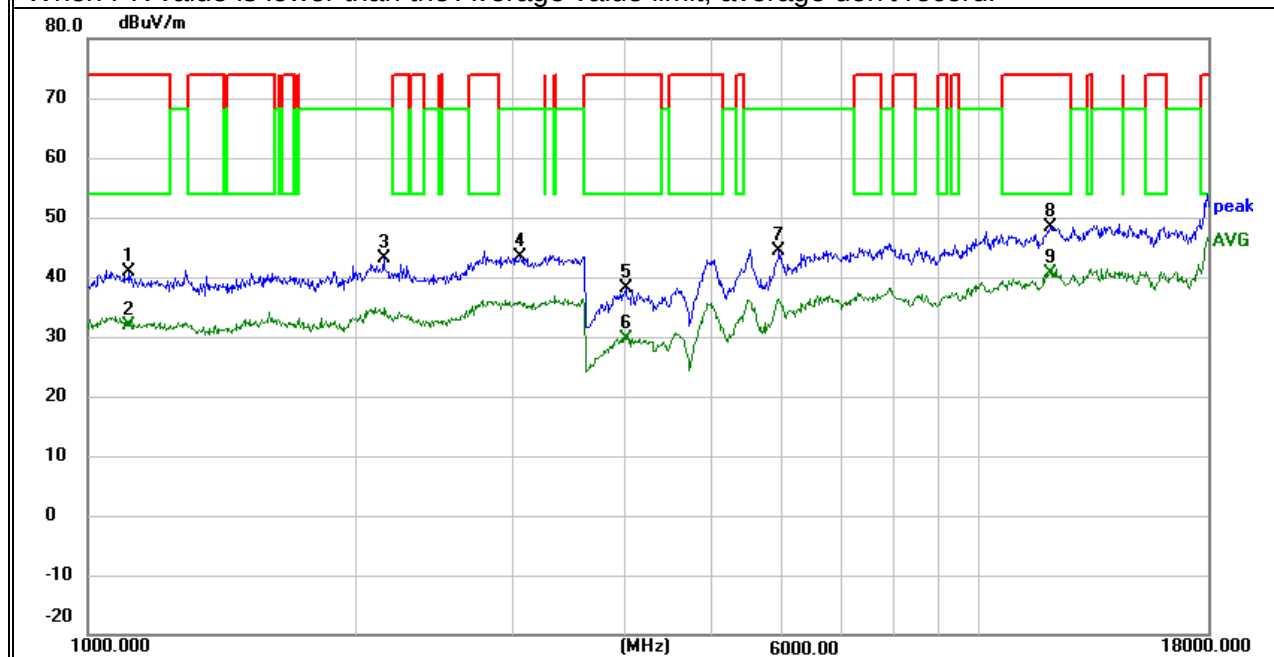


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1091.375	58.81	-18.04	40.77	74.00	-33.23	peak
H	1091.375	51.24	-18.04	33.20	54.00	-20.80	AVG
H	2078.225	54.59	-12.66	41.93	68.20	-26.27	peak
H	2989.000	53.42	-9.60	43.82	68.20	-24.38	peak
H	3994.550	45.51	-7.96	37.55	74.00	-36.45	peak
H	3994.550	37.70	-7.96	29.74	54.00	-24.26	AVG
H	6833.975	48.10	-3.47	44.63	68.20	-23.57	peak
H	12018.975	43.63	5.19	48.82	74.00	-25.18	peak
H	12018.975	35.86	5.19	41.05	54.00	-12.95	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

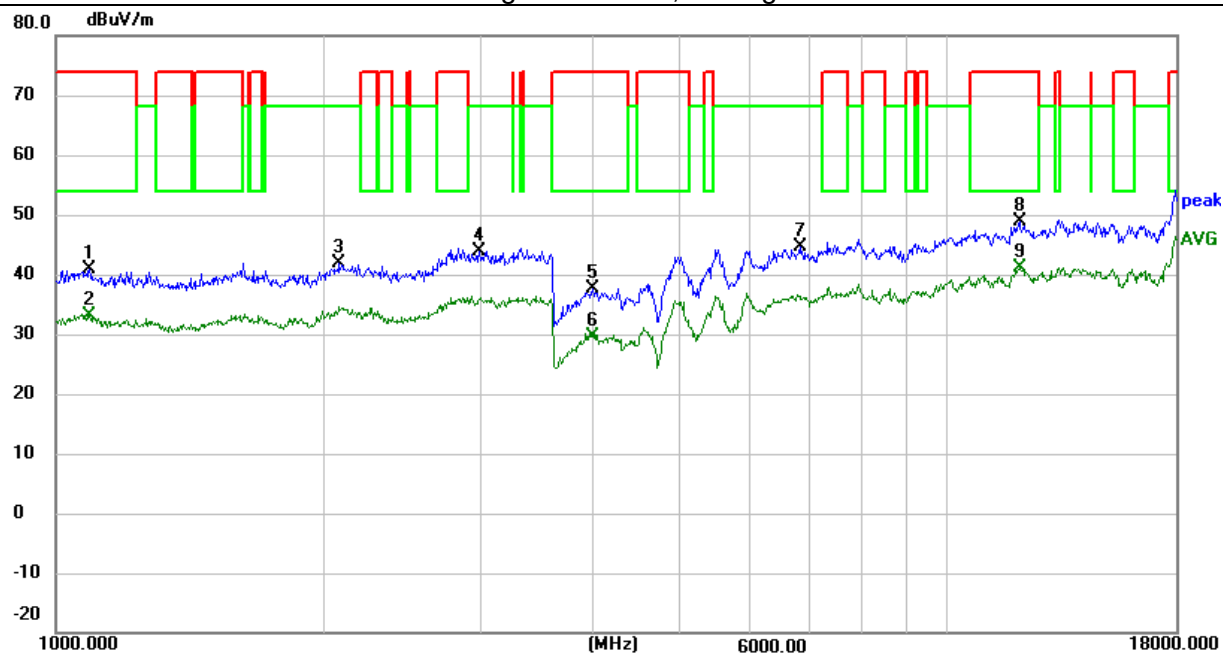

802.11ax80 5530


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1070.125	59.12	-18.26	40.86	74.00	-33.14	peak
V	1070.125	50.95	-18.26	32.69	54.00	-21.31	AVG
V	2096.075	54.61	-12.51	42.10	68.20	-26.10	peak
V	2997.500	54.56	-9.50	45.06	68.20	-23.14	peak
V	3979.250	46.00	-7.99	38.01	74.00	-35.99	peak
V	3979.250	37.41	-7.99	29.42	54.00	-24.58	AVG
V	6710.300	47.42	-3.02	44.40	68.20	-23.80	peak
V	12254.000	44.20	4.87	49.07	74.00	-24.93	peak
V	12254.000	35.45	4.87	40.32	54.00	-13.68	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

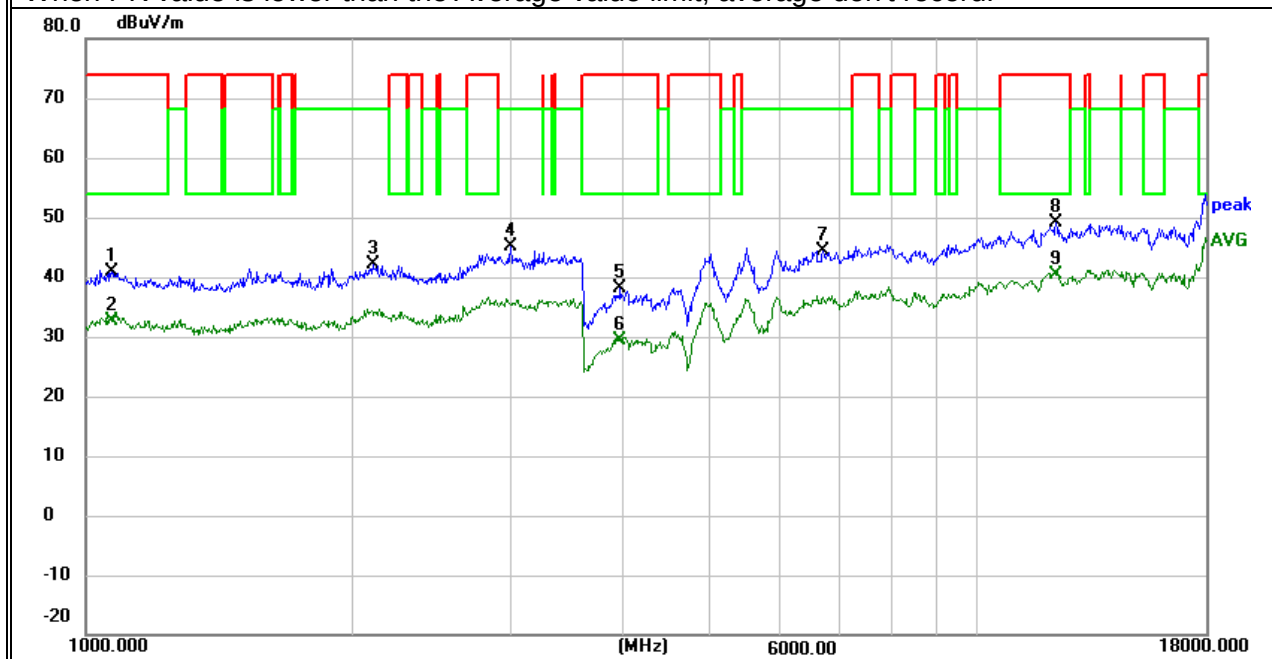


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1079.475	59.17	-18.16	41.01	74.00	-32.99	peak
H	1079.475	51.74	-18.16	33.58	54.00	-20.42	AVG
H	2113.075	54.58	-12.54	42.04	68.20	-26.16	peak
H	2909.525	53.58	-10.01	43.57	68.20	-24.63	peak
H	3927.400	46.05	-8.18	37.87	74.00	-36.13	peak
H	3927.400	37.40	-8.18	29.22	54.00	-24.78	AVG
H	6806.350	47.50	-3.26	44.24	68.20	-23.96	peak
H	12274.400	43.97	5.01	48.98	74.00	-25.02	peak
H	12274.400	35.58	5.01	40.59	54.00	-13.41	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

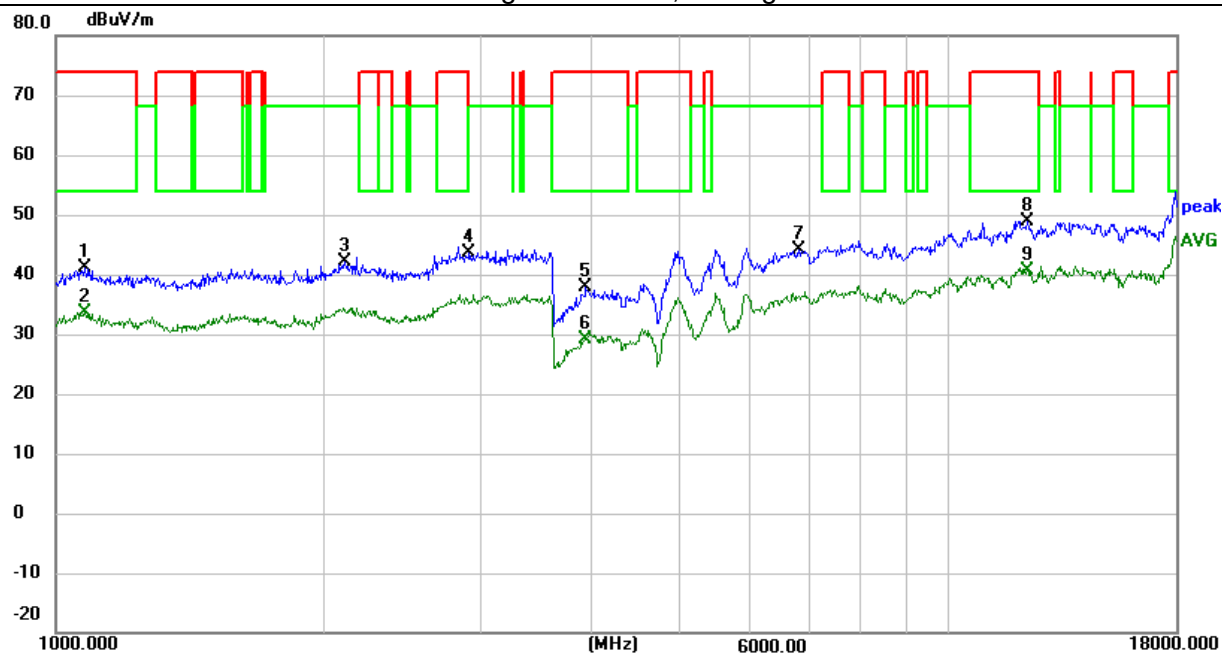

802.11ax80 5610


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1080.750	60.35	-18.15	42.20	74.00	-31.80	peak
V	1080.750	51.09	-18.15	32.94	54.00	-21.06	AVG
V	2091.825	53.87	-12.54	41.33	68.20	-26.87	peak
V	2960.950	54.01	-9.95	44.06	68.20	-24.14	peak
V	3994.550	45.62	-7.96	37.66	74.00	-36.34	peak
V	3994.550	37.72	-7.96	29.76	54.00	-24.24	AVG
V	5951.250	49.26	-4.40	44.86	68.20	-23.34	peak
V	12258.675	43.73	4.90	48.63	74.00	-25.37	peak
V	12258.675	35.98	4.90	40.88	54.00	-13.12	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

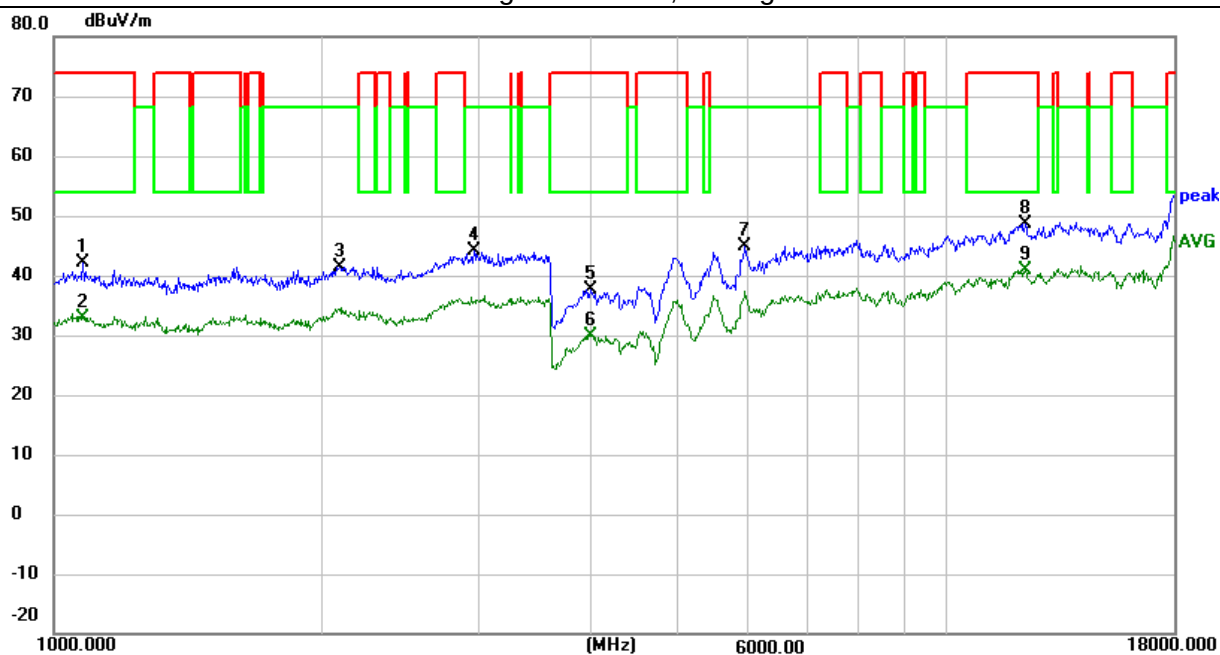


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1101.575	58.73	-17.98	40.75	74.00	-33.25	peak
H	1101.575	50.92	-17.98	32.94	54.00	-21.06	AVG
H	2084.600	54.59	-12.60	41.99	68.20	-26.21	peak
H	2900.600	53.59	-9.99	43.60	68.20	-24.60	peak
H	4190.050	46.42	-8.07	38.35	74.00	-35.65	peak
H	4190.050	37.28	-8.07	29.21	54.00	-24.79	AVG
H	5947.425	49.02	-4.40	44.62	68.20	-23.58	peak
H	12002.400	43.22	5.27	48.49	74.00	-25.51	peak
H	12002.400	35.35	5.27	40.62	54.00	-13.38	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

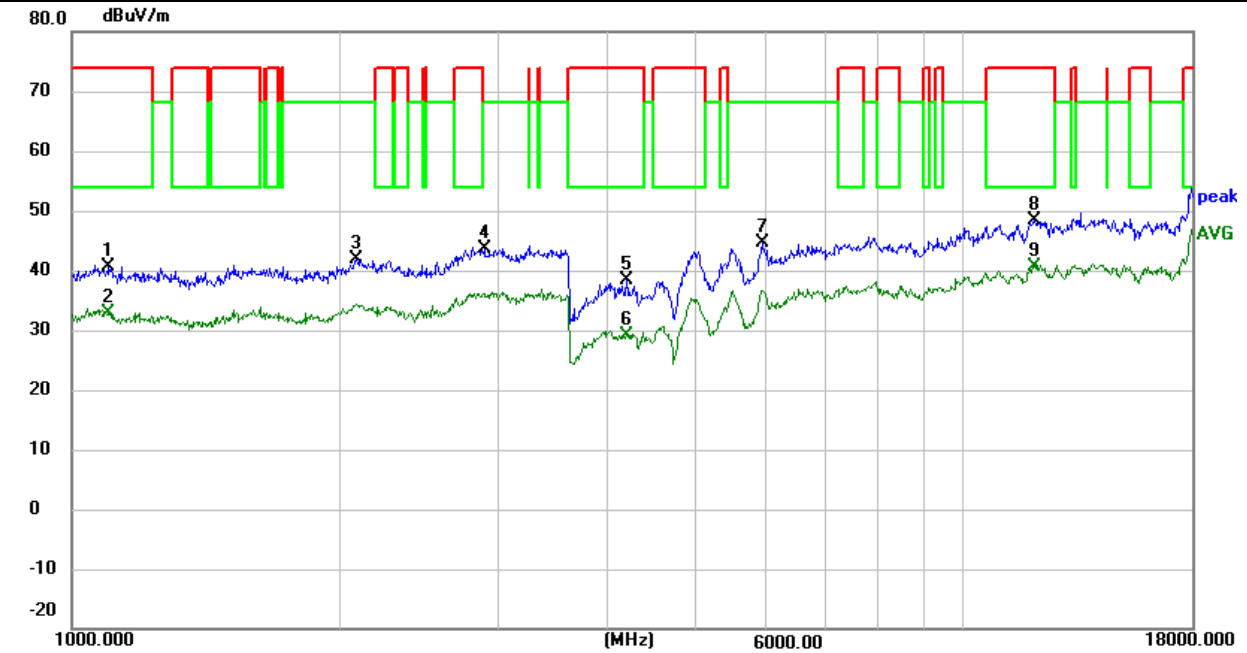

EUT :	PocketBook Q	Model Name. :	PB5084
Temperature :	24.1 °C	Relative Humidity :	50.1%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5.8G) -- 802.11a/n20/n40/ac20/ac40/ac80/ax20/ax40/ax80 mode		

All the modulation modes have been tested, and the worst-case result was 802.11a/ac40/ac80/ax20/ax40/ax80. Only the worst-case mode reported.
802.11a 5745


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1206.975	59.71	-18.33	41.38	74.00	-32.62	peak
V	1206.975	50.32	-18.33	31.99	54.00	-22.01	AVG
V	2181.075	55.74	-13.37	42.37	68.20	-25.83	peak
V	2181.075	47.06	-13.37	33.69	68.20	-34.51	AVG
V	3288.200	54.12	-9.31	44.81	68.20	-23.39	peak
V	3288.200	45.16	-9.31	35.85	68.20	-32.35	AVG
V	4956.325	49.45	-6.04	43.41	74.00	-30.59	peak
V	4956.325	42.31	-6.04	36.27	54.00	-17.73	AVG
V	7945.350	47.42	-1.31	46.11	68.20	-22.09	peak
V	7945.350	39.64	-1.31	38.33	68.20	-29.87	AVG
V	12011.325	44.67	5.22	49.89	74.00	-24.11	peak
V	12011.325	36.77	5.22	41.99	54.00	-12.01	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

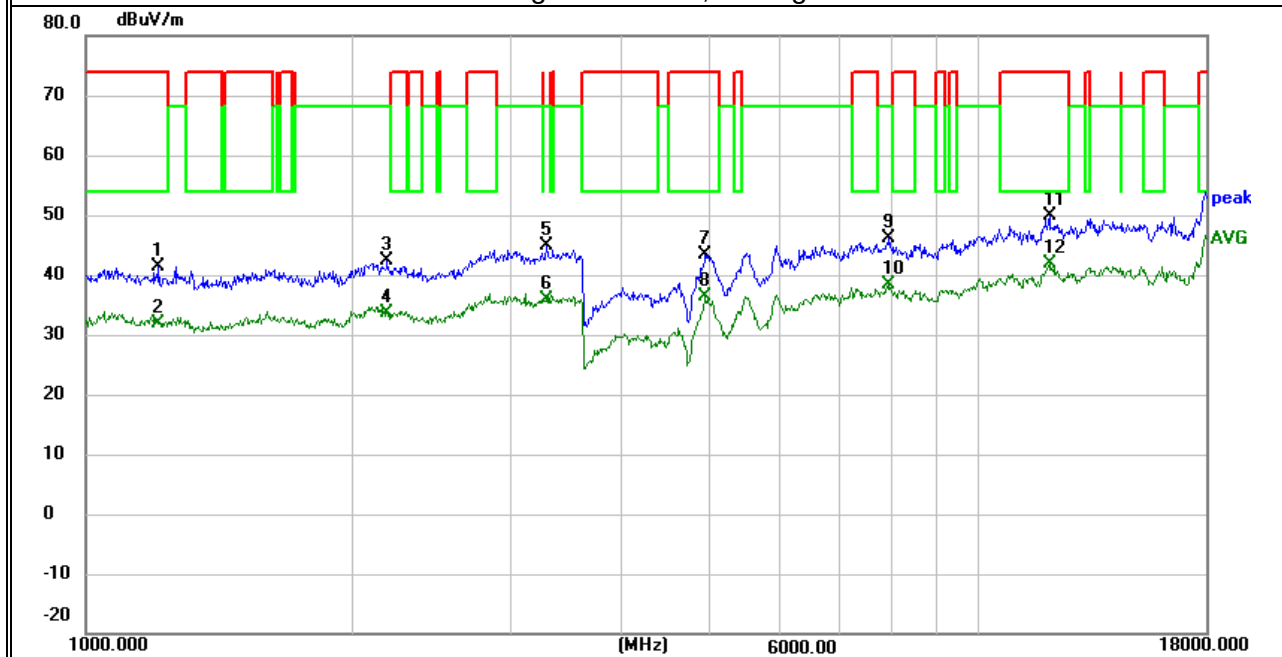


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1091.375	56.51	-18.04	38.47	74.00	-35.53	peak
H	1091.375	51.33	-18.04	33.29	54.00	-20.71	AVG
H	2083.325	55.15	-12.61	42.54	68.20	-25.66	peak
H	2083.325	47.20	-12.61	34.59	68.20	-33.61	AVG
H	2788.400	54.45	-10.52	43.93	74.00	-30.07	peak
H	2788.400	46.53	-10.52	36.01	54.00	-17.99	AVG
H	4980.975	50.44	-6.25	44.19	74.00	-29.81	peak
H	4980.975	41.54	-6.25	35.29	54.00	-18.71	AVG
H	7938.975	46.78	-1.35	45.43	68.20	-22.77	peak
H	7938.975	39.02	-1.35	37.67	68.20	-30.53	AVG
H	12108.650	44.36	4.76	49.12	74.00	-24.88	peak
H	12108.650	35.77	4.76	40.53	54.00	-13.47	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

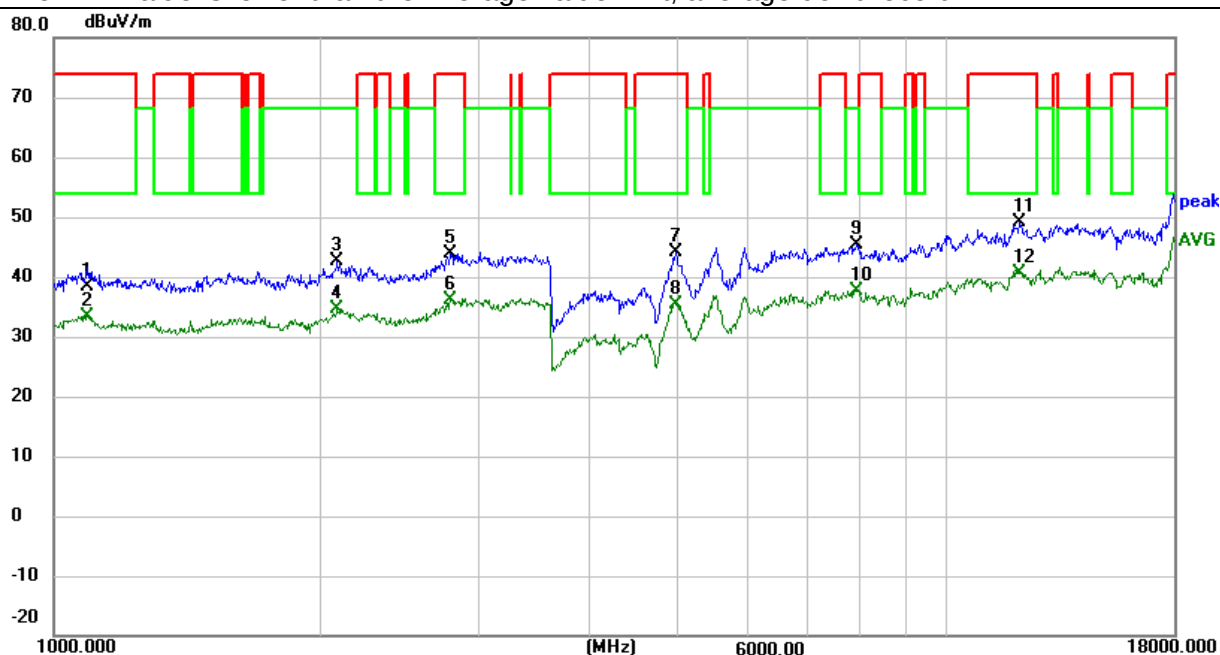

802.11a 5785


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1256.275	58.27	-17.87	40.40	68.20	-27.80	peak
V	1256.275	49.96	-17.87	32.09	68.20	-36.11	AVG
V	2151.750	55.07	-12.80	42.27	68.20	-25.93	peak
V	2151.750	46.46	-12.80	33.66	68.20	-34.54	AVG
V	2821.125	54.55	-10.33	44.22	74.00	-29.78	peak
V	2821.125	45.88	-10.33	35.55	54.00	-18.45	AVG
V	4972.900	49.66	-6.18	43.48	74.00	-30.52	peak
V	4972.900	41.57	-6.18	35.39	54.00	-18.61	AVG
V	7825.925	47.33	-1.80	45.53	68.20	-22.67	peak
V	7825.925	39.19	-1.80	37.39	68.20	-30.81	AVG
V	12008.350	43.97	5.24	49.21	74.00	-24.79	peak
V	12008.350	35.56	5.24	40.80	54.00	-13.20	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

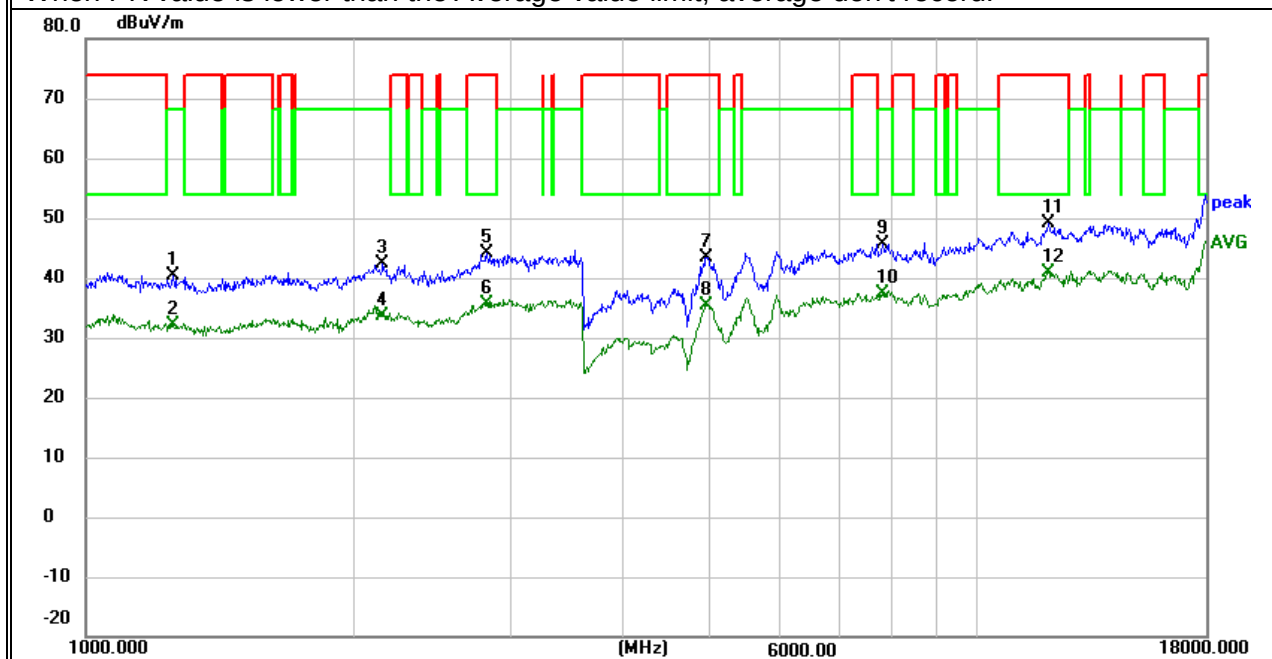


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1052.275	60.44	-18.45	41.99	74.00	-32.01	peak
H	1052.275	51.63	-18.45	33.18	54.00	-20.82	AVG
H	1623.900	57.19	-16.58	40.61	74.00	-33.39	peak
H	1623.900	50.06	-16.58	33.48	54.00	-20.52	AVG
H	2894.650	54.90	-10.02	44.88	74.00	-29.12	peak
H	2894.650	46.05	-10.02	36.03	54.00	-17.97	AVG
H	4959.725	48.94	-6.07	42.87	74.00	-31.13	peak
H	4959.725	41.12	-6.07	35.05	54.00	-18.95	AVG
H	7934.300	46.95	-1.37	45.58	68.20	-22.62	peak
H	7934.300	39.07	-1.37	37.70	68.20	-30.50	AVG
H	11894.875	43.86	5.12	48.98	74.00	-25.02	peak
H	11894.875	35.01	5.12	40.13	54.00	-13.87	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

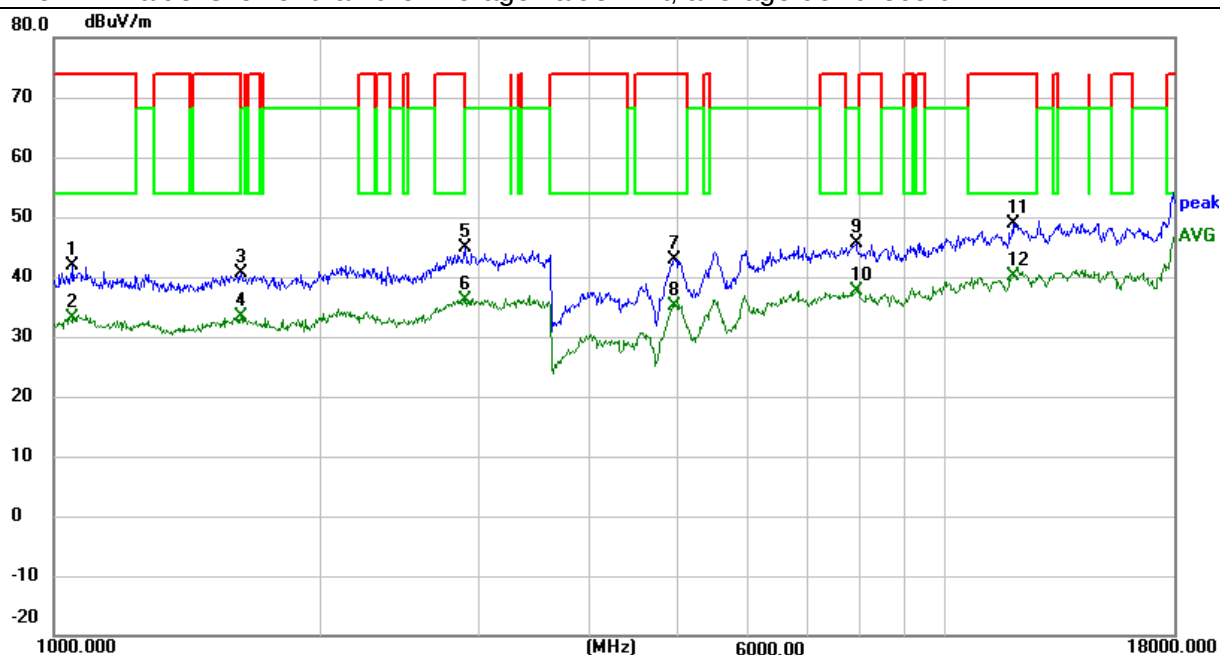

802.11a 5825


Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
V	1075.225	56.72	-18.21	38.51	74.00	-35.49	peak
V	1075.225	51.14	-18.21	32.93	54.00	-21.07	AVG
V	2111.800	54.88	-12.54	42.34	68.20	-25.86	peak
V	2111.800	46.60	-12.54	34.06	68.20	-34.14	AVG
V	2893.375	54.12	-10.02	44.10	74.00	-29.90	peak
V	2893.375	45.60	-10.02	35.58	54.00	-18.42	AVG
V	4978.850	49.24	-6.23	43.01	74.00	-30.99	peak
V	4978.850	41.59	-6.23	35.36	54.00	-18.64	AVG
V	8552.250	46.45	-0.70	45.75	68.20	-22.45	peak
V	8552.250	38.28	-0.70	37.58	68.20	-30.62	AVG
V	12018.125	43.61	5.19	48.80	74.00	-25.20	peak
V	12018.125	35.64	5.19	40.83	54.00	-13.17	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

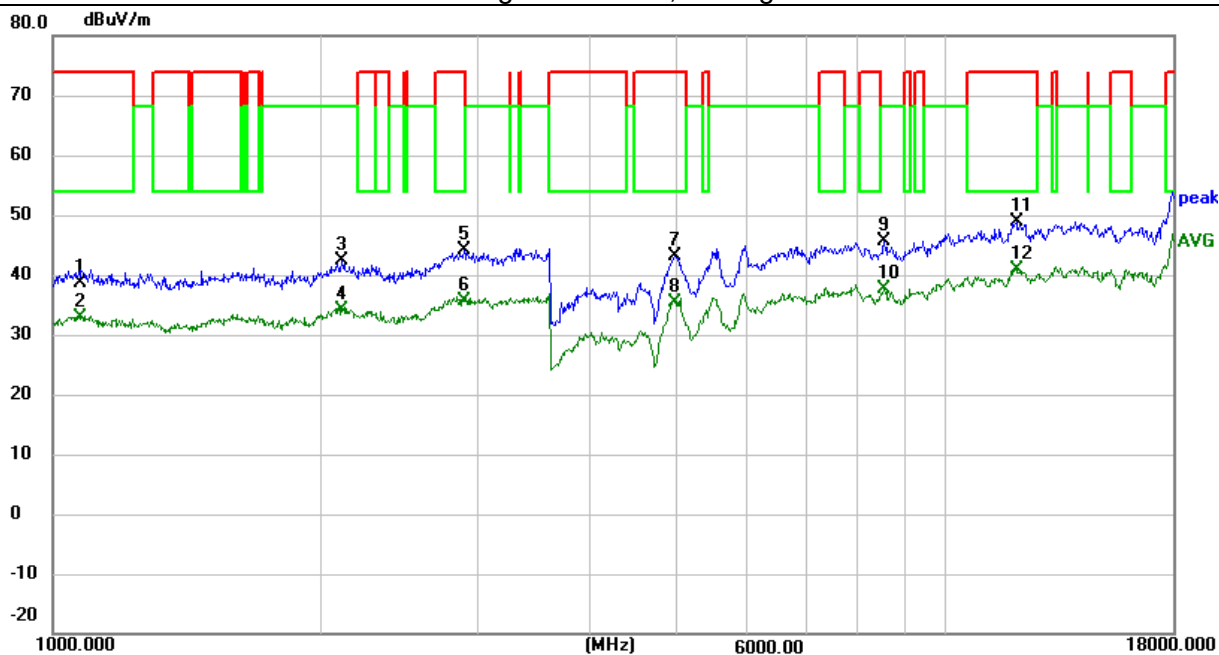


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1067.575	59.71	-18.29	41.42	74.00	-32.58	peak
H	1067.575	51.41	-18.29	33.12	54.00	-20.88	AVG
H	1624.750	58.52	-16.59	41.93	74.00	-32.07	peak
H	1624.750	49.18	-16.59	32.59	54.00	-21.41	AVG
H	2990.275	53.46	-9.59	43.87	68.20	-24.33	peak
H	2990.275	44.99	-9.59	35.40	68.20	-32.80	AVG
H	4944.850	48.95	-6.14	42.81	74.00	-31.19	peak
H	4944.850	41.75	-6.14	35.61	54.00	-18.39	AVG
H	7367.775	47.83	-2.21	45.62	74.00	-28.38	peak
H	7367.775	39.64	-2.21	37.43	54.00	-16.57	AVG
H	10052.075	46.33	1.68	48.01	68.20	-20.19	peak
H	10052.075	37.54	1.68	39.22	68.20	-28.98	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

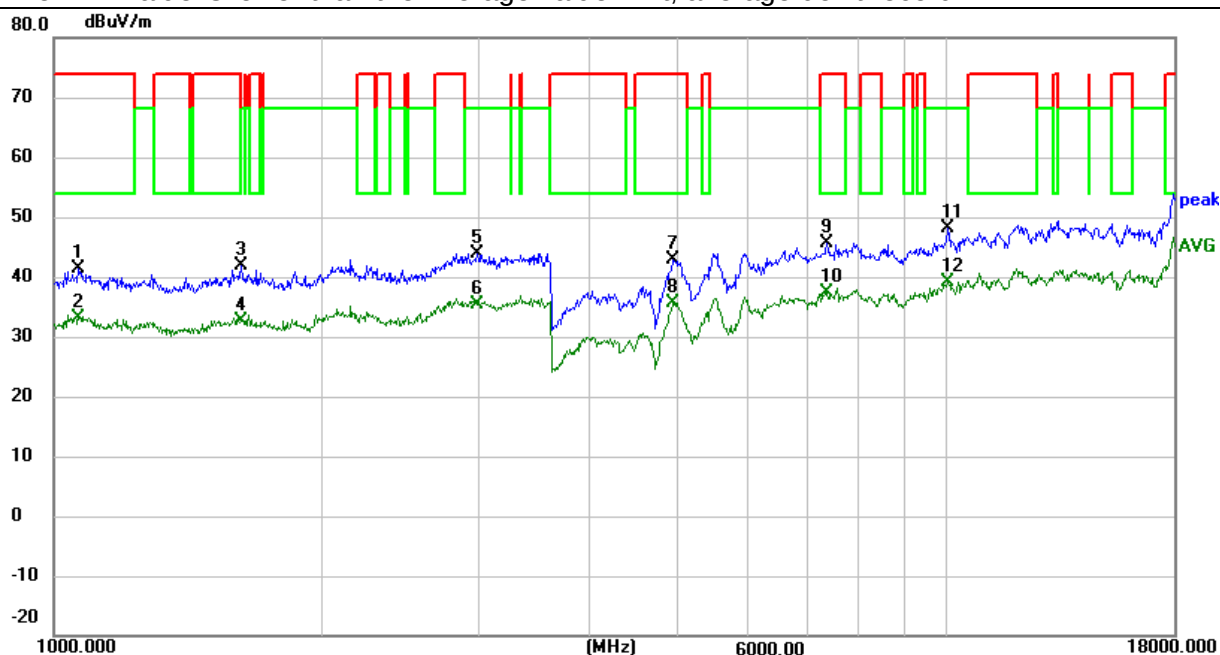

802.11ac20 5745


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	1066.300	59.46	-18.30	41.16	74.00	-32.84	peak
V	1066.300	51.47	-18.30	33.17	54.00	-20.83	AVG
V	2087.575	55.24	-12.58	42.66	68.20	-25.54	peak
V	2965.625	53.26	-9.88	43.38	68.20	-24.82	peak
V	4125.025	46.02	-8.65	37.37	74.00	-36.63	peak
V	4125.025	38.50	-8.65	29.85	54.00	-24.15	AVG
V	6536.900	48.56	-3.54	45.02	68.20	-23.18	peak
V	11970.525	43.74	5.24	48.98	74.00	-25.02	peak
V	11970.525	35.63	5.24	40.87	54.00	-13.13	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

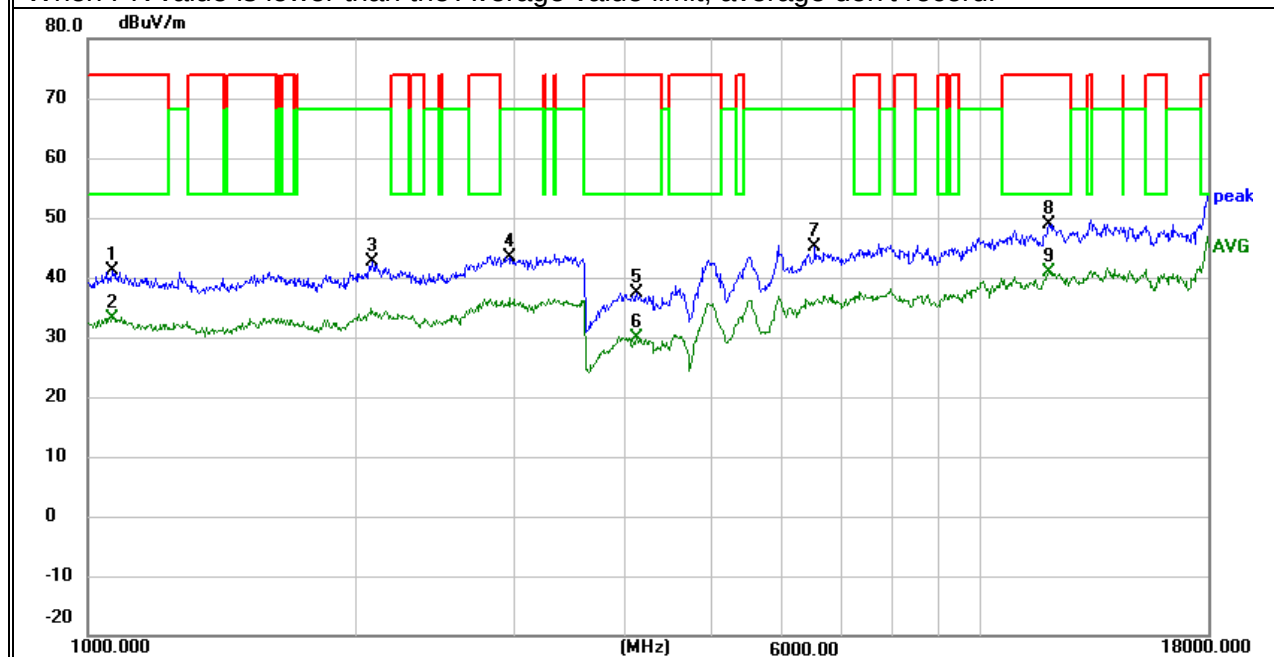


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1073.525	60.03	-18.23	41.80	74.00	-32.20	peak
H	1073.525	51.68	-18.23	33.45	54.00	-20.55	AVG
H	2073.550	54.52	-12.69	41.83	68.20	-26.37	peak
H	2952.875	53.66	-10.04	43.62	68.20	-24.58	peak
H	3994.125	45.81	-7.96	37.85	74.00	-36.15	peak
H	3994.125	37.58	-7.96	29.62	54.00	-24.38	AVG
H	6954.250	48.68	-3.61	45.07	68.20	-23.13	peak
H	12130.750	44.24	4.70	48.94	74.00	-25.06	peak
H	12130.750	36.46	4.70	41.16	54.00	-12.84	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

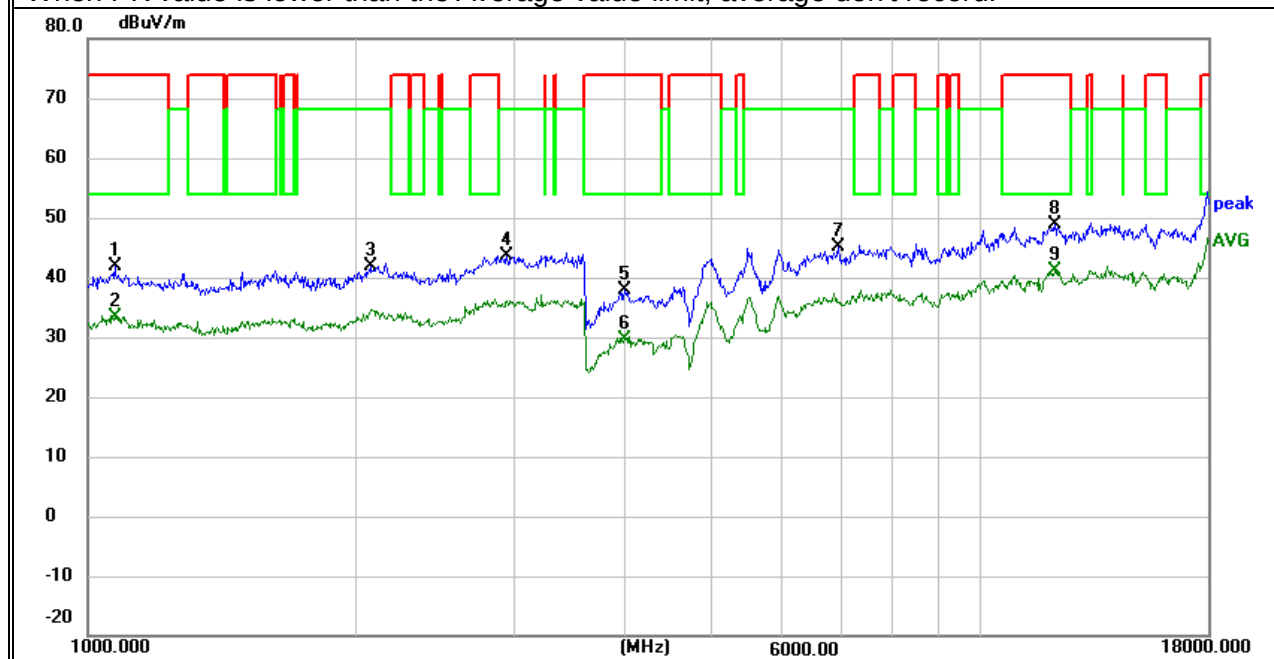

802.11ac20 5785


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1085.425	59.31	-18.11	41.20	74.00	-32.80	peak
V	1085.425	50.78	-18.11	32.67	54.00	-21.33	AVG
V	2069.725	54.89	-12.73	42.16	68.20	-26.04	peak
V	2936.725	54.39	-10.06	44.33	68.20	-23.87	peak
V	3994.125	45.06	-7.96	37.10	74.00	-36.90	peak
V	3994.125	37.61	-7.96	29.65	54.00	-24.35	AVG
V	6699.250	47.60	-2.84	44.76	68.20	-23.44	peak
V	11992.200	43.42	5.27	48.69	74.00	-25.31	peak
V	11992.200	35.72	5.27	40.99	54.00	-13.01	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

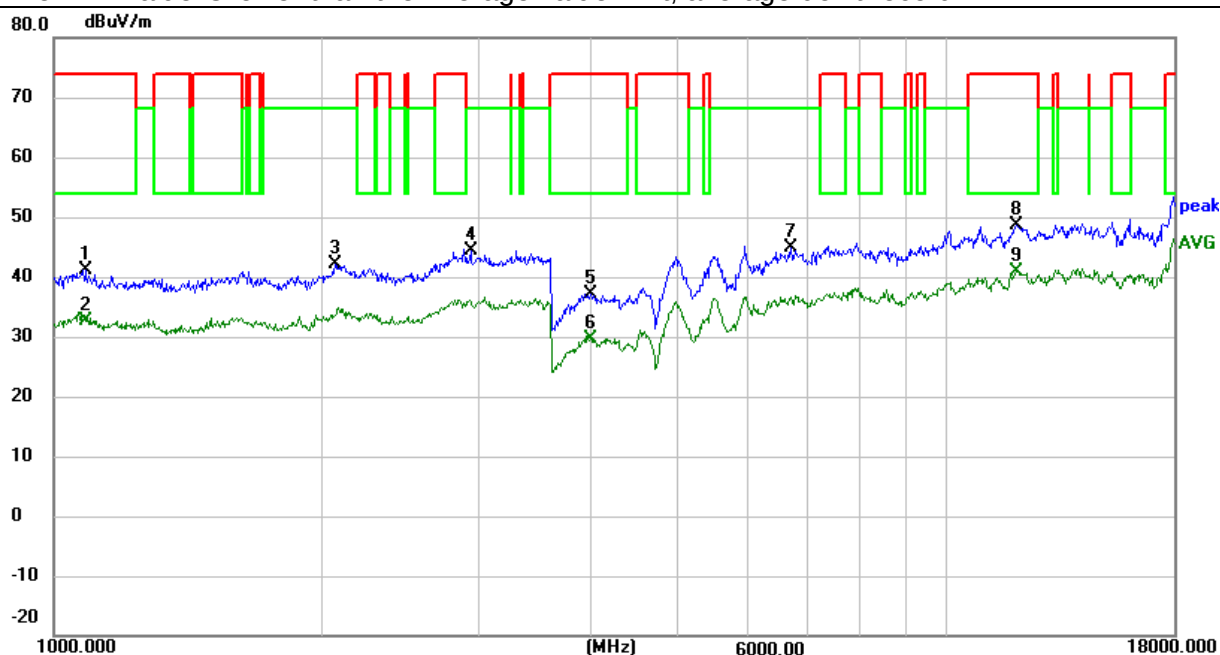


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1103.275	58.86	-18.01	40.85	74.00	-33.15	peak
H	1103.275	50.45	-18.01	32.44	54.00	-21.56	AVG
H	2082.050	54.73	-12.62	42.11	68.20	-26.09	peak
H	3035.325	53.66	-9.57	44.09	68.20	-24.11	peak
H	3930.375	45.71	-8.16	37.55	74.00	-36.45	peak
H	3930.375	37.75	-8.16	29.59	54.00	-24.41	AVG
H	6696.700	49.14	-2.88	46.26	68.20	-21.94	peak
H	11898.275	43.70	5.14	48.84	74.00	-25.16	peak
H	11898.275	35.26	5.14	40.40	54.00	-13.60	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

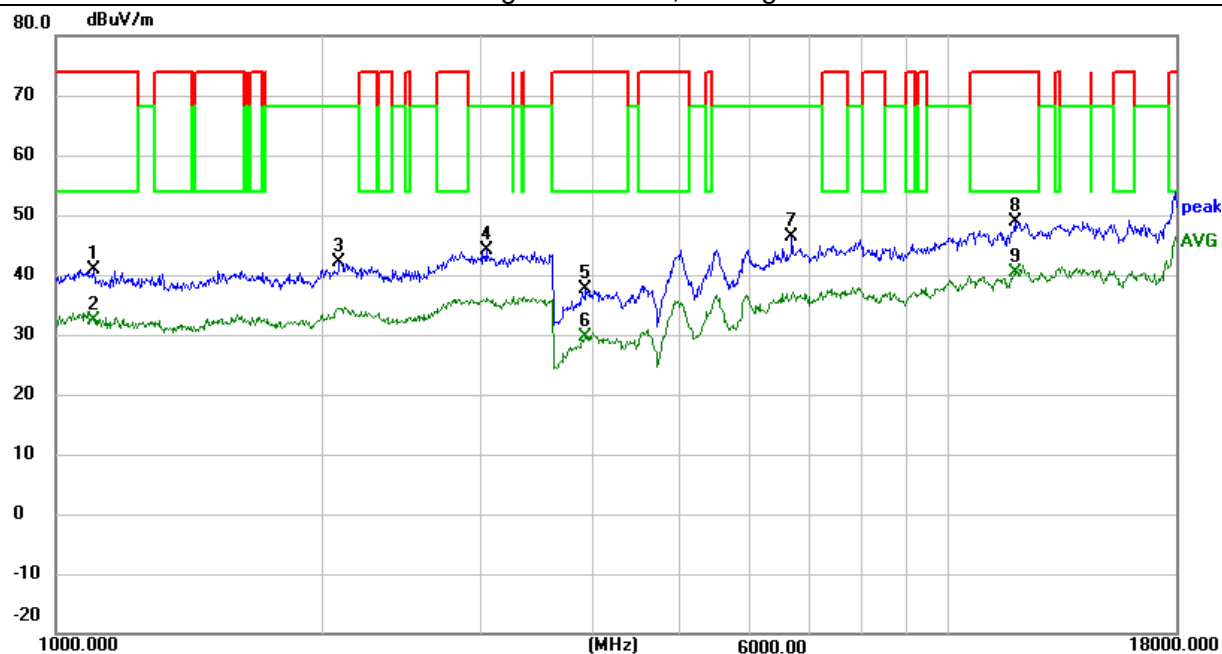

802.11ac20 5825


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1091.800	59.28	-18.04	41.24	74.00	-32.76	peak
V	1091.800	50.56	-18.04	32.52	54.00	-21.48	AVG
V	2084.600	54.51	-12.60	41.91	68.20	-26.29	peak
V	3166.225	53.36	-9.40	43.96	68.20	-24.24	peak
V	4166.675	46.88	-8.39	38.49	74.00	-35.51	peak
V	4166.675	37.68	-8.39	29.29	54.00	-24.71	AVG
V	6616.800	48.56	-3.37	45.19	68.20	-23.01	peak
V	12712.575	43.31	4.30	47.61	68.20	-20.59	peak
V	12712.575	35.80	4.30	40.10	68.20	-28.10	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

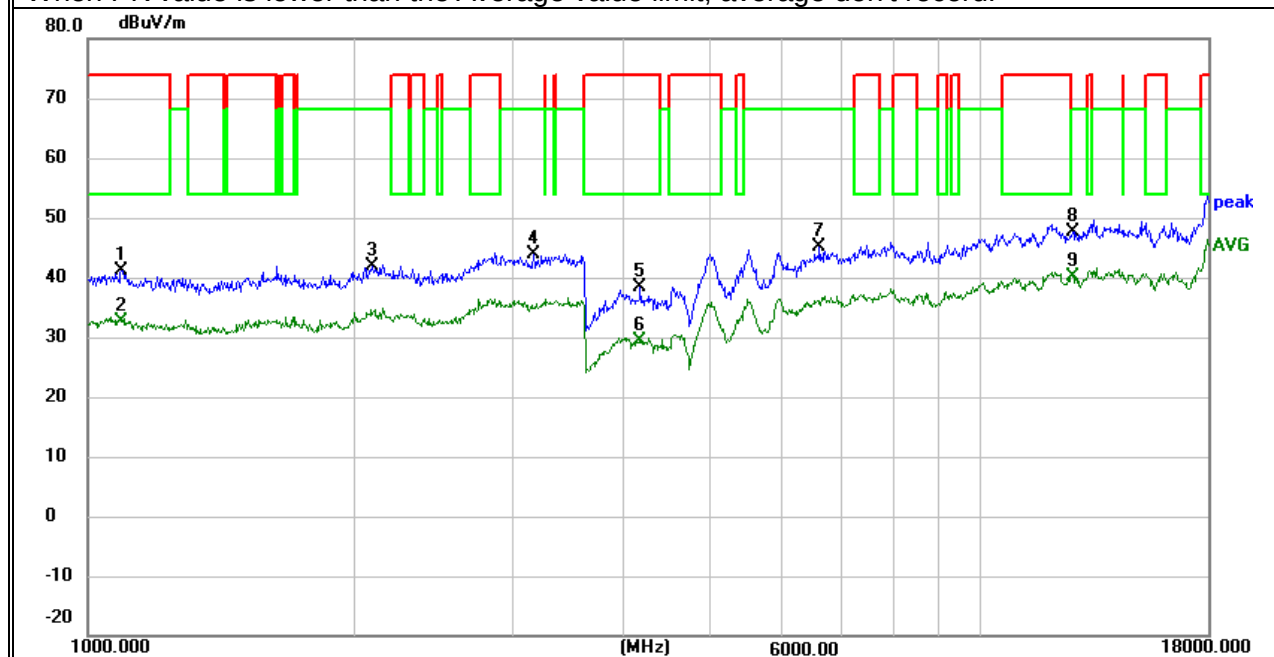


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1103.275	59.59	-18.01	41.58	74.00	-32.42	peak
H	1103.275	50.87	-18.01	32.86	54.00	-21.14	AVG
H	2088.850	55.42	-12.57	42.85	68.20	-25.35	peak
H	3037.450	53.24	-9.57	43.67	68.20	-24.53	peak
H	4167.100	46.44	-8.38	38.06	74.00	-35.94	peak
H	4167.100	37.80	-8.38	29.42	54.00	-24.58	AVG
H	5950.825	48.73	-4.40	44.33	68.20	-23.87	peak
H	11999.425	43.38	5.28	48.66	74.00	-25.34	peak
H	11999.425	35.89	5.28	41.17	54.00	-12.83	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

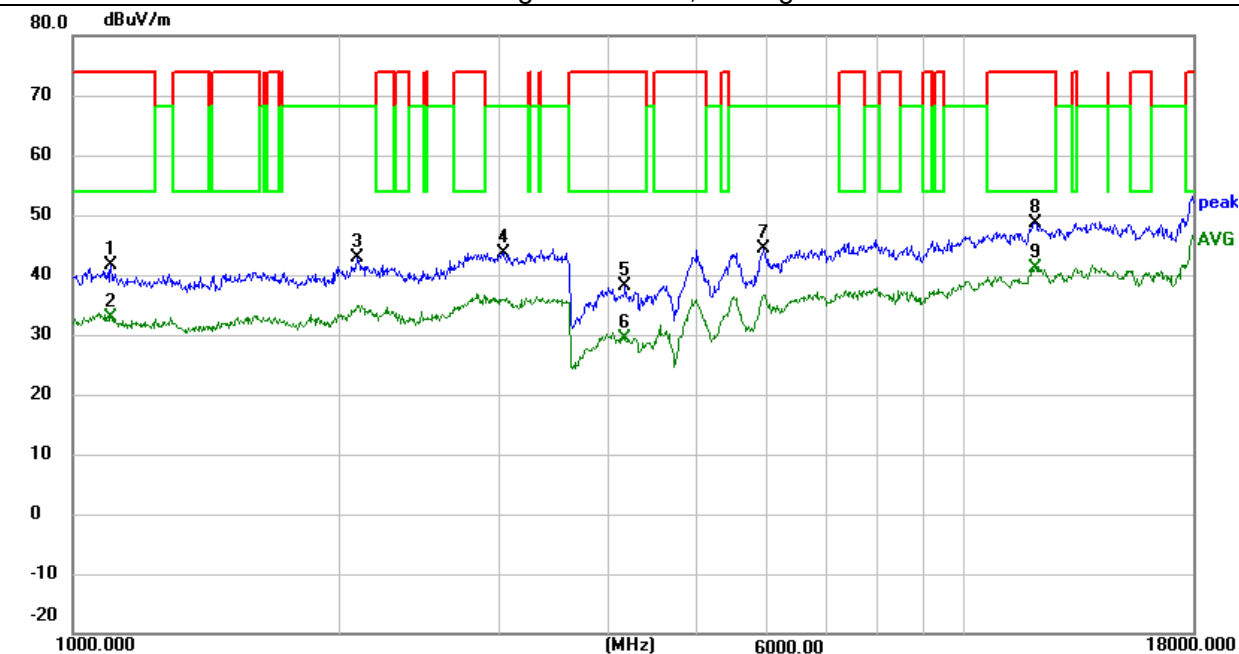

802.11ac40 5755


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1059.075	59.44	-18.39	41.05	74.00	-32.95	peak
V	1059.075	51.71	-18.39	33.32	54.00	-20.68	AVG
V	2121.150	54.34	-12.60	41.74	68.20	-26.46	peak
V	3109.700	53.09	-9.54	43.55	68.20	-24.65	peak
V	4017.500	47.14	-8.15	38.99	74.00	-35.01	peak
V	4017.500	37.78	-8.15	29.63	54.00	-24.37	AVG
V	5967.825	49.15	-4.73	44.42	68.20	-23.78	peak
V	12243.800	43.73	4.80	48.53	74.00	-25.47	peak
V	12243.800	35.25	4.80	40.05	54.00	-13.95	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

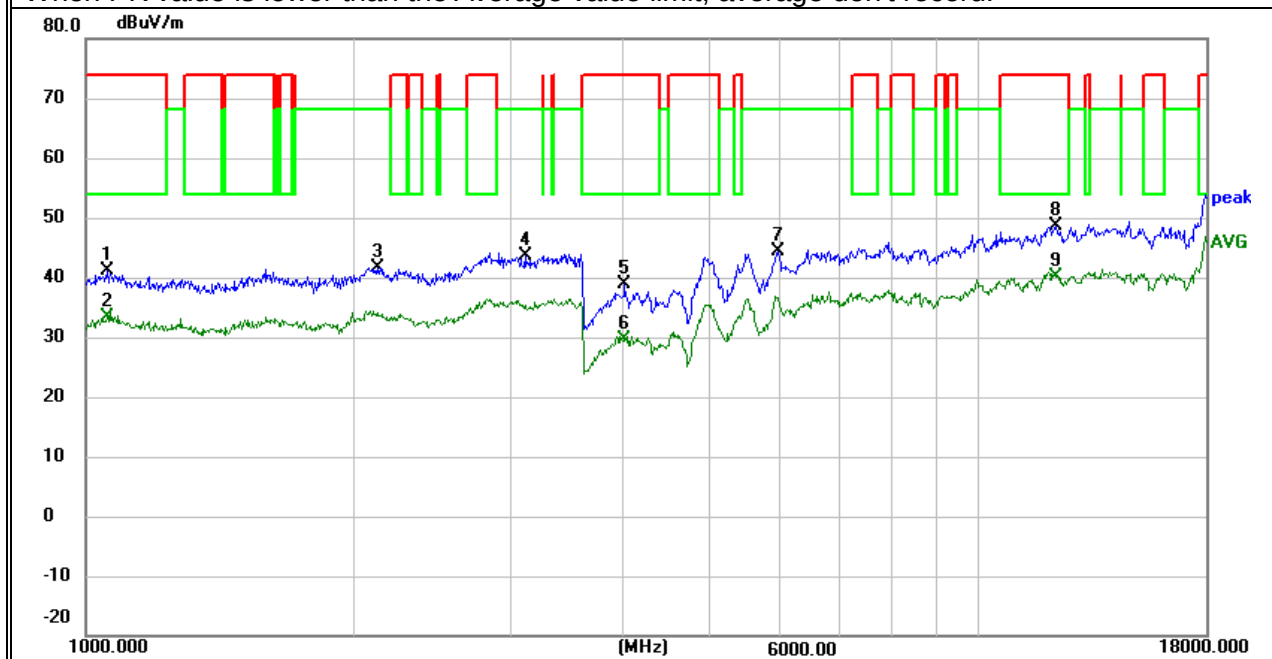


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1067.150	59.38	-18.29	41.09	74.00	-32.91	peak
H	1067.150	51.40	-18.29	33.11	54.00	-20.89	AVG
H	2111.375	55.19	-12.55	42.64	68.20	-25.56	peak
H	3027.675	53.26	-9.55	43.71	68.20	-24.49	peak
H	4124.600	46.76	-8.65	38.11	74.00	-35.89	peak
H	4124.600	38.63	-8.65	29.98	54.00	-24.02	AVG
H	6691.175	47.53	-2.97	44.56	68.20	-23.64	peak
H	11985.400	44.31	5.26	49.57	74.00	-24.43	peak
H	11985.400	36.08	5.26	41.34	54.00	-12.66	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

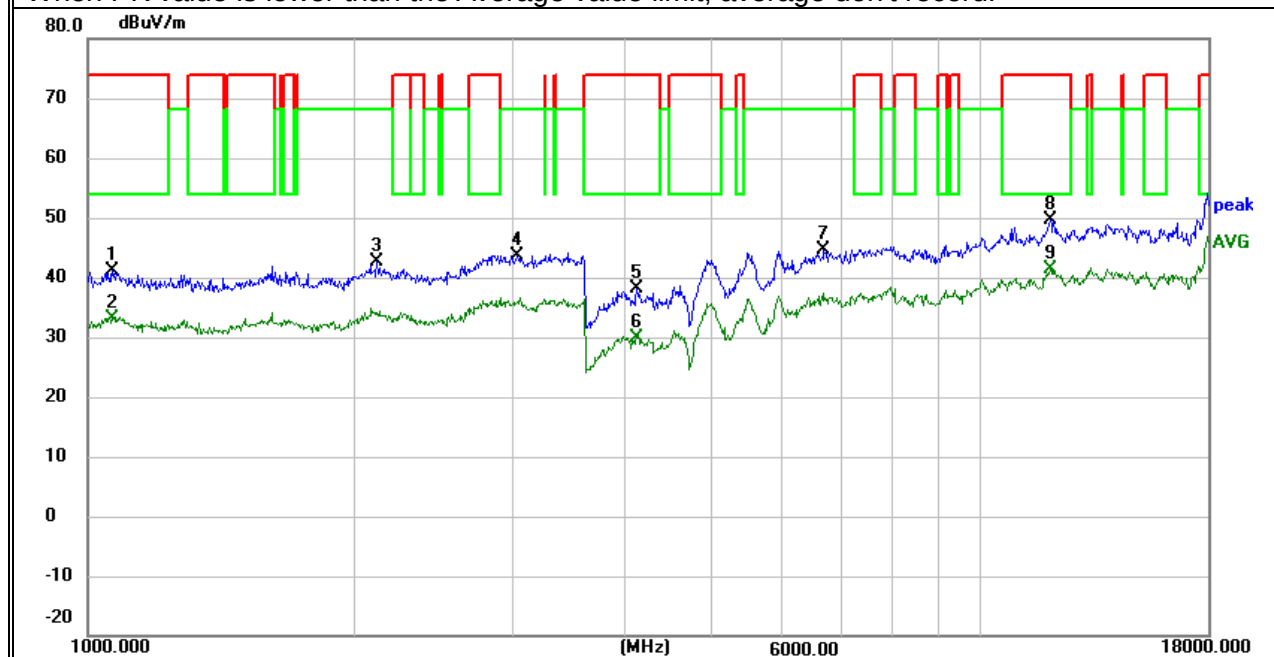

802.11ac40 5795


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1056.100	56.93	-18.41	38.52	74.00	-35.48	peak
V	1056.100	50.87	-18.41	32.46	54.00	-21.54	AVG
V	1982.600	54.58	-14.00	40.58	68.20	-27.62	peak
V	2965.200	54.10	-9.90	44.20	68.20	-24.00	peak
V	4043.000	45.76	-8.41	37.35	74.00	-36.65	peak
V	4043.000	37.94	-8.41	29.53	54.00	-24.47	AVG
V	6706.475	47.92	-2.95	44.97	68.20	-23.23	peak
V	12167.725	43.92	4.58	48.50	74.00	-25.50	peak
V	12167.725	35.88	4.58	40.46	54.00	-13.54	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

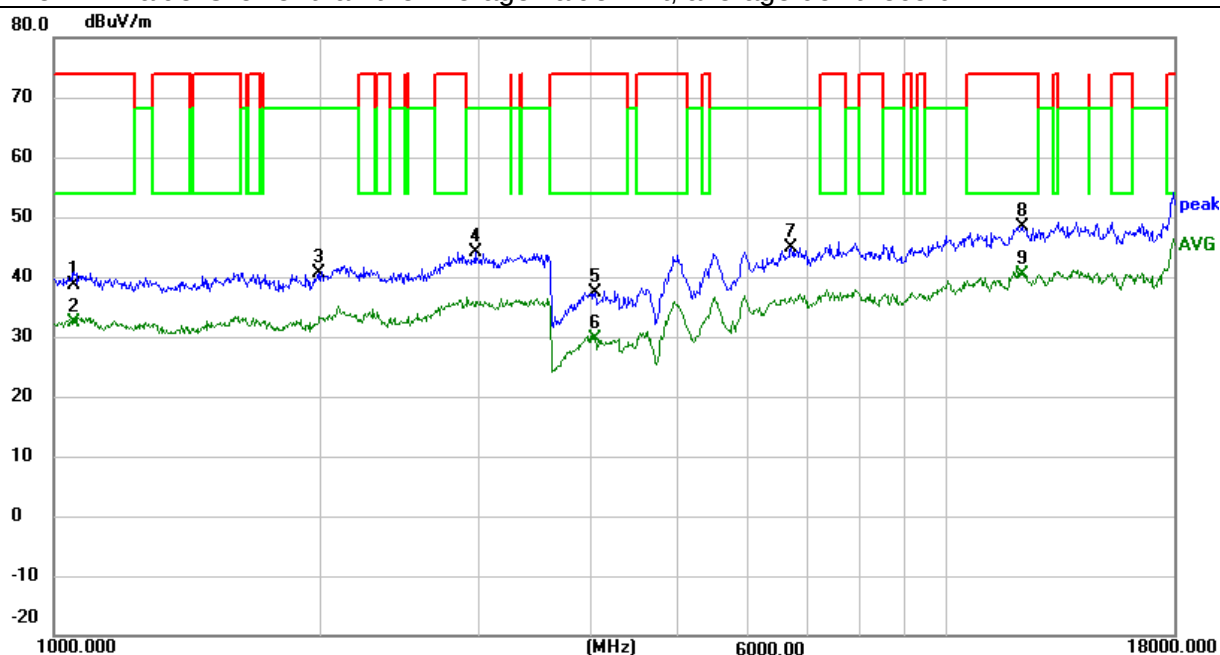


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1081.175	59.07	-18.15	40.92	74.00	-33.08	peak
H	2045.075	55.00	-12.96	42.04	68.20	-26.16	peak
H	2975.825	53.71	-9.76	43.95	68.20	-24.25	peak
H	4042.150	46.25	-8.40	37.85	74.00	-36.15	peak
H	6671.625	48.16	-3.29	44.87	68.20	-23.33	peak
H	12089.100	44.04	4.83	48.87	74.00	-25.13	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

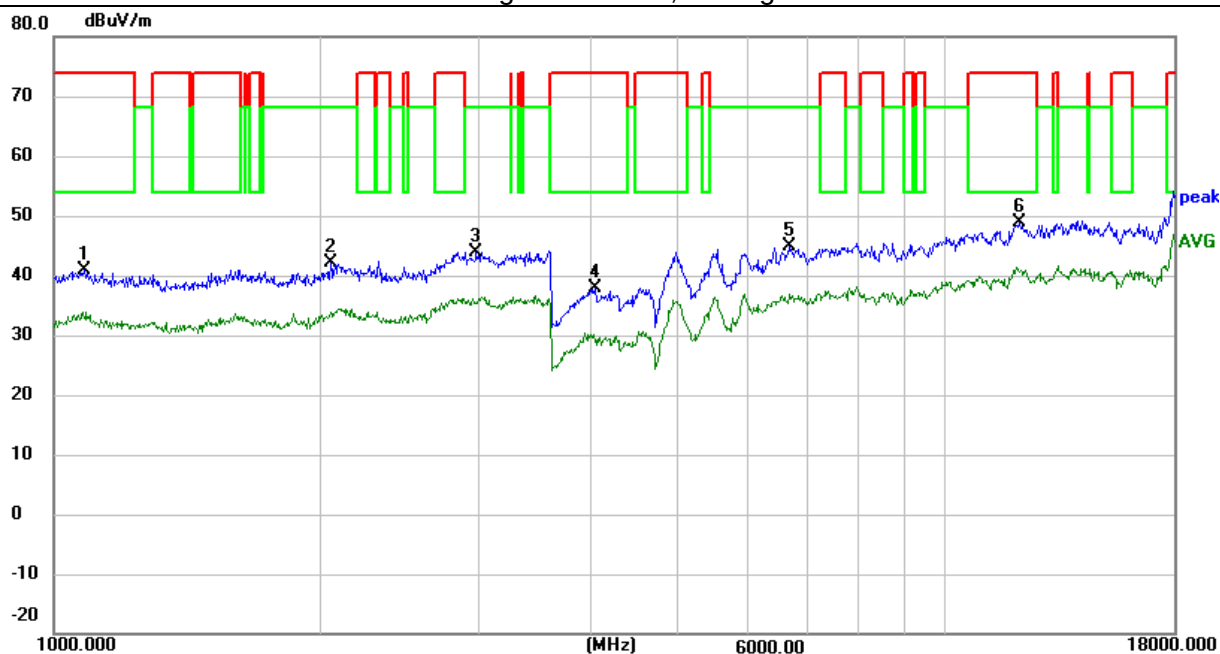

802.11ac80 5775


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1072.250	59.62	-18.24	41.38	74.00	-32.62	peak
V	1072.250	51.66	-18.24	33.42	54.00	-20.58	AVG
V	2116.050	55.33	-12.57	42.76	68.20	-25.44	peak
V	3028.950	53.23	-9.55	43.68	68.20	-24.52	peak
V	4180.275	46.10	-8.20	37.90	74.00	-36.10	peak
V	4180.275	37.45	-8.20	29.25	54.00	-24.75	AVG
V	5946.150	49.48	-4.41	45.07	68.20	-23.13	peak
V	12744.875	43.30	4.27	47.57	68.20	-20.63	peak
V	12744.875	36.06	4.27	40.33	68.20	-27.87	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

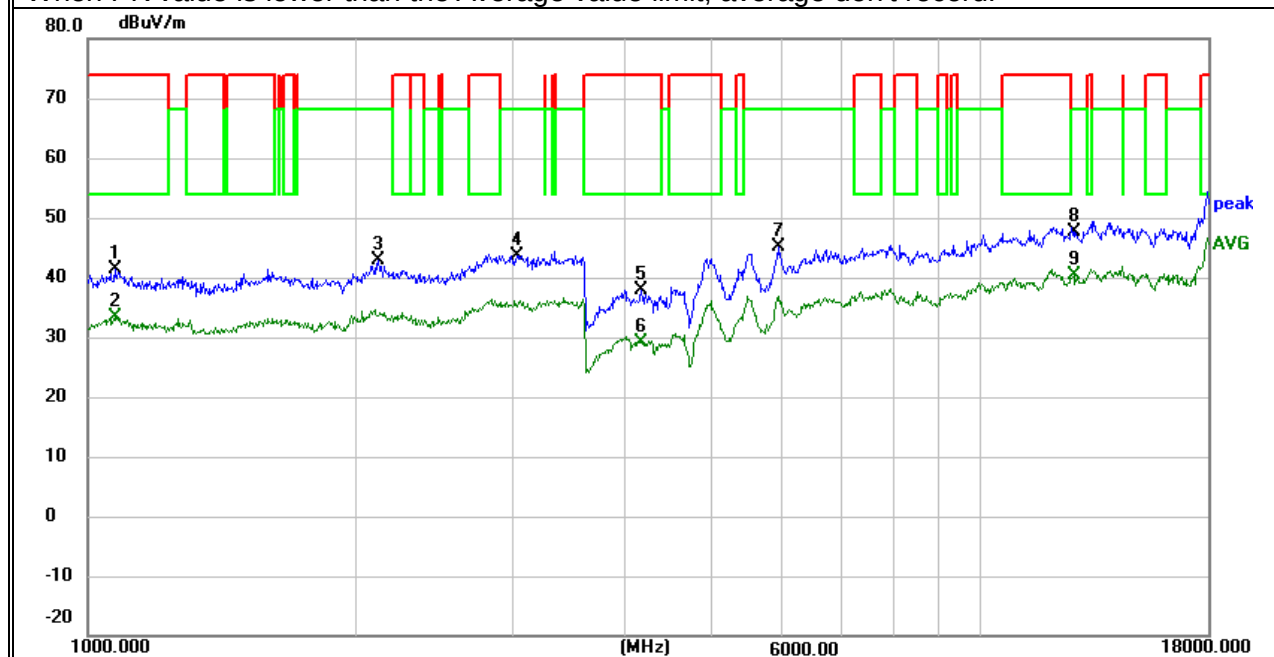


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1099.450	59.61	-17.95	41.66	74.00	-32.34	peak
H	1099.450	51.58	-17.95	33.63	54.00	-20.37	AVG
H	2043.800	53.96	-12.97	40.99	68.20	-27.21	peak
H	3040.425	53.26	-9.58	43.68	68.20	-24.52	peak
H	4043.425	46.28	-8.41	37.87	74.00	-36.13	peak
H	4043.425	38.03	-8.41	29.62	54.00	-24.38	AVG
H	5958.475	48.75	-4.55	44.20	68.20	-24.00	peak
H	12019.400	43.41	5.18	48.59	74.00	-25.41	peak
H	12019.400	35.69	5.18	40.87	54.00	-13.13	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

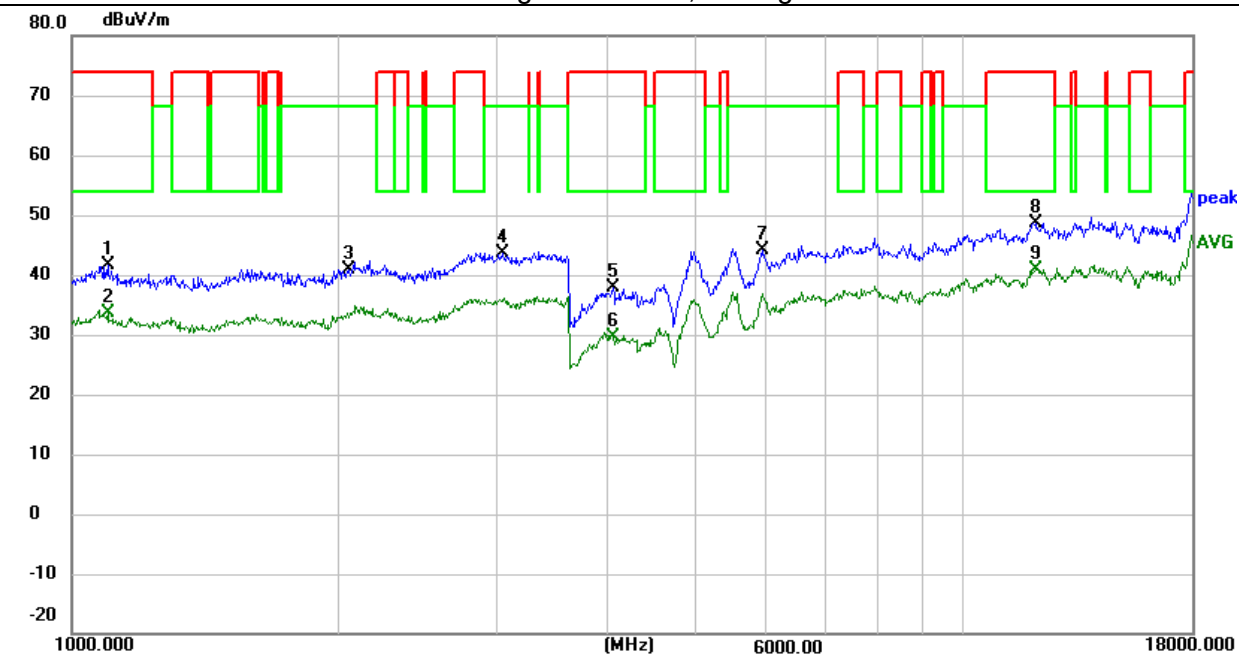

802.11ax20 5745


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1070.975	59.22	-18.25	40.97	74.00	-33.03	peak
V	1070.975	51.46	-18.25	33.21	54.00	-20.79	AVG
V	2079.925	54.73	-12.65	42.08	68.20	-26.12	peak
V	3008.125	53.79	-9.50	44.29	68.20	-23.91	peak
V	3920.175	45.43	-8.23	37.20	74.00	-36.80	peak
V	3920.175	37.59	-8.23	29.36	54.00	-24.64	AVG
V	5943.600	48.43	-4.43	44.00	68.20	-24.20	peak
V	12016.850	43.99	5.20	49.19	74.00	-24.81	peak
V	12016.850	35.89	5.20	41.09	54.00	-12.91	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

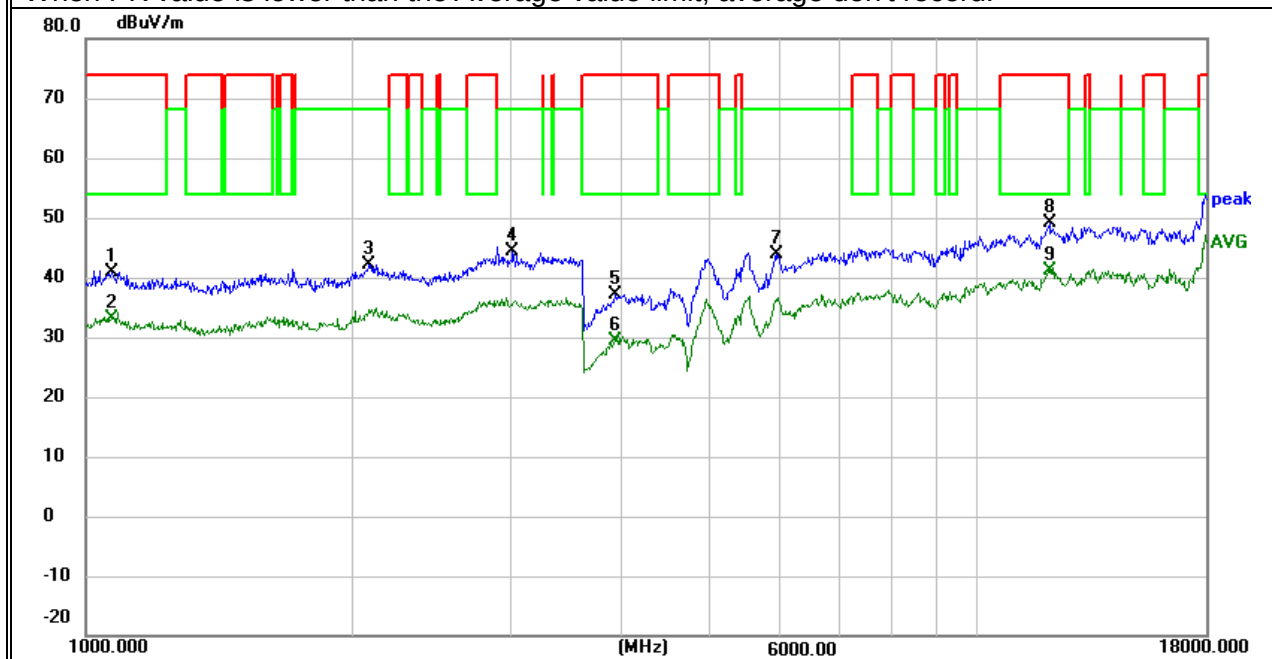


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1051.000	59.97	-18.46	41.51	74.00	-32.49	peak
H	1051.000	51.30	-18.46	32.84	54.00	-21.16	AVG
H	2070.150	54.57	-12.72	41.85	68.20	-26.35	peak
H	3021.725	52.92	-9.52	43.40	68.20	-24.80	peak
H	3950.775	45.62	-8.03	37.59	74.00	-36.41	peak
H	3950.775	37.52	-8.03	29.49	54.00	-24.51	AVG
H	5952.525	48.37	-4.43	43.94	68.20	-24.26	peak
H	12161.775	43.85	4.59	48.44	74.00	-25.56	peak
H	12161.775	36.11	4.59	40.70	54.00	-13.30	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

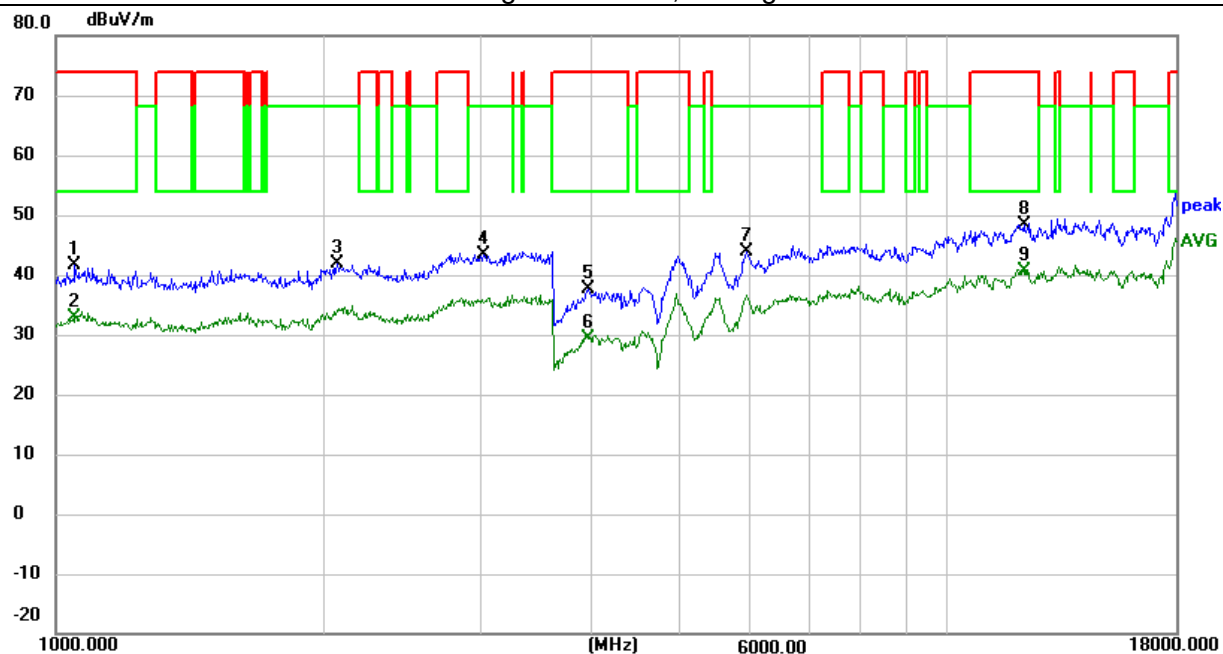

802.11ax20 5785


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1090.100	59.45	-18.05	41.40	74.00	-32.60	peak
V	1090.100	51.57	-18.05	33.52	54.00	-20.48	AVG
V	2081.625	54.54	-12.62	41.92	68.20	-26.28	peak
V	3082.075	53.48	-9.57	43.91	68.20	-24.29	peak
V	4028.975	46.36	-8.26	38.10	74.00	-35.90	peak
V	4028.975	38.26	-8.26	30.00	54.00	-24.00	AVG
V	5968.675	48.70	-4.74	43.96	68.20	-24.24	peak
V	11984.550	43.31	5.26	48.57	74.00	-25.43	peak
V	11984.550	35.34	5.26	40.60	54.00	-13.40	AVG

Remark:

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

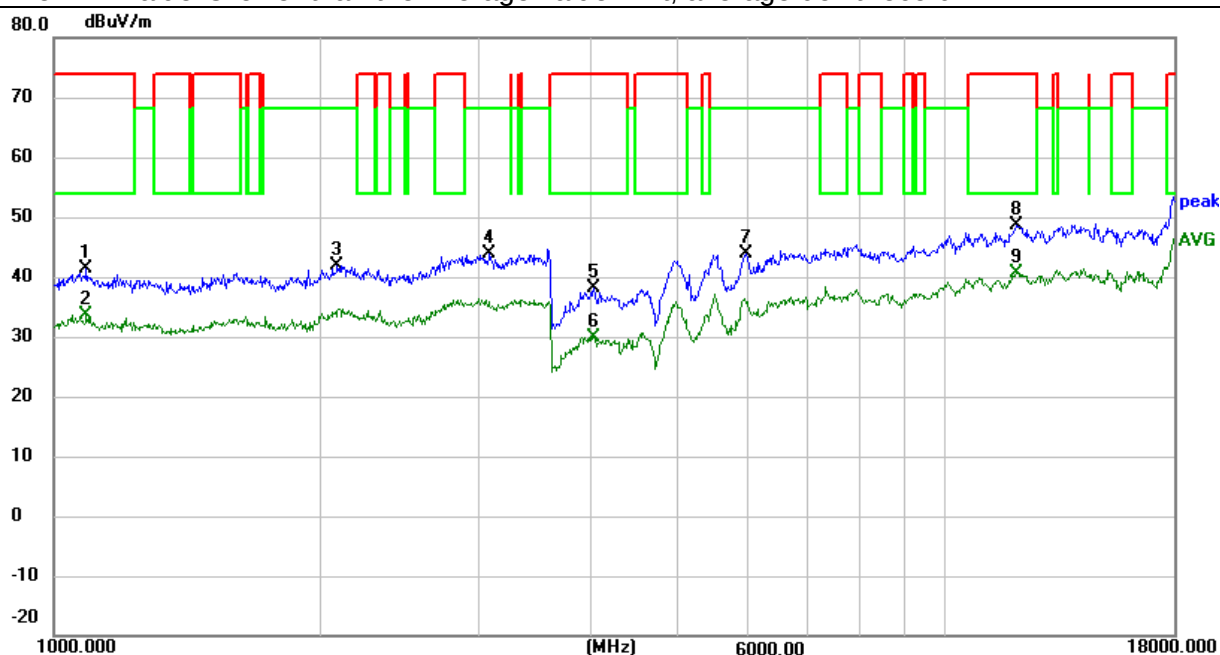


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBUV)	(dB)	(dBUV/m)	(dBUV/m)	(dB)	
H	1091.375	58.58	-18.04	40.54	74.00	-33.46	peak
H	1091.375	50.72	-18.04	32.68	54.00	-21.32	AVG
H	2117.325	54.64	-12.58	42.06	68.20	-26.14	peak
H	3049.350	53.24	-9.60	43.64	68.20	-24.56	peak
H	4188.775	45.15	-8.09	37.06	74.00	-36.94	peak
H	4188.775	37.28	-8.09	29.19	54.00	-24.81	AVG
H	5928.725	49.03	-4.58	44.45	68.20	-23.75	peak
H	12279.925	43.39	5.05	48.44	74.00	-25.56	peak
H	12279.925	34.93	5.05	39.98	54.00	-14.02	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

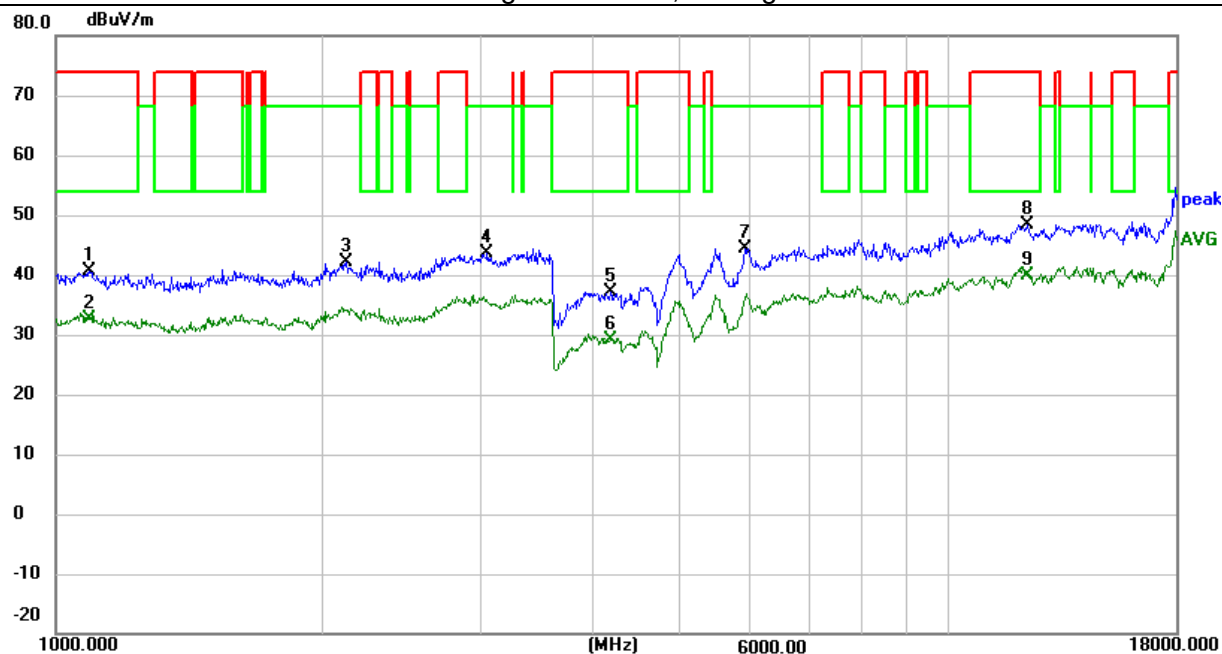

802.11ax20 5825


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1072.675	59.84	-18.24	41.60	74.00	-32.40	peak
V	1072.675	51.85	-18.24	33.61	54.00	-20.39	AVG
V	2077.800	54.30	-12.66	41.64	68.20	-26.56	peak
V	3057.850	53.31	-9.59	43.72	68.20	-24.48	peak
V	3901.475	45.94	-8.37	37.57	74.00	-36.43	peak
V	3901.475	37.42	-8.37	29.05	54.00	-24.95	AVG
V	6672.900	48.10	-3.27	44.83	68.20	-23.37	peak
V	12102.275	44.72	4.77	49.49	74.00	-24.51	peak
V	12102.275	35.53	4.77	40.30	54.00	-13.70	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

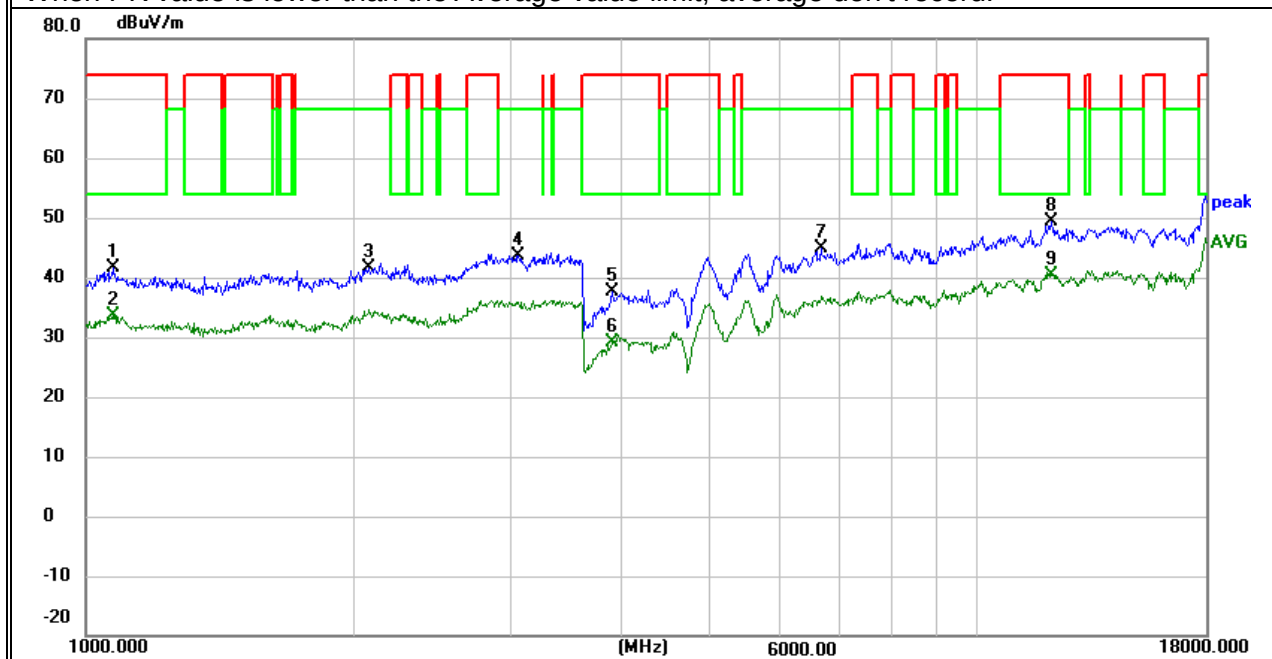


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBUV)	(dB)	(dBUV/m)	(dBUV/m)	(dB)	
H	1067.575	59.22	-18.29	40.93	74.00	-33.07	peak
H	1067.575	51.76	-18.29	33.47	54.00	-20.53	AVG
H	2088.000	54.67	-12.58	42.09	68.20	-26.11	peak
H	2956.700	54.98	-10.00	44.98	68.20	-23.22	peak
H	3991.575	47.21	-7.97	39.24	74.00	-34.76	peak
H	3991.575	37.51	-7.97	29.54	54.00	-24.46	AVG
H	5949.975	49.09	-4.37	44.72	68.20	-23.48	peak
H	11920.375	43.26	5.18	48.44	74.00	-25.56	peak
H	11920.375	34.93	5.18	40.11	54.00	-13.89	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

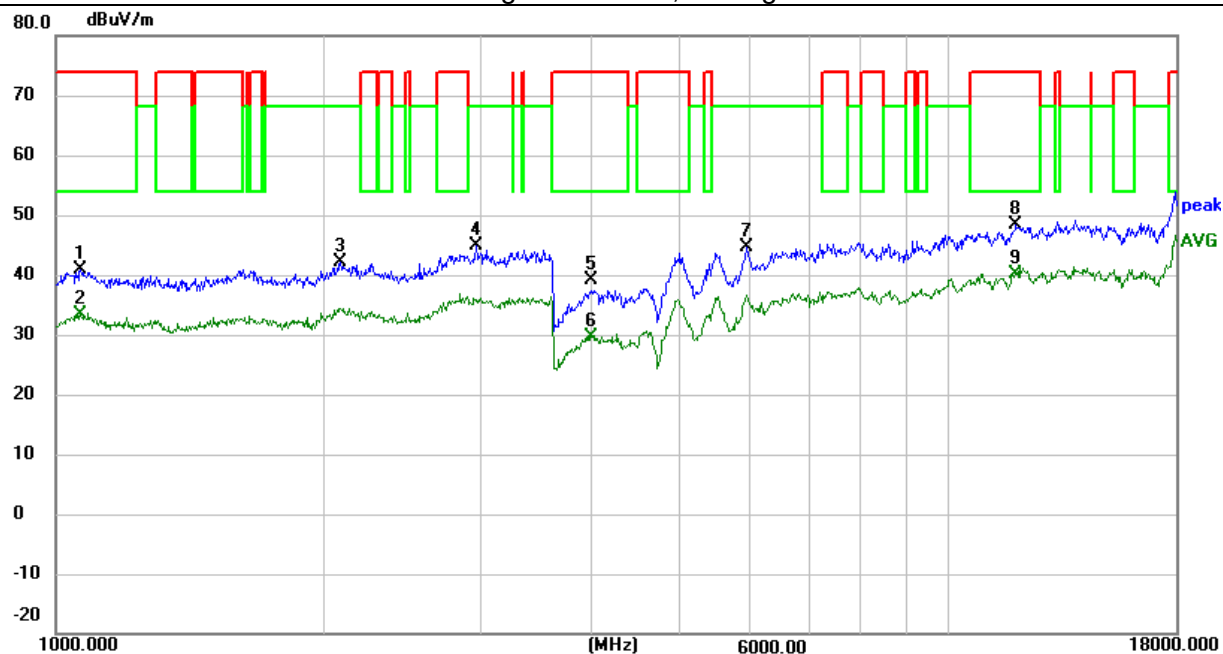

802.11ax40 5755


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1088.400	59.24	-18.06	41.18	74.00	-32.82	peak
V	1088.400	51.44	-18.06	33.38	54.00	-20.62	AVG
V	2089.700	54.82	-12.56	42.26	68.20	-25.94	peak
V	3031.500	54.20	-9.55	44.65	68.20	-23.55	peak
V	3927.825	45.98	-8.18	37.80	74.00	-36.20	peak
V	3927.825	37.22	-8.18	29.04	54.00	-24.96	AVG
V	5928.300	48.54	-4.59	43.95	68.20	-24.25	peak
V	11975.200	44.28	5.25	49.53	74.00	-24.47	peak
V	11975.200	35.80	5.25	41.05	54.00	-12.95	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

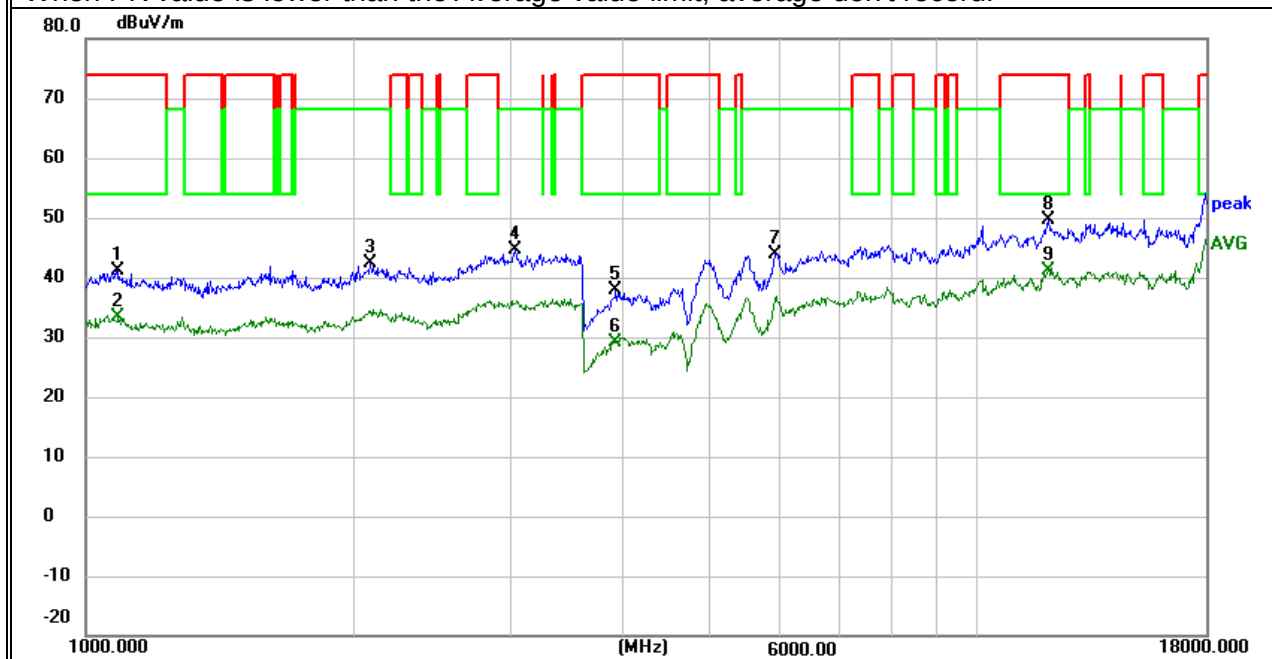


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1077.775	59.39	-18.19	41.20	74.00	-32.80	peak
H	1077.775	51.09	-18.19	32.90	54.00	-21.10	AVG
H	2154.300	55.32	-12.85	42.47	68.20	-25.73	peak
H	2972.850	53.83	-9.81	44.02	68.20	-24.18	peak
H	4209.600	46.01	-7.89	38.12	74.00	-35.88	peak
H	4209.600	36.82	-7.89	28.93	54.00	-25.07	AVG
H	5957.625	49.07	-4.53	44.54	68.20	-23.66	peak
H	12014.725	43.30	5.21	48.51	74.00	-25.49	peak
H	12014.725	35.55	5.21	40.76	54.00	-13.24	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

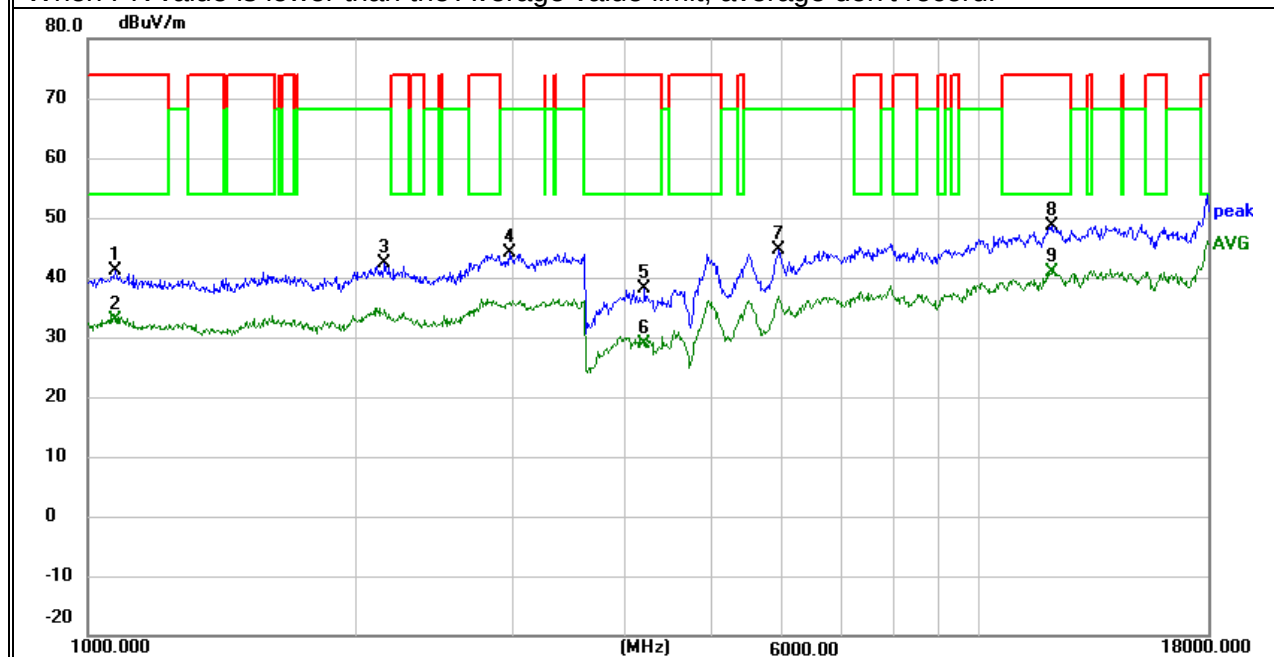

802.11ax40 5795


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1079.900	59.00	-18.16	40.84	74.00	-33.16	peak
V	1079.900	51.50	-18.16	33.34	54.00	-20.66	AVG
V	2120.300	54.91	-12.59	42.32	68.20	-25.88	peak
V	3038.300	53.57	-9.58	43.99	68.20	-24.21	peak
V	4010.275	45.46	-8.06	37.40	74.00	-36.60	peak
V	4010.275	38.06	-8.06	30.00	54.00	-24.00	AVG
V	5934.250	48.39	-4.53	43.86	68.20	-24.34	peak
V	12030.875	43.22	5.13	48.35	74.00	-25.65	peak
V	12030.875	35.86	5.13	40.99	54.00	-13.01	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

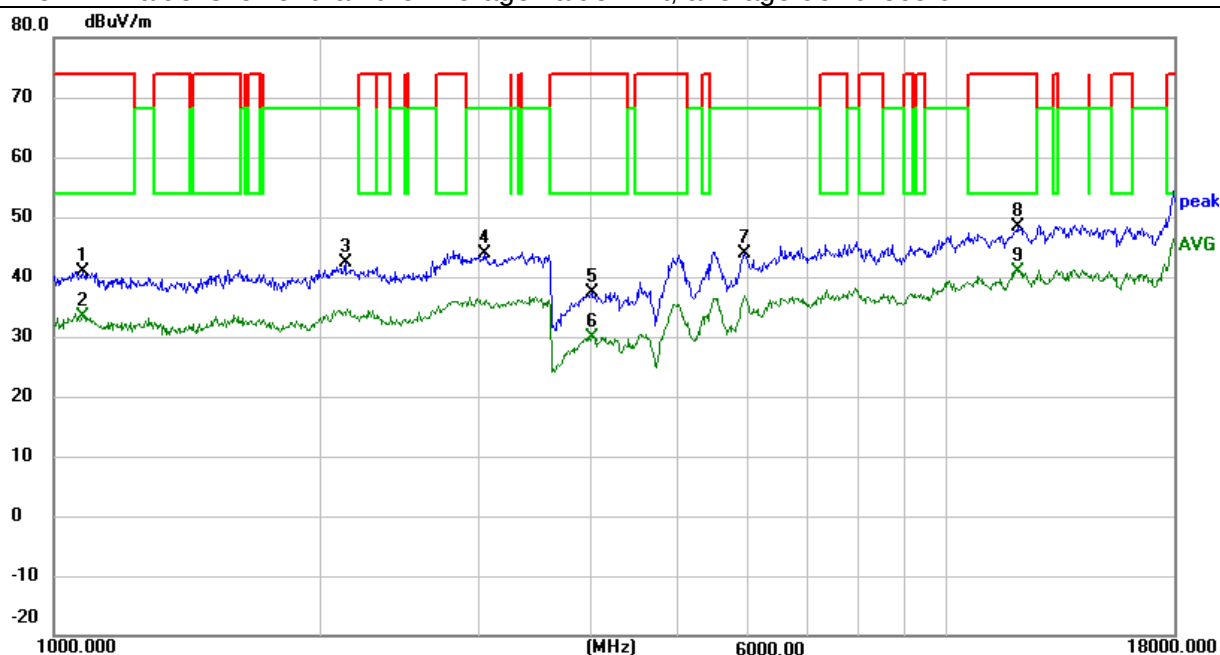


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1092.225	59.50	-18.03	41.47	74.00	-32.53	peak
H	1092.225	51.83	-18.03	33.80	54.00	-20.20	AVG
H	2087.575	55.73	-12.58	43.15	68.20	-25.05	peak
H	3086.750	53.35	-9.57	43.78	68.20	-24.42	peak
H	3968.625	45.94	-8.00	37.94	74.00	-36.06	peak
H	3968.625	37.54	-8.00	29.54	54.00	-24.46	AVG
H	5950.825	48.76	-4.40	44.36	68.20	-23.84	peak
H	12004.100	43.73	5.26	48.99	74.00	-25.01	peak
H	12004.100	35.65	5.26	40.91	54.00	-13.09	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

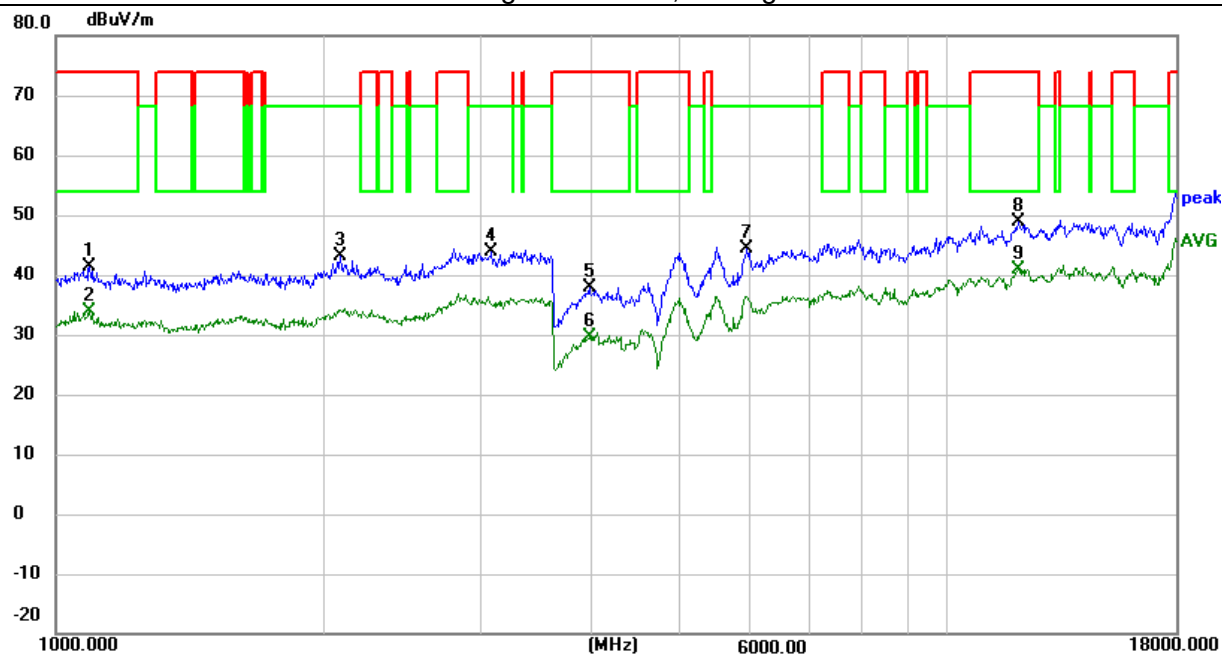

802.11ax80 5775


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1085.000	57.61	-18.11	39.50	74.00	-34.50	peak
V	1085.000	50.99	-18.11	32.88	54.00	-21.12	AVG
V	2111.800	55.32	-12.54	42.78	68.20	-25.42	peak
V	3159.425	52.94	-9.44	43.50	68.20	-24.70	peak
V	4014.100	45.95	-8.10	37.85	74.00	-36.15	peak
V	4014.100	37.92	-8.10	29.82	54.00	-24.18	AVG
V	5956.775	49.56	-4.52	45.04	68.20	-23.16	peak
V	12021.525	43.69	5.17	48.86	74.00	-25.14	peak
V	12021.525	36.00	5.17	41.17	54.00	-12.83	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

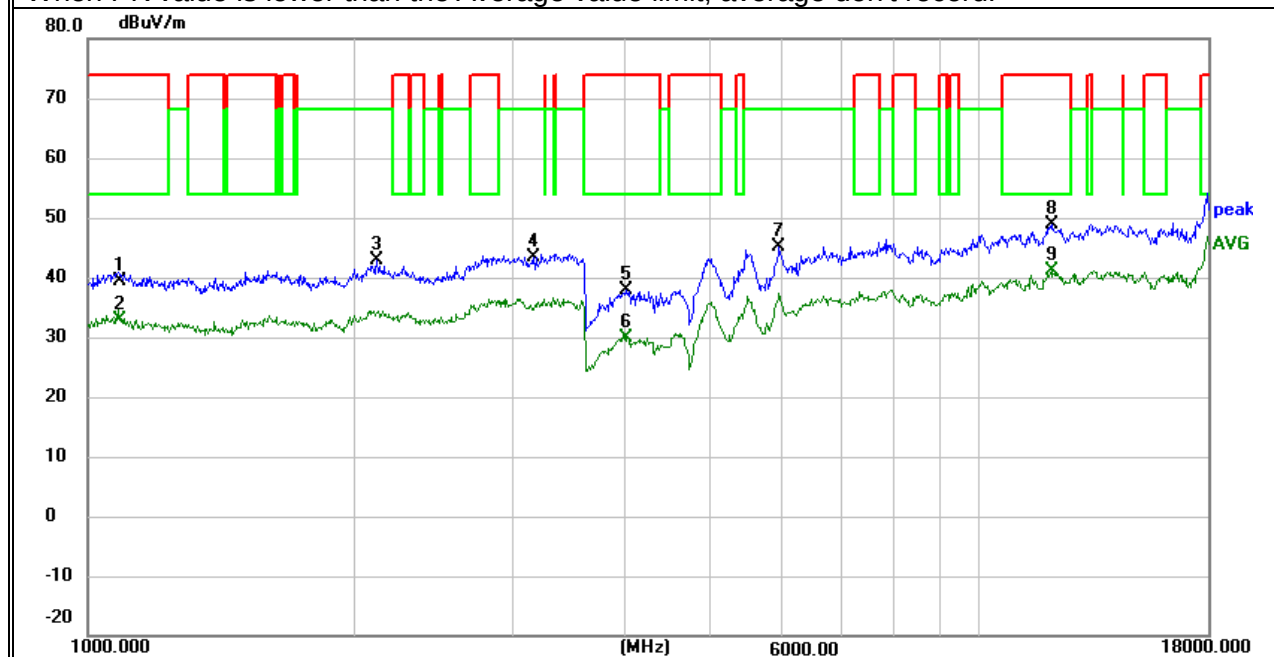


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBUV)	(dB)	(dBUV/m)	(dBUV/m)	(dB)	
H	1096.475	58.72	-17.99	40.73	74.00	-33.27	peak
H	1096.475	50.22	-17.99	32.23	54.00	-21.77	AVG
H	2110.100	54.85	-12.54	42.31	68.20	-25.89	peak
H	2949.050	54.03	-10.09	43.94	68.20	-24.26	peak
H	3915.925	46.07	-8.27	37.80	74.00	-36.20	peak
H	3915.925	37.04	-8.27	28.77	54.00	-25.23	AVG
H	5958.900	48.94	-4.56	44.38	68.20	-23.82	peak
H	12001.125	43.32	5.27	48.59	74.00	-25.41	peak
H	12001.125	35.68	5.27	40.95	54.00	-13.05	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

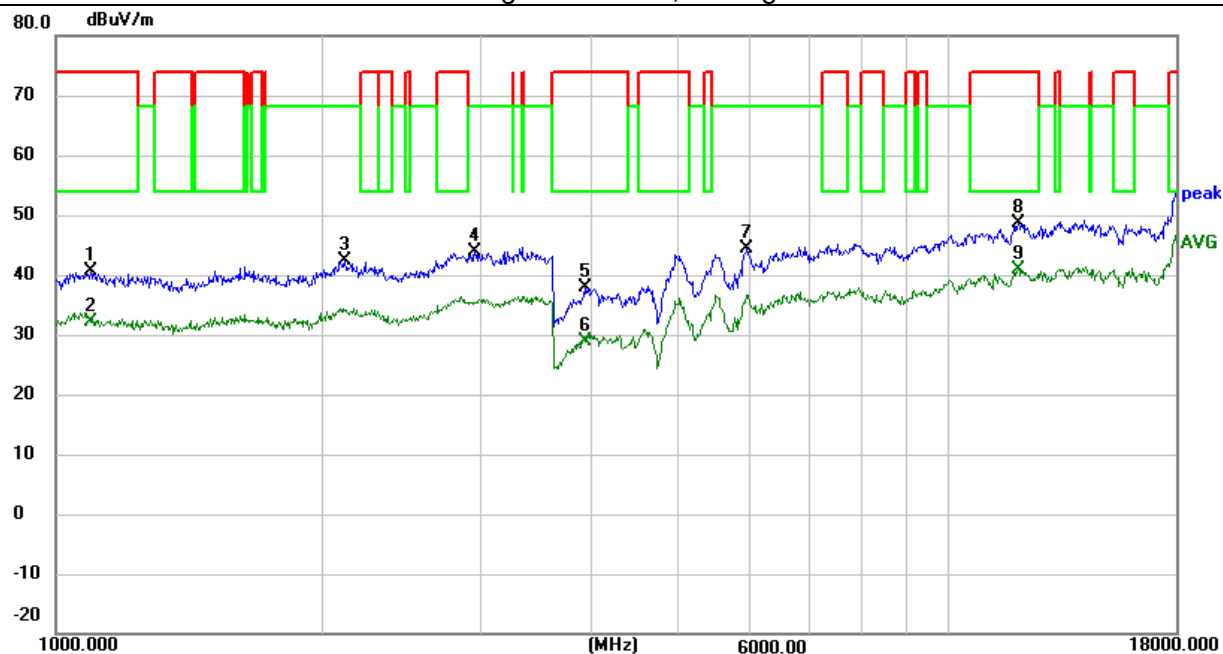

3.2.9 SPURIOUS EMISSION ABOVE 1GHZ (18GHZ TO 40GHZ)

EUT :	PocketBook Q	Model Name. :	PB5084
Temperature :	25.1 °C	Relative Humidity :	53.9%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5.2G) -- 802.11a/n20/ac20/ac40/ac80/ax20/ax40/ax80		

All the modulation modes have been tested, and the worst-case result was 802.11a ,Only the worst-case mode reported.

802.11a 5180


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	19360.150	61.74	-13.65	48.09	74.00	-25.91	peak
V	19360.150	53.35	-13.65	39.70	54.00	-14.30	AVG
V	22386.250	60.46	-11.63	48.83	74.00	-25.17	peak
V	22386.250	52.43	-11.63	40.80	54.00	-13.20	AVG
V	25326.000	60.24	-9.64	50.60	68.20	-17.60	peak
V	30698.400	60.62	-7.90	52.72	68.20	-15.48	peak
V	33960.450	58.75	-5.00	53.75	68.20	-14.45	peak
V	39558.350	58.98	-3.73	55.25	68.20	-12.95	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

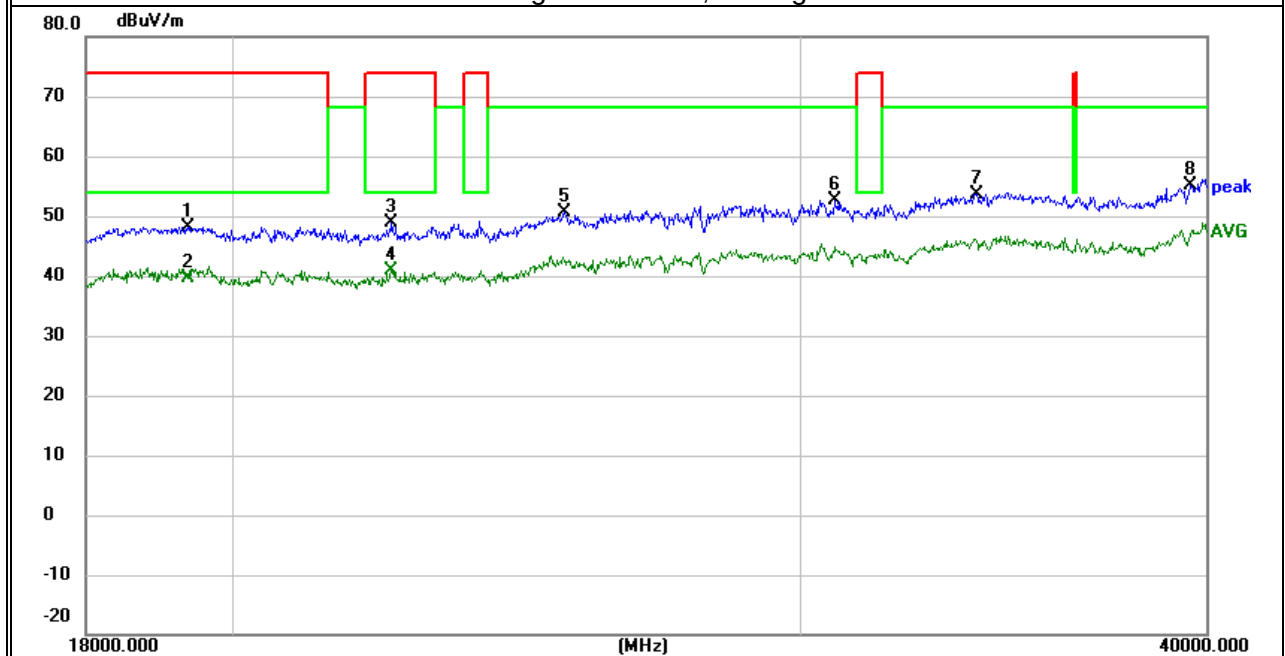


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	18365.200	62.89	-14.74	48.15	74.00	-25.85	peak
H	18365.200	53.69	-14.74	38.95	54.00	-15.05	AVG
H	22403.850	60.65	-11.61	49.04	74.00	-24.96	peak
H	22403.850	52.13	-11.61	40.52	54.00	-13.48	AVG
H	25323.250	60.82	-9.64	51.18	68.20	-17.02	peak
H	26861.050	61.16	-9.01	52.15	68.20	-16.05	peak
H	33541.350	59.10	-5.35	53.75	68.20	-14.45	peak
H	39612.800	59.56	-3.71	55.85	68.20	-12.35	peak

Remark:

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

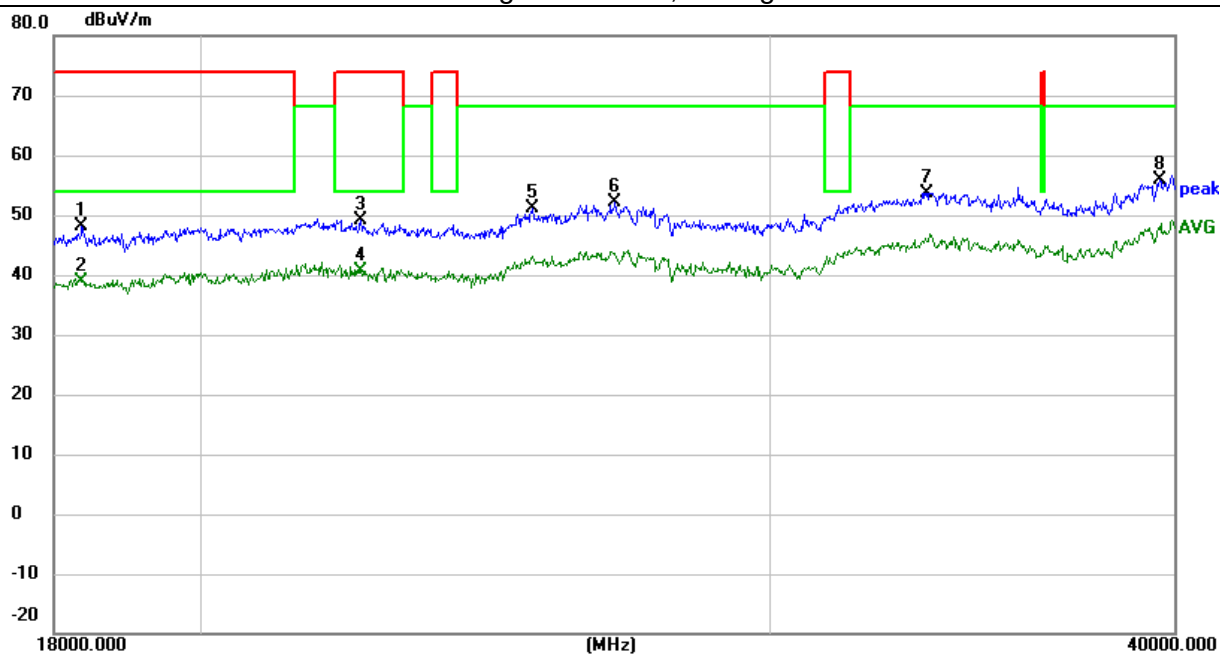

802.11a 5200


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	19423.950	62.75	-13.57	49.18	74.00	-24.82	peak
V	19423.950	53.86	-13.57	40.29	54.00	-13.71	AVG
V	22369.750	61.78	-11.65	50.13	74.00	-23.87	peak
V	22369.750	53.35	-11.65	41.70	54.00	-12.30	AVG
V	25301.250	60.25	-9.63	50.62	68.20	-17.58	peak
V	29707.850	59.15	-8.27	50.88	68.20	-17.32	peak
V	34390.000	59.46	-4.44	55.02	68.20	-13.18	peak
V	39250.350	60.69	-3.91	56.78	68.20	-11.42	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

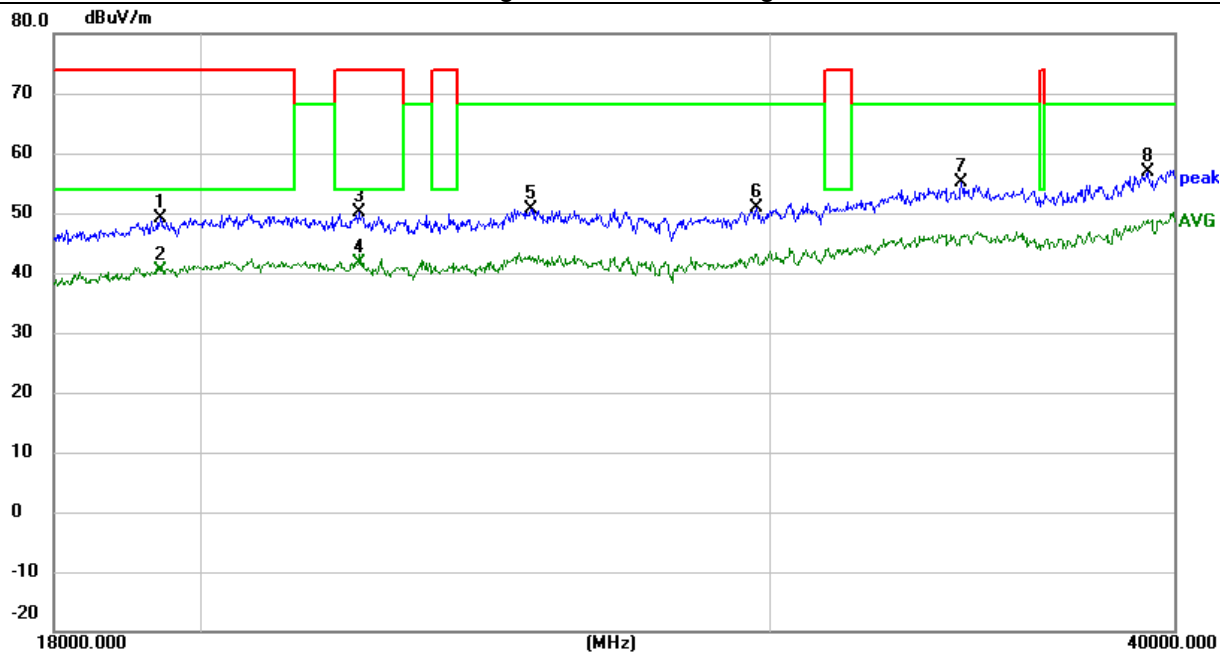


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	18832.150	61.67	-14.40	47.27	74.00	-26.73	peak
H	18832.150	53.09	-14.40	38.69	54.00	-15.31	AVG
H	22747.050	61.34	-11.78	49.56	74.00	-24.44	peak
H	22747.050	54.17	-11.78	42.39	54.00	-11.61	AVG
H	25062.550	59.97	-9.67	50.30	68.20	-17.90	peak
H	29982.300	57.95	-8.04	49.91	68.20	-18.29	peak
H	33708.550	58.35	-5.22	53.13	68.20	-15.07	peak
H	39139.800	58.97	-3.80	55.17	68.20	-13.03	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

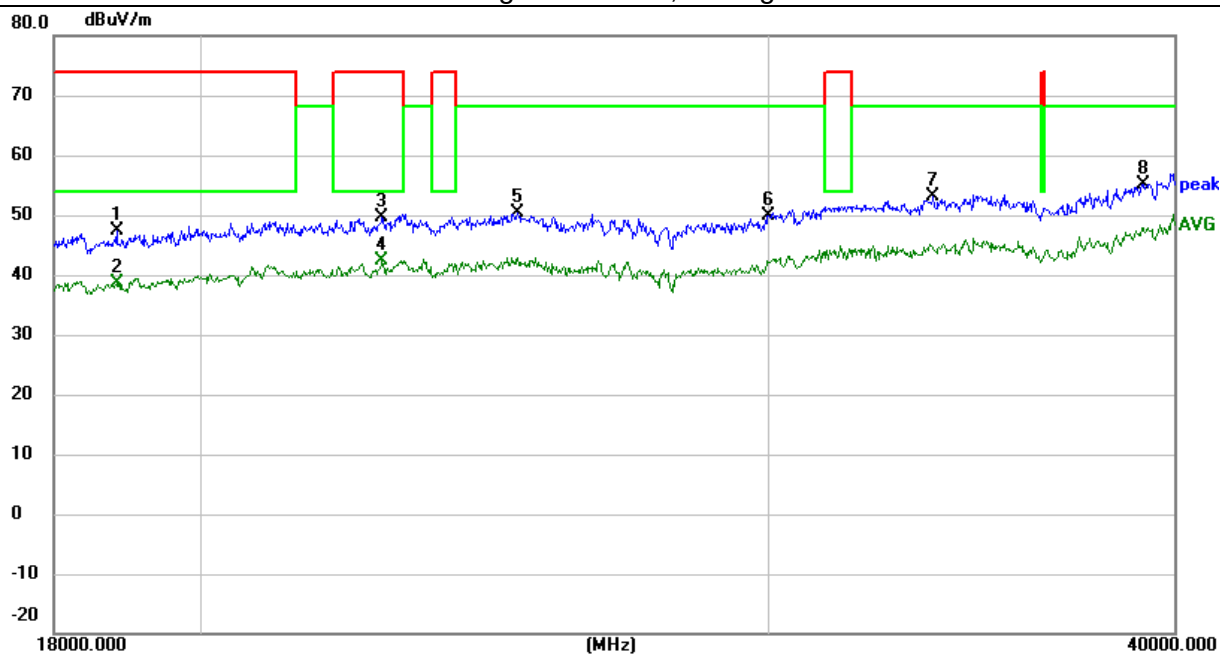

802.11a 5240


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	19786.400	60.56	-12.84	47.72	74.00	-26.28	peak
V	19786.400	52.66	-12.84	39.82	54.00	-14.18	AVG
V	22451.700	58.49	-11.55	46.94	74.00	-27.06	peak
V	22451.700	49.54	-11.55	37.99	54.00	-16.01	AVG
V	24533.450	60.90	-11.05	49.85	68.20	-18.35	peak
V	29345.400	59.93	-8.83	51.10	68.20	-17.10	peak
V	33670.050	57.34	-5.24	52.10	68.20	-16.10	peak
V	39098.550	56.85	-3.75	53.10	68.20	-15.10	peak

Remark:

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

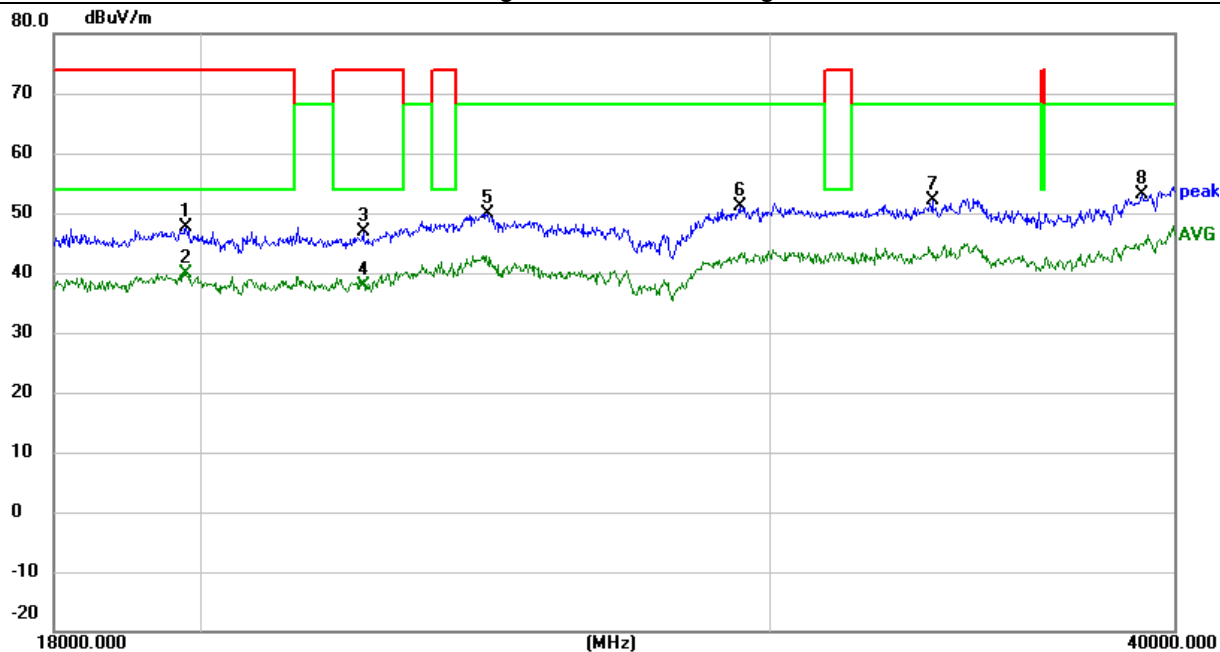


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	19450.350	61.53	-13.54	47.99	74.00	-26.01	peak
H	19450.350	53.19	-13.54	39.65	54.00	-14.35	AVG
H	22051.300	57.23	-11.95	45.28	74.00	-28.72	peak
H	22051.300	52.74	-11.95	40.79	54.00	-13.21	AVG
H	25005.350	59.70	-9.71	49.99	68.20	-18.21	peak
H	30118.150	59.00	-8.08	50.92	68.20	-17.28	peak
H	33529.800	58.75	-5.36	53.39	68.20	-14.81	peak
H	39297.650	59.69	-3.88	55.81	68.20	-12.39	peak

Remark:

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

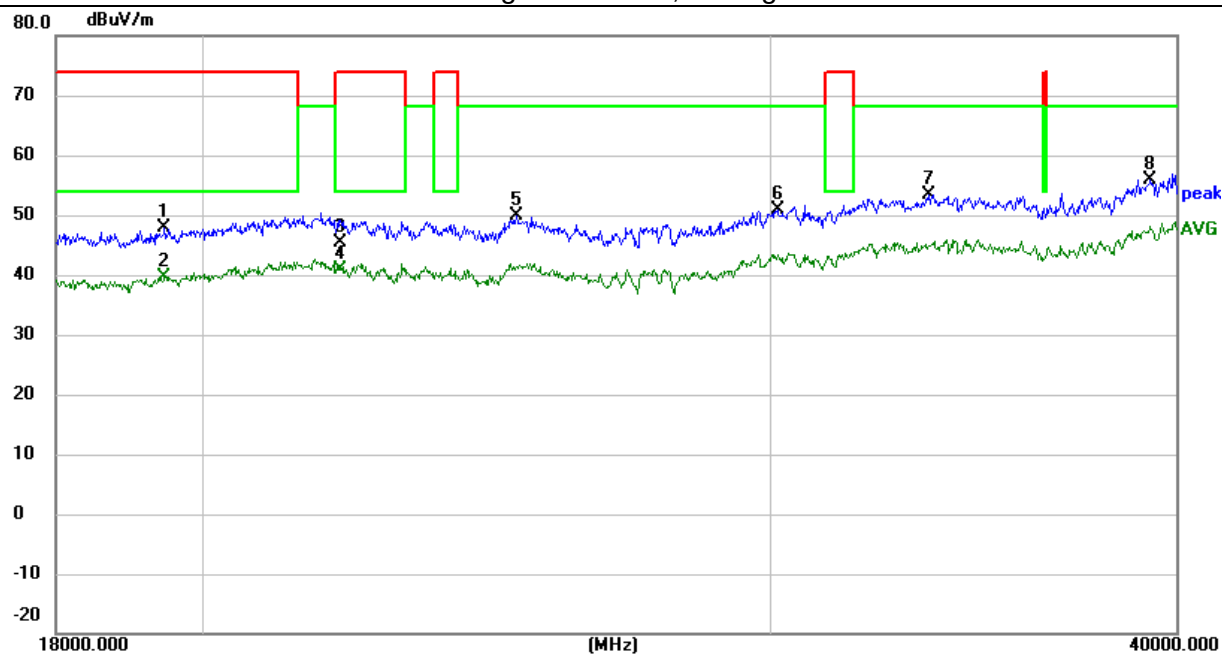

802.11a 5260


Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
V	20420.000	61.61	-12.35	49.26	74.00	-24.74	peak
V	20420.000	53.85	-12.35	41.50	54.00	-12.50	AVG
V	23002.250	59.32	-11.79	47.53	74.00	-26.47	peak
V	23002.250	50.79	-11.79	39.00	54.00	-15.00	AVG
V	25687.900	61.50	-9.66	51.84	68.20	-16.36	peak
V	30472.900	59.00	-7.98	51.02	68.20	-17.18	peak
V	32010.150	57.59	-6.55	51.04	68.20	-17.16	peak
V	38887.350	57.21	-3.70	53.51	68.20	-14.69	peak

Remark:

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

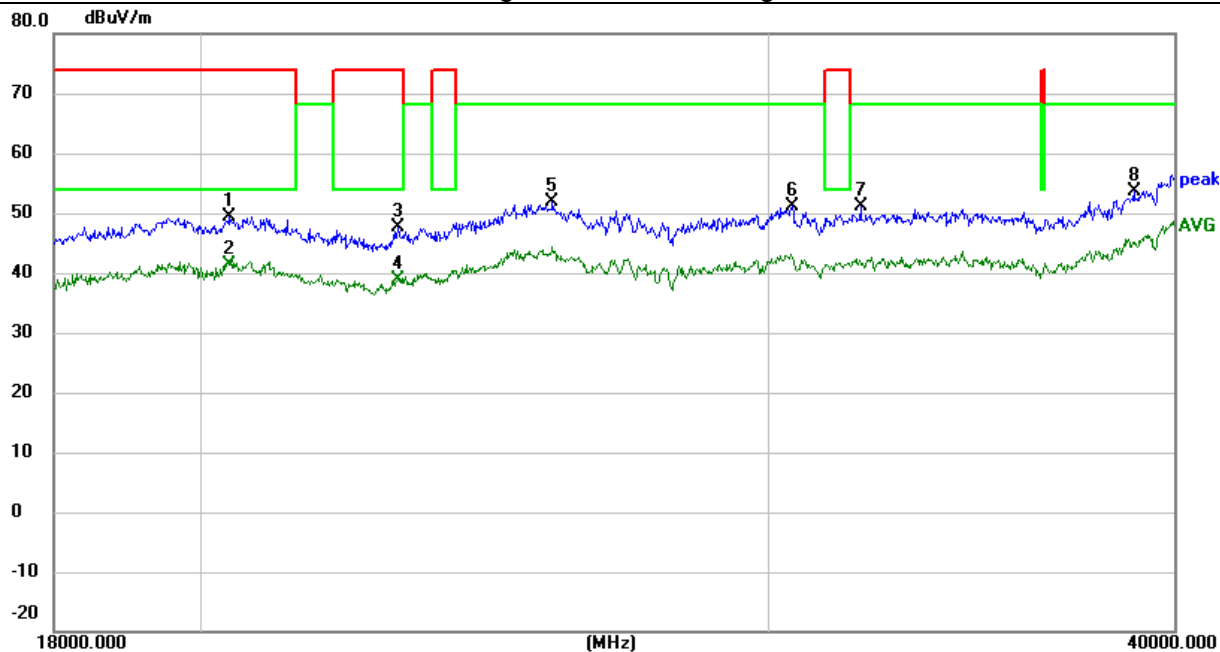


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	19815.550	63.58	-12.79	50.79	74.00	-23.21	peak
H	19815.550	55.44	-12.79	42.65	54.00	-11.35	AVG
H	21990.800	59.41	-11.99	47.42	68.20	-20.78	peak
H	21990.800	49.81	-11.99	37.82	68.20	-30.38	AVG
H	25310.600	61.35	-9.63	51.72	68.20	-16.48	peak
H	28307.000	58.17	-9.51	48.66	68.20	-19.54	peak
H	35293.100	57.54	-4.26	53.28	68.20	-14.92	peak
H	39314.700	59.42	-3.88	55.54	68.20	-12.66	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

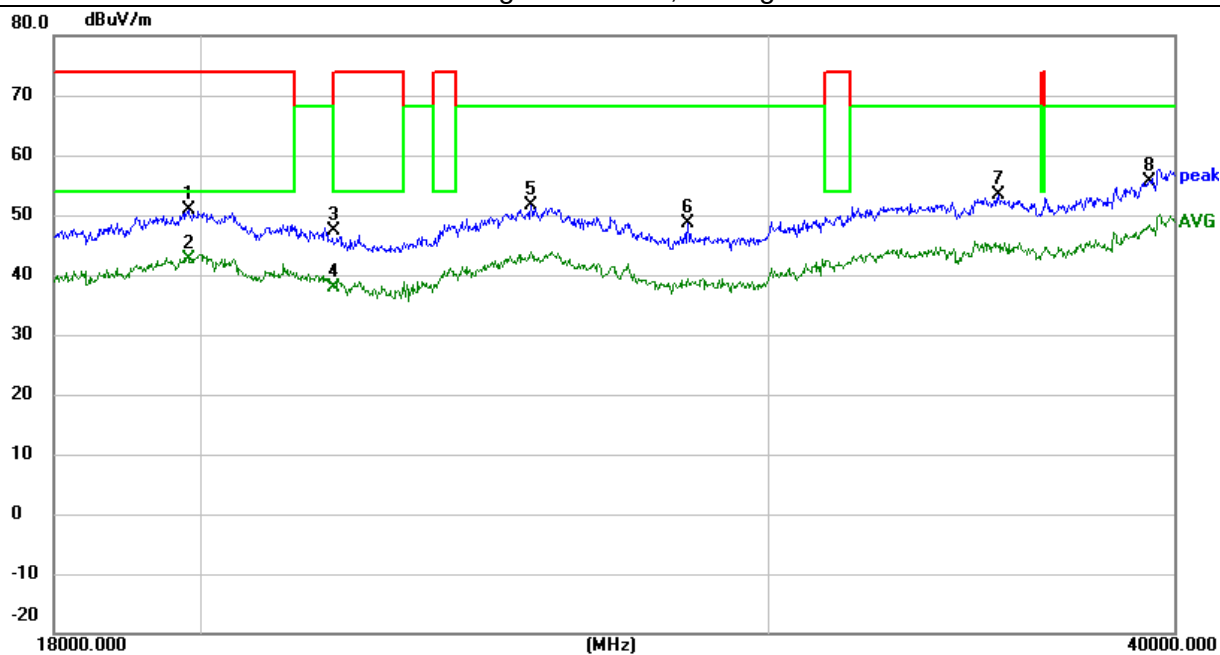

802.11a 5280


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	19490.500	62.31	-13.50	48.81	74.00	-25.19	peak
V	19490.500	53.90	-13.50	40.40	54.00	-13.60	AVG
V	22417.600	58.97	-11.60	47.37	74.00	-26.63	peak
V	22417.600	50.65	-11.60	39.05	54.00	-14.95	AVG
V	25120.300	60.52	-9.65	50.87	68.20	-17.33	peak
V	29695.200	58.04	-8.28	49.76	68.20	-18.44	peak
V	32671.250	57.83	-5.99	51.84	68.20	-16.36	peak
V	39942.800	61.64	-3.59	58.05	68.20	-10.15	peak

Remark:

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

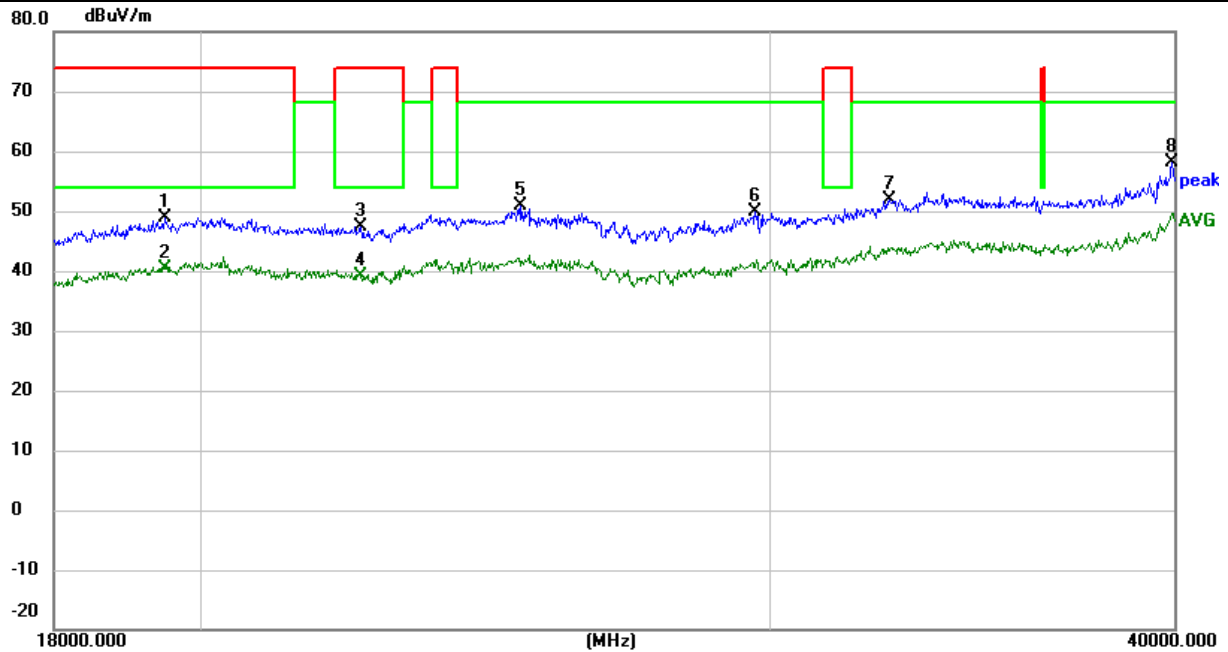


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	20126.300	62.18	-12.63	49.55	74.00	-24.45	peak
H	20126.300	55.22	-12.63	42.59	54.00	-11.41	AVG
H	22090.900	59.44	-11.93	47.51	74.00	-26.49	peak
H	22090.900	50.44	-11.93	38.51	54.00	-15.49	AVG
H	24944.300	59.59	-9.98	49.61	68.20	-18.59	peak
H	30360.150	56.22	-8.06	48.16	68.20	-20.04	peak
H	33885.650	58.38	-5.07	53.31	68.20	-14.89	peak
H	39918.050	61.07	-3.59	57.48	68.20	-10.72	peak

Remark:

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

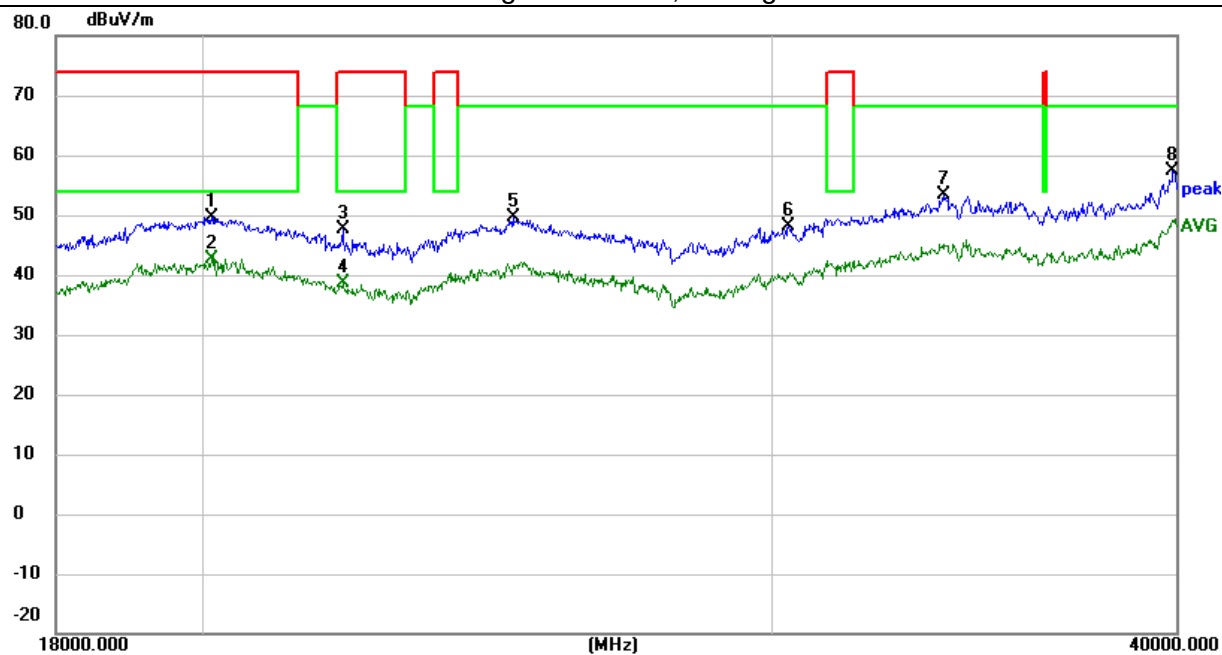

802.11a 5320


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	20390.850	62.04	-12.42	49.62	74.00	-24.38	peak
V	20390.850	54.17	-12.42	41.75	54.00	-12.25	AVG
V	22759.700	60.34	-11.79	48.55	74.00	-25.45	peak
V	22759.700	52.59	-11.79	40.80	54.00	-13.20	AVG
V	25796.250	59.72	-9.58	50.14	68.20	-18.06	peak
V	30802.350	59.94	-7.85	52.09	68.20	-16.11	peak
V	34469.750	57.52	-4.27	53.25	68.20	-14.95	peak
V	39942.250	61.17	-3.59	57.58	68.20	-10.62	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

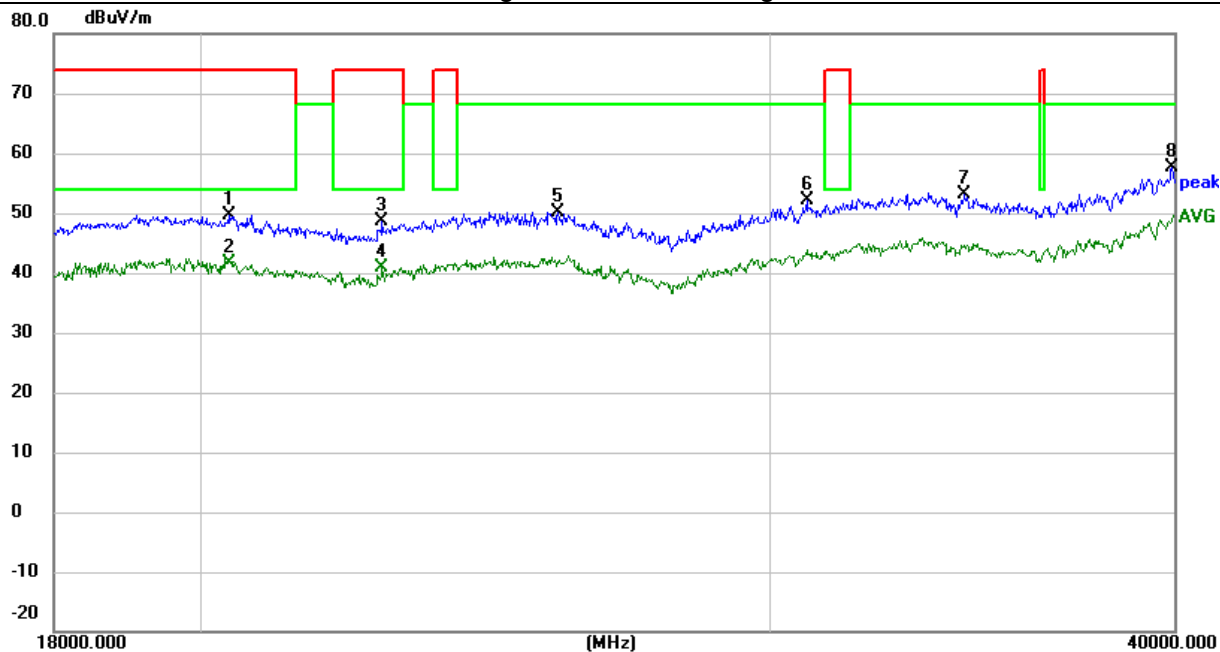


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	19075.250	63.28	-13.99	49.29	74.00	-24.71	peak
H	19075.250	55.02	-13.99	41.03	54.00	-12.97	AVG
H	22735.500	60.66	-11.77	48.89	74.00	-25.11	peak
H	22735.500	52.84	-11.77	41.07	54.00	-12.93	AVG
H	25043.850	61.00	-9.69	51.31	68.20	-16.89	peak
H	30403.600	59.32	-8.03	51.29	68.20	-16.91	peak
H	34421.900	56.21	-4.37	51.84	68.20	-16.36	peak
H	39623.800	59.93	-3.69	56.24	68.20	-11.96	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

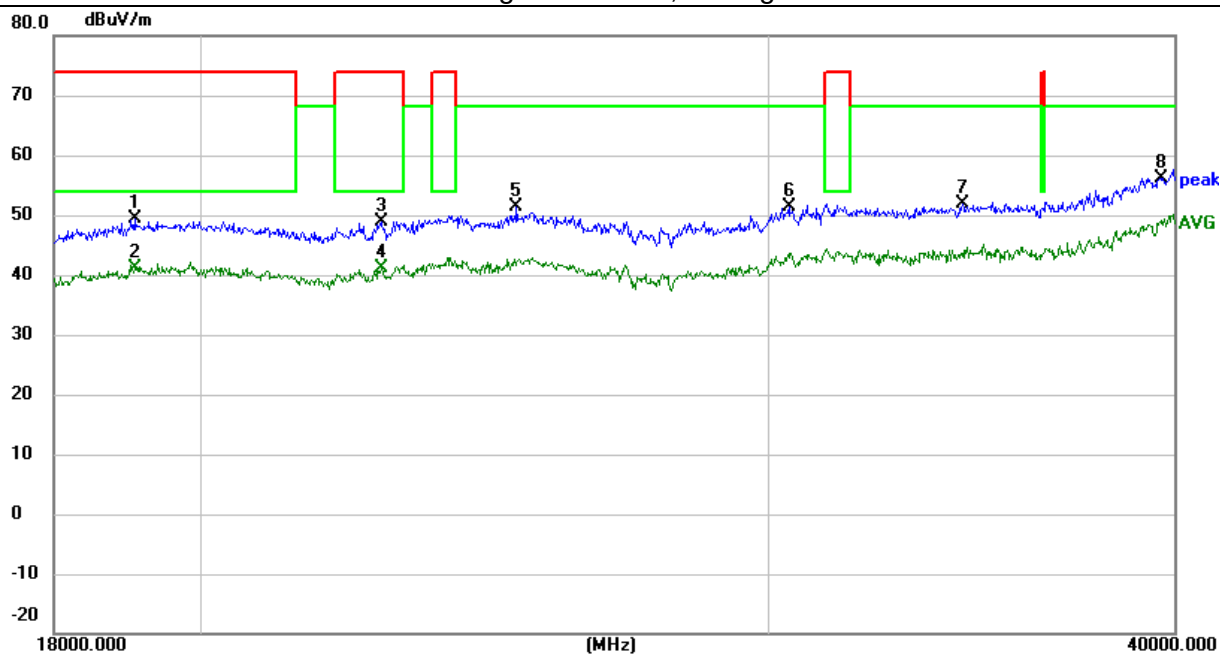

802.11a 5500


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	19994.850	61.64	-12.51	49.13	74.00	-24.87	peak
V	19994.850	54.75	-12.51	42.24	54.00	-11.76	AVG
V	22131.050	60.12	-11.89	48.23	74.00	-25.77	peak
V	22131.050	51.90	-11.89	40.01	54.00	-13.99	AVG
V	26053.650	60.00	-9.33	50.67	68.20	-17.53	peak
V	29990.550	59.37	-8.02	51.35	68.20	-16.85	peak
V	33085.400	58.44	-5.73	52.71	68.20	-15.49	peak
V	37897.350	57.01	-4.23	52.78	68.20	-15.42	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

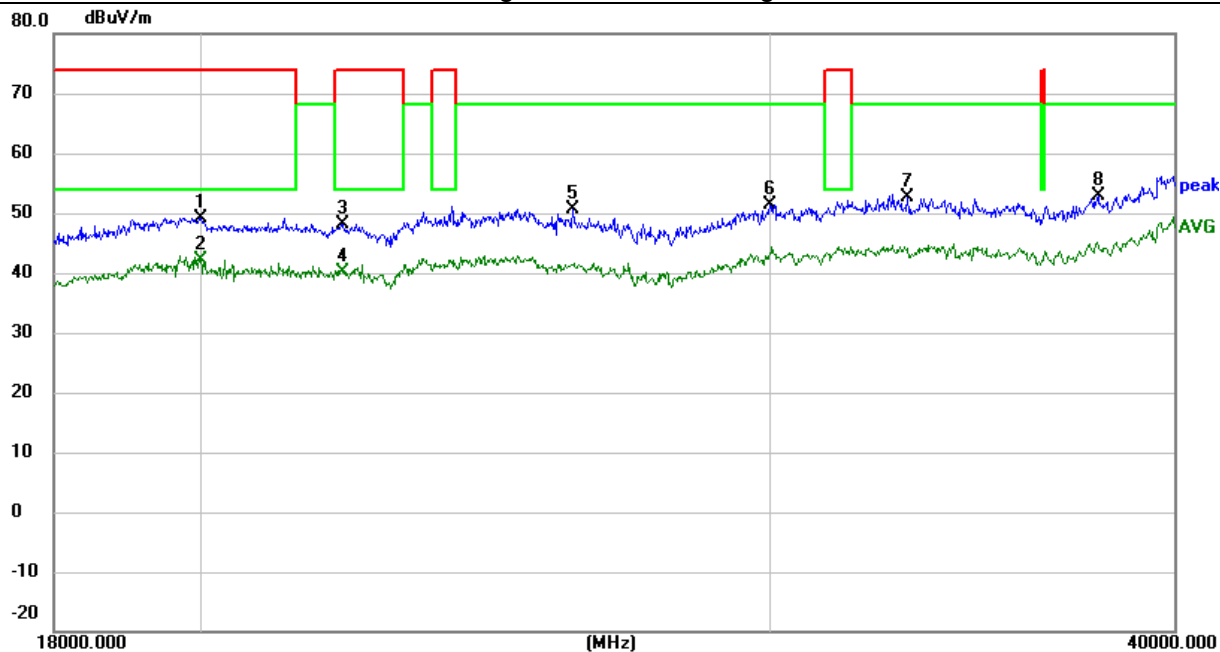


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	20162.600	63.97	-12.68	51.29	74.00	-22.71	peak
H	20162.600	55.70	-12.68	43.02	54.00	-10.98	AVG
H	22758.050	60.70	-11.79	48.91	74.00	-25.09	peak
H	22758.050	52.18	-11.79	40.39	54.00	-13.61	AVG
H	25307.850	62.05	-9.64	52.41	68.20	-15.79	peak
H	28892.200	57.84	-9.58	48.26	68.20	-19.94	peak
H	34699.100	59.19	-4.18	55.01	68.20	-13.19	peak
H	39323.500	59.04	-3.86	55.18	68.20	-13.02	peak

Remark:

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

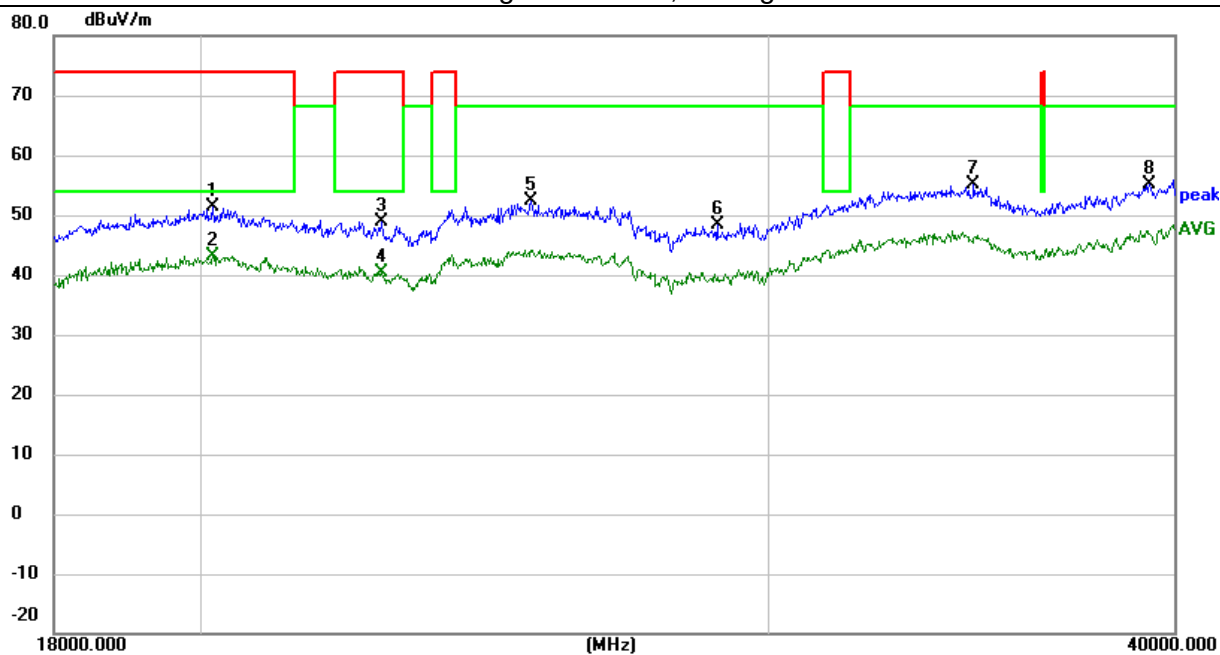

802.11a 5600


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	19366.750	63.50	-13.64	49.86	74.00	-24.14	peak
V	19366.750	54.21	-13.64	40.57	54.00	-13.43	AVG
V	23369.100	59.72	-11.79	47.93	68.20	-20.27	peak
V	23369.100	52.33	-11.79	40.54	68.20	-27.66	AVG
V	26326.450	59.03	-9.37	49.66	68.20	-18.54	peak
V	28461.550	59.44	-9.43	50.01	68.20	-18.19	peak
V	34771.700	56.97	-4.15	52.82	68.20	-15.38	peak
V	39083.150	59.89	-3.75	56.14	68.20	-12.06	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

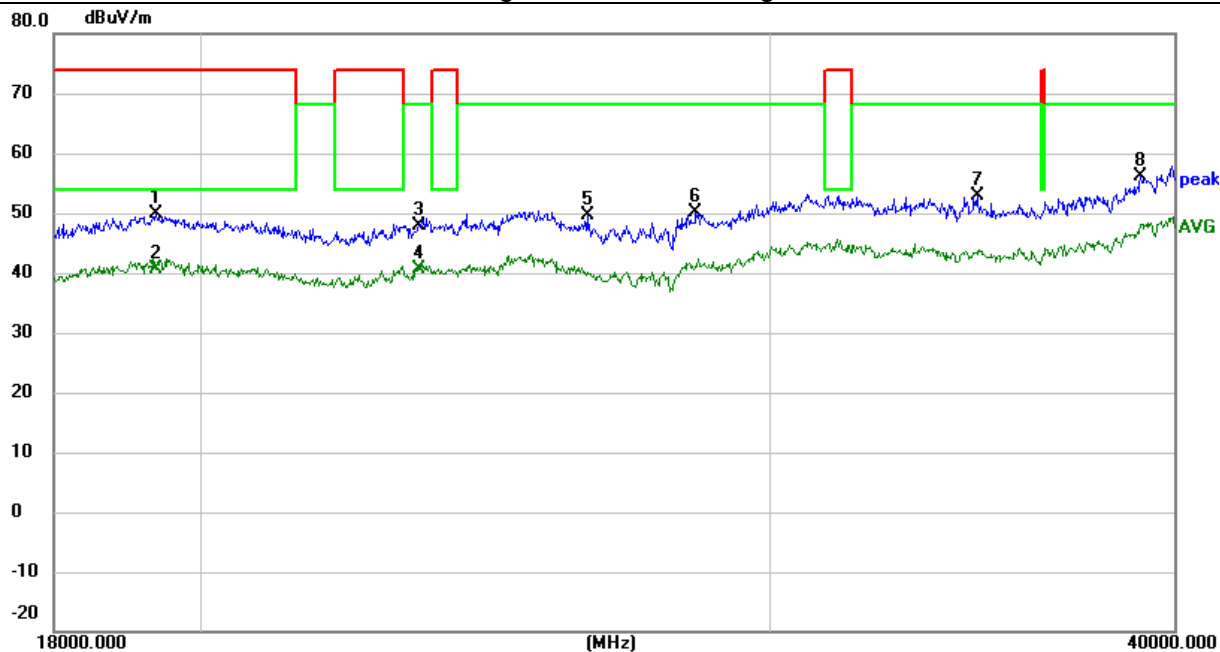


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	19747.350	62.55	-12.90	49.65	74.00	-24.35	peak
H	19747.350	54.83	-12.90	41.93	54.00	-12.07	AVG
H	22753.100	59.93	-11.79	48.14	74.00	-25.86	peak
H	22753.100	52.29	-11.79	40.50	54.00	-13.50	AVG
H	24957.500	60.61	-9.92	50.69	68.20	-17.51	peak
H	30733.600	59.40	-7.88	51.52	68.20	-16.68	peak
H	35769.950	56.79	-4.07	52.72	68.20	-15.48	peak
H	39555.600	61.02	-3.74	57.28	68.20	-10.92	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

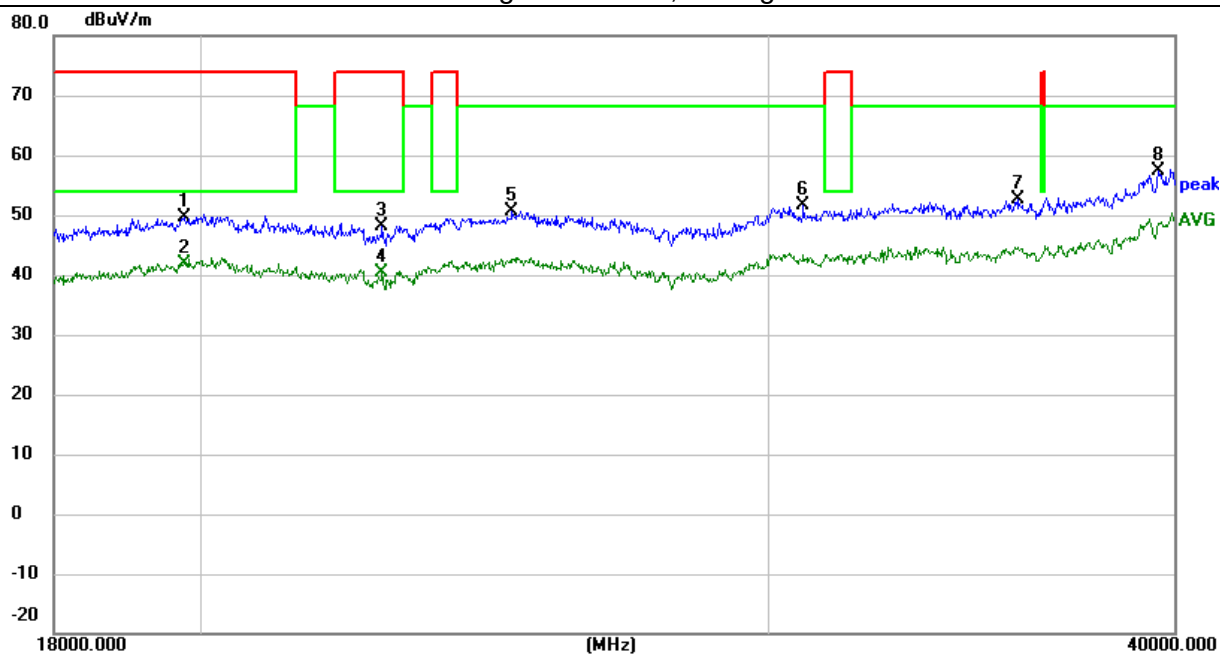

802.11a 5700


Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
V	20378.200	61.28	-12.45	48.83	74.00	-25.17	peak
V	20378.200	52.90	-12.45	40.45	54.00	-13.55	AVG
V	22448.950	60.57	-11.55	49.02	74.00	-24.98	peak
V	22448.950	52.54	-11.55	40.99	54.00	-13.01	AVG
V	24931.100	59.51	-10.03	49.48	68.20	-18.72	peak
V	27765.800	60.82	-9.36	51.46	68.20	-16.74	peak
V	33902.150	57.50	-5.05	52.45	68.20	-15.75	peak
V	39244.300	59.61	-3.91	55.70	68.20	-12.50	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

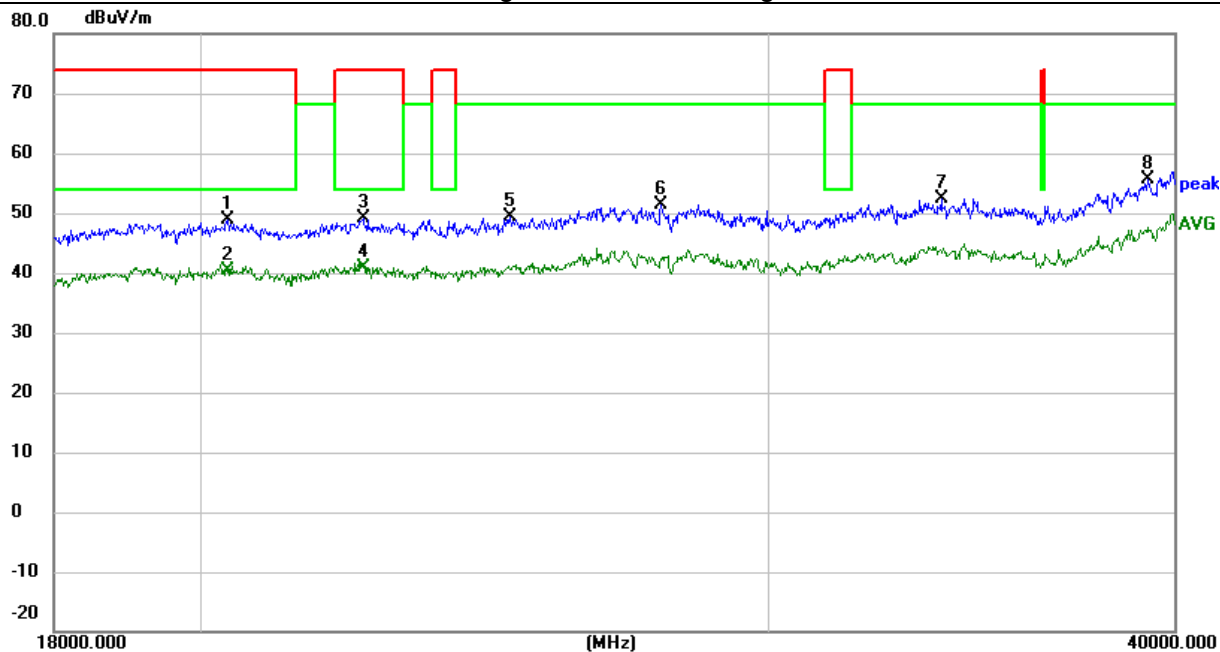


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	19494.900	63.10	-13.49	49.61	74.00	-24.39	peak
H	19494.900	54.10	-13.49	40.61	54.00	-13.39	AVG
H	22455.550	60.42	-11.54	48.88	74.00	-25.12	peak
H	22455.550	52.60	-11.54	41.06	54.00	-12.94	AVG
H	25314.450	59.35	-9.63	49.72	68.20	-18.48	peak
H	29718.300	57.97	-8.25	49.72	68.20	-18.48	peak
H	32628.350	58.43	-6.02	52.41	68.20	-15.79	peak
H	39313.600	60.78	-3.88	56.90	68.20	-11.30	peak

Remark:

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

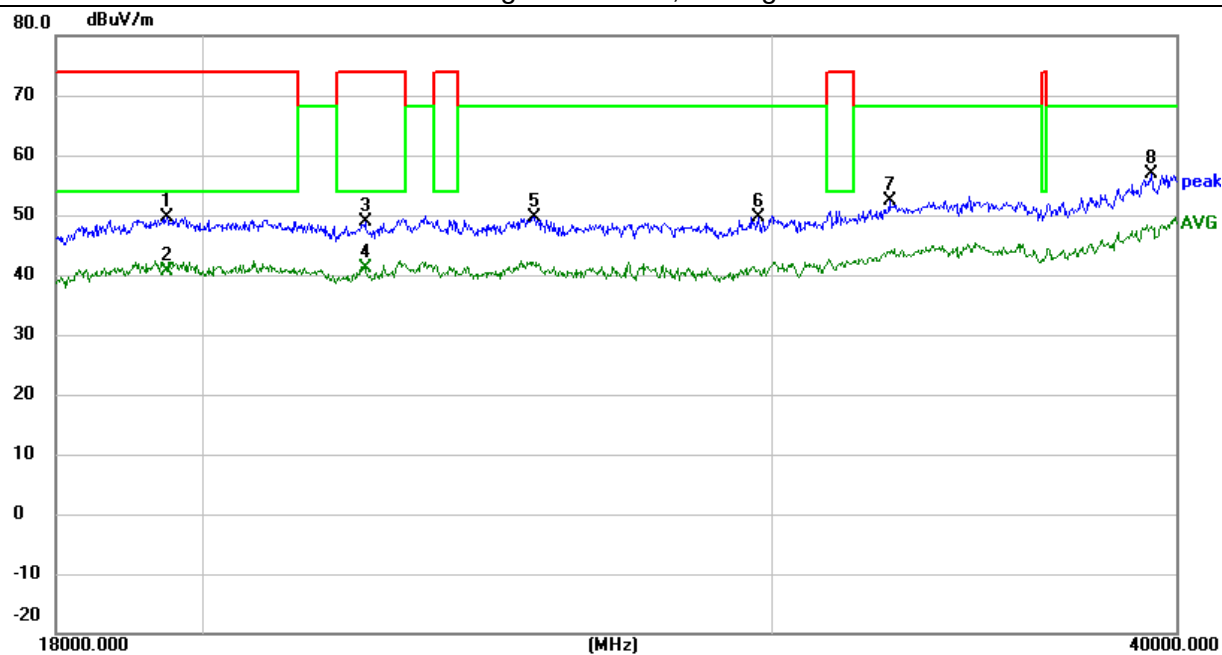

802.11a 5745


Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
V	20378.750	63.34	-12.45	50.89	74.00	-23.11	peak
V	20378.750	54.88	-12.45	42.43	54.00	-11.57	AVG
V	23051.200	59.92	-11.86	48.06	74.00	-25.94	peak
V	23051.200	51.35	-11.86	39.49	54.00	-14.51	AVG
V	25684.600	61.71	-9.67	52.04	68.20	-16.16	peak
V	30401.400	57.26	-8.03	49.23	68.20	-18.97	peak
V	34504.950	57.44	-4.20	53.24	68.20	-14.96	peak
V	37918.800	57.73	-4.23	53.50	68.20	-14.70	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

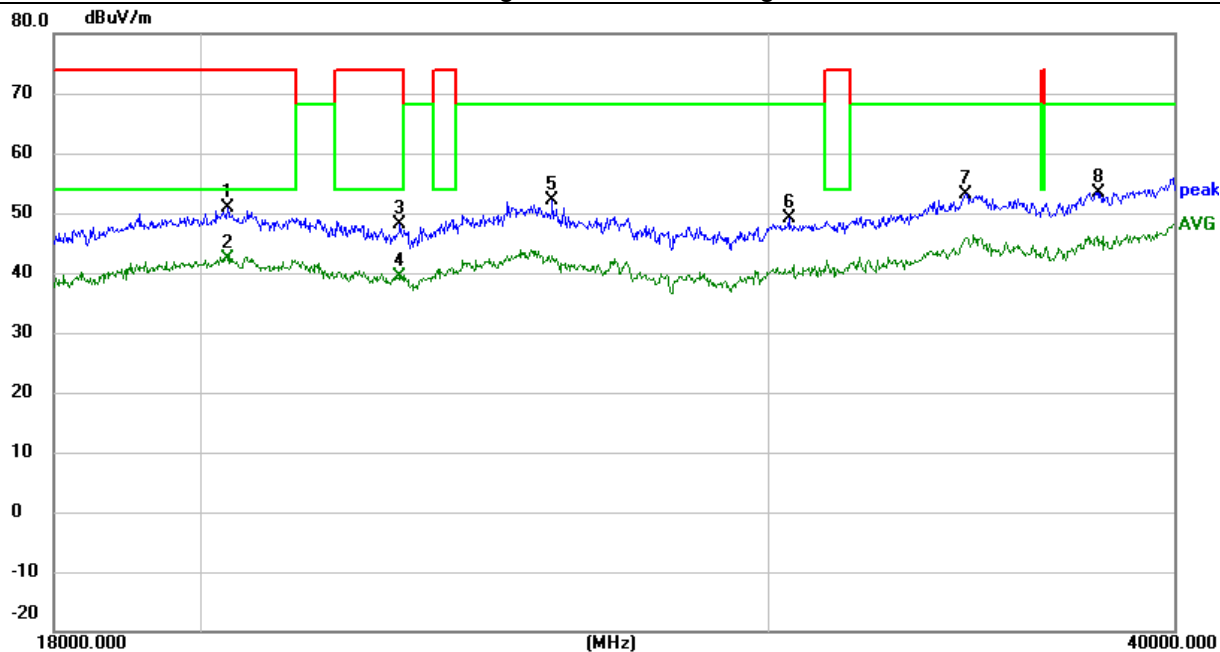


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	20434.300	62.83	-12.32	50.51	74.00	-23.49	peak
H	20434.300	54.53	-12.32	42.21	54.00	-11.79	AVG
H	22383.500	61.02	-11.63	49.39	74.00	-24.61	peak
H	22383.500	53.18	-11.63	41.55	54.00	-12.45	AVG
H	25331.500	60.05	-9.65	50.40	68.20	-17.80	peak
H	30353.000	59.45	-8.07	51.38	68.20	-16.82	peak
H	32780.150	59.56	-5.90	53.66	68.20	-14.54	peak
H	39268.500	59.11	-3.90	55.21	68.20	-12.99	peak

Remark:

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

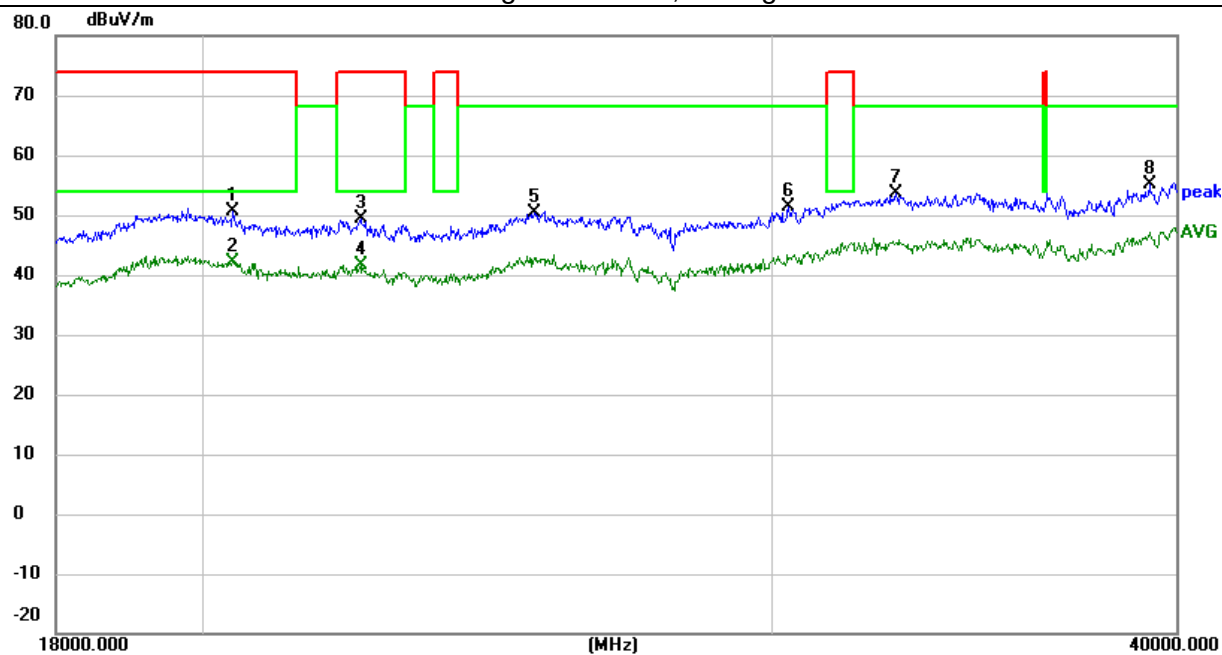

802.11a 5785


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	20359.500	62.97	-12.50	50.47	74.00	-23.53	peak
V	20359.500	54.86	-12.50	42.36	54.00	-11.64	AVG
V	23139.750	59.25	-11.99	47.26	68.20	-20.94	peak
V	23139.750	51.59	-11.99	39.60	68.20	-28.60	AVG
V	25344.700	61.07	-9.66	51.41	68.20	-16.79	peak
V	29719.400	58.93	-8.25	50.68	68.20	-17.52	peak
V	32694.900	59.59	-5.96	53.63	68.20	-14.57	peak
V	38956.650	58.78	-3.67	55.11	68.20	-13.09	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

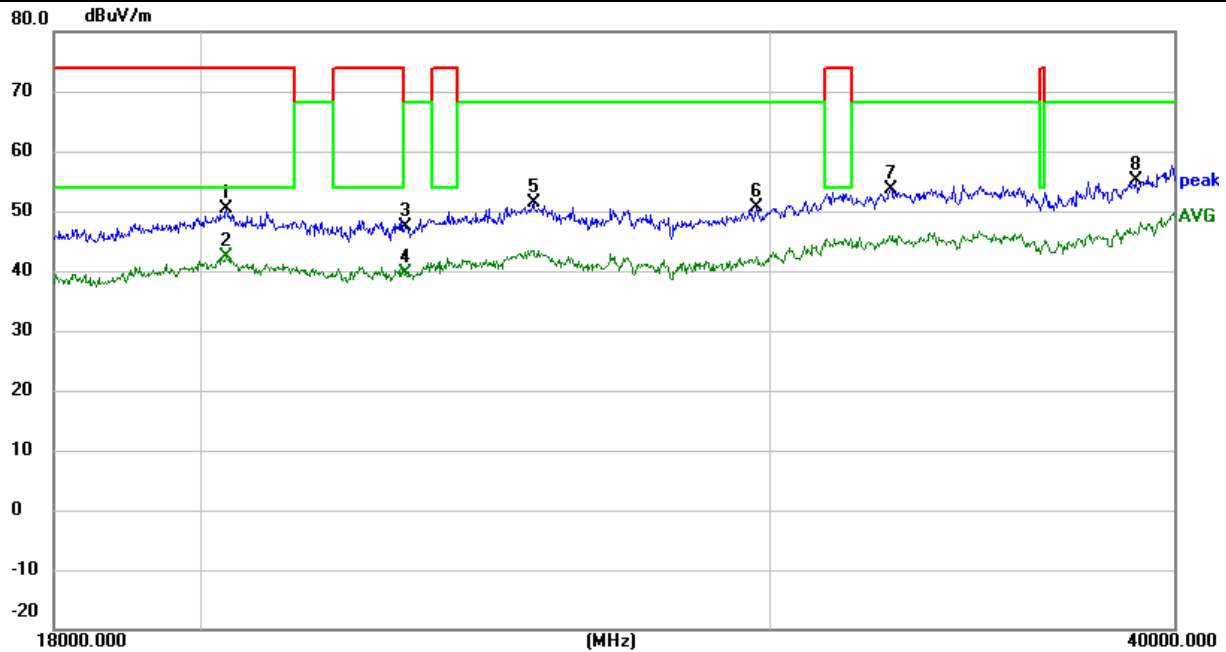


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	19087.350	63.74	-13.97	49.77	74.00	-24.23	peak
H	19087.350	55.79	-13.97	41.82	54.00	-12.18	AVG
H	22708.000	61.73	-11.74	49.99	74.00	-24.01	peak
H	22708.000	53.03	-11.74	41.29	54.00	-12.71	AVG
H	25309.500	59.53	-9.63	49.90	68.20	-18.30	peak
H	29541.200	60.22	-8.40	51.82	68.20	-16.38	peak
H	32531.000	59.23	-6.11	53.12	68.20	-15.08	peak
H	38415.450	57.54	-4.06	53.48	68.20	-14.72	peak

Remark:

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

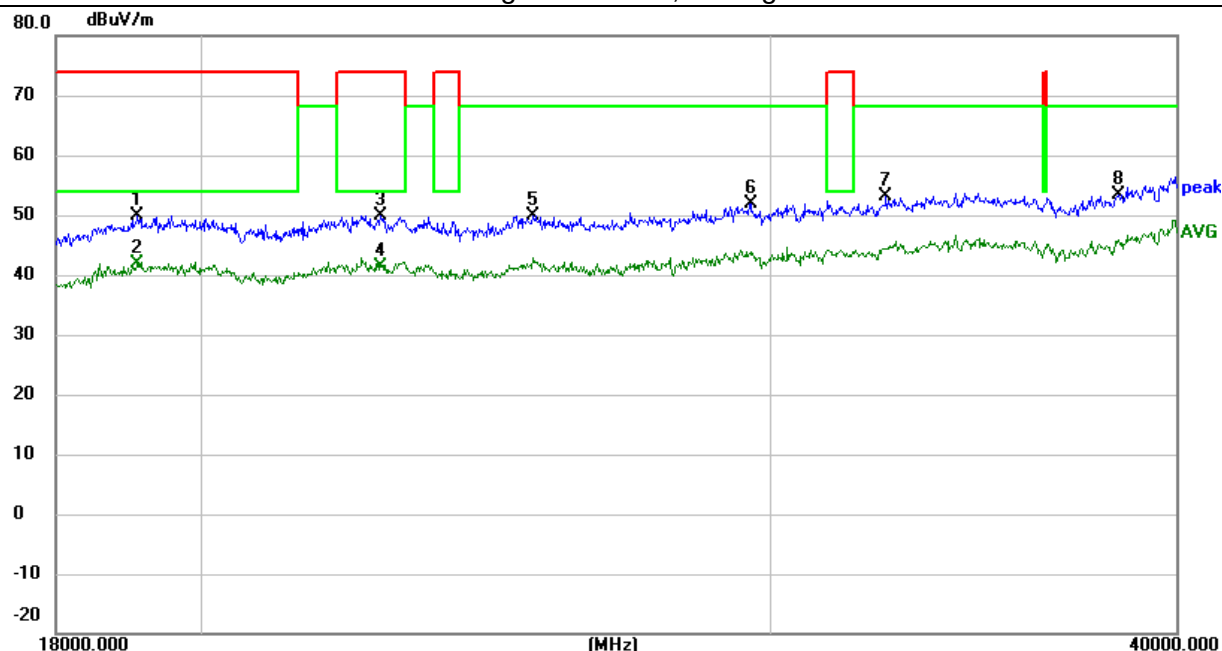

802.11a 5825


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	20335.850	62.20	-12.55	49.65	74.00	-24.35	peak
V	20335.850	53.35	-12.55	40.80	54.00	-13.20	AVG
V	22387.350	61.43	-11.63	49.80	74.00	-24.20	peak
V	22387.350	53.04	-11.63	41.41	54.00	-12.59	AVG
V	25444.800	61.53	-9.73	51.80	68.20	-16.40	peak
V	30379.950	59.95	-8.05	51.90	68.20	-16.30	peak
V	34709.550	59.38	-4.17	55.21	68.20	-12.99	peak
V	39529.200	59.72	-3.75	55.97	68.20	-12.23	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

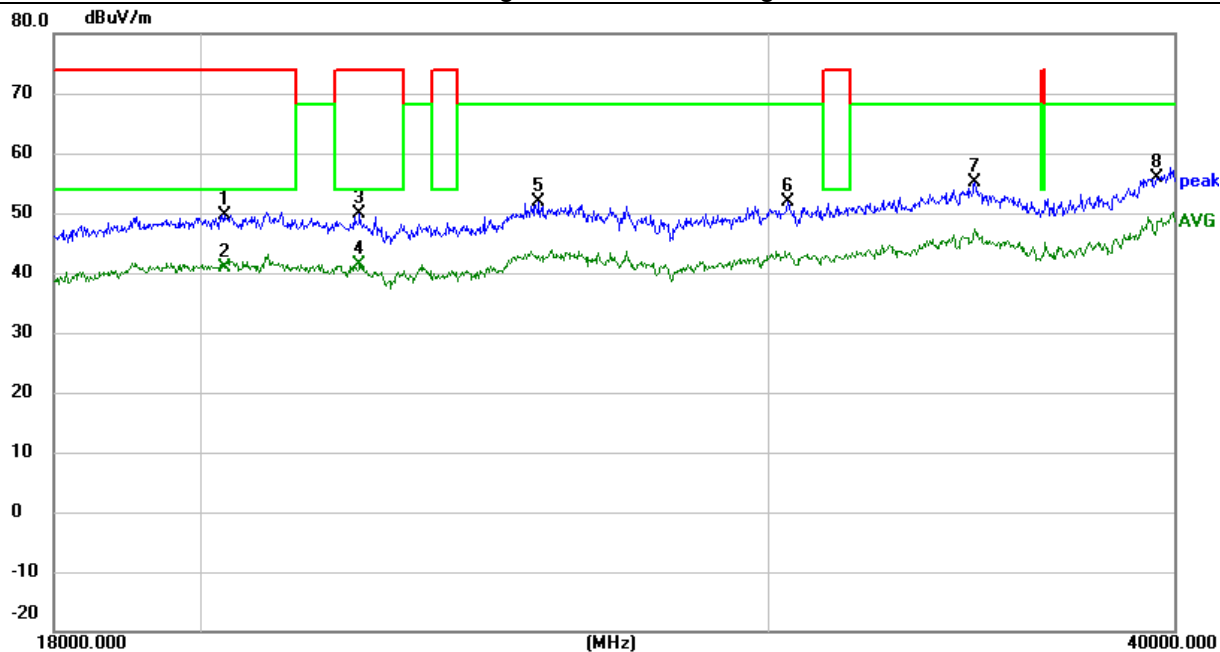


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	20451.900	62.65	-12.27	50.38	74.00	-23.62	peak
H	20451.900	55.09	-12.27	42.82	54.00	-11.18	AVG
H	22220.150	59.97	-11.81	48.16	74.00	-25.84	peak
H	22220.150	51.36	-11.81	39.55	54.00	-14.45	AVG
H	24924.500	62.34	-10.07	52.27	68.20	-15.93	peak
H	30449.250	60.38	-8.00	52.38	68.20	-15.82	peak
H	33578.200	60.06	-5.32	54.74	68.20	-13.46	peak
H	37864.350	58.34	-4.25	54.09	68.20	-14.11	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

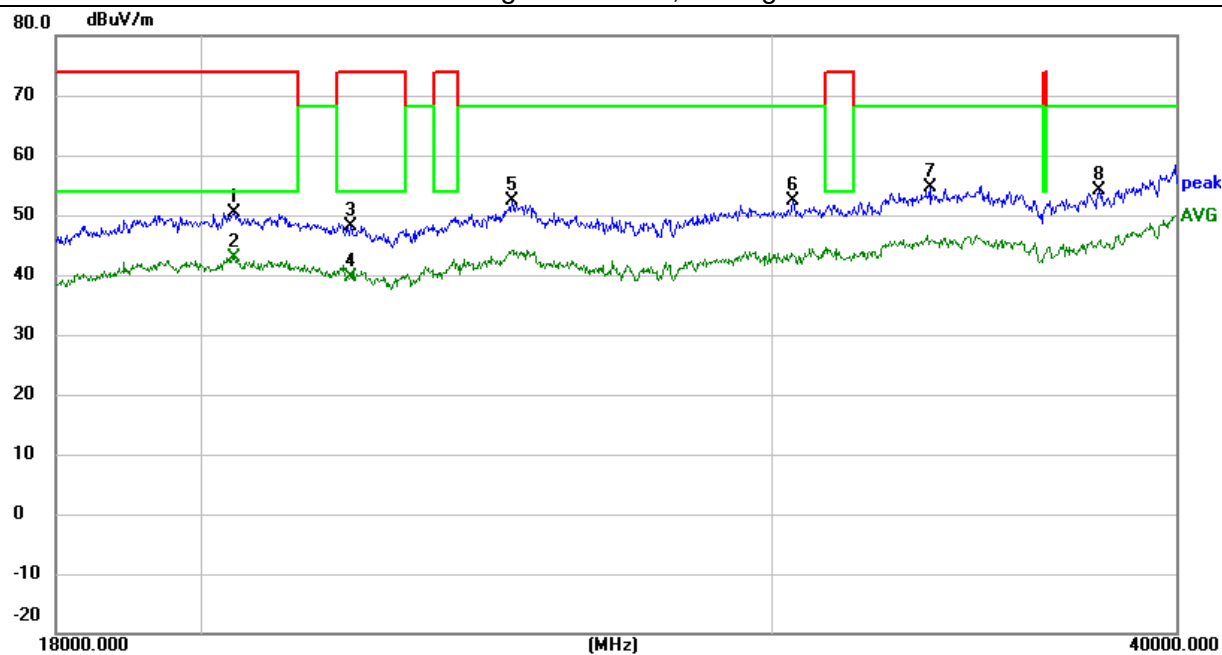

3.2.10 Radiated Spurious at Band Edges

EUT :	PocketBook Q	Model Name. :	PB5084
Temperature :	21.6 °C	Relative Humidity :	46.2%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (WIFI 5G)- 802.11a/n20/ac20/ac40/ac80/ax20/ax40/ax80		

All the modulation modes have been tested, and the worst-case result was 802.11a/ac/ax. Only the worst-case mode reported.

5.2G 802.11a 5180


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	5150.000	8.91	38.51	47.42	74.00	-26.58	peak
V	5150.000	0.48	38.51	38.99	54.00	-15.01	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

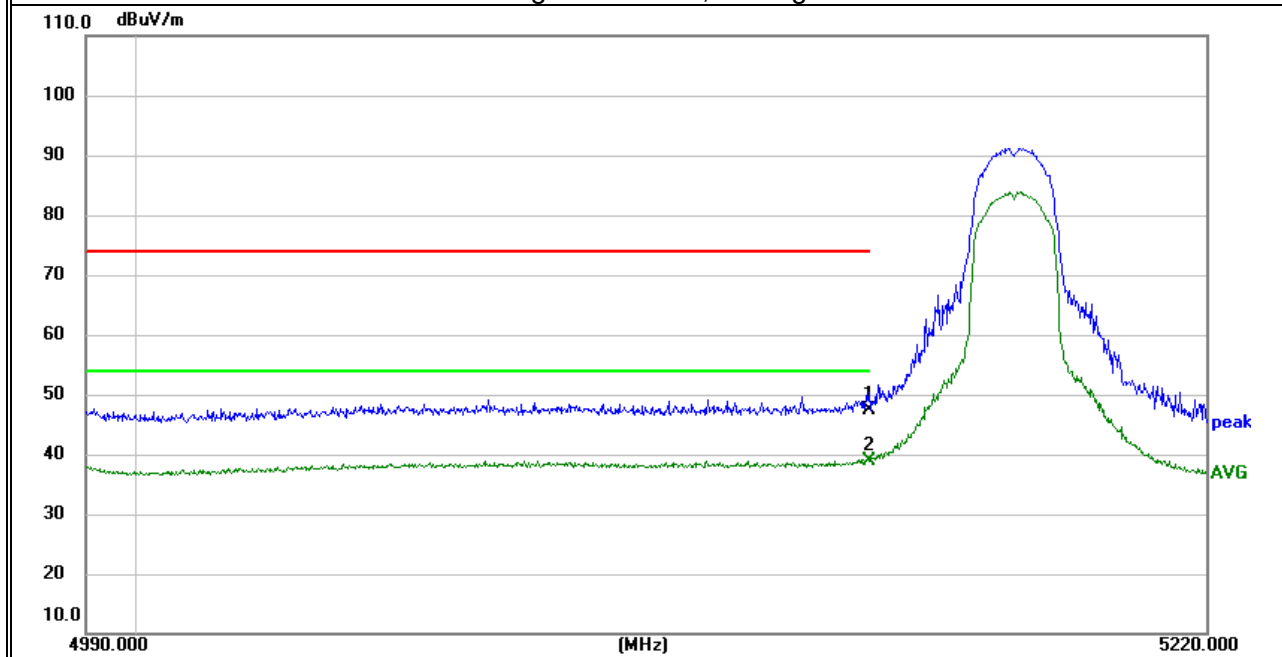


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5150.000	9.66	38.51	48.17	74.00	-25.83	peak
H	5150.000	0.61	38.51	39.12	54.00	-14.88	AVG

Remark:

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

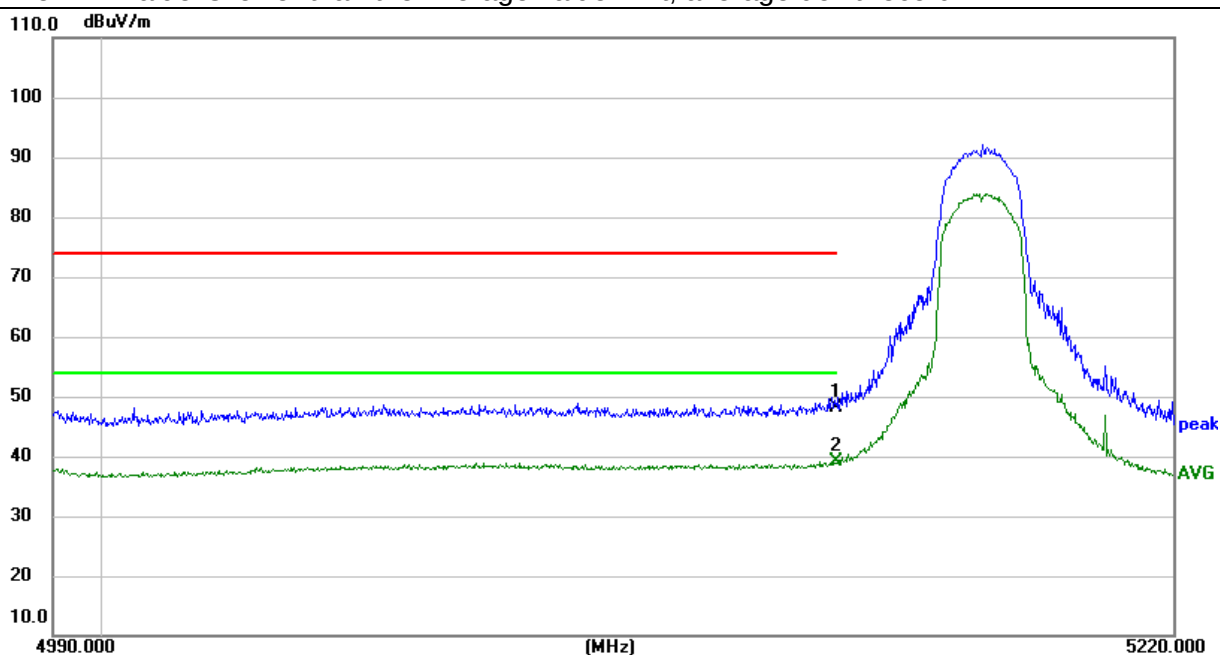

5.2G 802.11a 5240


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5350.000	7.15	37.64	44.79	74.00	-29.21	peak
V	5350.000	-1.78	37.64	35.86	54.00	-18.14	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

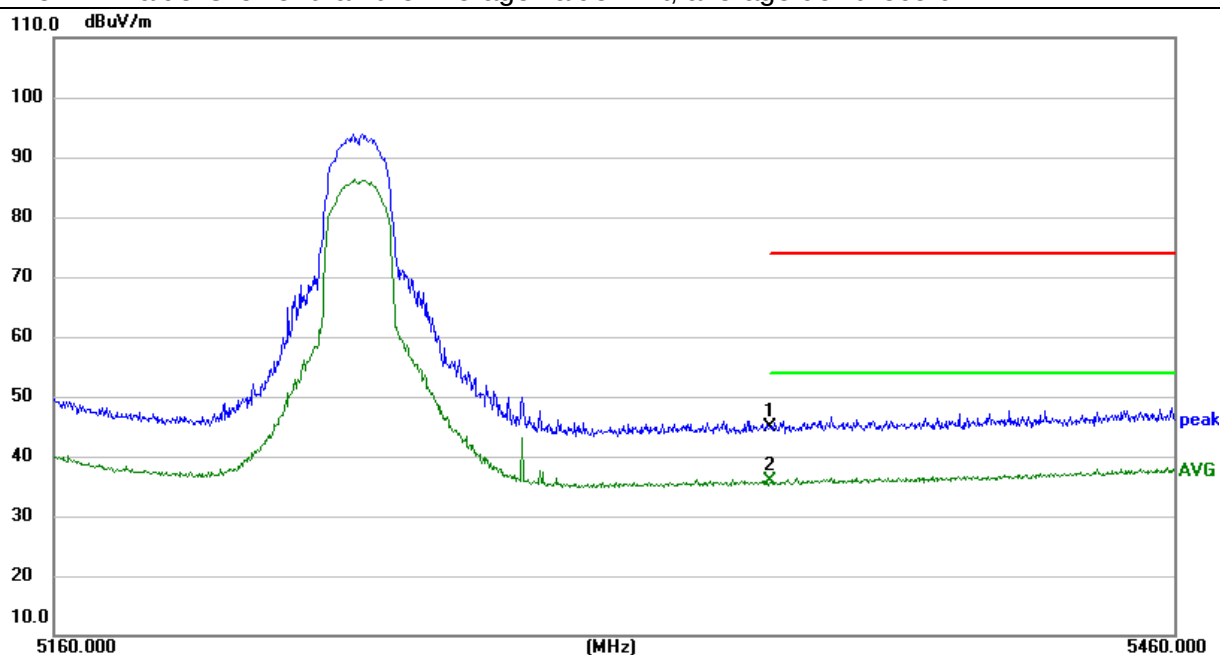


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5350.000	6.65	37.64	44.29	74.00	-29.71	peak
H	5350.000	-1.85	37.64	35.79	54.00	-18.21	AVG

Remark:

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

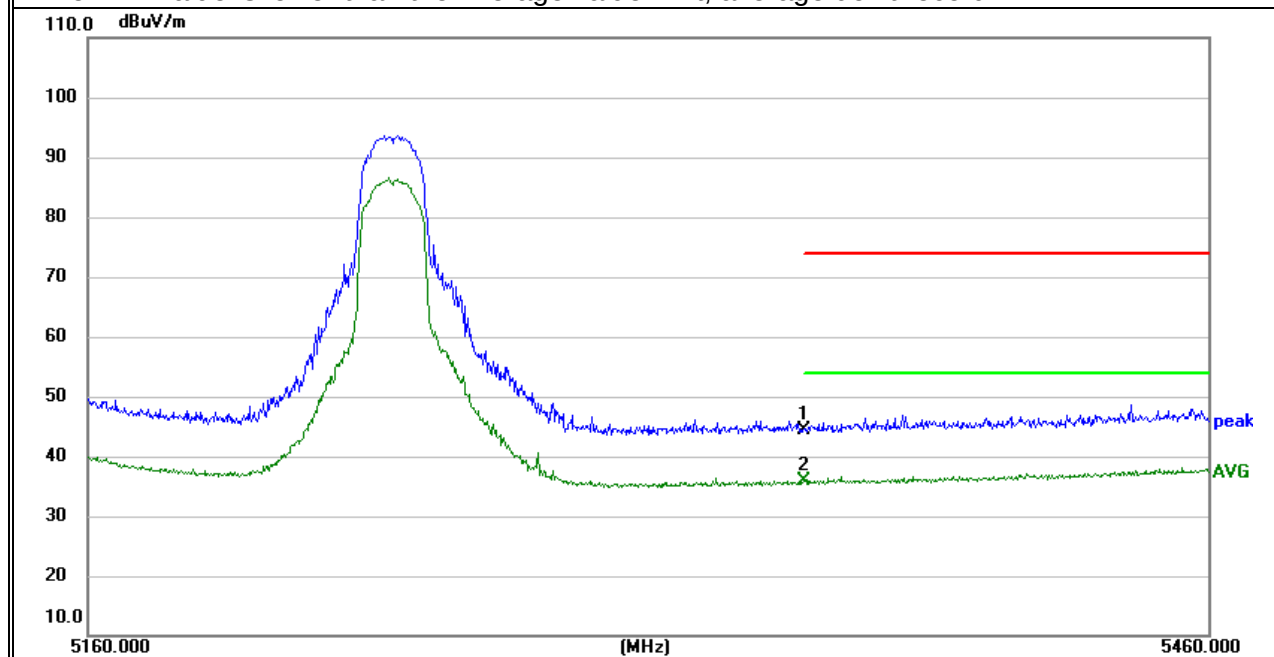

5.2G 802.11ac20 5180


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5150.000	9.47	38.51	47.98	74.00	-26.02	peak
V	5150.000	0.14	38.51	38.65	54.00	-15.35	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

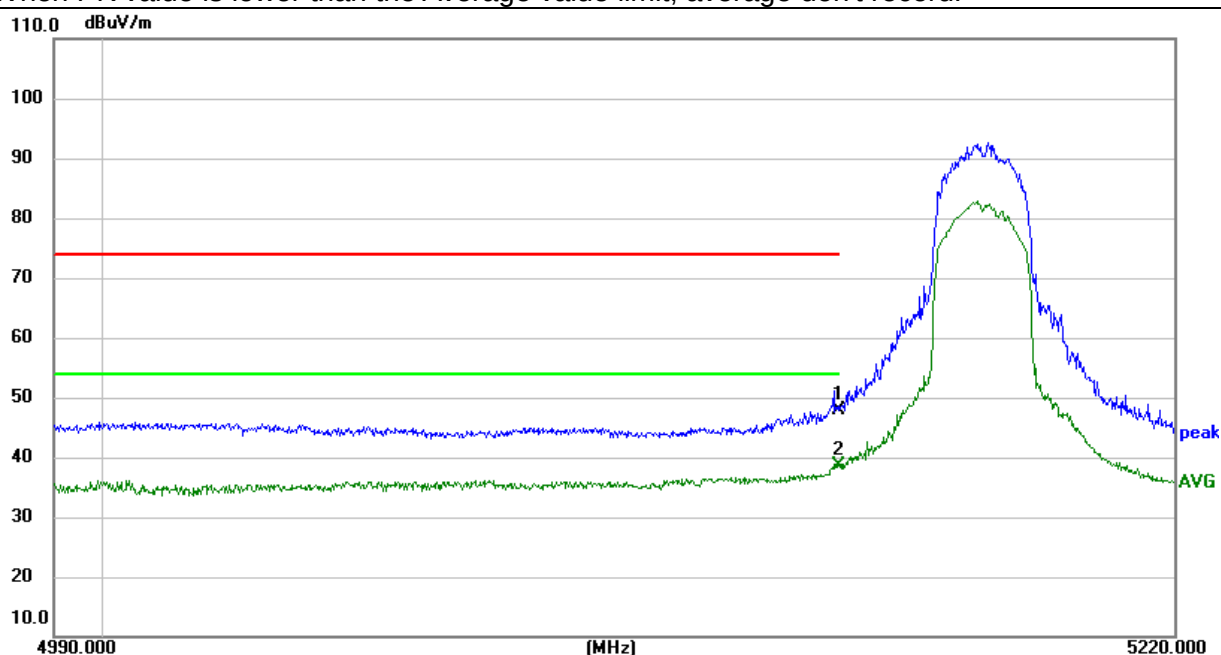


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5150.000	9.00	38.51	47.51	74.00	-26.49	peak
H	5150.000	0.51	38.51	39.02	54.00	-14.98	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

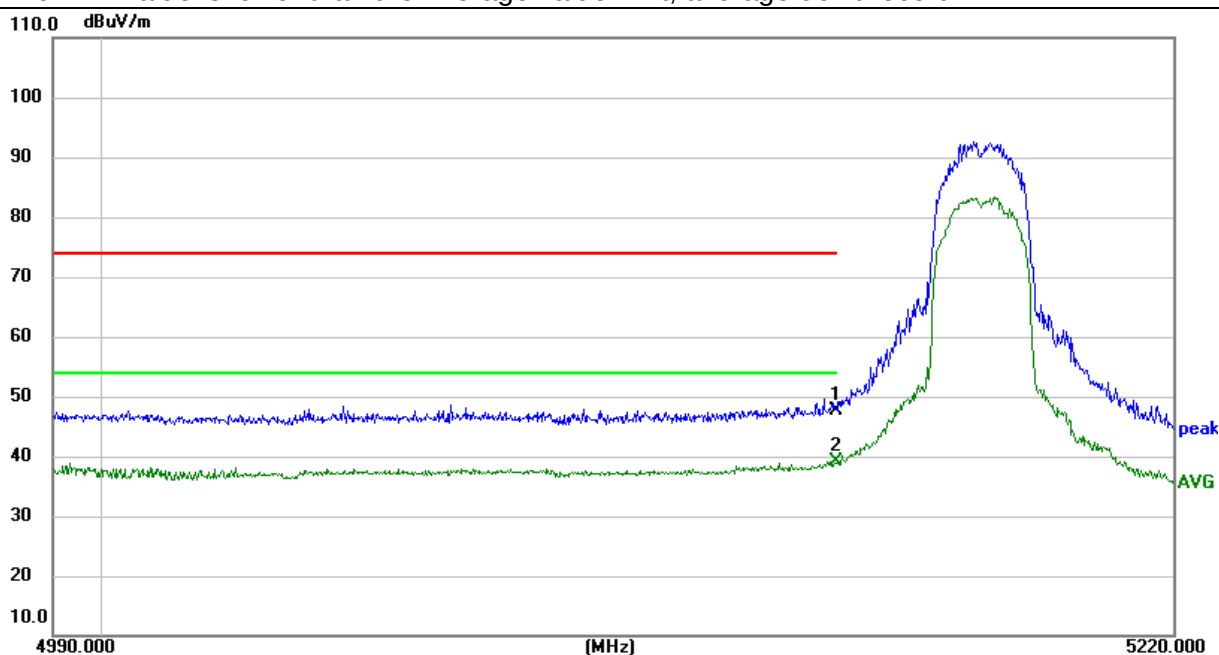

5.2G 802.11ac20 5240


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5350.000	7.29	37.64	44.93	74.00	-29.07	peak
V	5350.000	-1.90	37.64	35.74	54.00	-18.26	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

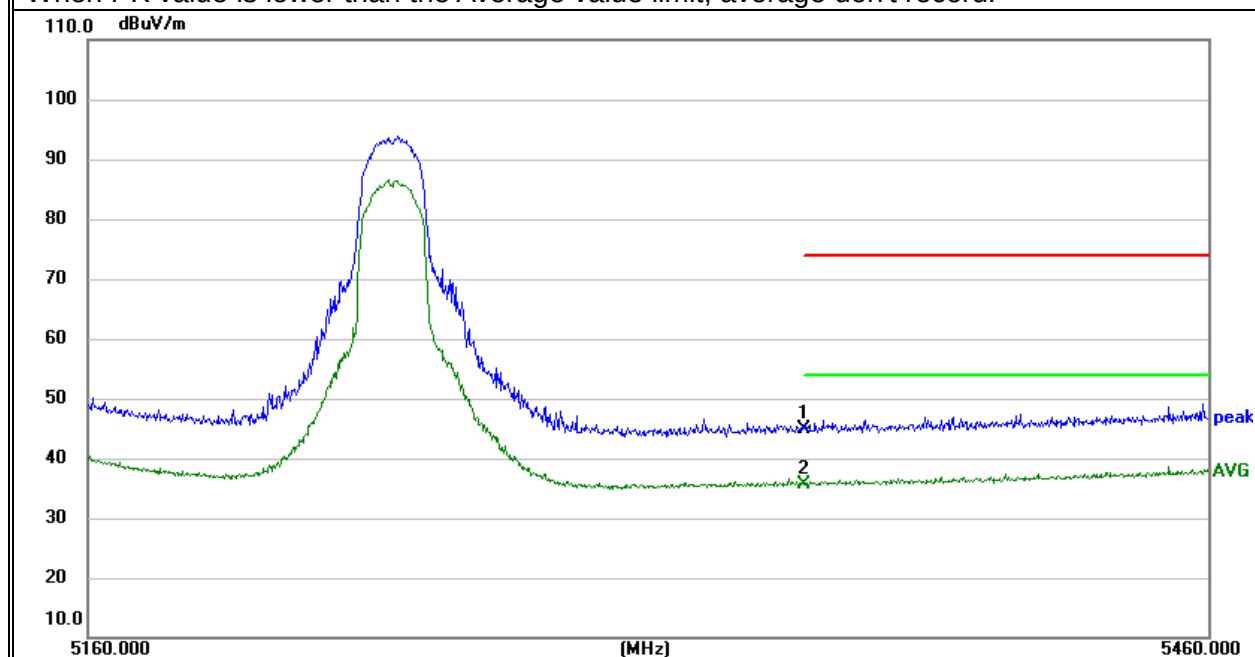

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5350.000	7.66	37.64	45.30	74.00	-28.70	peak
H	5350.000	-1.92	37.64	35.72	54.00	-18.28	AVG

Remark:


Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna

Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not

recorded in the report.

When PK value is lower than the Average value limit, average don't record.

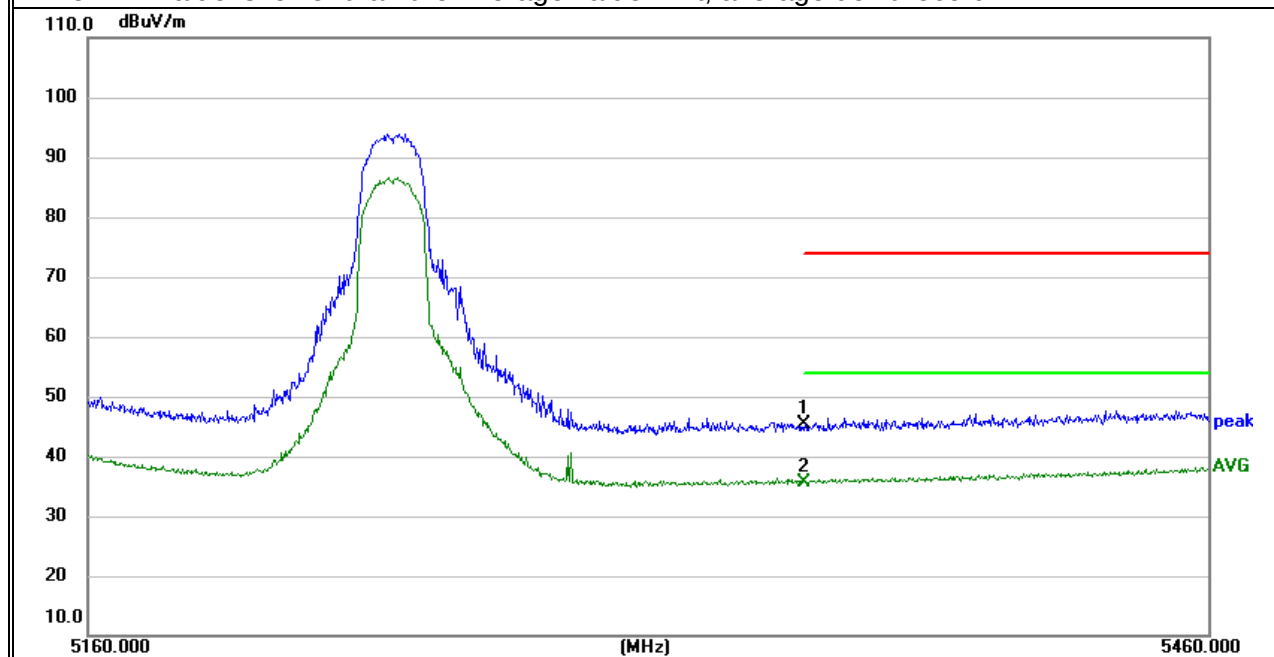

5.2G 802.11ac40 5190


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5150.000	15.01	38.51	53.52	74.00	-20.48	peak
V	5150.000	5.43	38.51	43.94	54.00	-10.06	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

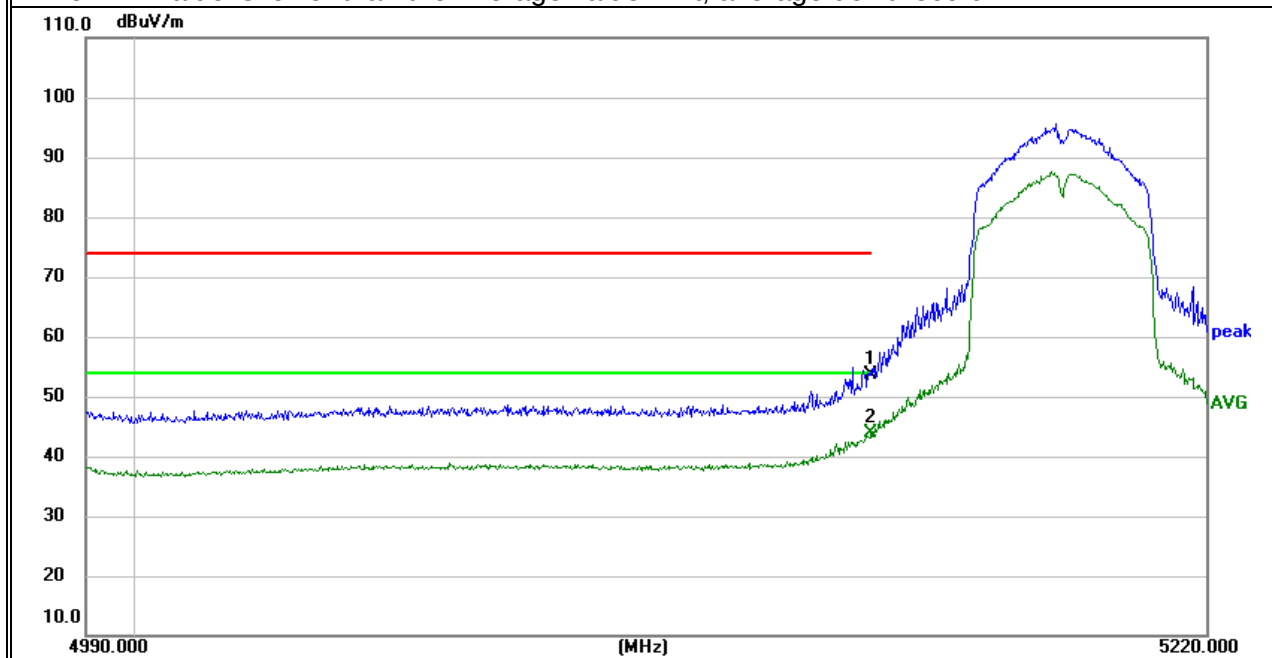


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5150.000	14.08	38.51	52.59	74.00	-21.41	peak
H	5150.000	3.13	38.51	41.64	54.00	-12.36	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

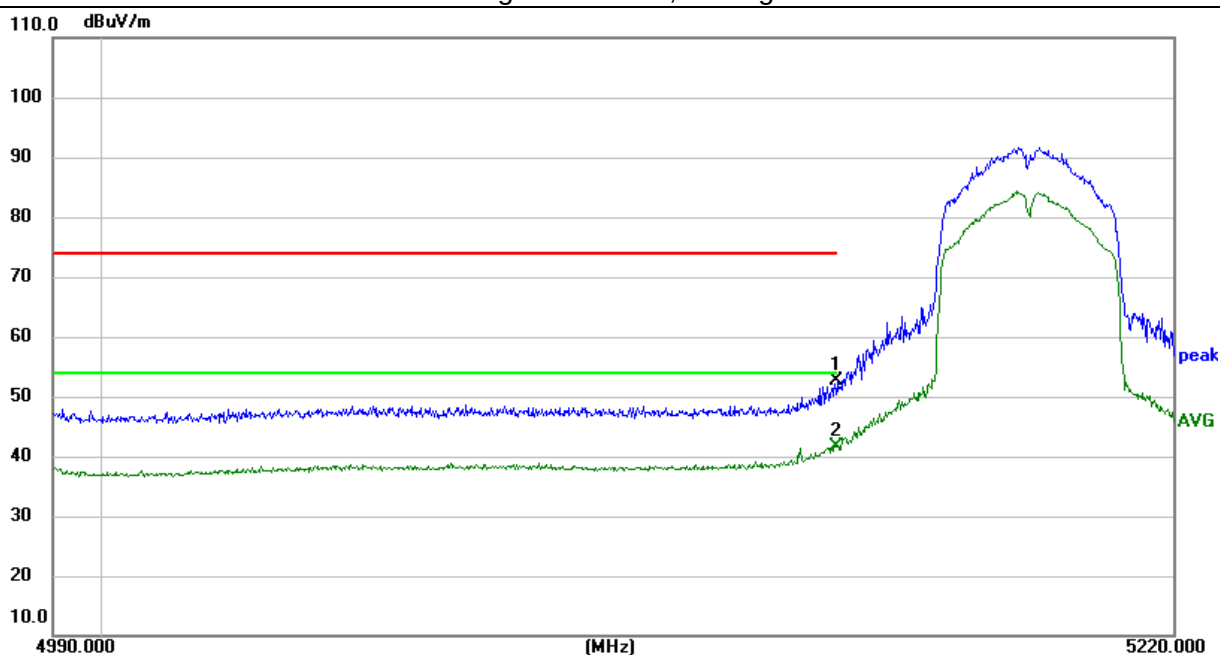

5.2G 802.11ac40 5230


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5350.000	7.24	37.64	44.88	74.00	-29.12	peak
V	5350.000	-1.89	37.64	35.75	54.00	-18.25	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

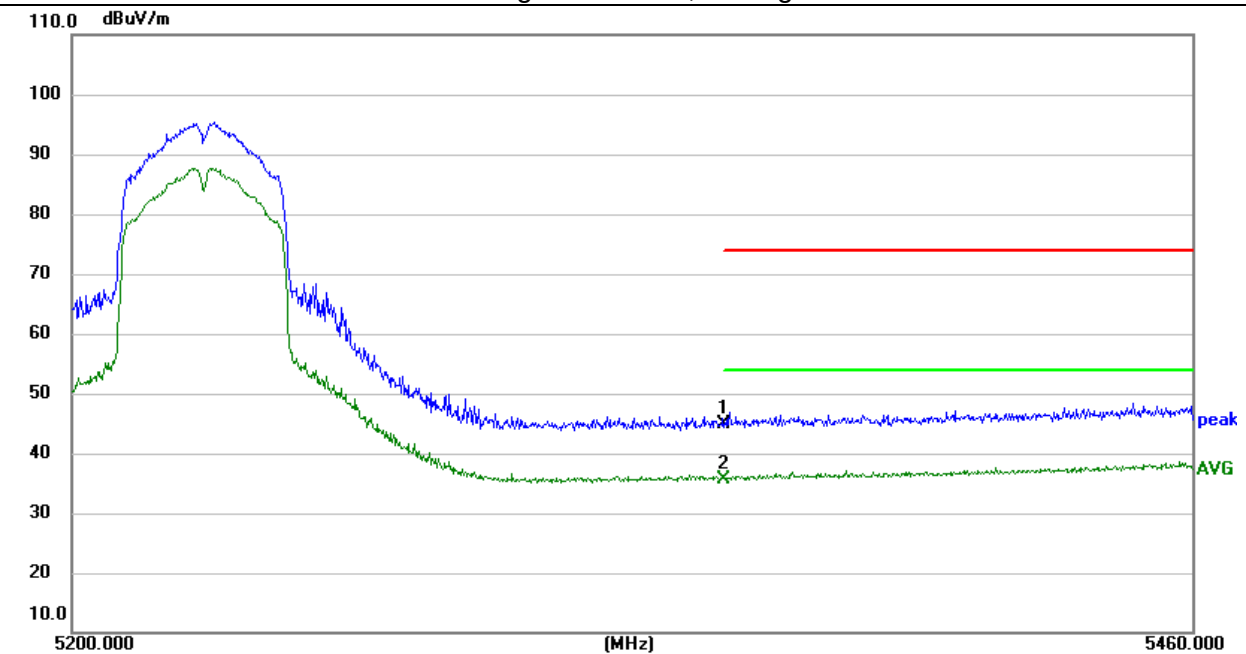


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5350.000	7.22	37.64	44.86	74.00	-29.14	peak
H	5350.000	-1.35	37.64	36.29	54.00	-17.71	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

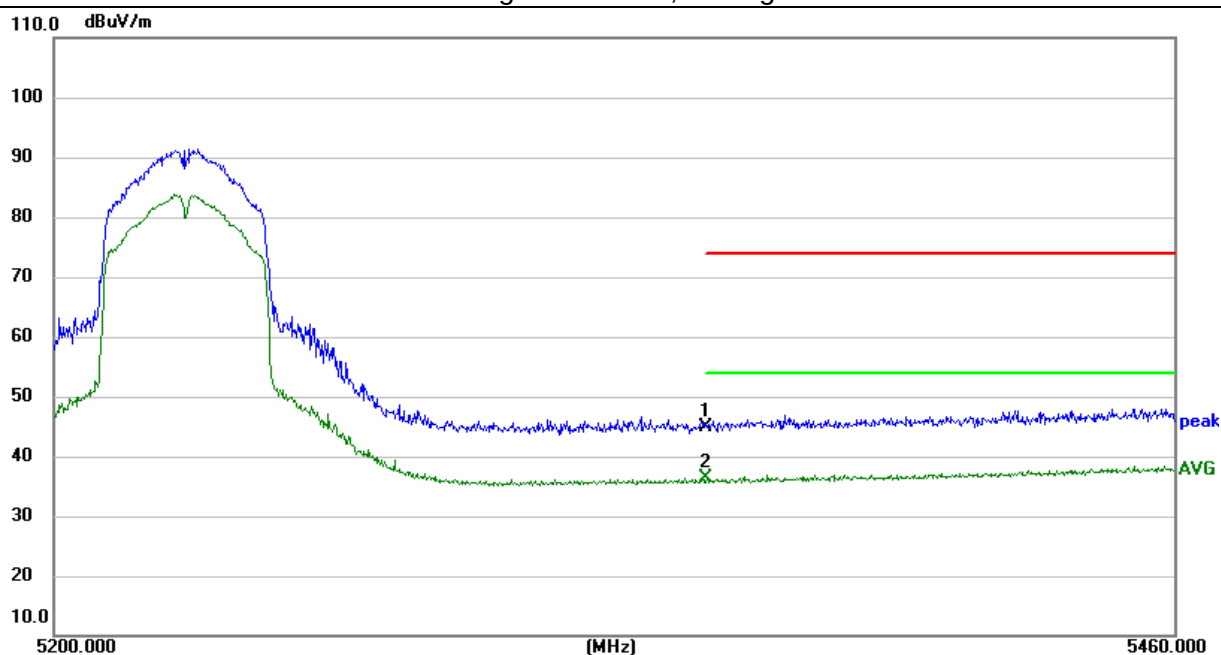

5.2G 802.11ac80 5210


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5150.000	22.46	38.51	60.97	74.00	-13.03	peak
V	5150.000	12.16	38.51	50.67	54.00	-3.33	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

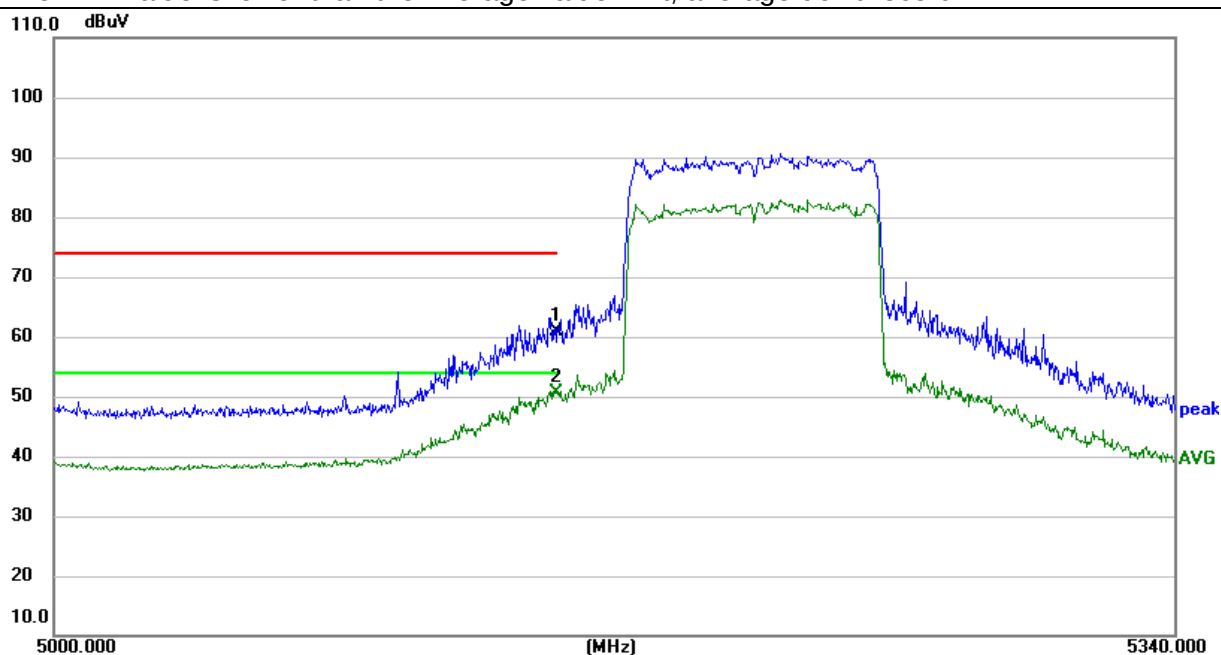


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5150.000	19.65	38.51	58.16	74.00	-15.84	peak
H	5150.000	9.58	38.51	48.09	54.00	-5.91	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

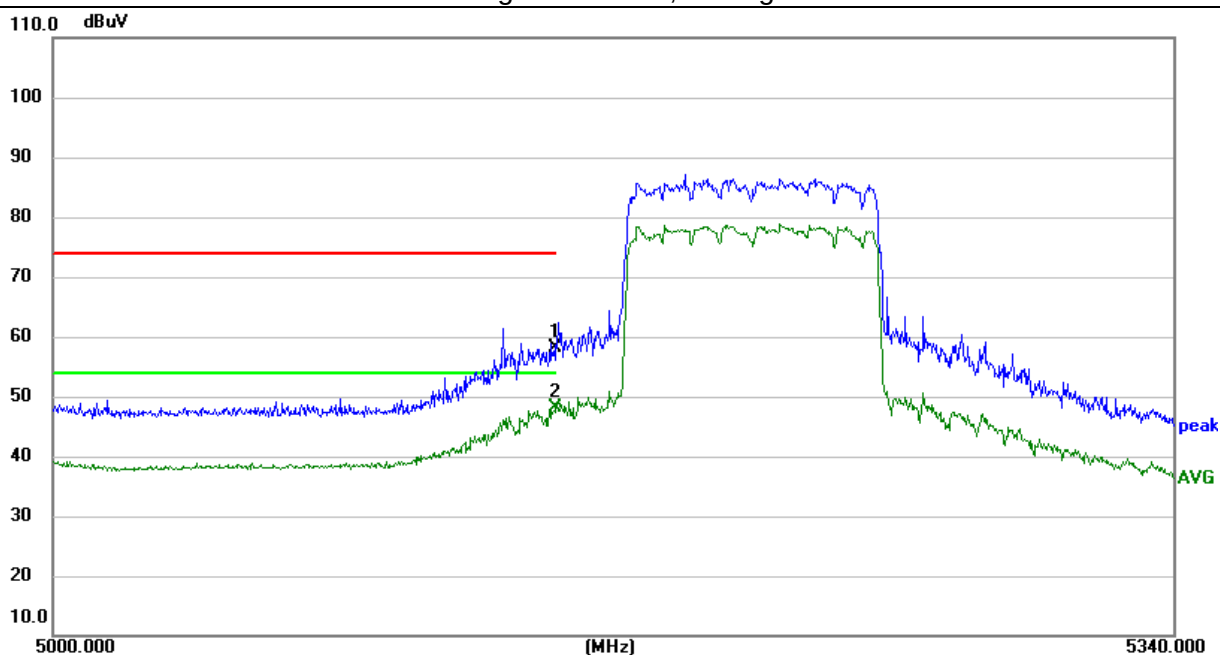

5.2G 802.11ac80 5210


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5350.000	8.61	37.64	46.25	74.00	-27.75	peak
V	5350.000	0.38	37.64	38.02	54.00	-15.98	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

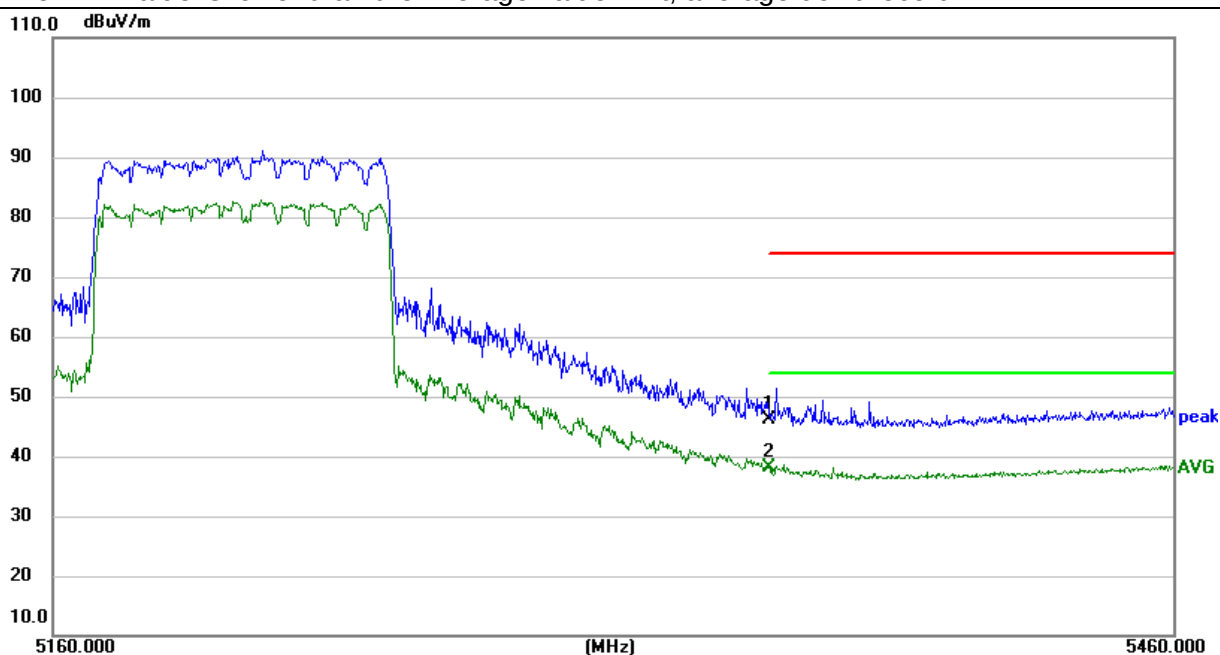


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5350.000	7.83	37.64	45.47	74.00	-28.53	peak
H	5350.000	-1.00	37.64	36.64	54.00	-17.36	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

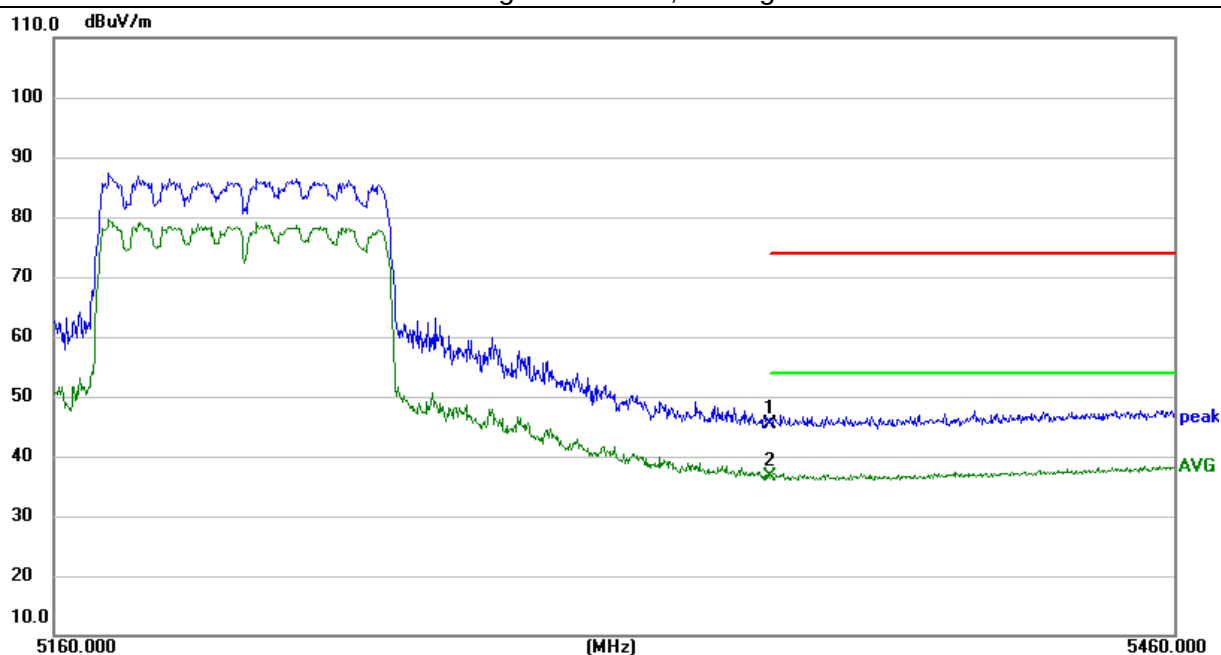

5.2G 802.11ax20 5180


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5150.000	9.97	38.51	48.48	74.00	-25.52	peak
V	5150.000	1.14	38.51	39.65	54.00	-14.35	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

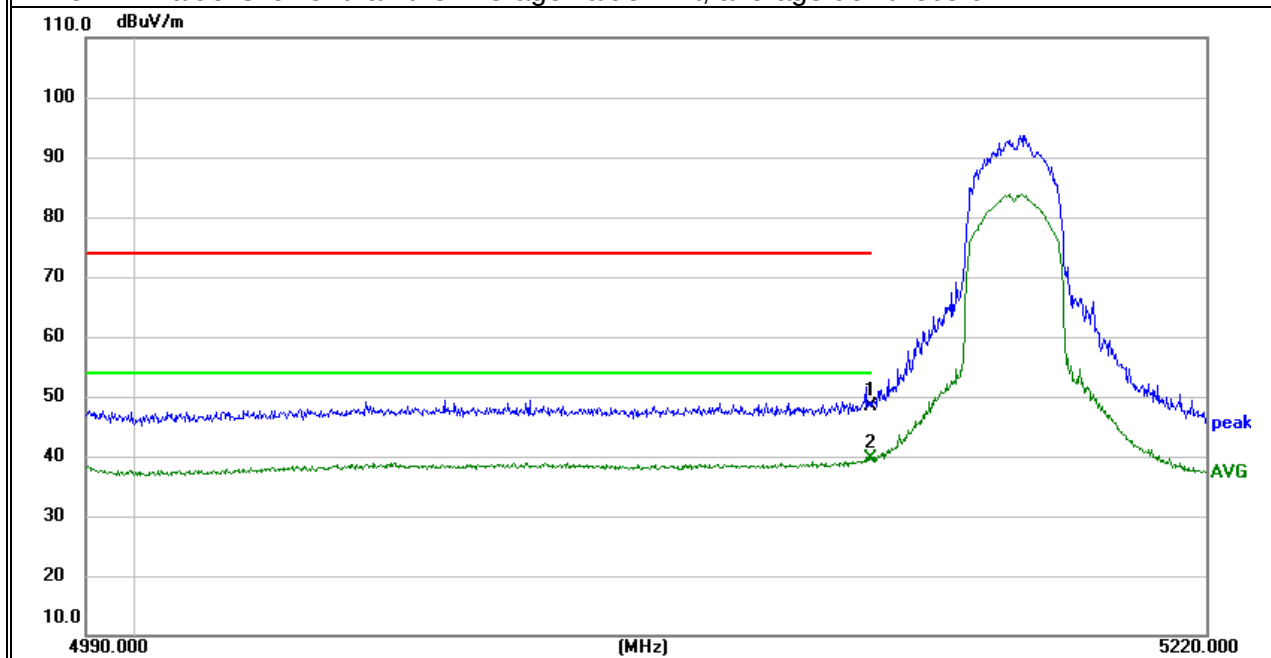


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5150.000	9.50	38.51	48.01	74.00	-25.99	peak
H	5150.000	1.01	38.51	39.52	54.00	-14.48	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

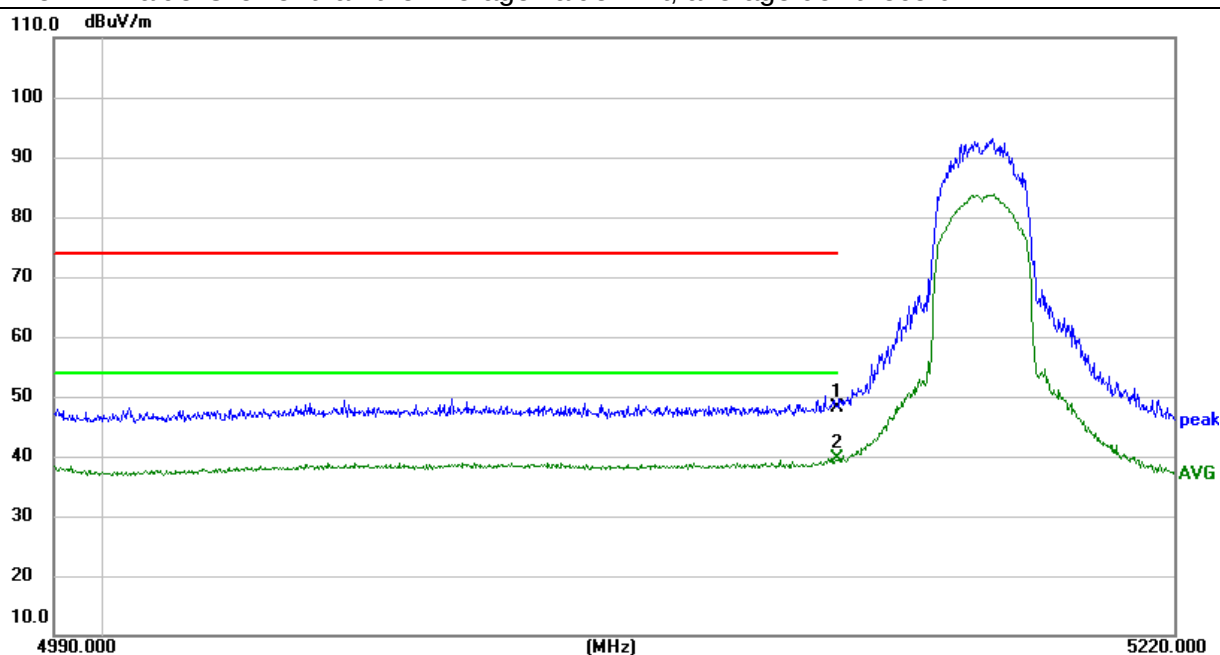

5.2G 802.11ax20 5240


Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
V	5350.000	7.58	37.64	45.22	74.00	-28.78	peak
V	5350.000	-2.13	37.64	35.51	54.00	-18.49	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

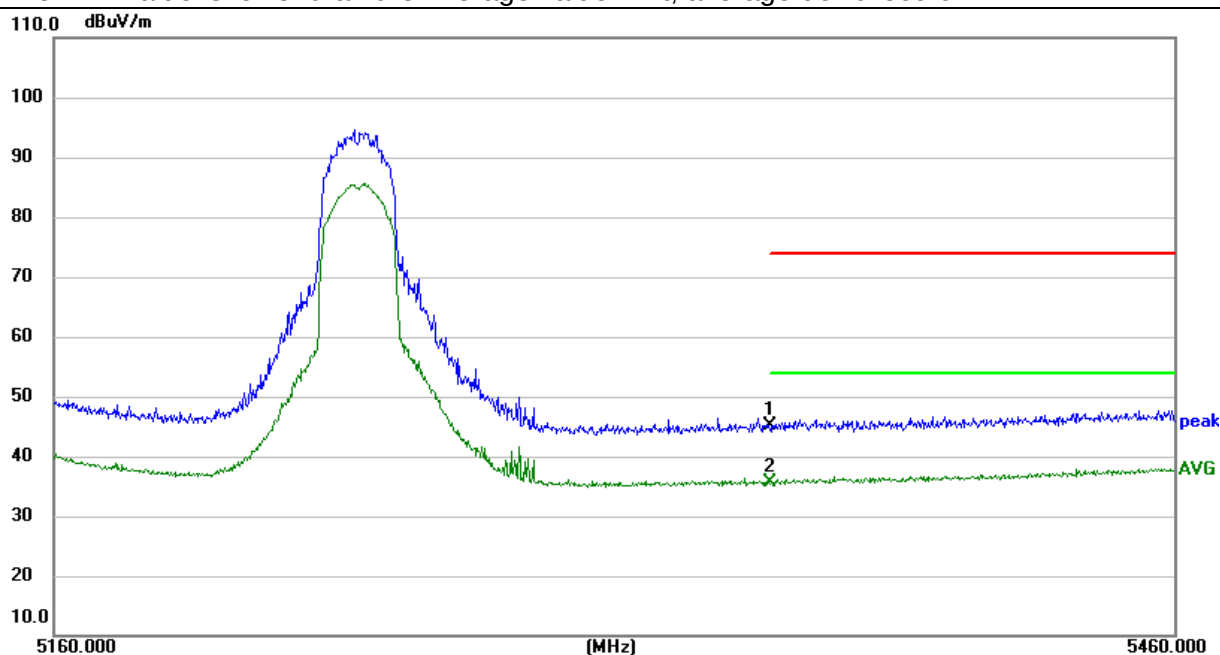


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5350.000	7.13	37.64	44.77	74.00	-29.23	peak
H	5350.000	-2.05	37.64	35.59	54.00	-18.41	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

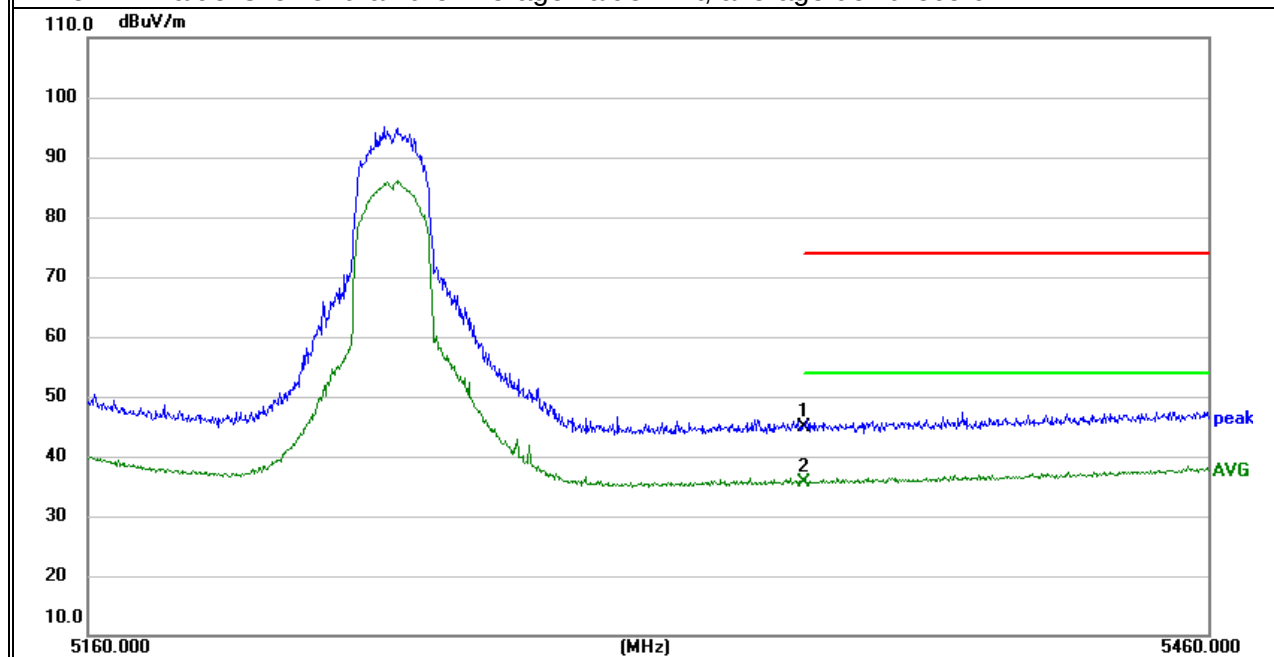

5.2G 802.11ax40 5190


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5150.000	14.62	38.51	53.13	74.00	-20.87	peak
V	5150.000	5.40	38.51	43.91	54.00	-10.09	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

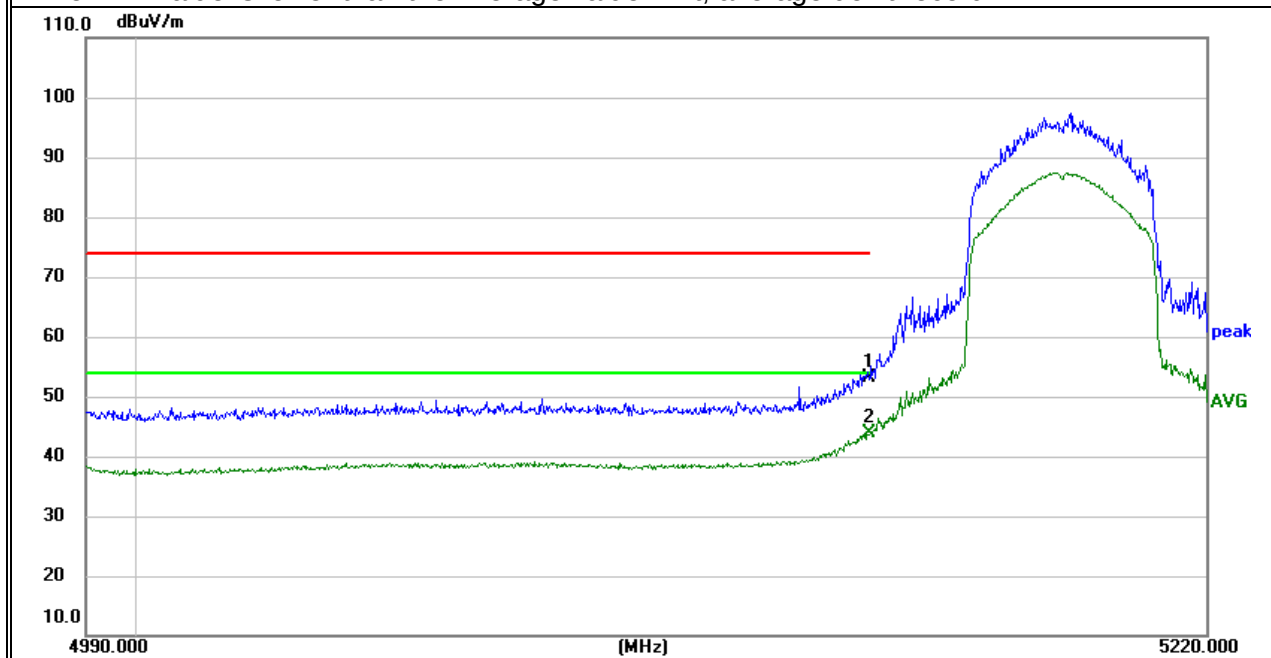


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5150.000	13.15	38.51	51.66	74.00	-22.34	peak
H	5150.000	3.53	38.51	42.04	54.00	-11.96	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

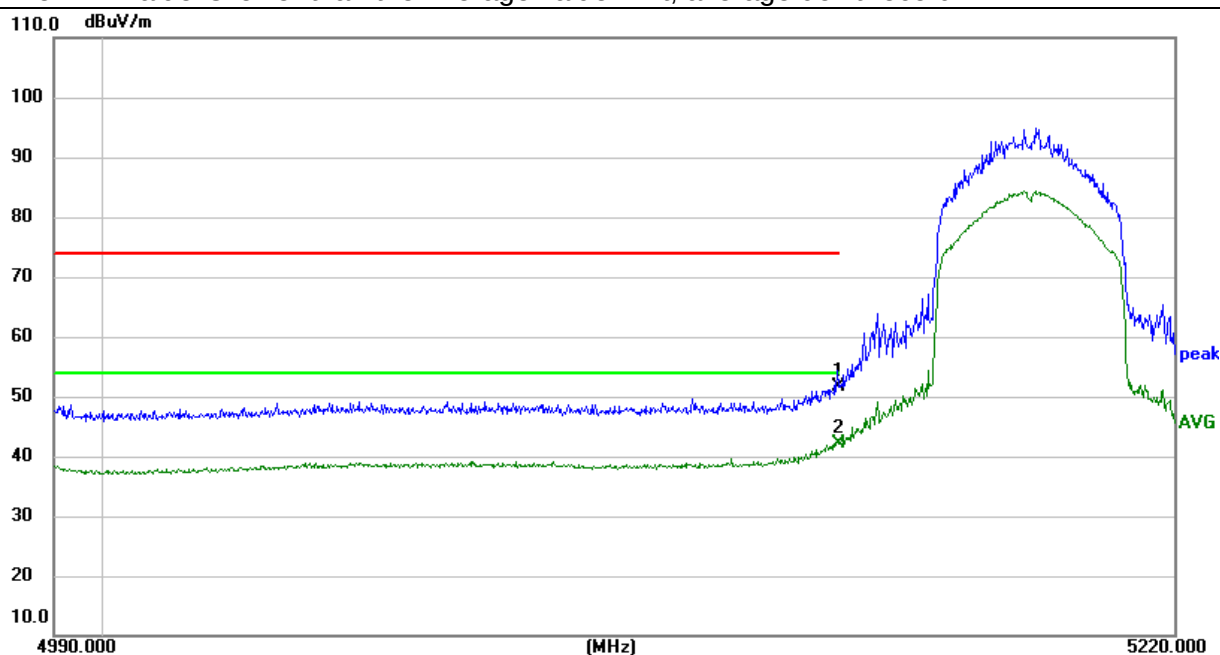

5.2G 802.11ax40 5230


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5350.000	7.45	37.64	45.09	74.00	-28.91	peak
V	5350.000	-1.23	37.64	36.41	54.00	-17.59	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

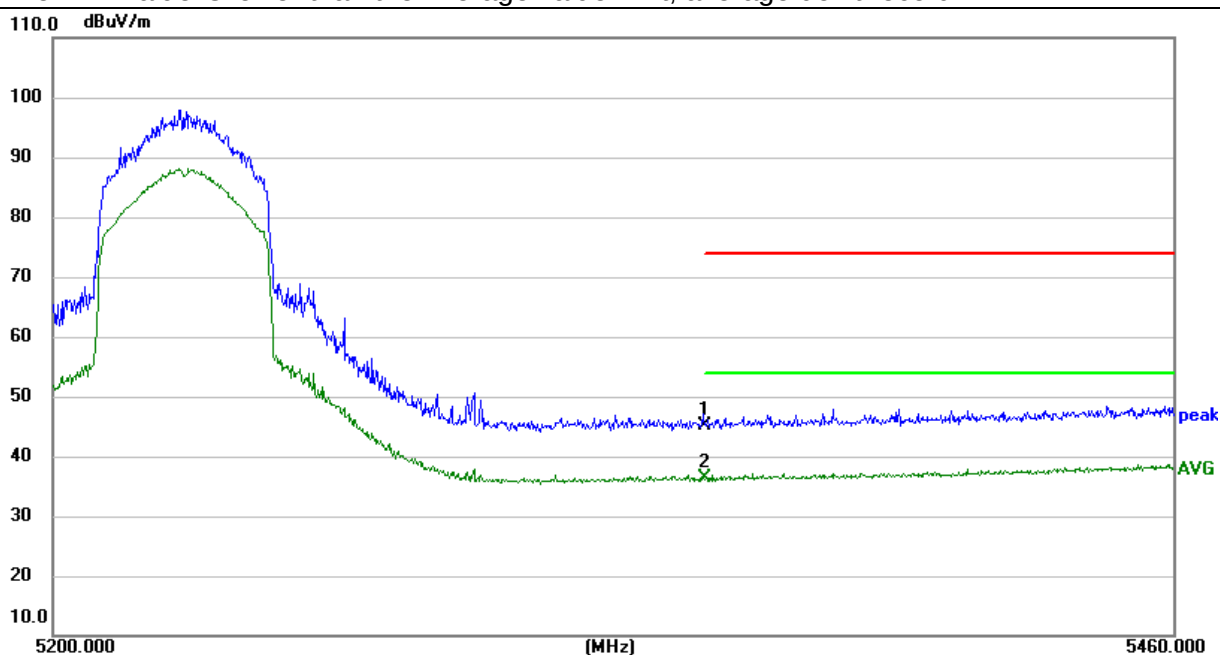


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5350.000	8.72	37.64	46.36	74.00	-27.64	peak
H	5350.000	-1.02	37.64	36.62	54.00	-17.38	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

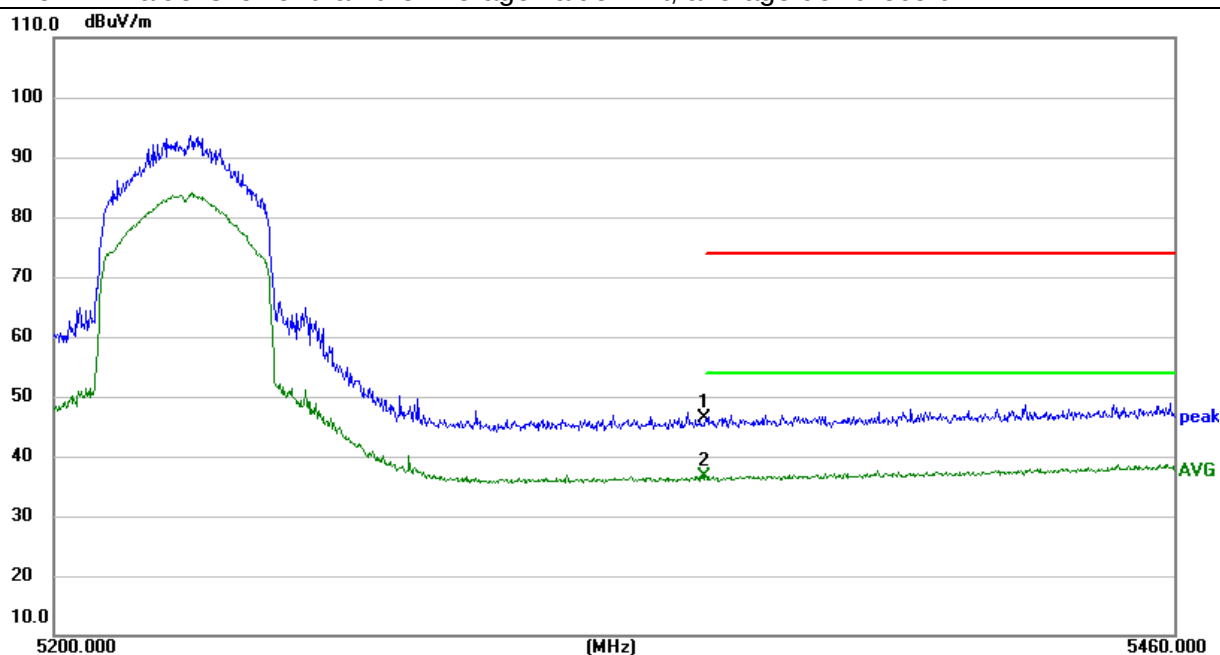

5.2G 802.11ax80 5210


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5150.000	22.23	38.51	60.74	74.00	-13.26	peak
V	5150.000	11.59	38.51	50.10	54.00	-3.90	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

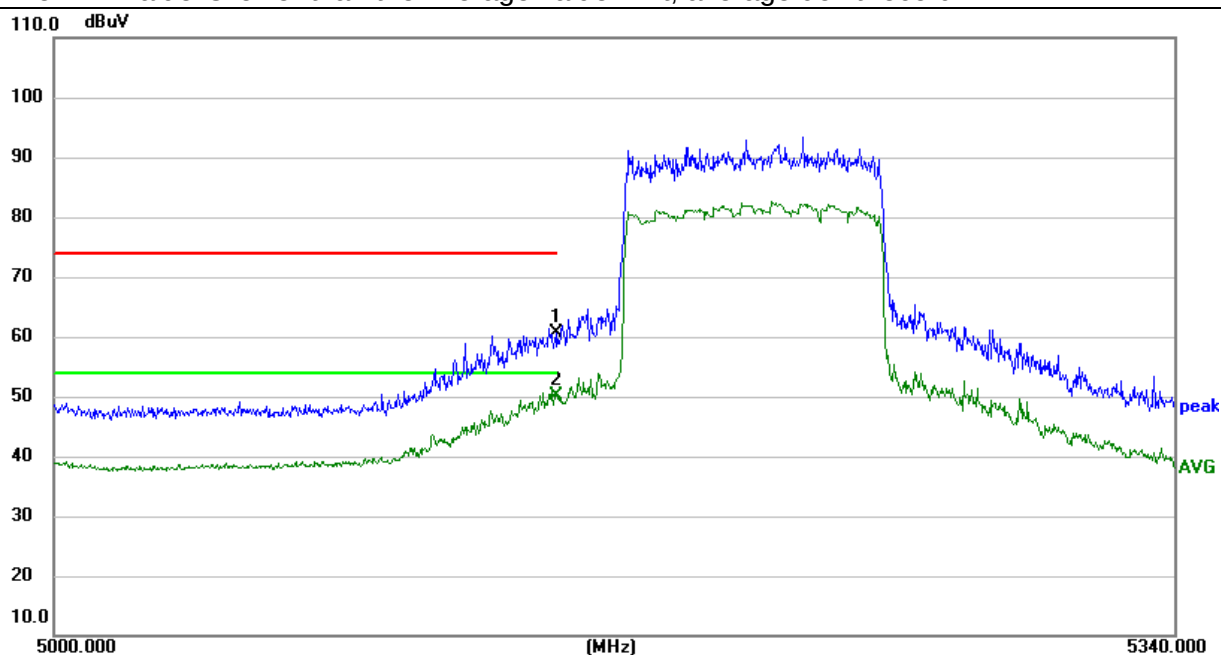


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5350.000	7.91	37.64	45.55	74.00	-28.45	peak
H	5350.000	-1.09	37.64	36.55	54.00	-17.45	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

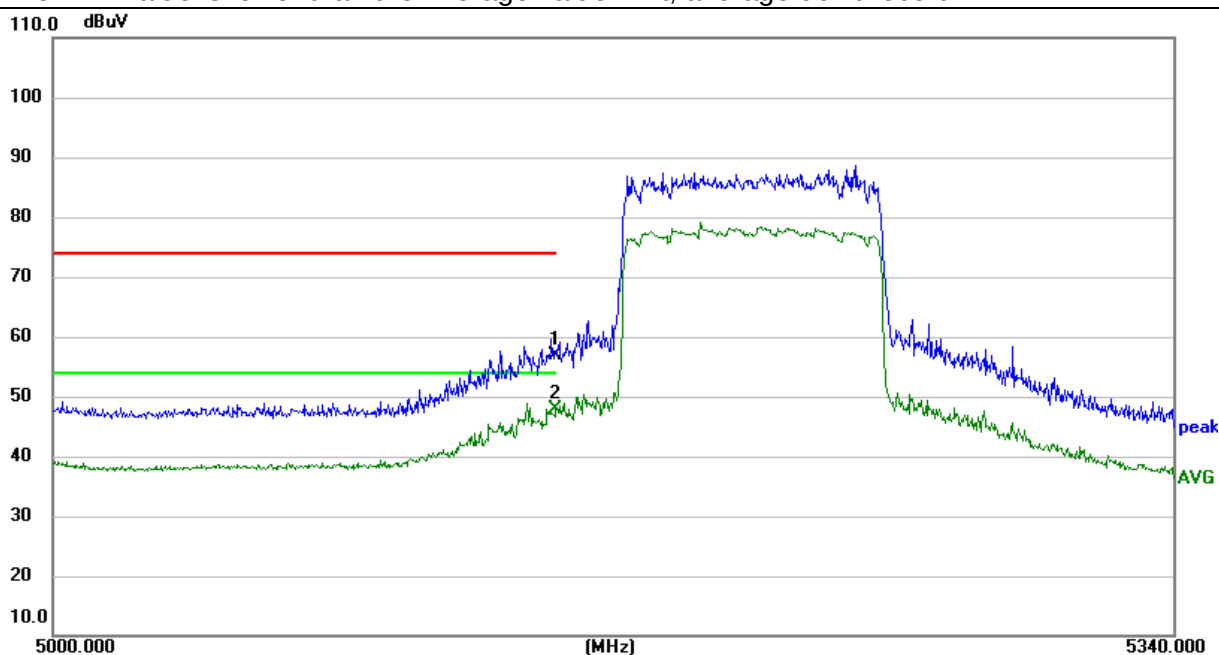

5.2G 802.11ax80 5210


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5350.000	9.87	37.64	47.51	74.00	-26.49	peak
V	5350.000	-0.58	37.64	37.06	54.00	-16.94	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

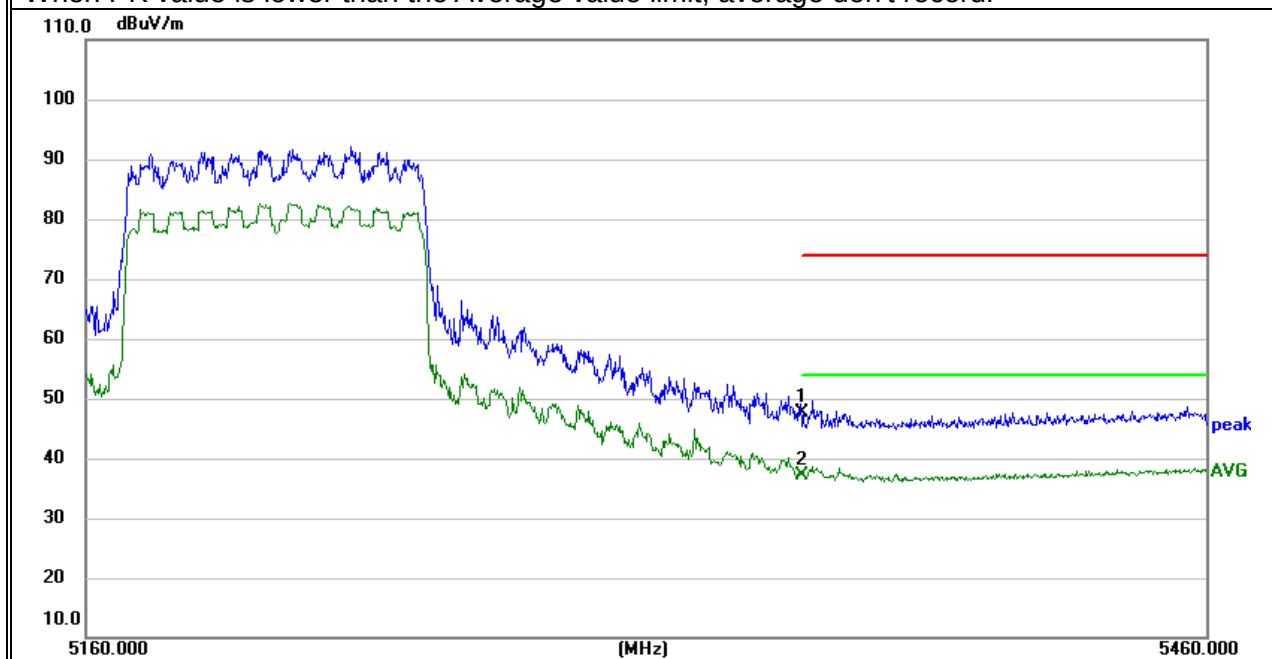


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5350.000	7.91	37.64	45.55	74.00	-28.45	peak
H	5350.000	-1.09	37.64	36.55	54.00	-17.45	AVG

Remark:

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

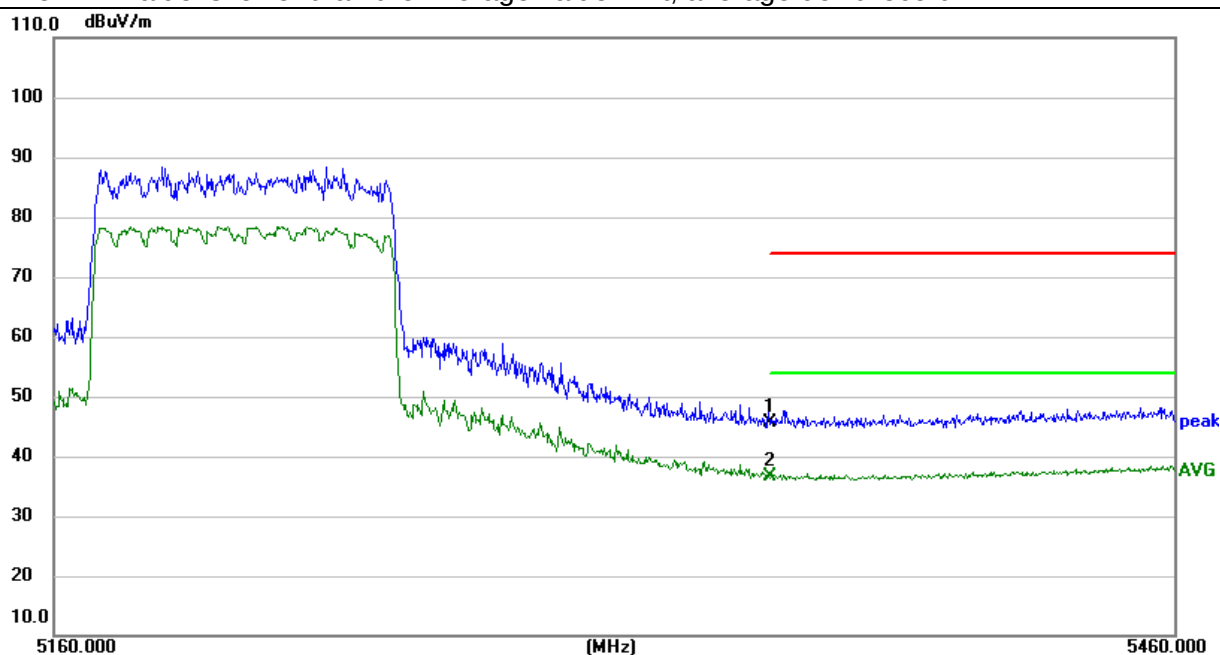

5.3G 802.11a 5260


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5150.000	8.82	38.51	47.33	74.00	-26.67	peak
V	5150.000	-0.20	38.51	38.31	54.00	-15.69	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

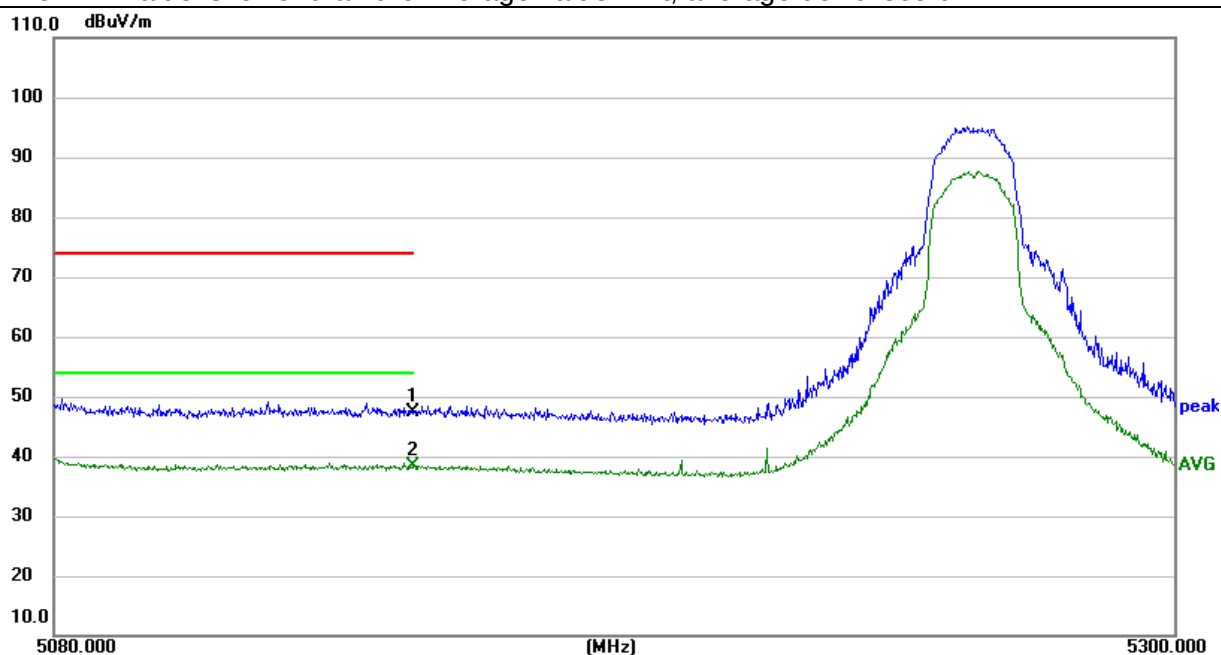


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5150.000	8.93	38.51	47.44	74.00	-26.56	peak
H	5150.000	-0.48	38.51	38.03	54.00	-15.97	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

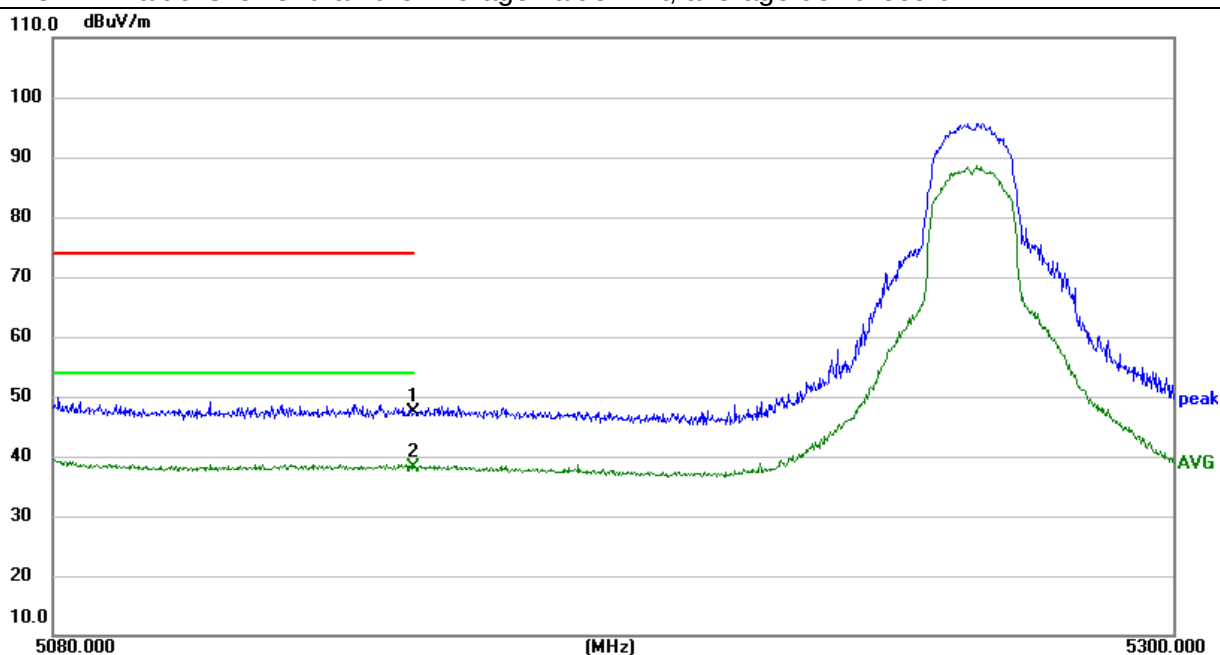

5.3G 802.11a 5320


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5350.000	12.18	37.64	49.82	74.00	-24.18	peak
V	5350.000	-0.15	37.64	37.49	54.00	-16.51	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

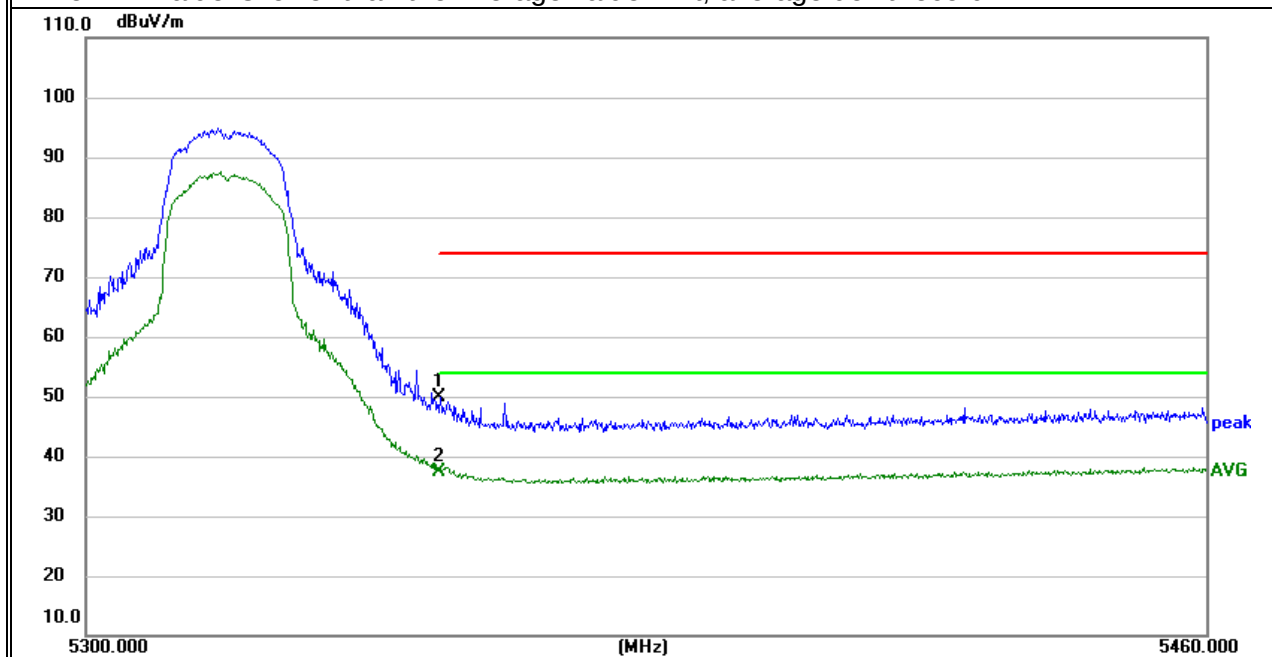

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5350.000	12.58	37.64	50.22	74.00	-23.78	peak
H	5350.000	1.18	37.64	38.82	54.00	-15.18	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

