

5.3G 802.11ac20 5260


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5150.000	9.34	38.51	47.85	74.00	-26.15	peak
V	5150.000	-0.35	38.51	38.16	54.00	-15.84	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

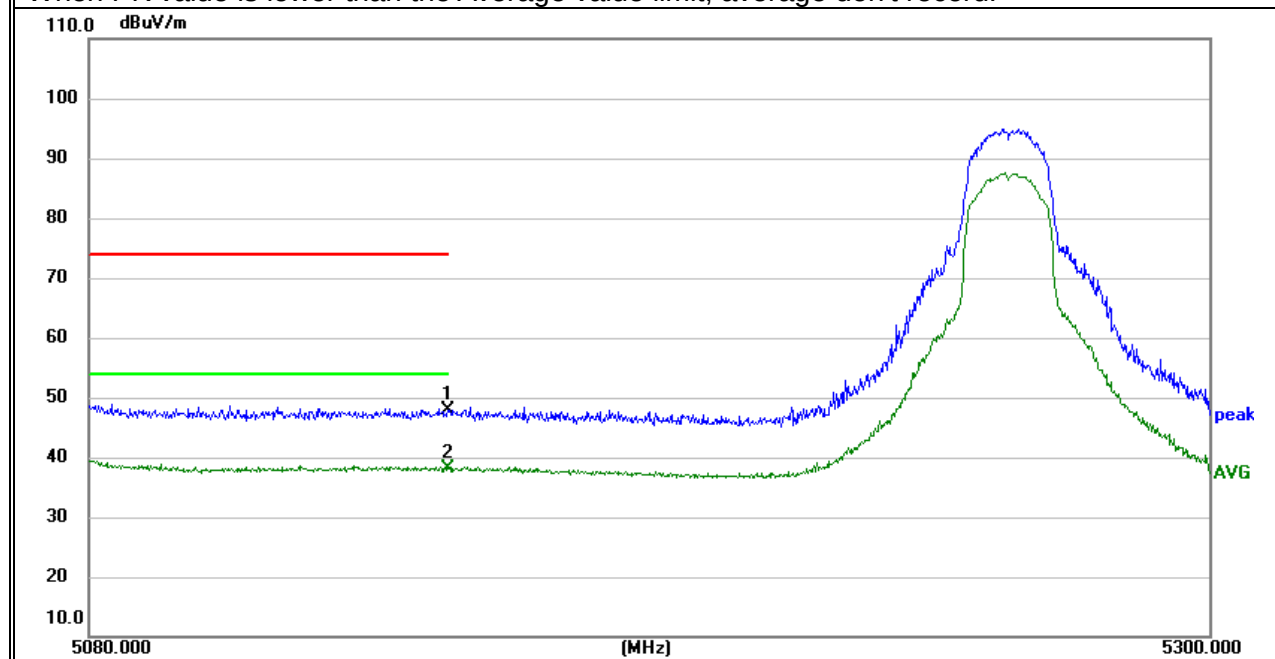


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5150.000	8.50	38.51	47.01	74.00	-26.99	peak
H	5150.000	-0.10	38.51	38.41	54.00	-15.59	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

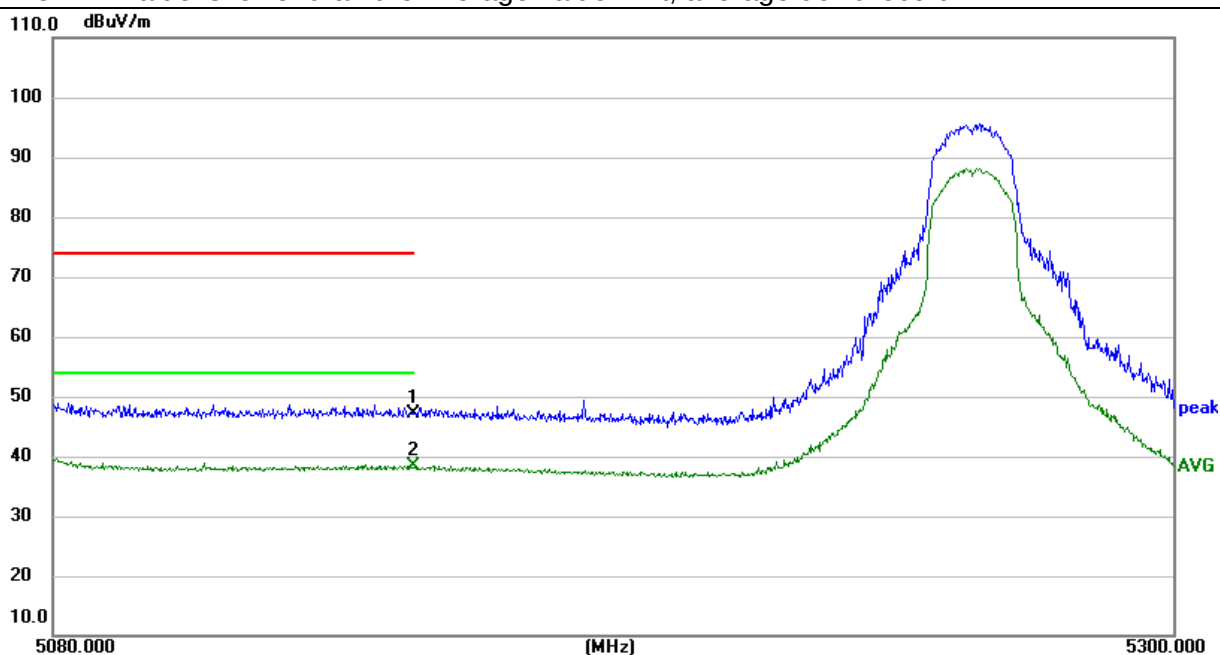

5.3G 802.11ac20 5320


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5350.000	10.52	37.64	48.16	74.00	-25.84	peak
V	5350.000	0.50	37.64	38.14	54.00	-15.86	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

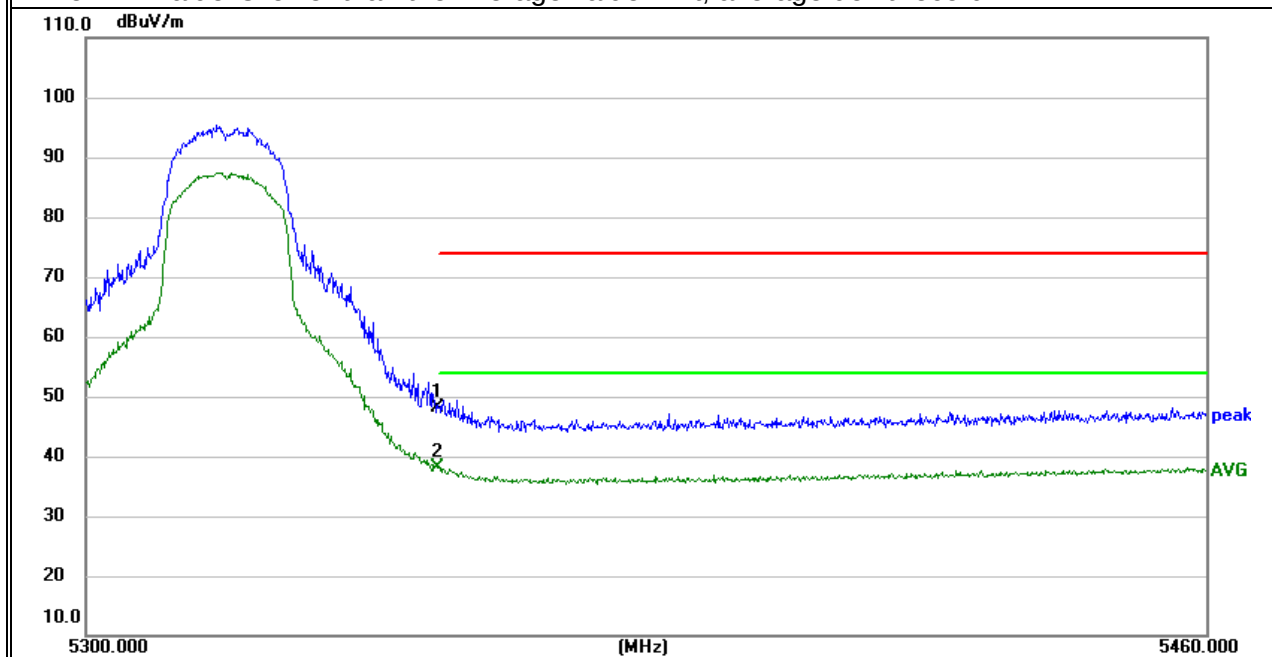


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5350.000	11.57	37.64	49.21	74.00	-24.79	peak
H	5350.000	1.10	37.64	38.74	54.00	-15.26	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

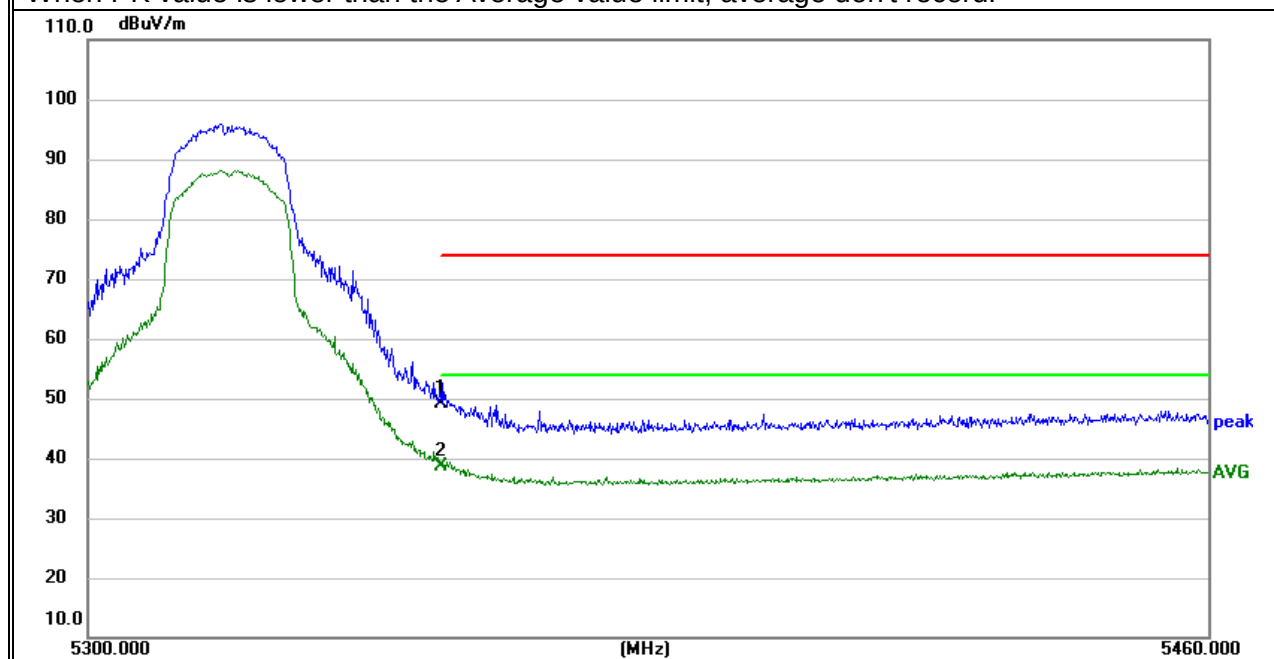

5.3G 802.11ac40 5270


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5150.000	9.51	38.51	48.02	74.00	-25.98	peak
V	5150.000	0.26	38.51	38.77	54.00	-15.23	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

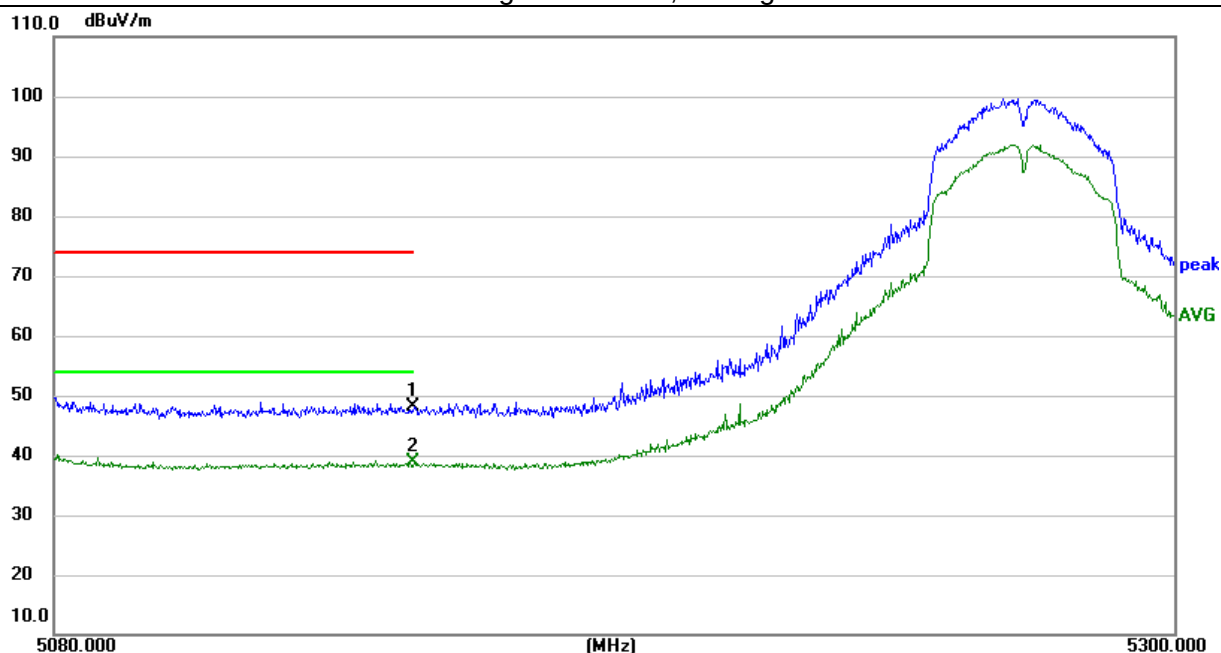


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5150.000	8.85	38.51	47.36	74.00	-26.64	peak
H	5150.000	0.08	38.51	38.59	54.00	-15.41	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

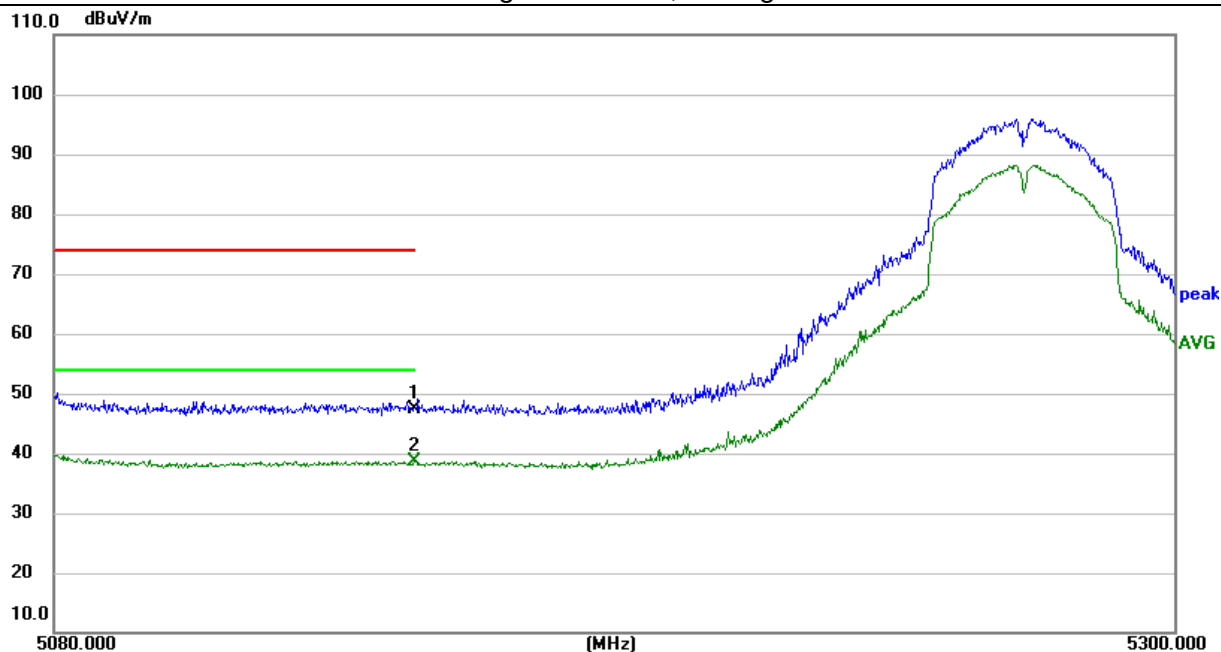

5.3G 802.11ac40 5310


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5350.000	21.99	37.64	59.63	74.00	-14.37	peak
V	5350.000	11.97	37.64	49.61	54.00	-4.39	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

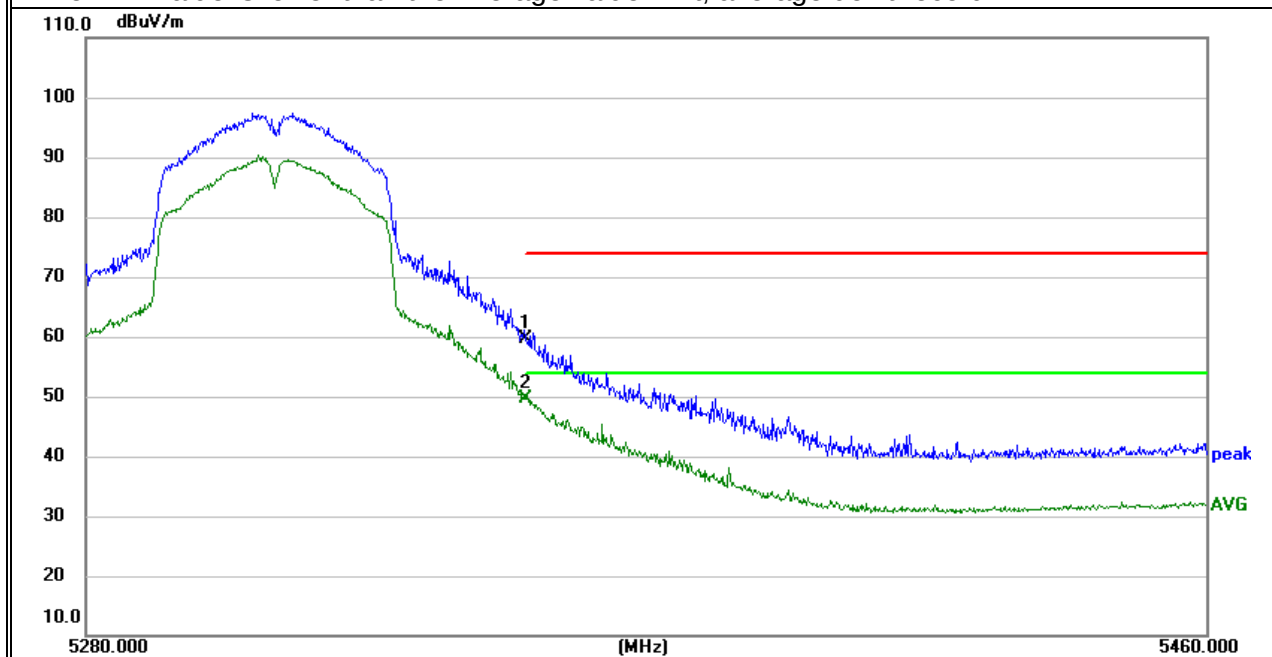


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5350.000	21.56	37.64	59.20	74.00	-14.80	peak
H	5350.000	12.19	37.64	49.83	54.00	-4.17	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

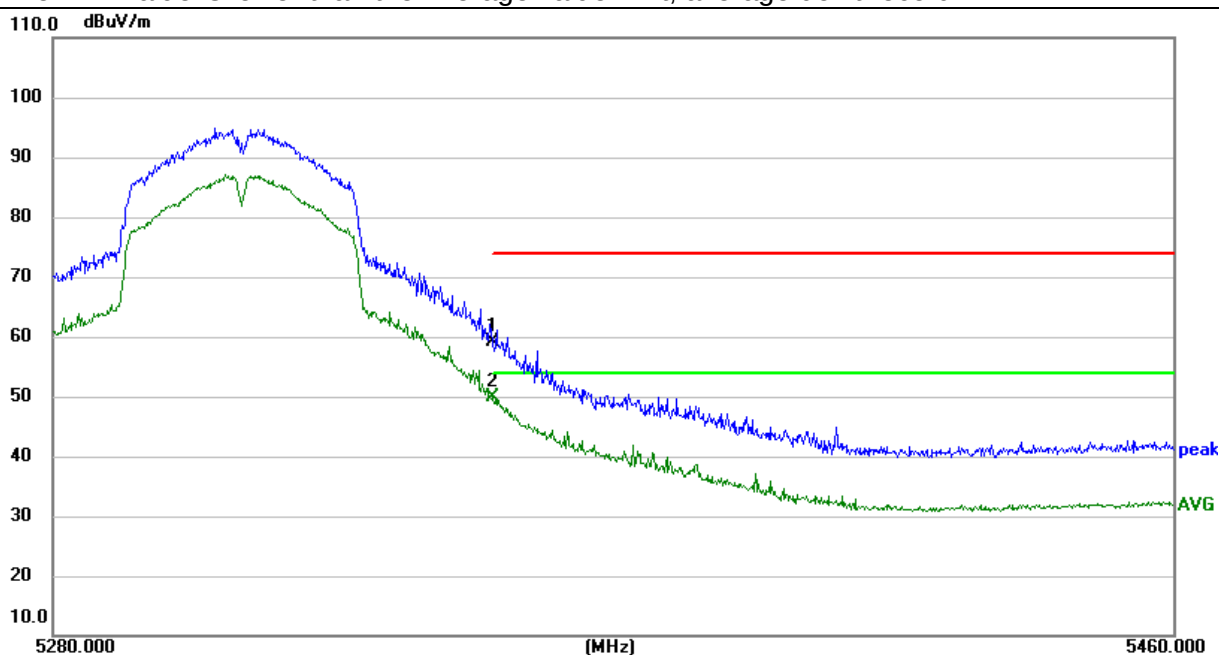

5.3G 802.11ac80 5290

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	5150.000	9.41	38.51	47.92	74.00	-26.08	peak
V	5150.000	0.37	38.51	38.88	54.00	-15.12	AVG

Remark:


Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna

Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not

recorded in the report.

When PK value is lower than the Average value limit, average don't record.

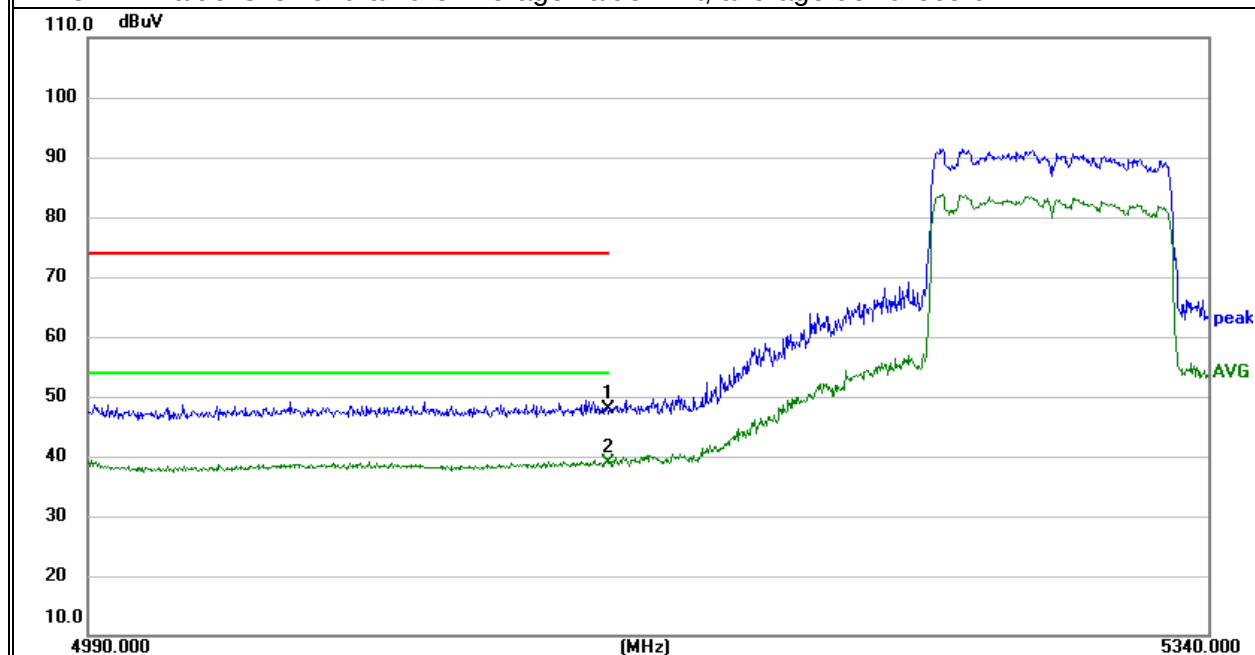


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5150.000	9.00	38.51	47.51	74.00	-26.49	peak
H	5150.000	0.10	38.51	38.61	54.00	-15.39	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

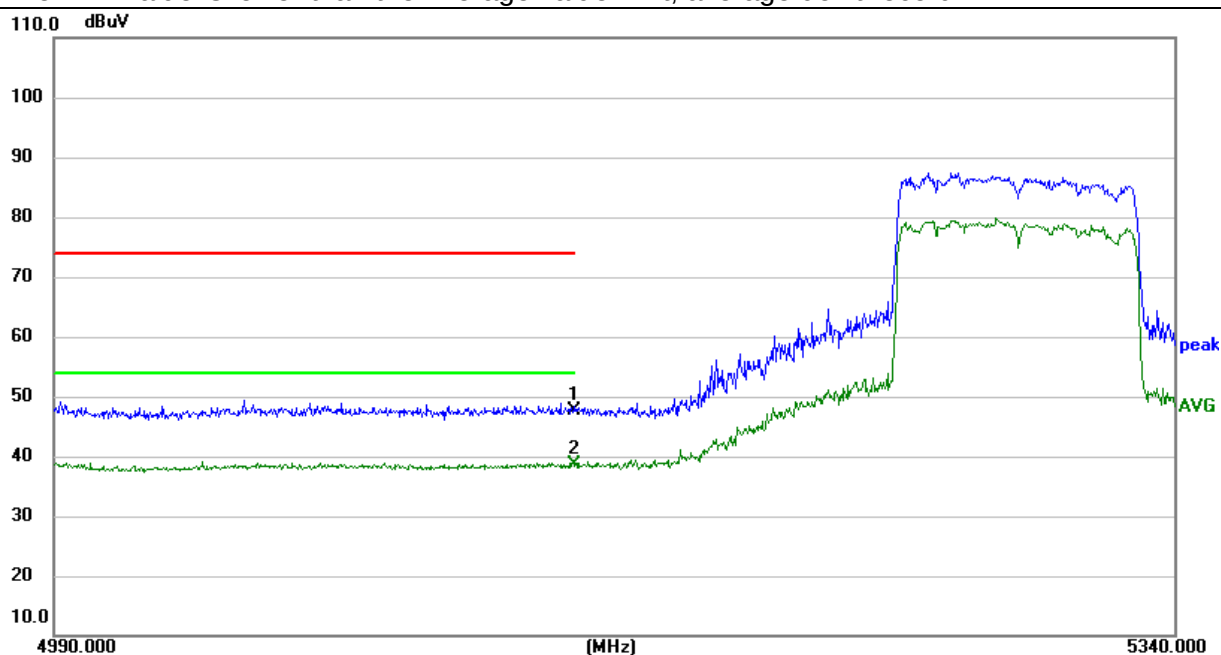

5.3G 802.11ac80 5290


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5350.000	22.05	37.64	59.69	74.00	-14.31	peak
V	5350.000	13.34	37.64	50.98	54.00	-3.02	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

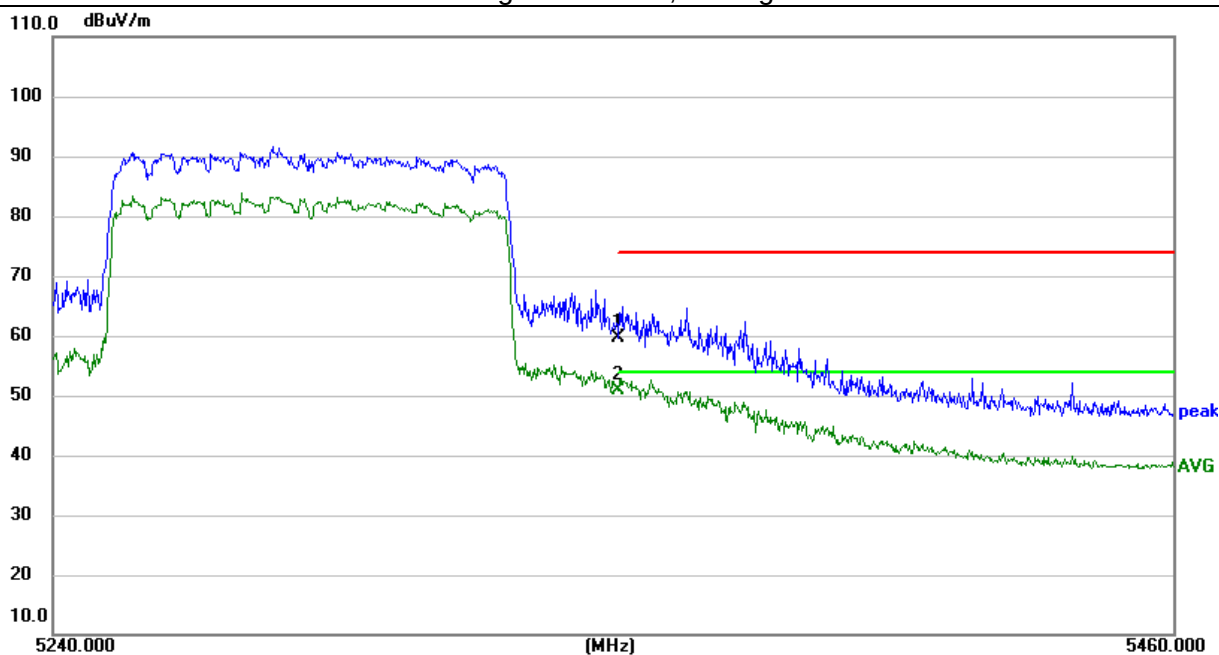


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5350.000	21.71	37.64	59.35	74.00	-14.65	peak
H	5350.000	10.44	37.64	48.08	54.00	-5.92	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

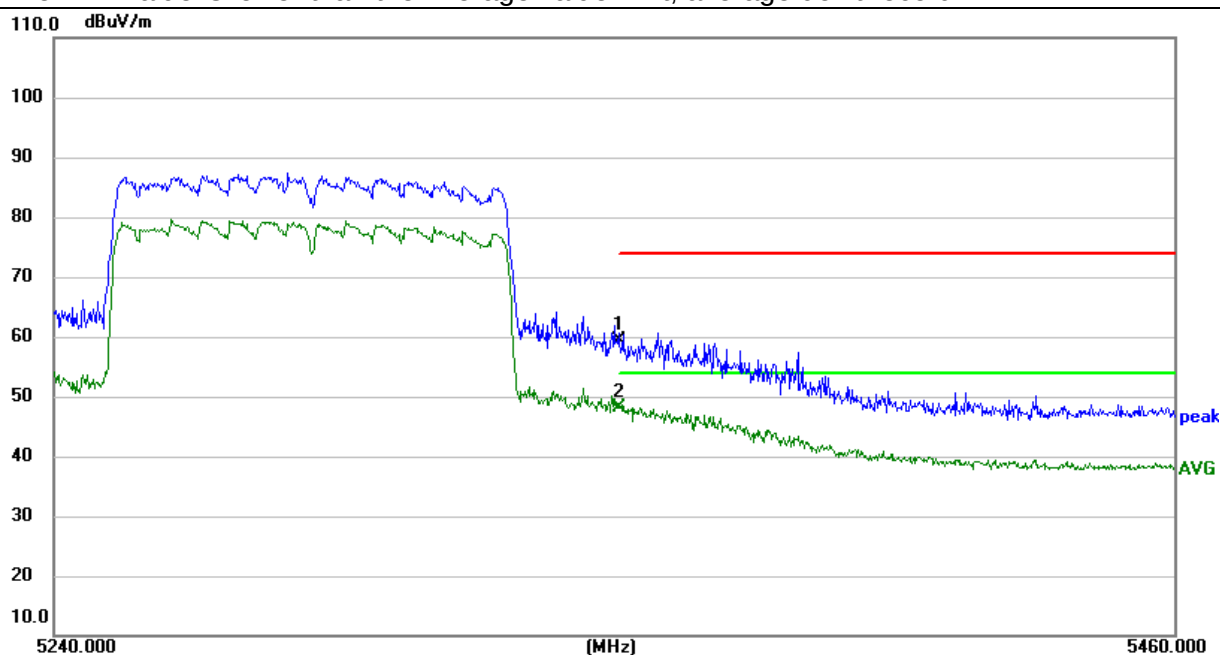

5.3G 802.11ax20 5260


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5150.000	8.84	38.51	47.35	74.00	-26.65	peak
V	5150.000	-0.14	38.51	38.37	54.00	-15.63	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

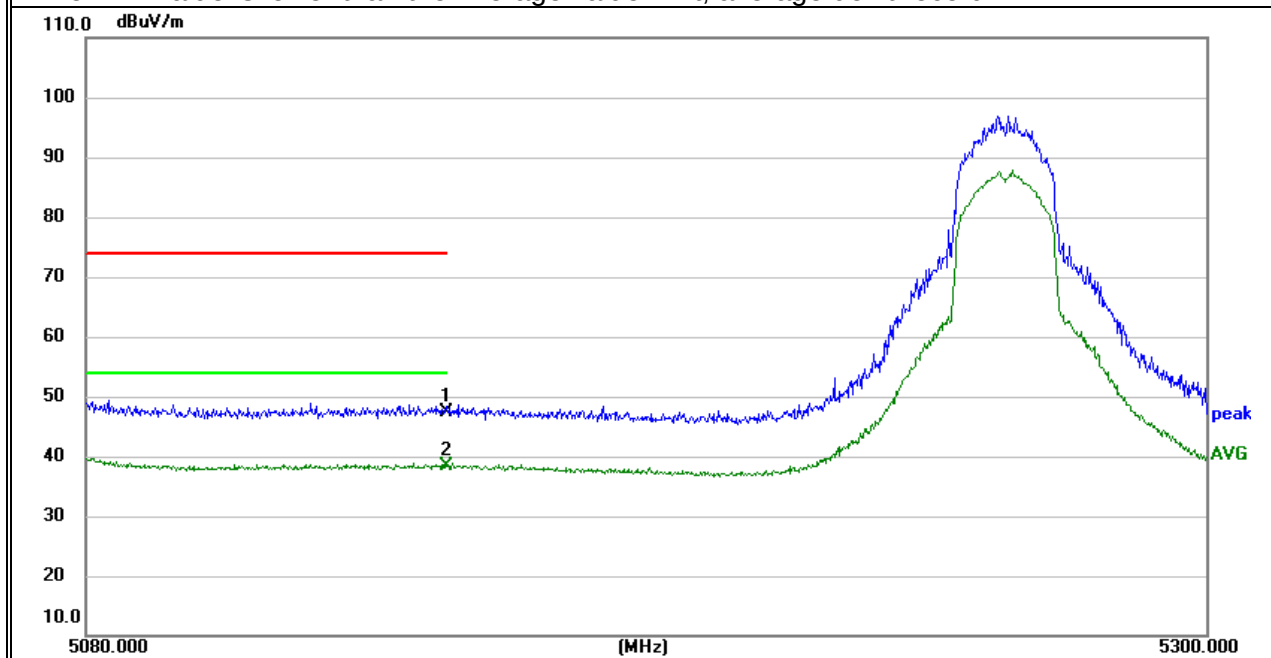


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5150.000	9.43	38.51	47.94	74.00	-26.06	peak
H	5150.000	0.13	38.51	38.64	54.00	-15.36	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

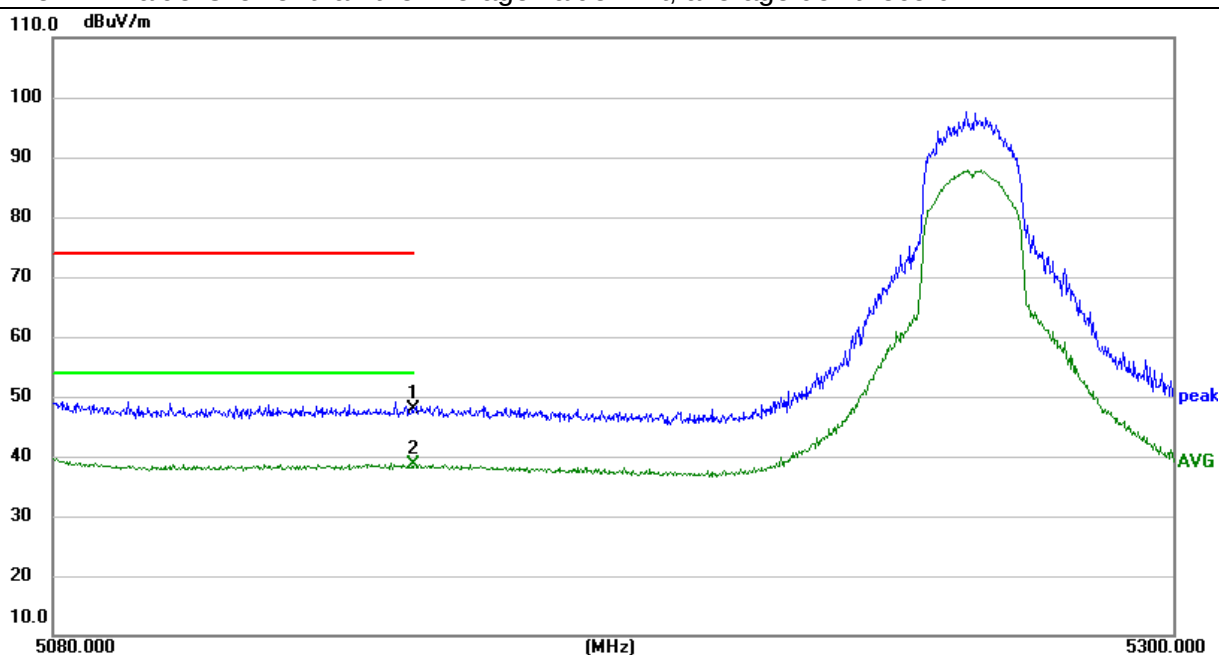

5.3G 802.11ax20 5320


Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
V	5350.000	10.32	37.64	47.96	74.00	-26.04	peak
V	5350.000	1.24	37.64	38.88	54.00	-15.12	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

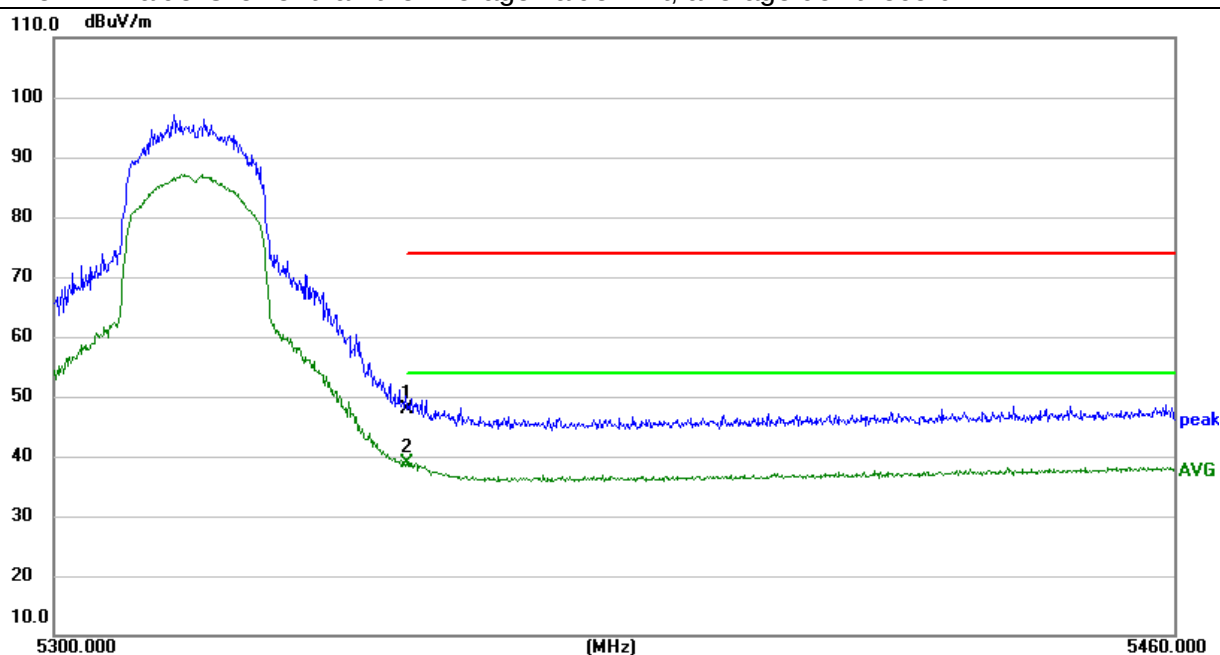


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5350.000	11.66	37.64	49.30	74.00	-24.70	peak
H	5350.000	2.05	37.64	39.69	54.00	-14.31	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

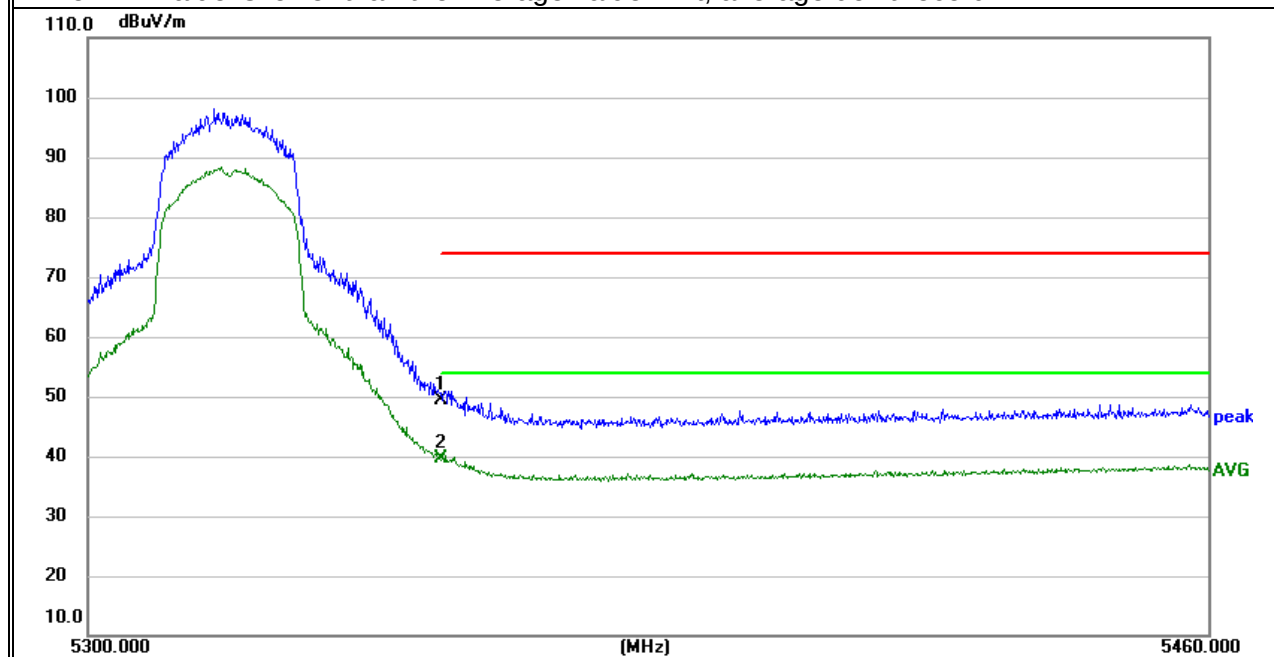

5.3G 802.11ax40 5270


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5150.000	9.70	38.51	48.21	74.00	-25.79	peak
V	5150.000	-0.15	38.51	38.36	54.00	-15.64	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

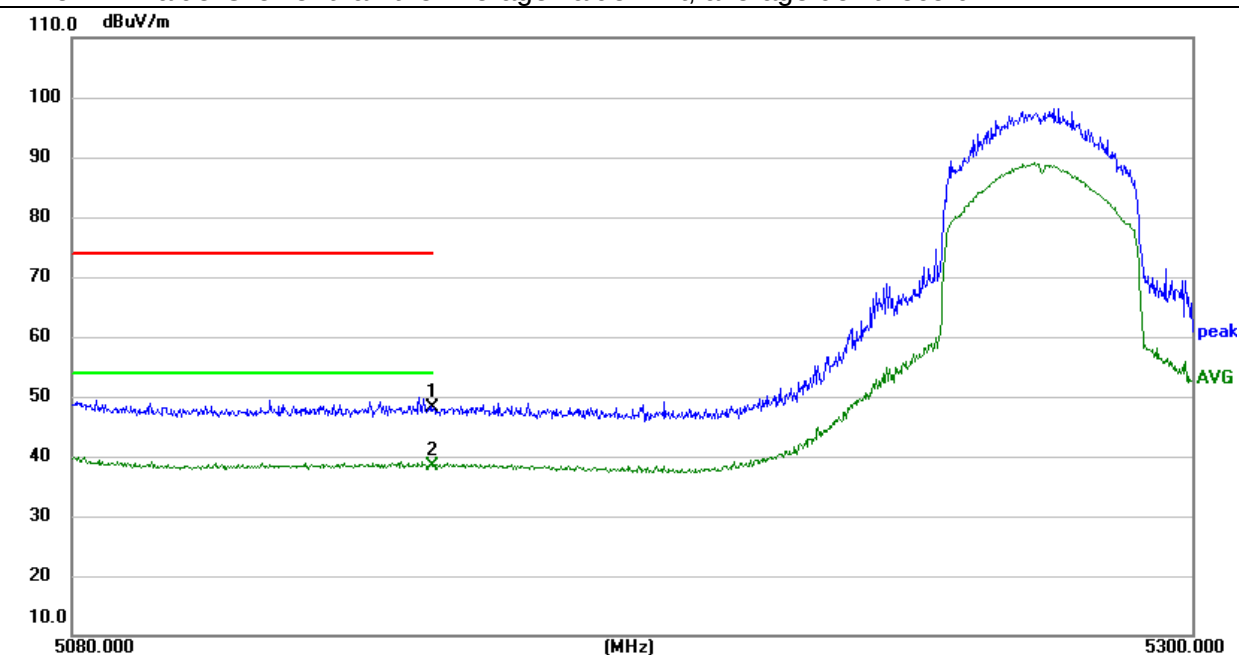


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5150.000	8.69	38.51	47.20	74.00	-26.80	peak
H	5150.000	-0.14	38.51	38.37	54.00	-15.63	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

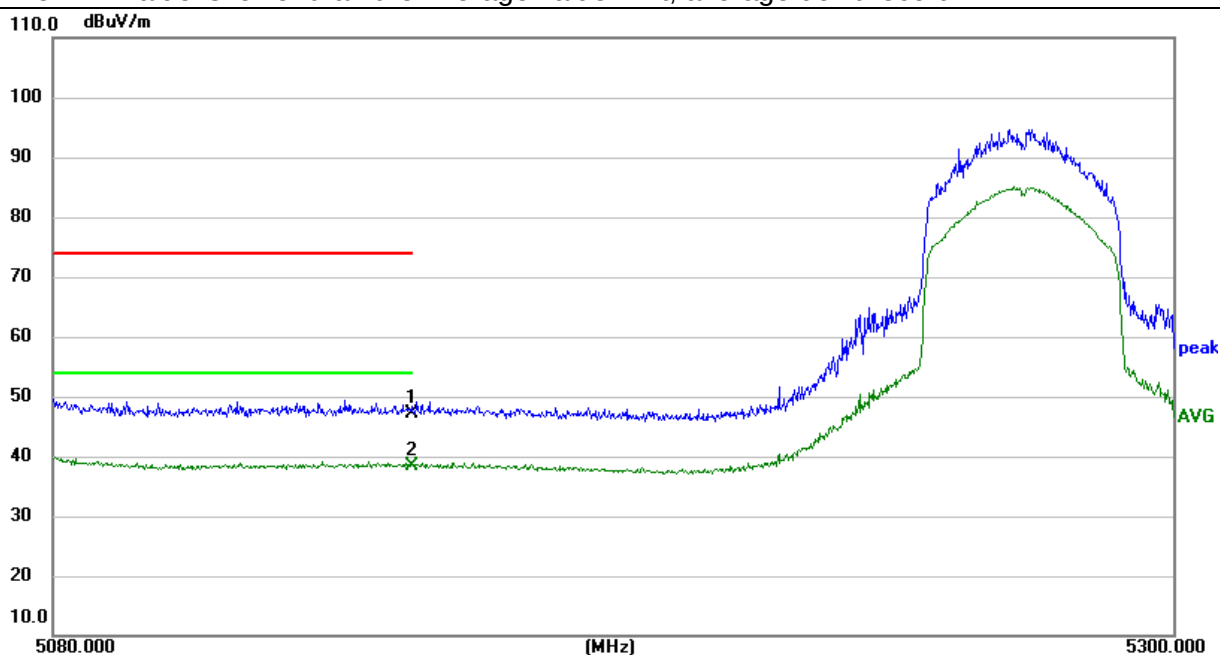

5.3G 802.11ax40 5310


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5350.000	16.90	37.64	54.54	74.00	-19.46	peak
V	5350.000	6.21	37.64	43.85	54.00	-10.15	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

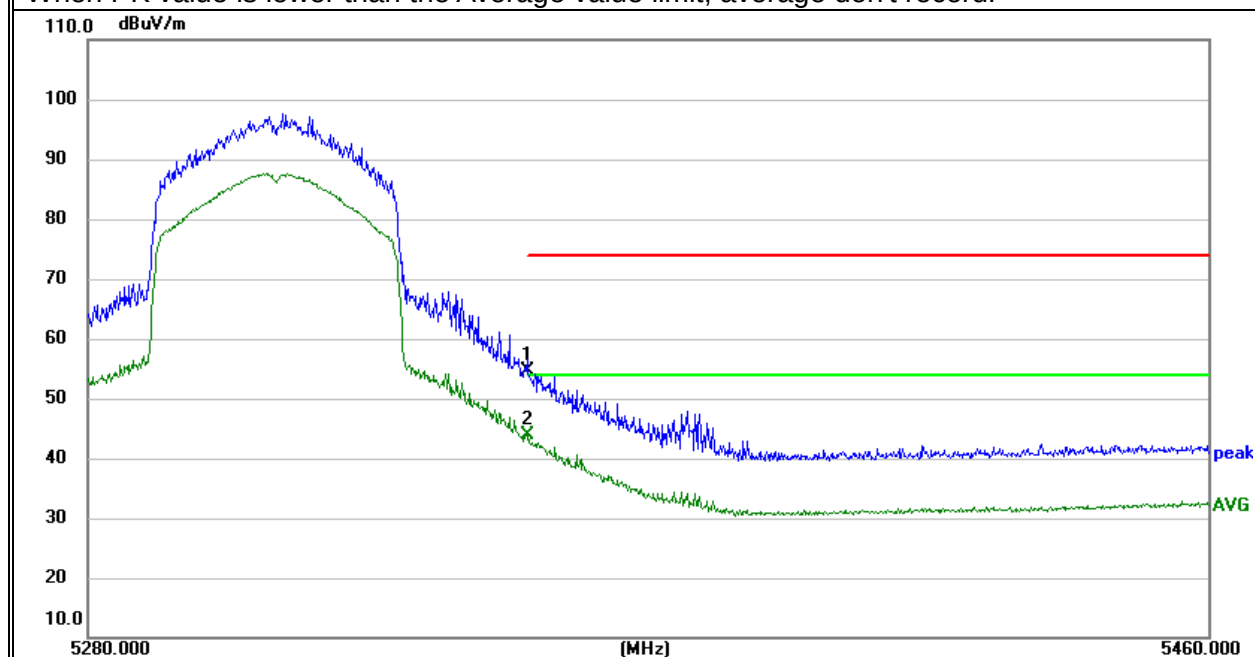


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5350.000	11.98	37.64	49.62	74.00	-24.38	peak
H	5350.000	1.66	37.64	39.30	54.00	-14.70	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

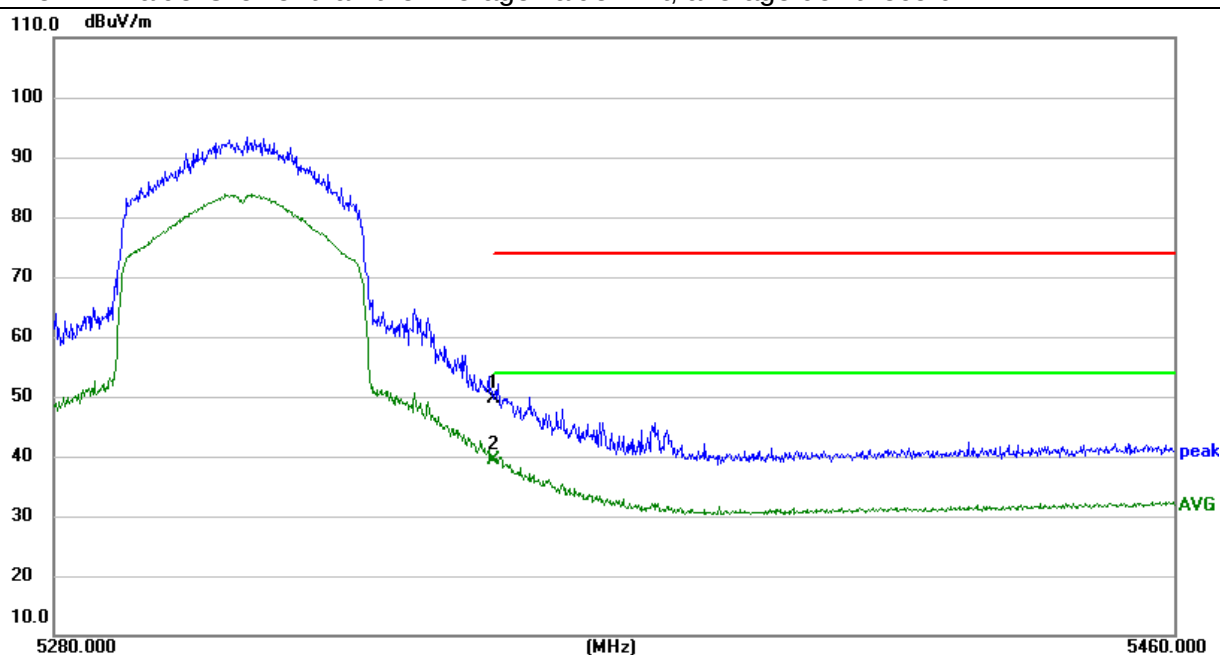

5.3G 802.11ax80 5290


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5150.000	10.22	38.51	48.73	74.00	-25.27	peak
V	5150.000	0.84	38.51	39.35	54.00	-14.65	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

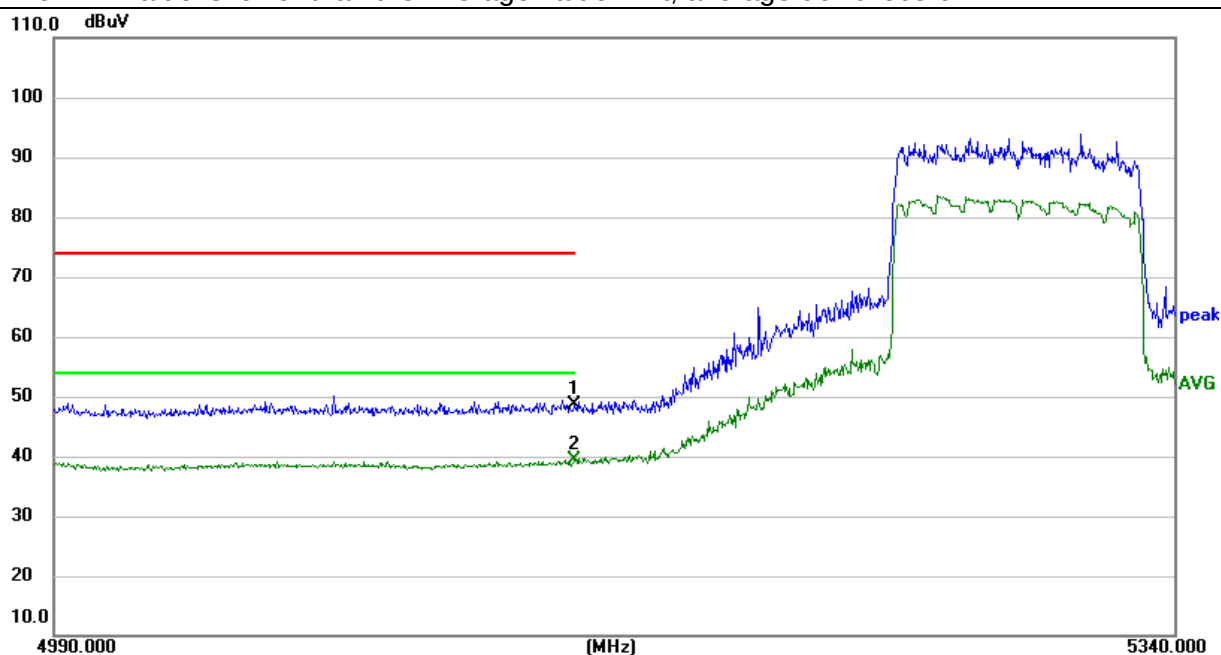


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5150.000	9.73	38.51	48.24	74.00	-25.76	peak
H	5150.000	0.07	38.51	38.58	54.00	-15.42	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

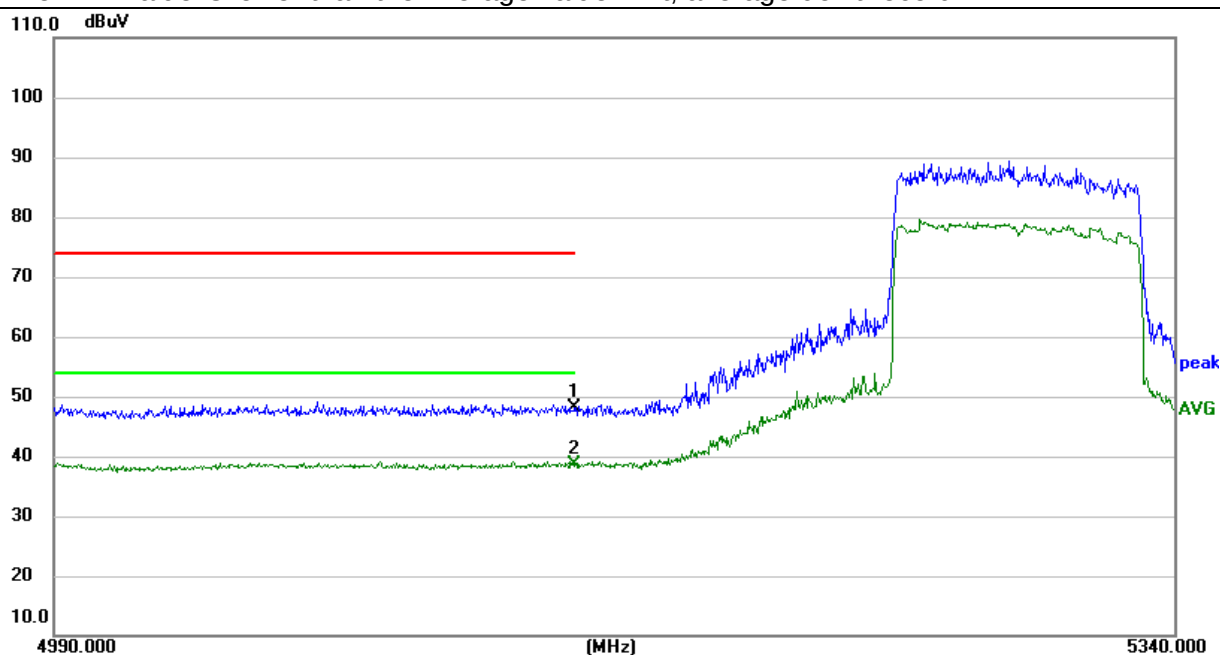

5.3G 802.11ax80 5290


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	5350.000	23.03	37.64	60.67	74.00	-13.33	peak
V	5350.000	12.72	37.64	50.36	54.00	-3.64	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

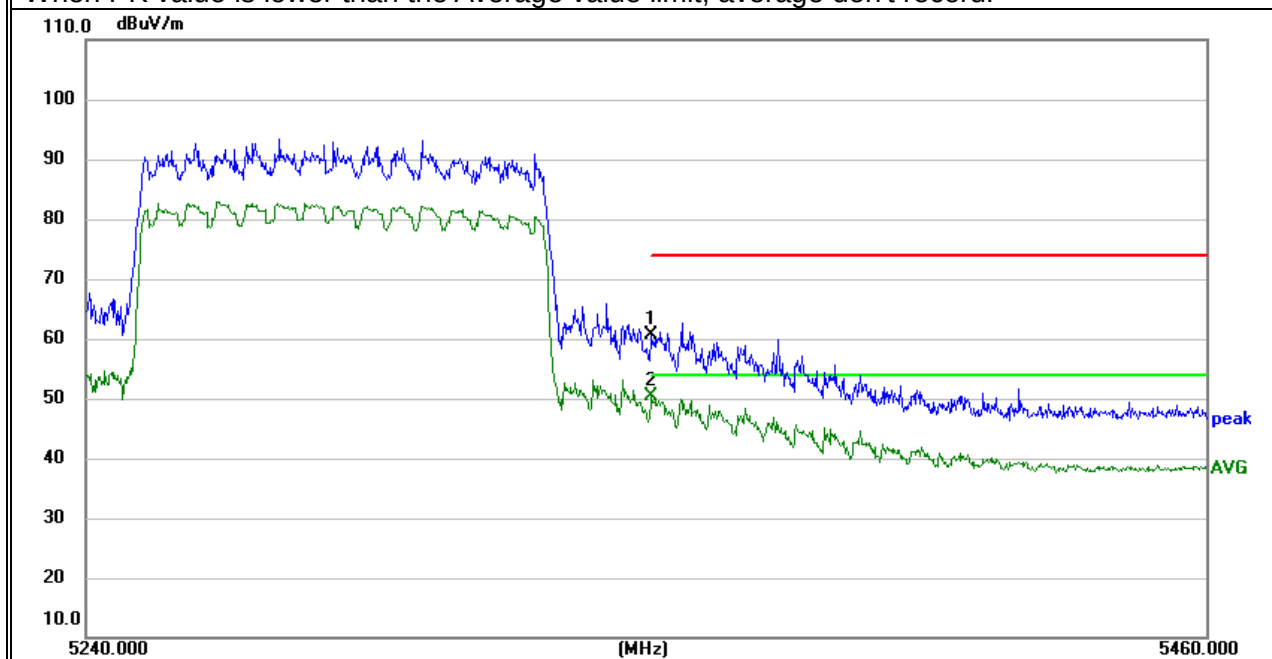


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5350.000	18.46	37.64	56.10	74.00	-17.90	peak
H	5350.000	10.09	37.64	47.73	54.00	-6.27	AVG

Remark:

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

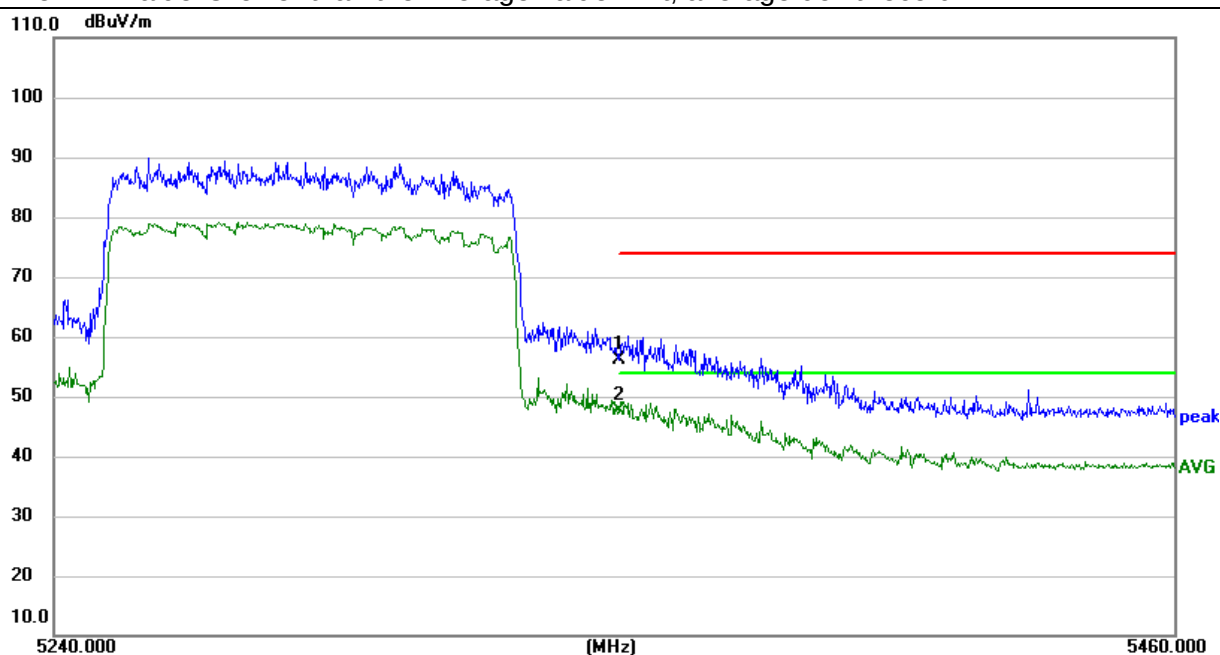

5.6G 802.11a 5500


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5460.000	8.14	38.51	46.65	74.00	-27.35	peak
V	5460.000	-0.61	38.51	37.90	54.00	-16.10	AVG
V	5470.000	9.83	38.68	48.51	68.20	-19.69	peak
V	5470.000	0.91	38.68	39.59	68.20	-28.61	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

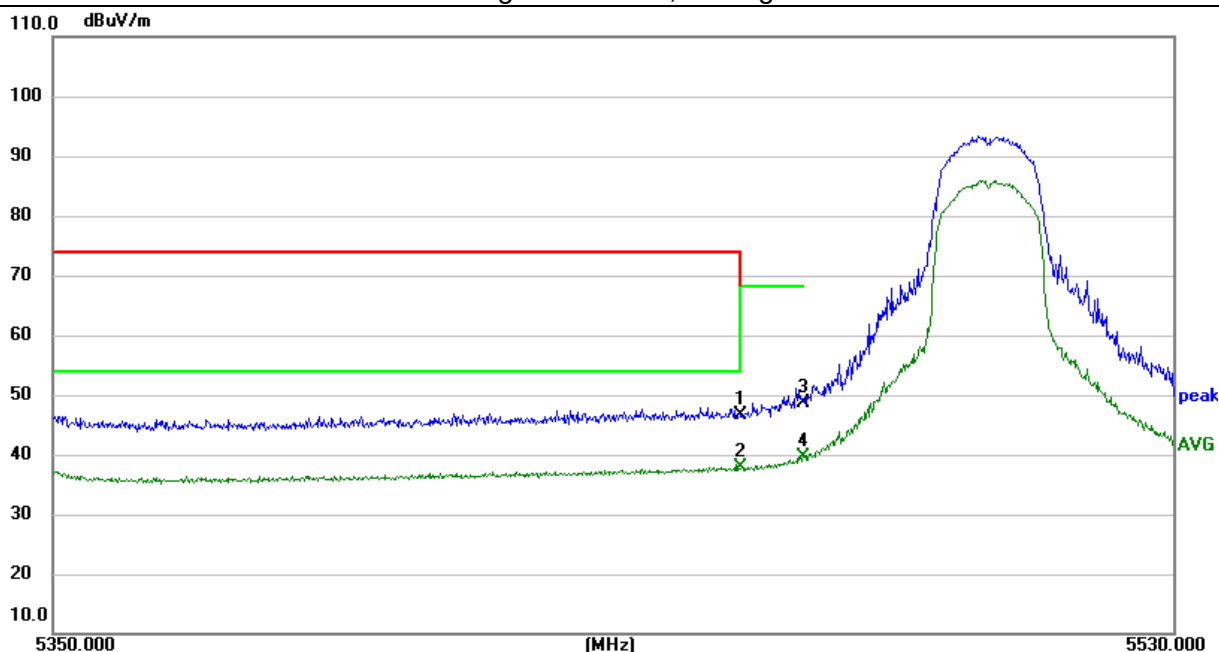


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5460.000	8.61	38.51	47.12	74.00	-26.88	peak
H	5460.000	-0.42	38.51	38.09	54.00	-15.91	AVG
H	5470.000	14.49	38.68	53.17	68.20	-15.03	peak
H	5470.000	2.88	38.68	41.56	68.20	-26.64	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

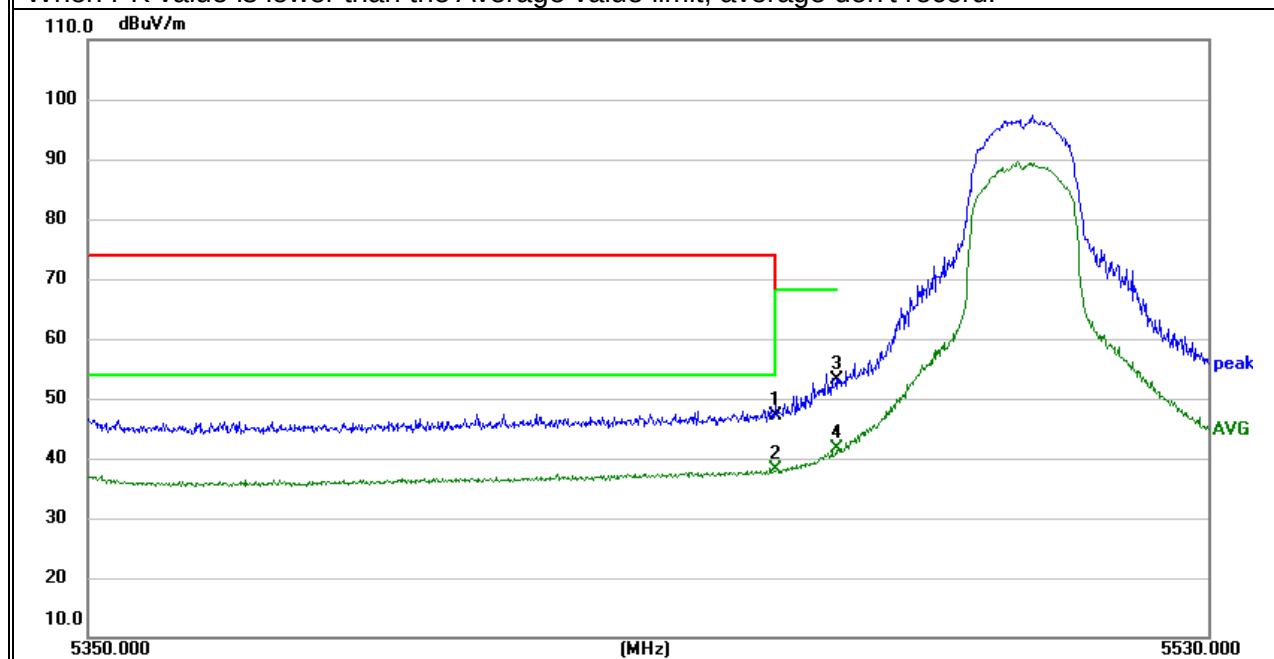

5.6G 802.11a 5700


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5725.000	10.33	39.09	49.42	68.20	-18.78	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

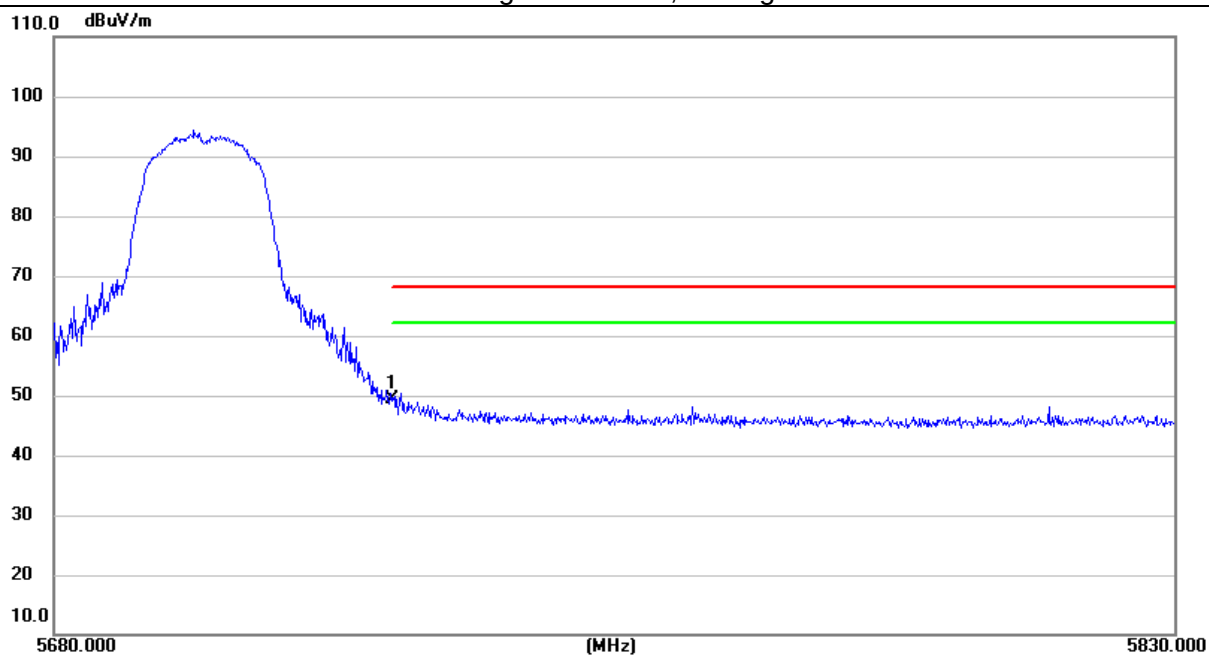


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5725.000	11.50	39.09	50.59	68.20	-17.61	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

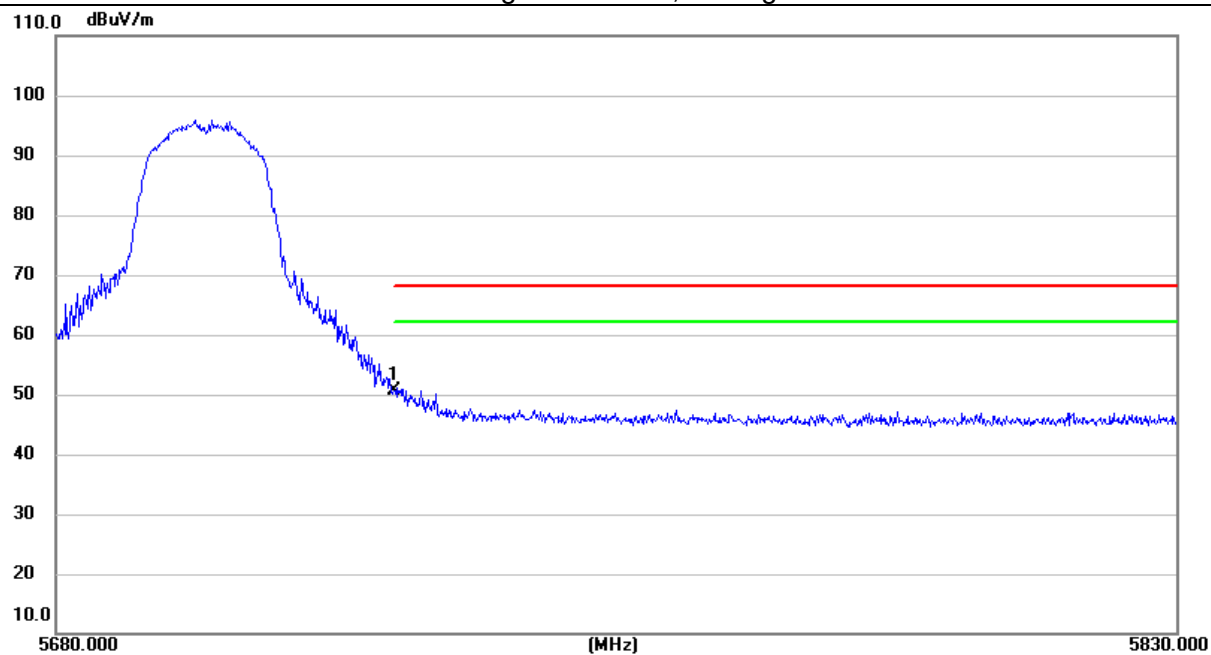

5.6G 802.11ac20 5500


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5460.000	8.08	38.51	46.59	74.00	-27.41	peak
V	5460.000	-0.93	38.51	37.58	54.00	-16.42	AVG
V	5470.000	10.89	38.68	49.57	68.20	-18.63	peak
V	5470.000	0.61	38.68	39.29	68.20	-28.91	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

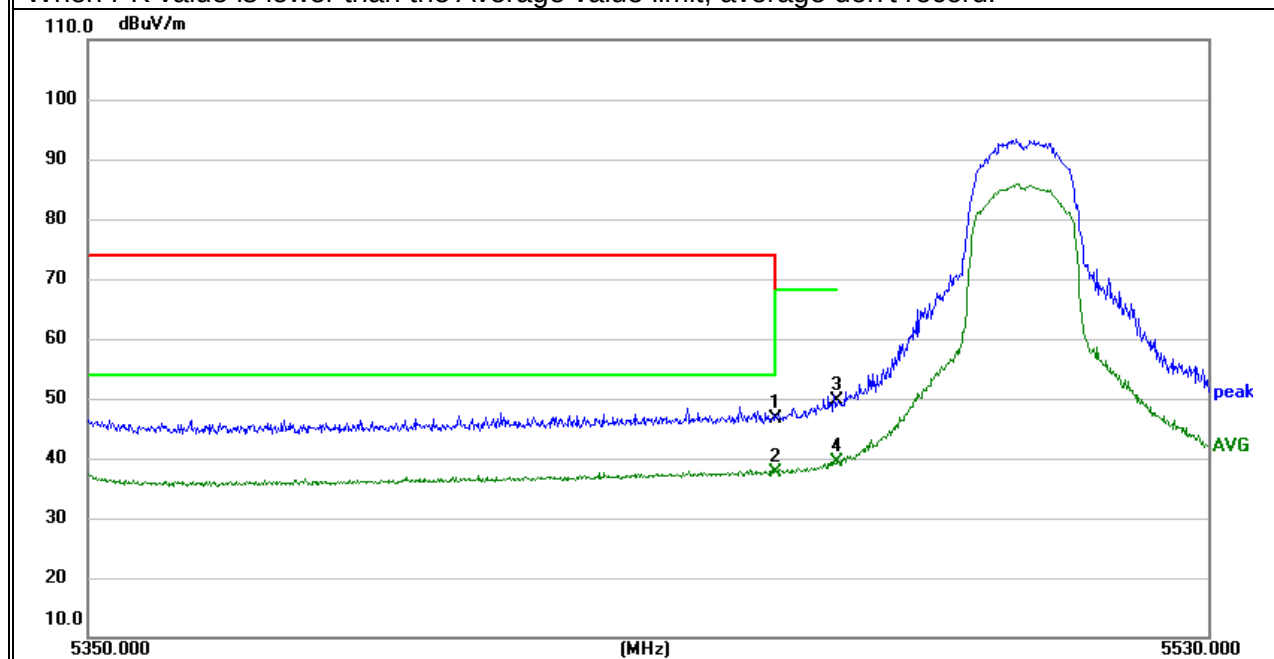


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
H	5460.000	8.15	38.51	46.66	74.00	-27.34	peak
H	5460.000	-0.73	38.51	37.78	54.00	-16.22	AVG
H	5470.000	14.56	38.68	53.24	68.20	-14.96	peak
H	5470.000	2.62	38.68	41.30	68.20	-26.90	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

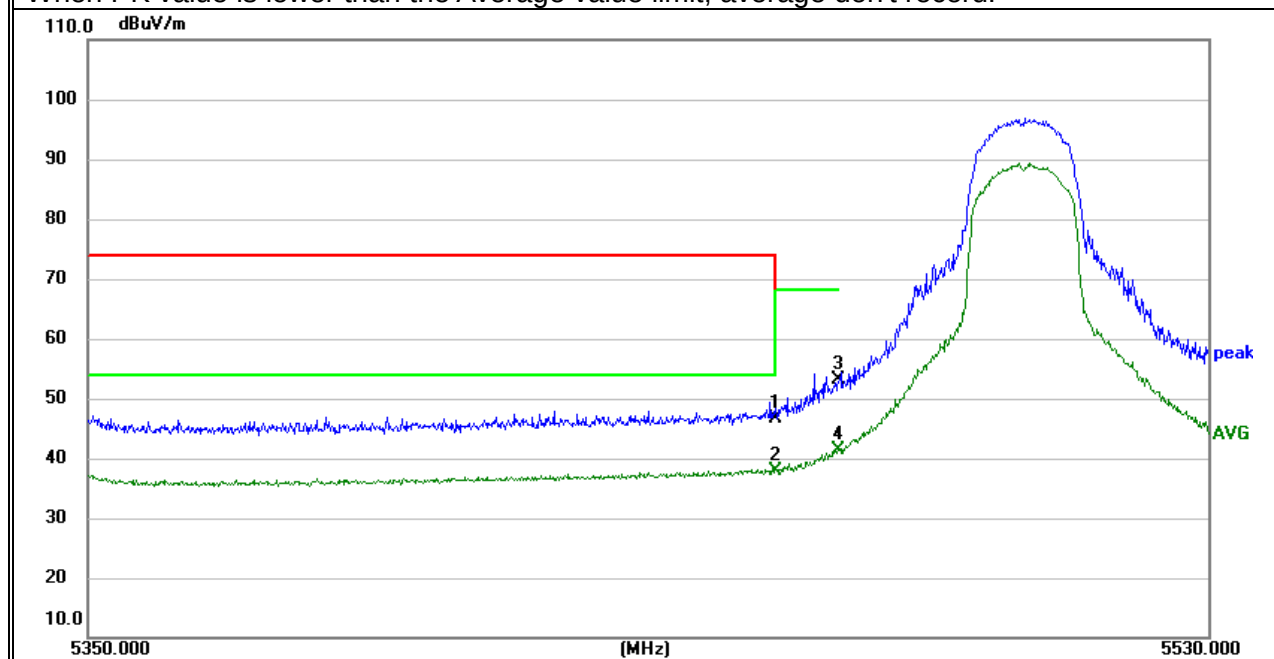

5.6G 802.11ac20 5700


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	5725.000	9.45	39.09	48.54	68.20	-19.66	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

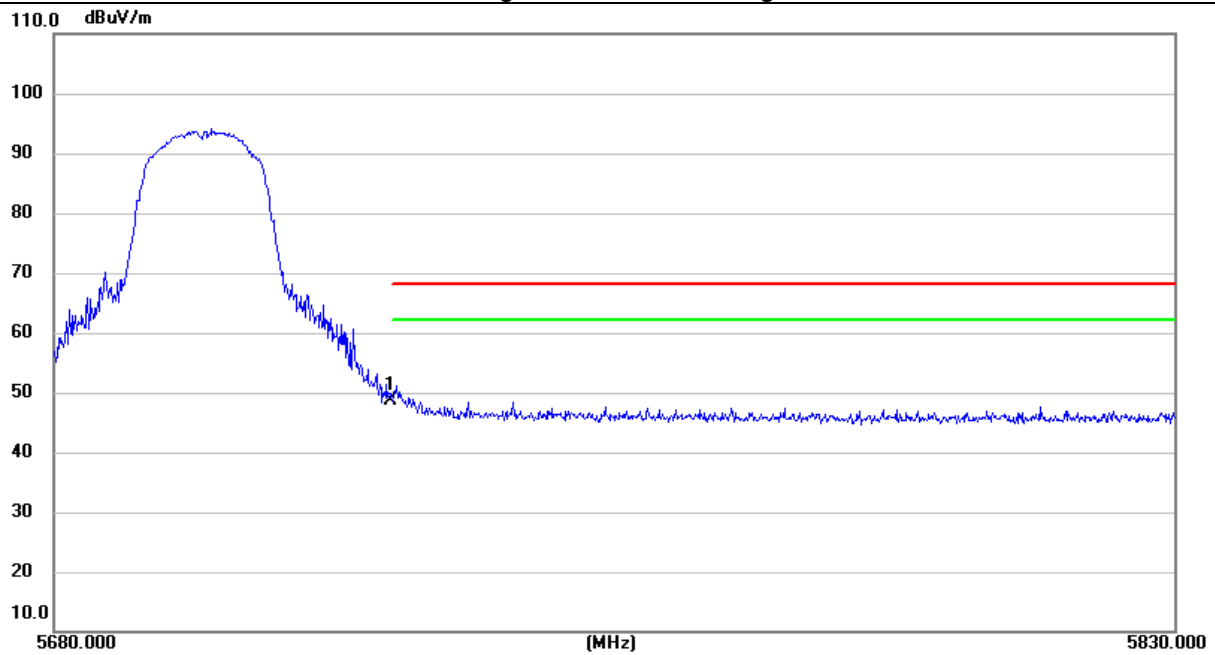


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5725.000	11.71	39.09	50.80	68.20	-17.40	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

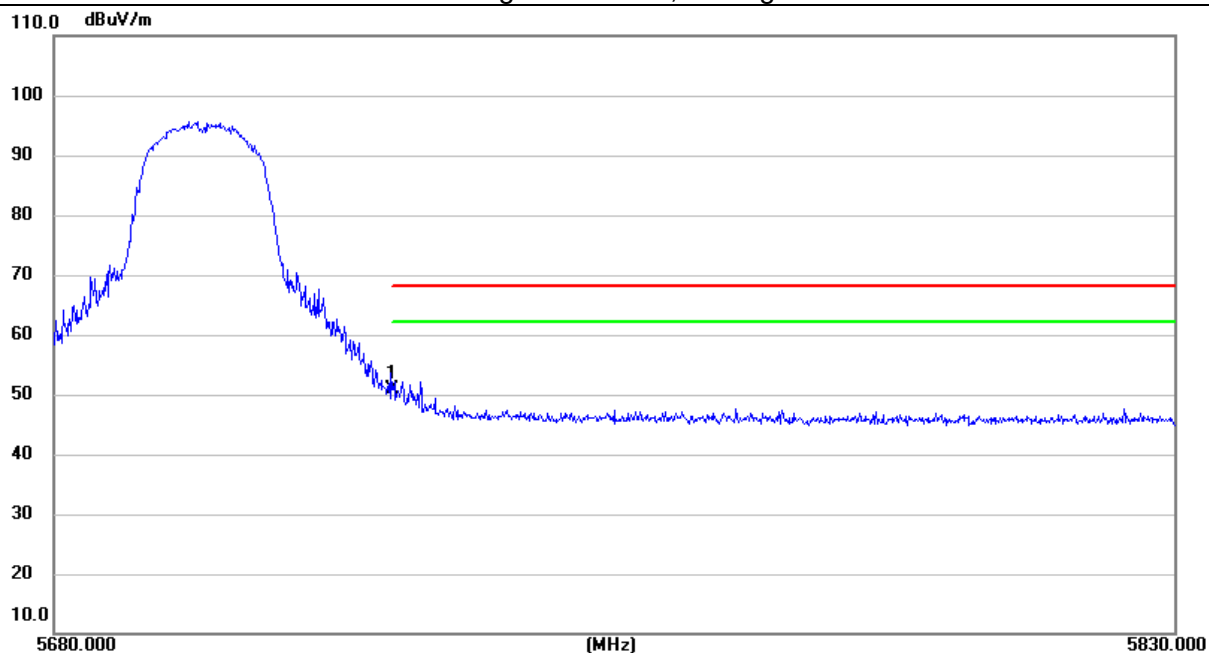

5.6G 802.11ac40 5510


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5460.000	11.76	38.51	50.27	74.00	-23.73	peak
V	5460.000	3.11	38.51	41.62	54.00	-12.38	AVG
V	5470.000	17.03	38.68	55.71	68.20	-12.49	peak
V	5470.000	7.19	38.68	45.87	68.20	-22.33	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

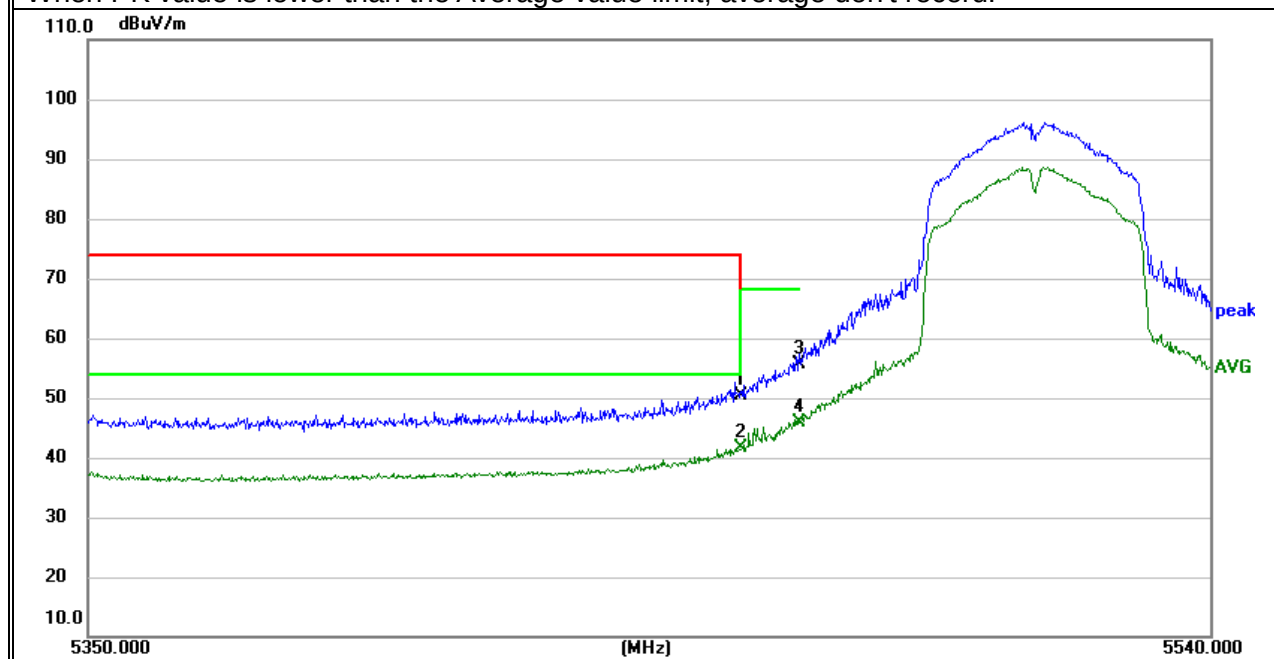


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5460.000	10.95	38.51	49.46	74.00	-24.54	peak
H	5460.000	1.89	38.51	40.40	54.00	-13.60	AVG
H	5470.000	14.50	38.68	53.18	68.20	-15.02	peak
H	5470.000	6.74	38.68	45.42	68.20	-22.78	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

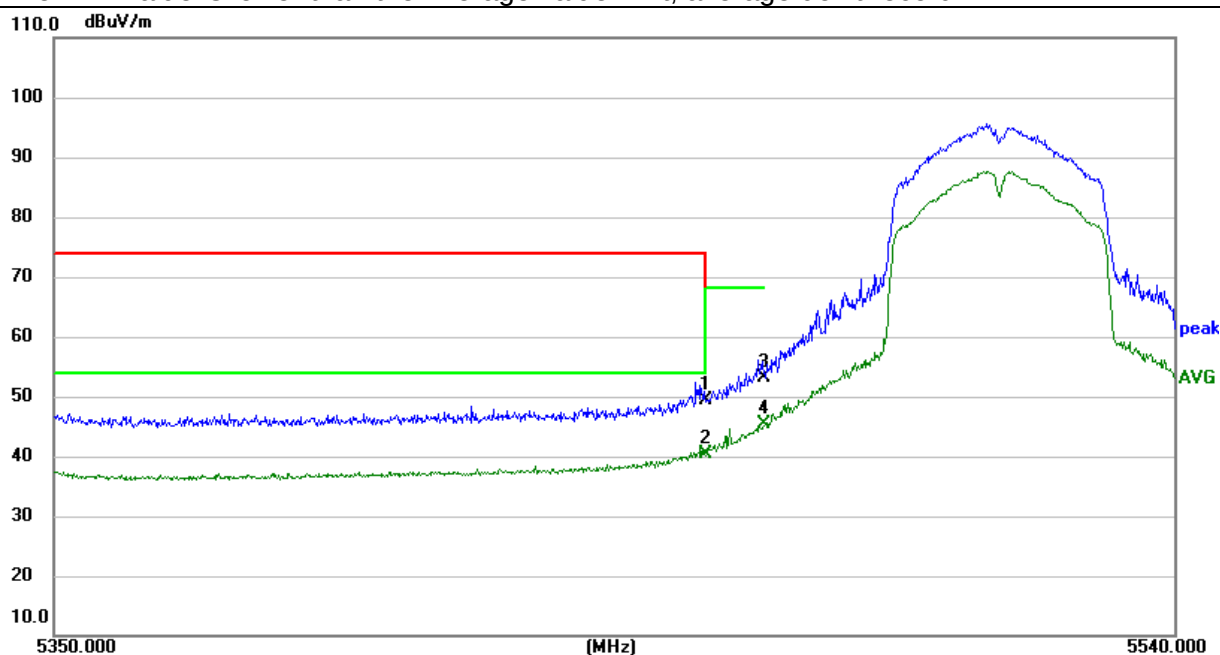

5.6G 802.11ac40 5670


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5725.000	8.56	39.09	47.65	68.20	-20.55	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

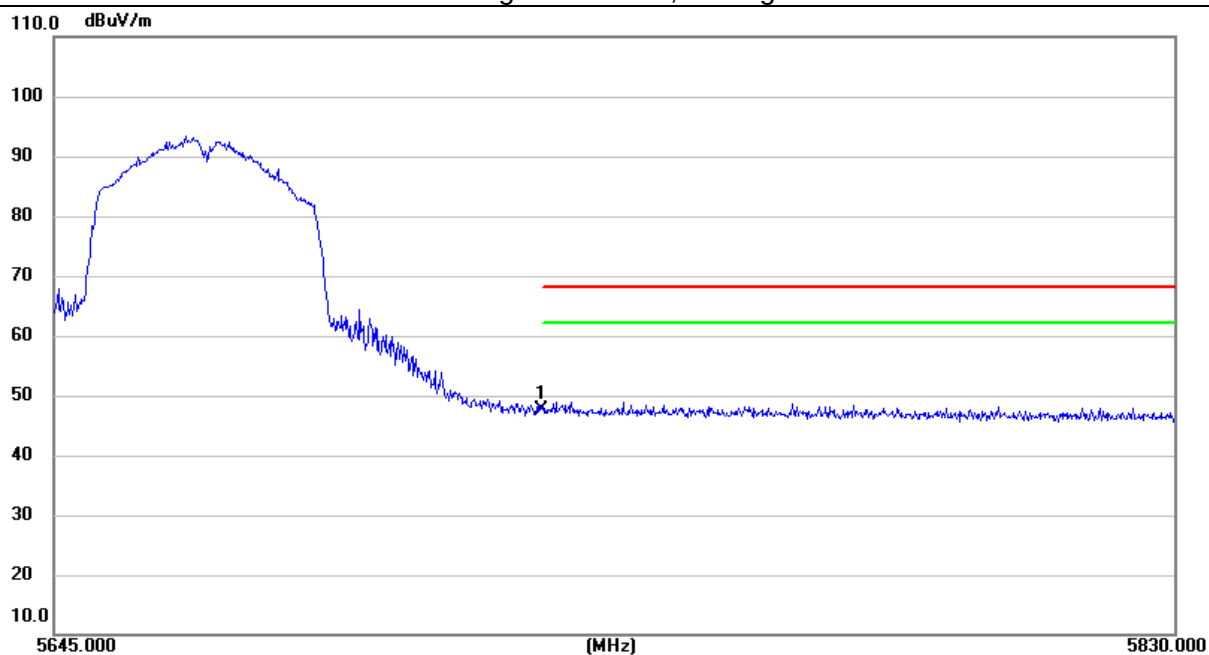


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5725.000	8.51	39.09	47.60	68.20	-20.60	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

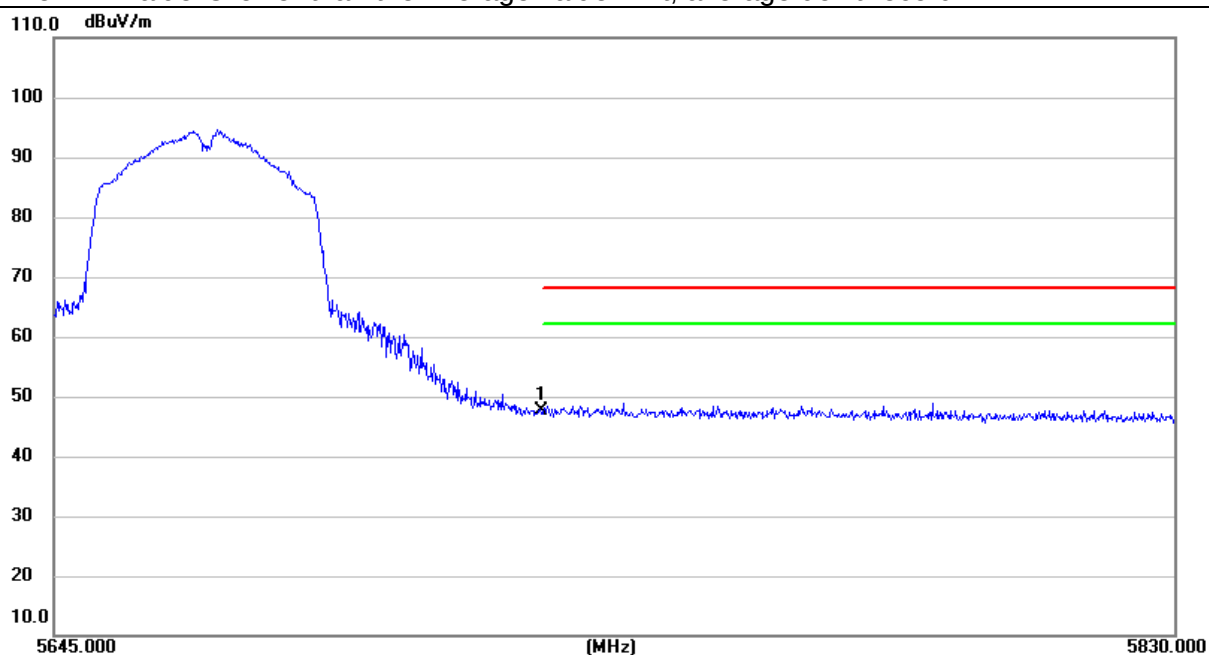

5.6G 802.11ac80 5530


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5460.000	23.13	38.51	61.64	74.00	-12.36	peak
V	5460.000	12.49	38.51	51.00	54.00	-3.00	AVG
V	5470.000	25.73	38.68	64.41	68.20	-3.79	peak
V	5470.000	16.77	38.68	55.45	68.20	-12.75	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

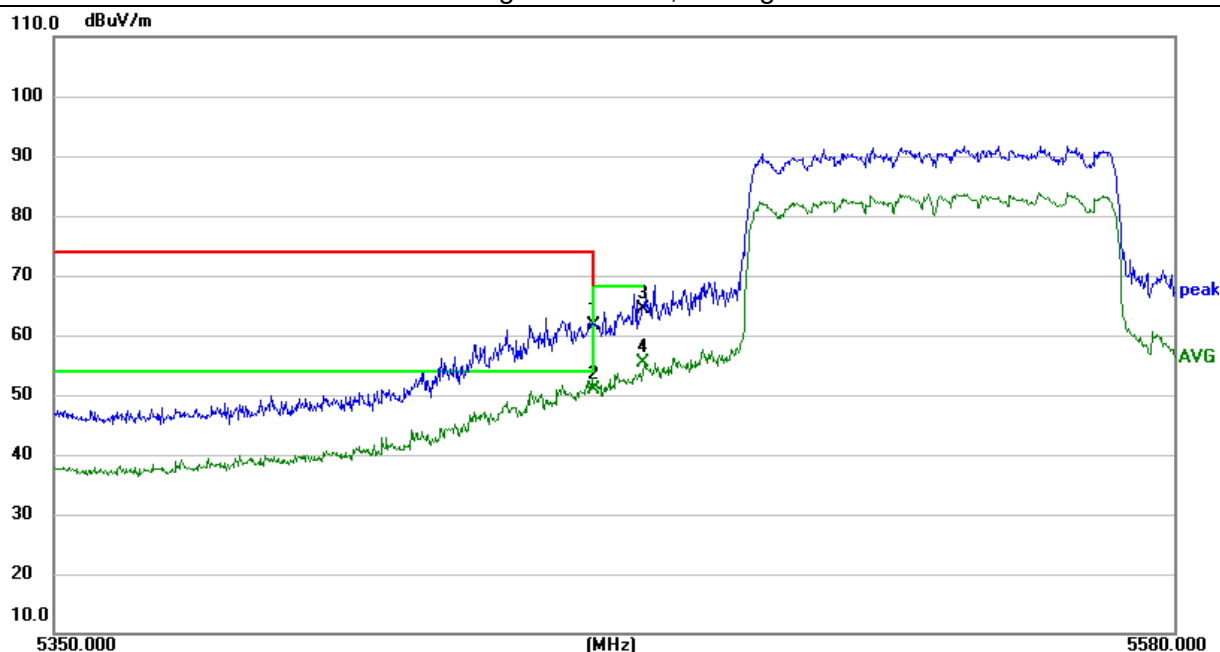


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5460.000	20.37	38.51	58.88	74.00	-15.12	peak
H	5460.000	11.66	38.51	50.17	54.00	-3.83	AVG
H	5470.000	22.69	38.68	61.37	68.20	-6.83	peak
H	5470.000	13.08	38.68	51.76	68.20	-16.44	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

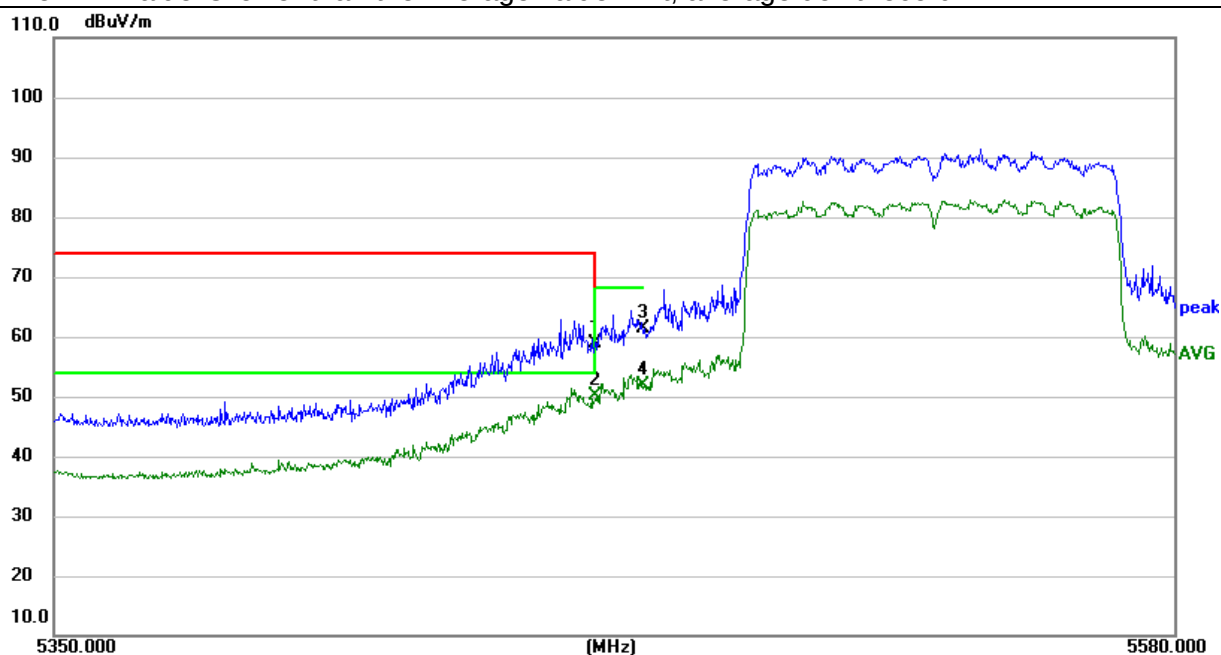

5.6G 802.11ac80 5610


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5725.000	10.42	39.09	49.51	68.20	-18.69	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

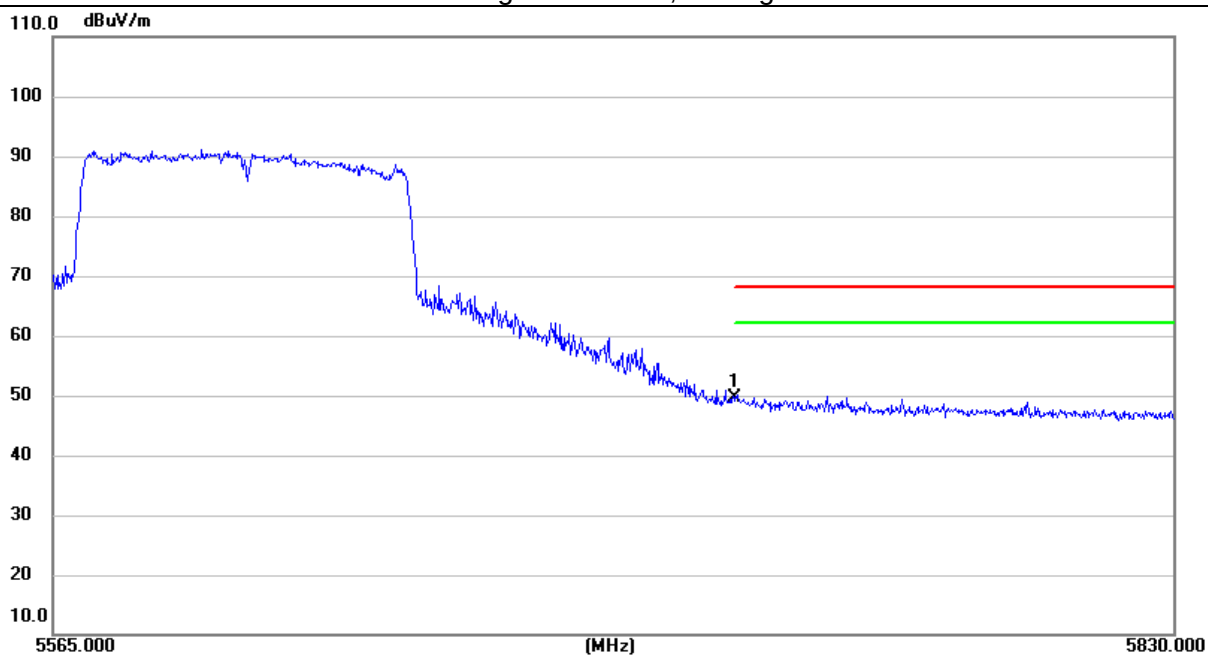


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5725.000	9.79	39.09	48.88	68.20	-19.32	peak

Remark:

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

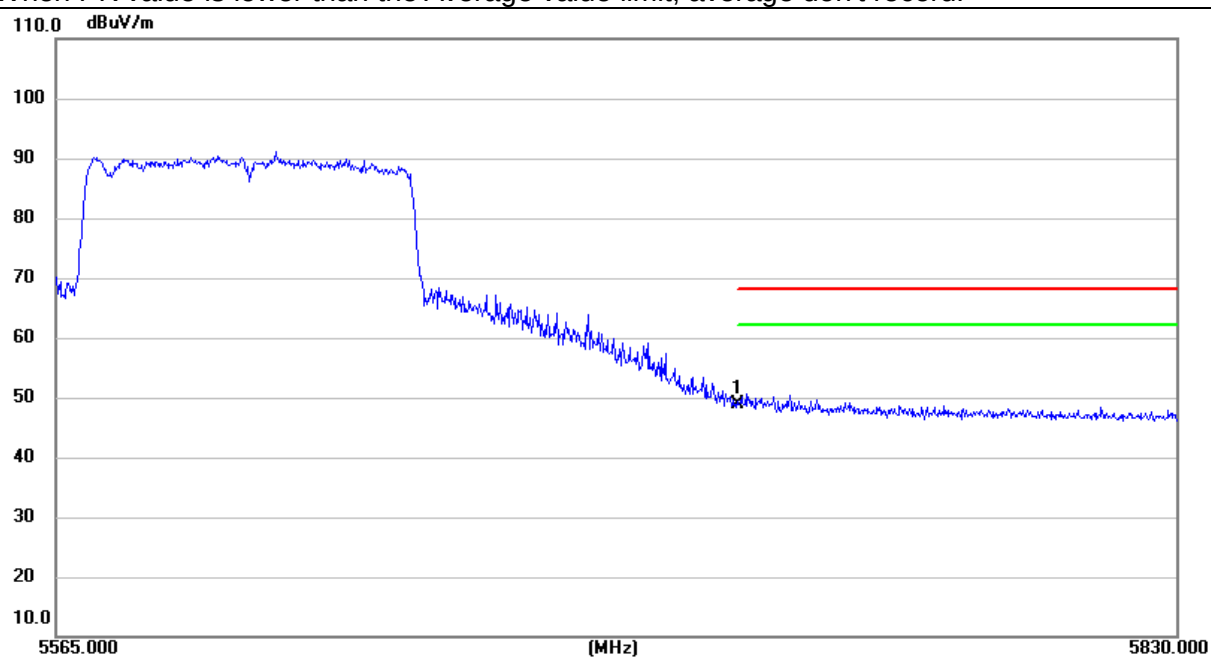

5.6G 802.11ax20 5500


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5460.000	8.77	38.51	47.28	74.00	-26.72	peak
V	5460.000	-0.77	38.51	37.74	54.00	-16.26	AVG
V	5470.000	10.59	38.68	49.27	68.20	-18.93	peak
V	5470.000	1.01	38.68	39.69	68.20	-28.51	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

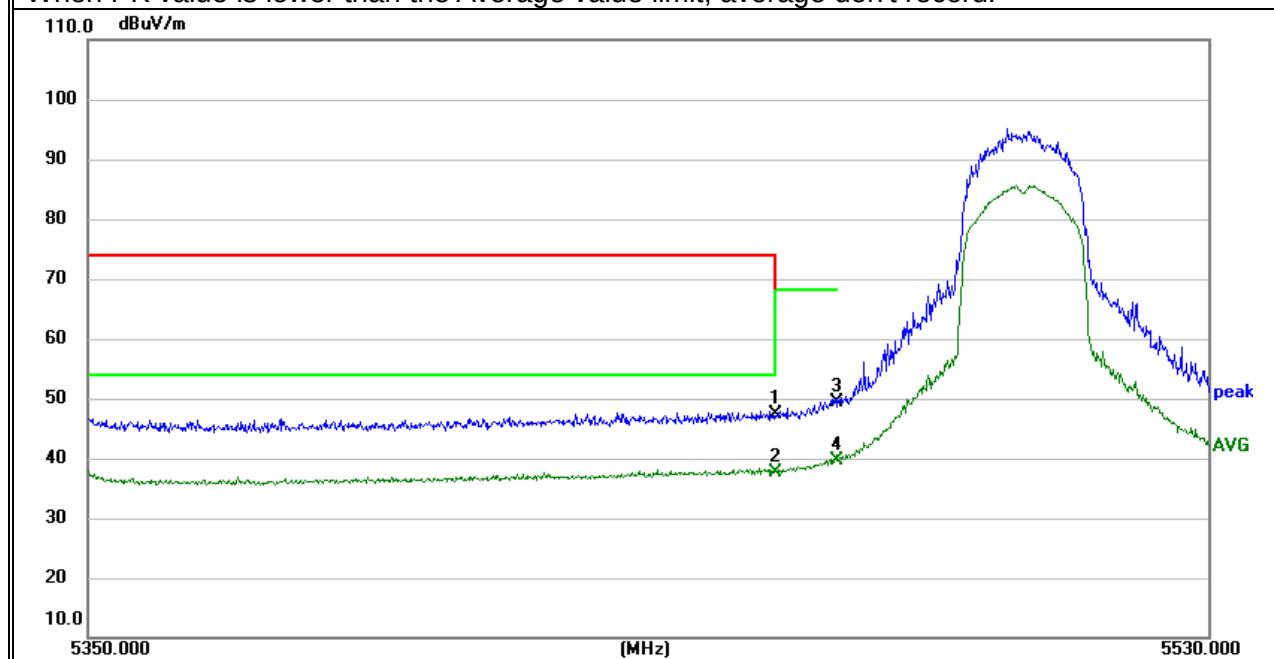


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5460.000	9.65	38.51	48.16	74.00	-25.84	peak
H	5460.000	-0.01	38.51	38.50	54.00	-15.50	AVG
H	5470.000	15.66	38.68	54.34	68.20	-13.86	peak
H	5470.000	3.60	38.68	42.28	68.20	-25.92	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

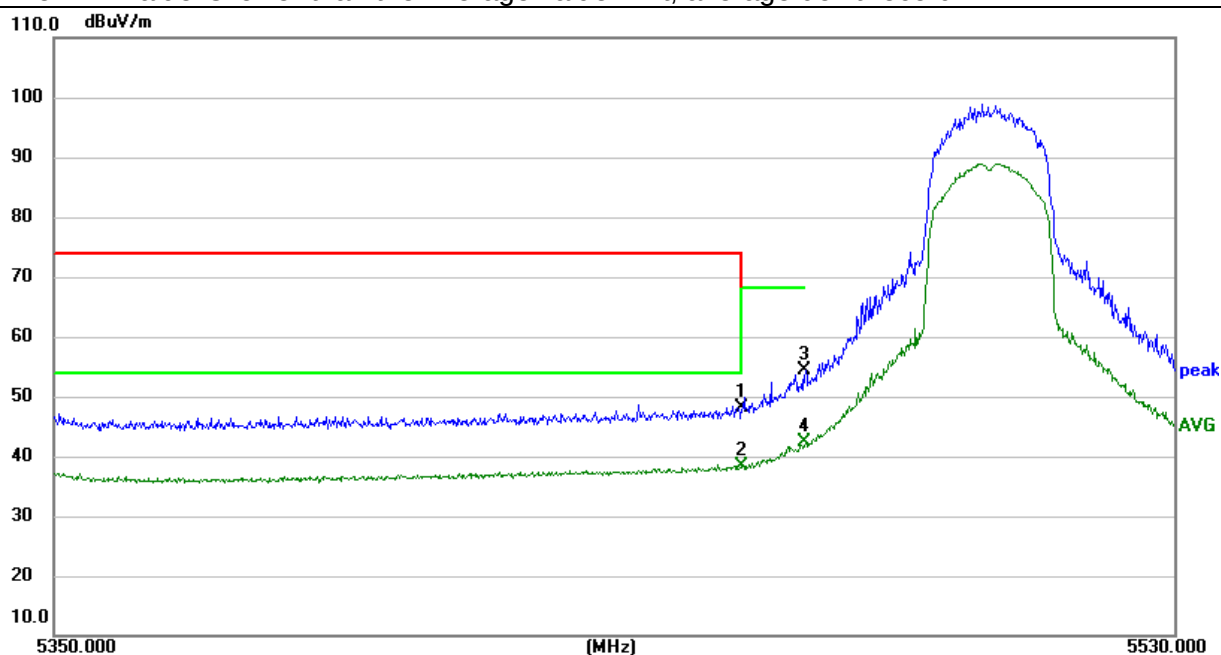

5.6G 802.11ax20 5700


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5725.000	11.57	39.09	50.66	68.20	-17.54	peak
V	5725.000	1.11	39.09	40.20	68.20	-28.00	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

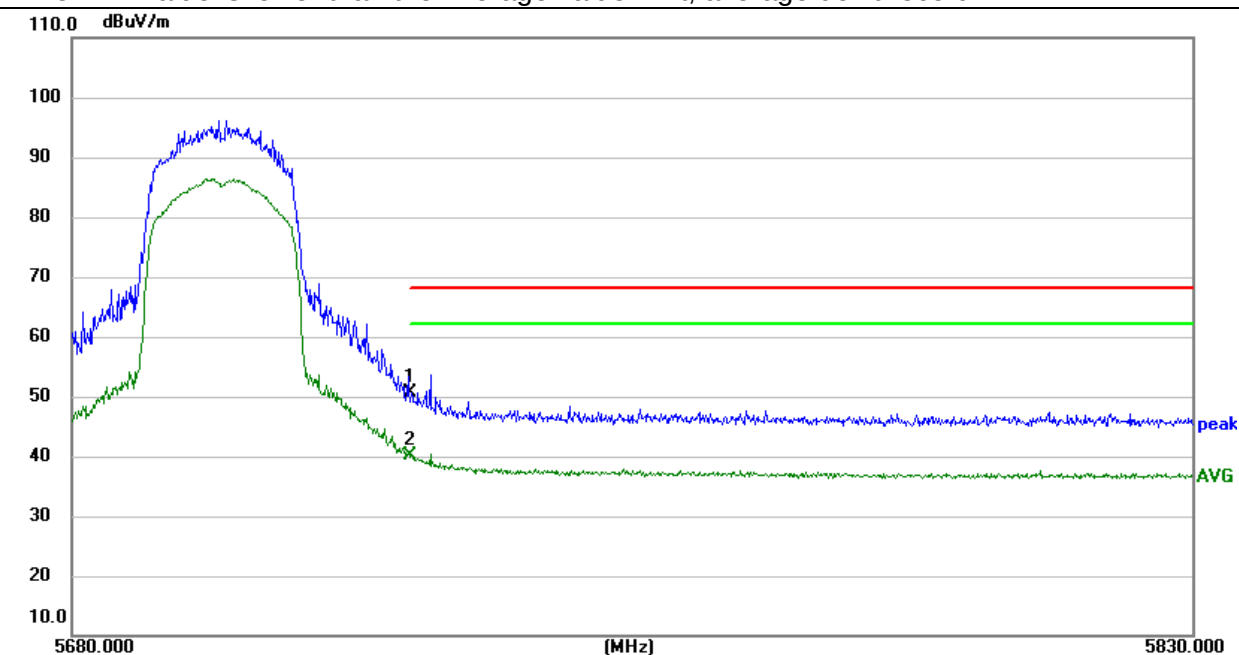


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5725.000	11.84	39.09	50.93	68.20	-17.27	peak
H	5725.000	1.67	39.09	40.76	68.20	-27.44	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

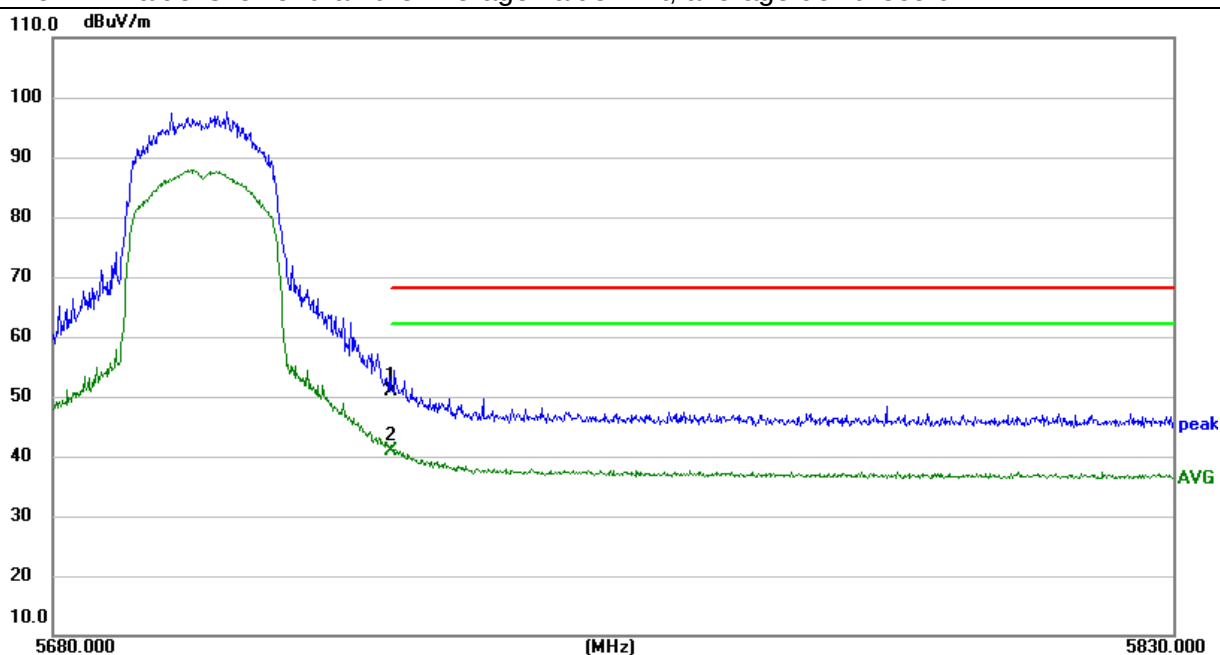

5.6G 802.11ax40 5510


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	5460.000	11.39	38.51	49.90	74.00	-24.1	peak
V	5460.000	2.59	38.51	41.10	54.00	-12.90	AVG
V	5470.000	16.47	38.68	55.15	68.20	-13.05	peak
V	5470.000	7.16	38.68	45.84	68.20	-22.36	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

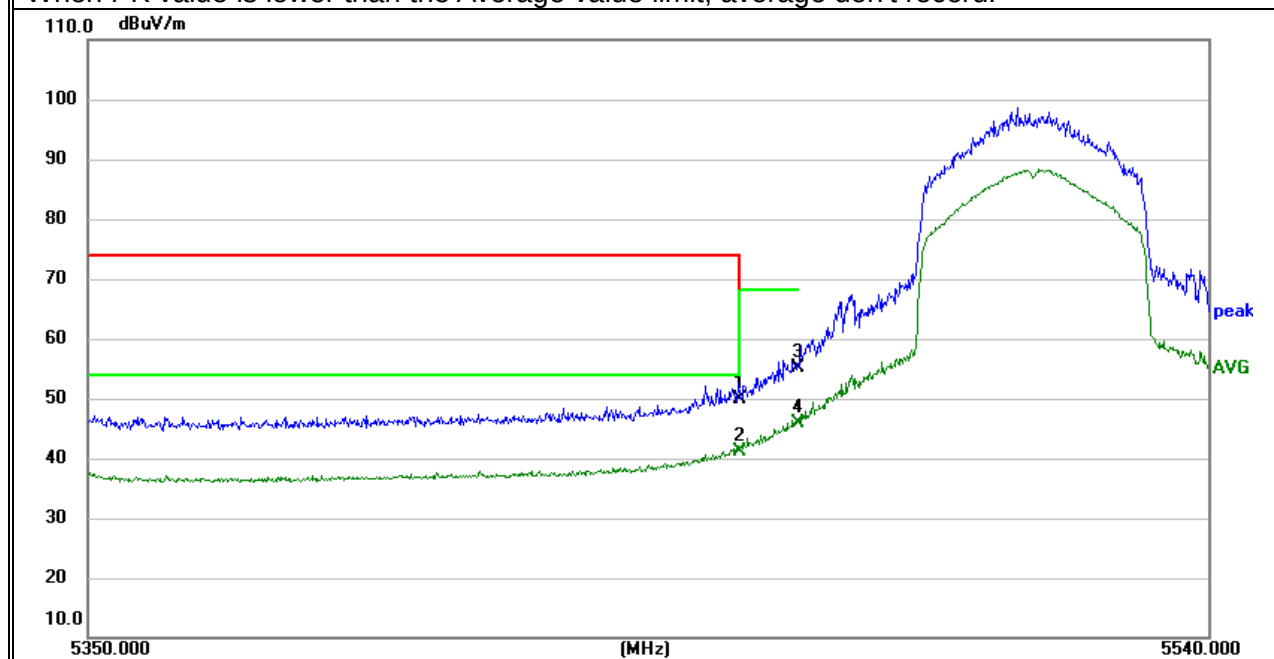


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5460.000	11.18	38.51	49.69	74.00	-24.31	peak
H	5460.000	2.46	38.51	40.97	54.00	-13.03	AVG
H	5470.000	17.27	38.68	55.95	68.20	-12.25	peak
H	5470.000	6.69	38.68	45.37	68.20	-22.83	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

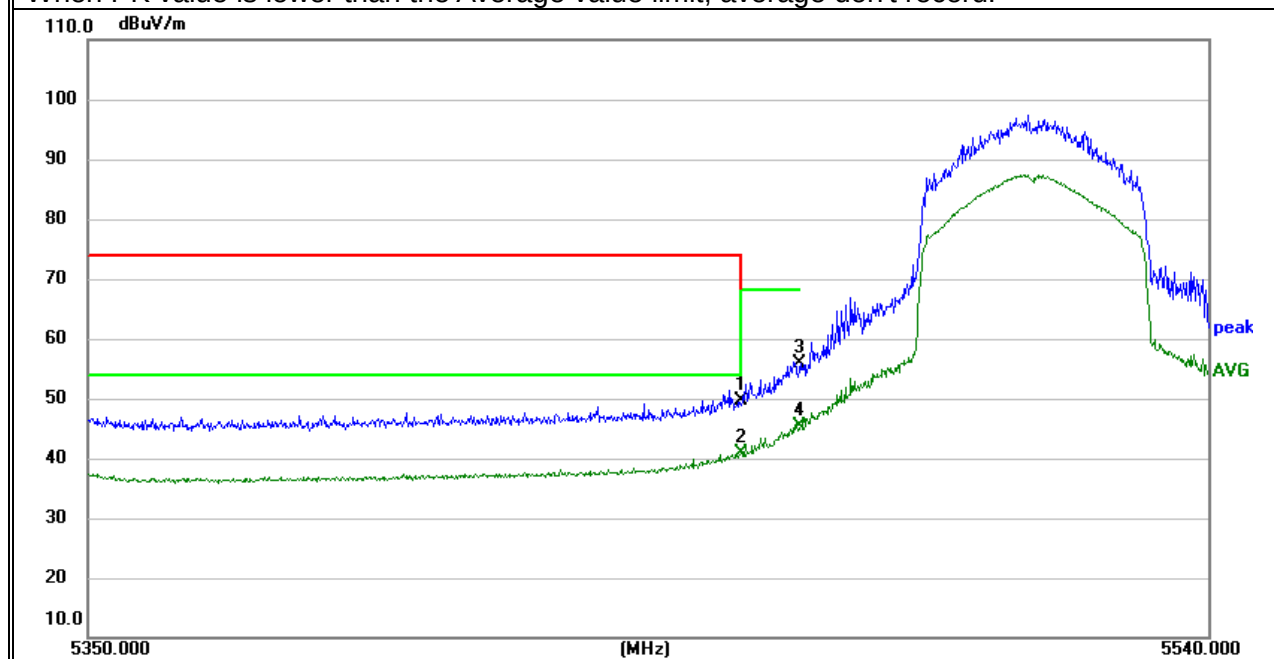


5.6G 802.11ax40 5670

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	5725.000	8.25	39.09	47.34	68.20	-20.86	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamplifier FactorOther emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

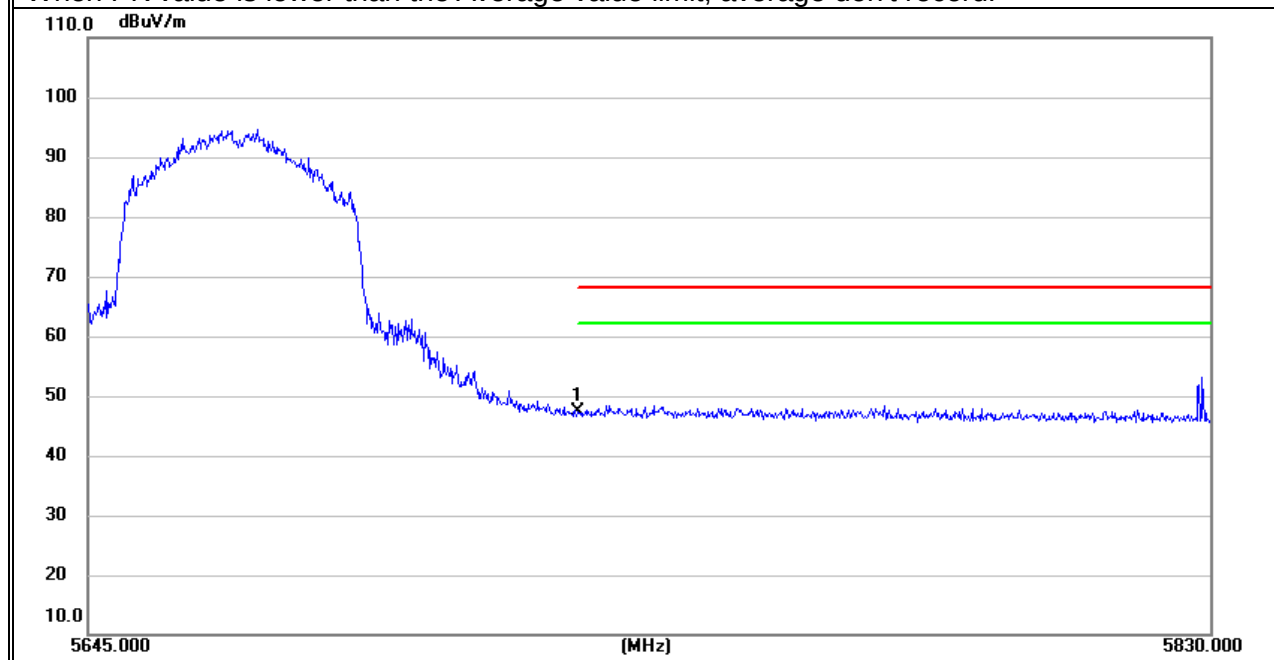


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5725.000	8.79	39.09	47.88	68.20	-20.32	peak

Remark:

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

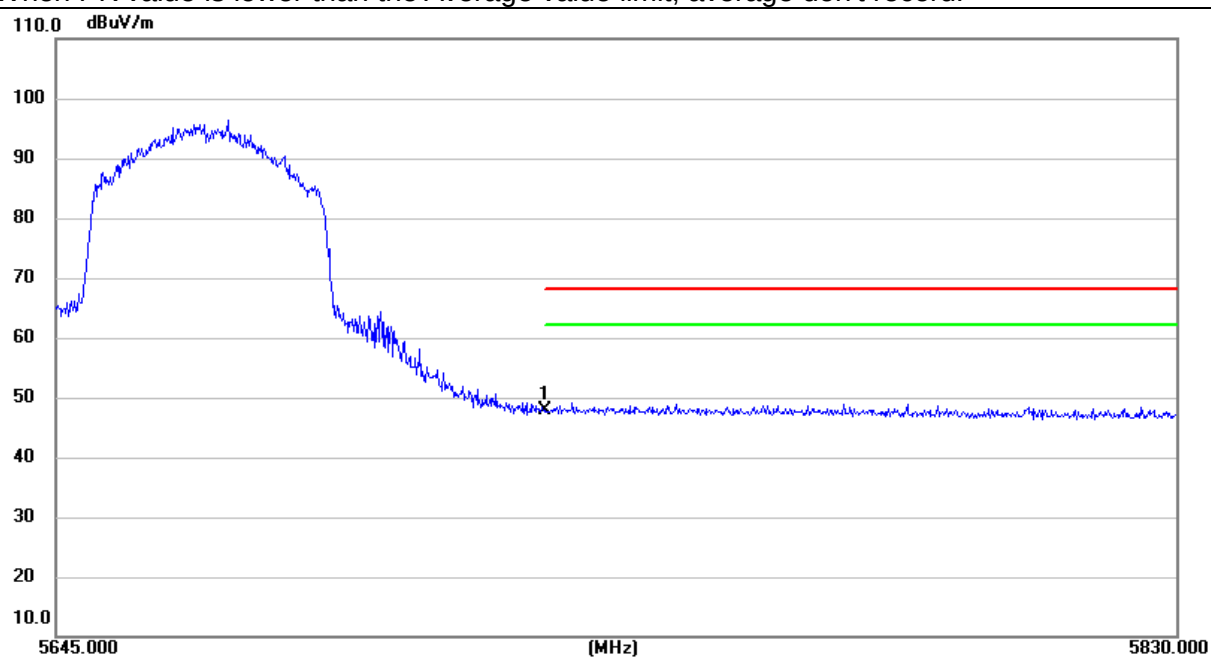

5.6G 802.11ax80 5530


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	5460.000	17.91	38.51	56.42	74.00	-17.58	peak
V	5460.000	9.22	38.51	47.73	54.00	-6.27	AVG
V	5470.000	23.83	38.68	62.51	68.20	-5.69	peak
V	5470.000	11.61	38.68	50.29	68.20	-17.91	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

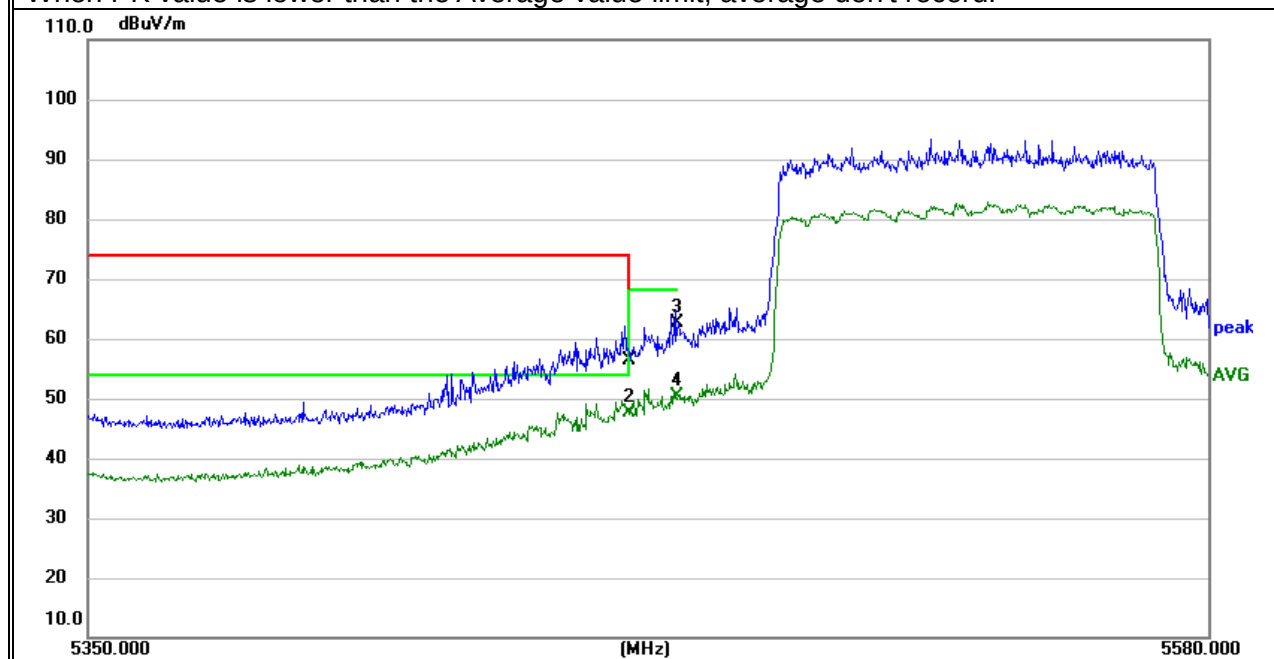


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	5460.000	18.48	38.51	56.99	74.00	-17.01	peak
H	5460.000	8.03	38.51	46.54	54.00	-7.46	AVG
H	5470.000	19.65	38.68	58.33	68.20	-9.87	peak
H	5470.000	9.29	38.68	47.97	68.20	-20.23	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

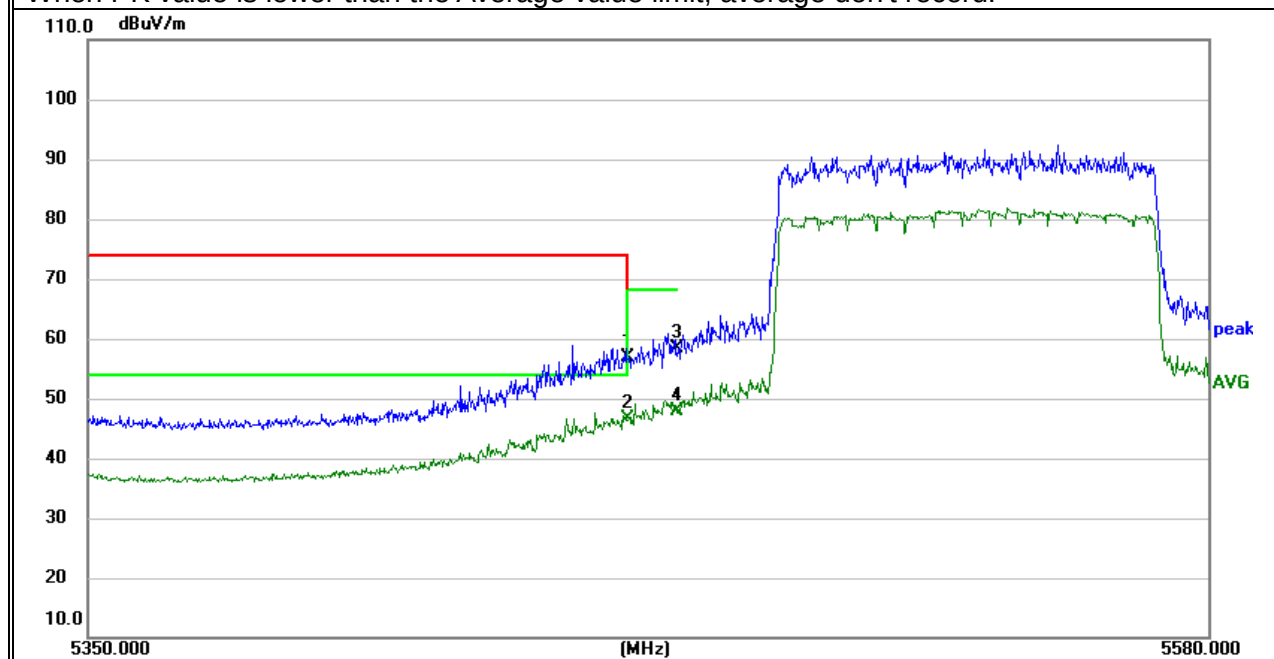

5.6G 802.11ax80 5610


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	5725.000	8.38	39.09	47.47	68.20	-20.73	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

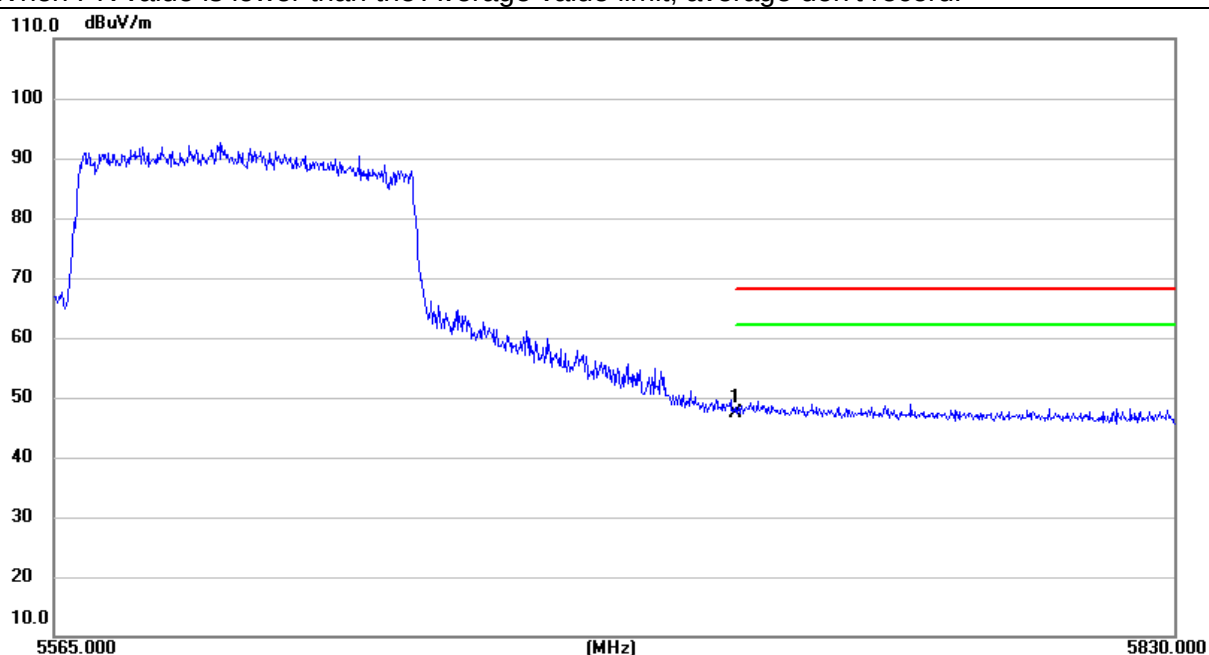


Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
H	5725.000	8.99	39.09	48.08	68.20	-20.12	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

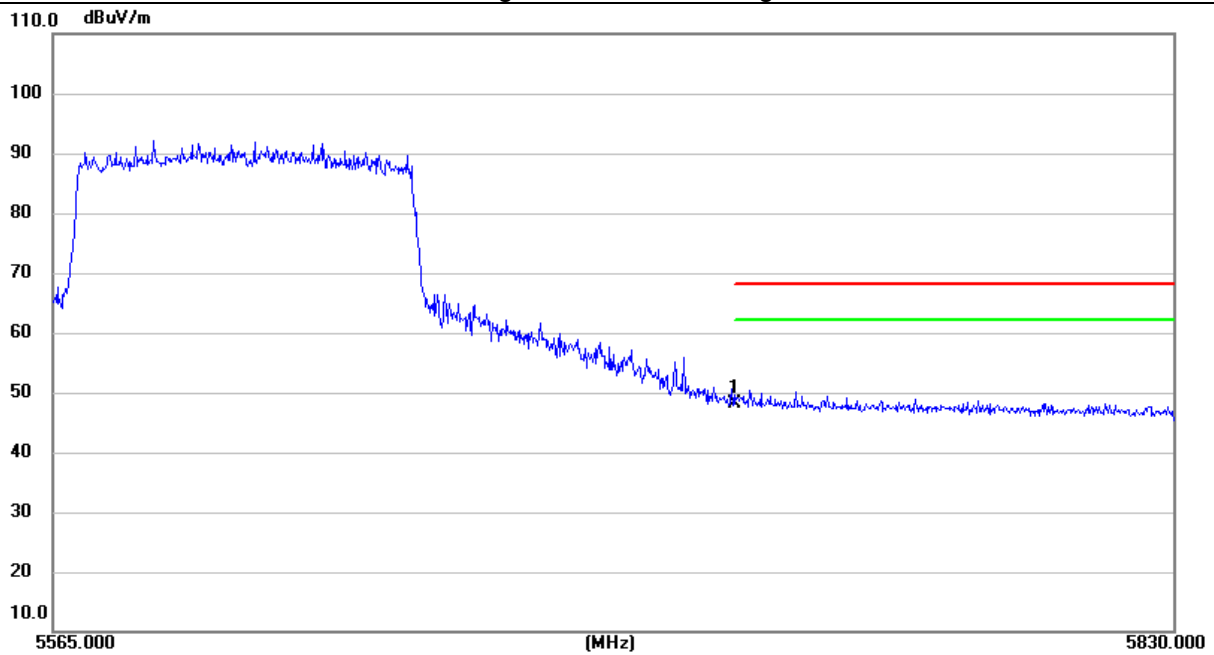

5.8G 802.11a 5745


Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
V	5639.048	-103.41	50.54	-52.87	-27.00	-25.87	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

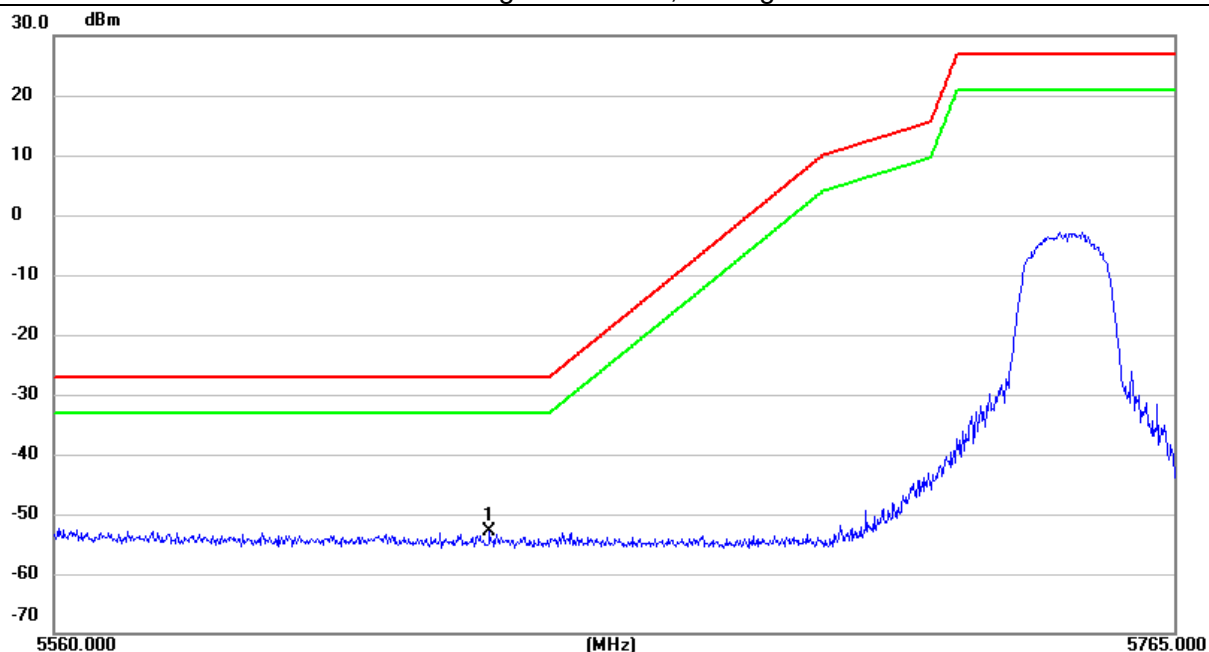


Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
H	5598.663	-103.17	50.38	-52.79	-27.00	-25.79	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

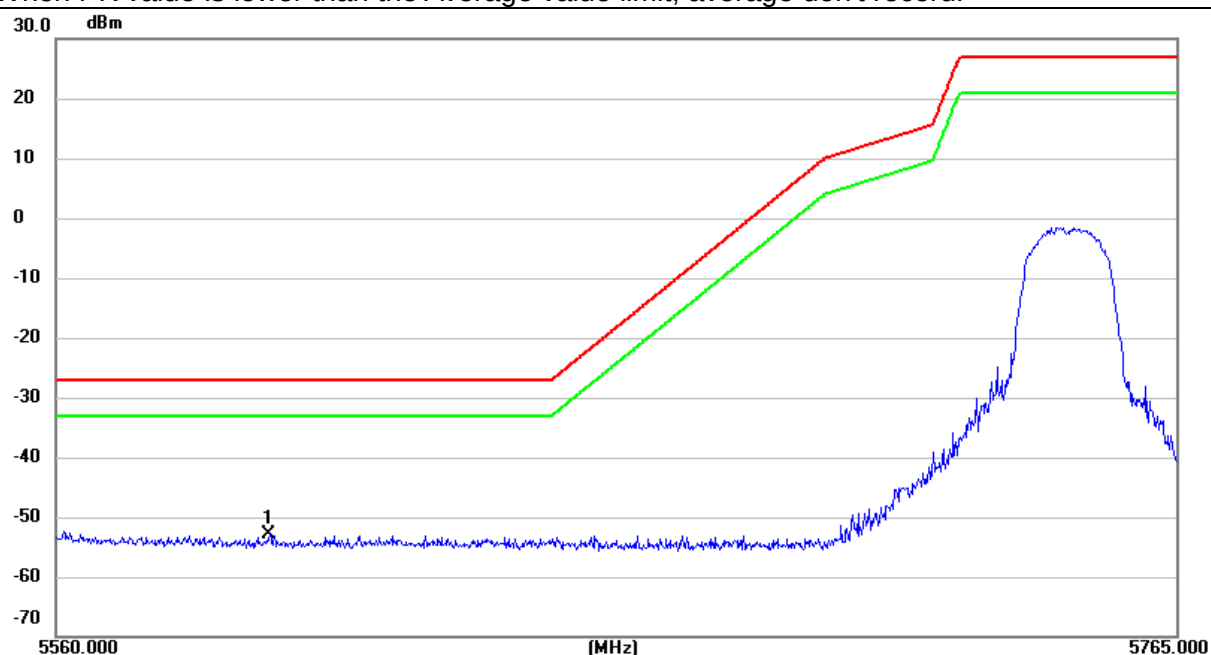

5.8G 802.11a 5825


Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
V	5945.543	-103.55	51.88	-51.67	-27.00	-24.67	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

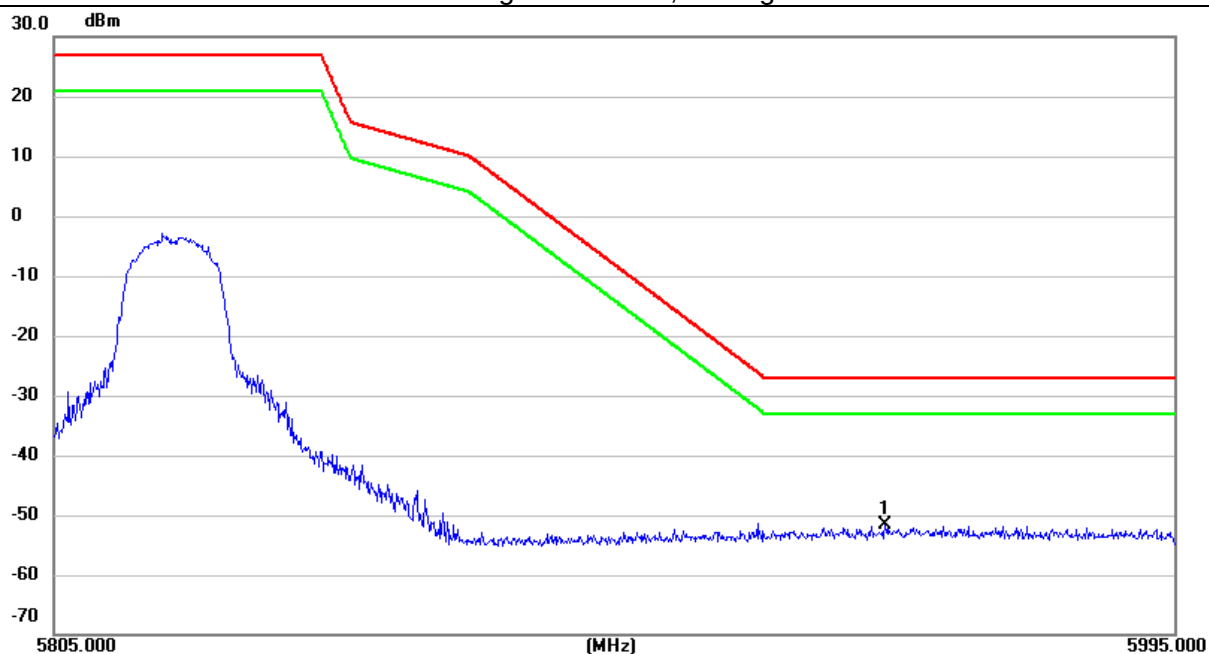


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
H	5963.422	-102.75	51.65	-51.10	-27.00	-24.10	peak

Remark:

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

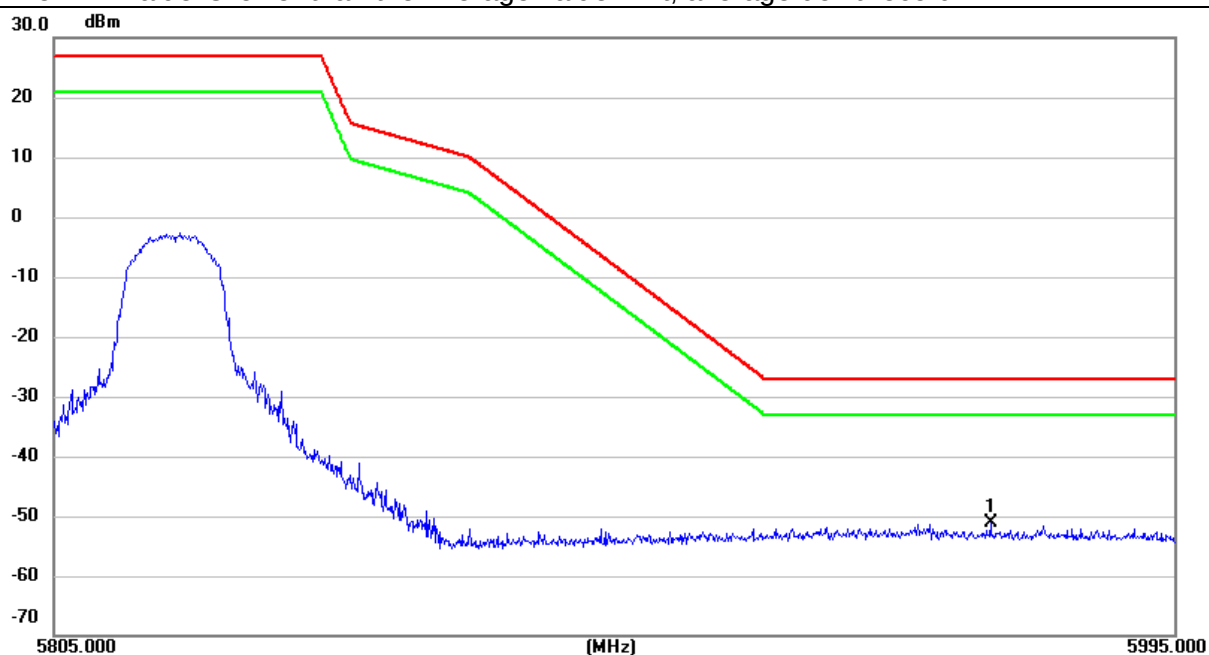

5.8G 802.11ac20 5745


Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
V	5583.042	-102.69	50.44	-52.25	-27.00	-25.25	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

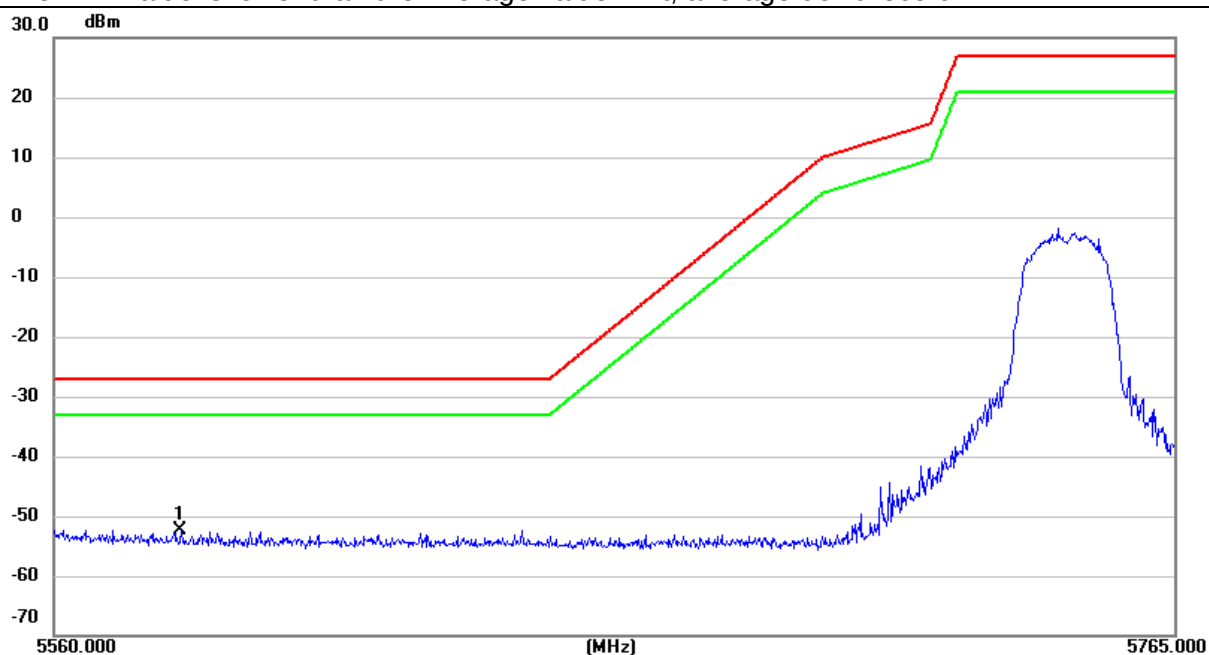


Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
H	5619.491	-102.79	50.46	-52.33	-27.00	-25.33	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

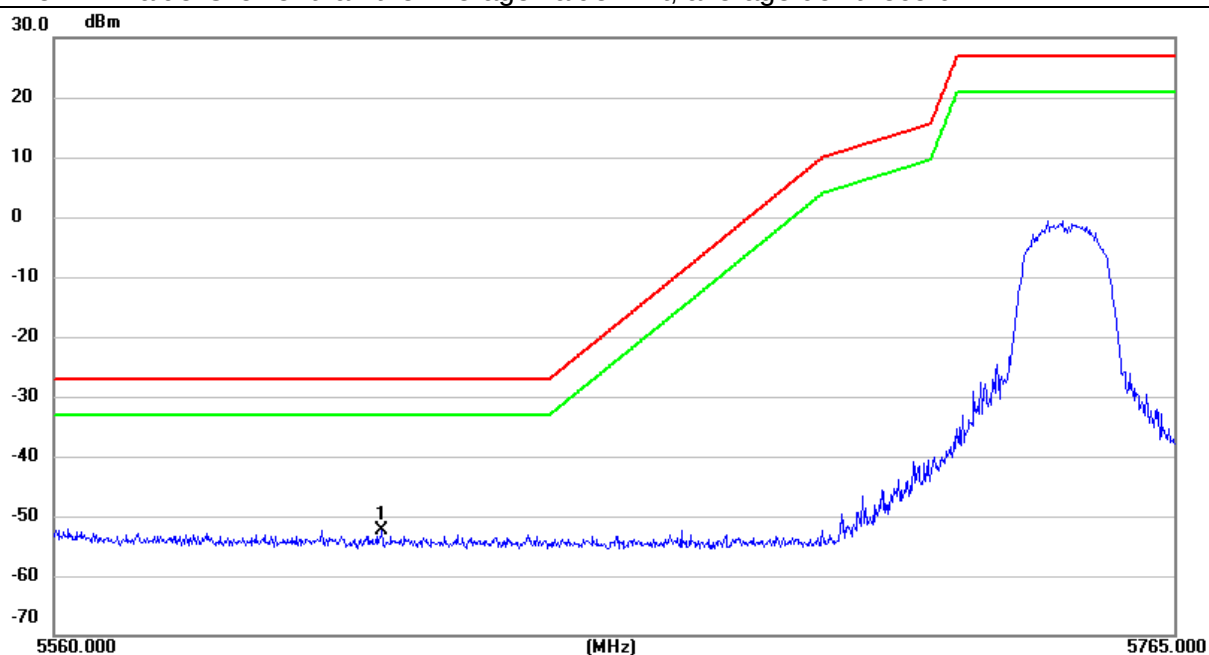

5.8G 802.11ac20 5825


Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
V	5941.534	-103.28	51.84	-51.44	-27.00	-24.44	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

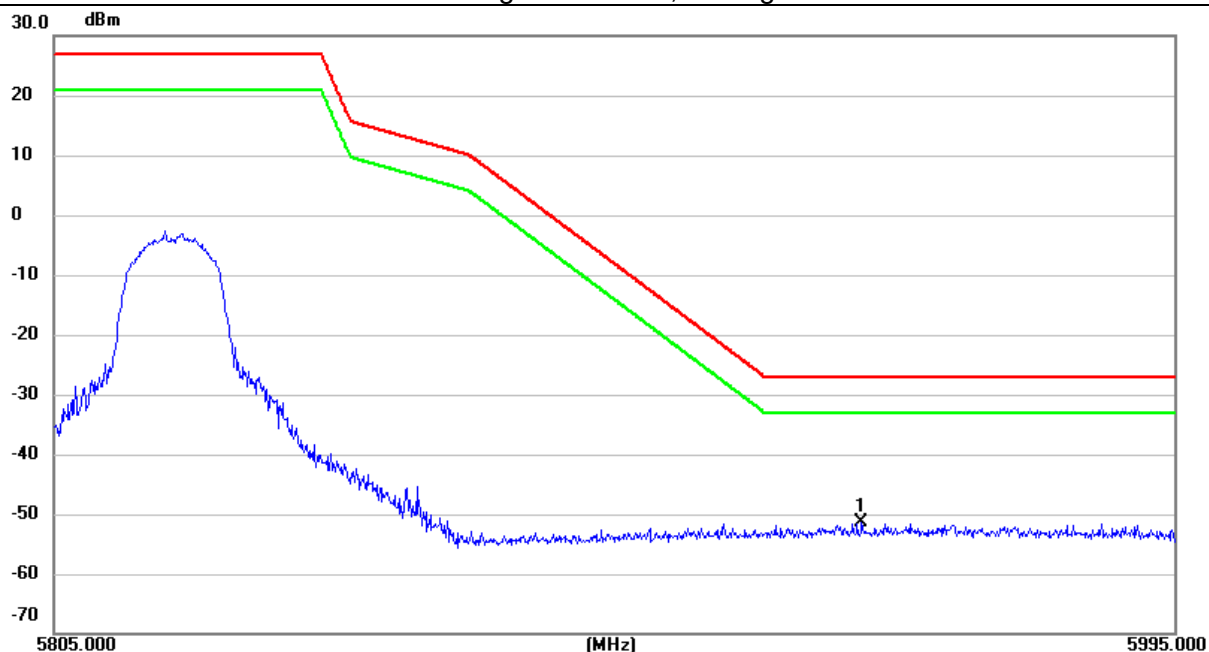


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
H	5945.695	-103.48	51.88	-51.60	-27.00	-24.60	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

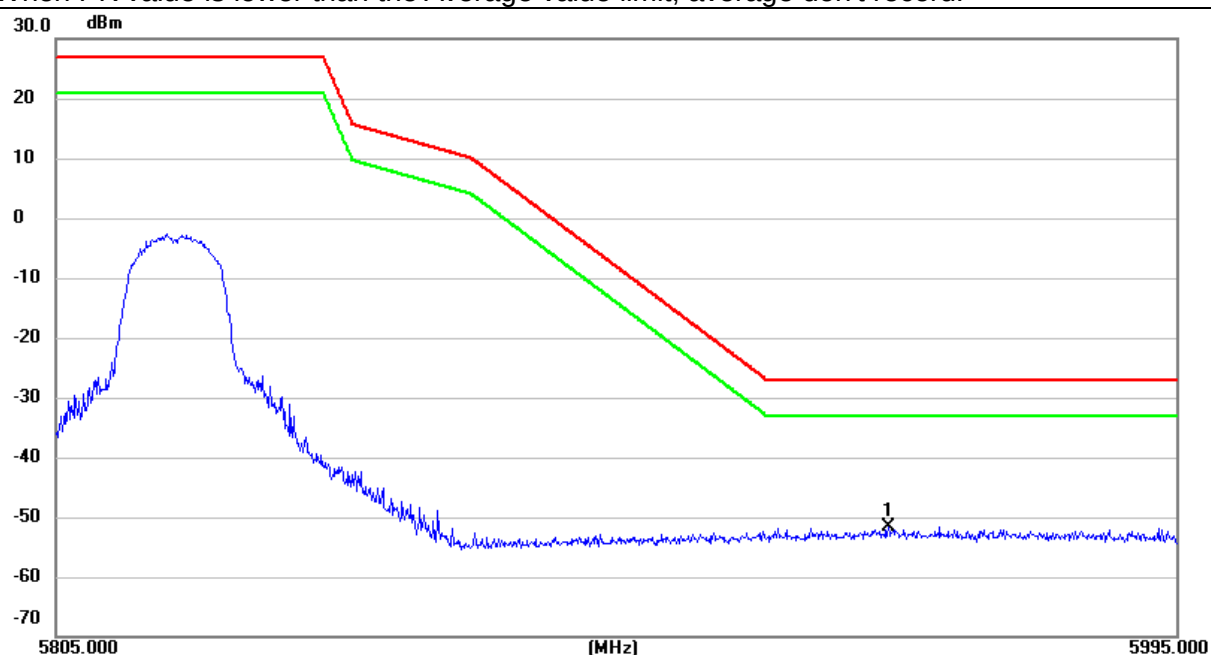

5.8G 802.11ac40 5755


Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
V	5578.000	-103.21	50.46	-52.75	-27.00	-25.75	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

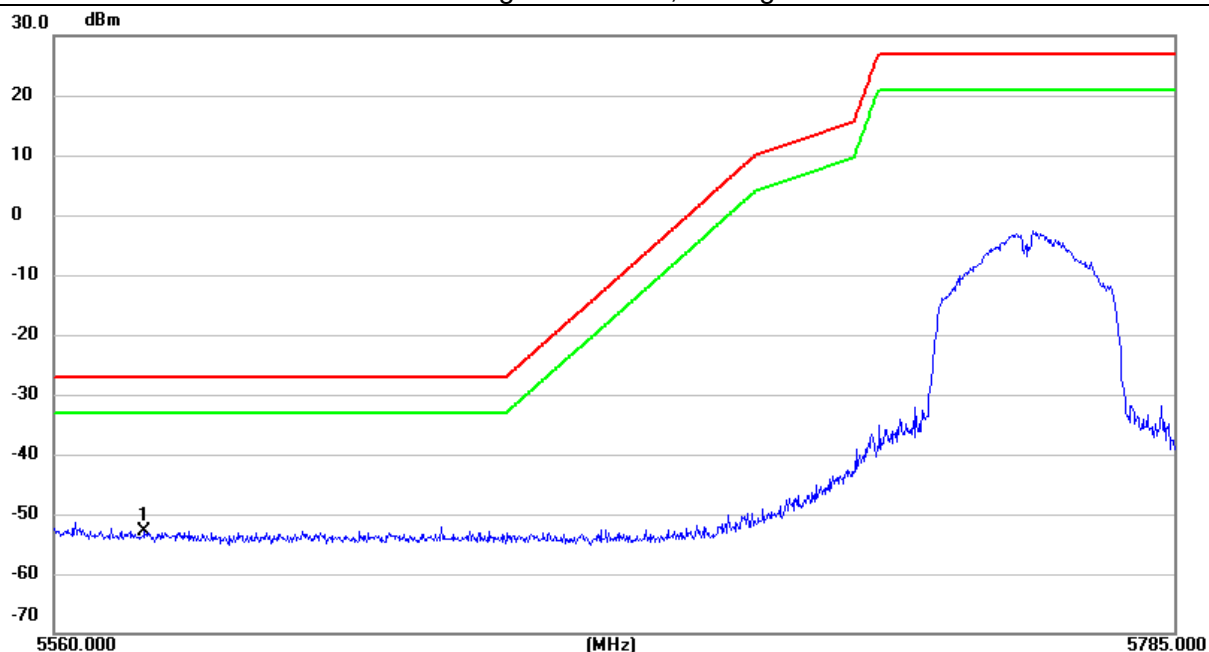


Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
H	5576.470	-102.88	50.46	-52.42	-27.00	-25.42	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

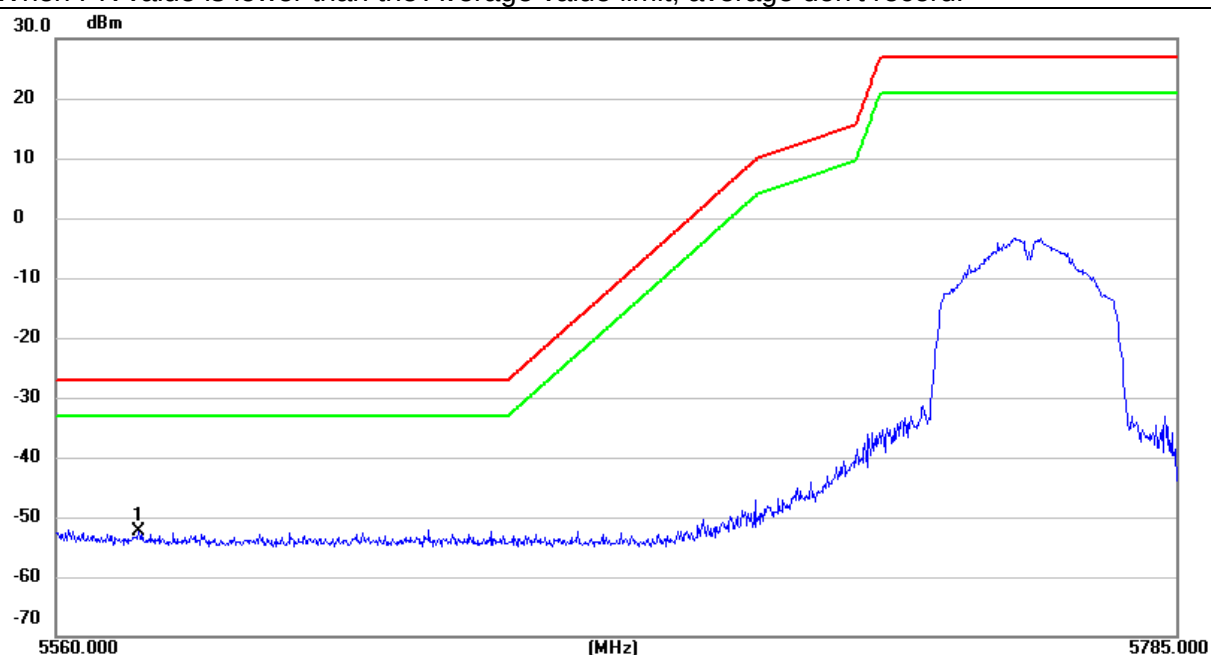

5.8G 802.11ac40 5795


Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
V	5982.580	-102.43	51.28	-51.15	-27.00	-24.15	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

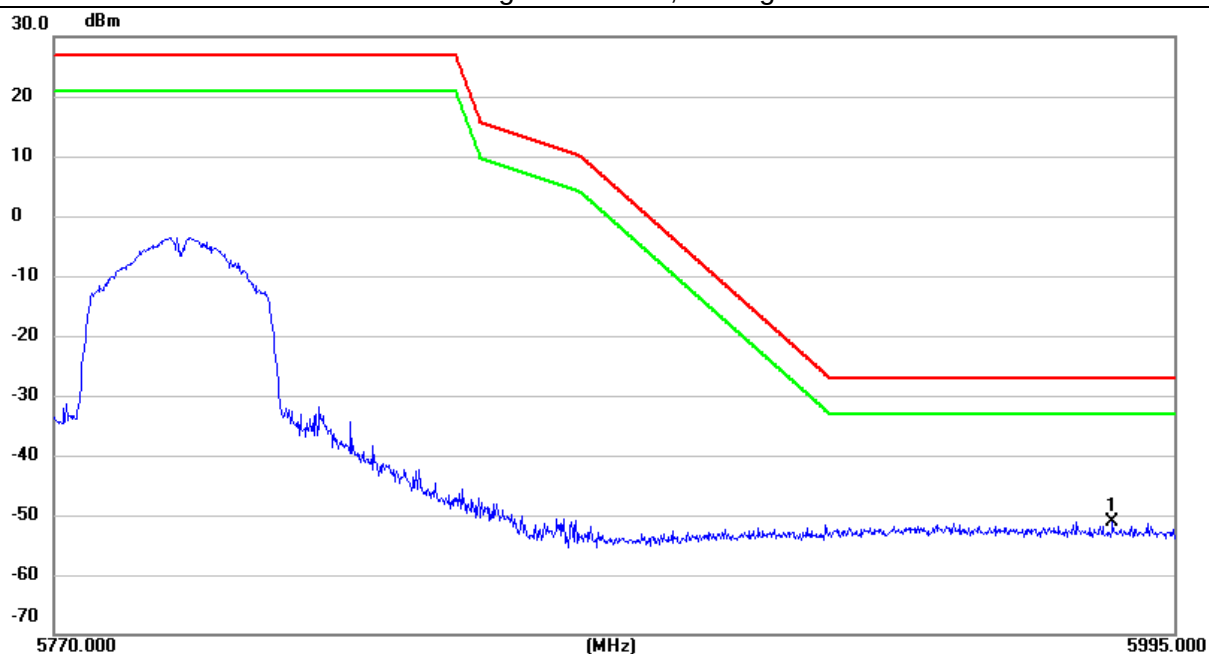


Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
H	5947.705	-102.97	51.90	-51.07	-27.00	-24.07	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

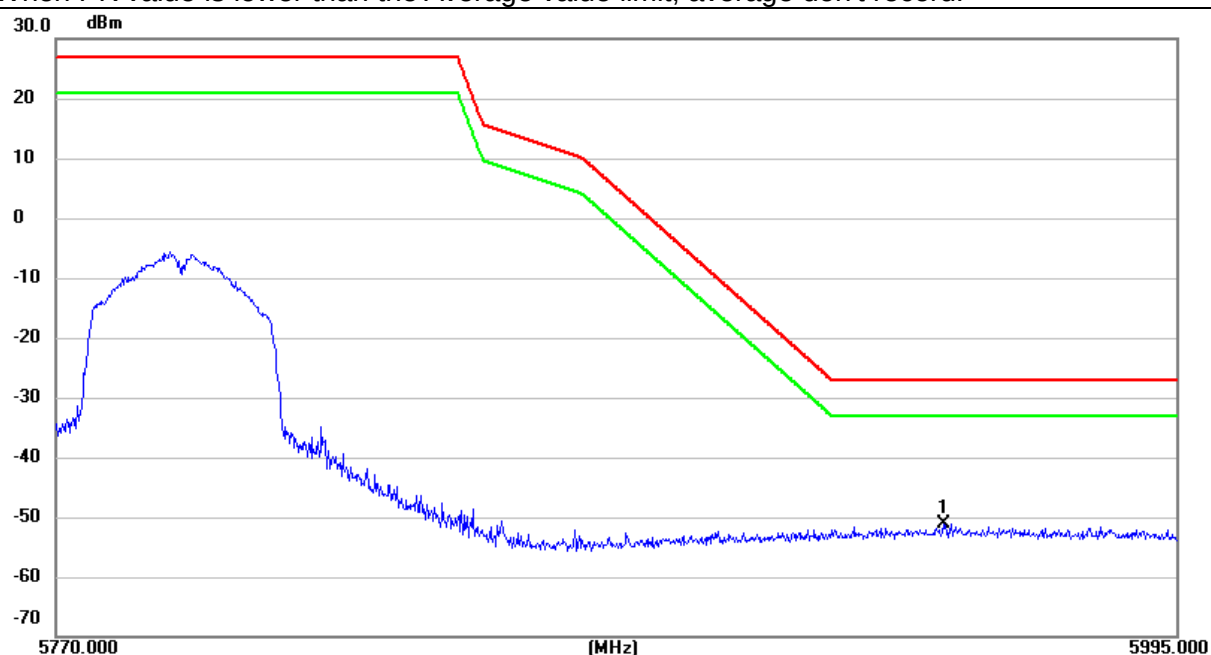

5.8G 802.11ac80 5775


Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
V	5647.556	-95.86	50.57	-45.29	-27.00	-18.29	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

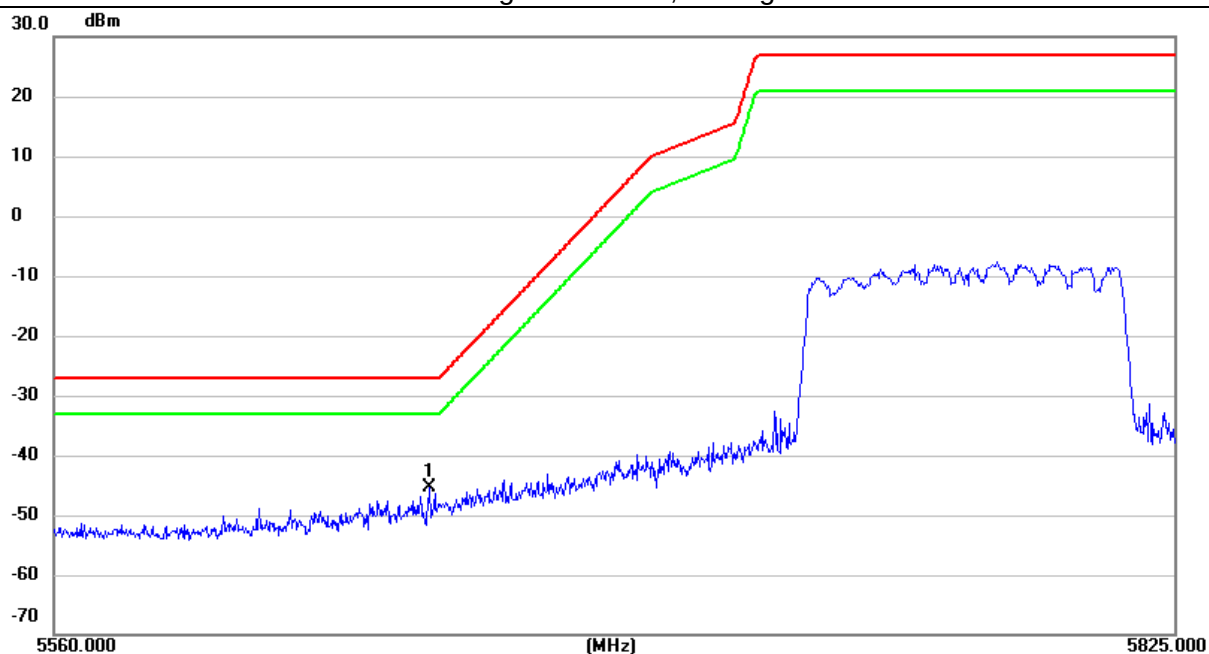


Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
H	5646.364	-96.65	50.57	-46.08	-27.00	-19.08	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

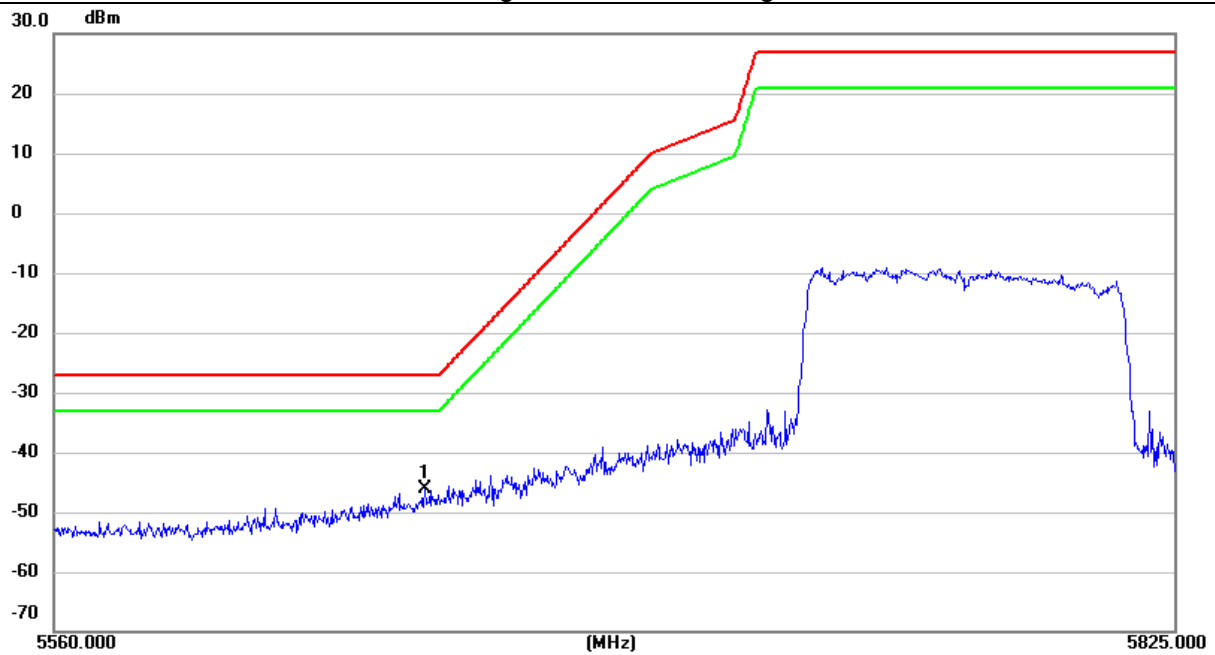

5.8G 802.11ac80 5775


Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
V	5928.121	-96.55	51.70	-44.85	-27.00	-17.85	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamplifier Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

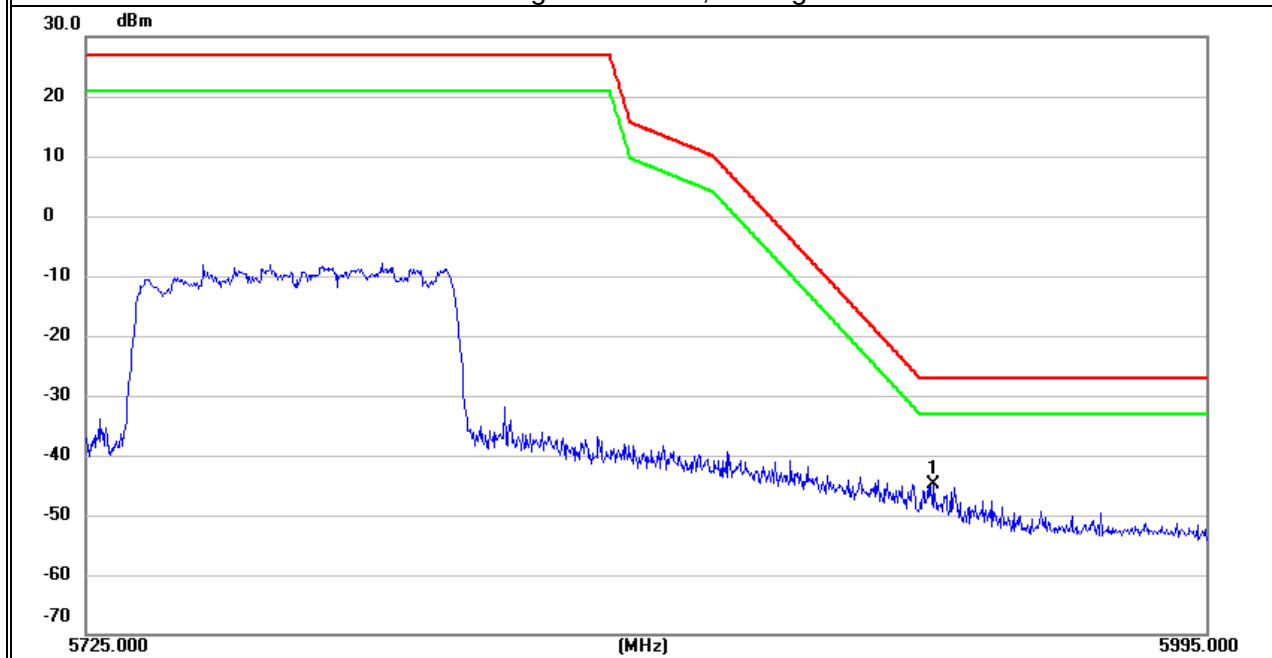


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
H	5925.421	-99.19	51.67	-47.52	-27.00	-20.52	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

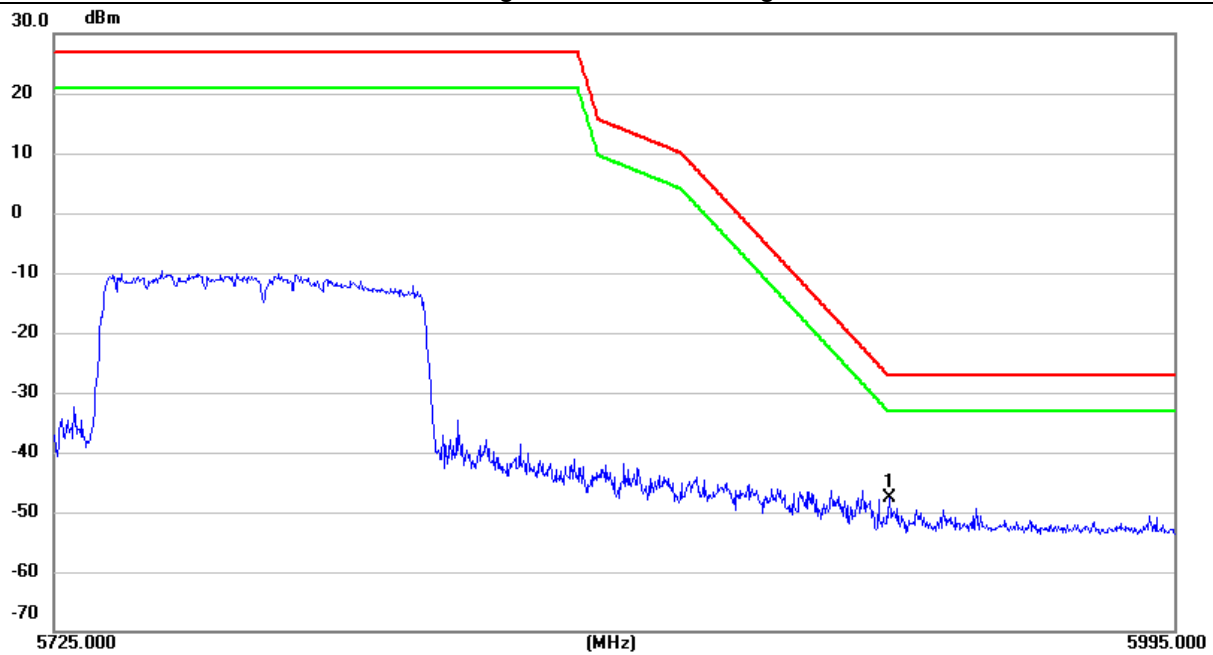

5.8G 802.11ax20 5745


Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
V	5590.525	-102.68	50.41	-52.27	-27.00	-25.27	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

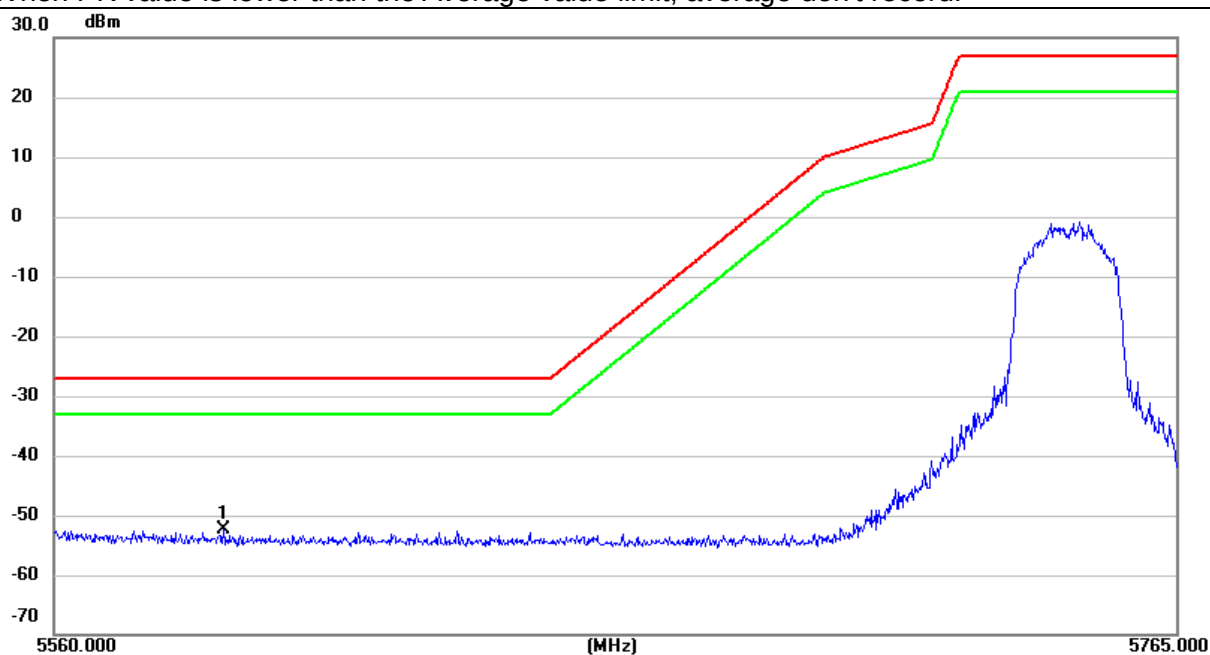


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
H	5590.545	-102.47	50.41	-52.06	-27.00	-25.06	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

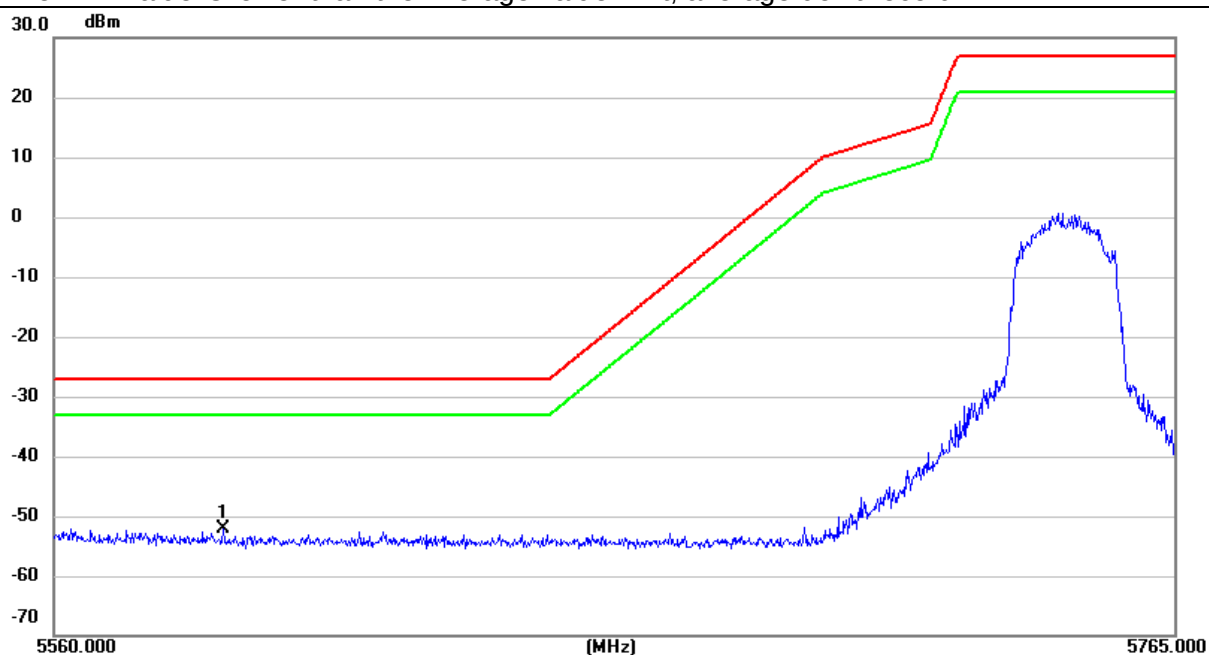

5.8G 802.11ax20 5825

Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
V	5967.621	-103.05	51.58	-51.47	-27.00	-24.47	peak


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 802.11ax20 5825MHz. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

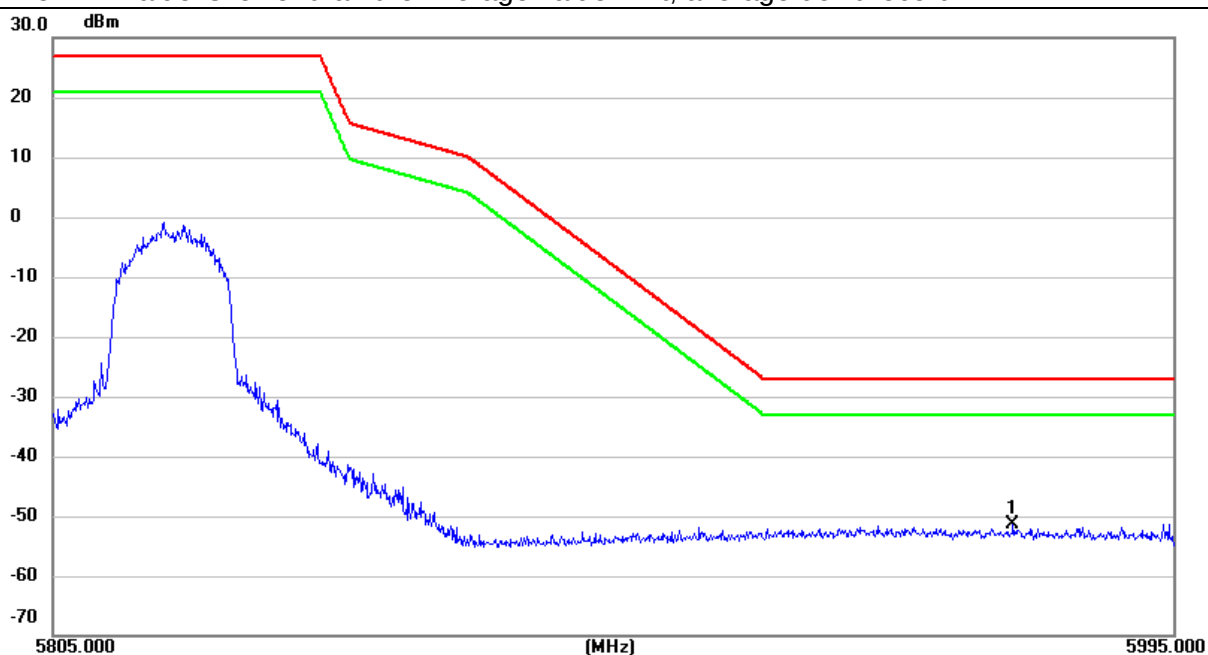


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
H	5944.061	-103.04	51.86	-51.18	-27.00	-24.18	peak

Remark:

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

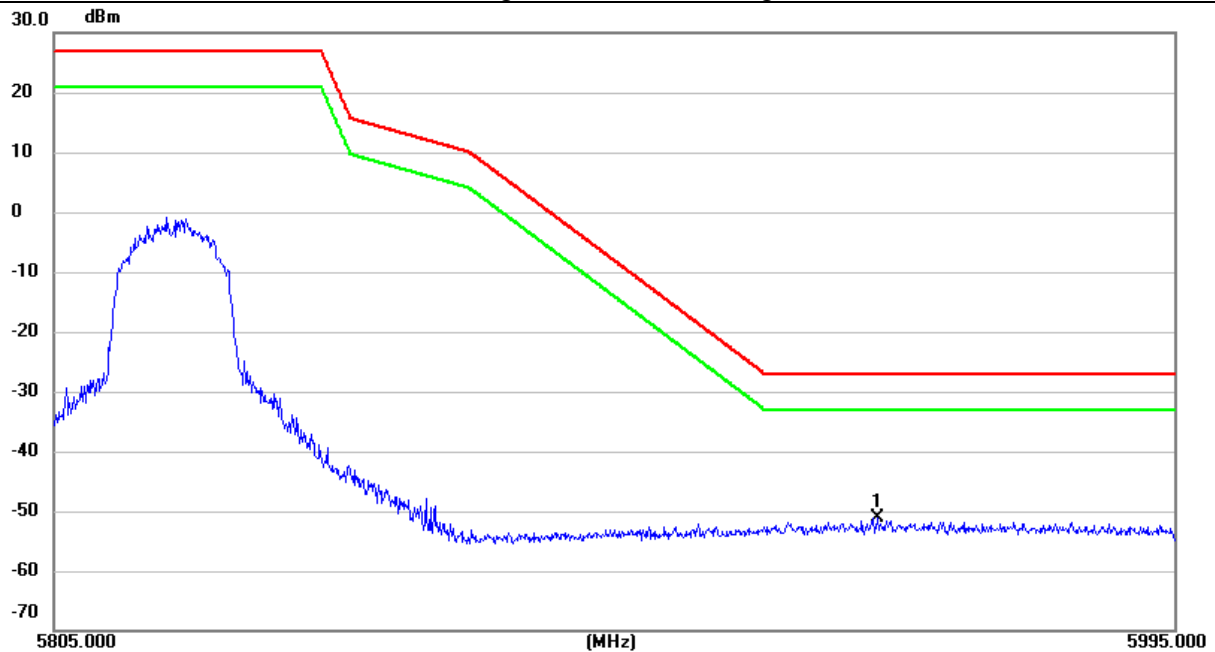

5.8G 802.11ax40 5775


Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
V	5626.488	-102.42	50.49	-51.93	-27.00	-24.93	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

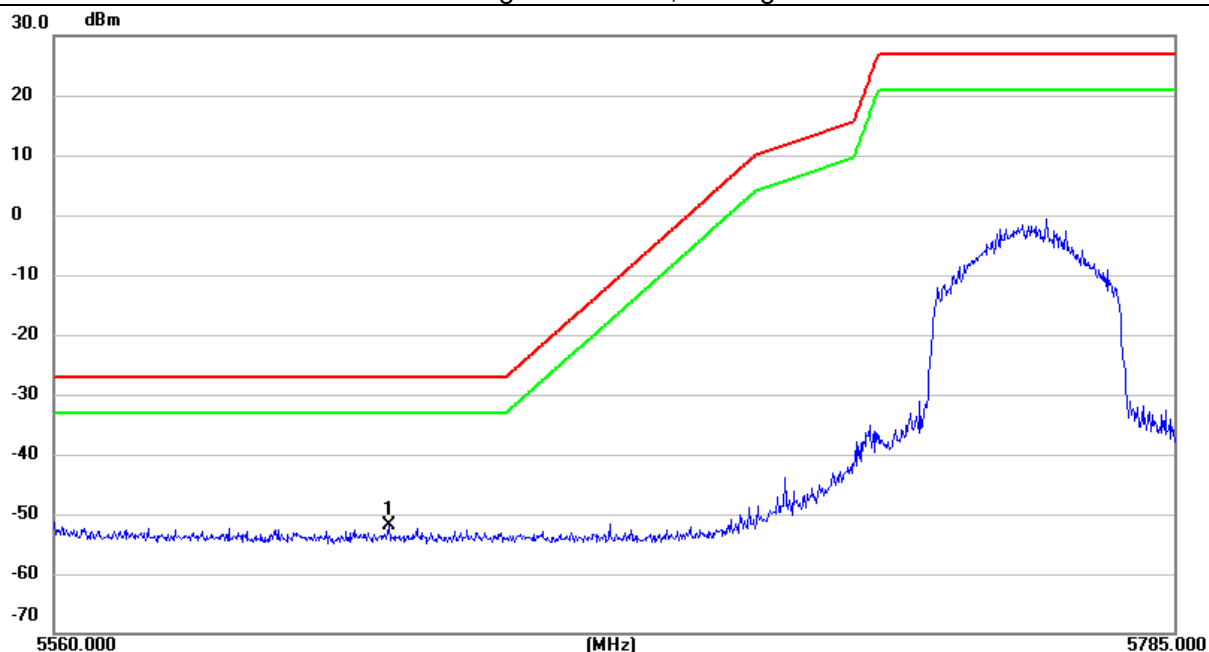


Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
H	5635.600	-103.00	50.52	-52.48	-27.00	-25.48	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

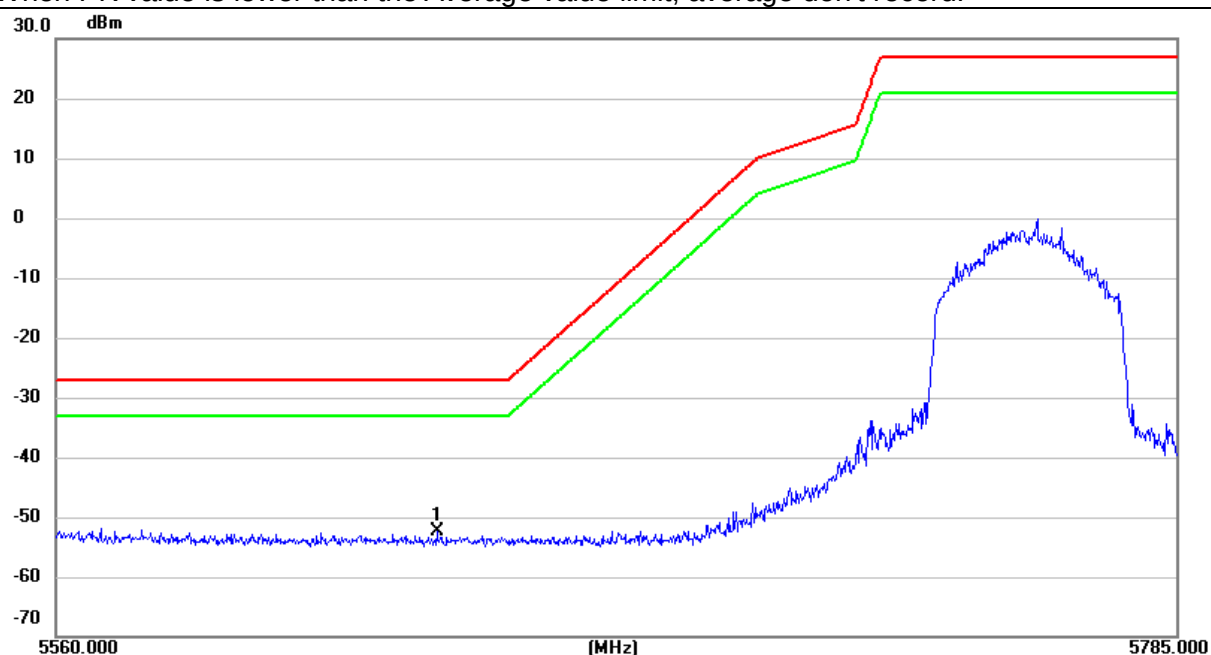

5.8G 802.11ax40 5795


Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
V	5960.958	-103.22	51.70	-51.52	-27.00	-24.52	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

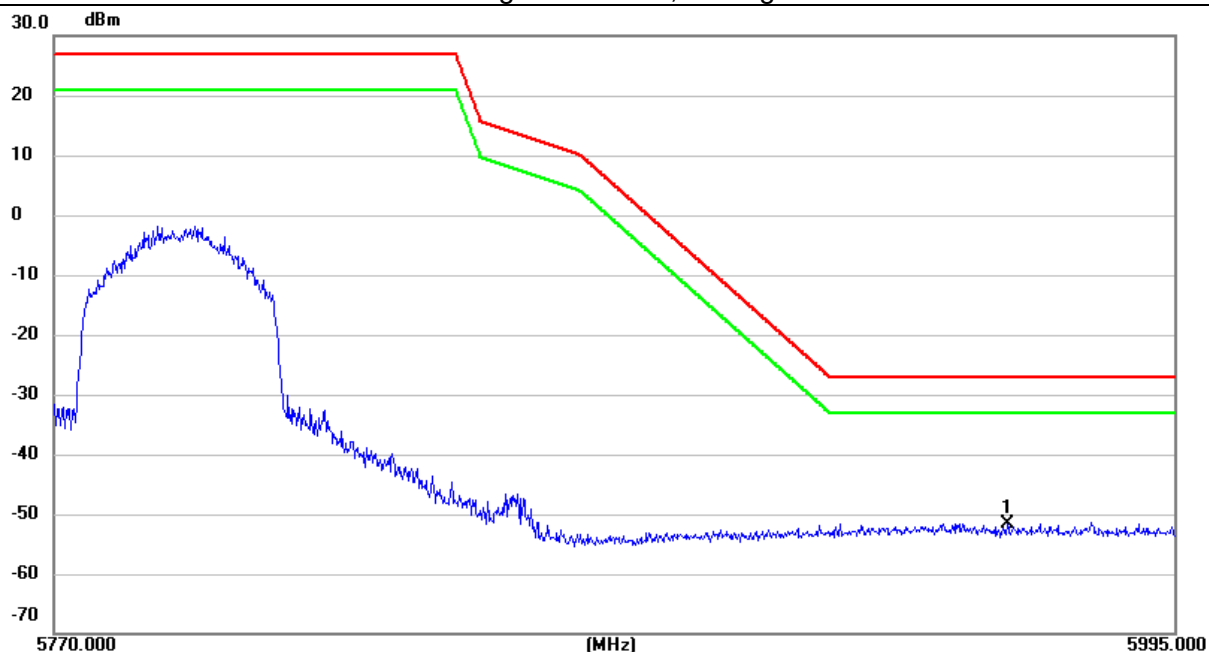


Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
H	5946.625	-102.95	51.89	-51.06	-27.00	-24.06	peak

Remark:

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

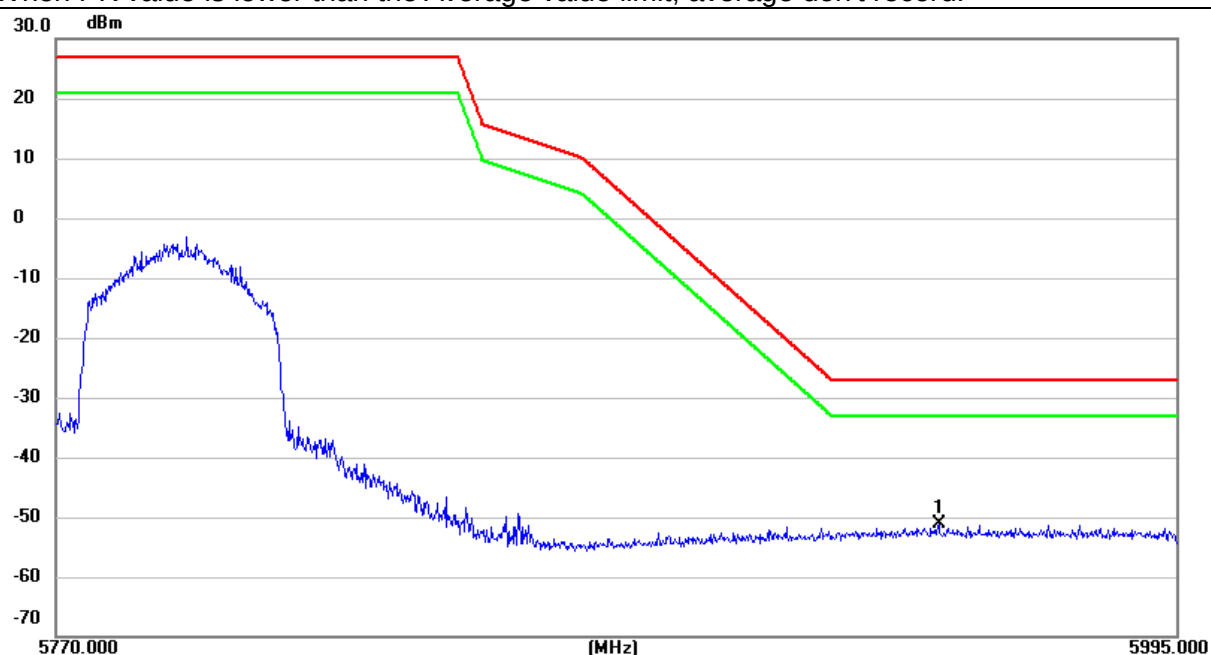

5.8G 802.11ax80 5775


Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
V	5645.966	-97.09	50.56	-46.53	-27.00	-19.53	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

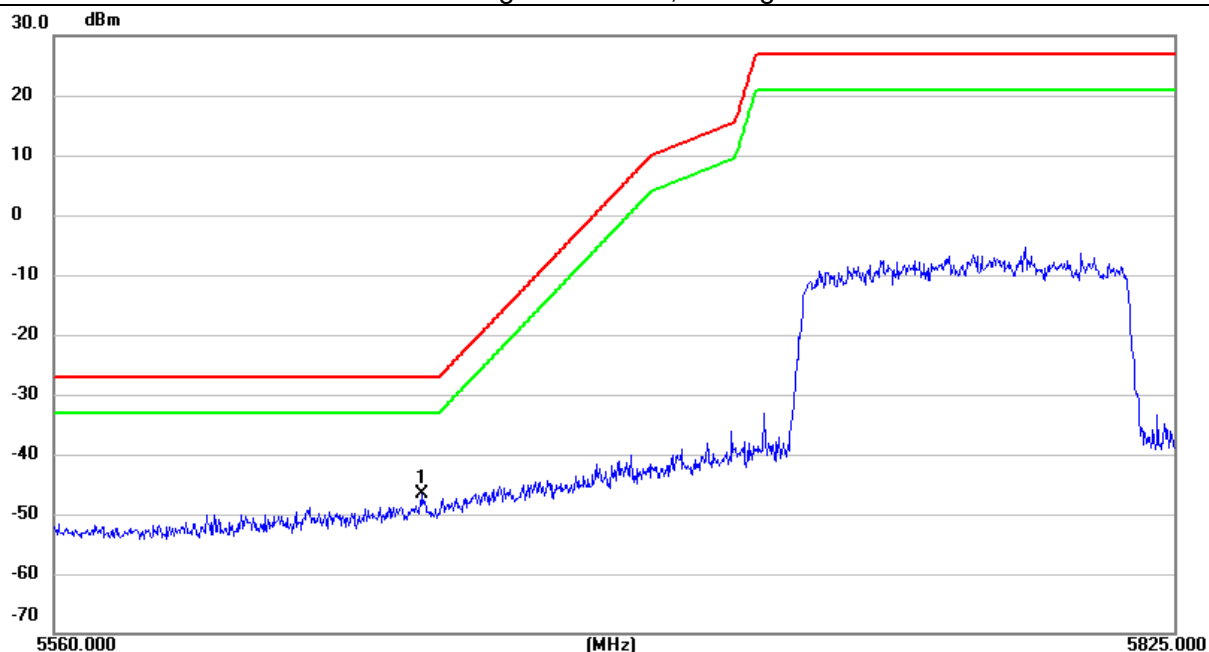


Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
H	5645.807	-97.32	50.56	-46.76	-27.00	-19.76	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna
Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not
recorded in the report.

When PK value is lower than the Average value limit, average don't record.

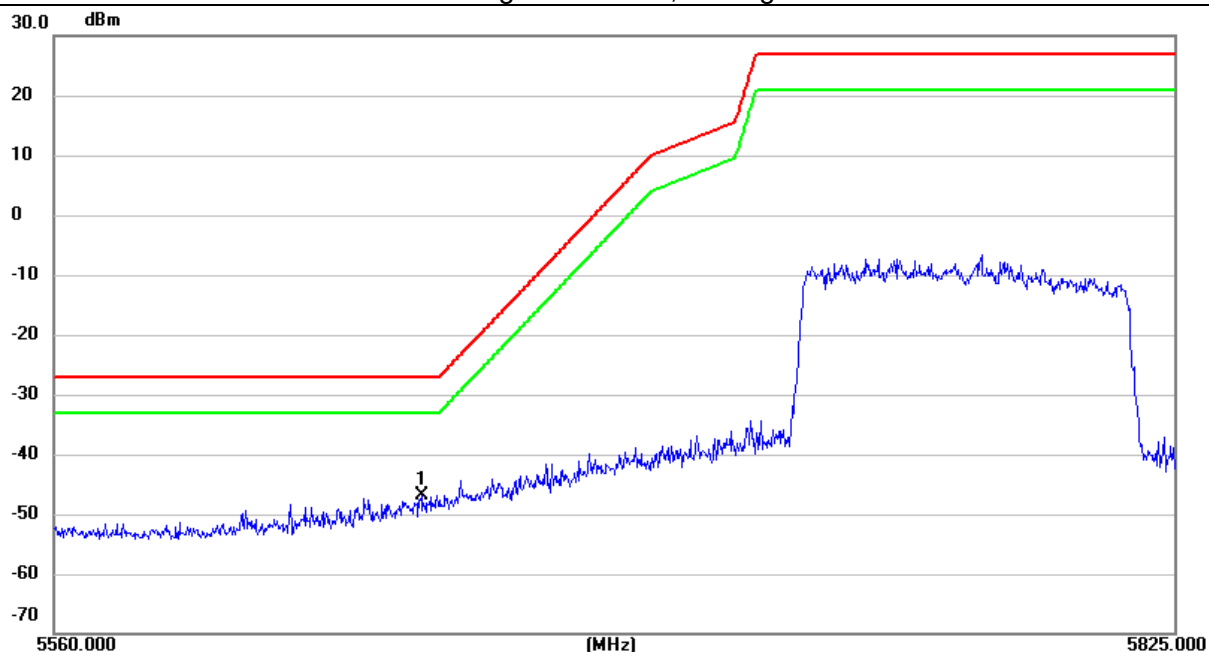

5.8G 802.11ax80 5775


Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
V	5934.196	-95.57	51.76	-43.81	-27.00	-16.81	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

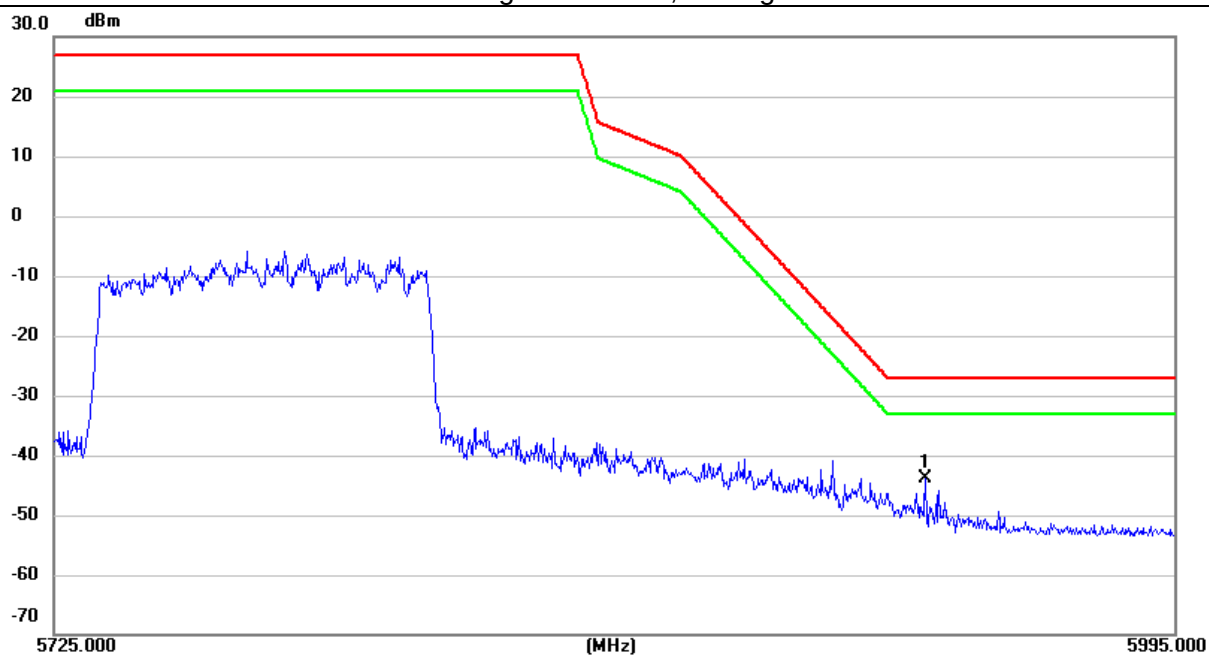


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
H	5928.580	-100.01	51.71	-48.30	-27.00	-21.30	peak

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

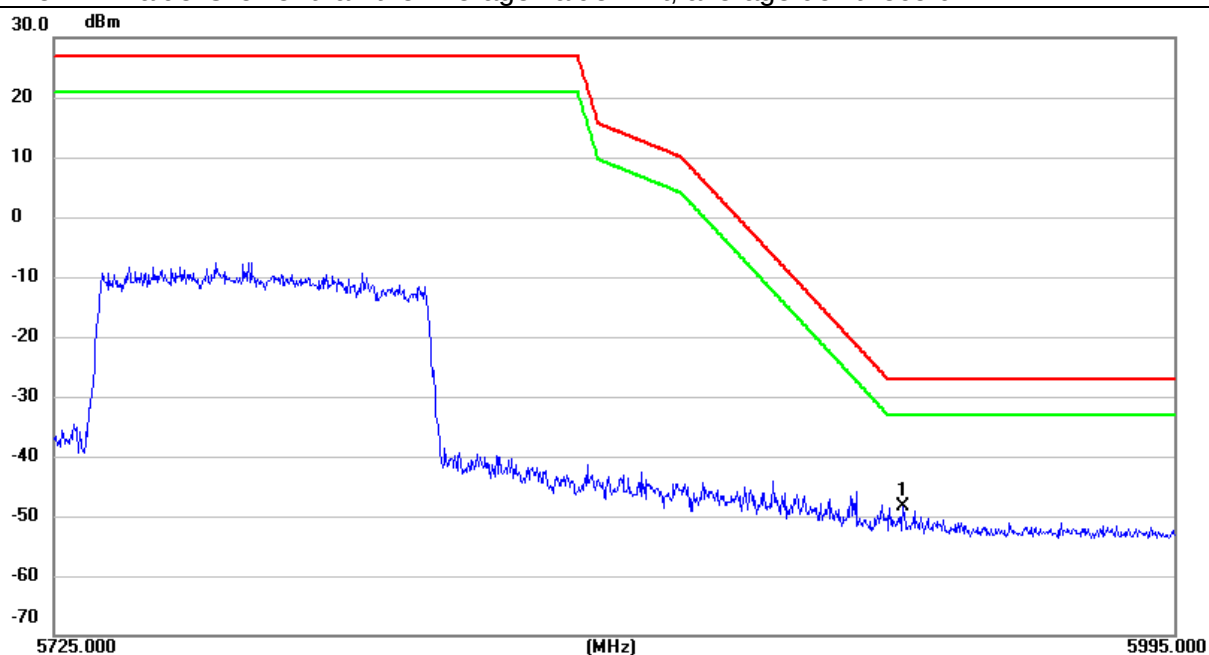

4 POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(a)

For the band 5.15-5.25 GHz,

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

- (3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:


- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3$ RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP

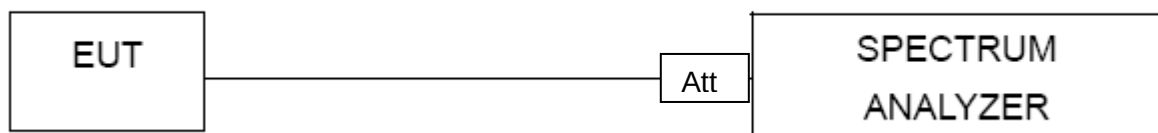

4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS

EUT :	PocketBook Q	Model Name :	PB5084
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1015 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C (5470-5725MHz), Band 3 (5745-5825MHz)		

Test data reference attachment.

5. 26DB & 99% EMISSION BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

5.2 TEST PROCEDURE

- a) Set RBW= shall be in the range of 1% to 5% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = peak.
- d) Trace mode = max-hold.
- e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

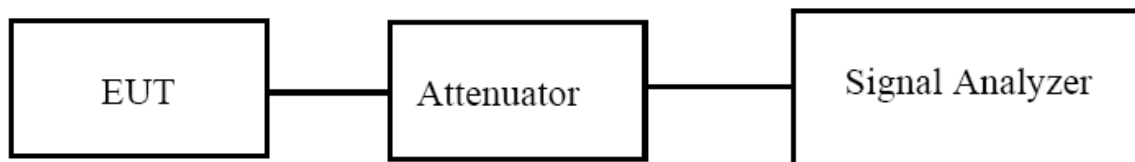

5.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.4 TEST RESULTS

EUT :	PocketBook Q	Model Name :	PB5084
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C(5470-5725MHz), Band 3(5725-5850MHz)		

Test data reference attachment.

6. MINIMUM 6 DB BANDWIDTH

6.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(e)

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

6.2 EST PROCEDURE


Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

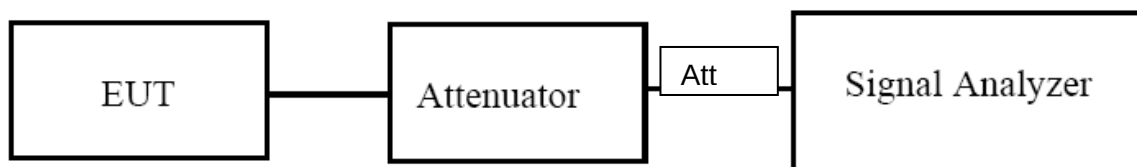

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULTS

EUT :	PocketBook Q	Model Name :	PB5084
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5G) Mode Frequency Band 3 (5725-5850MHz)		

Test data reference attachment.

7. MAXIMUM CONDUCTED OUTPUT POWER

7.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5250~5350	250 mW or 11 dBm + 10 log B Note: The limit is the smaller of the two, "B" represents -26dB bandwidth.
5470~5725	250 mW or 11 dBm + 10 log B Note: The limit is the smaller of the two, "B" represents -26dB bandwidth.
5725~5850	1W

7.2 TEST PROCEDURE


Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:

- a) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
 - 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
 - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
 - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- b) If the transmitter does not transmit continuously, measure the duty cycle D of the transmitter output signal as described in 12.2.
- c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- d) Correct the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle {e.g., $[10 \log (1 / 0.25)]$, if the duty cycle is 25%}.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

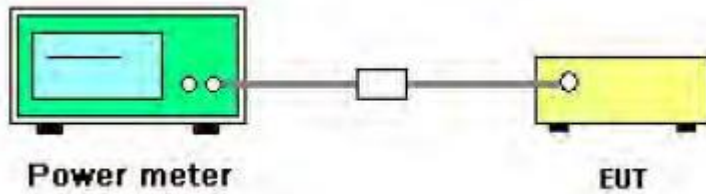

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS

EUT :	PocketBook Q	Model Name :	PB5084
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5G) Mode Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz) Band 2C, (5470-5725MHz), Band 3 (5725-5850MHz)		

Test data reference attachment.

8. OUT OF BAND EMISSIONS

8.1 APPLICABLE STANDARD

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(10) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.


8.2 TEST PROCEDURE

The testing per ANSI C63.10 Section 12.7.4.2

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP

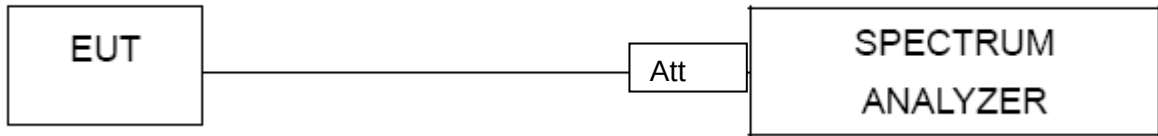

8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULTS

EUT :	PocketBook Q	Model Name :	PB5084
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5G) Mode Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz) Band 2C, (5470-5725MHz), Band 3 (5725-5850MHz)		

Test data reference attachment.

9. Frequency Stability Measurement


9.1 LIMIT

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

9.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm
- t6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is -20°C~70°C.

9.3 TEST SETUP LAYOUT

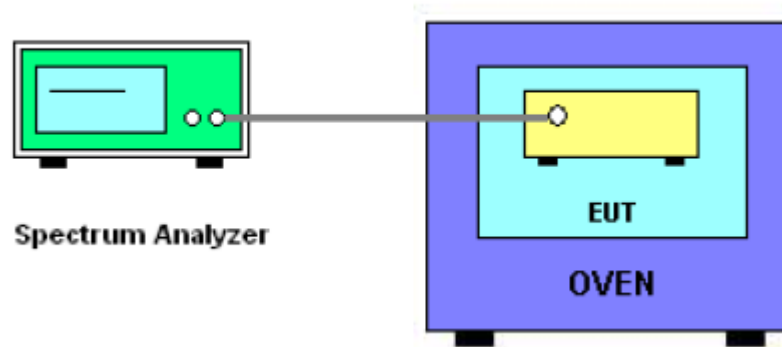

9.4 EUT OPERATION DURING TEST

1. The EUT was programmed to be in continuously un-modulation transmitting mode.

9.5 TEST RESULTS

EUT :	PocketBook Q	Model Name. :	PB5084
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5G) Mode Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz) Band 2C, (5470-5725MHz), Band 3 (5725-5850MHz)		

Test data reference attachment.

10. DYNAMIC FREQUENCY SELECTION(DFS)

10.1 APPLICABILITY OF DFS REQUIREMENTS

EUT is client and operates as client without radar detection function.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes
Client Beacon Test	N/A	Yes	Yes

Additional requirements for devices with multiple bandwidth modes	Operational Mode	
	Master or Client With Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

10.2 INTERFERENCE THRESHOLD VALUES, MASTER OR CLIENT INCORPORATING IN-SERVICE POCKETBOOK QING

Maximum Transmit Power	Value (see notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain.	

10.3 DFS RESPONSE REQUIREMENT VALUES

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the 99% power bandwidth See Note 3.

Note 1: The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate Channel changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

10.4 SHORT PULSE RADAR TEST WAVEFORMS

As the EUT is a Client Device with no Radar Detection, only one type radar pulse is required for the testing. Radar Pulse type 0 was used in the evaluation of the Client device for the purpose of measuring the Channel Move Time and the Channel Closing Transmission Time.

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	60%	30
1	1	Test A Test B	$\text{Roundup}\left(\frac{1}{360} \cdot \frac{19 \cdot 10^6}{\text{PRI}_{\text{min}}}\right)$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a

Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values selected in Test A

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.


If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

10.5 CALIBRATION SETUP AND DFS TEST RESULTS

Radar Waveform Calibration Procedure

- 1) A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to place of the master
- 2) The interference Radar Detection Threshold Level is $-62\text{dBm} + 3.69\text{dB} = -58.31\text{dBm}$ that had been taken into account the output power range and antenna gain.
- 3) The following equipment setup was used to calibrate the conducted radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the master or client device. The spectrum analyzer was switched to the zero spans (time domain) at the frequency of the radar waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz. The spectrum analyzer had offset -1.0dB to compensate RF cable loss 1.0dB.
- 4) The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was $-62\text{dBm} + 3.69\text{dB} + 1\text{dB} = -57.31\text{dBm}$. Capture the spectrum analyzer plots on short pulse radar waveform.

10.6 CONDUCTED CALIBRATION SETUP

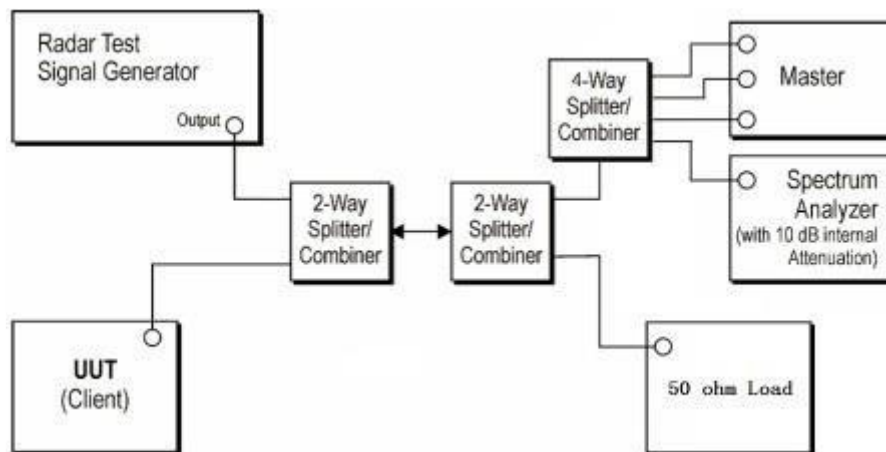

Wireless AP	Manufacturer	ASUSTek Computer Inc
	Model NO.	AX5400
	FCC ID	MSQ-RTAXJ300

Note:1. The Slave device associated with the EUT during these tests does not have radar detection capability.

2. WLAN traffic is generated by using the iperf software to send packets from the Master IP address to the Slave IP address.

3. The time required for the master and slave devices to fully start up is 120s.

4. EUT does not support TPC.


10.7 RADAR WAVEFORM CALIBRATION RESULT

Test data reference attachment.

10.8 IN-SERVICE POCKETBOOK QING: CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD

TEST CONFIGURATION:

Setup for Client with injection at the Master

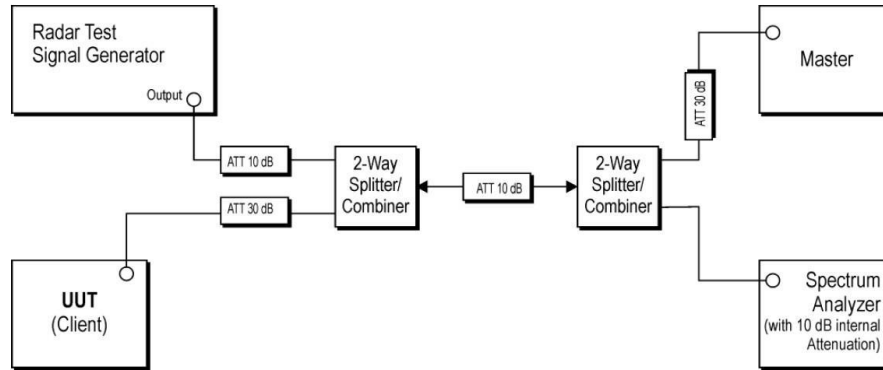

TEST PROCEDURE:

1. The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
2. The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device
3. A trigger is provided from the pulse generator to the DFS PocketBook Qing system in order to capture the traffic and the occurrence of the radar pulse.
4. EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is Streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
5. When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
6. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom In 600ms plot of the Short Pulse Radar Type
7. Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
8. Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

TEST MODE:

Mode	Frequency (MHz)
ax80	5290
ax80	5530
ac40	5310
ac40	5510
a	5320
a	5500

10.9 RESULT OF CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD FOR CLIENT BEACON TEST

Test data reference attachment.

11. ANTENNA REQUIREMENT

11.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

11.2 EUT ANTENNA

The EUT antenna is FPC Antenna. It comply with the standard requirement.

END OF REPORT