

Test report no.: Prüfbericht-Nr.:	CN2411OF 003	Order No.: Auftragsnr.:	168478642	Page 1 of 23 Seite 1 von 23
Client reference no.: Kunden-Referenz-Nr.:	N/A	Order date: Auftragsdatum:	2024-04-29	
Client: Auftraggeber:	Geomax AG Espenstrasse 135, 9443 Widnau Switzerland			
Test item: Prüfgegenstand:	Total Stations			
Identification / Type no.: Bezeichnung / Typ-Nr.:	Zoom45 2" N5, Zoom45 3" N5, Zoom45 5" N5			
Order content: Auftrags-Inhalt:	Test Report			
Test specification Prüfgrundlage:	CFR47 FCC Part 15: Subpart C Section 15.247			
Date of sample receipt: Wareneingangsdatum:	2024-05-07	Please refer to Photo Document		
Test sample no.: Prüfmuster-Nr.:	A003706405-001~003			
Testing period: Prüfzeitraum:	2024-05-20 - 2024-06-15			
Place of testing: Ort der Prüfung:	Refer to section 2.1			
Testing laboratory: Prüflaboratorium:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Test result*: Prüfergebnis*:	Pass			
tested by: geprüft von:			authorized by: genehmigt von:	
Date: 2024-09-09 Datum:	Signed by: Bell Hu		Issue date: 2024-09-09 Ausstellungsdatum:	Signed by: Lin Lin
Position / Stellung:	Expert/Sachverständige(r)		Position / Stellung:	Expert/Sachverständige(r)
Other: Sonstiges:	FCC ID: 2AUW9-ZOOM45 This report is for 5GHz Wi-Fi only.			
Condition of the test item at delivery: Zustand des Prüfgegenstandes bei Anlieferung:	Test item complete and undamaged Prüfmuster vollständig und unbeschädigt			
* Legend:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark. Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.				

V05

Test report no.: CN2411OF 003
Prüfbericht-Nr.:

Page 2 of 23
Seite 2 von 23

Remarks
Anmerkungen

- | | |
|----------|--|
| 1 | <p>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</p> <p><i>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.</i></p> <p><i>Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</i></p> |
| 2 | <p>As contractually agreed, this document has been signed digitally only. TÜV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TÜV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged.</p> <p><i>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben.</i></p> |
| 3 | <p>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report. Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</p> <p><i>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</i></p> |
| 4 | <p>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</p> <p><i>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</i></p> |

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.3 CONDUCTED POWER SPECTRAL DENSITY

RESULT: Pass

5.1.4 FREQUENCY STABILITY

RESULT: Pass

5.1.5 26dB BANDWIDTH AND 99% BANDWIDTH

RESULT: Pass

5.1.6 RADIATED SPURIOUS EMISSION

RESULT: Pass

5.1.7 DYNAMIC FREQUENCY SELECTION (DFS)

RESULT: Pass

5.1.8 AC CONDUCTED EMISSION

RESULT: N/A

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS.....	5
2	TEST SITES.....	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
2.3	TRACEABILITY	7
2.4	CALIBRATION.....	7
2.5	MEASUREMENT UNCERTAINTY	7
2.6	LOCATION OF ORIGINAL DATA	7
2.7	STATUS OF FACILITY USED FOR TESTING	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE	8
3.2	RATINGS AND SYSTEM DETAILS.....	8
3.3	INDEPENDENT OPERATION MODES.....	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	9
3.5	SUBMITTED DOCUMENTS.....	9
4	TEST SET-UP AND OPERATION MODES.....	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	12
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	12
4.5	TEST SETUP DIAGRAM	13
5	TEST RESULTS	15
5.1	TRANSMITTER REQUIREMENT & TEST SUITES.....	15
5.1.1	<i>Antenna Requirement.....</i>	<i>15</i>
5.1.2	<i>Maximum Conducted Output Power.....</i>	<i>16</i>
5.1.3	<i>Conducted Power Spectral Density.....</i>	<i>17</i>
5.1.4	<i>Frequency Stability.....</i>	<i>18</i>
5.1.5	<i>26dB Bandwidth and 99% Bandwidth</i>	<i>19</i>
5.1.6	<i>Radiated Spurious Emission</i>	<i>20</i>
5.1.7	<i>Dynamic Frequency Selection (DFS)</i>	<i>21</i>
5.1.8	<i>AC Conducted Emission.....</i>	<i>22</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	23
7	LIST OF TABLES.....	23

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

Appendix B: Test Results of 5GHz Wi-Fi

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China

FCC Accreditation Designation No.: 694916

ISED wireless device testing laboratory: 25069

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (TS8997-R&S)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
Wireless Connectivity Tester	R&S	CMW270	101375	25.07.2024
Signal Analyzer	R&S	FSV 40	101441	25.07.2024
Vector Signal Generator	R&S	SMBV100A	263301	25.07.2024
Signal Generator	R&S	SMB100A	115186	25.07.2024
OSP	R&S	OSP 150	101017	13.11.2024
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A
Power Meter	R&S	NRP2	107105	13.11.2024
Power Sensor	R&S	NRP-Z81	105677	25.07.2024
Humid & Temp Programmable Tester	BOST	NTH090-60	19040801	15.03.2024
Shielding Room 8#	Albatross	SR8	APC17151-SR8	22.06.2024
Unwanted Emission Testing (TS9975)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	25.07.2024
Signal Analyzer	R&S	FSV 40	101439	25.07.2024
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	25.07.2024
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	25.07.2024
Amplifier	R&S	SCU-18F	180070	25.07.2024
Amplifier	R&S	SCU40A	100475	25.07.2024
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	06.08.2024
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	06.08.2024
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	27.08.2024
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	06.08.2024
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	22.06.2024

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF Power (conducted)	± 2.5 dB
Radiated Emission of Transmitter, valid up to 26.5 GHz	± 6 dB
Radiated Emission of Receiver, valid up to 26.5 GHz	± 6 dB
Temperature	± 1 °C
Humidity	± 5 %
Voltage (DC)	± 1 %
Voltage (AC, <10kHz)	± 2 %

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. File for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The product is laser rangefinder which supports Bluetooth and Wi-Fi wireless technology.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	Total Stations
Type Designation:	Zoom45 2" N5, Zoom45 3" N5, Zoom45 5" N5 (They are electrically identical, the only difference among them is the measurement accuracy for market purpose. The product accuracy is customized by the production program during production, which has no impacts on EMC and RF characteristics.)
Trademark:	Geomax
Operating Voltage:	DC 7.2V by Li-ion battery
Operating Temperature Range:	-20 °C ~ 50 °C
FCC ID:	2AUW9-ZOOM45
Technical Specification of Bluetooth	
Operating Frequency:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Channel Number:	BDR/EDR:79 channels; BLE:40 Channels
Channel Separation:	BDR/EDR: 1MHz; BLE: 2MHz
Antenna Type:	Integral Antenna
Antenna Gain:	Max gain 3.64dBi
Technical Specification of Wi-Fi 802.11 b/g/n	
Operating Frequency:	2412 - 2462 MHz for 802.11b/g/n(HT20) 2422 - 2452 MHz for 802.11n(HT40)
Type of Modulation:	DSSS(DBPSK/DQPSK/CCK) OFDM(BPSK/QPSK/16QAM/64QAM)
Data Rate:	1/2/5.5/11 Mbps for 802.11b 6/9/12/18/24/36/48/54 Mbps for 802.11g MCS0 ~ MCS7 for 802.11n
Channel Number:	11 channels for 802.11b/g/n(HT20) 7 channels for 802.11n(HT40)
Channel Separation:	5 MHz
Antenna Type:	Integral Antenna
Antenna Gain:	Max gain 3.64dBi
Technical Specification of Wi-Fi 802.11 a/n/ac	
Operating Frequency:	5180-5320MHz, 5500-5720MHz, 5745-5825MHz

Type of Modulation:	OFDM(BPSK/QPSK/16QAM/64QAM/256QAM)
Operating Modes:	802.11 a/n20/n40/ac20/ac40/ac80
Channel Separation	5 MHz
Antenna Type:	Integral Antenna
Antenna Gain:	Max gain 4.02dBi

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wi-Fi 802.11 a/n/ac wireless transmitting mode
 - 1. Low channel
 - 2. Middle channel
 - 3. High channel
- B. On, Wi-Fi 802.11 a/n/ac connecting mode
- C. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Application Form
- User Manual
- Block Diagram
- Operation Description

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, all tests were performed on model Zoom45 2" N5 in this report.

Table 3: Test environments

Environment Parameter	Selected Values During Tests		
	Temperature	Voltage	Relative Humidity
NTNV	24.6°C	Normal	Ambient

Table 4: Test channel and frequency

U-NII-1					
20MHz Bandwidth		40MHz Bandwidth		80MHz Bandwidth	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

U-NII-2A					
20MHz Bandwidth		40MHz Bandwidth		80MHz Bandwidth	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

U-NII-2C					
20MHz Bandwidth		40MHz Bandwidth		80MHz Bandwidth	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590	138	5690
112	5560	126	5630		
116	5580	134	5670		
120	5600	142	5710		
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				
144	5720				

U-NII-3					
20MHz Bandwidth		40MHz Bandwidth		80MHz Bandwidth	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

4.3 Special Accessories and Auxiliary Equipment

Table 5: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Laptop	Lenovo	T480	PF-16A6N8	N/A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

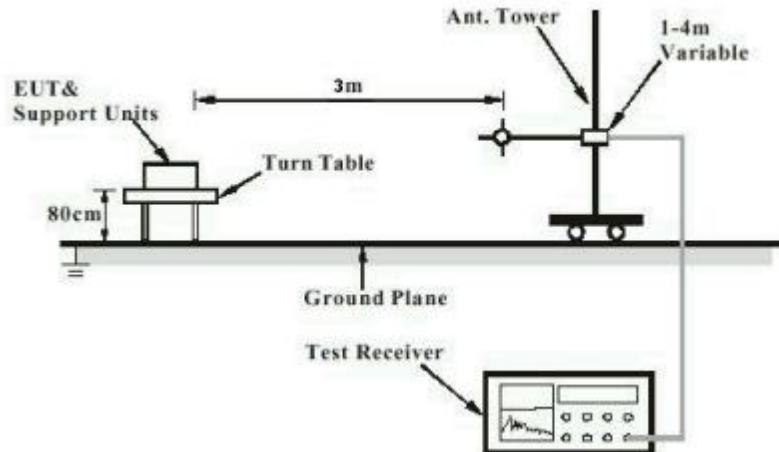


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

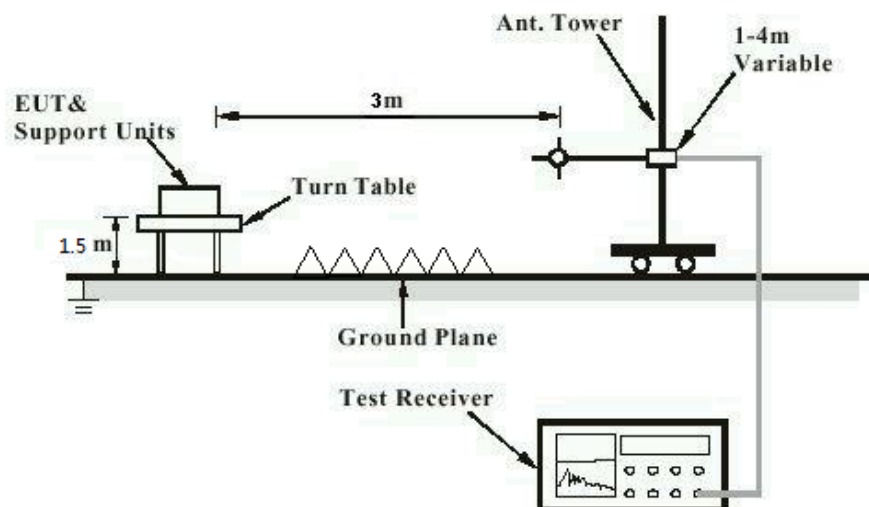


Diagram of Measurement Configuration for Conducted Transmitter Measurement


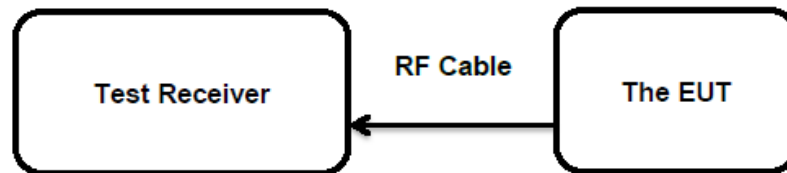


Diagram of Measurement Configuration for Dynamic Frequency Selection (DFS)

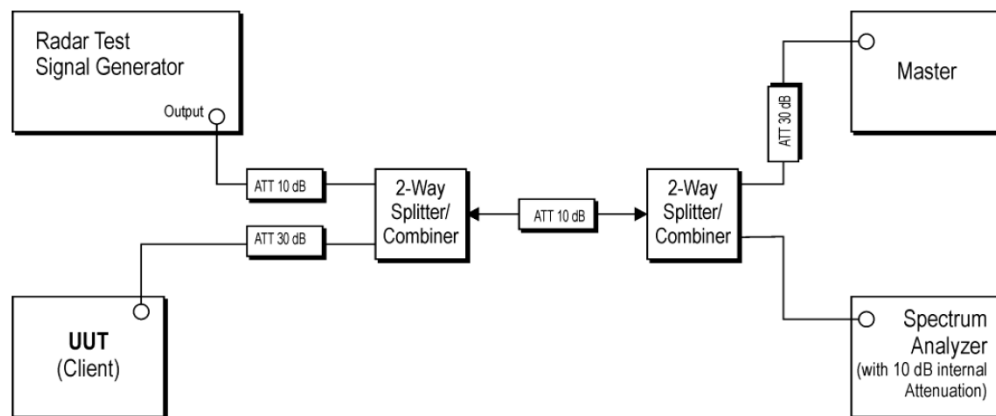

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Pass****Test Specification**

Test standard : FCC Part 15.247(b)(4) and Part 15.203
RSS-Gen Clause 6.8

The EUT has an integral antenna with a unique connector, which is designed with permanent attachment and no consideration of replacement. The maximum antenna gain is 4.02 dBi.

Therefore, the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

5.1.2 Maximum Conducted Output Power

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.407(a)(1)&(2)&(4) RSS-247 clause 6.2
Basic standard	: ANSI C63.10: 2013
Limits	: FCC: Conducted output power 250mW (24dBm) (5150-5250MHz) Conducted output power 250 mW (24dBm) or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz, where is lesser.(5250-5350MHz, 5470-5725MHz) IC: *e.i.r.p.200 mW (23dBm) or 10 dBm + 10 logB, where B is the 99% emission bandwidth in MHz, where is lesser. (5150-5250MHz) * Conducted output power 250 mW (24dBm) or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz, where is lesser. The maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log10B, dBm, whichever is less. (5250-5350MHz, 5470-5600MHz and 5650-5725MHz)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2024-06-01 to 2024-06-03
Input voltage	: DC 7.2V
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.6 °C
Relative humidity	: 55 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

5.1.3 Conducted Power Spectral Density

RESULT:**Pass****Test Specification**

Test standard	: FCC part 15.407(a) RSS-247 clause 6.2
Basic standard	: ANSI C63.10: 2013 KDB 789033 D02 v01r03
Limits	: FCC: The maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.(5150-5250MHz,5250-5350MHz, 5470-5725MHz) IC: The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band. (5150-5250MHz) The power spectral density shall not exceed 11 dBm in any 1.0 MHz band. (5250-5350MHz, 5470-5600MHz and 5650-5725MHz)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2024-06-01 to 2024-06-03
Input voltage	: DC 7.2V
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.6 °C
Relative humidity	: 55 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

5.1.4 Frequency Stability

RESULT:**Pass****Test Specification**

Test standard : FCC Part 15.407(g)
RSS-Gen Clause 6.11
Basic standard : ANSI C63.10: 2013
Limits : Within assigned bands
Kind of test site : Shielded Room

Test Setup

Date of testing : 2024-06-01 to 2024-06-03
Input voltage : DC 7.2V
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 24.6 °C
Relative humidity : 55 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: CN2411OF 003
Test Report No.:

Seite 19 von 23
Page 19 of 23

5.1.5 26dB Bandwidth and 99% Bandwidth

RESULT:

Pass

Test Specification

Test standard	:	FCC Part 15.407(e) RSS-Gen Clause 6.6
Basic standard	:	ANSI C63.10: 2013
Limits	:	N/A
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2024-06-01 to 2024-06-03
Input voltage	:	DC 7.2V
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	24.6 °C
Relative humidity	:	55 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix B.

5.1.6 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.407(b) & FCC Part 15.205 & FCC Part 15.209 RSS-247 clause 6.2 & RSS-GEN clause 8.9 and 8.10
Basic standard	: ANSI C63.10: 2013 KDB 789033 D02 v01r03
Limits	: • For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. • For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. • For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. Emissions outside the band 5470-5600 MHz and 5650-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p. • For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. Restricted Bands meet the requirement of 15.209 limit and RSS-GEN
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2024-06-01 to 2024-06-07
Input voltage	: DC 7.2V
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix B.

5.1.7 Dynamic Frequency Selection (DFS)

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.407(h) RSS-247 clause 6.3
Basic standard	: ANSI C63.10: 2013
Limits	: 5250-5350MHz, 5470-5725MHz Channel Move Time: Within 10 seconds. Channel Closing Transmission Time: 200ms+aggregate of 60ms over remaining 10s period; Non-Occupancy Period: at least 30 minutes.
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2024-06-01 to 2024-06-03
Input voltage	: DC 7.2V
Operation mode	: B
Test channel	: CH 58, CH 106
Ambient temperature	: 24.6 °C
Relative humidity	: 55 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

5.1.8 AC Conducted Emission

RESULT:

N/A

Test Specification

Test standard	:	FCC Part 15.207(a)
	:	RSS-GEN clause 8.8
Basic standard	:	ANSI C63.10: 2013
Frequency range	:	0.15 – 30MHz
Limits	:	FCC Part 15.207(a)
Kind of test site	:	Shielded Room

Battery powered only.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Technical Specification of EUT.....	8
Table 3: Test environments	10
Table 4: Test channel and frequency	10
Table 5: List of Accessories and Auxiliary Equipment.....	12