

Product Specification

Product Name: Smart Gateway
Model Name: DSGW-021

Revision History

Specification		Sect.	Update Description	By
Rev	Date			
1.0	2020-08-07		New version release	

Approvals

Organization	Name	Title	Date



Model List

Mode feature	Wi-Fi 2.4G/5G	LTE cat4	BLE
DSGW-021	●	●	●

Contents

1. Introduction.....	4
1.1 Purpose& Description.....	4
1.2 Product Feature Summary.....	4
1.3 Hardware block diagram.....	5
2. Mechanical Requirement	5
2.1 Drawings	5
3 .Electrical Requirements.....	6
3.1 Hardware Information.....	6
3.2Performance Requirement.....	7
3.3 Software feature.....	9
3.4 Other	9
4. QA Requirements	10
4.1 Quality Information.....	10
5. Application	10
6.Packing list.....	10
7.Web management.....	10
7.1Login	10
7.2 Modify the password.....	11
7.3Router Status	12
7.4 Internet Setting.....	12
7.5 Wi-Fi setting	13
7.6 LAN setting	13
7.7 Security Policy	14
7.7.1 MAC filter	14
7.7.2Domain Name filter	14
7.8 DMZ.....	15
7.9 Advanced Setting.....	15
7.10Factory Setting.....	16

1. Introduction


1.1 Purpose& Description

DSGW-021 wireless router complies with the latest IEEE 802.11ac Wi-Fi standard and LTE 4G function. It offers continual high-speed data transmission for multiple devices at the same time. Built-in 600MHz processor provides powerful data handling capacity to improve wireless transfer efficiency. Meanwhile, simultaneous dual band with middle power design on both bands makes wireless connection more flexible and stable, especially over long distance. Generally, DSGW-021 is designed for medium-size homes with increasing demand for high-speed Wi-Fi. It also supports Bluetooth, can connect to the BLE devices.

1.2 Product Feature Summary

- Cutting-edge 4G network – share internet access with up to 64 Wi-Fi devices and enjoy download speeds of up to 150 Mbps
- AC1200 Wi-Fi – creates simultaneous dual band Wi-Fi networks, with maximum speeds of up to 300 Mbps on the 2.4 GHz band and 867 Mbps on the 5 GHz band
- Plug a SIM card and play – no configurations needed, compatibility for SIM cards in 100+ countries are assured by years of field tests
- Two detachable advanced LTE antennas – enjoy stable and efficient connections to every device thanks to the two external antennas
- Wi-Fi router mode – plug an Ethernet cable into the LAN/WAN port for flexible access as a backup option if you can't get a 4G connection
- Support IoT wireless protocol: BLE5.2.
- Backup Li battery, lasts 12 hours

1.3 Hardware block diagram

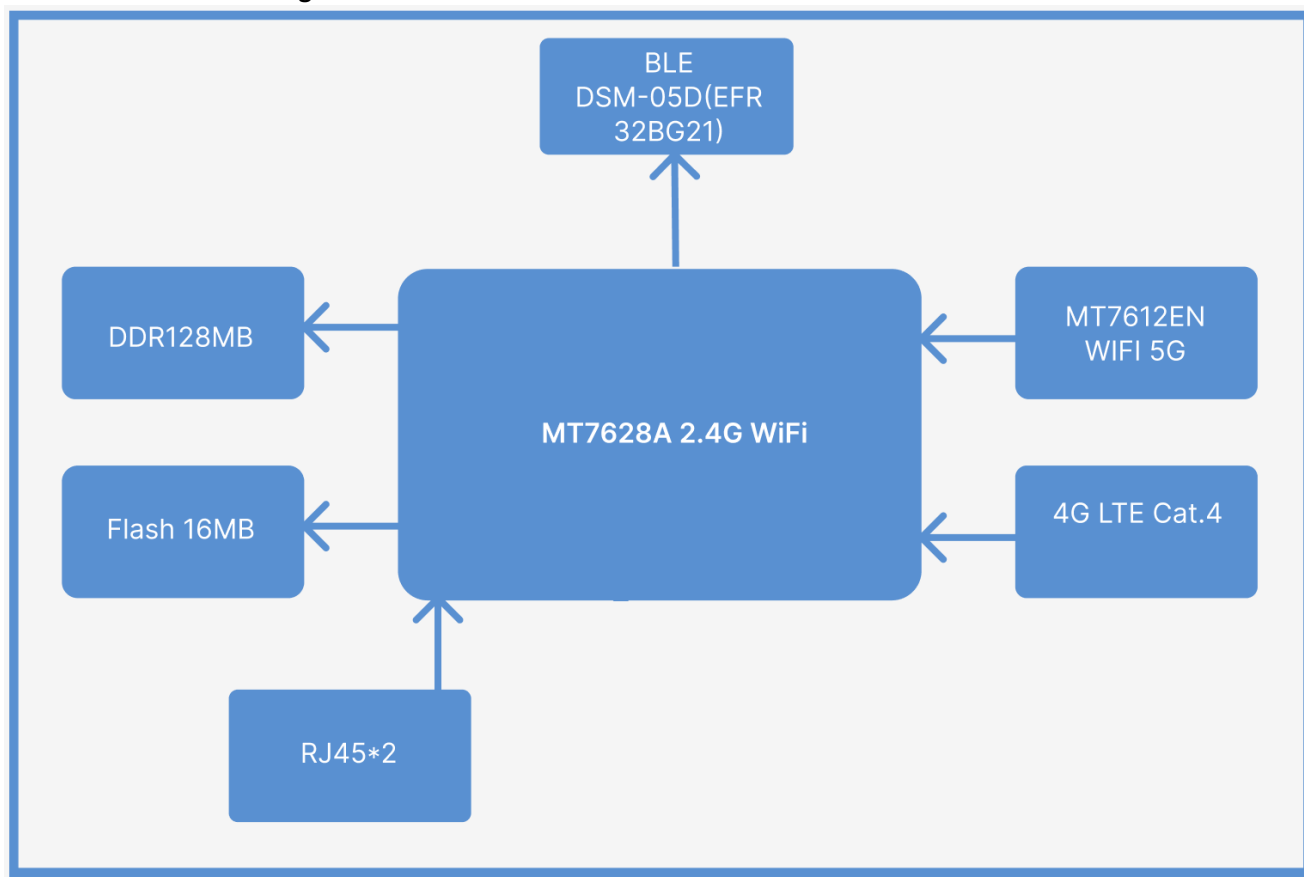

2. Mechanical Requirement

2.1 Drawings



3 .Electrical Requirements

3.1 Hardware Information

Category	Specifications
CPU	MT7628AN 600MHz processor
RAM	128MB
Flash	16MB
Power Supply Port	Support DC Input , input Voltage range is 4.5V to 5V. Power seat aperture is 3.5mm. The needle diameter is1.35 mm and is positive. Power adapter: 100-240V 50/60HZ, Output is 5V/2A
Reset button	After pressing the reset button for more than 5 seconds, the Wi-Fi unit will be restored to the factory settings.
Network Interface	1 10/100Mbps LAN Ports, 1 10/100Mbps LAN/WAN Port, 1 Micro SIM Card Slot
Indicator LEDs	1) .Power LED normally on when powered on 2) .Network LED normally on when connected 3) .Wi-Fi LED normally on after connecting to Wi-Fi for 1-2 sec
Antenna	Internal 4G LTE Antenna , 2 * 2.4G FPC antenna , 2 * 5 G FPC antenna
Operating Temperature	-0°C~40°C
Storage Temperature	-40°C~65°C
Currents	350mA@5V

3.2 Performance Requirement

Wi-Fi-Performance	● IEEE wireless LAN standard: IEEE802.11ac, IEEE802.11n; IEEE802.11g; IEEE 802.11b ● Data Rate: IEEE 802.11b Standard Mode: 1, 2, 5.5, 11 Mbps IEEE 802.11g Standard Mode: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE 802.11n: MCS0~MCS7 @ HT20/ 2.4GHz band MCS0~MCS7 @ HT40/ 2.4GHz band MCS0~MCS9 @ HT40/ 5GHz band IEEE 802.11ac: MCS0~MCS9 @ VHT80/ 5GHz band ● Sensitivity: VHT80 MCS9 : -60dBm@10% PER(MCS9) /5GHz band HT40 MCS9 : -63dBm@10% PER(MCS9) /5GHz band HT40 MCS7 : -70dBm@10% PER(MCS7) /2.4GHz band HT20 MCS7 : -71dBm@10% PER(MCS7) /2.4GHz band ● Transmit Power: IEEE 802.11ac: 13dBm @HT80 MCS9 /5GHz band IEEE 802.11ac: 16dBm @HT80 MCS0 /5GHz band IEEE 802.11n: 14dBm @HT20/40 MCS7 /5GHz band IEEE 802.11n: 16dBm @HT20/40 MCS0 /5GHz band IEEE 802.11n: 16dBm @HT20/40 MCS7 /2.4GHz band IEEE 802.11g: 16dBm @54MHz IEEE 802.11b: 18dBm @11MHz ● Wireless Security: WPA/WPA2, WEP, TKIP, and AES ● Working mode : Bridge、Gateway、AP Client
Cellular network	● LTE-FDD: B1/B2/B3/B4/B5/B7/B8/B12/B13/B18/B19/B20/B25/B26/B28 ● LTE-TDD: B38/B39/B40/B41 ● WCDMA: B1/B2/B4/B5/B6/B8/B19; ● GSM: B2/B3/B5/B8

Bluetooth (EFR32BG21)	● TX Power: 19.5dBm ● Range: 150 meters minimum, open filed ● Receiving Sensibility: -90dBm@0.1%BER ● Frequency offset: +/-20KHZ ● Frequency Range (MHz):2401.0~2483.5 ● Low Frequency (MHz):2400 ● High Frequency (MHz):2483.5 ● E.i.r.p (Equivalent Isotopically Radiated power)(mW)<10mW ● Bandwidth (MHz):2MHz ● Modulation: GFSK
Data rate	● Max. 150Mbps downlink / 50Mbps uplink under LTE

3.3 Software feature

Quality of Service	Prioritizes network traffic by device or application
Operating Modes	3G/4G Router, Wireless Router
WAN Type	Dynamic IP/Static IP/PPPoE/PPTP(Dual Access)/L2TP(Dual Access)
Management	Access Control, Local Management, Remote Management (TR069) reboot schedule
DHCP	Server, Client, DHCP Client List, Address Reservation
Port Forwarding	Virtual Server, Port Triggering, UPnP, DMZ
Dynamic DNS	DynDns, NO-IP
VPN	PPTP VPN, IPSec VPN , OpenVPN
Access Control	Parental Control, Local Management Control
Firewall Security	DoS, SPI Firewall, IP Address Filter/Domain Filter, IP and MAC Address Binding
Protocols	Supports IPv4 and IPv6
Guest Network	2.4GHz guest network x 1, 5GHz guest network x 1
IPSec VPN	Supports up to 10 IPSec VPN tunnels

3.4 Other

Certification	CE, FCC, RoHS
Environment	Operating Temperature: 0°C~40°C (32°F ~104°F) Storage Temperature: -40°C~70°C (-40°F ~158°F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing

4. QA Requirements

4.1 Quality Information

Quality &Testing Information	
Information Description	Standard(Yes) custom(No)
ESD Testing	Yes
RF Antenna Analysis	Yes
Environmental Testing	Yes
Reliability Testing	Yes
Bluetooth Certification	Yes
Radio Certification	CE, FCC, IC, SRRC

5. Application

1. Conference Room
2. Remote Area
3. Temporary Store
4. Private villa

6.Packing list

Gateway	1
adapter	1
network cable	1

7.Web management

7.1Login

English

Authorization Required

Please enter your password

LoginChange Password

杭州市大关路 189 号万通中心A 幢8 楼,310004


Tel:86-571-86769027/88810480

Website: www.dusuniot.com

www.dusunremotes.com

www.dusunlock.com

7.3 Router Status

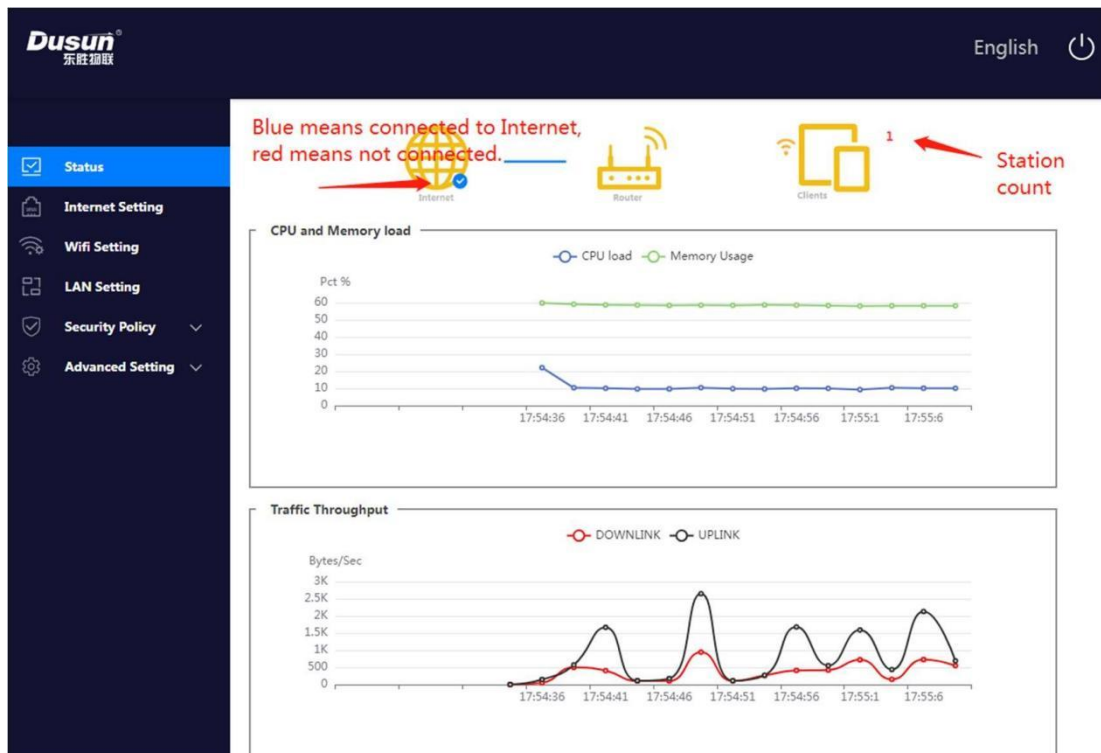

7.4 Internet Setting

You can setting the WAN Ethernet port and LTE.

The screenshot displays the 'Internet Setting' page of the DUSUN router. The left sidebar contains navigation options: Status, Internet Setting, Wifi Setting, LAN Setting, Security Policy, and Advanced Setting. The main content area shows two sections: 'Wired Internet Setting' and 'LTE Internet Setting'.

Wired Internet Setting

Setting	Value
Ethernet WAN	Enable
IP config	Dynamic IP

LTE Internet Setting

Setting	Value
LTE WAN	Enable
APN	
AuthMode	None
Username	
Password	

Buttons: Cancel, Apply

7.5 Wi-Fi setting

Dusun
东胜物联

English

Status

Internet Setting

Wifi Setting

LAN Setting

Security Policy

Advanced Setting

2.4G Setting

SSID

Dusun-2G-000A

Security

WPA2PSK

Password

Bandwidth

40M

Channel

Auto

Hide SSID Broadcast

OFF

5G Setting

SSID

Dusun-5G-000A

Security

WPA2PSK

Password

Bandwidth

20M/40M

Channel

Auto

Hide SSID Broadcast

OFF

DFS

ON

Cancel

Apply

7.6 LAN setting

Dusun
东胜物联

English

Status

Internet Setting

Wifi Setting

LAN Setting

Security Policy

Advanced Setting

LAN Setting

IP address

192.168.66.1

Subnet Mask

255.255.255.0

Starting IP

192.168.66.100

Ending IP

192.168.66.250

Lease Time

12H

Cancel

Apply

杭州市大关路 189 号万通中心A 幢8 楼,310004
Tel:86-571-86769027/88810480

Website: www.dusuniot.com

www.dusunremotes.com

www.dusunlock.com

7.7 Security Policy

7.7.1 MAC filter

Dusun®
东胜物联

English

Status

Internet Setting

Wifi Setting

LAN Setting

Security Policy

MAC Filter

Domain Name Filter

DMZ

Advanced Setting

MAC Filter Setting

MAC ACL (Access Control List) Policy:

MAC ACL Policy

Disabled

Add new MAC to the MAC ACL table:

Input MAC

XXXXXXXXXXXX

Add

Input comment (Optional)

MAC ACL table:

Select MAC item to delete

Delete

Clear

MAC Address	Comment
-------------	---------

Cancel

Apply

7.7.2 Domain Name filter

Dusun®
东胜物联

English

Status

Internet Setting

Wifi Setting

LAN Setting

Security Policy

MAC Filter

Domain Name Filter

DMZ

Advanced Setting

Domain Name Filter Setting

Domain Name Filter Policy:

DN Filter Policy

Disabled

Add new domain name to the table:

Input Domain Name

example.com

Add

Domain name table:

Select Domain Name item to delete

Delete


Clear

Domain Name


Cancel

Apply

7.8 DMZ

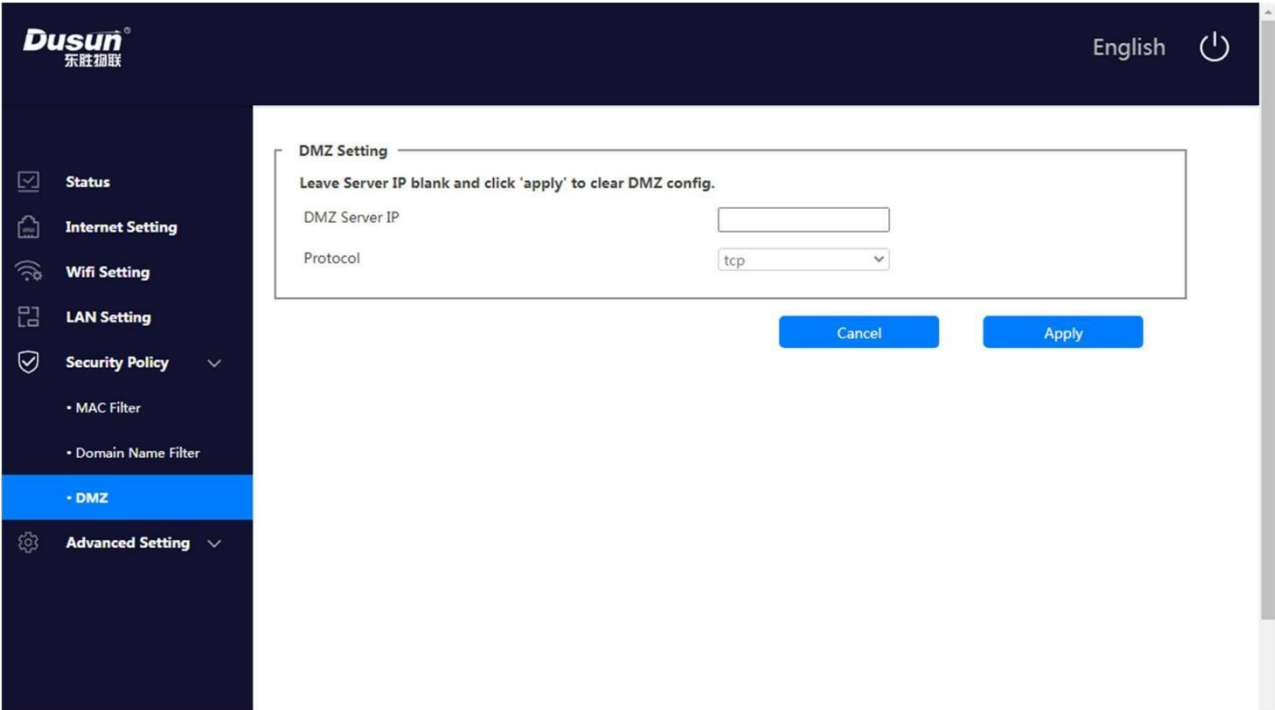

7.9 Advanced Setting

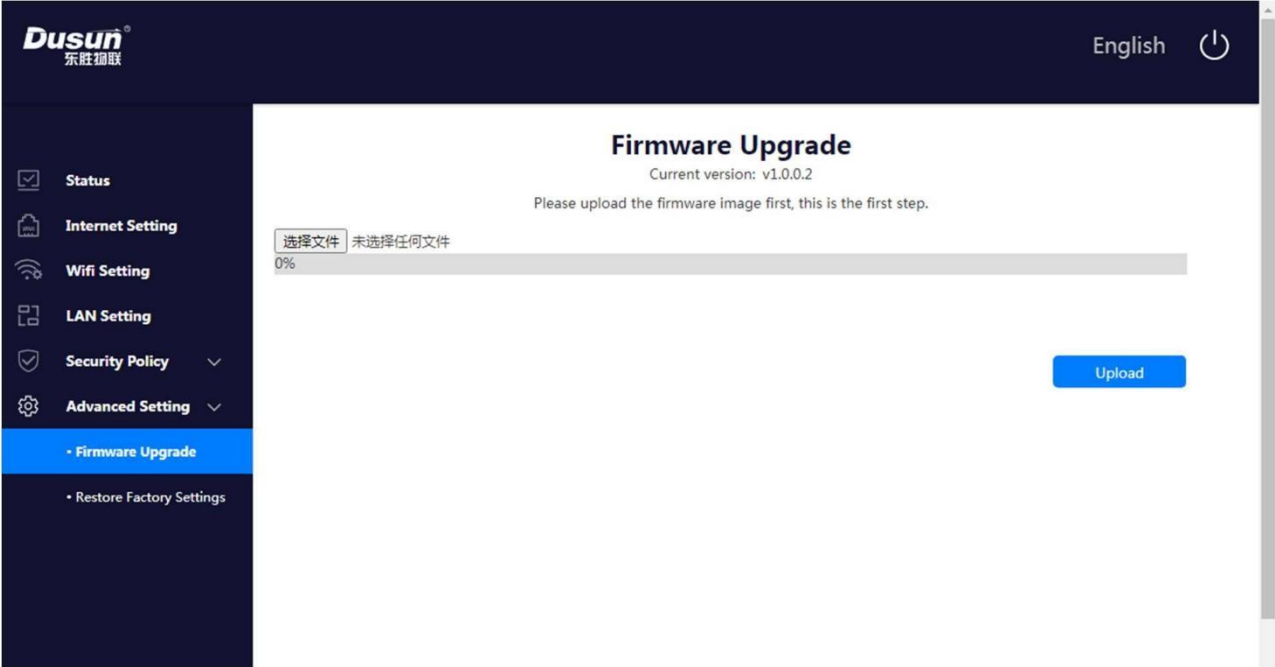

7.10Factory Setting



FCC Statement

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received, including interference that may cause undesired operation.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

To comply with RF exposure requirements, a minimum separation distance of 20cm must be maintained between the user's body and the device, including the antenna.