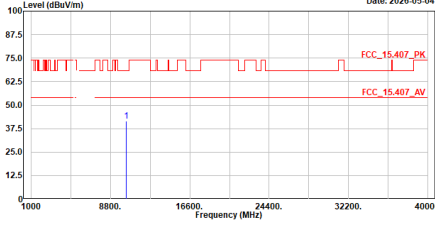
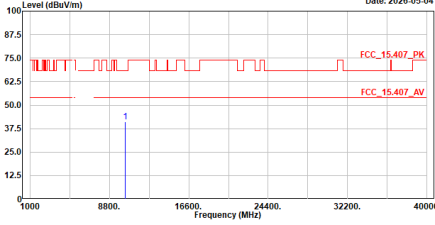
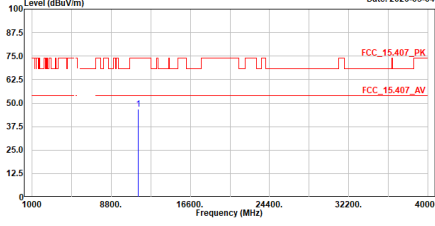
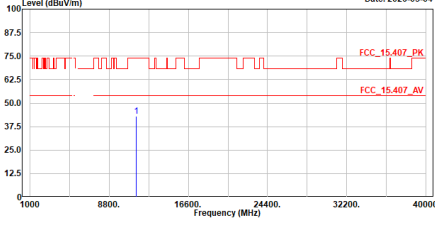


Appendix A. Test Result of Maximum Conducted Output Power


Modulation	Frequency (MHz)	Maximum Conducted Output Power (dBm)			Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
802.11a (20MHz)	5180	7.31	8.92	11.20	24.00	Pass
	5745	8.19	11.45	13.13	30.00	Pass

Appendix B. Test Result of Transmitter Radiated Spurious Emission

Appendix C. TX_a_5180MHz_H	TX_a_5180MHz_V																																																
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_a_5180MHz Test BY :Ashton Level (dBuV/m) Date: 2026-05-04  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>10360.000</td><td>41.39</td><td>68.22</td><td>-26.83</td><td>46.06</td><td>-4.67</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	10360.000	41.39	68.22	-26.83	46.06	-4.67	Peak	Site :HY-CB03 Condition :3m ,Vertical Mode :TX_a_5180MHz Test BY :Ashton Level (dBuV/m) Date: 2026-05-04  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>10360.000</td><td>41.06</td><td>68.22</td><td>-27.16</td><td>45.73</td><td>-4.67</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	10360.000	41.06	68.22	-27.16	45.73	-4.67	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	10360.000	41.39	68.22	-26.83	46.06	-4.67	Peak																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	10360.000	41.06	68.22	-27.16	45.73	-4.67	Peak																																										
TX_a_5745MHz_H	TX_a_5745MHz_V																																																
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_a_5745MHz Test BY :Ashton Level (dBuV/m) Date: 2026-05-04  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>11490.000</td><td>46.77</td><td>74.00</td><td>-27.23</td><td>48.65</td><td>-1.88</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	11490.000	46.77	74.00	-27.23	48.65	-1.88	Peak	Site :HY-CB03 Condition :3m ,Vertical Mode :TX_a_5745MHz Test BY :Ashton Level (dBuV/m) Date: 2026-05-04  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>11490.000</td><td>42.85</td><td>74.00</td><td>-31.15</td><td>44.73</td><td>-1.88</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	11490.000	42.85	74.00	-31.15	44.73	-1.88	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	11490.000	46.77	74.00	-27.23	48.65	-1.88	Peak																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	11490.000	42.85	74.00	-31.15	44.73	-1.88	Peak																																										

TX_a_5180MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_5180MHz
Test BY :Rock

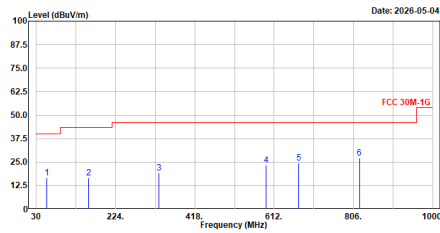


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	56.190	16.73	40.00	-23.27	40.48	-23.75	QP
2	158.331	16.67	43.50	-26.83	40.49	-23.82	QP
3	330.118	19.10	46.00	-26.90	41.14	-22.04	QP
4	592.697	23.27	46.00	-22.73	39.31	-16.04	QP
5	672.140	24.63	46.00	-21.37	39.35	-14.72	QP
6	820.647	27.01	46.00	-18.99	39.40	-12.39	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_a_5180MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5180MHz
Test BY :Rock

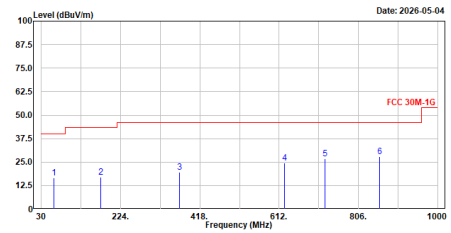


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	60.167	16.73	40.00	-23.27	40.91	-24.18	QP
2	176.082	16.94	43.50	-26.56	41.86	-24.92	QP
3	369.015	19.72	46.00	-26.28	41.87	-21.35	QP
4	624.901	24.53	46.00	-21.47	39.82	-15.29	QP
5	724.229	26.62	46.00	-19.38	40.26	-13.64	QP
6	858.089	27.98	46.00	-18.02	39.99	-12.01	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_a_5745MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_5745MHz
Test BY :Rock

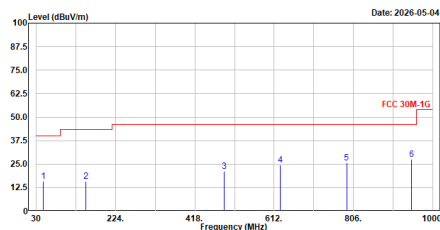


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	46.587	15.84	40.00	-24.16	39.40	-23.56	QP
2	151.250	15.99	43.50	-27.51	39.83	-23.84	QP
3	490.653	21.03	46.00	-24.97	39.43	-18.40	QP
4	627.229	24.35	46.00	-21.65	39.60	-15.25	QP
5	789.413	25.84	46.00	-20.16	38.56	-12.72	QP
6	947.911	27.38	46.00	-18.62	38.22	-10.84	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_a_5745MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5745MHz
Test BY :Rock

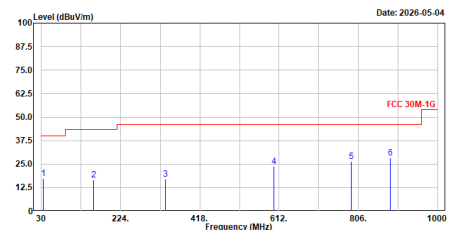

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	34.850	17.31	40.00	-22.69	42.06	-24.75	QP
2	157.749	16.56	43.50	-26.94	40.42	-23.86	QP
3	333.998	17.08	46.00	-28.92	39.12	-22.04	QP
4	599.875	23.71	46.00	-22.29	39.46	-15.75	QP
5	788.928	26.28	46.00	-19.72	39.00	-12.72	QP
6	883.891	28.34	46.00	-17.66	40.24	-11.90	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.