

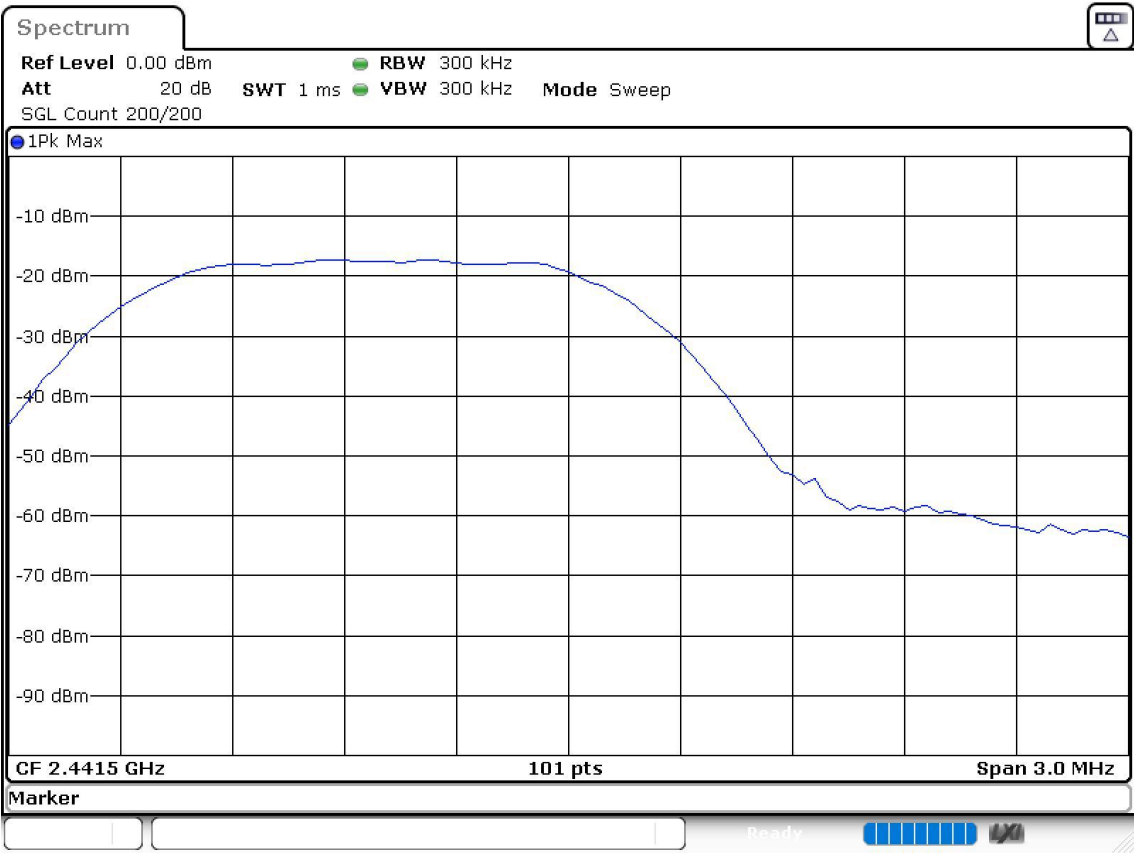


Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1
Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

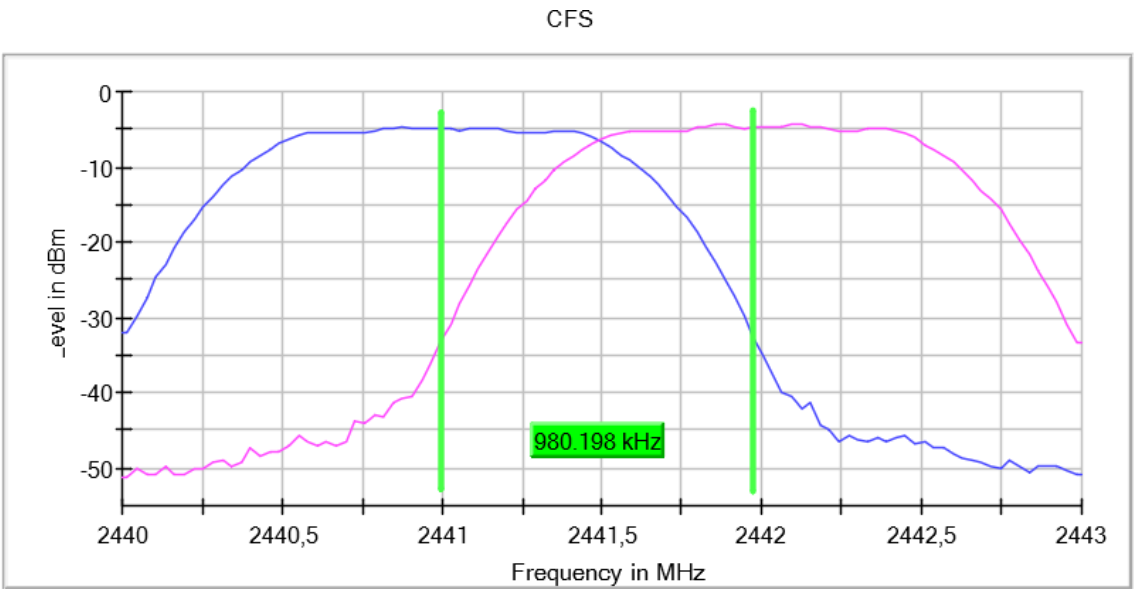

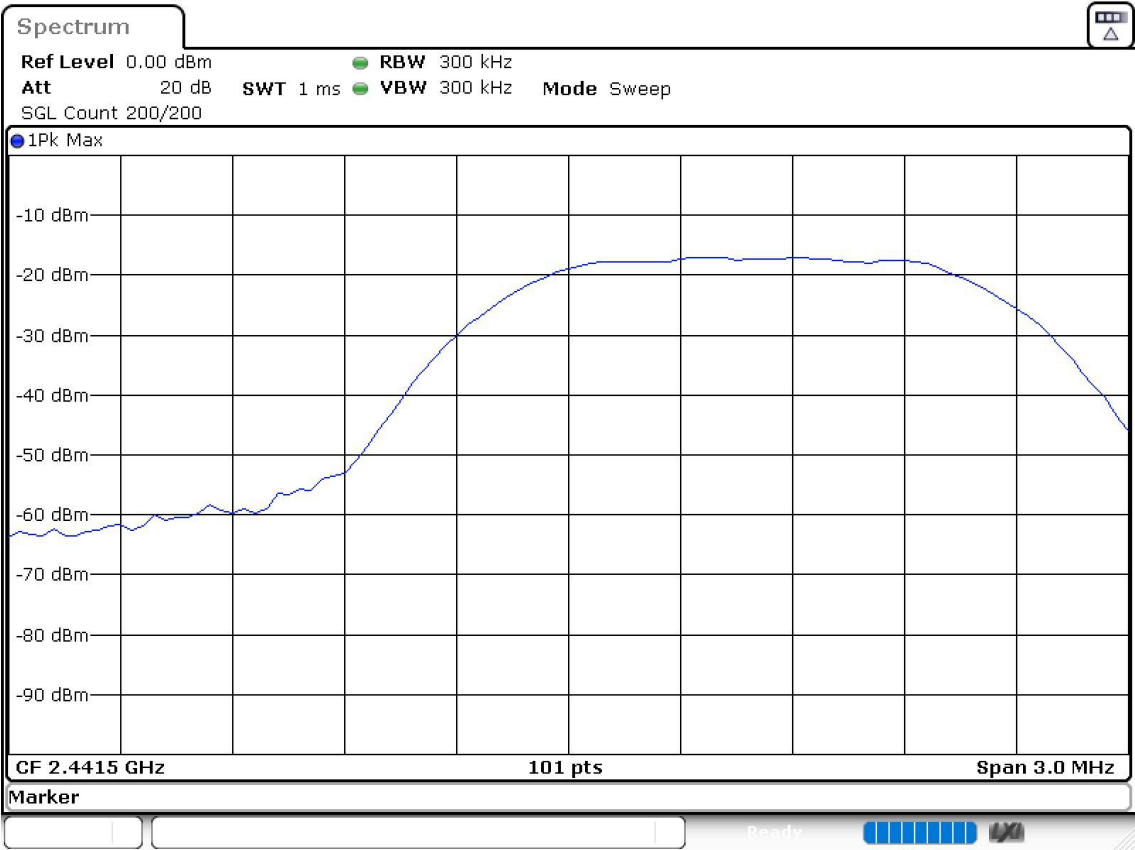

Modulation: BT (8DPSK 3-DH5)

Results

Equipment	Port	Freq Sep (MHz)
Frequency Hopping Spread Spectrum systems (DSS)	1	1.01


Verdict


Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1
Modulation = BT (8DPSK 3-DH5)

Images:

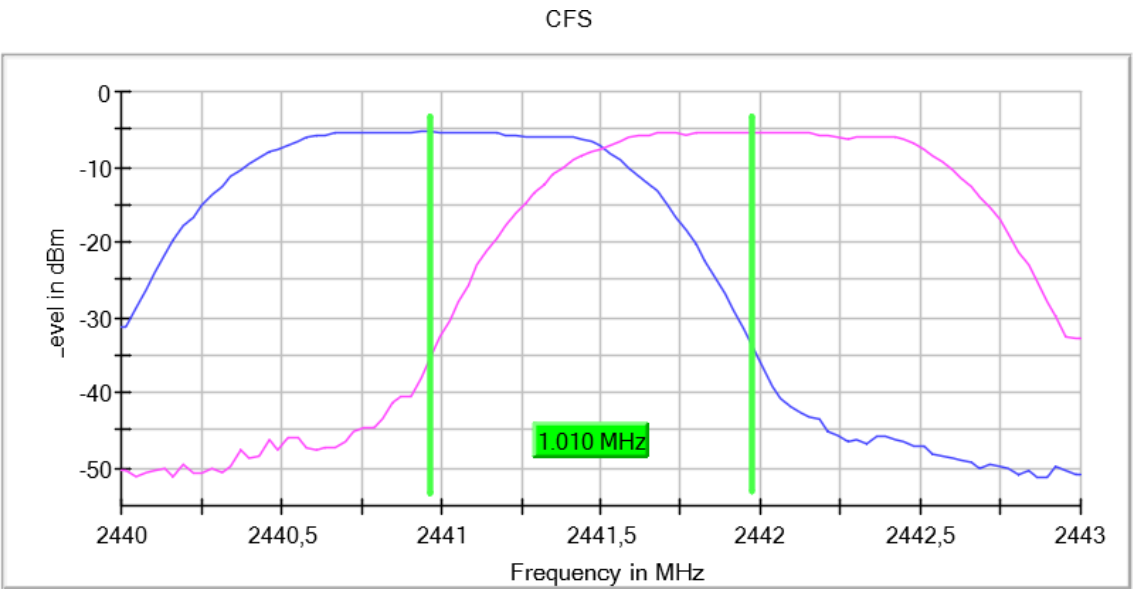

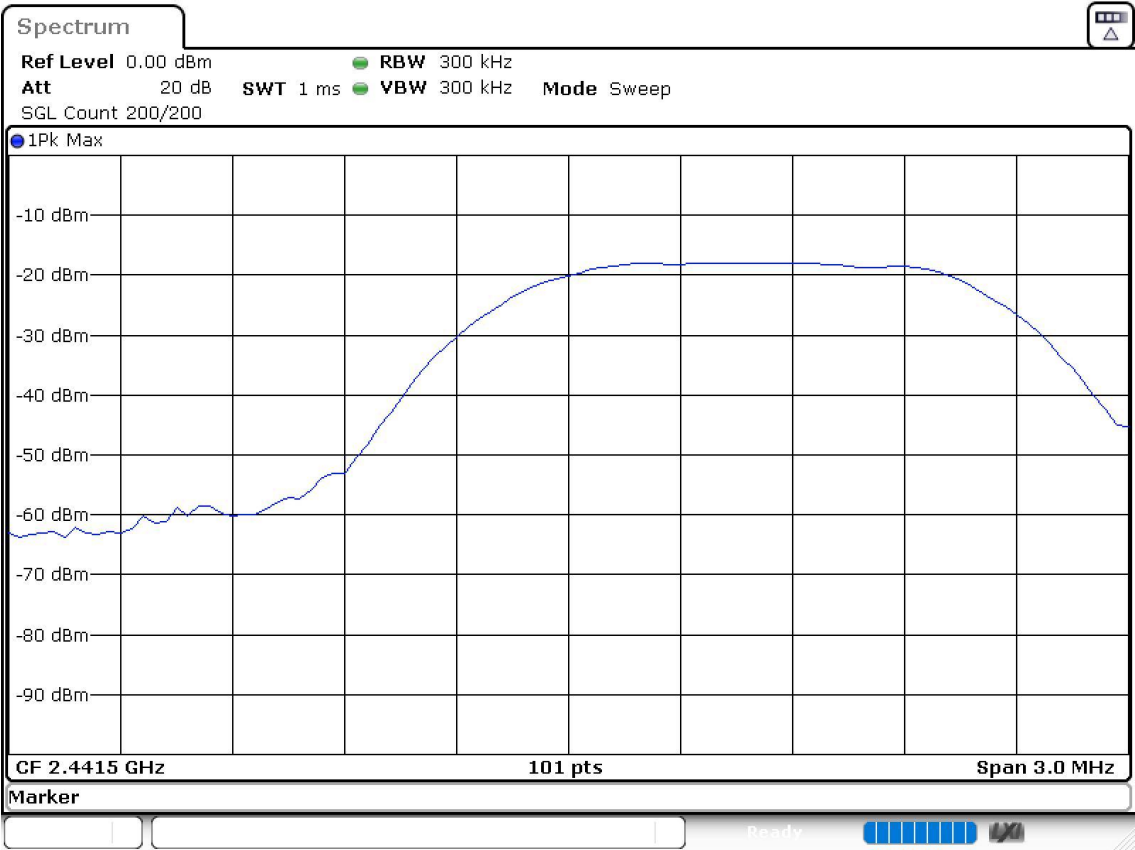

RSS-247 6.2.3.1 (b) / FCC 15.247 (a) (1) (iii) [DwT] Time of Occupancy (Dwell Time)

Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds (400 ms) within a period of 0.4 seconds multiplied by the number of hopping channels employed = 0.4 x 79= 31.6 seconds.

Modulation: BT (GFSK 1-DH5)

Results

Equipment	Port	Freq (MHz)	NHp	Avg COT (ms)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	115	333.35
		2441.00000	106	307.18
		2480.00000	119	344.79


Verdict

Pass


Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2402.00000

Images:

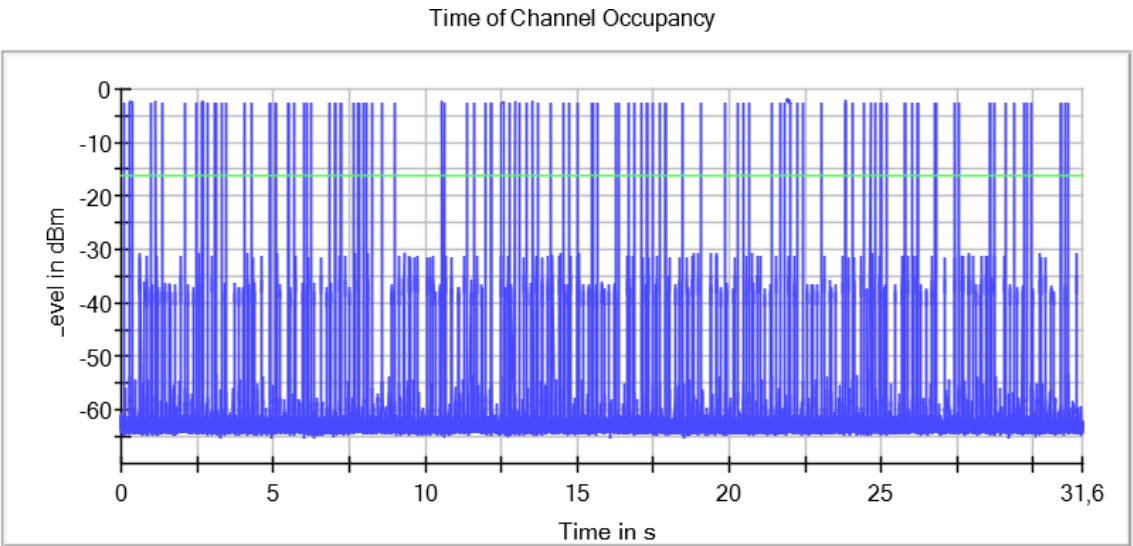

Trace Threshold


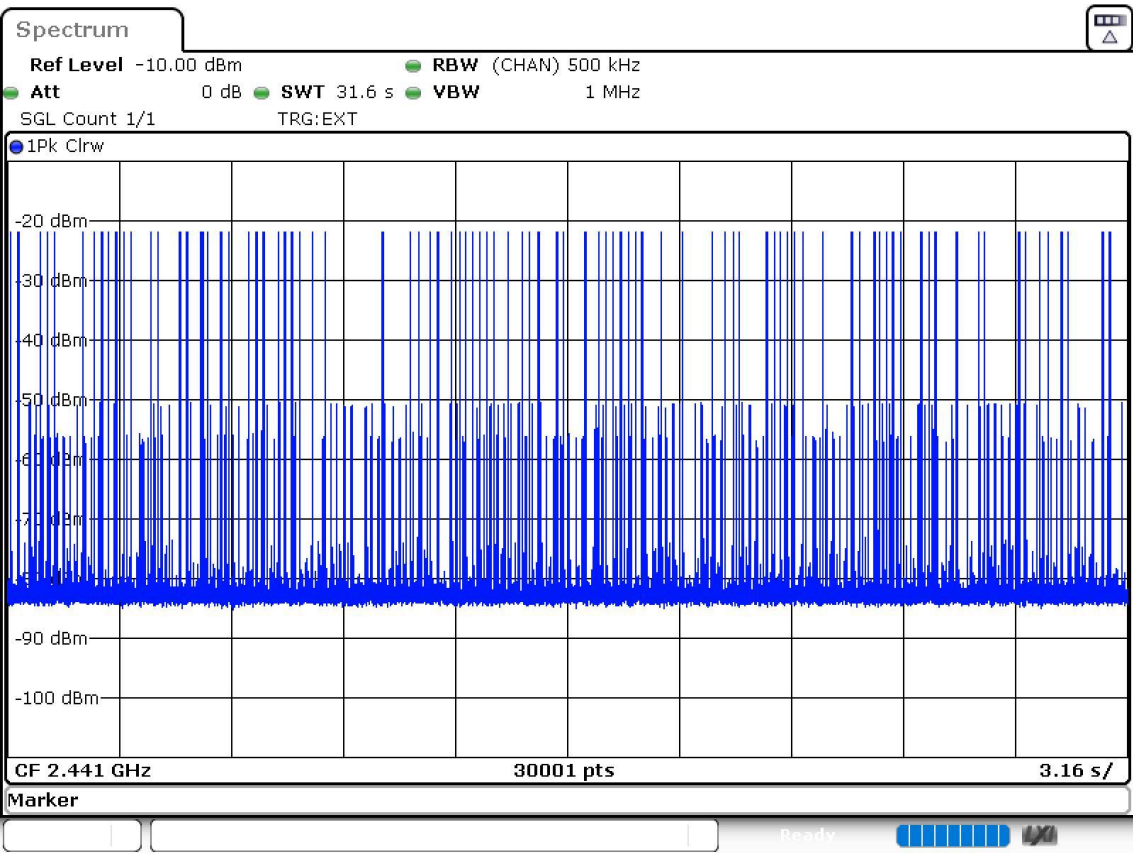


Tables:
Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Center Frequency	2.40200 GHz	2.40200 GHz
Span	ZeroSpan	ZeroSpan
RBW	500.000 kHz	~ 500.000 kHz
VBW	1.000 MHz	~ 1.500 MHz
SweepPoints	30001	~ 30001
SweepTime	31.600 s	31.600 s
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	1	1
Filter	Channel	Channel
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamplifier	off	off
Trigger	External	External
Trigger Offset	0.000 s	0.000 s

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2441.00000

Images:

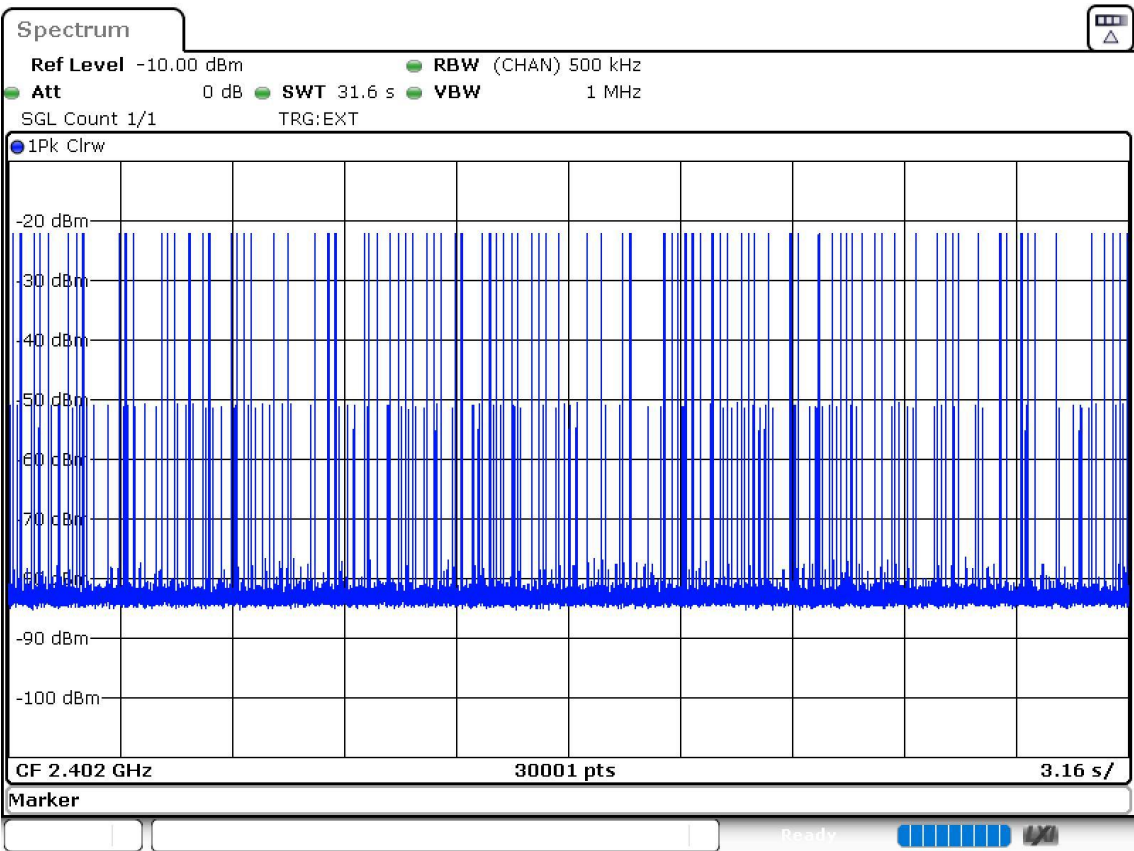
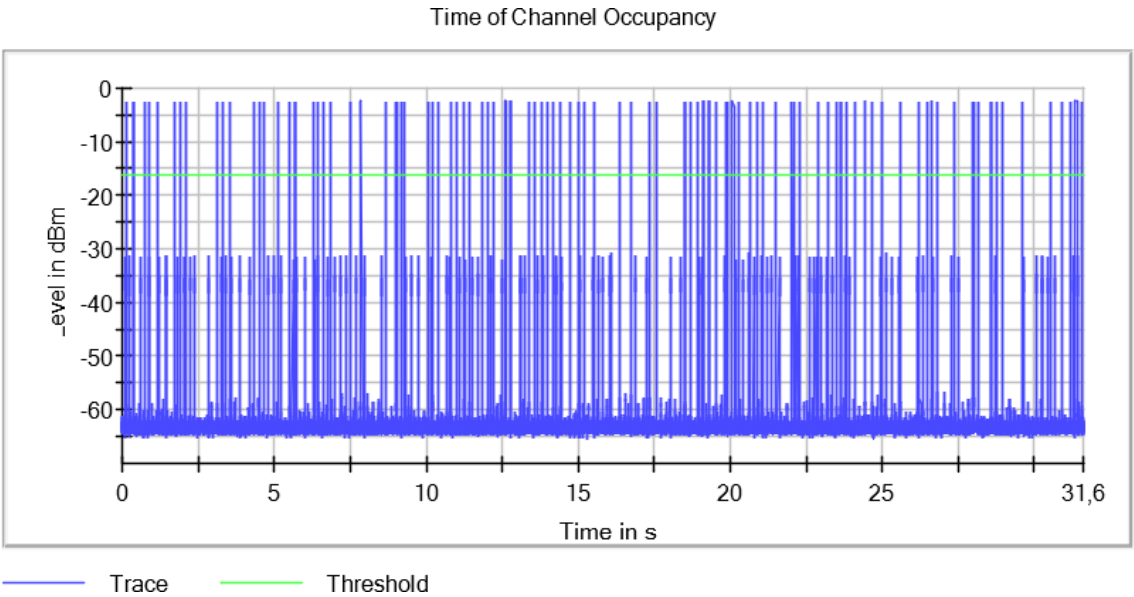


Tables:
Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Center Frequency	2.40200 GHz	2.40200 GHz
Span	ZeroSpan	ZeroSpan
RBW	500.000 kHz	~ 500.000 kHz
VBW	1.000 MHz	~ 1.500 MHz
SweepPoints	30001	~ 30001
SweepTime	31.600 s	31.600 s
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	1	1
Filter	Channel	Channel
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamplifier	off	off
Trigger	External	External
Trigger Offset	0.000 s	0.000 s

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2480.00000

Images:

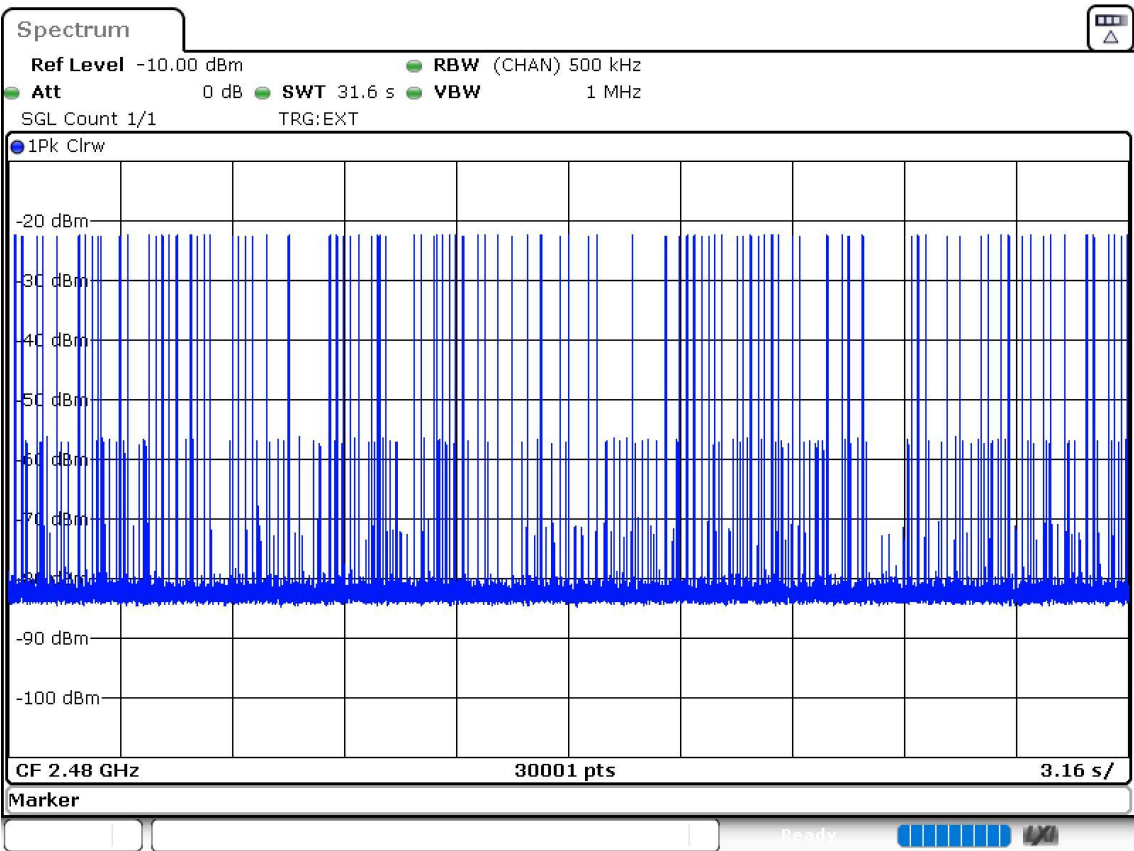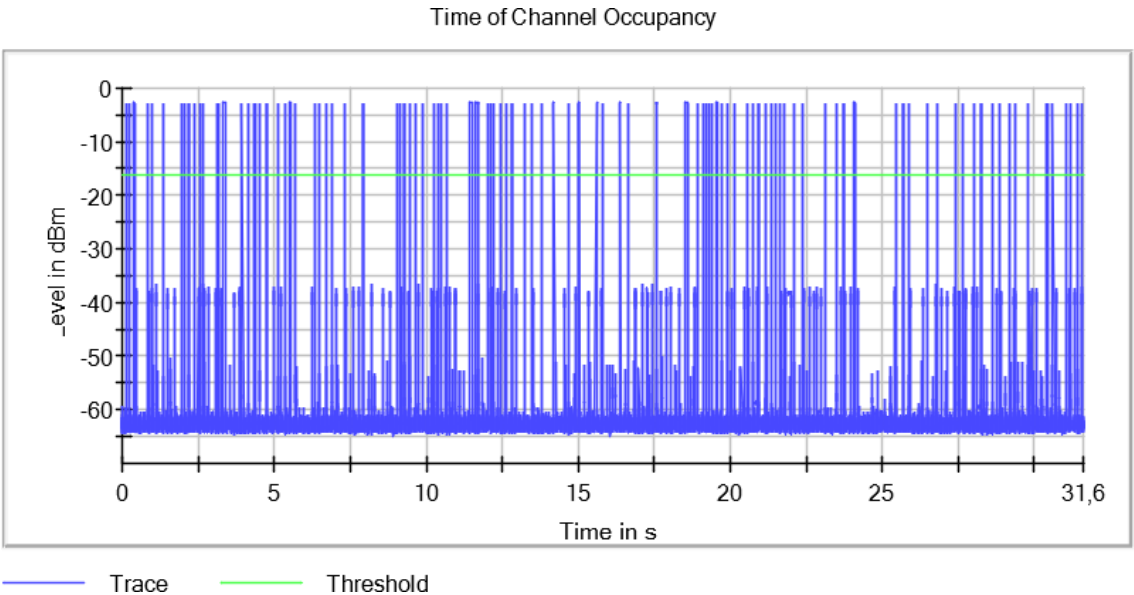

Tables:
Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Center Frequency	2.40200 GHz	2.40200 GHz
Span	ZeroSpan	ZeroSpan
RBW	500.000 kHz	~ 500.000 kHz
VBW	1.000 MHz	~ 1.500 MHz
SweepPoints	30001	~ 30001
SweepTime	31.600 s	31.600 s
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	1	1
Filter	Channel	Channel
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamplifier	off	off
Trigger	External	External
Trigger Offset	0.000 s	0.000 s

Modulation: BT (Pi/4 DQPSK 2-DH5)

Results

Equipment	Port	Freq (MHz)	NHp	Avg COT (ms)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	98	279.50
		2441.00000	108	306.16
		2480.00000	105	299.11



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1
Modulation = BT (Pi/4 DQPSK 2-DH5) Frequency MHz = 2402.00000

Images:

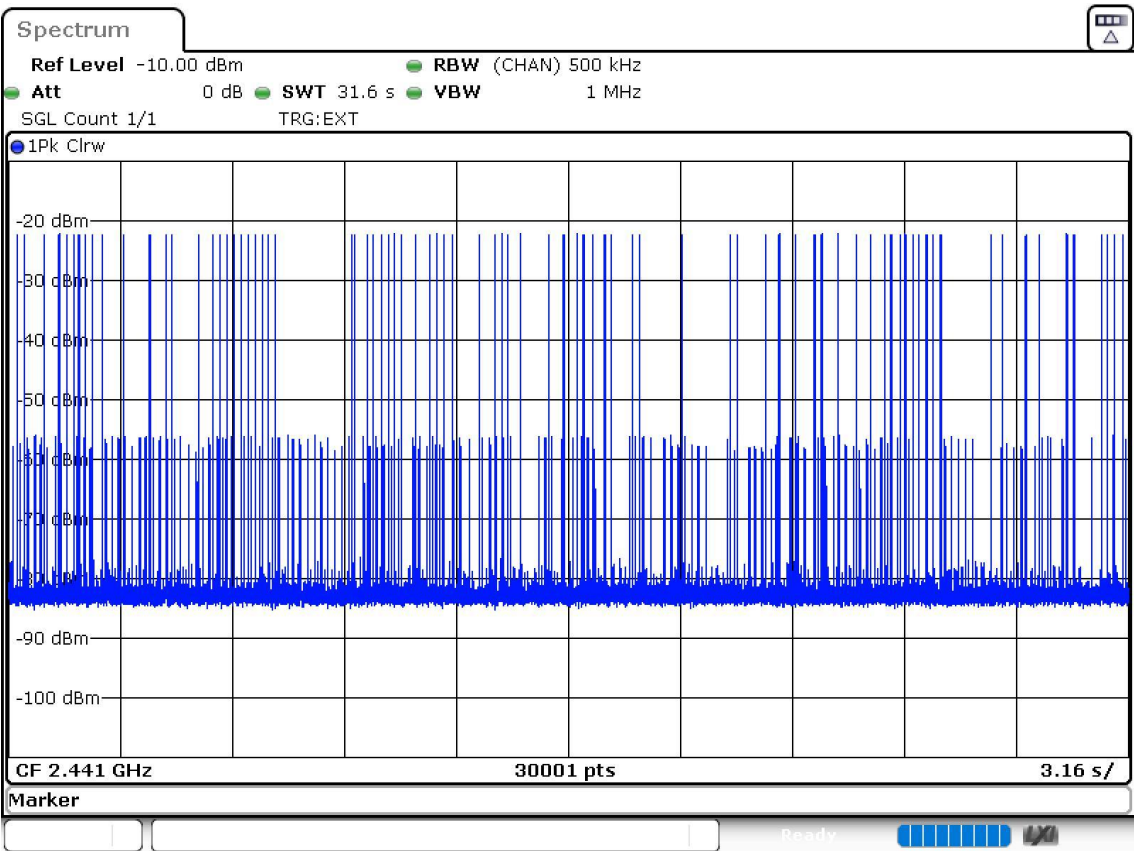
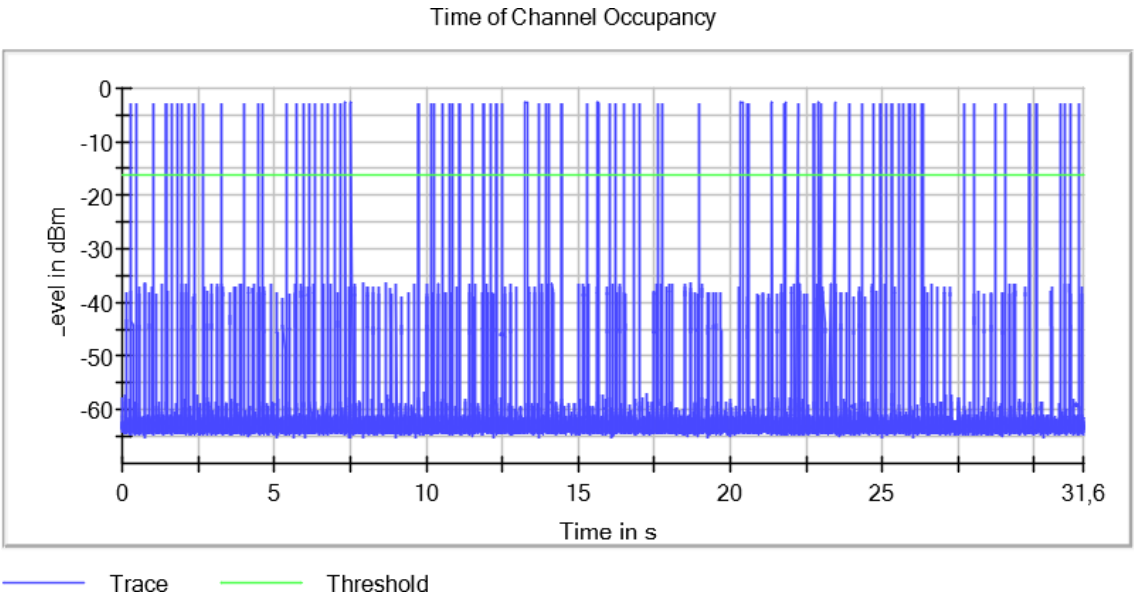


Tables:
Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Center Frequency	2.40200 GHz	2.40200 GHz
Span	ZeroSpan	ZeroSpan
RBW	500.000 kHz	~ 500.000 kHz
VBW	1.000 MHz	~ 1.500 MHz
SweepPoints	30001	~ 30001
SweepTime	31.600 s	31.600 s
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	1	1
Filter	Channel	Channel
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamplifier	off	off
Trigger	External	External
Trigger Offset	0.000 s	0.000 s

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1
Modulation = BT (Pi/4 DQPSK 2-DH5) Frequency MHz = 2441.00000

Images:

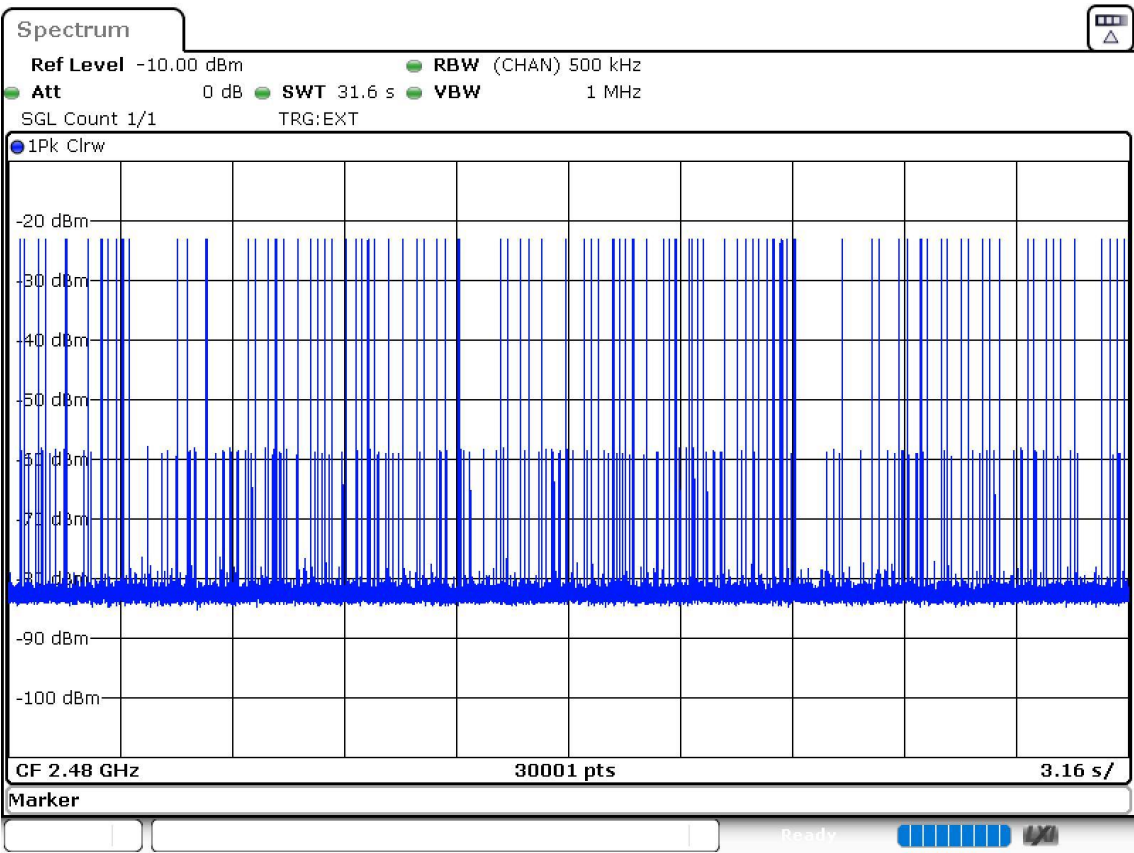
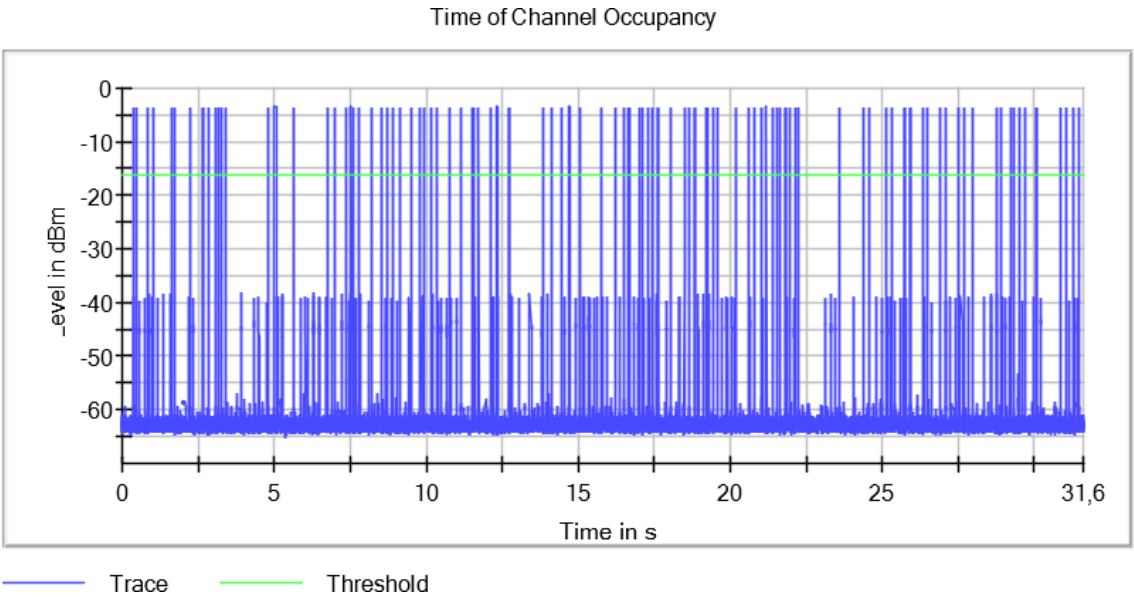


Tables:
Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Center Frequency	2.40200 GHz	2.40200 GHz
Span	ZeroSpan	ZeroSpan
RBW	500.000 kHz	~ 500.000 kHz
VBW	1.000 MHz	~ 1.500 MHz
SweepPoints	30001	~ 30001
SweepTime	31.600 s	31.600 s
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	1	1
Filter	Channel	Channel
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamplifier	off	off
Trigger	External	External
Trigger Offset	0.000 s	0.000 s

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1
Modulation = BT (Pi/4 DQPSK 2-DH5) Frequency MHz = 2480.00000

Images:

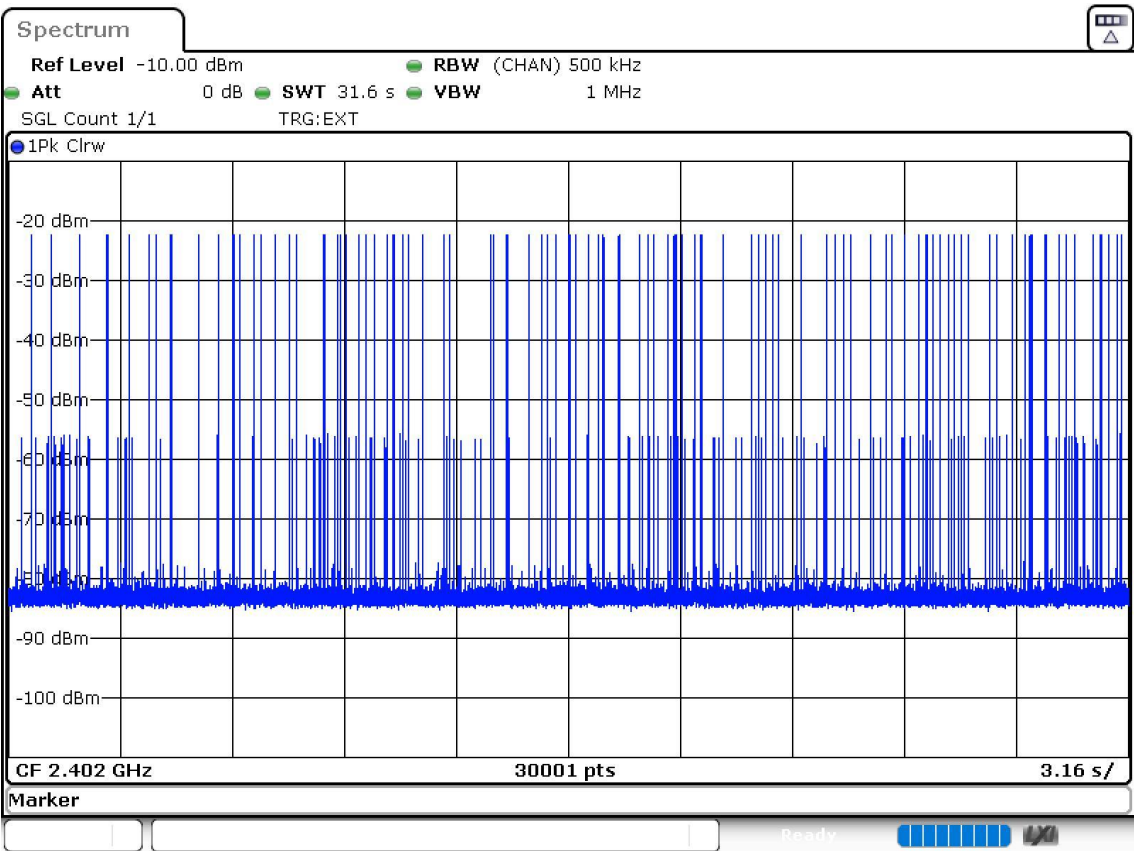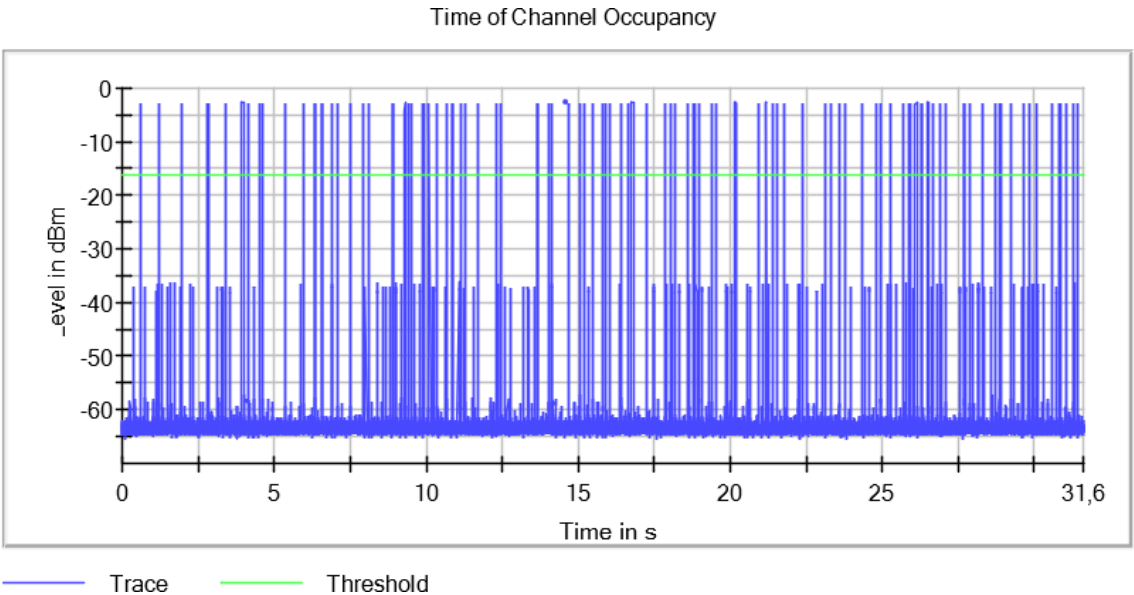

Tables:
Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Center Frequency	2.40200 GHz	2.40200 GHz
Span	ZeroSpan	ZeroSpan
RBW	500.000 kHz	~ 500.000 kHz
VBW	1.000 MHz	~ 1.500 MHz
SweepPoints	30001	~ 30001
Sweeptime	31.600 s	31.600 s
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	1	1
Filter	Channel	Channel
Trace Mode	Clear Write	Clear Write
Sweeptype	Sweep	AUTO
Preamplifier	off	off
Trigger	External	External
Trigger Offset	0.000 s	0.000 s

Modulation: BT (8DPSK 3-DH5)

Results

Equipment	Port	Freq (MHz)	NHp	Avg COT (ms)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	113	323.20
		2441.00000	110	316.37
		2480.00000	106	304.87

Verdict


Pass

Attachments


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2402.00000

Images:

Time of Channel Occupancy

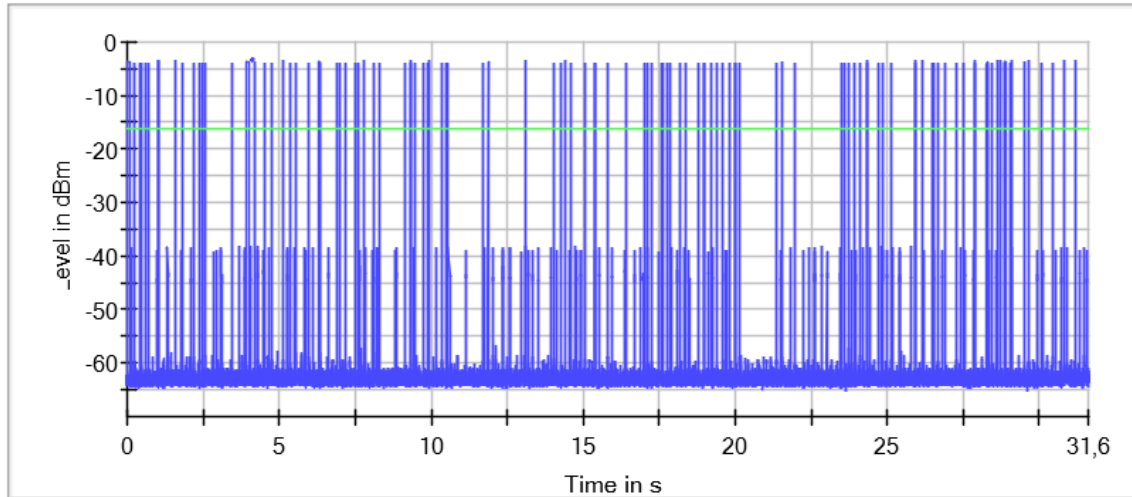

Trace Threshold


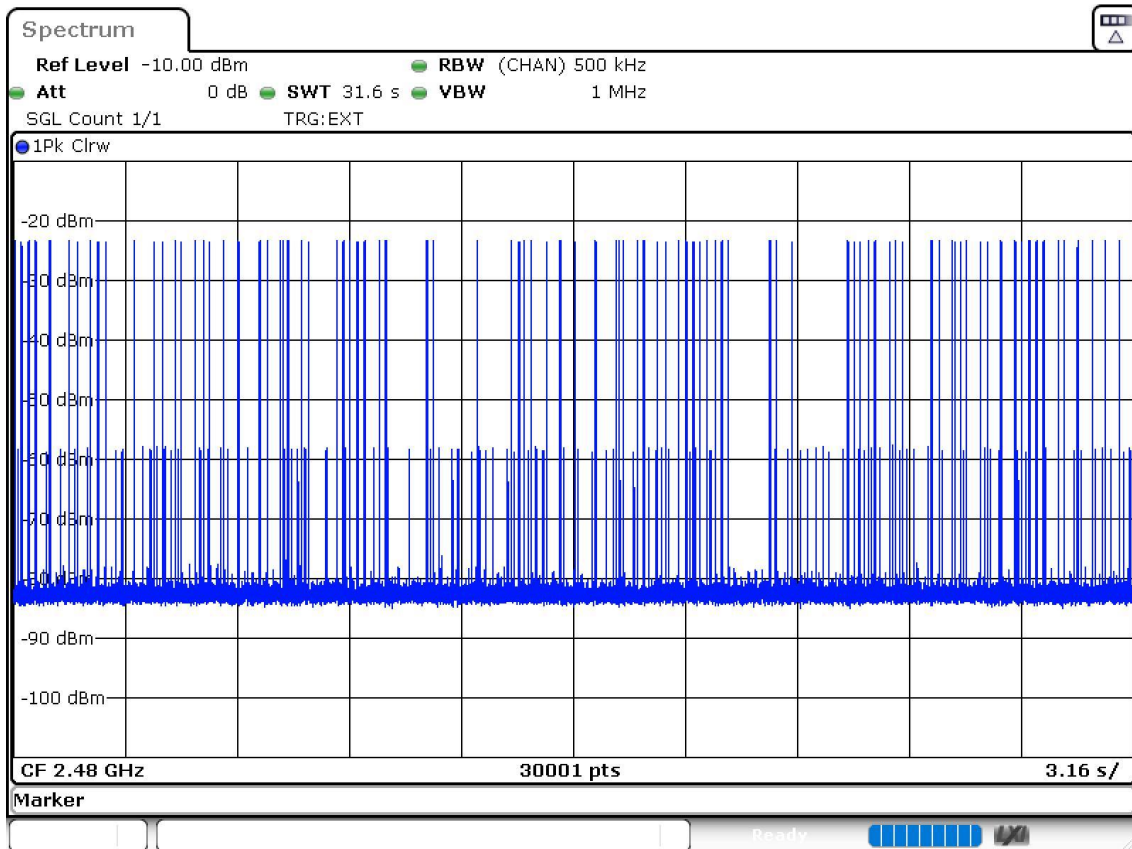


Tables:
Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Center Frequency	2.40200 GHz	2.40200 GHz
Span	ZeroSpan	ZeroSpan
RBW	500.000 kHz	~ 500.000 kHz
VBW	1.000 MHz	~ 1.500 MHz
SweepPoints	30001	~ 30001
SweepTime	31.600 s	31.600 s
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	1	1
Filter	Channel	Channel
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamplifier	off	off
Trigger	External	External
Trigger Offset	0.000 s	0.000 s

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2441.00000

Images:

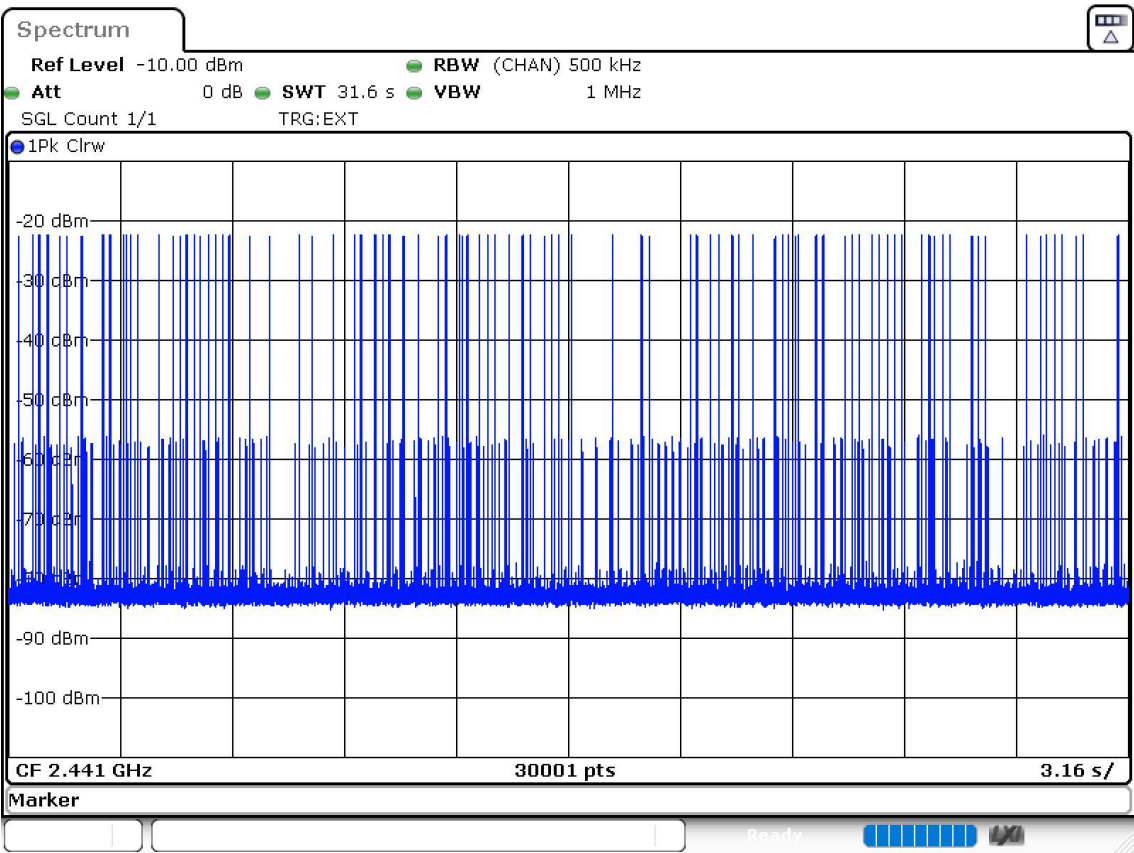
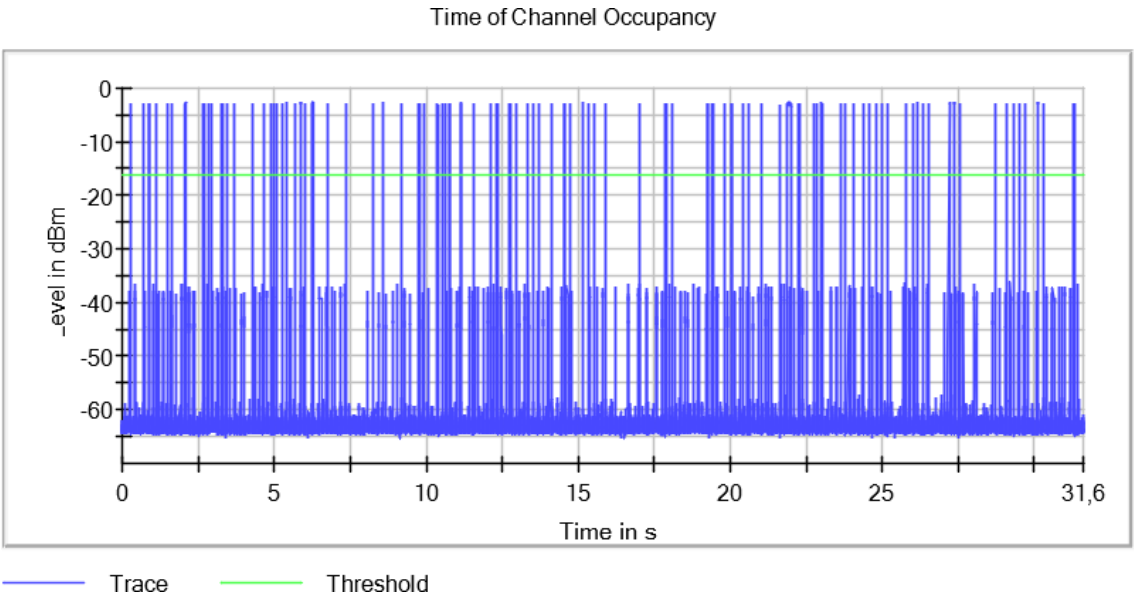


Tables:
Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Center Frequency	2.40200 GHz	2.40200 GHz
Span	ZeroSpan	ZeroSpan
RBW	500.000 kHz	~ 500.000 kHz
VBW	1.000 MHz	~ 1.500 MHz
SweepPoints	30001	~ 30001
SweepTime	31.600 s	31.600 s
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	1	1
Filter	Channel	Channel
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamplifier	off	off
Trigger	External	External
Trigger Offset	0.000 s	0.000 s

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2480.00000

Images:

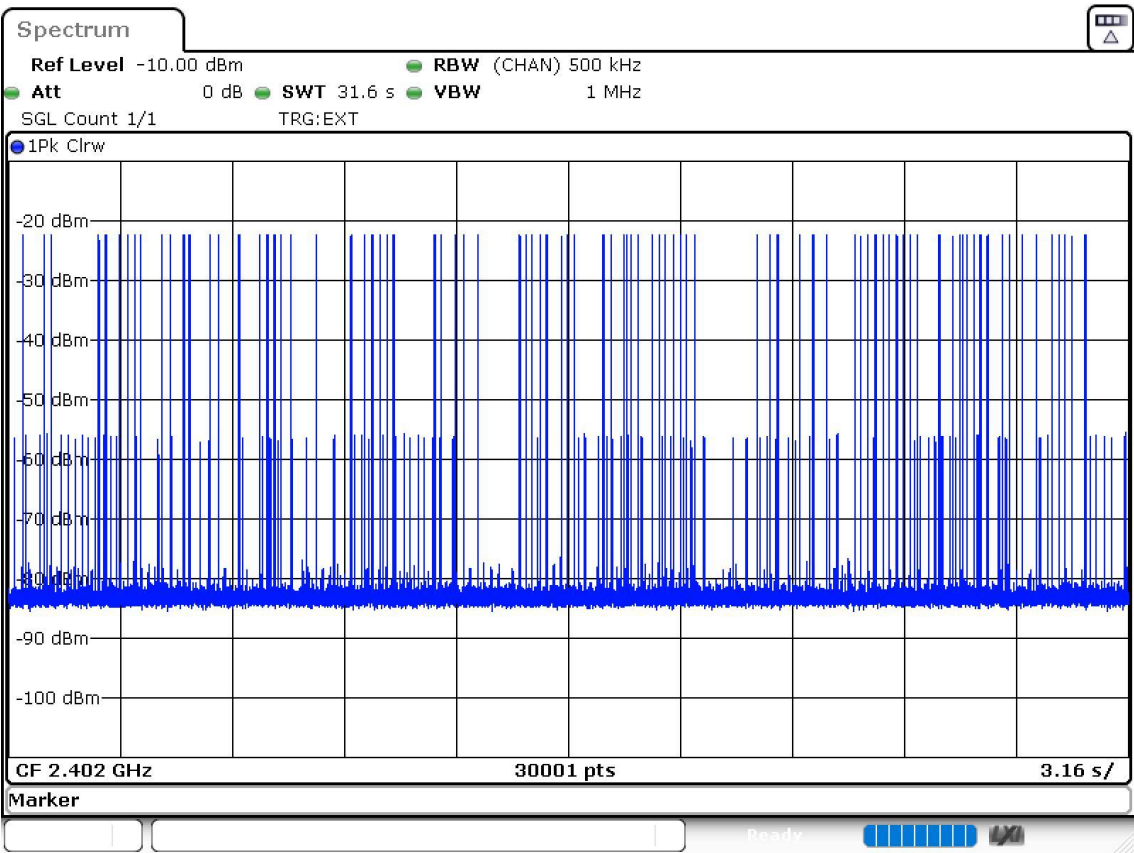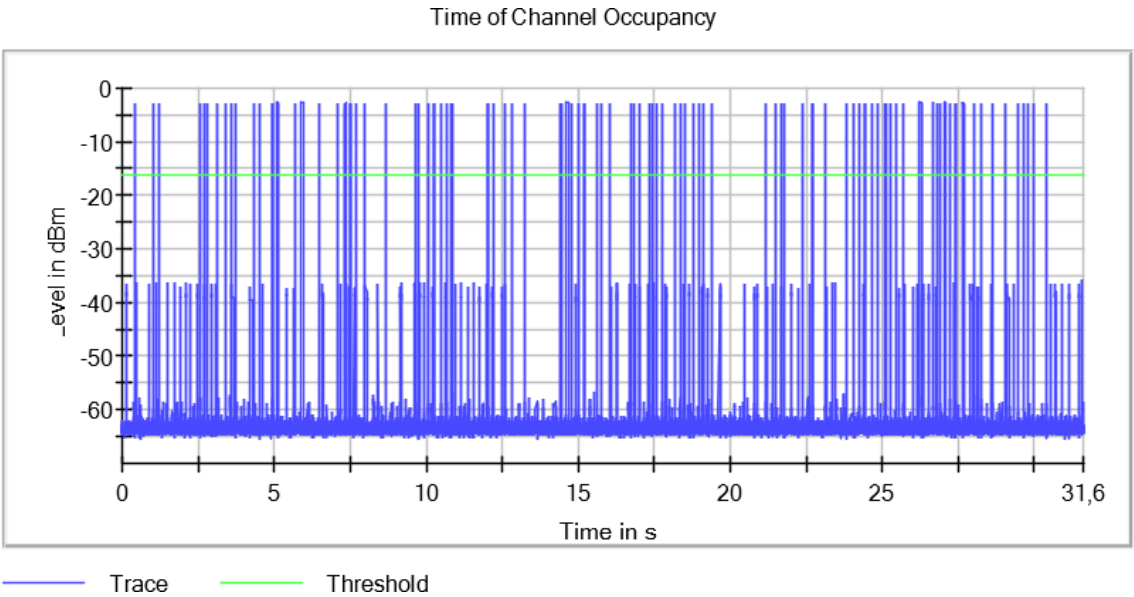

Tables:
Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Center Frequency	2.40200 GHz	2.40200 GHz
Span	ZeroSpan	ZeroSpan
RBW	500.000 kHz	~ 500.000 kHz
VBW	1.000 MHz	~ 1.500 MHz
SweepPoints	30001	~ 30001
SweepTime	31.600 s	31.600 s
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	1	1
Filter	Channel	Channel
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamplifier	off	off
Trigger	External	External
Trigger Offset	0.000 s	0.000 s

RSS-247 6.2.3.1 (b) / FCC 15.247 (a) (1) (iii) [NHC] Number of hopping channels

Limits

Frequency hopping system in the 2400-2483.5 MHz band shall use at least 15 channels.

Modulation: BT (GFSK 1-DH5)

Results

Equipment	Port	NHC
Frequency Hopping Spread Spectrum systems (DSS)	1	79



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1
Modulation = BT (GFSK 1-DH5)

Images:

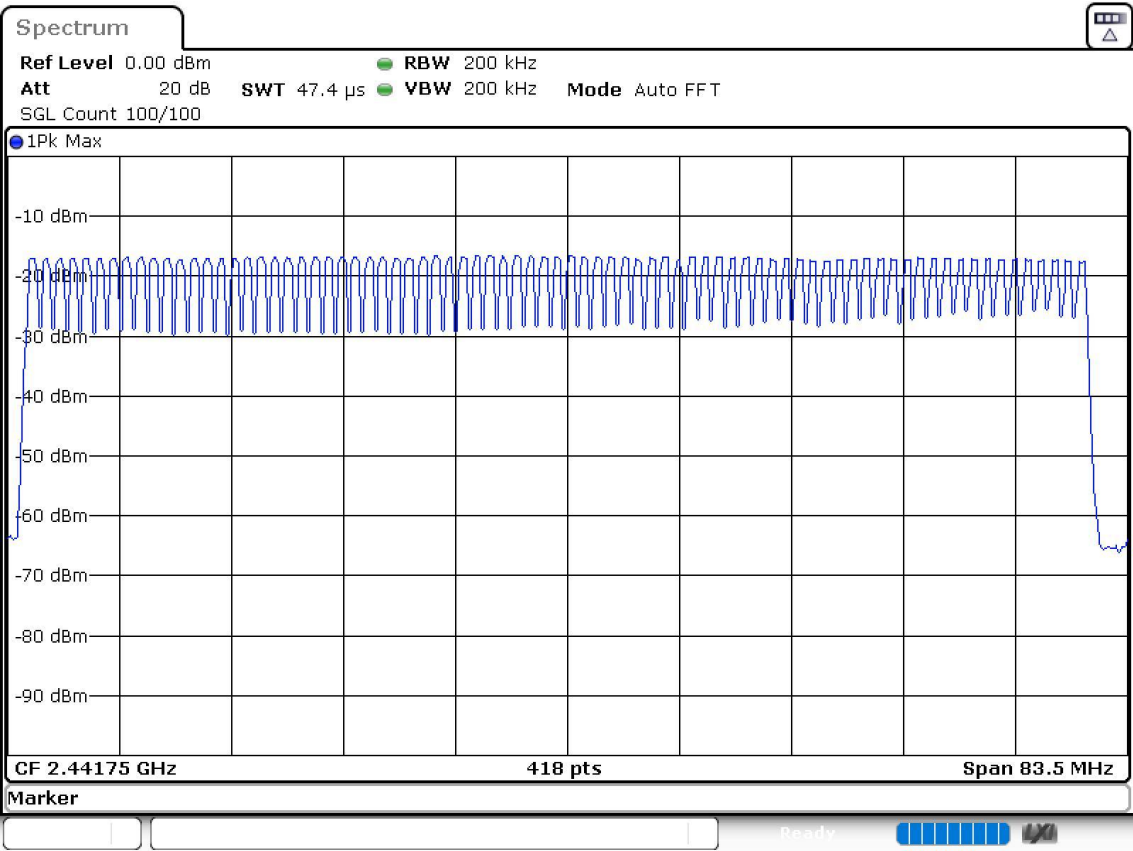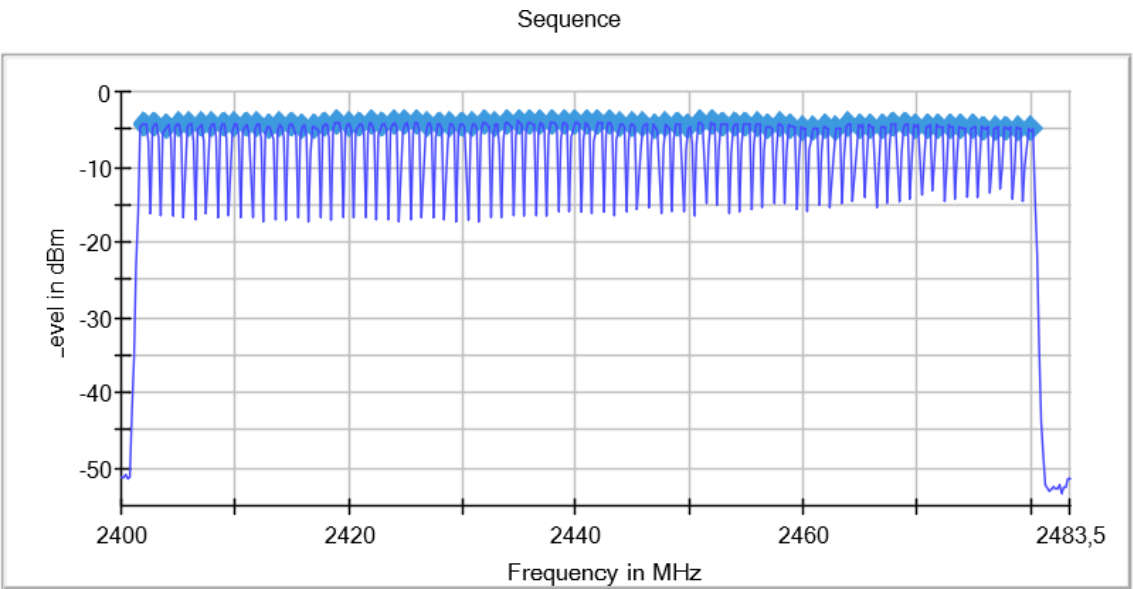

Tables:
Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	200.000 kHz	<= 299.000 kHz
VBW	200.000 kHz	>= 200.000 kHz
SweepPoints	418	~ 418
SweepTime	47.405 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	66 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Modulation: BT (Pi/4 DQPSK 2-DH5)

Results

Equipment	Port	NHC
Frequency Hopping Spread Spectrum systems (DSS)	1	79

Verdict



Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1

Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

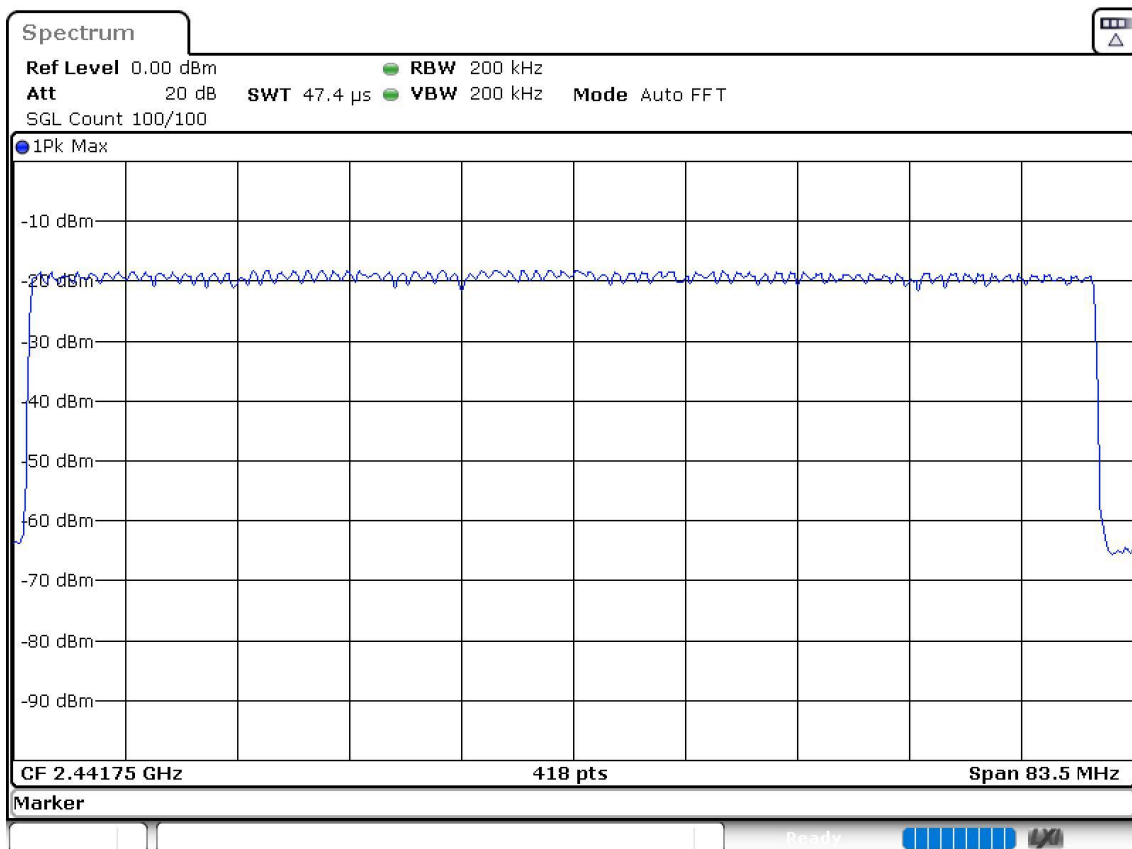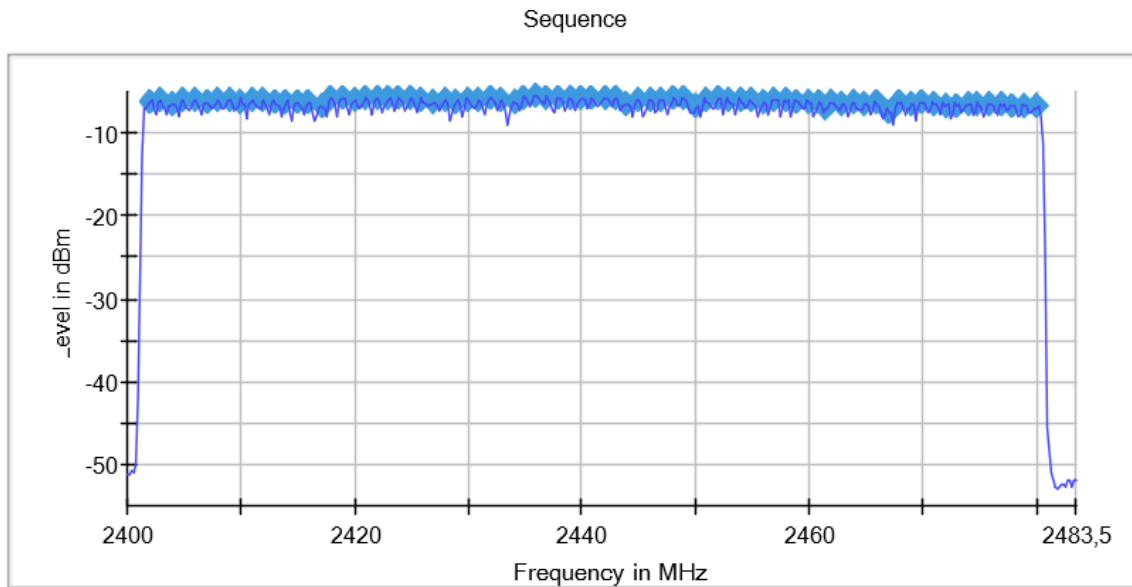

Tables:
Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	200.000 kHz	<= 299.000 kHz
VBW	200.000 kHz	>= 200.000 kHz
SweepPoints	418	~ 418
SweepTime	47.405 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	66 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Modulation: BT (8DPSK 3-DH5)

Results

Equipment	Port	NHC
Frequency Hopping Spread Spectrum systems (DSS)	1	79



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1
Modulation = BT (8DPSK 3-DH5)

Images:

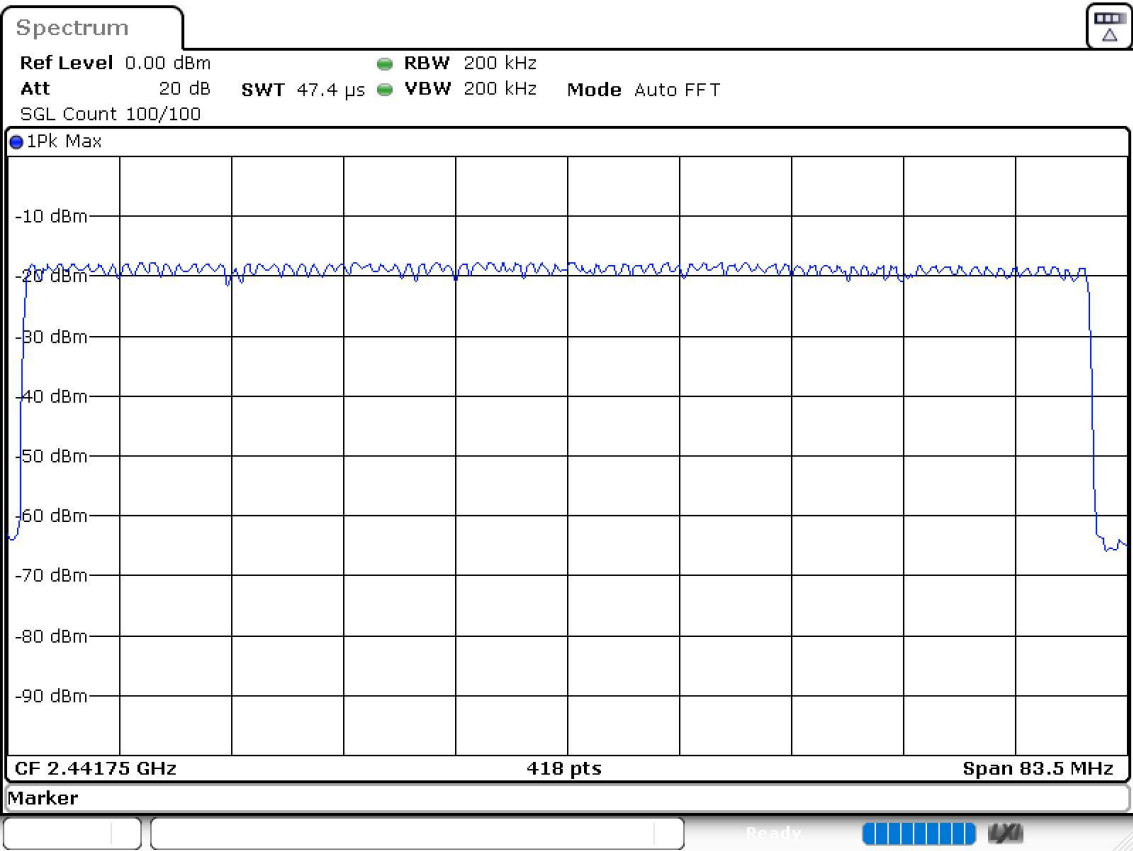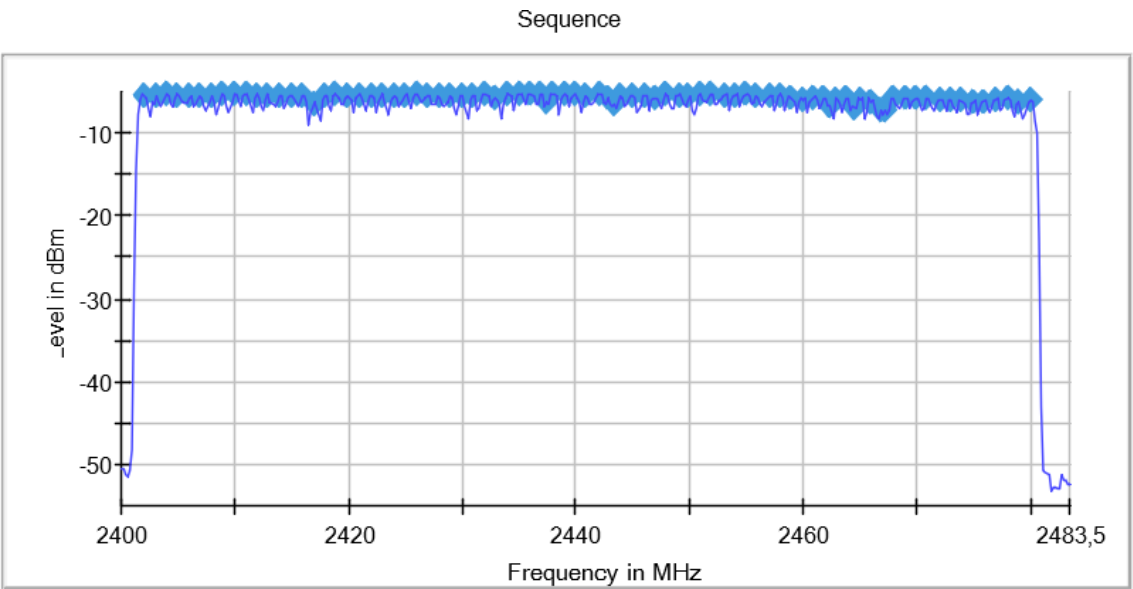

Tables:
Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	200.000 kHz	<= 299.000 kHz
VBW	200.000 kHz	>= 200.000 kHz
SweepPoints	418	~ 418
SweepTime	47.405 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	66 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

RSS-247 6.2.3.2 / FCC 15.247 (b) [Pkcp] Maximum Peak Conducted Output Power

Limits

FCC 15.247 (b) (1)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

RSS-247 6.2.3.2

For frequency hopping systems operating in the band 2400-2483.5 MHz, the following transmitter output power and e.i.r.p. requirements shall apply:

- if the hopset uses 75 or more hopping channels, the maximum peak conducted output power shall not exceed 1.0 W.
- if the hopset uses less than 75 hopping channels the maximum peak conducted output power shall not exceed 0.125 W.
- the e.i.r.p. shall not exceed 4 W, except as provided in sections 6.5 a) and b).

Modulation: BT (GFSK 1-DH5)

Results

Operation Band (MHz)	Equipment	Freq (MHz)	Port	Peak Power (dBm)	E.I.R.P. (dBm)
[2400, 2483.5]	Frequency Hopping Spread Spectrum systems (DSS)	2402.00000	1	-4.2000	-1.53
		2441.00000		-3.8640	-1.19
		2480.00000		-4.3790	-1.71



Verdict

Pass

Attachments



Operation Band MHz = [2400, 2483.5] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Frequency MHz = 2402.00000 Active Port = 1
Modulation = BT (GFSK 1-DH5)

Images:

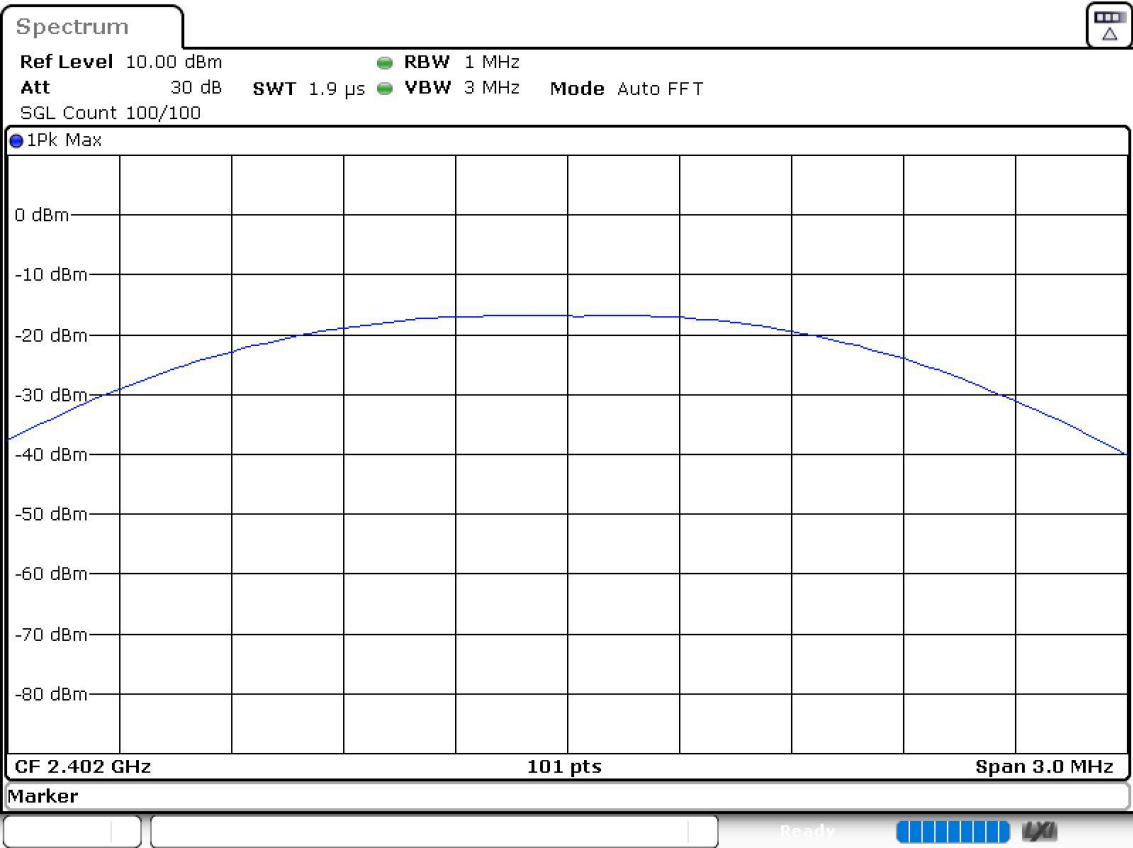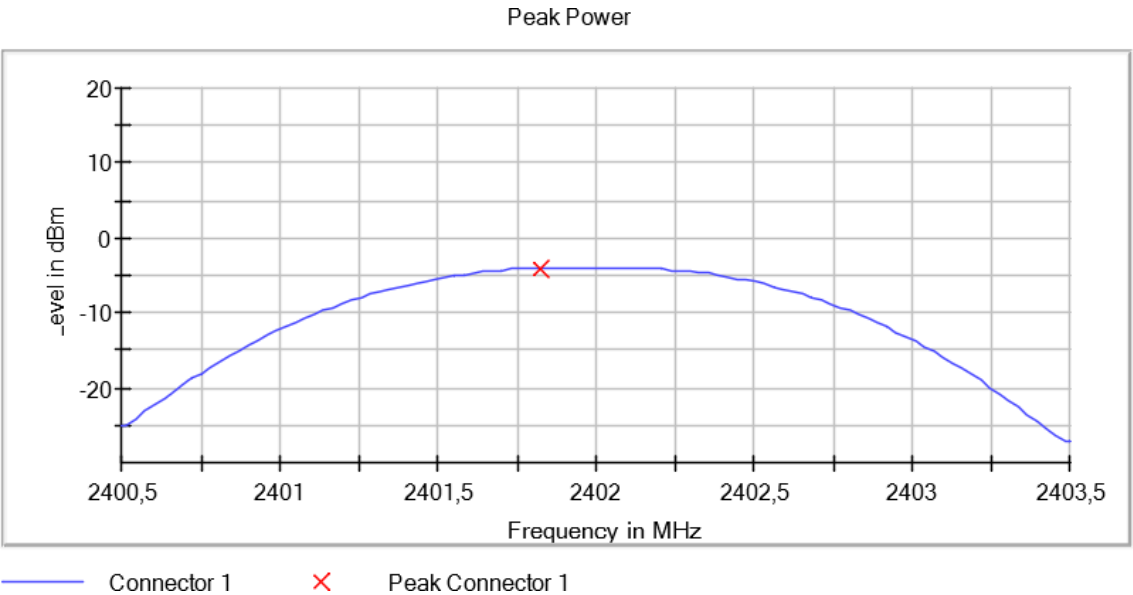



Operation Band MHz = [2400, 2483.5] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Frequency MHz = 2441.00000 Active Port = 1
Modulation = BT (GFSK 1-DH5)

Images:

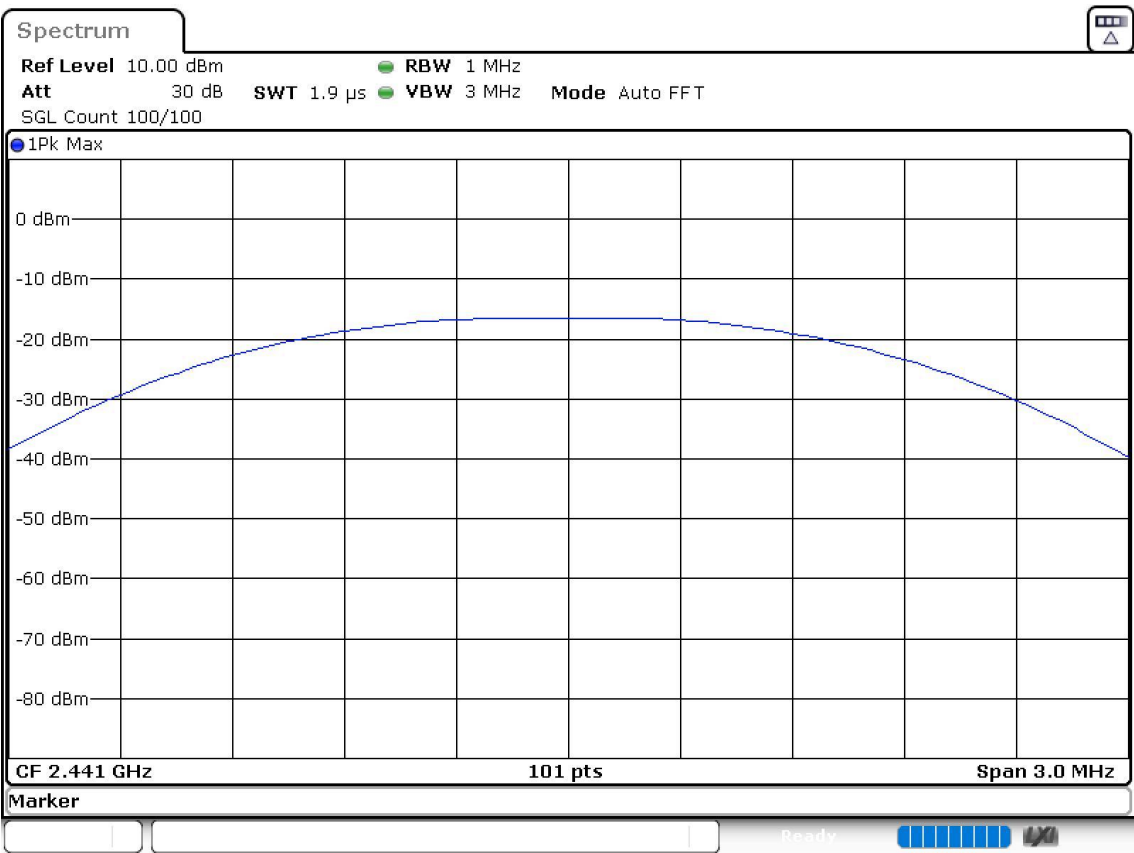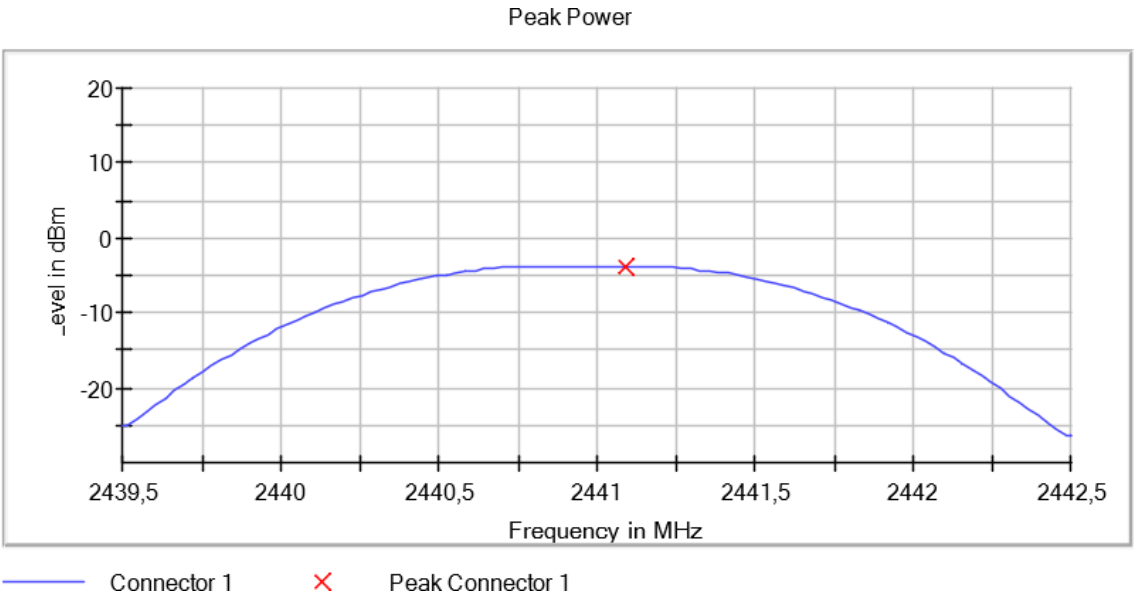

Operation Band MHz = [2400, 2483.5] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Frequency MHz = 2480.00000 Active Port = 1
Modulation = BT (GFSK 1-DH5)

Images:

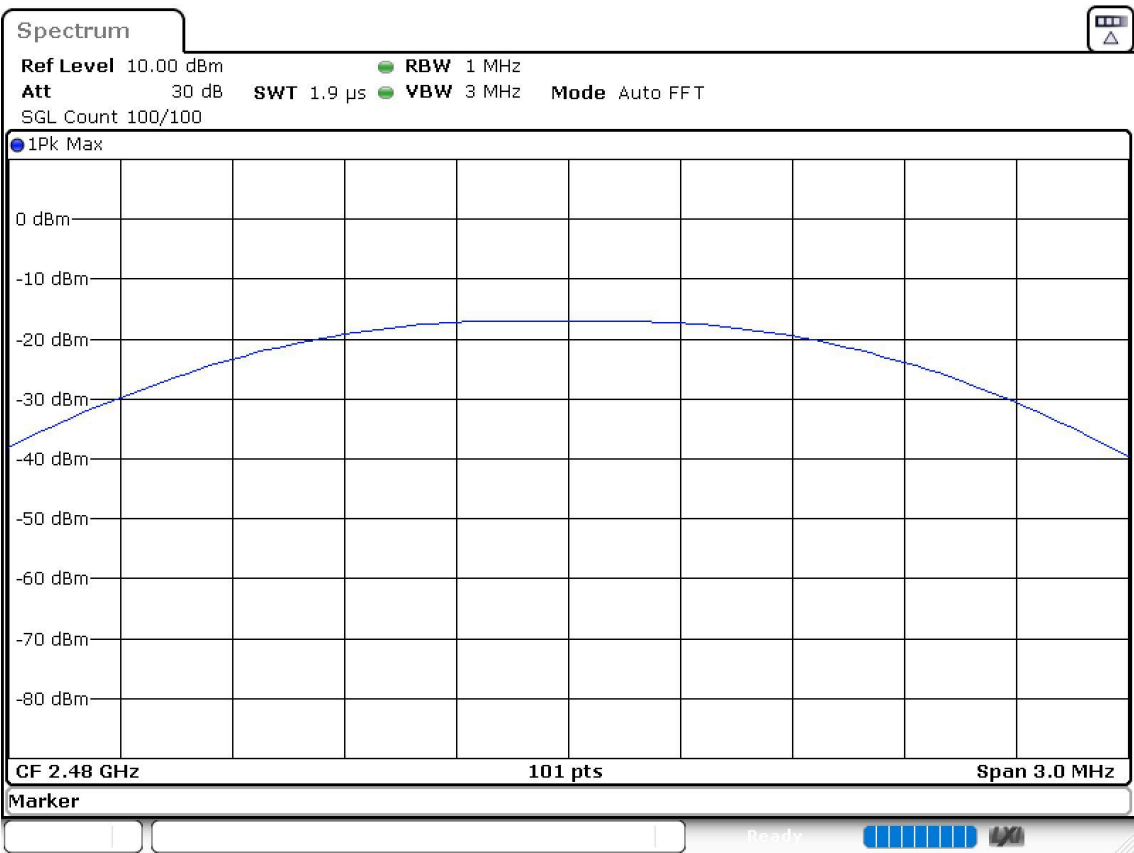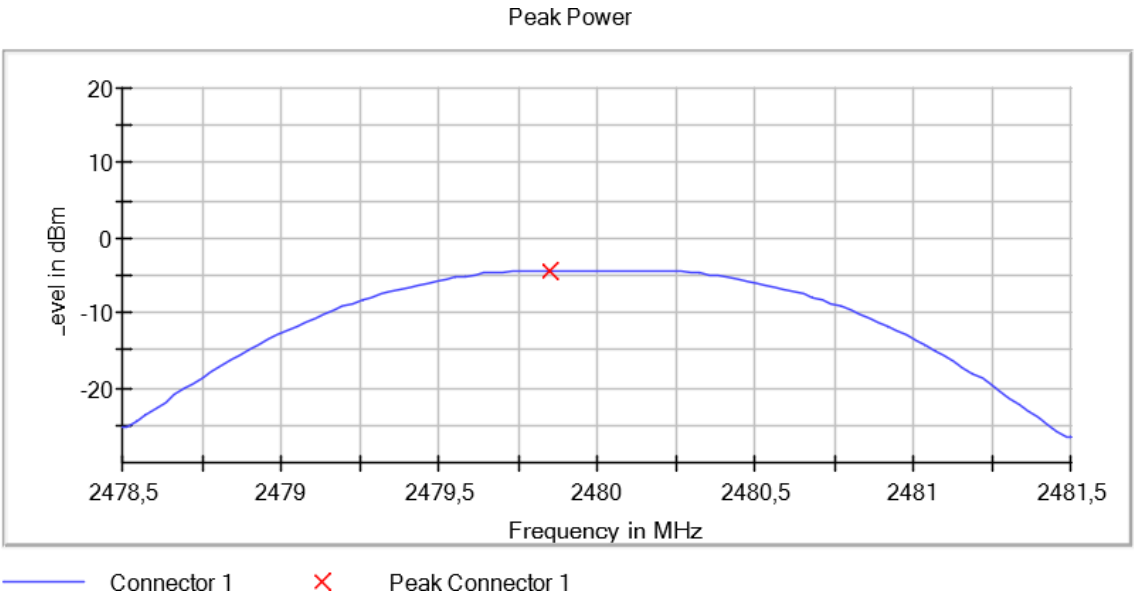

Modulation: BT (Pi/4 DQPSK 2-DH5)

Results

Operation Band (MHz)	Equipment	Freq (MHz)	Port	Peak Power (dBm)	E.I.R.P. (dBm)
[2400, 2483.5]	Frequency Hopping Spread Spectrum systems (DSS)	2402.00000	1	-2.2330	0.44
		2441.00000		-2.1170	0.55
		2480.00000		-3.2130	-0.54

Verdict

Pass



Attachments

Operation Band MHz = [2400, 2483.5] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2402.00000 Active Port = 1

Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

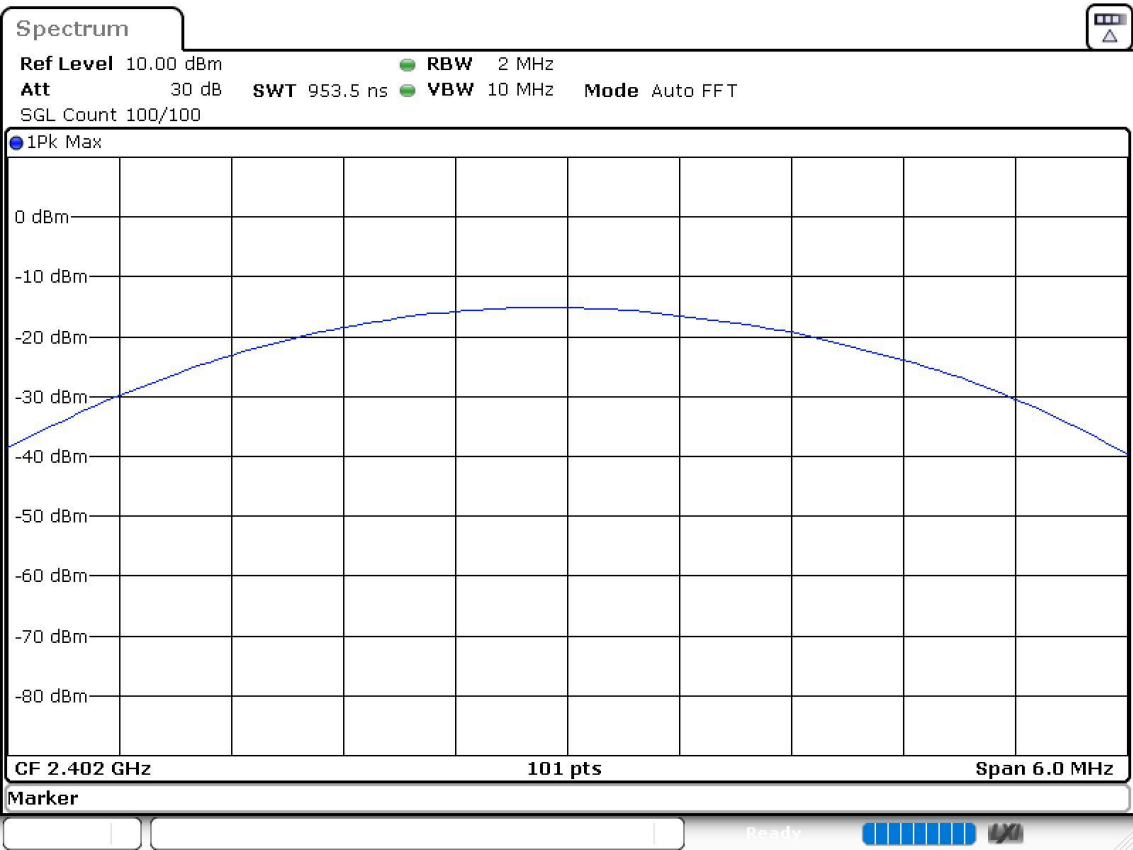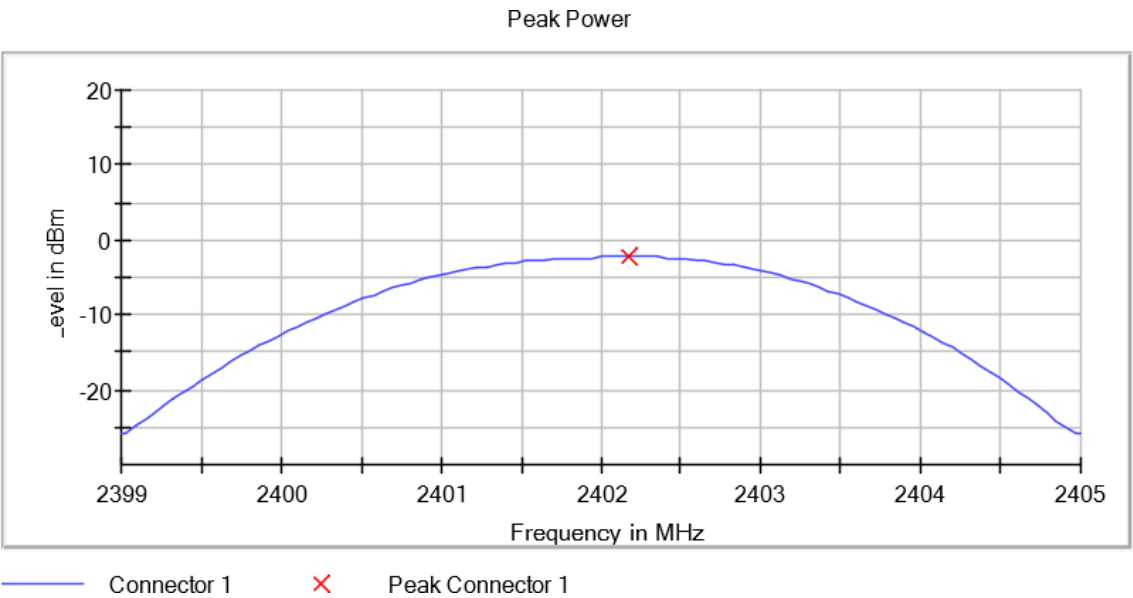

Operation Band MHz = [2400, 2483.5] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Frequency MHz = 2441.00000 Active Port = 1
Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

