

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2025/9/30

P01 LTE 2_QPSK20M_Bottom Side_1cm_Ch18700_1RB_OS0

DUT: EUT


Communication System: UID 0, LTE; Frequency: 1860 MHz; Duty Cycle: 1:1
Medium: H1900 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.428$ S/m; $\epsilon_r = 39.943$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.37, 7.85, 7.31) @ 1860 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (41x51x1):** Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.497 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 20.32 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.687 W/kg
SAR(1 g) = 0.382 W/kg; SAR(10 g) = 0.180 W/kg
Smallest distance from peaks to all points 3 dB below = 8.6 mm
Ratio of SAR at M2 to SAR at M1 = 59.6%
Maximum value of SAR (measured) = 0.565 W/kg

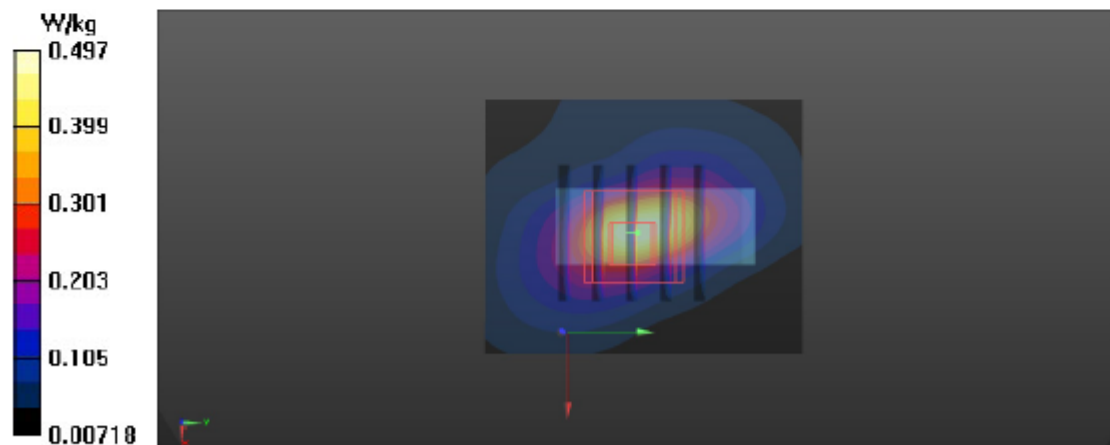

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2025/9/29

P02 LTE 4_QPSK20M_Front Face_1cm_Ch20300_1RB_OS0

DUT: EUT

Communication System: UID 0, LTE; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: H1750 Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.371 \text{ S/m}$; $\epsilon_r = 40.16$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.7, 8.21, 7.64) @ 1745 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (41x51x1):** Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.89 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 35.85 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 2.11 W/kg

SAR(1 g) = 1.3 W/kg; SAR(10 g) = 0.728 W/kg

Smallest distance from peaks to all points 3 dB below = 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 62%

Maximum value of SAR (measured) = 1.82 W/kg

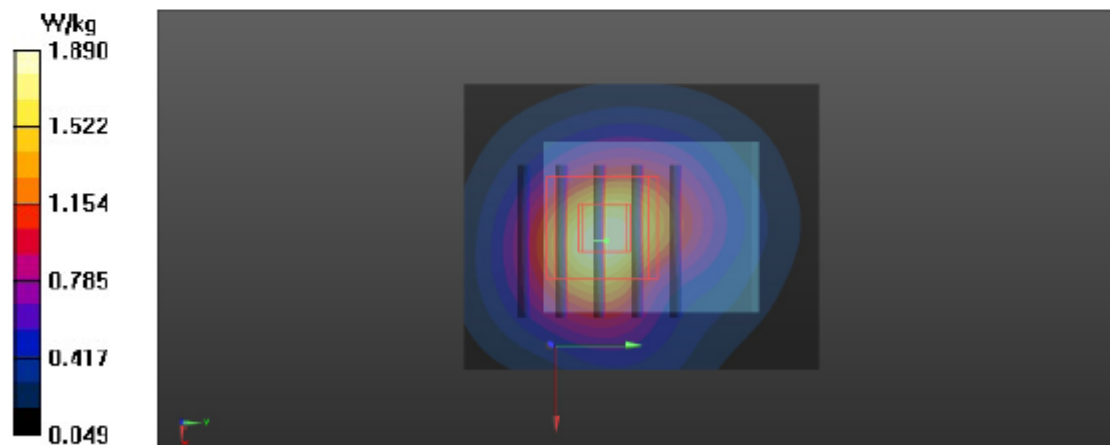

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2025/9/27

P03 LTE 5_QPSK10M_Bottom Side_1cm_Ch20600_1RB_OS0

DUT: EUT

Communication System: UID 0, LTE; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: H1750 Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.929 \text{ S/m}$; $\epsilon_r = 41.205$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.12, 9.72, 9.05) @ 844 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (41x51x1):** Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.504 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.15 V/m ; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.506 W/kg

SAR(1 g) = 0.350 W/kg ; SAR(10 g) = 0.231 W/kg

Smallest distance from peaks to all points 3 dB below = 17.9 mm

Ratio of SAR at M2 to SAR at M1 = 69.6%

Maximum value of SAR (measured) = 0.458 W/kg

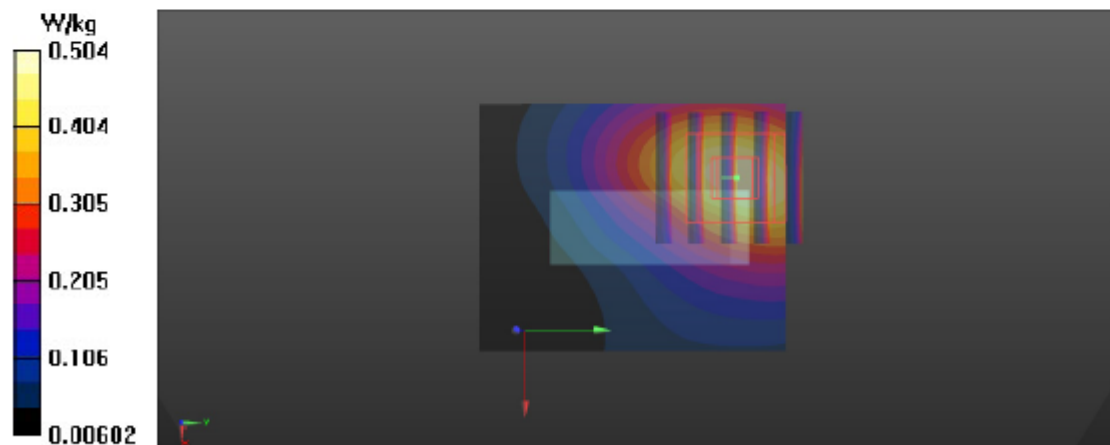

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2025/9/28

P04 LTE 12_QPSK10M_Bottom Side_1cm_Ch23130_1RB_OS0

DUT: EUT

Communication System: UID 0, LTE; Frequency: 711 MHz; Duty Cycle: 1:1


Medium: H750 Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.883 \text{ S/m}$; $\epsilon_r = 41.583$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.35, 9.96, 9.27) @ 711 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (41x51x1):** Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.0735 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 9.122 V/m ; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 0.0790 W/kg
SAR(1 g) = 0.052 W/kg ; SAR(10 g) = 0.035 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 67.7%
Maximum value of SAR (measured) = 0.0676 W/kg

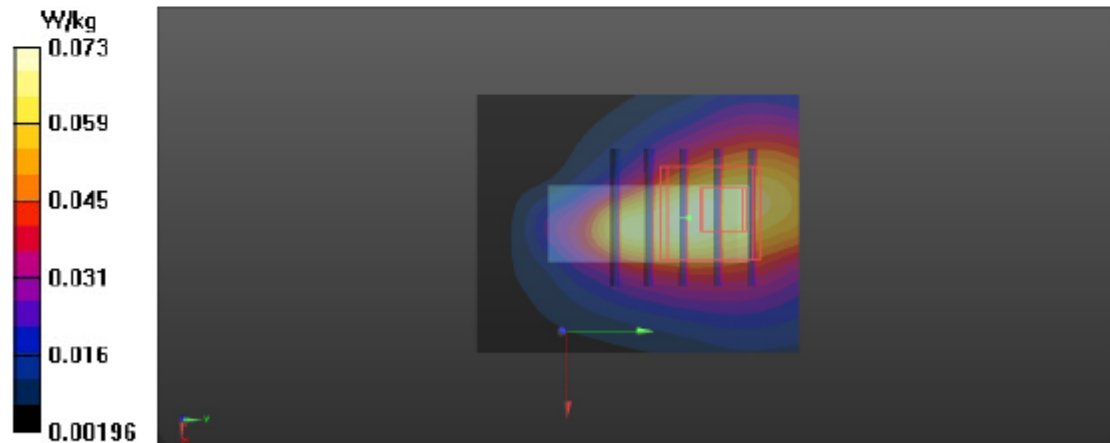

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2025/9/28

P05 LTE 13_QPSK10M_Bottom Side_1cm_Ch23230_1RB_OS0

DUT: EUT

Communication System: UID 0, LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.905 \text{ S/m}$; $\epsilon_r = 41.374$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.35, 9.96, 9.27) @ 782 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (41x51x1):** Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.159 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.82 V/m ; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.194 W/kg

SAR(1 g) = 0.113 W/kg ; SAR(10 g) = 0.071 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 60.1%

Maximum value of SAR (measured) = 0.160 W/kg

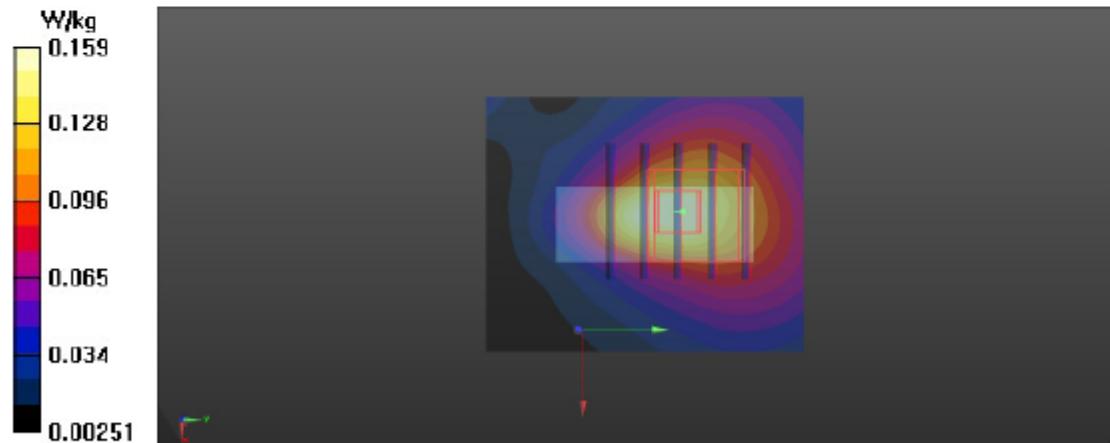

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2025/9/29

P06 LTE 66_QPSK20M_Front Face_1cm_Ch132072_1RB_OS0

DUT: EUT

Communication System: UID 0, LTE; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: H1750 Medium parameters used: $f = 1720 \text{ MHz}$; $\sigma = 1.356 \text{ S/m}$; $\epsilon_r = 40.23$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.7, 8.21, 7.64) @ 1720 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (41x51x1):** Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.21 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 29.15 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.819 W/kg; SAR(10 g) = 0.484 W/kg

Smallest distance from peaks to all points 3 dB below = 15.2 mm

Ratio of SAR at M2 to SAR at M1 = 64%

Maximum value of SAR (measured) = 1.11 W/kg

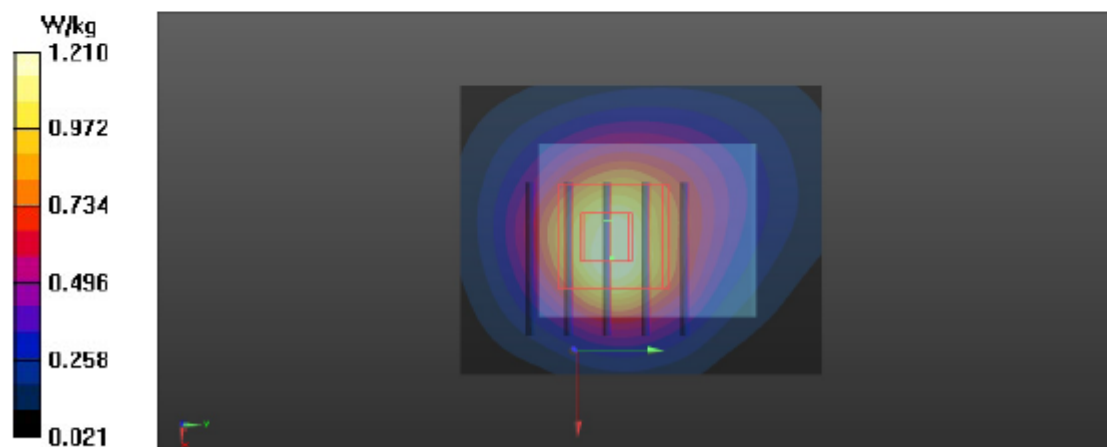

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2025/9/28

P07 BLE_1M_Front Face_1cm_Ch19

DUT: EUT

Communication System: UID 0, BT; Frequency: 2440 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2440 \text{ MHz}$; $\sigma = 1.818 \text{ S/m}$; $\epsilon_r = 37.98$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.78, 7.22, 6.73) @ 2440 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (51x61x1):** Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0865 W/kg

- **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.392 V/m ; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.0850 W/kg

SAR(1 g) = 0.043 W/kg ; SAR(10 g) = 0.022 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 51.5%

Maximum value of SAR (measured) = 0.0682 W/kg

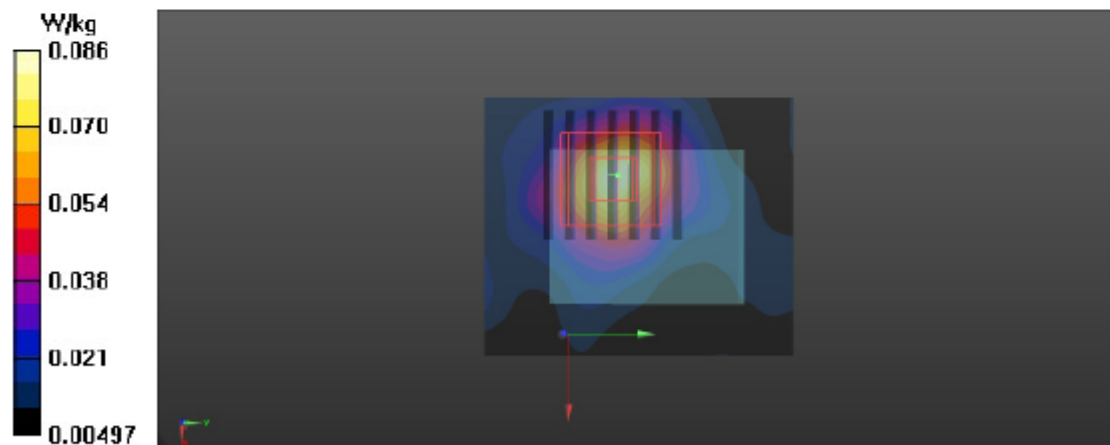

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2025/9/30

P08 LTE 2_QPSK20M_Bottom Side_0cm_Ch18700_1RB_OS0

DUT: EUT


Communication System: UID 0, LTE; Frequency: 1860 MHz; Duty Cycle: 1:1
Medium: H1900 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.428$ S/m; $\epsilon_r = 39.943$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.37, 7.85, 7.31) @ 1860 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (41x51x1):** Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 3.93 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 53.79 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 6.23 W/kg
SAR(1 g) = 2.35 W/kg; SAR(10 g) = 0.856 W/kg
Smallest distance from peaks to all points 3 dB below = 8.2 mm
Ratio of SAR at M2 to SAR at M1 = 39.2%
Maximum value of SAR (measured) = 4.09 W/kg

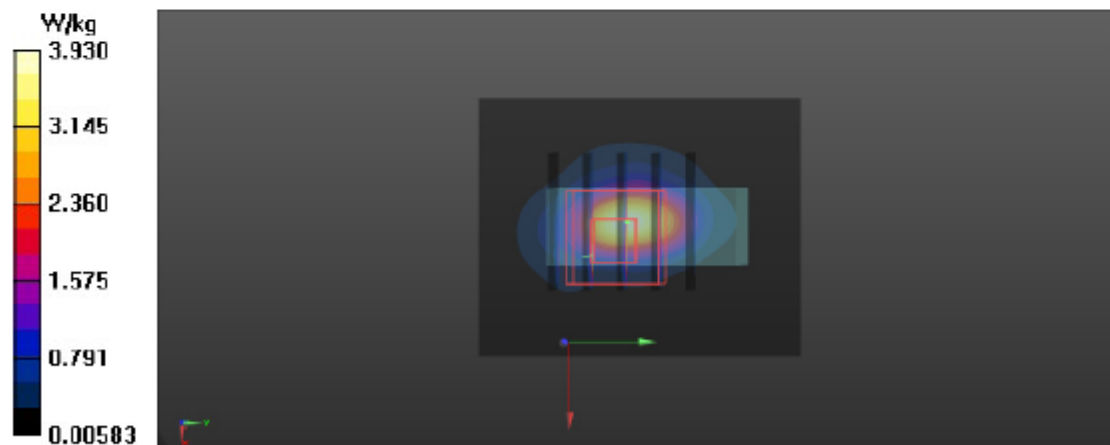

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2025/9/29

P09 LTE 4_QPSK20M_Front Face_0cm_Ch20300_1RB_OS0

DUT: EUT

Communication System: UID 0, LTE; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: H1750 Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.371 \text{ S/m}$; $\epsilon_r = 40.16$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.7, 8.21, 7.64) @ 1745 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (41x51x1):** Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 10.5 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 62.30 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 10.8 W/kg

SAR(1 g) = 4.99 W/kg; SAR(10 g) = 2.54 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 40.9%

Maximum value of SAR (measured) = 7.22 W/kg

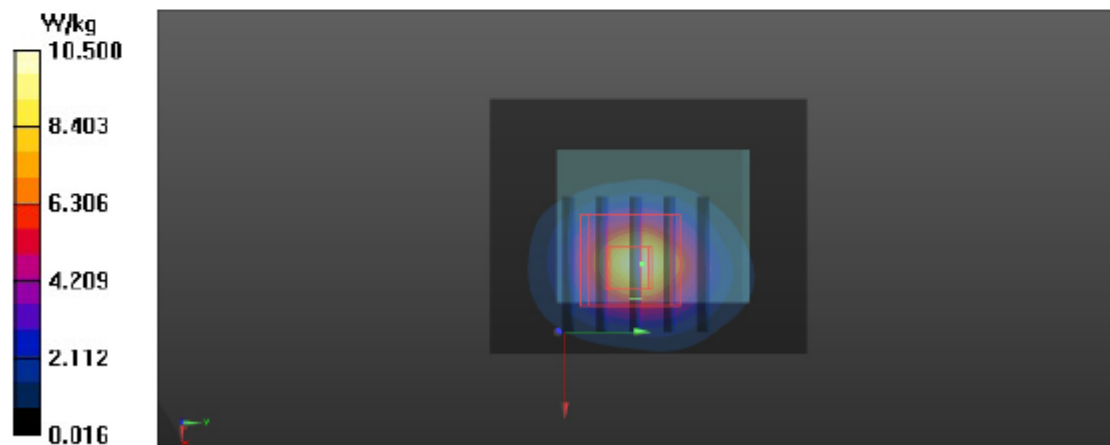

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2025/9/27

P10 LTE 5_QPSK10M_Bottom Side_0cm_Ch20600_1RB_OS0

DUT: EUT

Communication System: UID 0, LTE; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: H1750 Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.929 \text{ S/m}$; $\epsilon_r = 41.205$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.12, 9.72, 9.05) @ 844 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (41x51x1):** Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.30 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 31.64 V/m ; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.887 W/kg ; SAR(10 g) = 0.518 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 50.5%

Maximum value of SAR (measured) = 1.32 W/kg

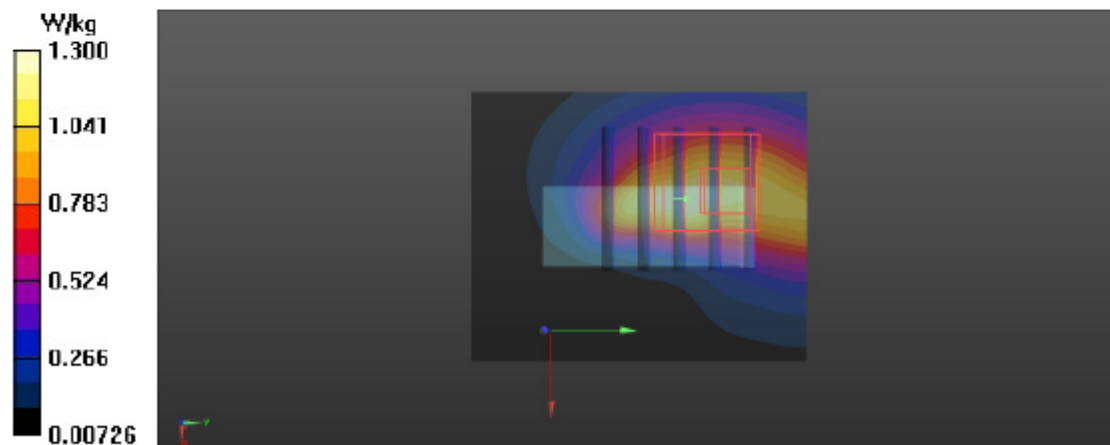

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2025/9/28

P11 LTE 12_QPSK10M_Bottom Side_0cm_Ch23130_1RB_OS0

DUT: EUT

Communication System: UID 0, LTE; Frequency: 711 MHz; Duty Cycle: 1:1


Medium: H750 Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.883 \text{ S/m}$; $\epsilon_r = 41.583$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.35, 9.96, 9.27) @ 711 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (41x51x1):** Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 1.75 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 46.48 V/m ; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 2.28 W/kg
SAR(1 g) = 0.727 W/kg ; SAR(10 g) = 0.365 W/kg
Smallest distance from peaks to all points 3 dB below = 8.4 mm
Ratio of SAR at M2 to SAR at M1 = 30.8%
Maximum value of SAR (measured) = 1.49 W/kg

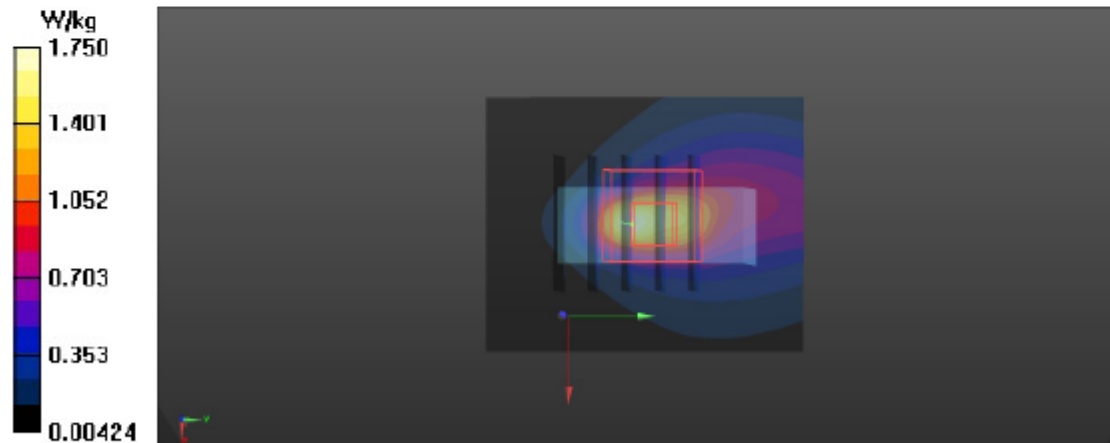

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2025/9/28

P12 LTE 13_QPSK10M_Bottom Side_0cm_Ch23230_1RB_OS0

DUT: EUT

Communication System: UID 0, LTE; Frequency: 782 MHz; Duty Cycle: 1:1


Medium: H750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.905 \text{ S/m}$; $\epsilon_r = 41.374$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.35, 9.96, 9.27) @ 782 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (41x51x1):** Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 1.00 W/kg

- **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 29.78 V/m ; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 1.53 W/kg
 $\text{SAR}(1 \text{ g}) = 0.792 \text{ W/kg}$; $\text{SAR}(10 \text{ g}) = 0.477 \text{ W/kg}$
Smallest distance from peaks to all points 3 dB below = 9 mm
Ratio of SAR at M2 to SAR at M1 = 53.9%
Maximum value of SAR (measured) = 1.20 W/kg

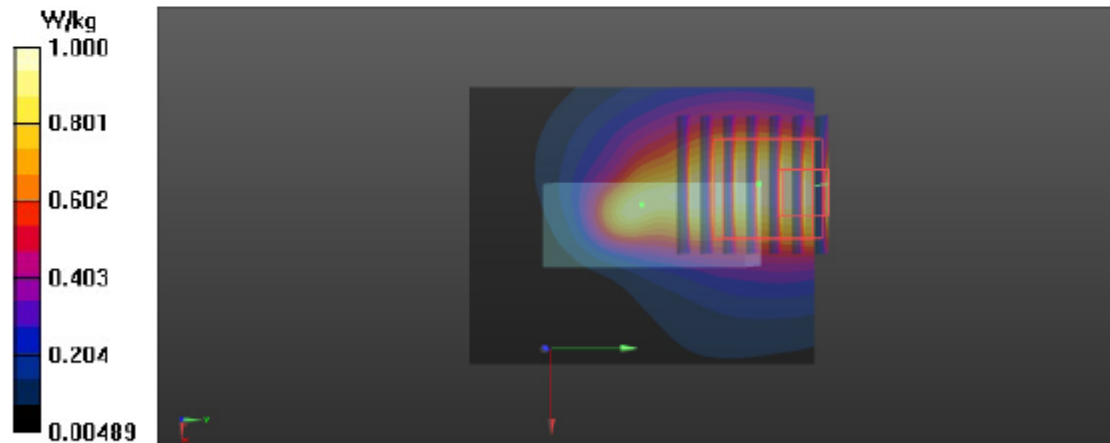

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2025/9/29

P13 LTE 66_QPSK20M_Front Face_0cm_Ch132072_1RB_OS0

DUT: EUT

Communication System: UID 0, LTE; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: H1750 Medium parameters used: $f = 1720 \text{ MHz}$; $\sigma = 1.356 \text{ S/m}$; $\epsilon_r = 40.23$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.7, 8.21, 7.64) @ 1720 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (41x51x1):** Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 10.3 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 60.09 V/m ; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 10.7 W/kg

SAR(1 g) = 4.52 W/kg ; SAR(10 g) = 2.25 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 40.9%

Maximum value of SAR (measured) = 7.11 W/kg

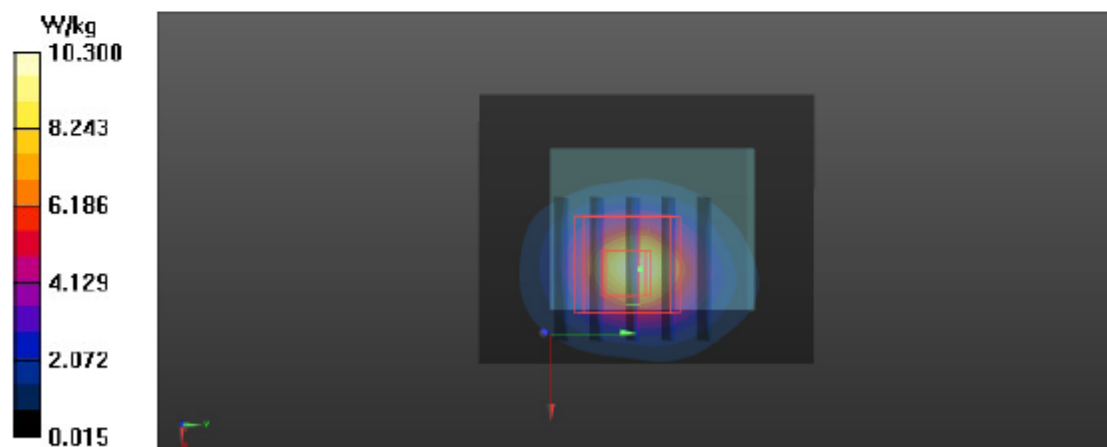

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2025/9/28

P14 BLE_1M_Front Face_0cm_Ch19

DUT: EUT

Communication System: UID 0, BT; Frequency: 2440 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2440 \text{ MHz}$; $\sigma = 1.818 \text{ S/m}$; $\epsilon_r = 37.98$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.78, 7.22, 6.73) @ 2440 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (51x61x1):** Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.686 W/kg

- **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.032 V/m ; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.655 W/kg

SAR(1 g) = 0.252 W/kg ; SAR(10 g) = 0.098 W/kg

Smallest distance from peaks to all points 3 dB below = 7.8 mm

Ratio of SAR at M2 to SAR at M1 = 39.1%

Maximum value of SAR (measured) = 0.483 W/kg

