

Test Laboratory: BTL Inc.

Date: 2021/8/13

System Check_H750_0813**DUT: Dipole 750 MHz D750V3;SN:1095;**


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.79$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.62, 10.62, 10.62) @ 750 MHz; Calibrated: 2020/12/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1423; Calibrated: 2020/12/11
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: S/N:1812
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 2.58 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 55.29 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 3.35 W/kg
SAR(1 g) = 2.2 W/kg; SAR(10 g) = 1.44 W/kg
Maximum value of SAR (measured) = 2.58 W/kg

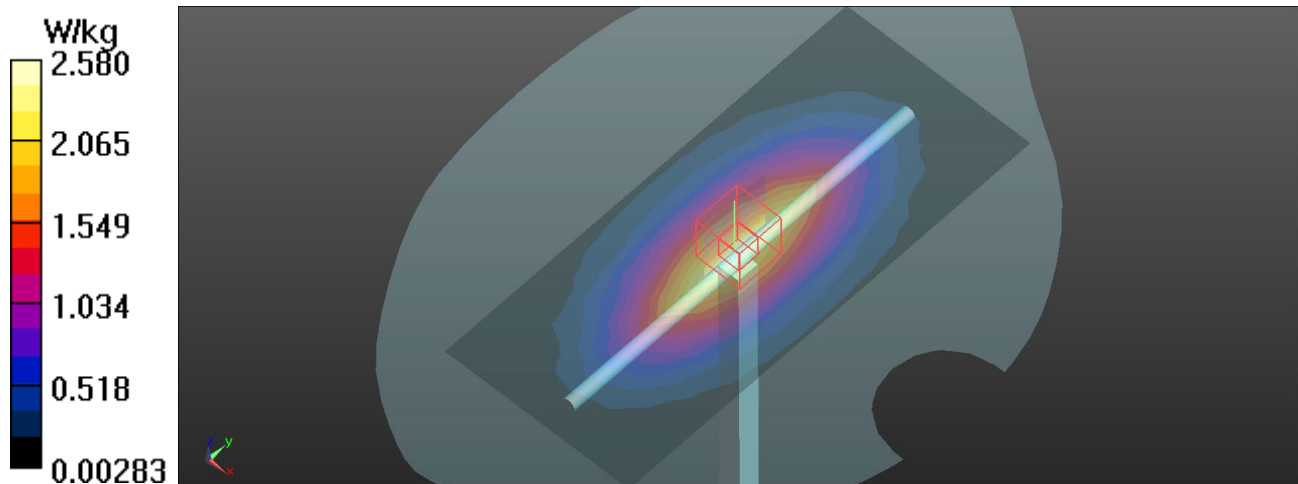

Test Laboratory: BTL Inc.

Date: 2021/8/14

System Check_H750_0814**DUT: Dipole 750 MHz D750V3;SN:1095;**


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 42.826$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2°C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.62, 10.62, 10.62) @ 750 MHz; Calibrated: 2020/12/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1423; Calibrated: 2020/12/11
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: S/N:1812
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 2.45 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 53.84 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 3.17 W/kg
SAR(1 g) = 2.09 W/kg; SAR(10 g) = 1.37 W/kg
Maximum value of SAR (measured) = 2.44 W/kg

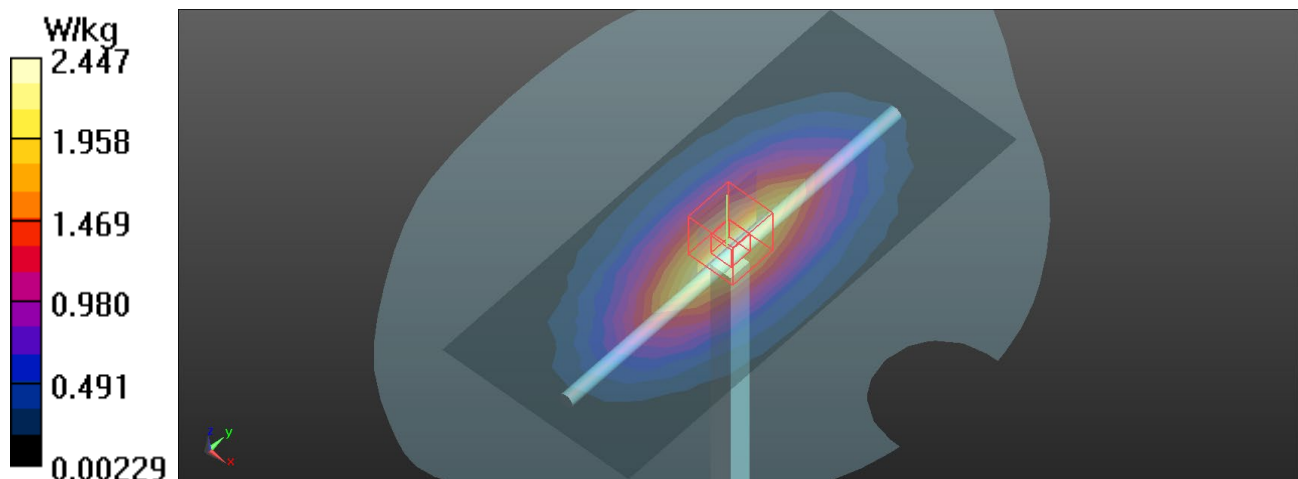

Test Laboratory: BTL Inc.

Date: 2021/8/13

System Check_H835_0813**DUT: Dipole 835 MHz D835V2;SN:4d160;**


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 835$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 42.116$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.22, 10.22, 10.22) @ 835 MHz; Calibrated: 2020/12/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1423; Calibrated: 2020/12/11
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: S/N:1812
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 3.41 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 62.72 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 4.02 W/kg
SAR(1 g) = 2.4 W/kg; SAR(10 g) = 1.49 W/kg
Maximum value of SAR (measured) = 3.44 W/kg

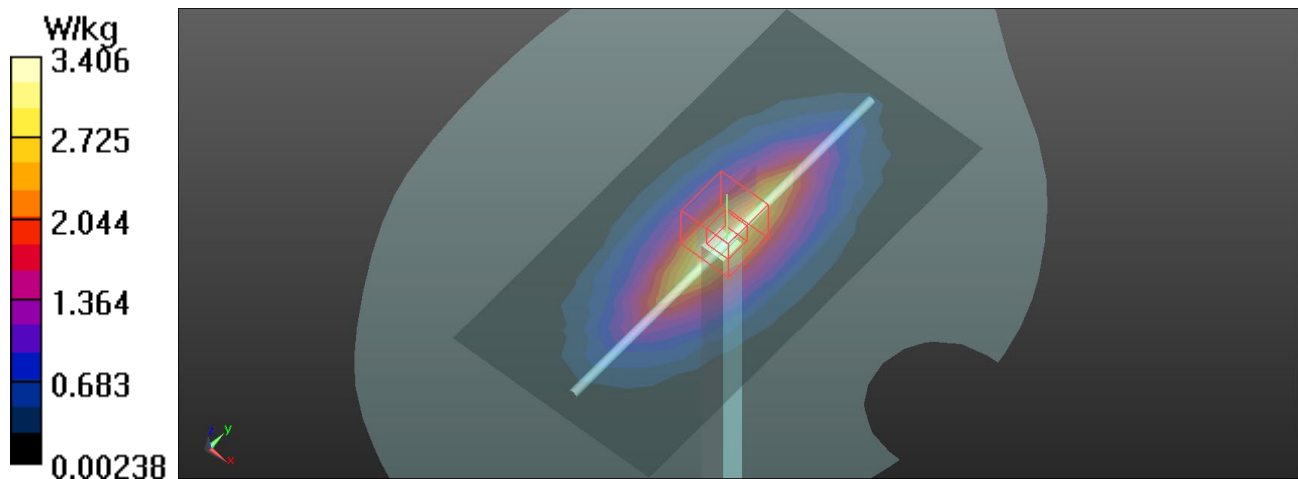

Test Laboratory: BTL Inc.

Date: 2021/8/14

System Check_H835_0814**DUT: Dipole 835 MHz D835V2;SN:4d160;**


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 835$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 42.151$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2°C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.22, 10.22, 10.22) @ 835 MHz; Calibrated: 2020/12/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1423; Calibrated: 2020/12/11
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: S/N:1812
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 3.17 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 56.79 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 3.59 W/kg
SAR(1 g) = 2.28 W/kg; SAR(10 g) = 1.46 W/kg
Maximum value of SAR (measured) = 3.16 W/kg

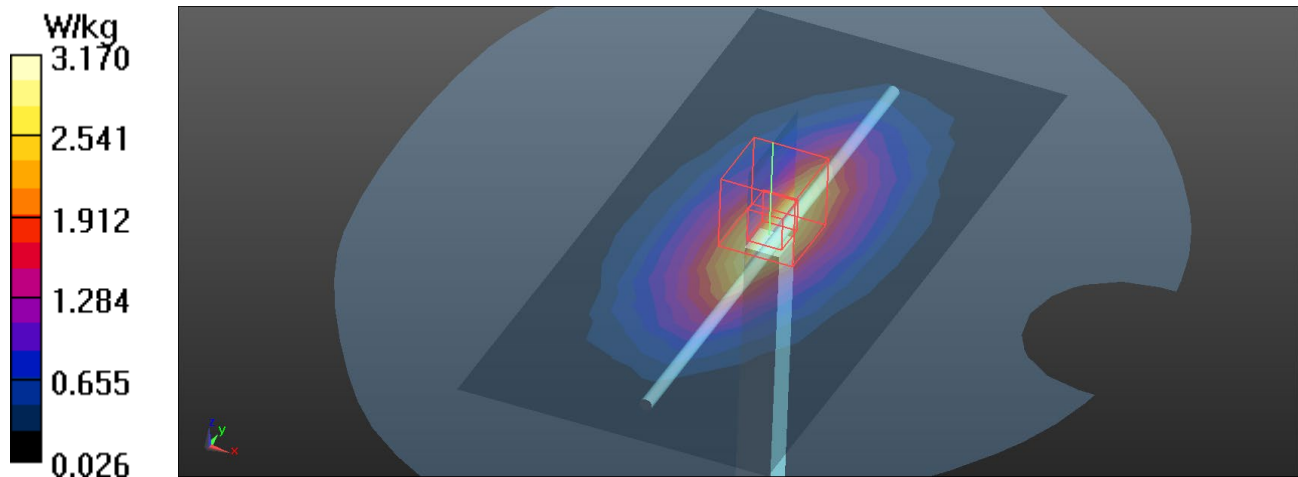

Test Laboratory: BTL, Inc

Date: 2021/8/18

System Check_H835_0818**DUT: Dipole 835 MHz D835V2;SN:4d160;**


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 835$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 42.142$; $\rho = 1000$ kg/m³
Ambient Temperature: 23.1 °C; Liquid Temperature: 22.3 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(10.06, 10.06, 10.06) @ 835 MHz; Calibrated: 2020/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2020/11/6
- Phantom: SAM Left; Type: Twin SAM; Serial: 1784
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 2.91 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 57.98 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 3.99 W/kg
SAR(1 g) = 2.44 W/kg; SAR(10 g) = 1.51 W/kg
Maximum value of SAR (measured) = 2.95 W/kg

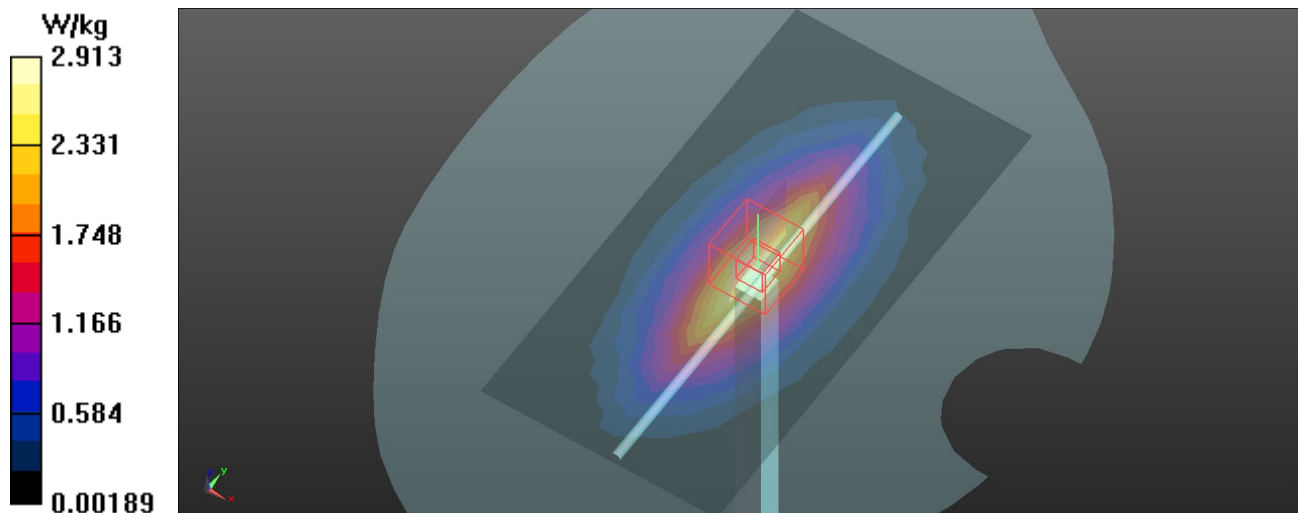

Test Laboratory: BTL, Inc

Date: 2021/8/17

System Check_H1750_0817**DUT: Dipole 1750 MHz D1750V2;SN:1101;**

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 39.912$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3 °C; Liquid Temperature: 22.3 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(8.56, 8.56, 8.56) @ 1750 MHz; Calibrated: 2020/10/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2020/11/6
- Phantom: SAM Left; Type: Twin SAM; Serial: 1784
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (6x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 10.7 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 102.0 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 17.3 W/kg

SAR(1 g) = 8.99 W/kg; SAR(10 g) = 4.75 W/kg

Maximum value of SAR (measured) = 14.1 W/kg

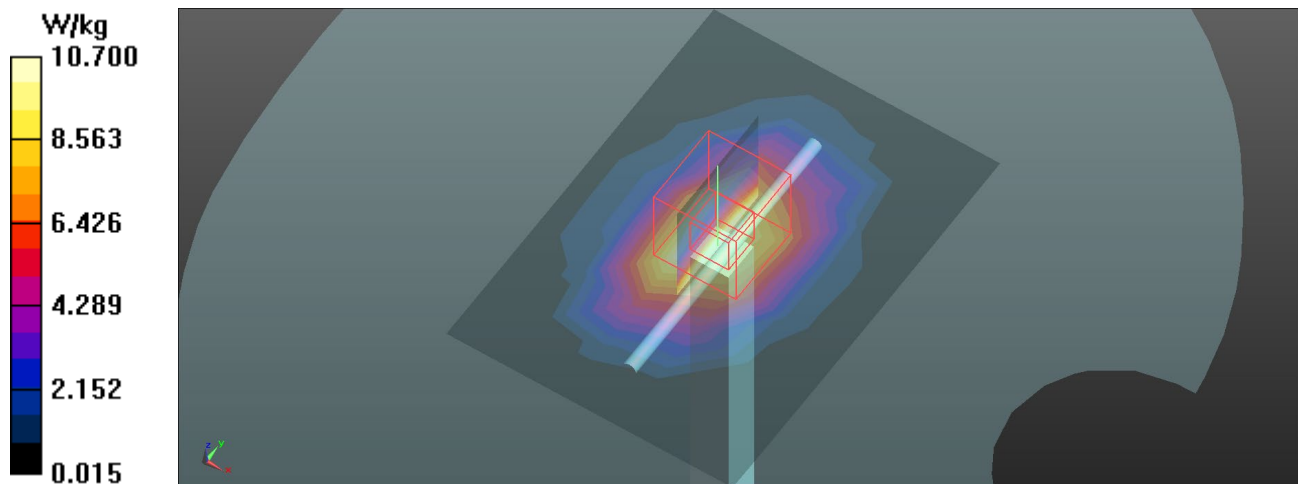

Test Laboratory: BTL Inc.

Date: 2021/8/15

System Check_H1900_0815

DUT: Dipole 1900 MHz D1900V2;SN:5d179;

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used (extrapolated): $f = 1900 \text{ MHz}$; $\sigma = 1.334 \text{ S/m}$; $\epsilon_r = 40.868$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.2°C ; Liquid Temperature: 22.2°C

DASY Configuration:


- Probe: ES3DV3 - SN3162; ConvF(4.99, 4.99, 4.99) @ 1900 MHz; Calibrated: 2021/6/15
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn420; Calibrated: 2020/12/9
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: S/N:1811
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (6x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 12.0 W/kg
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 89.09 V/m ; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 18.9 W/kg
SAR(1 g) = 10.3 W/kg ; SAR(10 g) = 5.20 W/kg

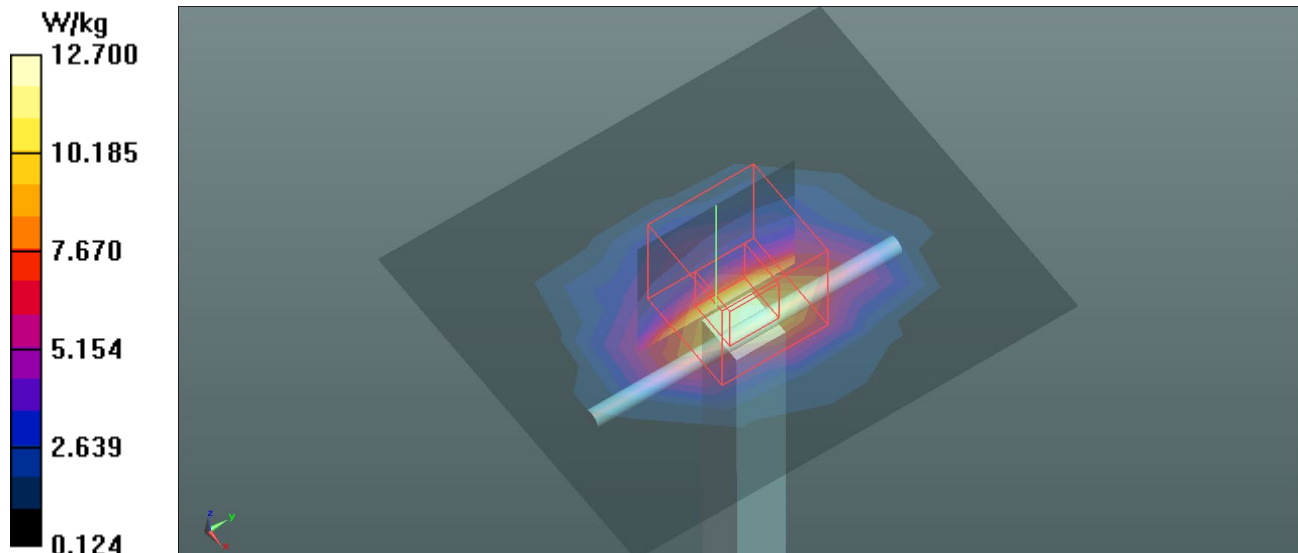Maximum value of SAR (measured) = 12.7 W/kg


Test Laboratory: BTL Inc.

Date: 2021/8/16

System Check_H1900_0816**DUT: Dipole 1900 MHz D1900V2;SN:5d179;**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.337$ S/m; $\epsilon_r = 41.926$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: ES3DV3 - SN3162; ConvF(4.99, 4.99, 4.99) @ 1900 MHz; Calibrated: 2021/6/15
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn420; Calibrated: 2020/12/9
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: S/N:1811
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (6x7x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 13.3 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 103.4 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 17.3 W/kg

SAR(1 g) = 9.53 W/kg; SAR(10 g) = 5.05 W/kg

Maximum value of SAR (measured) = 14.4 W/kg

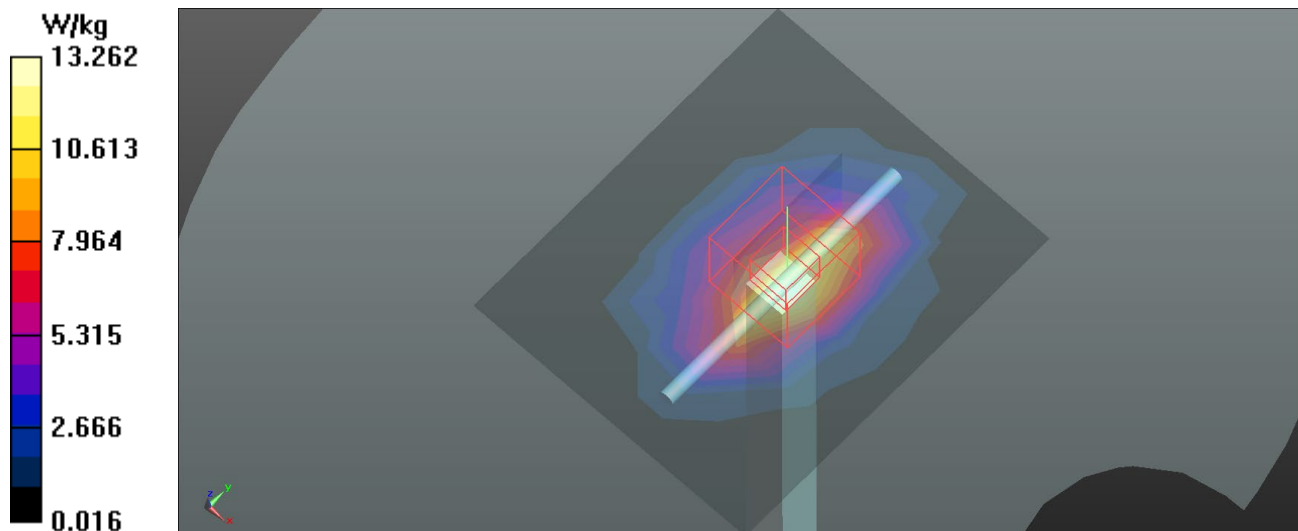

Test Laboratory: BTL Inc.

Date: 2021/8/18

System Check_H2450_0818**DUT: Dipole 2450 MHz D2450V2;SN:919;**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.849$ S/m; $\epsilon_r = 40.282$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.3 °C

DASY Configuration:

- Probe: EX3DV4 - SN3974; ConvF(7.98, 7.98, 7.98) @ 2450 MHz; Calibrated: 2020/12/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1423; Calibrated: 2020/12/11
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: S/N:1812
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (8x8x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 15.3 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 112.1 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 27.7 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.11 W/kg

Maximum value of SAR (measured) = 22.4 W/kg

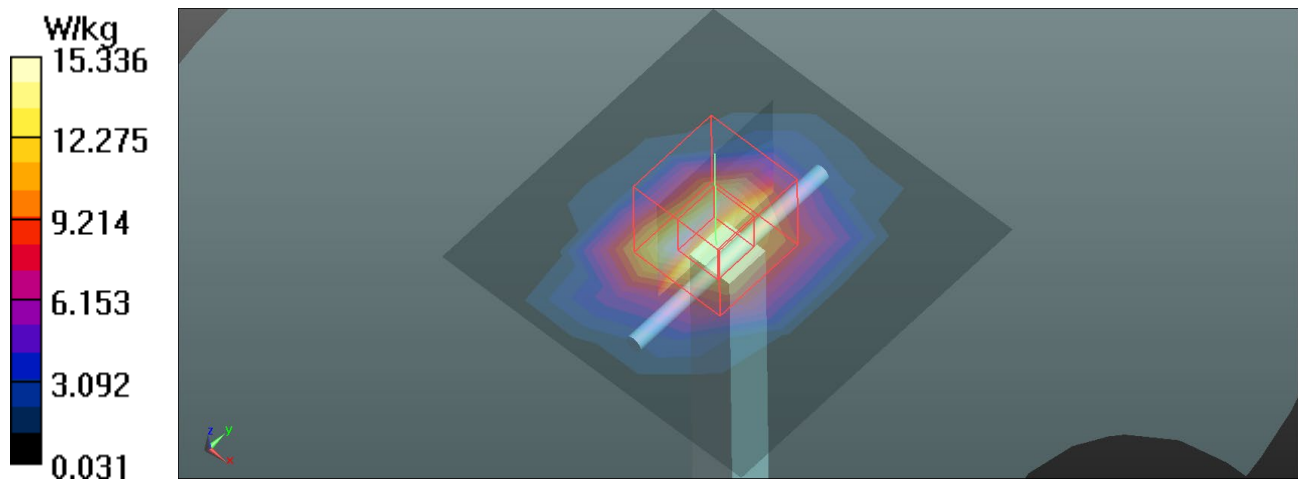

Test Laboratory: BTL Inc.

Date: 2021/8/16

System Check_H2600_0816**DUT: Dipole 2600 MHz D2600V2;SN:1067;**

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.979$ S/m; $\epsilon_r = 39.404$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.4 °C; Liquid Temperature: 22.5 °C

DASY Configuration:

- Probe: ES3DV3 - SN3162; ConvF(4.44, 4.44, 4.44) @ 2600 MHz; Calibrated: 2021/6/15
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn420; Calibrated: 2020/12/9
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: 1896
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (8x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 15.9 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 114.3 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 30.8 W/kg

SAR(1 g) = 13.7 W/kg; SAR(10 g) = 5.98 W/kg

Maximum value of SAR (measured) = 24.3 W/kg

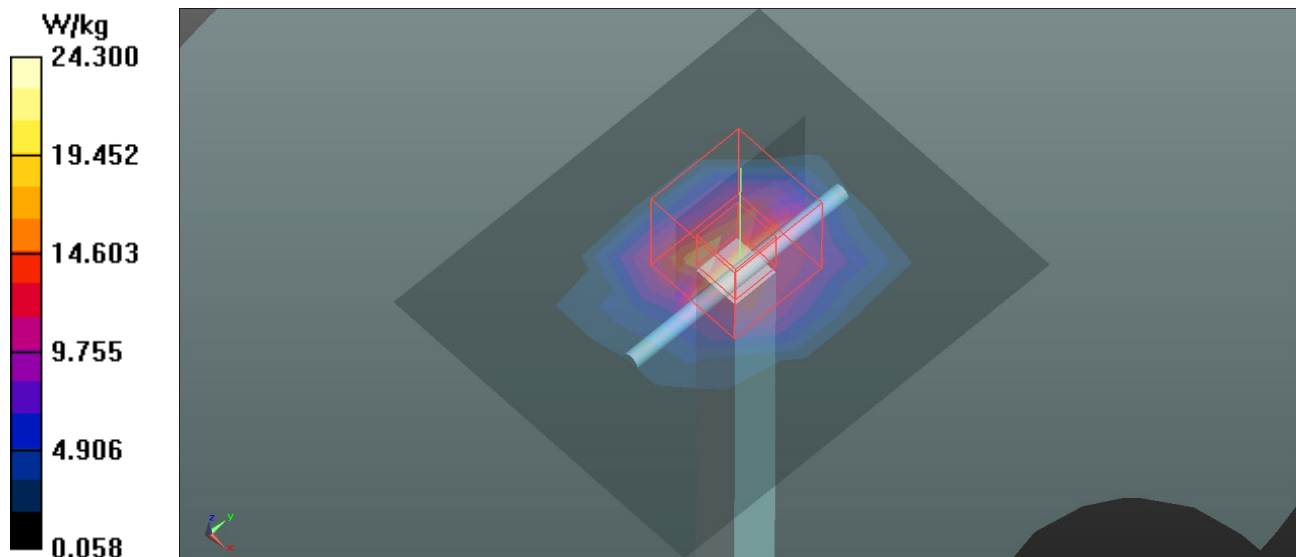

Test Laboratory: BTL Inc.

Date: 2021/8/19

System Check_H2600_0819**DUT: Dipole 2600 MHz D2600V2;SN:1067;**

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.982$ S/m; $\epsilon_r = 39.455$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN3974; ConvF(7.69, 7.69, 7.69) @ 2600 MHz; Calibrated: 2020/12/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1423; Calibrated: 2020/12/11
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: S/N:1812
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (8x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 15.5 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 117.4 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 31.6 W/kg

SAR(1 g) = 14.6 W/kg; SAR(10 g) = 6.4 W/kg

Maximum value of SAR (measured) = 25.2 W/kg

