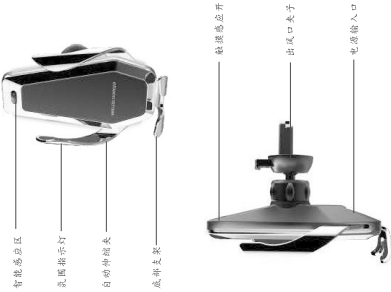
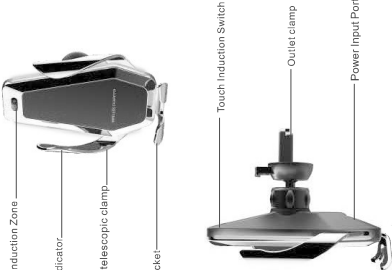


智能感应车载手机支架 无线充电器  非常感谢您选择我们的产品。 为了安全、高效的使用本产品,请仔细阅读使用说明书。	规格参数 1. 产品名称: 智能感应车载无线充电器 2. 型号: S8 3. 材质: PC+ABS 4. 尺寸: 125*78*90mm 5. 充电接口: Type-C 6. 输入电压/电流: 5V/2A, 9V/1.67A 7. 输出功率: 10W, 7.5W, 5W 自动识别 8. 无线充电感应距离: 0-5mm 9. 红外有效感应距离: 1-8cm 10. 支持品牌: 符合Qi无线协议设备, 如iPhone8, iPhoneX, iPhone8Plus, 三星S6, s6edge, S7, s7edge, s8, s8+, s9+ 11. 支持Qi0无线快充的设备, 需购买符合Qi标准 无线接收器方可使用。 2. 包装清单 包装清单: 车载支架*1 说明书*1 数据线*1 夹子*1	产品结构介绍示意图 	4. 使用说明 1. 首先将原配的数据线车载无线充电支架连接起来。 2. 将设备夹于夹在空调出风口处,也可放置在其他可夹的地方。 3. 将数据线的USB端接头连接至车上的可充电接口。 4. 设备连接通5V-9V直流电源(中:点)烟器转接充电器和车上USB充电口)。接通电源后,蓝色指示灯快闪3秒钟,证明设备供电正常。 5. 无线充电支架感应识别距离(5-20cm)感应到有物体时,双臂自动打开,放入手机后双臂自动加紧手机,此时蓝色指示灯将亮下到底马显示,手机也将进入充电状态,绿色指示灯将互呼吸状态闪烁,当手机电量充满时,绿色指示灯常亮。 6. 取出手机时,需要长按后壳触摸感应区1秒钟,蓝色指示灯将从上到下跑马显示,此时双臂也将自动打开取出手机。 7. 为了产品的视觉更加美观,本产品增加了氛围灯功能,可根据大家的爱好,只有选择打开关闭,快速双击触摸感应区,将打开和关闭灯。 8. 本设备有过压保护,过温保护,磁场保护,短路保护,如设备出现异常时,会自动停止工作。	3. schematic diagram of product structure Introduction 	1. Specification Parameters 1. Product Name: intelligent Induction Bracket Wireless Charger 2. Model: P10 3. Material: PC + ABS. 4. Size: 125* 78*90mm 5. Charging Interface: Type-C 6. Input voltage/current: 5V/2A, 9V/1.67A 7. Output power: 10W, 7.5W, 5W automatic identification 8. Wireless charging induction distance: 0-5mm 9. Infrared effective sensing distance: 1-8cm 10. Support Specifications: Qi-compliant Wireless Protocol Charging 11. Supporting QC wireless fast charging devices, such as Phone 8, iPhone X, iPhone 8plus, Samsung S6, s6edge, S7, s7edge, s8, s8+, s9+ 12. Devices that do not support wireless charging need to purchase Qi-compliant wireless receivers for use. 2. Packaging List Vehicle bracketx1 Data linex1 Descriptionx1 Clipx1	Intelligent Induction Bracket for Vehicle Mobile Phone Wireless charger  An instruction Manual Thanks you very much for choosing our products. In order to use our products safely and efficiently, please read the instructions carefully.	5. Notes 1. Do not over-squeeze or collide with equipment. Strictly interferes with the normal opening or closing of arms. 2. Do not use wireless charger in severe high temperature, humidity or corrosive environment to avoid damage to equipment. 3. Strictly connect the equipment with voltage that does not exceed the voltage of the product to prevent damage to the equipment circuit. 4. The internal result circuit of this product is precise. Do not dismantle the machine for non-technicians. 5. Packaging pictures are for reference only. Products are based on physical objects. special reminder, This product has NTC thermal protection function, which supports over-temperature detection. When NTC detects temperature up to 60 degrees, the product will stop charging, and the green light flashes into protection state to protect the device and mobile phone; after protection, the temperature drops to Recharge after 30 degrees or 10 minutes. When the temperature of the device is too high, the device will enter the protection state, the device will stop charging, and the sensor will also be turned off. The arms cannot be opened and the temperature will drop. After 50 degrees or less or 10 minutes, the battery will resume charging. When the green light is on, the device will resume normal operation.	5. Instructions for Use 1. Firstly, the original data line is connected with the vehicle wireless filling bracket. 2. Clamp the clamp on the air outlet end of the air conditioner, or place it in other clamping places. 3. Connect the USB end connector of the data line to the lighter converter charger and USB charging port on the car). 4. The device connects the 5V9V DC power supply (e.g. cigarette lighter converter charger and USB charging port on the car). After the power supply is connected, the blue indicator flashes for 3 seconds to prove that the power supply of the device is normal. 5. When the wireless charging bracket induction recognition area (5-20cm) senses an object, the arms automatically open and the arms automatically lighten the mobile phone after putting it into the mobile phone. At this time, the blue indicator will be lit, and the green indicator will be lit. When the mobile phone also enters the charging state, and the green indicator will be flashing in the breathing state. When the mobile phone is full of electricity, the green indicator will always be on. 6. When you take out the mobile phone, you need to touch the touch induction switch on the back of the device, the indicator will turn from top to bottom, and your arms will automatically open and take out the mobile phone 7. In order to make the product visual more beautiful, the product adds the function of atmosphere lamp. According to your preference, you can choose to turn on or turn off the atmosphere light. Double-click the touch sensing area, and turn on and off the lights. 8. The equipment has over-voltage protection, over temperature protection, magnetic field protection and short circuit protection. If the equipment is abnormal, it will automatically stop working.	5. Notes 1. Do not over-squeeze or collide with equipment. Strictly interferes with the normal opening or closing of arms. 2. Do not use wireless charger in severe high temperature, humidity or corrosive environment to avoid damage to equipment. 3. Strictly connect the equipment with voltage that does not exceed the voltage of the product to prevent damage to the equipment circuit. 4. The internal result circuit of this product is precise. Do not dismantle the machine for non-technicians. 5. Packaging pictures are for reference only. Products are based on physical objects. special reminder, This product has NTC thermal protection function, which supports over-temperature detection. When NTC detects temperature up to 60 degrees, the product will stop charging, and the green light flashes into protection state to protect the device and mobile phone; after protection, the temperature drops to Recharge after 30 degrees or 10 minutes. When the temperature of the device is too high, the device will enter the protection state, the device will stop charging, and the sensor will also be turned off. The arms cannot be opened and the temperature will drop. After 50 degrees or less or 10 minutes, the battery will resume charging. When the green light is on, the device will resume normal operation.	合格证 Certificate Quality inspector: _____ Date: _____	合格证 Certificate Quality inspector: _____ Date: _____
---	--	---	---	---	--	---	---	---	---	--	--

FCC WARNING STATEMENT

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help.
- The distance between user and products should be no less than 20cm